



# RADIO TEST REPORT

**Test Report No. : 13403530H**


**Applicant** : **DENSO CORPORATION**  
**Type of EUT** : **Electronic Key**  
**Model Number of EUT** : **14FTB**  
**FCC ID** : **HYQ14FTB**  
**Test regulation** : **FCC Part 15 Subpart C: 2020**  
**Test Result** : **Complied (Refer to SECTION 3.2)**


1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report covers Radio technical requirements.

It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)

6. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
7. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the U.S. Government.
8. The information provided from the customer for this report is identified in Section 1.

**Date of test:** July 8, 2020

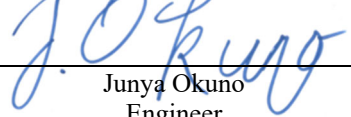**Representative test engineer:**   
Junya Okuno  
Engineer  
Consumer Technology Division

**Approved by:**   
Motoya Imura  
Leader  
Consumer Technology Division



This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.  
\*As for the range of Accreditation in NVLAP, you may refer to the WEB address,  
[http://japan.ul.com/resources/emc\\_accredited/](http://japan.ul.com/resources/emc_accredited/)

- This report contains data that are not covered by the NVLAP accreditation.  
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.**  
**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

## REVISION HISTORY

**Original Test Report No.: 13403530H**

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13403530H	July 27, 2020	-	-

## Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information .....</b>	<b>5</b>
<b>SECTION 2: Equipment under test (EUT).....</b>	<b>5</b>
<b>SECTION 3: Test specification, procedures &amp; results .....</b>	<b>7</b>
<b>SECTION 4: Operation of EUT during testing.....</b>	<b>10</b>
<b>SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission).....</b>	<b>11</b>
<b>SECTION 6: Automatically deactivate .....</b>	<b>13</b>
<b>SECTION 7: -20 dB and 99 % Occupied Bandwidth .....</b>	<b>13</b>
<b>APPENDIX 1: Test data .....</b>	<b>14</b>
Automatically deactivate.....	14
Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission).....	15
-20 dB and 99% Occupied Bandwidth.....	18
<b>APPENDIX 2: Test instruments .....</b>	<b>20</b>
<b>APPENDIX 3: Photographs of test setup.....</b>	<b>21</b>
Radiated emission .....	21
Worst case position .....	23

## **SECTION 1: Customer information**

Company Name : DENSO CORPORATION  
Address : 1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661, Japan  
Telephone Number : +81-566-20-3955  
Facsimile Number : +81-566-25-4837  
Contact Person : TAKAYUKI HATTORI

The information provided from the customer is as follows;

- Applicant, Type of EUT, Model Number of EUT, FCC ID on the cover and other relevant pages
- Operating/Test Mode(s) (Mode(s)) on all the relevant pages
- SECTION 1: Customer information
- SECTION 2: Equipment under test (EUT) other than the Receipt Date
- SECTION 4: Operation of EUT during testing

\* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

## **SECTION 2: Equipment under test (EUT)**

### **2.1 Identification of EUT**

Type : Electronic Key  
Model Number : 14FTB  
Serial Number : Refer to SECTION 4.2  
Rating : DC 3.0 V  
Receipt Date : July 3, 2020  
Country of Mass-production : Japan, United States of America, China  
Condition of EUT : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification : No Modification by the test lab

### **2.2 Product Description**

Model: 14FTB (referred to as the EUT in this report) is a Electronic Key.

#### **Radio Specification**

Radio Type : Transceiver  
Frequency of Operation : 314.35 MHz / 315.10 MHz\*  
\*These two different frequencies are not emitted simultaneously.  
Modulation : FSK (F1D)  
Type of Battery : One lithium battery  
Antenna type : Built-in type (Fixed)  
Clock frequency (Maximum) : 18.37 MHz Crystal  
  
Radio Type : Receiver  
Frequency of Operation : 134.2 kHz \*1)

\*1) The test of receiver part was performed separately from this test report, and the conformability is confirmed.

\* Original model: 14FTB has two types; Type A and Type B.  
The worst case was confirmed with Type A and Type B at pre check.  
The test was performed with Type A, which had the worst result.

\*Original model No.: 14FTB has 4 switches.  
Variation models have 3 switches and 2 switches.

The differences of Original model and Variation models are the number of switches, and design.  
They are completely identical in RF characteristics.  
Therefore the test was performed with the representative original type which was the worst one.

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test Specification**

Test Specification : FCC Part 15 Subpart C  
FCC Part 15 final revised on May 26, 2020 and effective July 27, 2020 except 15.258

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.231 Periodic operation in the band 40.66-40.70 MHz and above 70 MHz.

\* The revision does not affect the test result conducted before its effective date.

### **3.2 Procedures and results**

Item	Test Procedure	Specification	Worst margin	Results	Remarks
Conducted emission	FCC: ANSI C63.10:2013 6 Standard test methods	FCC: Section 15.207	N/A	N/A	*1)
	ISED: RSS-Gen 8.8	ISED: RSS-Gen 8.8			
Automatically Deactivate	FCC: ANSI C63.10:2013 6 Standard test methods	FCC: Section 15.231(a)(1)	N/A	Complied a)	Radiated
	ISED: -	ISED: RSS-210 A1.1			
Electric Field Strength of Fundamental Emission	FCC: ANSI C63.10:2013 6 Standard test methods	FCC: Section 15.231(b)	3.8 dB 314.350 MHz Horizontal PK with Duty Factor	Complied# b)	Radiated
	ISED: RSS-Gen 6.12	ISED: RSS-210 A1.2			
Electric Field Strength of Spurious Emission	FCC: ANSI C63.10:2013 6 Standard test methods	FCC: Section 15.205 Section 15.209 Section 15.231(b)	9.4 dB 2200.450 MHz Horizontal PK with Duty Factor	Complied b)	Radiated
	ISED: RSS-Gen 6.13	ISED: RSS-210 A1.2, 4.4 RSS-Gen 8.9			
-20dB Bandwidth	FCC: ANSI C63.10:2013 6 Standard test methods	FCC: Section 15.231(c)	N/A	Complied c)	Radiated
	ISED: -	ISED: Reference data			

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\*1) The test is not applicable since the EUT does not have AC Mains.

a) Refer to APPENDIX 1 (data of Automatically deactivate)

b) Refer to APPENDIX 1 (data of Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission))

c) Refer to APPENDIX 1 (data of -20 dB and 99% Occupied Bandwidth)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

#### **FCC Part 15.31 (e)**

This test was performed with the New Battery (DC 3.0 V) and the constant voltage was supplied to the EUT during the tests. Therefore, the EUT complies with the requirement.

#### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99 % Occupied Bandwidth	ISED: RSS-Gen 6.7	ISED: RSS-210 A1.3	N/A	-	Radiated

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

There is no applicable rule of uncertainty in this applied standard. Therefore, the following results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k = 2$ .

#### Radiated emission

Measurement distance	Frequency range	Uncertainty (+/-)
3 m	9 kHz to 30 MHz	3.3 dB
10 m		3.2 dB
3 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		5.0 dB
10 m	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.2 dB
		6.3 dB
3 m	30 MHz to 200 MHz (Horizontal) (Vertical)	4.8 dB
		4.8 dB
10 m	200 MHz to 1000 MHz (Horizontal) (Vertical)	5.0 dB
		5.0 dB
3 m	1 GHz to 6 GHz	4.9 dB
	6 GHz to 18 GHz	5.2 dB
1 m	10 GHz to 26.5 GHz	5.5 dB
	26.5 GHz to 40 GHz	5.5 dB
10 m	1 GHz to 18 GHz	5.2 dB

#### Antenna Terminal test

Test Item	Uncertainty (+/-)
Automatically Deactivate	0.10 %
-20 dB Emission Bandwidth / 99 % Occupied Bandwidth	0.96 %



### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

\*NVLAP Lab. code: 200572-0 / FCC Test Firm Registration Number: 199967 / ISED Lab Company Number: 2973C

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up


Refer to APPENDIX.

## **SECTION 4: Operation of EUT during testing**

### **4.1 Operating Mode(s)**

<b>Test Item*</b>	<b>Mode</b>
Automatically Deactivate	Normal use mode
Electric Field Strength of Fundamental Emission Electric Field Strength of Spurious Emission -20 dB & 99 % Occupied Bandwidth	Transmitting mode (Tx) *1)
<p>* The system was configured in typical fashion (as a user would normally use it) for testing.  *1) The software of this mode is the same as one of normal product, except that EUT continues to transmit when transmitter button is being pressed (For Normal use mode, EUT stops to transmit in a given time, even if transceiver button is being pressed.)</p> <p>* EUT was set by the software as follows;  Software: Product program Version 0000C104  (Date: 2019.08.21, Storage location: EUT memory)</p> <p>*This setting of software is the worst case.  Any conditions under the normal use do not exceed the condition of setting.  In addition, end users cannot change the settings of the output power of the product.</p>	

### **4.2 Configuration and peripherals**

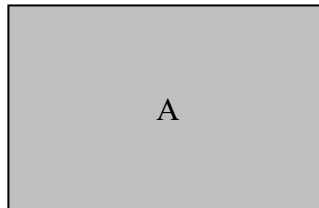

\* Setup was taken into consideration and test data was taken under worse case conditions.

#### **Description of EUT**

<b>No.</b>	<b>Item</b>	<b>Model number</b>	<b>Serial number</b>	<b>Manufacturer</b>	<b>Remarks</b>
A	Electronic Key	14FTB	No.1 *1) No.2 *2)	DENSO CORPORATION	EUT

\*1) Used for Normal use mode

\*2) Used for Transmitting mode

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)**

### **Test Procedure and conditions**

[For below 30 MHz]

The noise level was checked by moving a search-coil (Loop Antenna) close to the EUT.

[For 30 MHz to 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

[For above 1 GHz]

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The measuring antenna height was varied between 1 and 4 m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization.

The radiated emission measurements were made with the following detector function of the test receiver / spectrum analyzer.


### **Test Antennas are used as below;**

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

	From 9 kHz to 90 kHz and From 110 kHz to 150 kHz	From 90 kHz to 110 kHz	From 150 kHz to 490 kHz	From 490 kHz to 30 MHz	From 30 MHz to 1 GHz	Above 1 GHz
Detector Type	Peak	Peak	Peak	Peak	Peak and Peak with Duty factor	Peak and Peak with Duty factor
IF Bandwidth	200 Hz	200 Hz	9.1 kHz	9.1 kHz	120 kHz	PK: S/A: RBW 1 MHz, VBW: 3 MHz

**[Test Setup]**


Below 1 GHz

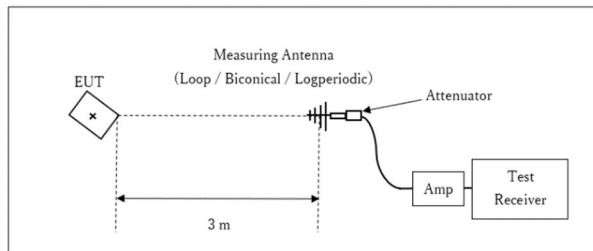

× : Center of turn table

Test Distance: 3 m

1 GHz - 10 GHz

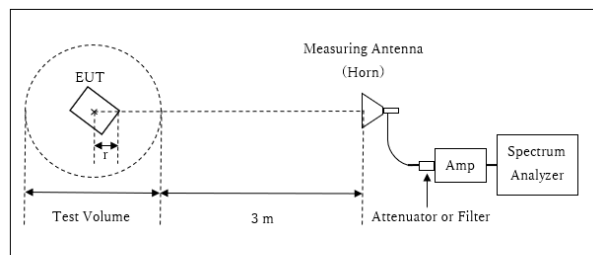

r : Radius of an outer periphery of EUT

× : Center of turn table

Distance Factor:  $20 \times \log(4.0 \text{ m} / 3.0 \text{ m}) = 2.50 \text{ dB}$   
\* Test Distance:  $(3 + \text{SVSWR Volume} / 2) - r = 4.0 \text{ m}$

SVSWR Volume : 2.0 m  
(SVSWR Volume has been calibrated based on CISPR 16-1-4.)  
r = 0.0 m

\* The test was performed with r = 0.0 m since EUT is small and it was the rather conservative condition.

- The carrier level (or, noise levels) was (or were) measured at each position of all three axes X, Y and Z, and the position that has the maximum noise was determined.

Noise levels of all the frequencies were measured at the position.

This EUT has two modes which mechanical key is inserted or not. The worst case was confirmed with and without mechanical key, as a result, the test with mechanical key was the worst case. Therefore, the test with mechanical key was performed only.

\*The result is rounded off to the second decimal place, so some differences might be observed.

**Measurement range** : 9 kHz - 3.2 GHz  
**Test data** : APPENDIX  
**Test result** : Pass

## **SECTION 6: Automatically deactivate**

### **Test Procedure**

The measurement was performed with Electric field strength using a spectrum analyzer.

**Test data** : APPENDIX  
**Test result** : Pass

## **SECTION 7: -20 dB and 99 % Occupied Bandwidth**

### **Test Procedure**

The test was measured with a spectrum analyzer using a test fixture.

Test	Span	RBW	VBW	Sweep	Detector	Trace	Instrument used
20 dB Bandwidth	150 kHz	1 kHz	3 kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth	Enough width to display emission skirts	1 to 5 % of OBW	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer

Peak hold was applied as Worst-case measurement.


**Test data** : APPENDIX  
**Test result** : Pass

**APPENDIX 1: Test data**

**Automatically deactivate**

Report No. 13403530H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.1  
Date July 8, 2020  
Temperature / Humidity 22 deg. C / 55 % RH  
Engineer Junya Okuno  
Mode Normal use mode 314.35 MHz / 315.10 MHz

Tx Frequency [MHz]	Time of Transmitting [sec]	Limit [sec]	Result
314.35	0.730	5.00	Pass
315.10	0.730	5.00	Pass

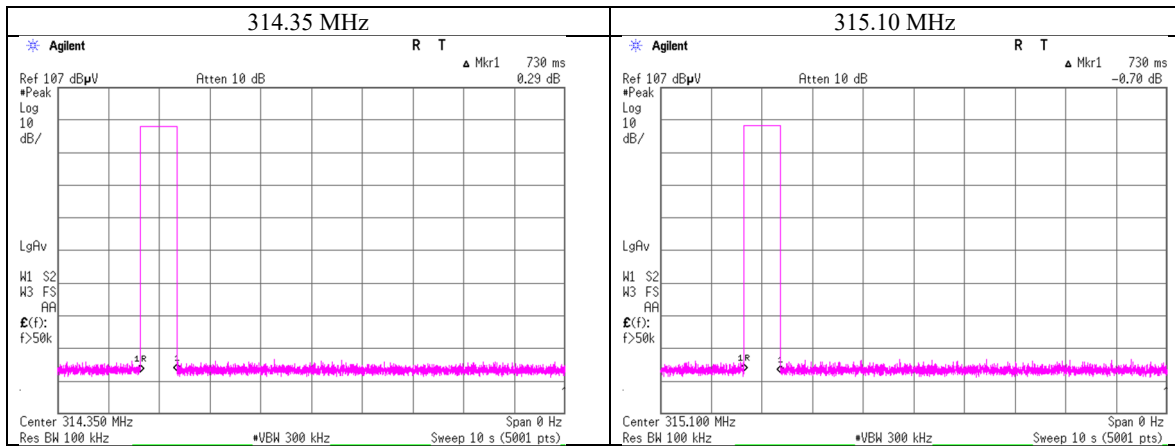

\* The EUT transmits UHF when LF signal is received from a car or a button on the EUT is pressed. In both cases, the UHF transmission is stopped within 5 seconds. So the test was performed by a button-pressed operation as the worst case. Please refer to the “Theory of Operation” for details.

**Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)**

Report No. 13403530H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.1  
Date July 8, 2020  
Temperature / Humidity 22 deg. C / 55 % RH  
Engineer Junya Okuno  
Mode Transmitting mode 314.35 MHz

**PK**

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit dBuV/m	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
314.350	PK	85.8	83.0	13.8	10.8	38.7	-	71.7	68.9	95.5	23.8	26.6	Carrier
628.700	PK	40.0	38.9	19.2	13.0	38.2	-	34.0	32.9	75.5	41.5	42.6	Outside
943.050	PK	33.4	33.5	21.7	14.8	37.9	-	32.1	32.2	75.5	43.4	43.3	Outside
1257.400	PK	46.6	46.5	25.9	6.2	37.0	-	41.7	41.6	75.5	33.8	33.9	Outside
1571.750	PK	46.5	46.7	25.3	5.7	36.8	-	40.7	40.9	73.9	33.2	33.0	Inside
1886.100	PK	46.9	46.8	25.6	5.6	36.5	-	41.6	41.6	75.5	33.9	33.9	Outside
2200.450	PK	46.8	46.7	28.5	5.7	36.5	-	44.5	44.4	73.9	29.4	29.5	Inside
2514.800	PK	46.7	46.5	27.5	5.8	36.5	-	43.6	43.3	75.5	31.9	32.2	Outside
2829.150	PK	46.6	46.6	28.4	5.9	36.6	-	44.4	44.3	73.9	29.5	29.6	Inside
3143.500	PK	46.8	46.9	28.7	6.1	36.6	-	45.0	45.0	75.5	30.6	30.5	Outside

**PK with Duty factor**

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit dBuV/m	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
314.350	PK	85.8	83.0	13.8	10.8	38.7	0.0	71.7	68.9	75.5	3.8	6.6	Carrier
628.700	PK	40.0	38.9	19.2	13.0	38.2	0.0	34.0	32.9	55.5	21.5	22.6	Outside
943.050	PK	33.4	33.5	21.7	14.8	37.9	0.0	32.1	32.2	55.5	23.4	23.3	Outside
1257.400	PK	46.6	46.5	25.9	6.2	37.0	0.0	41.7	41.6	55.5	13.8	13.9	Outside
1571.750	PK	46.5	46.7	25.3	5.7	36.8	0.0	40.7	40.9	53.9	13.2	13.0	Inside
1886.100	PK	46.9	46.8	25.6	5.6	36.5	0.0	41.6	41.6	55.5	13.9	13.9	Outside
2200.450	PK	46.8	46.7	28.5	5.7	36.5	0.0	44.5	44.4	53.9	9.4	9.5	Inside
2514.800	PK	46.7	46.5	27.5	5.8	36.5	0.0	43.6	43.3	55.5	11.9	12.2	Outside
2829.150	PK	46.6	46.6	28.4	5.9	36.6	0.0	44.4	44.3	53.9	9.5	9.6	Inside
3143.500	PK	46.8	46.9	28.7	6.1	36.6	0.0	45.0	45.0	55.5	10.6	10.5	Outside

Sample calculation:

Result of PK = Reading + Ant Factor + Loss {Cable + Attenuator + Filter (above 1GHz) +Distance factor (above 1 GHz)} - Gain (Amplifier)

Result of PK with Duty factor = Reading + Ant Factor + Loss {Cable + Attenuator + Filter (above 1 GHz) +Distance factor (above 1 GHz)} - Gain (Amplifier) + Duty factor

For above 1GHz : Distance Factor:  $20 \times \log(4.0 \text{ m}/3.0 \text{ m}) = 2.50 \text{ dB}$

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Since the peak emission result satisfied the average limit, duty factor was omitted.

Although Duty of this product was 100% or less, the result of AV (PK with Duty factor) was calculated by applying Duty 100% as worst.

**Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)**

Report No. 13403530H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.1  
Date July 8, 2020  
Temperature / Humidity 22 deg. C / 55 % RH  
Engineer Junya Okuno  
Mode Transmitting mode 315.10 MHz

**PK**

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit dBuV/m	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
315.100	PK	85.7	82.8	13.8	10.8	38.7	-	71.6	68.7	95.6	24.0	26.9	Carrier
630.200	PK	40.0	38.6	19.2	13.0	38.2	-	34.0	32.6	75.6	41.6	43.0	Outside
945.300	PK	34.0	33.8	21.7	14.8	37.8	-	32.7	32.5	75.6	42.9	43.1	Outside
1260.400	PK	46.8	46.7	25.9	6.2	37.0	-	41.9	41.8	75.6	33.7	33.8	Outside
1575.500	PK	46.7	46.9	25.3	5.7	36.8	-	40.8	41.1	73.9	33.1	32.8	Inside
1890.600	PK	46.7	46.9	25.6	5.6	36.5	-	41.5	41.6	75.6	34.1	34.0	Outside
2205.700	PK	46.5	46.3	28.4	5.7	36.5	-	44.2	44.0	73.9	29.7	29.9	Inside
2520.800	PK	46.4	46.9	27.5	5.8	36.5	-	43.3	43.7	75.6	32.3	31.9	Outside
2835.900	PK	46.5	46.5	28.4	5.9	36.6	-	44.3	44.2	73.9	29.7	29.7	Inside
3151.000	PK	46.3	46.5	28.7	6.1	36.6	-	44.5	44.7	75.6	31.1	30.9	Outside

**PK with Duty factor**

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit dBuV/m	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
315.100	PK	85.7	82.8	13.8	10.8	38.7	0.0	71.6	68.7	75.6	4.0	6.9	Carrier
630.200	PK	40.0	38.6	19.2	13.0	38.2	0.0	34.0	32.6	55.6	21.6	23.0	Outside
945.300	PK	34.0	33.8	21.7	14.8	37.8	0.0	32.7	32.5	55.6	22.9	23.1	Outside
1260.400	PK	46.8	46.7	25.9	6.2	37.0	0.0	41.9	41.8	55.6	13.7	13.8	Outside
1575.500	PK	46.7	46.9	25.3	5.7	36.8	0.0	40.8	41.1	53.9	13.1	12.8	Inside
1890.600	PK	46.7	46.9	25.6	5.6	36.5	0.0	41.5	41.6	55.6	14.1	14.0	Outside
2205.700	PK	46.5	46.3	28.4	5.7	36.5	0.0	44.2	44.0	53.9	9.7	9.9	Inside
2520.800	PK	46.4	46.9	27.5	5.8	36.5	0.0	43.3	43.7	55.6	12.3	11.9	Outside
2835.900	PK	46.5	46.5	28.4	5.9	36.6	0.0	44.3	44.2	53.9	9.6	9.7	Inside
3151.000	PK	46.3	46.5	28.7	6.1	36.6	0.0	44.5	44.7	55.6	11.1	10.9	Outside

Sample calculation:

Result of PK = Reading + Ant Factor + Loss {Cable + Attenuator + Filter (above 1GHz) +Distance factor (above 1 GHz)} - Gain (Amplifier)

Result of PK with Duty factor = Reading + Ant Factor + Loss {Cable + Attenuator + Filter (above 1 GHz) +Distance factor (above 1 GHz)} - Gain (Amplifier) + Duty factor

For above 1GHz : Distance Factor:  $20 \times \log(4.0 \text{ m}/3.0 \text{ m}) = 2.50 \text{ dB}$

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).



Since the peak emission result satisfied the average limit, duty factor was omitted.

Although Duty of this product was 100% or less, the result of AV (PK with Duty factor) was calculated by applying Duty 100% as worst.



**Radiated Spurious Emission**  
**(Plot data, Worst case)**

Report No. 13403530H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.1  
Date July 8, 2020  
Temperature / Humidity 22 deg. C / 55 % RH  
Engineer Junya Okuno  
Mode Transmitting mode 314.35 MHz

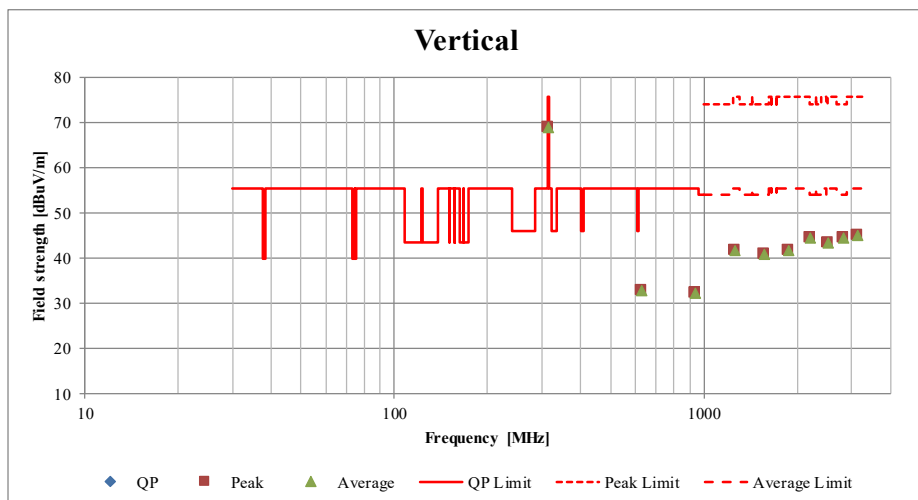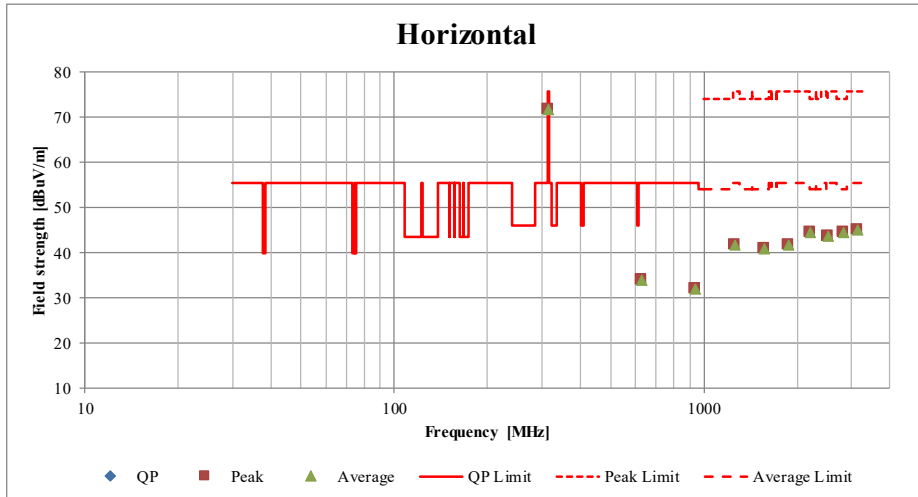

\*These plots data contains sufficient number to show the trend of characteristic features for EUT.

**-20 dB and 99% Occupied Bandwidth**

Report No. 13403530H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.1  
Date July 8, 2020  
Temperature / Humidity 22 deg. C / 55 % RH  
Engineer Junya Okuno  
Mode Transmitting mode 314.35 MHz / 315.10 MHz

Bandwidth Limit : Fundamental Frequency **314.35** MHz x 0.25% = 785.88 kHz

\* The above limit was calculated from more stringent nominal frequency.

\* Method of KDB 926416 for systems employing non sweeping frequencies was referred.

**314.35MHz**

-20dB Bandwidth [kHz]
36.623

**315.10MHz**

-20dB Bandwidth [kHz]
36.560

-20dB Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
73.183	785.88	Pass

Bandwidth Limit : Fundamental Frequency **314.35** MHz x 0.25% = 785.88 kHz

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
36.1953	785.88	Pass


Bandwidth Limit : Fundamental Frequency **315.10** MHz x 0.25% = 787.75 kHz

99% Occupied Bandwidth [kHz]	Bandwidth Limit [kHz]	Result
36.1867	787.75	Pass


**-20dB and 99% Occupied Bandwidth**

Report No. 13403530H  
 Test place Ise EMC Lab.  
 Semi Anechoic Chamber No.1  
 Date July 8, 2020  
 Temperature / Humidity 22 deg. C / 55 % RH  
 Engineer Junya Okuno  
 Mode Transmitting mode 314.35 MHz / 315.10 MHz

[314.35 MHz]

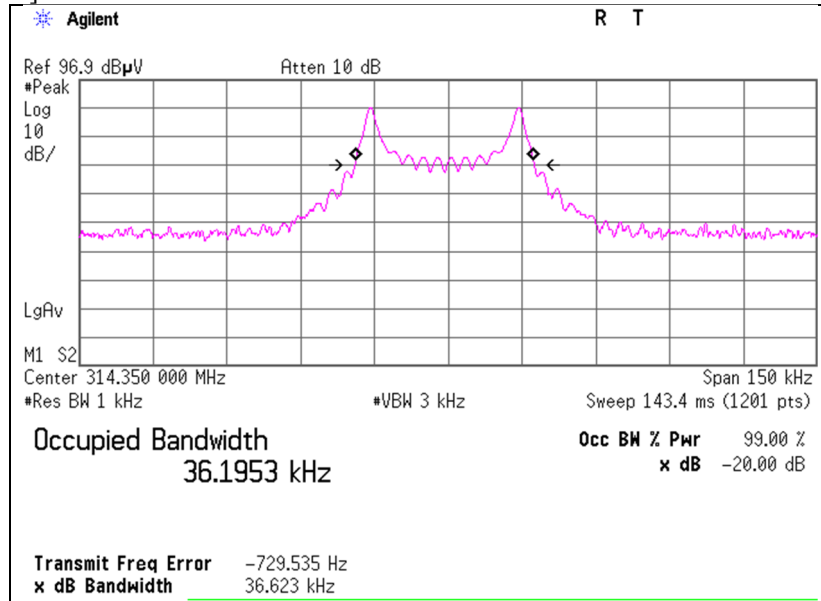

[315.10 MHz]

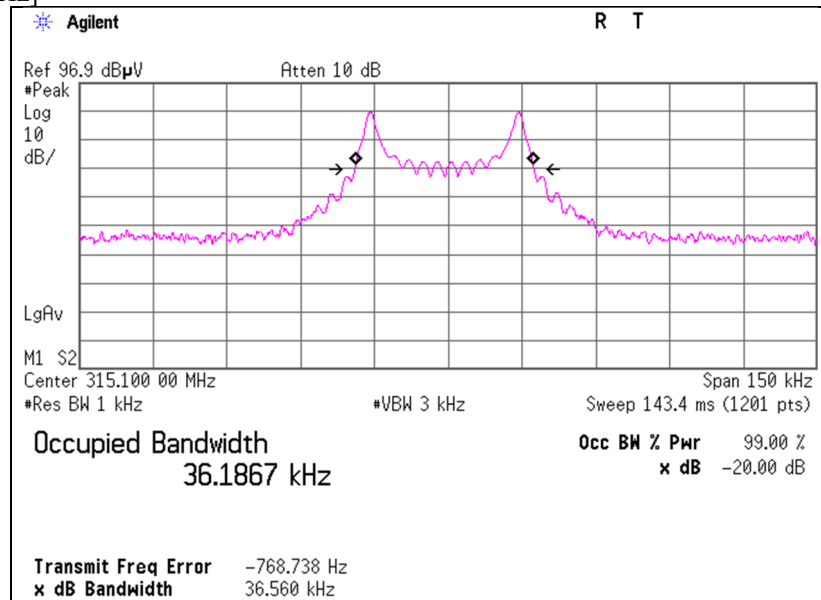

## **APPENDIX 2: Test instruments**

### **Test equipment**

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	MAEC-01	141998	AC1_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 10m	DA-06881	06/08/2020	24
RE	MOS-27	141566	Thermo-Hygrometer	CUSTOM	CTH-201	A08Q26	01/07/2020	12
RE	MMM-03	141530	Digital Tester	Fluke Corporation	FLUKE 26-3	78030621	08/20/2019	12
RE	MJM-25	142226	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-ME MI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-01-SVSWR	141994	AC1_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 10m	DA-06881	04/16/2019	24
RE	MAT-08	141213	Attenuator(6dB)	Weinschel Corp	2	BK7971	11/14/2019	12
RE	KBA-05	141198	Biconical Antenna	Schwarzbeck Mess - Elektronik	VHA9103+BBA9106	2513	04/22/2020	12
RE	MCC-02	141350	Coaxial Cable	Suhner/storm/Agilent/T SJ	-	-	06/25/2020	12
RE	MTR-09	141950	EMI Test Receiver	Rohde & Schwarz	ESU26	100412	06/03/2020	12
RE	MLA-20	141264	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess - Elektronik	VUSLP9111B	9111B-189	04/22/2020	12
RE	MPA-19	141585	Pre Amplifier	MITEQ	MLA-10K01-B01-35	1237616	02/10/2020	12
RE	MHA-05	141511	Horn Antenna 1-18GHz	Schwarzbeck Mess - Elektronik	BBHA9120D	253	09/03/2019	12
RE	MCC-217	141393	Microwave Cable	Junkosha	MWX221	1604S254(1 m) / 1608S088(5 m)	08/06/2019	12
RE	MPA-01	141576	Pre Amplifier	Keysight Technologies Inc	8449B	3008A01671	02/20/2020	12
RE	MSA-14	141901	Spectrum Analyzer	Keysight Technologies Inc	E4440A	MY48250080	10/06/2019	12
RE	MHF-27	141297	High Pass Filter (1.1-10GHz)	TOKYO KEIKI	TF219CD1	1001	01/09/2020	12
RE	MLPA-07	142645	Loop Antenna	UL Japan	-	-	-	-

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated emission, 99 % Occupied Bandwidth, -20 dB bandwidth, and Automatically deactivate tests

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124