



# EMI TEST REPORT

**Test Report No. : 11167562H**

**Applicant** : **DENSO CORPORATION**  
**Type of Equipment** : **Remote Keyless Entry System and TPMS (Receiver)**  
**Model No.** : **23ABE**  
**Test regulation** : **FCC Part 15 Subpart B: 2015**  
**FCC ID** : **HYQ23ABE**  
**Test Result** : **Complied**

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.
6. This test report covers EMC technical requirements. It does not cover administrative issues such as Manual or non-EMC test related Requirements. (if applicable)


**Date of test:** February 25 to March 2, 2016

**Representative test engineer:**



Shuichi Ohyama  
Engineer  
Consumer Technology Division

**Approved by:**



Motoya Imura  
Engineer  
Consumer Technology Division



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation. \*As for the range of Accreditation in NVLAP, you may refer to the WEB address, [http://japan.ul.com/resources/emc\\_accredited/](http://japan.ul.com/resources/emc_accredited/)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

13-EM-F0429



<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information .....</b>	<b>4</b>
<b>SECTION 2: Equipment under test (E.U.T.) .....</b>	<b>4</b>
<b>SECTION 3: Test specification, procedures &amp; results .....</b>	<b>5</b>
<b>SECTION 4: Operation of E.U.T. during testing .....</b>	<b>8</b>
<b>SECTION 5: Radiated Emission .....</b>	<b>10</b>
<b>SECTION 6: Antenna Terminal.....</b>	<b>11</b>
<b>APPENDIX 1: Test data .....</b>	<b>12</b>
Radiated Emission.....	12
Antenna Terminal Conducted Emission .....	18
Radiated Emission (Reference data).....	24
<b>APPENDIX 2: Test instruments .....</b>	<b>40</b>
<b>APPENDIX 3: Photographs of test setup.....</b>	<b>41</b>
Radiated Emission.....	41
Worst Case Position .....	43

## **SECTION 1: Customer information**

Company Name : DENSO CORPORATION  
Address : 1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661, Japan  
Telephone Number : +81-566-20-3953  
Facsimile Number : +81-566-25-4837  
Contact Person : Masashi Urabe

## **SECTION 2: Equipment under test (E.U.T.)**

### **2.1 Identification of E.U.T.**

Type of Equipment : Remote Keyless Entry System and TPMS (Receiver)  
Model No. : 23ABE  
Serial No. : Refer to Section 4, Clause 4.2  
Receipt Date of Sample : February 23, 2016  
Country of Mass-production : Japan  
Condition of EUT : Engineering prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification of EUT : No Modification by the test lab

### **2.2 Product description**

Model No: 23ABE (referred to as the EUT in this report) is Remote Keyless Entry System and TPMS (Receiver). 23ABE has 10 variations. For details of variations, see "Theory of Operation".

Feature of EUT:

<RKES mode>

RKE system is mainly used for locking or unlocking the doors of the vehicle.  
The transmitter sends a radio wave signal, while the button is pushed.  
The receiver becomes active in response to the signal from the transmitter.

<TPMS mode>

Tire Pressure Monitoring System is used for monitoring and indicating information of air pressure in vehicle's tires.  
Transmitter sends the data that informs air pressure in vehicle's tire to the receiver.  
The data also includes the information of temperature, battery voltage and identity code of transmitter.  
The receiver judges the data, and if the data of air pressure and others is not in a normal condition, the receiver sends a signal to a warning lamp.  
Then, the warning lamp warns drivers.

Type of receiving system : Super-heterodyne  
Frequency of Operation : RKES (CH1): 314.35 MHz  
RKES (CH2): 312.10 MHz  
TPMS: 314.98 MHz  
Oscillator Frequency : 21.948717MHz  
Type of Modulation : RKES: F1D  
TPMS: F1D  
Power Supply : DC 12.0 V  
Antenna Type : ANT1 : Internal antenna(Inverse F antenna / Inverse L antenna),  
ANT2 : External antenna(Connector)

Note:

RKES: Remote Keyless Entry System / TPMS: Tire Pressure Monitoring System

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 3: Test specification, procedures & results**

### **3.1 Test specification**

Test specification : FCC Part 15 Subpart B: 2015, final revised on November 23, 2015  
\*Some parts are effective on and after December 17, 2015 or December 23, 2015.  
The revision does not affect the test specification applied to the EUT.

Title : FCC 47CFR Part15 Radio Frequency Device  
Subpart B Unintentional Radiators

### **3.2 Procedures and results**

<b>Item</b>	<b>Test Procedure</b>	<b>Limits</b>	<b>Deviation</b>	<b>Worst margin</b>	<b>Result</b>
Conducted emission	<b>FCC:</b> ANSI C63.4: 2014 7. AC powerline conducted emission measurements <b>IC:</b> RSS-Gen 8.8	Class B	N/A *1)	N/A	N/A
Radiated emission	<b>FCC:</b> ANSI C63.4: 2014 8. Radiated emission measurements <b>IC:</b> RSS-Gen 7	Class B	N/A	18.8 dB 912.840 MHz, Horizontal/Vertical, QP	Complied
Antenna Terminal	<b>FCC:</b> ANSI C63.4: 2014 12. Measurement of unintentional radiators other than ITE <b>IC:</b> RSS-Gen 7	Receiver	N/A	9.1 dB 30.144 MHz, PK	Complied
*Note: UL Japan, Inc's EMI Work Procedure 13-EM-W0420. *1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.					

### **3.3 Addition to standard**

No addition, exclusion nor deviation has been made from the standard.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.4 Uncertainty

#### EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test distance	Radiated emission (+dB)
	9 kHz - 30 MHz
3m	3.8 dB
10m	3.7 dB

\*Measurement distance

Polarity	Radiated emission (Below 1GHz)			
	(3 m*)(+dB)		(10 m*)(+dB)	
	30 – 300 MHz	300 – 1000MHz	30 – 300 MHz	300 – 1000MHz
Horizontal	4.8 dB	5.2 dB	4.8 dB	5.0 dB
Vertical	4.5 dB	5.9 dB	4.8 dB	5.1 dB

Radiated emission				
(3 m*)(+dB)		(1 m*)(+dB)	(0.5 m*)(+dB)	(10 m*)(+dB)
1 – 6GHz	6 – 18GHz	10 – 26.5 GHz	26.5 – 40GHz	1 -18 GHz
5.1 dB	5.3 dB	5.1 dB	5.1 dB	5.3 dB

#### Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

#### Antenna terminal conducted emission test

The data listed in this test report has enough margin, more than the site margin.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab. \*NVLAP Lab. code: 200572-0  
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999 Facsimile : +81 596 24 8124

	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	4.0 x 4.5 x 2.7m	4.0 x 4.5 m	-
No.6 measurement room	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	8.8 x 4.6 x 2.8m	2.4 x 2.4m	-
No.11 measurement room	-	6.2 x 4.7 x 3.0m	4.8 x 4.6m	-

\* Size of vertical conducting plane (for Conducted Emission test): 2.0 x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

## **SECTION 4: Operation of E.U.T. during testing**

### **4.1 Operating modes**

The mode used: 1. RKES Receiving mode (314.35 MHz)  
2. RKES Receiving mode (312.10 MHz)  
3. TPMS Receiving mode (314.98 MHz)

\* Refer to the table in “Theory of Operation\_Variation\_23ABE” for test mode.

Regarding RKES Receiving mode (314.35 MHz / 312.10 MHz), internal antenna receiving was tested with Variation No. 6, because Variation No. 6 had the highest emission level compared to the other representative variants (Variation No.6, 7, 8, 9, and 10) of the table in “Theory of Operation”.

Regarding TPMS Receiving mode (314.98 MHz), internal antenna receiving was tested with Variation No. 6 which was the worst-variation of RKES Receiving mode.

Also, external antenna receiving (Test mode 1, 2, 3) was tested with Variation No. 6 as representative, because there was no difference in circuit construction by variations.

Among Variation No.1 to 10,

- the difference due to the feeding point and antenna variation of the internal antenna was confirmed with Variation No. 6, 7, 8, 9, and 10.
- regarding External antenna, variants with External antenna were tested, which were the worst condition for EMI.

As a result, enough margin for the limit was observed.

---

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124



## 4.2 Configuration and peripherals

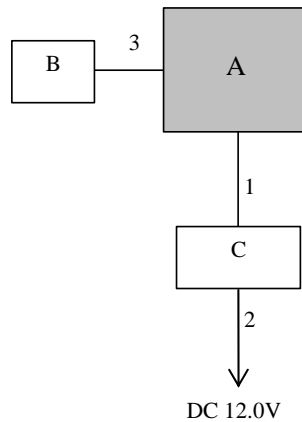

\*Cabling and setup were taken into consideration and test data was taken under worse case conditions.

### Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Remote Keyless Entry System and TPMS (Receiver)	23ABE	001 (Variation No. 6) *1)	DENSO CORPORATION	EUT
			002 (Variation No. 7)		
			003 (Variation No. 8)		
			004 (Variation No. 9)		
			005 (Variation No. 10)		
B	External Antenna	-	4G26	DENSO CORPORATION	-
C	Checker	-	3	DENSO CORPORATION	-

### List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC and Signal Cable	1.0	Unshielded	Unshielded	-
2	DC Cable	1.1	Unshielded	Unshielded	-
3	Antenna Cable	1.8	Shielded	Shielded	-

\*1) Variations owing to antenna matching (Inverse F Antenna Type) \*See "Theory of Operation" for details. TYPE1 which was used for the tests has 306 "Nothing" and 307 "Nothing".

The result of Radiated emission test was mainly from characteristics of Local Oscillator.

If the range of 306, 307, 308 and 309 becomes "Capacitor 0.1 - 1000pF", or "Inductor 1 - 100nH", there is no influence on the result of Radiated emission test.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 5: Radiated Emission**

### **5.1 Operating environment**

Test place : No. 3 semi anechoic chamber  
Temperature : See data  
Humidity : See data

### **5.2 Test configuration**

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane.

The EUT was set on the edge of the tabletop.

Test was made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna was varied in height above the conducting ground plane to obtain the maximum signal strength.

Photographs of the set up are shown in Appendix 3.

### **5.3 Test conditions**

Frequency range : 30 MHz - 300 MHz (Biconical antenna) / 300 MHz - 1000 MHz (Logperiodic antenna)  
1000 MHz - 2000 MHz (Horn antenna)  
Test distance : 3 m  
EUT position : Table top  
EUT operation mode : See Clause 4.1

### **5.4 Test procedure**

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver.

The radiated emission measurements were made with the following detector function of the Test Receiver.

Frequency	Below 1 GHz	Above 1 GHz
Instrument used	Test Receiver	Test Receiver
IF Bandwidth	QP: BW 120 kHz	PK: BW 1 MHz, CISPR AV: BW 1 MHz

- The noise levels were confirmed at each position of X, Y and Z axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

### **5.5 Test result**

Summary of the test results: Pass

Date: February 26, 2016  
March 2, 2016  
Test engineer: Tomotsugu Koyama  
Shuichi Ohyama

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 6: Antenna Terminal**

### **6.1 Operating environment**

Test place : No.3 and 4 semi anechoic chamber  
Temperature : See data  
Humidity : See data

### **6.2 Test configuration**

EUT was placed on a wooden table of nominal size, 0.5 m by 1.0 m, raised 0.8 m from the ground.

### **6.3 Test conditions**

Frequency range : 30 MHz - 1000 MHz / 1000 MHz - 2000 MHz  
Test distance : N/A  
EUT position : Table top  
EUT operation mode : See Clause 4.1

### **6.4 Test procedure**

The Antenna Terminal was measured with a spectrum analyzer connected to the antenna port.

Frequency	Below 1 GHz	Above 1 GHz
Instrument used	Spectrum Analyzer	Spectrum Analyzer
IF Bandwidth	PK: RBW:100 kHz/VBW: 100 kHz	PK: RBW:1 MHz/VBW: 3 MHz

### **6.5 Test result**

Summary of the test results: Pass

Date: February 25 and March 2, 2016

Test engineer: Shuichi Ohyama

**APPENDIX 1: Test data**

**Radiated Emission**  
**RKES (314.35MHz) Variation No. 6 External Antenna**  
**(Below 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/02/26

Report No. : 11167562H  
Temp./Humi. : 22 deg. C / 30% RH  
Engineer : Tomotsugu Koyama

Mode / Remarks : RKES Receiving mode 314.35MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

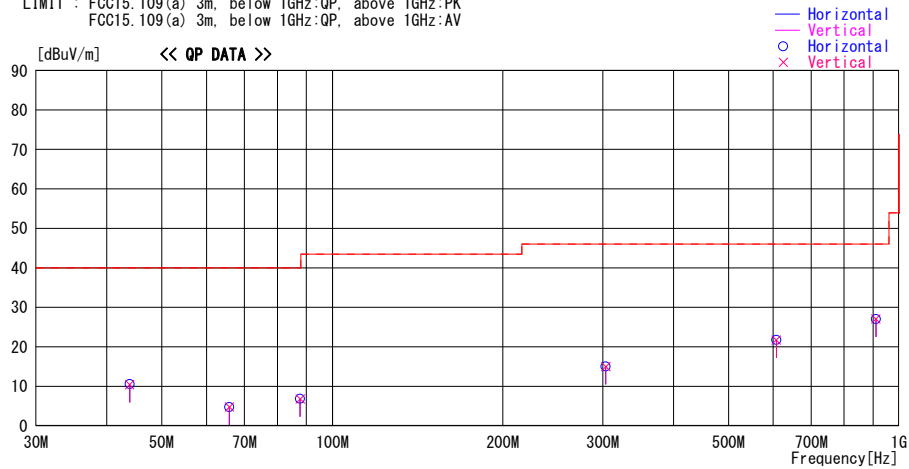

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor [dB/m]	Gain [dB]							
43.897	22.9	QP	12.5	-24.9	10.5	0	300	Hori.	40.0	29.5	
43.897	22.8	QP	12.5	-24.9	10.4	0	100	Vert.	40.0	29.6	
65.846	23.0	QP	6.2	-24.5	4.7	0	300	Hori.	40.0	35.3	
65.846	23.1	QP	6.2	-24.5	4.8	0	100	Vert.	40.0	35.2	
87.795	23.2	QP	7.8	-24.2	6.8	0	300	Hori.	40.0	33.2	
87.795	23.2	QP	7.8	-24.2	6.8	0	100	Vert.	40.0	33.2	
303.650	22.4	QP	14.6	-22.0	15.0	0	100	Hori.	46.0	31.0	
303.650	22.4	QP	14.6	-22.0	15.0	0	100	Vert.	46.0	31.0	
607.300	22.6	QP	19.4	-20.3	21.7	0	100	Hori.	46.0	24.3	
607.300	22.6	QP	19.4	-20.3	21.7	0	100	Vert.	46.0	24.3	
910.500	22.3	QP	22.4	-17.7	27.0	0	100	Hori.	46.0	19.0	
910.500	22.4	QP	22.4	-17.7	27.1	0	100	Vert.	46.0	18.9	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP))

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission**  
**RKES (314.35MHz) Variation No. 6 External Antenna**  
**(Above 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 314.35MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

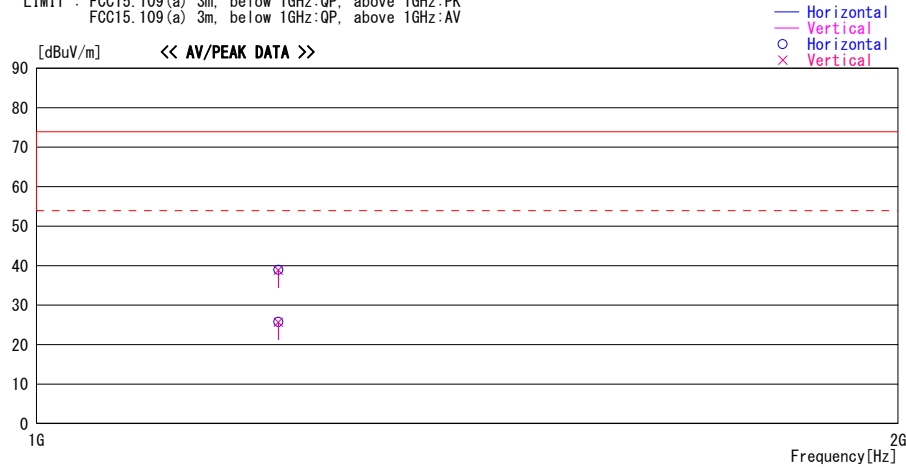

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss & Gain [dB]							
1214.600	43.8	PK	24.3	-29.2	38.9	0	100	Hori.	73.9	35.0	
1214.600	30.6	AV	24.3	-29.2	25.7	0	100	Hori.	53.9	28.2	
1214.600	43.8	PK	24.3	-29.2	38.9	0	100	Vert.	73.9	35.0	
1214.600	30.6	AV	24.3	-29.2	25.7	0	100	Vert.	53.9	28.2	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN(CABLE - GAIN(AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission**  
**RKES (312.10MHz) Variation No. 6 External Antenna**  
**(Below 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/02/26

Report No. : 11167562H  
Temp./Humi. : 22 deg. C / 30% RH  
Engineer : Tomotsugu Koyama

Mode / Remarks : RKES Receiving mode 312.10MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

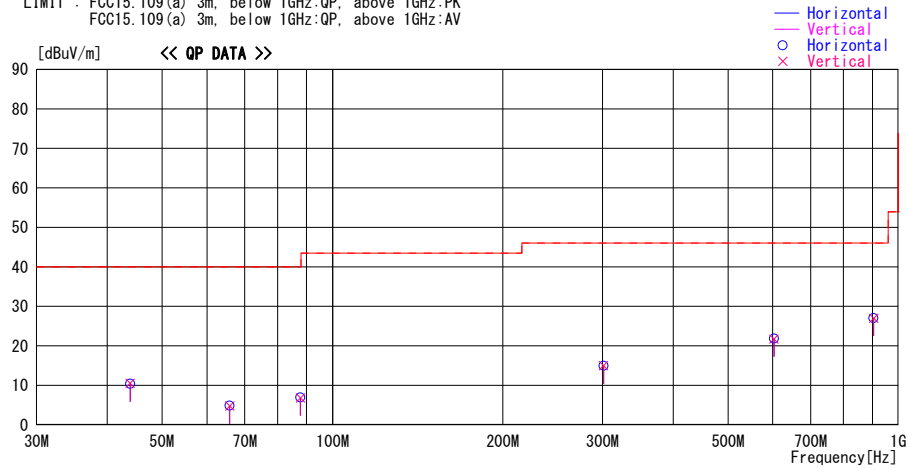

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
43.897	22.8	QP	12.5	-24.9	10.4	0	300	Hori.	40.0	29.6	
43.897	22.9	QP	12.5	-24.9	10.5	0	100	Vert.	40.0	29.5	
65.846	23.1	QP	6.2	-24.5	4.8	0	300	Hori.	40.0	35.2	
65.846	23.1	QP	6.2	-24.5	4.8	0	100	Vert.	40.0	35.2	
87.795	23.3	QP	7.8	-24.2	6.9	0	300	Hori.	40.0	33.1	
87.795	23.2	QP	7.8	-24.2	6.8	0	100	Vert.	40.0	33.2	
301.400	22.3	QP	14.6	-22.0	14.9	0	100	Hori.	46.0	31.1	
301.400	22.4	QP	14.6	-22.0	15.0	0	100	Vert.	46.0	31.0	
602.800	22.7	QP	19.4	-20.3	21.8	0	100	Hori.	46.0	24.2	
602.800	22.6	QP	19.4	-20.3	21.7	0	100	Vert.	46.0	24.3	
904.200	22.3	QP	22.4	-17.7	27.0	0	100	Hori.	46.0	19.0	
904.200	22.3	QP	22.4	-17.7	27.0	0	100	Vert.	46.0	19.0	

CHART: WITH FACTOR ANT TYPE: ~30MHz: LOOP, 30~300MHz: BICONICAL, 300MHz~1000MHz: LOGPERIODIC, 1000MHz~: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP))

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission**  
**RKES (312.10MHz) Variation No. 6 External Antenna**  
**(Above 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 312.10MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

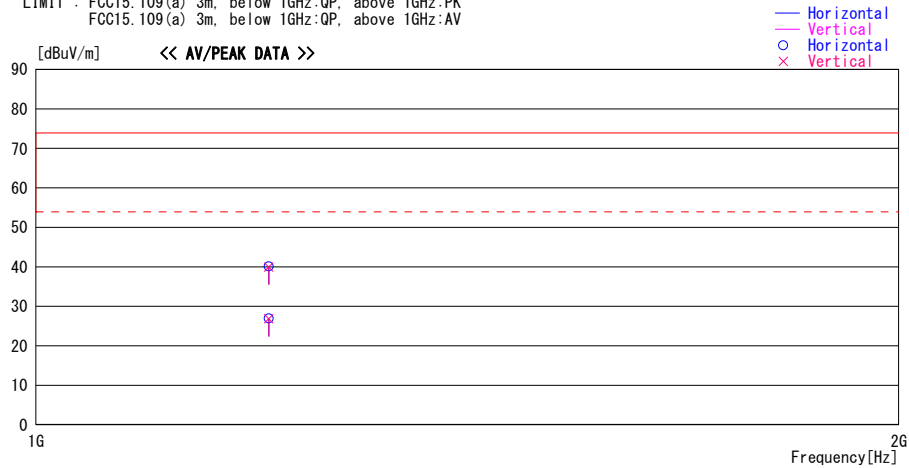

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1205.600	44.5	PK	24.2	-28.6	40.1	0	100	Hori.	73.9	33.8	
1205.600	31.3	AV	24.2	-28.6	26.9	0	100	Hori.	53.9	27.0	
1205.600	44.4	PK	24.2	-28.6	40.0	0	100	Vert.	73.9	33.9	
1205.600	31.3	AV	24.2	-28.6	26.9	0	100	Vert.	53.9	27.0	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission**  
TPMS (314.98MHz) Variation No. 6 External Antenna  
(Below 1GHz)


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/02/26

Report No. : 11167562H  
Temp./Humi. : 22 deg. C / 30% RH  
Engineer : Tomotsugu Koyama

Mode / Remarks : TPMS Receiving mode 314.98MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

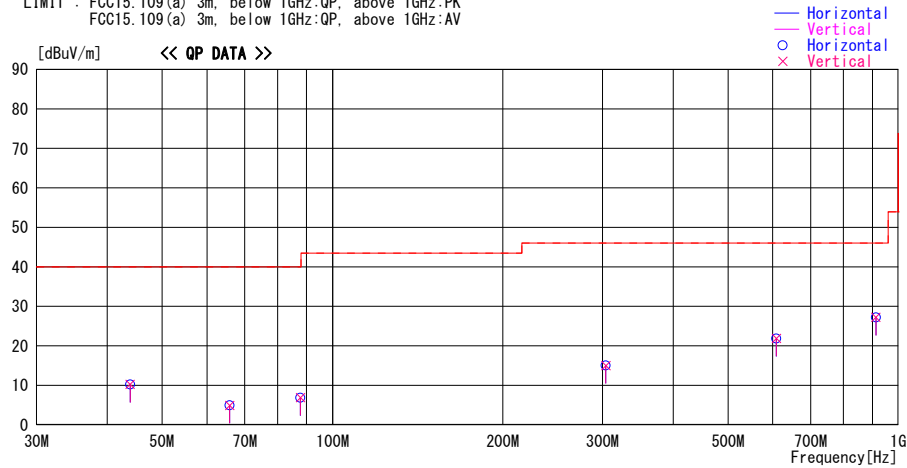

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor [dB/m]	Gain [dB]							
43.897	22.6	QP	12.5	-24.9	10.2	0	300	Hori.	40.0	29.8	
43.897	22.6	QP	12.5	-24.9	10.2	0	100	Vert.	40.0	29.8	
65.846	23.2	QP	6.2	-24.5	4.9	0	300	Hori.	40.0	35.1	
65.846	23.2	QP	6.2	-24.5	4.9	0	100	Vert.	40.0	35.1	
87.795	23.2	QP	7.8	-24.2	6.8	0	300	Hori.	40.0	33.2	
87.795	23.3	QP	7.8	-24.2	6.9	0	100	Vert.	40.0	33.1	
304.280	22.3	QP	14.7	-22.0	15.0	0	100	Hori.	46.0	31.0	
304.280	22.3	QP	14.7	-22.0	15.0	0	100	Vert.	46.0	31.0	
608.560	22.6	QP	19.5	-20.3	21.8	0	100	Hori.	46.0	24.2	
608.560	22.7	QP	19.5	-20.3	21.9	0	100	Vert.	46.0	24.1	
912.840	22.3	QP	22.5	-17.6	27.2	0	100	Hori.	46.0	18.8	
912.840	22.3	QP	22.5	-17.6	27.2	0	100	Vert.	46.0	18.8	

CHART: WITH FACTOR ANT TYPE: <30MHz>: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP))

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.



**Radiated Emission**  
TPMS (314.98MHz) Variation No. 6 External Antenna  
(Above 1GHz)


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : TPMS Receiving mode 314.98MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

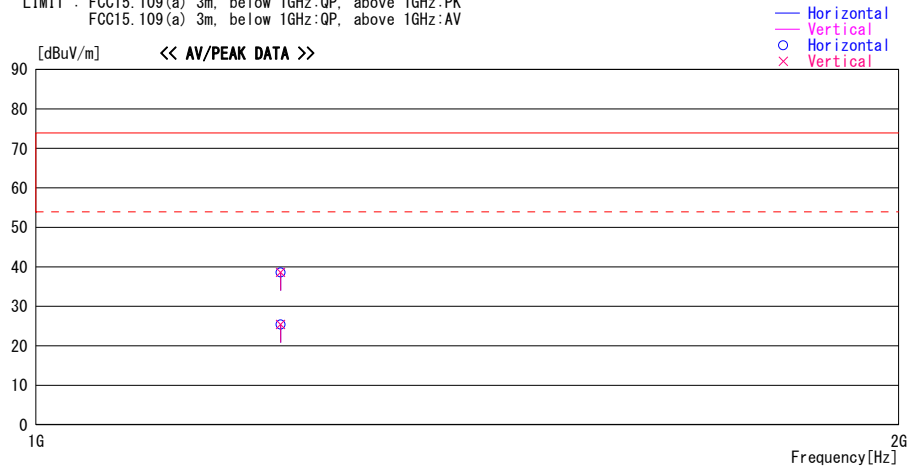

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1217.120	43.5	PK	24.3	-29.2	38.6	0	100	Hori.	73.9	35.3	
1217.120	30.3	AV	24.3	-29.2	25.4	0	100	Hori.	53.9	28.5	
1217.120	43.5	PK	24.3	-29.2	38.6	0	100	Vert.	73.9	35.3	
1217.120	30.3	AV	24.3	-29.2	25.4	0	100	Vert.	53.9	28.5	

CHART: WITH FACTOR ANT TYPE: <30MHz>: LOOP, <30-300MHz>: BICONICAL, <300MHz-1000MHz>: LOGPERIODIC, <1000MHz->: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN (AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Antenna Terminal Conducted Emission**  
**RKES (314.35MHz) Variation No. 6 External Antenna**  
**(Below 1GHz)**


UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H

Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 314.35MHz

LIMIT : FCC15.111 Antenna terminal measurement  
Except for the data below : adequate margin data below the limits.

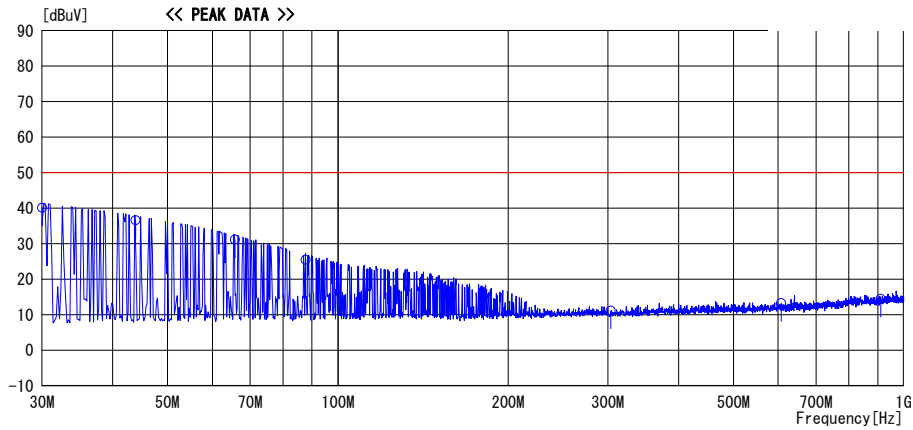

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit *1)	Margin	Comment
			Factor	Gain							
			[dB/m]	[dB]	[dBuV]	[Deg]	[cm]		[dBuV]	[dB]	
30.033	61.2	PK	0.0	-21.1	40.1	0	0	-	50.0	9.9	
43.897	57.3	PK	0.0	-20.7	36.6	0	0	-	50.0	13.4	
65.846	51.4	PK	0.0	-20.3	31.1	0	0	-	50.0	18.9	
87.795	45.5	PK	0.0	-20.0	25.5	0	0	-	50.0	24.5	
303.650	29.1	PK	0.0	-18.0	11.1	0	0	-	50.0	38.9	
607.300	29.4	PK	0.0	-16.2	13.2	0	0	-	50.0	36.8	
910.950	28.1	PK	0.0	-13.6	14.5	0	0	-	50.0	35.5	

\*1) 2nW = -57dBm = 50dBuV

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION: RESULT = READING + LOSS & GAIN (CABLE+ATTEN. - GAIN (AMP))


**Antenna Terminal Conducted Emission**  
**RKES (314.35MHz) Variation No. 6 External Antenna**  
**(Above 1GHz)**

UL Japan, Inc. Ise EMC Lab. No.4 Semi Anechoic Chamber  
Date : 2016/02/25

Report No. : 11167562H  
Temp./Humi. : 25deg. C / 31% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Rx 314.35MHz

LIMIT : FCC15.111 Antenna terminal measurement  
Except for the data below : adequate margin data below the limits.

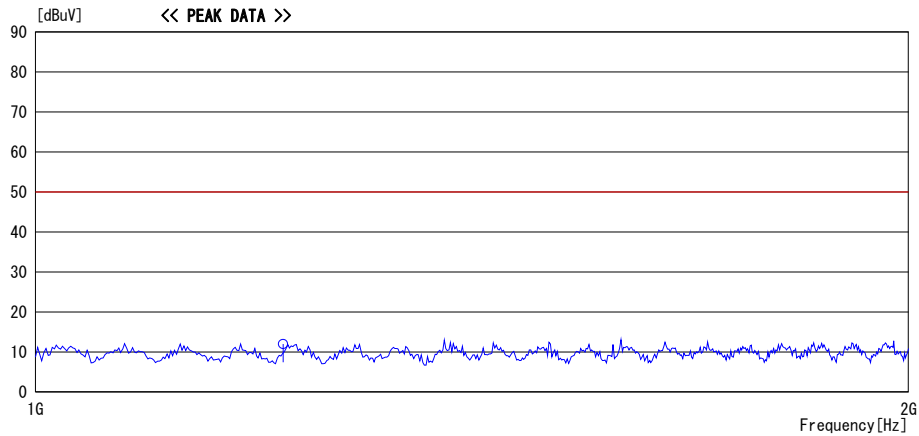

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV]	Angle [Deg]	Height [cm]	Polar.	Limit *1)	Margin	Comment
			Factor [dB/m]	Gain [dB]					[dBuV]	[dB]	
1217.120	45.3	PK	0.0	-33.3	12.0	0	0	-	50.0	38.0	

\*1) 2nW = -57dBm = 50dBuV

CHART: WITH FACTOR    ANT TYPE: -30MHz: LOOP. 30-300MHz: BICONICAL. 300MHz-1000MHz: LOGPERIODIC. 1000MHz-: HORN  
CALCULATION: RESULT = READING + LOSS & GAIN (CABLE+ATTEN. - GAIN (AMP))


**Antenna Terminal Conducted Emission**  
**RKES (312.10MHz) Variation No. 6 External Antenna**  
**(Below 1GHz)**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 312.10MHz

LIMIT : FCC15.111 Antenna terminal measurement  
Except for the data below : adequate margin data below the limits.

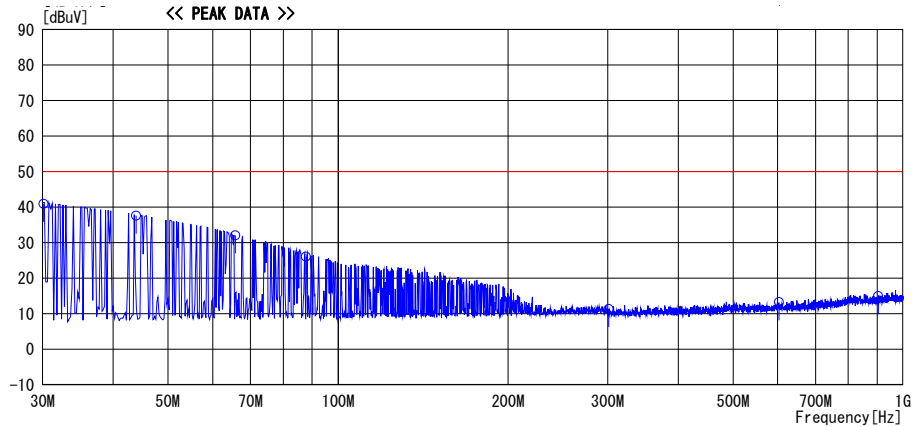

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV]	Angle [Deg]	Height [cm]	Polar.	Limit *1) [dBuV]	Margin [dB]	Comment
			Factor [dB/m]	Loss& Gain [dB]							
30.144	62.0	PK	0.0	-21.1	40.9	0	0	-	50.0	9.1	
43.897	58.3	PK	0.0	-20.7	37.6	0	0	-	50.0	12.4	
65.846	52.3	PK	0.0	-20.3	32.0	0	0	-	50.0	18.0	
87.795	46.1	PK	0.0	-20.0	26.1	0	0	-	50.0	23.9	
301.400	29.3	PK	0.0	-18.0	11.3	0	0	-	50.0	38.7	
602.800	29.4	PK	0.0	-16.2	13.2	0	0	-	50.0	36.8	
904.200	28.6	PK	0.0	-13.6	15.0	0	0	-	50.0	35.0	

\*1) 2nW = -57dBm = 50dBuV

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP. 30-300MHz: BICONICAL. 300MHz-1000MHz: LOGPERIODIC. 1000MHz-: HORN  
CALCULATION: RESULT = READING + LOSS & GAIN (CABLE+ATTEN. - GAIN (AMP))


**Antenna Terminal Conducted Emission**  
 RKES (312.10MHz) Variation No. 6 External Antenna  
 (Above 1GHz)

UL Japan, Inc. Ise EMC Lab. No.4 Semi Anechoic Chamber  
 Date : 2016/02/25

Report No. : 11167562H  
 Temp./Humi. : 25deg. C / 31% RH  
 Engineer : Shuichi Ohyama

Mode / Remarks : RKES Rx 312.10MHz

LIMIT : FCC15.111 Antenna terminal measurement  
 Except for the data below : adequate margin data below the limits.

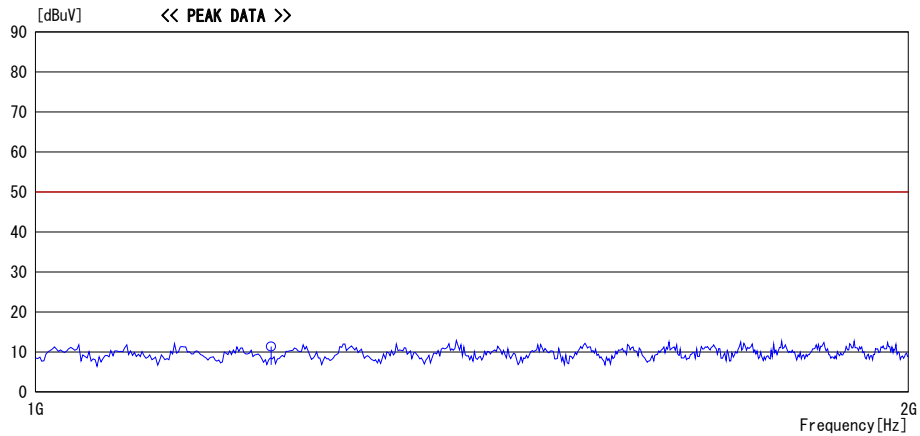

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit *1)	Margin	Comment
			Factor [dB/m]	Gain [dB]							
1205.600	44.8	PK	0.0	-33.4	11.4	0	0	-	50.0	38.6	

\*1) 2nW = -57dBm = 50dBuV

CHART: WITH FACTOR    ANT TYPE: -30MHz: LOOP. 30-300MHz: BICONICAL. 300MHz-1000MHz: LOGPERIODIC. 1000MHz-: HORN  
 CALCULATION: RESULT = READING + LOSS & GAIN (CABLE+ATTEN. - GAIN (AMP))


**Antenna Terminal Conducted Emission**  
TPMS (314.98MHz) Variation No. 6 External Antenna  
(Below 1GHz)

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : TPMS Receiving mode 314.98MHz

LIMIT : FCC15.111 Antenna terminal measurement  
Except for the data below : adequate margin data below the limits.

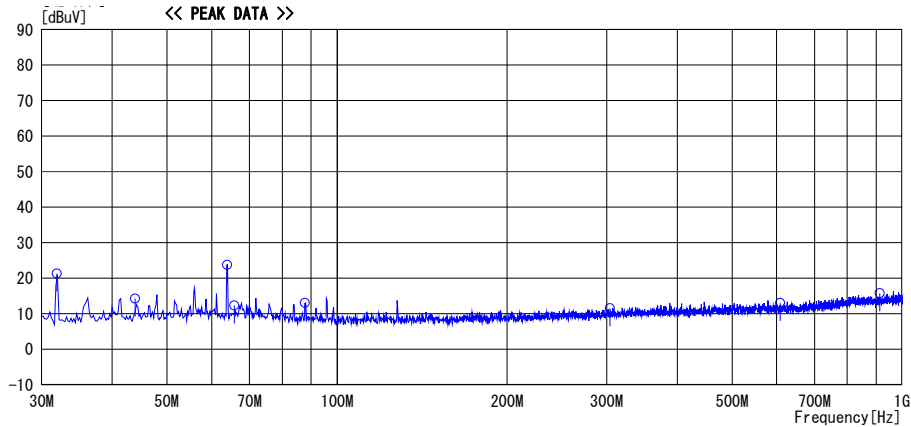

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV]	Angle [Deg]	Height [cm]	Polar.	Limit *1) [dBuV]	Margin [dB]	Comment
			Factor [dB/m]	Loss& Gain [dB]							
31.948	42.4	PK	0.0	-21.1	21.3	0	100	-	50.0	28.7	
43.897	35.0	PK	0.0	-20.7	14.3	0	100	-	50.0	35.7	
63.920	44.1	PK	0.0	-20.3	23.8	0	100	-	50.0	26.2	
65.846	32.6	PK	0.0	-20.3	12.3	0	100	-	50.0	37.7	
87.795	33.0	PK	0.0	-20.0	13.0	0	100	-	50.0	37.0	
304.280	29.5	PK	0.0	-18.0	11.5	0	100	-	50.0	38.5	
608.560	29.2	PK	0.0	-16.2	13.0	0	100	-	50.0	37.0	
912.840	29.3	PK	0.0	-13.5	15.8	0	100	-	50.0	34.2	

\*1) 2nW = -57dBm = 50dBuV

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP. 30-300MHz: BICONICAL. 300MHz-1000MHz: LOGPERIODIC. 1000MHz-: HORN  
CALCULATION: RESULT = READING + LOSS & GAIN (CABLE+ATTEN. - GAIN (AMP))


**Antenna Terminal Conducted Emission**  
TPMS (314.98MHz) Variation No. 6 External Antenna  
(Above 1GHz)

UL Japan, Inc. Ise EMC Lab. No.4 Semi Anechoic Chamber  
Date : 2016/02/25

Report No. : 11167562H  
Temp./Humi. : 25deg. C / 31% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : TPMS Rx 314.98MHz

LIMIT : FCC15.111 Antenna terminal measurement  
Except for the data below : adequate margin data below the limits.

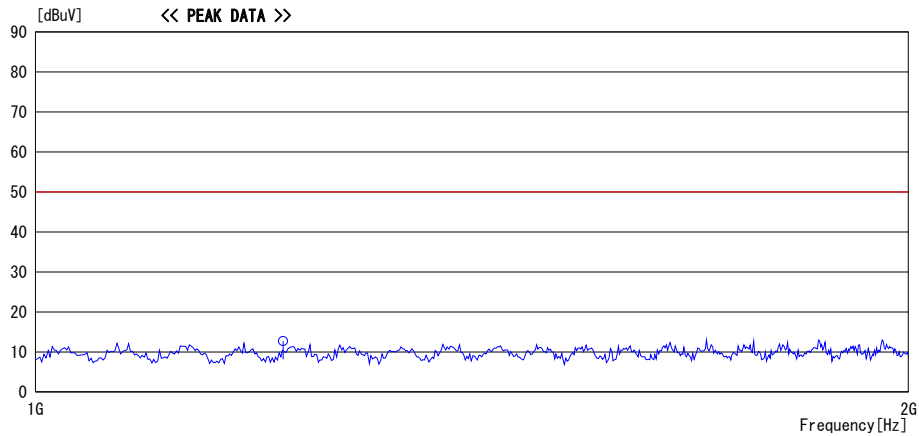

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level [dBuV]	Angle [Deg]	Height [cm]	Polar.	Limit *1) [dBuV]	Margin [dB]	Comment
			Factor [dB/m]	Gain [dB]							
1217.120	46.0	PK	0.0	-33.3	12.7	0	0	-	50.0	37.3	

\*1) 2nW = -57dBm = 50dBuV

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP. 30-300MHz: BICONICAL. 300MHz-1000MHz: LOGPERIODIC. 1000MHz-: HORN  
CALCULATION: RESULT = READING + LOSS & GAIN (CABLE+ATTEN. - GAIN (AMP))

**Radiated Emission (Reference data)**  
**RKES (314.35MHz) Variation No. 7 External Antenna**  
**(Below 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/02/26

Report No. : 11167562H  
Temp./Humi. : 22 deg. C / 30% RH  
Engineer : Tomotsugu Koyama

Mode / Remarks : RKES Receiving mode 314.35MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

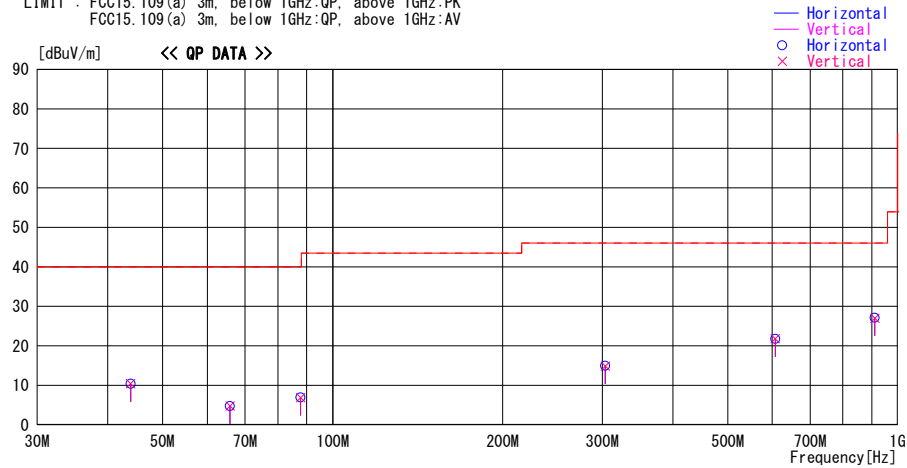

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
43.897	22.8	QP	12.5	-24.9	10.4	0	300	Hori.	40.0	29.6	
43.897	22.8	QP	12.5	-24.9	10.4	0	100	Vert.	40.0	29.6	
65.846	23.0	QP	6.2	-24.5	4.7	0	300	Hori.	40.0	35.3	
65.846	23.1	QP	6.2	-24.5	4.8	0	100	Vert.	40.0	35.2	
87.795	23.3	QP	7.8	-24.2	6.9	0	300	Hori.	40.0	33.1	
87.795	23.3	QP	7.8	-24.2	6.9	0	100	Vert.	40.0	33.1	
303.650	22.3	QP	14.6	-22.0	14.9	0	100	Hori.	46.0	31.1	
303.650	22.3	QP	14.6	-22.0	14.9	0	100	Vert.	46.0	31.1	
607.300	22.6	QP	19.4	-20.3	21.7	0	100	Hori.	46.0	24.3	
607.300	22.7	QP	19.4	-20.3	21.8	0	100	Vert.	46.0	24.2	
910.950	22.4	QP	22.4	-17.7	27.1	0	100	Hori.	46.0	18.9	
910.950	22.3	QP	22.4	-17.7	27.0	0	100	Vert.	46.0	19.0	

CHART:WITH FACTOR ANT TYPE: ~30MHz:LOOP, 30~300MHz:BICONICAL, 300MHz~1000MHz:LOGPERIODIC, 1000MHz~:HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN(CABLE + ATTEN - GAIN(AMP))

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.



**Radiated Emission (Reference data)**  
**RKES (314.35MHz) Variation No. 7 External Antenna**  
**(Above 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 314.35MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

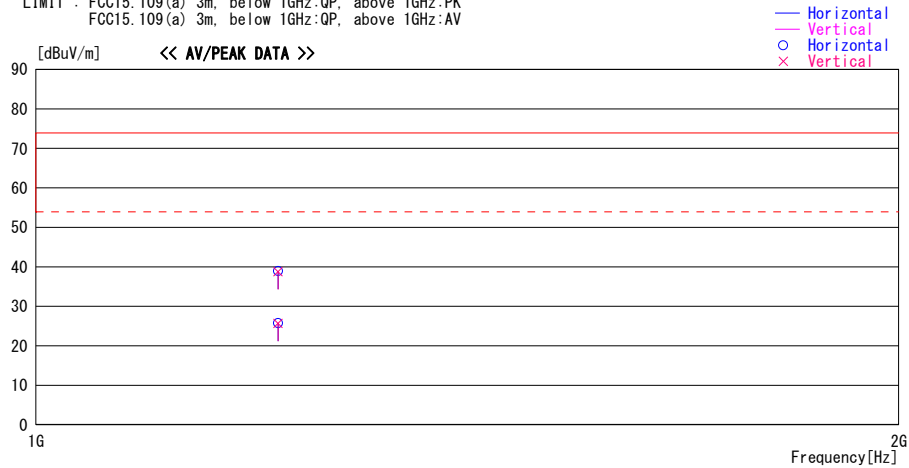

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1214.600	43.8	PK	24.3	-29.2	38.9	0	100	Hori.	73.9	35.0	
1214.600	30.6	AV	24.3	-29.2	25.7	0	100	Hori.	53.9	28.2	
1214.600	43.7	PK	24.3	-29.2	38.8	0	100	Vert.	73.9	35.1	
1214.600	30.6	AV	24.3	-29.2	25.7	0	100	Vert.	53.9	28.2	

CHART: WITH FACTOR ANT TYPE: <30MHz>: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN (AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (312.10MHz) Variation No. 7 External Antenna**  
**(Below 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/02/26

Report No. : 11167562H  
Temp./Humi. : 22 deg. C / 30% RH  
Engineer : Tomotsugu Koyama

Mode / Remarks : RKES Receiving mode 312.10MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

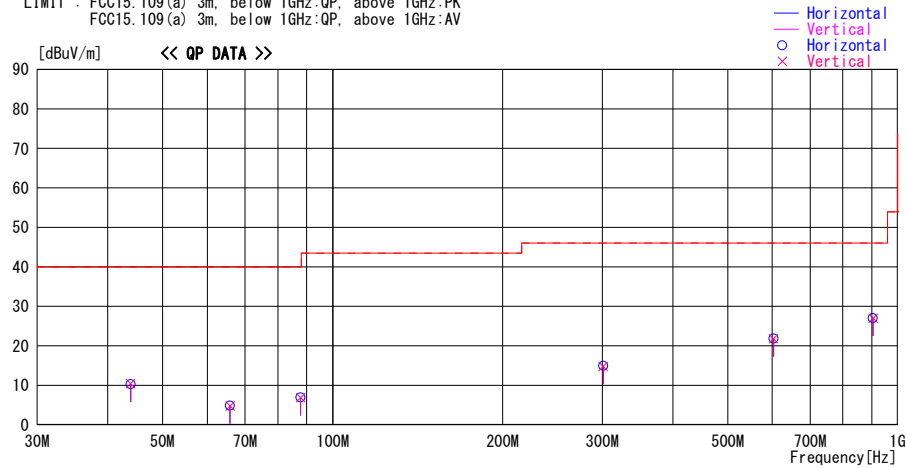

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
43.897	22.7	QP	12.5	-24.9	10.3	0	300	Hori.	40.0	29.7	
43.897	22.8	QP	12.5	-24.9	10.4	0	100	Vert.	40.0	29.6	
65.846	23.1	QP	6.2	-24.5	4.8	0	300	Hori.	40.0	35.2	
65.846	23.1	QP	6.2	-24.5	4.8	0	100	Vert.	40.0	35.2	
87.795	23.3	QP	7.8	-24.2	6.9	0	300	Hori.	40.0	33.1	
87.795	23.3	QP	7.8	-24.2	6.9	0	100	Vert.	40.0	33.1	
301.400	22.3	QP	14.6	-22.0	14.9	0	100	Hori.	46.0	31.1	
301.400	22.2	QP	14.6	-22.0	14.8	0	100	Vert.	46.0	31.2	
602.800	22.7	QP	19.4	-20.3	21.8	0	100	Hori.	46.0	24.2	
602.800	22.7	QP	19.4	-20.3	21.8	0	100	Vert.	46.0	24.2	
904.200	22.3	QP	22.4	-17.7	27.0	0	100	Hori.	46.0	19.0	
904.200	22.3	QP	22.4	-17.7	27.0	0	100	Vert.	46.0	19.0	

CHART: WITH FACTOR ANT TYPE: <30MHz>: LOOP, <30-300MHz>: BICONICAL, <300MHz-1000MHz>: LOGPERIODIC, <1000MHz->: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP))

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (312.10MHz) Variation No. 7 External Antenna**  
**(Above 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 312.10MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

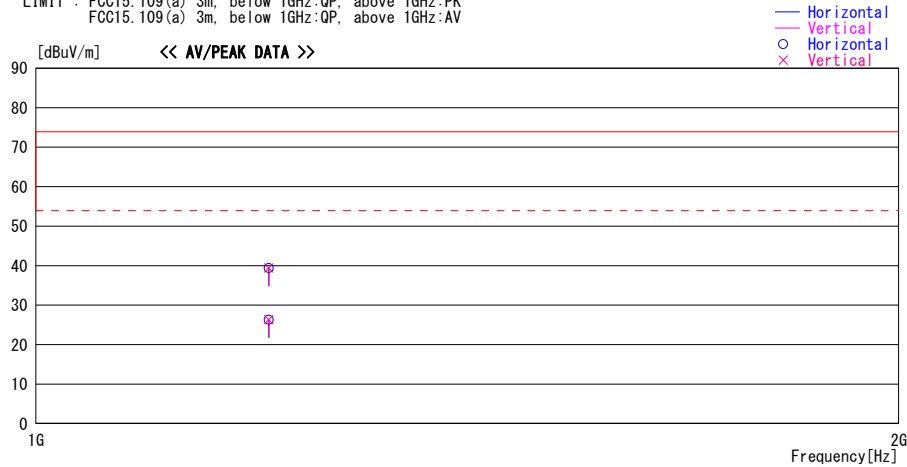

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss & Gain [dB]							
1205.600	44.4	PK	24.2	-29.2	39.4	0	100	Hori.	73.9	34.5	
1205.600	31.3	AV	24.2	-29.2	26.3	0	100	Hori.	53.9	27.6	
1205.600	44.4	PK	24.2	-29.2	39.4	0	100	Vert.	73.9	34.5	
1205.600	31.3	AV	24.2	-29.2	26.3	0	100	Vert.	53.9	27.6	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (314.35MHz) Variation No. 8 External Antenna**  
**(Below 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/02/26

Report No. : 11167562H  
Temp./Humi. : 22 deg. C / 30% RH  
Engineer : Tomotsugu Koyama

Mode / Remarks : RKES Receiving mode 314.35MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

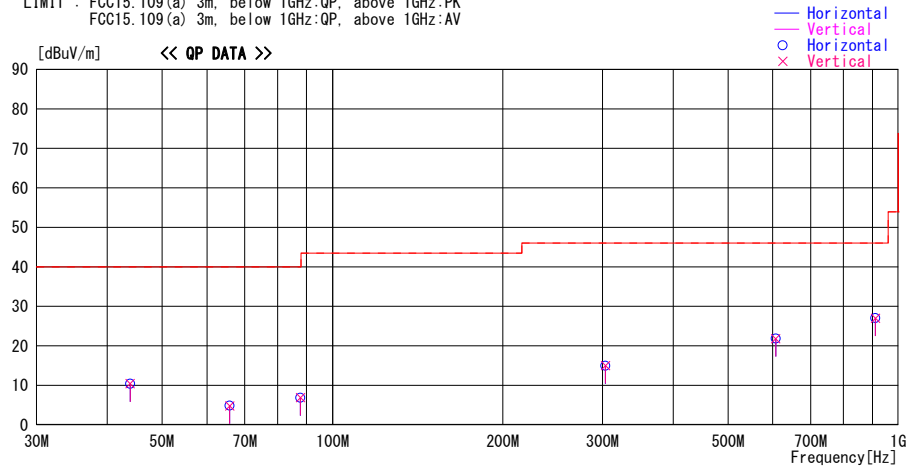

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor [dB/m]	Gain [dB]							
43.897	22.8	QP	12.5	-24.9	10.4	0	300	Hori.	40.0	29.6	
43.897	22.8	QP	12.5	-24.9	10.4	0	100	Vert.	40.0	29.6	
65.846	23.1	QP	6.2	-24.5	4.8	0	300	Hori.	40.0	35.2	
65.846	23.1	QP	6.2	-24.5	4.8	0	100	Vert.	40.0	35.2	
87.795	23.2	QP	7.8	-24.2	6.8	0	300	Hori.	40.0	33.2	
87.795	23.3	QP	7.8	-24.2	6.9	0	100	Vert.	40.0	33.1	
303.650	22.3	QP	14.6	-22.0	14.9	0	100	Hori.	46.0	31.1	
303.650	22.4	QP	14.6	-22.0	15.0	0	100	Vert.	46.0	31.0	
607.300	22.7	QP	19.4	-20.3	21.8	0	100	Hori.	46.0	24.2	
607.300	22.7	QP	19.4	-20.3	21.8	0	100	Vert.	46.0	24.2	
910.950	22.3	QP	22.4	-17.7	27.0	0	100	Hori.	46.0	19.0	
910.950	22.3	QP	22.4	-17.7	27.0	0	100	Vert.	46.0	19.0	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN(CABLE + ATTEN - GAIN(AMP))

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (314.35MHz) Variation No. 8 External Antenna**  
**(Above 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 314.35MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

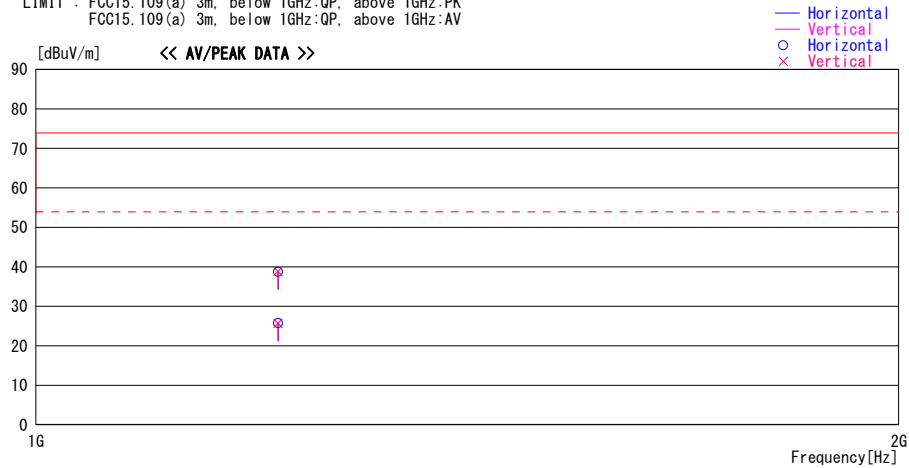

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1214.600	43.6	PK	24.3	-29.2	38.7	0	100	Hori.	73.9	35.2	
1214.600	30.6	AV	24.3	-29.2	25.7	0	100	Hori.	53.9	28.2	
1214.600	43.8	PK	24.3	-29.2	38.9	0	100	Vert.	73.9	35.0	
1214.600	30.6	AV	24.3	-29.2	25.7	0	100	Vert.	53.9	28.2	

CHART: WITH FACTOR ANT TYPE: <30MHz>: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN (AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
 RKES (312.10MHz) Variation No. 8 External Antenna  
 (Below 1GHz)


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
 Date : 2016/02/26

Report No. : 11167562H  
 Temp./Humi. : 22 deg. C / 30% RH  
 Engineer : Tomotsugu Koyama

Mode / Remarks : RKES Receiving mode 312.10MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
 FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

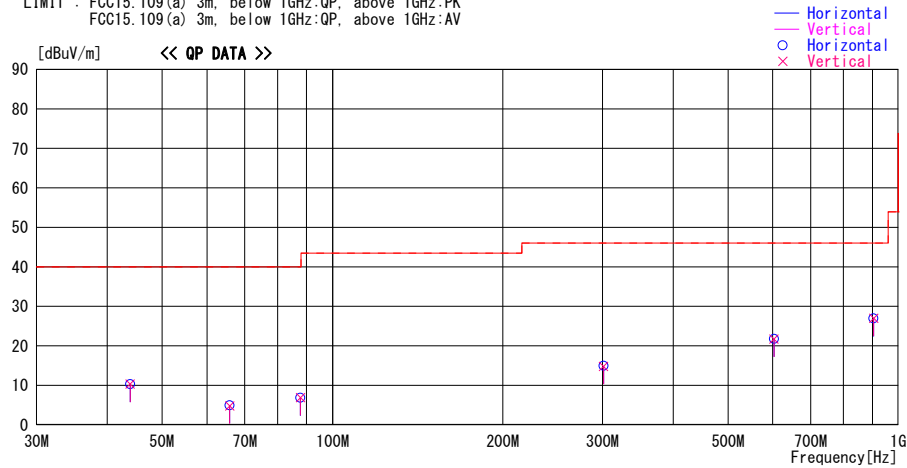

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
43.897	22.7	QP	12.5	-24.9	10.3	0	300	Hori.	40.0	29.7	
43.897	22.7	QP	12.5	-24.9	10.3	0	100	Vert.	40.0	29.7	
65.846	23.2	QP	6.2	-24.5	4.9	0	300	Hori.	40.0	35.1	
65.846	23.1	QP	6.2	-24.5	4.8	0	100	Vert.	40.0	35.2	
87.795	23.2	QP	7.8	-24.2	6.8	0	300	Hori.	40.0	33.2	
87.795	23.3	QP	7.8	-24.2	6.9	0	100	Vert.	40.0	33.1	
301.400	22.3	QP	14.6	-22.0	14.9	0	100	Hori.	46.0	31.1	
301.400	22.2	QP	14.6	-22.0	14.8	0	100	Vert.	46.0	31.2	
602.800	22.6	QP	19.4	-20.3	21.7	0	100	Hori.	46.0	24.3	
602.800	22.6	QP	19.4	-20.3	21.7	0	100	Vert.	46.0	24.3	
904.200	22.2	QP	22.4	-17.7	26.9	0	100	Hori.	46.0	19.1	
904.200	22.3	QP	22.4	-17.7	27.0	0	100	Vert.	46.0	19.0	

CHART: WITH FACTOR ANT TYPE: ~30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
 CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP))

\*The limit is rounded down to one decimal place.  
 \*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (312.10MHz) Variation No. 8 External Antenna**  
**(Above 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 312.10MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

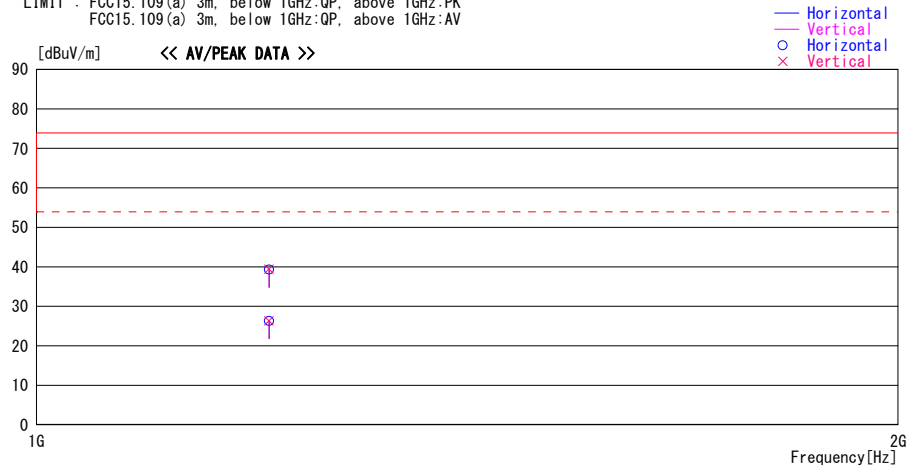

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1205.600	44.3	PK	24.2	-29.2	39.3	0	100	Hori.	73.9	34.6	
1205.600	31.3	AV	24.2	-29.2	26.3	0	100	Hori.	53.9	27.6	
1205.600	44.4	PK	24.2	-29.2	39.4	0	100	Vert.	73.9	34.5	
1205.600	31.3	AV	24.2	-29.2	26.3	0	100	Vert.	53.9	27.6	

CHART:WITH FACTOR ANT TYPE: <30MHz:LOOP, 30-300MHz:BICONICAL, 300MHz-1000MHz:LOGPERIODIC, 1000MHz-:HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN(CABLE + ATTEN - GAIN(AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (314.35MHz) Variation No. 9 External Antenna**  
**(Below 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/02/26

Report No. : 11167562H  
Temp./Humi. : 22 deg. C / 30% RH  
Engineer : Tomotsugu Koyama

Mode / Remarks : RKES Receiving mode 314.35MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

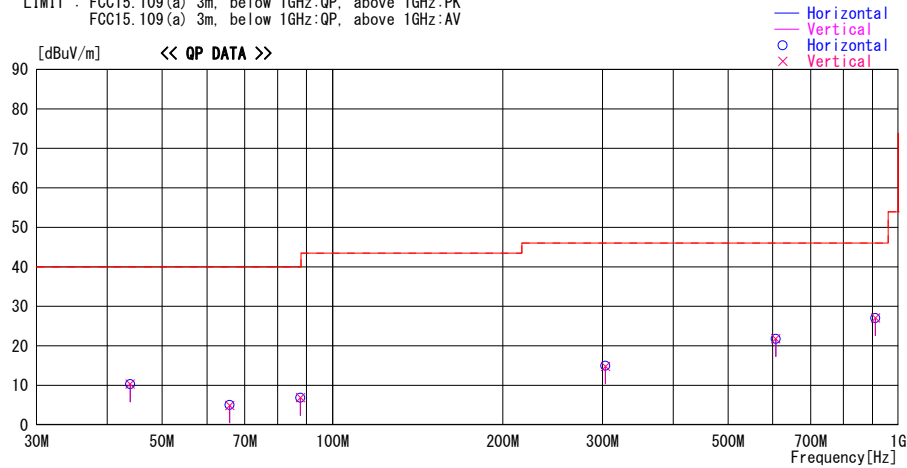

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
43.897	22.7	QP	12.5	-24.9	10.3	0	300	Hori.	40.0	29.7	
43.897	22.7	QP	12.5	-24.9	10.3	0	100	Vert.	40.0	29.7	
65.846	23.3	QP	6.2	-24.5	5.0	0	300	Hori.	40.0	35.0	
65.846	23.2	QP	6.2	-24.5	4.9	0	100	Vert.	40.0	35.1	
87.795	23.2	QP	7.8	-24.2	6.8	0	300	Hori.	40.0	33.2	
87.795	23.3	QP	7.8	-24.2	6.9	0	100	Vert.	40.0	33.1	
303.650	22.3	QP	14.6	-22.0	14.9	0	100	Hori.	46.0	31.1	
303.650	22.2	QP	14.6	-22.0	14.8	0	100	Vert.	46.0	31.2	
607.300	22.6	QP	19.4	-20.3	21.7	0	100	Hori.	46.0	24.3	
607.300	22.7	QP	19.4	-20.3	21.8	0	100	Vert.	46.0	24.2	
910.950	22.3	QP	22.4	-17.7	27.0	0	100	Hori.	46.0	19.0	
910.950	22.4	QP	22.4	-17.7	27.1	0	100	Vert.	46.0	18.9	

CHART: WITH FACTOR ANT TYPE: <30MHz>: LOOP, <30-300MHz>: BICONICAL, <300MHz-1000MHz>: LOGPERIODIC, <1000MHz->: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP))

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.



**Radiated Emission (Reference data)**  
**RKES (314.35MHz) Variation No. 9 External Antenna**  
**(Above 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 314.35MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

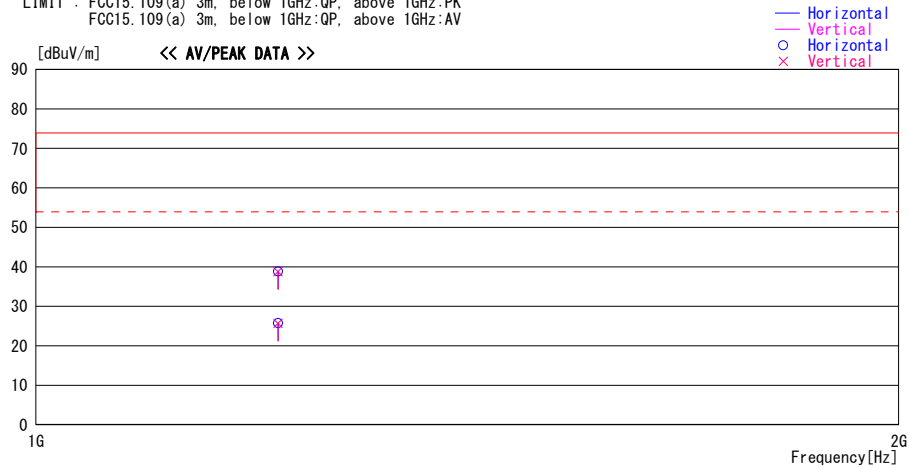

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1214.600	43.7	PK	24.3	-29.2	38.8	0	100	Hori.	73.9	35.1	
1214.600	30.6	AV	24.3	-29.2	25.7	0	100	Hori.	53.9	28.2	
1214.600	43.7	PK	24.3	-29.2	38.8	0	100	Vert.	73.9	35.1	
1214.600	30.6	AV	24.3	-29.2	25.7	0	100	Vert.	53.9	28.2	

CHART: WITH FACTOR ANT TYPE: <30MHz>: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN (AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (312.10MHz) Variation No. 9 External Antenna**  
**(Below 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/02/26

Report No. : 11167562H  
Temp./Humi. : 22 deg. C / 30% RH  
Engineer : Tomotsugu Koyama

Mode / Remarks : RKES Receiving mode 312.10MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

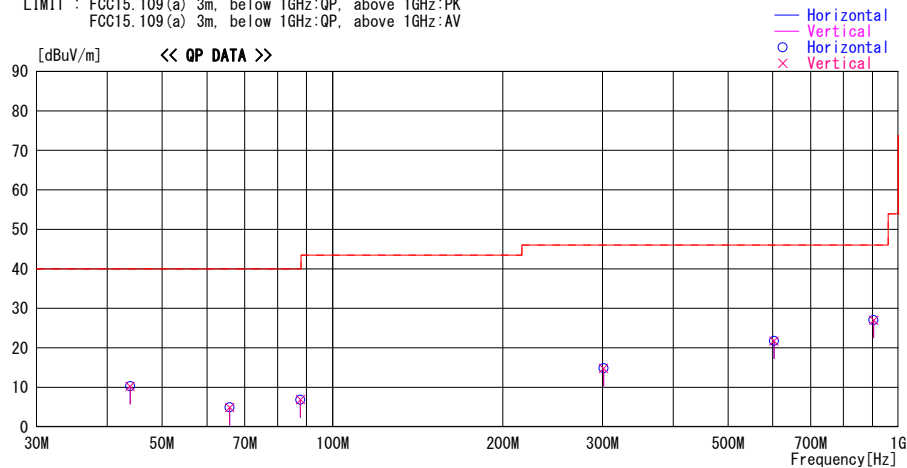

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
43.897	22.7	QP	12.5	-24.9	10.3	0	300	Hori.	40.0	29.7	
43.897	22.6	QP	12.5	-24.9	10.2	0	100	Vert.	40.0	29.8	
65.846	23.2	QP	6.2	-24.5	4.9	0	300	Hori.	40.0	35.1	
65.846	23.2	QP	6.2	-24.5	4.9	0	100	Vert.	40.0	35.1	
87.795	23.2	QP	7.8	-24.2	6.8	0	300	Hori.	40.0	33.2	
87.795	23.3	QP	7.8	-24.2	6.9	0	100	Vert.	40.0	33.1	
301.400	22.2	QP	14.6	-22.0	14.8	0	100	Hori.	46.0	31.2	
301.400	22.2	QP	14.6	-22.0	14.8	0	100	Vert.	46.0	31.2	
602.800	22.6	QP	19.4	-20.3	21.7	0	100	Hori.	46.0	24.3	
602.800	22.6	QP	19.4	-20.3	21.7	0	100	Vert.	46.0	24.3	
904.200	22.3	QP	22.4	-17.7	27.0	0	100	Hori.	46.0	19.0	
904.200	22.3	QP	22.4	-17.7	27.0	0	100	Vert.	46.0	19.0	

CHART: WITH FACTOR ANT TYPE: ~30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP))

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (312.10MHz) Variation No. 9 External Antenna**  
**(Above 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 312.10MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

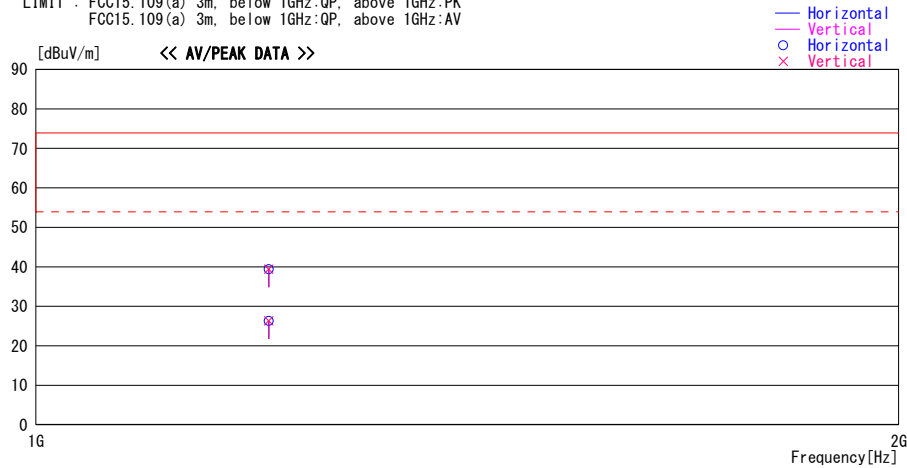

Frequency	Reading	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
[MHz]	[dBuV]		[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1205.600	44.4	PK	24.2	-29.2	39.4	0	100	Hori.	73.9	34.5	
1205.600	31.3	AV	24.2	-29.2	26.3	0	100	Hori.	53.9	27.6	
1205.600	44.4	PK	24.2	-29.2	39.4	0	100	Vert.	73.9	34.5	
1205.600	31.3	AV	24.2	-29.2	26.3	0	100	Vert.	53.9	27.6	

CHART: WITH FACTOR ANT TYPE: <30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
 RKES (314.35MHz) Variation No. 10 External Antenna  
 (Below 1GHz)


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.2 Semi Anechoic Chamber  
 Date : 2016/02/26

Report No. : 11167562H  
 Temp./Humi. : 22 deg. C / 30% RH  
 Engineer : Tomotsugu Koyama

Mode / Remarks : RKES Receiving mode 314.35MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
 FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

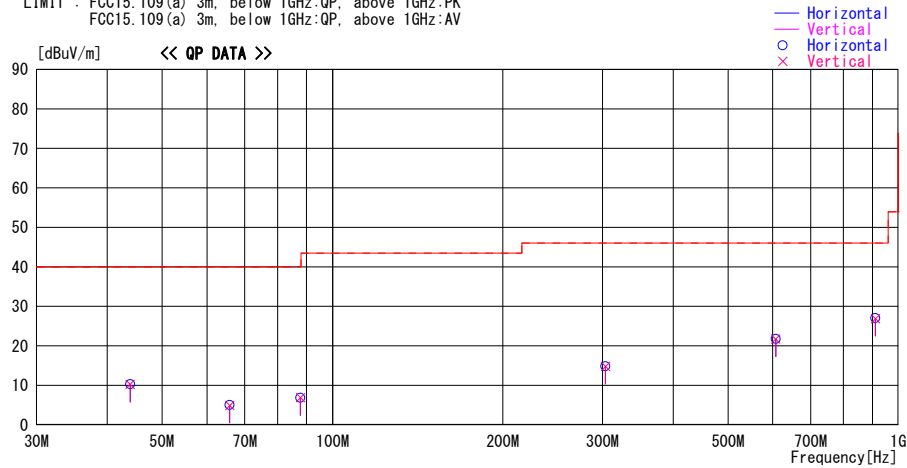

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain							
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
43.897	22.7	QP	12.5	-24.9	10.3	0	300	Hori.	40.0	29.7	
43.897	22.6	QP	12.5	-24.9	10.2	0	100	Vert.	40.0	29.8	
65.846	23.3	QP	6.2	-24.5	5.0	0	300	Hori.	40.0	35.0	
65.846	23.2	QP	6.2	-24.5	4.9	0	100	Vert.	40.0	35.1	
87.795	23.2	QP	7.8	-24.2	6.8	0	300	Hori.	40.0	33.2	
87.795	23.3	QP	7.8	-24.2	6.9	0	100	Vert.	40.0	33.1	
303.650	22.2	QP	14.6	-22.0	14.8	0	100	Hori.	46.0	31.2	
303.650	22.2	QP	14.6	-22.0	14.8	0	100	Vert.	46.0	31.2	
607.300	22.6	QP	19.4	-20.3	21.7	0	100	Hori.	46.0	24.3	
607.300	22.6	QP	19.4	-20.3	21.7	0	100	Vert.	46.0	24.3	
910.950	22.3	QP	22.4	-17.7	27.0	0	100	Hori.	46.0	19.0	
910.950	22.2	QP	22.4	-17.7	26.9	0	100	Vert.	46.0	19.1	

CHART: WITH FACTOR ANT TYPE: <30MHz>: LOOP, <30-300MHz>: BICONICAL, <300MHz-1000MHz>: LOGPERIODIC, <1000MHz->: HORN  
 CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP))

\*The limit is rounded down to one decimal place.  
 \*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (314.35MHz) Variation No. 10 External Antenna**  
**(Above 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 314.35MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

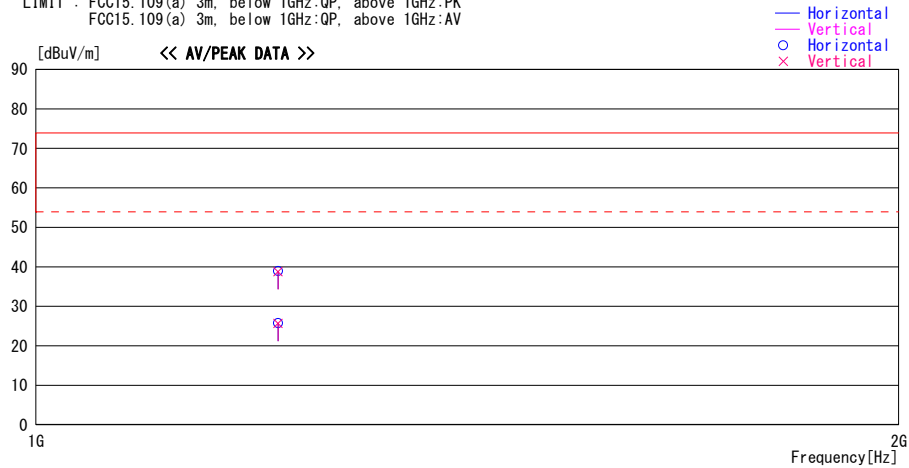

Frequency [MHz]	Reading [dBuV]	DET	Antenna	Loss&	Level	Angle	Height	Polar.	Limit	Margin	Comment
			Factor	Gain					[dBuV/m]	[dB]	
			[dB/m]	[dB]	[dBuV/m]	[Deg]	[cm]		[dBuV/m]	[dB]	
1214.600	43.8	PK	24.3	-29.2	38.9	0	100	Hori.	73.9	35.0	
1214.600	30.6	AV	24.3	-29.2	25.7	0	100	Hori.	53.9	28.2	
1214.600	43.7	PK	24.3	-29.2	38.8	0	100	Vert.	73.9	35.1	
1214.600	30.6	AV	24.3	-29.2	25.7	0	100	Vert.	53.9	28.2	

CHART: WITH FACTOR ANT TYPE: <30MHz>: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz-: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE - GAIN (AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (312.10MHz) Variation No. 10 External Antenna**  
**(Below 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/02/26

Report No. : 11167562H  
Temp./Humi. : 22 deg. C / 30% RH  
Engineer : Tomotsugu Koyama

Mode / Remarks : RKES Receiving mode 312.10MHz Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

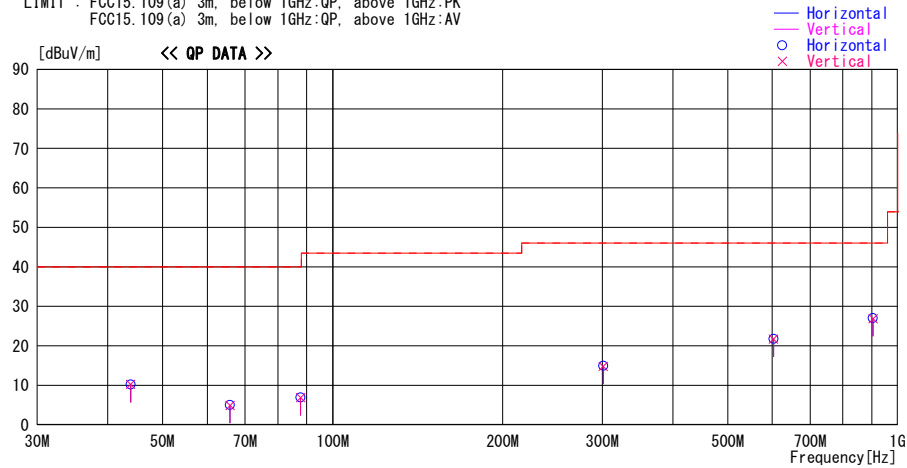

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss& Gain [dB]							
43.897	22.6	QP	12.5	-24.9	10.2	0	300	Hori.	40.0	29.8	
43.897	22.6	QP	12.5	-24.9	10.2	0	100	Vert.	40.0	29.8	
65.846	23.3	QP	6.2	-24.5	5.0	0	300	Hori.	40.0	35.0	
65.846	23.2	QP	6.2	-24.5	4.9	0	100	Vert.	40.0	35.1	
87.795	23.3	QP	7.8	-24.2	6.9	0	300	Hori.	40.0	33.1	
87.795	23.3	QP	7.8	-24.2	6.9	0	100	Vert.	40.0	33.1	
301.400	22.3	QP	14.6	-22.0	14.9	0	100	Hori.	46.0	31.1	
301.400	22.2	QP	14.6	-22.0	14.8	0	100	Vert.	46.0	31.2	
602.800	22.6	QP	19.4	-20.3	21.7	0	100	Hori.	46.0	24.3	
602.800	22.6	QP	19.4	-20.3	21.7	0	100	Vert.	46.0	24.3	
904.200	22.3	QP	22.4	-17.7	27.0	0	100	Hori.	46.0	19.0	
904.200	22.2	QP	22.4	-17.7	26.9	0	100	Vert.	46.0	19.1	

CHART:WITH FACTOR ANT TYPE: ~30MHz:LOOP, 30~300MHz:BICONICAL, 300MHz~1000MHz:LOGPERIODIC, 1000MHz~:HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN(CABLE + ATTEN - GAIN(AMP))

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

**Radiated Emission (Reference data)**  
**RKES (312.10MHz) Variation No. 10 External Antenna**  
**(Above 1GHz)**


**DATA OF RADIATED EMISSION TEST**

UL Japan, Inc. Ise EMC Lab. No.3 Semi Anechoic Chamber  
Date : 2016/03/02

Report No. : 11167562H  
Temp./Humi. : 23 deg. C / 32% RH  
Engineer : Shuichi Ohyama

Mode / Remarks : RKES Receiving mode 312.10MHz Worst-Axis(Hori X Vert X)

LIMIT : FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:PK  
FCC15.109(a) 3m, below 1GHz:QP, above 1GHz:AV

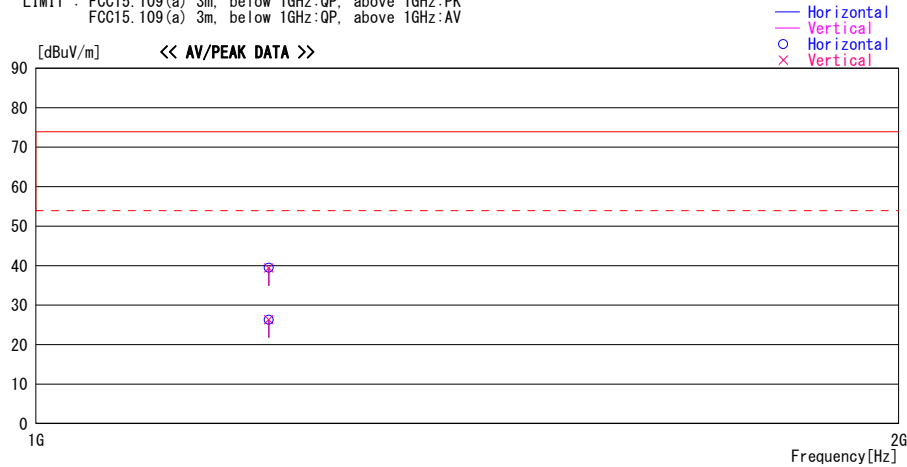

Frequency [MHz]	Reading [dBuV]	DET	Antenna		Level [dBuV/m]	Angle [Deg]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	Comment
			Factor [dB/m]	Loss & Gain [dB]							
1205.600	44.5	PK	24.2	-29.2	39.5	0	100	Hori.	73.9	34.4	
1205.600	31.3	AV	24.2	-29.2	26.3	0	100	Hori.	53.9	27.6	
1205.600	44.4	PK	24.2	-29.2	39.4	0	100	Vert.	73.9	34.5	
1205.600	31.3	AV	24.2	-29.2	26.3	0	100	Vert.	53.9	27.6	

CHART: WITH FACTOR ANT TYPE: -30MHz: LOOP, 30-300MHz: BICONICAL, 300MHz-1000MHz: LOGPERIODIC, 1000MHz--: HORN  
CALCULATION : RESULT = READING + ANT FACTOR + LOSS & GAIN (CABLE + ATTEN - GAIN (AMP) + D-Factor)

\*The limit is rounded down to one decimal place.  
\*The test result is rounded off to one or two decimal places, so some differences might be observed.

## **APPENDIX 2: Test instruments**

### **EMI test equipment**

Control No.	Instrument	Manufacturer	Model No	Serial No	Test Item	Calibration Date * Interval(month)
MAEC-03	Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	RE/AT	2015/10/01 * 12
MOS-13	Thermo-Hygrometer	Custom	CTH-180	1301	RE/AT	2016/01/21 * 12
MJM-16	Measure	KOMELON	KMC-36	-	RE/AT	-
COTS-MEMI	EMI measurement program	TSJ	TEPTO-DV	-	RE/AT	-
MTR-01	Test Receiver	Rohde & Schwarz	ESI40	100084	RE	2015/11/28 * 12
MBA-03	Biconical Antenna	Schwarzbeck	BBA9106	1915	RE	2015/10/11 * 12
MLA-03	Logperiodic Antenna	Schwarzbeck	USLP9143	174	RE	2015/10/11 * 12
MCC-51	Coaxial cable	UL Japan	-	-	RE/AT	2015/07/13 * 12
MAT-70	Attenuator(6dB)	Agilent	8491A-006	MY52460153	RE	2015/04/08 * 12
MPA-13	Pre Amplifier	SONOMA INSTRUMENT	310	260834	RE/AT	2015/03/10 * 12
MMM-08	DIGITAL HiTESTER	Hioki	3805	051201197	RE/AT	2016/01/13 * 12
MHA-20	Horn Antenna 1-18GHz	Schwarzbeck	BBHA9120D	258	RE	2015/05/18 * 12
MCC-167	Microwave Cable	Junkosha	MWX221	1404S374(1m) / 1405S074(5m)	RE	2015/05/21 * 12
MPA-11	MicroWave System Amplifier	Agilent	83017A	MY39500779	RE	2015/03/19 * 12
MSA-15	Spectrum Analyzer	Agilent	E4440A	MY46187105	AT	2015/11/11 * 12
MCC-172	Microwave Cable	Junkosha	MWX221	1409S495	AT	2015/03/04 * 12
MPA-12	MicroWave System Amplifier	Agilent	83017A	00650	AT	2015/10/01 * 12
MCC-96	Microwave Cable 1G-40GHz	Suhner	SUCOFLEX102	30817/2	AT	2015/05/01 * 12
MTW-03	Torque wrench	HUBER+SUHNER	74 Z-0-0-21	98142	AT	2015/01/16 * 36
MAT-10	Attenuator(10dB)	Weinschel Corp	2	BL1173	AT	2015/11/10 * 12

**The expiration date of the calibration is the end of the expired month.**

**All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.**

**As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.**

#### **Test Item:**

**RE: Radiated emission**

**AT: Antenna Terminal**

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124