



RADIO TEST REPORT

Test Report No. : 30KE0284-HO-01-A

Applicant : DENSO CORPORATION
Type of Equipment : Navigation ECU
Model No. : DNNS059
FCC ID : HYQDNNS059
Test regulation : FCC Part 15 Subpart C: 2010
Test Result : Complied

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the above regulation.
4. The test results in this report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government.

Date of test:

October 25 to November 11, 2010

**Representative
test engineer:**

Takayuki Shimada
Engineer of EMC Service

Approved by:

Shinya Watanabe
Leader of EMC Service



NVLAP LAB CODE: 200572-0

This laboratory is accredited by the NVLAP LAB CODE 200572-0, U.S.A. The tests reported herein have been performed in accordance with its terms of accreditation.
*As for the range of Accreditation in NVLAP, you may refer to the WEB address,
<http://www.ul.com/japan/jpn/pages/services/emc/about/mark1/index.jsp#nvlap>

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

MF058b (15.09.10)

CONTENTS	PAGE
SECTION 1: Customer information.....	3
SECTION 2: Equipment under test (E.U.T.).....	3
SECTION 3: Test specification, procedures & results.....	4
SECTION 4: Operation of E.U.T. during testing.....	8
SECTION 5: Radiated Spurious Emission	10
SECTION 6: Antenna Terminal Conducted Tests.....	11
APPENDIX 1: Photographs of test setup	12
Radiated Spurious Emission	12
APPENDIX 2: Data of EMI test.....	13
20dB Bandwidth and Carrier Frequency Separation.....	13
Number of Hopping Frequency	16
Dwell time.....	18
Maximum Peak Output Power	21
Radiated Spurious Emission	22
Conducted Spurious Emission	32
Conducted Emission Band Edge compliance	39
99% Occupied Bandwidth	41
APPENDIX 3: Test instruments	43

SECTION 1: Customer information

Company Name : DENSO CORPORATION
Address : 1-1 Showa-cho, Kariya-shi, Aichi-ken, 448-8661 Japan
Telephone Number : +81-566-25-5947
Facsimile Number : +81-566-25-4546
Contact Person : HIROYUKI SUDO

SECTION 2: Equipment under test (E.U.T.)

2.1 Identification of E.U.T.

Type of Equipment : Navigation ECU
Model No. : DNNS059
Serial No. : See Clause 4.2
Rating : DC 12.0V
Receipt Date of Sample : October 19, 2010
Country of Mass-production : United States of America
Condition of EUT : Production prototype
(Not for Sale: This sample is equivalent to mass-produced items.)
Modification of EUT : No Modification by the test lab

2.2 Product Description

Model No: DNNS059 (referred to as the EUT in this report) is the Navigation ECU.

Feature of EUT: EUT shall provide visual and verbal route guidance plan according to the desired destination selected by the user from information database. The system shall use GPS technology, dead reckoning and map matching to determine where the vehicle is located. EUT has Bluetooth communication with hands free phone.

Clock frequencies : GPS: 32.74MHz, FM Tuner: 41.6MHz, Bluetooth: 26MHz
Equipment type : Transceiver
Frequency of operation : 2402-2480MHz
Bandwidth & Channel spacing : 79MHz & 1MHz/CH
Modulation : FHSS
Power Supply (inner) : DC3.3V
Antenna type : Reverse F antenna
Antenna connector type : U.FL-LP
Antenna gain : -0.05dBi

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 3: Test specification, procedures & results

3.1 Test Specification

Test Specification : FCC Part 15 Subpart C: 2010, final revised on October 13, 2010

Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators
Section 15.207 Conducted limits
Section 15.247 Operation within the bands 902-928MHz,
2400-2483.5MHz, and 5725-5850MHz

* The EUT complies with FCC Part 15 Subpart B: 2009, final revised on October 13, 2010.

3.2 Procedures and results

Item	Test Procedure	Specification	Worst Margin	Results	Remarks	
Conducted Emission	FCC: ANSI C63.4:2003 7. AC powerline conducted emission measurements IC: RSS-Gen 7.2.2	FCC: Section 15.207 ----- IC: RSS-Gen 7.2.2	N/A	N/A *1)	-	
Carrier Frequency Separation	FCC: FCC Public Notice DA 00-705 ----- IC: -	FCC: Section15.247(a)(1) ----- IC: RSS-210 A8.1 (b)	See data.	Complied	Conducted	
20dB Bandwidth	FCC: FCC Public Notice DA 00-705 ----- IC: -	FCC: Section15.247(a)(1) ----- IC: RSS-210 A8.1 (a)		N/A	Conducted	
Number of Hopping Frequency	FCC: FCC Public Notice DA 00-705 ----- IC: -	FCC: Section15.247(a)(1)(iii) ----- IC: RSS-210 A8.1 (d)		Complied	Conducted	
Dwell time	FCC: FCC Public Notice DA 00-705 ----- IC: -	FCC: Section15.247(a)(1)(iii) ----- IC: RSS-210 A8.1 (d)		Complied	Conducted	
Maximum Peak Output Power	FCC: FCC Public Notice DA 00-705 ----- IC: RSS-Gen 4.8	FCC: Section15.247(b)(1) ----- IC: RSS-210 A8.4 (2)		Complied	Conducted	
Spurious Emission & Band Edge Compliance	FCC: FCC Public Notice DA 00-705 ----- IC: RSS-Gen 4.9 RSS-Gen 4.10	FCC: Section15.247(d) ----- IC: RSS-210 A8.5 RSS-Gen 7.2.1 and 7.2.3		[Tx] 4.0dB 2399.650MHz, AV, Horizontal [Rx] 6.5dB 629.030MHz, QP, Vertical	Complied	Conducted/ Radiated

Note: UL Japan, Inc.'s EMI Work Procedures No.QPM05 and QPM15.

*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

* In case any questions arise about test procedure, ANSI C63.4: 2003 is also referred.

FCC 15.31 (e)

This EUT provides stable voltage (DC3.3V) constantly to RF part regardless of input voltage. Therefore, this EUT complies with the requirement.

FCC Part 15.203 Antenna requirement

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

3.3 Addition to standard

Item	Test Procedure	Specification	Worst margin	Results	Remarks
99% Occupied Bandwidth	IC: RSS-Gen 4.6.1	IC: RSS-Gen 4.6.1	N/A	N/A	Conducted

Other than above, no addition, exclusion nor deviation has been made from the standard.

3.4 Uncertainty

EMI

The following uncertainties have been calculated to provide a confidence level of 95% using a coverage factor k=2.

Test room (semi-anechoic chamber)	Radiated emission (10m*)(±dB)		
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz
No.1	2.7dB	4.8dB	5.0dB
No.2	-	-	-
No.3	-	-	-
No.4	-	-	-

*10m = Measurement distance

Test room (semi-anechoic chamber)	Radiated emission						
	(3m*)(±dB)				(1m*)(±dB)		(0.5m*)(±dB)
	9kHz -30MHz	30MHz -300MHz	300MHz -1GHz	1GHz -10GHz	10GHz -18GHz	18GHz -26.5GHz	26.5GHz -40GHz
No.1	2.9dB	4.8dB	5.0dB	3.9dB	4.3dB	4.5dB	4.3dB
No.2	3.5dB	4.8dB	5.1dB	4.0dB	4.2dB	4.4dB	4.2dB
No.3	3.8dB	4.6dB	4.7dB	4.0dB	4.2dB	4.5dB	4.2dB
No.4	3.5dB	4.4dB	4.9dB	4.0dB	4.2dB	4.6dB	4.2dB

*3m/1m/0.5m = Measurement distance

Power meter (+dB)	
Below 1GHz	Above 1GHz
1.0dB	1.0dB

Antenna terminal conducted emission and Power density (+dB)			Antenna terminal conducted emission (+dB)		Channel power (±dB)
Below 1GHz	1GHz-3GHz	3GHz-18GHz	18GHz-26.5GHz	26.5GHz-40GHz	
1.0dB	1.1dB	2.7dB	3.2dB	3.3dB	1.5dB

Radiated emission test(3m)

The data listed in this test report has enough margin, more than the site margin.

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

3.5 Test Location

UL Japan, Inc. Head Office EMC Lab. *NVLAP Lab. code: 200572-0
4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN
Telephone : +81 596 24 8116 Facsimile : +81 596 24 8124

	FCC Registration Number	IC Registration Number	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms
No.1 semi-anechoic chamber	313583	2973C-1	19.2 x 11.2 x 7.7m	7.0 x 6.0m	No.1 Power source room
No.2 semi-anechoic chamber	655103	2973C-2	7.5 x 5.8 x 5.2m	4.0 x 4.0m	-
No.3 semi-anechoic chamber	148738	2973C-3	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.3 Preparation room
No.3 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.4 semi-anechoic chamber	134570	2973C-4	12.0 x 8.5 x 5.9m	6.8 x 5.75m	No.4 Preparation room
No.4 shielded room	-	-	4.0 x 6.0 x 2.7m	N/A	-
No.5 semi-anechoic chamber	-	-	6.0 x 6.0 x 3.9m	6.0 x 6.0m	-
No.6 shielded room	-	-	4.0 x 4.5 x 2.7m	4.75 x 5.4 m	-
No.6 measurement room	-	-	4.75 x 5.4 x 3.0m	4.75 x 4.15 m	-
No.7 shielded room	-	-	4.7 x 7.5 x 2.7m	4.7 x 7.5m	-
No.8 measurement room	-	-	3.1 x 5.0 x 2.7m	N/A	-
No.9 measurement room	-	-	8.0 x 4.5 x 2.8m	2.0 x 2.0m	-
No.10 measurement room	-	-	2.6 x 2.8 x 2.5m	2.4 x 2.4m	-
No.11 measurement room	-	-	3.1 x 3.4 x 3.0m	2.4 x 3.4m	-

* Size of vertical conducting plane (for Conducted Emission test) : 2.0 x 2.0m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

3.6 Test set up, Data of EMI, and Test instruments

Refer to APPENDIX.

SECTION 4: Operation of E.U.T. during testing

4.1 Operating Mode(s)

Bluetooth (BT): Transmitting (Tx), Payload: PRBS9
Receiving (Rx)
Inquiry

Details of Operating Mode(s)

Test Item	Mode	Tested frequency
Spurious Emission (Conducted/Radiated)	Tx (Hopping off) DH5, 3DH5	2402MHz 2441MHz 2480MHz
	Rx	2441MHz
Carrier Frequency Separation	Tx (Hopping on) DH5, 3DH5 Inquiry	2402MHz 2441MHz 2480MHz
20dB Bandwidth	Tx (Hopping off) DH5, 3DH5 Inquiry	2402MHz 2441MHz 2480MHz
Number of Hopping Frequency	Tx (Hopping on) DH5, 3DH5 Inquiry	-
Dwell time	Tx (Hopping on), -DH1, DH3, DH5 -3DH1, 3DH3, 3DH5 Inquiry	-
Maximum Peak Output Power	Tx (Hopping off) DH5, 3DH5 Inquiry	2402MHz 2441MHz 2480MHz
Band Edge Compliance (Conducted)	Tx DH5, 3DH5 -Hopping on -Hopping off	2402MHz 2480MHz
99% Occupied Bandwidth	Tx DH5, 3DH5 -Hopping on -Hopping off	2402MHz 2441MHz 2480MHz
<p>*As a result of preliminary test, the formal test was performed with the above modes, which had the maximum payload length (except Dwell time test) *EUT has the power settings by the software as follows; Power settings: Not changeable Software: pTool Navigator 2009 *This setting of software is the worst case. Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>		

UL Japan, Inc.


Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

4.2 Configuration and peripherals

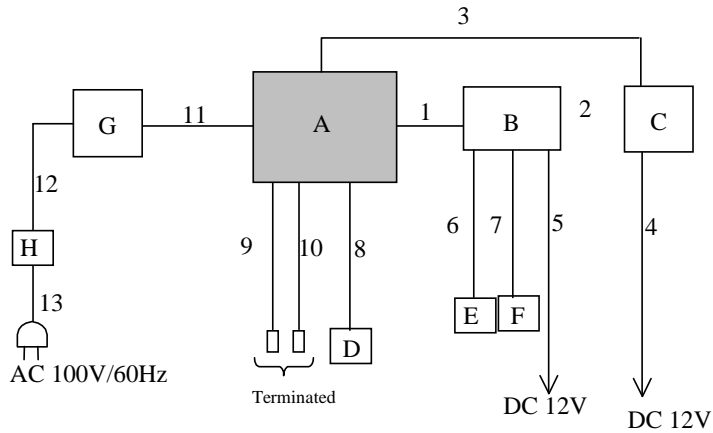

* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Navigation ECU	DNNS059	1G500017 *1) 1G500064 *2)	DENSO CORPORATION	EUT
B	Amplifier	-	S21-01994	HUMMER	-
C	JIG Box	-	-	-	-
D	GPS Antenna	-	08663-00414	-	-
E	Speaker	KSC-01X	71100097	Kenwood	-
F	Speaker	KSC-01X	71100099	Kenwood	-
G	PORTABLE DVD/CD PLAYER	DVD-LX87	VP7D003433R	Panasonic	-
H	AC Adaptor	RFEA216W	TAS5100/LA208 10T	Panasonic	-

*1) Used for Radiated Emission test.

*2) Used for Antenna Terminal Conducted test.

List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	Signal Cable	1.8	Unshielded	Unshielded	-
2	Signal Cable	1.0	Unshielded	Unshielded	-
3	Signal Cable	1.8	Unshielded	Unshielded	-
4	DC Cable	1.5	Unshielded	Unshielded	-
5	DC Cable	1.0	Unshielded	Unshielded	-
6	Speaker Cable	4.6	Unshielded	Unshielded	-
7	Speaker Cable	4.6	Unshielded	Unshielded	-
8	GPS Antenna Cable	3.5	Unshielded	Unshielded	-
9	FM Antenna Cable	0.1	Unshielded	Unshielded	-
10	FM Antenna Cable	3.5	Shielded	Shielded	-
11	Signal Cable	3.3	Unshielded	Unshielded	-
12	DC Cable	1.2	Unshielded	Unshielded	-
13	AC Cable	1.8	Unshielded	Unshielded	-

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 5: Radiated Spurious Emission

Test Procedure

EUT was placed on a urethane platform of nominal size, 1.0m by 1.5m, raised 0.8m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

The height of the measuring antenna varied between 1 and 4m and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

Test Antennas are used as below;

Frequency	Below 30MHz	30MHz to 300MHz	300MHz to 1GHz	Above 1GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

In any 100kHz bandwidth outside the restricted band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator confirmed 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on a radiated measurement.

20dBc was applied to the frequency over the limit of FCC 15.209 / Table 2 of RSS-210 2.7 (IC) and outside the restricted band of FCC15.205 / Table 1 of RSS-210 2.7 (IC).

Frequency	Below 1GHz	Above 1GHz		20dBc
Instrument used	Test Receiver	Spectrum Analyzer		Spectrum Analyzer
Detector	QP	PK	AV	PK
IF Bandwidth	BW 120kHz(T/R)	RBW: 1MHz VBW: 3MHz	RBW: 1MHz VBW: 10Hz or RBW: 1MHz VBW: 270Hz *1)	RBW: 100kHz VBW: 300kHz (S/A)
Test Distance	3m	3m (below 10GHz), 1m*2) (above 10GHz),		3m (below 10GHz), 1m*2) (above 10GHz),

*1) Used for the band edge of the carrier and the harmonics that can be measured. The VBW is based on the inverse of the duty cycle (see Appendix).

*2) Distance Factor: $20 \times \log(3.0\text{m}/1.0\text{m}) = 9.5\text{dB}$

The test was made on EUT at the normal use position.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

Measurement range : 30M-26.5GHz
Test data : APPENDIX
Test result : Pass

UL Japan, Inc.

Head Office EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8116

Facsimile : +81 596 24 8124

SECTION 6: Antenna Terminal Conducted Tests

Test Procedure

The tests were made with below setting connected to the antenna port.

Test	Span	RBW	VBW	Sweep time	Detector	Trace	Instrument used
20dB Bandwidth	3MHz	30kHz	100kHz	Auto	Peak	Max Hold	Spectrum Analyzer
99% Occupied Bandwidth	Enough width to display 20dB Bandwidth	1 to 3% of Span	Three times of RBW	Auto	Peak	Max Hold	Spectrum Analyzer
Maximum Peak Output Power	-	-	-	Auto	Peak	-	Power Meter (Sensor: 50MHz BW)
Carrier Frequency Separation	5MHz or 3MHz	100kHz or 30kHz	300kHz or 100kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Number of Hopping Frequency	30MHz	300kHz	1MHz	Auto	Peak	Max Hold	Spectrum Analyzer
Dwell Time	Zero Span	1MHz	3MHz	As necessary capture the entire dwell time per hopping channel	Peak	Max Hold	Spectrum Analyzer
Conducted Spurious Emission	Less or equal to 5GHz (Range: 30MHz-25GHz)	100kHz	300kHz	Auto	Peak	Max Hold	Spectrum Analyzer
Conducted Spurious Emission Band Edge compliance	20MHz	300kHz	1MHz	Auto	Peak	Max Hold	Spectrum Analyzer

The test results and limit are rounded off to two decimals place, so some differences might be observed.

Test data : APPENDIX
Test result : Pass