



# RADIO TEST REPORT

**Test Report No. : 13664347H-A-R2**

**Applicant** : DENSO CORPORATION  
**Type of EUT** : Blind Spot Monitor Sensor  
**Model Number of EUT** : DNSRR003  
**FCC ID** : HYQDNSRR003  
**Test regulation** : FCC Part 15 Subpart C: 2021  
\*For Permissive Change  
**Test Result** : Complied (Refer to SECTION 3.2)

1. This test report shall not be reproduced in full or partial, without the written approval of UL Japan, Inc.
2. The results in this report apply only to the sample tested.
3. This sample tested is in compliance with the limits of the above regulation.
4. The test results in this test report are traceable to the national or international standards.
5. This test report must not be used by the customer to claim product certification, approval, or endorsement by the A2LA accreditation body.
6. This test report covers Radio technical requirements. It does not cover administrative issues such as Manual or non-Radio test related Requirements. (if applicable)
7. The all test items in this test report are conducted by UL Japan, Inc. Ise EMC Lab.
8. The opinions and the interpretations to the result of the description in this report are outside scopes where UL Japan has been accredited.
9. The information provided from the customer for this report is identified in Section 1.
10. This report is a revised version of 13664347H-A-R1. 13664347H-A-R1 is replaced with this report.

**Date of test:** January 7 to 13, 2021

**Representative test engineer:**

  
Yuichiro Yamazaki

Engineer  
Consumer Technology Division

**Approved by:**

  
Tsubasa Takayama

Leader  
Consumer Technology Division



CERTIFICATE 5107.02

- The testing in which "Non-accreditation" is displayed is outside the accreditation scopes in UL Japan.  
 There is no testing item of "Non-accreditation".

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **REVISION HISTORY**

### **Original Test Report No.: 13664347H-A**

Revision	Test report No.	Date	Page revised	Contents
- (Original)	13664347H-A	March 1, 2021	-	-
1	13664347H-A-R1	April 20, 2021	P.6	Correction of "QP" to " PK with Duty Factor " in the worst margin for Electric Field Strength of Spurious Emission test of Clause 3.2.
1	13664347H-A-R1	April 20, 2021	P.6	Correction of the note * 2) in Section 3.2 to the following content; *2) The test is not required since this EUT does not point- to- point operation with 24.05 GHz to 24.25 GHz
1	13664347H-A-R1	April 20, 2021	P.10	Fixed Configuration and peripherals of Clause 4.2.
1	13664347H-A-R1	April 20, 2021	P.14	Correction of frequency and final peak detector table.
1	13664347H-A-R1	April 20, 2021	P.15	Correction of Test setup diagram.
2	13664347H-A-R2	April 21, 2021	P.10	Correction of Configuration and peripherals of Clause 4.2.

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## Reference: Abbreviations (Including words undescribed in this report)

A2LA	The American Association for Laboratory Accreditation	MCS	Modulation and Coding Scheme
AC	Alternating Current	MRA	Mutual Recognition Arrangement
AFH	Adaptive Frequency Hopping	N/A	Not Applicable
AM	Amplitude Modulation	NIST	National Institute of Standards and Technology
Amp, AMP	Amplifier	NS	No signal detect.
ANSI	American National Standards Institute	NSA	Normalized Site Attenuation
Ant, ANT	Antenna	NVLAP	National Voluntary Laboratory Accreditation Program
AP	Access Point	OBW	Occupied Band Width
ASK	Amplitude Shift Keying	OFDM	Orthogonal Frequency Division Multiplexing
Atten., ATT	Attenuator	P/M	Power meter
AV	Average	PCB	Printed Circuit Board
BPSK	Binary Phase-Shift Keying	PER	Packet Error Rate
BR	Bluetooth Basic Rate	PHY	Physical Layer
BT	Bluetooth	PK	Peak
BT LE	Bluetooth Low Energy	PN	Pseudo random Noise
BW	BandWidth	PRBS	Pseudo-Random Bit Sequence
Cal Int	Calibration Interval	PSD	Power Spectral Density
CCK	Complementary Code Keying	QAM	Quadrature Amplitude Modulation
Ch., CH	Channel	QP	Quasi-Peak
CISPR	Comite International Special des Perturbations Radioelectriques	QPSK	Quadri-Phase Shift Keying
CW	Continuous Wave	RBW	Resolution Band Width
DBPSK	Differential BPSK	RDS	Radio Data System
DC	Direct Current	RE	Radio Equipment
D-factor	Distance factor	RF	Radio Frequency
DFS	Dynamic Frequency Selection	RMS	Root Mean Square
DQPSK	Differential QPSK	RSS	Radio Standards Specifications
DSSS	Direct Sequence Spread Spectrum	Rx	Receiving
EDR	Enhanced Data Rate	SA, S/A	Spectrum Analyzer
EIRP, e.i.r.p.	Equivalent Isotropically Radiated Power	SG	Signal Generator
EMC	ElectroMagnetic Compatibility	SVSWR	Site-Voltage Standing Wave Ratio
EMI	ElectroMagnetic Interference	TR	Test Receiver
EN	European Norm	Tx	Transmitting
ERP, e.r.p.	Effective Radiated Power	VBW	Video BandWidth
EU	European Union	Vert.	Vertical
EUT	Equipment Under Test	WLAN	Wireless LAN
Fac.	Factor		
FCC	Federal Communications Commission		
FHSS	Frequency Hopping Spread Spectrum		
FM	Frequency Modulation		
Freq.	Frequency		
FSK	Frequency Shift Keying		
GFSK	Gaussian Frequency-Shift Keying		
GNSS	Global Navigation Satellite System		
GPS	Global Positioning System		
Hori.	Horizontal		
ICES	Interference-Causing Equipment Standard		
IEC	International Electrotechnical Commission		
IEEE	Institute of Electrical and Electronics Engineers		
IF	Intermediate Frequency		
ILAC	International Laboratory Accreditation Conference		
ISED	Innovation, Science and Economic Development Canada		
ISO	International Organization for Standardization		
JAB	Japan Accreditation Board		
LAN	Local Area Network		
LIMS	Laboratory Information Management System		

### UL Japan, Inc.

#### Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

<b>CONTENTS</b>	<b>PAGE</b>
<b>SECTION 1: Customer information</b> .....	<b>5</b>
<b>SECTION 2: Equipment under test (EUT)</b> .....	<b>5</b>
<b>SECTION 3: Test specification, methods &amp; procedures</b> .....	<b>6</b>
<b>SECTION 4: Operation of EUT during testing</b> .....	<b>9</b>
<b>SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)</b> .....	<b>11</b>
<b>SECTION 6: 20 dB Bandwidth, 99 % Occupied Bandwidth and Duty Cycle</b> .....	<b>16</b>
<b>APPENDIX 1: Test data</b> .....	<b>17</b>
Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission).....	17
20 dB Bandwidth, 99 % Occupied Bandwidth.....	27
Duty Cycle .....	30
<b>APPENDIX 2: Test Instruments</b> .....	<b>31</b>
<b>APPENDIX 3: Photograph of test setup</b> .....	<b>33</b>
Radiated Emission .....	33
Worst Case Position (Horizontal: Y-axis / Vertical: X-axis) .....	36

## **SECTION 1: Customer information**

Company Name : DENSO CORPORATION  
Address : 1-1, Showa-cho, Kariya-shi, Aichi-ken, 448-8661, Japan  
Telephone Number : +81-78-682-2674  
Facsimile Number : +81-78-682-2046  
Contact Person : Shozo Taniguchi

The information provided from the customer is as follows;

- Applicant, Type of EUT Model Number of EUT, FCC ID on the cover and other relevant pages- Operating/Test Mode(s) (Mode(s)) on all the relevant pages

- SECTION 1: Customer information

- SECTION 2: Equipment under test (EUT) other than the Receipt Date

- SECTION 4: Operation of EUT during testing

\* The laboratory is exempted from liability of any test results affected from the above information in SECTION 2 and 4.

## **SECTION 2: Equipment under test (EUT)**

### **2.1 Identification of EUT**

Type : Blind Spot Monitor Sensor  
Model Number : DNSRR003  
Serial Number : Refer to SECTION 4.2  
Rating : DC 12 V (Car battery)  
Receipt Date : January 7, 2021  
Country of Mass-production : Japan  
Condition : Production prototype  
(Not for Sale: This sample is equivalent to mass-produced items.)  
Modification : No Modification by the test lab.

### **2.2 Product Description**

This Radar Sensor (DNSRR003) is a vehicle-mounted field disturbance sensor which uses millimeter wave for detecting obstacles located diagonally backward.

### **General Specificaion**

Clock frequency(ies) in the system : Microcomputer: 240 MHz

### **Radio Specification**

Radio Type : Transceiver  
Frequency of Operation : 24.15 GHz  
Frequency range : 24.05 GHz to 24.25 GHz (FM-CW)  
24.15 GHz to 24.25 GHz (Two frequency-CW)  
Modulation : QXN (FM-CW, Two frequency-CW)  
Antenna type : Microstrip Antenna (Built-in type)  
Antenna connector : None (Internal Antenna)  
Antenna Gain : 9.3 dBi (Broad beam), 12.5 dBi (Narrow beam)  
Steerable Antenna : Electronically  
Usage location : Vehicle-mounted

---

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 3: Test specification, methods & procedures**

### **3.1 Test specification**

Test Specification : FCC Part 15 Subpart C  
FCC Part 15 final revised on January 12, 2021 and effective February 11, 2021  
Title : FCC 47CFR Part15 Radio Frequency Device Subpart C Intentional Radiators  
Section 15.207 Conducted limits  
Section 15.249 Operation within the bands 902-928 MHz,  
2400-2483.5 MHz, 5725-5875 MHz and 24.0-24.25 GHz

\* The revision does not affect the test result conducted before its effective date.

### **3.2 Procedures and results**

No.	Item	Test Procedure	Specification	Deviation	Worst margin	Results
1	Conducted Emission	ANSI C63.10-2013 6. Standard test methods	Section 15.207(a)	N/A	N/A	N/A *1)
2	Electric Field Strength of Fundamental Emission	ANSI C63.10-2013 6. Standard test methods	Section 15.249(a)(c)(e)	N/A	9.2 dB (24150.000 MHz, Vertical, PK with Duty Factor) < Broad beam >	Complied a)
3	Electric Field Strength of Spurious Emission	ANSI C63.10-2013 6. Standard test methods 9. Procedures for testing millimeter-wave systems	Section 15.205(a)(b)(d) Section 15.209(a) Section 15.249(a)(c)(d)(e)	N/A	5.2 dB (24250.00 MHz, Vertical, PK with Duty Factor) < Broad beam >	Complied# a)
4	20dB Bandwidth	ANSI C63.10-2013 6. Standard test methods	FCC 15.215	N/A	N/A	Complied b)
5	Frequency Tolerance	ANSI C63.10-2013 6. Standard test methods	Section 15.249(b)	N/A	N/A	N/A *2)

Note: UL Japan, Inc.'s EMI Work Procedures No. 13-EM-W0420 and 13-EM-W0422.

\*1) The test is not applicable since the EUT is not the device that is designed to be connected to the public utility (AC) power line.

\*2) The test is not required since this EUT does not point- to- point operation with 24.05 GHz to 24.25 GHz

a) Refer to APPENDIX 1 (data of Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission))

b) Refer to APPENDIX 1 (data of 20dB Bandwidth, 99% Occupied Bandwidth)

Symbols:

Complied The data of this test item has enough margin, more than the measurement uncertainty.

Complied# The data of this test item meets the limits unless the measurement uncertainty is taken into consideration.

### **FCC Part 15.31 (e)**

The EUT provides stable voltage constantly to the RF part regardless of input voltage. Instead of a new battery, DC power supply was used for the test.

That does not affect to the test result, therefore the EUT complies with the requirement.

### **FCC Part 15.203 Antenna requirement**

It is impossible for end users to replace the antenna, because the antenna is mounted inside of the EUT. Therefore, the equipment complies with the antenna requirement of Section 15.203.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.3 Addition, deviation, exclusion to standards

Other than above, no addition, exclusion nor deviation has been made from the standard.

### 3.4 Uncertainty

#### EMI

There is no applicable rule of uncertainty in this applied standard. Therefore, the results are derived depending on whether or not laboratory uncertainty is applied.

The following uncertainties have been calculated to provide a confidence level of 95 % using a coverage factor  $k = 2$ .

Ise EMC Lab.

Test distance	Radiated emission (+/-) 9 kHz - 30 MHz
3 m	3.3 dB
10 m	3.2 dB

Polarity	Radiated emission (Below 1 GHz)			
	(3 m*) (+/-)		(10 m*) (+/-)	
	30 MHz - 200 MHz	200 MHz - 1000 MHz	30 MHz - 200 MHz	200 MHz - 1000 MHz
Horizontal	4.8 dB	5.2 dB	4.8 dB	5.0 dB
Vertical	5.0 dB	6.3 dB	4.8 dB	5.0 dB

Radiated emission (Above 1 GHz)					
(3 m*) (+/-)		(1 m*) (+/-)		(0.5 m*) (+/-)	(10 m*) (+/-)
1 GHz - 6 GHz	6 GHz - 18 GHz	10 GHz - 26.5 GHz	26.5 GHz - 40 GHz	26.5 GHz - 40 GHz	1 GHz - 18 GHz
4.9 dB	5.2 dB	5.5 dB	5.5 dB	5.5 dB	5.2 dB

\*Measurement distance

Radiated emission (+/-)	Distance
40 GHz - 50 GHz	>=0.5 m
50 GHz - 75 GHz	>=0.5 m
75 GHz - 110 GHz	>=0.5 m

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

### 3.5 Test Location

UL Japan, Inc. Ise EMC Lab.

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone: +81 596 24 8999, Facsimile: +81 596 24 8124

\* A2LA Certificate Number: 5107.02 / FCC Test Firm Registration Number: 199967

ISED Lab Company Number: 2973C / CAB identifier: JP0002

Test site	Width x Depth x Height (m)	Size of reference ground plane (m) / horizontal conducting plane	Other rooms	Maximum measurement distance
No.1 semi-anechoic chamber	19.2 x 11.2 x 7.7	7.0 x 6.0	No.1 Power source room	10 m
No.2 semi-anechoic chamber	7.5 x 5.8 x 5.2	4.0 x 4.0	-	3 m
No.3 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.3 Preparation room	3 m
No.3 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.4 semi-anechoic chamber	12.0 x 8.5 x 5.9	6.8 x 5.75	No.4 Preparation room	3 m
No.4 shielded room	4.0 x 6.0 x 2.7	N/A	-	-
No.5 semi-anechoic chamber	6.0 x 6.0 x 3.9	6.0 x 6.0	-	-
No.5 measurement room	6.4 x 6.4 x 3.0	6.4 x 6.4	-	-
No.6 shielded room	4.0 x 4.5 x 2.7	4.0 x 4.5	-	-
No.6 measurement room	4.75 x 5.4 x 3.0	4.75 x 4.15	-	-
No.7 shielded room	4.7 x 7.5 x 2.7	4.7 x 7.5	-	-
No.8 measurement room	3.1 x 5.0 x 2.7	3.1 x 5.0	-	-
No.9 measurement room	8.8 x 4.6 x 2.8	2.4 x 2.4	-	-
No.11 measurement room	6.2 x 4.7 x 3.0	4.8 x 4.6	-	-

\* Size of vertical conducting plane (for Conducted Emission test) : 2.0 m x 2.0 m for No.1, No.2, No.3, and No.4 semi-anechoic chambers and No.3 and No.4 shielded rooms.

### 3.6 Test data, Test instruments, and Test set up

Refer to APPENDIX.

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124




**SECTION 4: Operation of EUT during testing**

**4.1 Operating Mode(s)**

Test Item	Mode	Tested frequency
Electric Field Strength of Fundamental Emission Electric Field Strength of Spurious Emission 20 dB Bandwidth, 99 % Occupied Bandwidth Duty Cycle	Transmitting mode (Tx)  Beam setting *1) - Broad beam - Narrow beam (Left) - Narrow beam (Right)	24.15 GHz  FSK setting *2) - Hopping (Normal mode) - Hopping Off (Highest)
<p>*1) This EUT has three transmission beam patterns. The tests were performed in these three patterns.</p> <p>*2) There are FM and FSK modulation parts in one transmission burst. (Hopping mode) The additional test mode was applied to make sure the band-edge compliance. (Hopping Off mode)</p> <p>The system was configured in typical fashion (as a customer would normally use it) for testing.</p> <p>*EUT has the power settings by the software as follows;            Power Settings: Same as Production model            Software: mwr_24370_p03            (Date: January 7, 2021, Storage location: EUT memory)</p> <p>*This setting of software is the worst case.            Any conditions under the normal use do not exceed the condition of setting. In addition, end users cannot change the settings of the output power of the product.</p>		

## 4.2 Configuration and peripherals

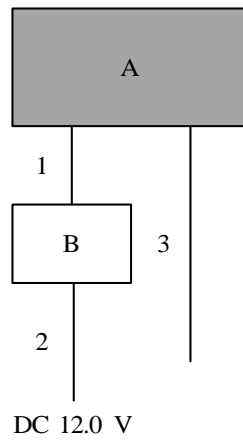

\* Cabling and setup(s) were taken into consideration and test data was taken under worse case conditions.

### Description of EUT and Support equipment

No.	Item	Model number	Serial number	Manufacturer	Remarks
A	Blind Spot Monitor Sensor	DNSRR003	120001112014	DENSO CORPORATION	EUT
B	Switch Box	110	-	DENSO CORPORATION	-

### List of cables used

No.	Name	Length (m)	Shield		Remarks
			Cable	Connector	
1	DC Cable	1.0	Unshielded	Unshielded	-
2	DC Cable	3.0	Unshielded	Unshielded	-
3	CAN Cable	1.0	Unshielded	Unshielded	-

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

## **SECTION 5: Radiated emission (Electric Field Strength of Fundamental and Spurious Emission)**

### **Test Procedure and conditions**

#### **[For below 30 MHz]**

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane.

The EUT was rotated a full revolution in order to obtain the maximum value of the electric field intensity.

The measurements were performed for vertical polarization (antenna angle: 0 deg., 45 deg., 90 deg., 135 deg and 180 deg.) and horizontal polarization.

\*Refer to Figure 1 about Direction of the Loop Antenna.

#### **[For below 1 GHz]**

EUT was placed on a urethane platform of nominal size, 0.5 m by 1.0 m, raised 0.8 m above the conducting ground plane. The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with a ground plane.

#### **[For above 1 GHz, up to 40 GHz]**

EUT was placed on a urethane platform of nominal size, 0.5 m by 0.5 m, raised 1.5 m above the conducting ground plane.

The Radiated Electric Field Strength has been measured in a Semi Anechoic Chamber with absorbent materials lined on a ground plane.

The height of the measuring antenna varied between 1 m and 4 m (frequency range 9 kHz - 30 MHz: loop antenna was fixed height at 1.0 m) and EUT was rotated a full revolution in order to obtain the maximum value of the electric field strength.

Test antenna was aimed at the EUT for receiving the maximum signal and always kept within the illumination area of the 3 dB beamwidth of the antenna.

The measurements were performed for both vertical and horizontal antenna polarization with the Test Receiver, or the Spectrum Analyzer.

The measurements were made with the following detector function of the test receiver and the Spectrum analyzer (in linear voltage average mode).

The test was made with the detector (RBW/VBW) in the following table.

When using Spectrum analyzer, the test was made with adjusting span to zero by using peak hold.

#### **Test Antennas are used as below;**

Frequency	Below 30 MHz	30 MHz to 200 MHz	200 MHz to 1 GHz	Above 1 GHz
Antenna Type	Loop	Biconical	Logperiodic	Horn

Frequency	9 kHz - 150 kHz	150 kHz - 30 MHz	30 MHz - 1 GHz	1 GHz - 40 GHz	
Instrument used	Test Receiver	Test Receiver	Test Receiver	Spectrum Analyzer	
Detector	QP, Average *1)	QP, Average *1)	QP	Peak	Average *2)
IF Bandwidth	BW 200 Hz	BW 9 kHz	BW 120 kHz	RBW: 1 MHz VBW: 3 MHz	Pulsed emission - RBW: 1 MHz - Peak with duty  Other than above - RBW: 1 MHz - VBW: 10 Hz

\*1) Although these tests were performed other than open field test site, adequate comparison measurements were confirmed against 30 m open field test site. Therefore sufficient tests were made to demonstrate that the alternative site produces results that correlate with the ones of tests made in an open field based on KDB 414788.

\*2) For Pulsed emission (Fundamental and band-edge): The Average value was calculated by reducing Duty factor from Peak (Peak value – Duty factor). For Duty factor, please refer to page Duty factor measurement. Other than pulsed emission, aVBW was set to 10 Hz and linear voltage average mode was used.

**UL Japan, Inc.**

**Ise EMC Lab.**


4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124


[Test setup]

Below 1 GHz

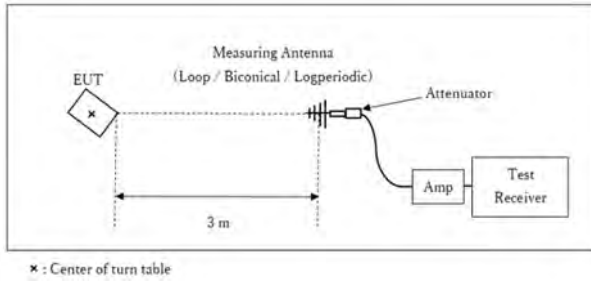

Test Distance: 3 m

1 GHz - 10 GHz

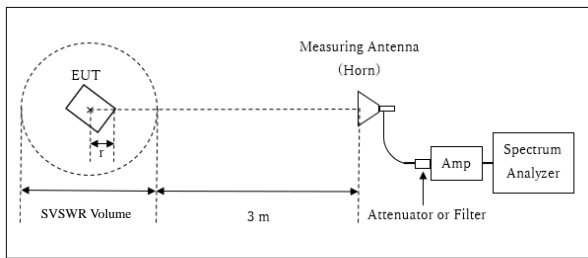


Distance Factor:  $20 \times \log(3.75 \text{ m}^*/3.0 \text{ m}) = 1.94 \text{ dB}$   
 \* Test Distance:  $(3 + \text{SVSWR Volume} / 2) - r = 3.75 \text{ m}$

SVSWR Volume: 1.5 m  
 (SVSWR Volume has been calibrated based on CISPR 16-1-4.)  
 $r = 0 \text{ m}$


\* The test was performed with  $r = 0.0 \text{ m}$  since EUT is small and it was the rather conservative condition.

10 GHz - 26.5 GHz

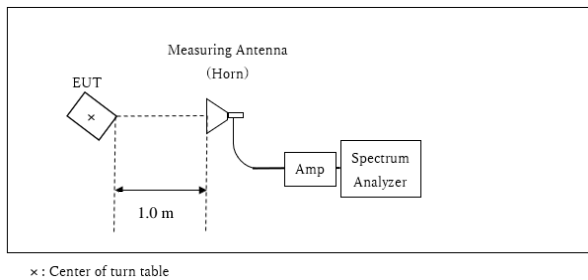

Distance Factor:  $20 \times \log(1.0 \text{ m}^* / 3.0 \text{ m}) = -9.5 \text{ dB}$   
 \*Test Distance: 1.0 m


26.5 GHz - 40 GHz

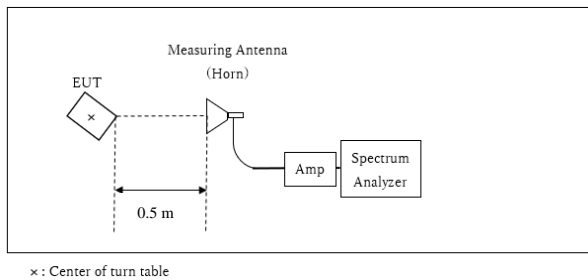


Distance Factor:  $20 \times \log(0.5 \text{ m}^* / 3.0 \text{ m}) = -15.6 \text{ dB}$   
 \*Test Distance: 0.5 m

**Figure 1: Direction of the Loop Antenna**

*Side View (Vertical)*

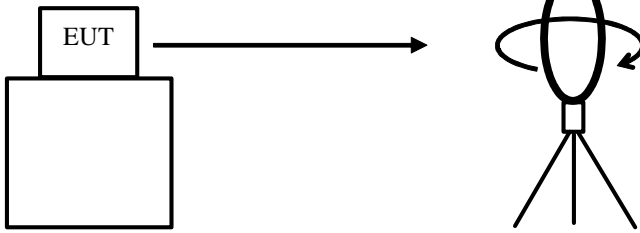


*Top View (Horizontal)*

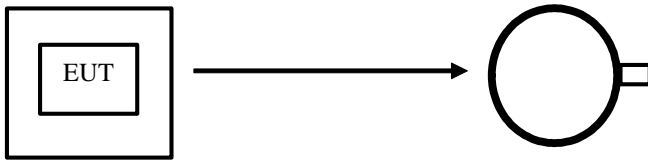

Antenna was not rotated.

---

*Top View (Vertical)*

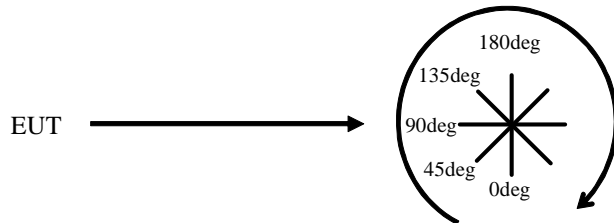

Front side: 0 deg.  
Forward direction: clockwise

**[About fundamental measurement]**

The carrier levels were confirmed at maximum direction of transmission. The maximum direction was searched under carefully since beam-widths are narrow.

The carrier levels were measured in the far field. The distance of the far field was calculated from follow equation.

$$r = \frac{2D^2}{\lambda}$$

where

*r* is the distance from the radiating element of the EUT to the edge of the far field, in m

*D* is the largest dimension of both the radiating element and the test antenna (horn), in m  
(The antenna aperture size of test antenna was used for this calculation.)

*Lambda* is the wavelength of the emission under investigation [300 / *f*(MHz) \* 10<sup>3</sup>], in millimeter

Frequency [GHz]	Wavelength <i>Lambda</i> [mm]	Maximum Dimention			Far Field Boundary <i>r</i> [m]
		EUT [m]	Test Antenna (MHA-02) [m]	Maximum <i>D</i> [m]	
24.250	12.4	0.028	0.039	0.039	0.246

**[Above 40 GHz]**

The test was performed based on “Procedures for testing millimeter-wave systems” of ANSI C63.10-2013. The EUT was placed on an urethane platform, raised 1.5 m above the conducting ground plane. The measurements were performed on handheld method.

Set spectrum analyzer RBW, VBW, span, etc., to the proper values. Note these values. Enable two traces—one set to “clear write,” and the other set to “max hold.” Begin hand-held measurements with the test antenna (horn) at a distance of 1 m from the EUT in a horizontally polarized position. Slowly adjust its position, entirely covering the plane 1 m from the EUT. Observation of the two active traces on the spectrum analyzer will allow refined horn positioning at the point(s) of maximum field intensity. Repeat with the horn in a vertically polarized position. If the emission cannot be detected at 1 m, reduce the RBW to increase system sensitivity. Note the value. If the emission still cannot be detected, move the horn closer to the EUT, noting the distance at which a measurement is made.


Note the maximum level indicated on the spectrum analyzer. Adjust this level, if necessary, by the antenna gain, conversion loss of the external mixer and gain of LNA used, at the frequency under investigation. Calculate the field strength of the emission at the measurement distance from the Friis’ transmission equation.

Frequency	40 GHz - 100 GHz
Final measurement distance with 1 MHz Peak detector	0.5 m

Detector	Peak	Average *1)	
IF Bandwidth	RBW: 1 MHz VBW: 3 MHz	Pulsed emission - RBW: 1 MHz - Peak with duty	Other than pulsed - RBW: 1 MHz - VBW: 10 Hz

\*1) For Pulsed emission: The Average value was calculated by reducing Duty factor from Peak (Peak value – Duty factor). For Duty factor, please refer to page Duty factor measurement. Other than pulsed emission, a VBW was set to 10 Hz and linear voltage average mode was used.

[Test setup]  
40 GHz - 100 GHz

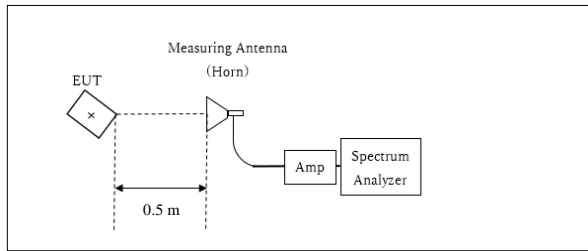

x : Center of turn table

Distance Factor:  $20 \times \log (0.5 \text{ m}^* / 3.0 \text{ m}) = -15.6 \text{ dB}$   
\*Test Distance: 0.5 m

- The carrier level and noise levels were confirmed at each position of X and Y axes of EUT to see the position of maximum noise, and the test was made at the position that has the maximum noise.

The test results and limit are rounded off to one decimal place, so some differences might be observed.

**Measurement** : **9 kHz - 100 GHz**  
**Test data** : **APPENDIX**  
**Test result** : **Pass**

## **SECTION 6: 20 dB Bandwidth, 99 % Occupied Bandwidth and Duty Cycle**

### **Test Procedure**

The measurement was performed in the antenna height to gain the maximum of Electric field strength.

<b>Test</b>	<b>Span</b>	<b>RBW</b>	<b>VBW</b>	<b>Sweep</b>	<b>Detector</b>	<b>Trace</b>	<b>Instrument used</b>
20 dB Bandwidth	600 MHz	2 MHz 1 % to 5 % of OBW	6 MHz Three times of RBW	60 sec	Peak	Max Hold	Spectrum Analyzer
99 % Occupied Bandwidth	600 MHz, Enough width to display emission skirts	2 MHz, 1 % to 5 % of OBW	6 MHz, Three times of RBW	60 sec	Peak *1)	Max Hold *2)	Spectrum Analyzer
Duty Cycle	-	-	-	200 msec	-	Single	Oscilloscope

\*1) Peak detector was applied as Worst-case measurement.  
\*2) The measurement was performed with Max Hold since the duty cycle was not 100 %.

**Test data** : **APPENDIX**  
**Test result** : **Pass**



## APPENDIX 1: Test data

### Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date January 7, 2021  
Temperature / Humidity 21 deg. C / 36 % RH  
Engineer Yuichiro Yamazaki  
Mode Tx 24.15 GHz, Broad beam

#### [Fundamental, band-edge]

##### Peak

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (3 m) [dBuV/m]		Limit (3 m) [dBuV/m]	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
24000.00	Peak	46.1	46.5	40.2	-1.2	32.4	-	52.6	53.0	73.9	21.3	20.9	Inside
24150.00	Peak	98.5	99.1	40.2	-1.2	32.7	-	104.9	105.5	127.9	23.0	22.4	Fundamental
24250.00	Peak	48.7	49.2	40.2	-1.2	32.7	-	55.1	55.6	73.9	18.8	18.4	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance Factor) - Gain(Amplifier)

##### Peak with Duty factor

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
24000.00	Peak	46.1	46.5	40.2	-1.2	32.4	-6.8	45.8	46.2	53.9	8.1	7.7	Inside
24150.00	Peak	98.5	99.1	40.2	-1.2	32.7	-6.8	98.1	98.7	107.9	9.8	9.2	Fundamental
24250.00	Peak	48.7	49.2	40.2	-1.2	32.7	-6.8	48.3	48.7	53.9	5.6	5.2	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance Factor) - Gain(Amplifier) + Duty factor (Refer to Duty factor data sheet)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)**

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2 No.3 No.3  
Date January 7, 2021 January 8, 2021 January 12, 2021 January 13, 2021  
Temperature / Humidity 21 deg. C / 36 % RH 21 deg. C / 34 % RH 23 deg. C / 34 % RH 22 deg. C / 35 % RH  
Engineer Yuichiro Yamazaki  
18 GHz - 26.5 GHz 1 GHz - 10 GHz 9 kHz - 1 GHz 50 GHz - 100 GHz  
10 GHz - 18 GHz  
26.5 GHz - 50 GHz  
Mode Tx 24.15 GHz, Broad beam

**[Spurious emissions other than above]**

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	35.013	QP	21.8	16.7	7.2	32.2	-	13.4	40.0	26.6	
Hori.	80.011	QP	21.7	7.0	7.9	32.2	-	4.5	40.0	35.6	
Hori.	180.045	QP	21.1	16.2	9.0	32.0	-	14.2	43.5	29.3	
Hori.	220.022	QP	21.2	11.1	9.4	32.0	-	9.7	46.0	36.3	
Hori.	450.021	QP	21.0	16.5	11.1	32.0	-	16.6	46.0	29.4	
Hori.	899.878	QP	20.9	22.0	13.6	30.9	-	25.5	46.0	20.5	
Hori.	48300.000	PK	53.6	41.7	-6.6	32.5	-	56.2	87.9	31.7	
Hori.	72450.000	PK	38.5	43.1	2.4	20.8	-	63.2	87.9	24.7	NS
Hori.	96600.000	PK	50.0	45.6	-4.5	34.8	-	56.4	73.9	17.5	NS
Hori.	48300.000	AV	41.4	41.7	-6.6	32.5	-	43.9	67.9	24.0	VBW:10Hz Voltage Avg
Hori.	72450.000	AV	25.2	43.1	2.4	20.8	-	49.9	67.9	18.1	NS VBW:10Hz Voltage Avg
Hori.	96600.000	AV	35.7	45.6	-4.5	34.8	-	42.0	53.9	11.9	NS VBW:10Hz Voltage Avg
Vert.	35.013	QP	21.8	16.7	7.2	32.2	-	13.5	40.0	26.5	
Vert.	80.011	QP	21.8	7.0	7.9	32.2	-	4.5	40.0	35.5	
Vert.	180.045	QP	21.1	16.2	9.0	32.0	-	14.3	43.5	29.2	
Vert.	220.022	QP	21.7	11.1	9.4	32.0	-	10.2	46.0	35.9	
Vert.	450.021	QP	21.0	16.5	11.1	32.0	-	16.6	46.0	29.4	
Vert.	899.878	QP	20.9	22.0	13.6	30.9	-	25.5	46.0	20.5	
Vert.	48300.000	PK	53.5	41.7	-6.6	32.5	-	56.1	87.9	31.8	
Vert.	72450.000	PK	38.1	43.1	2.4	20.8	-	62.8	87.9	25.1	NS
Vert.	96600.000	PK	49.9	45.6	-4.5	34.8	-	56.2	73.9	17.7	NS
Vert.	48300.000	AV	40.4	41.7	-6.6	32.5	-	43.0	67.9	24.9	VBW:10Hz Voltage Avg
Vert.	72450.000	AV	25.1	43.1	2.4	20.8	-	49.8	67.9	18.1	NS VBW:10Hz Voltage Avg
Vert.	96600.000	AV	35.5	45.6	-4.5	34.8	-	41.8	53.9	12.1	NS VBW:10Hz Voltage Avg



Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB  
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
26.5 GHz - 100 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date January 7, 2021  
Temperature / Humidity 21 deg. C / 36 % RH  
Engineer Yuichiro Yamazaki  
Mode Tx 24.15 GHz, Broad beam

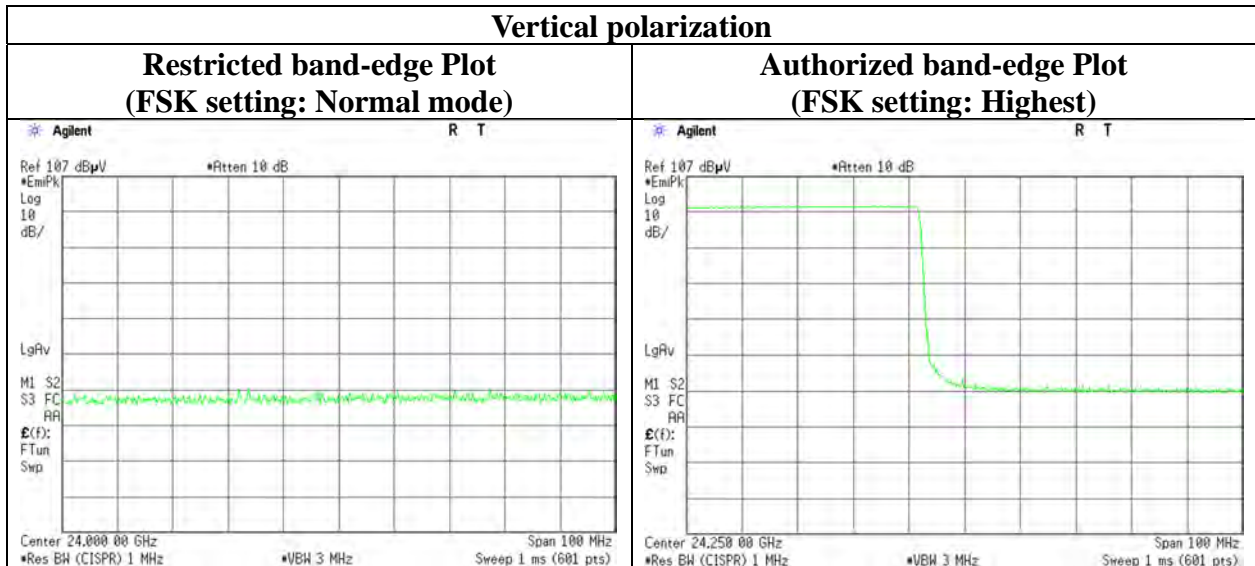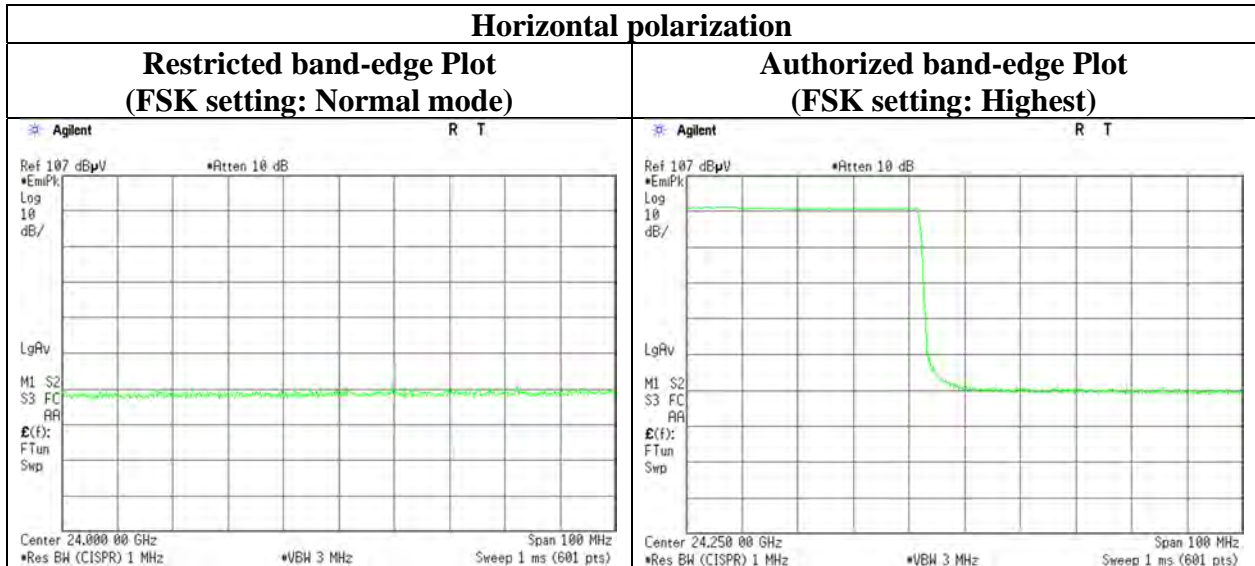

\* Final result of restricted band edge was shown in tabular data.

The test was performed on two FSK settings in consideration of the worst case measurement.

**Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)**

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date January 7, 2021  
Temperature / Humidity 21 deg. C / 36 % RH  
Engineer Yuichiro Yamazaki  
Mode Tx 24.15 GHz, Narrow beam (Left)

**[Fundamental, band-edge]**

**Peak**

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (3 m) [dBuV/m]		Limit (3 m) [dBuV/m]	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
24000.00	Peak	45.8	46.4	40.2	-1.2	32.4	-	52.4	53.0	73.9	21.5	20.9	Inside
24150.00	Peak	97.5	97.7	40.2	-1.2	32.7	-	103.9	104.1	127.9	24.1	23.9	Fundamental
24250.00	Peak	46.3	46.6	40.3	-1.1	32.8	-	52.6	52.9	73.9	21.3	21.0	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance Factor) - Gain(Amplifier)

**Peak with Duty factor**

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
24000.00	Peak	45.8	46.4	40.2	-1.2	32.4	-6.8	45.6	46.2	53.9	8.3	7.7	Inside
24150.00	Peak	97.5	97.7	40.2	-1.2	32.7	-6.8	97.0	97.2	107.9	10.9	10.7	Fundamental
24250.00	Peak	46.3	46.6	40.3	-1.1	32.8	-6.8	45.8	46.1	53.9	8.1	7.8	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance Factor) - Gain(Amplifier) + Duty factor (Refer to Duty factor data sheet)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)**

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2 No.2 No.3 No.3  
Date January 7, 2021 January 8, 2021 January 12, 2021 January 13, 2021  
Temperature / Humidity 21 deg. C / 36 % RH 21 deg. C / 34 % RH 23 deg. C / 34 % RH 22 deg. C / 35 % RH  
Engineer Yuichiro Yamazaki  
18 GHz - 26.5 GHz 1 GHz - 10 GHz 9 kHz - 1 GHz 50 GHz - 100 GHz  
10 GHz - 18 GHz  
26.5 GHz - 50 GHz  
Mode Tx 24.15 GHz, Narrow beam (Left)

**[Spurious emissions other than above]**

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	35.033	QP	21.8	16.7	7.2	32.2	-	13.4	40.0	26.6	
Hori.	79.952	QP	21.7	7.0	7.9	32.2	-	4.4	40.0	35.6	
Hori.	179.982	QP	21.0	16.2	9.0	32.0	-	14.2	43.5	29.3	
Hori.	219.934	QP	21.1	11.1	9.4	32.0	-	9.6	46.0	36.4	
Hori.	449.973	QP	20.1	16.5	11.1	32.0	-	15.7	46.0	30.3	
Hori.	900.062	QP	21.0	22.0	13.6	30.9	-	25.6	46.0	20.4	
Hori.	48300.000	PK	53.7	41.7	-6.6	32.5	-	56.2	87.9	31.7	
Hori.	72450.000	PK	39.3	43.1	2.4	20.8	-	64.0	87.9	23.9	NS
Hori.	96600.000	PK	50.1	45.6	-4.5	34.8	-	56.4	73.9	17.5	NS
Hori.	48300.000	AV	41.2	41.7	-6.6	32.5	-	43.8	67.9	24.1	VBW:10Hz Voltage Avg
Hori.	72450.000	AV	25.2	43.1	2.4	20.8	-	49.9	67.9	18.0	NS VBW:10Hz Voltage Avg
Hori.	96600.000	AV	35.7	45.6	-4.5	34.8	-	42.0	53.9	11.9	NS VBW:10Hz Voltage Avg
Vert.	35.033	QP	21.8	16.7	7.2	32.2	-	13.4	40.0	26.6	
Vert.	79.952	QP	21.7	7.0	7.9	32.2	-	4.5	40.0	35.5	
Vert.	179.982	QP	21.1	16.2	9.0	32.0	-	14.3	43.5	29.3	
Vert.	219.934	QP	21.7	11.1	9.4	32.0	-	10.2	46.0	35.9	
Vert.	449.973	QP	21.0	16.5	11.1	32.0	-	16.6	46.0	29.4	
Vert.	900.062	QP	20.9	22.0	13.6	30.9	-	25.5	46.0	20.5	
Vert.	48300.000	PK	53.4	41.7	-6.6	32.5	-	55.9	87.9	32.0	
Vert.	72450.000	PK	39.4	43.1	2.4	20.8	-	64.1	87.9	23.8	NS
Vert.	96600.000	PK	49.9	45.6	-4.5	34.8	-	56.2	73.9	17.7	NS
Vert.	48300.000	AV	40.1	41.7	-6.6	32.5	-	42.7	67.9	25.2	VBW:10Hz Voltage Avg
Vert.	72450.000	AV	25.2	43.1	2.4	20.8	-	49.9	67.9	18.0	NS VBW:10Hz Voltage Avg
Vert.	96600.000	AV	35.4	45.6	-4.5	34.8	-	41.8	53.9	12.1	NS VBW:10Hz Voltage Avg

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)

\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB  
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
26.5 GHz - 100 GHz 20log (0.5 m / 3.0 m) = -15.6 dB

**UL Japan, Inc.**

**Ise EMC Lab.**



4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date January 7, 2021  
Temperature / Humidity 21 deg. C / 36 % RH  
Engineer Yuichiro Yamazaki  
Mode Tx 24.15 GHz, Narrow beam (Left)

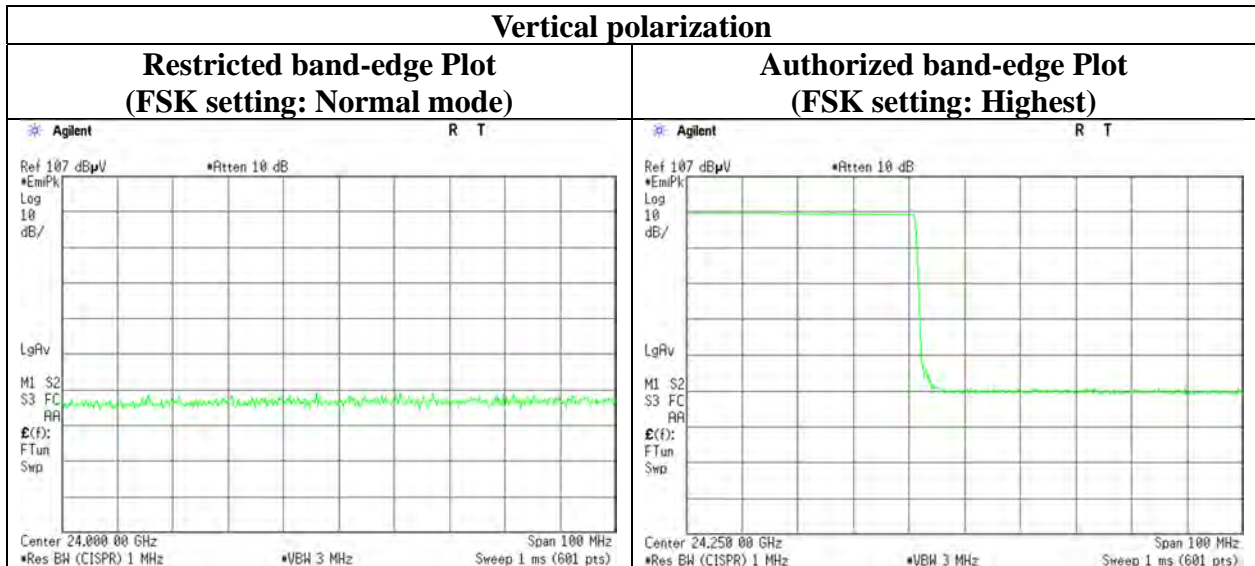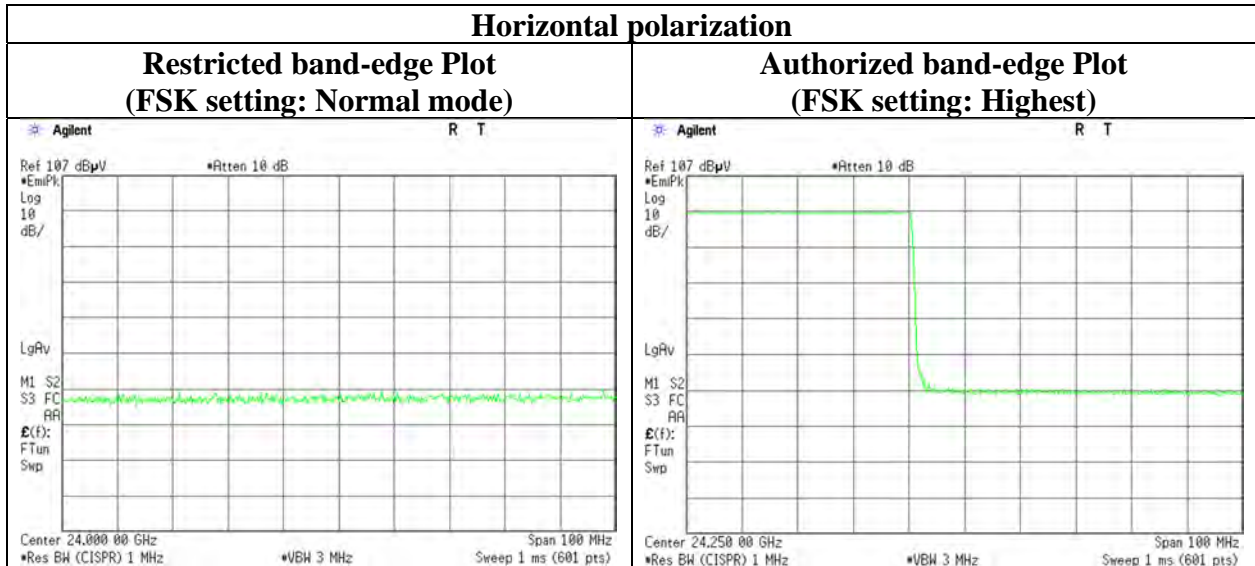

\* Final result of restricted band edge was shown in tabular data.

The test was performed on two FSK settings in consideration of the worst case measurement.

## Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date January 7, 2021  
Temperature / Humidity 21 deg. C / 36 % RH  
Engineer Yuichiro Yamazaki  
Mode Tx 24.15 GHz, Narrow beam (Right)

### [Fundamental, band-edge]

#### Peak

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result (3 m) [dBuV/m]		Limit (3 m) [dBuV/m]	Margin [dB]		Remark Inside or Outside of Restricted Bands
		Hor	Ver					Hor	Ver		Hor	Ver	
24000.00	Peak	46.5	46.9	40.2	-1.2	32.4	-	53.0	53.5	73.9	20.9	20.4	Inside
24150.00	Peak	98.1	98.1	40.2	-1.2	32.7	-	104.5	104.5	127.9	23.4	23.4	Fundamental
24250.00	Peak	46.4	46.7	40.3	-1.1	32.8	-	52.7	53.0	73.9	21.2	20.9	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance Factor) - Gain(Amplifier)

#### Peak with Duty factor

Frequency [MHz]	Detector	Reading [dBuV]		Ant Factor [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]		Limit [dBuV/m]	Margin [dB]		Remark
		Hor	Ver					Hor	Ver		Hor	Ver	
24000.00	Peak	46.5	46.9	40.2	-1.2	32.4	-6.8	46.2	46.7	53.9	7.7	7.2	Inside
24150.00	Peak	98.1	98.1	40.2	-1.2	32.7	-6.8	97.7	97.7	107.9	10.2	10.2	Fundamental
24250.00	Peak	46.4	46.7	40.3	-1.1	32.8	-6.8	45.9	46.2	53.9	8.0	7.7	Outside

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance Factor) - Gain(Amplifier) + Duty factor (Refer to Duty factor data sheet)

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124

**Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)**

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2 No.3 No.3  
Date January 7, 2021 January 8, 2021 January 12, 2021 January 13, 2021  
Temperature / Humidity 21 deg. C / 36 % RH 21 deg. C / 34 % RH 23 deg. C / 34 % RH 22 deg. C / 35 % RH  
Engineer Yuichiro Yamazaki  
18 GHz - 26.5 GHz 1 GHz - 10 GHz 9 kHz - 1 GHz 50 GHz - 100 GHz  
10 GHz - 18 GHz  
26.5 GHz - 50 GHz  
Mode Tx 24.15 GHz, Narrow beam (Right)

**[Spurious emissions other than above]**

Polarity	Frequency [MHz]	Detector	Reading [dBuV]	Ant.Fac. [dB/m]	Loss [dB]	Gain [dB]	Duty Factor [dB]	Result [dBuV/m]	Limit [dBuV/m]	Margin [dB]	Remark
Hori.	34.989	QP	21.8	16.7	7.2	32.2	-	13.5	40.0	26.5	
Hori.	79.943	QP	21.7	7.0	7.9	32.2	-	4.4	40.0	35.6	
Hori.	179.978	QP	21.0	16.2	9.0	32.0	-	14.2	43.5	29.3	
Hori.	219.965	QP	21.1	11.1	9.4	32.0	-	9.6	46.0	36.4	
Hori.	450.023	QP	20.1	16.5	11.1	32.0	-	15.7	46.0	30.3	
Hori.	900.013	QP	20.9	22.0	13.6	30.9	-	25.6	46.0	20.5	
Hori.	48300.000	PK	53.6	41.7	-6.6	32.5	-	56.2	87.9	31.7	
Hori.	72450.000	PK	39.3	43.1	2.4	20.8	-	64.0	87.9	23.9	NS
Hori.	96600.000	PK	50.0	45.6	-4.5	34.8	-	56.3	73.9	17.6	NS
Hori.	48300.000	AV	41.2	41.7	-6.6	32.5	-	43.8	67.9	24.1	VBW:10Hz Voltage Avg
Hori.	72450.000	AV	25.2	43.1	2.4	20.8	-	49.9	67.9	18.0	NS VBW:10Hz Voltage Avg
Hori.	96600.000	AV	35.7	45.6	-4.5	34.8	-	42.1	53.9	11.9	NS VBW:10Hz Voltage Avg
Vert.	34.989	QP	21.8	16.7	7.2	32.2	-	13.4	40.0	26.6	
Vert.	79.943	QP	21.7	7.0	7.9	32.2	-	4.5	40.0	35.5	
Vert.	179.978	QP	21.1	16.2	9.0	32.0	-	14.3	43.5	29.2	
Vert.	219.965	QP	21.7	11.1	9.4	32.0	-	10.2	46.0	35.8	
Vert.	450.023	QP	21.0	16.5	11.1	32.0	-	16.6	46.0	29.4	
Vert.	900.013	QP	20.9	22.0	13.6	30.9	-	25.5	46.0	20.5	
Vert.	48300.000	PK	53.4	41.7	-6.6	32.5	-	56.0	87.9	31.9	
Vert.	72450.000	PK	39.4	43.1	2.4	20.8	-	64.1	87.9	23.8	NS
Vert.	96600.000	PK	49.8	45.6	-4.5	34.8	-	56.1	73.9	17.8	NS
Vert.	48300.000	AV	40.2	41.7	-6.6	32.5	-	42.8	67.9	25.1	VBW:10Hz Voltage Avg
Vert.	72450.000	AV	25.2	43.1	2.4	20.8	-	49.9	67.9	18.0	NS VBW:10Hz Voltage Avg
Vert.	96600.000	AV	35.4	45.6	-4.5	34.8	-	41.8	53.9	12.1	NS VBW:10Hz Voltage Avg

Result = Reading + Ant Factor + Loss (Cable+Attenuator+Filter+Distance factor(above 1 GHz)) - Gain(Amplifier)



\*Other frequency noises omitted in this report were not seen or had enough margin (more than 20 dB).

Distance factor: 1 GHz - 10 GHz 20log (3.75 m / 3.0 m) = 1.94 dB  
10 GHz - 26.5 GHz 20log (1.0 m / 3.0 m) = -9.5 dB  
26.5 GHz - 100 GHz 20log (0.5 m / 3.0 m) = -15.6 dB



**Radiated Spurious Emission**  
**(Reference Plot for band-edge)**

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date January 7, 2021  
Temperature / Humidity 21 deg. C / 36 % RH  
Engineer Yuichiro Yamazaki  
Mode Tx 24.15 GHz, Narrow beam (Right)

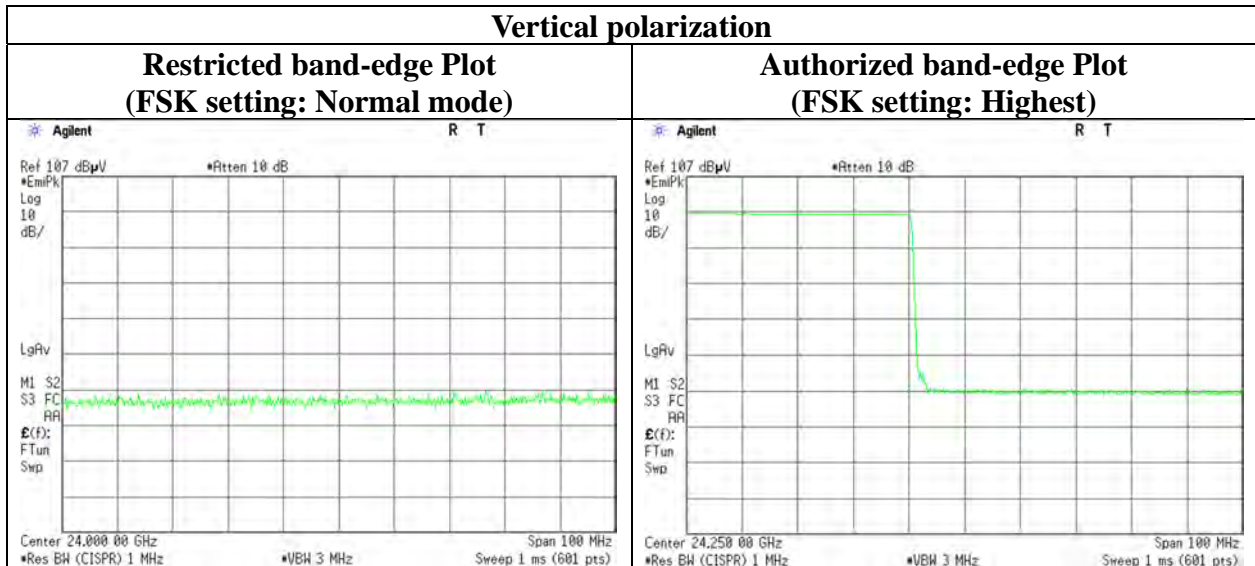
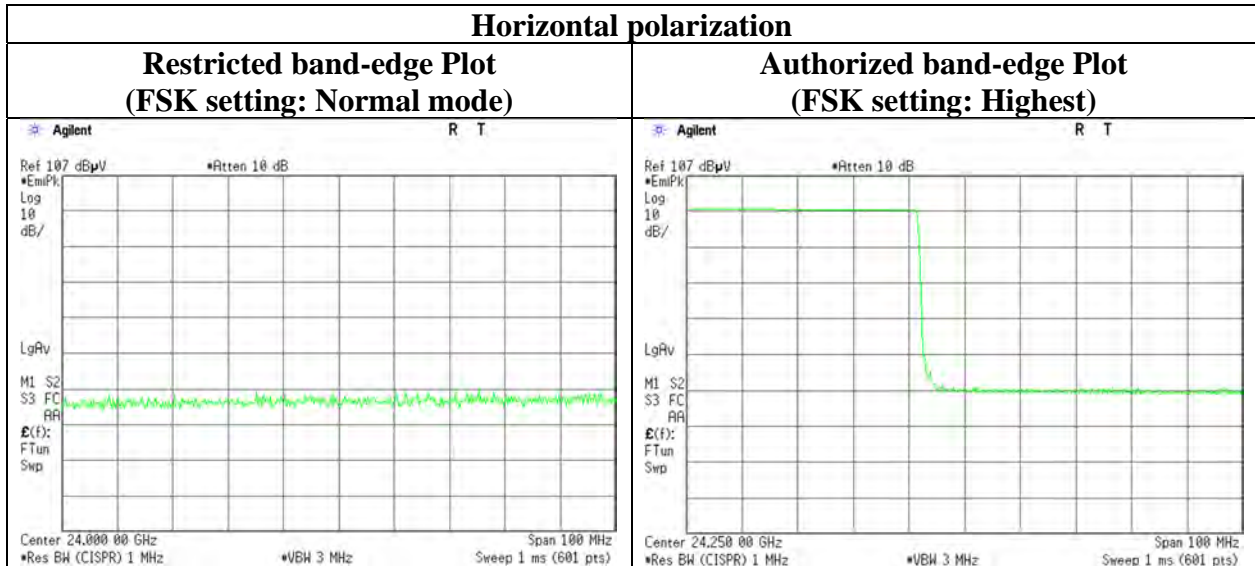


\* Final result of restricted band edge was shown in tabular data.

The test was performed on two FSK settings in consideration of the worst case measurement.

**Radiated Emission (Electric Field Strength of Fundamental and Spurious Emission)**  
**(Plot data, Worst case)**


Report No.	13664347H			
Test place	Ise EMC Lab.			
Semi Anechoic Chamber	No.2	No.2	No.3	No.3
Date	January 7, 2021	January 8, 2021	January 12, 2021	January 13, 2021
Temperature / Humidity	21 deg. C / 36 % RH	21 deg. C / 34 % RH	23 deg. C / 34 % RH	22 deg. C / 35 % RH
Engineer	Yuichiro Yamazaki			
	18 GHz - 26.5 GHz	1 GHz - 10 GHz	9 kHz - 1 GHz	50 GHz - 100 GHz
			10 GHz - 18 GHz	
			26.5 GHz - 50 GHz	
Mode	Tx 24.15 GHz, Broad beam			

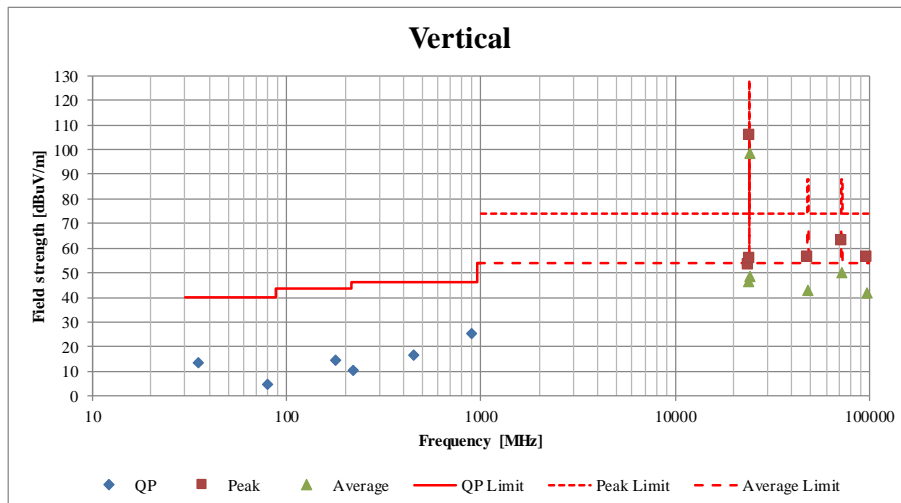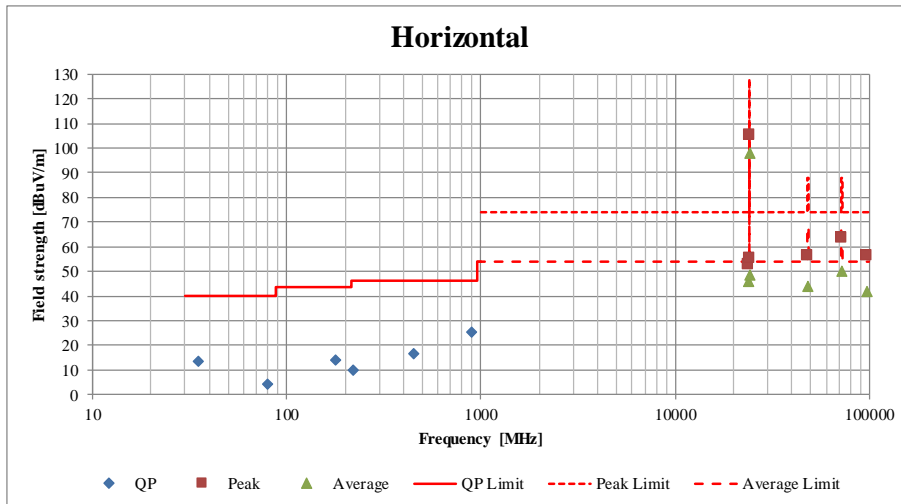

**20 dB Bandwidth, 99 % Occupied Bandwidth**

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date January 7, 2021  
Temperature / Humidity 21 deg. C / 36 % RH  
Engineer Yuichiro Yamazaki  
Mode Tx 24.15 GHz, Broad beam


Frequency [GHz]	FSK setting	20 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
24.15	Normal mode	188.265	183.0068
24.15	Highest	190.469	184.6254

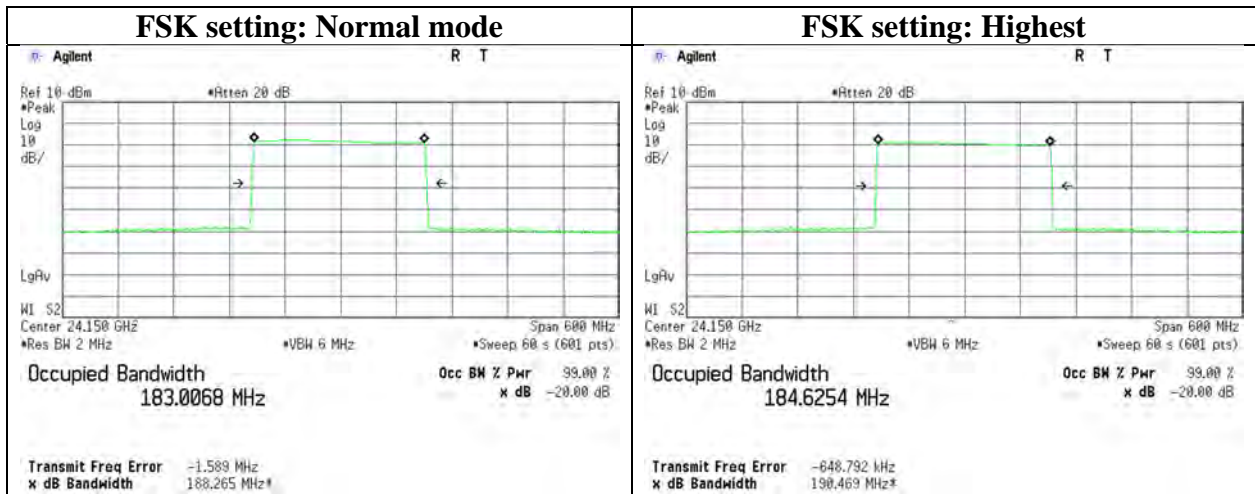

**20 dB Bandwidth, 99 % Occupied Bandwidth**

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date January 7, 2021  
Temperature / Humidity 21 deg. C / 36 % RH  
Engineer Yuichiro Yamazaki  
Mode Tx 24.15 GHz, Narrow beam (Left)


Frequency [GHz]	FSK setting	20 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
24.15	Normal mode	188.756	183.2172
24.15	Highest	189.824	184.6194

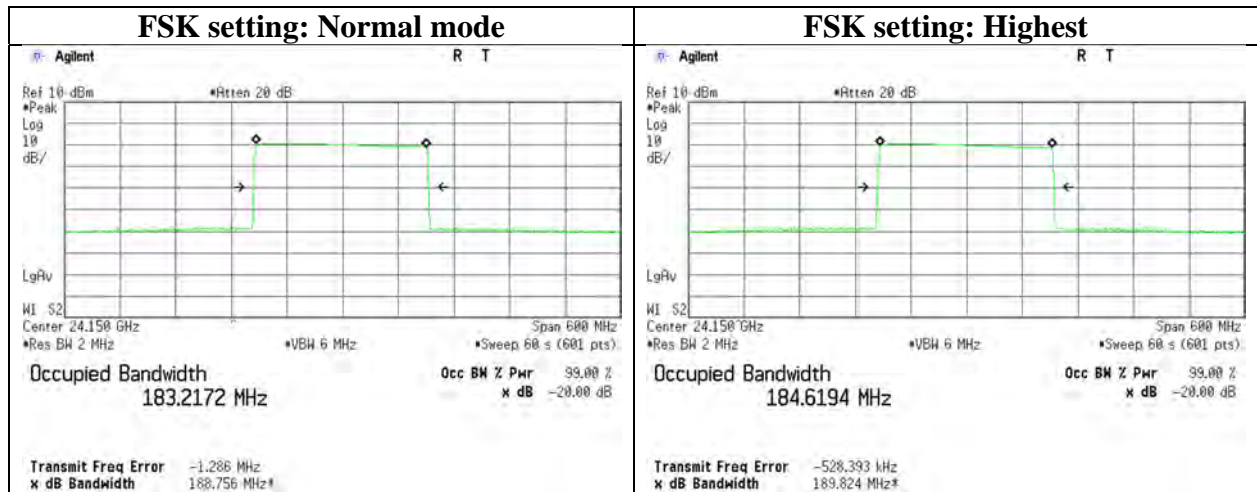

### 20 dB Bandwidth, 99 % Occupied Bandwidth

Report No.	13664347H
Test place	Ise EMC Lab.
Semi Anechoic Chamber	No.2
Date	January 7, 2021
Temperature / Humidity	21 deg. C / 36 % RH
Engineer	Yuichiro Yamazaki
Mode	Tx 24.15 GHz, Narrow beam (Right)

Frequency [GHz]	FSK setting	20 dB Bandwidth [MHz]	99% Occupied Bandwidth [MHz]
24.15	Normal mode	188.953	183.0605
24.15	Highest	190.090	184.0319



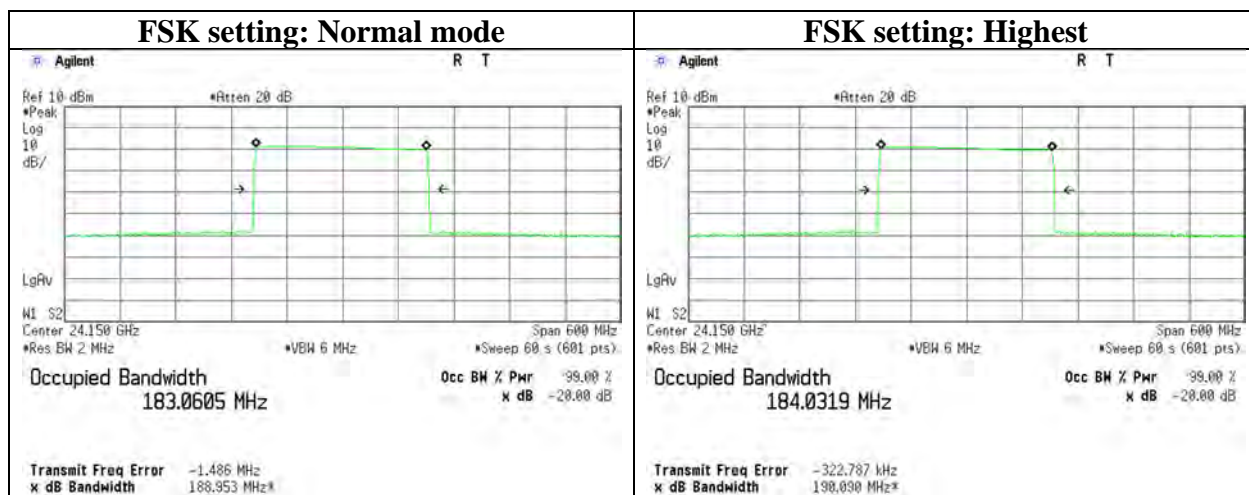


### Duty Cycle

Report No. 13664347H  
Test place Ise EMC Lab.  
Semi Anechoic Chamber No.2  
Date January 8, 2021  
Temperature / Humidity 20 deg. C / 37 % RH  
Engineer Yuichiro Yamazaki  
Mode Tx 24.15 GHz

Mode	Tx On time [ms]	Tx On + Off time [ms]	Duty factor [dB]
Broad beam	36.470	79.913	-6.81
Narrow beam (Left)	36.470	79.913	-6.81
Narrow beam (Right)	36.670	80.114	-6.79
Declared	36.400	80.000	-6.84

Duty factor = 20 \* log (Tx On time / Tx On + Off time)

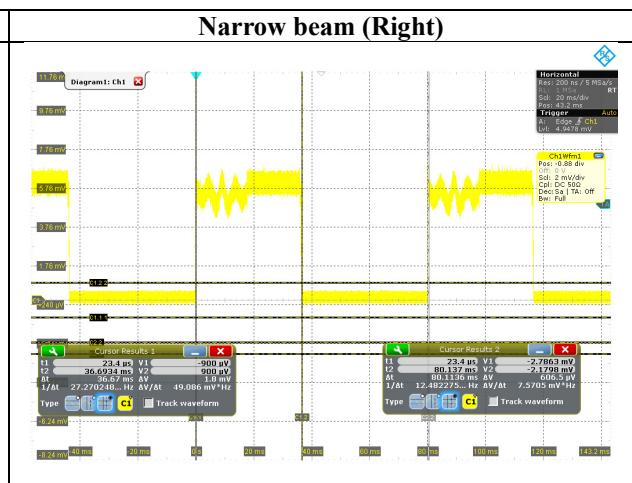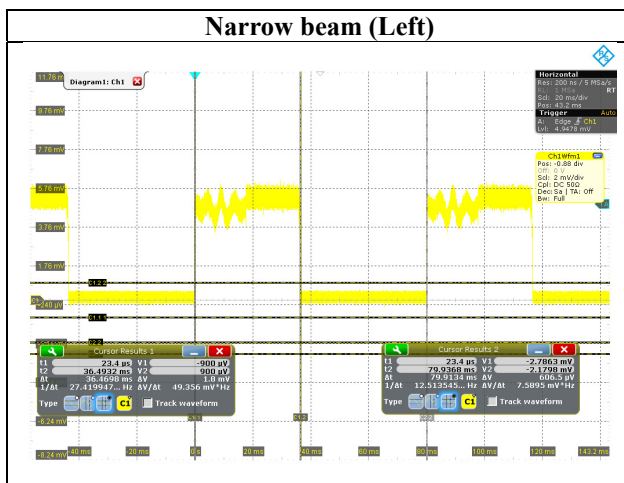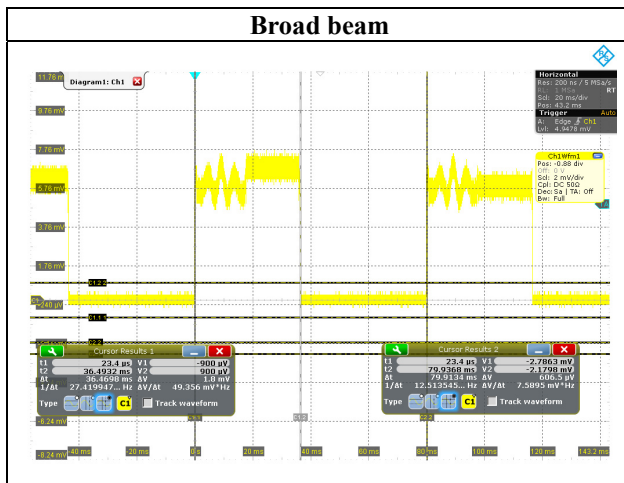

The declared duty factor and measured one were compared. The maximum duty factor of these results was applied to the average field strength measurement. (Worst case)

## APPENDIX 2: Test Instruments

### Test equipment (1/2)

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	MAEC-02	142004	AC2_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-06902	05/26/2020	24
RE	MOS-41	192300	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	0013	12/06/2020	12
RE	MMM-01	141542	Digital Tester	Fluke Corporation	FLUKE 26-3	78030611	08/18/2020	12
RE	MJM-27	142228	Measure	KOMELON	KMC-36	-	-	-
RE	COTS-MEMI-02	178648	EMI measurement program	TSJ (Techno Science Japan)	TEPTO-DV	-	-	-
RE	MAEC-02-SVSWR	142006	AC2_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-06902	04/01/2019	24
RE	MCC-216	141392	Microwave Cable	Junkosha	MWX221	1604S253(1 m) / 537073/126E(5 m)	02/18/2020	12
RE	MPA-10	141579	Pre Amplifier	Keysight Technologies Inc	8449B	3008A02142	01/12/2021	12
RE	MHA-02	141503	Horn Antenna 18-26.5GHz	EMCO	3160-09	1265	06/15/2020	12
RE	MSA-10	141899	Spectrum Analyzer	Keysight Technologies Inc	E4448A	MY46180655	08/04/2020	12
RE	MHA-06	141512	Horn Antenna 1-18GHz	Schwarzbeck Mess - Elektronik	BBHA9120D	254	09/14/2020	12
RE	MAEC-03	142008	AC3_Semi Anechoic Chamber(NSA)	TDK	Semi Anechoic Chamber 3m	DA-10005	05/22/2020	24
RE	MOS-13	141554	Thermo-Hygrometer	CUSTOM. Inc	CTH-201	1301	01/15/2021	12
RE	MMM-08	141532	DIGITAL HiTESTER	HIOKI E.E. CORPORATION	3805	51201197	01/07/2021	12
RE	MJM-16	142183	Measure	KOMELON	KMC-36	-	-	-
RE	MAT-95	142314	Attenuator	Pasternack	PE7390-6	D/C 1504	06/17/2020	12
RE	MCC-112	141216	Coaxial cable	Fujikura/Suhner/TSJ	5D-2W/SFM14/sucoform141-PE/421-010/RFM-E321(SW)	-/00640	07/06/2020	12
RE	MLPA-02	142152	Loop Antenna	Rohde & Schwarz	HFH2-Z2	836553/009	12/04/2020	12
RE	MCC-219	159670	Coaxial Cable	UL Japan Inc.	-	-	11/17/2020	12
RE	MPA-13	141582	Pre Amplifier	SONOMA INSTRUMENT	310	260834	02/10/2020	12
RE	MTR-08	141949	Test Receiver	Rohde & Schwarz	ESCI	100767	08/18/2020	12
RE	MBA-03	141424	Biconical Antenna	Schwarzbeck Mess - Elektronik	VHA9103+BBA9106	1915	08/13/2020	12
RE	MCC-51	141323	Coaxial cable	UL Japan	-	-	07/06/2020	12
RE	MLA-22	141266	Logperiodic Antenna (200-1000MHz)	Schwarzbeck Mess - Elektronik	VUSLP9111B	9111B-191	08/13/2020	12
RE	MHA-20	141507	Horn Antenna 1-18GHz	Schwarzbeck Mess - Elektronik	BBHA9120D	258	10/01/2020	12
RE	MPA-11	141580	MicroWave System Amplifier	Keysight Technologies Inc	83017A	MY39500779	03/24/2020	12
RE	MCC-231	177964	Microwave Cable	Junkosha INC.	MMX221	1901S329(1m)/1902S579(5m)	03/02/2020	12
RE	MAEC-03-SVSWR	142013	AC3_Semi Anechoic Chamber(SVSWR)	TDK	Semi Anechoic Chamber 3m	DA-10005	04/08/2019	24
RE	MHA-04	141505	Horn Antenna 26.5-40GHz	EMCO	3160-10	1140	08/03/2020	12
RE	MPA-03	141577	Microwave System Power Amplifier	Keysight Technologies Inc	83050A	MY39500610	10/19/2020	12
RE	MCC-220	151897	Microwave Cable	Huber+Suhner	SF101EA/11PC24/11PC24/2.5M	SN MY1726/1EA	04/13/2020	12
RE	MHA-31	142041	Horn Antenna	Oshima Prototype Engineering Co.	A16-187	1	09/24/2020	12
RE	MPA-25	159919	Power Amplifier	SAGE Millimeter, Inc.	SBP-4035033018-2F2F-S1	12559-01	06/30/2020	12
RE	MHA-33	180634	Horn Antenna	SAGE Millimeter, Inc.	SAZ-2410-15-S1	17343-01	06/24/2020	12

**UL Japan, Inc.**  
**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN  
Telephone : +81 596 24 8999  
Facsimile : +81 596 24 8124

**Test equipment (2/2)**

Test Item	Local ID	LIMS ID	Description	Manufacturer	Model	Serial	Last Calibration Date	Cal Int
RE	MMX-01	142047	Preselected Millimeter Mixer	Keysight Technologies Inc	11974V-E01	3001A00412	05/25/2020	12
RE	MPA-23	142055	Power Amplifier	SAGE Millimeter, Inc.	SBP-5037532015-1515-N1	11599-01	12/11/2020	12
RE	MCC-177	141226	Microwave Cable	Junkosha	MMX221-00500DMSDMS	1502S304	03/18/2020	12
RE	MHA-35	180544	Horn Antenna	SAGE Millimeter, Inc.	SAZ-2410-10-S1	17343-01	06/24/2020	12
RE	MPA-31	180607	Power Amplifier	SAGE Millimeter, Inc.	SBP-7531142515-1010-E1	17343-01	10/26/2020	12
RE	MMX-02	142048	Harmonic Mixer	Keysight Technologies Inc	11970W	2521 A01909	10/19/2020	12
RE	MCC-135	142032	Microwave Cable	Huber+Suhner	SUCOFLEX102	37511/2	09/16/2020	12
RE	MCC-136	142033	Microwave Cable	Huber+Suhner	SUCOFLEX102	37512/2	09/16/2020	12
RE	OSC-01	141962	Digital Oscilloscope	Rohde & Schwarz	RTO1004	200355	08/18/2020	12
RE	MDT-05	142529	Detector	HEROTEK, INC.	DT1840P	484823	-	-

\*Hyphens for Last Calibration Date and Cal Int (month) are instruments that Calibration is not required (e.g. software), or instruments checked in advance before use.

The expiration date of the calibration is the end of the expired month.

As for some calibrations performed after the tested dates, those test equipment have been controlled by means of an unbroken chains of calibrations.

All equipment is calibrated with valid calibrations. Each measurement data is traceable to the national or international standards.

Test item:

RE: Radiated emission, 20 dB bandwidth and Duty cycle tests

**UL Japan, Inc.**

**Ise EMC Lab.**

4383-326 Asama-cho, Ise-shi, Mie-ken 516-0021 JAPAN

Telephone : +81 596 24 8999

Facsimile : +81 596 24 8124