



Intertek Testing Services

FCC Part 15 Subpart E Test Report
for
Western Multiplex
on the
U-NII Radio
Model: 27750

FCC ID: HZB-U53-45

Report # 20338251
Date of Report: February 27, 2001

Job # J20033825
Date of Test: December 6, 2000 – January 23, 2001

Number of Pages: 20 pp. + Supporting Data and Documents



Lab Code 200201-0



Cell 37

Ollie Moyrong, Test Engineer



David Chernomordik

David Chernomordik, Ph.D., EMC Site Manager



This report shall not be reproduced except in full, without written approval of Intertek Testing Services.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.



The results contained in this report were derived from measurements performed on the identified test samples. Any implied performance of other samples on this report is dependent on the representative of the samples tested.



Intertek Testing Services NA Inc.

3003 SW 153rd Dr., #212, Beaverton, OR 97006
Telephone 503-626-6694 Fax 503-626-7328

Table of Contents

1.0	Summary of Tests	1
2.0	General Description	2
2.1	Product Description	2
2.2	Related Submittal(s) Grants.....	2
2.3	Test Methodology	3
2.4	Test Facility.....	3
3.0	System Test Configuration	4
3.1	Support Equipment and description.....	4
3.2	Block Diagram of Test Setup.....	4
3.3	Justification.....	5
3.4	Software Exercise Program.....	5
3.5	Mode of operation during test.....	5
3.6	Modifications required for Compliance.....	5
3.7	Additions, deviations and exclusions from standards.....	5
4.0	Measurement Results	6
4.1	Conducted Output Power at Antenna Terminal.....	6
4.2	26 dB Bandwidth	7
4.3	Power Density.....	8
4.4	The ratio of the peak excursion of the modulation envelope to the peak power	9
4.6	Transmitter Radiated Emissions in Restricted Bands.....	12
4.8	AC Line Conducted Emission	16
4.8.1	Line Conducted Emission Limits.....	16
4.9	Radiated Emissions from Digital Section	17
4.10	Radiated Emissions from Receiver Section.....	18
4.11	Transmitter Duty Cycle Calculation / Measurements.....	19
5.0	List of Test Equipment	20

1.0 Summary of Tests

Western Multiplex, Model: 27750

FCC ID: HZB-U53-45

TEST	REFERENCE	RESULTS
Output power	15.407 (a)	Pass
26 dB Bandwidth*	15.407 (a)	For calculation only
Power Density	15.407 (a) (5)	Pass
The ratio of the peak excursion of the modulation envelope to the peak transmit power	15.407 (a) (6)	Pass
Out of Band Antenna Conducted Emission	15.407 (b)	Pass
Radiated Emission in Restricted Bands	15.205	Pass
AC Conducted Emission	15.207	Pass
Radiated Emission from Digital Part	15.209	Pass
Radiated Emission from Receiver L.O.	15.209	Not Applicable
Radiation Exposure Requirement	1.1310	Pass
Antenna Requirement	15.203	Not Applicable

Test Engineer:


Ollie Moyriong

Date:

2/27/01

EMC Site Manager:


David Chernomordik

Date:

02/27/01

2.0 General Description**2.1 Product Description**

The EUT Model No.: 27900 is an intentional transmitter used for wireless point-to-point communications operating in the frequency ranges: 5.25 - 5.35 GHz and 5.725 - 5.825 GHz.

A pre-production version of the sample was received on October 22, 2000 in good condition.

Overview of the U-NII Radio

Applicant	Western Multiplex Corporation
Trade Name & Model No.	27750
FCC Identifier	HZB-U53-45
Use of Product	Point-to-point fixed wireless interconnect
Manufacturer & Model of Spread Spectrum Module	Western Multiplex, Model
Type of Transmission	QPSK
Maximum RF Output (dBm) *	19.5 dBm
Frequency Range (MHz)	5.275 - 5.825 GHz
Number of Channel(s)	2
Antenna(s) & Gain, dBi	Panel Antenna, 23.5 dBi Parabolic Antenna, 28.5 dBi
Antenna Requirement	<input type="checkbox"/> The EUT uses a permanently connected antenna. <input type="checkbox"/> The antenna is affixed to the EUT using a unique connector which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector. <input checked="" type="checkbox"/> The EUT requires professional installation (attach supporting documentation if using this option).
Manufacturer name & address	Western Multiplex Corporation 1196 Borregas Avenue Sunnyvale, California 94089

* The output power depends on the gain of the antenna used.

2.2 Related Submittal(s) Grants

None.

2.3 Test Methodology

Both AC mains line-conducted and radiated emissions measurements were performed according to the procedures in ANSI C63.4 (1992). Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility


The open area test site and conducted measurement facility used to collect the radiated data is site 2. This test facility and site measurement data have been fully placed on file with the FCC and NVLAP accredited.

3.0 System Test Configuration

3.1 Support Equipment and description

Item #	Description	Model No.	Serial No.
1	Gabriel 1' Flat Panel Antenna	DFPD 1-52	N/A
1	Gabriel 2' Parabolic Antenna	SSP2-52B	N/A

3.2 Block Diagram of Test Setup

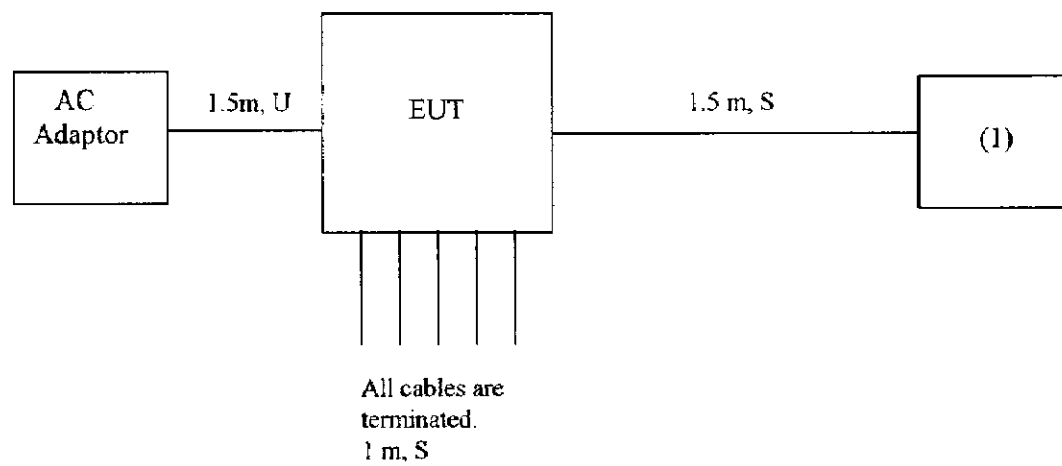

AC Adaptor is ZVC65NT24E, s/n 023496

m: Length
S: Shielded
U: Unshielded

3.3 Justification

For emission testing, the Equipment Under Test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst case emissions.

For radiated emission measurements, the EUT is attached to a cardboard box (if necessary) and placed on the wooden turntable. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). The EUT is wired to transmit full power.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. For emissions testing, the units were setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

3.5 Mode of operation during test

100% time transmitting signal on low and high channels.

3.6 Modifications required for Compliance

The following modifications were installed during compliance testing in order to bring the product into compliance (Please note that this list does not include changes made specifically by Western Multiplex prior to compliance testing):

No modifications were made to the EUT by Intertek Testing Services.

3.7 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.

4.0 Measurement Results

4.1 Conducted Output Power at Antenna Terminal FCC Rule 15.407(a)

Requirement:

For fixed point-to-point U-NII devices operating in 5.25-5.35 GHz band, the peak transmit power shall not exceed the lesser of 250 mW (24 dBm) or $11 \text{ dBm} + 10\log(B)$, where B is the 26 dB emission bandwidth in MHz (for antenna gain up to 6 dBi).

Procedure:


The antenna port of the EUT was connected to the input of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The RF output power was measured when the device was powered from DC power supply with 47 VDC, and 20 VDC (lowest DC input according the specification) and 63 VDC (highest DC input according the specification)..


Result:

Frequency, MHz	Output Power, mW	Output Power, dBm	EIRP Limit, dBm	Maximum allowed antenna gain, dBi
Low Channel: 5275	88.5	19.5	30.0	10.5
High Channel: 5325	83.0	19.2	30.0	10.8

Note:

1. The EUT Output Power was set to maximum to produce the worse case test result. In real application, when using an antenna with 23.5 dBi gain, the Output Power will have to be reduced by 13.0 dB.
2. When a higher gain antenna is used, the Output Power will be reduced further.
3. The RF Output Power was varied no more than 0.1 dB when the DC voltage was changed from 20 V to 63 V

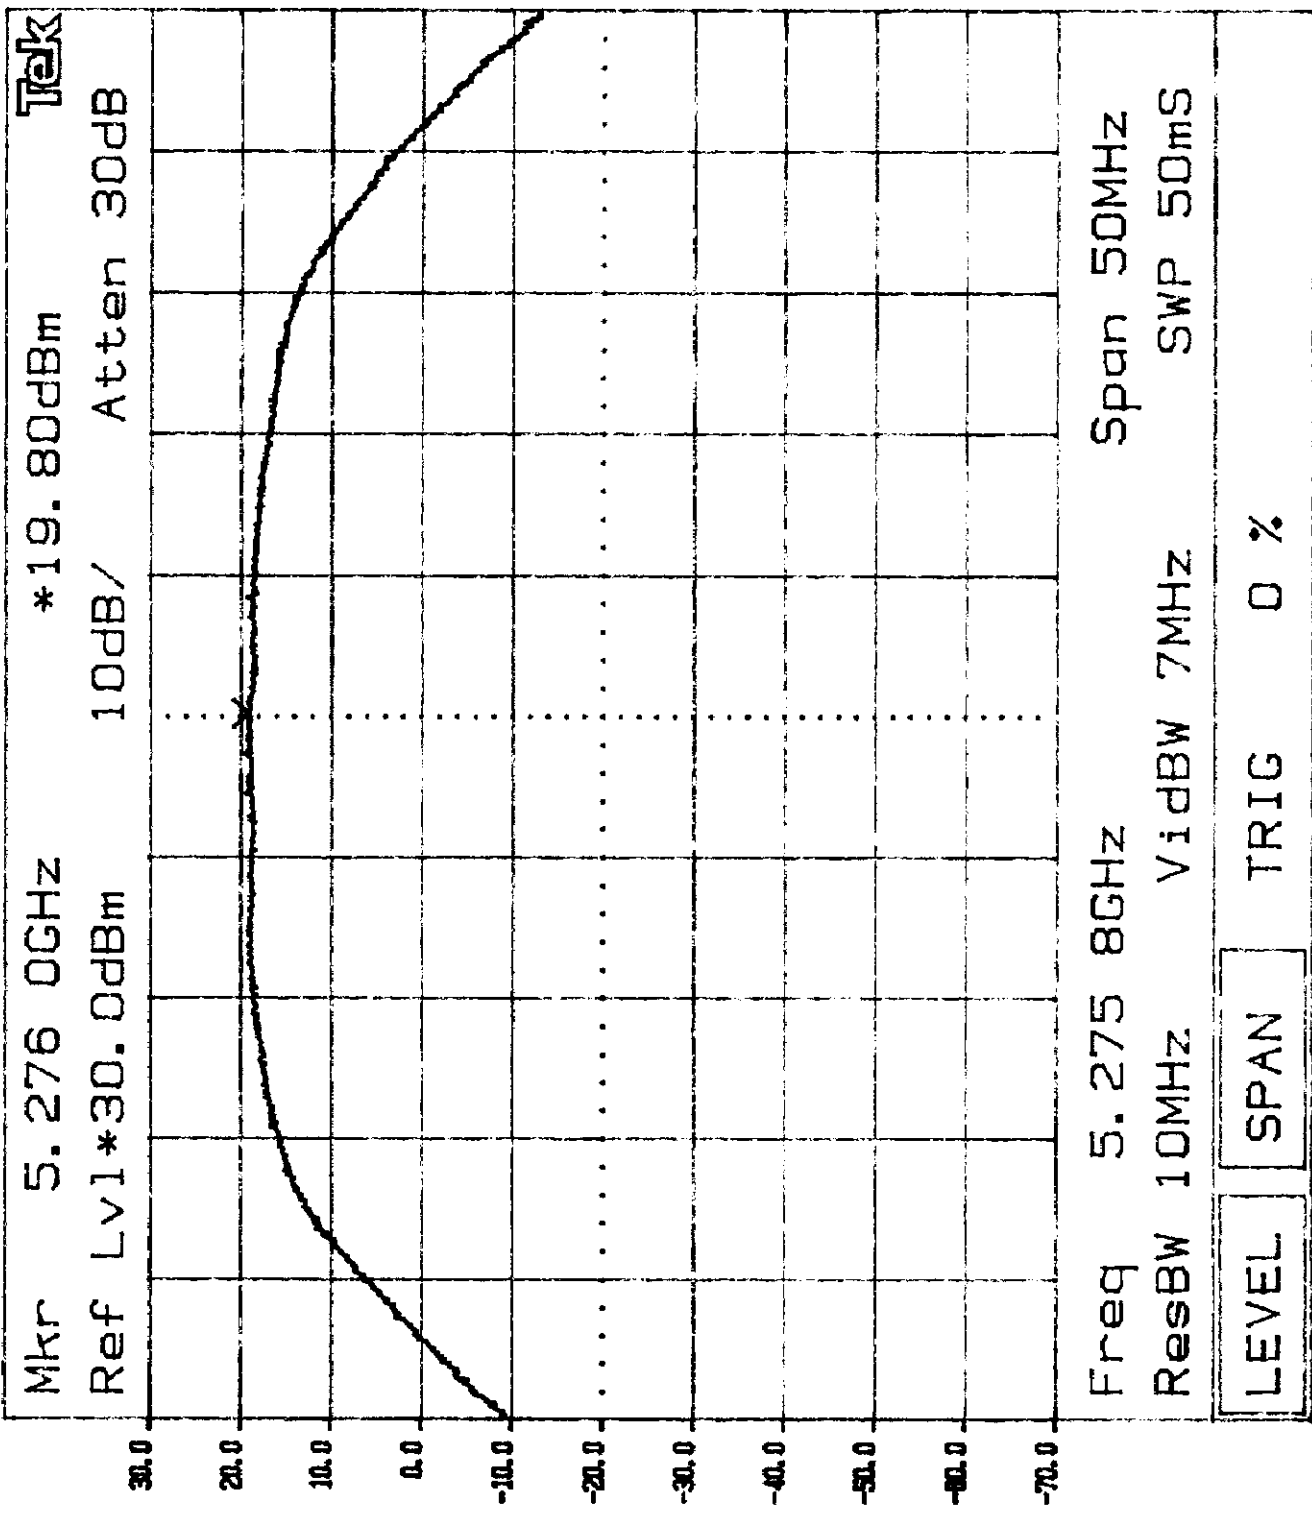

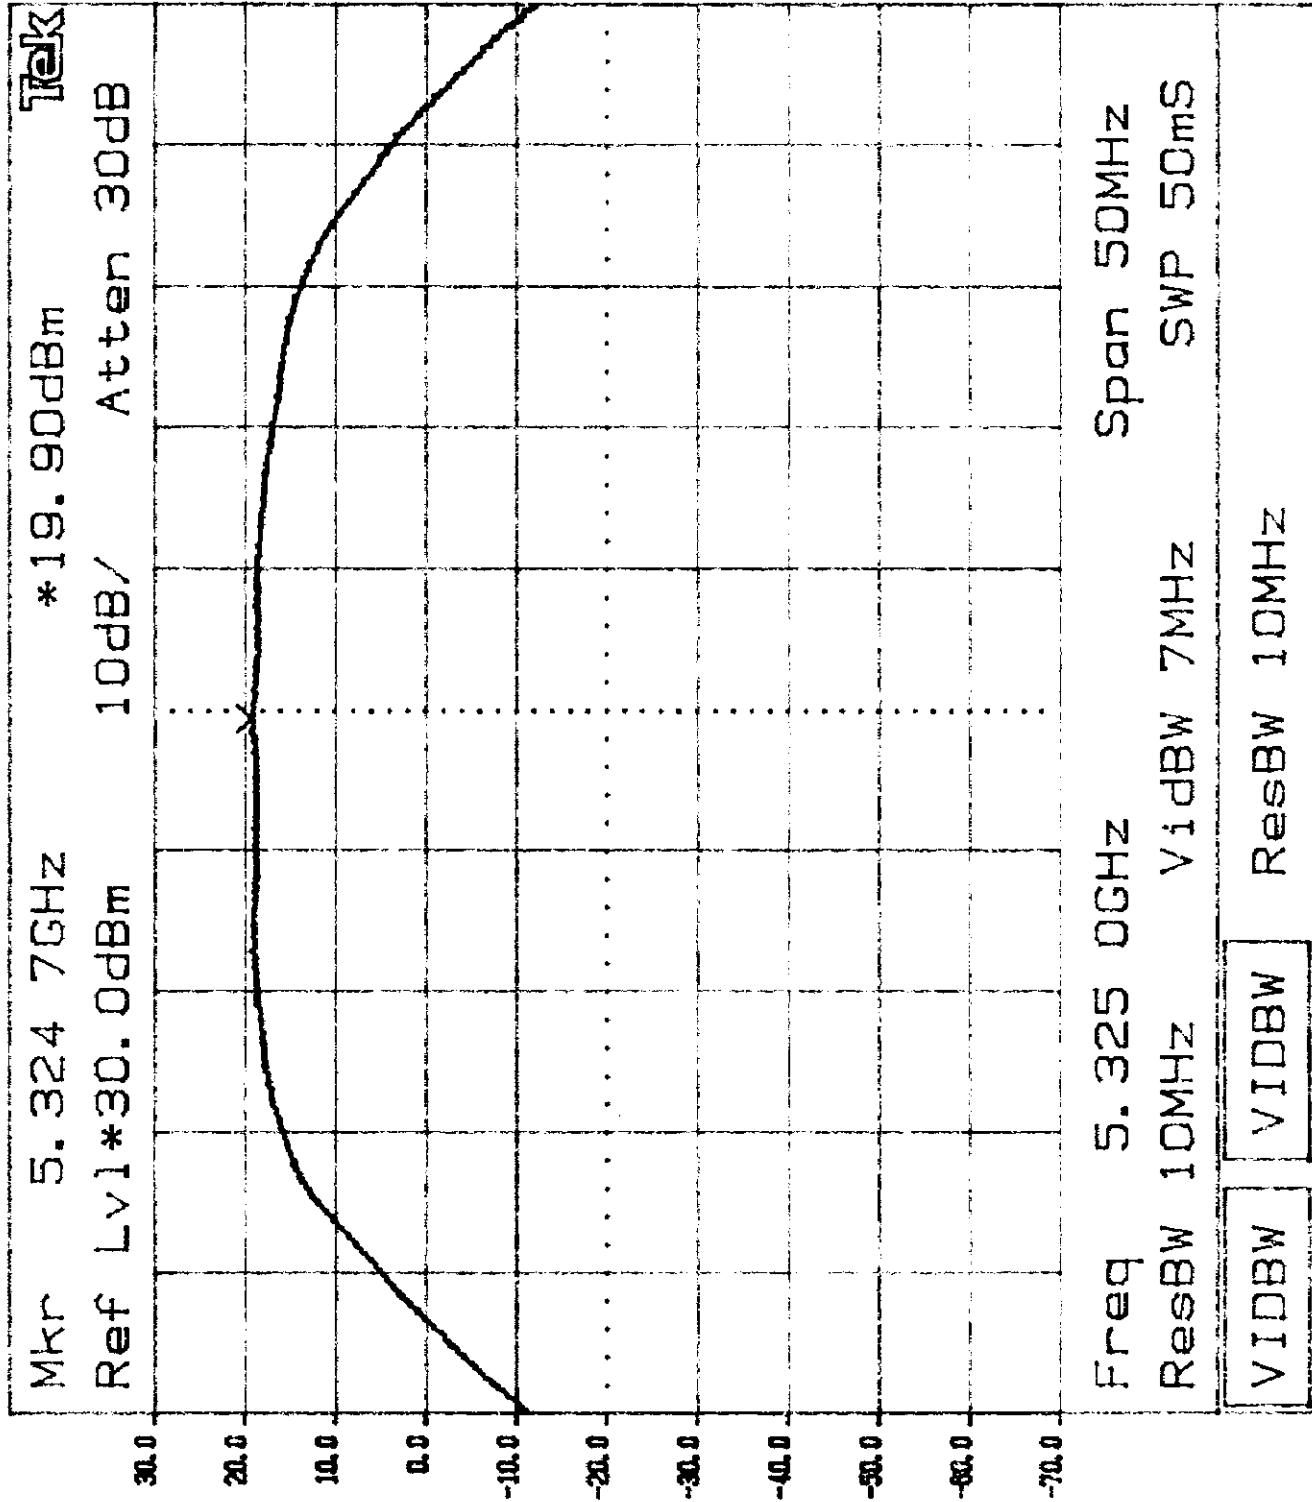

4.2 26 dB Bandwidth
FCC Rule 15.407(a) (for calculation only)


The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer Res BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 26 dB lower than PEAK level. The 26 dB bandwidth was determined from where the channel output spectrum intersected the display line.

Frequency, MHz	26 dB Bandwidth, MHz
5275	37.5
5325	37.3

Refer to the following plots for 26 dB bandwidth:


Plot 1a: Low Channel 26 dB Bandwidth

Plot 1b: High Channel 26 dB Bandwidth

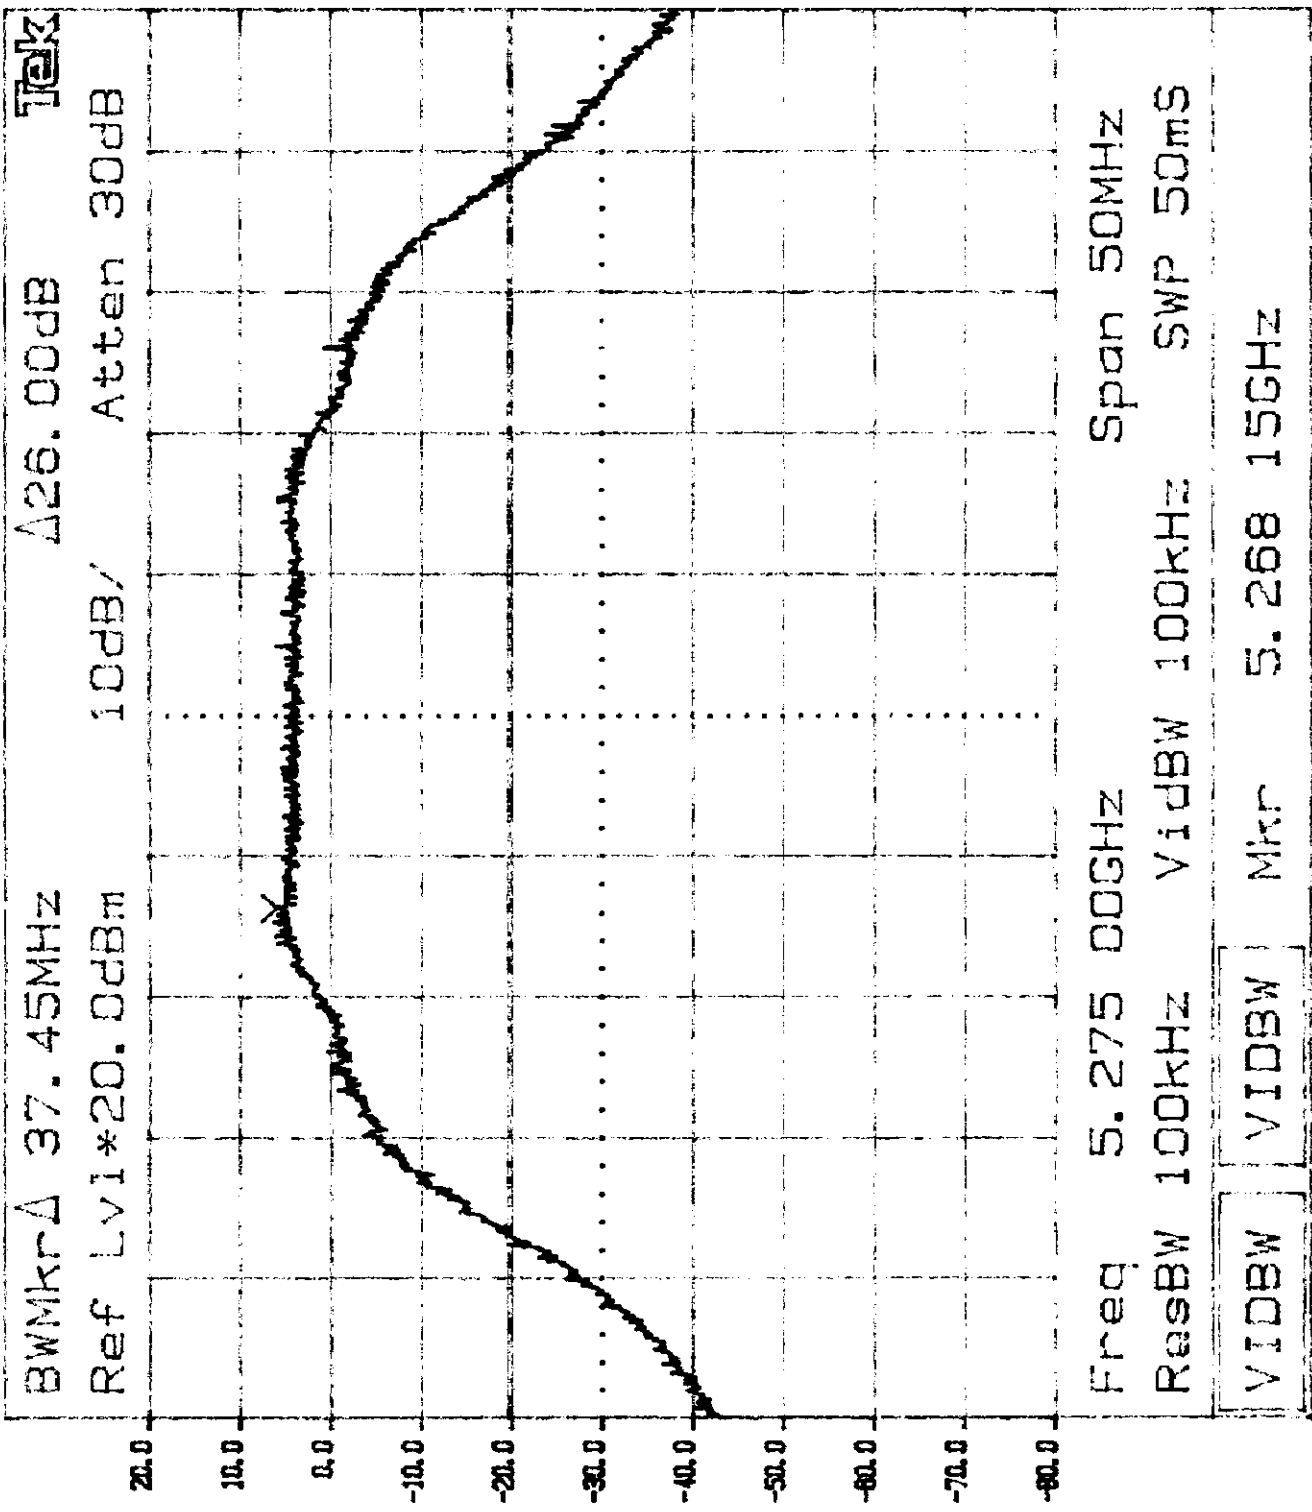

BWMkrΔ 37.25MHz Δ26.00dB Tek

Ref Lvl*20.0dBm 10dB/ Atten 30dB

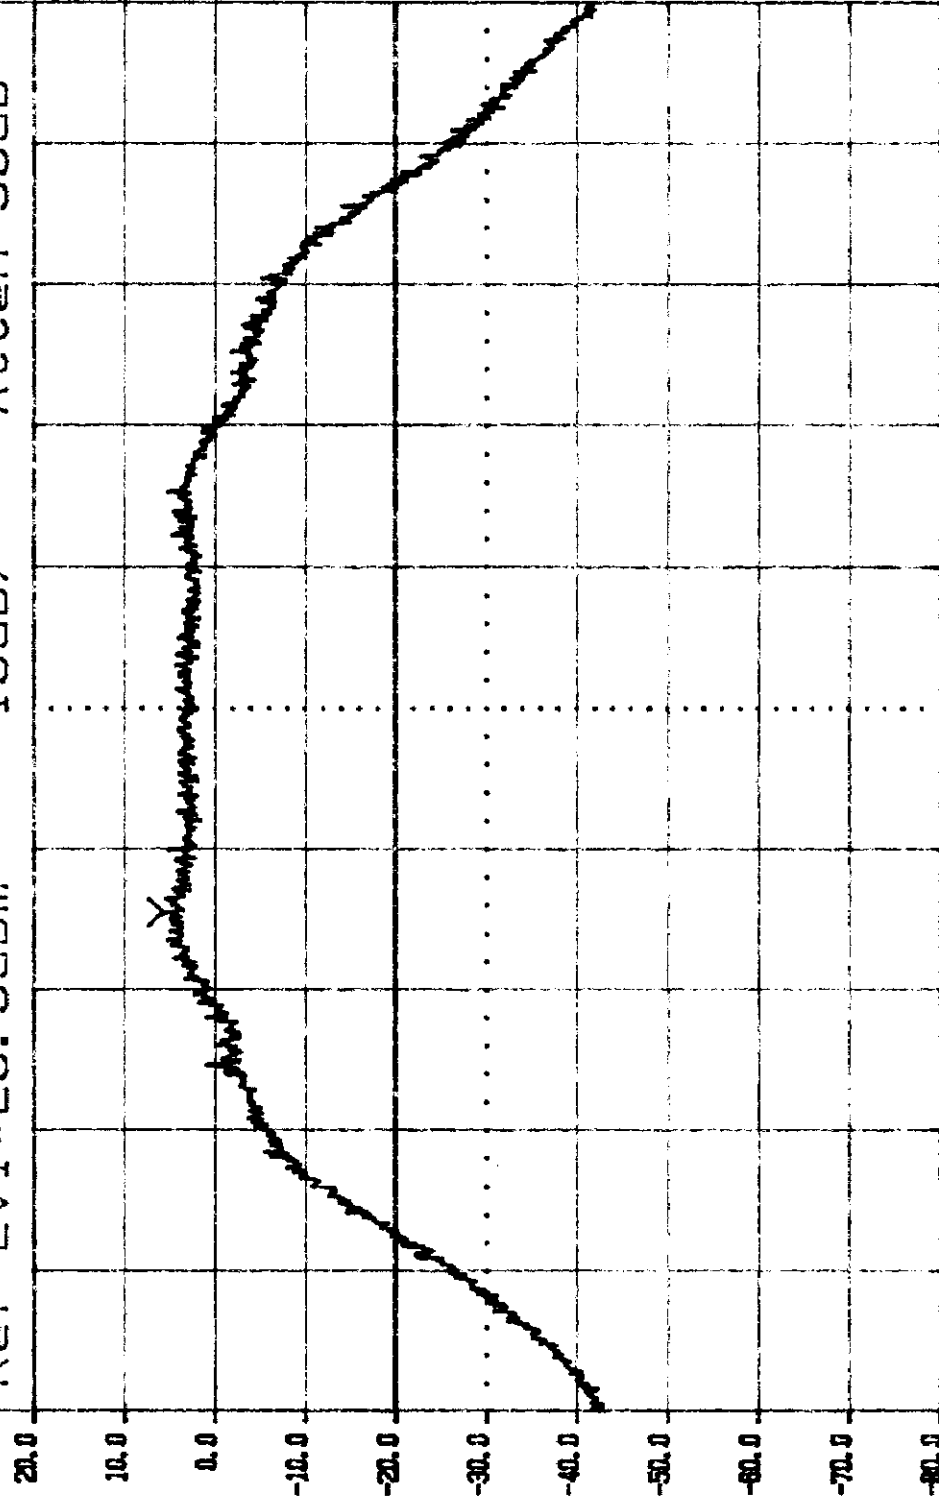

Freq 5.325 00GHz Span 50MHz
ResBW 100kHz VidBW 100kHz SWP 50ms

VIDBW VIDBW Mkr 5.317 75GHz