



Intertek Testing Services
ETL SEMKO

FCC Part 15 Subpart E Test Report

Western Multiplex

U-NII Radio
Model: 27900

FCC ID: HZB-U5358-480

Job # J20029334


Number of Pages: 20 pp. + Supporting Data and Documents

Date of Report: November 20, 2000

This report shall not be reproduced except in full, without written approval of Intertek Testing Services.

This report must not be used to claim product endorsement by NVLAP or any agency of the U.S. Government.

The results contained in this report were derived from measurements performed on the identified test samples. Any implied performance of other samples on this report is dependent on the representative of the samples tested.



Intertek Testing Services NA, Inc.
1365 Adams Court, Menlo Park, CA 94025

Telephone 650-463-2900 Fax 650-463-2910 Home Page www.etlsemko.com



Table of Contents

1.0 SUMMARY OF TESTS1

2.0 GENERAL DESCRIPTION2

 2.1 PRODUCT DESCRIPTION2

 2.2 RELATED SUBMITTAL(S) GRANTS2

 2.3 TEST METHODOLOGY3

 2.4 TEST FACILITY3

3.0 SYSTEM TEST CONFIGURATION.....4

 3.1 SUPPORT EQUIPMENT AND DESCRIPTION.....4

 3.2 BLOCK DIAGRAM OF TEST SETUP4

 3.3 JUSTIFICATION.....5

 3.4 SOFTWARE EXERCISE PROGRAM5

 3.5 MODE OF OPERATION DURING TEST5

 3.6 MODIFICATIONS REQUIRED FOR COMPLIANCE5

 3.7 ADDITIONS, DEVIATIONS AND EXCLUSIONS FROM STANDARDS5

4.0 MEASUREMENT RESULTS6

 4.1 CONDUCTED OUTPUT POWER AT ANTENNA TERMINAL6

 4.2 26 DB BANDWIDTH.....7

 4.3 POWER DENSITY8

 4.4 THE RATIO OF THE PEAK EXCURSION OF THE MODULATION ENVELOPE TO THE PEAK POWER9

 4.6 TRANSMITTER RADIATED EMISSIONS IN RESTRICTED BANDS.....12

 4.7 AC LINE CONDUCTED EMISSION14

 4.8 RADIATED EMISSIONS FROM DIGITAL SECTION15

 4.9 RADIATED EMISSIONS FROM RECEIVER SECTION16

 4.10 TRANSMITTER DUTY CYCLE CALCULATION / MEASUREMENTS.....17

5.0 LIST OF TEST EQUIPMENT18

1.0 Summary of Tests

Western Multiplex, MODEL: 27900 FCC ID: HZB-U5358-480

TEST	REFERENCE	RESULTS
Output power	15.407 (a)	Pass
26 dB Bandwidth	15.407 (a)	For calculation only
Power Density	15.407 (a) (5)	Pass
The ratio of the peak excursion of the modulation envelope to the peak transmit power	15.407 (a) (6)	Pass
Out of Band Antenna Conducted Emission	15.407 (b)	Pass
Radiated Emission in Restricted Bands	15.205	Pass
AC Conducted Emission	15.207	Pass
Radiated Emission from Digital Part	15.209	Pass
Radiated Emission from Receiver L.O.	15.209	Not Applicable
Radiation Exposure Requirement	1.1310	Pass
Antenna Requirement	15.203	Not Applicable

Test Engineer: *Ollie Moyrong*
Ollie Moyrong

Date: *11/28/00*

EMC Site Manager: *David Chernomordik*
David Chernomordik

Date: *11/28/00*

2.0 General Description

2.1 Product Description

The EUT Model No.: 27900 is an intentional transmitter used for wireless point-to-point communications operating in the frequency ranges: 5.25 - 5.35 GHz and 5.725 - 5.825 GHz.

A pre-production version of the sample was received on October 22, 2000 in good condition.

Overview of the U-NII 27900 Radio

Applicant	Western Multiplex Corporation
Trade Name & Model No.	27900
FCC Identifier	HZB-U5358-480
Use of Product	Point-to-point fixed wireless interconnect
Manufacturer & Model of Spread Spectrum Module	Western Multiplex, Model 27900
Type of Transmission	QPSK
Rated RF Output (dBm)	≤ 2.3 dBm * (5.25-5.35 GHz) ≤ 18.4 dBm * (5.725-5.825 GHz)
Frequency Range (MHz)	5.25-5.35 GHz, 5.725-5.825 GHz
Number of Channel(s)	2
Antenna(s) & Gain, dBi	2' Parabolic Antenna, 28.4 dBi
Antenna Requirement	<input type="checkbox"/> The EUT uses a permanently connected antenna. <input type="checkbox"/> The antenna is affixed to the EUT using a unique connector which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector. <input checked="" type="checkbox"/> The EUT requires professional installation (attach supporting documentation if using this option).
Manufacturer name & address	Western Multiplex Corporation 1196 Borregas Avenue Sunnyvale, California 94089

* The output power depends on the gain of the antenna used.

2.2 Related Submittal(s) Grants

None.

2.3 Test Methodology

Both AC mains line-conducted and radiated emissions measurements were performed according to the procedures in ANSI C63.4 (1992). Radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Data Sheet**" of this Application. All other measurements were made in accordance with the procedures in part 2 of CFR 47.

2.4 Test Facility


The open area test site and conducted measurement facility used to collect the radiated data is site 2. This test facility and site measurement data have been fully placed on file with the FCC and NVLAP accredited.

3.0 System Test Configuration

3.1 Support Equipment and description

Item #	Description	Model No.	Serial No.
1	GW DC Power Supply	GPR-6030	8690196
2	Gabriel Electronics Plane-Dual Polarized Antenna	SSD2-52	N/A

3.2 Block Diagram of Test Setup

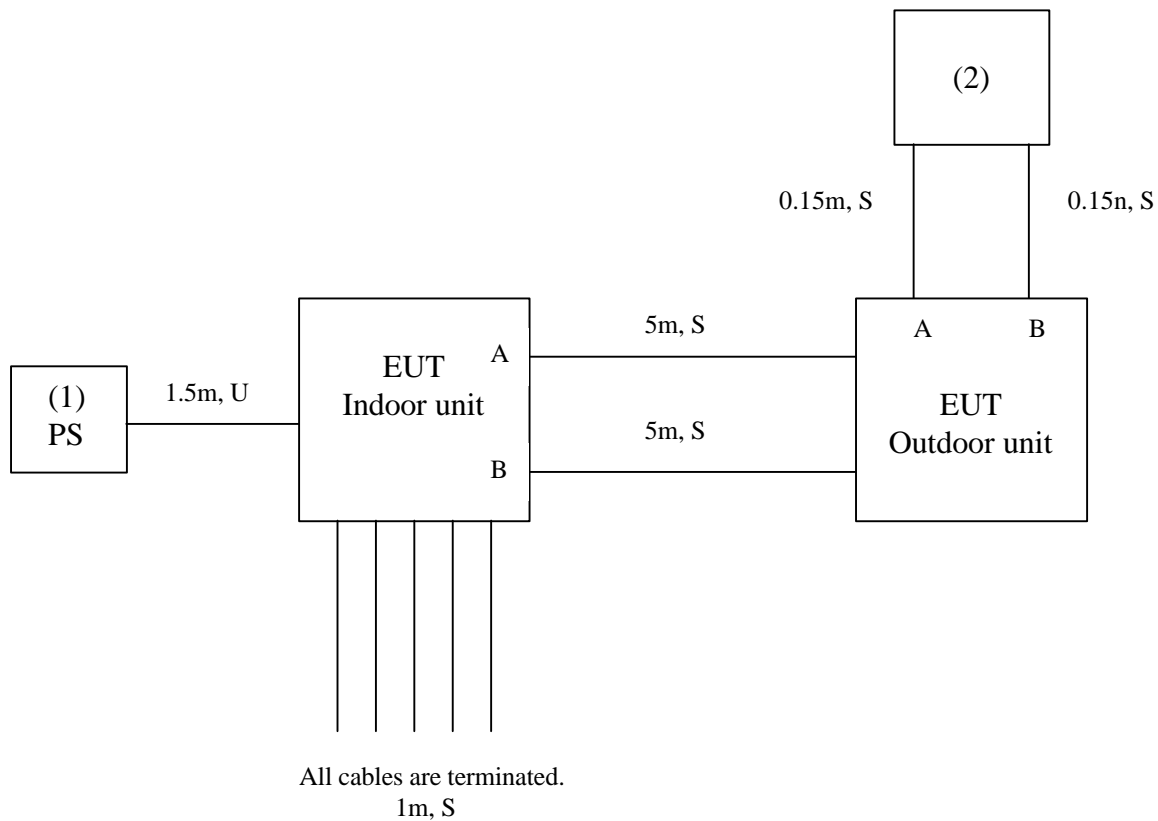

3.3 Justification

For emission testing, the Equipment Under Test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst case emissions.

For radiated emission measurements, the EUT is attached to a cardboard box (if necessary) and placed on the wooden turntable. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). The EUT is wired to transmit full power.

The signal is maximized through rotation and placement in the three orthogonal axes. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance.

3.4 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. For emissions testing, the units were setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

3.5 Mode of operation during test

100% time transmitting signal on low and high channels.

3.6 Modifications required for Compliance

The following modifications were installed during compliance testing in order to bring the product into compliance (Please note that this list does not include changes made specifically by Western Multiplex prior to compliance testing):

No modifications were made to the EUT by Intertek Testing Services.

3.7 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.

4.0 Measurement Results

4.1 Conducted Output Power at Antenna Terminal FCC Rule 15.407(a)

Requirement:

For fixed point-to-point U-NII devices operating in 5.725-5.825 GHz band, the peak transmit power shall not exceed the lesser of 1 Watt (30 dBm) or $17 \text{ dBm} + 10\text{Log}(B)$, where B is the 26dB emission bandwidth in MHz (for antenna gain up to 23 dBi). For devices operating in 5.25-5.35 GHz band, the peak transmit power shall not exceed the lesser of 250 mW (24 dBm) or $11 \text{ dBm} + 10\text{Log}(B)$, where B is the 26 dB emission bandwidth in MHz (for antenna gain up to 6 dBi).

Procedure:

The antenna port of the EUT was connected to the input of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal.

Result:

Frequency, MHz	Output Power, mW	Output Power, dBm	EIRP Limit, dBm	Maximum allowed antenna gain, dBi
Low Channel: 5300	1.7	2.3	30.0	27.7
High Channel: 5775	69.0	18.4	53.0	34.6

Note:

1. The EUT Output Power was set to maximum to produce the worse case test result. In real application, when using an antenna with 28.4 dBi gain, the Output Power will have to be reduced by 0.7 dB.
2. When a higher gain antenna is used, the Output Power will be reduced further.


4.2 26 dB Bandwidth
 FCC Rule 15.407(a) (for calculation only)


The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer Res BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken, a DISPLAY line was drawn 26 dB lower than PEAK level. The 26 dB bandwidth was determined from where the channel output spectrum intersected the display line.

Frequency, MHz	26 dB Bandwidth, MHz
5300	86.3
5775	80.4

Refer to the following plots for 26 dB bandwidth:

- Plot 1a: Low Channel 26 dB Bandwidth
- Plot 1b: High Channel 26 dB Bandwidth

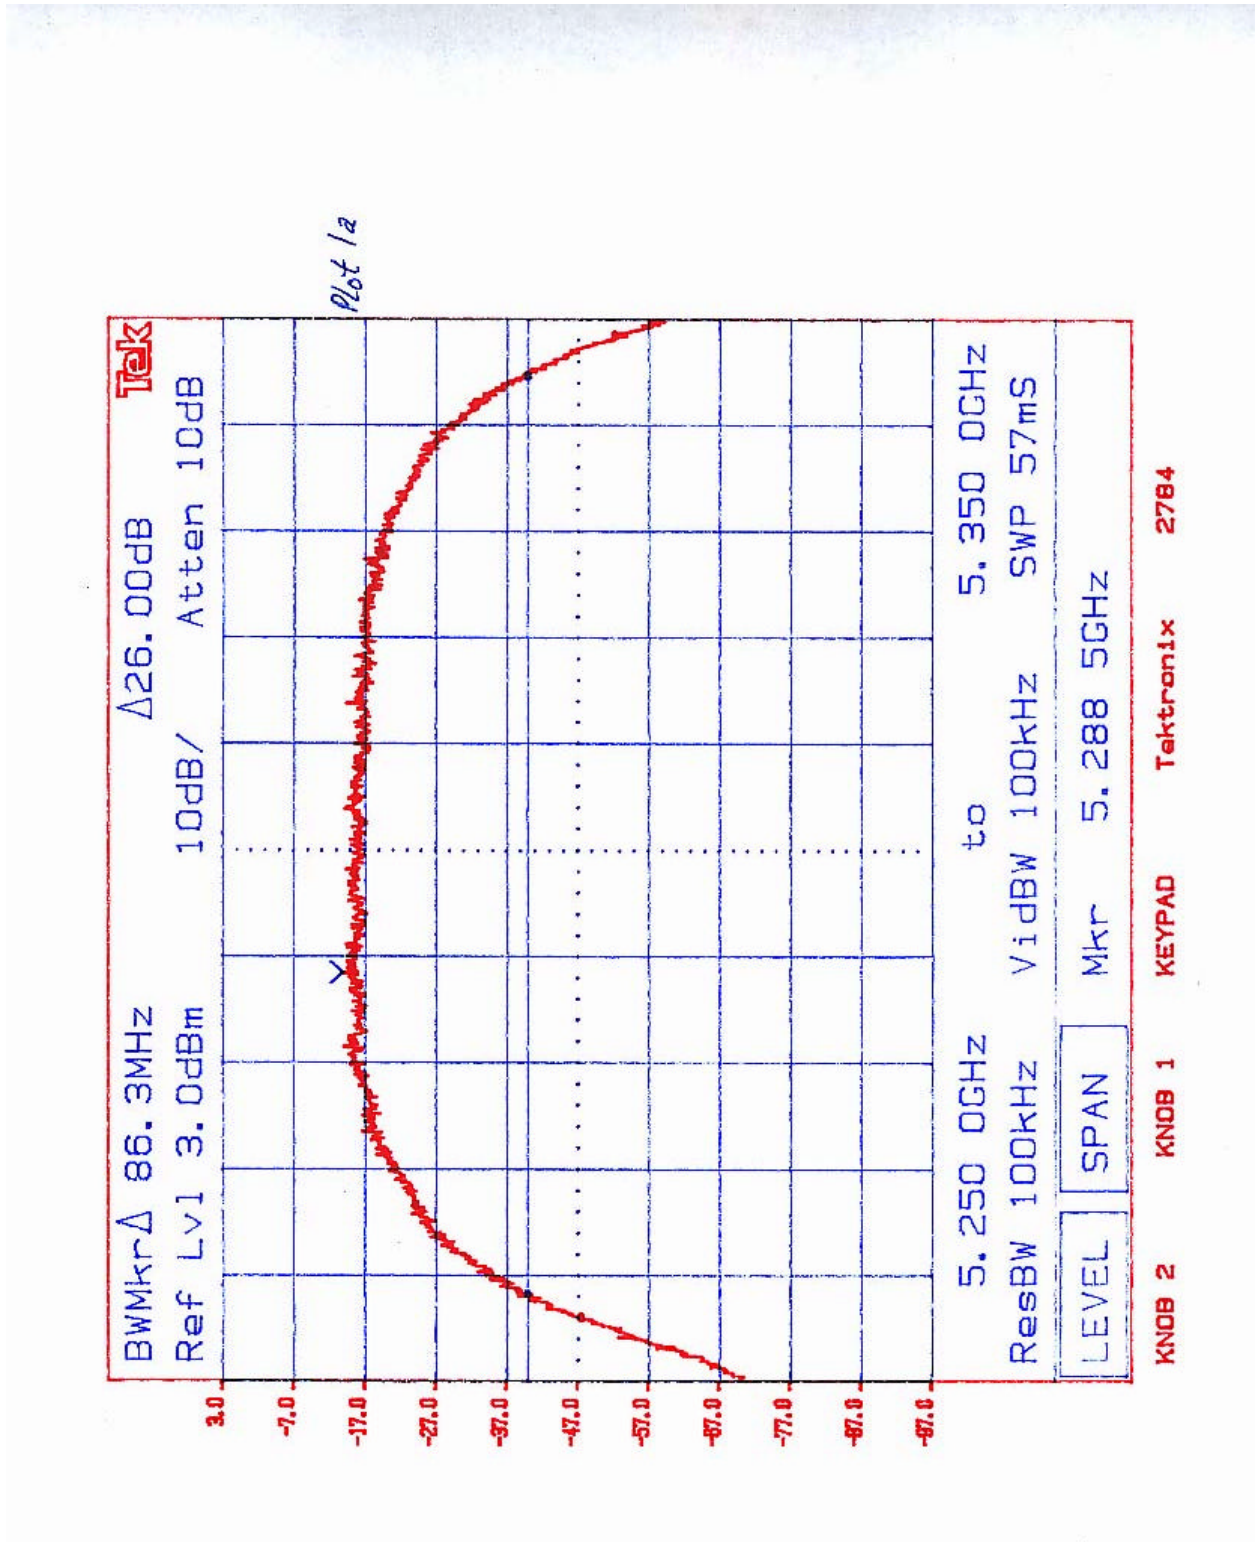

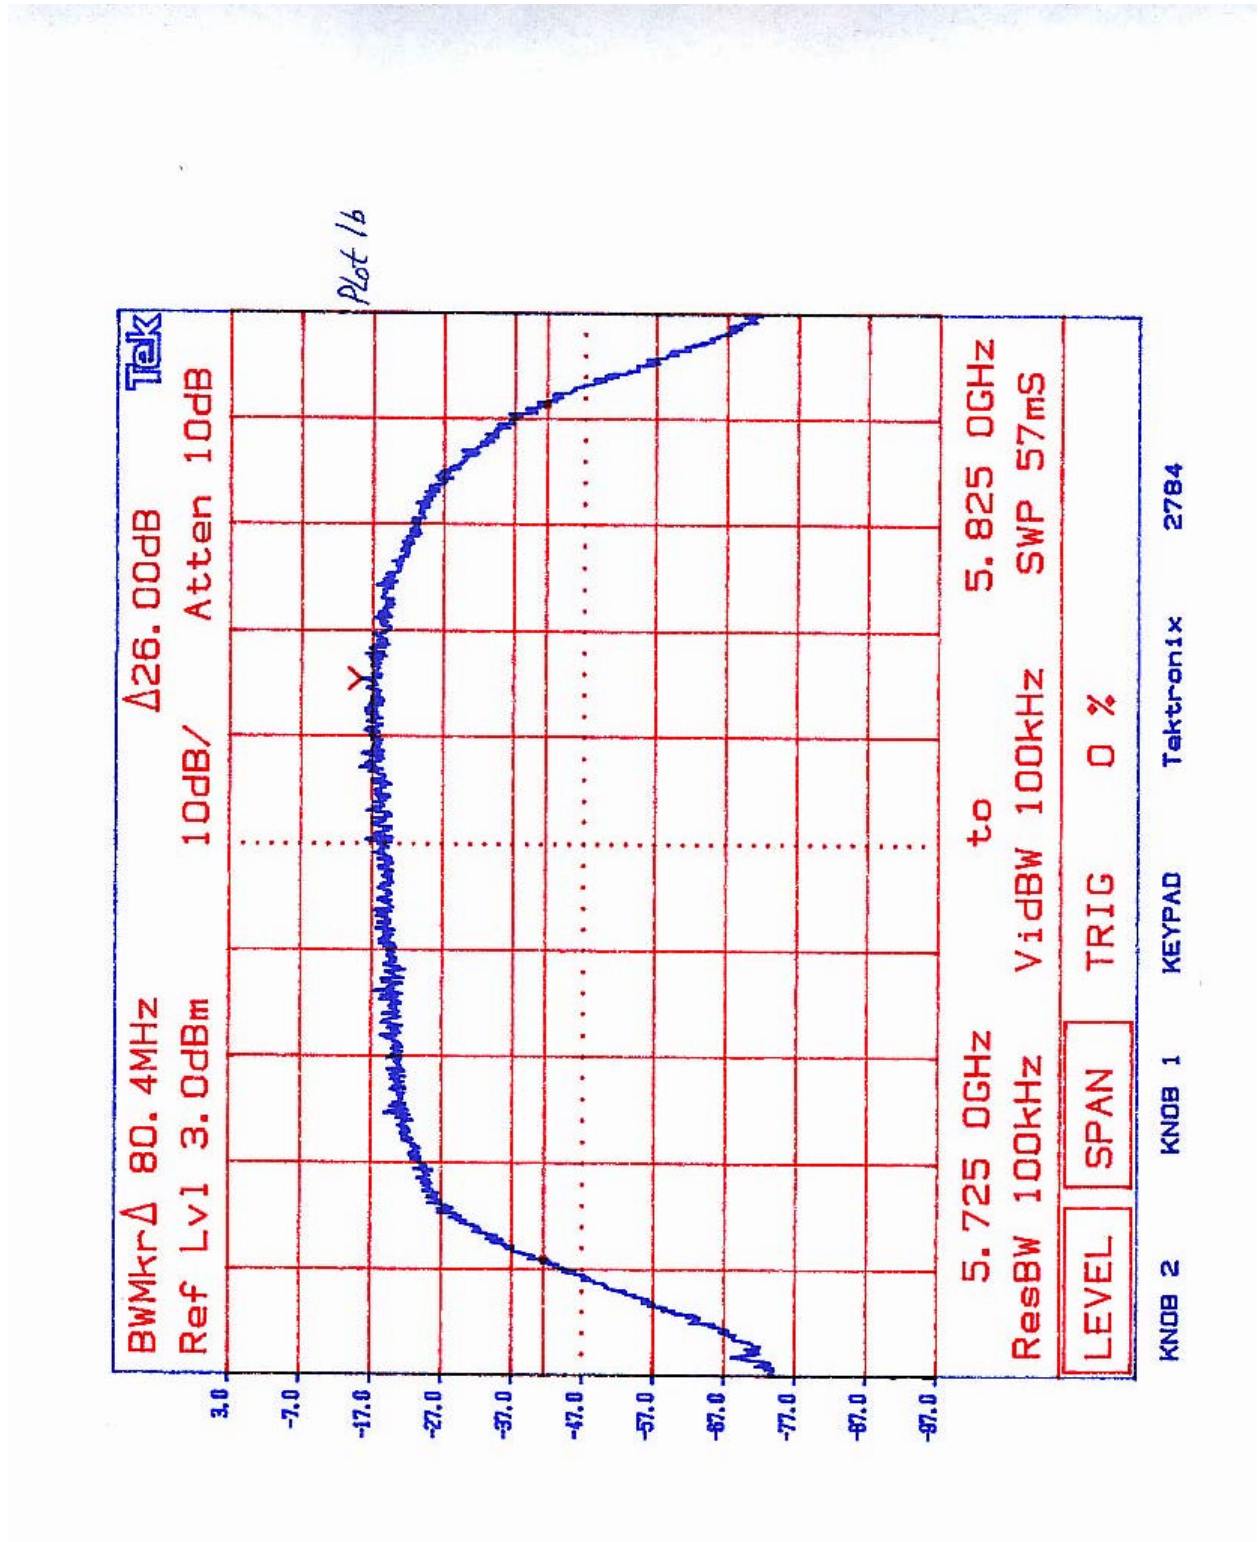

4.3 Power Density
FCC Rule 15.407(a)(3)

Requirement:

For fixed point-to-point U-NII devices operating in 5.725-5.825 GHz band the peak power spectral density shall not exceed 17 dBm in any 1 MHz band (for antenna gain up to 23 dBi).

For devices operating in 5.25-5.35 GHz band peak power spectral density shall not exceed 11 dBm in any 1 MHz band (for antenna gain up to 6 dBi).

Procedure:

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

The spectrum analyzer Resolution Bandwidth was set to 1 MHz and Video Bandwidth was set to 7 MHz. The START and STOP frequencies were set to the band edges of the maximum output passband. The spectrum analyzer was set to video average, 100 sweeps were used. Maximum peak-power spectral density reading was recorded.

Result:

Frequency MHz	Power Density dBm	EIRP Limit dBm	Maximum Allowed Antenna Gain dBi
5300	-10.8	17.0	27.8
5775	2.3	40.0	37.7


Refer to the following plots for power density data:


Plot 2a: Low Channel Power Density

Plot 2b: High Channel Power Density

Note:

1. As it is written in section 4.1, the Output Power should be reduced by 0.7 dB to meet the EIRP requirement with antenna gain 28.4 dBi. In this case, the Power Density will reduce on the same scale, so it will be in compliance with EIRP Power Density Limit.
2. When a higher gain antenna is used, the Output Power will be reduced further and, as a result, further down the Power Density.

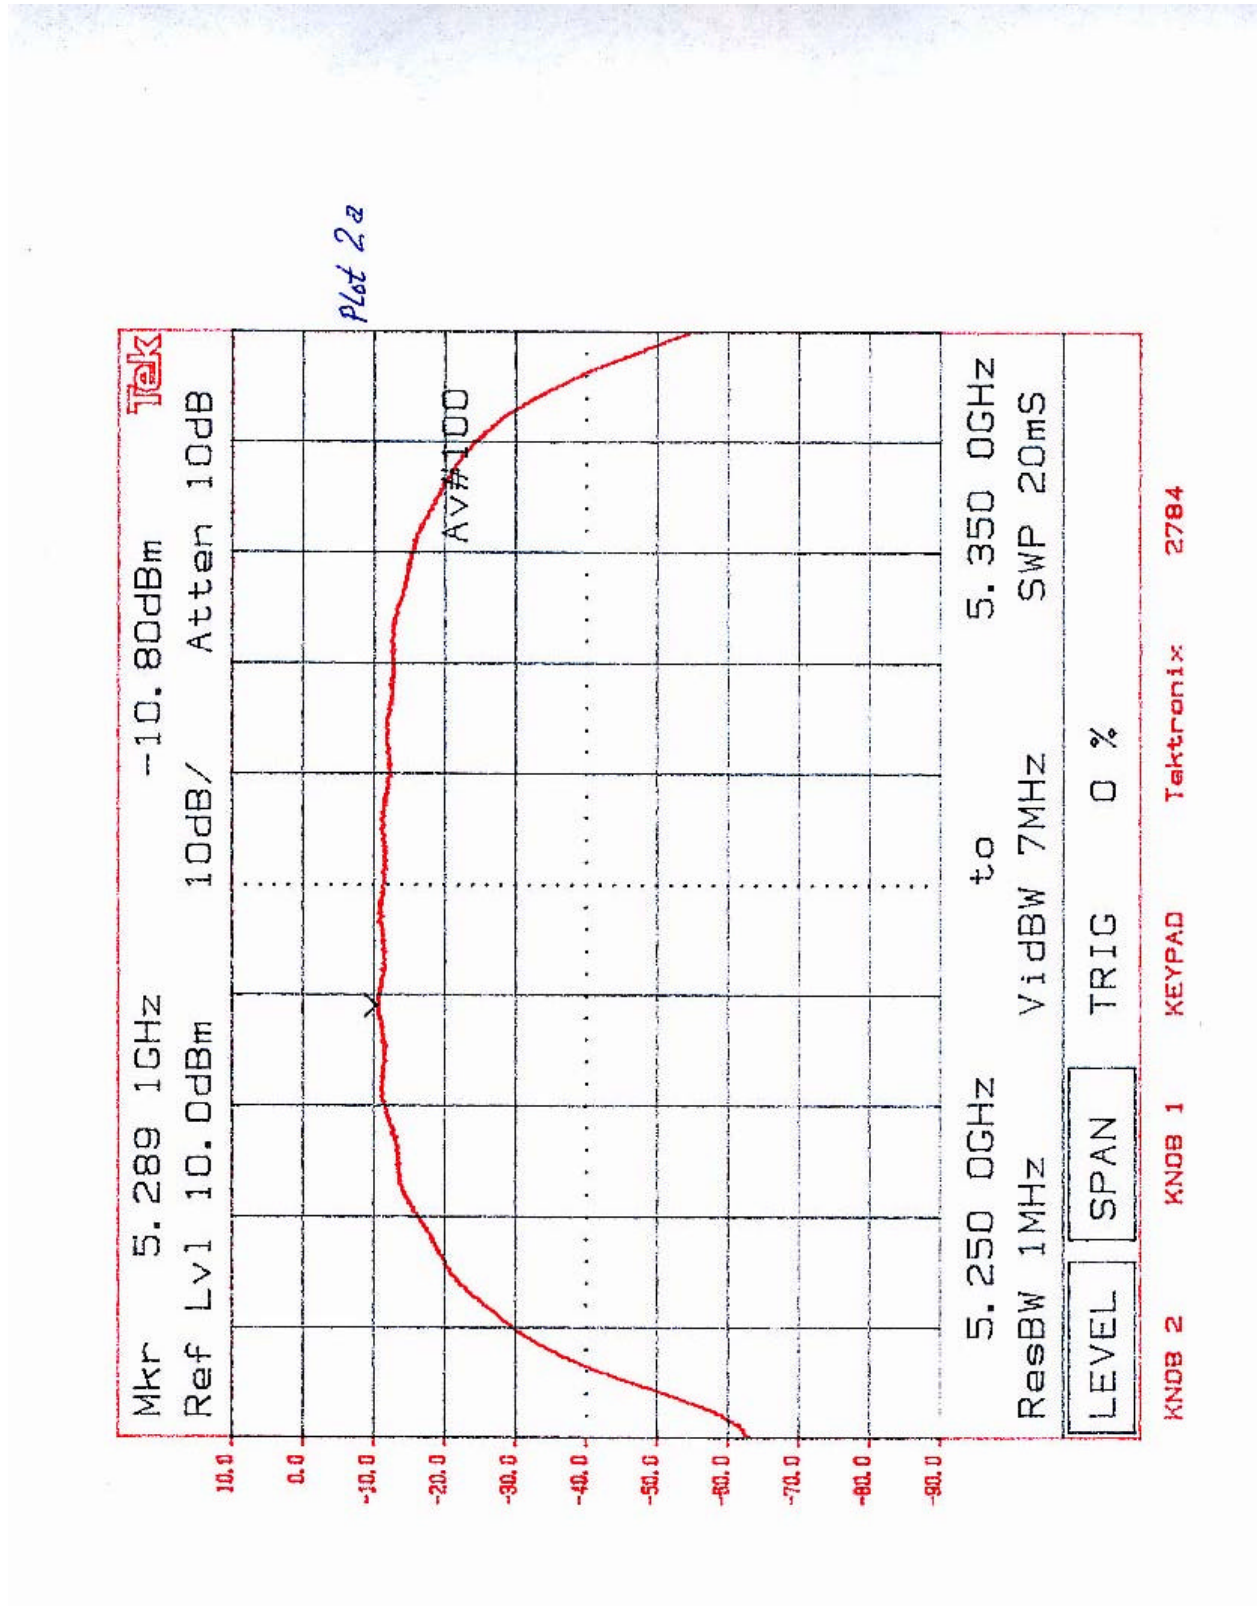

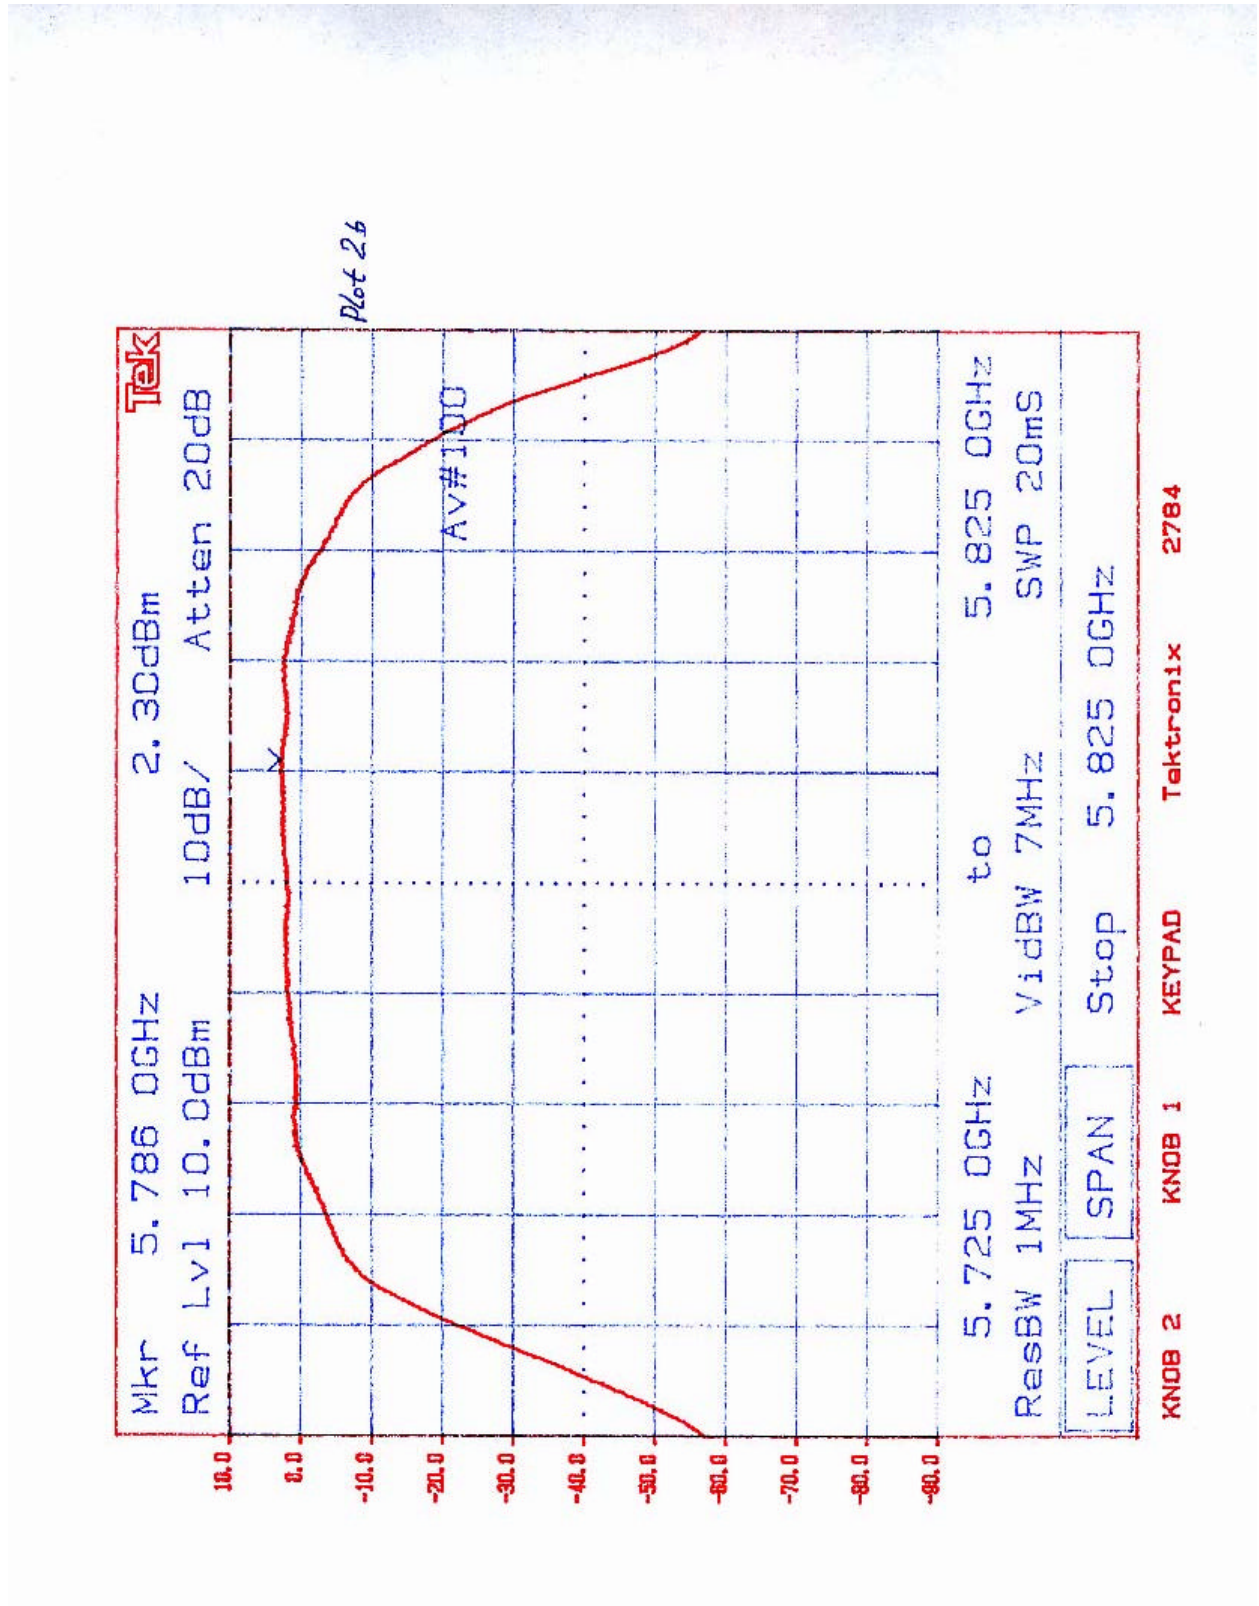

4.4 The ratio of the peak excursion of the modulation envelope to the peak power
 FCC Rule 15.407(a)(6)

Requirement:

The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13 dB.

Procedure:

Spectrum Analyzer was connected to the output of the EUT. The Resolution Bandwidth was set to 1 MHz. Two plots were made in each band: with the Video Bandwidth set to 7 MHz and with the Video Bandwidth set to 30 kHz. The difference between spectrum analyzer readings indicates the ratio of the peak excursion of the modulation envelope to the peak transmit power.

Test Result:

See attached plots 3.a1, 3.a2 and 3.b1, 3.b2. for the ratio of the peak excursion of the modulation envelope to the peak power. The maximum Ratio is 7.0 dB

