

## Class II Permissive Change Test Report

Report Number: 30301662  
Project Number: 3030166  
Report Date: August 22, 2002  
Revised: October 7, 2002

Testing performed on the

**U-NII Radio**  
**Model: 40100-XXX**  
**FCC ID: HZB-US58-S60**

for  
**Proxim Corporation**

**Test Performed by:**  
Intertek Testing Services  
1365 Adams Court  
Menlo Park, CA 94025

**Test Authorized by:**  
Proxim Corporation  
1196 Borregas Avenue,  
Sunnyvale, CA 94089 USA



Prepared by: David Chernomordik  
David Chernomordik

Date: 10/2/02



Reviewed by: Ollie Moyrong  
Ollie Moyrong

Date: 10/7/02



All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services NA Inc. This report must not be used to claim product endorsement by A2LA, NIST nor any other agency of the U.S. Government.



**Intertek Testing Services NA, Inc.**

1365 Adams Court, Menlo Park, CA 94025  
Telephone 650-463-2900 Fax 650-463-2910 Home Page [www.etlsemko.com](http://www.etlsemko.com)



**TABLE OF CONTENTS**

**1.0 INTRODUCTION..... 3**

**2.0 TEST SUMMARY ..... 4**

**3.0 GENERAL DESCRIPTION ..... 5**

    3.1 Description of Equipment ..... 5

    3.2 System Test Configuration ..... 6

        3.2.1 Support Equipment and description..... 6

        3.2.2 Block Diagram of Test Setup..... 6

    3.3 Test Facility ..... 7

    3.4 Justification..... 7

    3.5 Software Exercise Program..... 7

    3.6 Mode of operation during test..... 7

    3.7 Modifications required for Compliance..... 7

    3.8 Additions, deviations and exclusions from standards..... 7

**4.0 MEASUREMENT RESULTS ..... 8**

    4.1 Conducted Output Power at Antenna Terminals ..... 8

    4.2 26-dB Bandwidth..... 9

    4.3 Peak Power Density ..... 13

    4.4 Out-of-Band Conducted Emissions ..... 17

    4.5 The ratio of the peak excursion of the modulation envelope to the peak power ..... 18

    4.6 Radiated Emissions in restricted bands..... 22

    4.7 Radiated Emissions from digital part..... 27

**5.0 LIST OF TEST EQUIPMENT ..... 32**

**6.0 APPENDIX 1 ..... 33**

# Intertek Testing Services

---

## 1.0 Introduction

This report intends to show compliance of the certified device Model No: 40100-XXX (FCC ID: HZB-US58-S60) with the FCC Rules after modifications made by Proxim Corp.

### Change Description

The Tsunami Subscriber Unit is replacing the 100-00644-10 RF board with the 100-00864-00 RF board in order to take advantage of an improved RF ASIC chip. The new RF ASIC chip provides the capability of implementing the first local oscillator and additional transmitter gain on-chip instead of with discrete circuitry. While primary motivation is to reduce cost, it has the added benefit of reducing spurious emissions as more RF circuits are now contained on chip at lower power levels. The architecture, block diagram, and frequency plan of both RF boards are identical.

For the detailed list of changes please refer to the document “644 to 864 Change Description”.

The changes may affect the in-band and out-of-band conducted and radiated emissions. Therefore, the following tests were performed to show that the device still in compliance with FCC Part 15 Subpart E:

Conducted output power

26 dB Bandwidth

Power Density

Out-of-band Antenna Conducted Emission

The ratio of the peak excursion of the modulation envelope to the peak transmit power

Radiated Emissions in restricted bands

Radiated emissions from the digital part.

The test procedures, as described in American National Standards Institute C63.4-1992, were employed. A description of the product and operating configuration, the various provisions of the rules, the methods for determining compliance and a detailed summary of the results are included within this test report.

# Intertek Testing Services

---

## 2.0 Test Summary

Test results are given in full in Sections 4.

<b>Test</b>	<b>Reference</b>	<b>Results</b>
Output power	15.407(a)	Complies
26 dB Bandwidth	15.407(a)	For calculation only
Power Density	15.407(a)(5)	Complies
The ratio of the peak excursion of the modulation envelope to the peak transmit power	15.407(a)(6)	Complies
Out-of-band Antenna Conducted Emission	15.407(b)	Complies
Radiated Emission in Restricted Bands	15.209, 15.205	Complies
Radiated Emission from digital part	15.109	Complies
AC Conducted Emission	15.207	Test was not performed

# Intertek Testing Services

---

## 3.0 General Description

### 3.1 Description of Equipment

The EUT Model No.: 40100-XXX is a device used for wireless point-to-point communications operating in the frequency range 5.725 - 5.825 GHz.

#### Overview of the Tsunami Subscriber Unit

<b>Applicant</b>	Proxim Corporation
<b>Trade Name &amp; Model No.</b>	Tsunami Subscriber Unit, Model 40100-XXX
<b>FCC Identifier</b>	HZB-US58-S60
<b>Use of Product</b>	Fixed Wireless Ethernet Access
<b>Type of Transmission</b>	TDD
<b>Type of Modulation</b>	QAM16, QAM8, QPSK R <sup>3</sup> / <sub>4</sub> , QPSK R <sup>1</sup> / <sub>2</sub>
<b>Rated RF Output</b>	18 dBm (peak)
<b>Frequency Range</b>	5740 – 5810 MHz
<b>Number of Channel(s)</b>	6 channels maximum
<b>Antenna(s) &amp; Gain</b>	Circle polarized internal permanently connected antenna, 21 dBi gain
<b>Antenna Requirement</b>	The EUT uses a permanently connected antenna.
<b>Manufacturer name &amp; address</b>	Proxim Corporation 1196 Borregas Avenue, Sunnyvale, CA 94089 USA

A production version of the sample was received on August 15, 2002 in good operating condition.

# Intertek Testing Services


---

## 3.2 System Test Configuration

### 3.2.1 Support Equipment and description

Laptop computer: Hewlett Packard Omnibook 4150.

### 3.2.2 Block Diagram of Test Setup

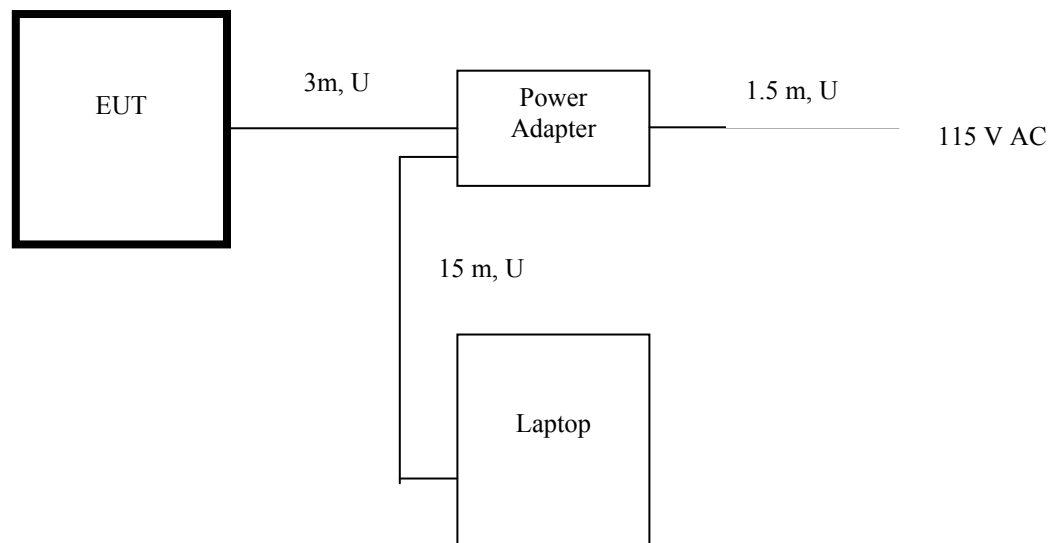

<b>S</b> = Shielded <b>U</b> = Unshielded	<b>F</b> = With Ferrite <b>M</b> = Meter
--	---

# Intertek Testing Services

---

## 3.3 Test Facility

The test facility and site measurement data have been fully placed on file with the FCC and NVLAP accredited.

## 3.4 Justification

For emission testing, the Equipment under Test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). During testing, all cables were manipulated to produce worst case emissions.

## 3.5 Software Exercise Program

The EUT exercise program used during radiated and conducted testing was designed to exercise the various system components in a manner similar to a typical use. For emissions testing, the units were setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing.

## 3.6 Mode of operation during test

100% time transmitting/receiving signal. The device was setup for 16QAM modulation as it is found as a worst case.

## 3.7 Modifications required for Compliance

The following modifications were installed during compliance testing in order to bring the product into compliance (Please note that this list does not include changes made specifically by Western Multiplex prior to compliance testing):

Intertek Testing Services made no modifications to the EUT.

## 3.8 Additions, deviations and exclusions from standards

No additions, deviations or exclusion have been made from standard.

# Intertek Testing Services

---

## 4.0 Measurement Results

### 4.1 Conducted Output Power at Antenna Terminals [FCC 15.407(a)]

#### Requirements

For fixed point-to-point U-NII devices operating in 5.725-5.825 GHz band, the peak transmit power shall not exceed the lesser of 1 Watt (30 dBm) or  $17 \text{ dBm} + 10\text{Log}(B)$ , where B is the 26dB emission bandwidth in MHz (for antenna gain up to 23 dBi). For devices operating in 5.25-5.35 GHz band, the peak transmit power shall not exceed the lesser of 250 mW (24 dBm) or  $11 \text{ dBm} + 10\text{Log}(B)$ , where B is the 26 dB emission bandwidth in MHz (for antenna gain up to 6 dBi).

#### Procedure

The antenna port of the 40100-XXX was connected to the input of a peak power meter. Power was read directly and cable loss correction was added to the reading to obtain the power at the 40100-XXX antenna terminal.

#### Test Results

Frequency (MHz)	Modulation	Output Power (dBm)
5740	16QAM	18.0
5768	16QAM	17.8
5810	16QAM	17.8

The difference between the power level for the originally certified device and the measured level is 0.2 dB.



## 4.2 26-dB Bandwidth [FCC Rule 15.407(a)]

### Requirements

For the U-NII device, there is no limit for 26-dB bandwidth.


### Procedure


The antenna port of the EUT was connected to the input of a spectrum analyzer. Analyzer RES BW was set to 100 kHz. For each RF output channel investigated, the spectrum analyzer center frequency was set to the channel carrier. A PEAK output reading was taken; a DISPLAY line was drawn 26 dB lower than PEAK level. The 26-dB bandwidths were determined from where the channel output spectrum intersected the display line.


### Test Result

Frequency (MHz)	Modulation	26-dB Bandwidth	Plot
5740	16QAM	25.15 MHz	1.1
5768	16QAM	25.10 MHz	1.3
5810	16QAM	25.20 MHz	1.4

Refer to the following plots for 26-dB bandwidths.

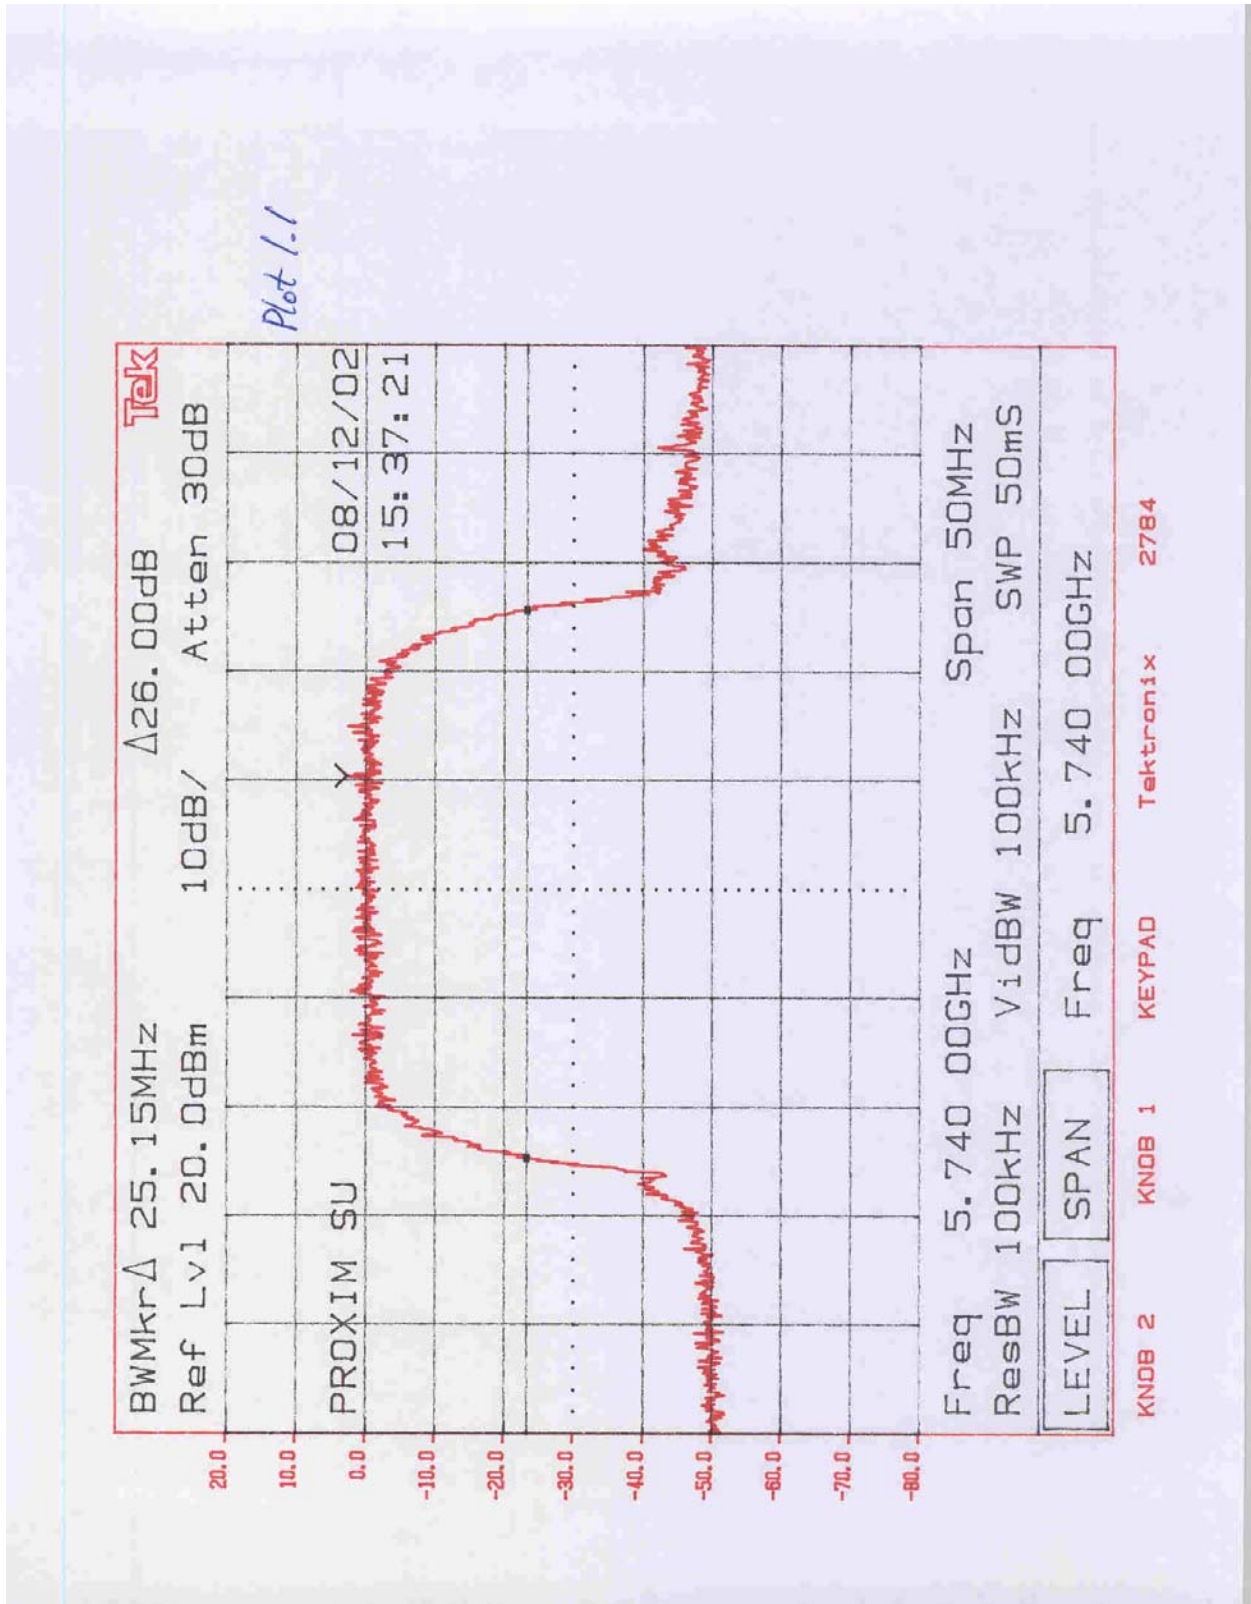

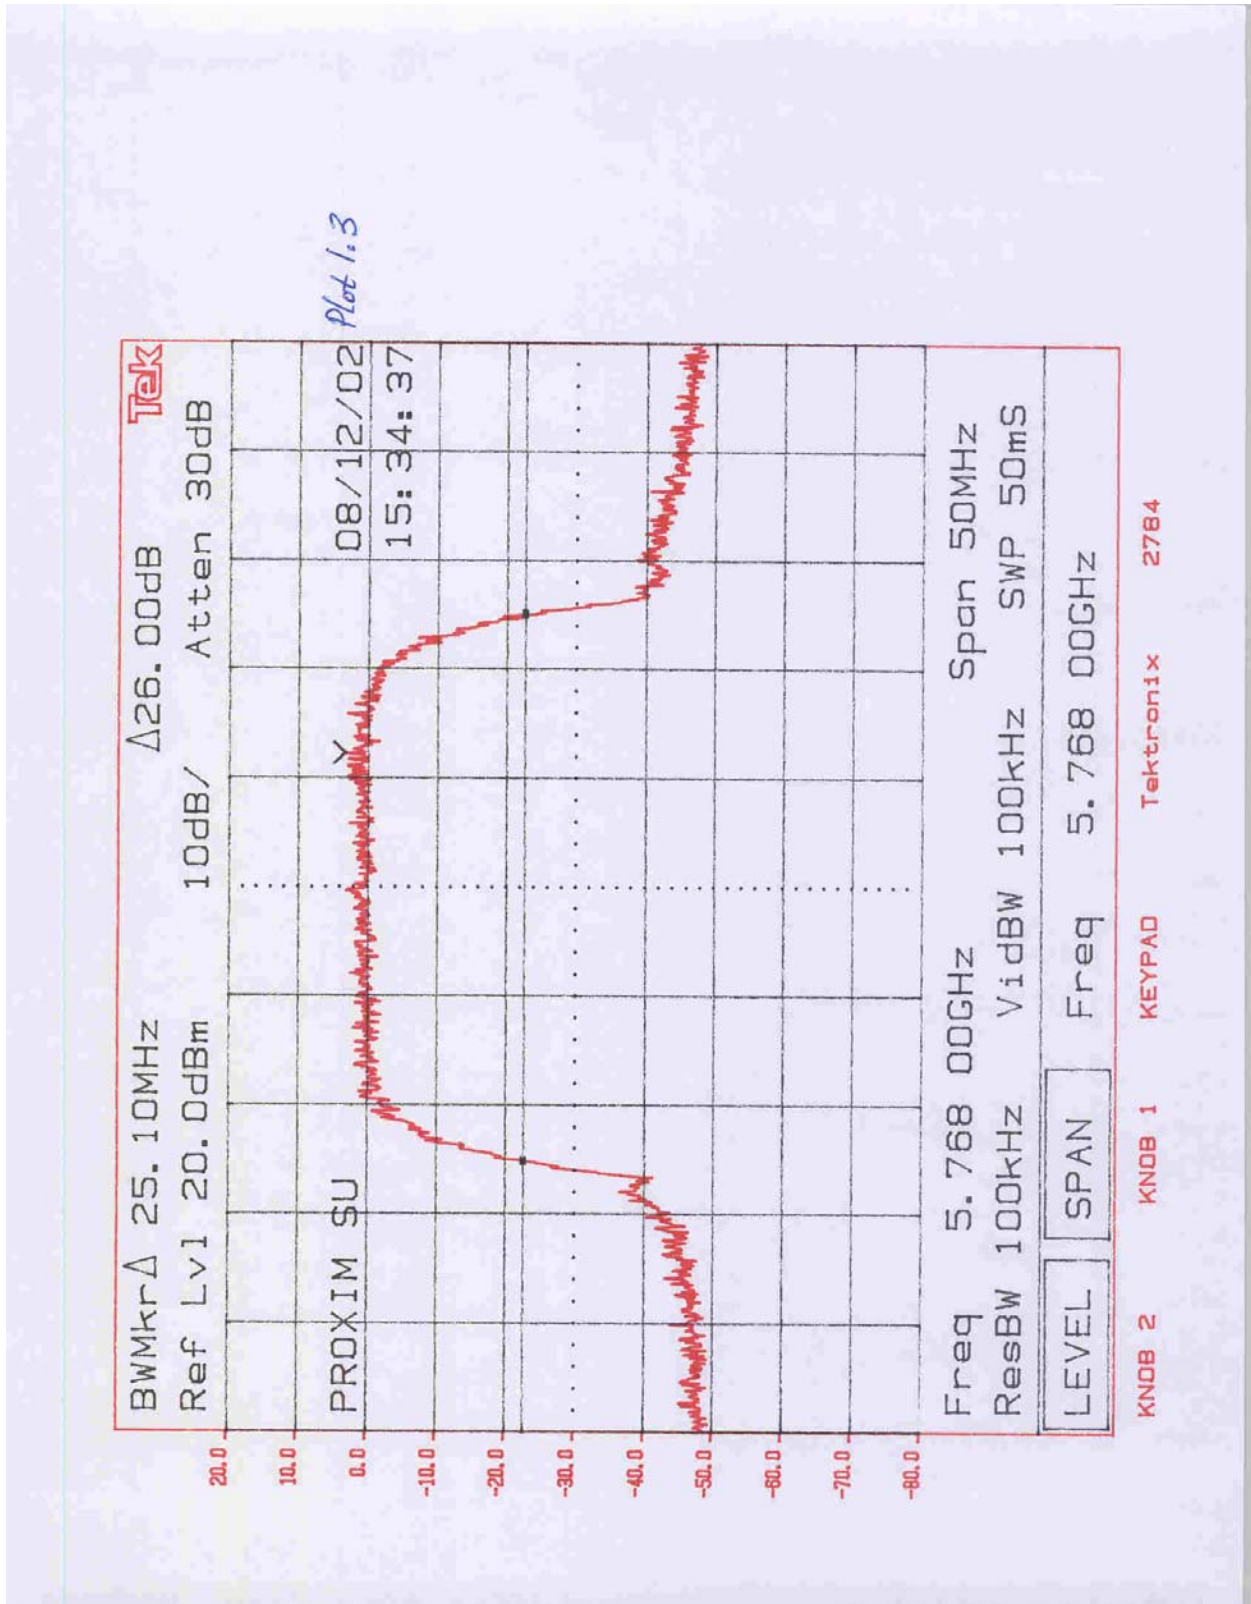

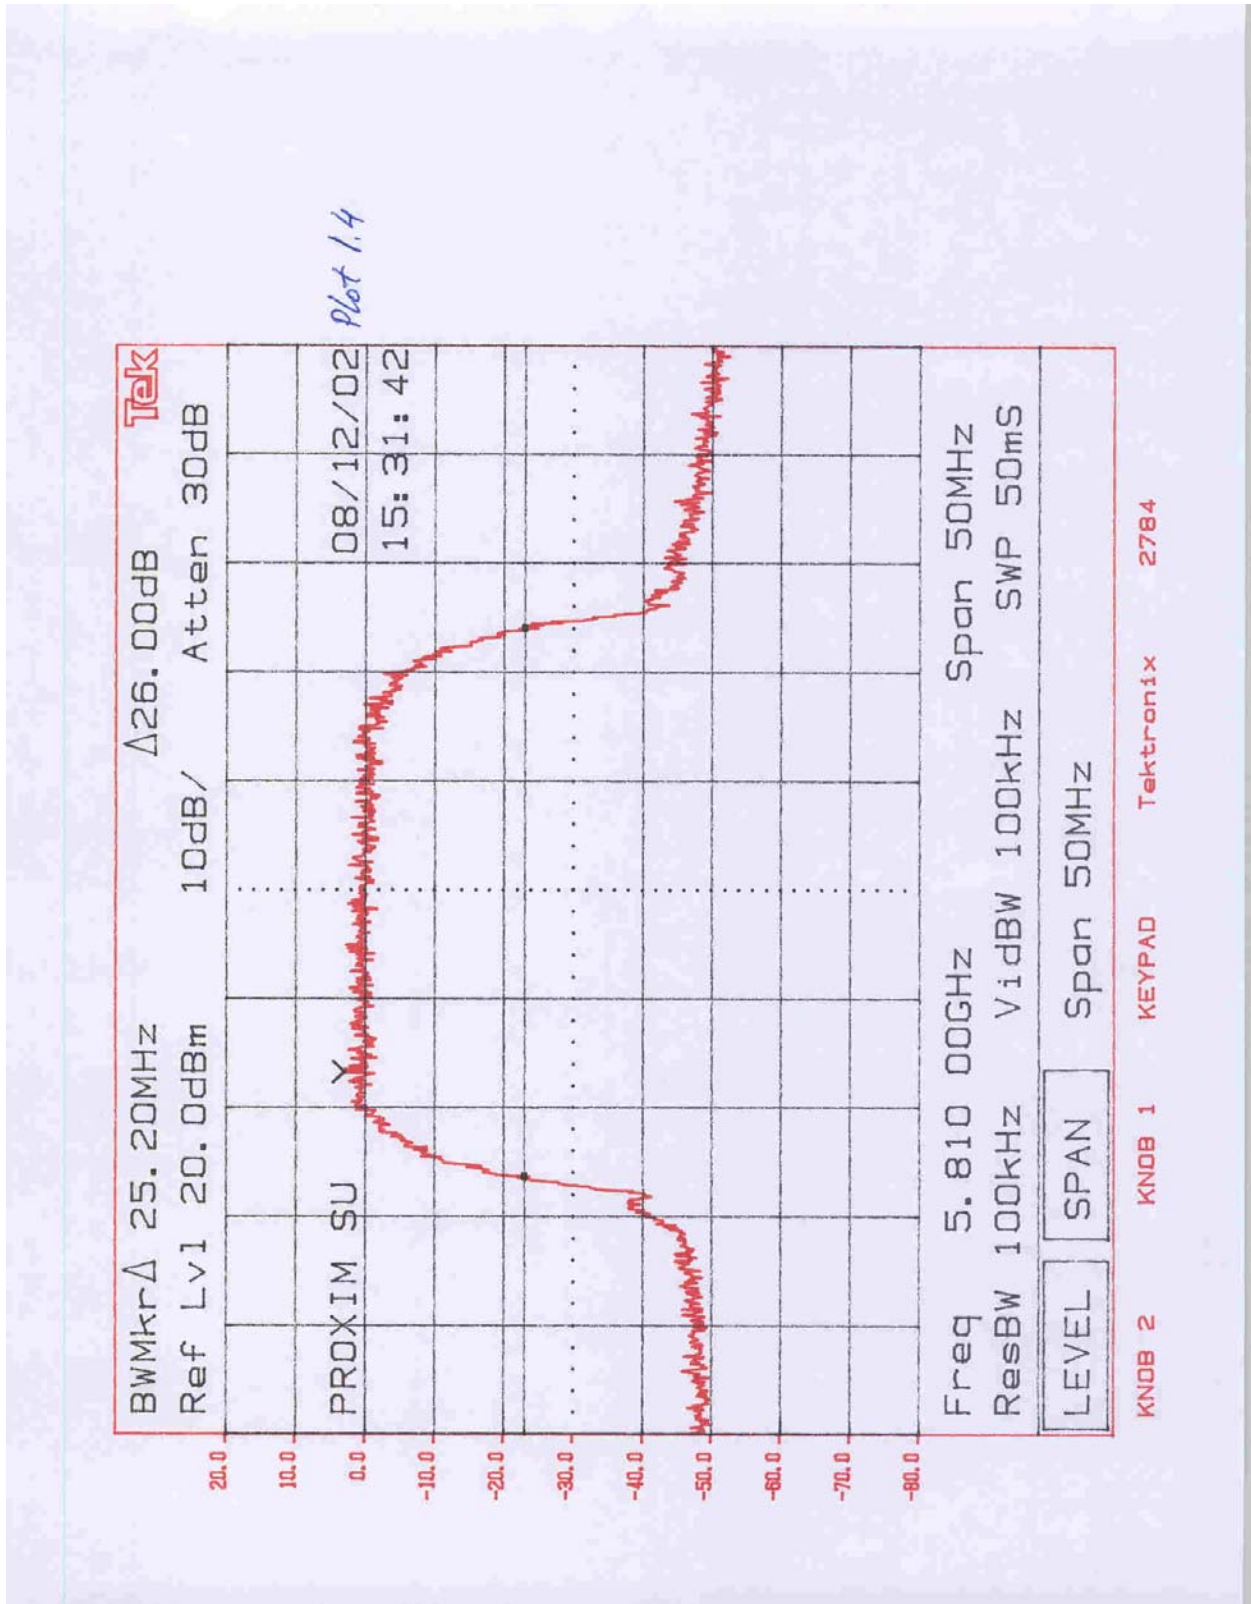

# Intertek Testing Services

---

## 4.3 Peak Power Density [FCC 15.407(a)(3)]

### Requirement:

For fixed point-to-point U-NII devices operating in 5.725-5.825 GHz band the peak power spectral density shall not exceed 17 dBm in any 1 MHz band (for antenna gain up to 23 dBi).

For devices operating in 5.25-5.35 GHz band peak power spectral density shall not exceed 11 dBm in any 1 MHz band (for antenna gain up to 6 dBi).

### Procedure

Antenna output of the EUT was coupled directly to spectrum analyzer; if an external attenuator and/or cable was used, these losses are compensated for with the analyzer OFFSET function.

The spectrum analyzer Resolution Bandwidth was set to 1 MHz and Video Bandwidth was set to 7 MHz. The START and STOP frequencies were set to the band edges of the maximum output passband. Maximum peak-power spectral density reading was recorded.


### Test Result

Frequency MHz	Modulation	Peak Power Density dBm	EIRP Density dBm	EIRP Density Limit (dBm)	Plots
5740	16QAM	12.7	33.7	40	4.1
5768	16QAM	14.6	35.6	40	4.2
5810	16QAM	13.5	34.5	40	4.3

Note: antenna gain equals 21 dBi





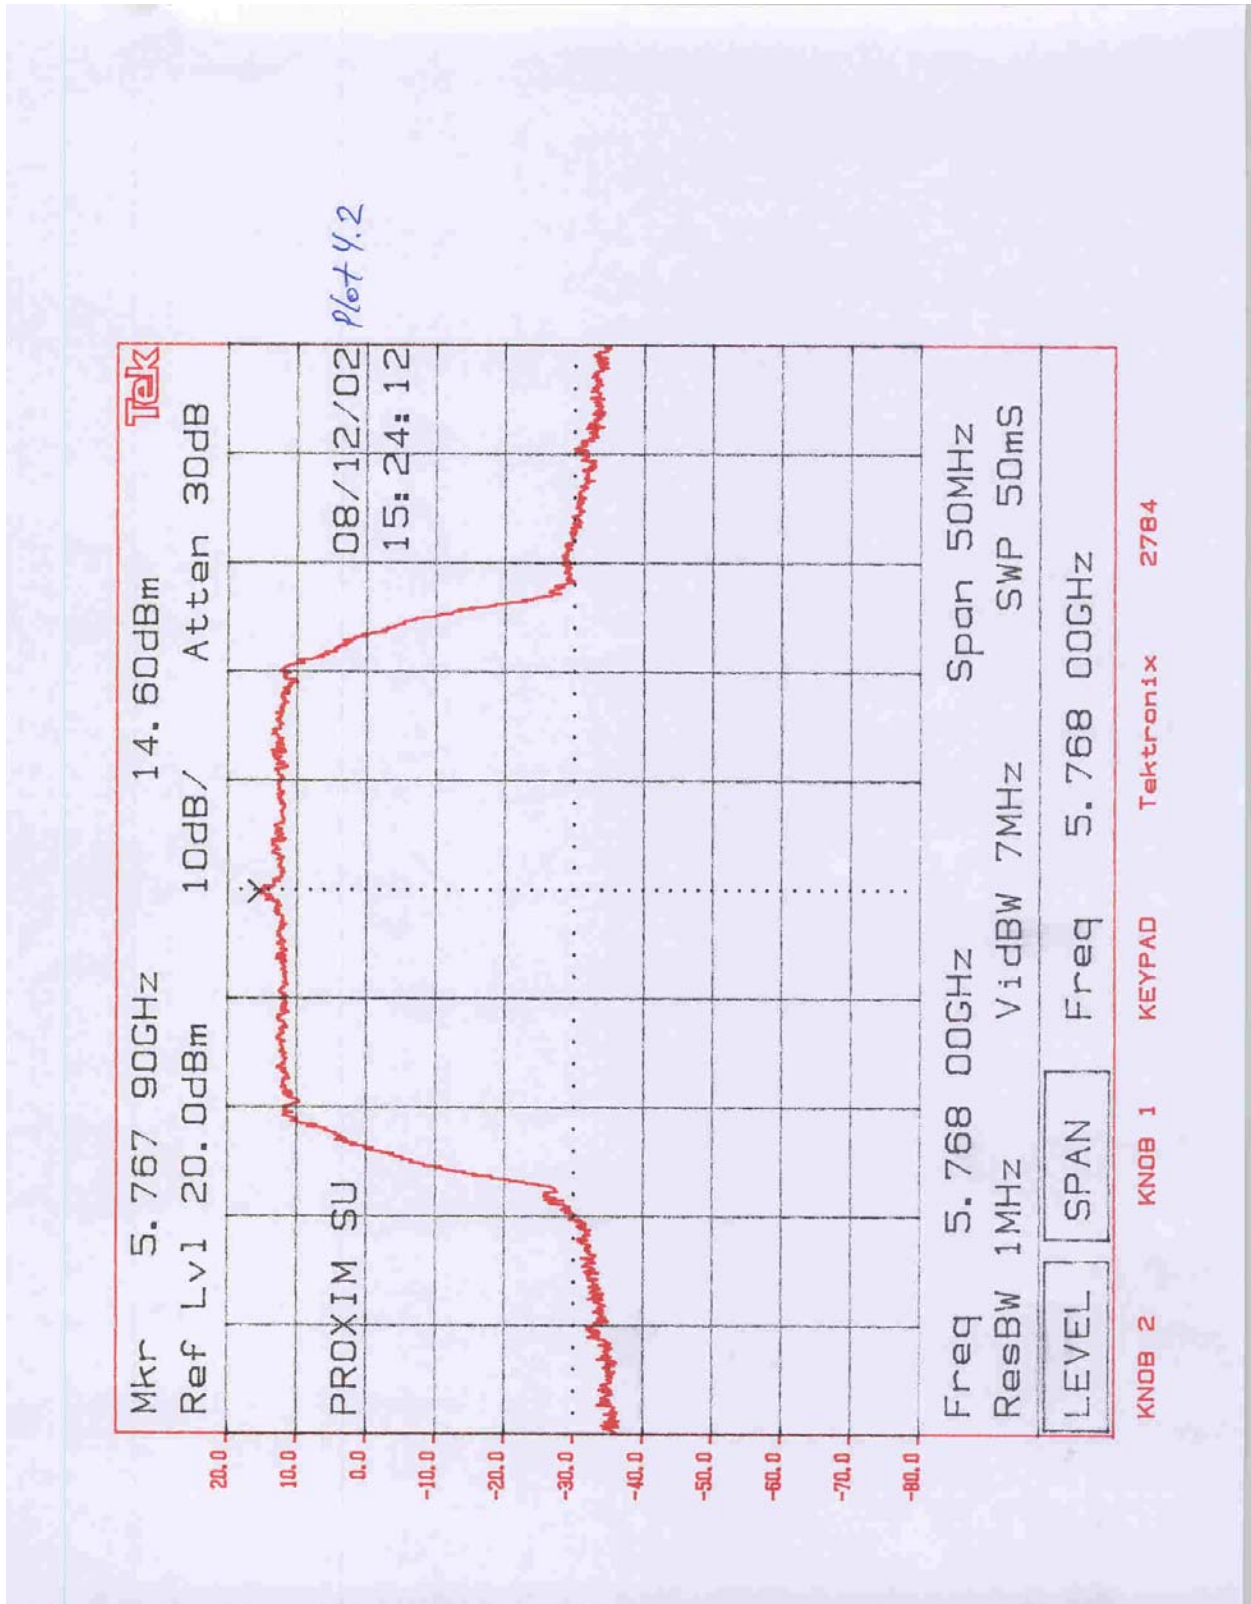





# Intertek Testing Services

---

## 4.4 Out-of-Band Conducted Emissions [FCC 15.407(b)]

### Requirement

For transmitters operating in the 5.25-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed an EIRP of  $-27$  dBm/MHz. Devices operating in the 5.25-5.35 GHz band that generate emissions in the 5.15-5.25 GHz band must meet all applicable technical requirements for operation in the 5.15-5.25 GHz band (including indoor use) or alternatively meet an out-of-band emission EIRP limit of  $-27$  dBm/MHz in the 5.15-5.25 GHz band.

For transmitters operating in the 5.725-5.825 GHz band: all emissions within the frequency range from the band edge to 10 MHz above or below the band edge shall not exceed an EIRP of  $-17$  dBm/MHz; for frequencies 10 MHz or greater above or below the band edge, emissions shall not exceed and EIRP of  $-27$  dBm/MHz.

The emission measurements shall be performed using a minimum resolution bandwidth of 1 MHz. A lower resolution bandwidth may be employed near the band edge, when necessary, provided the measured energy is integrated to show the total power over 1 MHz.

### Procedure

Spectrum Analyzer was connected to the output of the EUT. For measurements above 1 GHz, the Resolution Bandwidth was set to 1 MHz and the Video Bandwidth was set to 7 MHz; the Spectrum Analyzer was set to perform average by sampling, 100 sweeps was used. For measurements below 1 GHz, the Resolution Bandwidth and the Video Bandwidth were set 100 kHz. Several plots were made in the frequency range from 30 MHz to 40 GHz.

### Test Result

Refer to Appendix 1 for the plots for out-of-band conducted emissions data.

The EUT complies with out-of-band conducted emissions limits, calculated as EIRP Limit minus Antenna Gain (21 dBi).

Frequency, MHz	Modulation	Plots
5740	16QAM	5.1a – 5.1j
5768	16QAM	5.2a – 5.2j
5810	16QAM	5.3a – 5.3j

## Intertek Testing Services

---

- 4.5 The ratio of the peak excursion of the modulation envelope to the peak power  
[FCC 15.407(a)(6)]

### Requirement

The ratio of the peak excursion of the modulation envelope to the peak transmit power shall not exceed 13 dB.


### Procedure


Spectrum Analyzer was connected to the output of the EUT. The Resolution Bandwidth was set to 1 MHz. Two plots were made in each band: with the Video Bandwidth set to 7 MHz and with the Video Bandwidth set to 30 kHz. The difference between spectrum analyzer readings indicates the ratio of the peak excursion of the modulation envelope to the peak transmit power.

### Test Result


See attached plots for the ratio of the peak excursion of the modulation envelope to the peak power. The maximum Ratio is 7.3 dB.

Frequency, MHz	Modulation	Plots
5740	16QAM	6.1
5768	16QAM	6.2
5810	16QAM	6.3

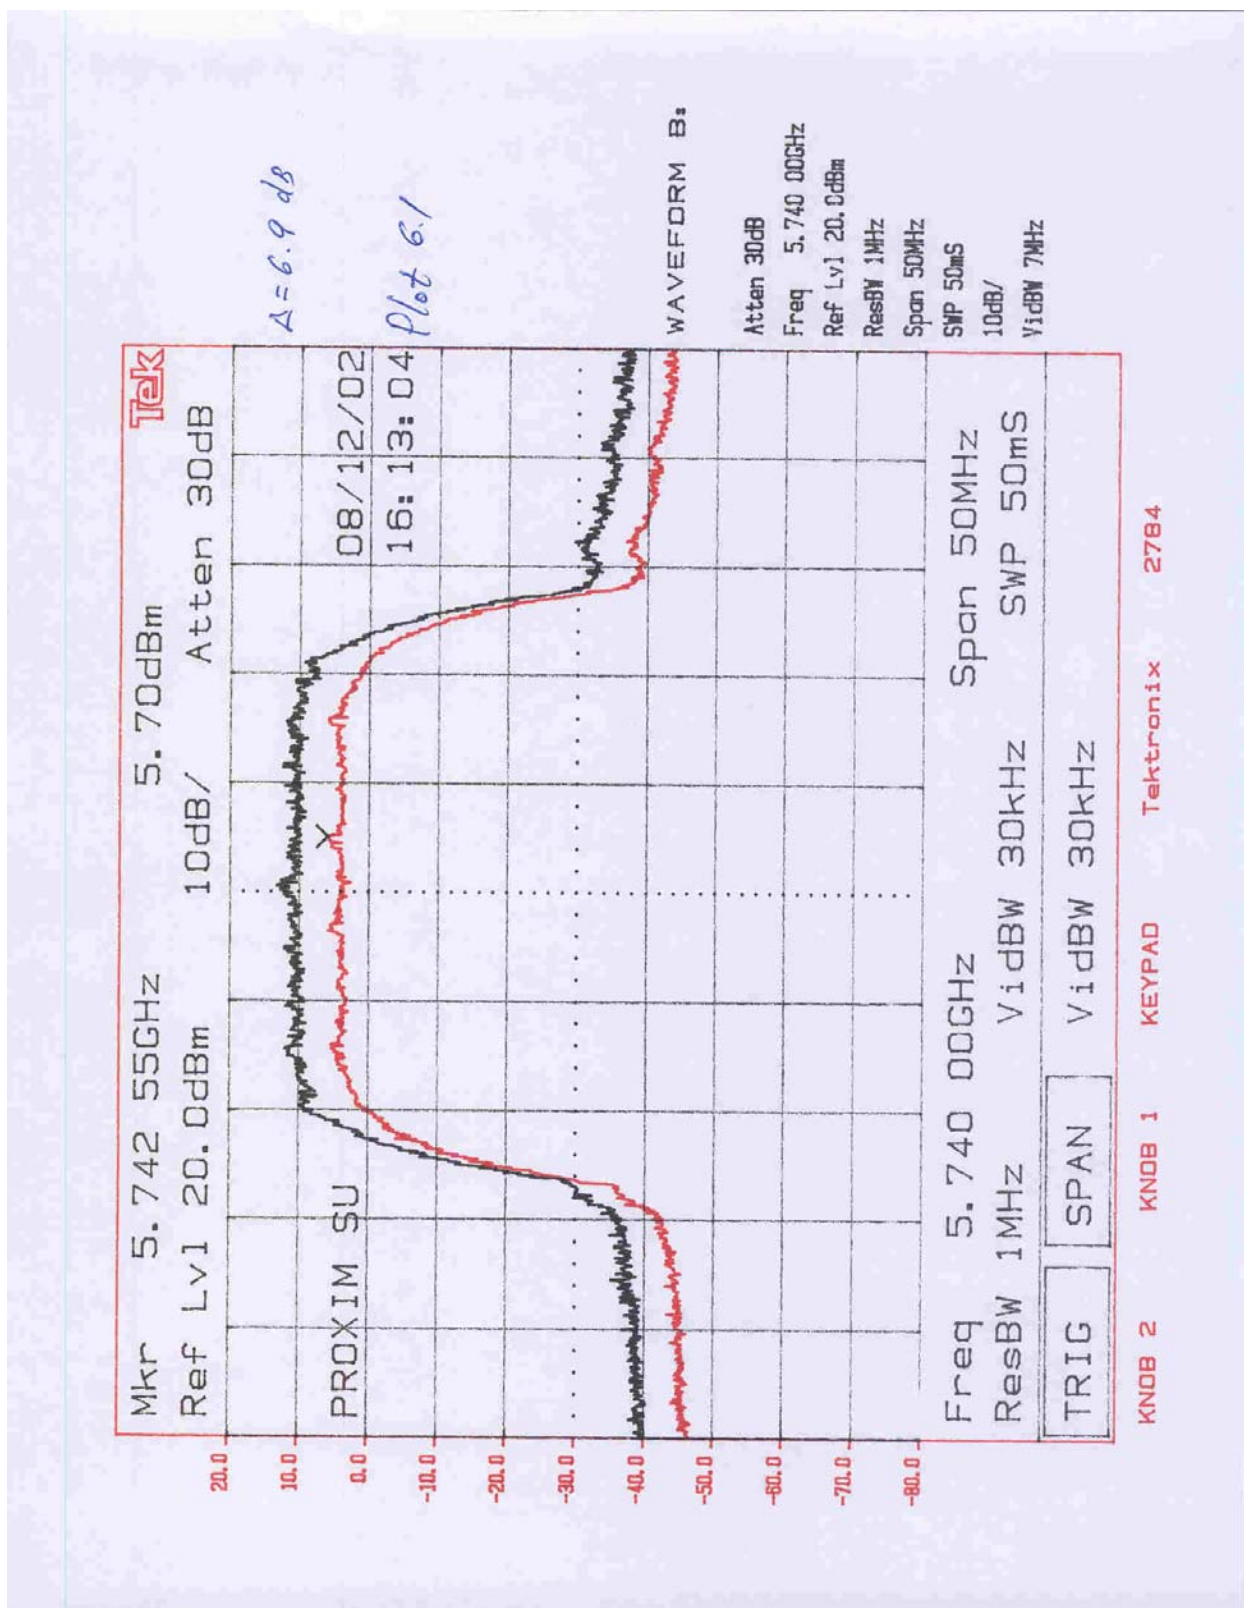

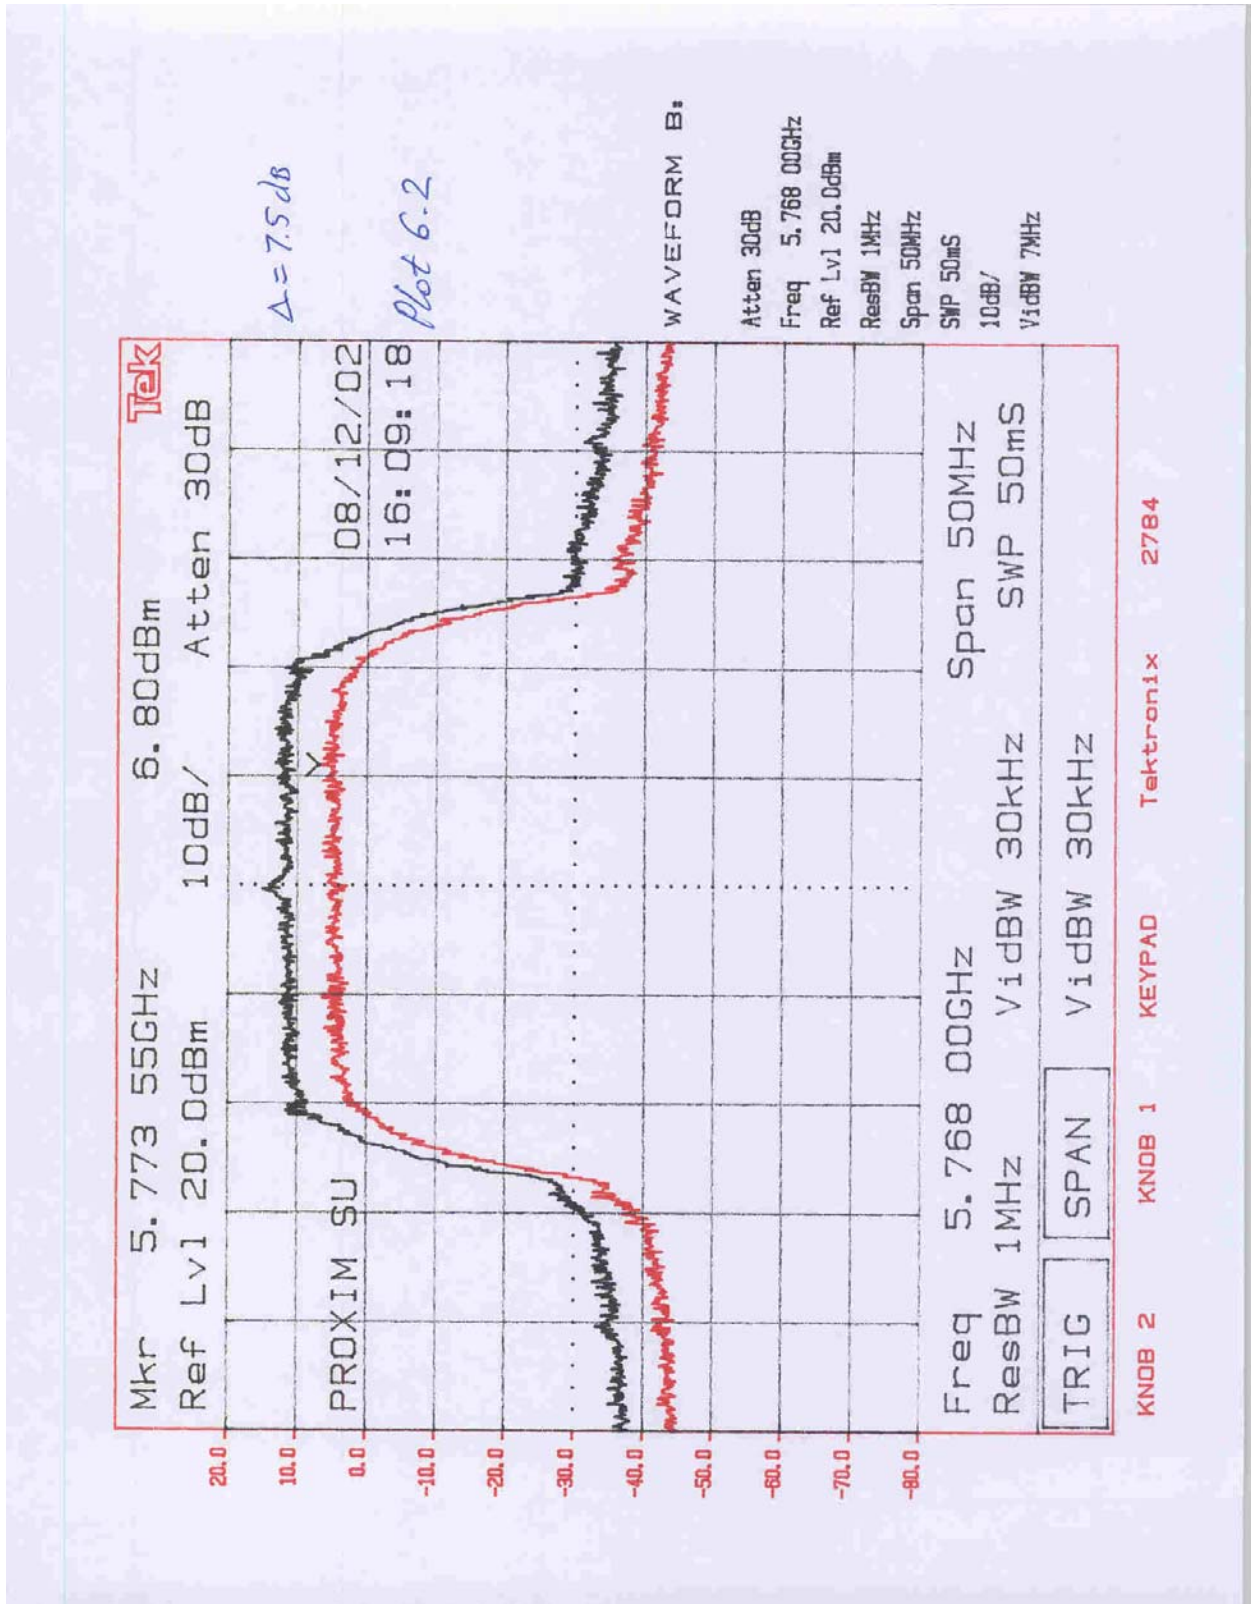



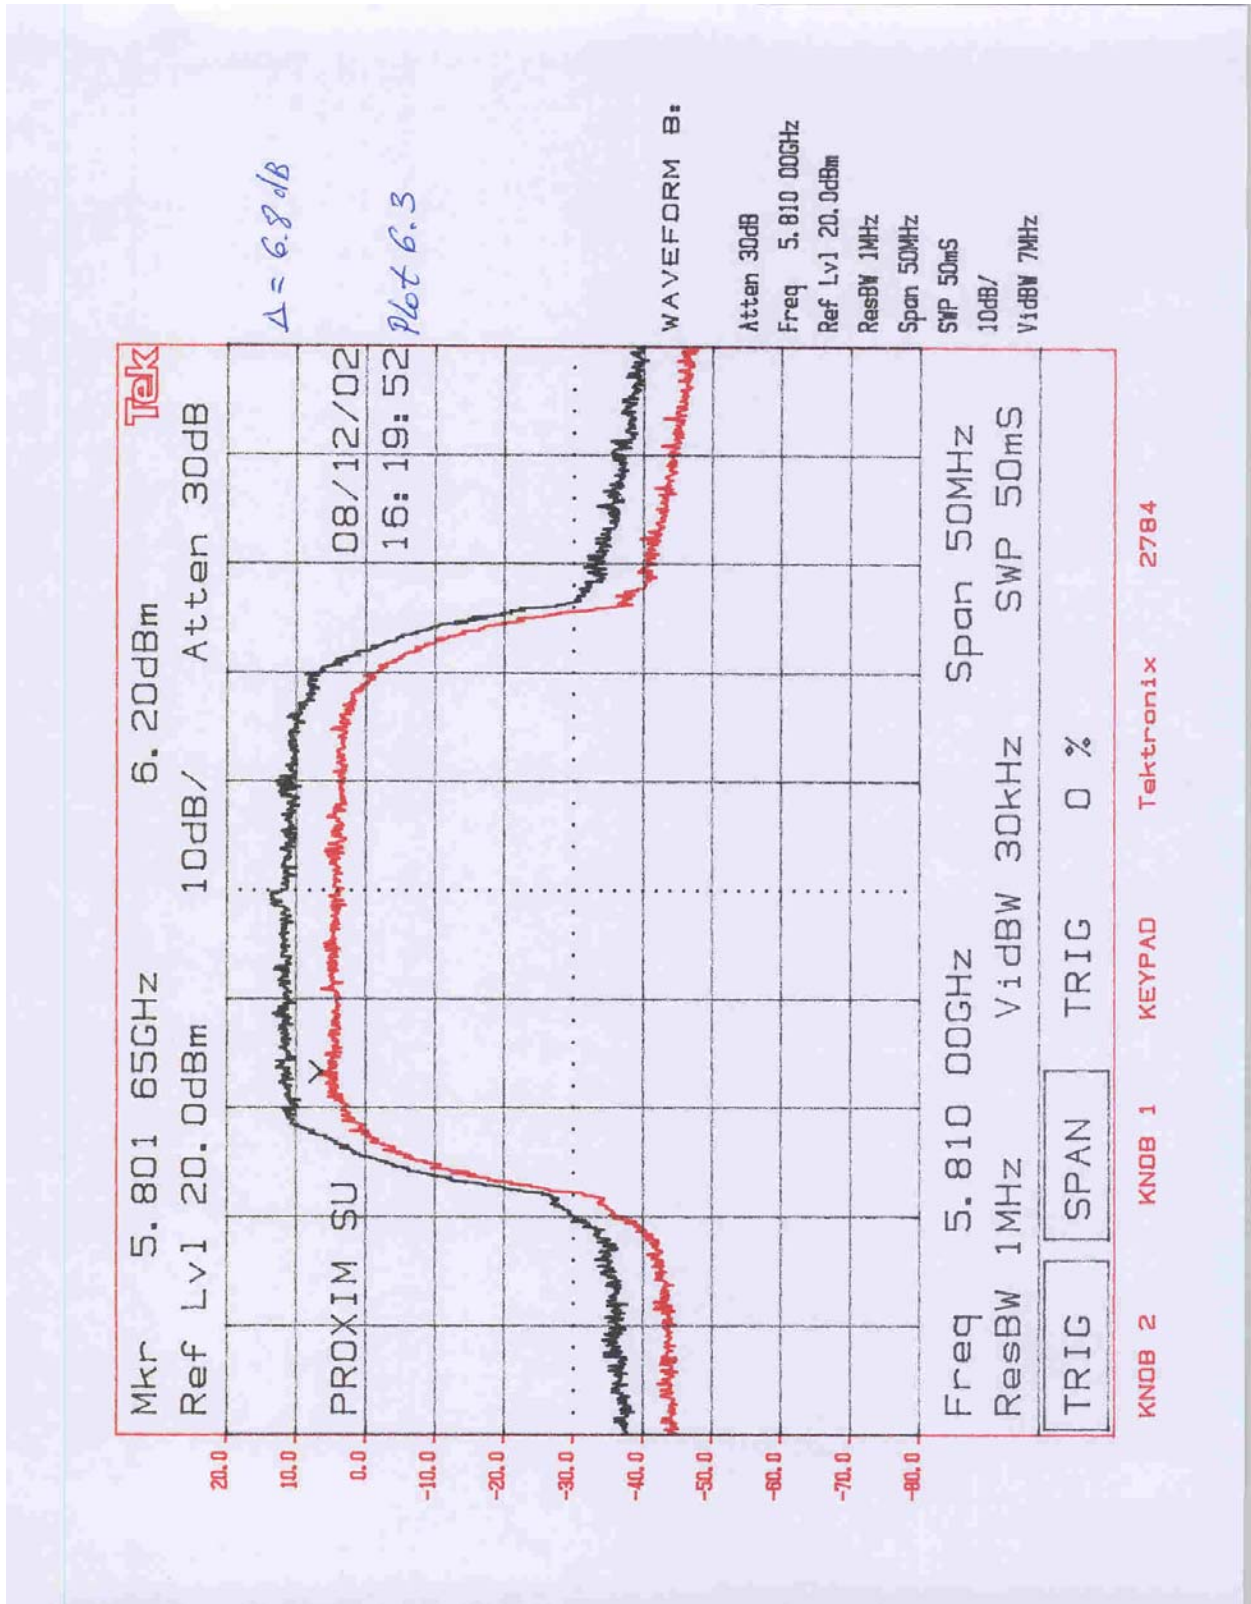

## 4.6 Radiated Emissions in restricted bands [FCC 15.209, 15.205]

### Procedure

Radiated emission measurements were performed from 30 MHz to 40,000 MHz. Spectrum Analyzer Resolution Bandwidth is 100 kHz or greater for frequencies 30 MHz to 1000 MHz, 1 MHz - for frequencies above 1000 MHz.

The EUT is placed on the wooden turntable. If the EUT attaches to peripherals, they are connected and operational (as typical as possible). During testing, all cables were manipulated to produce worst case emissions. The signal is maximized through rotation. The antenna height and polarization are varied during the search for maximum signal level. The antenna height is varied from 1 to 4 meters.

Radiated emissions are taken at three meters unless the signal level is too low for measurement at that distance. If necessary, a pre-amplifier is used and/or the test is conducted at a closer distance. All readings are extrapolated back to the equivalent three-meter reading using inverse scaling with distance.

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included. All measurements were performed with peak detection unless otherwise specified.

### Field Strength Calculation

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG$$

Where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

Where FS = Field Strength in dB $\mu$ V/m

RR = RA - AG in dB $\mu$ V

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antennas factor of 7.4-dB and cable factor of 1.6 dB is added. The amplifier gain of 29 dB is subtracted, giving field strength of 32 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$RA = 52.0 \text{ dB}\mu\text{V}$$

$$AF = 7.4 \text{ dB}$$

$$CF = 1.6 \text{ dB}$$

$$RR = 23.0 \text{ dB}\mu\text{V}$$

$$LF = 9.0 \text{ dB}$$

## Intertek Testing Services

---

AG = 29.0 dB

FS = RR + LF

FS = 23 + 9 = 32 dB $\mu$ V/m

Level in  $\mu$ V/m = Common Antilogarithm [(32 dB $\mu$ V/m)/20] = 39.8  $\mu$ V/m

### Result

The data on the following pages list the significant emission frequencies, the limit and the margin of compliance.

# Intertek Testing Services

<b>Company:</b>	Proxim	<b>Model #:</b>		<b>Standard_</b>	<b>FCC § 15B</b>	
<b>EUT:</b>	TSUNAMI SU	<b>S/N #:</b>		<b>Limits_</b>	2	
<b>Project #:</b>	3030166	<b>Test Date:</b>	August 13, 2002	<b>Test Distance_</b>	1	meter
<b>Test Mode:</b>	TX at 5740 MHz	<b>Engineer:</b>	Bruce G.	<b>Duty Relaxation</b>	0	dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
<b>Number:</b>	14	21	22	9	4	13	10	0	0	0
<b>Model:</b>	EMCO 3115	3160-9	3160-10	WJ	None	ACO/400	NPS72-1	None	None	None

Frequency	Reading	Detector	Ant. #	Amp. #	Ant. Pol.	Ant. Factor	Pre-Amp	Insert Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
11480	55.0	Peak	14	9	V	40.7	36.3	2.4	-9.5	52.3	74.0	-21.7
11480	40.5	Ave.	14	9	V	40.7	36.3	2.4	-9.5	37.8	54.0	-16.2
11480	53.3	Peak	14	9	H	40.7	36.3	2.4	-9.5	50.6	74.0	-23.4
11480	38.6	Ave.	14	9	H	40.7	36.3	2.4	-9.5	35.9	54.0	-18.1
22960	47.1	Peak	21	13	V	40.4	23.3	3.2	-9.5	57.9	74.0	-16.1
22960	27.0	Ave.	21	13	V	40.4	23.3	3.2	-9.5	37.8	54.0	-16.2
22960	48.6	Peak	21	13	H	40.4	23.3	3.2	-9.5	59.4	74.0	14.6
22960	27.4	Ave.	21	13	H	40.4	23.3	3.2	-9.5	38.2	54.0	-16.8

**Notes:**

- a) D.C.F.:Distance Correction Factor
- b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
- c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss - Duty Relaxation (transmitter only).
- d) Negative signs (-) in Margin column signify levels below the limits.
- e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.



# Intertek Testing Services

<b>Company:</b>	Proxim	<b>Model #:</b>		<b>Standard_</b>	<b>FCC § 15B</b>
<b>EUT:</b>	TSUNAMI SU	<b>S/N #:</b>		<b>Limits_</b>	2
<b>Project #:</b>	3030166	<b>Test Date:</b>	August 13, 2002	<b>Test Distance_</b>	1 meter
<b>Test Mode:</b>	TX at 5768 MHz	<b>Engineer:</b>	Bruce G.	<b>Duty Relaxation</b>	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
<b>Number:</b>	14	21	22	9	4	13	10	0	0	0
<b>Model:</b>	EMCO 3115	3160-9	3160-10	WJ	None	ACO/400	NPS72-1	None	None	None

Frequency	Reading	Detector	Ant. #	Ant. Amp. #	Ant. Pol.	Ant. Factor	Pre -Amp	Insert. Loss	D. C. F.	Net	Limit @3m	Margin
MHz	dB(μV)	P/A/Q	#	#	H/V	dB(1/m)	dB	dB	dB	dB(μV/m)	dB(μV/m)	dB
11536	61.8	Peak	14	9	V	41.2	37.0	2.5	-9.5	59.0	74.0	-15.0
11536	50.4	Ave.	14	9	V	41.2	37.0	2.5	-9.5	47.6	54.0	-6.4
11536	57.4	Peak	14	9	H	41.9	37.0	2.5	-9.5	55.3	74.0	-18.7
11536	45.0	Ave.	14	9	H	41.9	37.0	2.5	-9.5	42.9	54.0	-11.1
23072	47.0	Peak	21	13	V	40.4	23.3	3.2	-9.5	57.8	74.0	-16.2
23072	27.3	Ave.	21	13	V	40.4	23.3	3.2	-9.5	38.1	54.0	-15.9
23072	47.3	Peak	21	13	H	40.4	23.3	3.2	-9.5	58.1	74.0	-15.9
23072	28.7	Ave.	21	13	H	40.4	23.3	3.2	-9.5	39.5	54.0	-14.5

**Notes:**

- a) D.C.F.:Distance Correction Factor
- b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
- c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss - Duty Relaxation (transmitter only).
- d) Negative signs (-) in Margin column signify levels below the limits.
- e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.

# Intertek Testing Services

<b>Company:</b>	Proxim	<b>Model #:</b>		<b>Standard_</b>	FCC § 15B
<b>EUT:</b>	TSUNAMI SU	<b>S/N #:</b>		<b>Limits_</b>	2
<b>Project #:</b>	3030166	<b>Test Date:</b>	August 13, 2002	<b>Test Distance_</b>	1 meter
<b>Test Mode:</b>	TX at 5810 MHz	<b>Engineer:</b>	Bruce G.	<b>Duty Relaxation</b>	0 dB

	Antenna Used			Pre-Amp Used			Cable Used			Transducer Used
<b>Number:</b>	14	21	22	9	4	13	10	0	0	0
<b>Model:</b>	EMCO 3115	3160-9	3160-10	WJ	None	ACO/400	NPS72-1	None	None	None

Frequency	Reading	Detector	Ant.	Ant.	Pre-	Insert.	D. C. F.		Net	Limit	Margin	
MHz	dB(μV)	P/A/Q	#	#	Amp	Loss	dB	dB	dB(μV/m)	dB(μV/m)	dB	
11620	55.6	Peak	14	9	V	41.2	37.0	2.5	-9.5	52.8	74.0	-21.2
11620	43.0	Ave.	14	9	V	41.2	37.0	2.5	-9.5	40.2	54.0	-13.8
11620	53.5	Peak	14	9	H	41.9	37.0	2.5	-9.5	51.4	74.0	-32.6
11620	38.7	Ave.	14	9	H	41.9	37.0	2.5	-9.5	36.6	54.0	-17.4

**Notes:**

- a) D.C.F.:Distance Correction Factor
- b) Insert. Loss (dB) = Cable A + Cable B + Cable C .
- c) Net (dB) = Reading + Antenna Factor - Pre-amp + Insert. Loss - Duty Relaxation (transmitter only).
- d) Negative signs (-) in Margin column signify levels below the limits.
- e) All other emissions not reported are below the equipment noise floor which is at least 10 dB below the limits.


## 4.7 Radiated Emissions from digital part [FCC 15.109]

### Procedure


See section 4.6.

### Test Result

See the test results on the following pages.

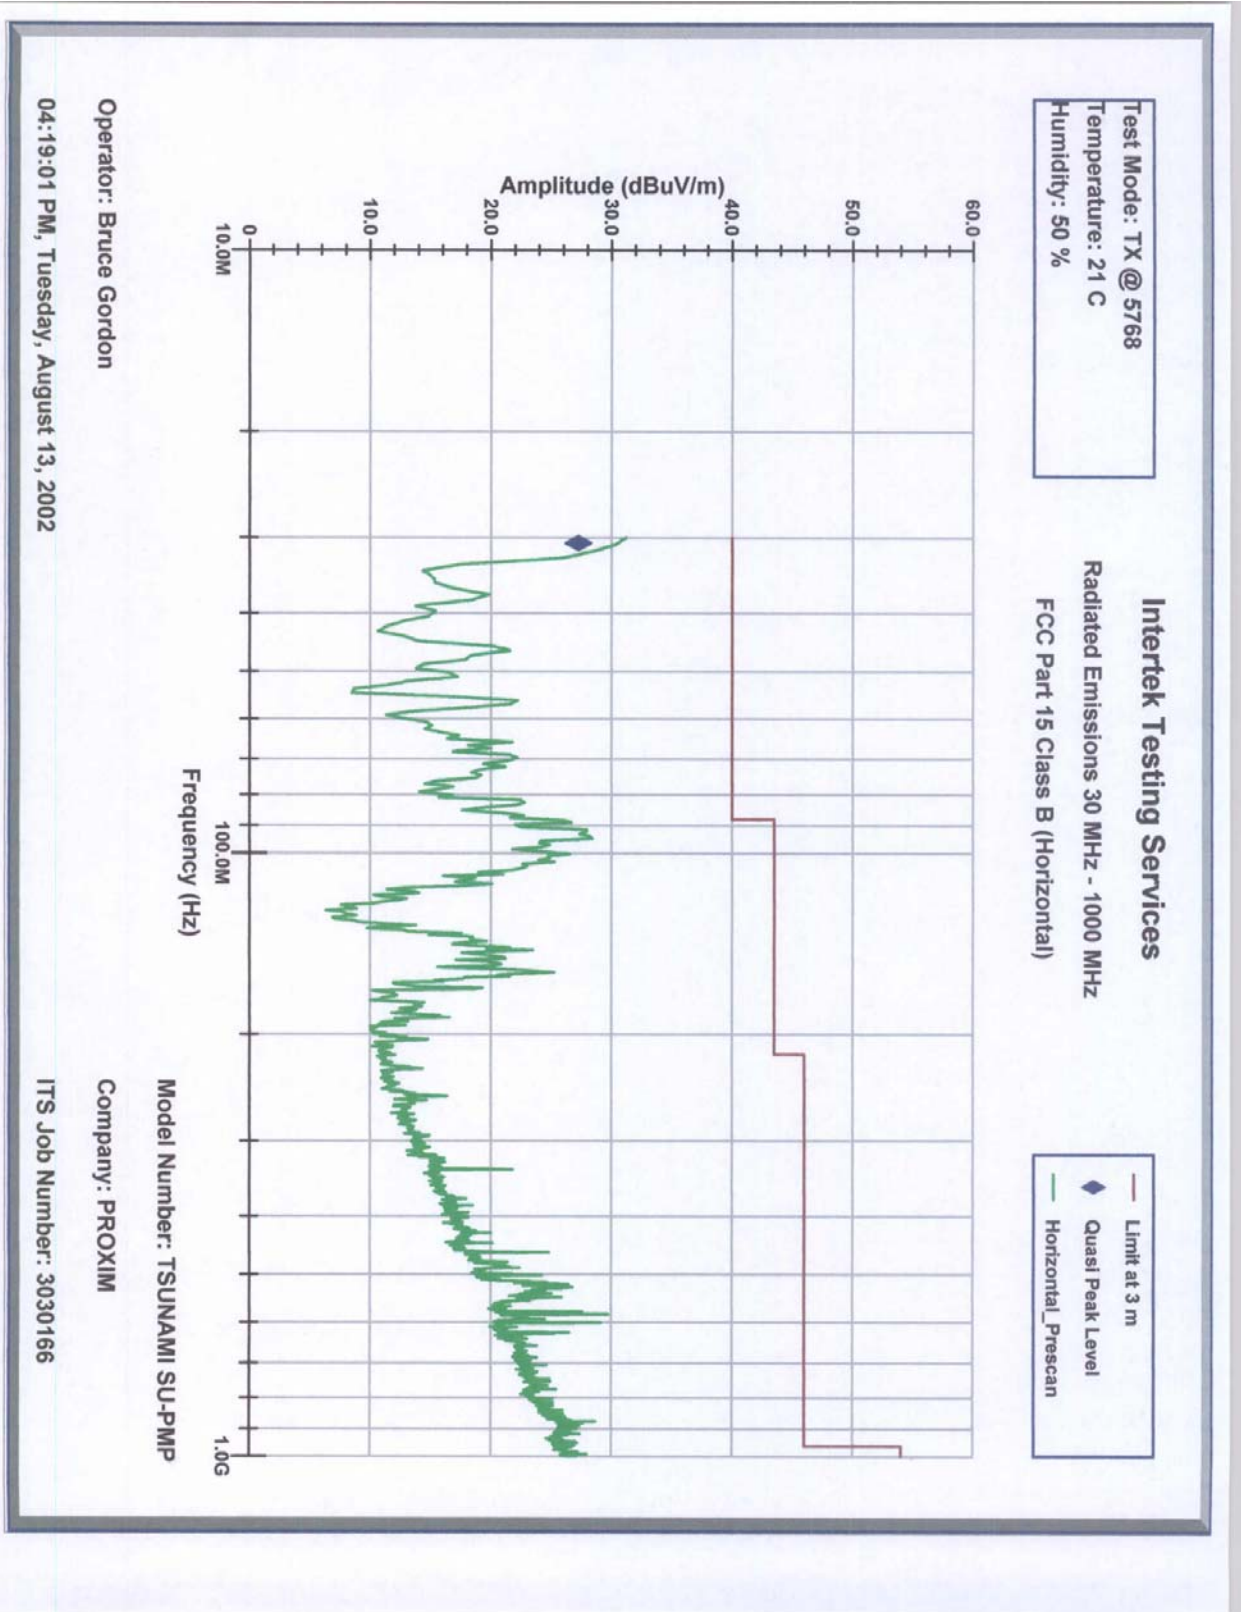



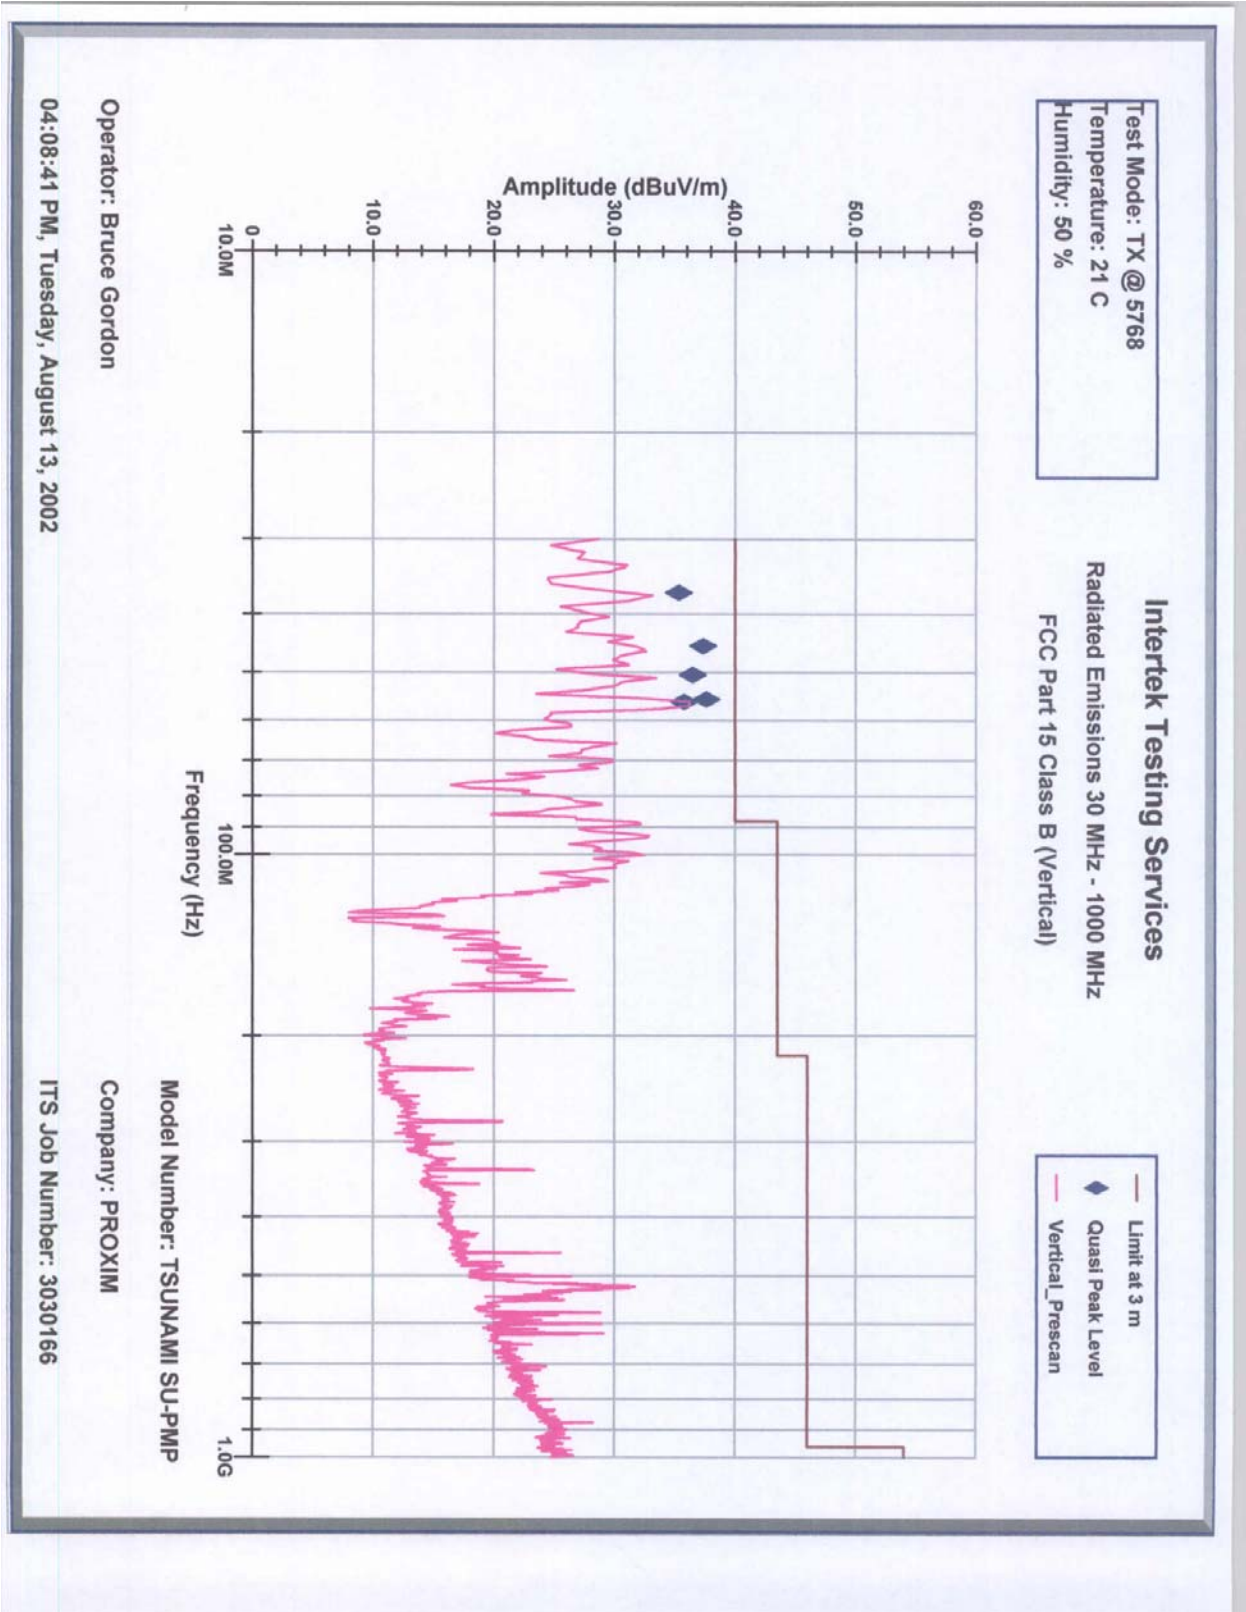





# Intertek Testing Services

---

## 5.0 List of Test Equipment

Measurement equipment used for emission compliance testing utilized the equipment on the following list:

Equipment	Manufacturer	Model/Type	Serial #	Cal Int	Cal Due
BI-Log Antenna	EMCO	3143	9509-1164	12	3/04/03
Pre-Amplifier	Sonoma Inst.	310	185634	12	01/10/03
RF Filter Section	Hewlett Packard	85460A	3448A00267	12	7/16/03
EMI Receiver	Hewlett Packard	8546A	3710A00373	12	7/16/03
Spectrum Analyzer	Tektronix	2784	B3020108	12	8/08/03
Spectrum Analyzer w/8650 QP Adapter	Hewlett Packard	8568B	1912A0053 2521A01021	12	3/15/03
Double-ridged Horn Antenna	EMCO	3115	8812-3049	12	4/03/03
Horn Antenna	EMCO	3160-09	-	#	#
Horn Antenna	EMCO	3160-10	-	#	#
Pre-Amplifier	Miteq	AMF-4D-001180-24-10P	799159	12	04/05/03
Pre-amplifier	CTT	ACO/400	47526	12	10/5/02
Pre-Amplifier	Avantek	AFT-18855	8723H705	12	10/5/02
Power Meter	Hewlett Packard	8900D	3607U00673	12	7/8/03
LISN	FCC	FCC-LISN-50-50-M-H	2011	12	1/02/03

# No calibration required



## 6.0 Appendix 1

Out-of-band conducted emissions plots.

Frequency, MHz	Modulation	Plots
5740	16QAM	5.1a – 5.1j
5768	16QAM	5.2a – 5.2j
5810	16QAM	5.3a – 5.3j