



# SPORTON International Inc.

No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, TaoYuan Hsien, Taiwan, R.O.C.  
Ph: 886-3-327-3456 / FAX: 886-3-327-0973 / www.sporton.com.tw

## FCC RADIO TEST REPORT

Applicant's company	Proxim Wireless Corporation
Applicant Address	1561 Buckeye Drive, Milpitas, CA 95035 USA
FCC ID	HZB-USABGNR01
Manufacturer's company	Wistron NeWeb Corporation
Manufacturer Address	No.10-1,Li-hsin Road I,Hsinchu Science Park,Hsinchu 300,Taiwan, R.O.C.

Product Name	ORiNOCO 802.11 a/b/g/n USB Adapter
Brand Name	ORiNOCO
Model Name	8494-US
Test Rule Part(s)	47 CFR FCC Part 15 Subpart C § 15.247
Test Freq. Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Received Date	Oct. 30. 2008
Final Test Date	Apr. 24, 2009
Submission Type	Original Equipment



### Statement

Test result included is only for the Draft n, 802.11b/g part and 802.11a (5725 ~ 5850MHz) of the product.

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in ANSI C63.4-2003 and 47 CFR FCC Part 15 Subpart C.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.





## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE .....</b>	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT .....</b>	<b>2</b>
<b>3. GENERAL INFORMATION .....</b>	<b>3</b>
3.1. Product Details.....	3
3.2. Accessories.....	5
3.3. Table for Filed Antenna.....	6
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes .....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units .....	10
3.8. Table for Parameters of Test Software Setting .....	10
3.9. Test Configurations .....	12
<b>4. TEST RESULT .....</b>	<b>14</b>
4.1. AC Power Line Conducted Emissions Measurement.....	14
4.2. Maximum Conducted Output Power Measurement.....	18
4.3. Power Spectral Density Measurement .....	46
4.4. 6dB Spectrum Bandwidth Measurement .....	59
4.5. Radiated Emissions Measurement .....	73
4.6. Band Edge Emissions Measurement .....	119
4.7. Antenna Requirements .....	131
<b>5. LIST OF MEASURING EQUIPMENTS .....</b>	<b>132</b>
<b>6. TEST LOCATION.....</b>	<b>134</b>
<b>7. TAF CERTIFICATE OF ACCREDITATION .....</b>	<b>135</b>
<b>APPENDIX A. PHOTOGRAPHS OF EUT.....</b>	<b>A1 ~ A9</b>
<b>APPENDIX B. TEST PHOTOS.....</b>	<b>B1 ~ B6</b>





## 1. CERTIFICATE OF COMPLIANCE

Product Name : ORINOCO 802.11 a/b/g/n USB Adapter  
Brand Name : ORINOCO  
Model Name : 8494-US  
Applicant : Proxim Wireless Corporation  
Test Rule Part(s) : 47 CFR FCC Part 15 Subpart C § 15.247

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Oct. 30. 2008 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.



Wayne Hsu

SPORTON INTERNATIONAL INC.

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart C				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	6.94 dB
4.2	15.247(b)(3)	Maximum Conducted Output Power	Complies	10.71 dB
4.3	15.247(e)	Power Spectral Density	Complies	10.66 dB
4.4	15.247(a)(2)	6dB Spectrum Bandwidth	Complies	-
4.5	15.247(d)	Radiated Emissions	Complies	4.08 dB
4.6	15.247(d)	Band Edge Emissions	Complies	0.50 dB
4.7	15.203	Antenna Requirements	Complies	-

Test Items	Uncertainty	Remark
AC Power Line Conducted Emissions	±2.3dB	Confidence levels of 95%
Maximum Conducted Output Power	±0.8dB	Confidence levels of 95%
Power Spectral Density	±0.5dB	Confidence levels of 95%
6dB Spectrum Bandwidth	±8.5×10 <sup>-8</sup>	Confidence levels of 95%
Radiated Emissions (9kHz~30MHz)	±0.8dB	Confidence levels of 95%
Radiated Emissions (30MHz~1000MHz)	±1.9dB	Confidence levels of 95%
Radiated / Band Edge Emissions (1GHz~18GHz)	±1.9dB	Confidence levels of 95%
Radiated Emissions (18GHz~40GHz)	±1.9dB	Confidence levels of 95%
Temperature	±0.7°C	Confidence levels of 95%
Humidity	±3.2%	Confidence levels of 95%
DC / AC Power Source	±1.4%	Confidence levels of 95%

### 3. GENERAL INFORMATION

#### 3.1. Product Details

Draft n

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for draft n
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for Draft n
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	<For 2.4GHz Band>: 11 for 20MHz bandwidth ; 7 for 40MHz bandwidth <For 5GHz Band>: 5 for 20MHz bandwidth ; 2 for 40MHz bandwidth
Channel Band Width (99%)	<For 2.4GHz Band>: MCS0 (20MHz): 17.68 MHz ; MCS0 (40MHz): 36.32 MHz <For 5GHz Band>: MCS0 (20MHz): 17.60 MHz ; MCS0 (40MHz): 36.24 MHz
Conducted Output Power	<For 2.4GHz Band>: MCS0 (20MHz): 19.04 dBm ; MCS0 (40MHz): 17.45 dBm <For 5GHz Band>: MCS0 (20MHz): 16.83 dBm ; MCS0 (40MHz): 16.58 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**802.11a/b/g**

Items	Description
Product Type	WLAN (2TX, 2RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	DSSS for IEEE 802.11b ; OFDM for IEEE 802.11a/g
Data Modulation	DSSS (BPSK / QPSK / CCK) ; OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	DSSS (1/ 2/ 5.5/11) ; OFDM (6/9/12/18/24/36/48/54)
Frequency Range	2400 ~ 2483.5MHz / 5725 ~ 5850MHz
Channel Number	11b/g: 11 ; 11a: 5
Channel Band Width (99%)	11b: 15.20 MHz ; 11g: 16.48 MHz ; 11a: 16.44 MHz
Conducted Output Power	11b: 17.80 dBm ; 11g: 19.29 dBm ; 11a: 16.87 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Band width**

Antenna	Single (TX)		Two (TX)	
	20 MHz	40 MHz	20 MHz	40 MHz
Band width Mode				
802.11a	X	X	V	X
802.11b	X	X	V	X
802.11g	X	X	V	X
Draff n	X	X	V	V

## Draft n spec

MCS Index	Nss	Modulation	R	NBPSC	NCBPS		NDBPS		Datarate(Mbps)			
					20MHz	40MHz	20MHz	40MHz	800nsGI		400nsGI	
									20MHz	40MHz	20MHz	40MHz
0	1	BPSK	1/2	1	52	108	26	54	6.5	13.5	7.200	15
1	1	QPSK	1/2	2	104	216	52	108	13.0	27.0	14.400	30
2	1	QPSK	3/4	2	104	216	78	162	19.5	40.5	21.700	45
3	1	16-QAM	1/2	4	208	432	104	216	26.0	54.0	28.900	60
4	1	16-QAM	3/4	4	208	432	156	324	39.0	81.0	43.300	90
5	1	64-QAM	2/3	6	312	648	208	432	52.0	108.0	57.800	120
6	1	64-QAM	3/4	6	312	648	234	486	58.5	121.5	65.000	135
7	1	64-QAM	5/6	6	312	648	260	540	65.0	135.0	72.200	150
8	2	BPSK	1/2	1	104	216	52	108	13.0	27.0	14.444	30
9	2	QPSK	1/2	2	208	432	104	216	26.0	54.0	28.889	60
10	2	QPSK	3/4	2	208	432	156	324	39.0	81.0	43.333	90
11	2	16-QAM	1/2	4	416	864	208	432	52.0	108.0	57.778	120
12	2	16-QAM	3/4	4	416	864	312	648	78.0	162.0	86.667	180
13	2	64-QAM	2/3	6	624	1296	416	864	104.0	216.0	115.556	240
14	2	64-QAM	3/4	6	624	1296	468	972	117.0	243.0	130.000	270
15	2	64-QAM	5/6	6	624	1296	520	1080	130.0	270.0	144.444	300

Symbol	Explanation
NSS	Number of spatial streams
R	Code rate
NBPSC	Number of coded bits per single carrier
NCBPS	Number of coded bits per symbol
NDBPS	Number of data bits per symbol
GI	guard interval

## 3.2. Accessories

Others	
USB Cable	1.4m, Shilded



### 3.3. Table for Filed Antenna

#### <For 5GHz Band>

Ant.	Brand	Model No	Antenna Type	Connector	Gain (dBi)	Remark
1	-	-	Printed Antenna	N/A	4.02	TX/RX
2	-	-	Printed Antenna	N/A	1.91	TX/RX


#### <For 2.4GHz Band>

Ant.	Brand	Model No	Antenna Type	Connector	Gain (dBi)	Remark
1	-	-	Printed Antenna	N/A	-0.45	TX/RX
2	-	-	Printed Antenna	N/A	-1.24	TX/RX

Note: The EUT has two antennas (2TX, 2RX).

Ant. 1 and Ant. 2 will transmit the same signal simultaneously.

Ant. 1 and Ant. 2 will receive the same signal simultaneously.

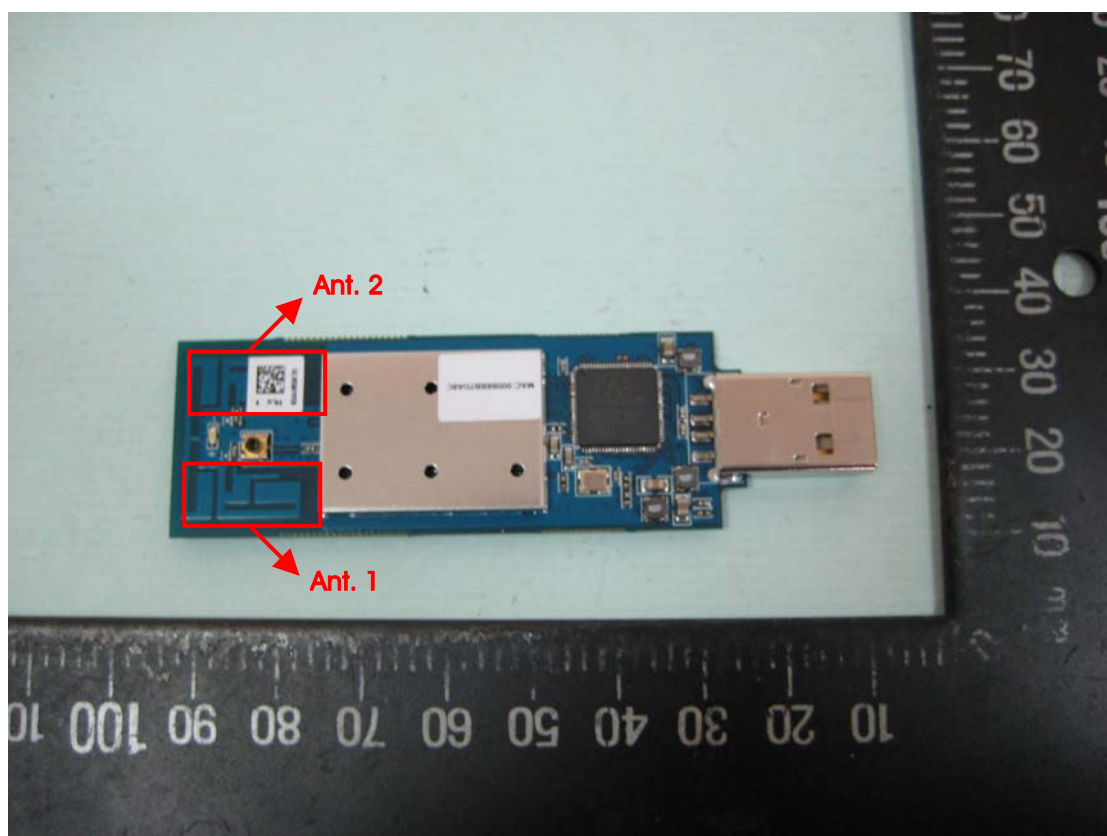

### 3.4. Table for Carrier Frequencies

<For 2.4GHz Band>

#### Frequency Allocation for 802.11b/g

There are two bandwidth systems for draft n.

For both 20MHz bandwidth systems, use Channel 1~Channel 11.

For both 40MHz bandwidth systems, use Channel 3~Channel 9.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
2400~2483.5MHz	1	2412 MHz	7	2442 MHz
	2	2417 MHz	8	2447 MHz
	3	2422 MHz	9	2452 MHz
	4	2427 MHz	10	2457 MHz
	5	2432 MHz	11	2462 MHz
	6	2437 MHz		

<For 5GHz Band>

#### Frequency Allocation for 802.11a

There are two bandwidth systems for draft n.

For 20MHz bandwidth systems, use Channel 149, 153, 157, 161, 165.

For 40MHz bandwidth systems, use Channel 151, 159.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5725~5850 MHz	149	5745 MHz	159	5795 MHz
	151	5755 MHz	161	5805 MHz
	153	5765 MHz	165	5825 MHz
	157	5785 MHz		

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

<For 2.4GHz Band>

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Max. Peak Conducted Output Power	MCS0/20MHz	6.5 Mbps	1/6/11	1 / 2 / 1+2
	MCS0/40MHz	13.5 Mbps	3/6/9	1 / 2 / 1+2
	11b/CCK	1 Mbps	1/6/11	1 / 2 / 1+2
	11g/BPSK	6 Mbps	1/6/11	1 / 2 / 1+2
Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	6.5 Mbps	1/6/11	1+2
	MCS0/40MHz	13.5 Mbps	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Radiated Emissions Below 1GHz	Normal Link	Auto	-	-
Radiated Emissions Above 1GHz	MCS0/20MHz	6.5 Mbps	1/6/11	1+2
	MCS0/40MHz	13.5 Mbps	3/6/9	1+2
	11b/CCK	1 Mbps	1/6/11	1+2
	11g/BPSK	6 Mbps	1/6/11	1+2
Band Edge Emissions	MCS0/20MHz	6.5 Mbps	1/11	1+2
	MCS0/40MHz	13.5 Mbps	3/9	1+2
	11b/CCK	1 Mbps	1/11	1+2
	11g/BPSK	6 Mbps	1/11	1+2

**<For 5GHz Band>**

Test Items	Mode	Data Rate	Channel	Antenna
AC Power Line Conducted Emissions	Normal Link	Auto	-	-
Max. Peak Conducted Output Power	MCS0/20MHz	6.5 Mbps	149/157/165	1 / 2 / 1+2
	MCS0/40MHz	13.5 Mbps	151/159	1 / 2 / 1+2
	11a/BPSK	6 Mbps	149/157/165	1 / 2 / 1+2
Power Spectral Density 6dB Spectrum Bandwidth	MCS0/20MHz	6.5 Mbps	149/157/165	1+2
	MCS0/40MHz	13.5 Mbps	151/159	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
Radiated Emissions Below 1GHz	Normal Link	Auto	-	-
Radiated Emissions Above 1GHz	MCS0/20MHz	6.5 Mbps	149/157/165	1+2
	MCS0/40MHz	13.5 Mbps	151/159	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2
Band Edge Emissions	MCS0/20MHz	6.5 Mbps	149/157/165	1+2
	MCS0/40MHz	13.5 Mbps	151/159	1+2
	11a/BPSK	6 Mbps	149/157/165	1+2

**Note:**

The test modes were illustrated as below.

Test Mode 1: EUT

Test Mode 2: EUT with USB Cable

<For Conducted Emissions>:

Due to Mode 1 generated the worst test result, so it was recorded in this report.

<For Radiated Emissions Below 1GHz>:

Due to Mode 2 generated the worst test result, so it was recorded in this report.

**3.6. Table for Testing Locations**

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.	VCCI Reg. No
03CH03-HY	SAC	Hwa Ya	101377	IC 4088	-
CO04-HY	Conduction	Hwa Ya	-	-	-
TH01-HY	OVEN Room	Hwa Ya	-	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC); Fully Anechoic Chamber (FAC).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2KWM3945ABG
Mouse	HP	M-UAE96	DoC
Wireless AP	Planex	GW-AP54SGX	N/A

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

<For 2.4GHz Band>

#### Power Parameters of Draft n MCS0 20MHz Ant. 1 / Ant. 2

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
Draft n 20MHz Ant. 1 / Ant. 2	15	15	13

#### Power Parameters of Draft n MCS0 40MHz Ant. 1 / Ant. 2

Test Software Version	ART		
Frequency	2422 MHz	2437 MHz	2452 MHz
Draft n 40MHz Ant. 1 / Ant. 2	11.5	14	10

#### Power Parameters of IEEE 802.11b/g Ant. 1 / Ant. 2

Test Software Version	ART		
Frequency	2412 MHz	2437 MHz	2462 MHz
IEEE 802.11b Ant. 1 / Ant. 2	15	15	15
IEEE 802.11g Ant. 1 / Ant. 2	15	15	14

<For 5GHz Band>

**Power Parameters of Draft n MCS0 20MHz Ant. 1 / Ant. 2**

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825 MHz
Draft n 20MHz Ant. 1 / Ant. 2	10.5	11	11

**Power Parameters of Draft n MCS0 40MHz Ant. 1 / Ant. 2**

Test Software Version	ART	
Frequency	5755 MHz	5795 MHz
Draft n 40MHz Ant. 1 / Ant. 2	10.5	11

**Power Parameters of IEEE 802.11a Ant. 1 / Ant. 2**

Test Software Version	ART		
Frequency	5745 MHz	5785 MHz	5825 MHz
IEEE 802.11a Ant. 1 / Ant. 2	11	11	11

During the test, the following program under WIN XP was executed:


At the same time, "ART" was executed to control the EUT continuously transmit RF signal.

### 3.9. Test Configurations


#### 3.9.1. Radiation Emissions Test Configuration

Test Configuration: 9kHz~1GHz

Test Mode: Mode 2

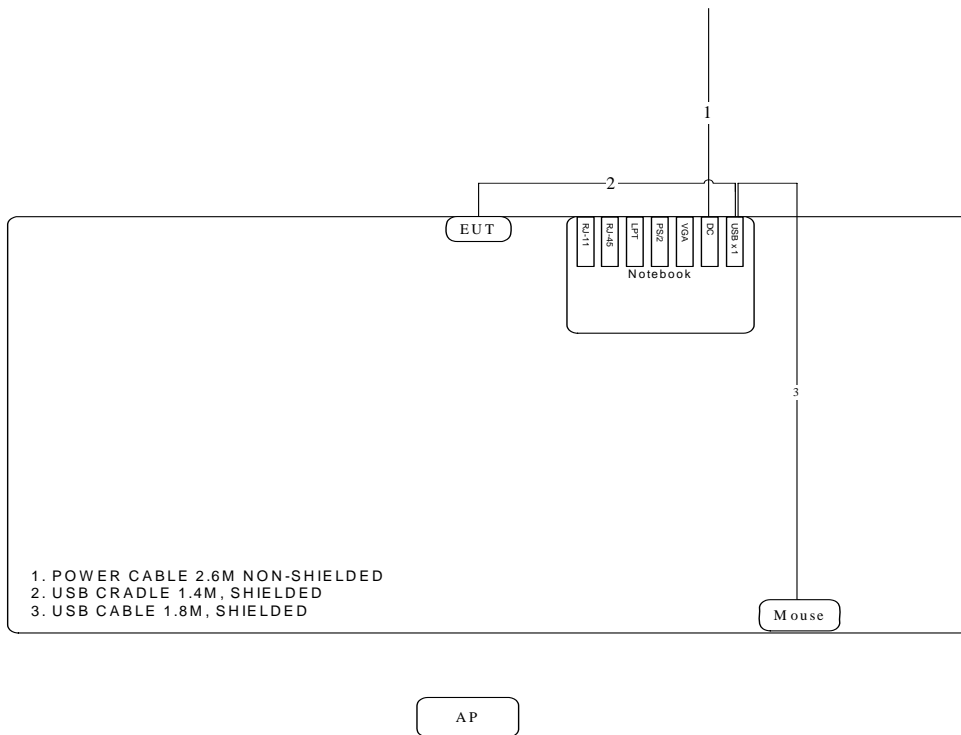


Test Configuration: Above 1GHz

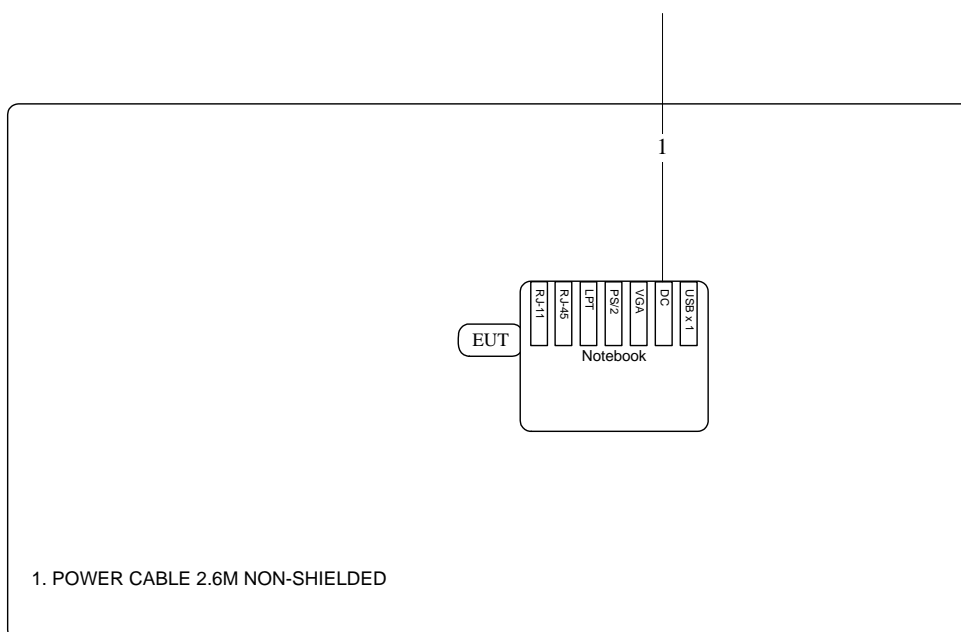

### 3.9.2. AC Power Line Conduction Emissions Test Configuration

Test Mode: Mode 1

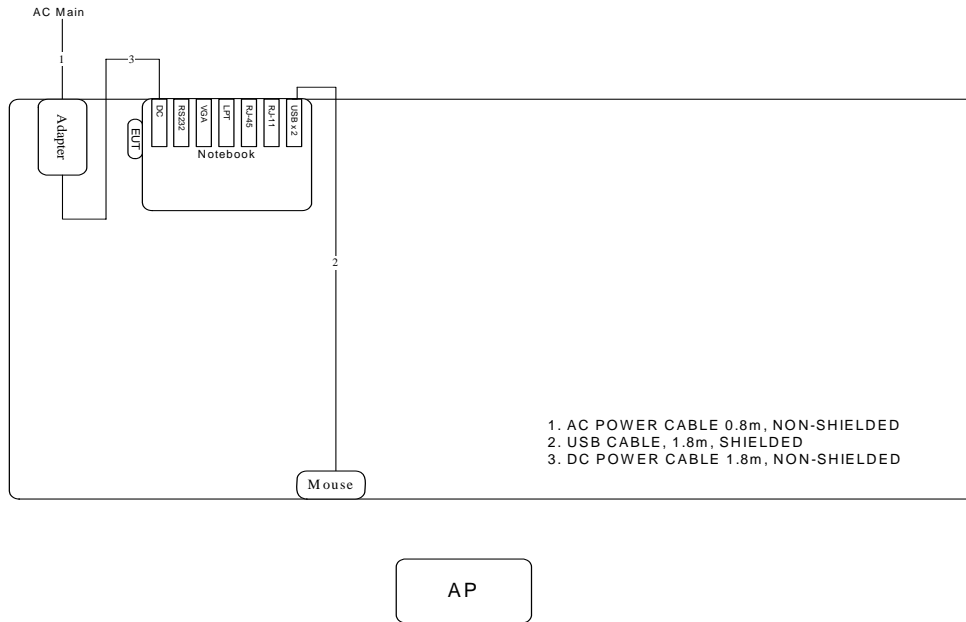



## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product which is designed to be connected to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.4. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

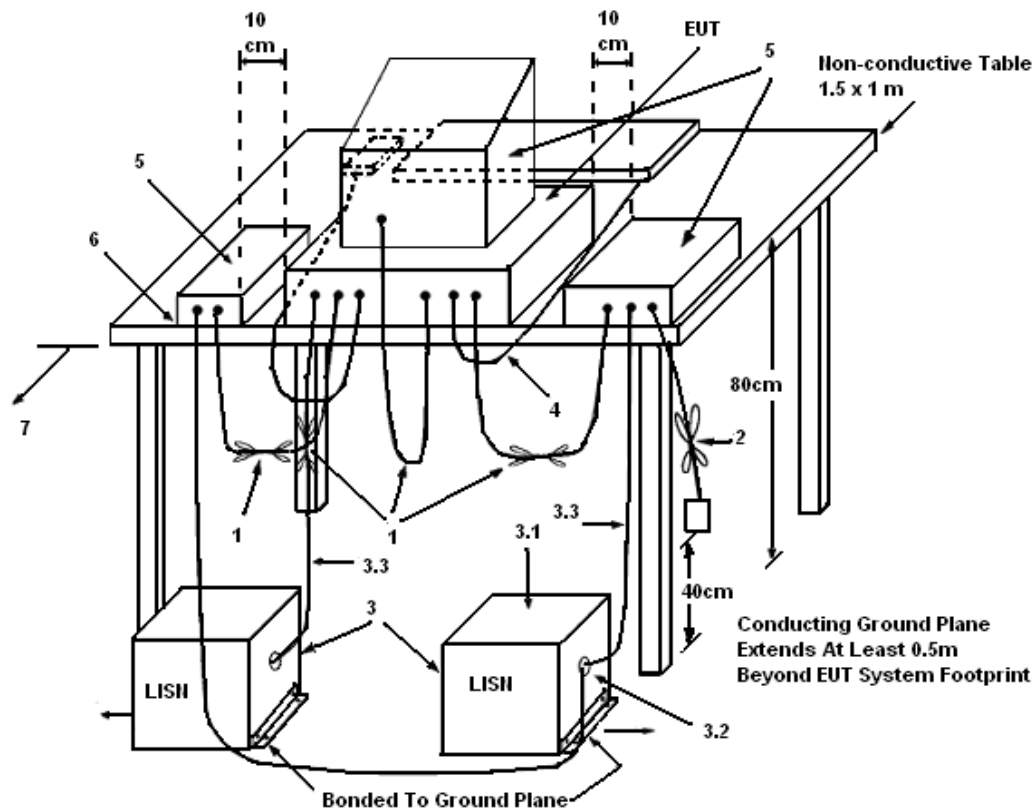

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50 Ω. LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


#### 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	21°C	Humidity	55%
Test Engineer	Howar Sung	Phase	Line
Configuration	Mode 1		

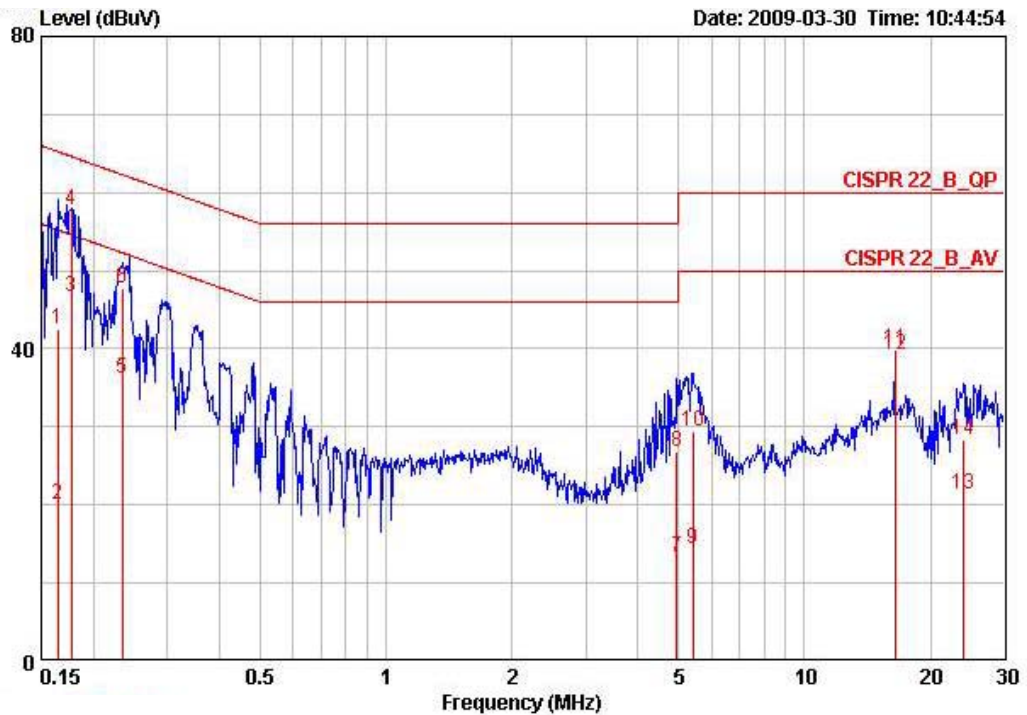

	Freq	Level	Over	Limit	Read	LISN	Cable	Remark
	MHz	dBuV	Limit	Line	Level	Factor	Loss	
			dB	dBuV	dBuV	dB	dB	
1	0.16414	42.46	-22.79	65.25	42.19	0.07	0.20	QP
2	0.16414	20.10	-35.15	55.25	19.83	0.07	0.20	AVERAGE
3	0.17714	46.69	-7.93	54.62	46.43	0.06	0.20	AVERAGE
4	0.17714	57.68	-6.94	64.62	57.42	0.06	0.20	QP
5	0.23473	36.28	-16.01	52.28	36.03	0.05	0.20	AVERAGE
6	0.23473	47.85	-14.44	62.28	47.60	0.05	0.20	QP
7	4.952	13.25	-32.75	46.00	12.79	0.16	0.30	AVERAGE
8	4.952	26.73	-29.27	56.00	26.27	0.16	0.30	QP
9	5.424	14.46	-35.54	50.00	13.98	0.18	0.30	AVERAGE
10	5.424	29.42	-30.58	60.00	28.94	0.18	0.30	QP
11	16.464	39.85	-20.15	60.00	38.81	0.64	0.40	QP
12	16.464	39.22	-10.78	50.00	38.18	0.64	0.40	AVERAGE
13	24.015	21.44	-28.56	50.00	19.87	1.07	0.50	AVERAGE
14	24.015	28.38	-31.62	60.00	26.81	1.07	0.50	QP

Temperature	24°C	Humidity	56%
Test Engineer	Howar Sung	Phase	Neutral
Configuration	Mode 1		

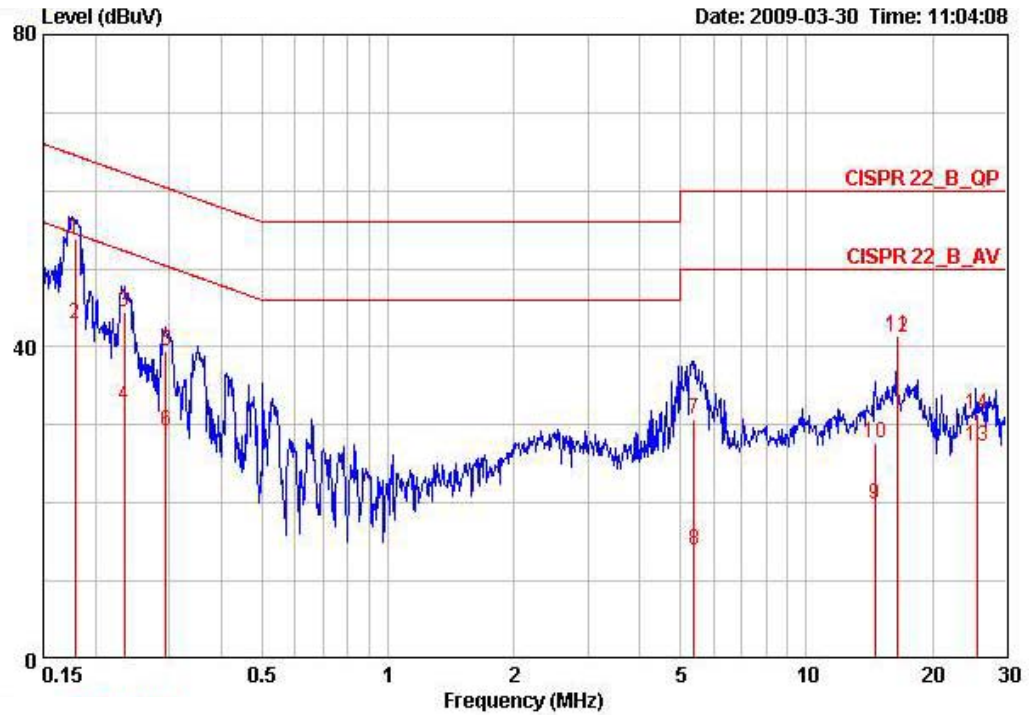

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.17872	53.91	-10.64	64.54	53.62	0.09	0.20	QP
2	0.17872	42.90	-11.65	54.54	42.61	0.09	0.20	AVERAGE
3	0.23409	44.51	-17.80	62.30	44.23	0.08	0.20	QP
4	0.23409	32.55	-19.76	52.30	32.27	0.08	0.20	AVERAGE
5	0.29398	39.51	-20.90	60.41	39.24	0.07	0.20	QP
6	0.29398	29.31	-21.10	50.41	29.04	0.07	0.20	AVERAGE
7	5.390	30.83	-29.17	60.00	30.31	0.22	0.30	QP
8	5.390	14.00	-36.00	50.00	13.48	0.22	0.30	AVERAGE
9	14.594	19.93	-30.07	50.00	18.97	0.56	0.40	AVERAGE
10	14.594	27.66	-32.34	60.00	26.70	0.56	0.40	QP
11	16.464	41.40	-18.60	60.00	40.35	0.65	0.40	QP
12	16.464	41.16	-8.84	50.00	40.11	0.65	0.40	AVERAGE
13	25.489	27.29	-22.71	50.00	25.48	1.21	0.60	AVERAGE
14	25.489	31.44	-28.56	60.00	29.63	1.21	0.60	QP

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. Maximum Conducted Output Power Measurement

### 4.2.1. Limit

For systems using digital modulation in the 2400-2483.5MHz, the limit for peak output power is 30dBm. The limited has to be reduced by the amount in dB that the gain of the antenna exceed 6dBi. In case of point-to-point operation, the limit has to be reduced by 1dB for every 3dB that the directional gain of the antenna exceeds 6dBi. Systems operating in the 5725-5850 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi without any corresponding reduction in transmitter conducted output power.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RB	1MHz
VB	3MHz
Detector	RMS
Trace	Max Hold
Sweep Time	Auto

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. Test was performed in accordance with Measurement of Digital Transmission Systems Operating under Section 15.247 March 23, 2005.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

### 4.2.4. Test Setup Layout

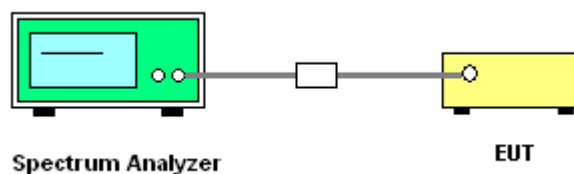

### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.2.7. Test Result of Maximum Conducted Output Power

<b>Temperature</b>	23°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Draft n
<b>Test Date</b>	Mar. 28, 2009 ~ Apr. 22, 2009		

<For 2.4GHz Band>

##### Configuration Draft n MCS0 20MHz Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.05	30.00	Complies
6	2437 MHz	15.91	30.00	Complies
11	2462 MHz	13.83	30.00	Complies

##### Configuration Draft n MCS0 20MHz Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.00	30.00	Complies
6	2437 MHz	16.09	30.00	Complies
11	2462 MHz	13.83	30.00	Complies

##### Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.04	30.00	Complies
6	2437 MHz	19.01	30.00	Complies
11	2462 MHz	16.84	30.00	Complies

**Configuration Drafft n MCS0 40MHz Ant. 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	12.14	30.00	Complies
6	2437 MHz	14.51	30.00	Complies
9	2452 MHz	11.30	30.00	Complies

**Configuration Drafft n MCS0 40MHz Ant. 2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	12.20	30.00	Complies
6	2437 MHz	14.36	30.00	Complies
9	2452 MHz	11.33	30.00	Complies

**Configuration Drafft n MCS0 40MHz Ant. 1 + Ant. 2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
3	2422 MHz	15.18	30.00	Complies
6	2437 MHz	17.45	30.00	Complies
9	2452 MHz	14.33	30.00	Complies

<For 5GHz Band>

Configuration Draft n MCS0 20MHz Ant. 1

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	12.32	30.00	Complies
157	5785 MHz	13.27	30.00	Complies
165	5825 MHz	13.43	30.00	Complies

Configuration Draft n MCS0 20MHz Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	11.86	30.00	Complies
157	5785 MHz	13.77	30.00	Complies
165	5825 MHz	14.18	30.00	Complies

Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	15.11	30.00	Complies
157	5785 MHz	16.54	30.00	Complies
165	5825 MHz	16.83	30.00	Complies



**Configuration Drafft n MCS0 40MHz Ant. 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	12.22	30.00	Complies
159	5795 MHz	13.13	30.00	Complies

**Configuration Drafft n MCS0 40MHz Ant. 2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	12.20	30.00	Complies
159	5795 MHz	13.96	30.00	Complies

**Configuration Drafft n MCS0 40MHz Ant. 1 + Ant. 2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
151	5755 MHz	15.22	30.00	Complies
159	5795 MHz	16.58	30.00	Complies

<b>Temperature</b>	23°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a/b/g
<b>Test Date</b>	Mar. 28, 2009 ~ Apr. 24, 2009		

**Configuration IEEE 802.11b Ant. 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.66	30.00	Complies
6	2437 MHz	14.34	30.00	Complies
11	2462 MHz	14.75	30.00	Complies

**Configuration IEEE 802.11b Ant. 2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	14.27	30.00	Complies
6	2437 MHz	14.57	30.00	Complies
11	2462 MHz	14.83	30.00	Complies

**Configuration IEEE 802.11b Ant. 1 + Ant. 2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	17.48	30.00	Complies
6	2437 MHz	17.47	30.00	Complies
11	2462 MHz	17.80	30.00	Complies

**Configuration IEEE 802.11g Ant. 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.01	30.00	Complies
6	2437 MHz	16.08	30.00	Complies
11	2462 MHz	15.27	30.00	Complies

**Configuration IEEE 802.11g Ant. 2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	16.26	30.00	Complies
6	2437 MHz	16.47	30.00	Complies
11	2462 MHz	15.43	30.00	Complies

**Configuration IEEE 802.11g Ant. 1 + Ant. 2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
1	2412 MHz	19.15	30.00	Complies
6	2437 MHz	19.29	30.00	Complies
11	2462 MHz	18.36	30.00	Complies

**Configuration IEEE 802.11a Ant. 1**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	12.96	30.00	Complies
157	5785 MHz	13.17	30.00	Complies
165	5825 MHz	13.46	30.00	Complies


**Configuration IEEE 802.11a Ant. 2**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	12.66	30.00	Complies
157	5785 MHz	14.08	30.00	Complies
165	5825 MHz	14.23	30.00	Complies

**Configuration IEEE 802.11a Ant. 1 + Ant. 2**


Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
149	5745 MHz	15.82	30.00	Complies
157	5785 MHz	16.66	30.00	Complies
165	5825 MHz	16.87	30.00	Complies

### Channel Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2412 MHz

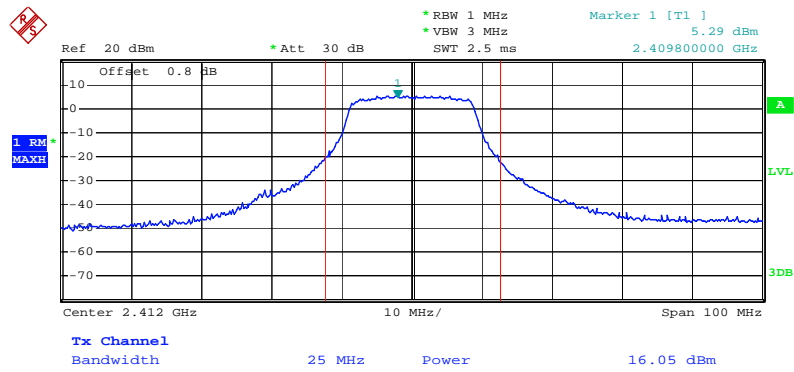


Date: 28.MAR.2009 12:28:00

### Channel Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2437 MHz

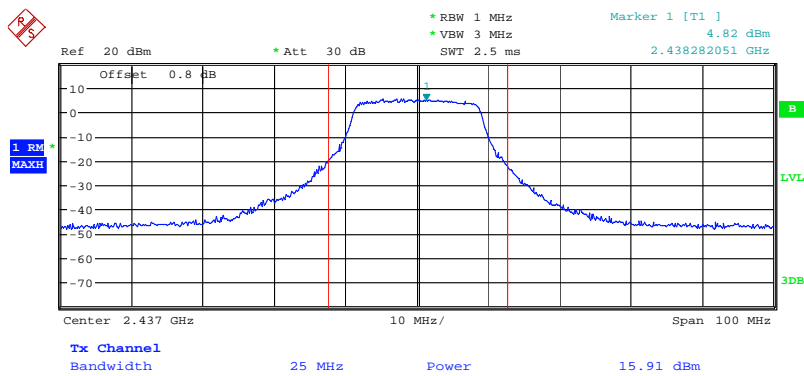


Date: 22.APR.2009 23:26:03

### Channel Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 1 / 2462 MHz

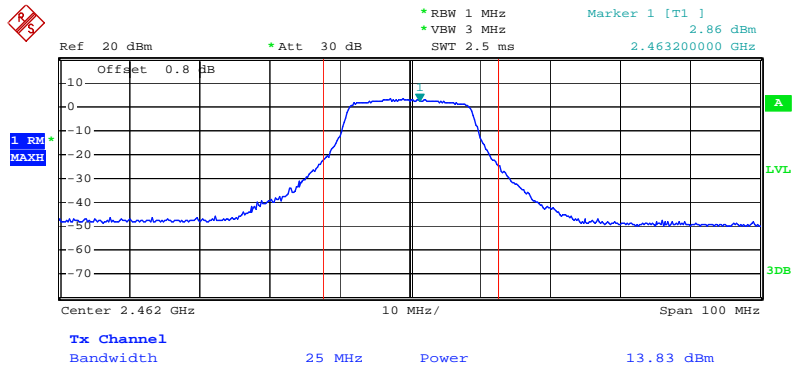

Date: 28.MAR.2009 12:23:48


### Channel Output Power Plot on Configuration Draft n MCS0 20MHz Ant. 2 / 2412 MHz

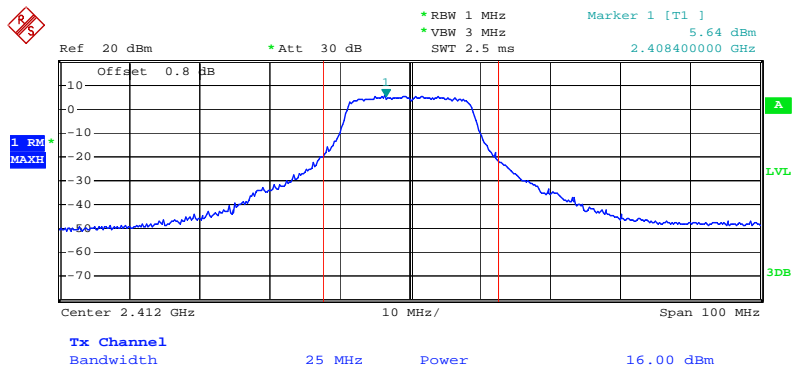

Date: 28.MAR.2009 12:27:14




### Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 1 / 2422 MHz

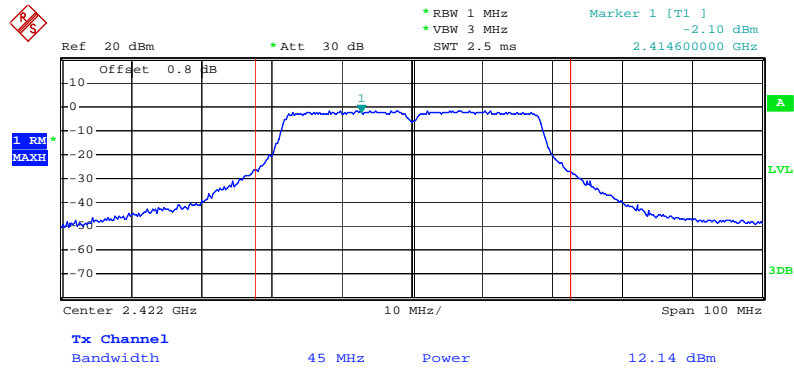

Date: 28.MAR.2009 12:29:15


### Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 1 / 2437 MHz

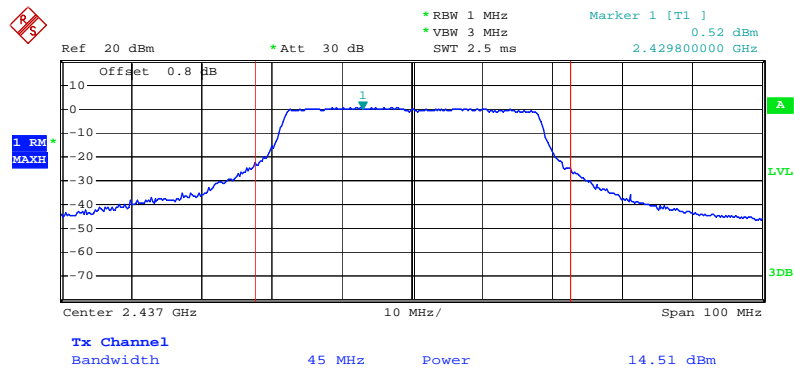

Date: 28.MAR.2009 12:31:52




### Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 1 / 2452 MHz

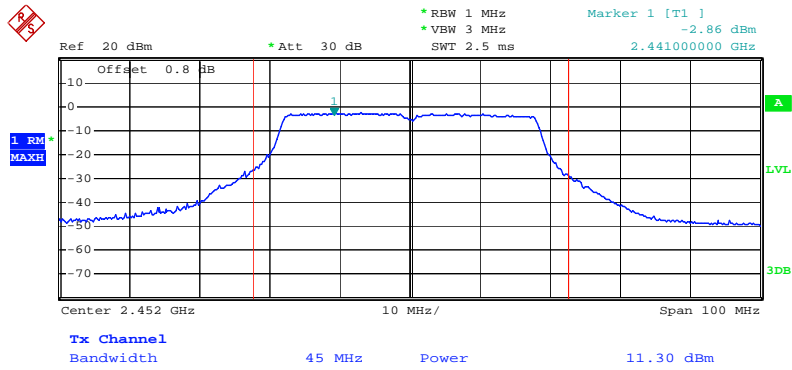


Date: 28.MAR.2009 12:32:51

### Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 2 / 2422 MHz

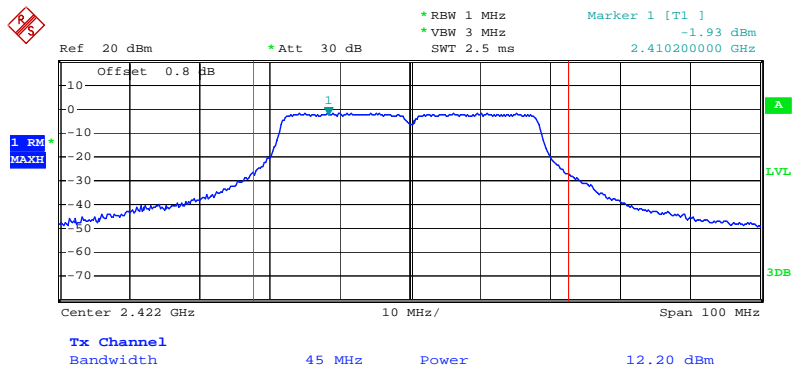


Date: 28.MAR.2009 12:30:08

### Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 2 / 2437 MHz

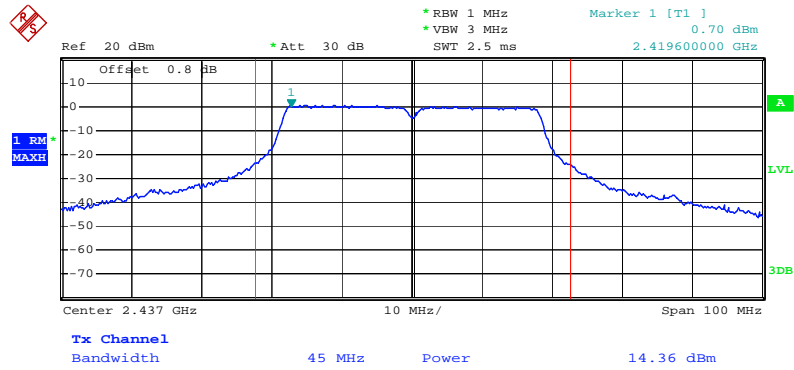

Date: 28.MAR.2009 12:31:05

### Channel Output Power Plot on Configuration Draft n MCS0 40MHz Ant. 2 / 2452 MHz

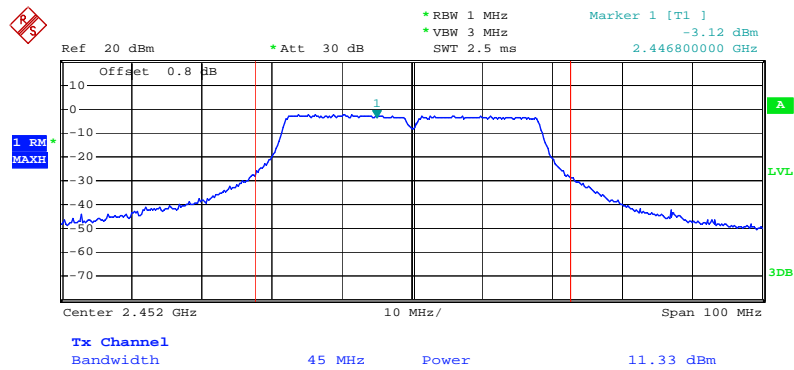


Date: 28.MAR.2009 12:33:44








**Channel Output Power Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 / 5755 MHz**

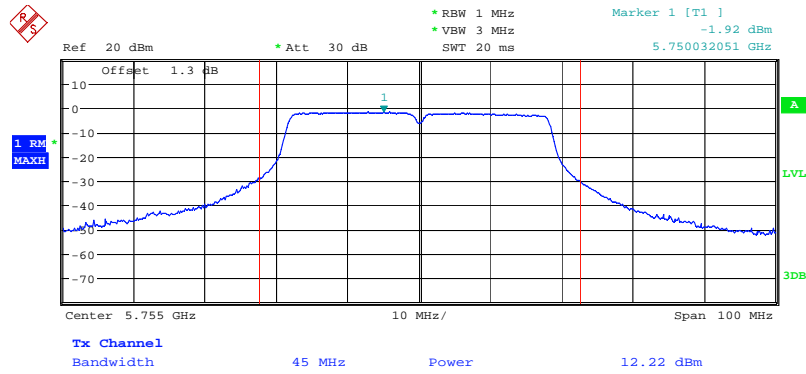


Date: 22.APR.2009 22:38:13

**Channel Output Power Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 / 5795 MHz**

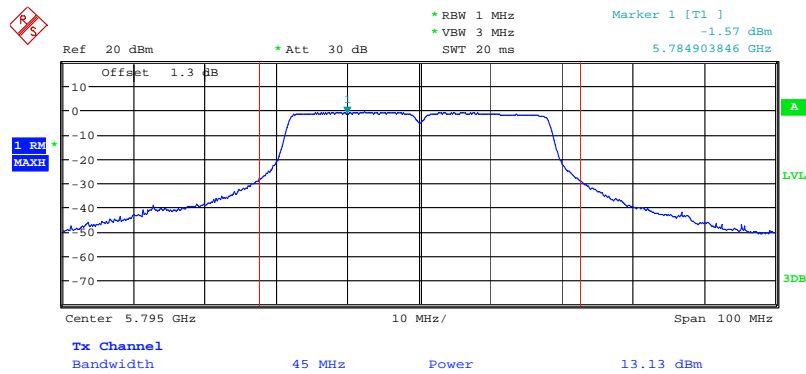


Date: 22.APR.2009 22:36:26

Channel Output Power Plot on Configuration 11a Draft n MCS0 40MHz Ant. 2 / 5755 MHz

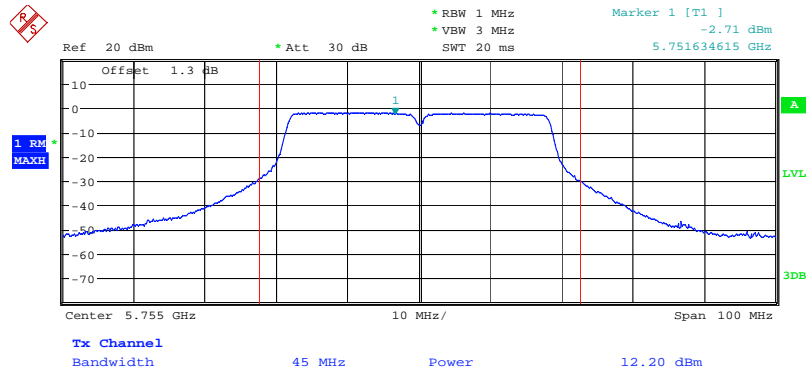


Date: 22.APR.2009 22:39:45

Channel Output Power Plot on Configuration 11a Draft n MCS0 40MHz Ant. 2 / 5795 MHz

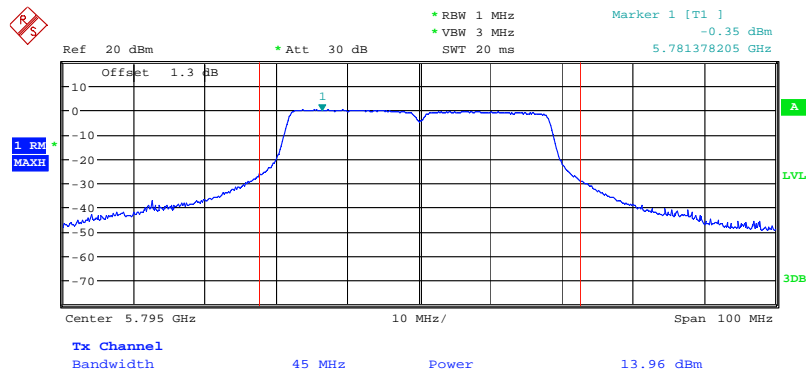


Date: 22.APR.2009 22:34:11

### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 1 / 2412 MHz

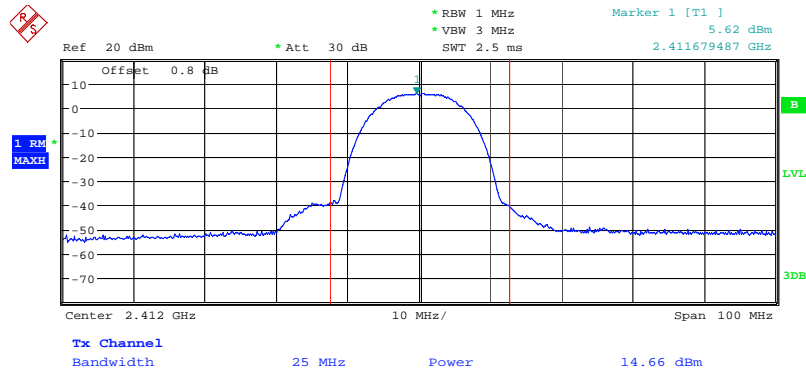

Date: 22.APR.2009 23:12:25


### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 1 / 2437 MHz

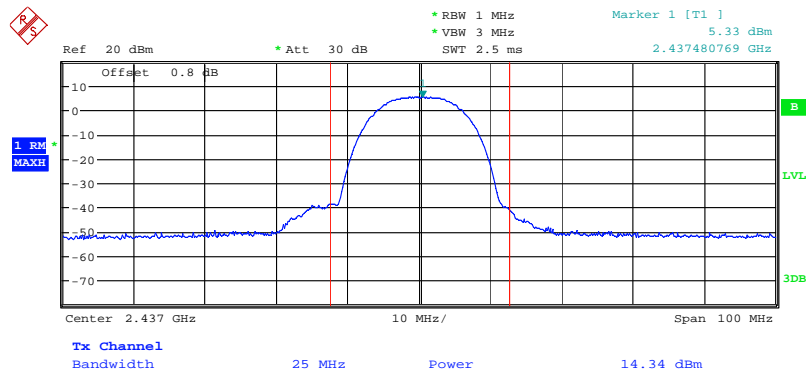

Date: 22.APR.2009 23:15:56




### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 1 / 2462 MHz

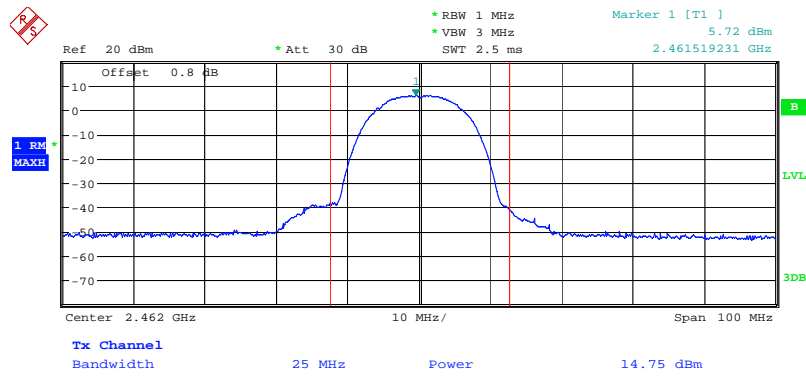

Date: 22.APR.2009 23:17:17


### Conducted Output Power Plot on Configuration IEEE 802.11b Ant. 2 / 2412 MHz

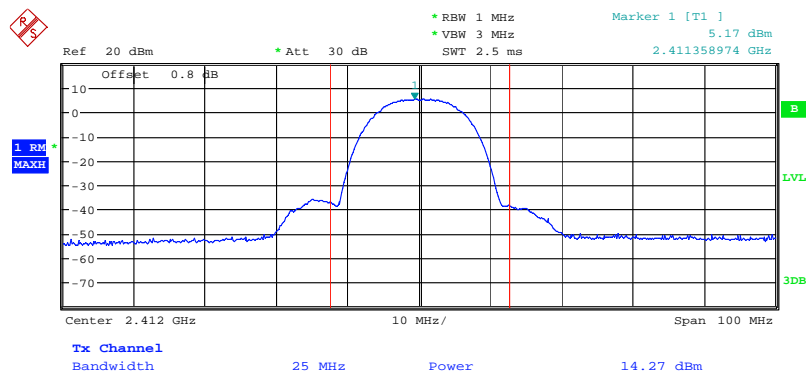

Date: 22.APR.2009 23:13:25




### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 1 / 2412 MHz

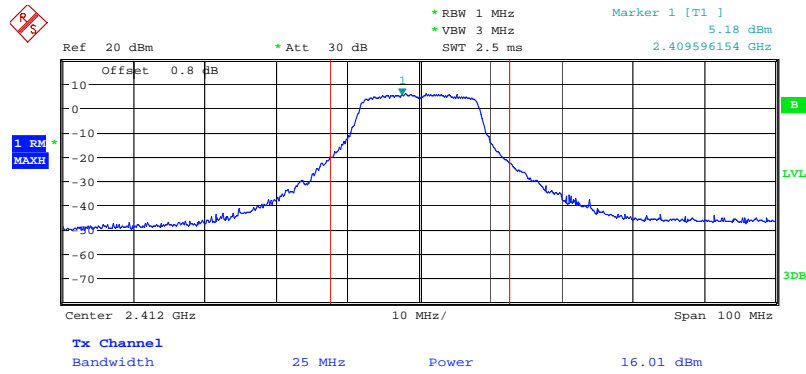


Date: 22.APR.2009 23:24:27

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 1 / 2437 MHz

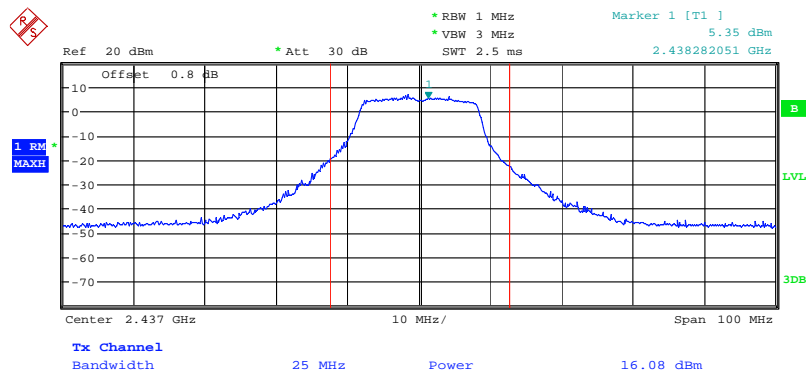


Date: 22.APR.2009 23:21:59

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 1 / 2462 MHz

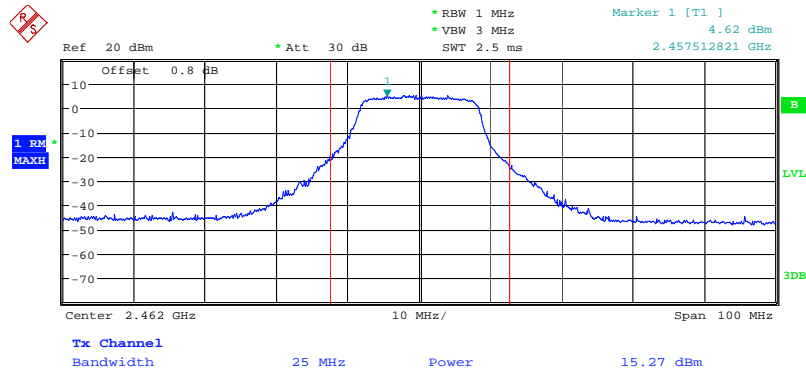


Date: 22.APR.2009 23:21:10

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 2 / 2412 MHz

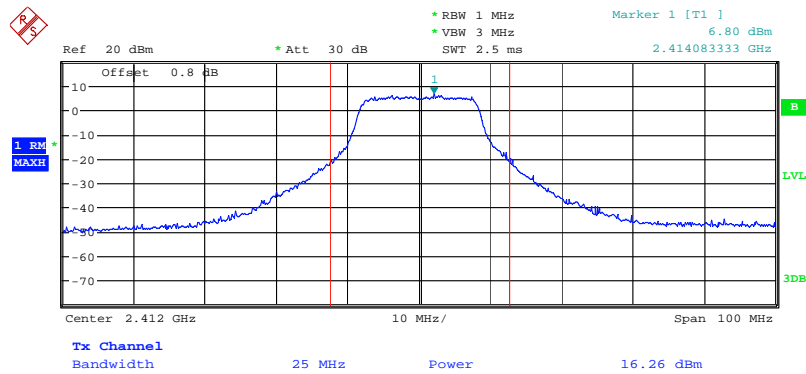


Date: 22.APR.2009 23:23:46

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 2 / 2437 MHz

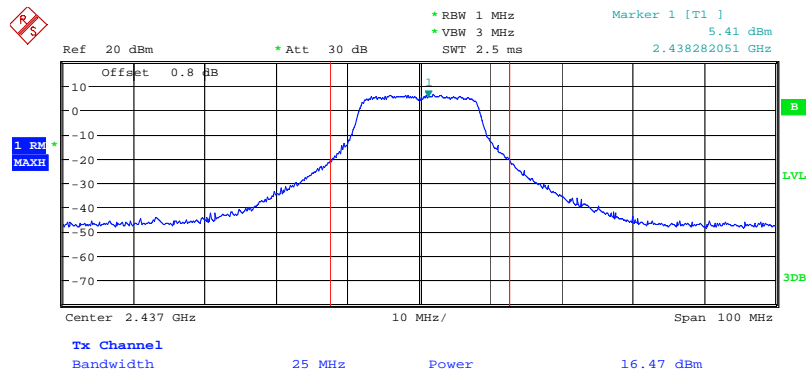


Date: 22.APR.2009 23:23:00

### Conducted Output Power Plot on Configuration IEEE 802.11g Ant. 2 / 2462 MHz

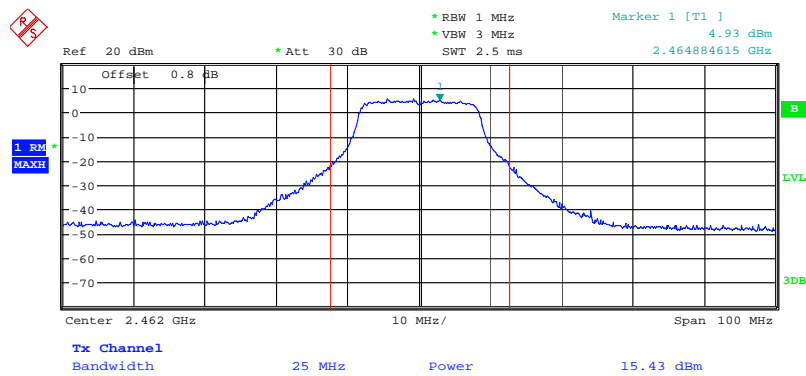


Date: 22.APR.2009 23:19:49

**Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1 / 5745 MHz**

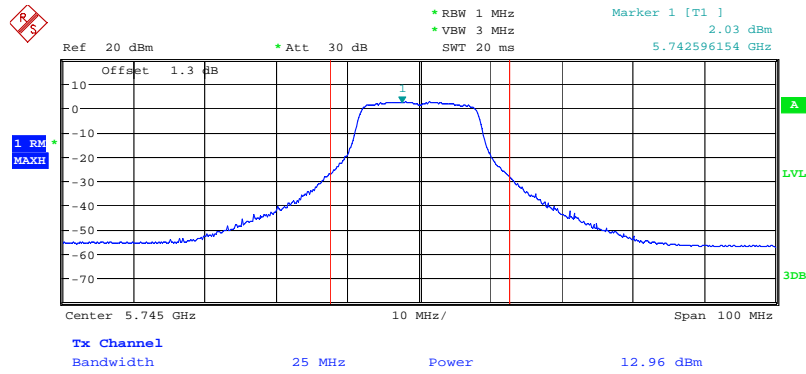


Date: 22.APR.2009 21:07:48

**Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1 / 5785 MHz**

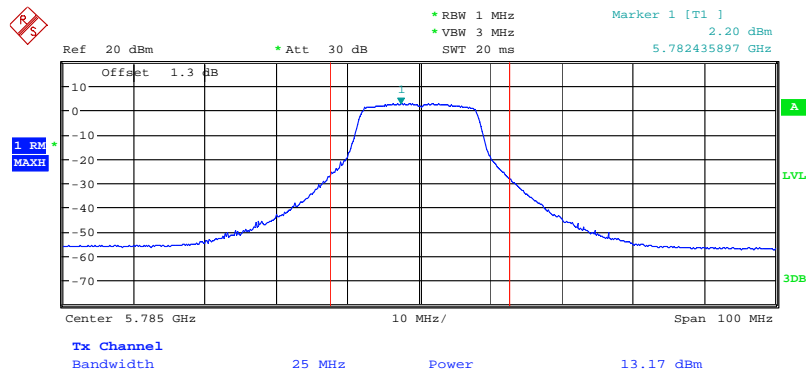


Date: 22.APR.2009 21:35:46

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 1 / 5825 MHz

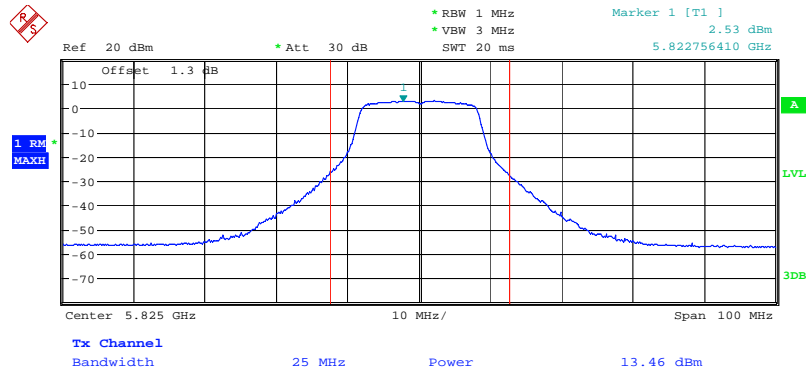


Date: 22.APR.2009 21:37:19

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 2 / 5745 MHz

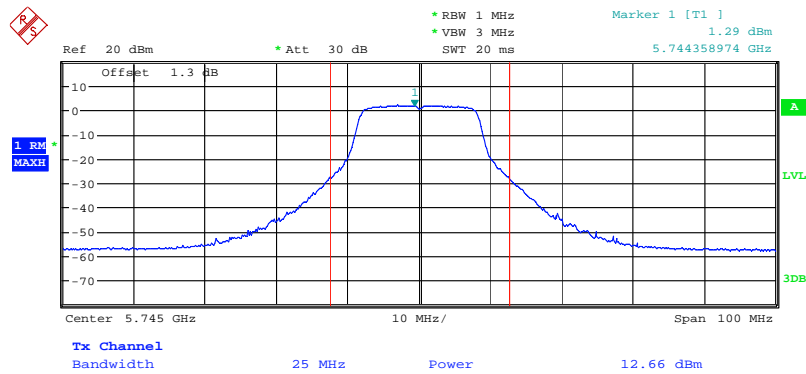


Date: 22.APR.2009 21:09:47

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 2 / 5785 MHz

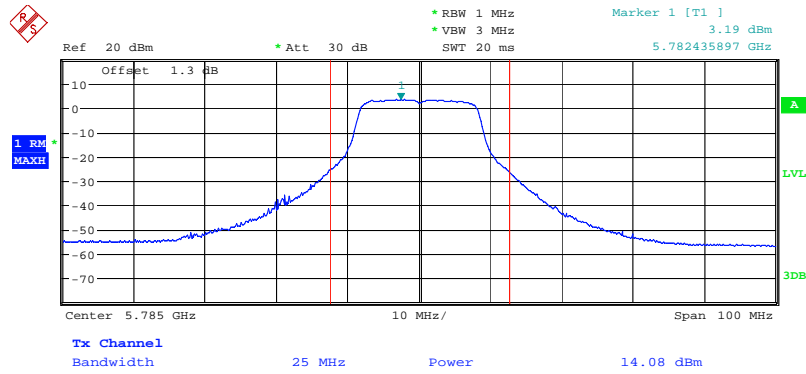

Date: 22.APR.2009 21:35:04

### Conducted Output Power Plot on Configuration IEEE 802.11a Ant. 2 / 5825 MHz

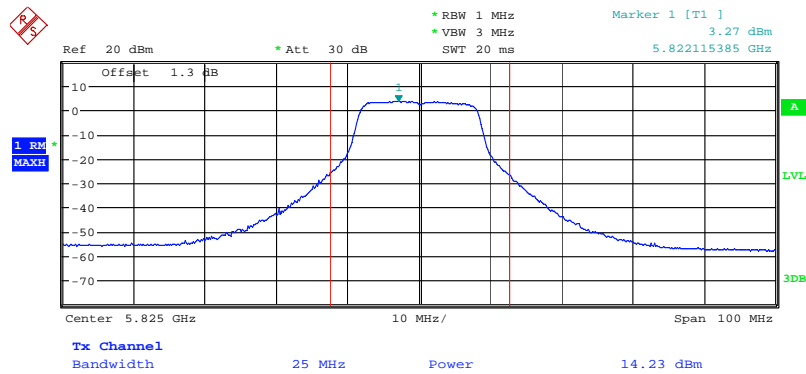

Date: 22.APR.2009 21:38:06



### 4.3. Power Spectral Density Measurement

#### 4.3.1. Limit

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3 kHz band during any time interval of continuous transmission.

#### 4.3.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	30 kHz
RB	3 kHz
VB	30 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	10s

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser.
2. Set RBW of spectrum analyzer to 3kHz and VBW to 30kHz. Set Detector to Peak, Trace to Max Hold.
3. Mark the frequency with maximum peak power as the center of the display of the spectrum.
4. Set the span to 30kHz and the sweep time to 10s and record the maximum peak value.
5. Measuring multiple antennas, the connector is required to link with spectrum analyser through a combiner.

#### 4.3.4. Test Setup Layout

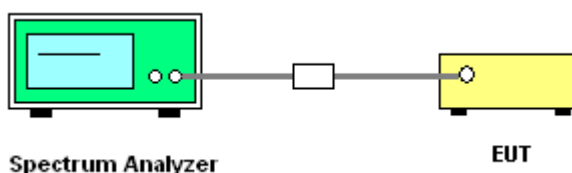

#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.3.7. Test Result of Power Spectral Density

<b>Temperature</b>	23°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Draft n
<b>Test Date</b>	Mar. 28, 2009 ~ Apr. 24, 2009		

<For 2.4GHz Band>

##### Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-6.02	8.00	Complies
6	2437 MHz	-6.29	8.00	Complies
11	2462 MHz	-7.24	8.00	Complies

##### Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
3	2422 MHz	-3.38	8.00	Complies
6	2437 MHz	-2.66	8.00	Complies
9	2452 MHz	-5.88	8.00	Complies

<For 5GHz Band>

##### Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
149	5745 MHz	-9.72	8.00	Complies
157	5785 MHz	-8.76	8.00	Complies
165	5825 MHz	-8.12	8.00	Complies

##### Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
151	5755 MHz	-11.98	8.00	Complies
159	5795 MHz	-12.37	8.00	Complies

<b>Temperature</b>	23°C	<b>Humidity</b>	62%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a/b/g
<b>Test Date</b>	Mar. 28, 2009 ~ Apr. 24, 2009		

**Configuration IEEE 802.11b Ant. 1 + Ant. 2**

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-7.80	8.00	Complies
6	2437 MHz	-7.88	8.00	Complies
11	2462 MHz	-7.44	8.00	Complies


**Configuration IEEE 802.11g Ant. 1 + Ant. 2**

Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
1	2412 MHz	-4.74	8.00	Complies
6	2437 MHz	-4.86	8.00	Complies
11	2462 MHz	-4.81	8.00	Complies

**Configuration IEEE 802.11a Ant. 1 + Ant. 2**


Channel	Frequency	Power Density (dBm / 3kHz)	Max. Limit (dBm / 3kHz)	Result
149	5745 MHz	-9.58	8.00	Complies
157	5785 MHz	-9.84	8.00	Complies
165	5825 MHz	-9.47	8.00	Complies

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 1 + Ant. 2 / 2412 MHz

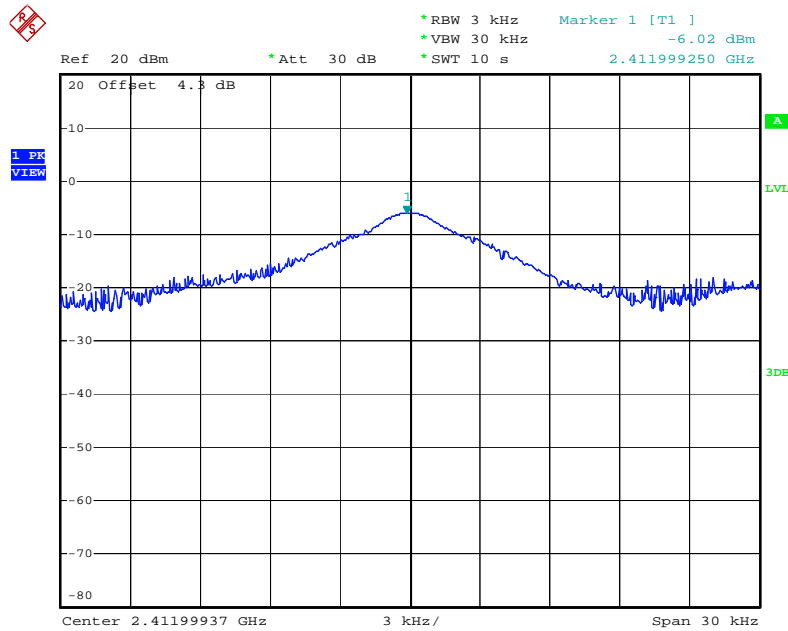


Date: 28.MAR.2009 15:36:37

Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 1 + Ant. 2 / 2437 MHz

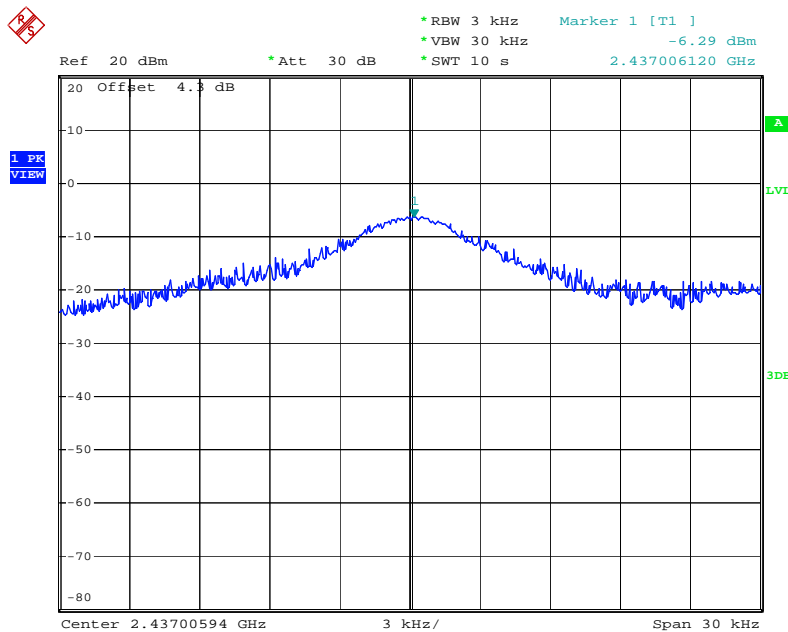


Date: 24.APR.2009 16:11:55

**Power Density Plot on Configuration Drafft n MCS0 20MHz Ant. 1 + Ant. 2 / 2462 MHz**

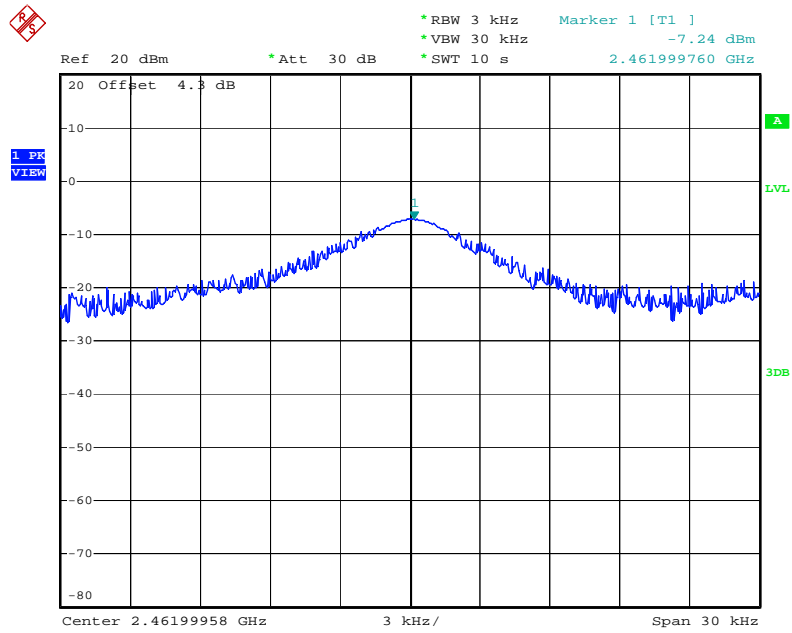


Date: 28.MAR.2009 15:31:43

**Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 1 + Ant. 2 / 2422 MHz**

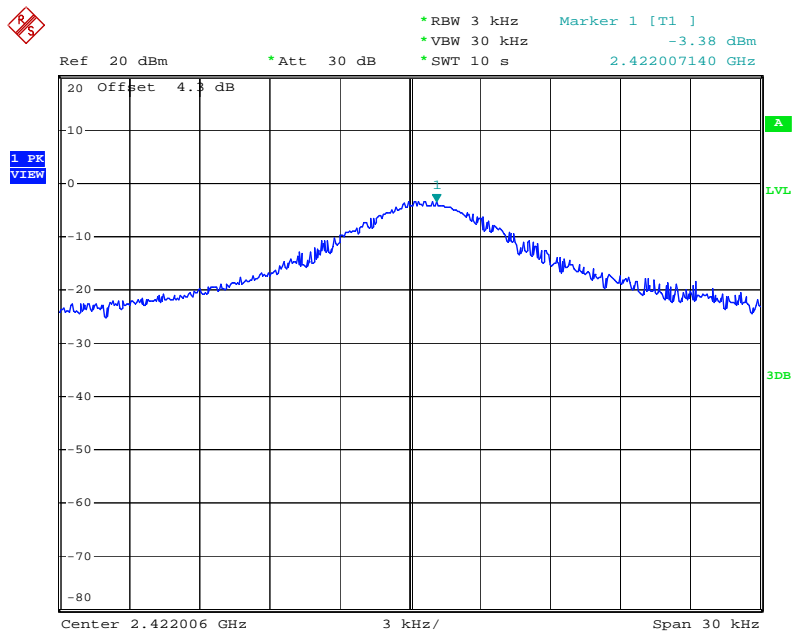


Date: 24.APR.2009 16:27:09

**Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 1 + Ant. 2 / 2437 MHz**

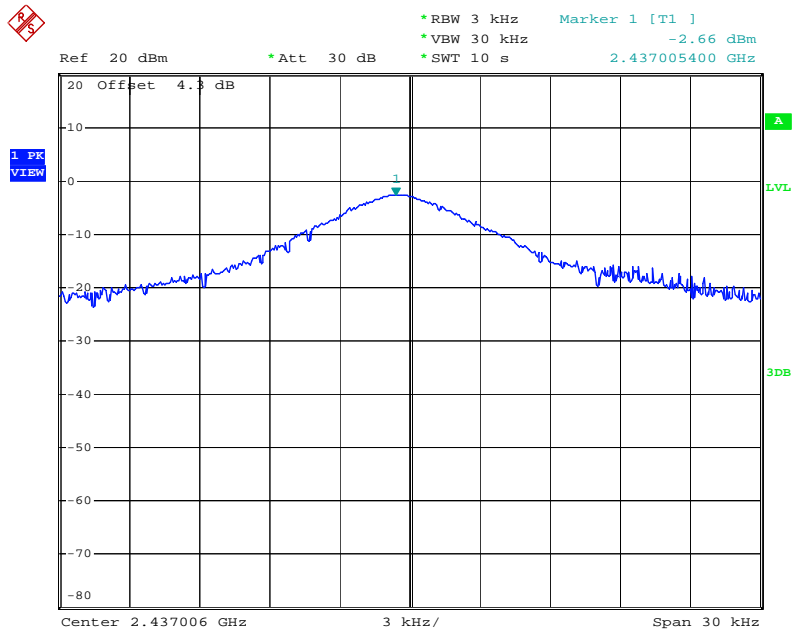

Date: 24.APR.2009 16:25:26


**Power Density Plot on Configuration Drafft n MCS0 40MHz Ant. 1 + Ant. 2 / 2452 MHz**

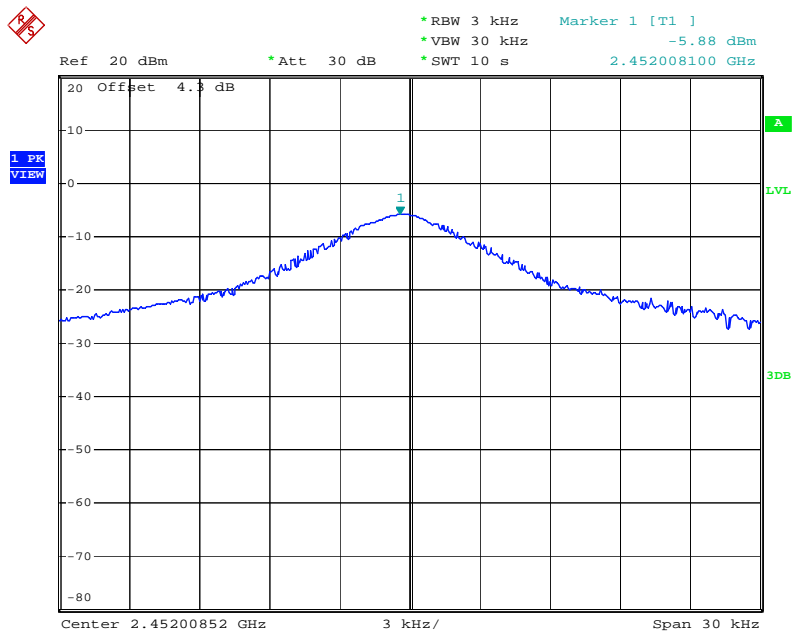

Date: 24.APR.2009 16:28:24




**Power Density Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 5825 MHz**

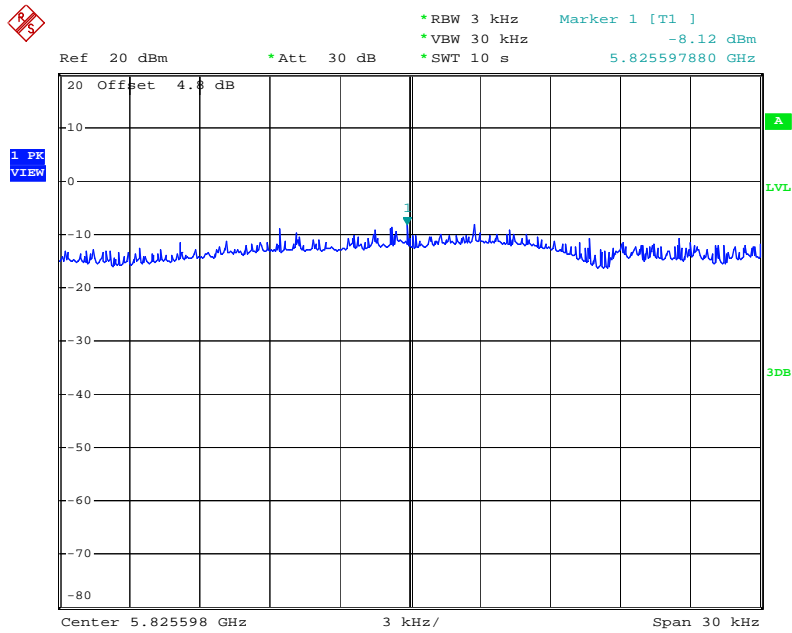

Date: 24.APR.2009 14:44:43


**Power Density Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 5755 MHz**

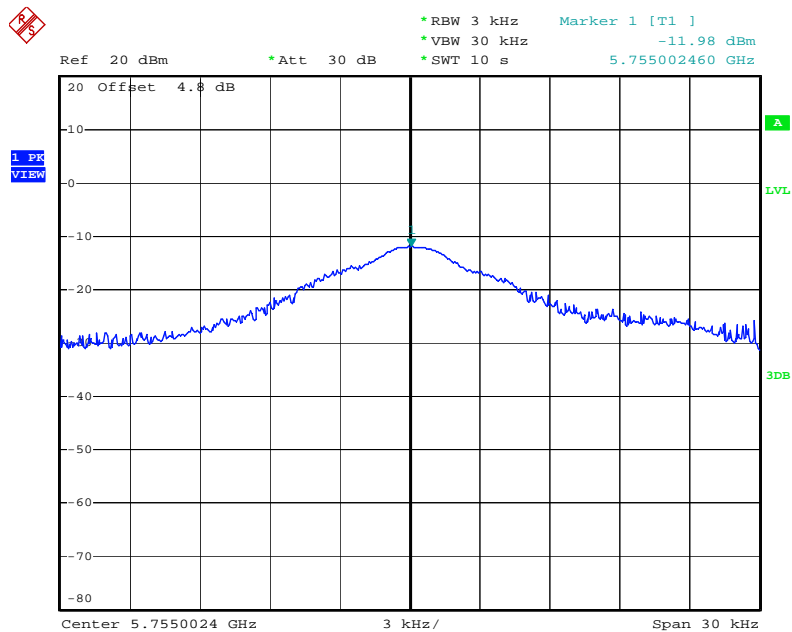

Date: 24.APR.2009 04:24:16




Power Density Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 5795 MHz

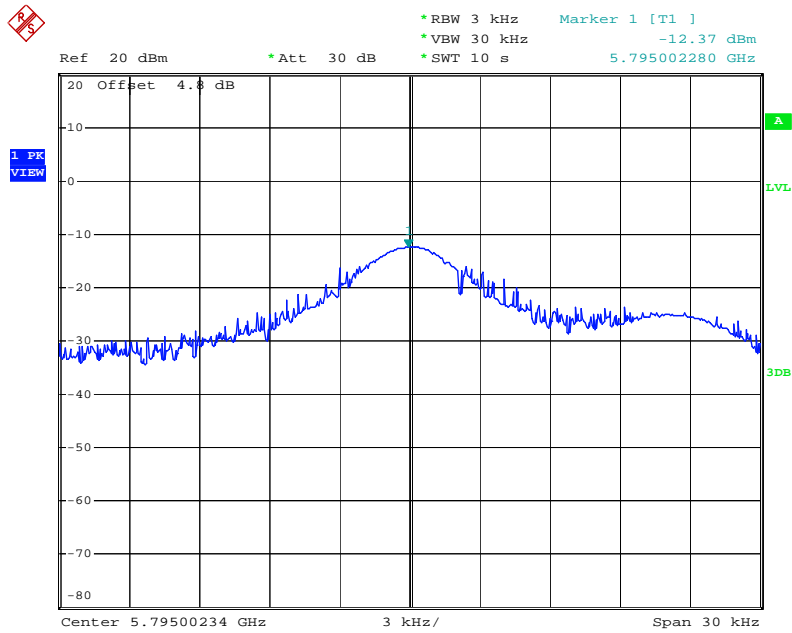


Date: 24.APR.2009 14:59:39

Power Density Plot on Configuration IEEE 802.11b Ant. 1 + Ant. 2 / 2412 MHz

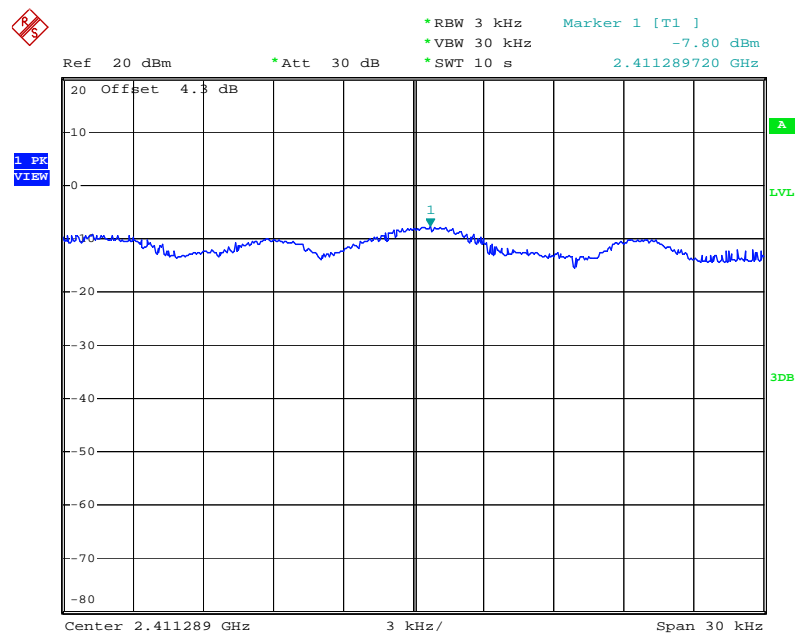


Date: 24.APR.2009 15:28:22

**Power Density Plot on Configuration IEEE 802.11b Ant. 1 + Ant. 2 / 2437 MHz**

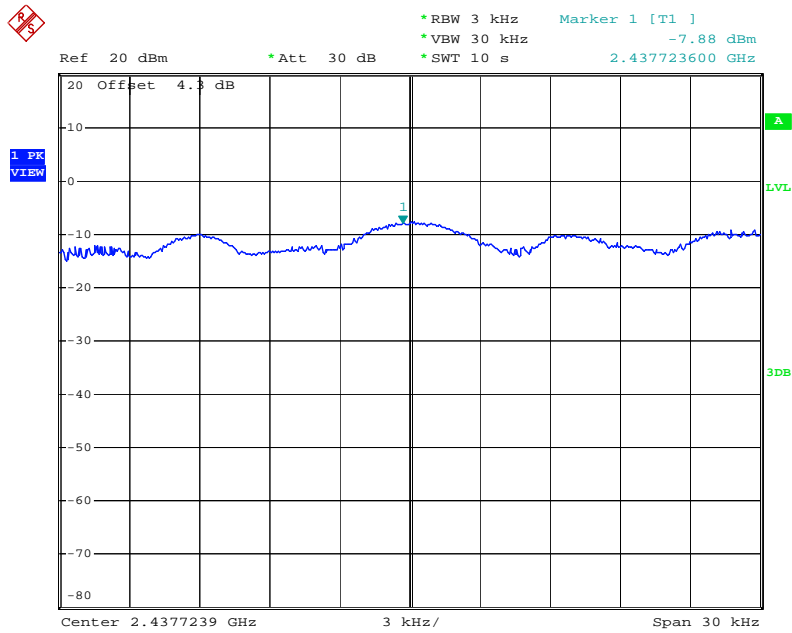


Date: 24.APR.2009 15:33:02

**Power Density Plot on Configuration IEEE 802.11b Ant. 1 + Ant. 2 / 2462 MHz**

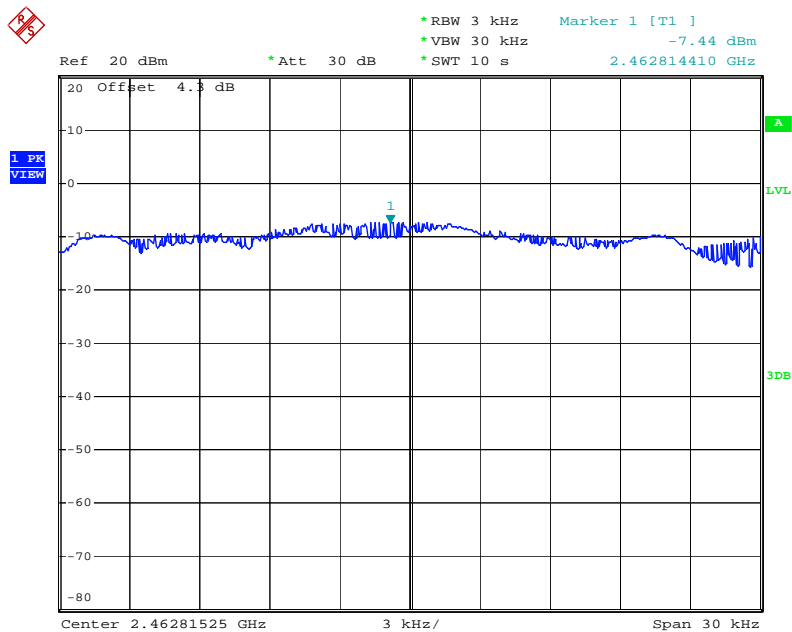


Date: 24.APR.2009 15:35:50

**Power Density Plot on Configuration IEEE 802.11g Ant. 1 + Ant. 2 / 2412 MHz**

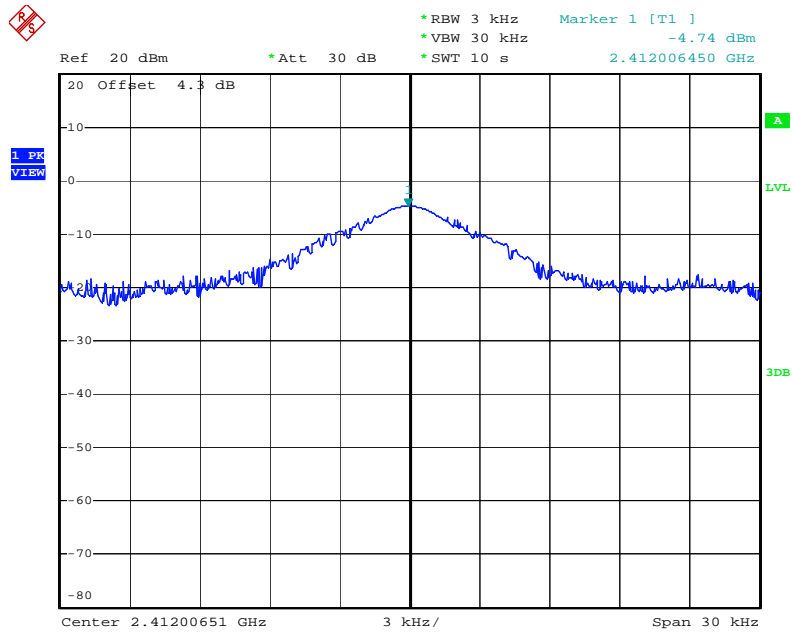


Date: 24.APR.2009 15:54:09

**Power Density Plot on Configuration IEEE 802.11g Ant. 1 + Ant. 2 / 2437 MHz**

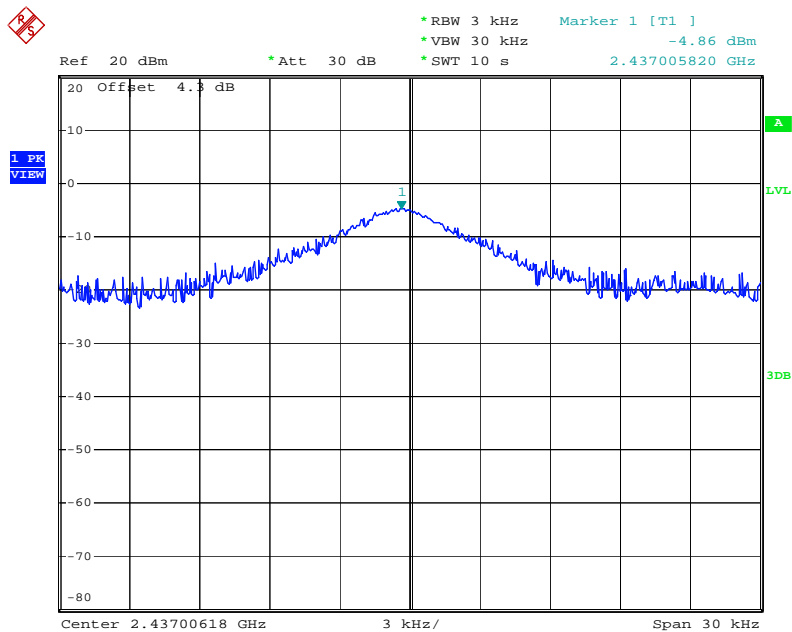


Date: 24.APR.2009 16:07:13

**Power Density Plot on Configuration IEEE 802.11g Ant. 1 + Ant. 2 / 2462 MHz**

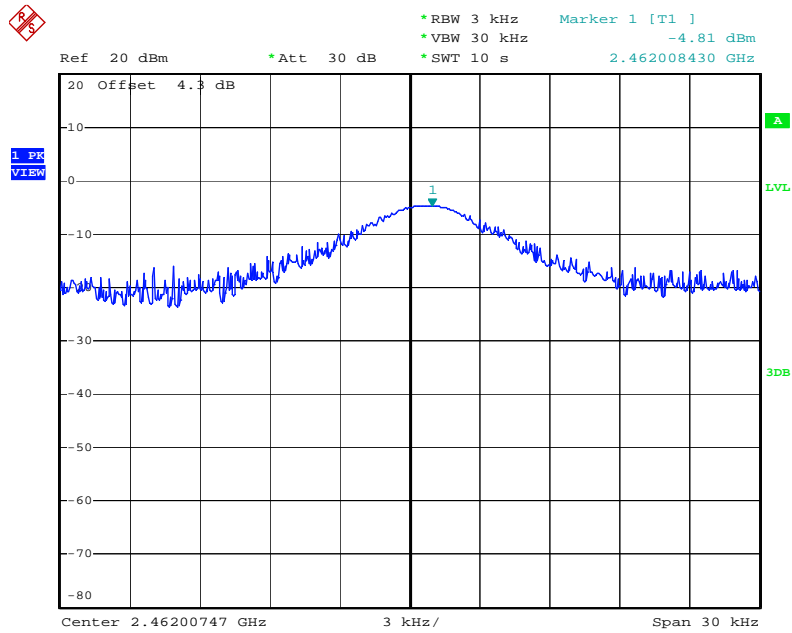


Date: 24.APR.2009 15:48:01

**Power Density Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5745 MHz**

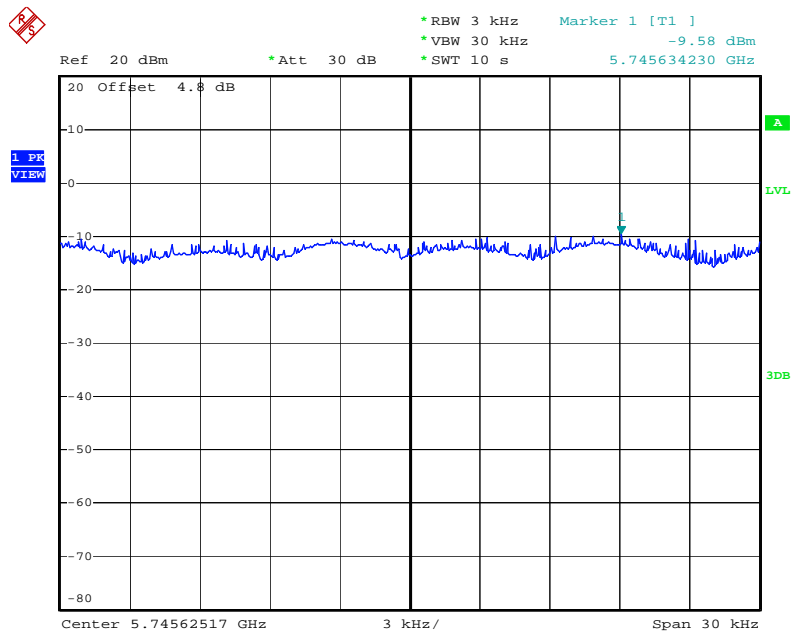


Date: 24.APR.2009 14:10:47

**Power Density Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5785 MHz**

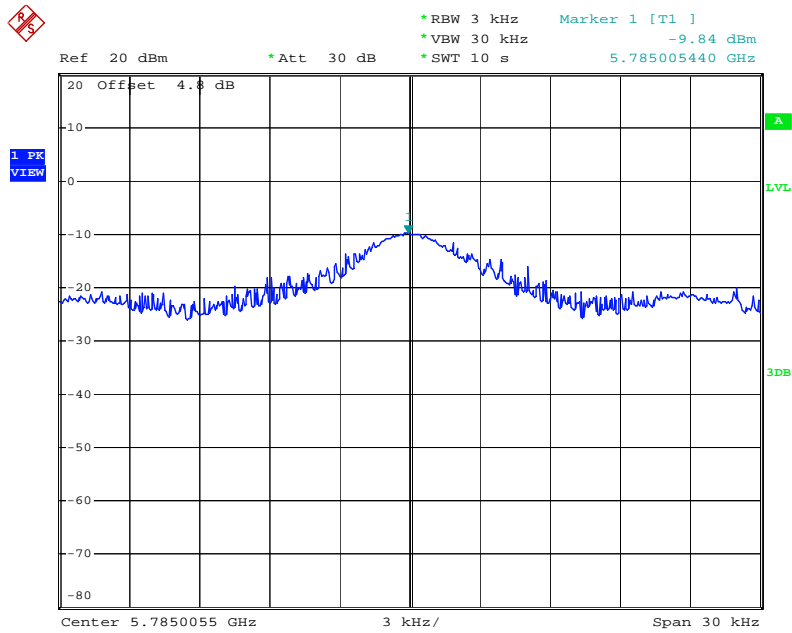

Date: 24.APR.2009 14:25:27

**Power Density Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5825 MHz**

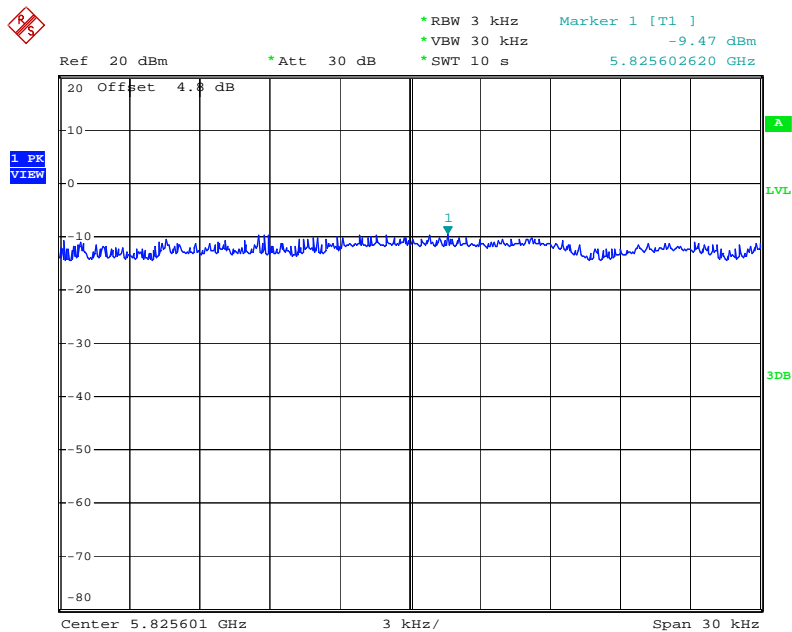

Date: 24.APR.2009 14:20:17

#### 4.4. 6dB Spectrum Bandwidth Measurement

##### 4.4.1. Limit

For digital modulation systems, the minimum 6dB bandwidth shall be at least 500 kHz.

##### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 6dB Bandwidth
RB	100 kHz
VB	100 kHz
Detector	Peak
Trace	Max Hold
Sweep Time	Auto

##### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyser in peak hold mode.
2. The resolution bandwidth of 100 kHz and the video bandwidth of 100 kHz were used.
3. Measured the spectrum width with power higher than 6dB below carrier.
4. Measuring multiple antennas, the connector is required to link with spectrum analyzer through a combiner.

##### 4.4.4. Test Setup Layout

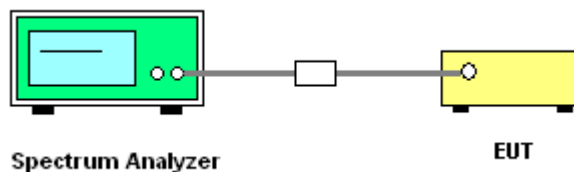

##### 4.4.5. Test Deviation

There is no deviation with the original standard.

##### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.4.7. Test Result of 6dB Spectrum Bandwidth

<b>Temperature</b>	23°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	Draft n
<b>Test Date</b>	Mar. 28, 2009 ~ Apr. 24, 2009		

<For 2.4GHz Band>

Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	17.60	17.68	500	Complies
6	2437 MHz	17.60	17.68	500	Complies
11	2462 MHz	17.60	17.68	500	Complies

Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
3	2422 MHz	36.32	36.32	500	Complies
6	2437 MHz	36.40	36.32	500	Complies
9	2452 MHz	36.40	36.32	500	Complies

<For 5GHz Band>

Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	16.96	17.60	500	Complies
157	5785 MHz	16.80	17.60	500	Complies
165	5825 MHz	16.32	17.56	500	Complies

Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
151	5755 MHz	36.32	36.16	500	Complies
159	5795 MHz	35.76	36.24	500	Complies



<b>Temperature</b>	23°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Sam Chen	<b>Configurations</b>	802.11a/b/g
<b>Test Date</b>	Mar. 28, 2009 ~ Apr. 24, 2009		

**Configuration IEEE 802.11b Ant. 1+ Ant. 2**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	10.12	15.20	500	Complies
6	2437 MHz	10.04	15.20	500	Complies
11	2462 MHz	10.12	15.12	500	Complies


**Configuration IEEE 802.11g Ant. 1+ Ant. 2**

Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
1	2412 MHz	16.36	16.44	500	Complies
6	2437 MHz	16.36	16.48	500	Complies
11	2462 MHz	16.04	16.44	500	Complies

**Configuration IEEE 802.11a Ant. 1+ Ant. 2**


Channel	Frequency	6dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)	Min. Limit (kHz)	Test Result
149	5745 MHz	15.96	16.40	500	Complies
157	5785 MHz	16.32	16.40	500	Complies
165	5825 MHz	16.32	16.44	500	Complies

6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 2412 MHz

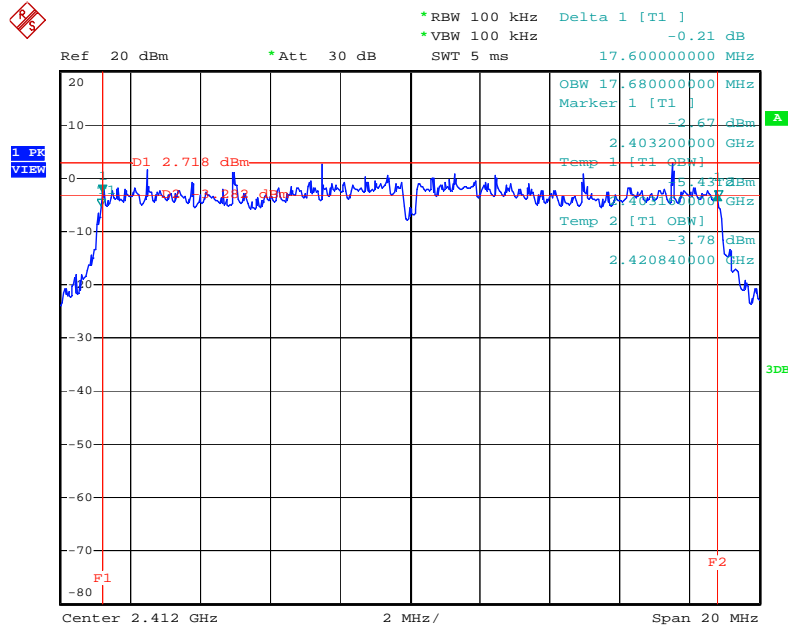


Date: 28.MAR.2009 15:35:10

6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 2437 MHz

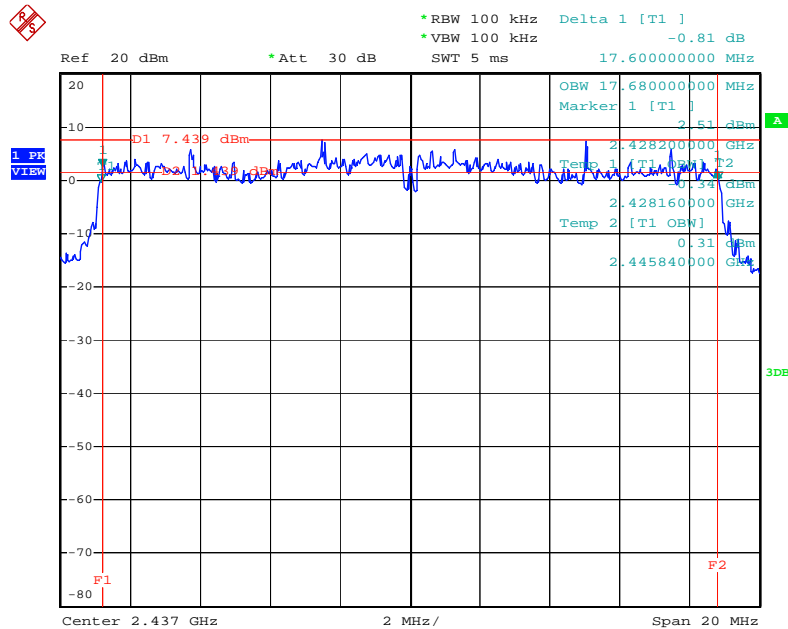


Date: 28.MAR.2009 15:32:48

6 dB Bandwidth Plot on Configuration Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 2462 MHz

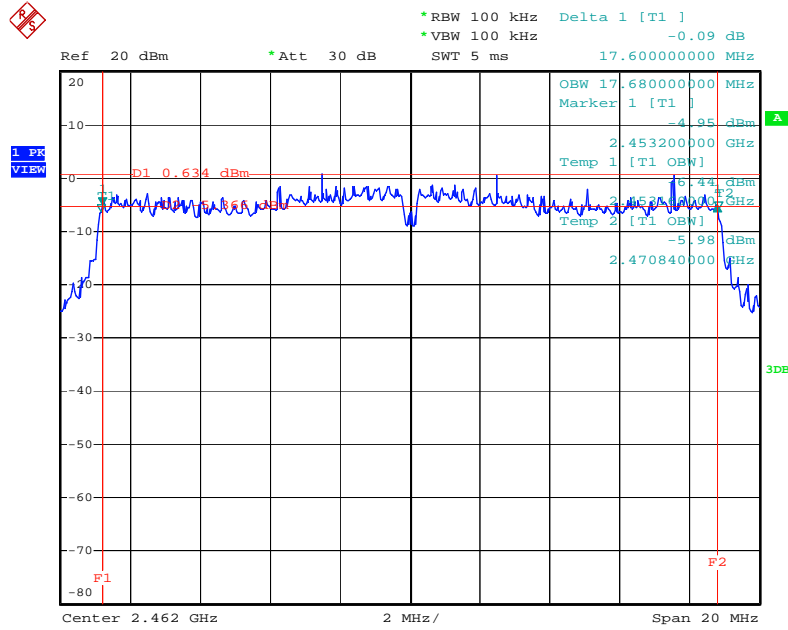


Date: 28.MAR.2009 15:30:15

6 dB Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 2422 MHz

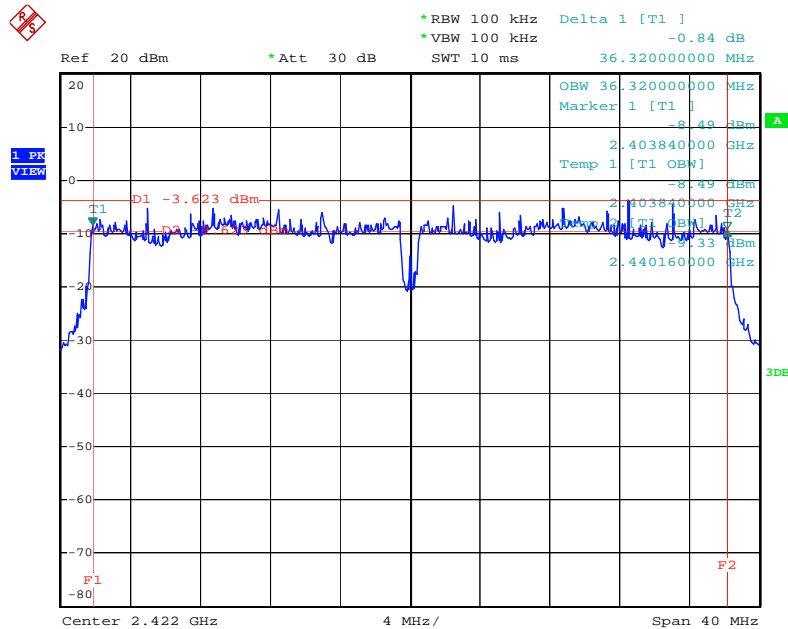


Date: 28.MAR.2009 15:37:44

6 dB Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 2437 MHz

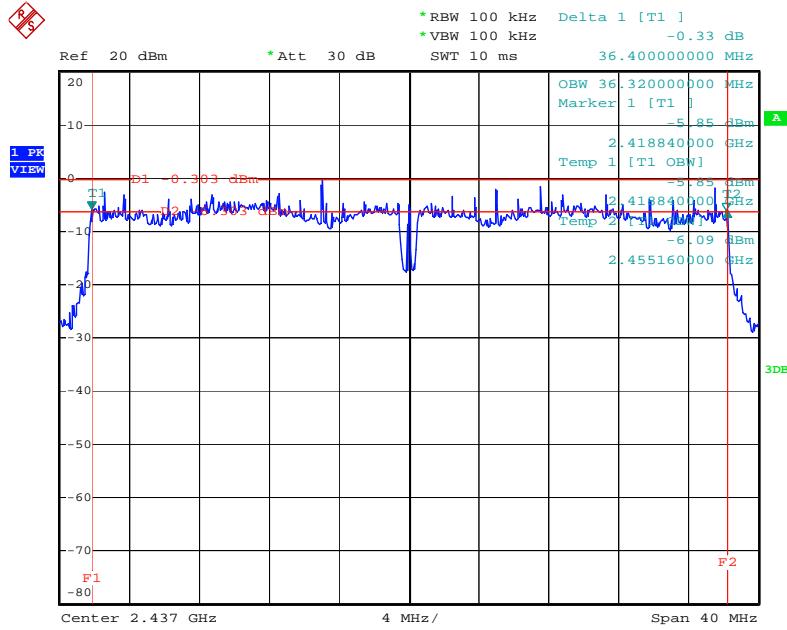


Date: 28.MAR.2009 15:40:05

6 dB Bandwidth Plot on Configuration Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 2452 MHz

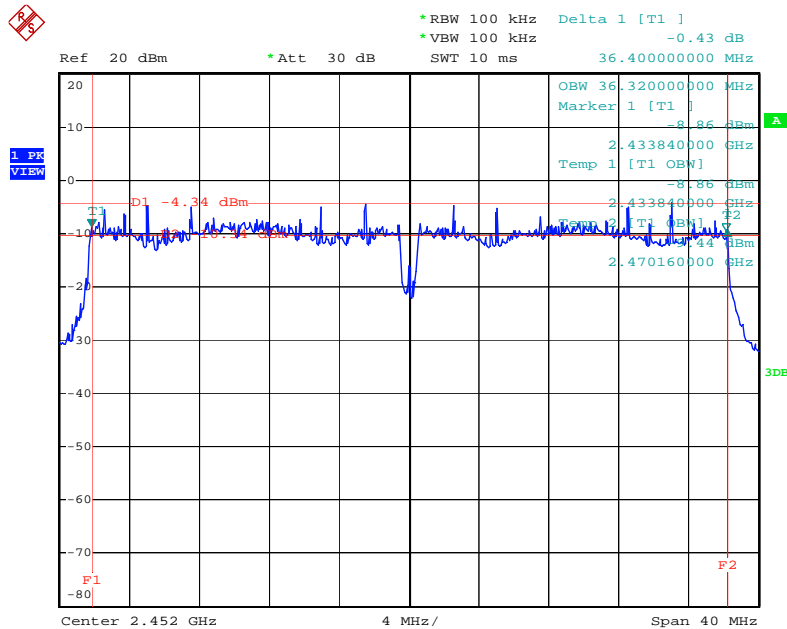


Date: 28.MAR.2009 15:42:15

6 dB Bandwidth Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 5745 MHz

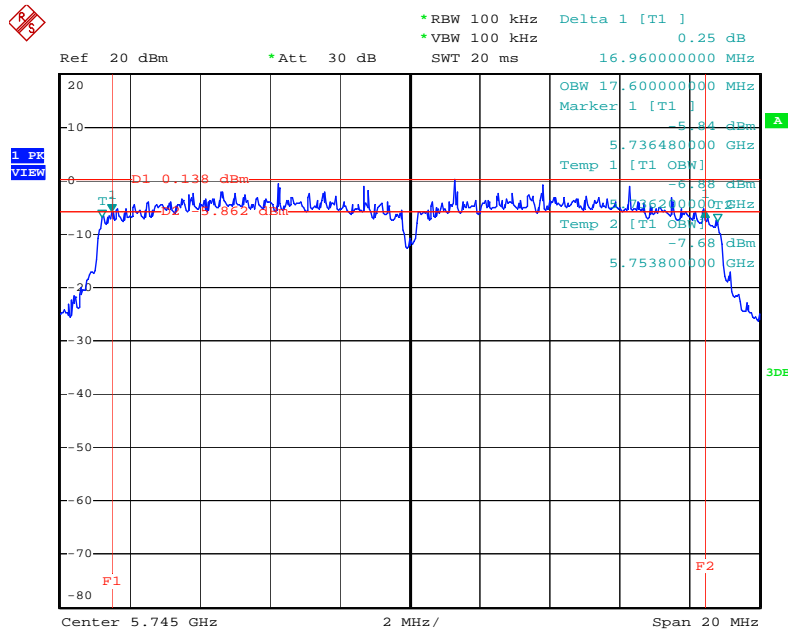


Date: 24.APR.2009 04:33:31

6 dB Bandwidth Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 5785MHz

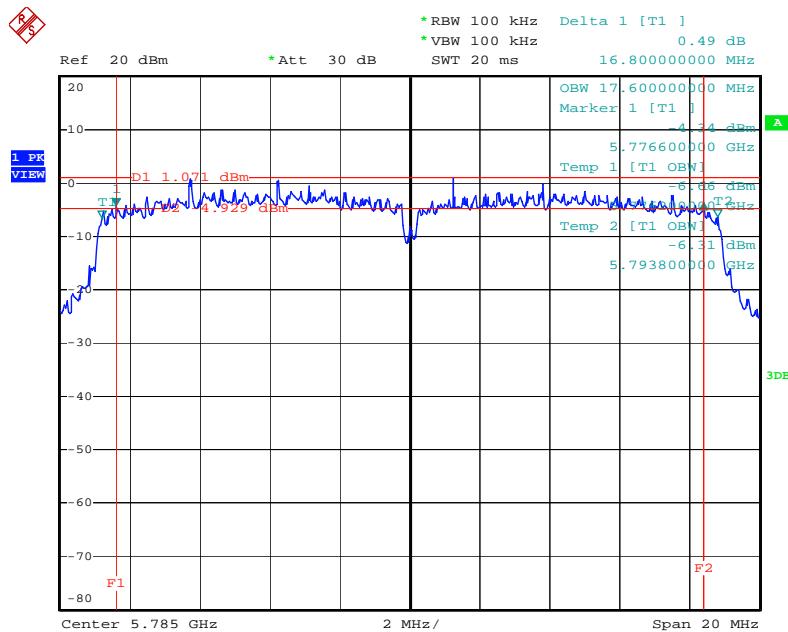


Date: 24.APR.2009 04:30:17

6 dB Bandwidth Plot on Configuration 11a Draft n MCS0 20MHz Ant. 1 + Ant. 2 / 5825 MHz

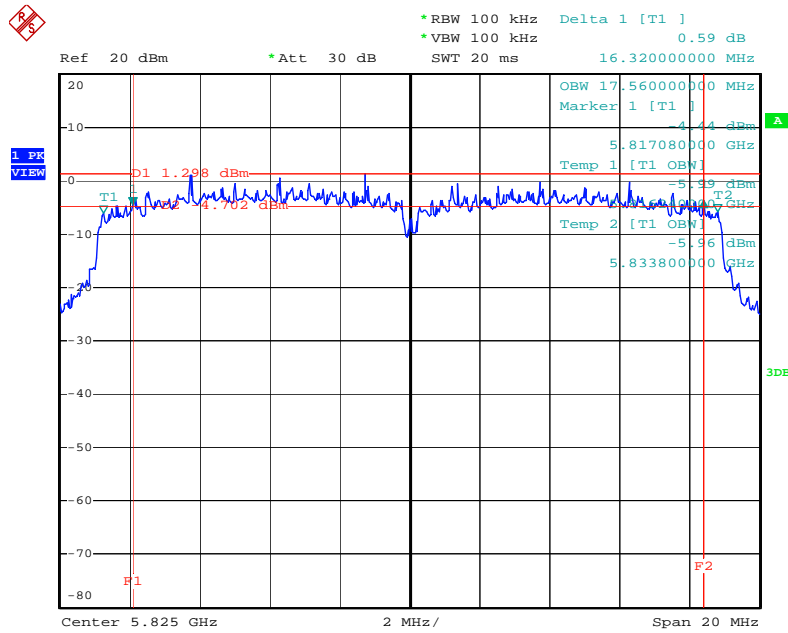


Date: 24.APR.2009 04:28:05

6 dB Bandwidth Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 5755MHz

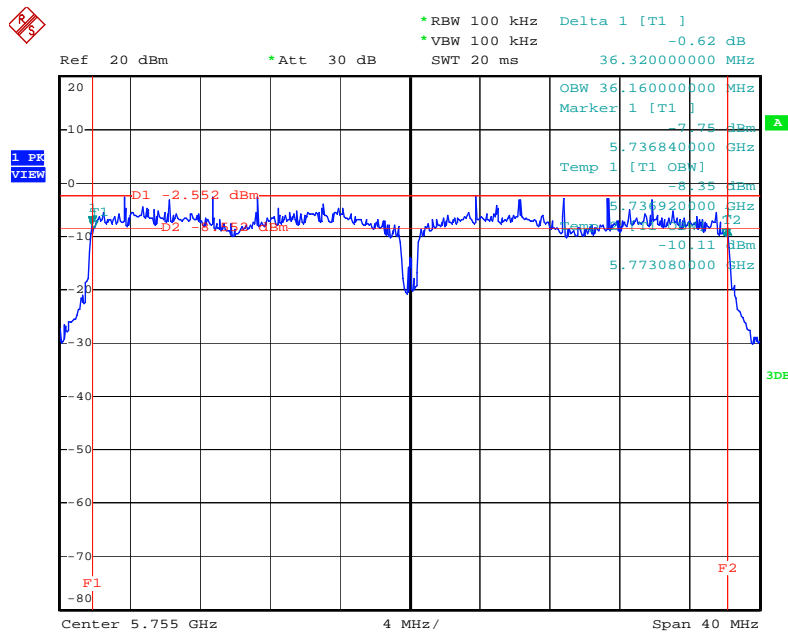


Date: 24.APR.2009 04:22:49

6 dB Bandwidth Plot on Configuration 11a Draft n MCS0 40MHz Ant. 1 + Ant. 2 / 5795 MHz

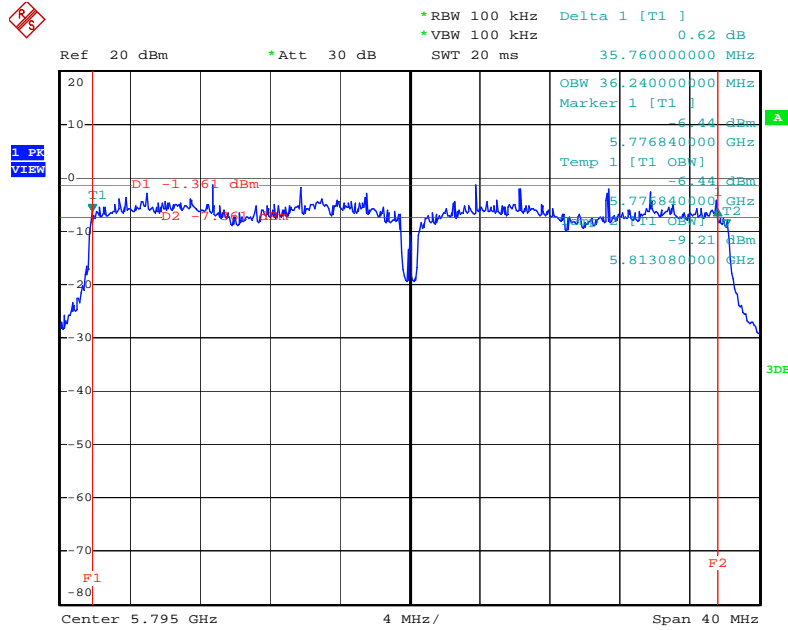


Date: 24.APR.2009 04:25:13

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 1 + Ant. 2 / 2412 MHz

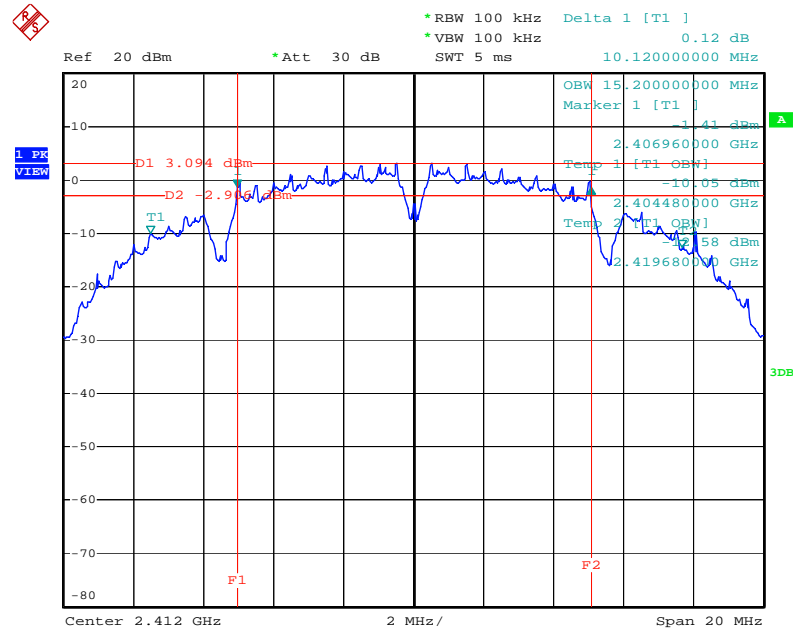


Date: 24.APR.2009 15:36:59

6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 1+ Ant. 2 / 2437 MHz

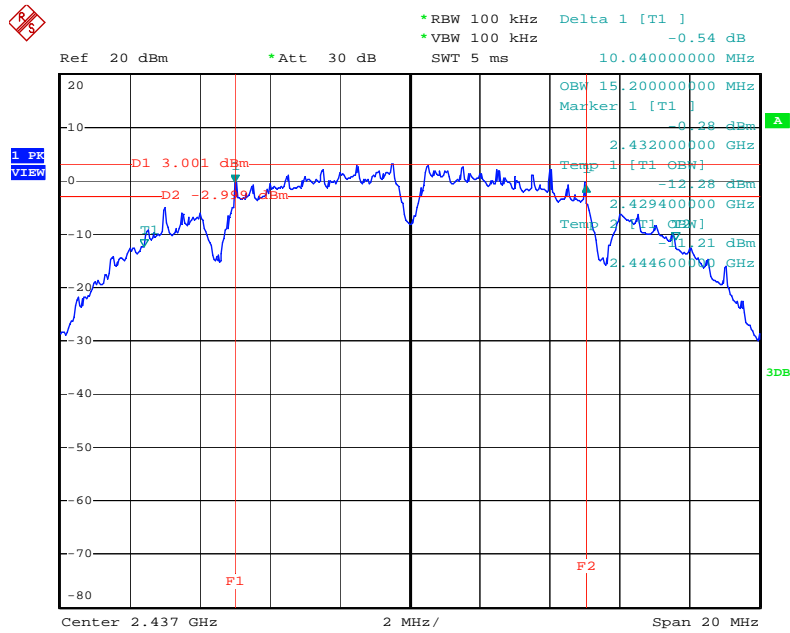

Date: 24.APR.2009 15:29:44


6 dB Bandwidth Plot on Configuration IEEE 802.11b Ant. 1+ Ant. 2 / 2462 MHz

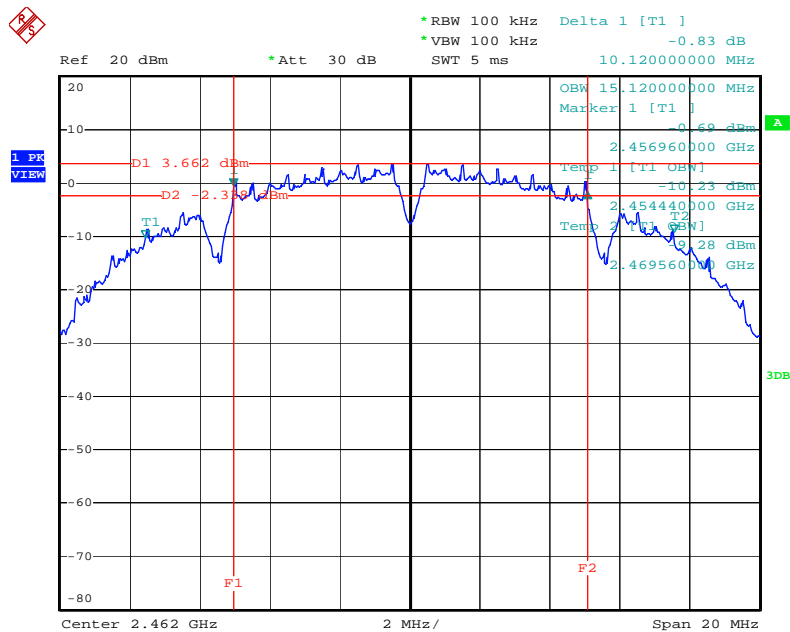

Date: 24.APR.2009 15:33:47




6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 1+ Ant. 2 / 2412 MHz

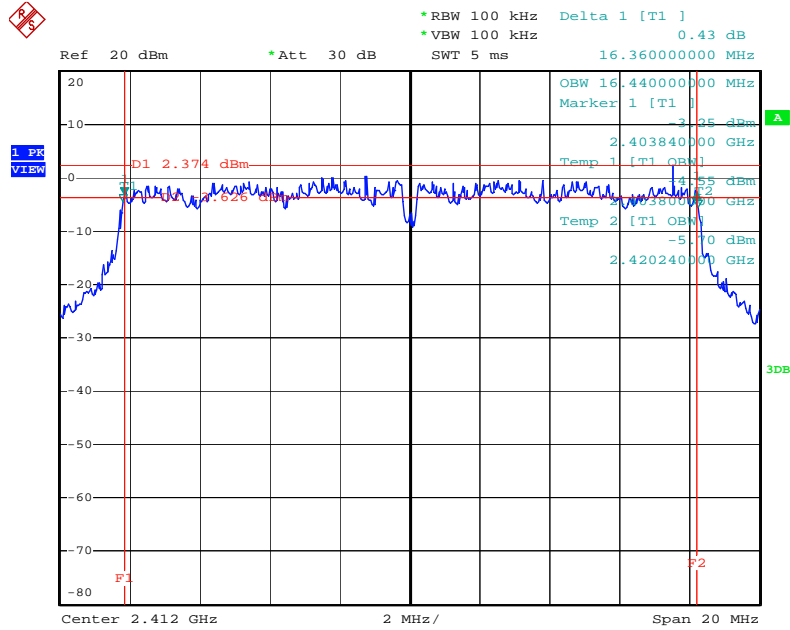


Date: 24.APR.2009 15:52:42

6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 1+ Ant. 2 / 2437 MHz

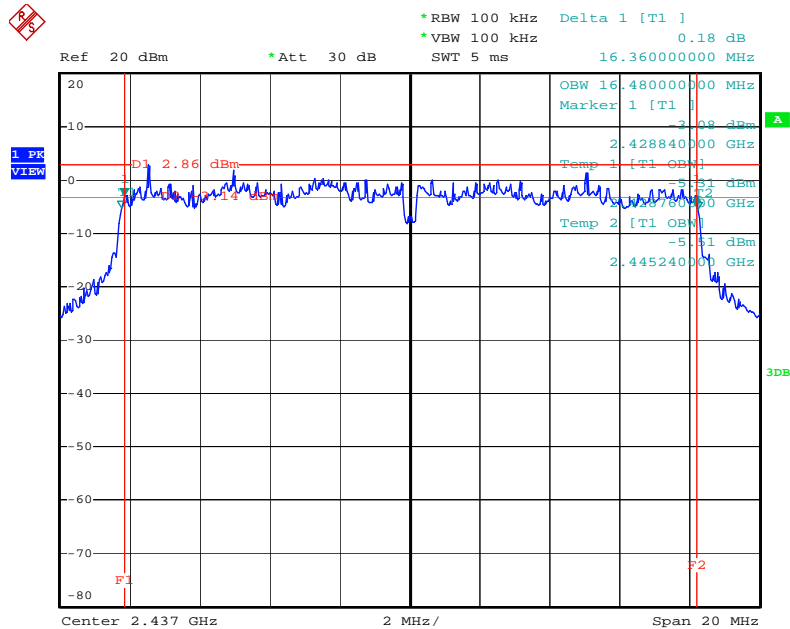


Date: 24.APR.2009 15:49:20

### 6 dB Bandwidth Plot on Configuration IEEE 802.11g Ant. 1+ Ant. 2 / 2462 MHz

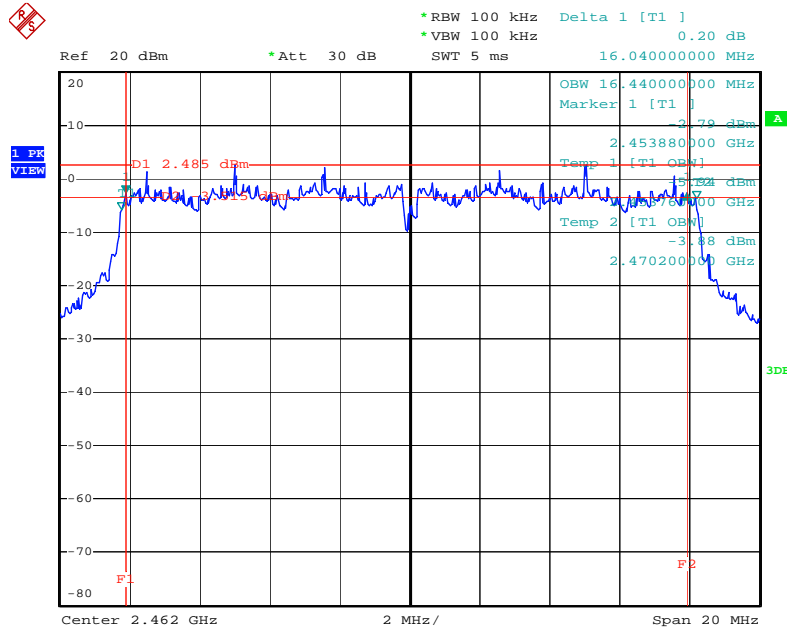


Date: 24.APR.2009 15:46:33

### 6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 1+ Ant. 2 / 5745 MHz

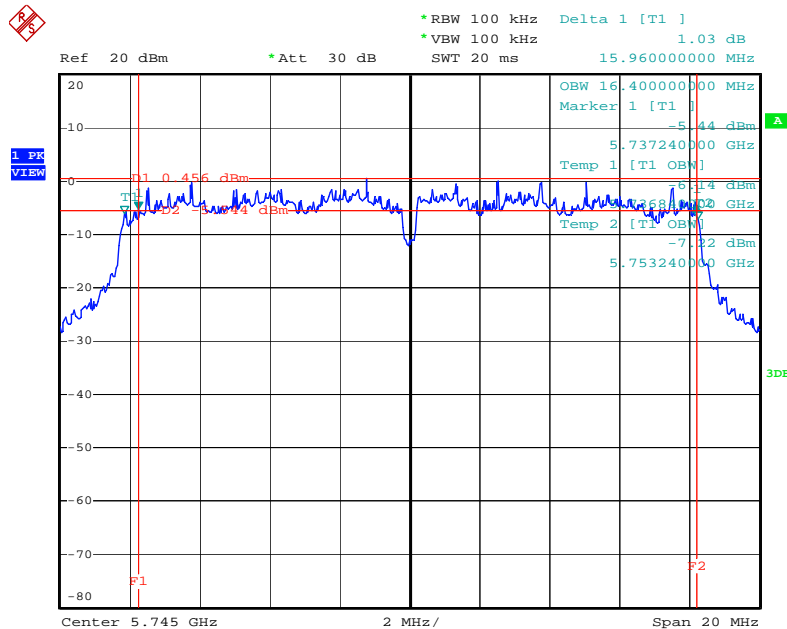


Date: 24.APR.2009 14:09:20

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5785 MHz

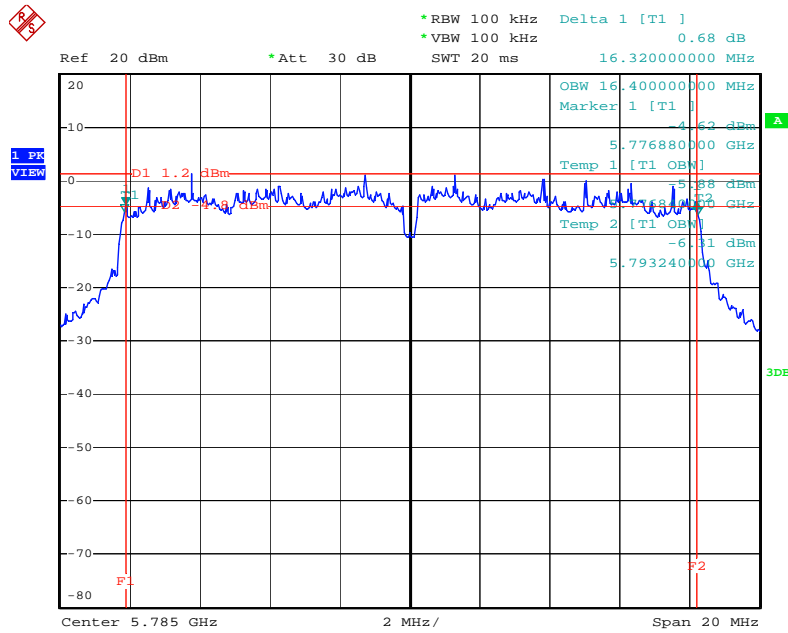

Date: 24.APR.2009 14:04:35

6 dB Bandwidth Plot on Configuration IEEE 802.11a Ant. 1 + Ant. 2 / 5825 MHz

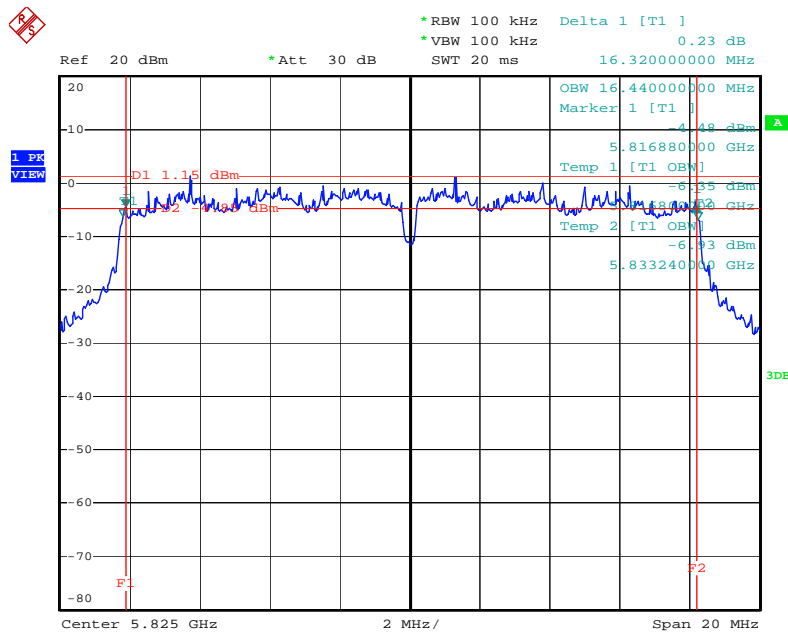

Date: 24.APR.2009 14:11:36

## 4.5. Radiated Emissions Measurement

### 4.5.1. Limit

20dBc in any 100 kHz bandwidth outside the operating frequency band. In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RB / VB (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP

#### 4.5.3. Test Procedures


1. Configure the EUT according to ANSI C63.4. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.5.4. Test Setup Layout

For radiated emissions below 30MHz

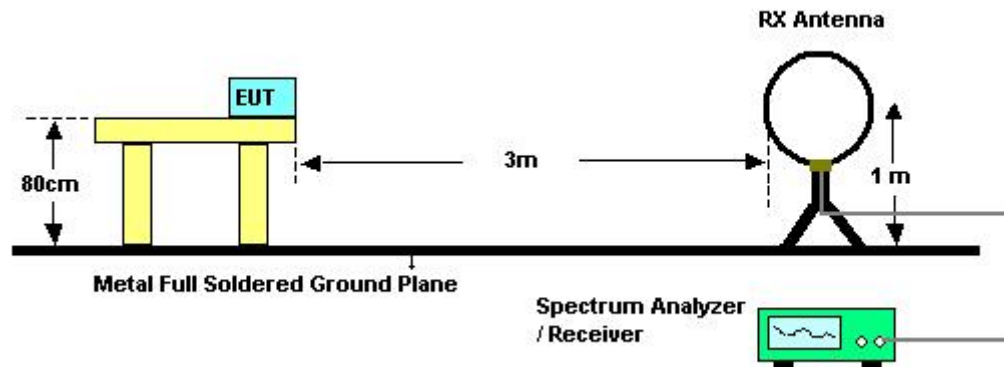

For radiated emissions above 30MHz

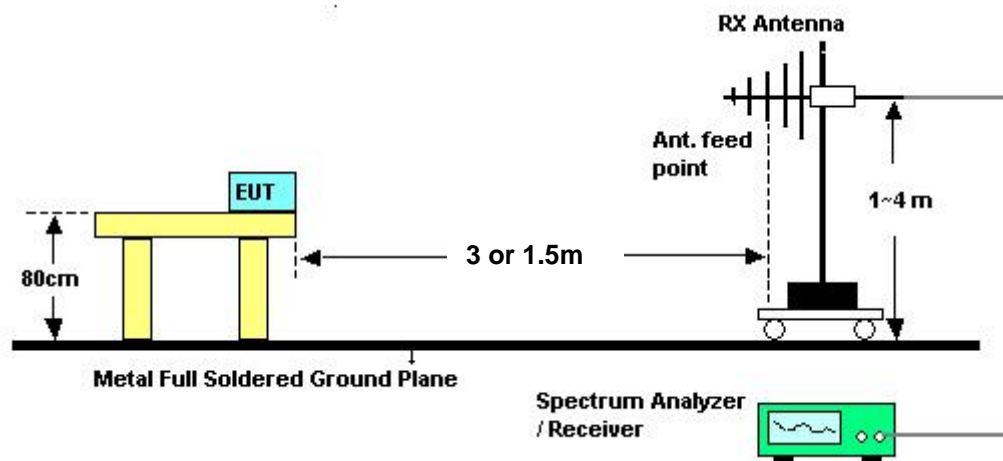

Above 10 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1.5m.

Distance extrapolation factor =  $20 \log (\text{specific distance [3m]} / \text{test distance [1.5m]})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

#### 4.5.5. Test Deviation

There is no deviation with the original standard.

#### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

#### 4.5.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Roy Huang		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log(\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

4.5.8. Results of Radiated Emissions (30MHz~1GHz)

Temperature	24.3°C	Humidity	56%
Test Engineer	Roy Huang	Configurations	Normal Link / Mode 2


Horizontal

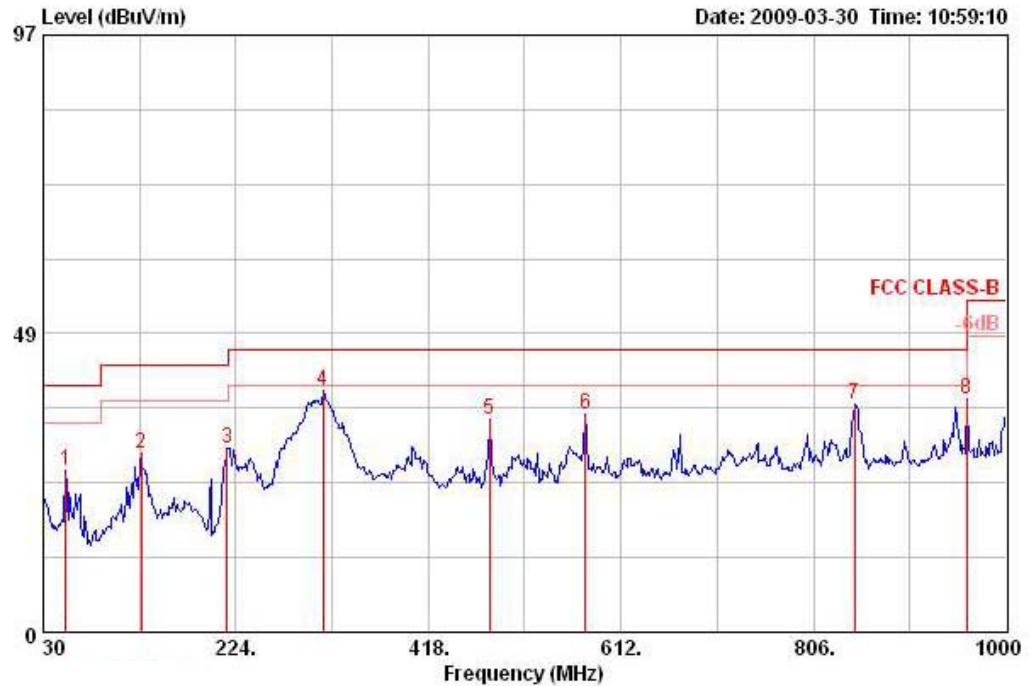

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	52.310	26.34	-13.66	40.00	45.22	8.18	27.79	0.74	Peak	HORIZONTAL	0	100
2	128.940	28.91	-14.59	43.50	42.82	12.25	27.45	1.29	Peak	HORIZONTAL	0	100
3	215.270	29.97	-13.53	43.50	45.09	10.19	27.07	1.76	Peak	HORIZONTAL	0	100
4	312.270	39.15	-6.85	46.00	50.30	13.70	26.98	2.13	Peak	HORIZONTAL	233	100
5	479.110	34.64	-11.36	46.00	42.68	17.30	27.99	2.66	Peak	HORIZONTAL	0	100
6	576.110	35.25	-10.75	46.00	42.00	18.49	28.10	2.85	Peak	HORIZONTAL	0	100
7	847.710	36.95	-9.05	46.00	40.93	20.13	27.51	3.40	Peak	HORIZONTAL	0	100
8	960.230	37.92	-16.08	54.00	40.47	20.99	27.16	3.62	Peak	HORIZONTAL	0	100



**Vertical**

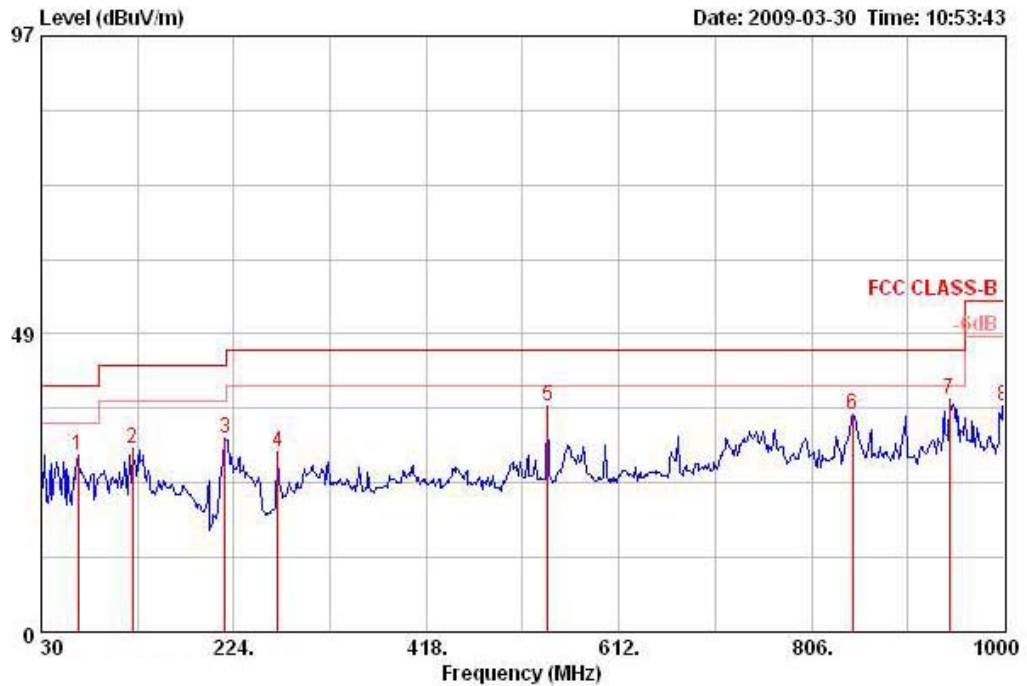

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Preamp Factor	Cable Loss	Remark	Pol/Phase	Table Pos	Ant Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB			deg	cm
1	66.860	28.87	-11.13	40.00	49.06	6.68	27.73	0.86	Peak	VERTICAL	0	400
2	122.150	29.83	-13.67	43.50	43.70	12.40	27.49	1.22	Peak	VERTICAL	0	400
3	215.270	31.44	-12.06	43.50	46.56	10.19	27.07	1.76	Peak	VERTICAL	0	400
4	268.620	29.20	-16.80	46.00	41.20	12.99	26.96	1.97	Peak	VERTICAL	0	400
5	540.220	36.66	-9.34	46.00	43.90	18.08	28.10	2.78	Peak	VERTICAL	0	400
6	847.710	35.30	-10.70	46.00	39.28	20.13	27.51	3.40	Peak	VERTICAL	0	400
7	944.710	37.84	-8.16	46.00	40.59	20.87	27.22	3.60	Peak	VERTICAL	121	100
8	1000.000	36.68	-17.32	54.00	38.69	21.29	27.00	3.70	Peak	VERTICAL	0	400

**Note:**

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Emission level (dBUV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

4.5.9. Results for Radiated Emissions (1GHz~10<sup>th</sup> Harmonic)


<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Roy Huang	<b>Configurations</b>	Draft n MCS0 20MHz Ch 1 / Ant. 1+ Ant. 2

*Horizontal*

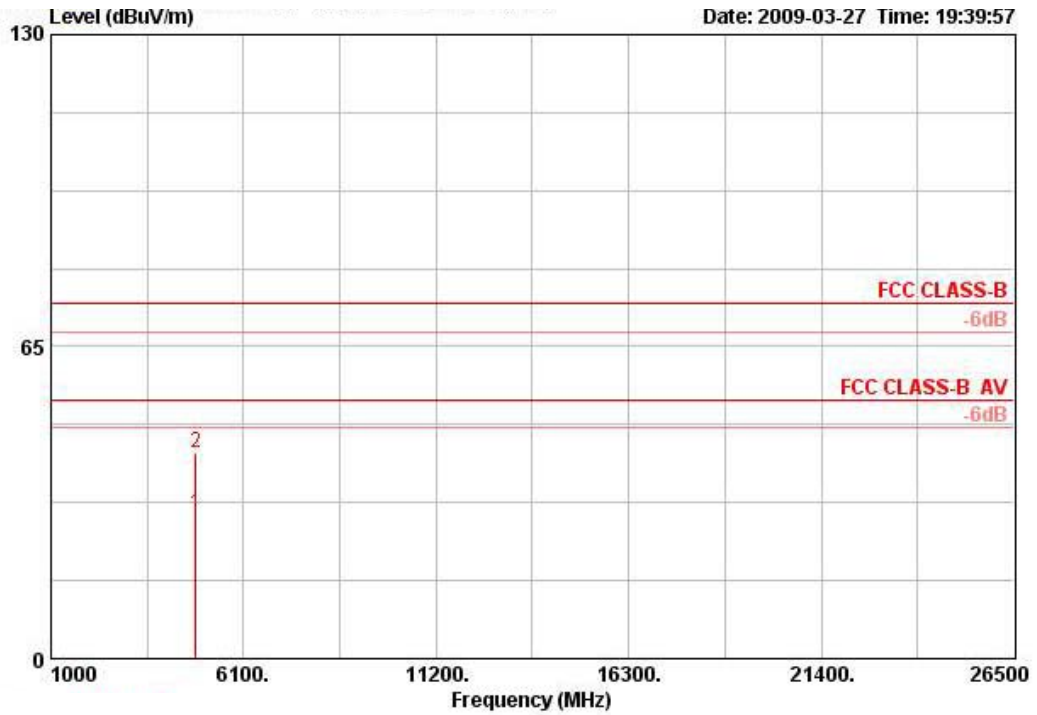

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Table Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4823.950	30.13	-23.87	54.00	29.59	32.46	3.34	35.26	AVERAGE	100	360	HORIZONTAL
2 @	4825.690	42.95	-31.05	74.00	42.41	32.46	3.34	35.26	PEAK	100	360	HORIZONTAL


**Vertical**

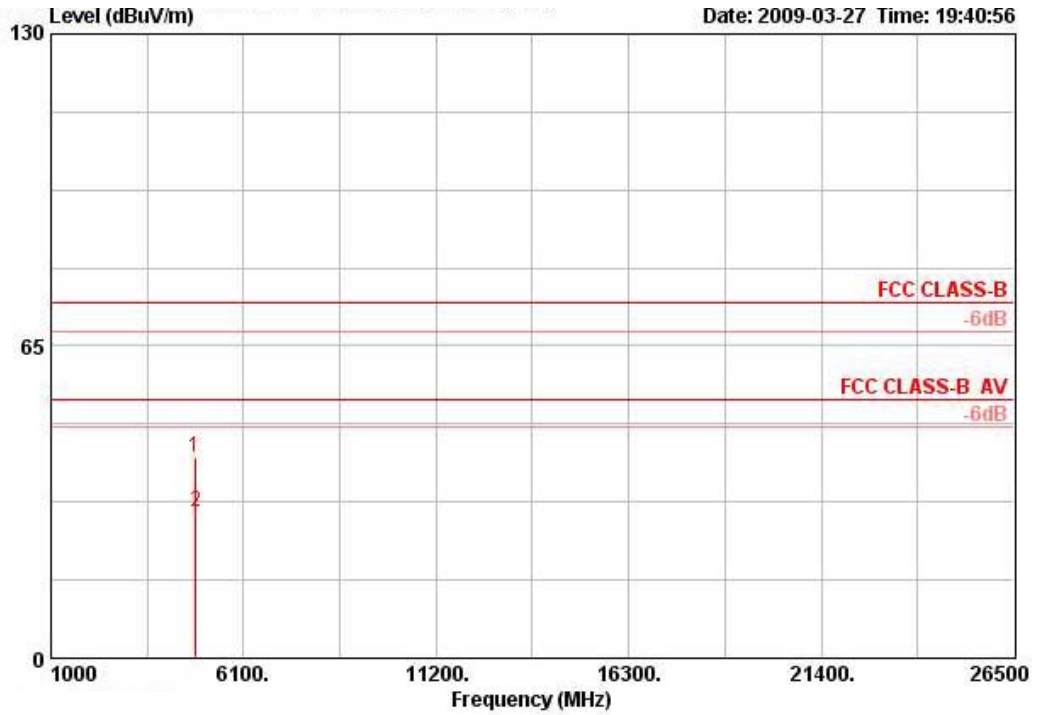

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4821.970	41.65	-32.35	74.00	41.11	32.46	3.34	35.26	PEAK	100	0	VERTICAL
2 @	4823.420	30.32	-23.68	54.00	29.78	32.46	3.34	35.26	AVERAGE	100	0	VERTICAL


<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Roy Huang	<b>Configurations</b>	Draft n MCS0 20MHz Ch 6 / Ant. 1 + Ant. 2

**Horizontal**

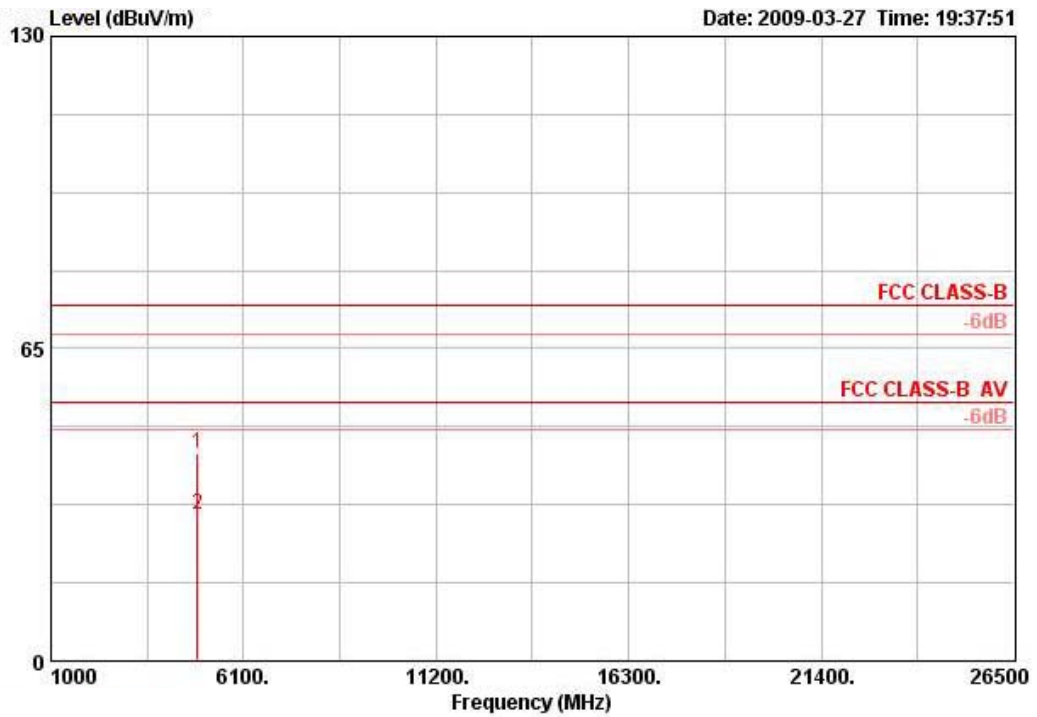

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBUV	dB/m	dB	dB		cm	deg	
1 @	4874.030	43.12	-30.88	74.00	42.34	32.56	3.36	35.15	PEAK	100	0	HORIZONTAL
2 @	4876.500	30.34	-23.66	54.00	29.56	32.56	3.36	35.15	AVERAGE	100	0	HORIZONTAL


**Vertical**

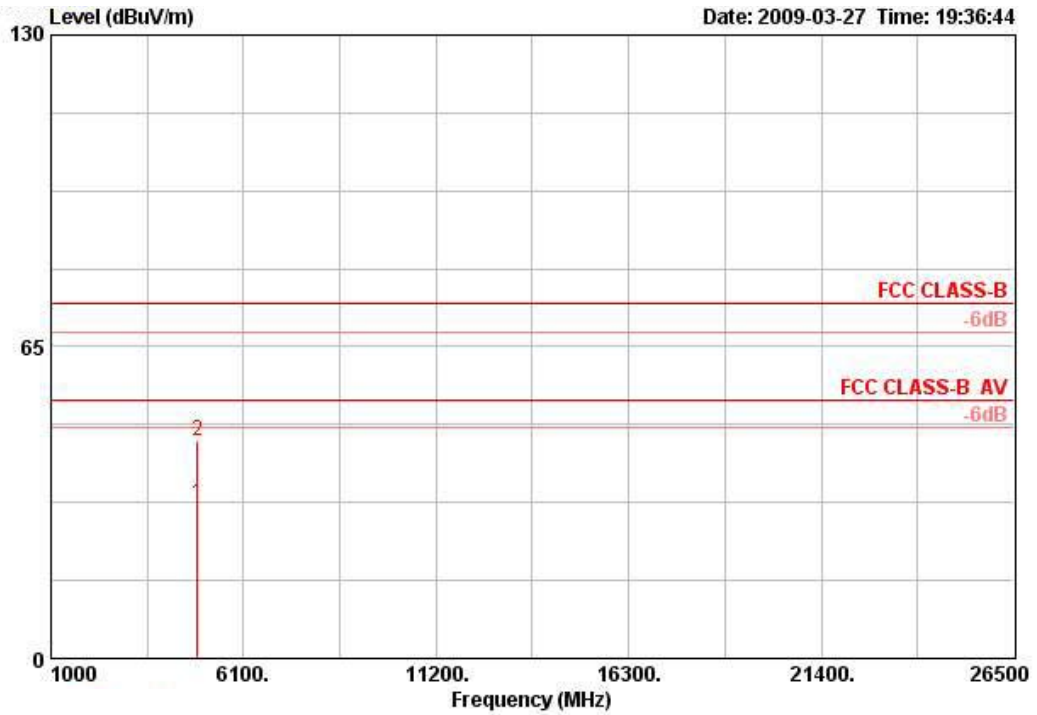

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4872.820	32.32	-21.68	54.00	31.54	32.56	3.36	35.15	AVERAGE	100	360	VERTICAL
2 @	4873.910	45.43	-28.57	74.00	44.66	32.56	3.36	35.15	PEAK	100	360	VERTICAL


<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Roy Huang	<b>Configurations</b>	Draft n MCS0 20MHz Ch11 / Ant. 1 + Ant. 2

**Horizontal**

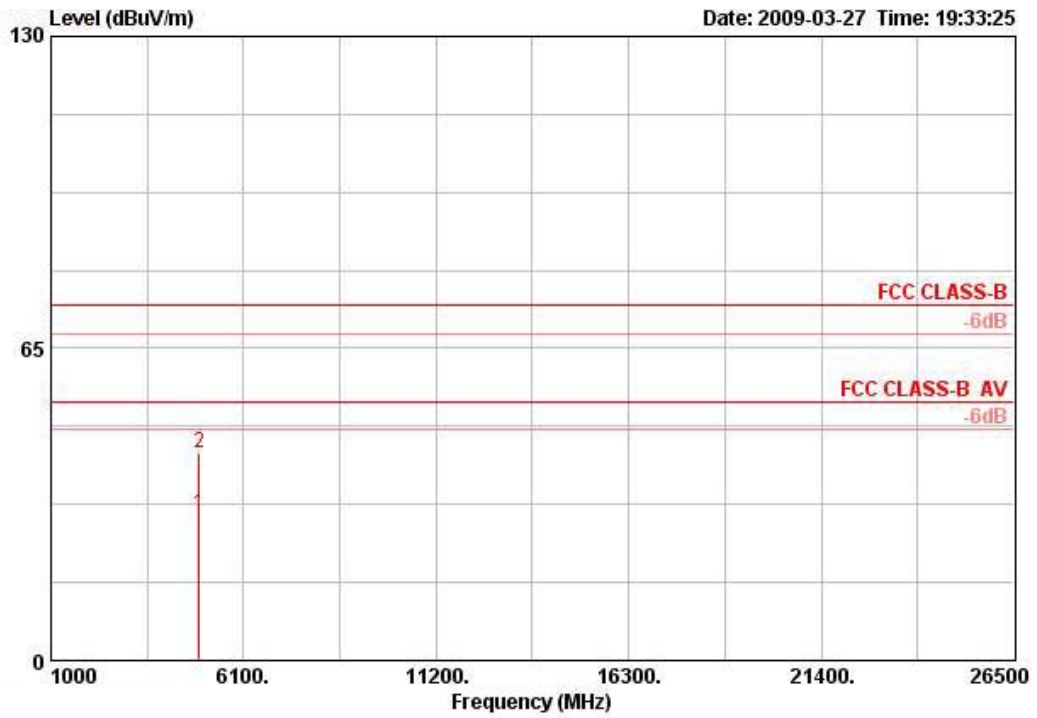

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4921.940	30.63	-23.37	54.00	29.62	32.66	3.38	35.03	AVERAGE	100	360	HORIZONTAL
2 @	4924.740	43.34	-30.66	74.00	42.32	32.66	3.38	35.03	PEAK	100	360	HORIZONTAL


**Vertical**

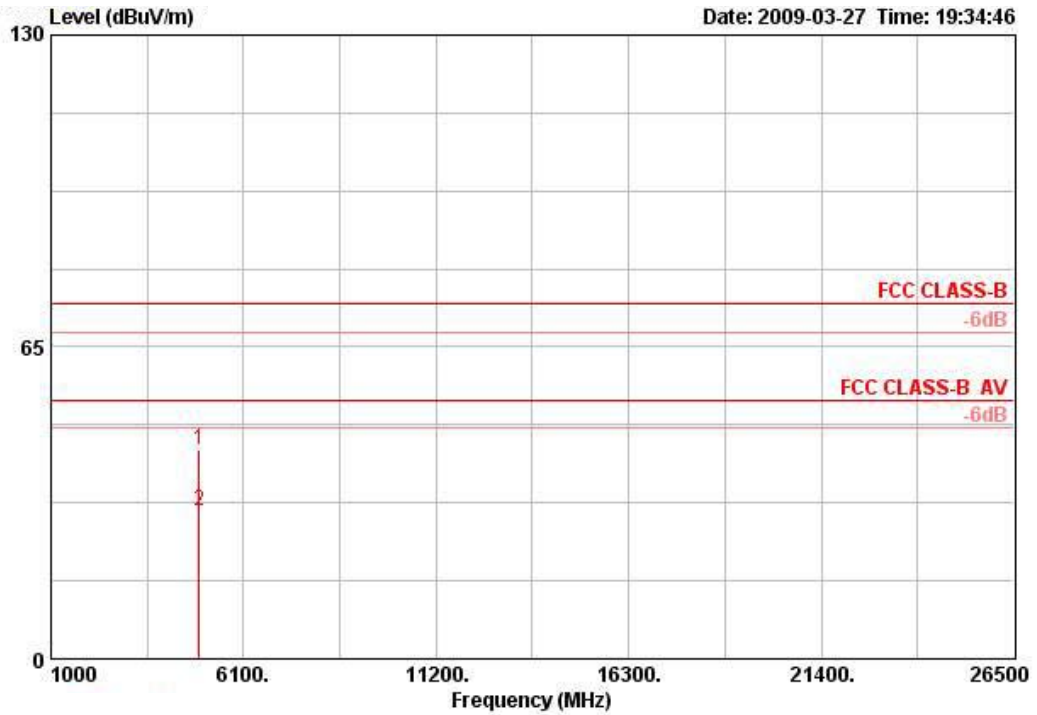

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4923.370	43.48	-30.52	74.00	42.47	32.66	3.38	35.03	PEAK	100	0	VERTICAL
2 @	4926.100	30.92	-23.08	54.00	29.91	32.66	3.38	35.03	AVERAGE	100	0	VERTICAL

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Roy Huang	<b>Configurations</b>	Draft n MCS0 40MHz Ch 3 / Ant. 1 + Ant. 2


**Horizontal**

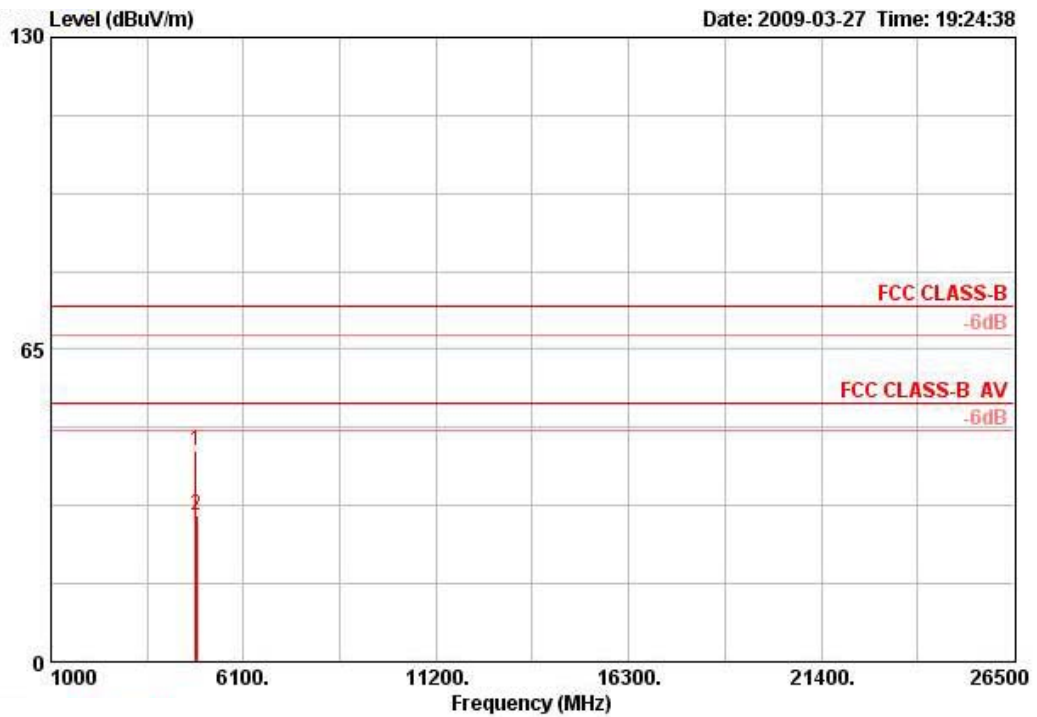

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4844.230	43.78	-30.22	74.00	43.14	32.49	3.35	35.20	PEAK	100	0	HORIZONTAL
2 @	4846.420	30.31	-23.69	54.00	29.67	32.49	3.35	35.20	AVERAGE	100	0	HORIZONTAL




**Vertical**

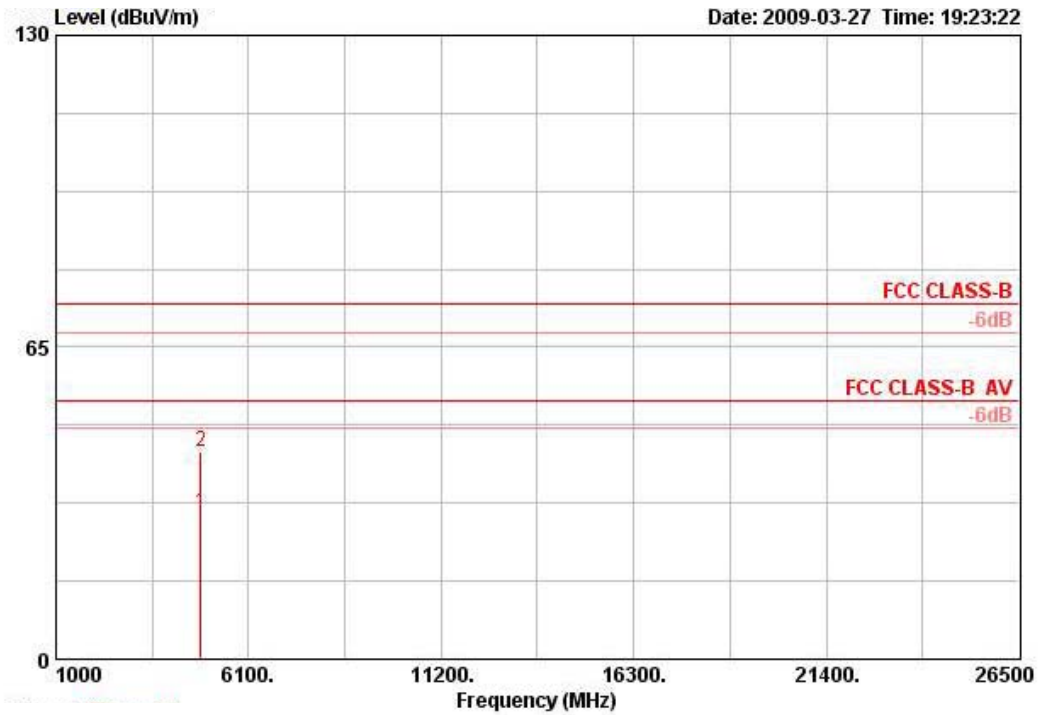

	Freq	Level	Over Limit	Limit Line	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4844.280	30.33	-23.67	54.00	29.69	32.49	3.35	35.20	AVERAGE	142	360	VERTICAL
2 @	4844.780	43.11	-30.89	74.00	42.47	32.49	3.35	35.20	PEAK	142	360	VERTICAL

<b>Temperature</b>	24.3°C	<b>Humidity</b>	56%
<b>Test Engineer</b>	Roy Huang	<b>Configurations</b>	Draft n MCS0 40MHz Ch 6 / Ant. 1 + Ant. 2

**Horizontal**

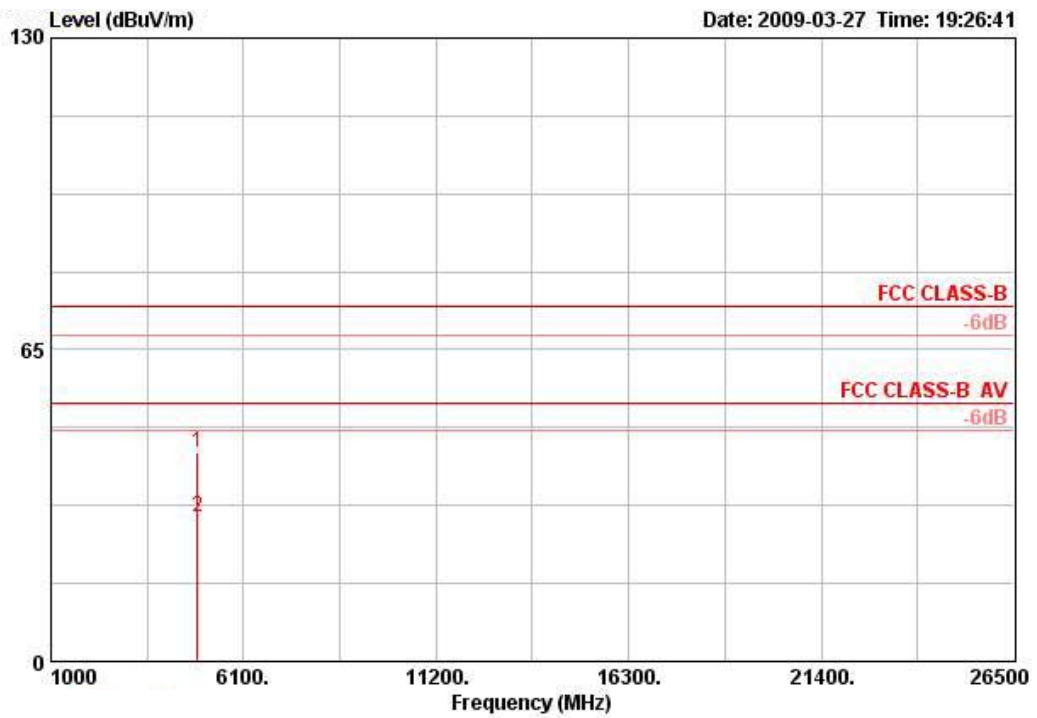

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos	Pol/Phase
	MHz	dBUV/m	dB	dBUV/m	dBuV	dB/m	dB	dB		cm	deg	
1 @	4874.150	43.51	-30.49	74.00	42.74	32.56	3.36	35.15	PEAK	100	360	HORIZONTAL
2 @	4876.140	30.20	-23.80	54.00	29.42	32.56	3.36	35.15	AVERAGE	100	360	HORIZONTAL