


# FCC SAR Test Report

**APPLICANT** : Proxim Wireless Corporation  
**EQUIPMENT** : ORiNOCO 802.11 a/b/g/n USB Adapter  
**BRAND NAME** : ORiNOCO  
**MODEL NAME** : 8494-US  
**FCC ID** : HZB-USABG NR01  
**STANDARD** : 47 CFR Part 2 (2.1093)  
IEEE C95.1-1999  
OET Bulletin 65 Supplement C (Edition 01-01)

The product sample received on Mar. 26, 2009 and completely tested on Apr. 19, 2009. We, SPORTON INTERNATIONAL INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL INC., the test report shall not be reproduced except in full.

Reviewed by:

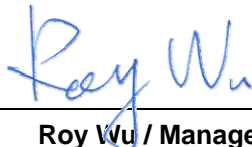

---

Roy Wu / Manager



**SPORTON INTERNATIONAL INC.**

No. 52, Hwa Ya 1<sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C.



Table of Contents

Revision History.....3
1. Statement of Compliance.....4
2. Administration Data.....5
2.1 Testing Laboratory.....5
2.2 Applicant.....5
2.3 Manufacturer.....5
2.4 Application Details.....5
3. General Information.....6
3.1 Description of Device Under Test (DUT).....6
3.2 Product Photos.....8
3.3 Applied Standards.....8
3.4 Device Category and SAR Limits.....9
3.5 Test Conditions.....9
3.5.1 Ambient Condition.....9
3.5.2 Test Configuration.....9
4. Specific Absorption Rate (SAR).....10
4.1 Introduction.....10
4.2 SAR Definition.....10
5. SAR Measurement Setup.....11
5.1 DASY4 E-Field Probe System.....12
5.1.1 E-Field Probe Specification.....12
5.1.2 E-Field Probe Calibration.....13
5.2 DATA Acquisition Electronics (DAE).....15
5.3 Robot.....15
5.4 Measurement Server.....15
5.5 SAM Twin Phantom.....16
5.6 Device Holder for SAM Twin Phantom.....17
5.7 Data Storage and Evaluation.....18
5.7.1 Data Storage.....18
5.7.2 Data Evaluation.....18
5.8 Test Equipment List.....20
6. Tissue Simulating Liquids.....21
7. Uncertainty Assessment.....23
8. SAR Measurement Evaluation.....26
8.1 Purpose of System Performance check.....26
8.2 System Setup.....26
8.3 Validation Results.....28
9. Description for DUT Testing Position.....29
10. Measurement Procedures.....30
10.1 Spatial Peak SAR Evaluation.....30
10.2 Scan Procedures.....31
10.3 SAR Averaged Methods.....31
11. SAR Test Results.....32
11.1 Conducted Power.....32
11.2 Test Records for Body SAR Test.....34
11.3 Test Records for Back-Off SAR Test.....35
12. References.....36

- Appendix A - System Performance Check Data
Appendix B - SAR Measurement Data
Appendix C - Calibration Data
Appendix D - Product Photos
Appendix E - Test Setup Photos



**Revision History**

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA803001-01	Rev. 02	Initial issue of report	Apr. 27, 2009



### 1. Statement of Compliance

The Specific Absorption Rate (SAR) maximum results found during testing for the **Proxim Wireless Corporation ORiNOCO 802.11 a/b/g/n USB Adapter ORiNOCO 8494-US** are as follows (with expanded uncertainty 21.9% for 2.4GHz Band and 25.9% for 5GHz Band):

Frequency	Position	SAR (W/kg)
802.11b/g/n	Body	1.12
802.11a/n	Body	1.18

They are in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1999, and had been tested in accordance with the measurement methods and procedures specified in OET Bulletin 65 Supplement C (Edition 01-01).



**2. Administration Data**

**2.1 Testing Laboratory**

Test Site	SPORTON INTERNATIONAL INC.
Test Site Location	No. 52, Hwa Ya 1 <sup>st</sup> Rd., Hwa Ya Technology Park, Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL: +886-3-327-3456 FAX: +886-3-328-4978
Test Site No.	<b>Sporton Site No. :</b> SAR01-HY

**2.2 Applicant**

Company Name	Proxim Wireless Corporation
Address	1561 Buckeye Drive, Milpitas, CA 95035 USA

**2.3 Manufacturer**

Company Name	Wistron NeWeb Corporation
Address	No. 10-1, Li-hsin Road I, Hsinchu Science Park, Hsinchu 300, Taiwan, R.O.C.

**2.4 Application Details**

Date of Receipt of Application	Mar. 26, 2009
Date of Start during the Test	Apr. 18, 2009
Date of End during the Test	Apr. 19, 2009



3. General Information

3.1 Description of Device Under Test (DUT)

Product Feature & Specification	
DUT Type	ORiNOCO 802.11 a/b/g/n USB Adapter
Trade Name	ORiNOCO
Model Name	8494-US
FCC ID	HZB-USABGNR01
Tx/Rx Frequency Range	802.11b/g/n : 2400 MHz ~ 2483.5 MHz 802.11a/n : 5150 MHz ~ 5250 MHz, 5250 MHz ~ 5350 MHz 5470 MHz ~ 5725 MHz, 5725 MHz ~ 5825 MHz
Maximum Output Power to Antenna	<p><b>&lt;2400 MHz ~ 2483.5 MHz&gt;</b>  <b>Antenna 1:</b>  802.11b : 14.75 dBm  802.11g : 16.08 dBm  802.11n (BW 20MHz) : 16.05 dBm  802.11n (BW 40MHz) : 14.51 dBm  <b>Antenna 2:</b>  802.11b : 14.83 dBm  802.11g : 16.47 dBm  802.11n (BW 20MHz) : 16.09 dBm  802.11n (BW 40MHz) : 14.36 dBm  <b>Antenna 1 + Antenna 2:</b>  802.11b : 17.80 dBm  802.11g : 19.29 dBm  802.11n (BW 20MHz) : 19.04 dBm  802.11n (BW 40MHz) : 17.45 dBm</p>
	<p><b>&lt;5150 MHz ~ 5250 MHz&gt;</b>  <b>Antenna 1:</b>  802.11a : 11.97 dBm  802.11n (BW 20MHz) : 11.47 dBm  802.11n (BW 40MHz) : 12.27 dBm  <b>Antenna 2:</b>  802.11a : 12.49 dBm  802.11n (BW 20MHz) : 10.98 dBm  802.11n (BW 40MHz) : 12.06 dBm  <b>Antenna 1 + Antenna 2:</b>  802.11a : 15.25 dBm  802.11n (BW 20MHz) : 14.24 dBm  802.11n (BW 40MHz) : 15.18 dBm</p>



<b>Maximum Output Power to Antenna</b>	<b>&lt;5250 MHz ~ 5350 MHz&gt;</b>
	<b>Antenna 1:</b>
	802.11a : 10.42 dBm
	802.11n (BW 20MHz) : 10.20 dBm
	802.11n (BW 40MHz) : 10.20 dBm
	<b>Antenna 2:</b>
	802.11a : 10.62 dBm
	802.11n (BW 20MHz) : 10.40 dBm
	802.11n (BW 40MHz) : 10.18 dBm
	<b>Antenna 1 + Antenna 2:</b>
	802.11a : 13.53 dBm
	802.11n (BW 20MHz) : 13.31 dBm
	802.11n (BW 40MHz) : 13.20 dBm
	<b>&lt;5470 MHz ~ 5725 MHz&gt;</b>
	<b>Antenna 1:</b>
802.11a : 12.57 dBm	
802.11n (BW 20MHz) : 12.47 dBm	
802.11n (BW 40MHz) : 12.45 dBm	
<b>Antenna 2:</b>	
802.11a : 13.33 dBm	
802.11n (BW 20MHz) : 13.10 dBm	
802.11n (BW 40MHz) : 12.18 dBm	
<b>Antenna 1 + Antenna 2:</b>	
802.11a : 15.98 dBm	
802.11n (BW 20MHz) : 15.81 dBm	
802.11n (BW 40MHz) : 15.20 dBm	
<b>&lt;5725 MHz ~ 5825 MHz&gt;</b>	
<b>Antenna 1:</b>	
802.11a : 13.46 dBm	
802.11n (BW 20MHz) : 13.42 dBm	
802.11n (BW 40MHz) : 13.13 dBm	
<b>Antenna 2:</b>	
802.11a : 14.23 dBm	
802.11n (BW 20MHz) : 14.18 dBm	
802.11n (BW 40MHz) : 13.96 dBm	
<b>Antenna 1 + Antenna 2:</b>	
802.11a : 16.87 dBm	
802.11n (BW 20MHz) : 16.83 dBm	
802.11n (BW 40MHz) : 16.58 dBm	



Antenna Type	Printed Antenna
Antenna Gain	Antenna 1 : -0.45 dBi (2.4GHz) / 4.02 dBi (5GHz) Antenna 2 : -1.24 dBi (2.4GHz) / 1.91 dBi (5GHz)
Type of Modulation	802.11b : DSSS 802.11a/g/n : OFDM
DUT Stage	Production Unit

**Remark:**

1. Antenna 1 and Antenna 2 can transmit simultaneously for 802.11a/b/g/n.
2. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.

**3.2 Product Photos**

Refer to Appendix D.

**3.3 Applied Standards**

The Specific Absorption Rate (SAR) testing specification, method and procedure for this ORiNOCO 802.11 a/b/g/n USB Adapter is in accordance with the following standards:

- 47 CFR Part 2 (2.1093)
- IEEE C95.1-1999
- OET Bulletin 65 Supplement C (Edition 01-01)
- KDB 248227 D01 v01r02
- KDB 447498 D02 v01





**3.4 Device Category and SAR Limits**

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

**3.5 Test Conditions**

**3.5.1 Ambient Condition**

Ambient Temperature	20-24°C
Humidity	<60%

**3.5.2 Test Configuration**

For WLAN link mode, engineering testing software installed on the EUT can provide continuous transmitting RF signal. This RF signal utilized in SAR measurement has almost 100% duty cycle and its crest factor is 1.

The data rates for WLAN SAR testing were set in 1Mbps for 802.11b, 6Mbps for 802.11g, 6Mbps for 802.11a, and 6.5Mbps for 802.11n BW 20MHz and 13.5Mbps for 802.11n BW 40MHz due to the highest RF output power.

## 4. Specific Absorption Rate (SAR)

### 4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

### 4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density.

ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

**SAR is expressed in units of Watts per kilogram (W/kg)**

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = C \frac{\delta T}{\delta t}$$

, where C is the specific heat capacity,  $\delta T$  is the temperature rise and  $\delta t$  the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

, where  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the rms electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

## 5. SAR Measurement Setup

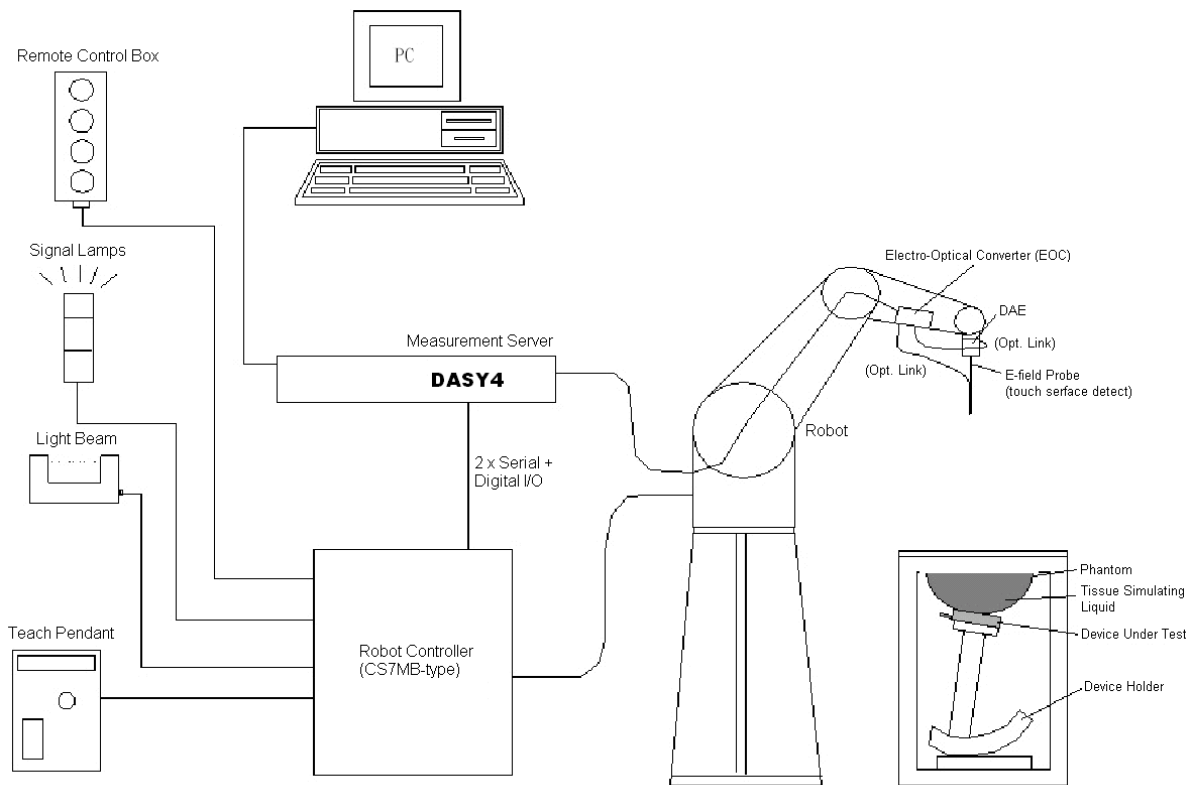


Fig. 5.1 DASY4 System

The DASY4 system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY4 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system


Some of the components are described in details in the following sub-sections.

**5.1 DASY4 E-Field Probe System**

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG).The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.


**5.1.1 E-Field Probe Specification**

**<ET3DV6 Probe >**

<b>Construction</b>	Symmetrical design with triangular core Built-in optical fiber for surface detection system Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents)	
<b>Frequency</b>	10 MHz to 3 GHz	
<b>Directivity</b>	± 0.2 dB in brain tissue (rotation around probe axis) ± 0.4 dB in brain tissue (rotation perpendicular to probe axis)	
<b>Dynamic Range</b>	5µW/g to 100mW/g; Linearity: ±0.2dB	
<b>Surface Detection</b>	± 0.2 mm repeatability in air and clear liquids on reflecting surface	
<b>Dimensions</b>	Overall length: 330mm Tip length: 16mm Body diameter: 12mm Tip diameter: 6.8mm Distance from probe tip to dipole centers: 2.7mm	
<b>Application</b>	General dosimetry up to 3GHz Compliance tests for mobile phones and Wireless LAN Fast automatic scanning in arbitrary phantoms	

**Fig. 5.2 Probe Setup on Robot**

**<EX3DV3 Probe>**

<b>Construction</b>	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents)	
<b>Frequency</b>	10 MHz to 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)	
<b>Directivity</b>	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
<b>Dynamic Range</b>	10 µW/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 µW/g)	
<b>Dimensions</b>	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	
<b>Application</b>	High precision dosimetric measurements in any exposure scenario (e.g., very strong gradient fields). Only probe which enables compliance testing for frequencies up to 6 GHz with precision of better 30%.	

**Fig. 5.3 EX3DV3 E-field Probe**



5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy shall be evaluated and within ± 0.25dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data are as below:

ET3DV6 sn1788 (Cal: Sep. 23, 2008)			
Item	X axis	Y axis	Z axis
Sensitivity (µV)	1.73	1.59	1.72
Diode Compression Point (mV)	95	98	91
Conversion Factor (Head / Body)	Frequency (MHz)	X,Y,Z axis	
	800~1000	6.55 / 6.34	
	1650~1850	5.59 / 4.87	
	1850~2050	5.13 / 4.73	
	2350~2550	4.68 / 3.98	
Boundary Effect (Head / Body)	Frequency (MHz)	Alpha	Depth
	800~1000	0.44 / 0.50	2.65 / 2.48
	1650~1850	0.68 / 0.63	1.98 / 2.33
	1850~2050	0.75 / 0.74	1.75 / 1.99
	2350~2550	0.80 / 0.94	1.45 / 1.75

NOTE: The probe parameters have been calibrated by the SPEAG.



EX3DV3 sn3514 (Cal: Jan. 21, 2009)			
Item	X axis	Y axis	Z axis
Sensitivity (µV)	0.66	0.70	0.60
Diode Compression Point (mV)	91	94	95
Conversion Factor (Head / Body)	Frequency (MHz)	X,Y,Z axis	
	800~1000	9.31 / 9.41	
	1710~1910	8.16 / 8.18	
	2200~2400	7.78 / 7.60	
	2500~2700	7.34 / 7.20	
	3400~3600	6.89 / 6.40	
	5100~5300	4.78 / 4.29	
	5200~5400	4.40 / 3.94	
	5400~5600	4.22 / 3.88	
	5500~5700	4.13 / 3.89	
5700~5900	4.13 / 3.85		
Boundary Effect (Head / Body)	Frequency (MHz)	Alpha	Depth
	800~1000	0.45 / 0.42	0.76 / 0.76
	1710~1910	0.60 / 0.85	0.63 / 0.56
	2200~2400	0.53 / 0.18	0.63 / 4.17
	2500~2700	0.16 / 0.34	2.19 / 1.14
	3400~3600	0.50 / 0.53	0.86 / 0.81
	5100~5300	0.40 / 0.45	1.70 / 1.75
	5200~5400	0.40 / 0.45	1.70 / 1.75
	5400~5600	0.40 / 0.45	1.70 / 1.75
	5500~5700	0.40 / 0.45	1.70 / 1.75
5700~5900	0.40 / 0.45	1.70 / 1.75	

NOTE: The probe parameters have been calibrated by the SPEAG.

### **5.2 DATA Acquisition Electronics (DAE)**

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The mechanical probe mounting device includes two different sensor systems for frontal and sideways probe contacts. They are used for mechanical surface detection and probe collision detection.

The input impedance of the DAE is 200M Ohm; the inputs are symmetrical and floating. Common mode rejection is above 80dB.

### **5.3 Robot**

The DASY4 system uses the high precision robots RX90BL type out of the newer series from Stäubli SA (France). For the 6-axis controller DASY4 system, the CS7MB robot controller version from Stäubli is used. The RX robot series have many features that are important for our application:

- High precision (repeatability 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)
- 6-axis controller

### **5.4 Measurement Server**

The DASY4 measurement server is based on a PC/104 CPU board with  
166 MHz CPU  
32 MB chipset and  
64 MB RAM.

Communication with  
the DAE electronic box  
the 16-bit AD-converter system for optical detection and digital I/O interface.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.

### 5.5 SAM Twin Phantom

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left head
- Right head
- Flat phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

The phantom can be used with the following tissue simulating liquids:

\*Water-sugar based liquid

\*Glycol based liquids

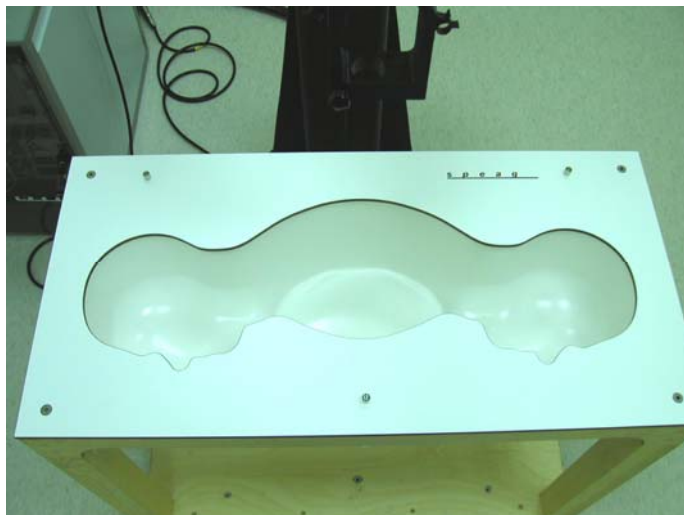


Fig. 5.4 Top View of Twin Phantom



Fig. 5.5 Bottom View of Twin Phantom



### **5.6 Device Holder for SAM Twin Phantom**

The SAR in the Phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5 mm distance, a positioning uncertainty of  $\pm 0.5\text{mm}$  would produce a SAR uncertainty of  $\pm 20\%$ . An accurate device position is therefore crucial for accurate and repeatable measurement. The position in which the devices must be measured, are defined by the standards.

The DASY4 device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR).

Thus the device needs no repositioning when changing the angles.

The DASY4 device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon_r = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



**Fig. 5.6 Device Holder**



## 5.7 Data Storage and Evaluation

### 5.7.1 Data Storage

The DASY4 software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files with the extension. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### 5.7.2 Data Evaluation

The DASY4 post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

<b>Probe parameters :</b>	- Sensitivity	Norm <sub>j</sub> , a <sub>ρ</sub> , a <sub>1</sub> , a <sub>2</sub>
	- Conversion factor	ConvF <sub>j</sub>
	- Diode compression point	dcp <sub>j</sub>
<b>Device parameters :</b>	- Frequency	f
	- Crest factor	cf
<b>Media parameters :</b>	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY4 components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with  **$V_i$**  = compensated signal of channel  $i$  ( $i = x, y, z$ )  
 **$U_i$**  = input signal of channel  $i$  ( $i = x, y, z$ )  
 **$cf$**  = crest factor of exciting field (DASY parameter)  
 **$dcp_i$**  = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

**E-field probes :**  $E_i = \sqrt{\frac{V_i}{Norm_i ConvF}}$

**H-field probes :**  $H_i = \sqrt{V_i \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$

with  **$V_i$**  = compensated signal of channel  $i$  ( $i = x, y, z$ )  
 **$Norm_i$**  = sensor sensitivity of channel  $i$  ( $i = x, y, z$ )  
 $\mu V/(V/m)^2$  for E-field Probes  
 **$ConvF$**  = sensitivity enhancement in solution  
 **$a_{ij}$**  = sensor sensitivity factors for H-field probes  
 **$f$**  = carrier frequency [GHz]  
 **$E_i$**  = electric field strength of channel  $i$  in V/m  
 **$H_i$**  = magnetic field strength of channel  $i$  in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with  **$SAR$**  = local specific absorption rate in mW/g  
 **$E_{tot}$**  = total field strength in V/m  
 $\sigma$  = conductivity in [mho/m] or [Siemens/m]  
 $\rho$  = equivalent tissue density in  $g/cm^3$

\* Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

The power flow density is calculated assuming the excitation field to be a free space field.

$$P_{pwe} = \frac{E_{tot}^2}{3770} \quad \text{or} \quad P_{pwe} = H_{tot}^2 \cdot 37.7$$

with  **$P_{pwe}$**  = equivalent power density of a plane wave in  $mW/cm^2$   
 **$E_{tot}$**  = total electric field strength in V/m  
 **$H_{tot}$**  = total magnetic field strength in A/m



**5.8 Test Equipment List**

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	Dosimetric E-Filed Probe	ET3DV6	1787	Aug. 26, 2008	Aug. 25, 2009
SPEAG	Dosimetric E-Filed Probe	ET3DV6	1788	Sep. 23, 2008	Sep. 22, 2009
SPEAG	Dosimetric E-Filed Probe	EX3DV3	3514	Jan. 21, 2009	Jan. 20, 2010
SPEAG	835MHz System Validation Kit	D835V2	499	Mar. 17, 2008	Mar. 16, 2010
SPEAG	900MHz System Validation Kit	D900V2	190	Jul. 16, 2007	Jul. 15, 2009
SPEAG	1800MHz System Validation Kit	D1800V2	2d076	Jul. 10, 2007	Jul. 09, 2009
SPEAG	1900MHz System Validation Kit	D1900V2	5d041	Mar. 28, 2008	Mar. 27, 2010
SPEAG	2000MHz System Validation Kit	D2000V2	1010	Sep. 17, 2008	Sep. 16, 2010
SPEAG	2300MHz System Validation Kit	D2300V2	1006	Sep. 12, 2007	Sep. 11, 2009
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 12, 2007	Jul. 11, 2009
SPEAG	2600MHz System Validation Kit	D2600V2	1008	Sep. 12, 2007	Sep. 11, 2009
SPEAG	3500MHz System Validation Kit	D3500V2	1014	Sep. 19, 2007	Sep. 18, 2009
SPEAG	5GHz System Validation Kit	D5GHzV2	1006	Jan. 24, 2008	Jan. 23, 2010
SPEAG	Data Acquisition Electronics	DAE3	577	Nov. 12, 2008	Nov. 11, 2009
SPEAG	Data Acquisition Electronics	DAE4	778	Sep. 22, 2008	Sep. 21, 2009
SPEAG	Device Holder	N/A	N/A	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1303	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1383	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1446	NCR	NCR
SPEAG	SAM Phantom	QD 000 P40 C	TP-1477	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BB	1026	NCR	NCR
SPEAG	ELI4 Phantom	QD 0VA 001 BA	1029	NCR	NCR
Agilent	ENA Series Network Analyzer	E5071C	MY46100746	Jan. 20, 2009	Jan. 19, 2010
Agilent	Wireless Communication Test Set	E5515C	MY48360820	Dec. 15, 2008	Dec. 14, 2009
R&S	Universal Radio Communication Tester	CMU200	105934	Nov. 11, 2008	Nov. 10, 2009
Agilent	Dielectric Probe Kit	85070D	US01440205	NCR	NCR
Agilent	Dual Directional Coupler	778D	50422	NCR	NCR
AR	Power Amplifier	5S1G4M2	0328767	NCR	NCR
R&S	Power Meter	NRVD	101394	Oct. 20, 2008	Oct. 19, 2009
R&S	Power Sensor	NRV-Z1	100130	Oct. 20, 2008	Oct. 19, 2009

**Table 5.1 Test Equipment List**

## 6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY4, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. The liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is (head SAR) or from the flat phantom to the liquid top surface (body SAR) is 15.2cm, which is shown in Fig. 6.1.



Fig 6.1 Liquid height from the bottom of the phantom body is 15.2 centimeters

Table 6.1 gives the targets for tissue simulating liquid.

Frequency (MHz)	Liquid Type	Conductivity ( $\sigma$ )	$\pm 5\%$ Range	Permittivity ( $\epsilon_r$ )	$\pm 5\%$ Range
2450	Body	1.95	1.85 ~ 2.05	52.7	50.1 ~ 55.3
5200	Body	5.30	5.04 ~ 5.57	49.0	46.6 ~ 51.5
5500	Body	5.65	5.37 ~ 5.93	48.6	46.2 ~ 51.0
5800	Body	6.00	5.70 ~ 6.30	48.2	45.8 ~ 50.6

Table 6.1 Targets of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.



Table 6.2 shows the measuring results for simulating liquid.

Band	Temperature (°C)	Frequency (MHz)	Conductivity ( $\sigma$ )	Permittivity ( $\epsilon_r$ )	Measurement date
802.11b/g/n (2400~2483.5 MHz)	21.8	2412	1.88	53.7	Apr. 18, 2009
		2437	1.91	53.6	
		2462	1.95	53.5	
802.11a/n (5150~5250 MHz)	21.5	5180	5.30	48.7	Apr. 19, 2009
		5240	5.39	48.6	
802.11a/n (5250~5350 MHz)	21.5	5260	5.42	48.6	Apr. 19, 2009
		5320	5.50	48.4	
802.11a/n (5470~5725 MHz)	21.5	5520	5.75	48.0	Apr. 19, 2009
		5580	5.82	47.8	
		5620	5.87	47.7	
		5680	5.94	47.5	
802.11a/n (5725~5825 MHz)	21.5	5745	6.05	47.5	Apr. 19, 2009
		5785	6.09	47.4	
		5825	6.13	47.2	

**Table 6.2 Measuring Results for Simulating Liquid**



### 7. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 7.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-shape
<b>Multiplying factor<sup>(a)</sup></b>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

**Table 7.1 Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY4 uncertainty Budget is showed in Table 7.2.



Error Description	Uncertainty Value ± %	Probability Distribution	Divisor	Ci (1g)	Standard Unc. (1g)	vi or Veff
<b>Measurement Equipment</b>						
Probe Calibration	±5.9 %	Normal	1	1	±5.9 %	∞
Axial Isotropy	±4.7 %	Rectangular	√3	0.7	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	Rectangular	√3	0.7	±3.9 %	∞
Boundary Effects	±1.0 %	Rectangular	√3	1	±0.6 %	∞
Linearity	±4.7 %	Rectangular	√3	1	±2.7 %	∞
System Detection Limits	±1.0 %	Rectangular	√3	1	±0.6 %	∞
Readout Electronics	±0.3 %	Normal	1	1	±0.3 %	∞
Response Time	±0.8 %	Rectangular	√3	1	±0.5 %	∞
Integration Time	±2.6 %	Rectangular	√3	1	±1.5 %	∞
RF Ambient Noise	±3.0 %	Rectangular	√3	1	±1.7 %	∞
RF Ambient Reflections	±3.0 %	Rectangular	√3	1	±1.7 %	∞
Probe Positioner	±0.4 %	Rectangular	√3	1	±0.2 %	∞
Probe Positioning	±2.9 %	Rectangular	√3	1	±1.7 %	∞
Max. SAR Eval.	±1.0 %	Rectangular	√3	1	±0.6 %	∞
<b>Test Sample Related</b>						
Device Positioning	±2.9 %	Normal	1	1	±2.9	145
Device Holder	±3.6 %	Normal	1	1	±3.6	5
Power Drift	±5.0 %	Rectangular	√3	1	±2.9	∞
<b>Phantom and Setup</b>						
Phantom Uncertainty	±4.0 %	Rectangular	√3	1	±2.3	∞
Liquid Conductivity (target)	±5.0 %	Rectangular	√3	0.64	±1.8	∞
Liquid Conductivity (meas.)	±2.5 %	Normal	1	0.64	±1.6	∞
Liquid Permittivity (target)	±5.0 %	Rectangular	√3	0.6	±1.7	∞
Liquid Permittivity (meas.)	±2.5 %	Normal	1	0.6	±1.5	∞
<b>Combined Standard Uncertainty</b>					<b>±10.9</b>	<b>387</b>
<b>Coverage Factor for 95 %</b>		<b>K=2</b>				
<b>Expanded uncertainty (Coverage factor = 2)</b>					<b>±21.9</b>	

Table 7.2 Uncertainty Budget of DASY4 for 2.4GHz Band





Error Description	Uncertainty Value	Probability Distribution	Divisor	Ci (1g)	Standard Unc. (1g)	vi or Veff
<b>Measurement System</b>						
Probe Calibration	±6.8 %	Normal	1	1	±6.8 %	∞
Axial Isotropy	±4.7 %	Rectangular	√3	0.7	±1.9 %	∞
Hemispherical Isotropy	±9.6 %	Rectangular	√3	0.7	±3.9 %	∞
Boundary Effect	±2.0 %	Rectangular	√3	1	±1.2 %	∞
Linearity	±4.7 %	Rectangular	√3	1	±2.7 %	∞
System Detection Limit	±1.0 %	Rectangular	√3	1	±0.6 %	∞
Readout Electronics	±0.3 %	Normal	1	1	±0.3 %	∞
Response Time	±0.8 %	Rectangular	√3	1	± 0.5 %	∞
Integration Time	±2.6 %	Rectangular	√3	1	± 1.5 %	∞
RF Ambient Noise	±3.0 %	Rectangular	√3	1	±1.7 %	∞
RF Ambient Reflections	±3.0 %	Rectangular	√3	1	±1.7 %	∞
Probe Positioner	±0.8 %	Rectangular	√3	1	±0.5 %	∞
Probe Positioning	±9.9 %	Rectangular	√3	1	±5.7 %	∞
Max. SAR Eval.	±4.0 %	Rectangular	√3	1	±2.3 %	∞
<b>Test Sample Related</b>						
Device Positioning	±2.9 %	Normal	1	1	±2.9 %	145
Device Holder	±3.6 %	Normal	1	1	±3.6 %	5
Power Drift	±5.0 %	Rectangular	√3	1	±2.9 %	∞
<b>Phantom and Setup</b>						
Phantom Uncertainty	±4.0 %	Rectangular	√3	1	±2.3 %	∞
Liquid Conductivity (target)	±5.0 %	Rectangular	√3	0.64	±1.8 %	∞
Liquid Conductivity (meas.)	±2.5 %	Normal	1	0.64	±1.6 %	∞
Liquid Permittivity (target)	±5.0 %	Rectangular	√3	0.6	±1.7 %	∞
Liquid Permittivity (meas.)	±2.5 %	Normal	1	0.6	±1.5 %	∞
<b>Combined Std. Uncertainty</b>					<b>±12.9 %</b>	<b>330</b>
<b>Coverage Factor for 95%</b>	<b>Kp=2</b>					
<b>Expanded STD Uncertainty</b>					<b>±25.9 %</b>	

Table 7.3 Uncertainty Budget of DASY4 for 5GHz Band

## 8. SAR Measurement Evaluation

Each DASY4 system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY4 software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 8.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 8.2 System Setup

In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator at frequency 2450 MHz, 5200 MHz, 5500 MHz and 5800 MHz. The calibrated dipole must be placed beneath the flat phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

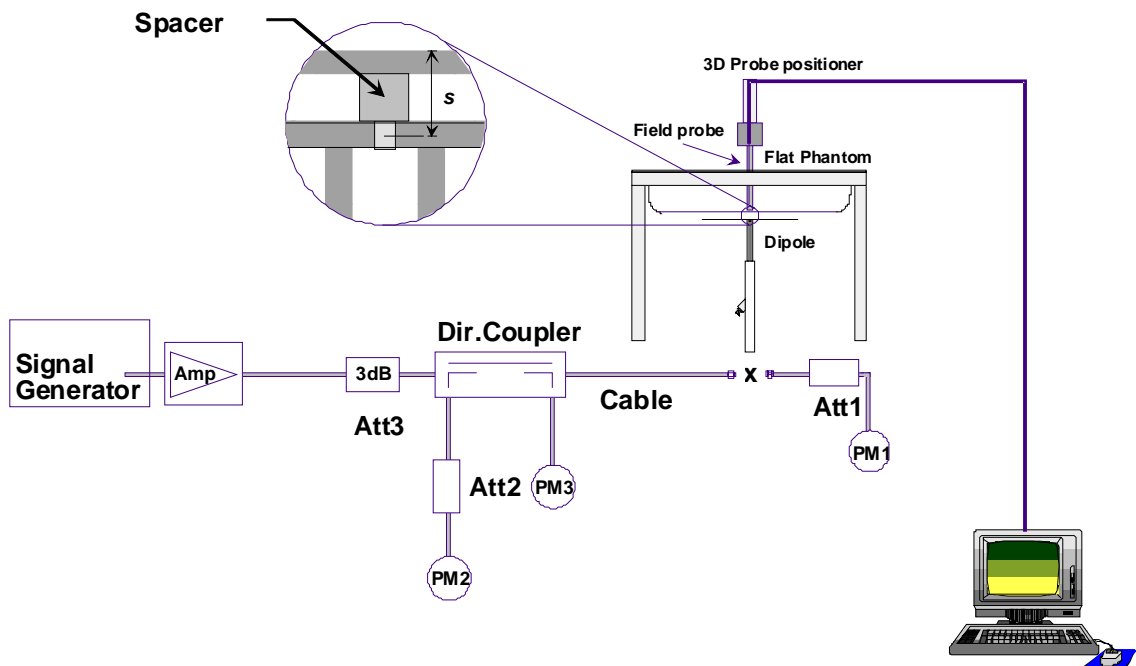


Fig. 8.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. 2450MHz or 5200 MHz or 5500 MHz or 5800 MHz Dipole

The output power on dipole port must be calibrated to 20dBm (100mW) before dipole is connected.



**Fig 8.2 Dipole Setup**



**8.3 Validation Results**





Comparing to the original SAR value provided by SPEAG, the validation data should be within its specification of 10 %. Table 8.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion.

Frequency (MHz)	SAR	Target (W/kg)	Measurement Data (W/kg)	Variation	Measurement Date
2450	SAR (1g)	52.5	55.4	5.5 %	Apr. 18, 2009
	SAR (10g)	24.4	26.4	8.2 %	
5200	SAR (1g)	76.8	74.7	-2.7 %	Apr. 19, 2009
	SAR (10g)	21.6	21.2	-1.9 %	
5500	SAR (1g)	80.1	80.7	0.7 %	Apr. 19, 2009
	SAR (10g)	22.3	22.9	2.7 %	
5800	SAR (1g)	69.4	70.9	2.2 %	Apr. 19, 2009
	SAR (10g)	19.3	20.1	4.1 %	

**Table 8.1 Target and Measurement Data Comparison**

**9. Description for DUT Testing Position**

This DUT was tested in four different USB configurations. They are “direct laptop plug-in for configuration 1” and “USB cable plug-in for configuration 2 to 4” shown as below. Both direct laptop plug-in and USB cable plug-in test configurations are tested with 5 mm separation between the particular dongle orientation and the flat phantom. Please refer to Appendix E for the test setup photos.

			
<p><b>Configuration 1 (Horizontal Up)</b></p>	<p><b>Configuration 2 (Horizontal Down)</b></p>	<p><b>Configuration 3 (Vertical Front)</b></p>	<p><b>Configuration 4 (Vertical Back)</b></p>

## **10. Measurement Procedures**

The measurement procedures are as follows:

- Using engineering software to transmit RF power continuously (continuous Tx)
- Placing the DUT in the positions described in the last section
- Setting scan area, grid size and other setting on the DASY4 software
- Taking data

According to the OET Bulletin 65 Supplement C standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement
- Area scan
- Zoom scan
- Power reference measurement

### **10.1 Spatial Peak SAR Evaluation**

The procedure for spatial peak SAR evaluation has been implemented according to the OET Bulletin 65 Supplement C standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY4 software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- extraction of the measured data (grid and values) from the Zoom Scan
- calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- generation of a high-resolution mesh within the measured volume
- interpolation of all measured values from the measurement grid to the high-resolution grid
- extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- calculation of the averaged SAR within masses of 1g and 10g



## **10.2 Scan Procedures**

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan measures 5x5x7 points with step size 8, 8 and 5 mm for 2.4GHz and 8x8x8 points with step size 4.3, 4.3 and 3 mm for 5GHz. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 1 g.

## **10.3 SAR Averaged Methods**

In DAS4, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.



## 11. SAR Test Results

### 11.1 Conducted Power

Channel	Frequency (MHz)	2.4GHz 802.11b RF Power (dBm)		
		Data Rate: 1Mbps		
		Antenna 1	Antenna 2	Antenna 1+ Antenna 2
CH 01	2412 MHz	14.66	14.27	17.48
CH 06	2437 MHz	14.34	14.57	17.47
CH 11	2462 MHz	14.75	14.83	17.80

Channel	Frequency (MHz)	2.4GHz 802.11g RF Power (dBm)		
		Data Rate: 1Mbps		
		Antenna 1	Antenna 2	Antenna 1+ Antenna 2
CH 01	2412 MHz	16.01	16.26	19.15
CH 06	2437 MHz	16.08	16.47	19.29
CH 11	2462 MHz	15.27	15.43	18.36

Channel	Frequency (MHz)	2.4GHz 802.11n (BW 20MHz) RF Power (dBm)		
		Data Rate: 6.5Mbps		
		Antenna 1	Antenna 2	Antenna 1+ Antenna 2
CH 01	2412 MHz	16.05	16.00	19.04
CH 06	2437 MHz	15.91	16.09	19.01
CH 11	2462 MHz	13.83	13.83	16.84

Channel	Frequency (MHz)	2.4GHz 802.11n (BW 40MHz) RF Power (dBm)		
		Data Rate: 13.5Mbps		
		Antenna 1	Antenna 2	Antenna 1+ Antenna 2
CH 03	2422 MHz	12.14	12.20	15.18
CH 06	2437 MHz	14.51	14.36	17.45
CH 09	2452 MHz	11.30	11.33	14.33





Channel	Frequency (MHz)	5GHz 802.11a RF Power (dBm)		
		Data Rate: 6.5Mbps		
		Antenna 1	Antenna 2	Antenna 1+ Antenna 2
CH 36	5180 MHz	10.34	10.74	13.55
CH 40	5200 MHz	10.04	10.20	13.13
CH 48	5240 MHz	11.97	12.49	15.25
CH 52	5260 MHz	10.42	10.62	13.53
CH 60	5300 MHz	9.92	9.61	12.78
CH 64	5320 MHz	9.72	9.87	12.81
CH 100	5500 MHz	12.27	11.78	15.04
CH 104	5520 MHz	12.54	11.98	15.28
CH 116	5580 MHz	12.57	13.33	15.98
CH 124	5620 MHz	12.19	12.32	15.27
CH 136	5680 MHz	12.56	11.73	15.18
CH 140	5700 MHz	12.14	11.50	14.84
CH 149	5745 MHz	12.96	12.66	15.82
CH 157	5785 MHz	13.17	14.08	16.66
CH 165	5825 MHz	13.46	14.23	16.87

Channel	Frequency (MHz)	5GHz 802.11n (BW 20MHz)RF Power (dBm)		
		Data Rate: 13.5Mbps		
		Antenna 1	Antenna 2	Antenna 1+ Antenna 2
CH 36	5180 MHz	10.17	10.74	13.47
CH 40	5200 MHz	10.06	10.14	13.11
CH 48	5240 MHz	11.47	10.98	14.24
CH 52	5260 MHz	10.20	10.40	13.31
CH 60	5300 MHz	9.34	9.28	12.32
CH 64	5320 MHz	9.81	9.68	12.76
CH 100	5500 MHz	12.38	11.63	15.03
CH 104	5520 MHz	12.26	11.96	15.12
CH 116	5580 MHz	12.47	13.10	15.81
CH 124	5620 MHz	12.18	12.22	15.21
CH 136	5680 MHz	12.26	11.41	14.87
CH 140	5700 MHz	12.10	11.22	14.69
CH 149	5745 MHz	12.32	11.86	15.11
CH 157	5785 MHz	13.27	13.77	16.54
CH 165	5825 MHz	13.42	14.18	16.83



Channel	Frequency (MHz)	5GHz 802.11n (BW 40MHz) RF Power (dBm)		
		Data Rate: 6Mbps		
		Antenna 1	Antenna 2	Antenna 1+ Antenna 2
CH 38	5190 MHz	10.26	10.53	13.41
CH 46	5230 MHz	12.17	11.59	15.07
CH 48	5240 MHz	12.27	12.06	15.18
CH 54	5270 MHz	10.20	10.18	13.20
CH 62	5310 MHz	9.60	9.20	12.41
CH 102	5510 MHz	12.45	11.88	15.18
CH 110	5550 MHz	12.20	12.18	15.20
CH 134	5670 MHz	12.18	11.55	14.89
CH 151	5755 MHz	12.22	12.20	15.22
CH 159	5795 MHz	13.13	13.96	16.58

**11.2 Test Records for Body SAR Test**

USB Configuration	Separation	Antenna	Band	Chan.	Freq. (MHz)	Modulation Type	Measured 1g SAR (W/kg)	Limit (W/kg)	Result
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11b	6	2437	DSSS	1.07	1.6	Pass
2 (USB Cable) (Horizontal Down)	5 mm	Ant. 1+2	802.11b	6	2437	DSSS	0.459	1.6	Pass
3 (USB Cable) (Vertical Front)	5 mm	Ant. 1+2	802.11b	6	2437	DSSS	0.256	1.6	Pass
4 (USB Cable) (Vertical Back)	5 mm	Ant. 1+2	802.11b	6	2437	DSSS	0.254	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11g	6	2437	OFDM	0.972	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11n (BW 20MHz)	6	2437	OFDM	0.966	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11n (BW 40MHz)	6	2437	OFDM	0.8	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1	802.11b	6	2437	DSSS	0.581	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 2	802.11b	6	2437	DSSS	0.581	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11b	1	2412	DSSS	0.953	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11b	11	2462	DSSS	0.992	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11g	1	2412	OFDM	0.941	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11g	11	2462	OFDM	0.972	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11n (BW 20MHz)	1	2412	OFDM	0.892	1.6	Pass
<b>1 (Laptop) (Horizontal Up)</b>	<b>5 mm</b>	<b>Ant. 1+2</b>	<b>802.11n (BW 20MHz)</b>	<b>11</b>	<b>2462</b>	<b>OFDM</b>	<b>1.12</b>	<b>1.6</b>	<b>Pass</b>



USB Configuration	Separation	Antenna	Band	Chan.	Freq. (MHz)	Modulation Type	Measured 1g SAR (W/kg)	Limit (W/kg)	Result
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	48	5240	OFDM	1.18	1.6	Pass
2 (USB Cable) (Horizontal Down)	5 mm	Ant. 1+2	802.11a	48	5240	OFDM	0.553	1.6	Pass
3 (USB Cable) (Vertical Front)	5 mm	Ant. 1+2	802.11a	48	5240	OFDM	0.33	1.6	Pass
4 (USB Cable) (Vertical Back)	5 mm	Ant. 1+2	802.11a	48	5240	OFDM	0.412	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11n (BW 20MHz)	48	5240	OFDM	0.939	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11n (BW 40MHz)	48	5240	OFDM	0.942	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1	802.11a	48	5240	OFDM	0.476	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 2	802.11a	48	5240	OFDM	0.496	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	36	5180	OFDM	0.909	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	52	5260	OFDM	0.791	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	64	5320	OFDM	0.828	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	104	5520	OFDM	0.874	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	116	5580	OFDM	0.863	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	124	5620	OFDM	0.845	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	136	5680	OFDM	0.836	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	149	5745	OFDM	0.815	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	157	5785	OFDM	0.81	1.6	Pass
1 (Laptop) (Horizontal Up)	5 mm	Ant. 1+2	802.11a	165	5825	OFDM	0.837	1.6	Pass

**11.3 Test Records for Back-Off SAR Test**

USB Configuration	Separation	Antenna	Band	Chan.	Freq. (MHz)	Modulation Type	Measured 1g SAR (W/kg)	Limit (W/kg)	Result
1 (Laptop) (Horizontal Up)	10 mm	Ant. 1+2	802.11n (BW 20MHz)	11	2462	OFDM	0.41	1.6	Pass
1 (Laptop) (Horizontal Up)	10 mm	Ant. 1+2	802.11a	48	5240	OFDM	0.506	1.6	Pass

Test Engineer : Jason Wang, Robert Liu, A-Rod Chen, and Gordon Lin



## **12. References**

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] Supplement C (Edition 01-01) to OET Bulletin 65 (Edition 97-01), "Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to RF Emissions", June 2001
- [3] IEEE Std. C95.1-1999, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", 1999
- [4] Robert J. Renka, "Multivariate Interpolation Of Large Sets Of Scattered Data", University of North Texas ACM Transactions on Mathematical Software, vol. 14, no. 2, June 1988, pp. 139-148
- [5] DASY4 System Handbook
- [6] KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [7] KDB 447498 D02 v01, "SAR Measurement Procedures for USB Dongle Transmitters", December 02, 2008

## Appendix A - System Performance Check Data

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/18

### System Check\_Body\_2450MHz\_20090418

#### DUT: Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.93$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.8 °C

#### DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(3.98, 3.98, 3.98); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 6.45 mW/g


**Pin=100mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 58.8 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 11.7 W/kg

**SAR(1 g) = 5.54 mW/g; SAR(10 g) = 2.64 mW/g**

Maximum value of SAR (measured) = 6.24 mW/g

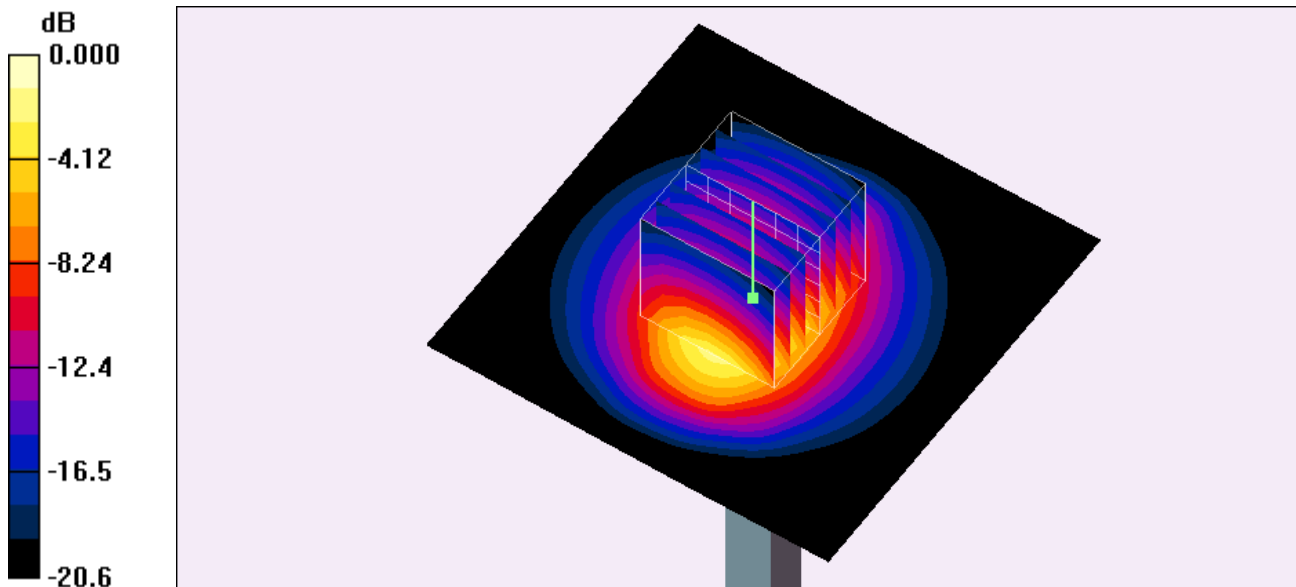

0 dB = 6.24mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/19

**System Check\_Body\_5200MHz\_20090419**

**DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5200 MHz; Duty Cycle: 1:1

Medium: MSL\_5G Medium parameters used:  $f = 5200$  MHz;  $\sigma = 5.33$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV3 - SN3514; ConvF(4.29, 4.29, 4.29); Calibrated: 2009/1/21
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 13.2 mW/g

**Pin=100mW/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm  
Reference Value = 50.9 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 26.7 W/kg

**SAR(1 g) = 7.47 mW/g; SAR(10 g) = 2.12 mW/g**

Maximum value of SAR (measured) = 12.9 mW/g

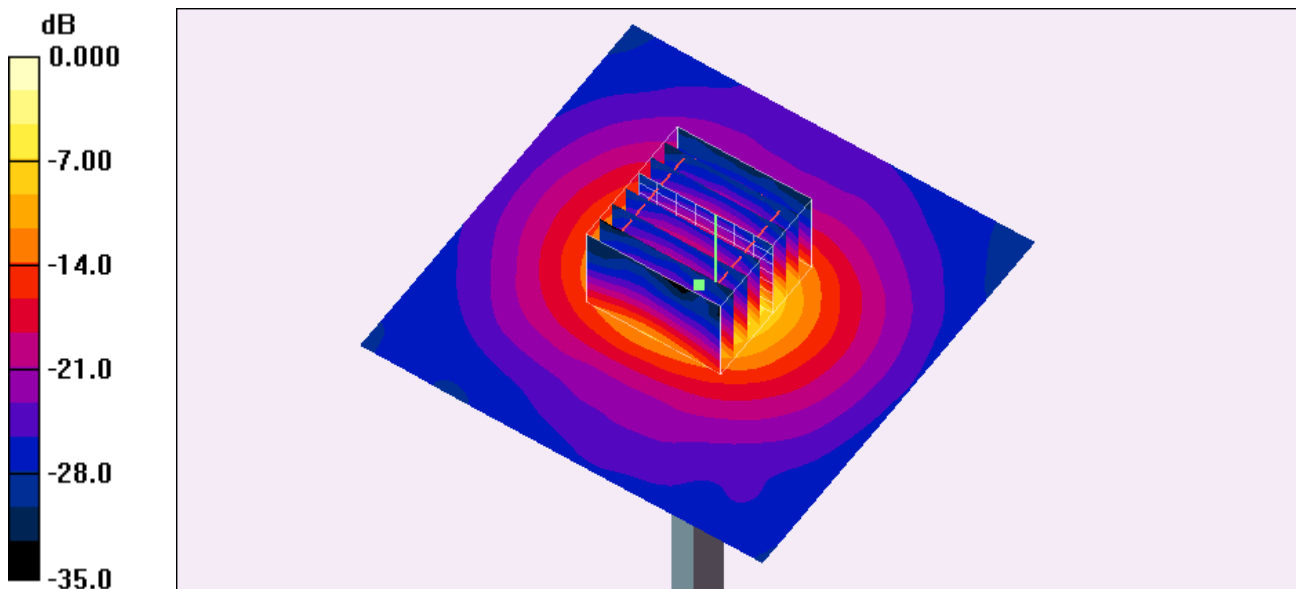

0 dB = 12.9mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/19

**System Check\_Body\_5500MHz\_20090419**

**DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5500 MHz; Duty Cycle: 1:1

Medium: MSL\_5G Medium parameters used:  $f = 5500$  MHz;  $\sigma = 5.74$  mho/m;  $\epsilon_r = 48.1$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV3 - SN3514; ConvF(3.88, 3.88, 3.88); Calibrated: 2009/1/21
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 14.7 mW/g

**Pin=100mW/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm  
Reference Value = 52.3 V/m; Power Drift = -0.038 dB

Peak SAR (extrapolated) = 30.7 W/kg

**SAR(1 g) = 8.07 mW/g; SAR(10 g) = 2.29 mW/g**

Maximum value of SAR (measured) = 13.5 mW/g

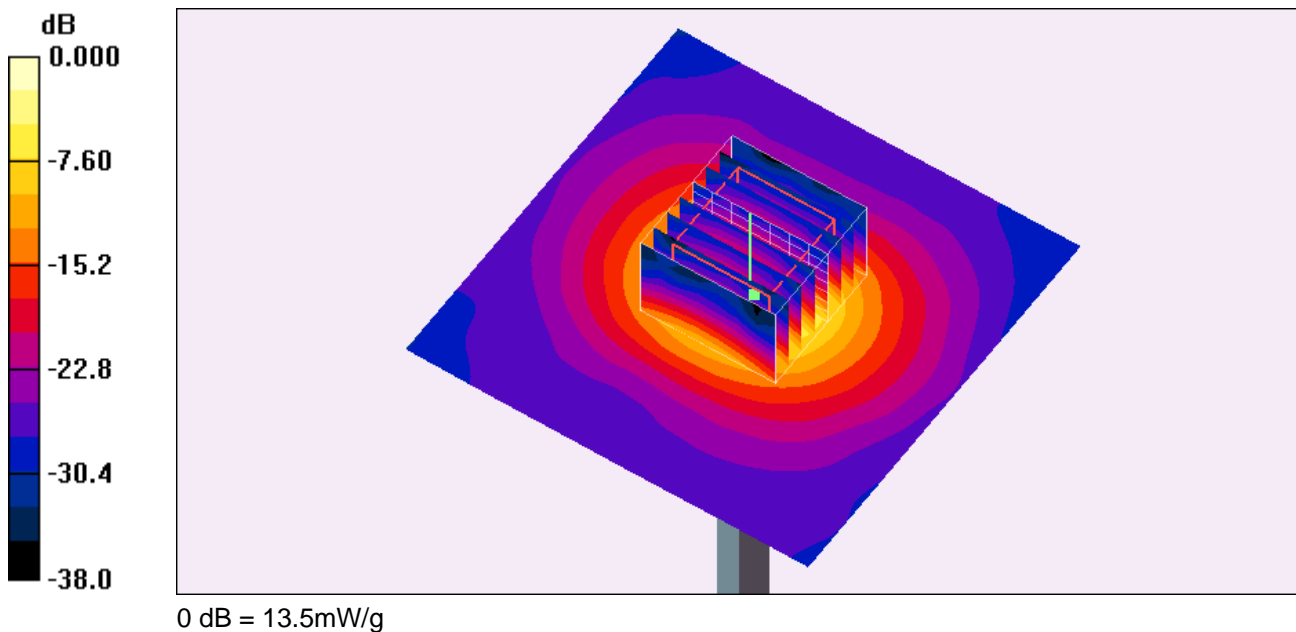

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/19

**System Check\_Body\_5800MHz\_20090419**

**DUT: Dipole 5GHz**

Communication System: CW; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium: MSL\_5G Medium parameters used:  $f = 5800$  MHz;  $\sigma = 6.11$  mho/m;  $\epsilon_r = 47.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV3 - SN3514; ConvF(3.85, 3.85, 3.85); Calibrated: 2009/1/21
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186


**Pin=100mW/Area Scan (91x91x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 12.7 mW/g

**Pin=100mW/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm  
Reference Value = 47.3 V/m; Power Drift = -0.010 dB

Peak SAR (extrapolated) = 28.8 W/kg

**SAR(1 g) = 7.09 mW/g; SAR(10 g) = 2.01 mW/g**

Maximum value of SAR (measured) = 11.8 mW/g

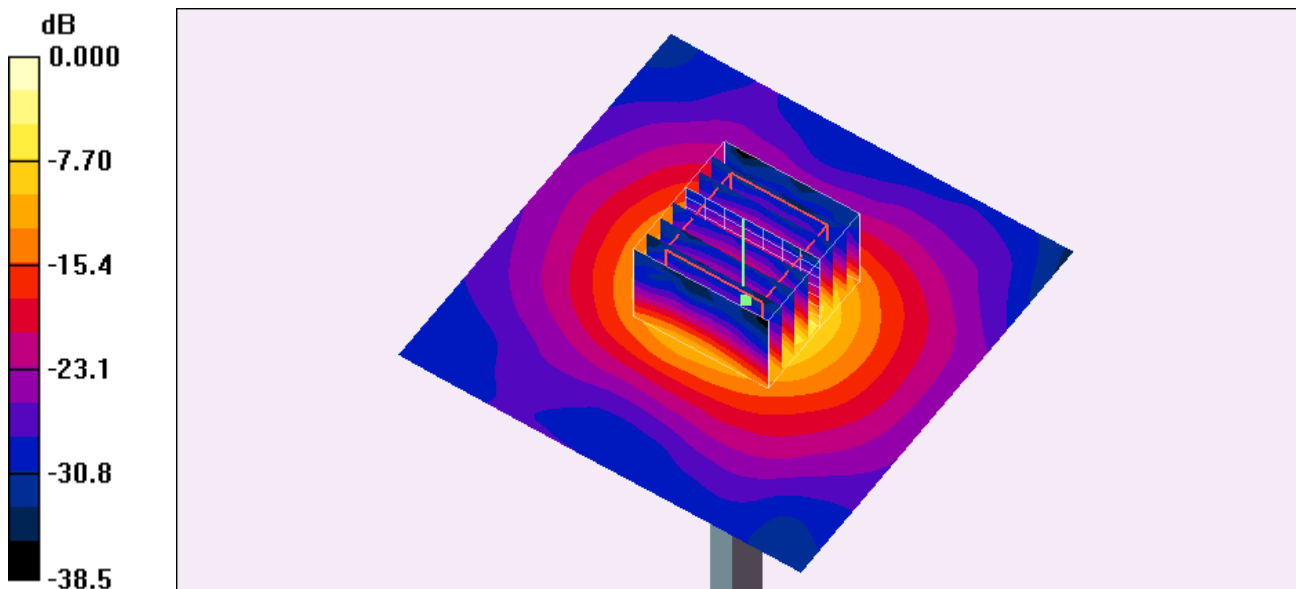

0 dB = 11.8mW/g



## Appendix B - SAR Measurement Data

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/18

Body\_802.11n Ch11\_Horizontal Up with 0.5cm Gap\_Antenna 1 + Antenna 2

DUT: 803001-01

Communication System: 802.11n; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.95$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.4 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(3.98, 3.98, 3.98); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (41x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.16 mW/g


**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.71 V/m; Power Drift = -0.087 dB

Peak SAR (extrapolated) = 2.92 W/kg

**SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.451 mW/g**

Maximum value of SAR (measured) = 1.30 mW/g

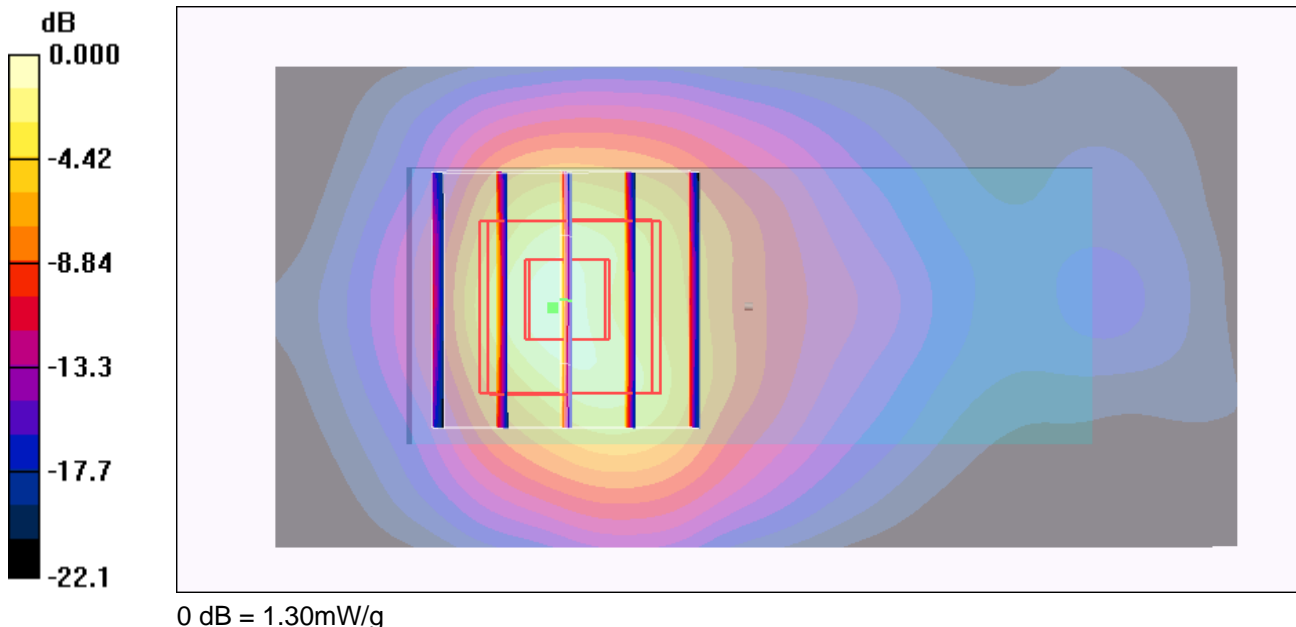



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/18

**Body\_802.11b Ch6\_Horizontal Down with 0.5cm Gap\_Antenna 1 + Antenna 2**

**DUT: 803001-01**

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: MSL\_2450 Medium parameters used: f = 2437 MHz;  $\sigma = 1.91$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.8 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(3.98, 3.98, 3.98); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch6/Area Scan (41x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.514 mW/g


**Ch6/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.03 V/m; Power Drift = 0.111 dB

Peak SAR (extrapolated) = 1.06 W/kg

**SAR(1 g) = 0.459 mW/g; SAR(10 g) = 0.207 mW/g**

Maximum value of SAR (measured) = 0.492 mW/g

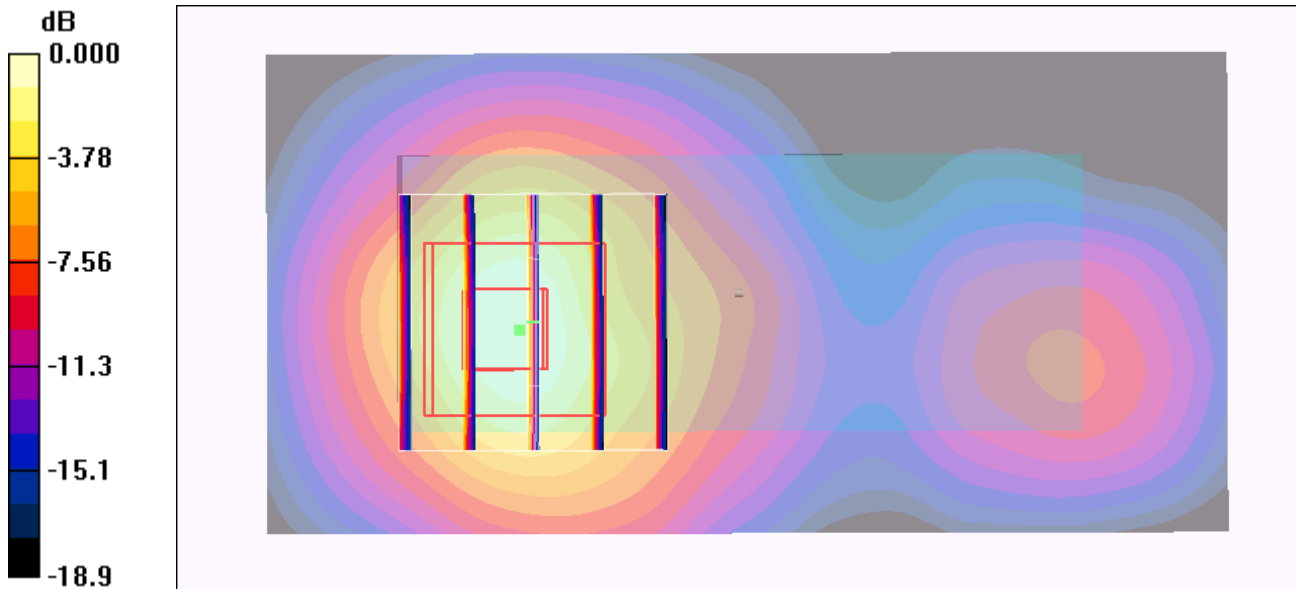



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/18

#03 Body\_802.11b Ch6\_Verical-Front with 0.5cm Gap\_Antenna 1 + Antenna 2

DUT: 803001-01

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: MSL\_2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.91$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 22.3 °C; Liquid Temperature : 21.8 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(3.98, 3.98, 3.98); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch6/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.269 mW/g

Ch6/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 7.16 V/m; Power Drift = -0.170 dB  
Peak SAR (extrapolated) = 0.584 W/kg  
**SAR(1 g) = 0.256 mW/g; SAR(10 g) = 0.118 mW/g**  
Maximum value of SAR (measured) = 0.290 mW/g

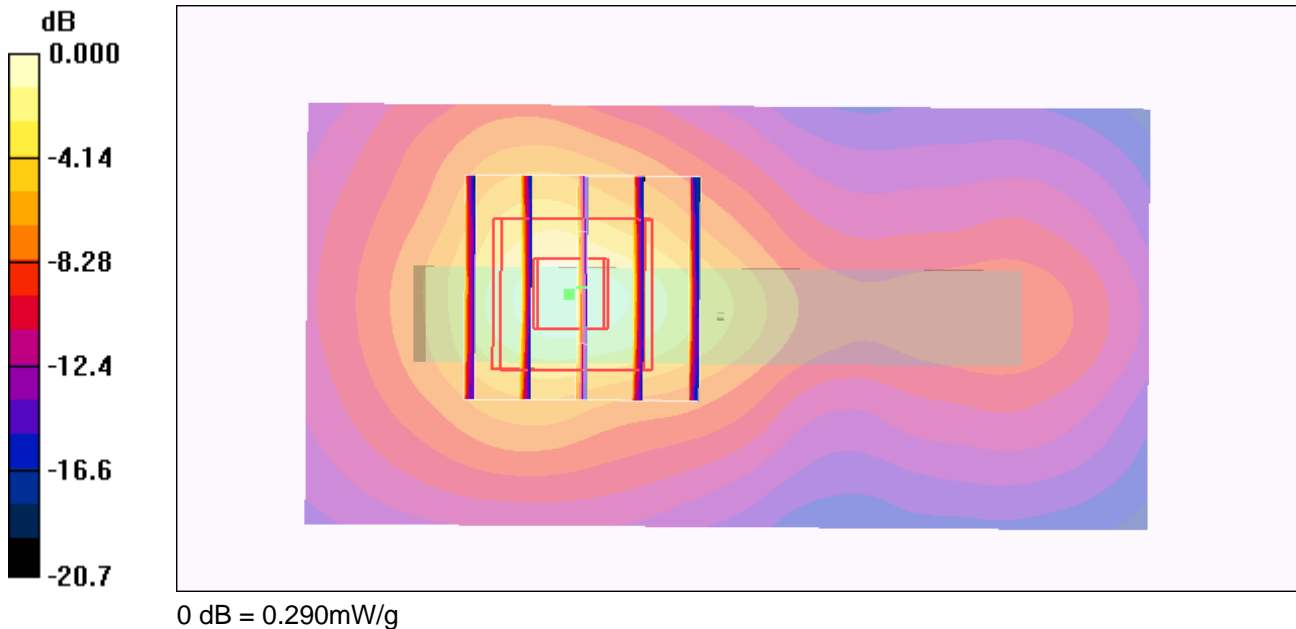

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/18

**Body\_802.11b Ch6\_Vetical-Back with 0.5cm Gap\_Antenna 1 + Antenna 2**

**DUT: 803001-01**

Communication System: 802.11b ; Frequency: 2437 MHz;Duty Cycle: 1:1

Medium: MSL\_2450 Medium parameters used:  $f = 2437$  MHz;  $\sigma = 1.91$  mho/m;  $\epsilon_r = 53.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.8 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(3.98, 3.98, 3.98); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch6/Area Scan (41x81x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.265 mW/g


**Ch6/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.52 V/m; Power Drift = -0.192 dB

Peak SAR (extrapolated) = 0.585 W/kg

**SAR(1 g) = 0.254 mW/g; SAR(10 g) = 0.113 mW/g**

Maximum value of SAR (measured) = 0.306 mW/g

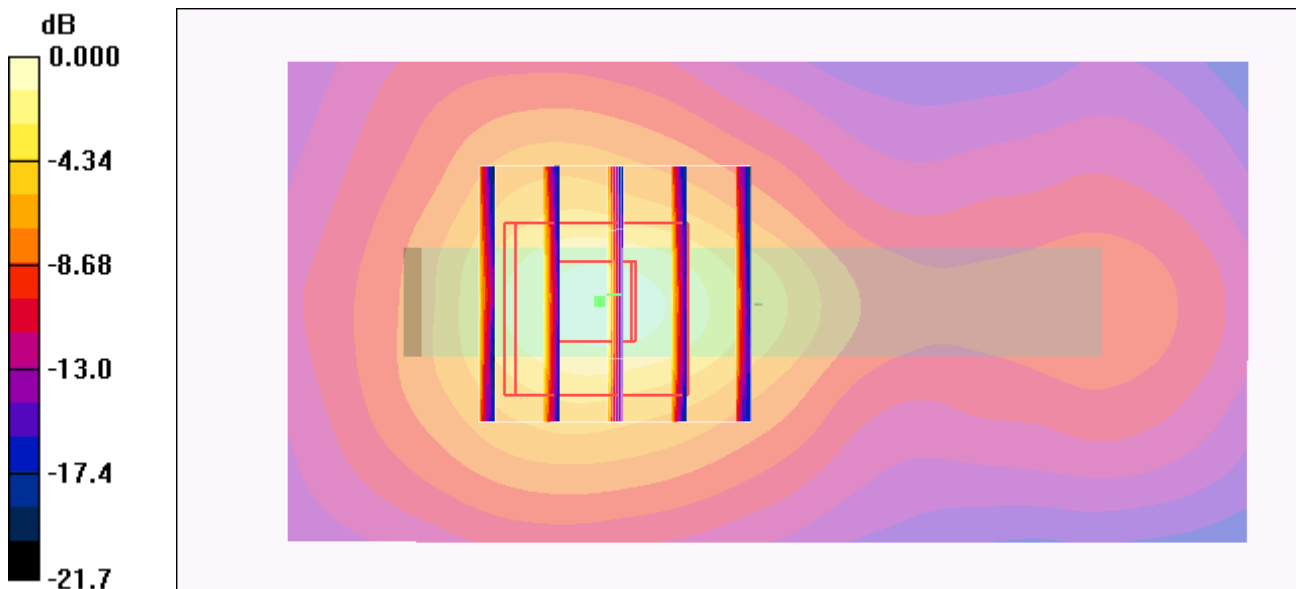

0 dB = 0.306mW/g



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/19

**Body\_802.11a Ch48\_Horizontal Up with 0.5cm Gap\_Antenna 1 + Antenna 2**

**DUT: 803001-01**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: MSL\_5G Medium parameters used:  $f = 5240$  MHz;  $\sigma = 5.39$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV3 - SN3514; ConvF(4.29, 4.29, 4.29); Calibrated: 2009/1/21
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch48/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.09 mW/g


**Ch48/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 8.81 V/m; Power Drift = 0.196 dB

Peak SAR (extrapolated) = 4.17 W/kg

**SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.474 mW/g**

Maximum value of SAR (measured) = 2.09 mW/g

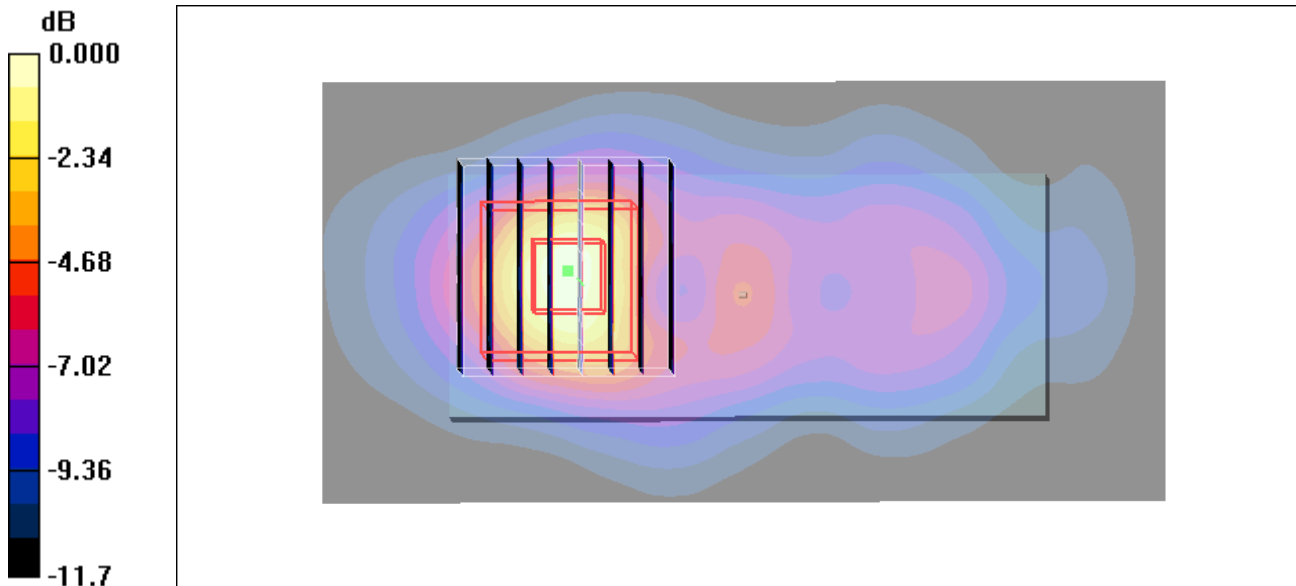

0 dB = 2.09mW/g



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/19

**Body\_802.11a Ch48\_Horizontal Down with 0.5cm Gap\_Antenna 1 + Antenna 2**

**DUT: 803001-01**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: MSL\_5G Medium parameters used:  $f = 5240$  MHz;  $\sigma = 5.39$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5°C; Liquid Temperature : 21.6 °C

DASY4 Configuration:

- Probe: EX3DV3 - SN3514; ConvF(4.29, 4.29, 4.29); Calibrated: 2009/1/21
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch48/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 1.01 mW/g


**Ch48/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 7.31 V/m; Power Drift = 0.002 dB

Peak SAR (extrapolated) = 1.77 W/kg

**SAR(1 g) = 0.553 mW/g; SAR(10 g) = 0.249 mW/g**

Maximum value of SAR (measured) = 0.980 mW/g

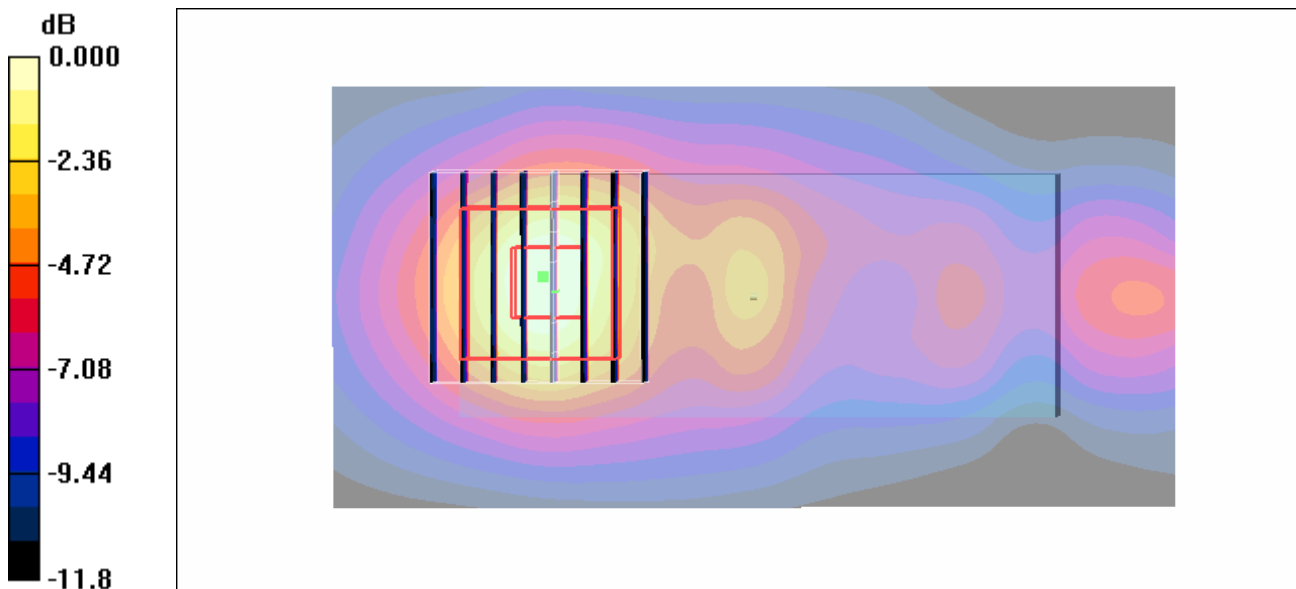



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/19

**Body\_802.11a Ch48\_Vertical-Front with 0.5cm Gap\_Antenna 1 + Antenna 2**

**DUT: 803001-01**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: MSL\_5G Medium parameters used:  $f = 5240$  MHz;  $\sigma = 5.39$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.6 °C


DASY4 Configuration:

- Probe: EX3DV3 - SN3514; ConvF(4.29, 4.29, 4.29); Calibrated: 2009/1/21
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch48/Area Scan (31x121x1):** Measurement grid: dx=10mm, dy=10mm  
Maximum value of SAR (interpolated) = 0.518 mW/g

**Ch48/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm  
Reference Value = 6.25 V/m; Power Drift = 0.106 dB  
Peak SAR (extrapolated) = 1.00 W/kg  
**SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.169 mW/g**  
Maximum value of SAR (measured) = 0.545 mW/g

**Ch48/Zoom Scan (8x8x8)/Cube 1:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm  
Reference Value = 6.25 V/m; Power Drift = 0.106 dB  
Peak SAR (extrapolated) = 0.649 W/kg  
**SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.121 mW/g**  
Maximum value of SAR (measured) = 0.366 mW/g

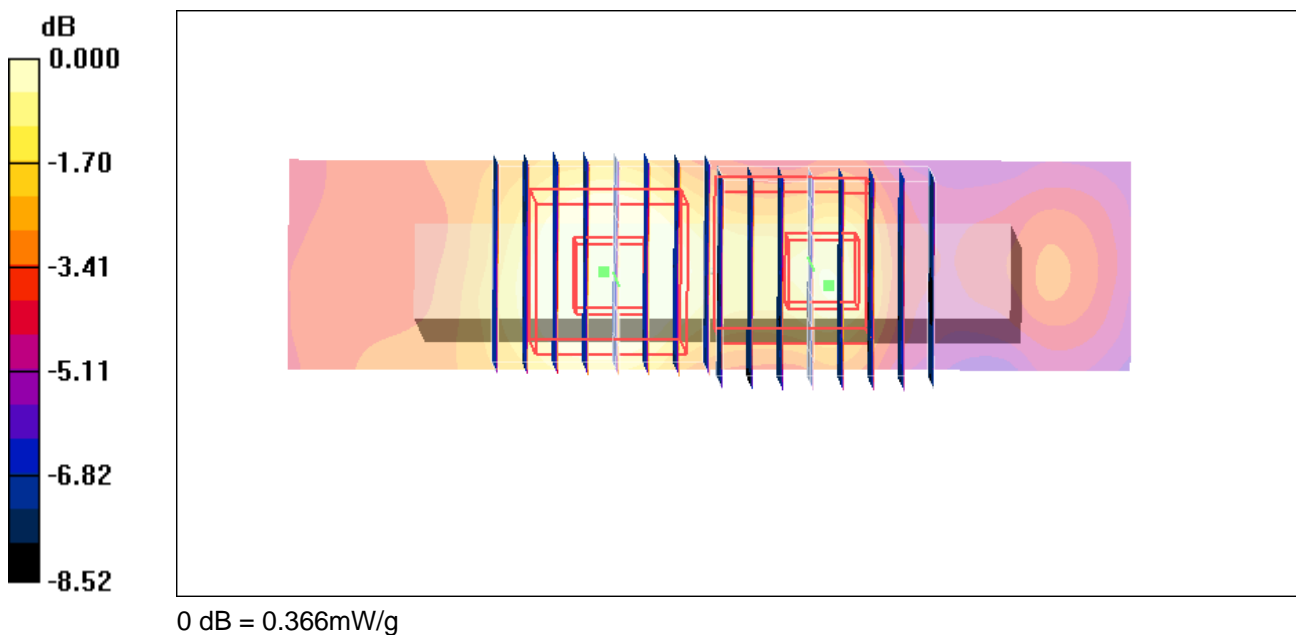



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/19

**Body\_802.11a Ch48\_Vertical-Back with 0.5cm Gap\_Antenna 1 + Antenna 2**

**DUT: 803001-01**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: MSL\_5G Medium parameters used:  $f = 5240$  MHz;  $\sigma = 5.39$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C ; Liquid Temperature : 21.5°C

DASY4 Configuration:

- Probe: EX3DV3 - SN3514; ConvF(4.29, 4.29, 4.29); Calibrated: 2009/1/21
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch48/Area Scan (31x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.749 mW/g


**Ch48/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 6.54 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 1.20 W/kg

**SAR(1 g) = 0.412 mW/g; SAR(10 g) = 0.204 mW/g**

Maximum value of SAR (measured) = 0.680 mW/g

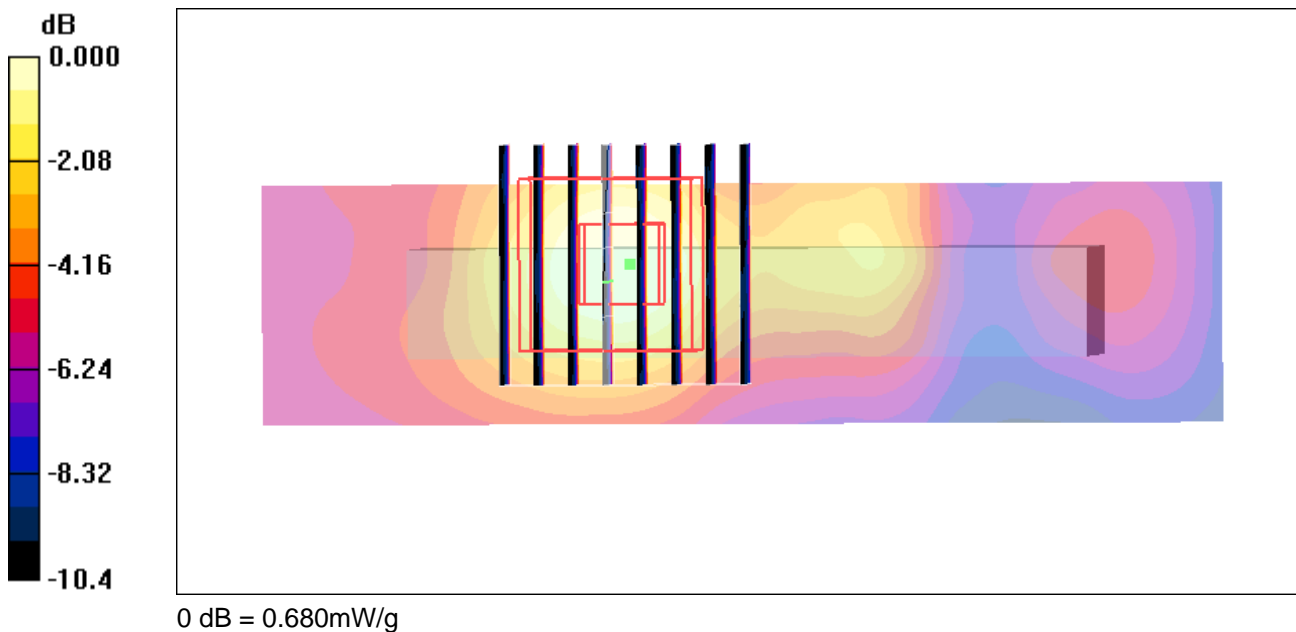





Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/18

#16 Body\_802.11n Ch11\_Horizontal Up with 1cm Gap\_Antenna 1 + Antenna 2

DUT: 803001-01

Communication System: 802.11n; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.95$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C; Liquid Temperature : 21.8 °C

DASY4 Configuration:

- Probe: ET3DV6 - SN1788; ConvF(3.98, 3.98, 3.98); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

Ch11/Area Scan (41x81x1): Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 0.429 mW/g


Ch11/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.49 V/m; Power Drift = 0.031 dB

Peak SAR (extrapolated) = 0.993 W/kg

**SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.186 mW/g**

Maximum value of SAR (measured) = 0.460 mW/g

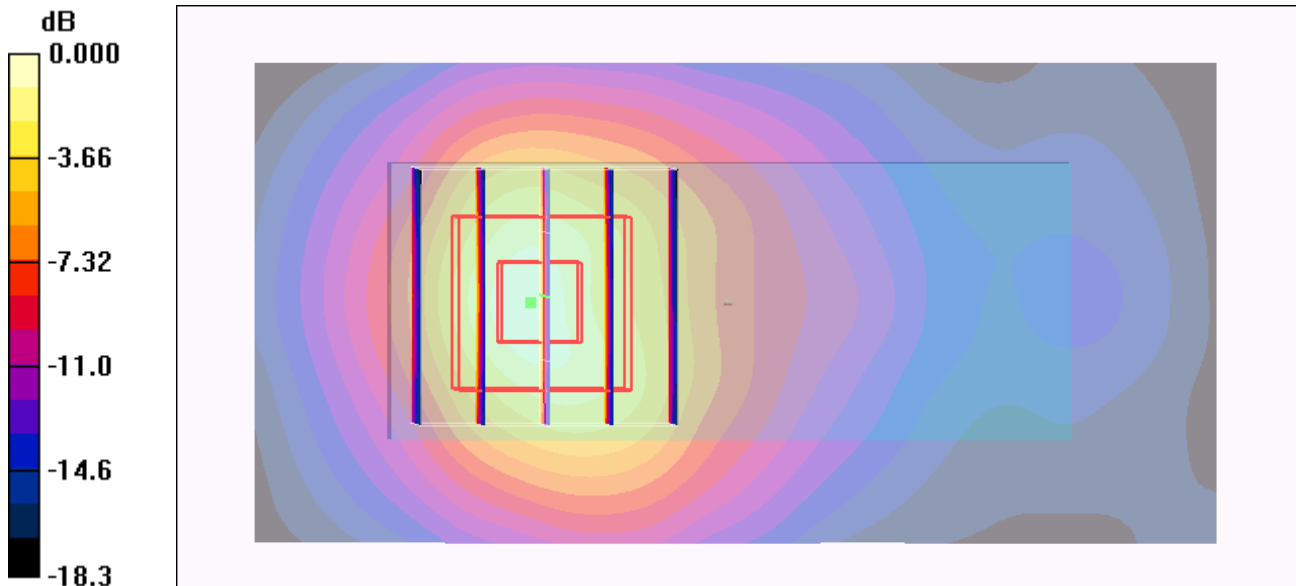

0 dB = 0.460mW/g

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/19

**#35 Body\_802.11a Ch48\_Horizontal Up with 1cm Gap\_Antenna 1 + Antenna 2**

**DUT: 803001-01**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: MSL\_5G Medium parameters used:  $f = 5240$  MHz;  $\sigma = 5.39$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.5 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV3 - SN3514; ConvF(4.29, 4.29, 4.29); Calibrated: 2009/1/21
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch48/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 0.755 mW/g


**Ch48/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 6.56 V/m; Power Drift = 0.199 dB

Peak SAR (extrapolated) = 1.44 W/kg

**SAR(1 g) = 0.506 mW/g; SAR(10 g) = 0.287 mW/g**

Maximum value of SAR (measured) = 0.788 mW/g

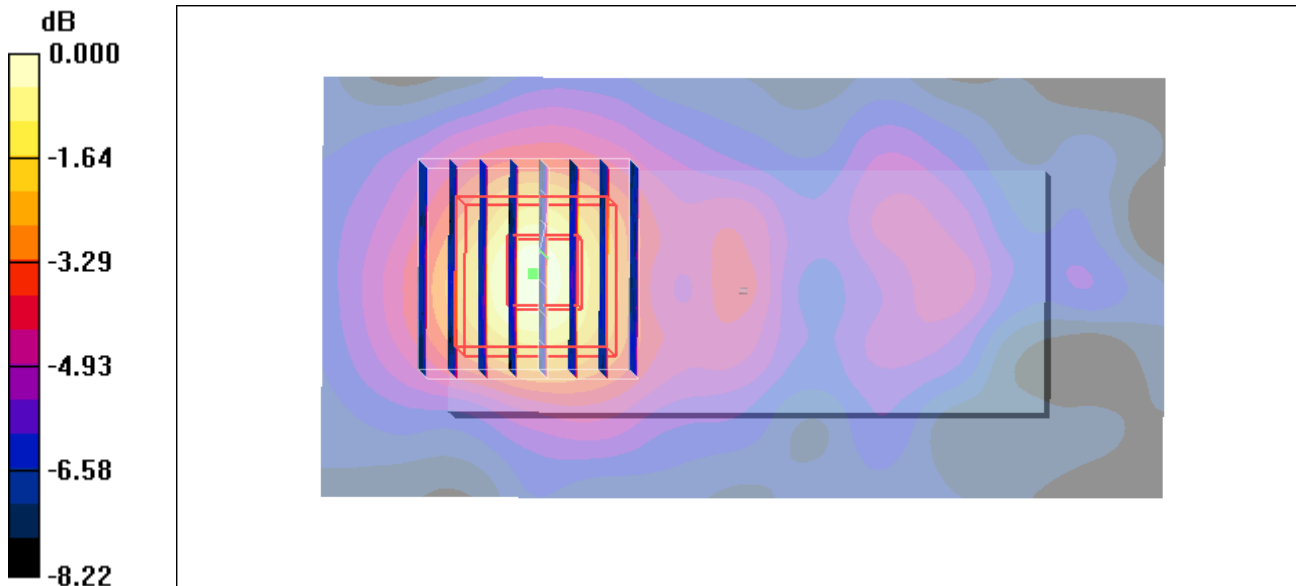

0 dB = 0.788mW/g



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/18

**Body\_802.11n Ch11\_Horizontal Up with 0.5cm Gap\_Antenna 1 + Antenna 2\_2D**

**DUT: 803001-01**

Communication System: 802.11n; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450 Medium parameters used:  $f = 2462$  MHz;  $\sigma = 1.95$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.3 °C ; Liquid Temperature : 21.8 °C

DASY4 Configuration:


- Probe: ET3DV6 - SN1788; ConvF(3.98, 3.98, 3.98); Calibrated: 2008/9/23
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch11/Area Scan (41x81x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.16 mW/g

**Ch11/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 8.71 V/m; Power Drift = -0.087 dB  
Peak SAR (extrapolated) = 2.92 W/kg

**SAR(1 g) = 1.12 mW/g; SAR(10 g) = 0.451 mW/g**

Maximum value of SAR (measured) = 1.30 mW/g

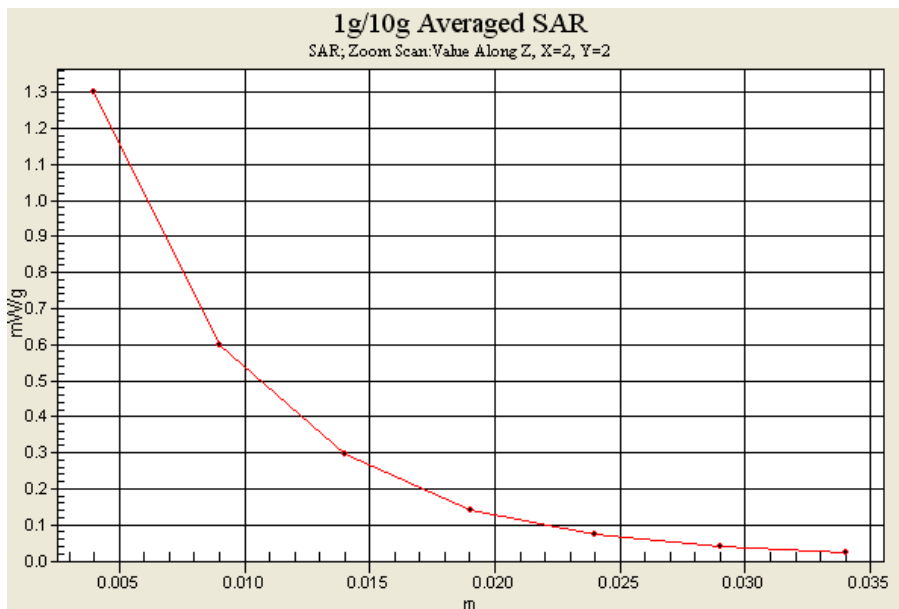



Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 2009/4/19

**Body\_802.11a Ch48\_Horizontal Up with 0.5cm Gap\_Antenna 1 + Antenna 2\_2D**

**DUT: 803001-01**

Communication System: 802.11a; Frequency: 5240 MHz; Duty Cycle: 1:1

Medium: MSL\_5G Medium parameters used:  $f = 5240$  MHz;  $\sigma = 5.39$  mho/m;  $\epsilon_r = 48.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature : 22.4 °C; Liquid Temperature : 21.5 °C

DASY4 Configuration:

- Probe: EX3DV3 - SN3514; ConvF(4.29, 4.29, 4.29); Calibrated: 2009/1/21
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn778; Calibrated: 2008/9/22
- Phantom: ELI 4.0\_Front; Type: QDOVA001BB; Serial: 1026
- Measurement SW: DASY4, V4.7 Build 80; Postprocessing SW: SEMCAD, V1.8 Build 186

**Ch48/Area Scan (61x121x1):** Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (interpolated) = 2.09 mW/g


**Ch48/Zoom Scan (8x8x8)/Cube 0:** Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 8.81 V/m; Power Drift = 0.196 dB

Peak SAR (extrapolated) = 4.17 W/kg

**SAR(1 g) = 1.18 mW/g; SAR(10 g) = 0.474 mW/g**

Maximum value of SAR (measured) = 2.09 mW/g

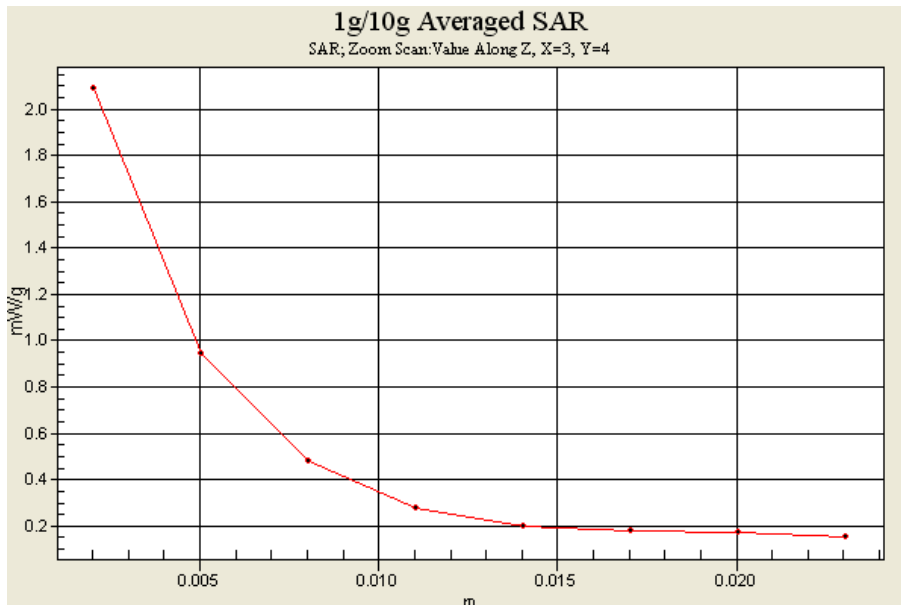



## ***Appendix C – Calibration Data***

Please refer to the calibration certificates of DASY as below.



Calibration Laboratory of Schmid & Partner Engineering AG



S Schweizerischer Kalibrierdienst
C Service suisse d'etalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation
The Swiss Accreditation Service is one of the signatories to the EA
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Sporton (Auden)

Certificate No: D2450V2-736\_Jul07

CALIBRATION CERTIFICATE

Object: D2450V2 - SN: 736
Calibration procedure(s): QA CAL-05.v6
Calibration procedure for dipole validation kits
Calibration date: July 12, 2007
Condition of the calibrated item: In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Table with 4 columns: Primary Standards, ID #, Cal Date (Calibrated by, Certificate No.), Scheduled Calibration. Includes items like Power meter EPM-442A, Power sensor HP 8481A, Reference 20 dB Attenuator, etc.

Calibrated by: Mike Mellli, Laboratory Technician, Signature: M. Mellli

Approved by: Katja Pokovic, Technical Manager, Signature: Katja Pokovic

Issued: July 12, 2007

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.

**Calibration Laboratory of**  
Schmid & Partner  
Engineering AG  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**S** Service suisse d'étalonnage  
**C** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Federal Office of Metrology and Accreditation  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- DASY4 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:** Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:** The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:** These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:** One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:** SAR measured at the stated antenna input power.
- SAR normalized:** SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:** The measured TSL parameters are used to calculate the nominal SAR result.



**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

<b>DASY Version</b>	DASY4	V4.7
<b>Extrapolation</b>	Advanced Extrapolation	
<b>Phantom</b>	Modular Flat Phantom V5.0	
<b>Distance Dipole Center - TSL</b>	10 mm	with Spacer
<b>Zoom Scan Resolution</b>	dx, dy, dz = 5 mm	
<b>Frequency</b>	2450 MHz ± 1 MHz	

**Head TSL parameters**

The following parameters and calculations were applied.

	<b>Temperature</b>	<b>Permittivity</b>	<b>Conductivity</b>
<b>Nominal Head TSL parameters</b>	22.0 °C	39.2	1.80 mho/m
<b>Measured Head TSL parameters</b>	(22.0 ± 0.2) °C	38.6 ± 6 %	1.81 mho/m ± 6 %
<b>Head TSL temperature during test</b>	(22.0 ± 0.2) °C	-----	-----

**SAR result with Head TSL**

<b>SAR averaged over 1 cm<sup>3</sup> (1 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	13.3 mW / g
SAR normalized	normalized to 1W	53.2 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>52.7 mW / g ± 17.0 % (k=2)</b>

<b>SAR averaged over 10 cm<sup>3</sup> (10 g) of Head TSL</b>	condition	
SAR measured	250 mW input power	6.17 mW / g
SAR normalized	normalized to 1W	24.7 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>24.5 mW / g ± 16.5 % (k=2)</b>

<sup>1</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"





**Body TSL parameters**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	52.7	1.95 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	53.5 ± 6 %	1.94 mho/m ± 6 %
Body TSL temperature during test	(22.0 ± 0.2) °C	-----	-----

**SAR result with Body TSL**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	Condition	
SAR measured	250 mW input power	13.0 mW / g
SAR normalized	normalized to 1W	52.0 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>52.5 mW / g ± 17.0 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	Condition	
SAR measured	250 mW input power	6.05 mW / g
SAR normalized	normalized to 1W	24.2 mW / g
SAR for nominal Body TSL parameters <sup>2</sup>	normalized to 1W	<b>24.4 mW / g ± 16.5 % (k=2)</b>

<sup>2</sup> Correction to nominal TSL parameters according to d), chapter "SAR Sensitivities"



**Appendix**

**Antenna Parameters with Head TSL**

Impedance, transformed to feed point	53.1 $\Omega$ + 3.0 j $\Omega$
Return Loss	- 27.6 dB

**Antenna Parameters with Body TSL**

Impedance, transformed to feed point	48.7 $\Omega$ + 4.6 j $\Omega$
Return Loss	- 26.3 dB

**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.158 ns
----------------------------------	----------

After long term use with 100W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	August 26, 2003

**DASY4 Validation Report for Head TSL**

Date/Time: 12.07.2007 11:00:03

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN736**

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL U10 BB;

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.81$  mho/m;  $\epsilon_r = 38.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

**DASY4 Configuration:**

- Probe: ES3DV2 - SN3025 (HF); ConvP(4.5, 4.5, 4.5); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.01.2007
- Phantom: Flat Phantom 5.0 (front); Type: QD000P50AA
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.0 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 28.1 W/kg

**SAR(1 g) = 13.3 mW/g; SAR(10 g) = 6.17 mW/g**


Maximum value of SAR (measured) = 15.0 mW/g

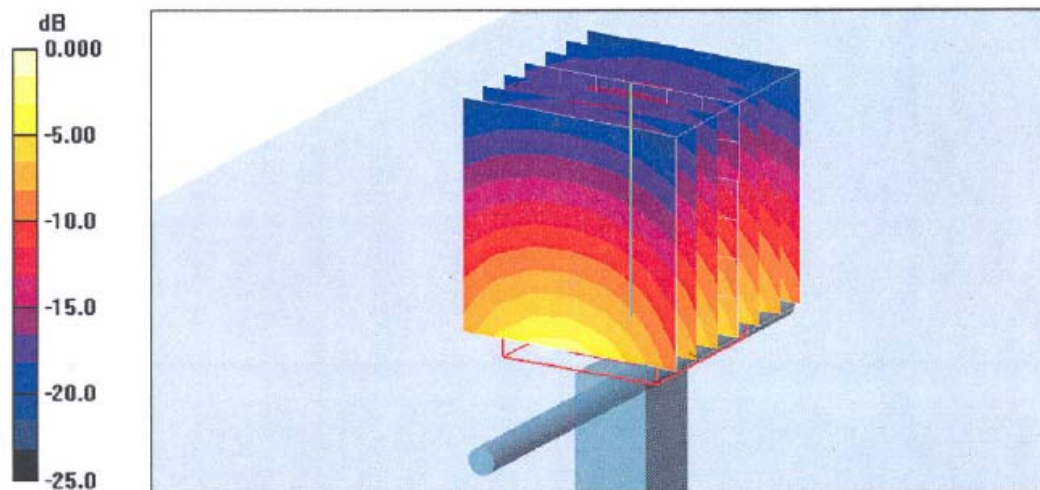

0 dB = 15.0mW/g



Impedance Measurement Plot for Head TSL

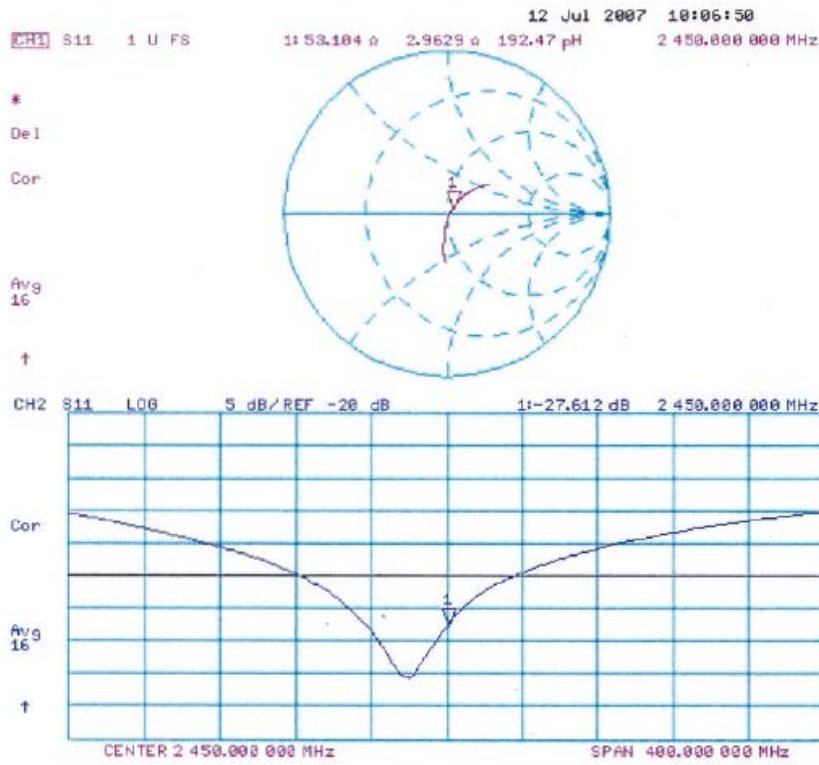

**DASY4 Validation Report for Body TSL**

Date/Time: 12.07.2007 12:28:49

Test Laboratory: SPEAG, Zurich, Switzerland

**DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN736**

Communication System: CW-2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL U10 BB;

Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.94$  mho/m;  $\epsilon_r = 53.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

Measurement Standard: DASY4 (High Precision Assessment)

DASY4 Configuration:

- Probe: ES3DV2 - SN3025 (HF); ConvF(4.16, 4.16, 4.16); Calibrated: 19.10.2006
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn601; Calibrated: 30.01.2007
- Phantom: Flat Phantom 5.0 (back); Type: QD000P50AA
- Measurement SW: DASY4, V4.7 Build 53; Postprocessing SW: SEMCAD, V1.8 Build 172

**Pin = 250 mW; d = 10 mm/Zoom Scan (7x7x7)/Cube 0:**


Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 88.6 V/m; Power Drift = 0.005 dB

Peak SAR (extrapolated) = 27.0 W/kg

**SAR(1 g) = 13 mW/g; SAR(10 g) = 6.05 mW/g**


Maximum value of SAR (measured) = 14.8 mW/g

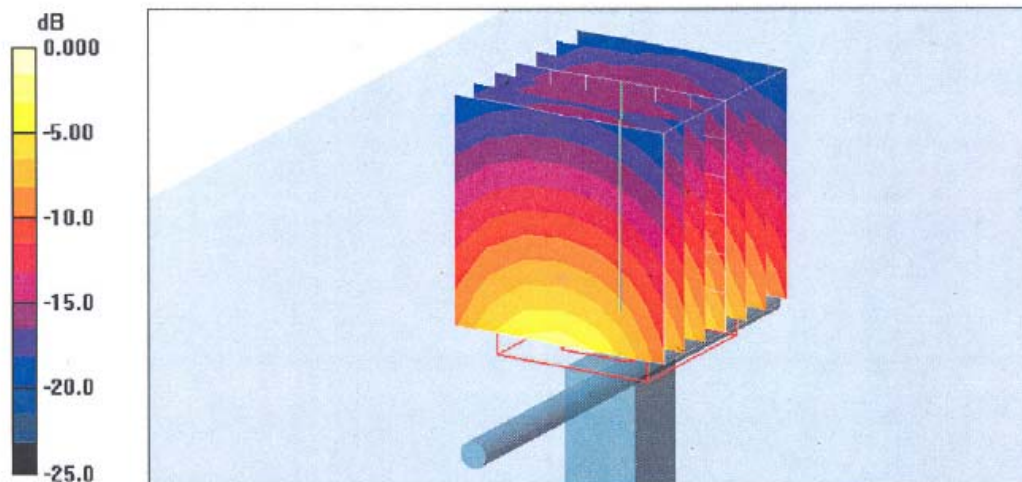

0 dB = 14.8mW/g



### Impedance Measurement Plot for Body TSL

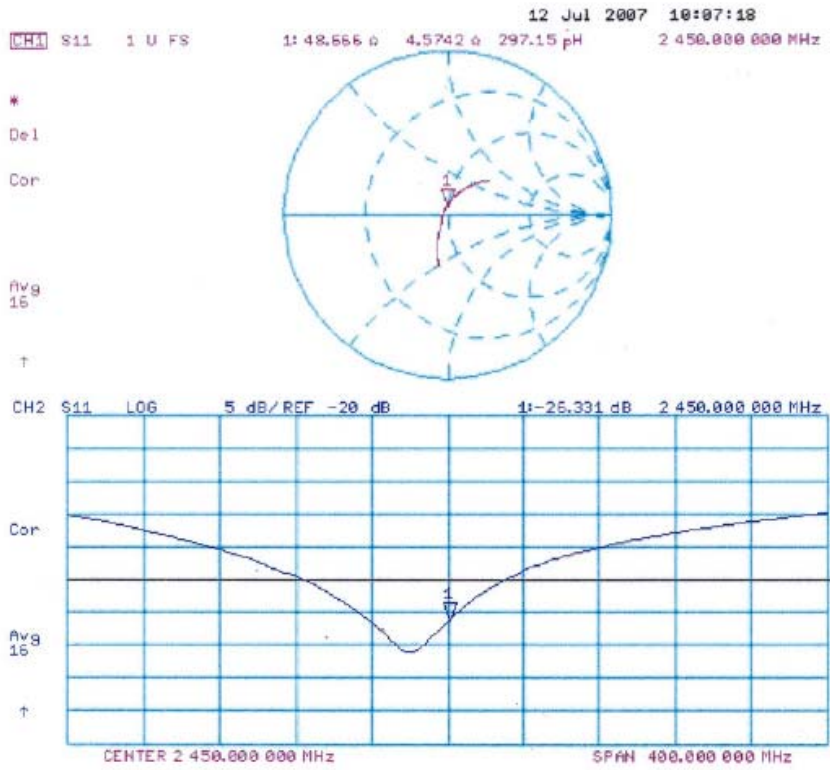



Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland



S Schweizerischer Kalibrierdienst
C Service suisse d'etalonnage
S Servizio svizzero di taratura
S Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)
The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: SCS 108

Client Sporton (Auden)

Certificate No: D5GHzV2-1006\_Jan08

CALIBRATION CERTIFICATE

Object D5GHzV2 - SN: 1006
Calibration procedure(s) QA CAL-22.v1
Calibration procedure for dipole validation kits between 3-6 GHz
Calibration date: January 24, 2008
Condition of the calibrated item In Tolerance

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

Table with 4 columns: Primary Standards, ID #, Cal Date (Calibrated by, Certificate No.), Scheduled Calibration. Includes items like Power meter EPM-442A, Reference 20 dB Attenuator, etc.

Calibrated by: Mike Mell, Laboratory Technician
Approved by: Katja Pokovic, Technical Manager

Issued: January 24, 2008

This calibration certificate shall not be reproduced except in full without written approval of the laboratory.



**Calibration Laboratory of  
Schmid & Partner  
Engineering AG**  
Zeughausstrasse 43, 8004 Zurich, Switzerland



**S** Schweizerischer Kalibrierdienst  
**C** Service suisse d'étalonnage  
**S** Servizio svizzero di taratura  
**S** Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)  
The Swiss Accreditation Service is one of the signatories to the EA  
Multilateral Agreement for the recognition of calibration certificates

Accreditation No.: **SCS 108**

**Glossary:**

TSL	tissue simulating liquid
ConvF	sensitivity in TSL / NORM x,y,z
N/A	not applicable or not measured

**Calibration is Performed According to the Following Standards:**

- IEC Std 62209 Part 2, "Evaluation of Human Exposure to Radio Frequency Fields from Handheld and Body-Mounted Wireless Communication Devices in the Frequency Range of 30 MHz to 6 GHz: Human models, Instrumentation, and Procedures"; Part 2: "Procedure to determine the Specific Absorption Rate (SAR) for including accessories and multiple transmitters", Draft Version 0.9, December 2004
- Federal Communications Commission Office of Engineering & Technology (FCC OET), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields; Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits for Human Exposure to Radiofrequency Emissions", Supplement C (Edition 01-01) to Bulletin 65

**Additional Documentation:**

- DASY4 System Handbook

**Methods Applied and Interpretation of Parameters:**

- Measurement Conditions:* Further details are available from the Validation Report at the end of the certificate. All figures stated in the certificate are valid at the frequency indicated.
- Antenna Parameters with TSL:* The dipole is mounted with the spacer to position its feed point exactly below the center marking of the flat phantom section, with the arms oriented parallel to the body axis.
- Feed Point Impedance and Return Loss:* These parameters are measured with the dipole positioned under the liquid filled phantom. The impedance stated is transformed from the measurement at the SMA connector to the feed point. The Return Loss ensures low reflected power. No uncertainty required.
- Electrical Delay:* One-way delay between the SMA connector and the antenna feed point. No uncertainty required.
- SAR measured:* SAR measured at the stated antenna input power.
- SAR normalized:* SAR as measured, normalized to an input power of 1 W at the antenna connector.
- SAR for nominal TSL parameters:* The measured TSL parameters are used to calculate the nominal SAR result.





**Measurement Conditions**

DASY system configuration, as far as not given on page 1.

DASY Version	DASY4	V4.7
Extrapolation	Advanced Extrapolation	
Phantom	Modular Flat Phantom V5.0	
Distance Dipole Center - TSL	10 mm	with Spacer
Area Scan resolution	dx, dy = 10 mm	
Zoom Scan Resolution	dx, dy = 4.0 mm, dz = 2.5 mm	
Frequency	5200 MHz ± 1 MHz 5500 MHz ± 1 MHz 5800 MHz ± 1 MHz	

**Head TSL parameters at 5200 MHz**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	36.0	4.66 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	36.0 ± 6 %	4.53 mho/m ± 6 %
Head TSL temperature during test	(21.2 ± 0.2) °C	----	----

**SAR result with Head TSL at 5200 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	condition	
SAR measured	100 mW input power	8.24 mW / g
SAR normalized	normalized to 1W	82.4 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>82.4 mW / g ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.31 mW / g
SAR normalized	normalized to 1W	23.1 mW / g
SAR for nominal Head TSL parameters <sup>1</sup>	normalized to 1W	<b>23.0 mW / g ± 19.5 % (k=2)</b>

<sup>1</sup> Correction to nominal TSL parameters according to c), chapter "SAR Sensitivities"



**Head TSL parameters at 5500 MHz**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.6	4.96 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	35.5 ± 6 %	4.81 mho/m ± 6 %
Head TSL temperature during test	(21.1 ± 0.2) °C	----	----

**SAR result with Head TSL at 5500 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	condition	
SAR measured	100 mW input power	8.63 mW / g
SAR normalized	normalized to 1W	86.3 mW / g
SAR for nominal Head TSL parameters <sup>2</sup>	normalized to 1W	<b>86.2 mW / g ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.42 mW / g
SAR normalized	normalized to 1W	24.2 mW / g
SAR for nominal Head TSL parameters <sup>2</sup>	normalized to 1W	<b>24.1 mW / g ± 19.5 % (k=2)</b>

**Head TSL parameters at 5800 MHz**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Head TSL parameters	22.0 °C	35.3	5.27 mho/m
Measured Head TSL parameters	(22.0 ± 0.2) °C	34.8 ± 6 %	5.11 mho/m ± 6 %
Head TSL temperature during test	(21.0 ± 0.2) °C	----	----

**SAR result with Head TSL at 5800 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Head TSL	condition	
SAR measured	100 mW input power	8.13 mW / g
SAR normalized	normalized to 1W	81.3 mW / g
SAR for nominal Head TSL parameters <sup>2</sup>	normalized to 1W	<b>80.8 mW / g ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Head TSL	condition	
SAR measured	100 mW input power	2.27 mW / g
SAR normalized	normalized to 1W	22.7 mW / g
SAR for nominal Head TSL parameters <sup>2</sup>	normalized to 1W	<b>22.5 mW / g ± 19.5 % (k=2)</b>

<sup>2</sup> Correction to nominal TSL parameters according to c), chapter "SAR Sensitivities"



**Body TSL parameters at 5200 MHz**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	49.0	5.30 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	47.3 ± 6 %	5.27 mho/m ± 6 %
Body TSL temperature during test	(20.7 ± 0.2) °C	----	----

**SAR result with Body TSL at 5200 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	condition	
SAR measured	100 mW input power	7.77 mW / g
SAR normalized	normalized to 1W	77.7 mW / g
SAR for nominal Body TSL parameters <sup>3</sup>	normalized to 1W	<b>76.8 mW / g ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.18 mW / g
SAR normalized	normalized to 1W	21.8 mW / g
SAR for nominal Body TSL parameters <sup>3</sup>	normalized to 1W	<b>21.6 mW / g ± 19.5 % (k=2)</b>

**Body TSL parameters at 5500 MHz**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.6	5.65 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.6 ± 6 %	5.62 mho/m ± 6 %
Body TSL temperature during test	(20.7 ± 0.2) °C	----	----

**SAR result with Body TSL at 5500 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	condition	
SAR measured	100 mW input power	8.12 mW / g
SAR normalized	normalized to 1W	81.2 mW / g
SAR for nominal Body TSL parameters <sup>3</sup>	normalized to 1W	<b>80.1 mW / g ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	2.26 mW / g
SAR normalized	normalized to 1W	22.6 mW / g
SAR for nominal Body TSL parameters <sup>3</sup>	normalized to 1W	<b>22.3 mW / g ± 19.5 % (k=2)</b>

<sup>3</sup> Correction to nominal TSL parameters according to c), chapter "SAR Sensitivities"



**Body TSL parameters at 5800 MHz**

The following parameters and calculations were applied.

	Temperature	Permittivity	Conductivity
Nominal Body TSL parameters	22.0 °C	48.2	6.00 mho/m
Measured Body TSL parameters	(22.0 ± 0.2) °C	46.0 ± 6 %	6.04 mho/m ± 6 %
Body TSL temperature during test	(20.6 ± 0.2) °C	----	----

**SAR result with Body TSL at 5800 MHz**

SAR averaged over 1 cm <sup>3</sup> (1 g) of Body TSL	condition	
SAR measured	100 mW input power	7.04 mW / g
SAR normalized	normalized to 1W	70.4 mW / g
SAR for nominal Body TSL parameters <sup>4</sup>	normalized to 1W	<b>69.4 mW / g ± 19.9 % (k=2)</b>

SAR averaged over 10 cm <sup>3</sup> (10 g) of Body TSL	condition	
SAR measured	100 mW input power	1.95 mW / g
SAR normalized	normalized to 1W	19.5 mW / g
SAR for nominal Body TSL parameters <sup>4</sup>	normalized to 1W	<b>19.3 mW / g ± 19.5 % (k=2)</b>

<sup>4</sup> Correction to nominal TSL parameters according to c), chapter "SAR Sensitivities"



**Appendix**

**Antenna Parameters with Head TSL at 5200 MHz**

Impedance, transformed to feed point	52.7 $\Omega$ - 10.9 j $\Omega$
Return Loss	-19.3 dB

**Antenna Parameters with Head TSL at 5500 MHz**

Impedance, transformed to feed point	49.4 $\Omega$ - 2.6 j $\Omega$
Return Loss	-31.2 dB

**Antenna Parameters with Head TSL at 5800 MHz**

Impedance, transformed to feed point	56.0 $\Omega$ - 6.1 j $\Omega$
Return Loss	-21.9 dB

**Antenna Parameters with Body TSL at 5200 MHz**

Impedance, transformed to feed point	52.8 $\Omega$ - 9.1 j $\Omega$
Return Loss	-20.7 dB

**Antenna Parameters with Body TSL at 5500 MHz**

Impedance, transformed to feed point	49.3 $\Omega$ - 1.0 j $\Omega$
Return Loss	-38.1 dB

**Antenna Parameters with Body TSL at 5800 MHz**

Impedance, transformed to feed point	56.1 $\Omega$ + 7.7 j $\Omega$
Return Loss	-20.7 dB



**General Antenna Parameters and Design**

Electrical Delay (one direction)	1.202 ns
----------------------------------	----------

After long term use with 40 W radiated power, only a slight warming of the dipole near the feedpoint can be measured.

The dipole is made of standard semirigid coaxial cable. The center conductor of the feeding line is directly connected to the second arm of the dipole. The antenna is therefore short-circuited for DC-signals.

No excessive force must be applied to the dipole arms, because they might bend or the soldered connections near the feedpoint may be damaged.

**Additional EUT Data**

Manufactured by	SPEAG
Manufactured on	August 28, 2003