



# RF TEST REPORT







Report No.: FCC\_RF\_SL13110101-ZBR-051\_RFID  
Supersede Report No.: NONE

|  |  |   |  |
|--|--|---|--|
| Applicant  | Zebra Technologies Corp.                                     |   |  |
| Product Name   | RFID Module  |   |  |
| Model No.  | M6e-MicroTT  |   |  |
| Test Standard  | 47CFR15.247: 2013, RSS-210 Issue8: 2010                      |   |  |
| Test Method  | ANCI C63.4:2009<br>DA 00-705 Measurement Guidelines for FHSS |   |  |
| FCC ID   | I28MD-RFIDM6EMTT   |   |  |
| IC ID  | 3798B-RFIDM6EMTT   |   |  |
| Date of test   | 12/02/2013 - 12/17/2013                                      |   |  |
| Issue Date   | 12/18/2013   |   |  |
| Test Result  | <u>Pass</u>  | Fail  |  |
| Equipment complied with the specification  |  | [ x ]   |  |
| Equipment did not comply with the specification  |  | [ ]   |  |
|  |  |   |  |
|   |  |  |  |
| David Zhang  |  | Choon Sian Ooi  |  |
| Test Engineer  |  | Engineer Reviewer   |  |
| This test report may be reproduced in full only<br>Test result presented in this test report is applicable to the tested sample only |  |   |  |

Issued By:  
SIEMIC Laboratories  
775 Montague Expressway, Milpitas, 95035 CA



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: [www.siemic.com](http://www.siemic.com); Follow us at:    

## Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

### Accreditations for Conformity Assessment

| Country/Region | Accreditation Body     | Scope                              |
|----------------|------------------------|------------------------------------|
| USA            | FCC, A2LA              | EMC , RF/Wireless , Telecom        |
| Canada         | IC, A2LA, NIST         | EMC, RF/Wireless , Telecom         |
| Taiwan         | BSMI , NCC , NIST      | EMC, RF, Telecom , Safety          |
| Hong Kong      | OFTA , NIST            | RF/Wireless ,Telecom               |
| Australia      | NATA, NIST             | EMC, RF, Telecom , Safety          |
| Korea          | KCC/RRA, NIST          | EMI, EMS, RF , Telecom, Safety     |
| Japan          | VCCI, JATE, TELEC, RFT | EMI, RF/Wireless, Telecom          |
| Mexico         | NOM, COFETEL, Caniety  | Safety, EMC , RF/Wireless, Telecom |
| Europe         | A2LA, NIST             | EMC, RF, Telecom , Safety          |

### Accreditations for Product Certifications

| Country   | Accreditation Body | Scope                 |
|-----------|--------------------|-----------------------|
| USA       | FCC TCB, NIST      | EMC , RF , Telecom    |
| Canada    | IC FCB , NIST      | EMC , RF , Telecom    |
| Singapore | iDA, NIST          | EMC , RF , Telecom    |
| EU        | NB                 | EMC & R&TTE Directive |
| Japan     | MIC (RCB 208)      | RF , Telecom          |
| HongKong  | OFTA (US002)       | RF , Telecom          |

**CONTENTS**

**1 REPORT REVISION HISTORY .....4**

**2 EXECUTIVE SUMMARY .....5**

**3 CUSTOMER INFORMATION .....5**

**4 TEST SITE INFORMATION .....5**

**5 MODIFICATION .....5**

**6 EUT INFORMATION .....6**

6.1 EUT Description .....6

6.2 Radio Description .....7

6.3 EUT test modes/configuration Description.....7

6.4 EUT Photos - External .....8

6.5 EUT Photos - Internal .....9

6.6 EUT Test Setup Photos .....10

**7 SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION.....13**

7.1 Supporting Equipment .....13

7.2 Test Software Description .....13

**8 TEST SUMMARY .....14**

**9 MEASUREMENT UNCERTAINTY .....15**

**10 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS .....16**

10.1 Antenna Requirement.....16

10.2 Conducted Emissions.....17

10.3 20dB Bandwidth .....20

10.4 99% Occupied Bandwidth .....23

10.5 Number of Hopping Channel.....25

10.6 Peak Output Power .....27

10.7 Channel Separation .....30

10.8 Time of Occupancy .....33

10.9 100 KHz Bandwidth of Frequency Band Edge.....36

10.10 Radiated Emissions below 1GHz.....38

10.11 Radiated Spurious Emissions above 1GHz.....42

**ANNEX A. TEST INSTRUMENT.....46**

**ANNEX B. USER MANUAL, BLOCK & CIRCUIT DIAGRAM .....47**

**ANNEX C. SIEMIC ACCREDITATION .....48**

## 1 Report Revision History

| Report No.                     | Report Version | Description | Issue Date |
|--------------------------------|----------------|-------------|------------|
| FCC_RF_SL13110101-ZBR-051_RFID | None           | Original    | 12/18/2013 |
|                                |                |             |            |
|                                |                |             |            |
|                                |                |             |            |
|                                |                |             |            |

## 2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Zebra Technologies Corp.  
Product: RFID Module  
Model: M6e-MicroTT

to be installed into a printer host (Printer Model: ZT410, ZT420) and simultaneously transmission with FCC certified WLAN radio module (FCC ID: 128MD-EXLAN11N, IC ID: 3798B-EXLAN11N) and Bluetooth radio module (FCC ID: 128MD-ZBR5QLN, IC ID: 3798B-ZBR5QLN), against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1<sup>st</sup> page.

## 3 Customer information

|                      |   |
|----------------------|---|
| Applicant Name       | Zebra Technologies Corp.                              |
| Applicant Address    | 333 Corporate Woods Pkwy. Vernon Hills, IL 60061, USA |
| Manufacturer Name    | Zebra Technologies Corp.                              |
| Manufacturer Address | 333 Corporate Woods Pkwy. Vernon Hills, IL 60061, USA |

## 4 Test site information

|                      |   |
|----------------------|---|
| Lab performing tests | SIEMIC Laboratories                         |
| Lab Address          | 775 Montague Expressway, Milpitas, CA 95035 |
| FCC Test Site No.    | 881796                                      |
| IC Test Site No.     | 4842D-2                                     |
| VCCI Test Site No.   | A0133                                       |

## 5 Modification

| Index | Item | Description | Note |
|-------|------|-------------|------|
| -     | -    | -           | -    |
|       |      |             |      |
|       |      |             |      |
|       |      |             |      |
|       |      |             |      |

## 6 EUT Information

### 6.1 EUT Description

|                           |   |
|---------------------------|---|
| Product Name              | RFID Module                               |
| Model No.                 | M6e-MicroTT                               |
| Trade Name                | Zebra                                     |
| Serial No.                | 18J131600052 (ZT410),18J131600164 (ZT420) |
| Input Power (RFID)        | 5VDC                                      |
| Power Adapter Manu/Model  | N/A                                       |
| Power Adapter SN          | -   |
| Hardware version          | N/A                                       |
| Software version          | N/A                                       |
| Date of EUT received      | 11/25/2013                                |
| Equipment Class/ Category | DSS                                       |
| Clock Frequencies         | -   |
| Port/Connectors           | N/A                                       |
| Remark                    | NONE                                      |

## 6.2 Radio Description

### Spec for Radio -


| Radio Type          | UHF RFID          |
|---------------------|-------------------|
| Operating Frequency | 902.75-927.25 MHz |
| Modulation          | ASK               |
| Antenna Type        | Loop/Coil         |
| Antenna Gain        | -36dBi            |
| Channel Separation  | 500 KHz           |
| Number of Channels  | 50                |

## 6.3 EUT test modes/configuration Description


### Test mode

| Test Mode    |  | Note |
|--------------|--|------|
| Test mode1   | Below 1GHz-Mode1: UHF cont TX at 915.25MHz | -    |
| Test mode2   | Above 1GHz-Mode1: UHF cont TX at 902.75MHz | -    |
| Test mode3   | Above 1GHz-Mode2: UHF cont TX at 915.25MHz | -    |
| Test mode4   | Above 1GHz-Mode3: UHF cont TX at 927.25MHz | -    |
| Test mode5   | -  | -    |
| Test mode6   | -  | -    |
| Test mode7   | -  | -    |
| Test mode8   | -  | -    |
| Test mode9   | -  | -    |
| Remark: NONE |  |      |

### 6.4 EUT Photos - External

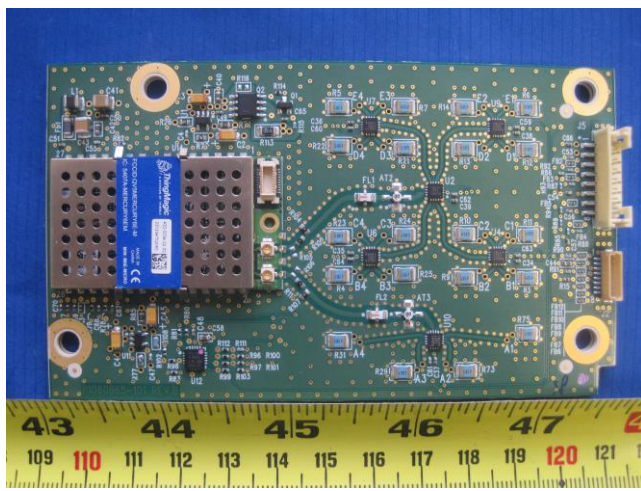


RFID Radio Module & Antenna – Top view

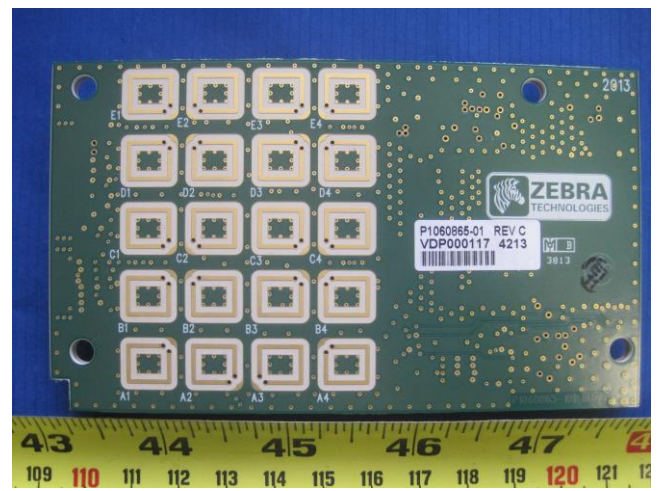

RFID Radio Module & Antenna – Bottom view



**6.5 EUT Photos - Internal**

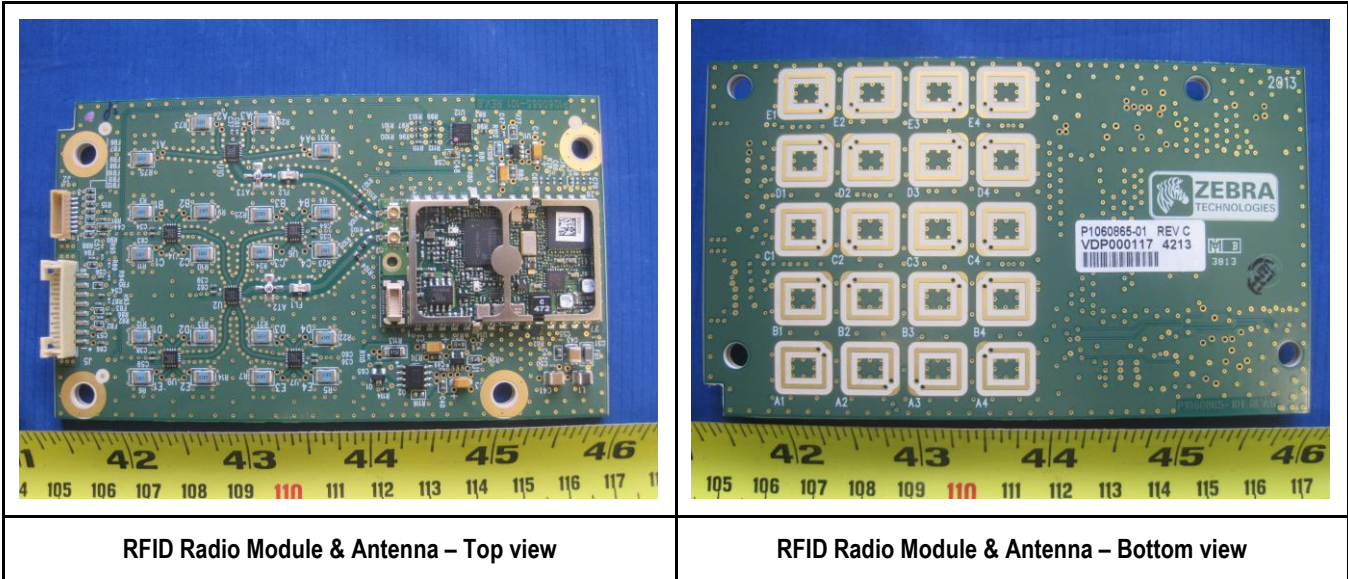

### 6.6 EUT Test Setup Photos




AC Line Conducted Emissions – Front View



AC Line Conducted Emissions – Rear View




Radiated Emissions (<1GHz) – Front View

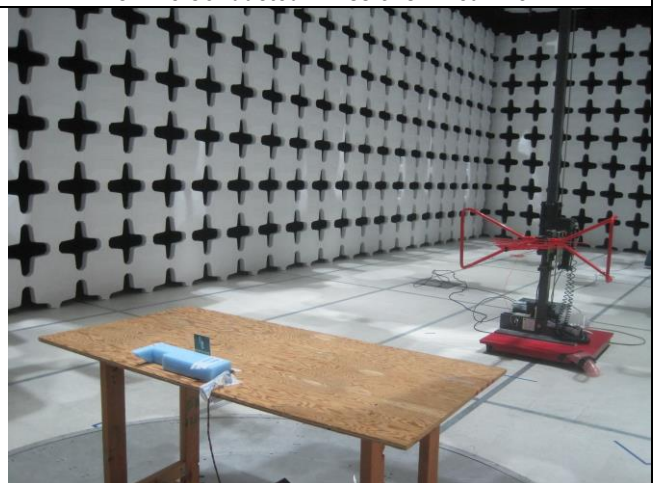

Radiated Emissions (<1GHz) – Rear View



Radiated Emissions (>1GHz) – Front View

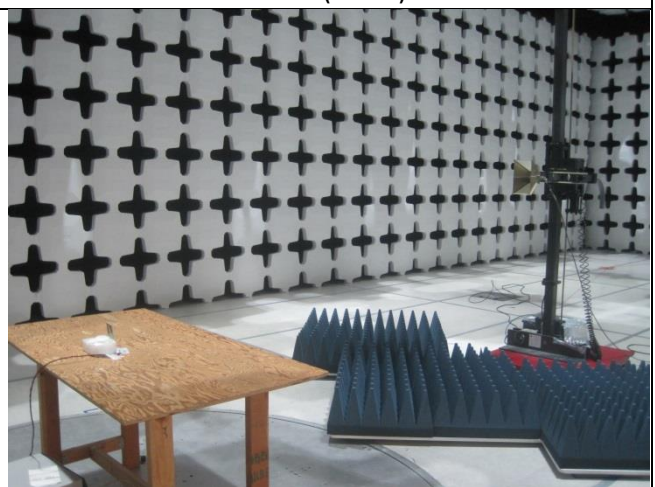

Radiated Emissions (>1GHz) – Rear View







**Radiated Emission below 1GHz – ZT410 (Front)**




**Radiated Emission below 1GHz – ZT410 (Rear)**

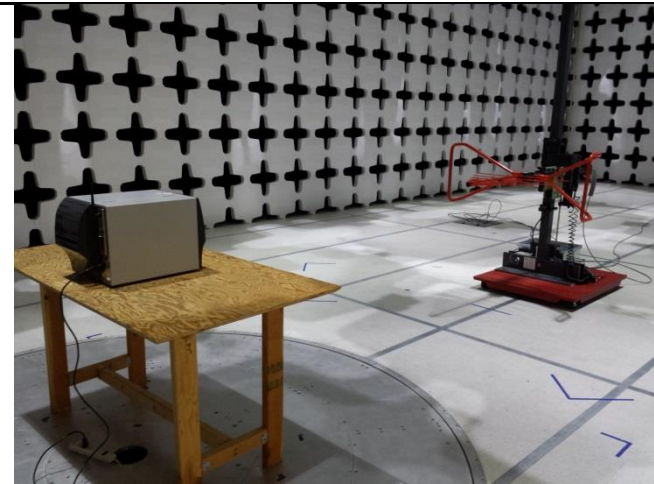


**Radiated Emission below 1GHz – ZT420 (Front)**

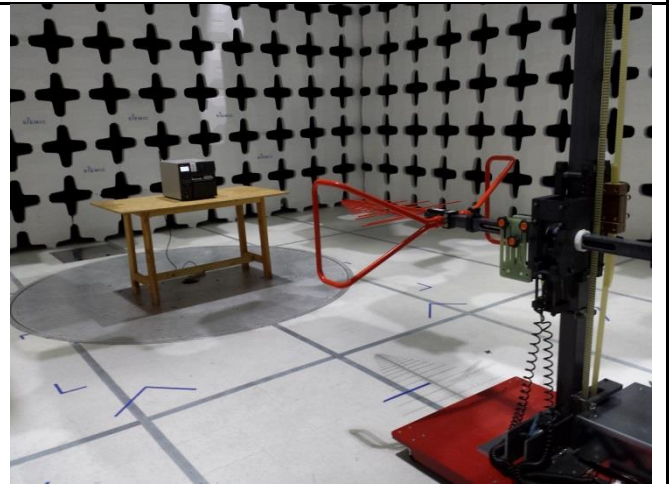

**Radiated Emission below 1GHz – ZT420 (Rear)**

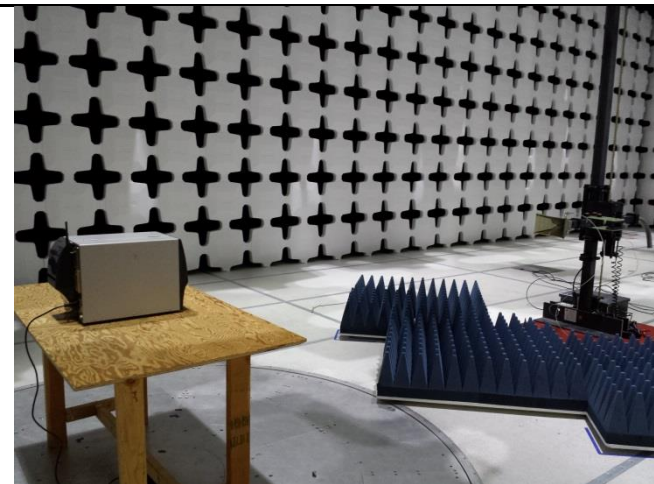

**Radiated Emission above 1GHz – ZT410 (Front)**

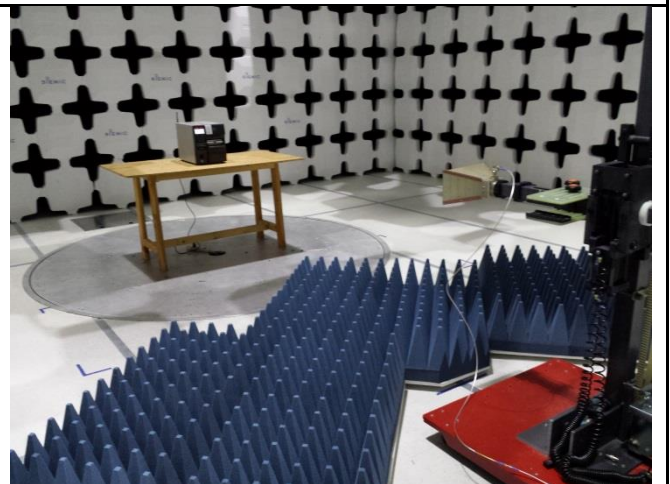

**Radiated Emission above 1GHz – ZT410 (Rear)**



Radiated Emission above 1GHz – ZT420 (Front)



Radiated Emission above 1GHz – ZT420 (Rear)

## 7 Supporting Equipment/Software and cabling Description

### 7.1 Supporting Equipment

| Item | Supporting Equipment Description | Model            | Serial Number | Manufacturer | Note |
|------|----------------------------------|------------------|---------------|--------------|------|
| 1    | D600                             | Laptop PC        | 9444352681    | Dell         |      |
| 2    | PA-1650-05D2                     | AC Power Adapter | F7970         | Dell         |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |
|      |                                  |                  |               |              |      |

### 7.2 Test Software Description

| Test Item         | Software      | Description                |
|-------------------|---------------|----------------------------|
| Spurious Emission | Zebra toolbox | Enable RF Test mode for BT |
|                   |               |                            |
|                   |               |                            |
|                   |               |                            |
|                   |               |                            |

## 8 Test Summary

| Test Item                      | Test standard |                 | Test Method/Procedure |  | Pass / Fail  |
|--------------------------------|---------------|-----------------|-----------------------|--|--|
| Restricted Band of Operation   | FCC           | 15.205          | FCC                   | ANSI C63.4 – 2009<br>FCC Public Notice DA 00-705 | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|                                | IC            | RSS 210 (2.2)   | IC                    | -  |  |
| AC Conducted Emissions Voltage | FCC           | 15.207(a)       | FCC                   | ANSI C63.4 – 2009                                | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|                                | IC            | RSS Gen (7.2.2) | IC                    | -  |  |

| Test Item                                 | Test standard  |               | Test Method/Procedure |                             | Pass / Fail  |
|---|--|---------------|-----------------------|-----------------------------|--|
| Channel Separation                        | FCC  | 15.247 (a)(1) | FCC                   | FCC Public Notice DA 00-705 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|   | IC   | RSS210 (A8.1) | IC                    | -                           |  |
| Occupied Bandwidth                        | FCC  | 15.247(a)(1)  | FCC                   | FCC Public Notice DA 00-705 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|   | IC   | RSS210(A8.1)  | IC                    | -                           |  |
| Bandwidth                                 | FCC  | 15.247(a)(2)  | FCC                   | FCC Public Notice DA 00-705 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|   | IC   | RSS210 (A8.2) | IC                    | -                           |  |
| Number of Hopping Channels                | FCC  | 15.247(a)(1)  | FCC                   | FCC Public Notice DA 00-705 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|   | IC   | RSS210(A8.1)  | IC                    | -                           |  |
| Band Edge and Radiated Spurious Emissions | FCC  | 15.247(d)     | FCC                   | FCC Public Notice DA 00-705 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|   | IC   | RSS210(A8.5)  | IC                    | -                           |  |
| Time of Occupancy                         | FCC  | 15.247(a)(1)  | FCC                   | FCC Public Notice DA 00-705 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|   | IC   | RSS210(A8.1)  | IC                    | -                           |  |
| Output Power                              | FCC  | 15.247(b)     | FCC                   | FCC Public Notice DA 00-705 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|   | IC   | RSS210 (A8.4) | IC                    | -                           |  |
| Receiver Spurious Emissions               | FCC  | 15.247(d)     |                       | FCC Public Notice DA 00-705 | <input checked="" type="checkbox"/> Pass<br><input type="checkbox"/> N/A |
|   | IC   | RSS Gen (4.8) |                       | -                           |  |
| Antenna Gain > 6 dBi                      | FCC  | 15.247(e)     | FCC                   | -                           | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|   | IC   | RSS210(A8.4)  | IC                    | -                           |  |
| Power Spectral Density                    | FCC  | 15.247(e)     | FCC                   | -                           | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|   | IC   | RSS210(A8.3)  | IC                    | -                           |  |
| Hybrid System Requirement                 | FCC  | 15.247(f)     | FCC                   | -                           | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|   | IC   | RSS210(A8.3)  | IC                    | -                           |  |
| Hopping Capability                        | FCC  | 15.247(g)     | FCC                   | -                           | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|   | IC   | RSS210(A8.1)  | IC                    | -                           |  |
| Hopping Coordination Requirement          | FCC  | 15.247(h)     | FCC                   | -                           | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|   | IC   | RSS210(A8.1)  | IC                    | -                           |  |
| RF Exposure requirement                   | FCC  | 15.247(i)     | FCC                   | -                           | <input type="checkbox"/> Pass<br><input checked="" type="checkbox"/> N/A |
|   | IC   | RSS Gen(5.5)  | IC                    | -                           |  |
| Remark                                    | <ol style="list-style-type: none"> <li>All measurement uncertainties do not take into consideration for all presented test results.</li> <li>The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual.</li> </ol> |               |                       |                             |  |



## 9 Measurement Uncertainty

| Test Item                                 | Frequency Range | Description   | Uncertainty   |
|---|-----------------|---|---------------|
| Band Edge and Radiated Spurious Emissions | 30MHz – 1GHz    | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m) | +5.6dB/-4.5dB |
| Band Edge and Radiated Spurious Emissions | 1Hz – 40GHz     | Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m) | +4.3dB/-4.1dB |

## 10 Measurements, Examination and Derived Results

### 10.1 Antenna Requirement


| Spec    | Requirement  | Applicable                          |
|---------|--|-------------------------------------|
| §15.203 | <p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>a) Antenna must be permanently attached to the device.<br/>           b) Antenna must use a unique type of connector to attach to the device.<br/>           c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.</p> | <input checked="" type="checkbox"/> |
| Remark  | The RFID antenna is integral to the PCB board permanently to the device which meets the requirement (See Internal Photographs submitted as another Exhibit).   |                                     |
| Result  | <input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL   |                                     |



## 10.2 Conducted Emissions

### Conducted Emission Limit

| Frequency ranges (MHz) | Limit (dBuV) |         |
|------------------------|--------------|---------|
|                        | QP           | Average |
| 0.15 ~ 0.5             | 66 – 56      | 56 – 46 |
| 0.5 ~ 5                | 56           | 46      |
| 5 ~ 30                 | 60           | 50      |

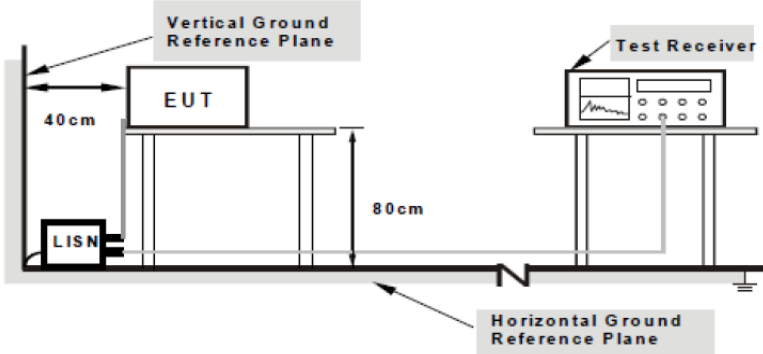
| Spec                       | Item  | Requirement   | Applicable                          |
|----------------------------|---|---|-------------------------------------|
| 47CFR§15.207, RSS210(A8.1) | a)  | For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequency ranges. | <input checked="" type="checkbox"/> |
| Test Setup                 |  <p>Note: 1.Support units were connected to second LISN.<br/>2.Both of LISNs (AMN) are 80cm from EUT and at least 80cm from other units and other metal planes support units.</p>  |   |                                     |
| Procedure                  | <ul style="list-style-type: none"> <li>- The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.</li> <li>- The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains.</li> <li>- The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.</li> <li>- All other supporting equipment were powered separately from another main supply.</li> </ul> |   |                                     |
| Remark                     | Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n –HT20-2437MHz mode.  |   |                                     |
| Result                     | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |   |                                     |

Test Data     Yes                       N/A

Test Plot      Yes (See below)             N/A


### 10.2.1 Conducted Emission Test Results (AC Line Test Result)

|                           |                             |    |        |
|---------------------------|-----------------------------|----|--------|
| Environmental Conditions: | Temp (°C):                  | 21 | Result |
|                           | Humidity (%)                | 44 |        |
|                           | Atmospheric (mPa):          |    |        |
| Mains Power:              | 120 VAC/ 60Hz/ Neutral Line |    |        |
| Tested by:                | Osvaldo Casorla             |    |        |
| Test Date:                | 16-Dec-13                   |    |        |
| Remarks:                  | ZT420                       |    |        |

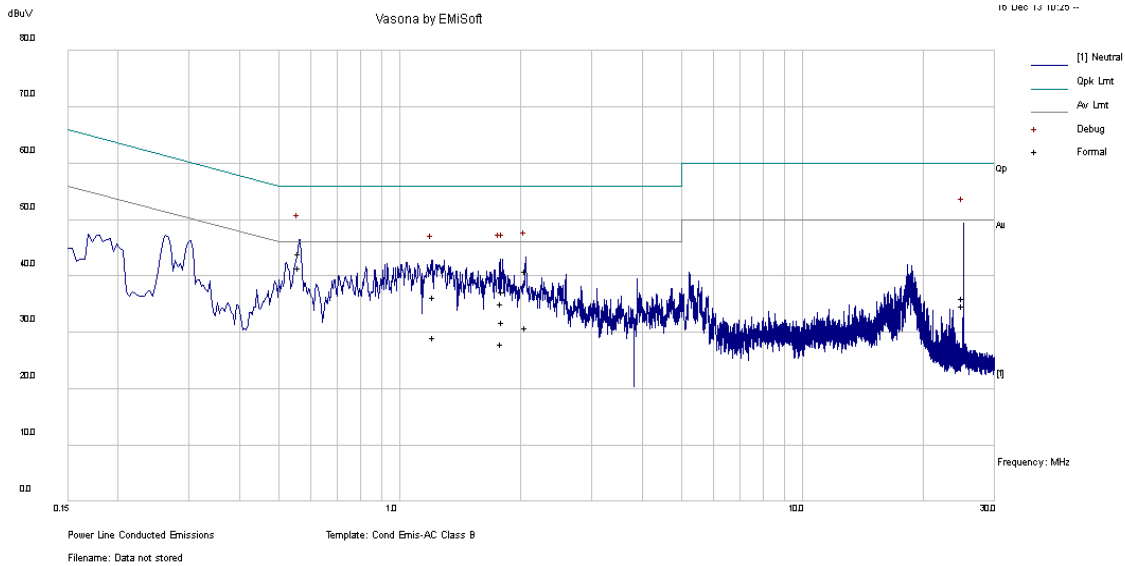

| Frequency MHz | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line    | Limit dBuV | Margin dB | Pass /Fail |
|---------------|----------|------------|------------|------------|------------------|---------|------------|-----------|------------|
| 0.56          | 33.32    | 10.01      | 0.74       | 44.07      | Quasi Peak       | Neutral | 56         | -11.93    | Pass       |
| 25.06         | 22.4     | 10.08      | 2.27       | 34.75      | Quasi Peak       | Neutral | 60         | -25.25    | Pass       |
| 2.06          | 30       | 10.02      | 0.95       | 40.97      | Quasi Peak       | Neutral | 56         | -15.03    | Pass       |
| 1.79          | 24.11    | 10.02      | 0.92       | 35.05      | Quasi Peak       | Neutral | 56         | -20.95    | Pass       |
| 1.80          | 26.38    | 10.02      | 0.92       | 37.32      | Quasi Peak       | Neutral | 56         | -18.68    | Pass       |
| 1.22          | 25.54    | 10.02      | 0.82       | 36.38      | Quasi Peak       | Neutral | 56         | -19.62    | Pass       |
| 0.56          | 30.67    | 10.01      | 0.74       | 41.42      | Average          | Neutral | 46         | -4.58     | Pass       |
| 25.06         | 23.75    | 10.08      | 2.27       | 36.1       | Average          | Neutral | 50         | -13.9     | Pass       |
| 2.06          | 19.84    | 10.02      | 0.95       | 30.81      | Average          | Neutral | 46         | -15.19    | Pass       |
| 1.79          | 16.95    | 10.02      | 0.92       | 27.89      | Average          | Neutral | 46         | -18.11    | Pass       |
| 1.80          | 20.93    | 10.02      | 0.92       | 31.87      | Average          | Neutral | 46         | -14.13    | Pass       |
| 1.22          | 18.26    | 10.02      | 0.82       | 29.1       | Average          | Neutral | 46         | -16.9     | Pass       |


|                           |                             |    |        |
|---------------------------|-----------------------------|----|--------|
| Environmental Conditions: | Temp (°C):                  | 21 | Result |
|                           | Humidity (%)                | 44 |        |
|                           | Atmospheric (mPa):          |    |        |
| Mains Power:              | 120 VAC/ 60Hz/ Neutral Line |    |        |
| Tested by:                | Osvaldo Casorla             |    |        |
| Test Date:                | 16-Dec-13                   |    |        |
| Remarks:                  | ZT420                       |    |        |

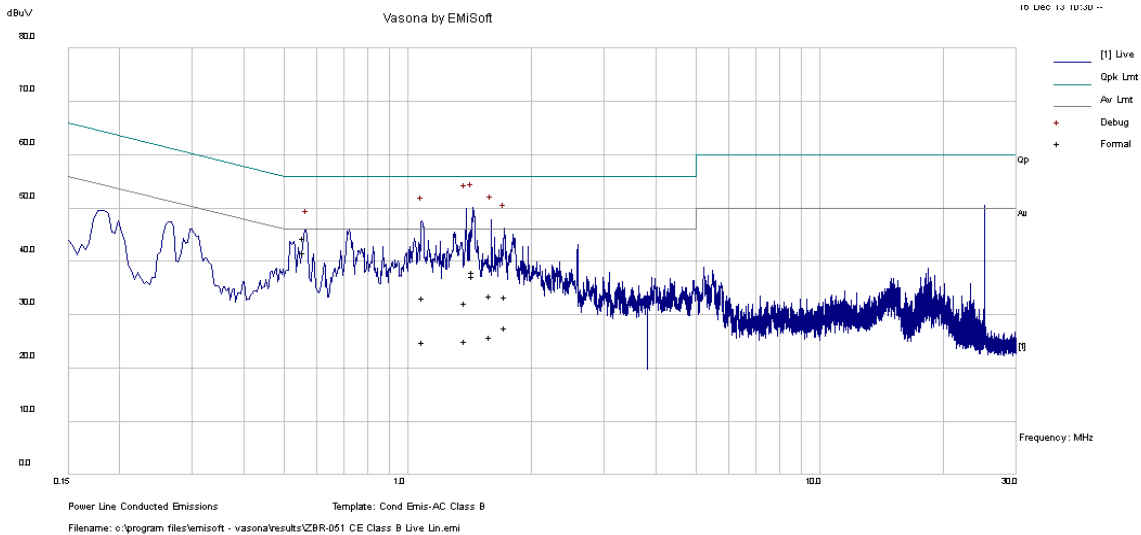

| Frequency MHz | Raw dBuV | Cable Loss | Factors dB | Level dBuV | Measurement Type | Line | Limit dBuV | Margin dB | Pass /Fail |
|---------------|----------|------------|------------|------------|------------------|------|------------|-----------|------------|
| 1.44          | 26.37    | 10.02      | 0.86       | 37.26      | Quasi Peak       | Live | 56         | -18.74    | Pass       |
| 1.38          | 21.43    | 10.02      | 0.85       | 32.3       | Quasi Peak       | Live | 56         | -23.7     | Pass       |
| 1.59          | 22.58    | 10.02      | 0.89       | 33.49      | Quasi Peak       | Live | 56         | -22.51    | Pass       |
| 1.09          | 22.38    | 10.02      | 0.8        | 33.19      | Quasi Peak       | Live | 56         | -22.81    | Pass       |
| 1.73          | 22.4     | 10.02      | 0.91       | 33.33      | Quasi Peak       | Live | 56         | -22.67    | Pass       |
| 0.56          | 33.62    | 10.01      | 0.74       | 44.37      | Quasi Peak       | Live | 56         | -11.63    | Pass       |
| 1.44          | 27.2     | 10.02      | 0.86       | 38.08      | Average          | Live | 46         | -7.92     | Pass       |
| 1.38          | 14.25    | 10.02      | 0.85       | 25.12      | Average          | Live | 46         | -20.88    | Pass       |
| 1.59          | 14.97    | 10.02      | 0.89       | 25.88      | Average          | Live | 46         | -20.12    | Pass       |
| 1.09          | 14.11    | 10.02      | 0.8        | 24.92      | Average          | Live | 46         | -21.08    | Pass       |
| 1.73          | 16.75    | 10.02      | 0.91       | 27.68      | Average          | Live | 46         | -18.32    | Pass       |
| 0.56          | 30.87    | 10.01      | 0.74       | 41.62      | Average          | Live | 46         | -4.38     | Pass       |

### 10.3 20dB Bandwidth

**Requirement(s):**

| Spec                                | Item  | Requirement  | Applicable                          |
|-------------------------------------|---|--|-------------------------------------|
| 47CFR§15.247(a),<br>RSS210(A8.1)(b) | a)  | Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or the 20dB bandwidth of the hopping channel, whichever is greater. However, frequency hopping systems operated in 2400-2483.5MHz with output power not greater than 125mW, the intervals of hopping channel carrier frequencies shall not be less than 25kHz or two thirds of the 20dB bandwidth of the hopping channel, whichever is greater. | <input checked="" type="checkbox"/> |
| 47CFR§15.247(a),<br>RSS210(A8.1)(e) | b)  | Frequency hopping systems operating in the 5725-5850MHz band shall use at least 75 hopping frequencies. The maximum 20dB bandwidth of the hopping channel is 1MHz.   | <input type="checkbox"/>            |
| Test Setup                          |   |  |                                     |
| Test Procedure                      | <p><u>20dB Emission bandwidth measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Set RBW <math>\geq</math> 1% 20dB Bandwidth</li> <li>- Set the video bandwidth (VBW) <math>\geq</math> RBW.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- Sweep = auto couple.</li> <li>- Allow the trace to stabilize.</li> <li>- Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.</li> </ul> |  |                                     |
| Remark                              | The 20 dB test result and the 2/3 of 20 dB data calculation are for channel separation measurement reference only. There isn't limit for 20 dB bandwidth for this product.  |  |                                     |
| Result                              | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |  |                                     |

**Equipment Setting**

| TEST           | RBW                      | VBW        | SPAN                       | Detector | SWEEP | Trace   | NOTES |
|----------------|--------------------------|------------|----------------------------|----------|-------|---------|-------|
| 20dB Bandwidth | $\geq$ 1% 20dB bandwidth | $\geq$ RBW | ~2 – 3 times 20dBbandwidth | PK       | Auto  | Maxhold | -     |


**Test Data**     Yes                                       N/A

**Test Plot**     Yes (See below)                                       N/A


20dB Bandwidth measurement result

| Type     | Freq (MHz) | Test mode | CH   | 20dB Bandwidth (MHz) | 2/3 20dB Bandwidth (MHz) | Pass/Fail |
|----------|------------|-----------|------|----------------------|--------------------------|-----------|
| 20dB OBW | 902.750    | Cont-TX   | Low  | 0.158                | 0.105                    | N/A       |
| 20dB OBW | 915.250    | Cont-TX   | Mid  | 0.162                | 0.108                    | N/A       |
| 20dB OBW | 927.250    | Cont-TX   | High | 0.164                | 0.109                    | N/A       |


Test Plots

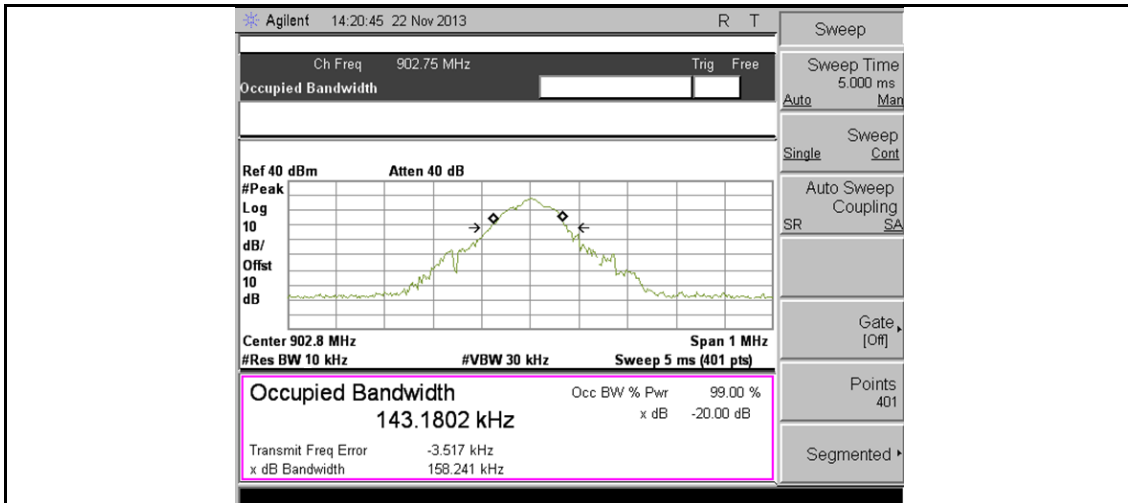

20dB Low CH

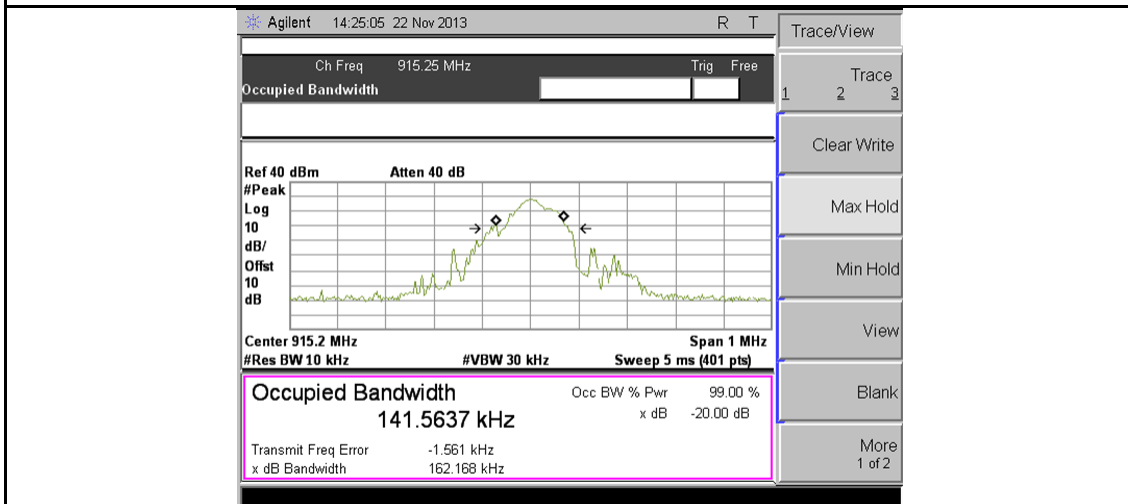


20dB Mid CH

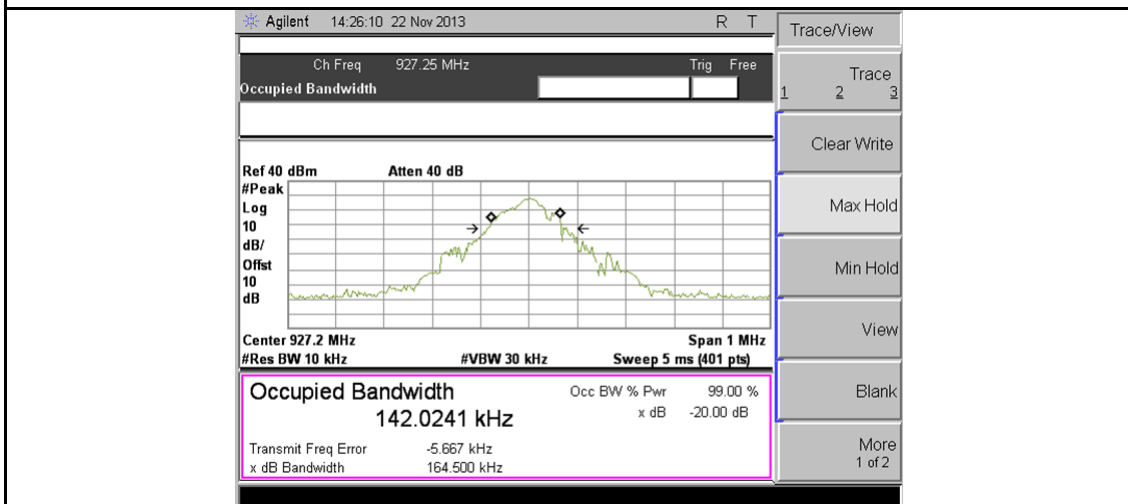

20dB High CH

### 10.4 99% Occupied Bandwidth


**Requirement(s):**

| Spec                    | Requirement  | Applicable   |                         |             |      |  |                   |     |  |                      |          |
|-------------------------|--|--|-------------------------|-------------|------|--|-------------------|-----|--|----------------------|----------|
| RSS Gen 4.6.1           | The transmitter shall be operated at its maximum carrier power measured under normal test conditions. The span of the analyzer shall be set to capture all products of the modulation process, including the emission skirts. The resolution bandwidth shall be set to as close to 1% of the selected span as is possible without being below 1%. The video bandwidth shall be set to 3 times the resolution bandwidth. Video averaging is not permitted. Where practical, a sampling detector shall be used given that a peak or peak hold may produce a wider bandwidth than actual. The trace data points are recovered and directly summed in linear terms. The recovered amplitude data points, beginning at the lowest frequency, are placed in a running sum until 0.5% of the total is reached and that frequency recorded. The process is repeated for the highest frequency data points. This frequency is recorded. The span between the two recorded frequencies is the occupied bandwidth | <input checked="" type="checkbox"/>  |                         |             |      |  |                   |     |  |                      |          |
| Test Setup              |    |  |                         |             |      |  |                   |     |  |                      |          |
| Procedure               | <ol style="list-style-type: none"> <li>EUT was set for low , mid, high channel with modulated mode and highest RF output power.</li> <li>The spectrum analyzer was connected to the antenna terminal.</li> </ol>   |  |                         |             |      |  |                   |     |  |                      |          |
| Test Date               | 08/20/2013   | <table border="1"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>22°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>47%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1019mbar</td> </tr> </table> | Environmental condition | Temperature | 22°C |  | Relative Humidity | 47% |  | Atmospheric Pressure | 1019mbar |
| Environmental condition | Temperature  | 22°C   |                         |             |      |  |                   |     |  |                      |          |
|                         | Relative Humidity  | 47%  |                         |             |      |  |                   |     |  |                      |          |
|                         | Atmospheric Pressure   | 1019mbar   |                         |             |      |  |                   |     |  |                      |          |
| Remark                  | -  |  |                         |             |      |  |                   |     |  |                      |          |
| Result                  | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |  |                         |             |      |  |                   |     |  |                      |          |


**Test Data**     Yes (See below)       N/A

| Channel | Channel Frequency (MHz) | 99% Occupied Bandwidth (KHz) |
|---------|-------------------------|------------------------------|
| Low     | 902.750                 | 143.2                        |
| Mid     | 915.250                 | 141.6                        |
| High    | 927.250                 | 142.0                        |


**Test Plot**     Yes (See below)       N/A

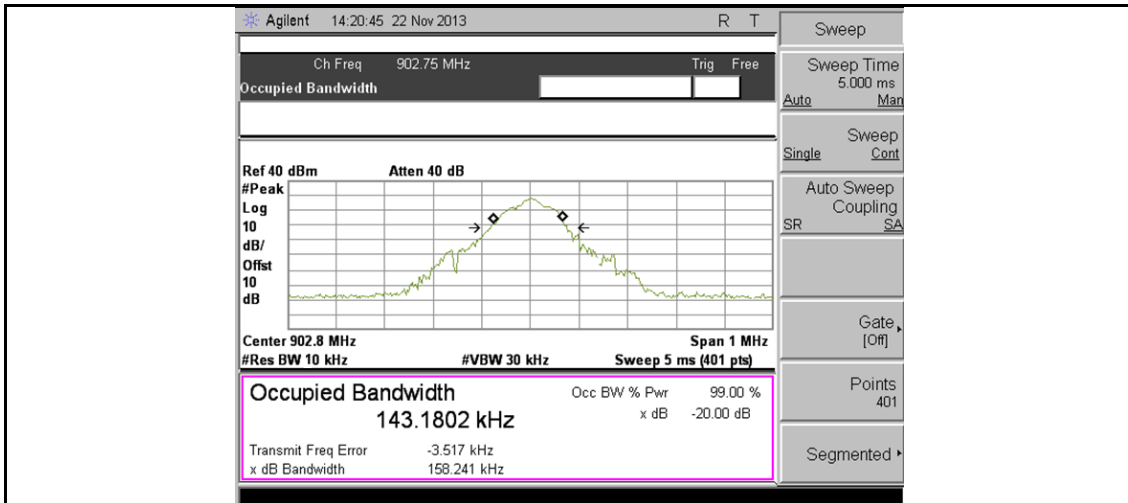

99% BW Low CH

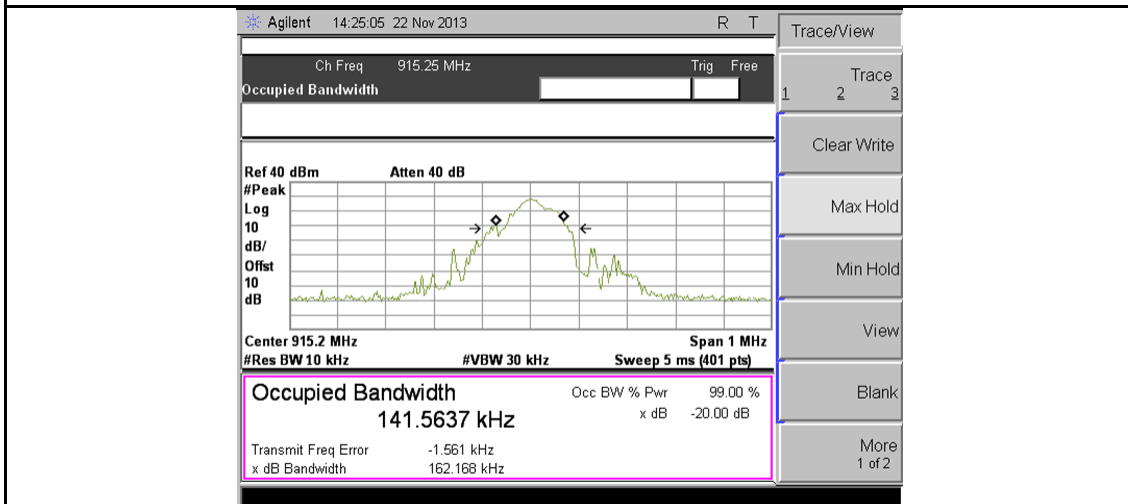

99% BW Mid CH

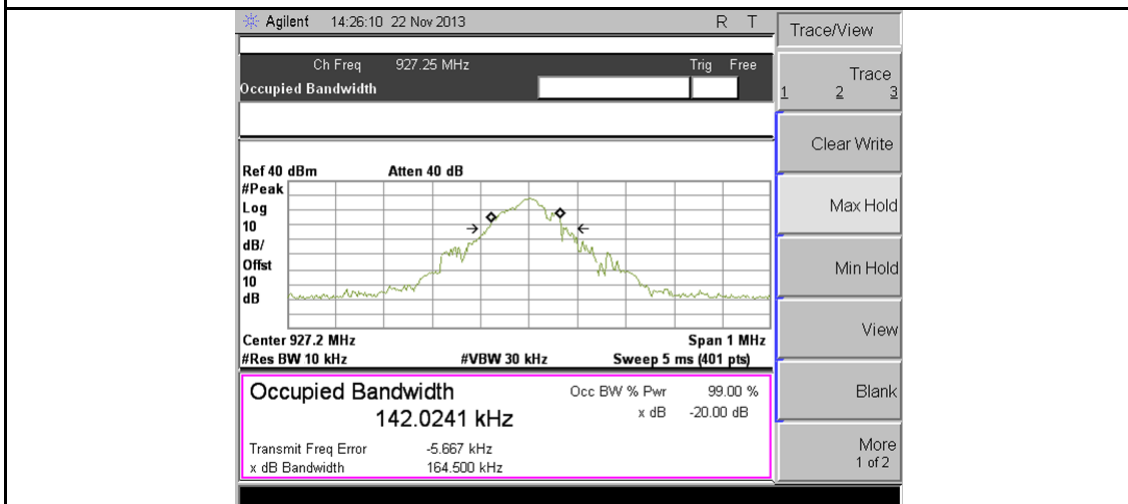


99% BW High CH



## 10.5 Number of Hopping Channel

### Requirement(s):

| Spec                             | Item   | Requirement   | Applicable                          |
|----------------------------------|--|---|-------------------------------------|
| 47CFR§15.247(a),<br>RSS210(A8.1) | a)   | For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz | <input checked="" type="checkbox"/> |
| Test Setup                       |    |   |                                     |
| Test Procedure                   | <u>Number of hopping frequencies procedure</u> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled</li> <li>- Span = the frequency band of operation.</li> <li>- Resolution (or IF) Bandwidth (RBW) &gt;= 1% of the span.</li> <li>- Video (or Average) Bandwidth (VBW) &gt;= RBW.</li> <li>- Detector = peak.</li> <li>- Sweep time = auto couple.</li> <li>- Trace mode = max hold.</li> <li>- Allow trace to fully stabilize.</li> <li>- Save the plot</li> </ul> |   |                                     |
| Remark                           | NONE   |   |                                     |
| Result                           | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |   |                                     |


### Equipment Setting

| TEST                   | RBW      | VBW   | SPAN | Detector | SWEEP | Trace   | NOTES |
|------------------------|----------|-------|------|----------|-------|---------|-------|
| Hopping Channel Number | ≥1% Span | ≥ RBW | -    | PK       | Auto  | Maxhold | -     |

**Test Data**     Yes                       N/A

**Test Plot**     Yes (See below)               N/A


Test Plots

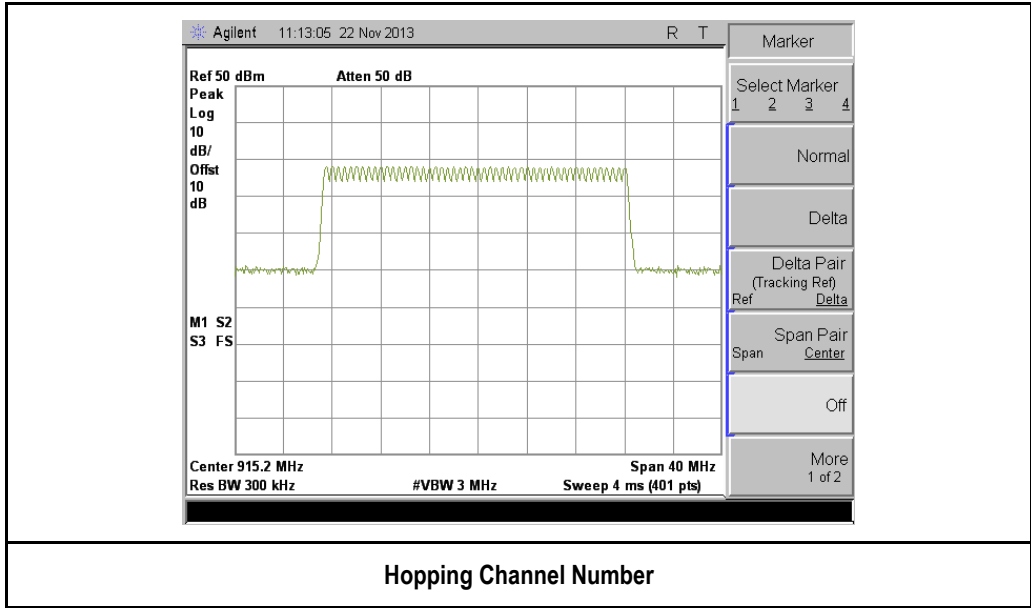

Hopping Channel Number

## 10.6 Peak Output Power

### Requirement(s):

| Spec                       | Item  | Requirement  | Applicable                          |
|----------------------------|---|--|-------------------------------------|
| 47CFR§15.247, RSS210(A8.1) | a)  | For frequency hopping systems in the 2400-2483.5MHz band employing at least 75 hopping channels, and all frequency hopping systems in the 5725-5850MHz band: below 1 Watt (inclusive).   | <input type="checkbox"/>            |
|                            | b)  | For all other frequency hopping systems in the 902-928 MHz band: 1 Watt. The power is converted from watt to dBm, therefore, 1 watt = 30 dBm.  | <input checked="" type="checkbox"/> |
| 47CFR§15.247, RSS210(A8.1) |   | frequency hopping systems operated in 2400-2483.5MHz with output power not greater than 125mW, the intervals of hopping channel carrier frequencies shall not be less than 25kHz or two thirds of the 20dB bandwidth of the hopping channel, whichever is greater. | <input type="checkbox"/>            |
| Test Setup                 |   |  |                                     |
| Test Procedure             | <p><u>Maximum output power measurement procedure</u></p> <ul style="list-style-type: none"> <li>- Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel.</li> <li>- RBW &gt; 1% of the 20 dB bandwidth of the emission being measured;</li> <li>- VBW &gt;= RBW.</li> <li>- Detector = peak.</li> <li>- Sweep time = auto couple.</li> <li>- Trace mode = max hold.</li> <li>- Allow trace to fully stabilize.</li> <li>- Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power.</li> </ul> |  |                                     |
| Remark                     | NONE  |  |                                     |
| Result                     | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |  |                                     |

### Equipment Setting

| TEST            | RBW                | VBW   | SPAN                     | Detector | SWEEP | Trace   | NOTES                                |
|-----------------|--------------------|-------|--------------------------|----------|-------|---------|--------------------------------------|
| PK output power | ≥1% 20dB bandwidth | ≥ RBW | ~ 5 times 20dB bandwidth | Peak     | Auto  | Maxhold | Including Cable loss and Attenuation |


Test Data     Yes                       N/A

Test Plot     Yes (See below)               N/A


Output Power measurement result

| Type         | Freq (MHz) | Test mode | CH   | Conducted Power (dBm) | Limit (dBm) | Result |
|--------------|------------|-----------|------|-----------------------|-------------|--------|
| Output power | 902.75     | Cont-TX   | Low  | 28.11                 | 30          | Pass   |
| Output power | 915.25     | Cont-TX   | Mid  | 28.01                 | 30          | Pass   |
| Output power | 927.25     | Cont-TX   | High | 27.81                 | 30          | Pass   |


Test Plots

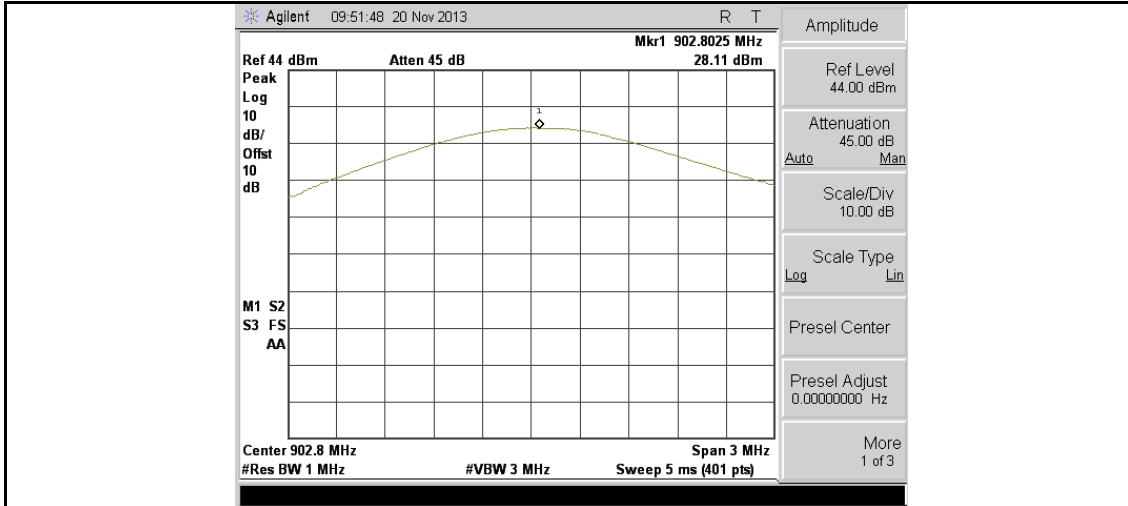

FCC-15.247-PWR-902.75M

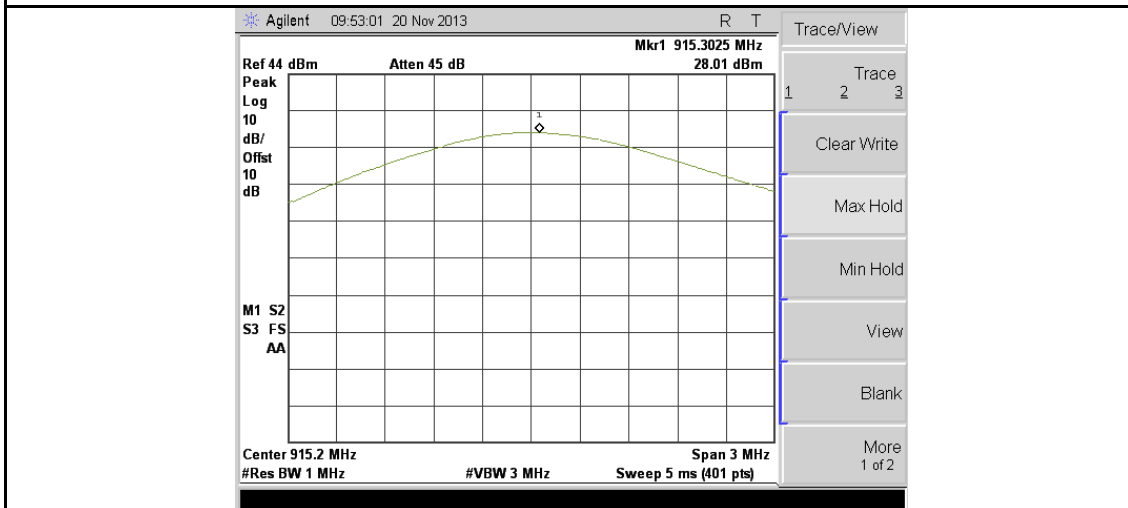


FCC-15.247-PWR-915.25M

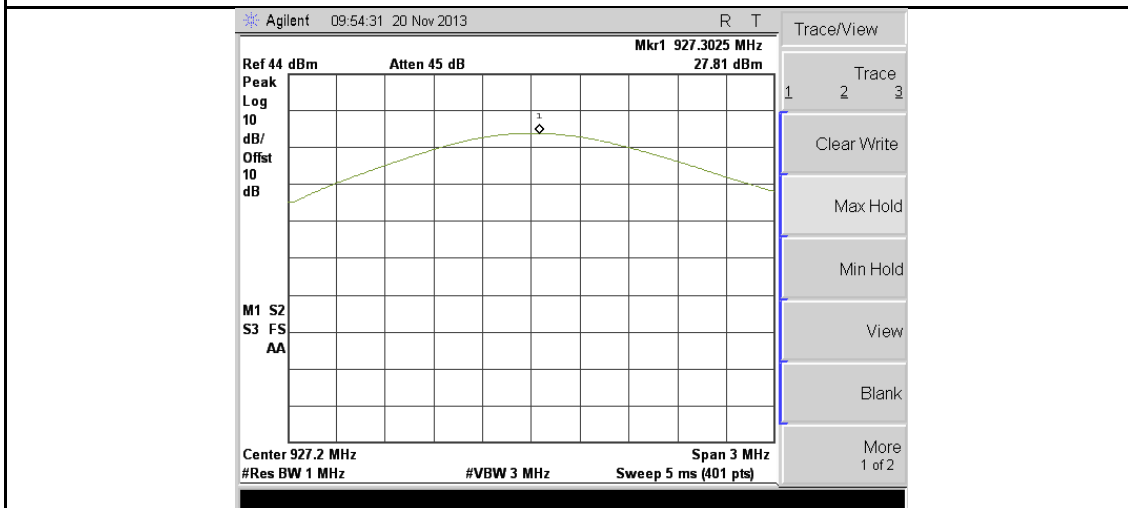

FCC-15.247-PWR-927.25M

## 10.7 Channel Separation

### Requirement(s):

| Spec                       | Item   | Requirement  | Applicable                          |
|----------------------------|--|--|-------------------------------------|
| 47CFR§15.247, RSS210(A8.1) | a)   | Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. | <input checked="" type="checkbox"/> |
| Test Setup                 |    |  |                                     |
| Test Procedure             | DA 00-705 Measurement Guidelines for Frequency Hopping Spread Spectrum Systems<br><br><u>Channel Separation procedure</u> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled.</li> <li>- Span = wide enough to capture the peaks of two adjacent channels</li> <li>- Resolution (or IF) Bandwidth (RBW) &gt;= 1% of the span</li> <li>- Video (or Average) Bandwidth (VBW) &gt;= RBW.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- Use the marker-delta function to determine the separation between the peaks of the adjacent channels.</li> </ul> |  |                                     |
| Remark                     | NONE   |  |                                     |
| Result                     | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |  |                                     |

### Equipment Setting

| TEST               | RBW      | VBW   | SPAN | Detector | SWEEP | Trace   | NOTES |
|--------------------|----------|-------|------|----------|-------|---------|-------|
| Channel Separation | ≥1% Span | ≥ RBW | -    | PK       | Auto  | Maxhold | -     |


Test Data     Yes                       N/A

Test Plot     Yes (See below)               N/A


Measurement result

| Type        | Freq (MHz) | Test mode | CH   | Result (MHz) | 20dB Bandwidth (MHz) | Result |
|-------------|------------|-----------|------|--------------|----------------------|--------|
| Channel Sep | 902.750    | Con-TX    | Low  | 0.505        | 0.158                | Pass   |
| Channel Sep | 915.250    | Con-TX    | Mid  | 0.505        | 0.162                | Pass   |
| Channel Sep | 927.250    | Con-TX    | High | 0.505        | 0.164                | Pass   |


Test Plots

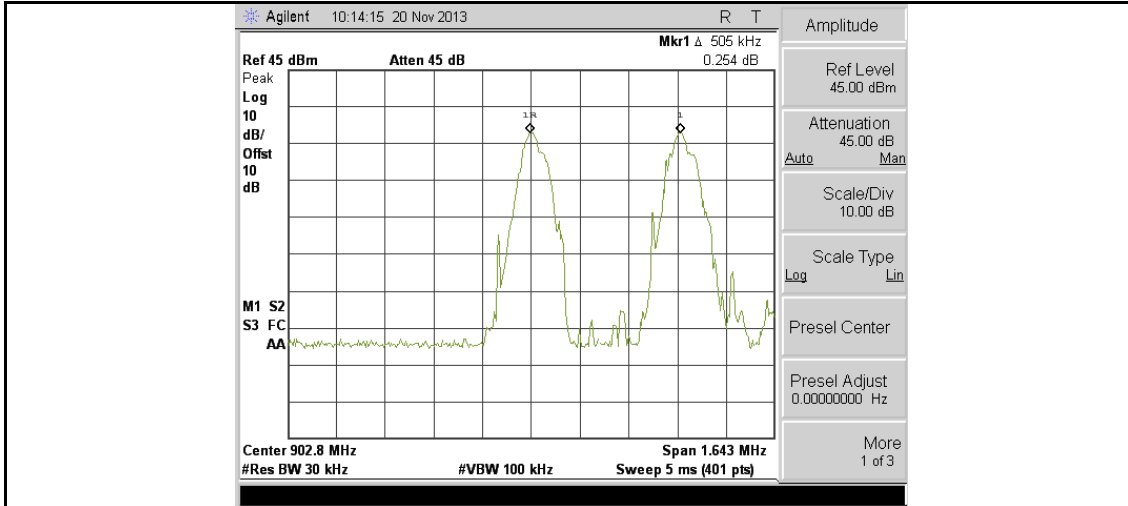

FCC-15.247- Ch Sep-902.75M

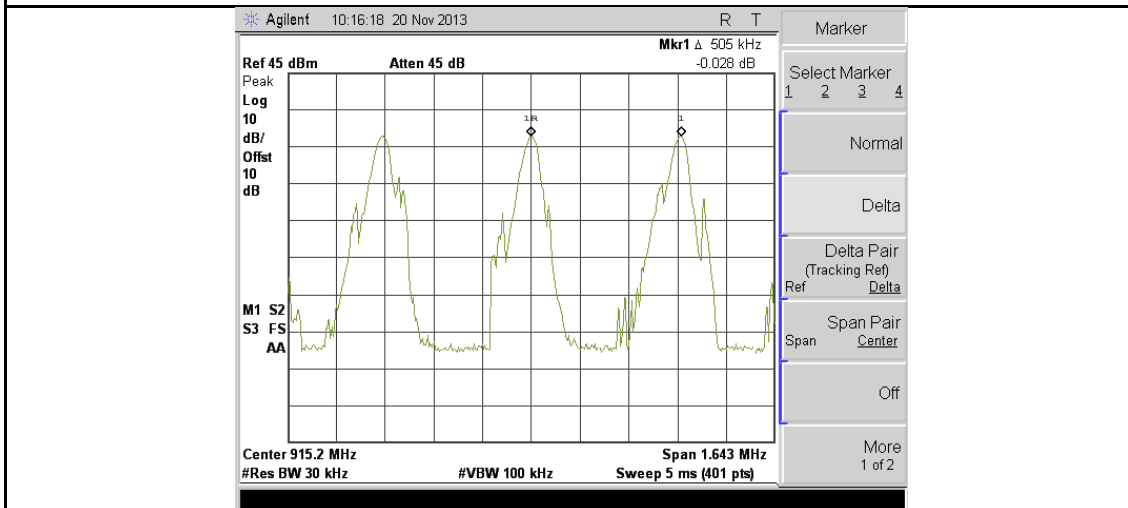

FCC-15.247- Ch Sep-915.25M

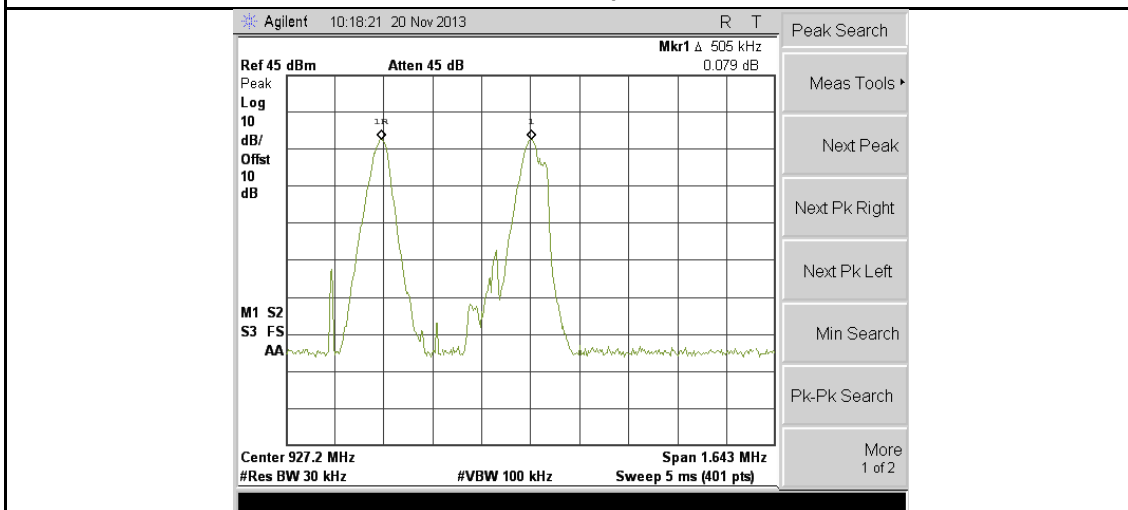


FCC-15.247- Ch Sep-927.25M



## 10.8 Time of Occupancy

### Requirement(s):

| Spec                          | Item  | Requirement   | Applicable                          |
|-------------------------------|---|---|-------------------------------------|
| 47CFR§15.247,<br>RSS210(A8.1) |   | For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz | <input checked="" type="checkbox"/> |
| Test Setup                    |   |   |                                     |
| Test Procedure                | DA 00-705 Measurement Guidelines for Frequency Hopping Spread Spectrum Systems<br><br><u>Channel Separation procedure</u> <ul style="list-style-type: none"> <li>- The EUT must have its hopping function enabled.</li> <li>- Span = zero span</li> <li>- centered on a hopping channel</li> <li>- RBW = 1 MHz; VBW &gt;= RBW</li> <li>- Sweep = as necessary to capture the entire dwell time per hopping channel.</li> <li>- Detector = Peak.</li> <li>- Trace mode = max hold.</li> <li>- If possible, use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation.</li> </ul> |   |                                     |
| Remark                        | EUT has 50 hopping channel.<br>Repetition cycle time = Sweep time/ Quantity of pulse<br>Dwell time = (0.4 * 50) / Repetition cycle time * Pulse on time   |   |                                     |
| Result                        | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |   |                                     |

### Equipment Setting

| TEST          | RBW  | VBW   | SPAN | Detector | SWEEP | Trace   | NOTES |
|---------------|------|-------|------|----------|-------|---------|-------|
| Occupied Time | 1MHz | ≥ RBW | 0Hz  | PK       | -     | Maxhold | -     |


Test Data     Yes                       N/A

Test Plot     Yes (See below)             N/A

Dwell time measurement result


| Type       | Freq (MHz) | Test mode | CH   | Pulse time (msec) | Repetition Cycle Number in 20s | Dwell Time (sec) | Limit (Sec) |
|------------|------------|-----------|------|-------------------|--------------------------------|------------------|-------------|
| Dwell time | 902.750    | Cont-TX   | Low  | 4.875             | 30                             | 0.065            | 0.4         |
| Dwell time | 915.250    | Cont-TX   | Mid  | 5.100             | 30                             | 0.068            | 0.4         |
| Dwell time | 927.250    | Cont-TX   | High | 5.326             | 30                             | 0.071            | 0.4         |

Test Plots

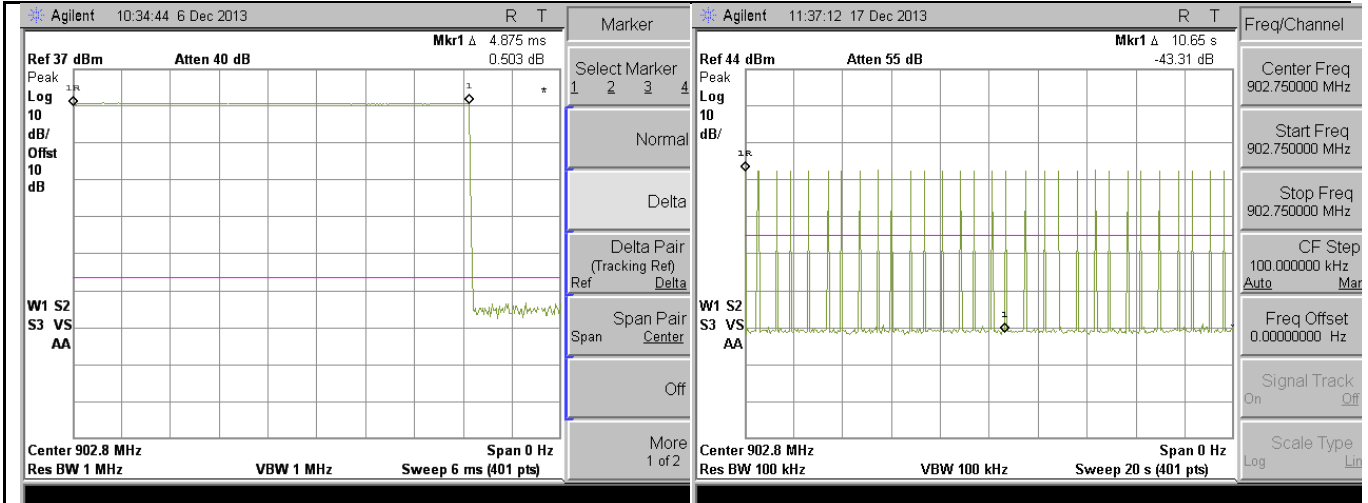


FCC-15.247-DwT-902.75M

FCC-15.247-DwT-Num-904.86M

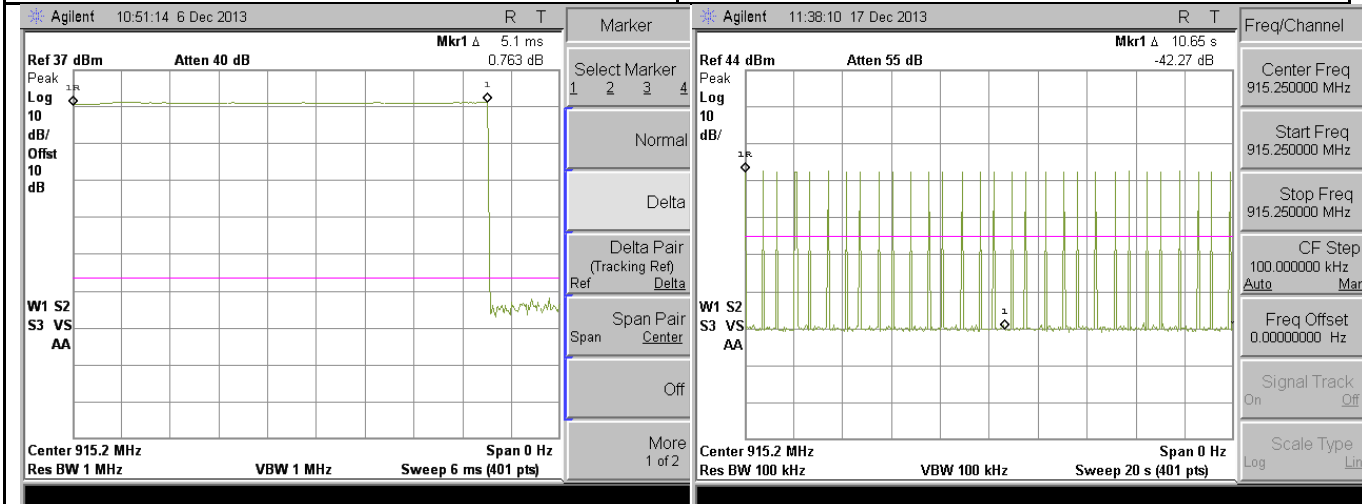

FCC-15.247-DwT-915.25M

FCC-15.247-DwT-Num-915.25M

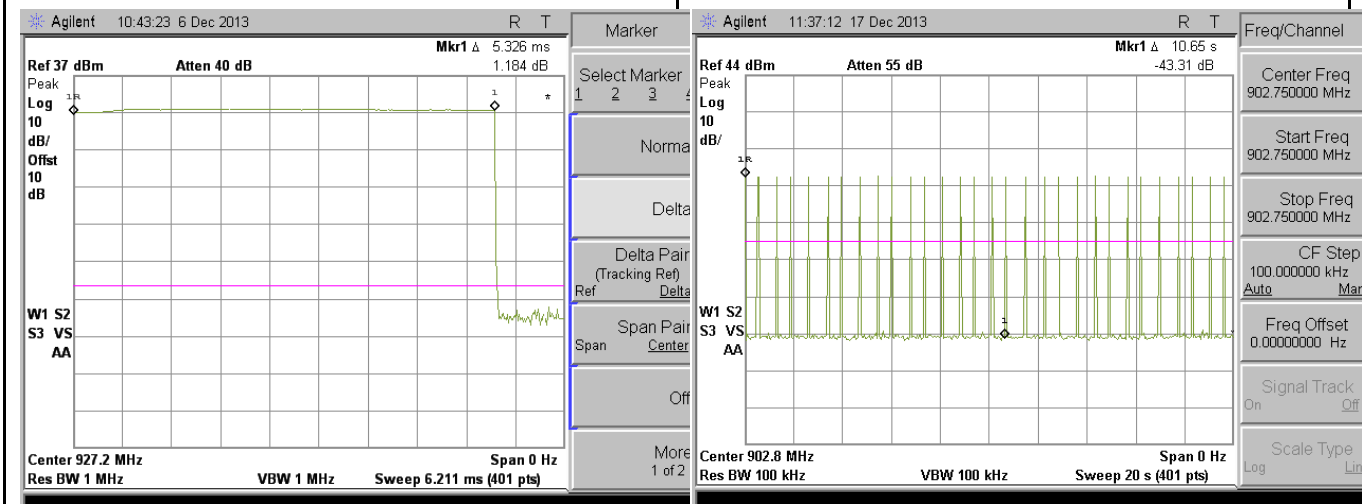


FCC-15.247-DwT-927.25M

FCC-15.247-DwT-Num-927.25M

### 10.9 100 KHz Bandwidth of Frequency Band Edge


**Requirement(s):**

| Spec                                 | Requirement  | Applicable   |                         |             |      |  |                   |     |  |                      |          |
|--------------------------------------|--|--|-------------------------|-------------|------|--|-------------------|-----|--|----------------------|----------|
| 47 CFR §15.247 (b)<br>RSS-210 (A2.6) | In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in §15.209(a) is not required | <input checked="" type="checkbox"/>  |                         |             |      |  |                   |     |  |                      |          |
| Test Setup                           |    |  |                         |             |      |  |                   |     |  |                      |          |
| Procedure                            | <ol style="list-style-type: none"> <li>EUT was set for low , mid, high channel with modulated mode and highest RF output power.</li> <li>The spectrum analyzer was connected to the antenna terminal.</li> <li>RBW=3 KHz, VBW &gt; RBW, Sweep time: auto</li> </ol>  |  |                         |             |      |  |                   |     |  |                      |          |
| Test Date                            | 08/21/2013   | <table border="1"> <tr> <td>Environmental condition</td> <td>Temperature</td> <td>24°C</td> </tr> <tr> <td></td> <td>Relative Humidity</td> <td>47%</td> </tr> <tr> <td></td> <td>Atmospheric Pressure</td> <td>1019mbar</td> </tr> </table> | Environmental condition | Temperature | 24°C |  | Relative Humidity | 47% |  | Atmospheric Pressure | 1019mbar |
| Environmental condition              | Temperature  | 24°C   |                         |             |      |  |                   |     |  |                      |          |
|                                      | Relative Humidity  | 47%  |                         |             |      |  |                   |     |  |                      |          |
|                                      | Atmospheric Pressure   | 1019mbar   |                         |             |      |  |                   |     |  |                      |          |
| Remark                               | -  |  |                         |             |      |  |                   |     |  |                      |          |
| Result                               | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |  |                         |             |      |  |                   |     |  |                      |          |


**Test Data**     Yes (See below)       N/A

| Channel | Channel Frequency (MHz) | Measured (dB) | Limit (dB)   | Pass/Fail |
|---------|-------------------------|---------------|--------------|-----------|
| Low     | 902.750                 | 54.72         | More than 20 | Pass      |
| High    | 927.250                 | 53.25         | More than 20 | Pass      |

**Test Plot**     Yes (See below)       N/A

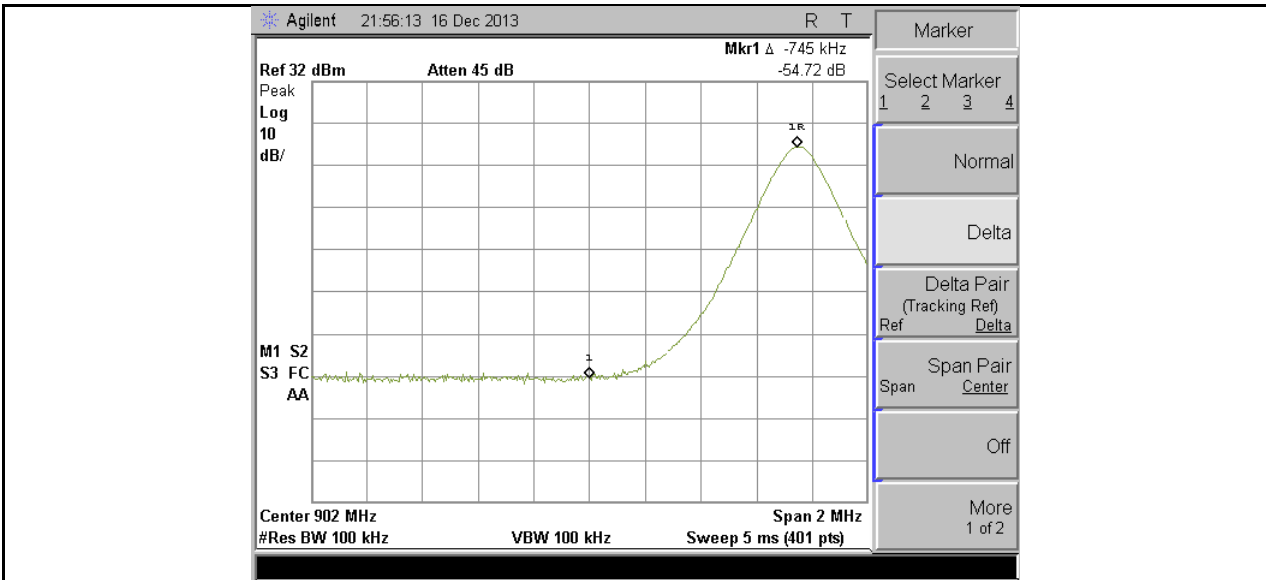

100 KHz Bandwidth of Frequency Band Edge-Low Channel

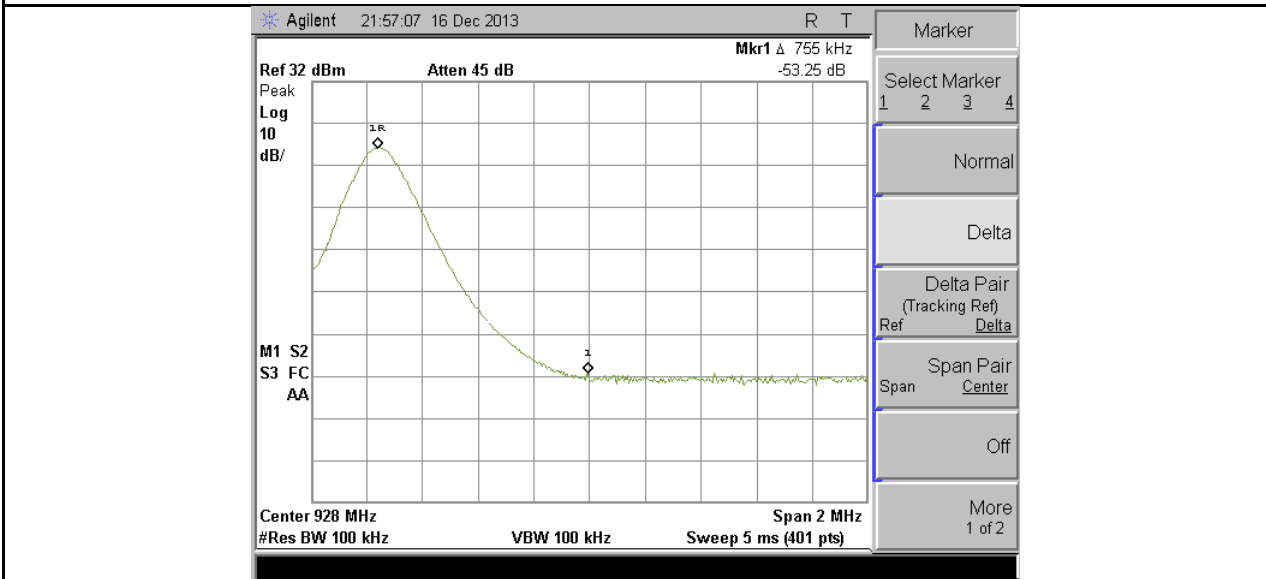

100 KHz Bandwidth of Frequency Band Edge -High Channel

### 10.10 Radiated Emissions below 1GHz

**Requirement(s):**


| Spec                             | Item   | Requirement  | Applicable            |                       |         |     |          |     |         |     |           |     |                                     |
|----------------------------------|--|--|-----------------------|-----------------------|---------|-----|----------|-----|---------|-----|-----------|-----|-------------------------------------|
| 47CFR§15.247(d),<br>RSS210(A8.5) | a)   | Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges<br><br><table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength (uV/m)</th> </tr> </thead> <tbody> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table> | Frequency range (MHz) | Field Strength (uV/m) | 30 – 88 | 100 | 88 – 216 | 150 | 216 960 | 200 | Above 960 | 500 | <input checked="" type="checkbox"/> |
| Frequency range (MHz)            | Field Strength (uV/m)  |  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| 30 – 88                          | 100  |  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| 88 – 216                         | 150  |  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| 216 960                          | 200  |  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| Above 960                        | 500  |  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| Test Setup                       |  |  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| Procedure                        | <ol style="list-style-type: none"> <li>The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:           <ol style="list-style-type: none"> <li>Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>The EUT was then rotated to the direction that gave the maximum emission.</li> <li>Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>A Quasi-peak measurement was then made for that frequency point.</li> <li>Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol> |  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| Remark                           | Different RF configuration has been evaluated but not much difference was found. The data presented here is the worst case data with EUT under 802.11n –HT20-2437MHz mode.   |  |                       |                       |         |     |          |     |         |     |           |     |                                     |
| Result                           | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail   |  |                       |                       |         |     |          |     |         |     |           |     |                                     |

**Test Data**     Yes (See below)       N/A

**Test Plot**     Yes (See below)       N/A


### Radiated Emission Test Results (Below 1GHz)

|                           |                               |      |  |        |      |
|---------------------------|-------------------------------|------|--|--------|------|
| Test specification        | below 1GHz                    |      |  | Result | Pass |
| Environmental Conditions: | Temp (°C):                    | 22   |  |        |      |
|                           | Humidity (%)                  | 54   |  |        |      |
|                           | Atmospheric (mPa):            | 1008 |  |        |      |
| Mains Power:              | 5VDC                          |      |  |        |      |
| Tested by:                | David Zhang                   |      |  |        |      |
| Test Date:                | 12-17-13                      |      |  |        |      |
| Remarks:                  | UHF RFID @ 915.25MHz, Cont-TX |      |  |        |      |

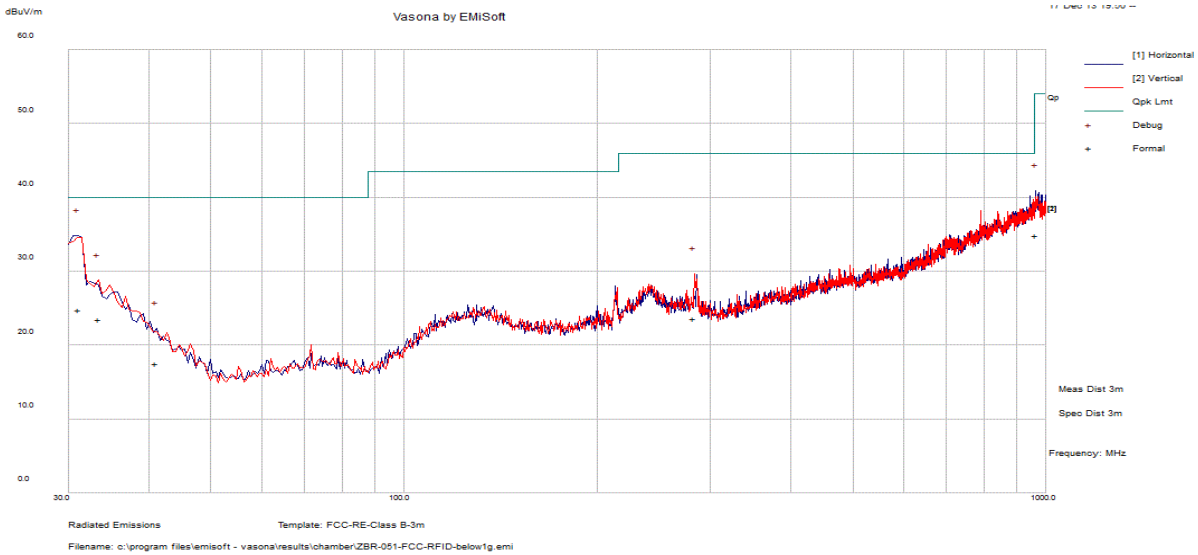

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 31.185        | 30.4     | 0.7        | -6.2  | 24.8         | Quasi Max        | H   | 101    | 13      | 40           | -15.2     | Pass       |
| 33.466        | 30.7     | 0.7        | -7.8  | 23.5         | Quasi Max        | V   | 400    | 71      | 40           | -16.5     | Pass       |
| 963.621       | 31.4     | 5.6        | -2.1  | 34.8         | Quasi Max        | H   | 262    | 346     | 54           | -19.2     | Pass       |
| 283.019       | 34.3     | 2.9        | -13.5 | 23.7         | Quasi Max        | V   | 103    | 236     | 46           | -22.3     | Pass       |
| 41.04         | 30       | 0.7        | -13.2 | 17.5         | Quasi Max        | H   | 170    | 154     | 40           | -22.5     | Pass       |
| 31.185        | 30.4     | 0.7        | -6.2  | 24.8         | Quasi Max        | H   | 101    | 13      | 40           | -15.2     | Pass       |


| Test specification        | below 1GHz  |      | Result | Pass |
|---------------------------|---|------|--------|------|
| Environmental Conditions: | Temp (°C):  | 21   |        |      |
|                           | Humidity (%)  | 56   |        |      |
|                           | Atmospheric (mbar):   | 1008 |        |      |
| Mains Power:              | 110VAC,60Hz   |      |        |      |
| Tested by:                | Teody Manansala   |      |        |      |
| Test Date:                | 2-Dec-13  |      |        |      |
| Remarks:                  | RFID Mid (915.25MHz) + BT at GFSK (2441MHz) + N radio at 802.11b (2437MHz) all transmit simultaneously on ZT410 |      |        |      |

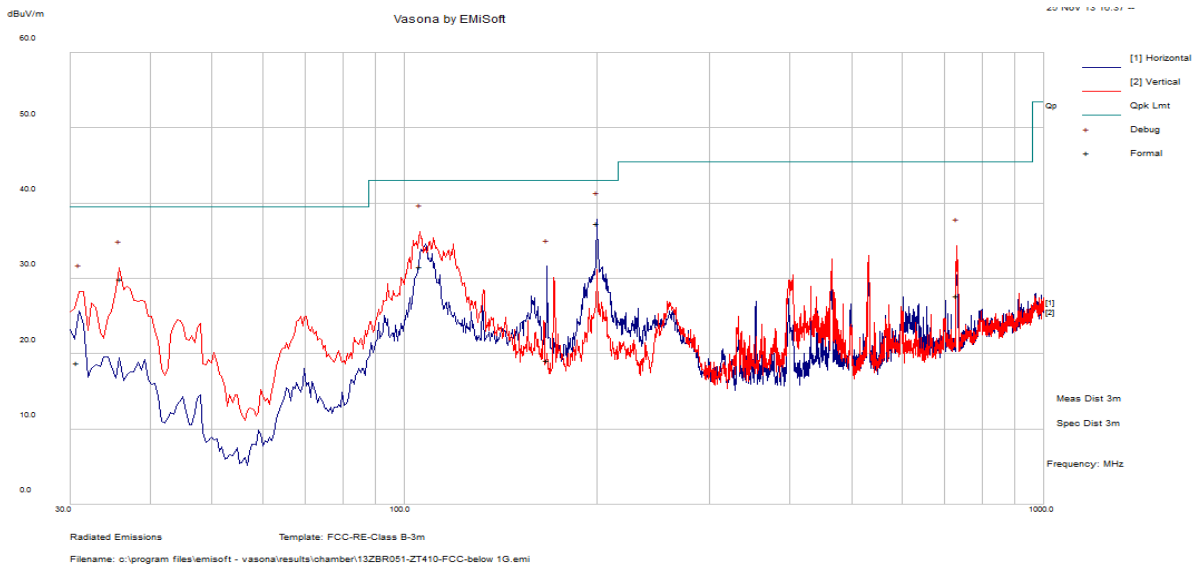

| Frequency MHz | Raw dBuV | Cable Loss | AF dB  | Level dBuV/m | Measurement Type | Po l | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|--------|--------------|------------------|------|--------|---------|--------------|-----------|------------|
| 200.18        | 49.09    | 2.46       | -14.26 | 37.29        | Quasi Max        | H    | 116.00 | 118.00  | 43.00        | -5.71     | Pass       |
| 105.86        | 44.52    | 1.73       | -14.70 | 31.55        | Quasi Max        | V    | 100.00 | 73.00   | 43.00        | -11.45    | Pass       |
| 35.99         | 38.92    | 0.70       | -9.66  | 29.96        | Quasi Max        | V    | 100.00 | 136.00  | 39.50        | -9.54     | Pass       |
| 730.16        | 30.02    | 4.79       | -7.13  | 27.68        | Quasi Max        | H    | 150.00 | 89.00   | 45.50        | -17.82    | Pass       |
| 30.80         | 24.09    | 0.65       | -5.97  | 18.77        | Quasi Max        | V    | 100.00 | 194.00  | 39.50        | -20.73    | Pass       |
| 167.41        | 31.79    | 2.25       | -14.94 | 19.10        | Quasi Max        | H    | 125.00 | 131.00  | 43.00        | -23.90    | Pass       |



|                           |   |      |        |      |
|---------------------------|---|------|--------|------|
| Test specification        | below 1GHz  |      | Result | Pass |
| Environmental Conditions: | Temp (°C):  | 21   |        |      |
|                           | Humidity (%)  | 56   |        |      |
|                           | Atmospheric (mbar):   | 1008 |        |      |
| Mains Power:              | 110VAC,60Hz   |      |        |      |
| Tested by:                | Teody Manansala   |      |        |      |
| Test Date:                | 2-Dec-13  |      |        |      |
| Remarks:                  | RFID Mid (915.25MHz) + BT at GFSK (2441MHz) + N radio at 802.11b (2437MHz) all transmit simultaneously on ZT420 printer |      |        |      |

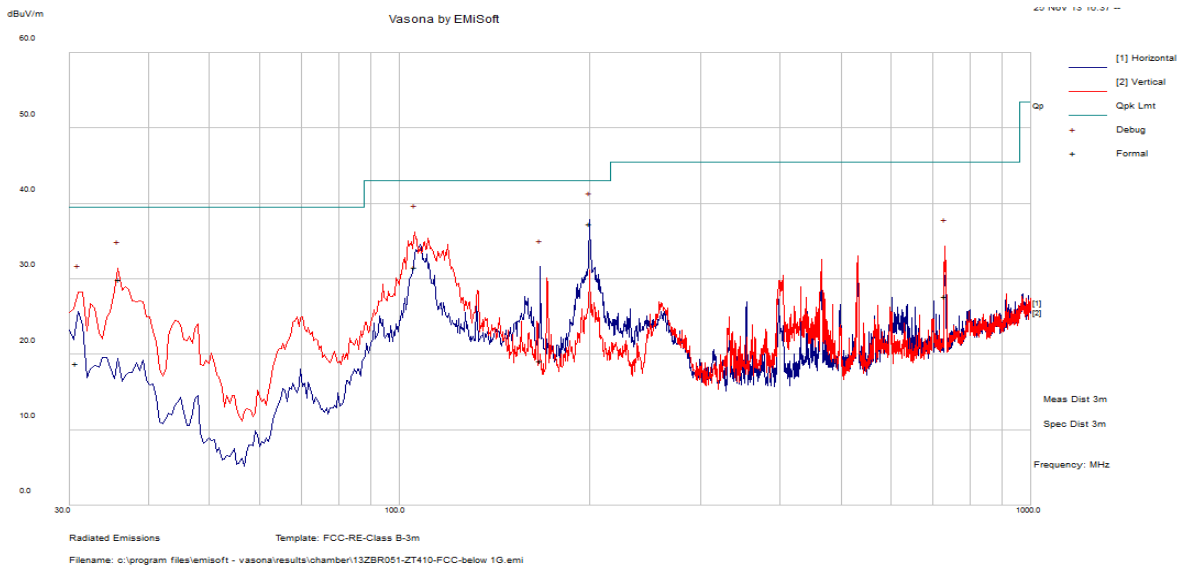

| Frequency MHz | Raw dBuV | Cable Loss | AF dB  | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|--------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 221.11        | 38.38    | 2.58       | -16.16 | 24.79        | Quasi Max        | H   | 151.00 | 57.00   | 45.50        | -20.71    | Pass       |
| 116.56        | 42.54    | 1.84       | -12.83 | 31.55        | Quasi Max        | V   | 133.00 | 159.00  | 43.00        | -11.45    | Pass       |
| 781.39        | 19.81    | 4.98       | -6.05  | 18.74        | Quasi Max        | H   | 162.00 | 76.00   | 45.50        | -26.76    | Pass       |
| 200.18        | 48.17    | 2.46       | -14.26 | 36.37        | Quasi Max        | H   | 100.00 | 89.00   | 43.00        | -6.63     | Pass       |
| 30.79         | 27.01    | 0.65       | -5.96  | 21.69        | Quasi Max        | H   | 110.00 | 319.00  | 39.50        | -17.81    | Pass       |
| 211.05        | 40.55    | 2.52       | -16.41 | 26.66        | Quasi Max        | H   | 100.00 | 106.00  | 43.00        | -16.34    | Pass       |

### 10.11 Radiated Spurious Emissions above 1GHz

**Requirement(s):**

| Spec                             | Item  | Requirement   | Applicable                          |
|----------------------------------|---|---|-------------------------------------|
| 47CFR§15.247(d),<br>RSS210(A8.5) | a)  | For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required<br><br><input checked="" type="checkbox"/> 20 dB down <input type="checkbox"/> 30 dB down | <input checked="" type="checkbox"/> |
|                                  | b)  | or restricted band, emission must also comply with the radiated emission limits specified in 2.8  | <input checked="" type="checkbox"/> |
| Test Setup                       |   |   |                                     |
| Procedure                        | <ol style="list-style-type: none"> <li>1. The EUT was switched on and allowed to warm up to its normal operating condition.</li> <li>2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> <li>a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen.</li> <li>b. The EUT was then rotated to the direction that gave the maximum emission.</li> <li>c. Finally, the antenna height was adjusted to the height that gave the maximum emission.</li> </ol> </li> <li>3. An average measurement was then made for that frequency point.</li> <li>4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</li> </ol> |   |                                     |
| Remark                           | None  |   |                                     |
| Result                           | <input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail  |   |                                     |

**Test Data**     Yes (See below)     N/A

**Test Plot**     Yes (See below)     N/A

### Radiated Emission Test Results (Above 1GHz)

#### Above 1GHz-10GHz- Mode1: RFID Low (902.75MHz)

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 4338          | 41.06    | 2.41       | -0.26 | 43.21        | Peak Max         | H   | 381    | 327     | 74           | -30.79    | Pass       |
| 1327.5        | 59.96    | 1.02       | -6.55 | 54.43        | Peak Max         | H   | 114    | 318     | 74           | -19.57    | Pass       |
| 1246.7        | 42.07    | 0.96       | -6.7  | 36.34        | Peak Max         | V   | 300    | 302     | 74           | -37.66    | Pass       |
| 4338          | 29.56    | 2.41       | -0.26 | 31.72        | Average Max      | H   | 381    | 327     | 54           | -22.28    | Pass       |
| 1327.5        | 38.83    | 1.02       | -6.55 | 33.3         | Average Max      | H   | 114    | 318     | 54           | -20.7     | Pass       |
| 1246.7        | 29.84    | 0.96       | -6.7  | 24.1         | Average Max      | V   | 300    | 302     | 54           | -29.9     | Pass       |

#### Above 1GHz-10GHz- Mode2: RFID Low (915.25MHz)

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 1328.063      | 55.39    | 1.02       | -6.55 | 49.86        | Peak Max         | H   | 177    | 360     | 74           | -24.14    | Pass       |
| 3718.3        | 41.65    | 2.18       | -0.72 | 43.11        | Peak Max         | H   | 229    | 173     | 74           | -30.89    | Pass       |
| 1328.063      | 37.41    | 1.02       | -6.55 | 31.87        | Average Max      | H   | 177    | 360     | 54           | -22.13    | Pass       |
| 3718.3        | 30.13    | 2.18       | -0.72 | 31.59        | Average Max      | H   | 229    | 173     | 54           | -22.41    | Pass       |

#### Above 1GHz-10GHz- Mode3: RFID Low (927.25MHz)

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 1329.833      | 51.75    | 1.02       | -6.55 | 46.22        | Peak Max         | H   | 179    | 356     | 74           | -27.78    | Pass       |
| 4389.067      | 42.76    | 2.43       | -0.27 | 44.92        | Peak Max         | V   | 249    | 0       | 74           | -29.08    | Pass       |
| 1329.833      | 36.89    | 1.02       | -6.55 | 31.36        | Average Max      | H   | 179    | 356     | 54           | -22.64    | Pass       |
| 4389.067      | 30.21    | 2.43       | -0.27 | 32.37        | Average Max      | V   | 249    | 0       | 54           | -21.63    | Pass       |

Above 1GHz-40GHz- Mode1: RFID Low CH (902.75MHz) + BT at GFSK (Hopping) + N radio at 802.11b (2462MHz) all transmit simultaneously on ZT410 printer

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 15559.61      | 44.76    | 5.51       | 9.69  | 59.95        | Peak Max         | H   | 285    | 129     | 74           | -14.05    | Pass       |
| 2708.228      | 47.71    | 1.76       | -2.74 | 46.73        | Peak Max         | V   | 163    | 30      | 74           | -27.27    | Pass       |
| 4924.063      | 55.21    | 2.57       | 0.26  | 58.04        | Peak Max         | V   | 230    | 85      | 74           | -15.96    | Pass       |
| 1465.448      | 44.03    | 1.12       | -6.33 | 38.81        | Peak Max         | V   | 171    | 80      | 74           | -35.19    | Pass       |
| 15559.61      | 33       | 5.5        | 9.7   | 48.2         | Average Max      | H   | 285    | 129     | 54           | -5.8      | Pass       |
| 2708.228      | 39.4     | 1.76       | -2.74 | 38.43        | Average Max      | V   | 163    | 30      | 54           | -15.57    | Pass       |
| 4924.063      | 40.56    | 2.57       | 0.26  | 43.39        | Average Max      | V   | 230    | 85      | 54           | -10.61    | Pass       |
| 1465.448      | 30.71    | 1.12       | -6.33 | 25.49        | Average Max      | V   | 171    | 80      | 54           | -28.51    | Pass       |

Above 1GHz-40GHz- Mode2: RFID Mid CH (915.25MHz) + BT at GFSK (Hopping) + N radio at 802.11b (2462MHz) all transmit simultaneously on ZT410 printer

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 15486.82      | 46.06    | 5.5        | 10.18 | 61.75        | Peak Max         | V   | 352    | 112     | 74           | -12.25    | Pass       |
| 1420.62       | 41.64    | 1.09       | -6.4  | 36.33        | Peak Max         | H   | 362    | 236     | 74           | -37.67    | Pass       |
| 1057.58       | 46.23    | 0.8        | -7.06 | 39.96        | Peak Max         | V   | 109    | 197     | 74           | -34.04    | Pass       |
| 1340.78       | 44.23    | 1.03       | -6.53 | 38.73        | Peak Max         | V   | 163    | 93      | 74           | -35.28    | Pass       |
| 15486.82      | 33.47    | 5.5        | 10.18 | 49.16        | Average Max      | V   | 352    | 112     | 54           | -4.84     | Pass       |
| 1420.62       | 29.94    | 1.09       | -6.4  | 24.62        | Average Max      | V   | 395    | 283     | 54           | -29.38    | Pass       |
| 1057.58       | 33.59    | 0.8        | -7.06 | 27.32        | Average Max      | V   | 109    | 197     | 54           | -26.68    | Pass       |
| 1340.78       | 31.75    | 1.03       | -6.53 | 26.24        | Average Max      | V   | 163    | 93      | 54           | -27.76    | Pass       |

Above 1GHz-10GHz- Mode3: RFID High CH (927.25MHz) + BT at GFSK (Hopping) + N radio at 802.11b (2462MHz) all transmit simultaneously on ZT410 printer

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 4924.08       | 52.84    | 2.57       | 0.26  | 55.66        | Peak Max         | V   | 104    | 74      | 74           | -18.34    | Pass       |
| 2781.365      | 43.16    | 1.77       | -2.55 | 42.37        | Peak Max         | V   | 179    | 31      | 74           | -31.63    | Pass       |
| 1719.393      | 42.3     | 1.33       | -5.45 | 38.17        | Peak Max         | H   | 228    | 268     | 74           | -35.83    | Pass       |
| 4924.08       | 38.57    | 2.57       | 0.26  | 41.4         | Average Max      | V   | 104    | 74      | 54           | -12.6     | Pass       |
| 2781.365      | 31.68    | 1.77       | -2.55 | 30.9         | Average Max      | V   | 179    | 31      | 54           | -23.1     | Pass       |
| 1719.393      | 30.45    | 1.33       | -5.45 | 26.32        | Average Max      | V   | 98     | 218     | 54           | -27.68    | Pass       |

Above 1GHz-40GHz- Mode4: RFID Low CH (902.75MHz) + BT at GFSK (Hopping) + N radio at 802.11b (2462MHz) all transmit simultaneously on ZT420 printer

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 1593.295      | 56.3     | 1.22       | -5.92 | 51.61        | Peak Max         | H   | 168    | 61      | 74           | -22.39    | Pass       |
| 3611.06       | 50.49    | 2.13       | -0.94 | 51.68        | Peak Max         | V   | 130    | 182     | 74           | -22.32    | Pass       |
| 1394.073      | 45.78    | 1.07       | -6.44 | 40.4         | Peak Max         | H   | 130    | 87      | 74           | -33.6     | Pass       |
| 1593.295      | 36.11    | 1.22       | -5.92 | 31.42        | Average Max      | H   | 168    | 61      | 54           | -22.58    | Pass       |
| 3611.06       | 42.82    | 2.13       | -0.94 | 44.01        | Average Max      | V   | 130    | 182     | 54           | -9.99     | Pass       |
| 1394.073      | 31.39    | 1.07       | -6.44 | 26.02        | Average Max      | H   | 130    | 87      | 54           | -27.98    | Pass       |

Above 1GHz-40GHz- Mode5: RFID Mid CH (915.25MHz) + BT at GFSK (Hopping) + N radio at 802.11b (2462MHz) all transmit simultaneously on ZT420 printer

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 3660          | 48.56    | 2.15       | -0.84 | 49.87        | Peak Max         | H   | 123    | 113     | 74           | -24.13    | Pass       |
| 1597.5        | 51.12    | 1.23       | -5.9  | 46.45        | Peak Max         | V   | 201    | 150     | 74           | -27.55    | Pass       |
| 1385          | 49.07    | 1.06       | -6.46 | 43.67        | Peak Max         | H   | 102    | 250     | 74           | -30.33    | Pass       |
| 3660          | 34.27    | 2.15       | -0.84 | 35.58        | Average Max      | H   | 123    | 113     | 54           | -18.42    | Pass       |
| 1597.5        | 39.43    | 1.23       | -5.9  | 34.76        | Average Max      | V   | 201    | 150     | 54           | -19.24    | Pass       |
| 1385          | 41.34    | 1.06       | -6.46 | 35.94        | Average Max      | H   | 102    | 250     | 54           | -18.06    | Pass       |

Above 1GHz-10GHz- Mode6: RFID High CH (927.25MHz) + BT at GFSK (Hopping) + N radio at 802.11b (2462MHz) all transmit simultaneously on ZT420 printer

| Frequency MHz | Raw dBuV | Cable Loss | AF dB | Level dBuV/m | Measurement Type | Pol | Hgt cm | Azt Deg | Limit dBuV/m | Margin dB | Pass /Fail |
|---------------|----------|------------|-------|--------------|------------------|-----|--------|---------|--------------|-----------|------------|
| 3710          | 47.44    | 2.18       | -0.74 | 48.88        | Peak Max         | H   | 102    | 321     | 74           | -25.12    | Pass       |
| 1592.5        | 47.24    | 1.22       | -5.92 | 42.54        | Peak Max         | H   | 201    | 133     | 74           | -31.46    | Pass       |
| 9126.063      | 40.7     | 3.32       | 5.91  | 49.93        | Peak Max         | V   | 99     | 15      | 74           | -24.07    | Pass       |
| 3710          | 32.94    | 2.18       | -0.74 | 34.38        | Average Max      | H   | 102    | 321     | 54           | -19.62    | Pass       |
| 1592.5        | 36.33    | 1.22       | -5.92 | 31.63        | Average Max      | H   | 201    | 133     | 54           | -22.37    | Pass       |
| 9126.063      | 30.13    | 3.32       | 5.91  | 39.36        | Average Max      | V   | 99     | 15      | 54           | -14.64    | Pass       |

## Annex A. TEST INSTRUMENT

















| Instrument                         | Model   | Serial #    | Cal Date   | Cal Cycle | Cal Due    | In use                              |
|------------------------------------|---------|-------------|------------|-----------|------------|-------------------------------------|
| <b>Conducted Emissions</b>         |         |             |            |           |            |                                     |
| R & S Receiver                     | ESIB 40 | 100179      | 04/20/2013 | 1 Year    | 04/20/2014 | <input checked="" type="checkbox"/> |
| R&S LISN                           | ESH2-Z5 | 861741/013  | 05/18/2013 | 1 Year    | 05/18/2014 | <input checked="" type="checkbox"/> |
| CHASE LISN                         | MN2050B | 1018        | 07/24/2013 | 1 Year    | 07/24/2014 | <input checked="" type="checkbox"/> |
| Sekonic Hygro Hermograph           | ST-50   | HE01-000092 | 05/25/2013 | 1 Year    | 05/25/2014 | <input checked="" type="checkbox"/> |
| <b>Radiated Emissions</b>          |         |             |            |           |            |                                     |
| R & S Receiver                     | ESL6    | 100178      | 03/01/2013 | 1 Year    | 03/01/2014 | <input checked="" type="checkbox"/> |
| R & S Receiver                     | ESIB 40 | 100179      | 04/20/2013 | 1 Year    | 04/20/2014 | <input checked="" type="checkbox"/> |
| ETS-Lingren Loop Antenna           | 6512    | 00049120    | 05/13/2013 | 1 Year    | 05/13/2014 | <input checked="" type="checkbox"/> |
| Bi-Log antenna (30MHz~2GHz)        | JB1     | A030702     | 02/09/2013 | 1 Year    | 02/09/2014 | <input checked="" type="checkbox"/> |
| Horn Antenna (1-26.5GHz)           | 3115    | 10SL0059    | 04/26/2013 | 1 Year    | 04/26/2014 | <input checked="" type="checkbox"/> |
| Horn Antenna (18-40 GHz)           | AH-840  | 101013      | 04/23/2013 | 1 Year    | 04/23/2014 | <input checked="" type="checkbox"/> |
| Pre-Amplifier (1-26.5GHz)          | 8449B   | 3008A00715  | 05/30/2013 | 1 Year    | 05/30/2014 | <input checked="" type="checkbox"/> |
| Microwave Preamplifier (18-40 GHz) | PA-840  | 181251      | 05/30/2013 | 1 Year    | 05/30/2014 | <input checked="" type="checkbox"/> |
| 3 Meters SAC                       | 3M      | N/A         | 10/13/2013 | 1 Year    | 10/13/2014 | <input type="checkbox"/>            |
| 10 Meters SAC                      | 10M     | N/A         | 06/05/2013 | 1 Year    | 06/05/2014 | <input checked="" type="checkbox"/> |
| Sekonic Hygro Hermograph           | ST-50   | HE01-000092 | 05/25/2013 | 1 Year    | 05/25/2014 | <input checked="" type="checkbox"/> |
| <b>RF Conducted Measurement</b>    |         |             |            |           |            |                                     |
| Spectrum Analyzer                  | N9010A  | MY50210206  | 05/30/2013 | 1 Year    | 05/30/2014 | <input checked="" type="checkbox"/> |
| Spectrum Analyzer                  | E4407B  | US88441016  | 05/31/2013 | 1 Year    | 05/31/2014 | <input checked="" type="checkbox"/> |
| R & S Receiver                     | ESIB 40 | 100179      | 04/20/2013 | 1 Year    | 04/20/2014 | <input checked="" type="checkbox"/> |

|                 |                                |
|-----------------|--------------------------------|
| Test report No. | FCC_RF_SL13110101-ZBR-051_RFID |
| Page            | 47 of 49                       |








## **Annex B. USER MANUAL, BLOCK & CIRCUIT DIAGRAM**

Please see attachment

## Annex C. SIEMIC Accreditation

| Accreditations                          | Document  | Scope / Remark  |
|---|---|---|
| ISO 17025 (A2LA)                        |    | Please see the documents for the detailed scope   |
| ISO Guide 65 (A2LA)                     |    | Please see the documents for the detailed scope   |
| TCB Designation                         |   | A1, A2, A3, A4, B1, B2, B3, B4, C   |
| FCC DoC Accreditation                   |    | FCC Declaration of Conformity Accreditation   |
| FCC Site Registration                   |    | 3 meter site  |
| FCC Site Registration                   |    | 10 meter site   |
| IC Site Registration                    |    | 3 meter site  |
| IC Site Registration                    |    | 10 meter site   |
| EU NB                                   |   | <b>Radio &amp; Telecommunications Terminal Equipment:</b><br>EN45001 – EN ISO/IEC 17025 |
|   |    | <b>Electromagnetic Compatibility:</b><br>EN45001 – EN ISO/IEC 17025                     |
| Singapore iDA<br>CB(Certification Body) |   | Phase I, Phase II   |
| Vietnam MIC<br>CAB Accreditation        |    | Please see the document for the detailed scope  |
| HongKong OFCA                           |    | <b>(Phase II)</b> OFCA Foreign Certification Body for Radio and Telecom                 |
|   |    | <b>(Phase I)</b> Conformity Assessment Body for Radio and Telecom                       |
| Industry Canada CAB                     |    | <b>Radio:</b> Scope A – All Radio Standard Specification in Category I                  |
|   |    | <b>Telecom:</b> CS-03 Part I, II, V, VI, VII, VIII                                      |



|   |   |  |
|---|---|--|
| Japan Recognized Certification Body Designation |    | <p><b>Radio</b> : A1. Terminal equipment for purpose of calling</p> <p><b>Telecom</b> : B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>  |
| Korea CAB Accreditation                         |    | <p><b>EMI</b>: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI<br/>         KN22: Test Method for EMI<br/> <b>EMS</b>: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS<br/>         KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p>  |
|   |   | <p><b>Radio</b>: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p><b>Telecom</b>: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p> |
| Taiwan NCC CAB Recognition                      |    | LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08   |
| Taiwan BSMI CAB Recognition                     |  | CNS 13438  |
| Japan VCCI                                      |  | R-3083: Radiation 3 meter site   |
|   |   | <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>   |
| Australia CAB Recognition                       |  | <p><b>EMC</b>: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p>  |
|   |   | <p><b>Radiocommunications</b>: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p>   |
|   |   | <p><b>Telecommunications</b>: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06 AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>  |
| Australia NATA Recognition                      |  | AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2   |