



# FCC RADIO TEST REPORT

**FCC ID** : I28-WYSBHVDXP  
**Equipment** : WLAN/BTLE module  
**Brand Name** : ZEBRA  
**Model Name** : WYSBHVDXP  
**Applicant** : Zebra Technologies Corporation  
3 Overlook Point, Lincolnshire, IL 60069, United States  
**Manufacturer** : Zebra Technologies Corporation  
3 Overlook Point, Lincolnshire, IL 60069, United States  
**Standard** : FCC Part 15 Subpart C §15.247

The product was received on Jun. 27, 2023 and testing was performed from Jul. 11, 2023 to Aug. 01, 2023. We, Sporton International Inc. Wensan Laboratory, would like to declare that the tested sample has been evaluated in accordance with the test procedures and has been in compliance with the applicable technical standards.

The test results in this variant report apply exclusively to the tested model / sample. Without written approval from Sporton International Inc. Wensan Laboratory, the test report shall not be reproduced except in full.

Approved by: Louis Wu

**Sporton International Inc. Wensan Laboratory**

No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.)



## Table of Contents

History of this test report.....	3
Summary of Test Result.....	4
<b>1 General Description.....</b>	<b>5</b>
1.1 Product Feature of Equipment Under Test.....	5
1.2 Product Specification of Equipment Under Test.....	6
1.3 Modification of EUT .....	6
1.4 Testing Location .....	6
1.5 Applicable Standards.....	7
<b>2 Test Configuration of Equipment Under Test.....</b>	<b>8</b>
2.1 Carrier Frequency Channel .....	8
2.2 Test Mode.....	9
2.3 Connection Diagram of Test System.....	11
2.4 EUT Operation Test Setup .....	11
2.5 Measurement Results Explanation Example.....	11
<b>3 Test Result.....</b>	<b>12</b>
3.1 6dB and 99% Bandwidth Measurement .....	12
3.2 Output Power Measurement.....	13
3.3 Power Spectral Density Measurement .....	14
3.4 Conducted Band Edges and Spurious Emission Measurement .....	15
3.5 Radiated Band Edges and Spurious Emission Measurement .....	16
3.6 Antenna Requirements.....	20
<b>4 List of Measuring Equipment .....</b>	<b>21</b>
<b>5 Measurement Uncertainty .....</b>	<b>22</b>
<b>Appendix A. Conducted Test Results</b>	
<b>Appendix B. Radiated Spurious Emission</b>	
<b>Appendix C. Radiated Spurious Emission Plots</b>	
<b>Appendix D. Duty Cycle Plots</b>	
<b>Appendix E. Setup Photographs</b>	



### History of this test report

Report No.	Version	Description	Issue Date
FR0D2423-05B	01	Initial issue of report	Sep. 25, 2023



### Summary of Test Result

Report Clause	Ref Std. Clause	Test Items	Result (PASS/FAIL)	Remark
3.1	15.247(a)(2)	6dB Bandwidth	Pass	-
3.1	2.1049	99% Occupied Bandwidth	Reporting only	-
3.2	15.247(b)(3) 15.247(b)(4)	Output Power	Pass	-
3.3	15.247(e)	Power Spectral Density	Pass	-
3.4	15.247(d)	Conducted Band Edges and Spurious Emission	Pass	-
3.5	15.247(d)	Radiated Band Edges and Spurious Emission	Pass	7.42 dB under the limit at 335.55 MHz
-	15.207	AC Conducted Emission	Not Required	-
3.6	15.203	Antenna Requirement	Pass	-

**Note:**

1. Not required means after assessing, test items are not necessary to carry out.
2. This is a variant report by changing the Bluetooth antenna trace design and additionally assess Bluetooth and WLAN antennas. All the test cases were performed on original report which can be referred to Sporton Report Number FR0D2423-01B. Based on the original report, only worst case was verified.

**Conformity Assessment Condition:**

1. The test results (PASS/FAIL) with all measurement uncertainty excluded are presented against the regulation limits or in accordance with the requirements stipulated by the applicant/manufacturer who shall bear all the risks of non-compliance that may potentially occur if measurement uncertainty is taken into account.
2. The measurement uncertainty please refer to each test result in the section "Measurement Uncertainty".

**Disclaimer:**

The product specifications of the EUT presented in the test report that may affect the test assessments are declared by the manufacturer who shall take full responsibility for the authenticity.

**Reviewed by: Wei Chen**

**Report Producer: Lucy Wu**



# 1 General Description

## 1.1 Product Feature of Equipment Under Test

Product Feature	
Equipment	WLAN/BTLE module
Brand Name	ZEBRA
Model Name	WYSBHVDXP
FCC ID	I28-WYSBHVDXP
EUT supports Radios application	WLAN 11a/b/g/n HT20/HT40 WLAN 11ac VHT20/VHT40/VHT80 WLAN 11ax HE20/HE40/HE80 Bluetooth BR/EDR/LE
HW Version	Revision G
SW Version	17.68.01.p94
EUT Stage	Identical Prototype

Remark: The EUT's information above is declared by manufacturer.

Supported Unit Used in Test Configuration and System				
Test Fixture	Brand Name	ZEBRA	Model Name	P1129126-101
AC Adapter	Brand Name	ZEBRA	Model Name	FSP025-DYAA3
Bluetooth Antenna 1	Brand Name	gigaAnt	Model Name	3030A5645-01
Bluetooth Antenna 2	Brand Name	TAIYO YUDEN	Model Name	AH 168M245001
Bluetooth Antenna 3	Brand Name	Johanson Technology	Model Name	2450AT07A0100
Bluetooth Antenna 4	Brand Name	Laird	Model Name	RD2458-5
Bluetooth Antenna 5	Brand Name	Auden	Model Name	220370-09
Bluetooth Antenna 6	Brand Name	Auden	Model Name	A73009-00
Bluetooth Antenna 7	Brand Name	Auden	Model Name	B53026-90
WLAN Antenna 1	Brand Name	Laird	Model Name	RD2458-5
WLAN Antenna 2	Brand Name	Pulse	Model Name	W3006
WLAN Antenna 3	Brand Name	Auden	Model Name	220370-09
WLAN Antenna 4	Brand Name	Auden	Model Name	B91882-30
WLAN Antenna 5	Brand Name	Auden	Model Name	B53023-30
WLAN Antenna 6	Brand Name	Auden	Model Name	B53025-30

## 1.2 Product Specification of Equipment Under Test

Product Specification is subject to this standard	
<b>Tx/Rx Frequency Range</b>	2402 MHz ~ 2480 MHz
<b>Number of Channels</b>	40
<b>Carrier Frequency of Each Channel</b>	40 Channel (37 hopping + 3 advertising channel)
<b>Maximum Output Power to Antenna</b>	3.20 dBm (0.0021 W) for 1Mbps 3.20 dBm (0.0021 W) for 2Mbps
<b>99% Occupied Bandwidth</b>	1.001 MHz for 1Mbps 1.994 MHz for 2Mbps
<b>Antenna Type</b>	<3030A5645-01>: Monopole Antenna with gain 2.70 dBi <AH 168M245001>: Monopole Antenna with gain 3.00 dBi <2450AT07A0100>: Monopole Antenna with gain 1.00 dBi <RD2458-5>: Dipole Antenna with gain 3.00 dBi <220370-09>: Monopole Antenna with gain 3.81 dBi <A73009-00>: Monopole Antenna with gain 3.20 dBi <B53026-90>: Monopole Antenna with gain 5.50 dBi
<b>Type of Modulation</b>	Bluetooth LE : GFSK

**Remark:** The EUT's information above is declared by manufacturer. Please refer to Disclaimer in report summary.

## 1.3 Modification of EUT

No modifications made to the EUT during the testing.

## 1.4 Testing Location

<b>Test Site</b>	Sporton International Inc. Wensan Laboratory
<b>Test Site Location</b>	No.58, Aly. 75, Ln. 564, Wenhua 3rd, Rd., Guishan Dist., Taoyuan City 333010, Taiwan (R.O.C.) TEL: +886-3-327-0868 FAX: +886-3-327-0855
<b>Test Site No.</b>	<b>Sporton Site No.</b> TH05-HY, 03CH20-HY

**Note:** The test site complies with ANSI C63.4 2014 requirement.

FCC designation No.: TW3786



## 1.5 Applicable Standards

According to the specifications declared by the manufacturer, the EUT must comply with the requirements of the following standards:

- ♦ FCC Part 15 Subpart C §15.247
- ♦ FCC KDB Publication No. 558074 D01 15.247 Meas Guidance v05r02
- ♦ FCC KDB 414788 D01 Radiated Test Site v01r01
- ♦ ANSI C63.10-2013

**Remark:**

1. All the test items were validated and recorded in accordance with the standards without any modification during the testing.
2. The TAF code is not including all the FCC KDB listed without accreditation.



## 2 Test Configuration of Equipment Under Test

### 2.1 Carrier Frequency Channel

Frequency Band	Channel	Freq. (MHz)	Channel	Freq. (MHz)
2400-2483.5 MHz	0	2402	21	2444
	1	2404	22	2446
	2	2406	23	2448
	3	2408	24	2450
	4	2410	25	2452
	5	2412	26	2454
	6	2414	27	2456
	7	2416	28	2458
	8	2418	29	2460
	9	2420	30	2462
	10	2422	31	2464
	11	2424	32	2466
	12	2426	33	2468
	13	2428	34	2470
	14	2430	35	2472
	15	2432	36	2474
	16	2434	37	2476
	17	2436	38	2478
	18	2438	39	2480
	19	2440	-	-
20	2442	-	-	





## 2.2 Test Mode

- a. The EUT has been associated with peripherals and configuration operated in a manner tended to maximize its emission characteristics in a typical application. Frequency range investigated: radiation emission (9 kHz to the 10th harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower). For radiated measurement, the measured emission level of the EUT was maximized by rotating the EUT on a turntable, adjusting the orientation of the EUT and EUT antenna in three orthogonal axis (X: flat, Y: portrait, Z: landscape), and adjusting the measurement antenna orientation, following C63.10 exploratory test procedures and only the worst case emissions were reported in this report.

The following summary table is showing all test modes to demonstrate in compliance with the standard.


Summary table of Test Cases	
Test Item	Data Rate / Modulation
Conducted Test Cases	Bluetooth – LE / GFSK
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps



Summary table of Test Cases	
Test Item	Data Rate / Modulation
<b>Radiated Test Cases</b>	<b>&lt;EUT with Bluetooth Antenna (RD2458-5)&gt;</b>
	Mode 1: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 2: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 3: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 4: Bluetooth Tx CH00_2402 MHz_2Mbps
	Mode 5: Bluetooth Tx CH19_2440 MHz_2Mbps
	Mode 6: Bluetooth Tx CH39_2480 MHz_2Mbps
	<b>&lt;EUT with Bluetooth Antenna (B53026-90)&gt;</b>
	Mode 7: Bluetooth Tx CH00_2402 MHz_1Mbps
	Mode 8: Bluetooth Tx CH19_2440 MHz_1Mbps
	Mode 9: Bluetooth Tx CH39_2480 MHz_1Mbps
	Mode 10: Bluetooth Tx CH00_2402 MHz_2Mbps
Mode 11: Bluetooth Tx CH19_2440 MHz_2Mbps	
Mode 12: Bluetooth Tx CH39_2480 MHz_2Mbps	
<b>Remark:</b>	
1. For Radiated Test Cases, the tests were performed with Bluetooth Antenna (RD2458-5) and Bluetooth Antenna (B53026-90)	
2. For radiation spurious emission, the modulation and the data rate picked for testing are determined by the Max. RF conducted power.	

## 2.3 Connection Diagram of Test System

<Bluetooth - LE Tx Mode>

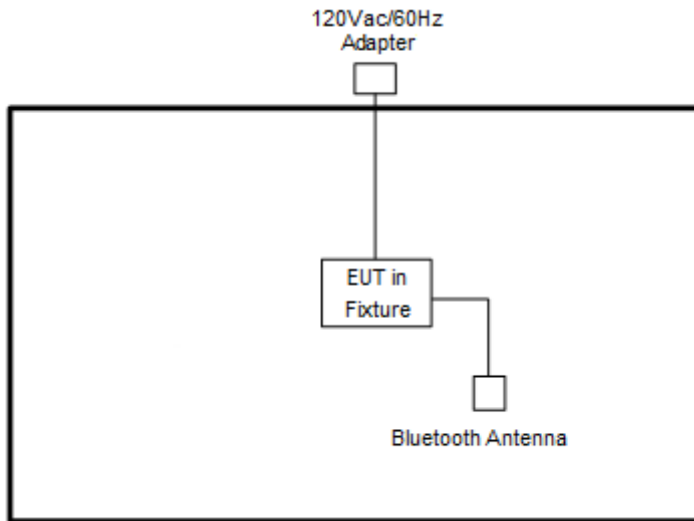

## 2.4 EUT Operation Test Setup

The RF test items, utility “Tool box Version 1.84” was installed in Notebook which was programmed in order to make the EUT get into the engineering modes to provide channel selection, power level, data rate and the application type and for continuous transmitting signals.

## 2.5 Measurement Results Explanation Example

For all conducted test items:

The offset level is set in the spectrum analyzer to compensate the RF cable loss and attenuator factor between EUT conducted output port and spectrum analyzer. With the offset compensation, the spectrum analyzer reading level is exactly the EUT RF output level.

Example :

The spectrum analyzer offset is derived from RF cable loss and attenuator factor.

*Offset = RF cable loss + attenuator factor.*

Following shows an offset computation example with cable loss 4.2 dB and 10 dB attenuator.

$$\begin{aligned} \text{Offset(dB)} &= \text{RF cable loss(dB)} + \text{attenuator factor(dB)}. \\ &= 4.2 + 10 = 14.2 \text{ (dB)} \end{aligned}$$

### 3 Test Result

#### 3.1 6dB and 99% Bandwidth Measurement

##### 3.1.1 Limit of 6dB and 99% Bandwidth

The minimum 6 dB bandwidth shall be at least 500 kHz.

##### 3.1.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

##### 3.1.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 6.9.3 (OBW) and 11.8.1 (6dB BW).
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. Set the Video bandwidth (VBW) = 300 kHz. In order to make an accurate measurement. The 6dB bandwidth must be greater than 500 kHz.
5. For 99% Bandwidth Measurement, the spectrum analyzer's resolution bandwidth (RBW) is set 1-5% of the emission bandwidth and set the Video bandwidth (VBW)  $\geq 3 * RBW$ .
6. Measure and record the results in the test report.

##### 3.1.4 Test Setup



##### 3.1.5 Test Result of 6dB Bandwidth

Please refer to Appendix A.

##### 3.1.6 Test Result of 99% Occupied Bandwidth

Please refer to Appendix A.

## 3.2 Output Power Measurement

### 3.2.1 Limit of Output Power

For systems using digital modulation in the 2400-2483.5 MHz, the limit for output power is 30 dBm. If transmitting antenna of directional gain greater than 6 dBi is used, the peak output power from the intentional radiator shall be reduced below the above stated value by the amount in dB that the directional gain of the antenna exceeds 6 dBi. In case of point-to-point operation, the limit has to be reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.


### 3.2.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

### 3.2.3 Test Procedures

1. For Average Power, the testing follows ANSI C63.10 Section 11.9.2.3.2 Method AVGPM-G
2. The RF output of EUT is connected to the power meter by RF cable and attenuator.
3. The path loss is compensated to the results for each measurement.
4. Set the maximum power setting and enable the EUT to transmit continuously.
5. Measure the conducted output power and record the results in the test report.

### 3.2.4 Test Setup



### 3.2.5 Test Result of Average Output Power

Please refer to Appendix A.

### 3.3 Power Spectral Density Measurement

#### 3.3.1 Limit of Power Spectral Density

The peak power spectral density shall not be greater than 8 dBm in any 3 kHz band at any time interval of continuous transmission.

#### 3.3.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.

#### 3.3.3 Test Procedures

1. The testing follows the ANSI C63.10 Section 11.10.2 Method PKPSD.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 3 kHz. Video bandwidth (VBW) = 10 kHz. In order to make an accurate measurement, set the span to 1.5 times DTS Channel Bandwidth. (6 dB BW)
5. Detector = peak, Sweep time = auto couple, Trace mode = max hold, Allow trace to fully stabilize. Use the peak marker function to determine the maximum power level.
6. Measure and record the results in the test report.
7. The Measured power density (dBm)/ 100 kHz is a reference level and is used as 20 dBc down limit line for Conducted Band Edges and Conducted Spurious Emission.

#### 3.3.4 Test Setup



#### 3.3.5 Test Result of Power Spectral Density

Please refer to Appendix A.

## **3.4 Conducted Band Edges and Spurious Emission Measurement**

### **3.4.1 Limit of Conducted Band Edges and Spurious Emission**

All harmonics/spurious must be at least 30 dB down from the highest emission level within the authorized band.

### **3.4.2 Measuring Instruments**

Please refer to the measuring equipment list in this test report.

### **3.4.3 Test Procedure**

1. The testing follows the ANSI C63.10 Section 11.11.3 Emission level measurement.
2. The RF output of EUT is connected to the spectrum analyzer by RF cable and attenuator. The path loss is compensated to the results for each measurement.
3. Set the maximum power setting and enable the EUT to transmit continuously.
4. Set RBW = 100 kHz, VBW = 300 kHz, Peak Detector. Unwanted Emissions measured in any 100 kHz bandwidth outside of the authorized frequency band shall be attenuated by at least 20 dB relative to the maximum in-band peak PSD level in 100 kHz when maximum peak conducted output power procedure is used. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
5. Measure and record the results in the test report.
6. The RF fundamental frequency should be excluded against the limit line in the operating frequency band.

### **3.4.4 Test Setup**



### **3.4.5 Test Result of Conducted Band Edges Plots**

Please refer to Appendix A.

### **3.4.6 Test Result of Conducted Spurious Emission Plots**

Please refer to Appendix A.



### 3.5 Radiated Band Edges and Spurious Emission Measurement

#### 3.5.1 Limit of Radiated Band Edges and Spurious Emission

In any 100 kHz bandwidth outside the intentional radiator frequency band, all harmonics/spurious must be at least 20 dB below the highest emission level within the authorized band. If the output power of this device is measured by spectrum analyzer, the attenuation under this paragraph shall be 30 dB instead of 20 dB. In addition, radiated emissions which fall in the restricted bands must also comply with the limits as below.

Frequency (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 – 0.490	2400/F(kHz)	300
0.490 – 1.705	24000/F(kHz)	30
1.705 – 30.0	30	30
30 – 88	100	3
88 – 216	150	3
216 - 960	200	3
Above 960	500	3

#### 3.5.2 Measuring Instruments

Please refer to the measuring equipment list in this test report.






### 3.5.3 Test Procedures


1. The testing follows the ANSI C63.10 Section 11.12.1 Radiated emission measurements.
2. The EUT is arranged to its worst case and then tune the antenna tower (from 1 m to 4 m) and turntable (from 0 degree to 360 degrees) to find the maximum reading. A pre-amp and a high pass filter are used for the test in order to get better signal level.
3. The EUT is placed on a turntable with 0.8 meter for frequency below 1 GHz and 1.5 meter for frequency above 1 GHz respectively above ground.
4. The EUT is set 3 meters away from the receiving antenna, which is mounted on the top of a variable height antenna tower.
5. Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level
6. Radiated testing below 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading. When there is no suspected emission found and the emission level is with at least 6 dB margin against QP limit line, the position is marked as “-“.
7. Radiated testing above 1 GHz is performed by adjusting the antenna tower from 1 m to 4 m and by rotating the turn table from 0 degree to 360 degrees to find the peak maximum hold reading for scanning all frequencies. When there is no suspected emission found and the harmonic emission level is with at least 6 dB margin against average limit line, the position is marked as “-“.
8. Use the following spectrum analyzer settings:
  - (1) Span shall wide enough to fully capture the emission being measured;
  - (2) Set RBW = 100 kHz for  $f < 1$  GHz; VBW  $\geq$  RBW; Sweep = auto; Detector function = peak; Trace = max hold;
  - (3) Set RBW = 1 MHz, VBW = 3 MHz for  $f \geq 1$  GHz for peak measurement.  
For average measurement:
    - VBW = 10 Hz, when duty cycle is no less than 98 percent.
    - VBW  $\geq 1/T$ , when duty cycle is less than 98 percent where T is the minimum transmission duration over which the transmitter is on and is transmitting at its maximum power control level for the tested mode of operation.

### 3.5.4 Test Setup


For radiated test below 30MHz

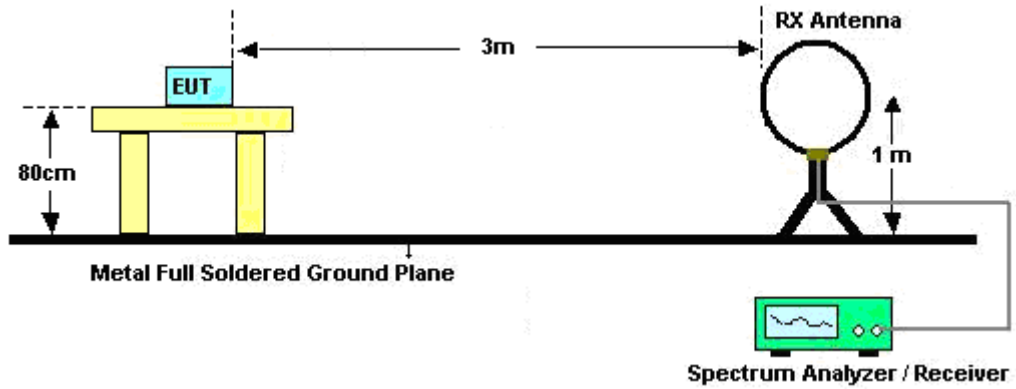


For radiated test from 30MHz to 1GHz

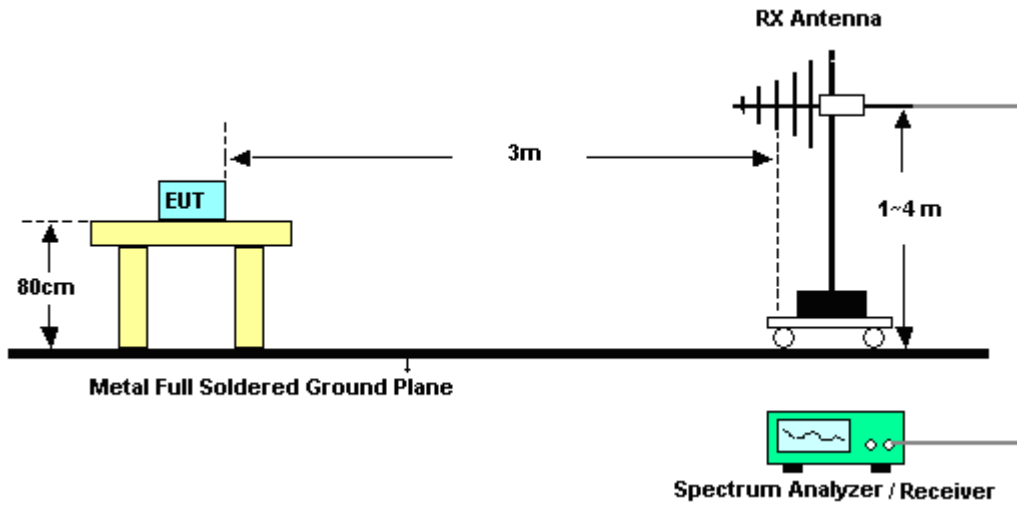

For radiated test from 1GHz to 18GHz

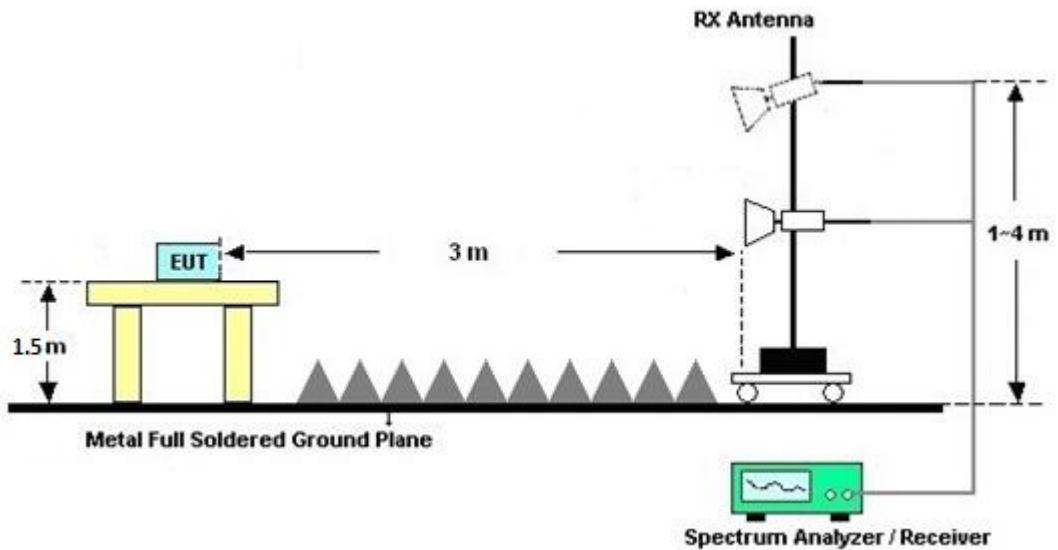

For radiated test above 18GHz

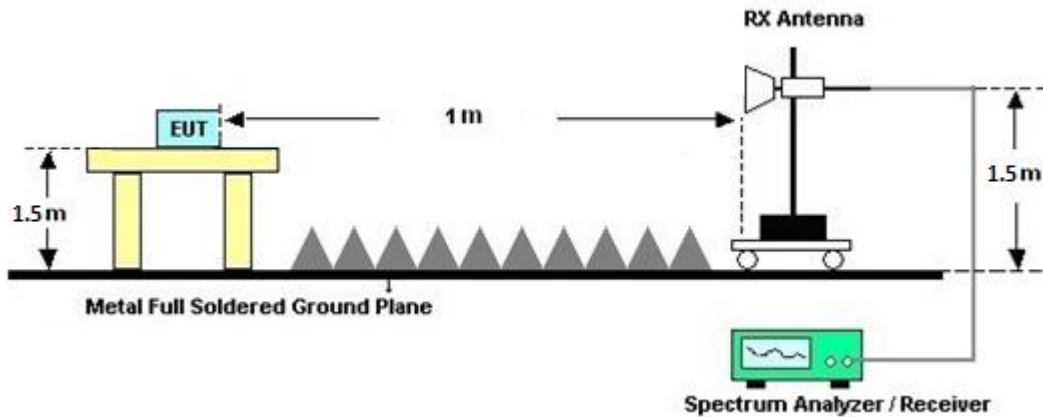

### 3.5.5 Test Results of Radiated Spurious Emissions (9 kHz ~ 30 MHz)

The low frequency, which starts from 9 kHz to 30 MHz, is pre-scanned and the result which is 20 dB lower than the limit line is not reported.

There is adequate comparison measurement of both open-field test site and alternative test site - semi-Anechoic chamber according to 414788 D01 Radiated Test Site v01r01, and the result comes out very similar.

### 3.5.6 Test Result of Radiated Spurious at Band Edges

Please refer to Appendix B and C.

### 3.5.7 Duty Cycle

Please refer to Appendix D.

### 3.5.8 Test Result of Radiated Spurious Emission (30 MHz ~ 10th Harmonic)

Please refer to Appendix B and C.



## **3.6 Antenna Requirements**

### **3.6.1 Standard Applicable**

The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the rule.

### **3.6.2 Antenna Anti-Replacement Construction**

An embedded-in antenna design is used.



## 4 List of Measuring Equipment

Instrument	Brand Name	Model No.	Serial No.	Characteristics	Calibration Date	Test Date	Due Date	Remark
EMI Test Receiver	Keysight	N9038A	MY59053012	N/A	Nov. 18, 2022	Jul. 11, 2023~ Aug. 01, 2023	Nov. 17, 2023	Radiation (03CH20-HY)
Loop Antenna	Rohde & Schwarz	HFH2-Z2	100488	9 kHz~30 MHz	Sep. 20, 2022	Jul. 11, 2023~ Aug. 01, 2023	Sep. 19, 2023	Radiation (03CH20-HY)
Preamplifier	EMEC	EM18G40G	060715	18GHz~40GHz	Dec. 07, 2022	Jul. 11, 2023~ Aug. 01, 2023	Dec. 06, 2023	Radiation (03CH20-HY)
Controller	ChainTek	3000-1	N/A	Control Turn table & Ant Mast	N/A	Jul. 11, 2023~ Aug. 01, 2023	N/A	Radiation (03CH20-HY)
Antenna Mast	ChainTek	MBS-520-1	N/A	1m~4m	N/A	Jul. 11, 2023~ Aug. 01, 2023	N/A	Radiation (03CH20-HY)
Turn Table	ChainTek	T-200-S-1	N/A	0~360 Degree	N/A	Jul. 11, 2023~ Aug. 01, 2023	N/A	Radiation (03CH20-HY)
Signal Analyzer	Keysight	N9010B	MY60240520	N/A	Dec. 22, 2022	Jul. 11, 2023~ Aug. 01, 2023	Dec. 21, 2023	Radiation (03CH20-HY)
Bilog Antenna	TESEQ	CBL 6111D&00802N 1D01N-06	55606 & 08	30MHz~1GHz	Oct. 22, 2022	Jul. 11, 2023~ Aug. 01, 2023	Oct. 21, 2023	Radiation (03CH20-HY)
Horn Antenna	SCHWARZBE CK	BBHA 9120 D	02360	1GHz-18GHz	Nov. 04, 2022	Jul. 11, 2023~ Aug. 01, 2023	Nov. 03, 2023	Radiation (03CH20-HY)
SHF-EHF Horn Antenna	SCHWARZBE CK	BBHA 9170	00994	18GHz-40GHz	Nov. 04, 2022	Jul. 11, 2023~ Aug. 01, 2023	Nov. 03, 2023	Radiation (03CH20-HY)
Preamplifier	COM-POWER	PAM-103	18020201	1MHz-1000MHz	Jan. 02, 2023	Jul. 11, 2023~ Aug. 01, 2023	Jan. 01, 2024	Radiation (03CH20-HY)
Amplifier	EMCI	EMC118A45SE	980792	N/A	Nov. 14, 2022	Jul. 11, 2023~ Aug. 01, 2023	Nov. 13, 2023	Radiation (03CH20-HY)
RF Cable	HUBER + SUHNER	SUCOFLEX 102	519229/2,8040 15/2,804027/2	N/A	Jan. 18, 2023	Jul. 11, 2023~ Aug. 01, 2023	Jan. 17, 2024	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303B	TP200728	N/A	Mar. 28, 2023	Jul. 11, 2023~ Aug. 01, 2023	Mar. 27, 2024	Radiation (03CH20-HY)
Software	Audix	N/A	RK-002156	N/A	N/A	Jul. 11, 2023~ Aug. 01, 2023	N/A	Radiation (03CH20-HY)
Hygrometer	TECPEL	DTM-303A	TP201996	N/A	Nov. 17, 2022	Jul. 25, 2023	Nov. 16, 2023	Conducted (TH05-HY)
Power Sensor	DARE	RPR3006W	16I00054SNO 12 (NO:113)	10MHz~6GHz	Dec. 13, 2022	Jul. 25, 2023	Dec. 12, 2023	Conducted (TH05-HY)
Signal Analyzer	Rohde & Schwarz	FSV40	101905	10Hz - 40GHz(amp)	Aug. 03, 2022	Jul. 25, 2023	Aug. 02, 2023	Conducted (TH05-HY)



## 5 Measurement Uncertainty

### Uncertainty of Radiated Emission Measurement (30 MHz ~ 1000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	6.5 dB
---	--------

### Uncertainty of Radiated Emission Measurement (1000 MHz ~ 6000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.3 dB
---	--------

### Uncertainty of Radiated Emission Measurement (6000 MHz ~ 18000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	4.8 dB
---	--------

### Uncertainty of Radiated Emission Measurement (18000 MHz ~ 40000 MHz)

Measuring Uncertainty for a Level of Confidence of 95% ( $U = 2Uc(y)$ )	5.4 dB
---	--------

**Appendix A. Test Result of Conducted Test Items**

Test Engineer:	James Li	Temperature:	21~25	°C
Test Date:	2023/7/25	Relative Humidity:	51~54	%

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	1Mbps	1	0	2402	0.999	0.658	0.50	Pass
BLE	1Mbps	1	19	2440	1.001	0.658	0.50	Pass
BLE	1Mbps	1	39	2480	1.001	0.658	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	1Mbps	1	0	2402	3.20	30.00	5.50	8.70	36.00	Pass
BLE	1Mbps	1	19	2440	3.10	30.00	5.50	8.60	36.00	Pass
BLE	1Mbps	1	39	2480	2.80	30.00	5.50	8.30	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	1Mbps	1	0	2402	3.18	2.37	5.50	8.00	Pass
BLE	1Mbps	1	19	2440	2.99	2.19	5.50	8.00	Pass
BLE	1Mbps	1	39	2480	2.73	1.93	5.50	8.00	Pass

**Note:** PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.

**TEST RESULTS DATA**  
**6dB and 99% Occupied Bandwidth**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	99% Occupied BW (MHz)	6dB BW (MHz)	6dB BW Limit (MHz)	Pass/Fail
BLE	2Mbps	1	0	2402	1.990	1.168	0.50	Pass
BLE	2Mbps	1	19	2440	1.994	1.168	0.50	Pass
BLE	2Mbps	1	39	2480	1.994	1.168	0.50	Pass

**TEST RESULTS DATA**  
**Average Power Table**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Average Conducted Power (dBm)	Conducted Power Limit (dBm)	DG (dBi)	EIRP Power (dBm)	EIRP Power Limit (dBm)	Pass /Fail
BLE	2Mbps	1	0	2402	3.20	30.00	5.50	8.70	36.00	Pass
BLE	2Mbps	1	19	2440	3.10	30.00	5.50	8.60	36.00	Pass
BLE	2Mbps	1	39	2480	2.80	30.00	5.50	8.30	36.00	Pass

**TEST RESULTS DATA**  
**Peak Power Density**

Mod.	Data Rate	NTX	CH.	Freq. (MHz)	Peak PSD (dBm /100kHz)	Peak PSD (dBm /3kHz)	DG (dBi)	Peak PSD Limit (dBm /3kHz)	Pass/Fail
BLE	2Mbps	1	0	2402	3.16	-1.24	5.50	8.00	Pass
BLE	2Mbps	1	19	2440	2.97	-1.43	5.50	8.00	Pass
BLE	2Mbps	1	39	2480	2.71	-1.70	5.50	8.00	Pass

**Note:** PSD (dBm/ 100kHz) is a reference level used for Conducted Band Edges and Conducted Spurious Emission 30dBc limit.







# 6dB Bandwidth

<1Mbps>


6 dB Bandwidth Plot on Channel 00

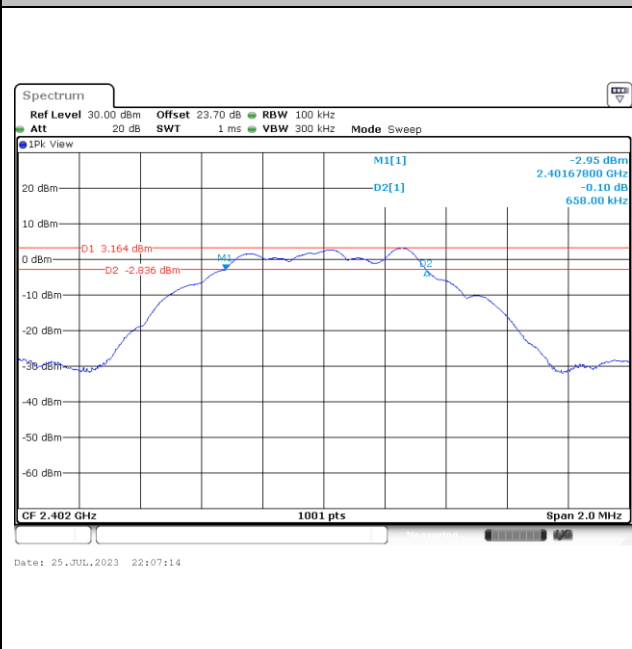

6 dB Bandwidth Plot on Channel 19

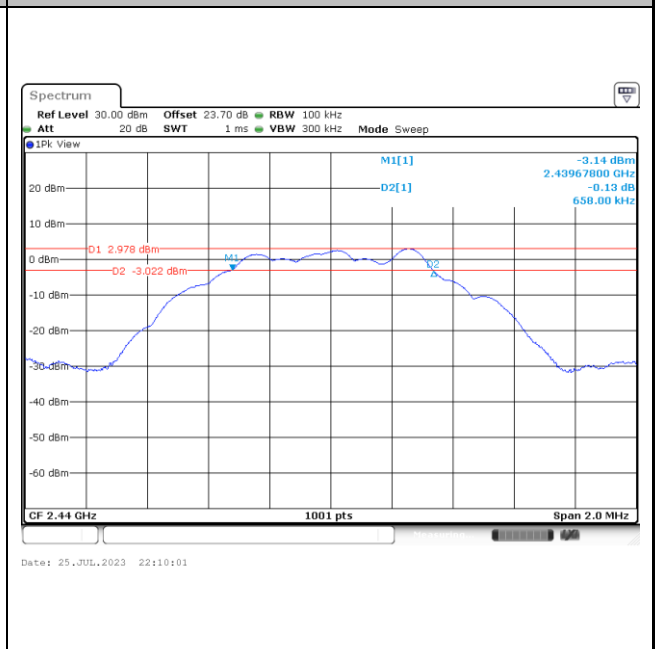


6 dB Bandwidth Plot on Channel 39

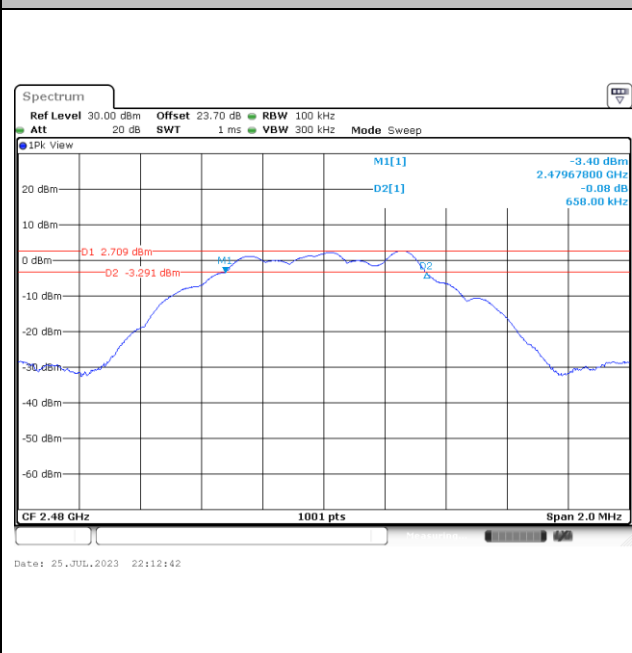




<2Mbps>


6 dB Bandwidth Plot on Channel 00

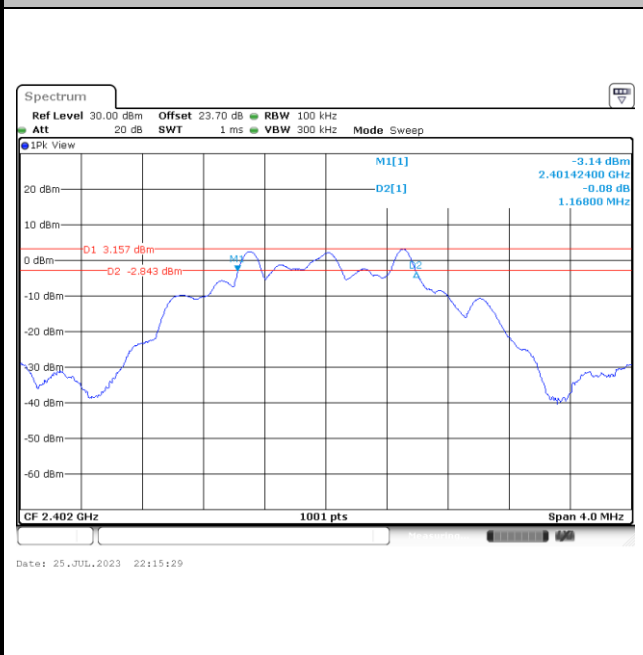

6 dB Bandwidth Plot on Channel 19

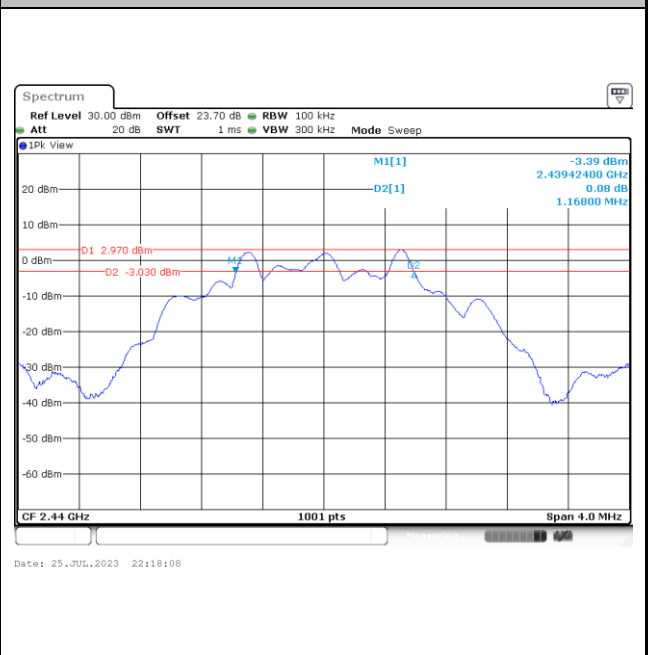

6 dB Bandwidth Plot on Channel 39

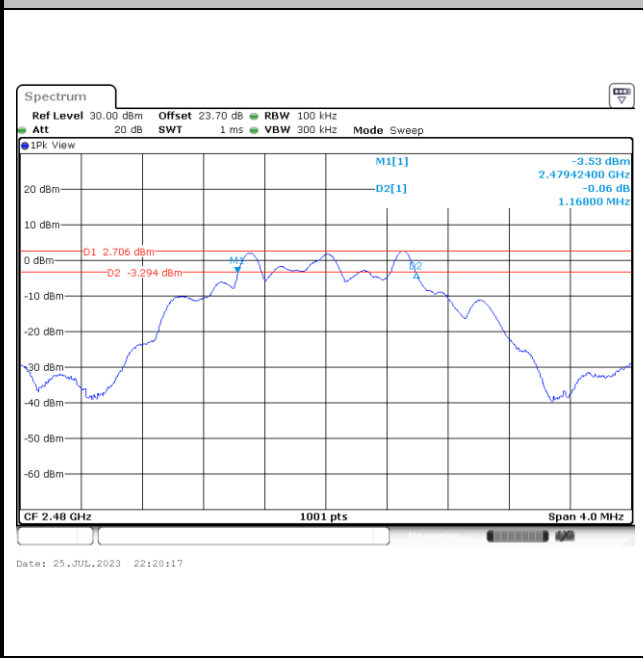




# 99% Occupied Bandwidth

<1Mbps>


### 99% Occupied Bandwidth Plot on Channel 00

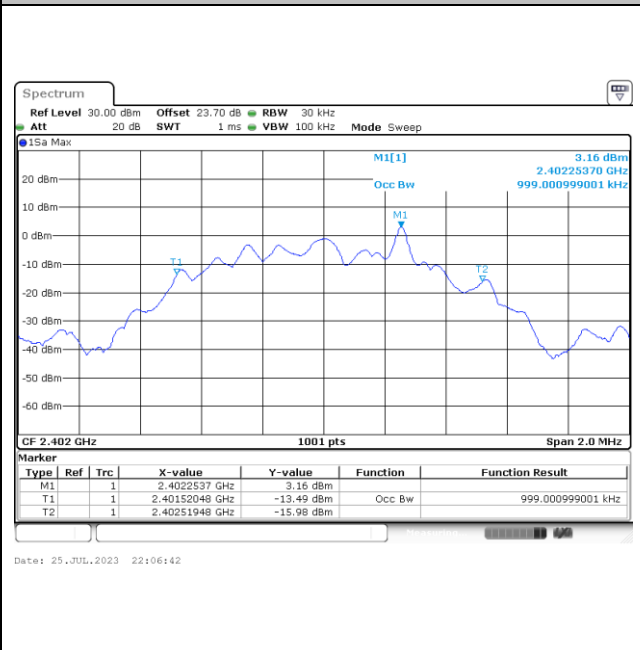

### 99% Occupied Plot Bandwidth on Channel 19




### 99% Occupied Bandwidth Plot on Channel 39

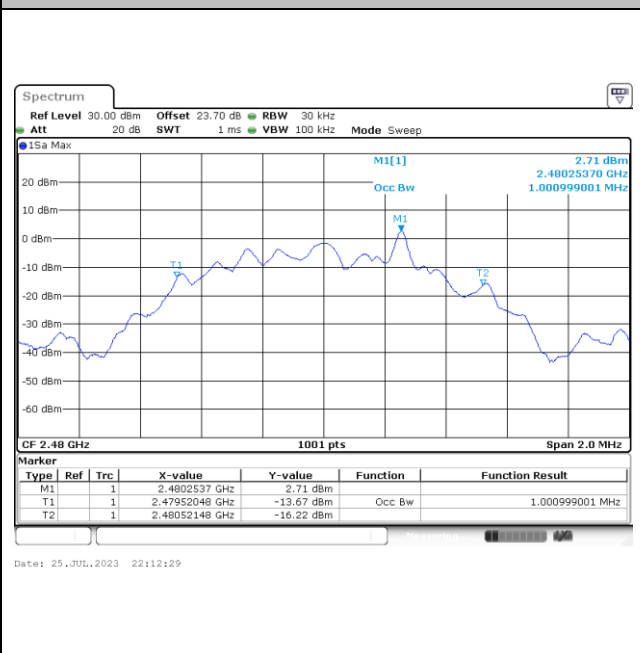

**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



<2Mbps>

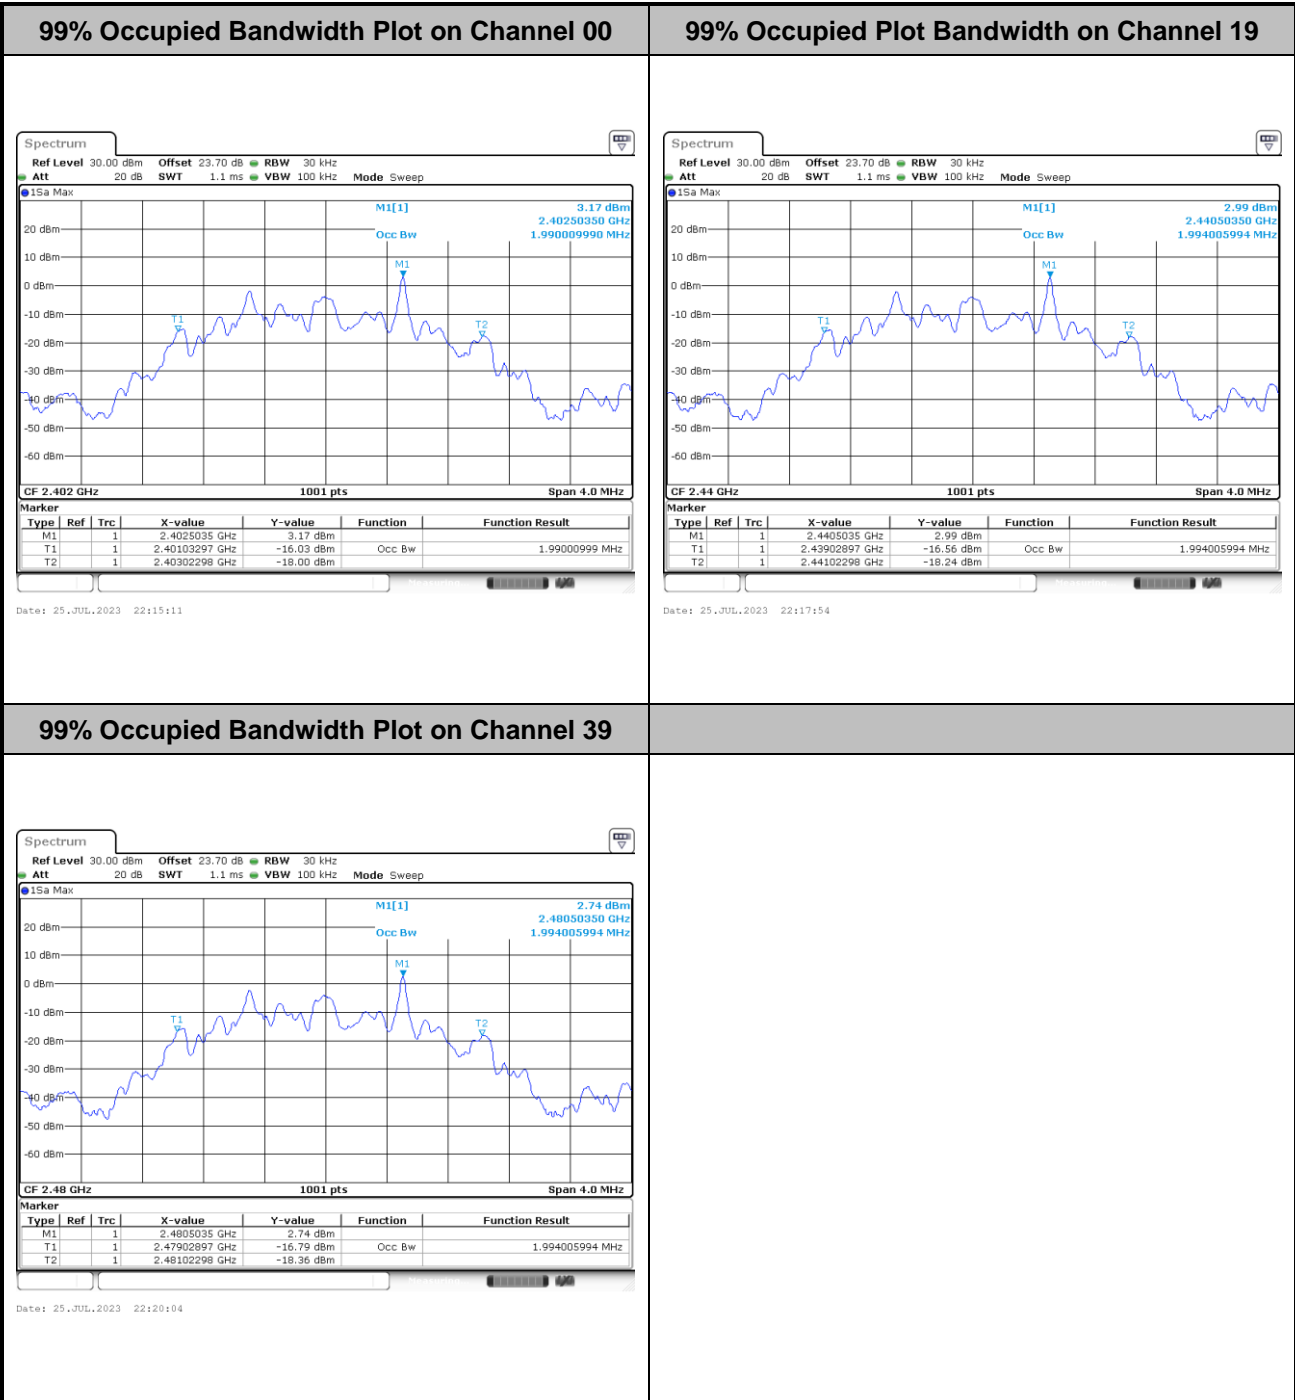


**Note:** The occupied channel bandwidth is maintained within the band of operation for all of the modulations.



# Power Spectral Density (dBm/3kHz)


<1Mbps>

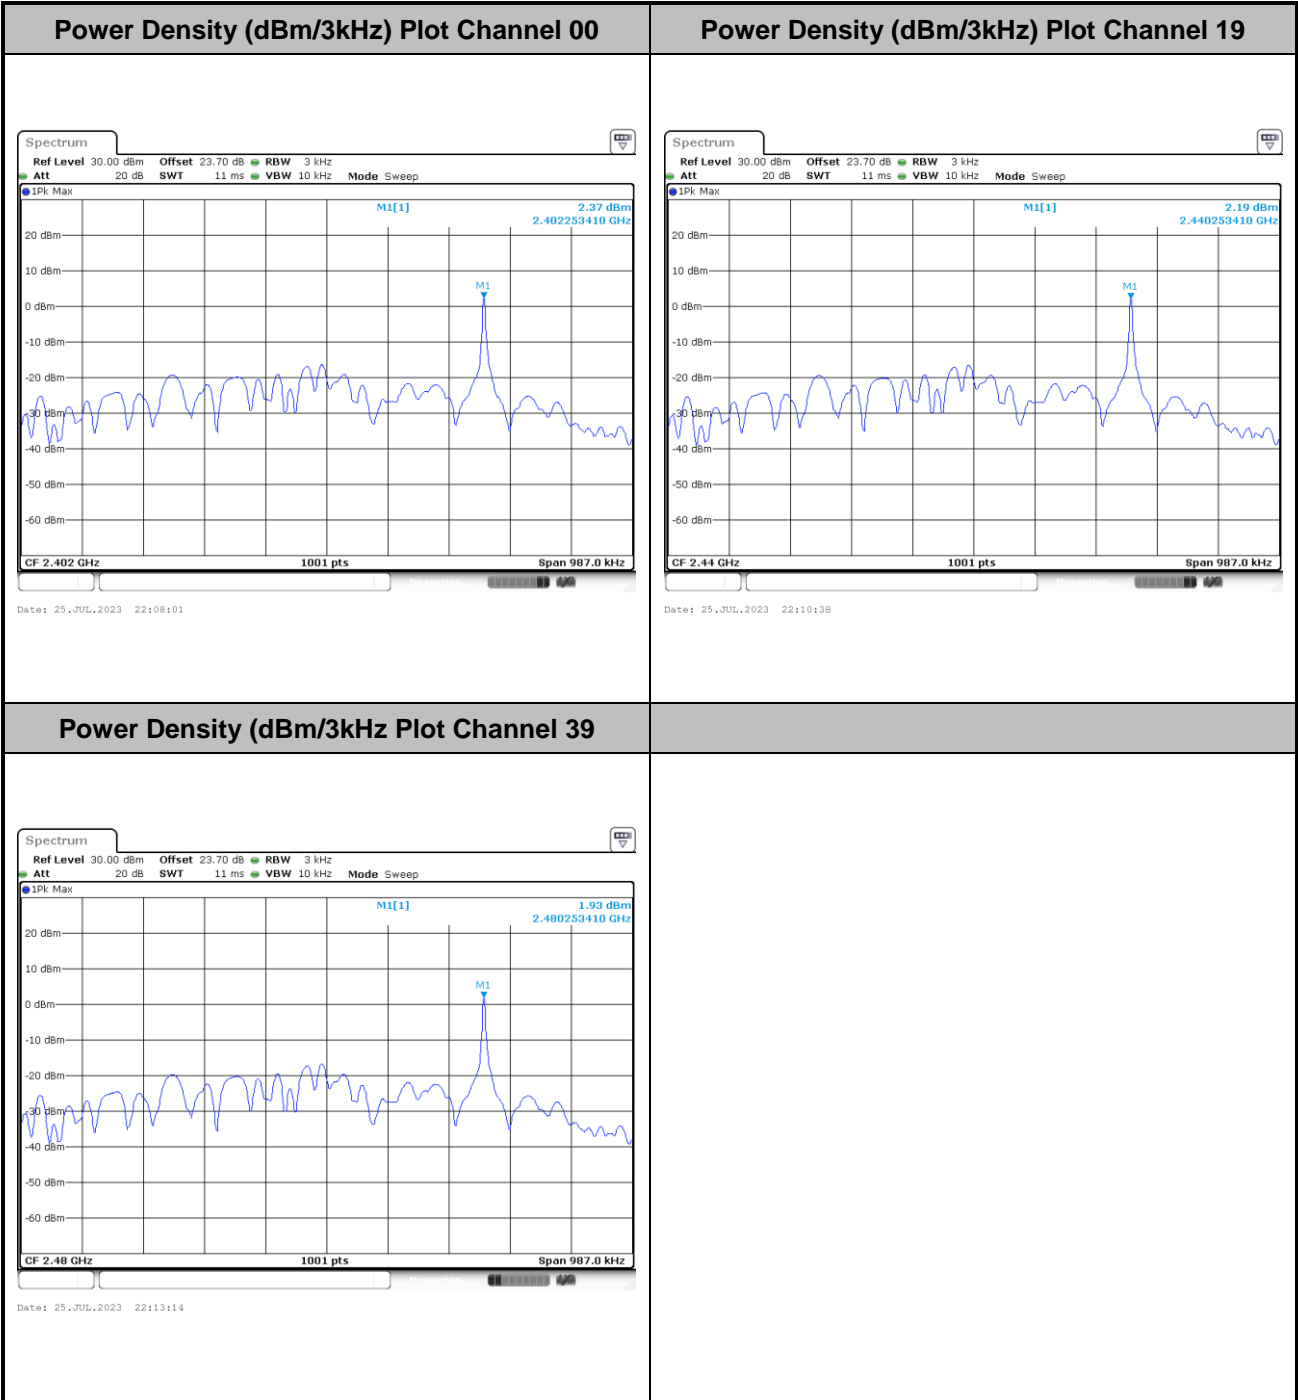




<2Mbps>


Power Density (dBm/3kHz) Plot Channel 00

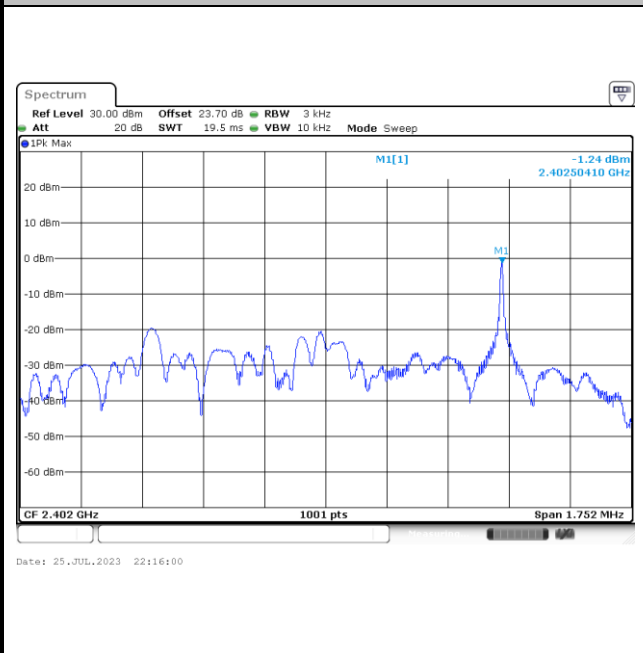

Power Density (dBm/3kHz) Plot Channel 19

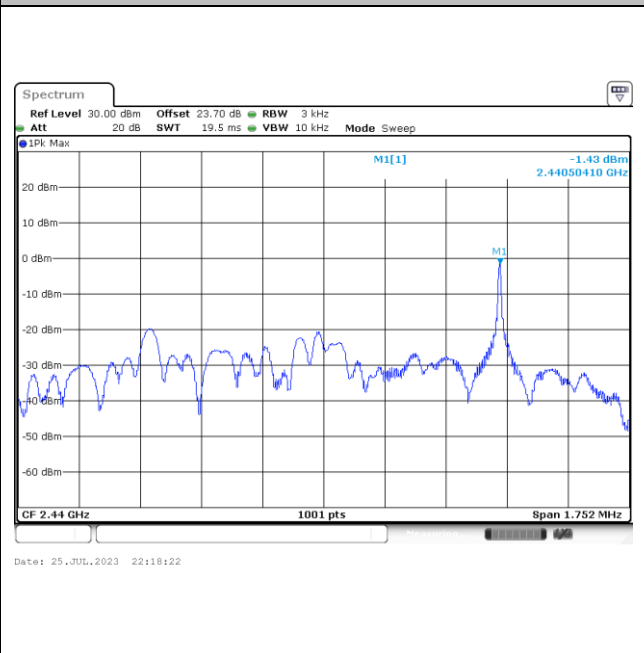

Power Density (dBm/3kHz) Plot Channel 39

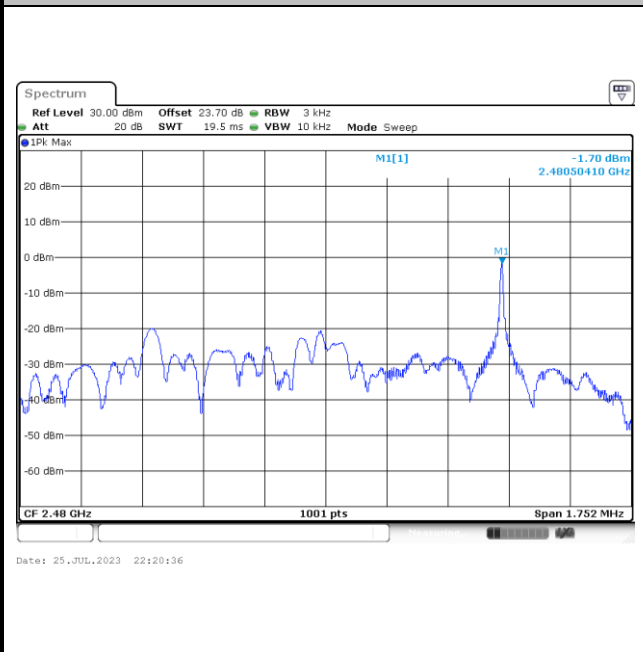




# Band Edge and Conducted Spurious Emission

<1Mbps>


## Channel 00

### 100kHz PSD reference Level Plot

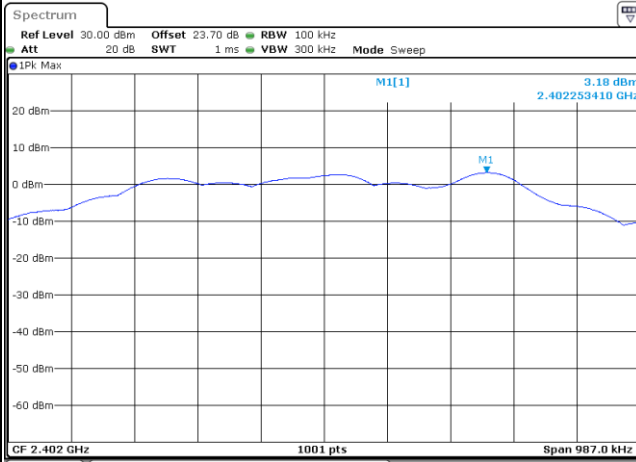


Date: 25.JUL.2023 22:07:48

### Low Channel Plot

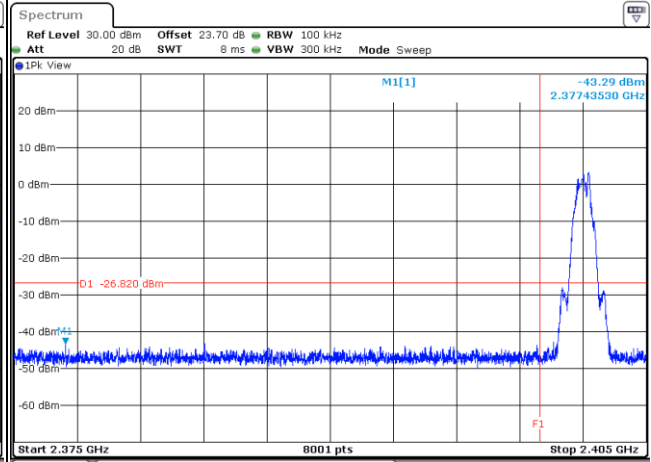


Date: 25.JUL.2023 22:08:51

### Spurious Emission 30MHz~1GHz Plot

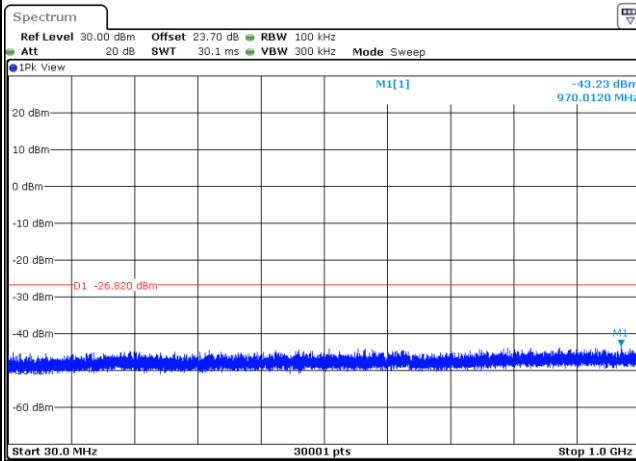

Date: 25.JUL.2023 22:08:22

### Spurious Emission 1GHz~26.5GHz Plot

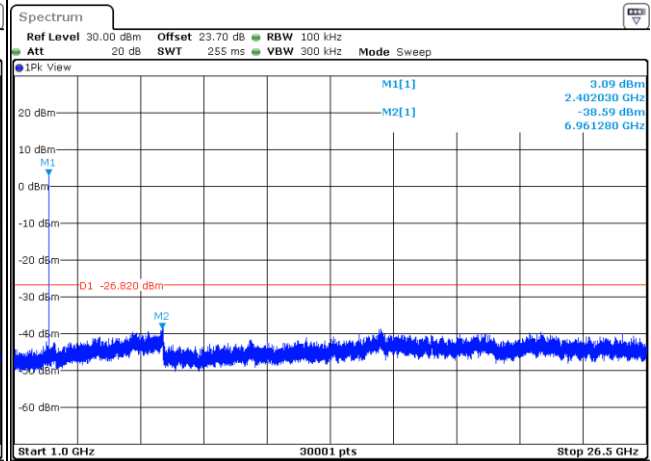


Date: 25.JUL.2023 22:08:36




Channel 19

100kHz PSD reference Level Plot

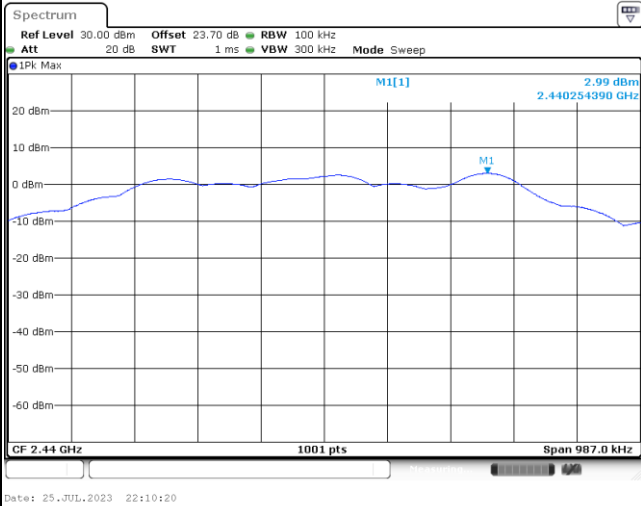


Middle Channel Plot


Spurious Emission 30MHz~1GHz Plot

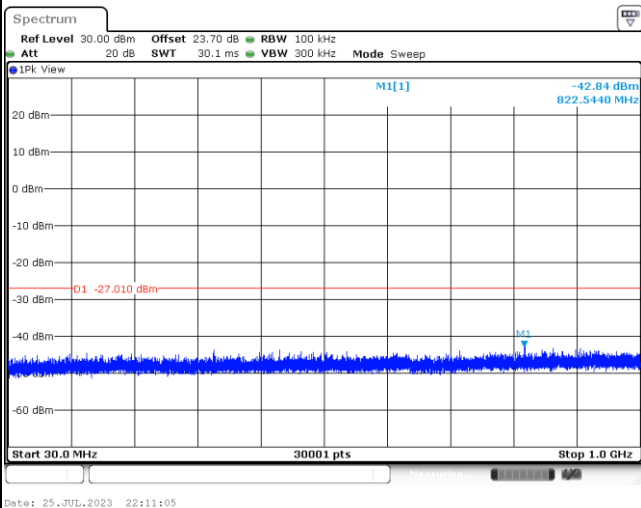

Spurious Emission 1GHz~26.5GHz Plot

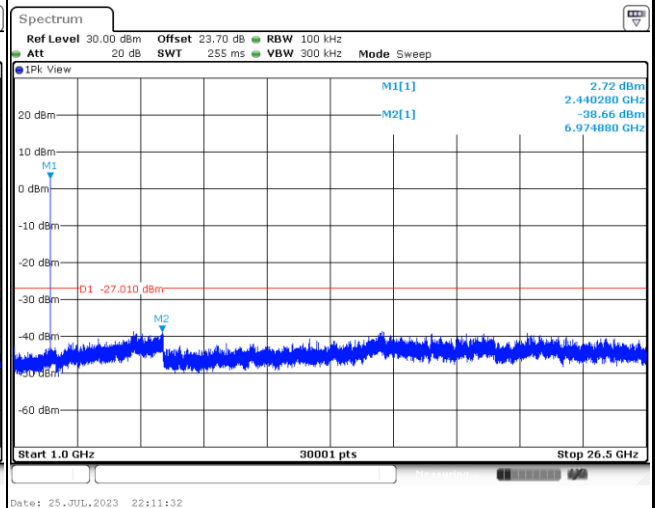




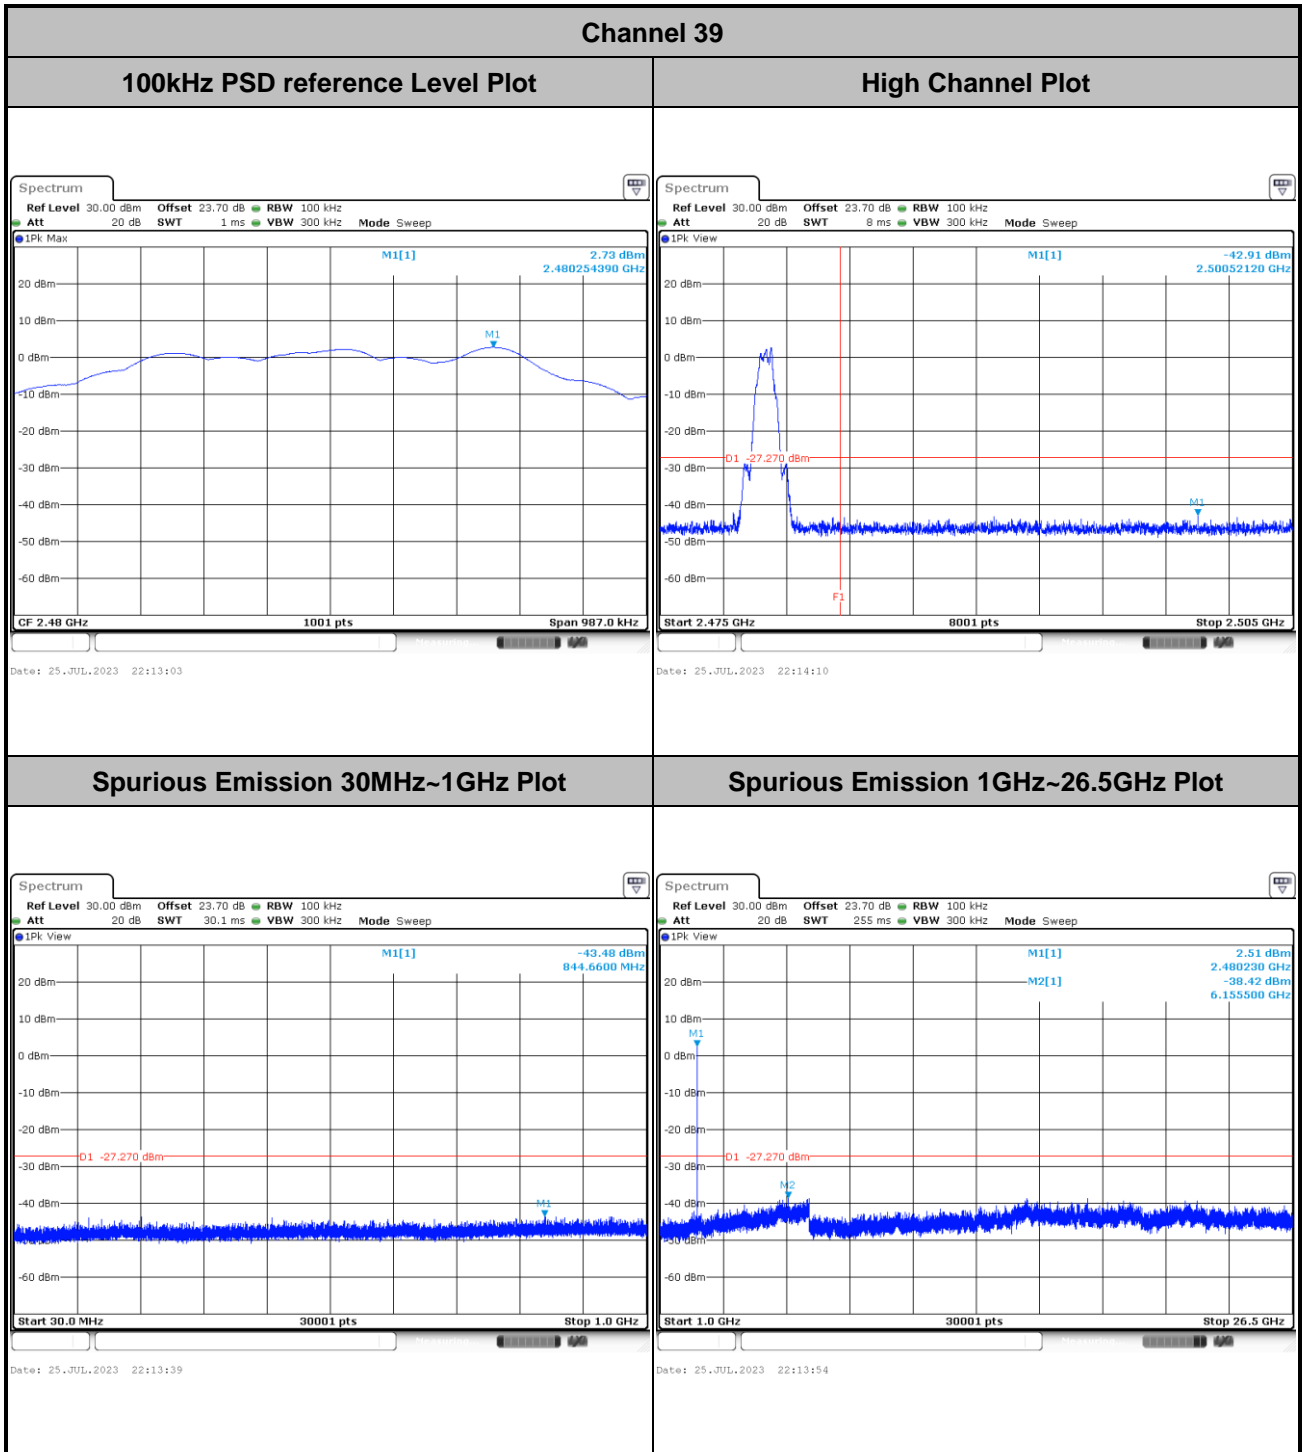




<2Mbps>

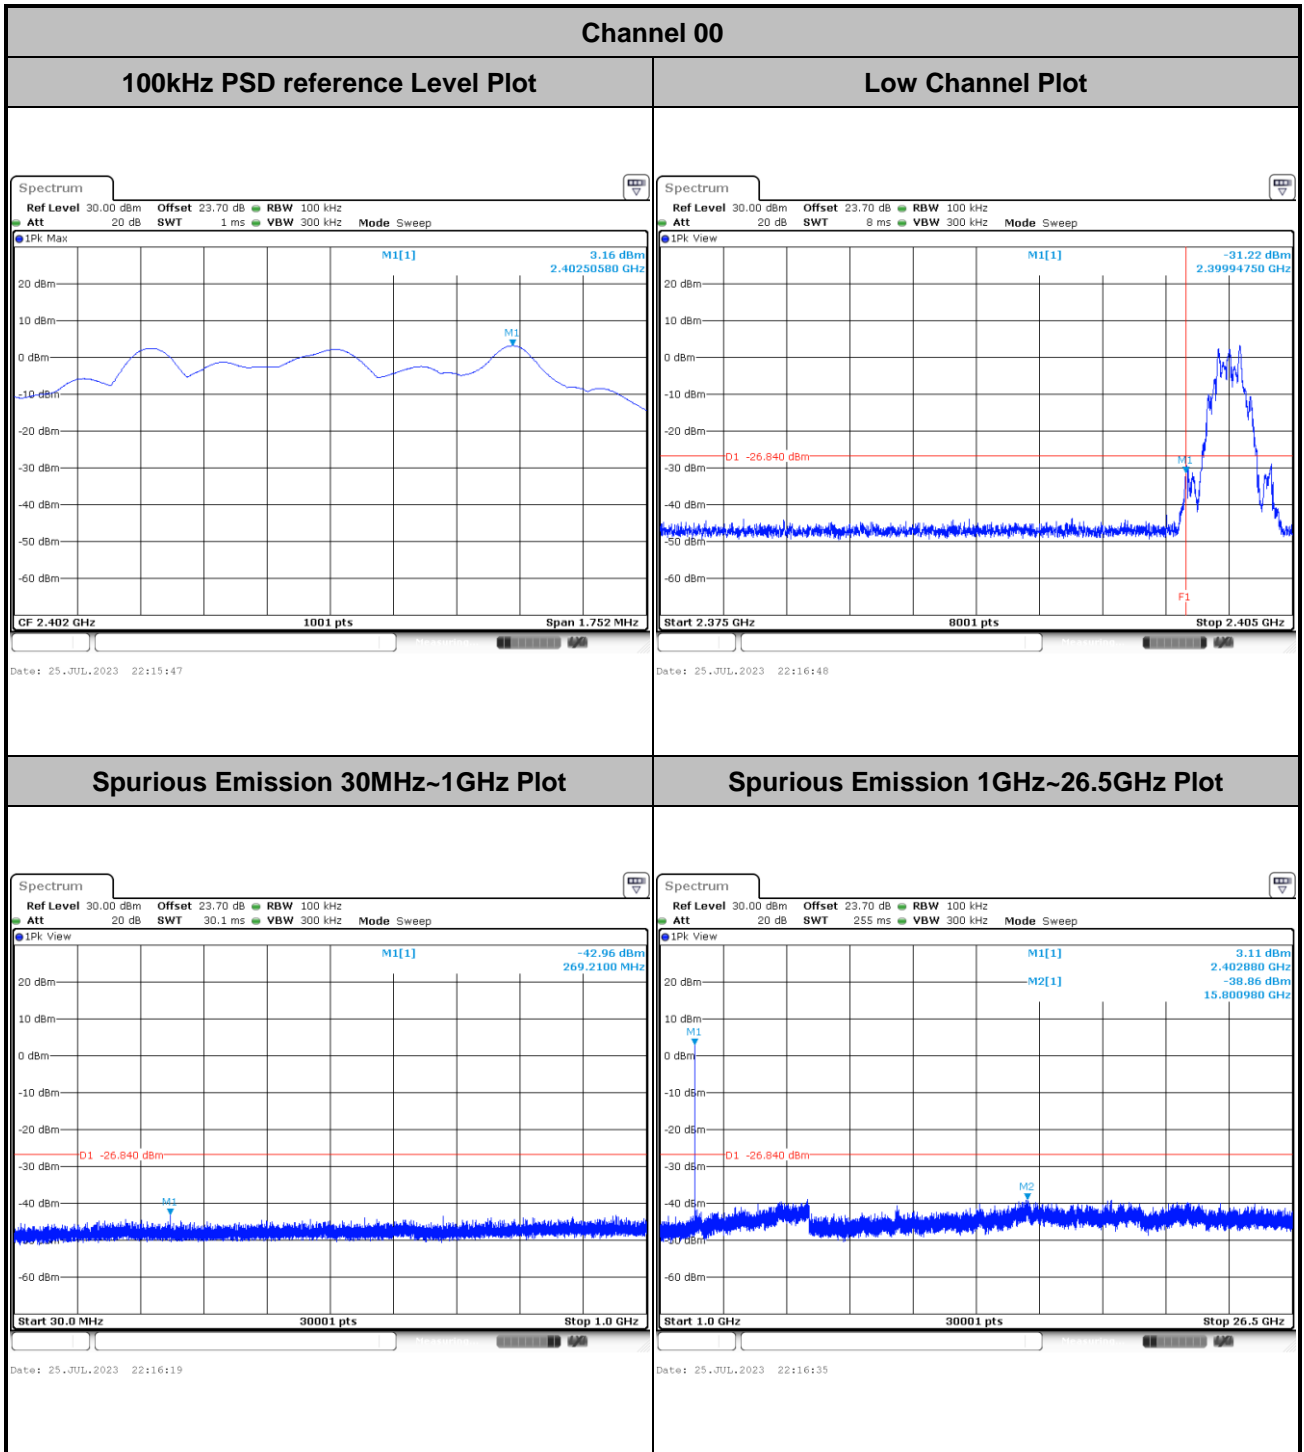




Channel 19

100kHz PSD reference Level Plot

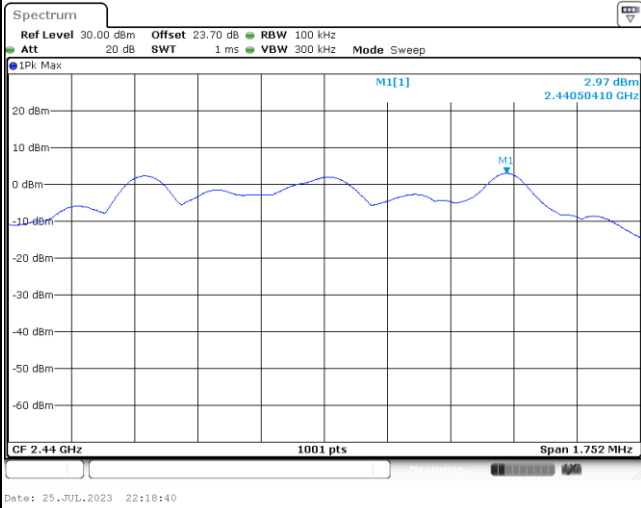



Middle Channel Plot

Spurious Emission 30MHz~1GHz Plot

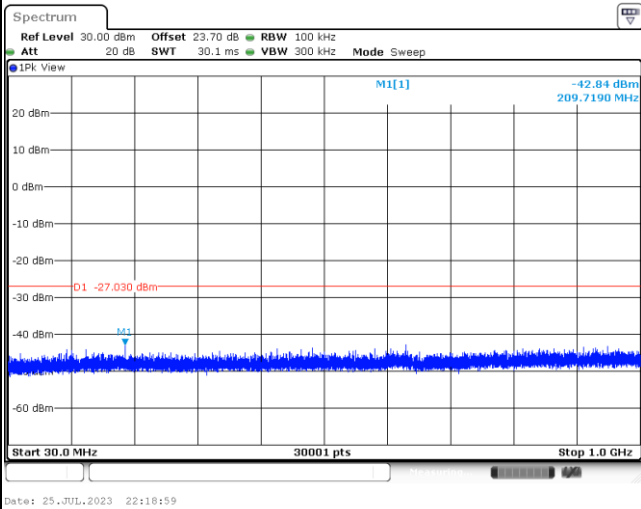

Spurious Emission 1GHz~26.5GHz Plot

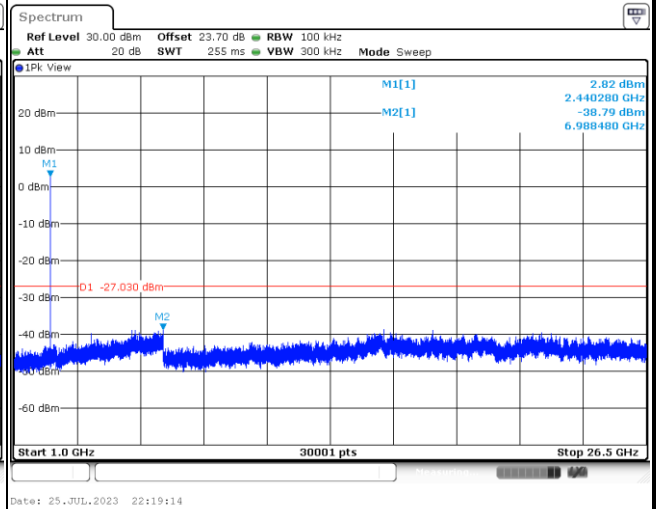

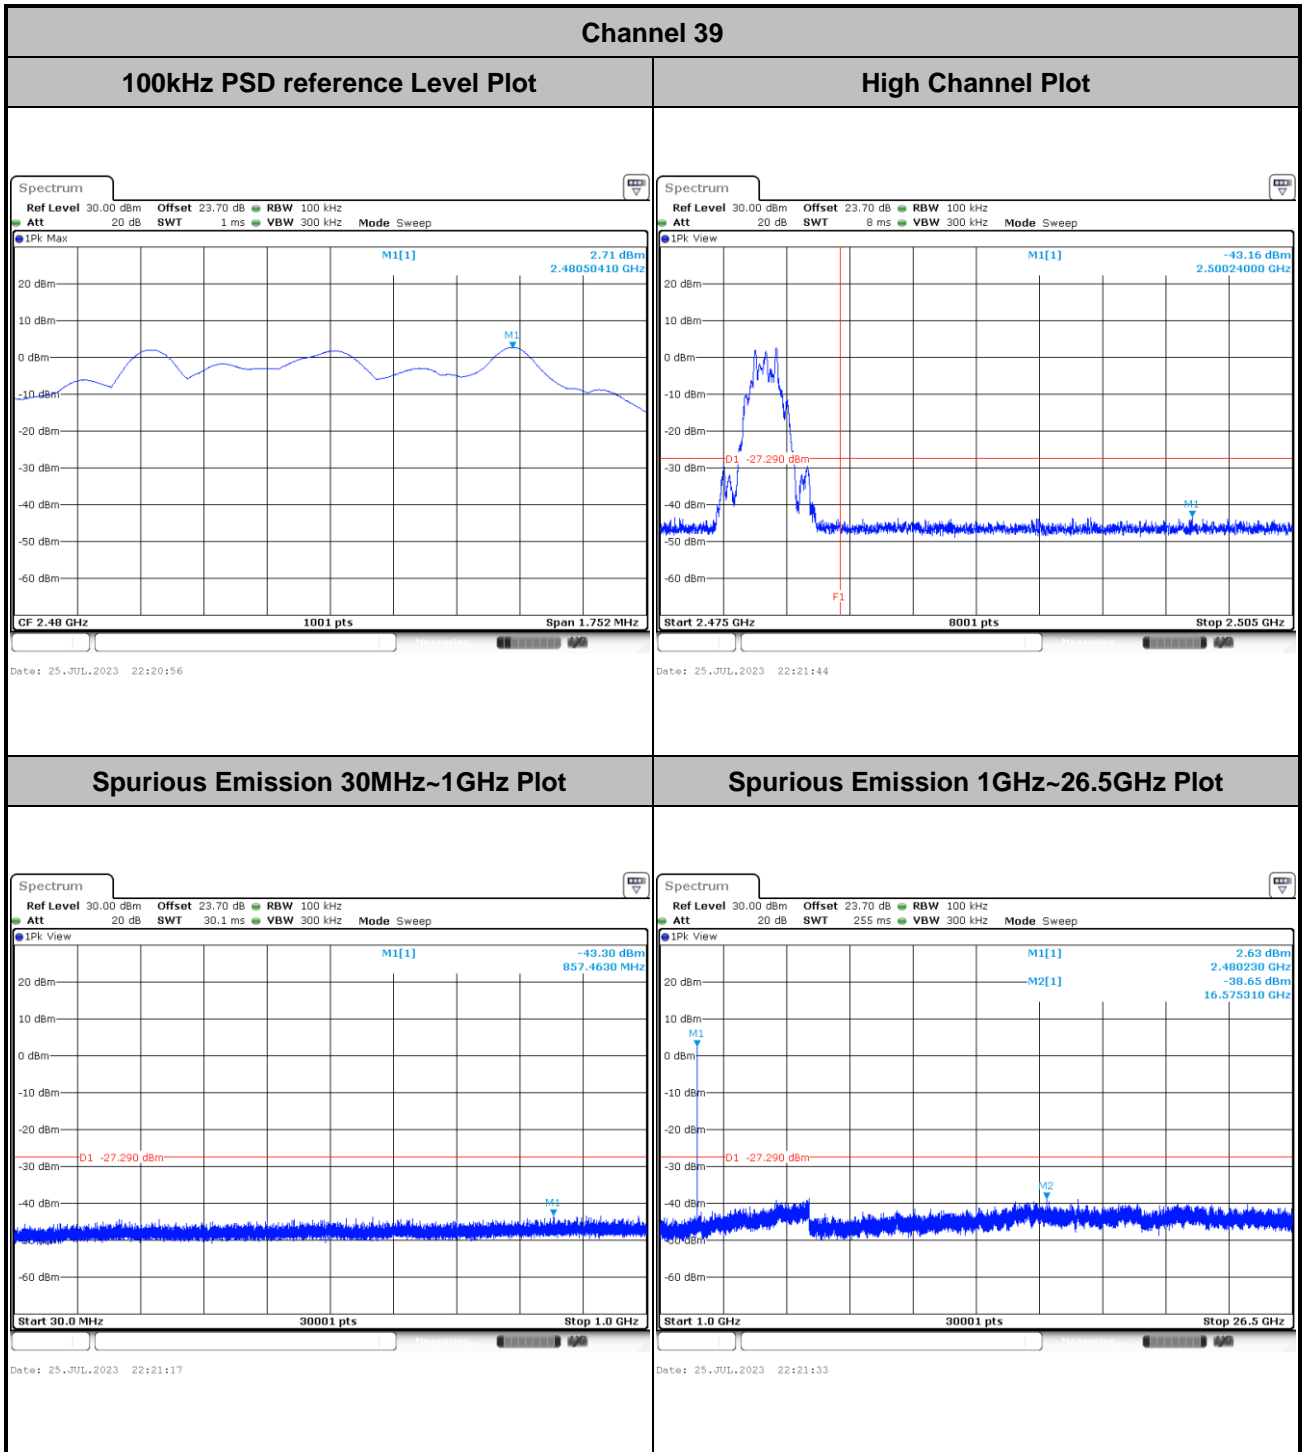



## Appendix B. Radiated Spurious Emission

Test Engineer :	John Chuang, David Dai and Howard Huang	Temperature :	18.6~22.4°C
		Relative Humidity :	66.8~69.2%

<EUT with Bluetooth Antenna (RD2458-5)>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2354.52	49.76	-24.24	74	39.94	27.31	18.56	36.05	310	69	P	H	
		2376.045	40.87	-13.13	54	30.97	27.35	18.6	36.05	310	69	A	H	
	*	2402	101.97	-	-	91.97	27.41	18.65	36.06	310	69	P	H	
	*	2402	101.41	-	-	91.41	27.41	18.65	36.06	310	69	A	H	
													H	
			2376.045	52.06	-21.94	74	42.16	27.35	18.6	36.05	395	12	P	V
			2376.045	41.7	-12.3	54	31.8	27.35	18.6	36.05	395	12	A	V
	*		2402	98.1	-	-	88.1	27.41	18.65	36.06	395	12	P	V
	*		2402	97.63	-	-	87.63	27.41	18.65	36.06	395	12	A	V
														V
BLE CH 19 2440MHz		2381.36	50.13	-23.87	74	40.21	27.36	18.61	36.05	305	70	P	H	
		2376.08	40.99	-13.01	54	31.09	27.35	18.6	36.05	305	70	A	H	
	*	2440	101.42	-	-	91.2	27.56	18.73	36.07	305	70	P	H	
	*	2440	100.94	-	-	90.72	27.56	18.73	36.07	305	70	A	H	
			2484.48	50.8	-23.2	74	40.33	27.74	18.82	36.09	305	70	P	H
			2492.64	41.14	-12.86	54	30.62	27.77	18.84	36.09	305	70	A	H
			2354.32	49.72	-24.28	74	39.9	27.31	18.56	36.05	343	31	P	V
			2375.6	40.82	-13.18	54	30.92	27.35	18.6	36.05	343	31	A	V
	*		2440	97.75	-	-	87.53	27.56	18.73	36.07	343	31	P	V
	*		2440	97.26	-	-	87.04	27.56	18.73	36.07	343	31	A	V
			2498.56	50.07	-23.93	74	39.52	27.79	18.85	36.09	343	31	P	V
			2496.32	40.87	-13.13	54	30.33	27.79	18.84	36.09	343	31	A	V



<b>BLE CH 39 2480MHz</b>	*	2480	100.6	-	-	90.15	27.72	18.81	36.08	296	67	P	H
	*	2480	100.13	-	-	89.68	27.72	18.81	36.08	296	67	A	H
		2483.84	52.62	-21.38	74	42.15	27.74	18.82	36.09	296	67	P	H
		2488.36	42.62	-11.38	54	32.13	27.75	18.83	36.09	296	67	A	H
													H
													H
	*	2480	96.87	-	-	86.42	27.72	18.81	36.08	300	29	P	V
	*	2480	96.4	-	-	85.95	27.72	18.81	36.08	300	29	A	V
		2484.44	50.72	-23.28	74	40.25	27.74	18.82	36.09	300	29	P	V
		2487.76	41.35	-12.65	54	30.86	27.75	18.83	36.09	300	29	A	V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>1. No other spurious found.</li> <li>2. All results are PASS against Peak and Average limit line.</li> </ol>												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	45.1	-28.9	74	37.09	32.32	12.89	37.2	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	43.54	-30.46	74	35.53	32.32	12.89	37.2	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
<b>BLE CH 19 2440MHz</b>		4880	43.66	-30.34	74	35.15	32.66	13.11	37.26	-	-	P	H	
		7320	48.75	-25.25	74	34.21	36.82	15.89	38.17	313	65	P	H	
		7320	39.34	-14.66	54	24.8	36.82	15.89	38.17	313	65	A	H	
													H	
													H	
													H	
														H
														H
														H
														H
														H
														H
			4880	44.36	-29.64	74	35.85	32.66	13.11	37.26	-	-	P	V
			7320	48.89	-25.11	74	34.35	36.82	15.89	38.17	384	11	P	V
			7320	39.78	-14.22	54	25.24	36.82	15.89	38.17	384	11	A	V
														V
														V
														V
														V
														V
													V	
													V	





BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 39 2480MHz		4960	44.43	-29.57	74	35.48	32.94	13.34	37.33	-	-	P	H
		7440	47.43	-26.57	74	33.25	36.42	16.01	38.25	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4960	44.72	-29.28	74	35.77	32.94	13.34	37.33	-	-	P
		7440	47.3	-26.7	74	33.12	36.42	16.01	38.25	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2385.6	50.23	-23.77	74	40.3	27.37	18.62	36.06	311	70	P	H	
		2386.86	41.93	-12.07	54	32	27.37	18.62	36.06	311	70	A	H	
	*	2402	102.24	-	-	92.24	27.41	18.65	36.06	311	70	P	H	
	*	2402	100.94	-	-	90.94	27.41	18.65	36.06	311	70	A	H	
													H	
													H	
			2357.775	50.1	-23.9	74	40.26	27.32	18.57	36.05	400	13	P	V
			2375.94	42.45	-11.55	54	32.55	27.35	18.6	36.05	400	13	A	V
	*		2402	98.02	-	-	88.02	27.41	18.65	36.06	400	13	P	V
	*		2402	96.7	-	-	86.7	27.41	18.65	36.06	400	13	A	V
													V	
													V	
BLE CH 19 2440MHz		2351.6	49.64	-24.36	74	39.83	27.3	18.56	36.05	306	70	P	H	
		2320.08	41.37	-12.63	54	31.62	27.3	18.49	36.04	306	70	A	H	
	*	2440	101.7	-	-	91.48	27.56	18.73	36.07	306	70	P	H	
	*	2440	100.39	-	-	90.17	27.56	18.73	36.07	306	70	A	H	
			2487.36	50.22	-23.78	74	39.74	27.75	18.82	36.09	306	70	P	H
			2490.64	41.54	-12.46	54	31.04	27.76	18.83	36.09	306	70	A	H
			2347.92	50.19	-23.81	74	40.38	27.3	18.55	36.04	344	12	P	V
			2376.08	42.93	-11.07	54	33.03	27.35	18.60	36.05	344	12	A	V
	*		2440	98.26	-	-	88.04	27.56	18.73	36.07	344	12	P	V
	*		2440	96.95	-	-	86.73	27.56	18.73	36.07	344	12	A	V
			2499.76	50.62	-23.38	74	40.06	27.8	18.85	36.09	344	12	P	V
			2493.36	41.51	-12.49	54	30.99	27.77	18.84	36.09	344	12	A	V



<b>BLE CH 39 2480MHz</b>	*	2480	101.19	-	-	90.74	27.72	18.81	36.08	295	68	P	H
	*	2480	99.86	-	-	89.41	27.72	18.81	36.08	295	68	A	H
		2483.72	53.27	-20.73	74	42.81	27.73	18.82	36.09	295	68	P	H
		2487	43.43	-10.57	54	32.95	27.75	18.82	36.09	295	68	A	H
													H
													H
	*	2480	96.77	-	-	86.32	27.72	18.81	36.08	301	28	P	V
	*	2480	95.47	-	-	85.02	27.72	18.81	36.08	301	28	A	V
		2487.44	50.74	-23.26	74	40.26	27.75	18.82	36.09	301	28	P	V
		2486	42.02	-11.98	54	31.55	27.74	18.82	36.09	301	28	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	46.16	-27.84	74	38.15	32.32	12.89	37.2	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	42.93	-31.07	74	34.92	32.32	12.89	37.2	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
<b>BLE CH 19 2440MHz</b>		4880	43.54	-30.46	74	35.03	32.66	13.11	37.26	-	-	P	H	
		7320	49.55	-24.45	74	35.01	36.82	15.89	38.17	300	63	P	H	
		7320	39.89	-14.11	54	25.35	36.82	15.89	38.17	300	63	A	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4880	42.73	-31.27	74	34.22	32.66	13.11	37.26	-	-	P	V
			7320	49.88	-24.12	74	35.34	36.82	15.89	38.17	400	19	P	V
			7320	39.48	-14.52	54	24.94	36.82	15.89	38.17	400	19	A	V
														V
														V
														V
														V
														V
														V
													V	



BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 39 2480MHz		4960	45.41	-28.59	74	36.46	32.94	13.34	37.33	-	-	P	H
		7440	46.77	-27.23	74	32.59	36.42	16.01	38.25	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4960	44.53	-29.47	74	35.58	32.94	13.34	37.33	-	-	P
		7440	47.85	-26.15	74	33.67	36.42	16.01	38.25	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>												



Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE SHF		24986	42.6	-31.4	74	36.22	39.69	19.8	53.11	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24566	42.28	-31.72	74	36.4	39.67	19.57	53.36	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		30.97	23.06	-16.94	40	33.34	24.17	1.31	35.76	-	-	P	H	
		62.01	22.22	-17.78	40	44.54	11.85	1.54	35.71	-	-	P	H	
		335.55	38.58	-7.42	46	50.32	20.05	3.39	35.18	-	-	P	H	
		662.44	29.77	-16.23	46	32.98	26.31	4.73	34.25	-	-	P	H	
		792.42	33.36	-12.64	46	33.89	28.05	5.18	33.76	-	-	P	H	
		952.47	35.64	-10.36	46	32.2	30.85	5.71	33.12	-	-	P	H	
														H
														H
														H
														H
														H
														H
			34.85	28.34	-11.66	40	40.48	22.38	1.24	35.76	-	-	P	V
			62.01	23.1	-16.9	40	45.42	11.85	1.54	35.71	-	-	P	V
			329.73	30.25	-15.75	46	42.17	19.91	3.37	35.2	-	-	P	V
			494.63	30.54	-15.46	46	37.28	23.93	4.12	34.79	-	-	P	V
			792.42	33.73	-12.27	46	34.26	28.05	5.18	33.76	-	-	P	V
			949.56	35.32	-10.68	46	32.03	30.72	5.7	33.13	-	-	P	V
														V
														V
													V	
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.





<EUT with Bluetooth Antenna (B53026-90)>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2311.575	50.09	-23.91	74	40.34	27.3	18.48	36.03	150	147	P	H	
		2375.94	40.83	-13.17	54	30.93	27.35	18.6	36.05	150	147	A	H	
	*	2402	98.68	-	-	88.68	27.41	18.65	36.06	150	147	P	H	
	*	2402	98.19	-	-	88.19	27.41	18.65	36.06	150	147	A	H	
													H	
													H	
			2359.455	51.02	-22.98	74	41.18	27.32	18.57	36.05	400	183	P	V
			2376.15	40.79	-13.21	54	30.89	27.35	18.6	36.05	400	183	A	V
	*		2402	95.97	-	-	85.97	27.41	18.65	36.06	400	183	P	V
	*		2402	95.53	-	-	85.53	27.41	18.65	36.06	400	183	A	V
													V	
													V	
BLE CH 19 2440MHz		2357.52	49.86	-24.14	74	40.02	27.32	18.57	36.05	100	143	P	H	
		2376.08	40.52	-13.48	54	30.62	27.35	18.6	36.05	100	143	A	H	
	*	2440	98.23	-	-	88.01	27.56	18.73	36.07	100	143	P	H	
	*	2440	97.78	-	-	87.56	27.56	18.73	36.07	100	143	A	H	
			2492.56	50.21	-23.79	74	39.69	27.77	18.84	36.09	100	143	P	H
			2490.96	40.74	-13.26	54	30.24	27.76	18.83	36.09	100	143	A	H
			2373.52	50.38	-23.62	74	40.48	27.35	18.6	36.05	300	183	P	V
			2375.92	40.48	-13.52	54	30.58	27.35	18.6	36.05	300	183	A	V
	*		2440	95.96	-	-	85.74	27.56	18.73	36.07	300	183	P	V
	*		2440	95.5	-	-	85.28	27.56	18.73	36.07	300	183	A	V
			2495.2	50.46	-23.54	74	39.93	27.78	18.84	36.09	300	183	P	V
			2493.92	40.79	-13.21	54	30.26	27.78	18.84	36.09	300	183	A	V



<b>BLE CH 39 2480MHz</b>	*	2480	97.5	-	-	87.05	27.72	18.81	36.08	300	147	P	H
	*	2480	96.97	-	-	86.52	27.72	18.81	36.08	300	147	A	H
		2484.88	50.87	-23.13	74	40.4	27.74	18.82	36.09	300	147	P	H
		2487.6	41.71	-12.29	54	31.22	27.75	18.83	36.09	300	147	A	H
													H
													H
	*	2480	94.64	-	-	84.19	27.72	18.81	36.08	300	178	P	V
	*	2480	94.18	-	-	83.73	27.72	18.81	36.08	300	178	A	V
		2487.88	50.76	-23.24	74	40.27	27.75	18.83	36.09	300	178	P	V
		2497.68	40.98	-13.02	54	30.43	27.79	18.85	36.09	300	178	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	43.52	-30.48	74	35.51	32.32	12.89	37.2	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	43.02	-30.98	74	35.01	32.32	12.89	37.2	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V





BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 39 2480MHz		4960	45.05	-28.95	74	36.1	32.94	13.34	37.33	-	-	P	H
		7440	47.86	-26.14	74	33.68	36.42	16.01	38.25	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4960	44.76	-29.24	74	35.81	32.94	13.34	37.33	-	-	P
		7440	47.79	-26.21	74	33.61	36.42	16.01	38.25	-	-	P	V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



<2Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

BLE	Note	Frequency	Level	Margin	Limit Line	Read Level	Antenna Factor	Path Loss	Preamp Factor	Ant Pos	Table Pos	Peak Avg.	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
BLE CH 00 2402MHz		2348.535	50.57	-23.43	74	40.76	27.3	18.55	36.04	150	148	P	H	
		2376.045	41.39	-12.61	54	31.49	27.35	18.6	36.05	150	148	A	H	
	*	2402	98.61	-	-	88.61	27.41	18.65	36.06	150	148	P	H	
	*	2402	97.27	-	-	87.27	27.41	18.65	36.06	150	148	A	H	
													H	
													H	
			2380.56	50.43	-23.57	74	40.51	27.36	18.61	36.05	400	183	P	V
			2384.76	41.23	-12.77	54	31.3	27.37	18.62	36.06	400	183	A	V
	*		2402	96.03	-	-	86.03	27.41	18.65	36.06	400	183	P	V
	*		2402	94.59	-	-	84.59	27.41	18.65	36.06	400	183	A	V
													V	
													V	
BLE CH 19 2440MHz		2347.6	50.02	-23.98	74	40.21	27.3	18.55	36.04	150	146	P	H	
		2375.76	41.18	-12.82	54	31.28	27.35	18.6	36.05	150	146	A	H	
	*	2440	98.23	-	-	88.01	27.56	18.73	36.07	150	146	P	H	
	*	2440	96.9	-	-	86.68	27.56	18.73	36.07	150	146	A	H	
			2487.6	50.43	-23.57	74	39.94	27.75	18.83	36.09	150	146	P	H
			2484.56	41.39	-12.61	54	30.92	27.74	18.82	36.09	150	146	A	H
			2342.32	50.25	-23.75	74	40.45	27.3	18.54	36.04	300	182	P	V
			2376.08	41.43	-12.57	54	31.53	27.35	18.6	36.05	300	182	A	V
	*		2440	95.79	-	-	85.57	27.56	18.73	36.07	300	182	P	V
	*		2440	94.4	-	-	84.18	27.56	18.73	36.07	300	182	A	V
			2488	50.2	-23.8	74	39.71	27.75	18.83	36.09	300	182	P	V
			2499.36	41.69	-12.31	54	31.13	27.8	18.85	36.09	300	182	A	V



<b>BLE CH 39 2480MHz</b>	*	2480	97.67	-	-	87.22	27.72	18.81	36.08	150	147	P	H
	*	2480	96.36	-	-	85.91	27.72	18.81	36.08	150	147	A	H
		2484	51.31	-22.69	74	40.84	27.74	18.82	36.09	150	147	P	H
		2487.16	42.27	-11.73	54	31.79	27.75	18.82	36.09	150	147	A	H
													H
													H
	*	2480	94.57	-	-	84.12	27.72	18.81	36.08	300	179	P	V
	*	2480	93.26	-	-	82.81	27.72	18.81	36.08	300	179	A	V
		2491.04	50.18	-23.82	74	39.68	27.76	18.83	36.09	300	179	P	V
		2487.84	41.85	-12.15	54	31.36	27.75	18.83	36.09	300	179	A	V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against Peak and Average limit line.												



2.4GHz 2400~2483.5MHz  
BLE (Harmonic @ 3m)

BLE	Note	Frequency ( MHz )	Level ( dBµV/m )	Margin ( dB )	Limit Line ( dBµV/m )	Read Level ( dBµV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )
BLE CH 00 2402MHz		4804	43.63	-30.37	74	35.62	32.32	12.89	37.2	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			4804	43.93	-30.07	74	35.92	32.32	12.89	37.2	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V







BLE	Note	Frequency ( MHz )	Level ( dBμV/m )	Margin ( dB )	Limit Line ( dBμV/m )	Read Level ( dBμV )	Antenna Factor ( dB/m )	Path Loss ( dB )	Preamp Factor ( dB )	Ant Pos ( cm )	Table Pos ( deg )	Peak Avg. ( P/A )	Pol. ( H/V )	
BLE CH 39 2480MHz		4960	44.09	-29.91	74	35.14	32.94	13.34	37.33	-	-	P	H	
		7440	47.1	-26.9	74	32.92	36.42	16.01	38.25	-	-	P	H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
													H	
			4960	44.65	-29.35	74	35.7	32.94	13.34	37.33	-	-	P	V
			7440	48.76	-25.24	74	34.58	36.42	16.01	38.25	100	17	P	V
			7440	39.05	-14.95	54	24.87	36.42	16.01	38.25	100	17	A	V
														V
														V
														V
														V
														V
														V
													V	
<b>Remark</b>	<ol style="list-style-type: none"> <li>No other spurious found.</li> <li>All results are PASS against Peak and Average limit line.</li> <li>The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.</li> </ol>													



Emission above 18GHz

2.4GHz BLE (SHF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
2.4GHz BLE SHF		24440	42.18	-31.82	74	36.67	39.46	19.5	53.45	-	-	P	H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
													H
			24791.5	43.02	-30.98	74	36.94	39.62	19.69	53.23	-	-	P
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
													V
<b>Remark</b>	1. No other spurious found. 2. All results are PASS against limit line. 3. The emission position marked as "-" means no suspected emission found with sufficient margin against limit line or noise floor only.												



Emission below 1GHz

2.4GHz BLE (LF)

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.	
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )	
2.4GHz BLE LF		30.97	23.67	-16.33	40	33.95	24.17	1.31	35.76	-	-	P	H	
		62.01	21.81	-18.19	40	44.13	11.85	1.54	35.71	-	-	P	H	
		457.77	30.97	-15.03	46	38.58	23.33	3.95	34.89	-	-	P	H	
		525.67	31.64	-14.36	46	38.04	24.04	4.25	34.69	-	-	P	H	
		741.01	31.48	-14.52	46	32.5	27.9	5.01	33.93	-	-	P	H	
		955.38	35.15	-10.85	46	31.51	31.03	5.72	33.11	-	-	P	H	
														H
														H
														H
														H
														H
														H
			35.82	29.25	-10.75	40	41.94	21.83	1.24	35.76	-	-	P	V
			62.01	24.02	-15.98	40	46.34	11.85	1.54	35.71	-	-	P	V
			310.33	24.82	-21.18	46	37.42	19.38	3.27	35.25	-	-	P	V
			451.95	31.11	-14.89	46	38.91	23.17	3.93	34.9	-	-	P	V
			754.59	32.26	-13.74	46	33.12	27.97	5.05	33.88	-	-	P	V
			958.29	36.2	-9.8	46	32.48	31.1	5.72	33.1	-	-	P	V
														V
														V
													V	
													V	
													V	

**Remark**

- No other spurious found.
- All results are PASS against limit line.
- The emission position marked as "-" means no suspected emission found and emission level has at least 6dB margin against limit or emission is noise floor only.



**Note symbol**

*	<b>Fundamental Frequency</b> which can be ignored. However, the level of any unwanted emissions shall not exceed the level of the fundamental frequency.
!	Test result is <b>Margin</b> line.
P/A	<b>Peak</b> or <b>Average</b>
H/V	<b>Horizontal</b> or <b>Vertical</b>



A calculation example for radiated spurious emission is shown as below:

BLE	Note	Frequency	Level	Margin	Limit	Read	Antenna	Path	Preamp	Ant	Table	Peak	Pol.
		( MHz )	( dBμV/m )	( dB )	( dBμV/m )	( dBμV )	( dB/m )	( dB )	( dB )	( cm )	( deg )	( P/A )	( H/V )
BLE CH 00 2402MHz		2390	55.45	-18.55	74	54.51	32.22	4.58	35.86	103	308	P	H
		2390	43.54	-10.46	54	42.6	32.22	4.58	35.86	103	308	A	H

1. Path Loss(dB) = Cable loss(dB) + Filter loss(dB) + Attenuator loss(dB)
2. Level(dBμV/m) =  
Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)
3. Margin (dB) = Level(dBμV/m) – Limit Line(dBμV/m)

**For Peak Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 54.51(dBμV) – 35.86 (dB)  
= 55.45 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 55.45(dBμV/m) – 74(dBμV/m)  
= -18.55(dB)

**For Average Limit @ 2390MHz:**

1. Level(dBμV/m)  
= Antenna Factor(dB/m) + Path Loss(dB) + Read Level(dBμV) - Preamp Factor(dB)  
= 32.22(dB/m) + 4.58(dB) + 42.6(dBμV) – 35.86 (dB)  
= 43.54 (dBμV/m)
2. Margin (dB)  
= Level(dBμV/m) – Limit Line(dBμV/m)  
= 43.54(dBμV/m) – 54(dBμV/m)  
= -10.46(dB)

Both peak and average measured complies with the limit line, so test result is “PASS”.



## Appendix C. Radiated Spurious Emission Plots

Test Engineer :	John Chuang, David Dai and Howard Huang	Temperature :	18.6~22.4°C
		Relative Humidity :	66.8~69.2%

### Note symbol

-L	Low channel location
-R	High channel location







<EUT with Bluetooth Antenna (RD2458-5)>

<1Mbps>

2.4GHz 2400~2483.5MHz

BLE (Band Edge @ 3m)

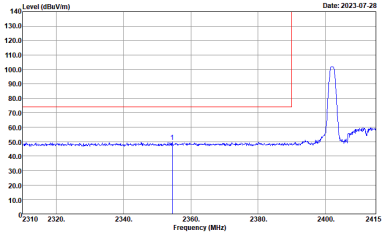
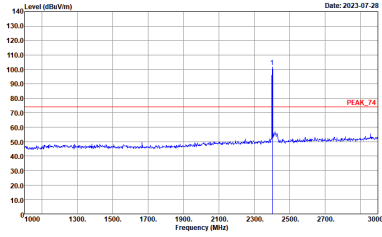
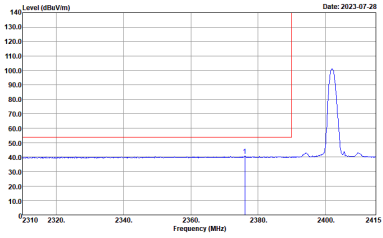
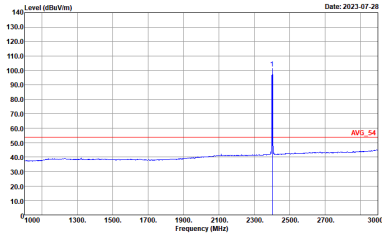
BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>







BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	<p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>	<p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>

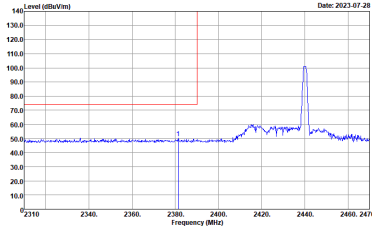
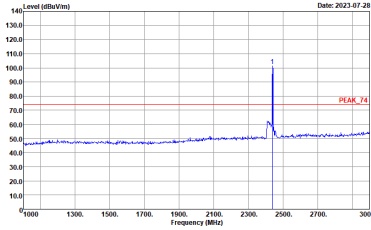
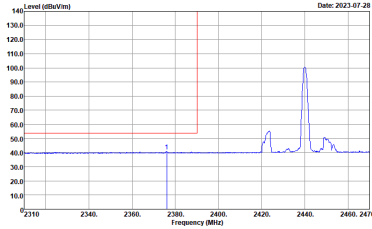
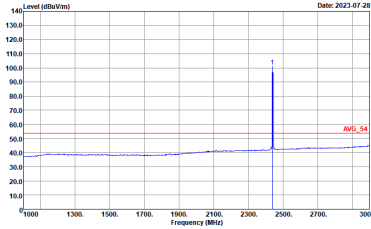


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>

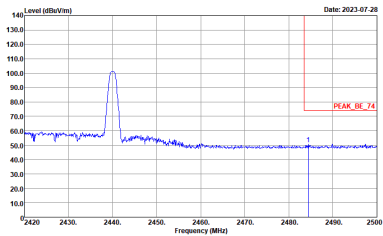
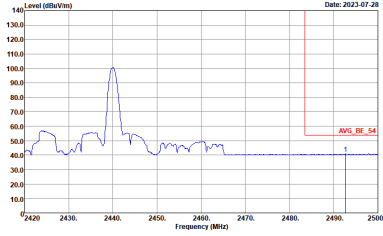


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Horizontal		Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 9120D_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 9120D_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	Left blank

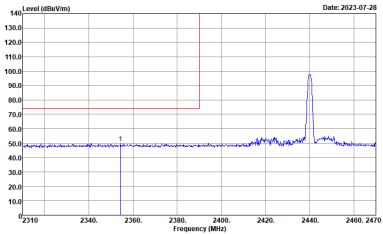
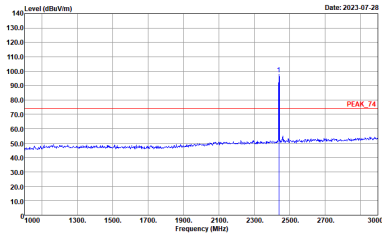
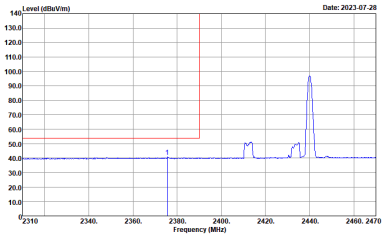
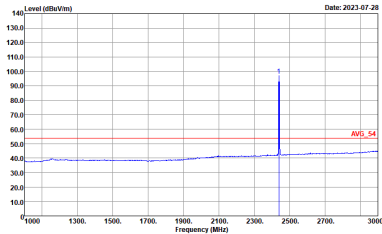


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2310 to 2470 MHz. A red vertical line marks the peak at 2440 MHz.</p> <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is labeled 'PEAK_74'.</p> <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing an average spectrum with a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2310 to 2470 MHz. A red vertical line marks the peak at 2440 MHz.</p> <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing an average spectrum with a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is labeled 'AVG_54'.</p> <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>



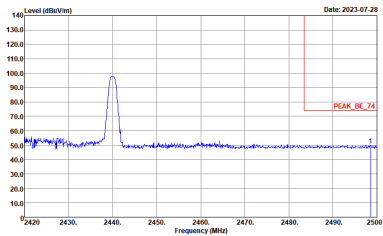
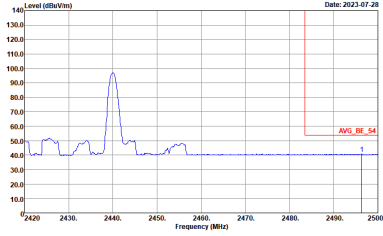


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
<p><b>Peak</b></p>	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 9120D_02360_221104 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Left blank</p>
<p><b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 9120D_02360_221104 VERTICAL : RBW:1000.000kHz VBW:2700kHz SWT:Auto</p>	<p>Left blank</p>

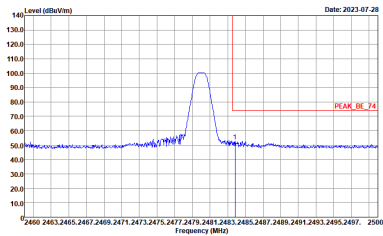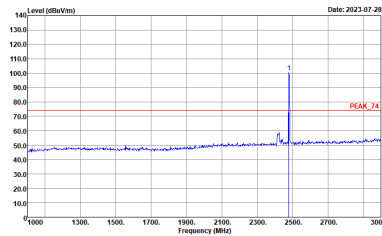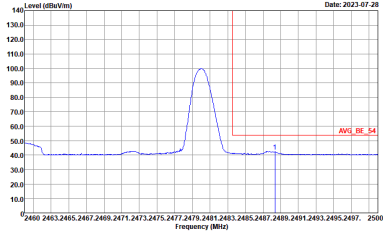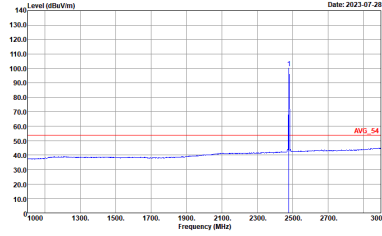

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>

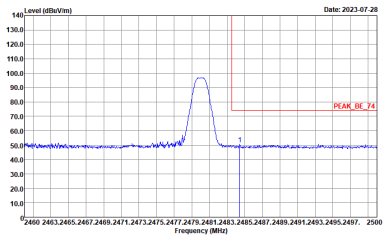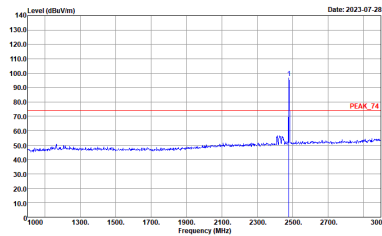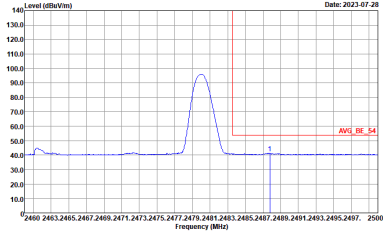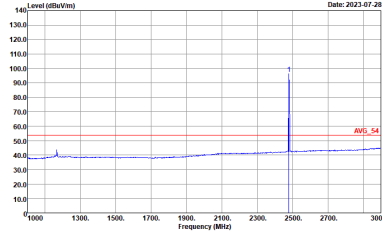

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Vertical		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red horizontal line labeled 'PEAK_BE_74' at the peak level.</p> <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red horizontal line labeled 'PEAK_74' at the peak level.</p> <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average spectrum with a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red horizontal line labeled 'AVG_BE_54' at the peak level.</p> <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average spectrum with a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red horizontal line labeled 'AVG_54' at the peak level.</p> <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>







2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-1HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL</p>	<p>Site : 03CH20-1HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL</p>



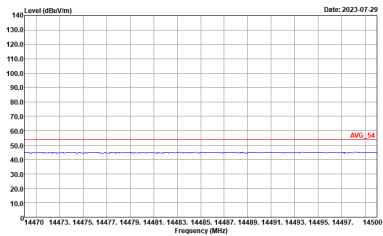
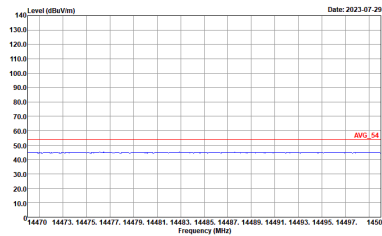
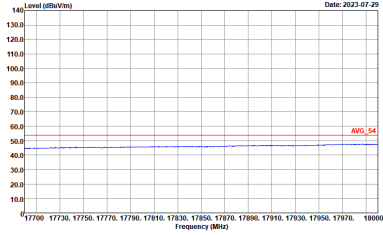
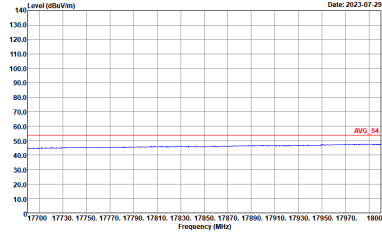


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL</p>

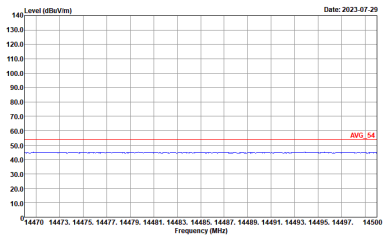
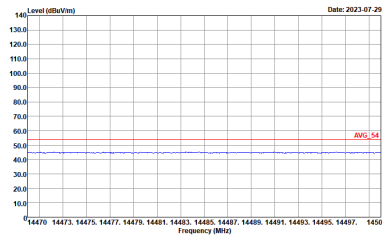
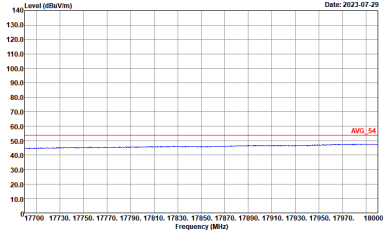
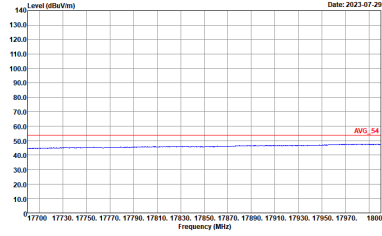


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL</p>

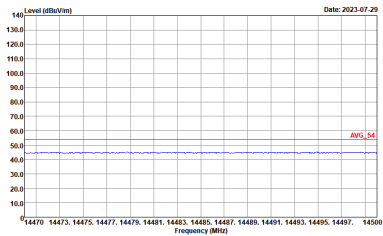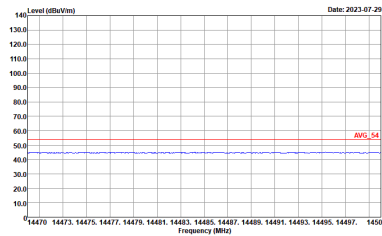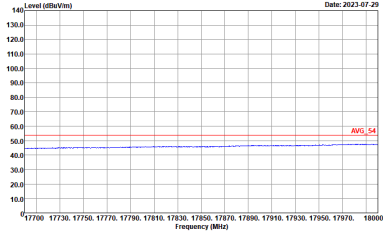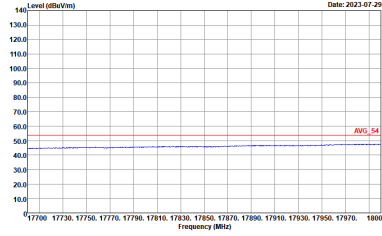





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>







<2Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

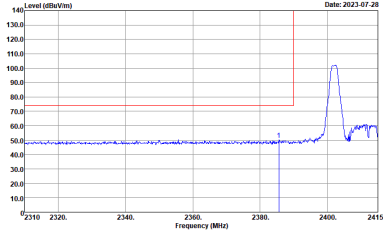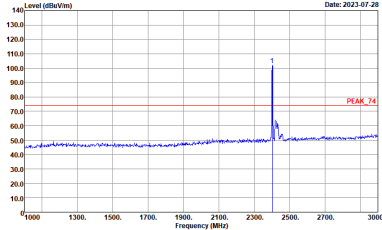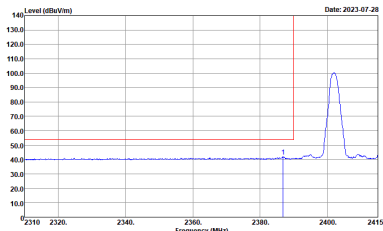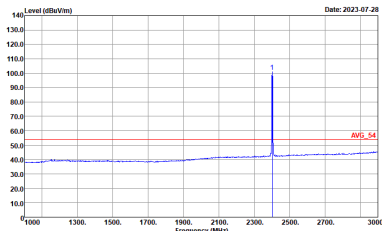BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>

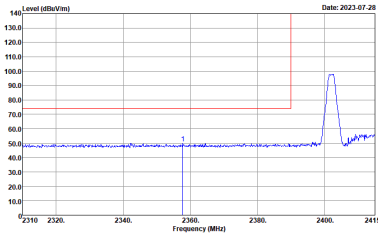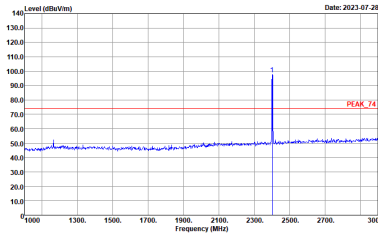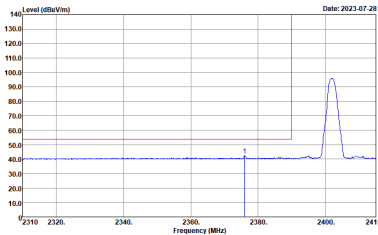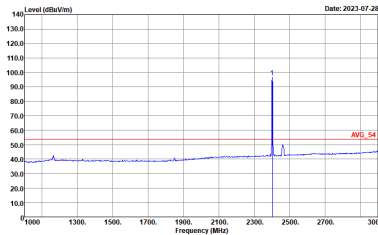



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH00 2402MHz		
Vertical		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2415 MHz. A red horizontal line is at approximately 75 dBm/100kHz. The peak is labeled '1'.</p> <p>Site : 03CH20-HY            Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is at approximately 75 dBm/100kHz. The peak is labeled 'PEAK_74'.</p> <p>Site : 03CH20-HY            Condition : PEAK_74 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average peak at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2415 MHz. A red horizontal line is at approximately 75 dBm/100kHz. The peak is labeled '1'.</p> <p>Site : 03CH20-HY            Condition : AV6_BE_54 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average peak at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line is at approximately 75 dBm/100kHz. The peak is labeled 'AVG_54'.</p> <p>Site : 03CH20-HY            Condition : AV6_54 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>

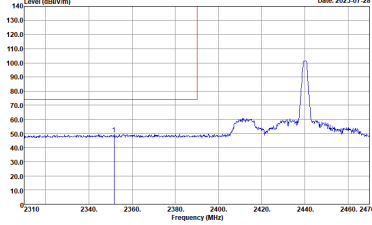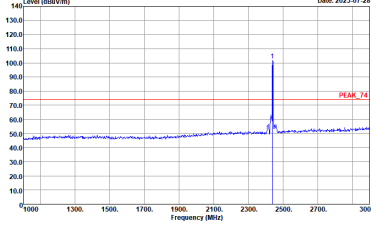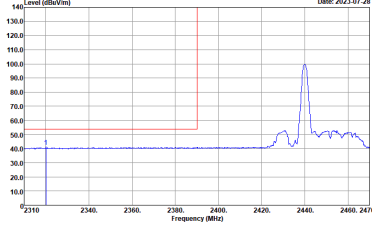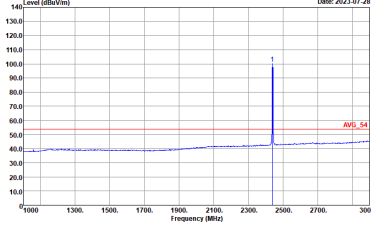





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Horizontal		Fundamental
Peak	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:5.000KHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:5.000KHz SWT:Auto</p>



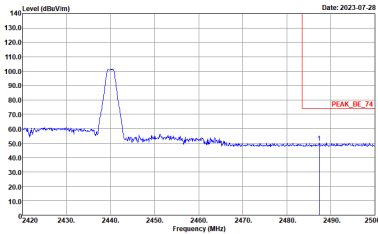
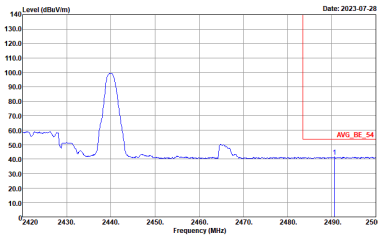


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 9120D_02360_221104 HORIZONTAL RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 9120D_02360_221104 HORIZONTAL RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>	Left blank

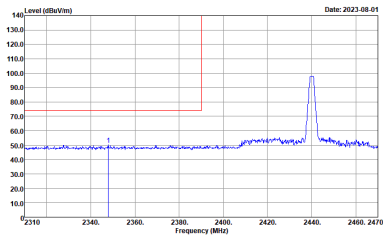
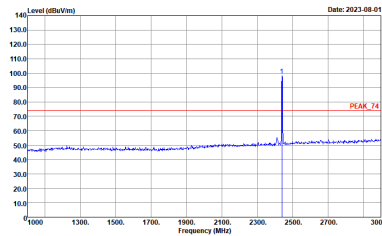
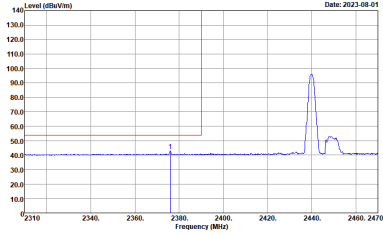
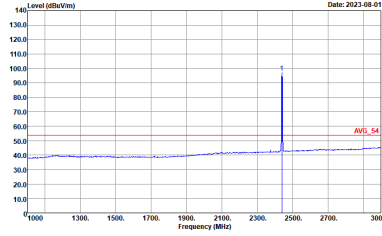


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2470 MHz. A red vertical line marks the peak at 2440 MHz.</p> <p>Site : 03CH20-HY  Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL  : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the peak level, labeled 'PEAK_74'.</p> <p>Site : 03CH20-HY  Condition : PEAK_74 3m 91200_02360_221104 VERTICAL  : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average spectrum with a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2470 MHz. A red vertical line marks the peak at 2440 MHz.</p> <p>Site : 03CH20-HY  Condition : AV6_BE_54 3m 91200_02360_221104 VERTICAL  : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average spectrum with a peak at 2440 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red horizontal line indicates the average level, labeled 'AVG_54'.</p> <p>Site : 03CH20-HY  Condition : AV6_54 3m 91200_02360_221104 VERTICAL  : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>



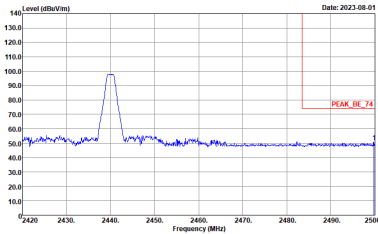
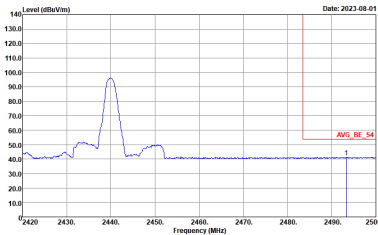


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Vertical		Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	Left blank
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SWF:Auto</p>	Left blank

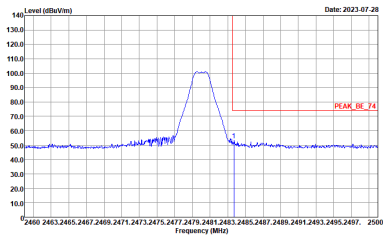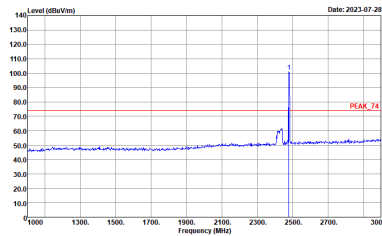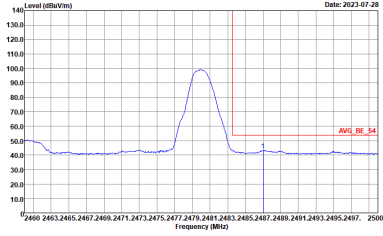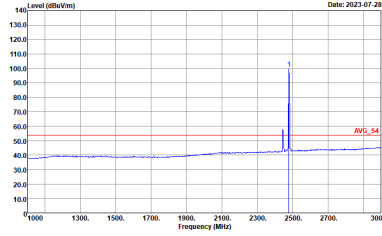

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. A red line indicates the peak level at 100.0 dBm/100kHz. The plot is labeled 'PEAK_BE_74'.</p> <p>Site : 03CH20-HY            Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. A red line indicates the peak level at 100.0 dBm/100kHz. The plot is labeled 'PEAK_74'.</p> <p>Site : 03CH20-HY            Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. A red line indicates the average level at 100.0 dBm/100kHz. The plot is labeled 'AVG_BE_54'.</p> <p>Site : 03CH20-HY            Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL            : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a sharp peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. A red line indicates the average level at 100.0 dBm/100kHz. The plot is labeled 'AVG_54'.</p> <p>Site : 03CH20-HY            Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL            : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>

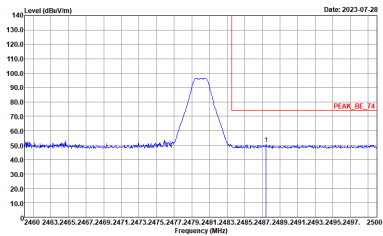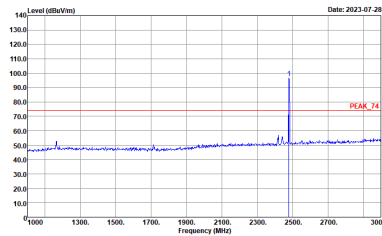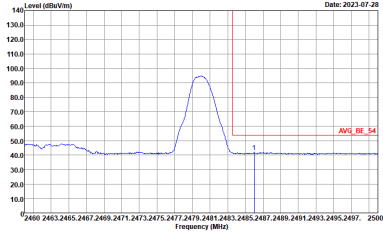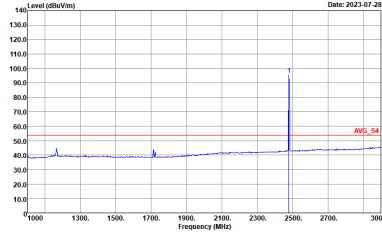

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Vertical		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red line indicating the peak level and a blue line for the spectrum. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red line indicating the peak level and a blue line for the spectrum. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : PEAK_74 3m 91200_02360_221104 VERTICAL            : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 100 dBm/100kHz. The plot includes a red line indicating the average level and a blue line for the spectrum. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : AV6_BE_54 3m 91200_02360_221104 VERTICAL            : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 100 dBm/100kHz. The plot includes a red line indicating the average level and a blue line for the spectrum. The x-axis ranges from 1000 to 3000 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : AV6_54 3m 91200_02360_221104 VERTICAL            : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>







2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL</p>

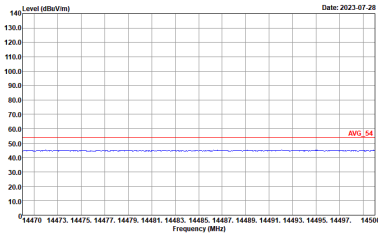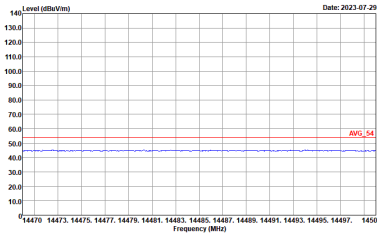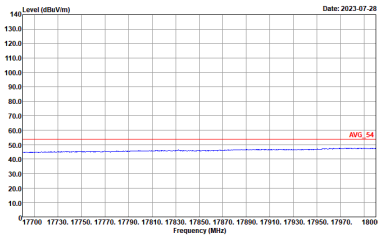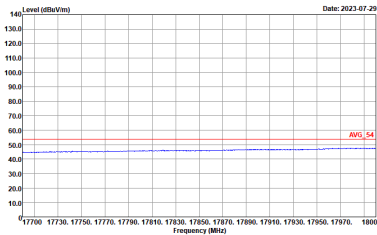





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Date: 2023-07-29</p> <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Date: 2023-07-29</p> <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL</p>



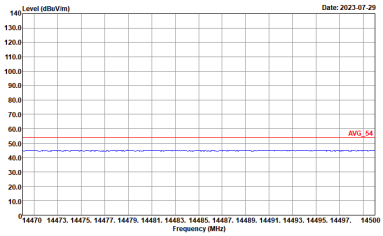
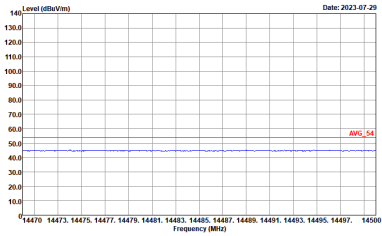
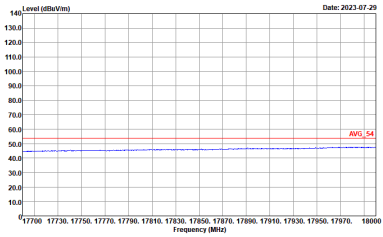
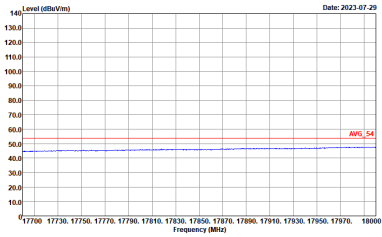


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>

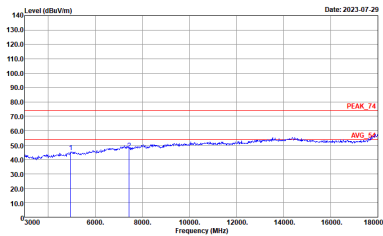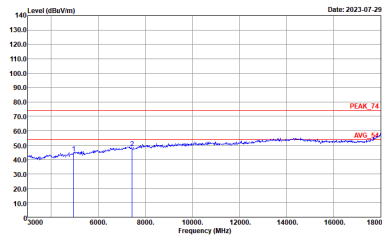

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL</p>

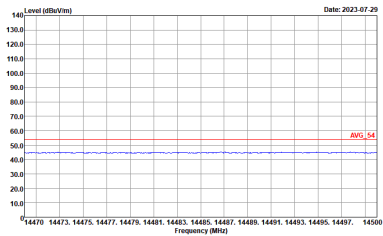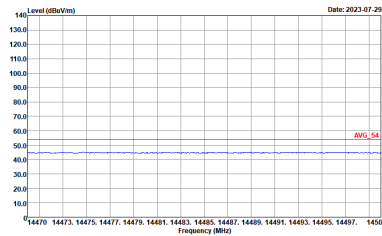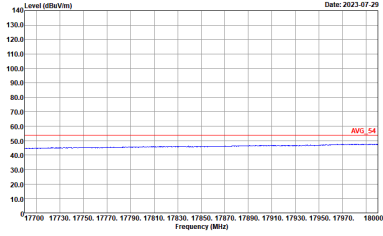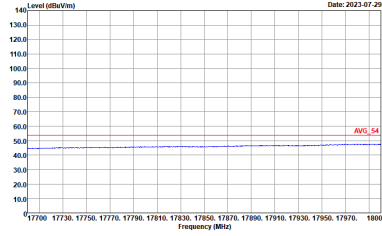

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>



Emission above 18GHz

2.4GHz BLE (SHF @ 1m)

BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-HY Condition : PEAK_74 1m SHF_00994_221104 HORIZONTAL -</p>	<p>Site : 03CH20-HY Condition : PEAK_74 1m SHF_00994_221104 VERTICAL -</p>



Emission below 1GHz

2.4GHz BLE (LF)

<b>BLE</b>	<b>2.4GHz 2400~2483.5MHz</b>	
	<b>BLE LF</b>	
	<b>Horizontal</b>	<b>Vertical</b>
<b>QP / Peak</b>	<p>Site : 03CH20-HY Condition : QP_3m_LF_55606608_221022 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : QP_3m_LF_55606608_221022 VERTICAL</p>







<EUT with Bluetooth Antenna (B53026-90)>





<1Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

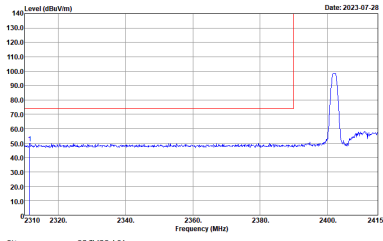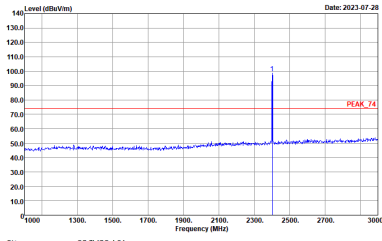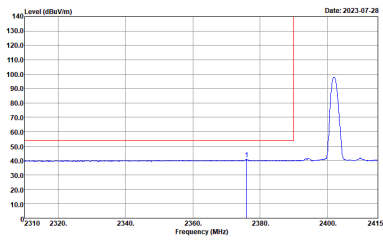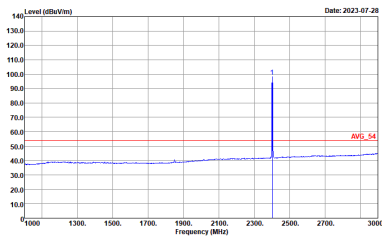BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2402 MHz.</p> <p>Site : 03CH20-HY  Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL  : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing a peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 1900 to 3000 MHz. A red vertical line marks the peak at 2402 MHz, labeled 'PEAK_74'.</p> <p>Site : 03CH20-HY  Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL  : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing an average spectrum with a peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 2310 to 2415 MHz. A red vertical line marks the peak at 2402 MHz.</p> <p>Site : 03CH20-HY  Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL  : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>	 <p>Level (dBm/1m) vs Frequency (MHz) plot showing an average spectrum with a peak at approximately 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/1m, and the x-axis ranges from 1900 to 3000 MHz. A red vertical line marks the peak at 2402 MHz, labeled 'AVG_54'.</p> <p>Site : 03CH20-HY  Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL  : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>

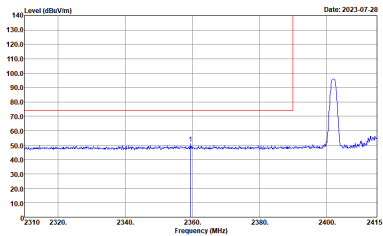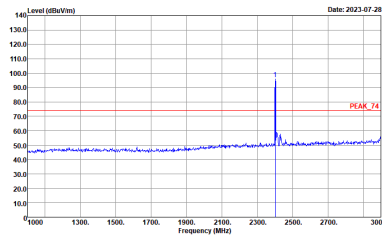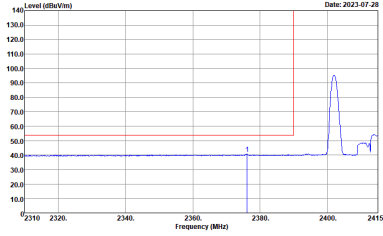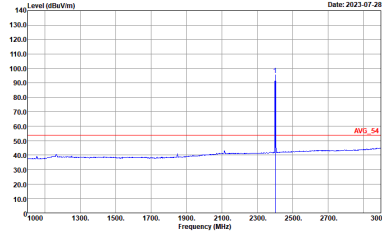



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>

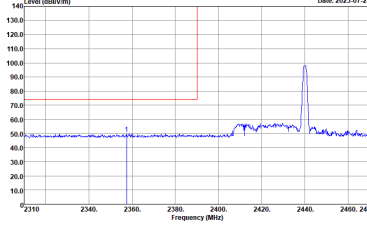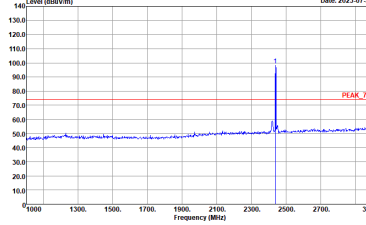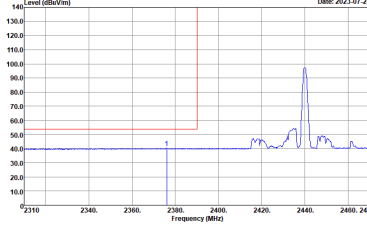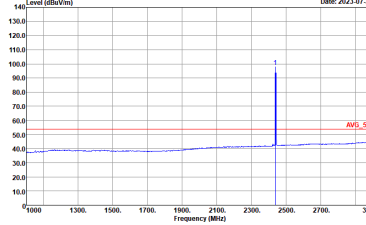





BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:2.700KHz SWT:Auto</p>



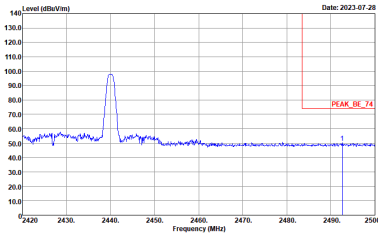
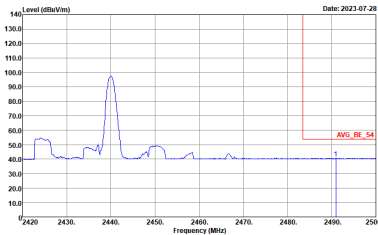


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
Horizontal		Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 9120D_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 9120D_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	Left blank

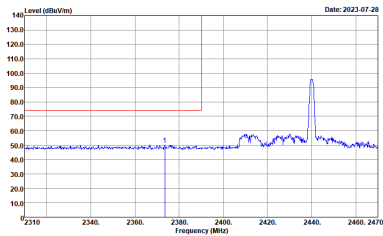
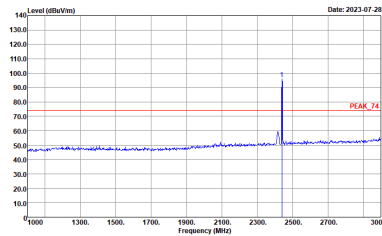
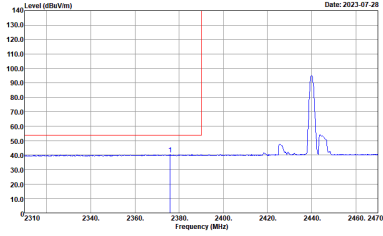
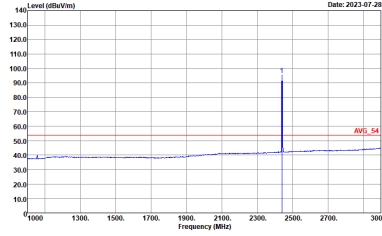


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
Vertical		Fundamental
Peak	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>



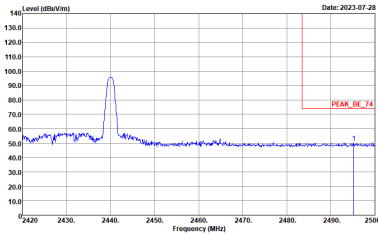
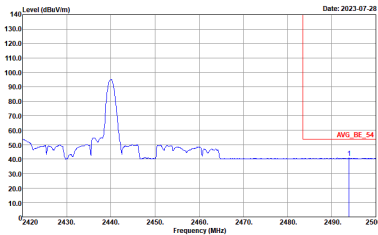


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
<b>Peak</b>	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	Left blank
<b>Avg.</b>	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000kHz VBW:2700kHz SWF:Auto</p>	Left blank

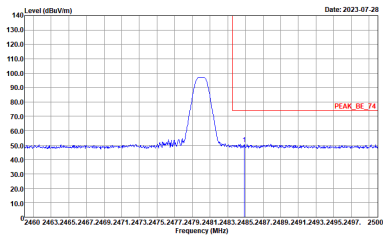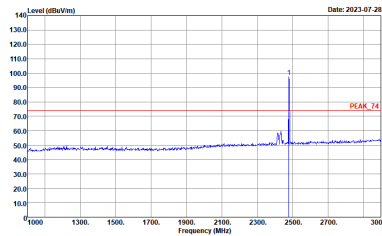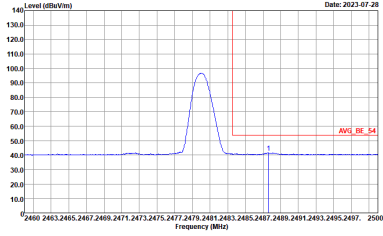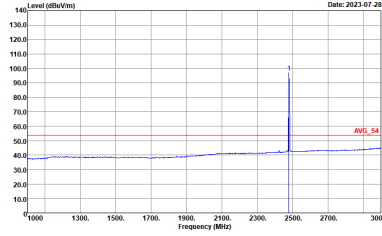

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH39 2480MHz		
Horizontal		Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. A red line indicates the peak level at 100.0 dBm/100kHz. The plot is labeled 'PEAK_BE_74'.</p> <p>Site : 03CH20-HY            Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. A red line indicates the peak level at 100.0 dBm/100kHz. The plot is labeled 'PEAK_74'.</p> <p>Site : 03CH20-HY            Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average spectrum. The average level is approximately 50 dBm/100kHz. A red line indicates the average level at 50.0 dBm/100kHz. The plot is labeled 'AVG_BE_54'.</p> <p>Site : 03CH20-HY            Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL            : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average spectrum. The average level is approximately 50 dBm/100kHz. A red line indicates the average level at 50.0 dBm/100kHz. The plot is labeled 'AVG_54'.</p> <p>Site : 03CH20-HY            Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL            : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>

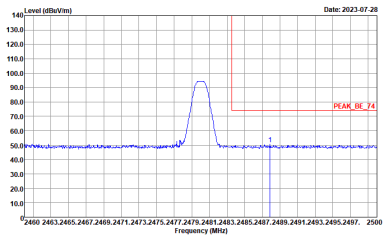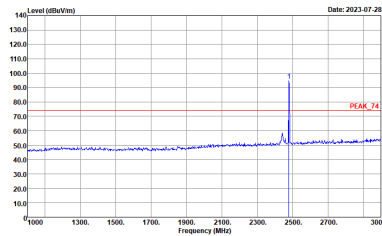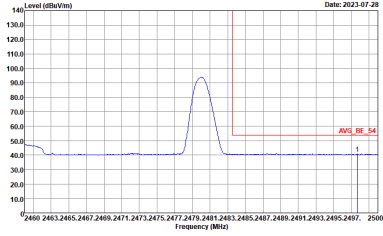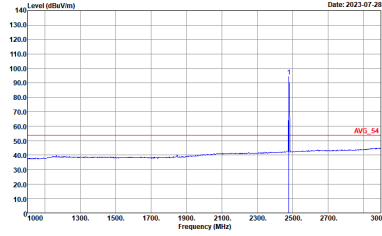

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red line indicating the peak level and a blue line for the spectrum. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red line indicating the peak level and a blue line for the spectrum. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : PEAK_74 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average spectrum with a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red line indicating the average level and a blue line for the spectrum. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average spectrum with a peak at 2480 MHz. The peak level is approximately 100 dBm/100kHz. The plot includes a red line indicating the average level and a blue line for the spectrum. The x-axis ranges from 2460 to 2500 MHz, and the y-axis ranges from 10.0 to 140.0 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : AVG_54 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:2.700kHz SWT:Auto</p>







2.4GHz 2400~2483.5MHz

BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL</p>

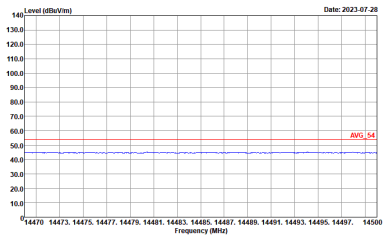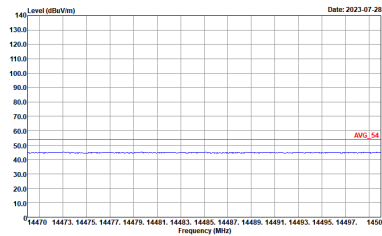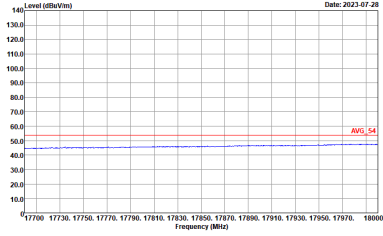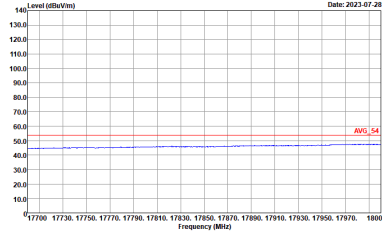





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH19 2440MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL</p>



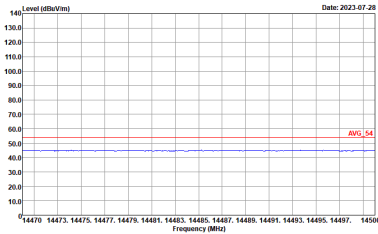
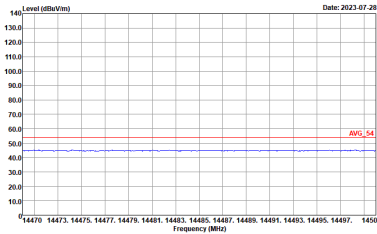
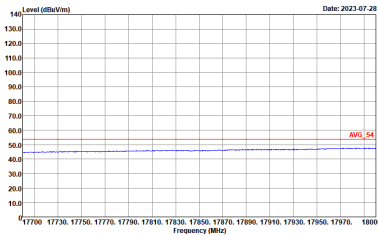
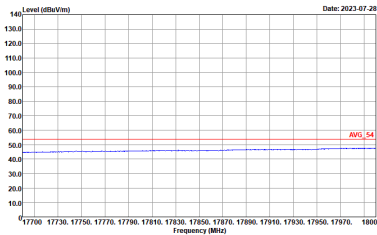


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>

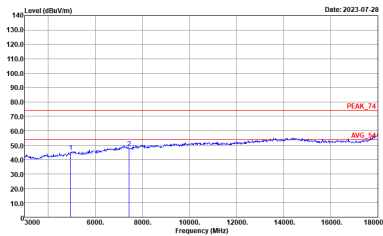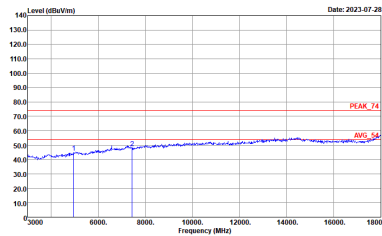

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL</p>

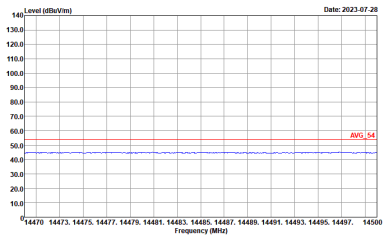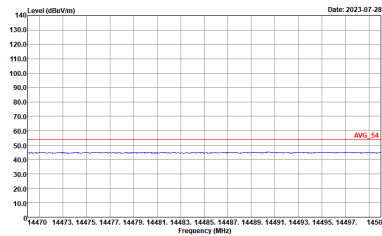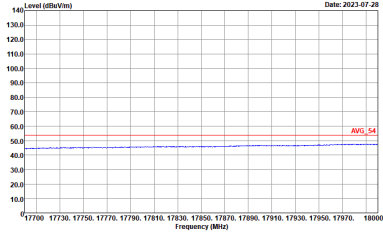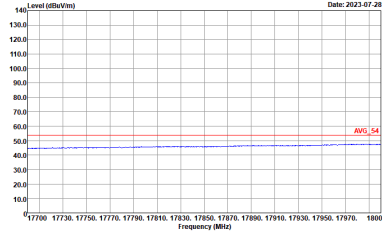





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>







<2Mbps>

2.4GHz 2400~2483.5MHz





BLE (Band Edge @ 3m)

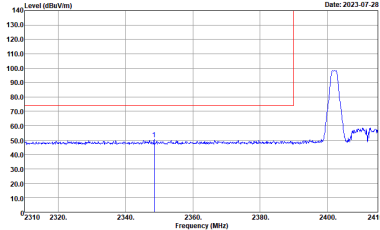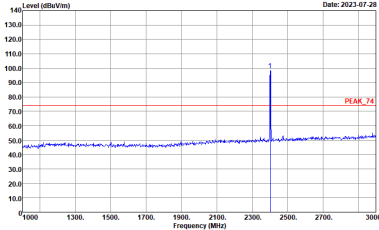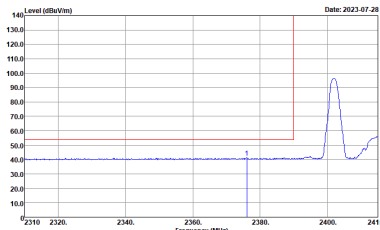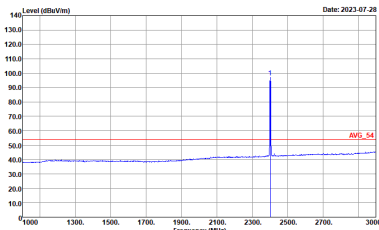BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Fundamental
Peak	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>

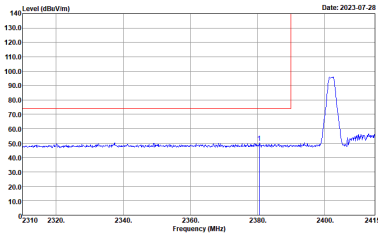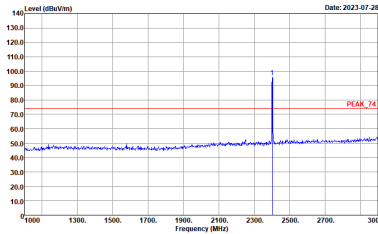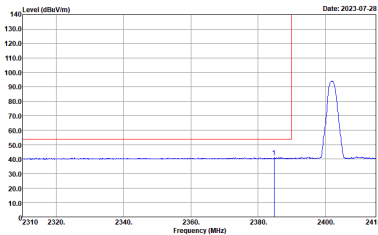
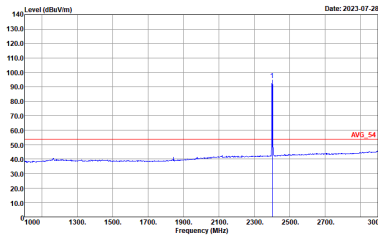


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH00 2402MHz	
	Vertical	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2415 MHz. A red line indicates the peak level at approximately 100 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red line indicates the peak level at approximately 75 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : PEAK_74 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 2310 to 2415 MHz. A red line indicates the average level at approximately 50 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : AV6_BE_54 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2402 MHz. The y-axis ranges from 10.0 to 140.0 dBm/100kHz, and the x-axis ranges from 1000 to 3000 MHz. A red line indicates the average level at approximately 50 dBm/100kHz.</p> <p>Site : 03CH20-HY            Condition : AV6_54 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>

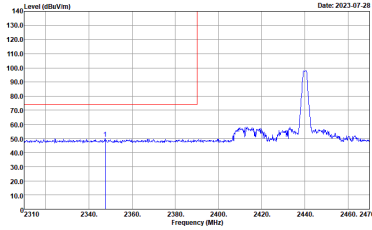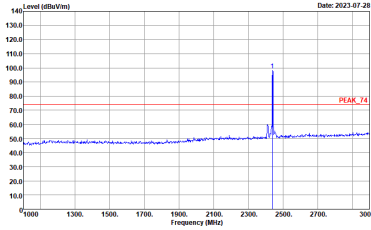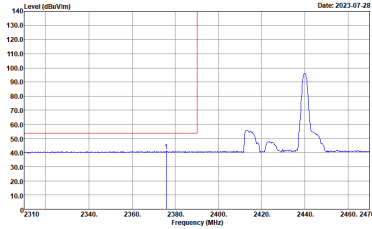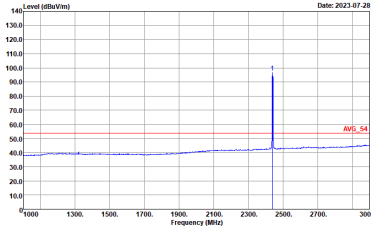

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - L		
	Horizontal	Fundamental
Peak	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:5.000KHz SWT:Auto</p>	 <p>Date: 2023-07-28</p> <p>Site : 03CH20-HY Condition : AVG_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000KHz VBW:5.000KHz SWT:Auto</p>

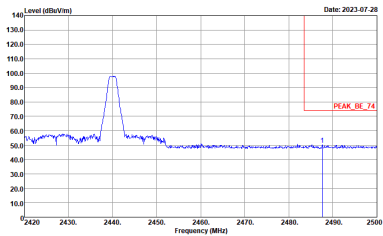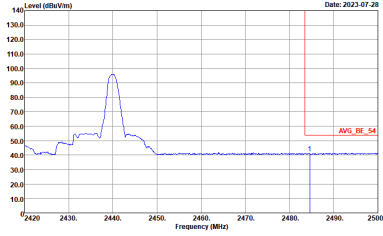



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Horizontal	Fundamental
<b>Peak</b>	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 9120D_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	Left blank
<b>Avg.</b>	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 9120D_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH19 2440MHz - L	
	Vertical	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:3000.000KHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL : RBW:1000.000KHz VBW:5.100KHz SWT:Auto</p>





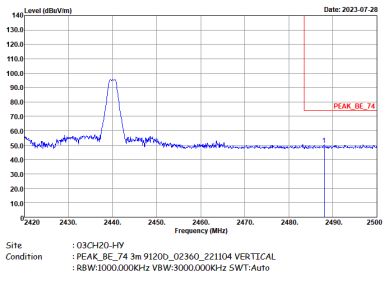
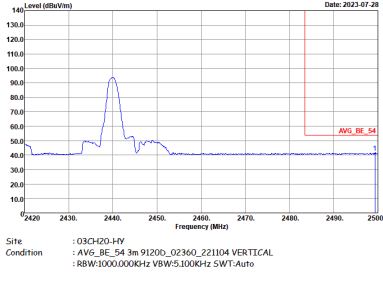


BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
BLE CH19 2440MHz - R		
	Vertical	Fundamental
Peak	 <p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 9120D_02360_221104 VERTICAL : RBW:1000.000kHz VBW:3000.000kHz SWF:Auto</p>	Left blank
Avg.	 <p>Site : 03CH20-HY Condition : AVG_BE_54 3m 9120D_02360_221104 VERTICAL : RBW:1000.000kHz VBW:5.100kHz SWF:Auto</p>	Left blank



BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Fundamental
Peak	<p>Site : 03CH20-HY Condition : PEAK_BE_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	<p>Site : 03CH20-HY Condition : AV6_BE_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>	<p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>

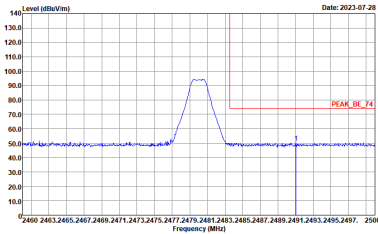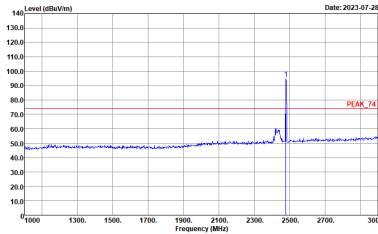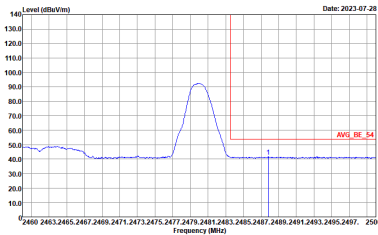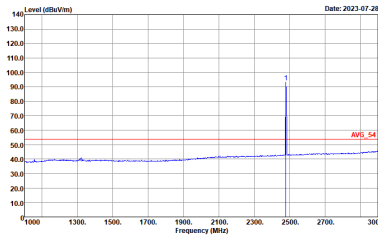

BLE	2.4GHz 2400~2483.5MHz Band Edge @ 3m	
	BLE CH39 2480MHz	
	Vertical	Fundamental
Peak	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 95 dBm/100kHz. The plot includes a red horizontal line labeled 'PEAK_BE_74' at the peak level.</p> <p>Site : 03CH20-HY            Condition : PEAK_BE_74 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing a peak at 2480 MHz. The peak level is approximately 95 dBm/100kHz. The plot includes a red horizontal line labeled 'PEAK_74' at the peak level.</p> <p>Site : 03CH20-HY            Condition : PEAK_74 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:3000.000kHz SWT:Auto</p>
Avg.	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 95 dBm/100kHz. The plot includes a red horizontal line labeled 'AVG_BE_54' at the average level.</p> <p>Site : 03CH20-HY            Condition : AVG_BE_54 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>	 <p>Level (dBm/100kHz) vs Frequency (MHz) plot showing an average level at 2480 MHz. The average level is approximately 95 dBm/100kHz. The plot includes a red horizontal line labeled 'AVG_54' at the average level.</p> <p>Site : 03CH20-HY            Condition : AVG_54 3m 91200_02360_221104 VERTICAL            : RBW:1000.000kHz VBW:5.100kHz SWT:Auto</p>







2.4GHz 2400~2483.5MHz



BLE (Harmonic @ 3m)

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH00 2402MHz	
	Horizontal	Vertical
Peak Avg.	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 91200_02360_221104 VERTICAL</p>

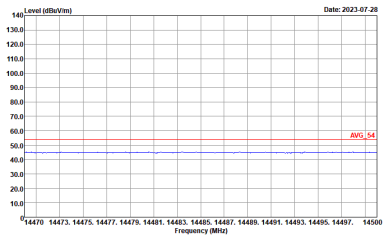
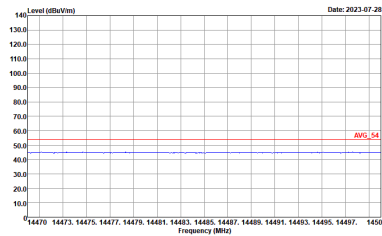
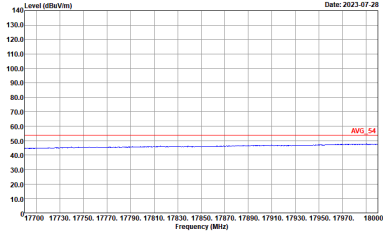
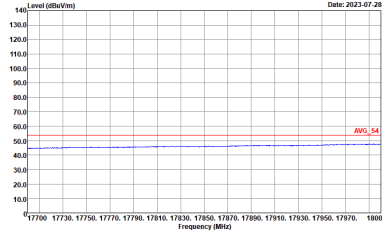


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH00 2402MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>

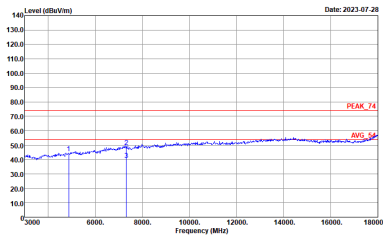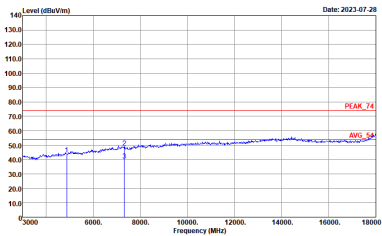

BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
Horizontal		Vertical
Peak Avg.	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL</p>

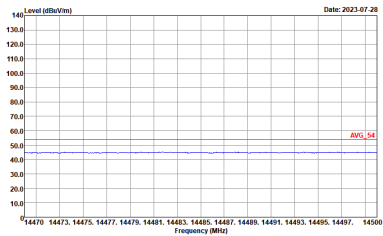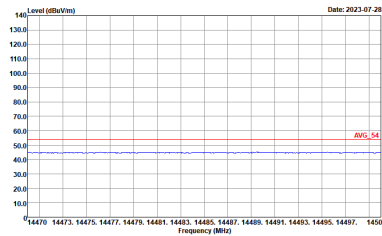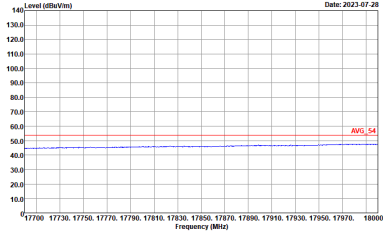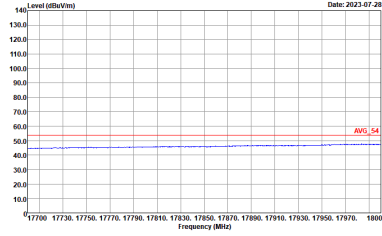





BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH19 2440MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>



BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
	BLE CH39 2480MHz	
	Horizontal	Vertical
Peak	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 HORIZONTAL</p>	<p>Site : 03CH20-HY Condition : PEAK_74 3m 9120D_02360_221104 VERTICAL</p>



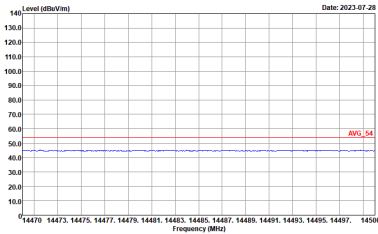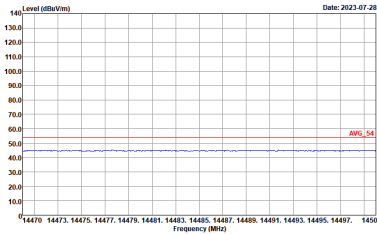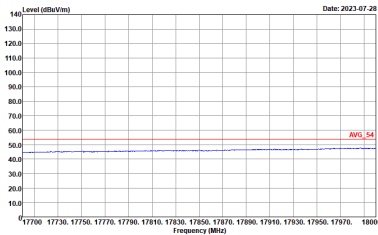
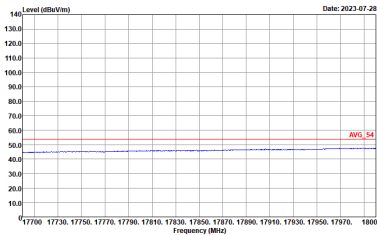


BLE	2.4GHz 2400~2483.5MHz Harmonic @ 3m	
BLE CH39 2480MHz		
Horizontal		Vertical
<p><b>14.47G</b> <b>~14.5G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>
<p><b>17.7G</b> <b>~18G</b> <b>Avg.</b></p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : AV6_54 3m 91200_02360_221104 VERTICAL</p>



Emission above 18GHz



2.4GHz BLE (SHF @ 1m)

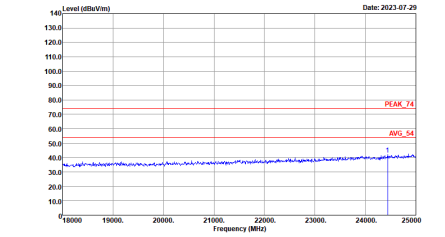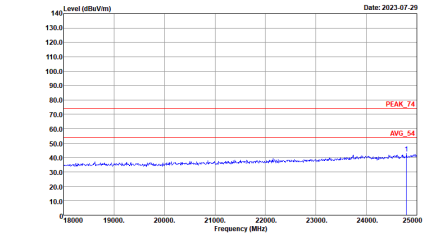BLE	2.4GHz 2400~2483.5MHz	
	BLE SHF	
	Horizontal	Vertical
<p>Peak</p> <p>Avg.</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 1m SHF_00994_221104 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : PEAK_74 1m SHF_00994_221104 VERTICAL</p>



Emission below 1GHz


2.4GHz BLE (LF)

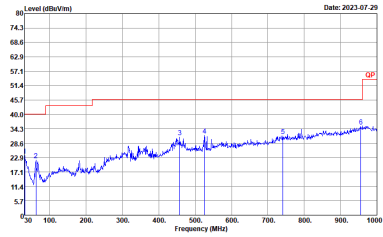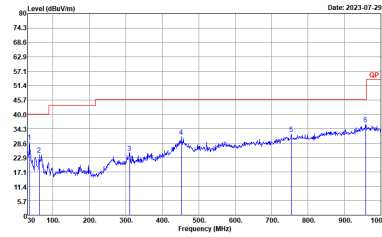BLE	2.4GHz 2400~2483.5MHz	
	BLE LF	
	Horizontal	Vertical
QP / Peak	 <p>Site : 03CH20-HY Condition : QP_3m_LF_55606608_221022 HORIZONTAL</p>	 <p>Site : 03CH20-HY Condition : QP_3m_LF_55606608_221022 VERTICAL</p>

## Appendix D. Duty Cycle Plots

### <EUT with Bluetooth Antenna (RD2458-5)>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth –LE for 1Mbps	61.66	386	2.59	2.7kHz
Bluetooth –LE for 2Mbps	32.59	204	5.1kHz	

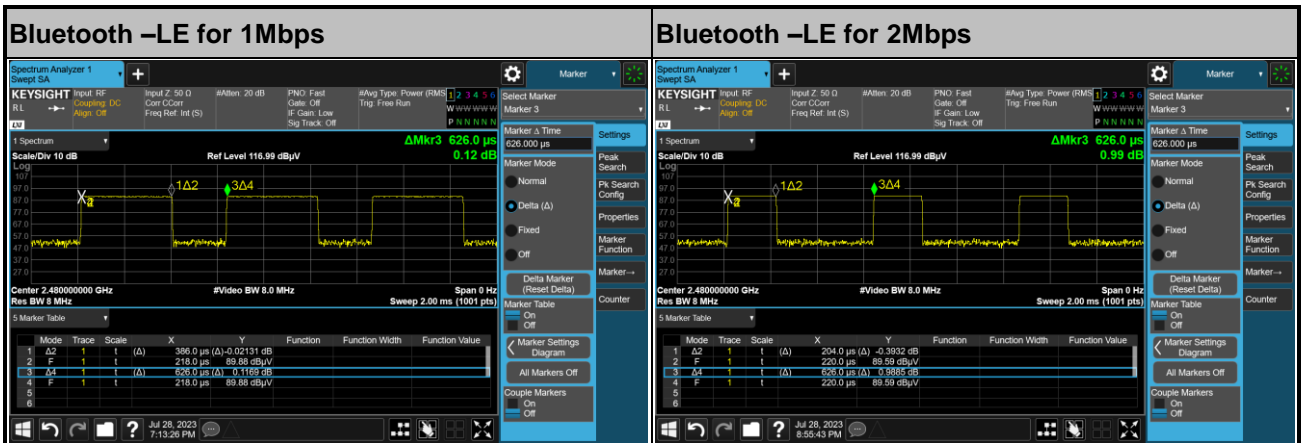

### <EUT with Bluetooth Antenna (B53026-90)>

Band	Duty Cycle(%)	T(us)	1/T(kHz)	VBW Setting
Bluetooth –LE for 1Mbps	61.54	384	2.60	2.7kHz
Bluetooth –LE for 2Mbps	32.21	201	4.98	5.1kHz

