

RF TEST REPORT





Report No.: FCC_IC_RF_SL18102402-ZBR-062_Co-Location_Rev3.0

Supersede Report No.: FCC_IC_RF_SL18102402-ZBR-062_Co-Location_Rev2.0

Applicant	:	Zebra Technologies Corporation
Host Product Name	:	Thermal Printer
Module Model No.	:	ZQ3BT M6e-MicroTT
Test Standard	:	FCC 15.225, 15.247, 15.249 RSS 247 Issue 2, RSS-210 Issue 9: 2016
Test Method	:	FCC 15.225, 15.247 ANSI C63.10 2013 RSS Gen Issue 5 2014
FCC ID	:	I28-ZBRZQ3BT I28-RFIDM6EMTT
IC	:	3798B-ZBRZQ3BT RFIDM6EMTT
Dates of test	:	12/10/2018 – 12/20/2018
Issue Date	:	01/04/2019
Test Result	:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Equipment complied with the specification		[X]
Equipment did not comply with the specification		[]

This Test Report is Issued Under the Authority of:

	
Shuo Zhang	Chen Ge
RF Test Engineer	Engineer Reviewer
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only	

Issued By:
SIEMIC Laboratories
775 Montague Expressway, Milpitas, CA 95035



775 Montague Expressway, Milpitas, CA 95035, USA • Phone: (+1) 408 526 1188 • Facsimile (+1) 408 526 1088

Visit us at: www.siemmic.com; Follow us at:



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Accreditation Body	Scope
USA	FCC, A2LA	EMC, RF/Wireless, Telecom
Canada	IC, A2LA, NIST	EMC, RF/Wireless, Telecom
Taiwan	BSMI, NCC, NIST	EMC, RF, Telecom, Safety
Hong Kong	OFTA, NIST	RF/Wireless, Telecom
Australia	NATA, NIST	EMC, RF, Telecom, Safety
Korea	KCC/RRR, NIST	EMI, EMS, RF, Telecom, Safety
Japan	VCCI, JATE, TELEC, RFT	EMI, RF/Wireless, Telecom
Mexico	NOM, COFETEL, Caniety	EMC, RF/Wireless, Telecom, Safety
Europe	A2LA, NIST	EMC, RF, Telecom, Safety
Israel	MOC, NIST	EMC, RF, Telecom, Safety

Accreditations for Product Certifications

Country	Accreditation Body	Scope
USA	FCC TCB, NIST	EMC, RF, Telecom
Canada	IC FCB, NIST	EMC, RF, Telecom
Singapore	iDA, NIST	EMC, RF, Telecom
EU	NB	EMC & RED Directive
Japan	MIC (RCB 208)	RF, Telecom
Hong Kong	OFTA (US002)	RF, Telecom

CONTENTS

1	REPORT REVISION HISTORY	4
2	EXECUTIVE SUMMARY	5
3	CUSTOMER INFORMATION	5
4	TEST SITE INFORMATION	5
5	MODIFICATION	5
6	EUT INFORMATION	6
6.1	EUT Description	6
6.2	Radio Description	6
7	SUPPORTING EQUIPMENT/SOFTWARE AND CABLING DESCRIPTION	8
7.1	Supporting Equipment	8
7.2	Cabling Description	8
7.3	Test Software Description	8
8	TEST SUMMARY	9
9	MEASUREMENT UNCERTAINTY	10
10	MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	11
10.1	Antenna Requirement	11
10.2	Radiated Measurements	12
10.2.1	Radiated Measurements 30MHz to 1GHz	12
10.2.2	Radiated Spurious Emissions between 1GHz-25GHz	14
ANNEX A. TEST INSTRUMENT		16
ANNEX A. SIEMIC ACCREDITATION		17

1 Report Revision History

Report No.	Report Version	Description	Issue Date
FCC_IC_RF_SL18012901-ZBR-003_Co-Location	None	Original	12/20/2018
FCC_IC_RF_SL18102402-ZBR-062_Co-Location_Rev1.0	1.0	Update EUT info	12/27/2018
FCC_IC_RF_SL18102402-ZBR-062_Co-Location_Rev2.0	2.0	Update Radio Description	01/03/2019
FCC_IC_RF_SL18102402-ZBR-062_Co-Location_Rev3.0	3.0	Update Antenna Info	01/04/2019

2 Executive Summary

The purpose of this test program was to demonstrate compliance of following product

Company: Zebra Technologies Corporation
Host Product: ZT610, ZT620
Module(s) Model: ZQ3BT
M6e-MicroTT

against the current Stipulated Standards. The specified model product stated above has demonstrated compliance with the Stipulated Standard listed on 1st page.

3 Customer information

Applicant Name	:	Zebra Technologies Corporation
Applicant Address	:	3 Overlook Point Lincolnshire, IL 60069, USA
Manufacturer Name	:	Zebra Technologies Corporation
Manufacturer Address	:	3 Overlook Point Lincolnshire, IL 60069, USA

4 Test site information

Lab performing tests	:	SIEMIC Laboratories
Lab Address	:	775 Montague Expressway, Milpitas, CA 95035
FCC Test Site No.	:	881796
IC Test Site No.	:	4842D-2
VCCI Test Site No.	:	A0133

5 Modification

Index	Item	Description	Note
-	-	-	-
-	-	-	-

6 EUT Information

6.1 EUT Description

Host Product Name	Thermal Printer
Host Model No.	ZT610, ZT620
Trade Name	Zebra Technologies Corporation
Serial No.	76J184300386, 76J184400121
Input Power	100-240V, 50-60Hz
Power Adapter Manu/Model	N/A, internal PSU
Power Adapter SN	N/A, internal PSU
Product Hardware version	N/A
Date of EUT received	12/01/2018
Equipment Class/ Category	DTS, DSS
Port/Connectors	USB, USB host x2, Gig-Ethernet, RS232, Parallel
Remark	Only model ZT620 is tested as worst case. ZT610 and ZT620 have the same internal power supply and control PCB

6.2 Radio Description

Specifications for Radio:

Bluetooth LE:

Radio Type	Bluetooth LE
Radio Module	ZQ3BT
Operating Frequency	2402MHz-2480MHz
Modulation	DSSS (LE)
Channel Spacing	2MHz (LE)
Antenna Type	Chip
Antenna Gain	1.69 dBi
Antenna Connector Type	N/A
Maximum conducted power	4.72 dBm See FCC IC_SL17060501-ZBR-021_BLE_Rev2.0 pg24
Maximum EIRP	6.41 dBm

BT Radio:

Radio Type	Bluetooth (Ver4.0+EDR)
Radio Module	ZQ3BT
Operating Frequency	2402MHz-2480MHz
Modulation	GFSK, DQPSK, 8DPSK (BDR, EDR)
Channel Spacing	1MHz (BDR, EDR)
Antenna Type	Chip
Antenna Gain	1.69 dBi
Antenna Connector Type	N/A
Maximum conducted power	7.4 dBm See FCC IC_SL17060501-ZBR-021_DSS_Rev2.0 pg32
Maximum EIRP	9.09 dBm

UHF RFID for colocation with ZQ3BT

Radio Type	UHF RFID
Radio Module	M6e-MicroTT
Operating Frequency	902.75-927.25 MHz
Modulation	ASK
Antenna Gain	-36dBi
Channel Separation	500 KHz
Antenna Type	PCB array
Number of Channels	50
Antenna Connector Type	N/A
Maximum conducted power	28.11 dBm See FCC_RF_SL13110101-ZBR-051_RFID_Rev1.0 pg28
Maximum EIRP	-7.89 dBm

7 Supporting Equipment/Software and cabling Description

7.1 Supporting Equipment

Item	Supporting Equipment Description	Model	Serial Number	Manufacturer	Note
1	Laptop	ThinkPad T420s	N/A	Lenovo	-

7.2 Cabling Description

Name	Connection Start		Connection Stop		Length / shielding Info		Note
	From	I/O Port	To	I/O Port	Length (m)	Shielding	
USB	EUT	I/O Port	Laptop	USB	2	Unshielded	-

7.3 Test Software Description

Test Item	Software	Description
RF Testing	Zebra Toolbox	Set the EUT to transmit continuously in different test mode

8 Test Summary

Test Item	Test standard		Test Method/Procedure	Pass / Fail
Antenna Requirement	FCC	15.203	ANSI C63.10 – 2013 558074 D01 DTS Meas Guidance v05	<input checked="" type="checkbox"/> Pass
	IC	-		<input type="checkbox"/> N/A
AC Conducted Emissions Voltage	FCC	15.225(a)	ANSI C63.10 2013 RSS Gen. 8.8	<input type="checkbox"/> Pass
	IC	RSS Gen (7.2.2)		<input checked="" type="checkbox"/> N/A

Test Item	Test standard		Test Method/Procedure		Pass / Fail
Radiated Spurious Emission	FCC	-	FCC	RSS Gen Issue 5: 2018	<input checked="" type="checkbox"/> Pass
	IC		IC		<input type="checkbox"/> N/A
Frequency Stability	FCC	-	FCC	-	<input type="checkbox"/> Pass
	IC	-	IC	-	<input checked="" type="checkbox"/> N/A
Occupied Bandwidth	FCC	-	FCC	-	<input type="checkbox"/> Pass
	IC	-	IC	-	<input checked="" type="checkbox"/> N/A
Remark	<ol style="list-style-type: none"> All measurement uncertainties are not taken into consideration for all presented test result. The applicant shall ensure frequency stability by showing that an emission is maintained within the band of operation under all normal operating conditions as specified in the user's manual. Only Radiated Spurious Emission for colocation has been tested for this report 				

9 Measurement Uncertainty

Emissions			
Test Item	Frequency Range	Description	Uncertainty
AC Conducted Emissions	150KHz – 30MHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±3.5dB
RF conducted measurement	150KHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2	±0.95dB
Radiated Spurious Emissions	30MHz – 1GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±6dB
Radiated Spurious Emissions	1GHz – 40GHz	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	±6dB

10 Measurements, examination and derived results

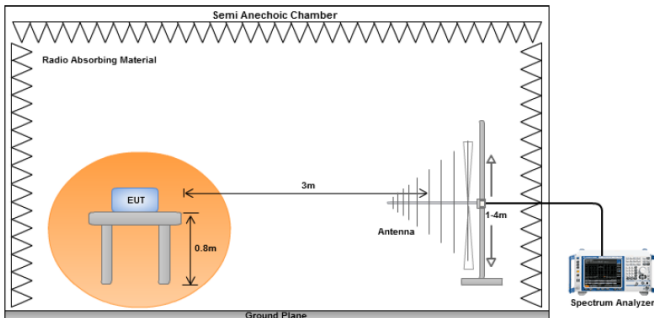
10.1 Antenna Requirement

Spec	Requirement	Applicable
§15.203	<p>An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.</p> <p>Antenna requirement must meet at least one of the following:</p> <p>a) Antenna must be permanently attached to the device. b) The antenna must use a unique type of connector to attach to the device. c) Device must be professionally installed. The installer shall be responsible for ensuring that the correct antenna is employed by the device.</p>	<input checked="" type="checkbox"/>
Remark	The Bluetooth Module uses a Chip antenna that is permanently attached to the board which meets the requirement. The UHF RFID Module uses a Loop/Coil antenna that is integrated to the board which meets the requirement.	
Result	<input checked="" type="checkbox"/> PASS <input type="checkbox"/> FAIL	

10.2 Radiated Measurements

10.2.1 Radiated Measurements 30MHz to 1GHz

Requirement(s):

Spec	Requirement	Applicable										
47 CFR §15.225 RSS-210 (B.6)	<div>Operation within the band 13.110–14.010 MHz: (a) The field strength of any emissions within the band 13.553–13.567 MHz shall not exceed 15,848 microvolts/meter at 30 meters. (b) Within the bands 13.410–13.553 MHz and 13.567–13.710 MHz, the field strength of any emissions shall not exceed 334 microvolts/meter at 30 meters. (c) Within the bands 13.110–13.410 MHz and 13.710–14.010 MHz the field strength of any emissions shall not exceed 106 microvolts/meter at 30 meters. (d) The field strength of any emissions appearing outside of the 13.110–14.010 MHz band shall not exceed the general radiated emission limits in §15.209.</div> <table><thead><tr><th>Frequency range (MHz)</th><th>Field Strength (uV/m)</th></tr></thead><tbody><tr><td>30 – 88</td><td>100</td></tr><tr><td>88 – 216</td><td>150</td></tr><tr><td>216 960</td><td>200</td></tr><tr><td>Above 960</td><td>500</td></tr></tbody></table>	Frequency range (MHz)	Field Strength (uV/m)	30 – 88	100	88 – 216	150	216 960	200	Above 960	500	<div>☒</div>
Frequency range (MHz)	Field Strength (uV/m)											
30 – 88	100											
88 – 216	150											
216 960	200											
Above 960	500											
Test Setup												
Procedure	<div>1. The EUT was switched on and allowed to warm up to its normal operating condition. 2. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: a. Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. b. The EUT was then rotated to the direction that gave the maximum emission. c. Finally, the antenna height was adjusted to the height that gave the maximum emission. 3. A Quasi-peak measurement was then made for that frequency point. 4. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.</div>											
Test Date	12/10/2018 – 12/19/2018	<div>Environmental conditions</div> <div>Temperature20.1°C Relative Humidity36% Atmospheric Pressure1026mbar</div>										
Remark	-											
Result	<div>☒ Pass</div> <div>☐ Fail</div>											

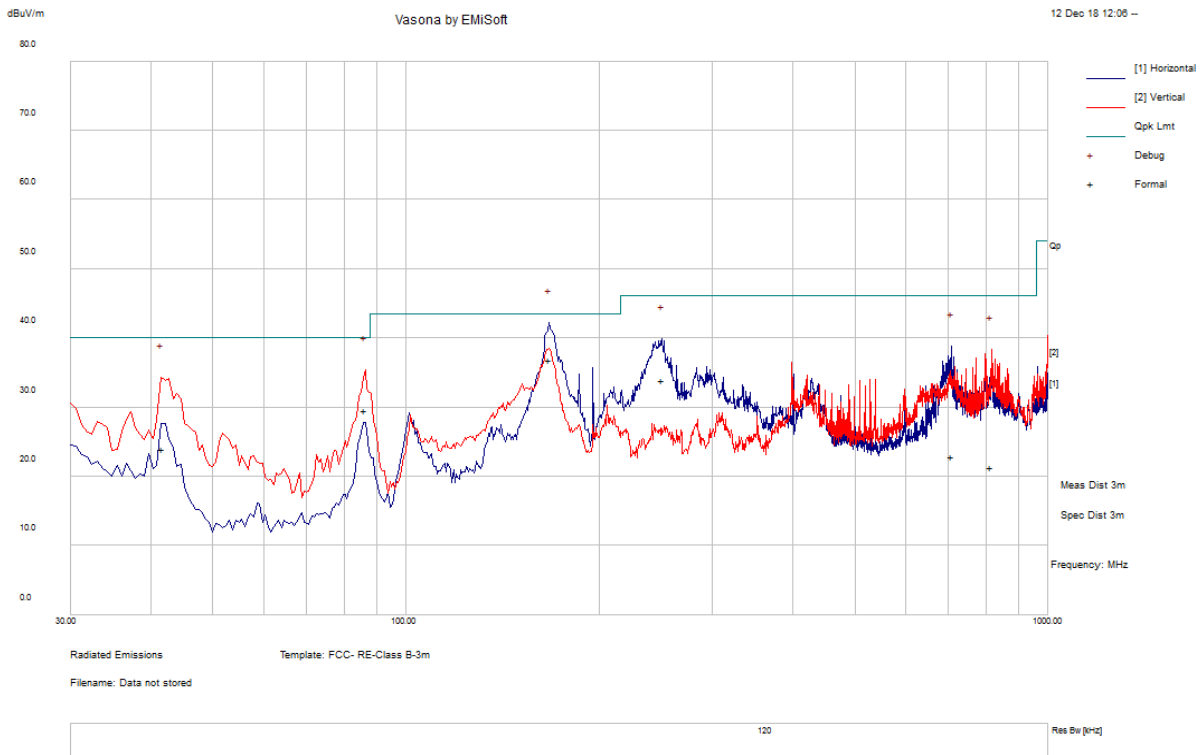
Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☒ Yes (See below) ☐ N/A

Test was done by Shuo Zhang at 10-meter chamber.

Test specification:	Radiated Emissions			
Mains Power:	120VAC, 60Hz		Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Tested by:	Shuo Zhang			
Test Date:	12/12/2018			
Remarks:	UHF and BT transmit simultaneously			

$f=30\text{MHz} - 1000\text{MHz}$ plot and 3-meter distance

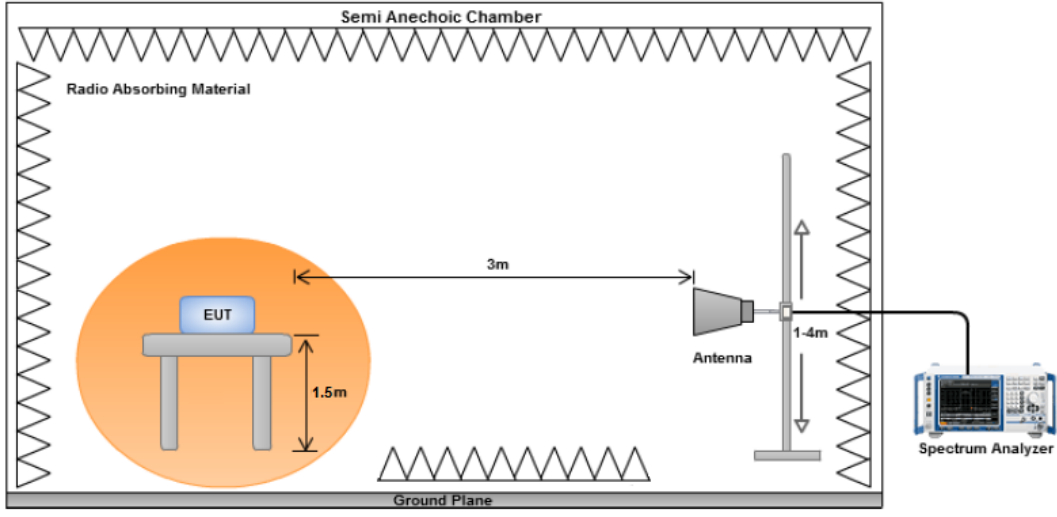


$f=30\text{MHz} - 1000\text{MHz}$ Measurements

Frequency MHz	Raw dBuV/m	Cable Loss	AF dB	Level dBuV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBuV/m	Margin dB	Pass /Fail
167.23	48.11	12.33	-23.6	36.84	Quasi Max	H	143	253	43.5	-6.66	Pass
86.39	45.55	11.75	-27.7	29.6	Quasi Max	V	101	206	40	-10.4	Pass
41.76	34.26	11.34	-21.53	24.07	Quasi Max	V	100	188	40	-15.93	Pass
250.78	45.35	12.93	-24.41	33.87	Quasi Max	H	107	233	46	-12.13	Pass
707.31	22.89	15.19	-15.17	22.91	Quasi Max	H	161	242	46	-23.09	Pass
815.74	20.14	15.51	-14.27	21.39	Quasi Max	V	345	257	46	-24.61	Pass

10.2.2 Radiated Spurious Emissions between 1GHz-25GHz

Requirement(s):

Spec	Item	Requirement	Applicable
47CFR§15.247(d), RSS210(A8.5)	a)	For non-restricted band, In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB or 30dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, determined by the measurement method on output power to be used. Attenuation below the general limits specified in § 15.209(a) is not required <input type="checkbox"/> 20 dB down <input checked="" type="checkbox"/> 30 dB down	<input checked="" type="checkbox"/>
	b)	or restricted band, emission must also comply with the radiated emission limits specified in 15.209	<input type="checkbox"/>
Test Setup			
Procedure	<ol style="list-style-type: none"> The EUT was switched on and allowed to warm up to its normal operating condition. The test was carried out at the selected frequency points obtained from the EUT characterisation. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner: <ol style="list-style-type: none"> Vertical or horizontal polarisation (whichever gave the higher emission level over a full rotation of the EUT) was chosen. The EUT was then rotated to the direction that gave the maximum emission. Finally, the antenna height was adjusted to the height that gave the maximum emission. An average measurement was then made for that frequency point. Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured. 		
Remark	The EUT was scanned up to 40GHz. Both horizontal and vertical polarities were investigated. The results show only the worst case.		
Result	<input checked="" type="checkbox"/> Pass		

Test Data ☒ Yes (See below) ☐ N/A

Test Plot ☐ Yes (See below) ☒ N/A

Test was done by Shuo Zhang at 10-meter chamber.

















Test specification:	Radiated Emissions			
Mains Power:	120VAC, 60Hz		Result:	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail
Tested by:	Shuo Zhang			
Test Date:	12/12/2018			
Remarks:	UHF and BT transmit simultaneously			







Frequency MHz	Raw dBμV/m	Cable Loss	AF dB	Level dBμV/m	Measurement Type	Pol	Hgt cm	Azt Deg	Limit dBμV/m	Margin dB	Pass /Fail
4803.64	55.59	4.1	-0.93	58.77	Peak Max	H	103	54	74	-15.23	Pass
8818.23	41.25	5.62	-0.15	46.73	Peak Max	V	101	144	74	-27.27	Pass
1593.34	47.43	2.43	-6.04	43.83	Peak Max	V	137	270	74	-30.17	Pass
4803.64	48.76	4.1	-0.93	51.93	Average Max	H	103	54	54	-2.07	Pass
8818.23	27.5	5.62	-0.15	32.98	Average Max	V	101	144	54	-21.02	Pass
1593.34	32.1	2.43	-6.04	28.49	Average Max	V	137	270	54	-25.51	Pass

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Cycle	Cal Due	In use
Radiated Emissions						
Keysight EXA 44GHz Spectrum Analyzer	N9030B(PXA)	MY57140374	09/06/2018	1 Year	09/06/2019	<input checked="" type="checkbox"/>
Bi-Log antenna (30MHz~2GHz)	JB1	A030702	03/09/2018	1 Year	03/09/2019	<input checked="" type="checkbox"/>
Horn Antenna (1GHz~26GHz)	3115	100059	11/09/2018	1 Year	11/09/2019	<input checked="" type="checkbox"/>
Horn Antenna (18GHz~40GHz)	PA-840	181251	06/23/2018	1 Year	06/23/2019	<input checked="" type="checkbox"/>
Preamplifier (100KHz-7GHz)	LPA-6-30	11170602	05/09/2018	1 Year	05/09/2019	<input checked="" type="checkbox"/>
Pre-Amplifier (1-26.5GHz)	8449B	3008A00715	08/16/2018	1 Year	08/16/2019	<input checked="" type="checkbox"/>

Annex A. SIEMIC Accreditation

Accreditations	Document	Scope / Remark
ISO 17025 (A2LA)		Please see the documents for the detailed scope
ISO Guide 65 (A2LA)		Please see the documents for the detailed scope
TCB Designation		A1 , A2 , A3 , A4 , B1 , B2 , B3 , B4 , C
FCC DoC Accreditation		FCC Declaration of Conformity Accreditation
FCC Site Registration		3 meter site
FCC Site Registration		10 meter site
IC Site Registration		3 meter site
IC Site Registration		10 meter site
EU NB		Radio Equipment: EN45011: EN ISO/IEC 17065
		Electromagnetic Compatibility: EN45011 – EN ISO/IEC 17065
Singapore iDA CB(Certification Body)	 	Phase I , Phase II
Vietnam MIC CAB Accreditation		Please see the document for the detailed scope
Hong Kong OFCA		(Phase II) OFCA Foreign Certification Body for Radio and Telecom
		(Phase I) Conformity Assessment Body for Radio and Telecom
Industry Canada CAB		Radio: Scope A – All Radio Standard Specification in Category I
		Telecom: CS-03 Part I, II, V, VI, VII, VIII

Japan Recognized Certification Body Designation		<p>Radio: A1. Terminal equipment for purpose of calling</p> <p>Telecom: B1. Specified radio equipment specified in Article 38-2, Paragraph 1, Item 1 of the Radio Law</p>
Korea CAB Accreditation		<p>EMI: KCC Notice 2008-39, RRL Notice 2008-3: CA Procedures for EMI KN22: Test Method for EMI</p> <p>EMS: KCC Notice 2008-38, RRL Notice 2008-4: CA Procedures for EMS KN24, KN61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11: Test Method for EMS</p> <p>Radio: RRL Notice 2008-26, RRL Notice 2008-2, RRL Notice 2008-10, RRL Notice 2007-49, RRL Notice 2007-20, RRL Notice 2007-21, RRL Notice 2007-80, RRL Notice 2004-68</p> <p>Telecom: President Notice 20664, RRL Notice 2007-30, RRL Notice 2008-7 with attachments 1, 3, 5, 6; President Notice 20664, RRL Notice 2008-7 with attachment 4</p>
Taiwan NCC CAB Recognition		LP0002, PSTN01, ADSL01, ID0002, IS6100, CNS14336, PLMN07, PLMN01, PLMN08
Taiwan BSMI CAB Recognition		CNS 13438
Japan VCCI		<p>R-3083: Radiation 3 meter site</p> <p>C-3421: Main Ports Conducted Interference Measurement</p> <p>T-1597: Telecommunication Ports Conducted Interference Measurement</p>
Australia CAB Recognition		<p>EMC: AS/NZS CISPR 11, AS/NZS CISPR 14.1, AS/NZS CISPR22, AS/NZS 61000.6.3, AS/NZS 61000.6.4</p> <p>Radiocommunications: AS/NZS 4281, AS/NZS 4268, AS/NZS 4280.1, AS/NZS 4280.2, AS/NZS 4295, AS/NZS 4582, AS/NZS 4583, AS/NZS 4769.1, AS/NZS 4769.2, AS/NZS 4770, AS/NZS 4771</p> <p>Telecommunications: AS/ACIF S002:05, AS/ACIF S003:06, AS/ACIF S004:06, AS/ACIF S006:01, AS/ACIF S016:01, AS/ACIF S031:01, AS/ACIF S038:01, AS/ACIF S040:01, AS/ACIF S041:05, AS/ACIF S043.2:06, AS/ACIF S60950.1</p>
Australia NATA Recognition		AS/ACIF S002, AS/ACIF S003, AS/ACIF S004, AS/ACIF S006, AS/ACIF S016, AS/ACIF S031, AS/ACIF S038, AS/ACIF S040, AS/ACIF S041, AS/ACIF S043.2