TEST REPORT

FROM



For

RW-ZBR3 Bluetooth Radio Module

То

47 CFR 15.247

Test Report Serial No.: SL05082301-ZBRA-024

This report supersedes None

Remarks:

Equipment complied with the specification Equipment did not comply with the specification

This Test Report is Issued Under the Authority of:

Tested by: Alvin Ilarina, Test Enginner

Reviewed by: Leslie Bai, Lab Manager


Issue date: 18 August 2005

Equipment Details:

Manufacturer: Zebra Technologies Corporation



















Issue Date

Serial#SL05082301-ZBRA-024 18 August 2005 2 of 38

Page

This page has been left blank intentionally.

Page

CONTENTS

EX	ECUTIVE SUMMARY5
1	TECHNICAL DETAILS6
2	TESTS REQUIRED7
3	MEASUREMENTS, EXAMINATIONS AND DERIVED RESULTS8
4	TEST INSTRUMENTATION
AP	PENDIX A: EUT TEST CONDITIONS
AP	PENDIX B: EXTERNAL PHOTOS
AP	PENDIX C: CIRCUIT/BLOCK DIAGRAMS34
	PENDIX D: INTERNAL PHOTOS35
AP	PENDIX F: PRODUCT DESCRIPTION36
AP	PENDIX H: FCC LABEL LOCATION37
AP	PENDIX I: USER MANUAL



Issue Date

Serial#SL05082301-ZBRA-024 18 August 2005 4 of 38

Page

This page has been left blank intentionally.



Serial#SL05082301-ZBRA-024 Issue Date

18 August 2005

5 of 38 Page

Executive Summary

The purpose of this test programme was to demonstrate compliance of the Zebra Technologies Corporation, RW-ZBR3 Bluetooth Radio Module against the current 47 CFR 15.247. The RW-ZBR3 Bluetooth Radio Module demonstrated compliance with the 47 CFR 15.247.

Zebra Technologies Corporation is the applicant and claimed manufacturer of this tested product. For the detailed description of this product, please refer to the RW-ZBR3 Bluetooth Radio Module User Manual.

The unit was tested with two unique antennas that become integral to the host unit:

ZEBRA CX17109-1 ZEBRA CX17109-2

The test has demonstrated that this unit complies with stipulated standards.



Manufacturer

Standard applied

Zebra Technologies Corporation RW-ZBR3 Bluetooth Radio Module 47 CFR 15.247

Serial#SL05082301-ZBRA-024 Issue Date 18 August 2005

6 of 38 Page

Technical Details

Compliance testing of RW-ZBR3 Bluetooth Radio Purpose

Module with 47 CFR 15.247

Applicant / Client Zebra Technologies Corporation

333 Corporate Wood Parkway Vernon Hills, IL 60061

Zebra Technologies Corporation

Laboratory performing the tests SIEMIC Labs

> 2206 Ringwood Avenue San Jose, CA 95131

Test location(s) SIEMIC Labs

2206 Ringwood Avenue San Jose, CA 95131

Test report reference number SL05082301-ZBRA-024 Date EUT received 17 August 2005

47 CFR 15.247

No of Units: 1 **Equipment Category:** DSS

Trade/Product Name: RW-ZBR3 Bluetooth Radio Module Type/Model Name/No: RW-ZBR3 Bluetooth Radio Module Technical Variants: None

FCC ID No. I28MD-BTC2TY3

Issue Date Page

Serial#SL05082301-ZBRA-024 18 August 2005

7 of 38

Tests Required

The product was tested in accordance with the following specifications. The test results recorded in this Test Report are exclusively referred to the tested sample(s).

Test Standard	Description	Pass / Fail	
47CFR Part 15, General Cond	itions		
15.207	Power Line Conducted Emissions	N/A	
15.209	Radiated Spurious Emissions	Pass	
47CFR Part 15, §15.247			
15.247(a)1	Carrier Frequency Separation	Pass	
15.247(a)1	20 dB Bandwidth	Pass	
15.247(a)1	Number of Hopping Frequencies	Pass	
15.247(a)1	Time of Occupancy	Pass	
15.247(b)(1)	Power Output	Pass	
15.247(c)	Conducted Spurious Emissions	Pass	
15.247(c)	Radiated Spurious Emissions	Pass	
15.205	Radiated Spurious Emissions Bandedge	Pass	
ANSI C63.4: 2001		•	

Notes: Deviations to above standards are outlined in specific test sections if applicable. Cable loss and external attenuation are compensated for in the measurement system when applicable.



Module Issue Date

Serial#SL05082301-ZBRA-024 Issue Date 18 August 2005

Page 8 of 38

3 Measurements, Examinations and Derived Results

3.1 **General observations**

Equipment serial number(s)								
Module: Part number: Serial number:								
RW-ZBR3 Bluetooth Radio Module	RW-ZBR3 Bluetooth Radio Module	None						
Wieddio	Widdaid							



47 CFR 15.247

Serial#SL05082301-ZBRA-024 Issue Date 18 August 2005

Page 9 of 38

3.2 <u>Test Results</u>

3.2.1 Power Line Conducted Emissions

Requirement(s): 47 CFR §15.207

Results: Not Applicable – the equipment is battery powered.

47 CFR 15.247

Serial#SL05082301-ZBRA-024 Issue Date 18 August 2005


Page 10 of 38

3.2.2 Radiated Spurious Emissions < 1 GHz

Requirement(s): 47 CFR §15.209

Procedures: Radiated emissions were measured according to ANSI C63.4. Equipment was tested in

three orthogonal axis at hi mid and low with the worse case reported

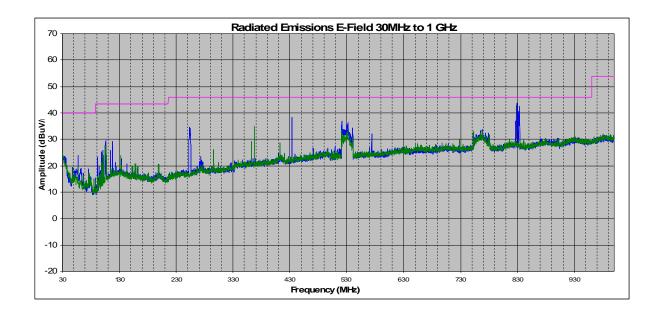

Frequency	Azimuth	Measure	Antenna Polarity	Antenna Height	Raw Amplitude @ 3m	ACF	CBL loss	Corrected Amplitude @ 3m	Limit @3m	Delta
(MHz)	(degrees)	(Avg/QP)	(H/V)	(m)	(dBuV/m)	(dBm)	(dBm)	(dBuV/m)	(dBuV/m)	(dBuV/m)
57.19	180	qp	v	1	11.4	7.84	0.78	20.01	40.00	-19.99
105.69	90	qp	v	1	8.9	12.24	0.91	22.04	43.50	-21.46
114.41	90	qp	v	1	10.9	13.54	0.91	25.36	43.50	-18.14
521.04	200	qp	v	1	11.6	17.80	1.82	31.22	46.00	-14.78
532.41	180	qp	h	1.6	15.8	18.15	1.83	35.78	46.00	-10.22
769.02	330	qp	v	1	10.2	20.79	2.14	33.13	46.00	-12.87
835.10	180	qp	v	1	8.4	21.40	2.27	32.07	46.00	-13.93

Issue Date

Serial#SL05082301-ZBRA-024 18 August 2005

11 of 38 Page


3.2.3 Carrier Frequency Separation

Requirement(s): 47 CFR §15.247(a)(1)

The carrier frequency separation measurement was taken conducted using a spectrum

analyzer.

Plot #	Carrier Frequency Separation (MHz)
1	1.0

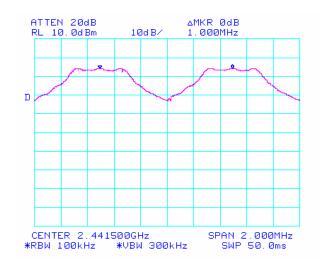

Plot 1: Carrier Frequency Separation

47 CFR 15.247

Serial#SL05082301-ZBRA-024 Issue Date 18 August 2005


Page 12 of 38

3.2.4 20dB Bandwidth


Requirement(s): 47 CFR §15.247(a)(1)

Procedures: The 20dB bandwidths were measured conducted using a spectrum analyzer for the low, mid, and hi channels.


Plot #	Channel	Channel Bandwidth (kHz)
2	Low	713
3	Mid	713
4	Hi	713

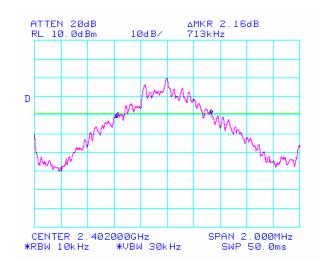

Plot 1: 20dB Bandwidth Low

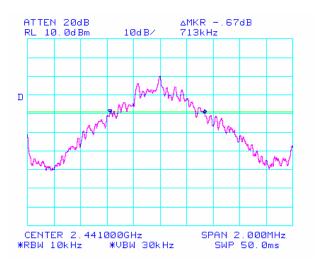

Plot 2: 20dB Bandwidth Mid

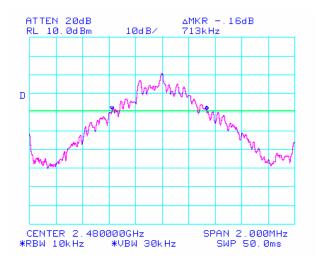

Plot 3: 20dB Bandwidth Hi

Issue Date

Serial#SL05082301-ZBRA-024 18 August 2005

Page


14 of 38

3.2.5 Number of Hopping Frequencies

Requirement(s): 47 CFR §15.247(a)(1)

Procedures: The number of hopping channels was measured conducted with a spectrum analyzer.

Plot #	Number of Hopping Channels
4	79

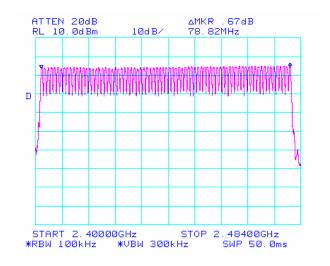

Plot 4: Number of Hopping Channels



Issue Date

Serial#SL05082301-ZBRA-024 18 August 2005

Page

15 of 38

3.2.6 Time of Occupancy

Requirement(s): 47 CFR §15.247(a)1

Time of occupancy shall not be greater than 0.4 seconds within a period of 0.4 second

multiplied by the number of hopping channels (79) = 31.6 seconds

The time of occupancy was measured conducted with a spectrum analyzer. Procedures:


Results:


Plot #	Time of Occupancy (ms)
5 and 6	138.6

Time of occupancy per period = 0.43ms

Number of periods per 31.6 seconds = 31.6 seconds/ 0.098 seconds = 322.4 periods

Time of occupancy = 0.43ms * 322.4 = 138.6ms

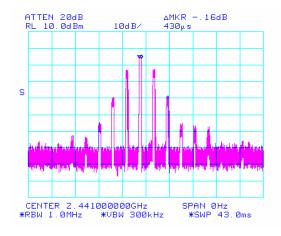

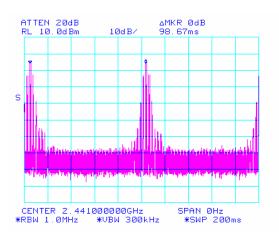

Plot 5: Time of occupancy (1 of 2)

Plot 6: Time of occupancy (2 of 2)

47 CFR 15.247

Serial#SL05082301-ZBRA-024 Issue Date 18 August 2005


Page 16 of 38

3.2.7 Peak Output Power


Requirement(s): 47 CFR §15.247(b)(1)

Procedures: The peak output power was measured conducted using a spectrum analyzer for the low, mid, and hi channels.


Plot #	Channel	Peak Power (dBm)
7	Low	-6.0
8	Mid	-5.5
9	Hi	-4.5

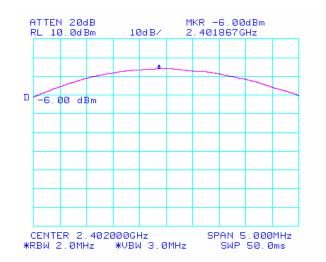

Plot 7: Peak Power Low

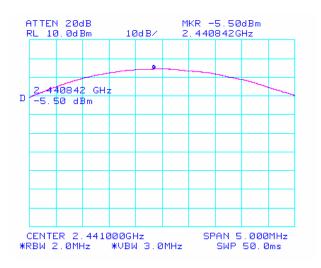

Plot 8: Peak Power Mid

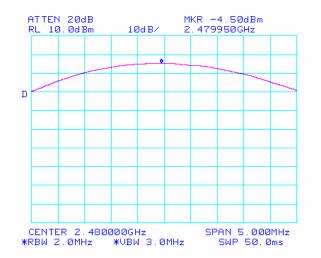

Plot 9: Peak Power Hi

Page


Serial#SL05082301-ZBRA-024 Issue Date 18 August 2005 18 of 38

3.2.8 Conducted Spurious Emissions


Requirement(s): 47 CFR §15.247(c)

Procedures: The conducted spurious emissions were measured conducted using a spectrum analyzer for the low, mid, and hi channels.


Plots #	Channel	Pass/Fail
10 to 13	Hi	Pass
14 to 16	Mid	Pass
17 to 20	Low	Pass

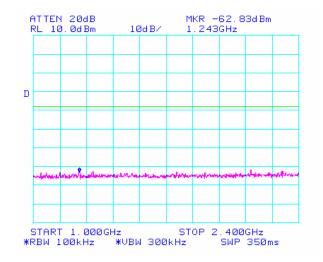


Plot 10: Conducted Spurious Emissions Hi (1/4)

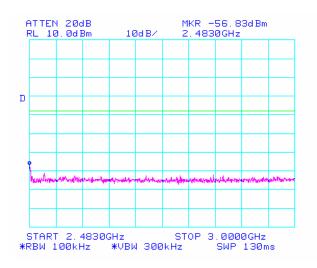


Plot 11: Conducted Spurious Emissions Hi (2/4)

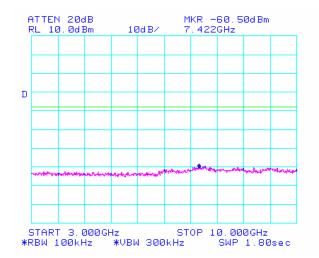


Plot 12: Conducted Spurious Emissions Hi (3/4)

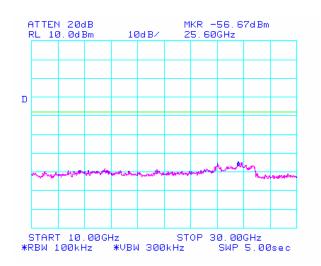


Plot 13: Conducted Spurious Emissions Hi (4/4)

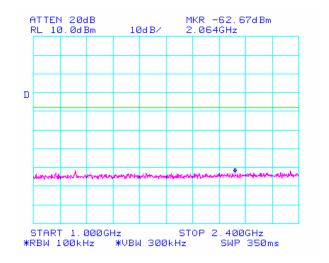


Plot 14: Conducted Spurious Emissions Mid (1/3)

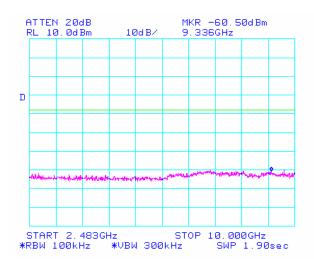


Plot 15: Conducted Spurious Emissions Mid (2/3)

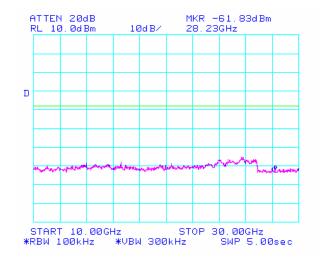


Plot 16: Conducted Spurious Emissions Mid (3/3)

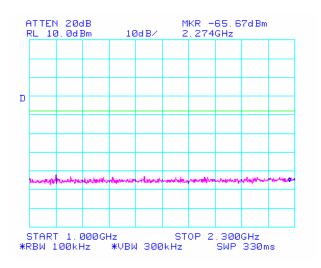


Plot 17: Conducted Spurious Emissions Low (1/4)

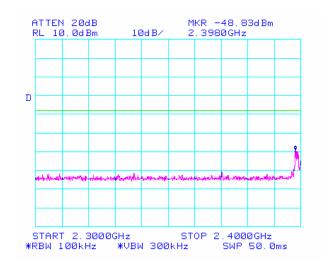

Plot 18: Conducted Spurious Emissions Low (2/4)

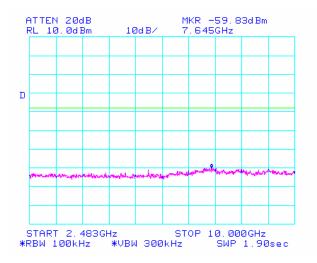

Plot 19: Conducted Spurious Emissions Low (3/4)

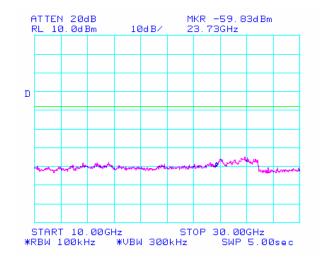

Plot 20: Conducted Spurious Emissions Low (4/4)



47 CFR 15.247

Serial#SL05082301-ZBRA-024 Issue Date 18 August 2005

Page 24 of 38

3.2.9 Radiated Spurious Emissions > 1 GHz

Requirement(s): 47 CFR §15.247(c)

Procedures: Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 1MHz resolution bandwidth was used.

Results:

Channel	Frequency (GHz)	Detector	Azimuth (Degrees)	Antenna Polarity (H/V)	Height (m)	EUT Field Strength Final Amp. (dBuV/m)	FS Limit @ 3m (dBuV/m)	Margin (dBuV/m)		
hi	4.96	Pk	0	H/V	noise floor					
hi	7.44	Pk	0	H/V	noise floor					
hi	9.92	Pk	0	H/V	noise floor					
lo	1.8	Pk	0	H/V	noise floor					
lo	1.8	Pk	0	H/V		noise	floor			
lo	2.7	Pk	0	H/V	noise floor					
mid	1.83	Pk	0	H/V	noise floor					
mid	1.83	Pk	0	H/V	noise floor					
mid	2.74	Pk	0	H/V		noise	noise floor			

Sample Calculation:

EUT Field Strength = Antenna Factor(dB) + Cable Loss(dB) - Amplifier Gain(dB) + Filter Attenuation(dB, if used)



47 CFR 15.247

Serial#SL05082301-ZBRA-024 Issue Date 18 August 2005

Page 25 of 38

3.2.10 Radiated Spurious Emissions Restricted Bandedges

Requirement(s): 47 CFR §15.205


Procedures: Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz peak and average measurements were taken with a 1MHz resolution bandwidth.

Results:


Frequency (GHz)	Azimuth (Degrees)	Antenna Polarity (H/V)	Height	Raw Amp @ 1m	P.Amp (dB)	ACF (dB)	Cable Loss (dB)	DCF (dB)	EUT Field Strength Amp.	Limit @ 3m	Delta (dBuV/m)
									(dBuV/m)	(dBuV/m)	
CX17109-2											
2.4835	270	Н	1.2	54.33	32	28	12	10.46	51.87	74	-22.13
2.4835	270	Н	1.2	36.33	32	28	12	10.46	33.87	54	-20.13
2400	270	Н	1.2	46.83	32	28	12	10.46	44.37	74	-29.63
2400	270	Н	1.2	34	32	28	12	10.46	31.54	54	-22.46
CX17109-1											
2.4835	270	Н	1.2	54.83	32	28	12	10.46	52.37	74	-21.63
2.4835	270	Н	1.2	34.17	32	28	12	10.46	31.71	54	-22.29
2400	270	Н	1.2	45.8	32	28	12	10.46	43.34	74	-30.66
2400	270	Н	1.2	34	32	28	12	10.46	31.54	54	-22.46

Sample Calculation: Corrected Amplitude = Raw - P.Amp + ACF + Cable Loss - DCF


Plots #	Channel	Detector	Pass/Fail
21	Hi	Peak	Pass
22	Hi	Average	Pass
23	Low	Peak	Pass
24	Low	Average	Pass
25	Hi	Peak	Pass
26	Hi	Average	Pass
27	Low	Peak	Pass
28	Low	Average	Pass

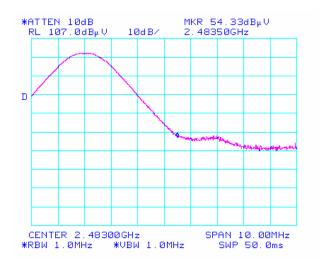


Plot 21: High Bandedge Peak CX17109-2 Antenna

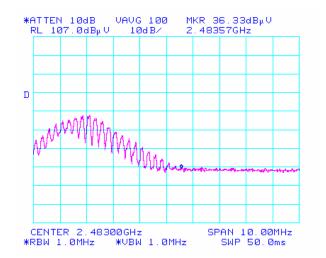


Plot 22: High Bandedge Average CX17109-2 Antenna

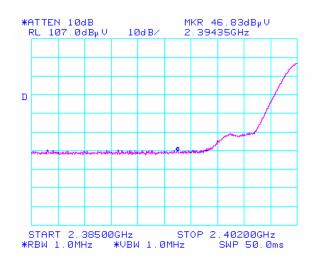


Plot 23: Low Bandedge Peak CX17109-2 Antenna

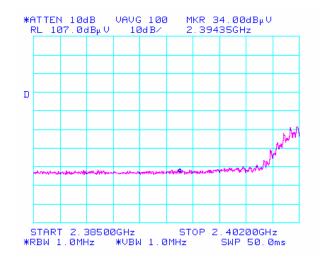


Plot 24: Low Bandedge Average CX17109-2 Antenna

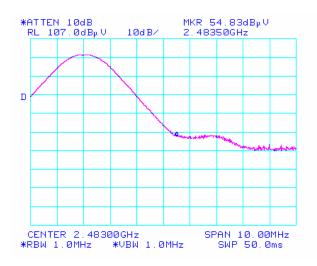


Plot 25: High Bandedge Peak CX17109-1 Antenna

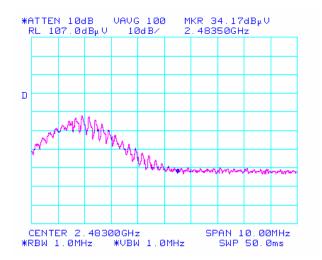

Plot 26: High Bandedge Average CX17109-1 Antenna

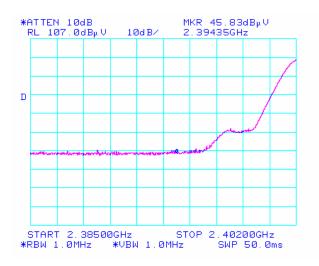

Plot 27: Low Bandedge Peak CX17109-1 Antenna

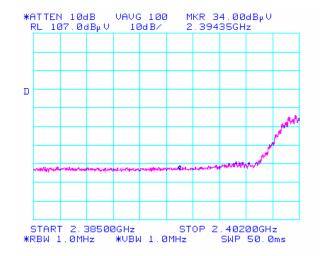

Plot 28: Low Bandedge Average CX17109-1 Antenna



Serial#SL05082301-ZBRA-024 18 August 2005 30 of 38 Issue Date

Page

Issue Date Page

Serial#SL05082301-ZBRA-024 18 August 2005

31 of 38

4 TEST INSTRUMENTATION

4.1 TEST INSTRUMENTATION

Instrument	Manufacturer	Model
Spectrum Analyzer	НР	8564E
Power Meter	НР	437B
Power Sensor	НР	8485A
Antenna	Emco	3115
Antenna	Emco	3115
Signal Generator	Wiltron	68169B
Chamber	Lingren	3m
Pre-Amplifier	НР	8449
DMM	Fluke	73111
Variac	KRM	AEEC-2090
Chamber	Tenney	TTRS
DMM	Fluke	51II



47 CFR 15.247

Serial#SL05082301-ZBRA-024 Issue Date 18 August 2005

Page 32 of 38

APPENDIX A: EUT TEST CONDITIONS

The following is the description of supporting equipment and details of cables used with the EUT.

Equipment Description	Cable Description
(Including Brand Name)	
PC Laptop	None

EUT Description : RW-ZBR3 Bluetooth Radio Module

Model No : RW-ZBR3 Bluetooth Radio Module

The following is the description of how the EUT is exercised during testing.

Test	Description Of Operation	
	The EUT was controlled and monitored via custom programming box.	



47 CFR 15.247

Serial#SL05082301-ZBRA-024 18 August 2005 33 of 38 Issue Date

Page

APPENDIX B: External Photos



47 CFR 15.247

Serial#SL05082301-ZBRA-024 18 August 2005 34 of 38 Issue Date

Page

APPENDIX C: CIRCUIT/BLOCK DIAGRAMS



47 CFR 15.247

Serial#SL05082301-ZBRA-024 18 August 2005 35 of 38 Issue Date

Page

APPENDIX D: Internal Photos



Page

Serial#SL05082301-ZBRA-024 18 August 2005 Issue Date

36 of 38

APPENDIX F: PRODUCT DESCRIPTION

Detail description of this product is shown in the User's Guide.



47 CFR 15.247

Serial#SL05082301-ZBRA-024 18 August 2005 37 of 38 Issue Date

Page

APPENDIX H: FCC LABEL LOCATION



47 CFR 15.247

Serial#SL05082301-ZBRA-024 18 August 2005 38 of 38 Issue Date

Page

APPENDIX I: USER MANUAL