

## DECLARATION OF COMPLIANCE SAR RF EXPOSURE EVALUATION

|   |   |
|---|---|
| <p><b><u>Test Lab</u></b></p> <p><b>CELLTECH LABS INC.</b><br/>Testing and Engineering Services<br/>1955 Moss Court<br/>Kelowna, B.C.<br/>Canada V1Y 9L3<br/>Phone: 250-448-7047<br/>Fax: 250-448-7046<br/>e-mail: info@celltechlabs.com<br/>web site: www.celltechlabs.com</p>   | <p><b><u>Applicant Information</u></b></p> <p><b>ZEBRA TECHNOLOGIES CORPORATION</b><br/>30 Plan Way<br/>Warwick, RI 02886<br/>United States</p> |
| <p><b>FCC IDENTIFIER:</b> I28MD-RW4137<br/><b>IC IDENTIFIER:</b> 3798A-RW4137<br/><b>Model(s):</b> QL220, QL320, QL420, RW420</p>   |   |
| <p><b>Rule Part(s):</b> FCC 47 CFR §2.1093; IC RSS-102 Issue 1 (Provisional)<br/><b>Test Procedure(s):</b> FCC OET Bulletin 65, Supplement C (Edition 01-01)<br/><b>FCC Device Classification:</b> Digital Transmission System (DTS)<br/><b>IC Device Classification:</b> Low Power Licence-Exempt Radiocommunication Device (RSS-210)<br/><b>Device Description:</b> Wireless Portable Printer with Symbol LA-4137 Compact Flash DSSS WLAN Card<br/><b>Modulation Type:</b> Direct Sequence Spread Spectrum (DSSS)</p> |   |
| <p><b>Tx Frequency Range:</b> 2412 - 2462 MHz<br/><b>Max. RF Output Power Measured:</b> 20.0 dBm (100 mW) - Peak Conducted (2412 MHz)<br/>18.2 dBm (66.1 mW) - Peak Conducted (2437 MHz)<br/>17.8 dBm (60.3 mW) - Peak Conducted (2462 MHz)</p> <p><b>Antenna Type(s) Tested:</b> Internal<br/><b>Battery Type(s) Tested:</b> Li-ion 7.4 VDC P/N: AT16004-1 (Printer Models: QL220, QL320)<br/>Li-ion 7.4 VDC P/N: AT16293-1 (Printer Model: QL420)<br/>Li-ion 7.4 VDC P/N: CT17102-2 (Printer Model: RW420)</p>        |   |
| <p><b>Body-Worn Accessories:</b> Shoulder Strap<br/>Plastic Belt-Clip with metal screws (Printer Models: QL220, QL320, QL420)<br/>Plastic Belt-Clip (Printer Model: RW420)</p>  |   |
| <p><b>Max. SAR Levels Evaluated:</b> QL220: 0.0618 W/kg body-worn (1g average)<br/>QL320: 0.0500 W/kg body-worn (1g average)<br/>QL420: 0.0155 W/kg body-worn (1g average)<br/>RW420: 0.0432 W/kg body-worn (1g average)</p>  |   |

Celltech Labs Inc. declares under its sole responsibility that this wireless portable device has demonstrated compliance with the Specific Absorption Rate (SAR) RF exposure requirements specified in FCC 47 CFR §2.1093 and Health Canada's Safety Code 6. The device was tested in accordance with the measurement standards and procedures specified in FCC OET Bulletin 65, Supplement C (Edition 01-01) and Industry Canada RSS-102 Issue 1 (Provisional) for the General Population / Uncontrolled Exposure environment. All measurements were performed in accordance with the SAR system manufacturer recommendations.

I attest to the accuracy of data. All measurements were performed by me or were made under my supervision and are correct to the best of my knowledge and belief. I assume full responsibility for the completeness of these measurements and vouch for the qualifications of all persons taking them.

This test report shall not be reproduced partially, or in full, without the prior written approval of Celltech Labs Inc. The results and statements contained in this report pertain only to the device(s) evaluated.

Performed By:



Spencer Watson  
Compliance Technologist  
Celltech Labs Inc.

Reviewed By:



Russell W. Pipe  
Senior Compliance Technologist  
Celltech Labs Inc.




| <b>TABLE OF CONTENTS</b> |   |              |
|--------------------------|---|--------------|
| <b>1.0</b>               | <b>INTRODUCTION.....</b>  | <b>3</b>     |
| <b>2.0</b>               | <b>DESCRIPTION OF DUT.....</b>                                    | <b>3</b>     |
| <b>3.0</b>               | <b>SAR MEASUREMENT SYSTEM .....</b>                               | <b>4</b>     |
| <b>4.0</b>               | <b>MEASUREMENT SUMMARY.....</b>                                   | <b>5</b>     |
| <b>5.0</b>               | <b>DETAILS OF SAR EVALUATION.....</b>                             | <b>6</b>     |
| <b>6.0</b>               | <b>EVALUATION PROCEDURES.....</b>                                 | <b>7</b>     |
| <b>7.0</b>               | <b>SYSTEM PERFORMANCE CHECK.....</b>                              | <b>8</b>     |
| <b>8.0</b>               | <b>SIMULATED EQUIVALENT TISSUES.....</b>                          | <b>9</b>     |
| <b>9.0</b>               | <b>SAR SAFETY LIMITS.....</b>                                     | <b>9</b>     |
| <b>10.0</b>              | <b>ROBOT SYSTEM SPECIFICATIONS.....</b>                           | <b>10</b>    |
| <b>11.0</b>              | <b>PROBE SPECIFICATION.....</b>                                   | <b>11</b>    |
| <b>12.0</b>              | <b>SAM PHANTOM.....</b>   | <b>11</b>    |
| <b>13.0</b>              | <b>PLANAR PHANTOM.....</b>  | <b>11</b>    |
| <b>14.0</b>              | <b>DEVICE HOLDER.....</b>   | <b>11</b>    |
| <b>15.0</b>              | <b>TEST EQUIPMENT LIST.....</b>                                   | <b>12</b>    |
| <b>16.0</b>              | <b>MEASUREMENT UNCERTAINTIES.....</b>                             | <b>13-14</b> |
| <b>17.0</b>              | <b>REFERENCES.....</b>  | <b>15</b>    |
|                          | <b>APPENDIX A - SAR MEASUREMENT DATA.....</b>                     | <b>16</b>    |
|                          | <b>APPENDIX B - SYSTEM PERFORMANCE CHECK DATA.....</b>            | <b>17</b>    |
|                          | <b>APPENDIX C - SYSTEM VALIDATION.....</b>                        | <b>18</b>    |
|                          | <b>APPENDIX D - PROBE CALIBRATION.....</b>                        | <b>19</b>    |
|                          | <b>APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS.....</b>     | <b>20</b>    |
|                          | <b>APPENDIX F - SAM PHANTOM CERTIFICATE OF CONFORMITY.....</b>    | <b>21</b>    |
|                          | <b>APPENDIX G - PLANAR PHANTOM CERTIFICATE OF CONFORMITY.....</b> | <b>22</b>    |
|                          | <b>APPENDIX H - SAR TEST SETUP &amp; DUT PHOTOGRAPHS.....</b>     | <b>23</b>    |

## 1.0 INTRODUCTION

This measurement report demonstrates that the Zebra Technologies Corporation Model(s): QL220, QL320, QL420, RW420 Wireless Portable Printer FCC ID: I28MD-RW4137 with internal Symbol LA-4137 Compact Flash DSSS WLAN Card complies with the SAR (Specific Absorption Rate) RF exposure requirements specified in FCC 47 CFR §2.1093 (see reference [1]), and Health Canada's Safety Code 6 (see reference [2]) for the General Population / Uncontrolled Exposure environment. The test procedures described in FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3]), and Industry Canada RSS-102 Issue 1 (Provisional) (see reference [4]) were employed. A description of the product, operating configuration, detailed summary of the test results, methodology and procedures used in the evaluation, equipment used, and the various provisions of the rules are included within this test report.

## 2.0 DESCRIPTION of DEVICE UNDER TEST (DUT)

|                                      |  |         |                 |                |
|--------------------------------------|--|---------|-----------------|----------------|
| <b>FCC Rule Part(s)</b>              | 47 CFR §2.1093   |         |                 |                |
| <b>IC Rule Part(s)</b>               | RSS-102 Issue 1 (Provisional)  |         |                 |                |
| <b>Test Procedure(s)</b>             | FCC OET Bulletin 65, Supplement C (01-01)  |         |                 |                |
| <b>FCC Device Classification</b>     | Digital Transmission System (DTS)  |         |                 |                |
| <b>IC Device Classification</b>      | Low Power Licence-Exempt Radiocommunication Device (RSS-210)   |         |                 |                |
| <b>Device Description</b>            | Wireless Portable Printer with internal Symbol LA-4137 Compact Flash DSSS WLAN   |         |                 |                |
| <b>FCC IDENTIFER</b>                 | I28MD-RW4137   |         |                 |                |
| <b>IC IDENTIFER</b>                  | 3798A-RW4137   |         |                 |                |
| <b>Model(s)</b>                      | QL220  | QL320   | QL420           | RW420          |
| <b>Serial No.(s)</b>                 | XXVA03-12-0096   | QL220   | Production Unit |                |
|                                      | CVVQ03-10-0033   | QL320   | Production Unit |                |
|                                      | XXVT04-33-0027   | QL420   | Production Unit |                |
|                                      | XXRC04-37-0085   | RW420   | Production Unit |                |
| <b>Modulation</b>                    | Direct Sequence Spread Spectrum (DSSS)   |         |                 |                |
| <b>Tx Frequency Range</b>            | 2412 - 2462 MHz  |         |                 |                |
| <b>Antenna Type(s) Tested</b>        | Internal   |         |                 |                |
| <b>Max. RF Output Power Measured</b> | 20.0 dBm   | 100 mW  | Peak Conducted  | 2412 MHz       |
|                                      | 18.2 dBm   | 66.1 mW | Peak Conducted  | 2437 MHz       |
|                                      | 17.8 dBm   | 60.3 mW | Peak Conducted  | 2462 MHz       |
| <b>Battery Type(s) Tested</b>        | QL220  | Li-ion  | 7.4 VDC         | P/N: AT16004-1 |
|                                      | QL320  |         |                 |                |
|                                      | QL420  | Li-ion  | 7.4 VDC         | P/N: AT16293-1 |
|                                      | RW420  | Li-ion  | 7.4 VDC         | P/N: CT17102-2 |
| <b>Body-Worn Accessories Tested</b>  | Shoulder Strap   |         |                 |                |
|                                      | Belt-Clip tested with Printer Models: QL220, QL320, QL420 (containing metal screws)<br>Note: Belt-Clip for Model: RW420 contains no metallic components, therefore worst-case configuration only was tested (without belt-clip, with shoulder strap accessory) |         |                 |                |

|  |                                |  |              |                 |   |
|--|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>  | Zebra Technologies Corporation | <b>FCC ID:</b>                           | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>   | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. 3 of 23 |                                |  |              |                 |   |

### 3.0 SAR MEASUREMENT SYSTEM


Celltech Labs Inc. SAR measurement facility utilizes the Dosimetric Assessment System (DASY™) manufactured by Schmid & Partner Engineering AG (SPEAG™) of Zurich, Switzerland. The DASY4 measurement system is comprised of the measurement server, robot controller, computer, near-field probe, probe alignment sensor, specific anthropomorphic mannequin (SAM) phantom, and various planar phantoms for brain and/or body SAR evaluations. The robot is a six-axis industrial robot performing precise movements to position the probe to the location (points) of maximum electromagnetic field (EMF). A cell controller system contains the power supply, robot controller, teach pendant (Joystick), and remote control, is used to drive the robot motors. The Staubli robot is connected to the cell controller to allow software manipulation of the robot. A data acquisition electronic (DAE) circuit performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. is connected to the Electro-optical coupler (EOC). The EOC performs the conversion from the optical into digital electric signal of the DAE and transfers data to the DASY4 measurement server. The DAE4 utilizes a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16-bit AD-converter and a command decoder and control logic unit. Transmission to the DASY4 measurement server is accomplished through an optical downlink for data and status information and an optical uplink for commands and clock lines. The mechanical probe-mounting device includes two different sensor systems for frontal and sidewise probe contacts. The sensor systems are also used for mechanical surface detection and probe collision detection. The robot uses its own controller with a built in VME-bus computer.



DASY4 SAR Measurement System with planar phantom



DASY4 SAR Measurement System with SAM phantom

|  |                                |  |              |                 |   |
|--|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>  | Zebra Technologies Corporation | <b>FCC ID:</b>                           | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>   | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                                |  |              |                 | 4 of 23   |



## 4.0 MEASUREMENT SUMMARY

### BODY-WORN SAR EVALUATION RESULTS


| Test Date | DUT Model | Freq (MHz) | Chan. |   | Test Mode | Antenna Position | Body-worn Accessories | DUT Position to Planar Phantom | Separation Distance to Planar Phantom (cm) | Cond. Power Before Test (dBm) | Measured SAR 1g (W/kg) | SAR Drift During Test (dB) | Scaled SAR 1g (W/kg) |
|-----------|-----------|------------|-------|---|-----------|------------------|-----------------------|--------------------------------|--|-------------------------------|------------------------|----------------------------|----------------------|
| Nov-17    | QL220     | 2437       | Mid   | 6 | DSSS      | Internal         | Shoulder Strap        | Front Side                     | 0.0  | 18.2                          | 0.0194                 | -1.37                      | 0.0266               |
| Nov-17    | QL220     | 2437       | Mid   | 6 | DSSS      | Internal         | --                    | Left Side                      | 0.0  | 18.2                          | 0.0426                 | -0.237                     | 0.0450               |
| Nov-17    | QL220     | 2437       | Mid   | 6 | DSSS      | Internal         | --                    | Right Side                     | 0.0  | 18.2                          | 0.0500                 | 0.286                      | 0.0500               |
| Nov-18    | QL320     | 2437       | Mid   | 6 | DSSS      | Internal         | Shoulder Strap        | Front Side                     | 0.0  | 18.2                          | 0.0181                 | -0.322                     | 0.0195               |
| Nov-18    | QL320     | 2437       | Mid   | 6 | DSSS      | Internal         | Shoulder Strap        | Left Side                      | 0.0  | 18.2                          | 0.0497                 | -0.0275                    | 0.0500               |
| Nov-18    | QL320     | 2437       | Mid   | 6 | DSSS      | Internal         | Shoulder Strap        | Right Side                     | 0.0  | 18.2                          | 0.0213                 | -0.182                     | 0.0222               |
| Nov-19    | QL420     | 2437       | Mid   | 6 | DSSS      | Internal         | Shoulder Strap        | Front Side                     | 0.0  | 18.2                          | 0.0148                 | -0.214                     | 0.0155               |
| Nov-19    | RW420     | 2437       | Mid   | 6 | DSSS      | Internal         | Shoulder Strap        | Front Side                     | 0.0  | 18.2                          | 0.0415                 | -0.173                     | 0.0432               |
| Nov-19    | QL220     | 2412       | Low   | 1 | DSSS      | Internal         | --                    | Right Side                     | 0.0  | 20.0                          | 0.0610                 | -0.0583                    | 0.0618               |

**ANSI / IEEE C95.1 1999 - SAFETY LIMIT**  
**BODY: 1.6 W/kg (averaged over 1 gram)**  
**Spatial Peak - Uncontrolled Exposure / General Population**

| Test Date(s)                     | November 17, 2004 |      |          |        |        | Test Date(s)                | Nov-17            | Nov-18 | Nov-19 | Unit |    |
|----------------------------------|-------------------|------|----------|--------|--------|-----------------------------|-------------------|--------|--------|------|----|
|                                  | November 18, 2004 |      |          |        |        |                             | Relative Humidity | 30     | 31     |      | 30 |
|                                  | November 19, 2004 |      |          |        |        |                             |                   |        |        |      |    |
| Measured Fluid Type              | 2450 MHz Body     |      |          |        |        | Atmospheric Pressure        | 103.1             | 101.9  | 103.2  | kPa  |    |
| Dielectric Constant $\epsilon_r$ | IEEE Target       |      | Measured |        |        | Ambient Temperature         | 25.8              | 25.3   | 25.6   | °C   |    |
|                                  | 52.7              | ± 5% | Nov-17   | Nov-18 | Nov-19 | Fluid Temperature           | 23.9              | 23.9   | 23.9   | °C   |    |
| Conductivity $\sigma$ (mho/m)    | IEEE Target       |      | Measured |        |        | Fluid Depth                 | ≥ 15              | ≥ 15   | ≥ 15   | cm   |    |
|                                  | 1.95              | ± 5% | Nov-17   | Nov-18 | Nov-19 | $\rho$ (Kg/m <sup>3</sup> ) | 1000              |        |        |      |    |
|                                  |                   |      | 2.01     | 2.01   | 1.98   |                             |                   |        |        |      |    |

Note(s):


- The measurement results were obtained with the DUT tested in the conditions described in this report. Detailed measurement data and plots showing the maximum SAR location of the DUT are reported in Appendix A.
- If the SAR measurements performed at the mid channel were  $\geq 3$  dB below the SAR limit; SAR evaluation for the low and high channels was optional (per FCC OET Bulletin 65, Supplement C, Edition 01-01 (see reference [3])). Based on the peak conducted power level measured at the low channel was .18 dB higher than the mid channel, a SAR evaluation was performed at the low channel in the worst-case mid channel configuration in order to show compliance at the higher power level as shown in the above test data table.
- The power drifts measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the above table.
- The QL220 unit was tested without shoulder strap accessory for the left and right side configurations in order to report a worst-case result with 0.0 cm gap (shoulder strap links are on the sides of the unit and provide a spacing when the shoulder strap is attached).
- For the QL220 & QL320 units the Bottom Side Peak SAR level measured during the area scan was <1% of the General Population / Uncontrolled exposure limit, therefore the zoom scan was not evaluated based on the 1 gram average SAR level determined to be near the measurement noise floor. See Appendix A for area scan evaluation plot.
- For the QL420 & RW420 units the Bottom Side, Left Side & Right Side Peak SAR levels measured during the area scan were <1% of the General Population / Uncontrolled exposure limit, therefore the zoom scan was not evaluated based on the 1 gram average SAR level determined to be near the measurement noise floor. See Appendix A for area scan evaluation plots.
- The SAR evaluations were performed within 24 hours of the system performance check.

|  |                                |  |              |                 |   |
|--|--------------------------------|--|--------------|-----------------|---|
| Applicant:   | Zebra Technologies Corporation | FCC ID:                                  | I28MD-RW4137 | IC ID:          | 3798A-RW4137  |
| Model(s):  | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                                |  |              |                 | 5 of 23   |

## 5.0 DETAILS OF SAR EVALUATION

The Zebra Technologies Corporation Model(s): QL220, QL320, QL420, RW420 Wireless Portable Printer FCC ID: I28MD-RW4137 with internal Symbol LA-4137 Compact Flash DSSS WLAN Card was compliant for localized Specific Absorption Rate (General Population / Uncontrolled Exposure) based on the test provisions and conditions described below. Detailed photographs of the measurement setup are shown in Appendix H.

1. The QL220, QL320, and QL420 models were tested for body-worn SAR on the bottom side (battery side) of the device with the belt-clip accessory attached. The bottom side of the DUT was positioned parallel to the outer surface of the planar phantom. The belt-clip accessory for the QL220 model provided a 1.6 cm spacing from the bottom of the printer to the outer surface of the planar phantom. The belt-clip accessory for the QL320 and QL420 models provided a 1.8 cm spacing from the bottom of the printer to the outer surface of the planar phantom. The belt-clip accessories for the QL220, QL320, and QL420 printer models contain metallic screws.
2. The RW420 model was tested for body-worn SAR without the belt-clip accessory in a worst-case configuration, with the bottom of the unit touching the outer surface of the planar phantom. The belt-clip accessory for the RW420 model contains no metallic components; therefore the worst-case configuration only was tested without belt-clip accessory and with shoulder strap accessory.
3. The QL220, QL320, and QL420 models were tested for body-worn SAR on the bottom side (battery side) of the device (without belt-clip accessory) with the shoulder strap accessory attached. The bottom side of the DUT was positioned parallel to, and touching, the outer surface of the planar phantom.
4. The printers were tested for body SAR on the front side (LCD display side) of the device with the shoulder strap accessory attached. The front side of the DUT was positioned parallel to, and touching, the outer surface of the planar phantom.
5. The printers were tested for body SAR on the left side of the device with the shoulder strap accessory attached (except for model QL220 the shoulder strap links are on the sides of the unit and provide a spacing when the shoulder strap is attached, therefore was tested without the shoulder strap accessory in order to report a worst-case result with 0.0 cm gap). The left side of the DUT was positioned parallel to, and touching, the outer surface of the planar phantom.
6. The DUT was tested for body SAR on the right side of the device with the shoulder strap accessory attached (except for model QL220 the shoulder strap links are on the sides of the unit and provide a spacing when the shoulder strap is attached, therefore was tested without the shoulder strap accessory in order to report a worst-case result with 0.0 cm gap). The right side of the DUT was positioned parallel to, and touching, the outer surface of the planar phantom.
7. If the Peak SAR level measured during the area scan was <1% of the General Population / Uncontrolled exposure limit, then the zoom scan was not evaluated based on the 1 gram average SAR level determined to be near the measurement noise floor. See Appendix A for area scan evaluation plots.
8. The DUT was placed into test mode using internal software and operated at maximum power in modulated DSSS continuous transmit mode for the duration of the tests.
9. The conducted power levels were measured before each test using a Gigatronics 8652A Universal Power Meter according to the procedures described in FCC 47 CFR §2.1046.
10. The power drifts measured by the DASY4 system for the duration of the SAR evaluations were added to the measured SAR levels to report scaled SAR results as shown in the test data table (page 5).
11. Each SAR evaluation was performed with a fully charged battery in the DUT.
12. For certain printer models and test positions it was not possible for the DUT to be positioned in the device holder, in which case a stack of low-density, low-loss dielectric foamed polystyrene was used.
13. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the SAR evaluation. The temperatures reported were consistent for all measurement periods.
14. The dielectric parameters of the simulated tissue were measured prior to the evaluations using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters).

|  |                                       |   |                     |                        |   |
|--|---------------------------------------|---|---------------------|------------------------|---|
| <b>Applicant:</b>  | <b>Zebra Technologies Corporation</b> | <b>FCC ID:</b>                                  | <b>I28MD-RW4137</b> | <b>IC ID:</b>          | <b>3798A-RW4137</b>   |
| <b>Model(s):</b>   | <b>QL220, QL320, QL420, RW420</b>     | <b>Wireless Portable Printer with DSSS WLAN</b> |                     | <b>2412 - 2462 MHz</b> |  |
| 2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                                       |   |                     |                        | 6 of 23   |

## 6.0 EVALUATION PROCEDURES

- a. (i) The evaluation was performed in the applicable area of the phantom depending on the type of device being tested. For devices held to the ear during normal operation, both the left and right ear positions were evaluated using the SAM phantom.
- (ii) For body-worn and face-held devices a planar phantom was used.
- b. The SAR was determined by a pre-defined procedure within the DASY4 software. Upon completion of a reference and optical surface check, the exposed region of the phantom was scanned near the inner surface with a grid spacing of 15mm x 15mm.

An area scan was determined as follows:

- c. Based on the defined area scan grid, a more detailed grid is created to increase the points by a factor of 10. The interpolation function then evaluates all field values between corresponding measurement points.
- d. A linear search is applied to find all the candidate maxima. Subsequently, all maxima are removed that are >2 dB from the global maximum. The remaining maxima are then used to position the cube scans.

A 1g and 10g spatial peak SAR was determined as follows:

- e. Extrapolation is used to find the points between the dipole center of the probe and the surface of the phantom. This data cannot be measured, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.4 mm (see probe calibration document in Appendix D). The extrapolation was based on trivariate quadratics computed from the previously calculated 3D interpolated points nearest the phantom surface.
- f. Interpolated data is used to calculate the average SAR over 1g and 10g cubes by spatially discretizing the entire measured cube. The volume used to determine the averaged SAR is a 1mm grid (42875 interpolated points).
- g. A zoom scan volume of 32 mm x 32 mm x 30 mm (5 x 5 x 7 points) centered at the peak SAR location determined from the area scan is used for all zoom scans for devices with a transmit frequency < 800 MHz. Zoom scans for frequencies ≥ 800 MHz are determined with a scan volume of 30 mm x 30 mm x 30 mm (7 x 7 x 7) to ensure complete capture of the peak spatial-average SAR.

## 7.0 SYSTEM PERFORMANCE CHECK

Prior to the SAR evaluation a system check was performed in the planar section of the SAM phantom with a 2450MHz dipole (see Appendix C for system validation procedures). The dielectric parameters of the simulated tissue were measured prior to the system performance check using an HP 85070C Dielectric Probe Kit and an HP 8753E Network Analyzer (see Appendix E for printout of measured fluid dielectric parameters). A forward power of 250 mW was applied to the dipole and the system was verified to a tolerance of  $\pm 10\%$  (see Appendix B for system performance check test plots).

| SYSTEM PERFORMANCE CHECK |                       |                 |              |                                  |          |                               |          |                             |                 |                  |                  |            |                     |
|--------------------------|-----------------------|-----------------|--------------|----------------------------------|----------|-------------------------------|----------|-----------------------------|-----------------|------------------|------------------|------------|---------------------|
| Test Date                | 2450MHz Equiv. Tissue | SAR 1g (W/kg)   |              | Dielectric Constant $\epsilon_r$ |          | Conductivity $\sigma$ (mho/m) |          | $\rho$ (Kg/m <sup>3</sup> ) | Amb. Temp. (°C) | Fluid Temp. (°C) | Fluid Depth (cm) | Humid. (%) | Barom. Press. (kPa) |
|                          |                       | IEEE Target     | Measured     | IEEE Target                      | Measured | IEEE Target                   | Measured |                             |                 |                  |                  |            |                     |
| 11/17/04                 | Brain                 | 13.1 $\pm 10\%$ | 13.0 (-0.8%) | 39.2 $\pm 5\%$                   | 38.6     | 1.80 $\pm 5\%$                | 1.89     | 1000                        | 24.9            | 23.9             | $\geq 15$        | 30         | 103.1               |
| 11/18/04                 | Brain                 | 13.1 $\pm 10\%$ | 13.7 (+4.6%) | 39.2 $\pm 5\%$                   | 38.2     | 1.80 $\pm 5\%$                | 1.89     | 1000                        | 25.2            | 23.9             | $\geq 15$        | 30         | 101.9               |
| 11/19/04                 | Brain                 | 13.1 $\pm 10\%$ | 13.5 (+3.1%) | 39.2 $\pm 5\%$                   | 38.1     | 1.80 $\pm 5\%$                | 1.86     | 1000                        | 24.4            | 23.9             | $\geq 15$        | 30         | 103.0               |
| 11/26/04                 | Brain                 | 13.1 $\pm 10\%$ | 13.7 (+4.6%) | 39.2 $\pm 5\%$                   | 38.4     | 1.80 $\pm 5\%$                | 1.87     | 1000                        | 25.5            | 23.9             | $\geq 15$        | 30         | 102.2               |

Note(s):  
 1. The ambient and fluid temperatures were measured prior to, and during, the fluid dielectric parameter check and the system performance check. The temperatures reported in the table above were consistent for all measurement periods.

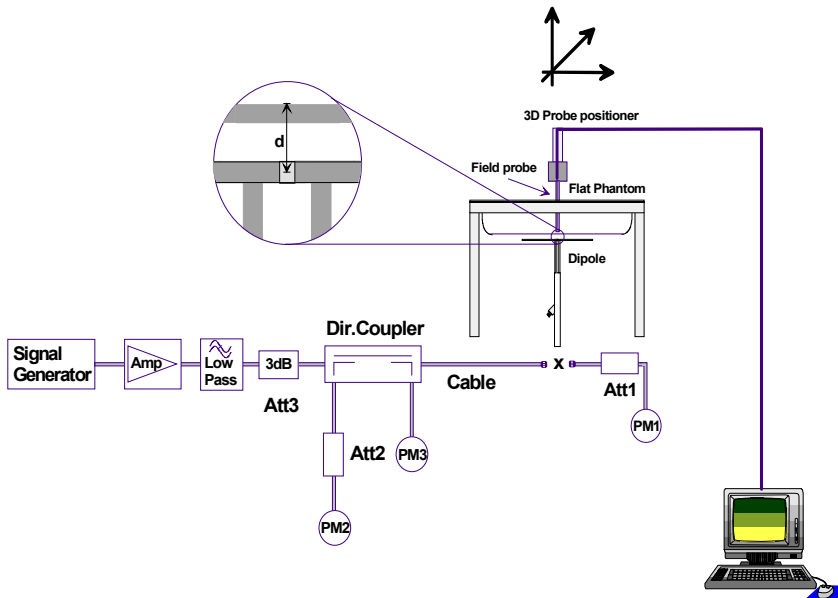


Figure 1. System Performance Check Setup Diagram



2450MHz Dipole Setup



## 8.0 SIMULATED EQUIVALENT TISSUES

The 2450MHz brain and body simulated tissue mixtures consist of Glycol-monobutyl, water, and salt (body mixture only). The fluid was prepared according to standardized procedures and measured for dielectric parameters (permittivity and conductivity).

| SIMULATED TISSUE MIXTURES |                          |                |
|---------------------------|--------------------------|----------------|
| INGREDIENT                | 2450MHz Brain            | 2450MHz Body   |
|                           | System Performance Check | DUT Evaluation |
| Water                     | 52.00 %                  | 69.98 %        |
| Glycol Monobutyl          | 48.00 %                  | 30.00 %        |
| Salt                      | -                        | 0.02 %         |

## 9.0 SAR SAFETY LIMITS

| EXPOSURE LIMITS   | SAR (W/kg)   |  |
|---|--|--|
|   | (General Population / Uncontrolled Exposure Environment) | (Occupational / Controlled Exposure Environment) |
| Spatial Average<br>(averaged over the whole body)             | 0.08   | 0.4  |
| Spatial Peak<br>(averaged over any 1 g of tissue)             | 1.60   | 8.0  |
| Spatial Peak<br>(hands/wrists/feet/ankles averaged over 10 g) | 4.0  | 20.0   |

Notes:

1. Uncontrolled environments are defined as locations where there is potential exposure of individuals who have no knowledge or control of their potential exposure.
2. Controlled environments are defined as locations where there is potential exposure of individuals who have knowledge of their potential exposure and can exercise control over their exposure.

## 10.0 ROBOT SYSTEM SPECIFICATIONS

### Specifications

**POSITIONER:** Stäubli Unimation Corp. Robot Model: RX60L  
**Repeatability:** 0.02 mm  
**No. of axis:** 6

### Data Acquisition Electronic (DAE) System

#### Cell Controller

**Processor:** AMD Athlon XP 2400+  
**Clock Speed:** 2.0 GHz  
**Operating System:** Windows XP Professional

#### Data Converter

**Features:** Signal Amplifier, multiplexer, A/D converter, and control logic  
**Software:** DASY4 software  
**Connecting Lines:** Optical downlink for data and status info.  
 Optical uplink for commands and clock

### DASY4 Measurement Server

**Function:** Real-time data evaluation for field measurements and surface detection  
**Hardware:** PC/104 166MHz Pentium CPU; 32 MB chipdisk; 64 MB RAM  
**Connections:** COM1, COM2, DAE, Robot, Ethernet, Service Interface

### E-Field Probe

**Model:** ET3DV6  
**Serial No.:** 1387  
**Construction:** Triangular core fiber optic detection system  
**Frequency:** 10 MHz to 6 GHz  
**Linearity:**  $\pm 0.2$  dB (30 MHz to 3 GHz)

### Phantom(s)

#### Evaluation Phantom

**Type:** Planar Phantom  
**Shell Material:** Fiberglass  
**Thickness:**  $2.0 \pm 0.1$  mm  
**Volume:** Approx. 72 liters

#### Validation Phantom

**Type:** SAM V4.0C  
**Shell Material:** Fiberglass  
**Thickness:**  $2.0 \pm 0.1$  mm  
**Volume:** Approx. 25 liters

## 11.0 PROBE SPECIFICATION (ET3DV6)

**Construction:** Symmetrical design with triangular core  
 Built-in shielding against static charges  
 PEEK enclosure material (resistant to organic solvents, e.g. glycol)

**Calibration:** In air from 10 MHz to 2.5 GHz  
 In brain simulating tissue at frequencies of 900 MHz and 1.8 GHz (accuracy  $\pm 8\%$ )

**Frequency:** 10 MHz to >6 GHz; Linearity:  $\pm 0.2$  dB (30 MHz to 3 GHz)

**Directivity:**  $\pm 0.2$  dB in brain tissue (rotation around probe axis)  
 $\pm 0.4$  dB in brain tissue (rotation normal to probe axis)

**Dynamic Range:**  $5 \mu\text{W/g}$  to >100 mW/g; Linearity:  $\pm 0.2$  dB

**Surface Detection:**  $\pm 0.2$  mm repeatability in air and clear liquids over diffuse reflecting surfaces

**Dimensions:** Overall length: 330 mm  
 Tip length: 16 mm  
 Body diameter: 12 mm  
 Tip diameter: 6.8 mm  
 Distance from probe tip to dipole centers: 2.7 mm

**Application:** General dosimetry up to 3 GHz  
 Compliance tests of mobile phone



ET3DV6 E-Field Probe

## 12.0 SAM PHANTOM V4.0C

The SAM phantom V4.0C is a fiberglass shell phantom with a 2.0 mm (+/-0.2 mm) shell thickness for left and right head and flat planar area integrated in a wooden table. The shape of the fiberglass shell corresponds to the phantom defined by SCC34-SC2. The device holder positions are adjusted to the standard measurement positions in the three sections (see Appendix F for specifications of the SAM phantom V4.0C).



SAM Phantom

## 13.0 PLANAR PHANTOM

The planar phantom is a fiberglass shell phantom with a 2.0 mm (+/-0.2mm) thick device measurement area at the center of the phantom for SAR evaluations of devices with a larger surface area than the planar section of the SAM phantom. The planar phantom is integrated in a wooden table (see Appendix G for dimensions and specifications of the planar phantom).




Planar Phantom

## 14.0 DEVICE HOLDER

The DASY4 device holder has two scales for device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear openings). The plane between the ear openings and the mouth tip has a rotation angle of 65°. The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections.



Device Holder

|   |                                |  |              |                 |   |
|---|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>   | Zebra Technologies Corporation | <b>FCC ID:</b>                           | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>  | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. 11 of 23 |                                |  |              |                 |   |

## 15.0 TEST EQUIPMENT LIST

| TEST EQUIPMENT                           | SERIAL NO. | CALIBRATION DATE |
|--|------------|------------------|
| Schmid & Partner DASY4 System            | -          | -                |
| DASY4 Measurement Server                 | 1078       | N/A              |
| -Robot                                   | 599396-01  | N/A              |
| -DAE3                                    | 353        | Dec 2003         |
| -DAE3                                    | 370        | May 2004         |
| -ET3DV6 E-Field Probe                    | 1387       | Mar 2004         |
| -ET3DV6 E-Field Probe                    | 1590       | May 2004         |
| -300MHz Validation Dipole                | 135        | Oct 2004         |
| -450MHz Validation Dipole                | 136        | Nov 2004         |
| -835MHz Validation Dipole                | 411        | Mar 2004         |
| -900MHz Validation Dipole                | 054        | June 2004        |
| -1800MHz Validation Dipole               | 247        | June 2004        |
| -1900MHz Validation Dipole               | 151        | June 2004        |
| -2450MHz Validation Dipole               | 150        | Sept 2004        |
| -SAM Phantom V4.0C                       | 1033       | N/A              |
| -Barski Planar Phantom                   | 03-01      | N/A              |
| -Plexiglas Planar Phantom                | 161        | N/A              |
| -Validation Planar Phantom               | 137        | N/A              |
| HP 85070C Dielectric Probe Kit           | N/A        | N/A              |
| Gigatronics 8651A Power Meter            | 8650137    | April 2004       |
| Gigatronics 8652A Power Meter            | 1835267    | April 2004       |
| Gigatronics 80701A Power Sensor          | 1833535    | April 2004       |
| Gigatronics 80701A Power Sensor          | 1833542    | April 2004       |
| Gigatronics 80701A Power Sensor          | 1834350    | April 2004       |
| HP E4408B Spectrum Analyzer              | US39240170 | Dec 2003         |
| HP 8594E Spectrum Analyzer               | 3543A02721 | April 2004       |
| HP 8753E Network Analyzer                | US38433013 | April 2004       |
| HP 8648D Signal Generator                | 3847A00611 | April 2004       |
| Amplifier Research 5S1G4 Power Amplifier | 26235      | N/A              |

## 16.0 MEASUREMENT UNCERTAINTIES

| UNCERTAINTY BUDGET FOR DEVICE EVALUATION |                         |                          |         |                      |                                 |                                    |
|--|-------------------------|--------------------------|---------|----------------------|---------------------------------|------------------------------------|
| Error Description                        | Uncertainty Value<br>±% | Probability Distribution | Divisor | C <sub>i</sub><br>1g | Standard Uncertainty<br>±% (1g) | v <sub>i</sub> or v <sub>eff</sub> |
| <b>Measurement System</b>                |                         |                          |         |                      |                                 |                                    |
| Probe calibration                        | ± 4.85                  | Normal                   | 1       | 1                    | ± 4.85                          | ∞                                  |
| Axial isotropy of the probe              | ± 4.7                   | Rectangular              | √3      | (1-c <sub>p</sub> )  | ± 1.9                           | ∞                                  |
| Spherical isotropy of the probe          | ± 9.6                   | Rectangular              | √3      | (c <sub>p</sub> )    | ± 3.9                           | ∞                                  |
| Spatial resolution                       | ± 0.0                   | Rectangular              | √3      | 1                    | ± 0.0                           | ∞                                  |
| Boundary effects                         | ± 5.5                   | Rectangular              | √3      | 1                    | ± 3.2                           | ∞                                  |
| Probe linearity                          | ± 4.7                   | Rectangular              | √3      | 1                    | ± 2.7                           | ∞                                  |
| Detection limit                          | ± 1.0                   | Rectangular              | √3      | 1                    | ± 0.6                           | ∞                                  |
| Readout electronics                      | ± 1.0                   | Normal                   | 1       | 1                    | ± 1.0                           | ∞                                  |
| Response time                            | ± 0.8                   | Rectangular              | √3      | 1                    | ± 0.5                           | ∞                                  |
| Integration time                         | ± 1.4                   | Rectangular              | √3      | 1                    | ± 0.8                           | ∞                                  |
| RF ambient conditions                    | ± 3.0                   | Rectangular              | √3      | 1                    | ± 1.7                           | ∞                                  |
| Mech. constraints of robot               | ± 0.4                   | Rectangular              | √3      | 1                    | ± 0.2                           | ∞                                  |
| Probe positioning                        | ± 2.9                   | Rectangular              | √3      | 1                    | ± 1.7                           | ∞                                  |
| Extrapolation & integration              | ± 3.9                   | Rectangular              | √3      | 1                    | ± 2.3                           | ∞                                  |
| <b>Test Sample Related</b>               |                         |                          |         |                      |                                 |                                    |
| Device positioning                       | ± 6.0                   | Normal                   | √3      | 1                    | ± 6.7                           | 12                                 |
| Device holder uncertainty                | ± 5.0                   | Normal                   | √3      | 1                    | ± 5.9                           | 8                                  |
| Power drift                              | ± 5.0                   | Rectangular              | √3      |                      | ± 2.9                           | ∞                                  |
| <b>Phantom and Setup</b>                 |                         |                          |         |                      |                                 |                                    |
| Phantom uncertainty                      | ± 4.0                   | Rectangular              | √3      | 1                    | ± 2.3                           | ∞                                  |
| Liquid conductivity (target)             | ± 5.0                   | Rectangular              | √3      | 0.6                  | ± 1.7                           | ∞                                  |
| Liquid conductivity (measured)           | ± 5.0                   | Rectangular              | √3      | 0.6                  | ± 1.7                           | ∞                                  |
| Liquid permittivity (target)             | ± 5.0                   | Rectangular              | √3      | 0.6                  | ± 1.7                           | ∞                                  |
| Liquid permittivity (measured)           | ± 5.0                   | Rectangular              | √3      | 0.6                  | ± 1.7                           | ∞                                  |
| <b>Combined Standard Uncertainty</b>     |                         |                          |         |                      | <b>± 13.32</b>                  |                                    |
| <b>Expanded Uncertainty (k=2)</b>        |                         |                          |         |                      | <b>± 26.64</b>                  |                                    |


Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 ( see reference [5])



## MEASUREMENT UNCERTAINTIES (Cont.)

| UNCERTAINTY BUDGET FOR SYSTEM VALIDATION |                         |                          |         |                      |                                 |                                    |
|--|-------------------------|--------------------------|---------|----------------------|---------------------------------|------------------------------------|
| Error Description                        | Uncertainty Value<br>±% | Probability Distribution | Divisor | C <sub>i</sub><br>1g | Standard Uncertainty<br>±% (1g) | v <sub>i</sub> or v <sub>eff</sub> |
| <b>Measurement System</b>                |                         |                          |         |                      |                                 |                                    |
| Probe calibration                        | ± 4.85                  | Normal                   | 1       | 1                    | ± 4.85                          | ∞                                  |
| Axial isotropy of the probe              | ± 4.7                   | Rectangular              | √3      | (1-c <sub>p</sub> )  | ± 1.9                           | ∞                                  |
| Spherical isotropy of the probe          | ± 9.6                   | Rectangular              | √3      | (c <sub>p</sub> )    | ± 3.9                           | ∞                                  |
| Spatial resolution                       | ± 0.0                   | Rectangular              | √3      | 1                    | ± 0.0                           | ∞                                  |
| Boundary effects                         | ± 5.5                   | Rectangular              | √3      | 1                    | ± 3.2                           | ∞                                  |
| Probe linearity                          | ± 4.7                   | Rectangular              | √3      | 1                    | ± 2.7                           | ∞                                  |
| Detection limit                          | ± 1.0                   | Rectangular              | √3      | 1                    | ± 0.6                           | ∞                                  |
| Readout electronics                      | ± 1.0                   | Normal                   | 1       | 1                    | ± 1.0                           | ∞                                  |
| Response time                            | ± 0.8                   | Rectangular              | √3      | 1                    | ± 0.5                           | ∞                                  |
| Integration time                         | ± 1.4                   | Rectangular              | √3      | 1                    | ± 0.8                           | ∞                                  |
| RF ambient conditions                    | ± 3.0                   | Rectangular              | √3      | 1                    | ± 1.7                           | ∞                                  |
| Mech. constraints of robot               | ± 0.4                   | Rectangular              | √3      | 1                    | ± 0.2                           | ∞                                  |
| Probe positioning                        | ± 2.9                   | Rectangular              | √3      | 1                    | ± 1.7                           | ∞                                  |
| Extrapolation & integration              | ± 3.9                   | Rectangular              | √3      | 1                    | ± 2.3                           | ∞                                  |
| <b>Dipole</b>                            |                         |                          |         |                      |                                 |                                    |
| Dipole Axis to Liquid Distance           | ± 2.0                   | Rectangular              | √3      | 1                    | ± 1.2                           | ∞                                  |
| Input Power                              | ± 4.7                   | Rectangular              | √3      | 1                    | ± 2.7                           | ∞                                  |
| <b>Phantom and Setup</b>                 |                         |                          |         |                      |                                 |                                    |
| Phantom uncertainty                      | ± 4.0                   | Rectangular              | √3      | 1                    | ± 2.3                           | ∞                                  |
| Liquid conductivity (target)             | ± 5.0                   | Rectangular              | √3      | 0.6                  | ± 1.7                           | ∞                                  |
| Liquid conductivity (measured)           | ± 5.0                   | Rectangular              | √3      | 0.6                  | ± 1.7                           | ∞                                  |
| Liquid permittivity (target)             | ± 5.0                   | Rectangular              | √3      | 0.6                  | ± 1.7                           | ∞                                  |
| Liquid permittivity (measured)           | ± 5.0                   | Rectangular              | √3      | 0.6                  | ± 1.7                           | ∞                                  |
| <b>Combined Standard Uncertainty</b>     |                         |                          |         |                      | <b>± 9.97</b>                   |                                    |
| <b>Expanded Uncertainty (k=2)</b>        |                         |                          |         |                      | <b>± 19.93</b>                  |                                    |


Measurement Uncertainty Table in accordance with IEEE Standard 1528-2003 (see reference [5])

|   |                                |  |              |                 |   |
|---|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>   | Zebra Technologies Corporation | <b>FCC ID:</b>                           | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>  | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. 14 of 23 |                                |  |              |                 |   |

|                  |                           |
|------------------|---------------------------|
| Test Report S/N: | 110804I28-T583-586-S15W   |
| Test Date(s):    | November 17-19 & 26, 2004 |
| Test Type:       | FCC/IC SAR Evaluation     |


## 17.0 REFERENCES

- [1] Federal Communications Commission, "Radiofrequency radiation exposure evaluation: portable devices", Rule Part 47 CFR §2.1093: 1999.
- [2] Health Canada, "Limits of Human Exposure to Radiofrequency Electromagnetic Fields in the Frequency Range from 3 kHz to 300 GHz", Safety Code 6.
- [3] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radio frequency Electromagnetic Fields", OET Bulletin 65, Supplement C (Edition 01-01), FCC, Washington, D.C.: June 2001.
- [4] Industry Canada, "Evaluation Procedure for Mobile and Portable Radio Transmitters with respect to Health Canada's Safety Code 6 for Exposure of Humans to Radio Frequency Fields", Radio Standards Specification RSS-102 Issue 1 (Provisional): September 1999.
- [5] IEEE Std 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques": June 2003.

|                         |                                       |  |                     |                        |   |
|-------------------------|---------------------------------------|--|---------------------|------------------------|---|
| <b>Applicant:</b>       | <b>Zebra Technologies Corporation</b> | <b>FCC ID:</b>   | <b>I28MD-RW4137</b> | <b>IC ID:</b>          | <b>3798A-RW4137</b>   |
| <b>Model(s):</b>        | <b>QL220, QL320, QL420, RW420</b>     | <b>Wireless Portable Printer with DSSS WLAN</b>  |                     | <b>2412 - 2462 MHz</b> |  |
| 2004 Celltech Labs Inc. |                                       | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                     |                        | 15 of 23  |

|                  |                           |
|------------------|---------------------------|
| Test Report S/N: | 110804I28-T583-586-S15W   |
| Test Date(s):    | November 17-19 & 26, 2004 |
| Test Type:       | FCC/IC SAR Evaluation     |

**APPENDIX B - SYSTEM PERFORMANCE CHECK DATA**

|                         |                                       |  |                     |                        |   |
|-------------------------|---------------------------------------|--|---------------------|------------------------|---|
| <b>Applicant:</b>       | <b>Zebra Technologies Corporation</b> | <b>FCC ID:</b>   | <b>I28MD-RW4137</b> | <b>IC ID:</b>          | <b>3798A-RW4137</b>   |
| <b>Model(s):</b>        | <b>QL220, QL320, QL420, RW420</b>     | <b>Wireless Portable Printer with DSSS WLAN</b>  |                     | <b>2412 - 2462 MHz</b> |  |
| 2004 Celltech Labs Inc. |                                       | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                     |                        | 17 of 23  |

Date 11/17/04

### System Performance Check - 2450 MHz Dipole

**DUT: Dipole 2450 MHz; Model: D2450V2; Type: System Performance Check; Serial: 150; Calibrated: 09/30/2004**

Ambient Temp: 24.9 °C; Fluid Temp: 23.9 °C; Barometric Pressure: 103.1 kPa; Humidity: 30%

Communication System: CW  
 Forward Conducted Power: 250mW  
 Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium: HSL2450 ( $\sigma = 1.89 \text{ mho/m}$ ;  $\epsilon_r = 38.6$ ;  $\rho = 1000 \text{ kg/m}^3$ )


- Probe: ET3DV6 - SN1387; ConvF(4.77, 4.77, 4.77); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASy4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127


#### 2450 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm


#### 2450 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 93 V/m; Power Drift = 0.006 dB  
 Peak SAR (extrapolated) = 27 W/kg  
**SAR(1 g) = 13.0 mW/g; SAR(10 g) = 6.02 mW/g**

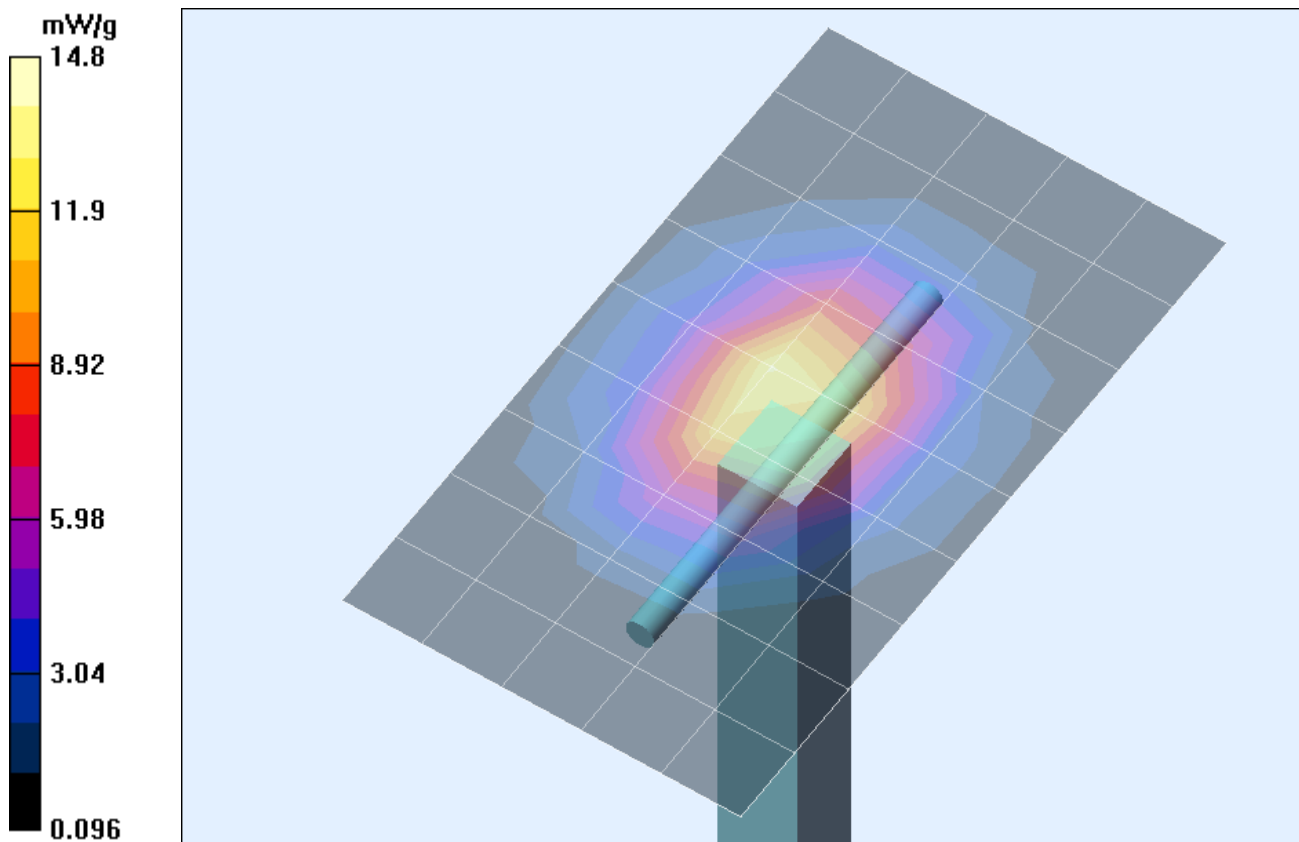

|  |                                |  |              |                 |   |
|--|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>  | Zebra Technologies Corporation | <b>FCC ID:</b>                           | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>   | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                                |  |              |                 |   |

### Z-Axis Scan

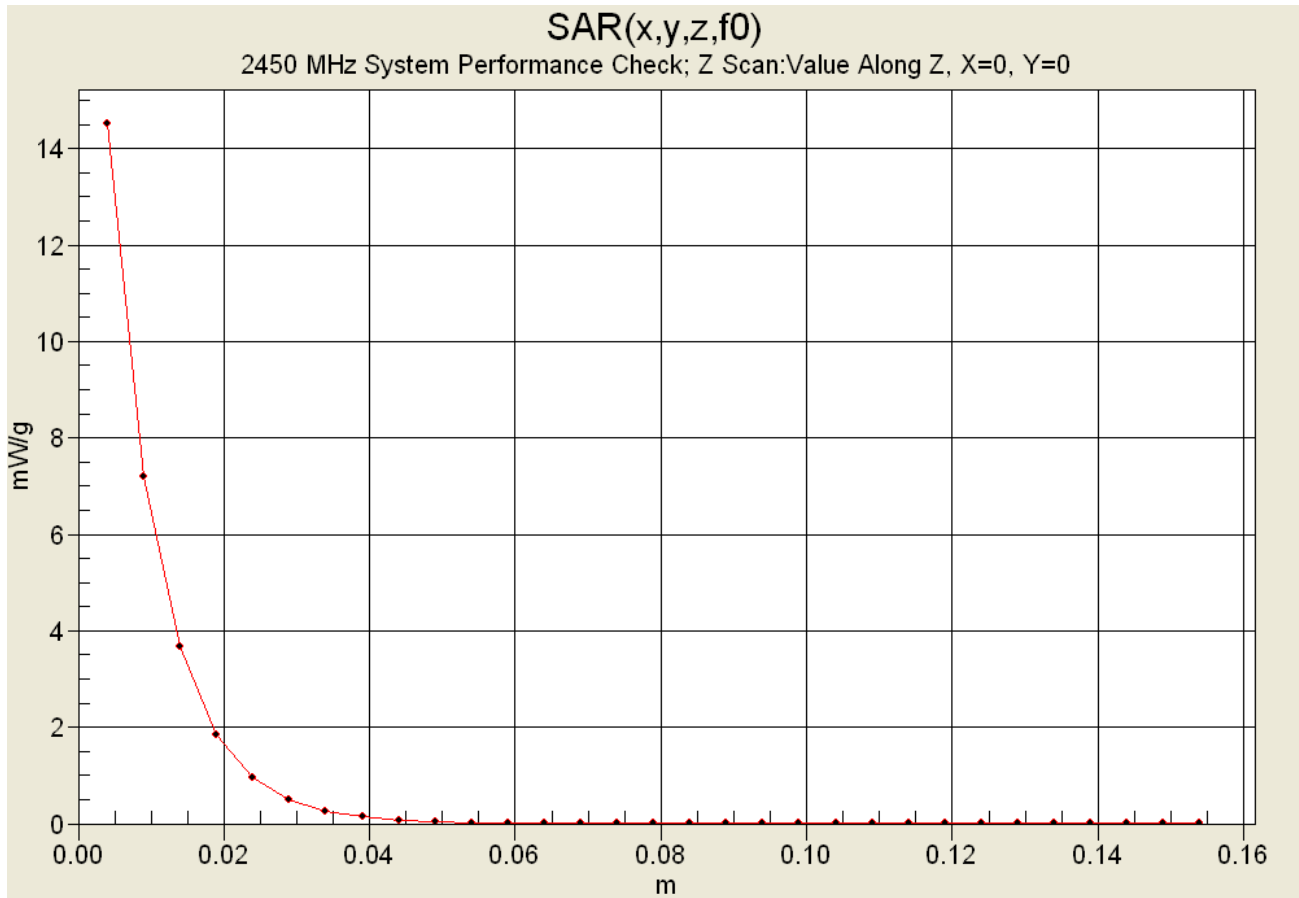

|                         |                                |  |              |                 |   |
|-------------------------|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>       | Zebra Technologies Corporation | <b>FCC ID:</b>   | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>        | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN   |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |              |                 |   |



Date: 11/18/04

## System Performance Check - 2450 MHz Dipole

**DUT: Dipole 2450 MHz; Model: D2450V2; Type: System Performance Check; Serial: 150; Calibrated: 09/30/2004**

Ambient Temp: 25.2 °C; Fluid Temp: 23.9 °C; Barometric Pressure: 101.9 kPa; Humidity: 30%

Communication System: CW  
 Forward Conducted Power: 250mW  
 Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium: HSL2450 ( $\sigma = 1.89 \text{ mho/m}$ ;  $\epsilon_r = 38.2$ ;  $\rho = 1000 \text{ kg/m}^3$ )


- Probe: ET3DV6 - SN1387; ConvF(4.77, 4.77, 4.77); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127


### 2450 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm


### 2450 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 96.7 V/m; Power Drift = -0.1 dB  
 Peak SAR (extrapolated) = 28.6 W/kg  
**SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.37 mW/g**

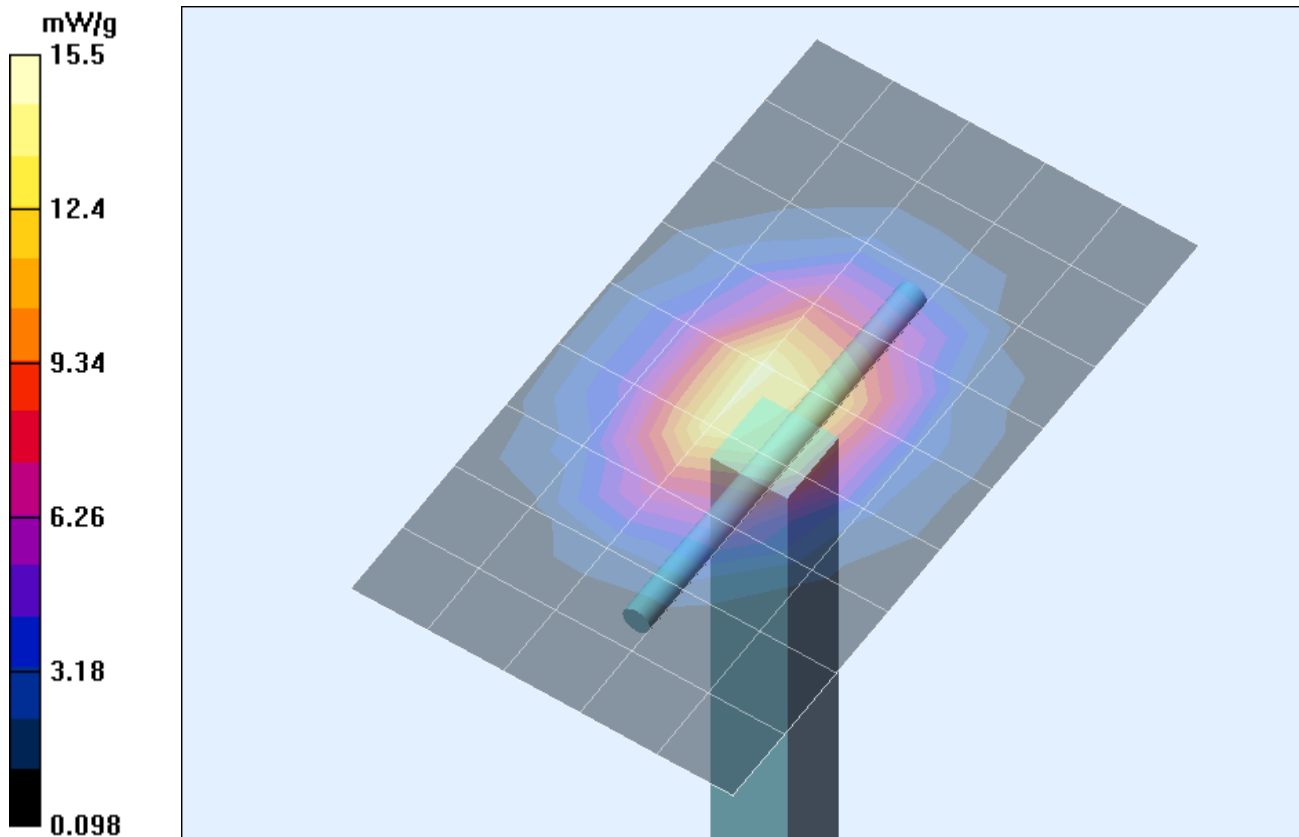

|  |                                |  |              |                 |   |
|--|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>  | Zebra Technologies Corporation | <b>FCC ID:</b>                           | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>   | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                                |  |              |                 |   |

### Z-Axis Scan

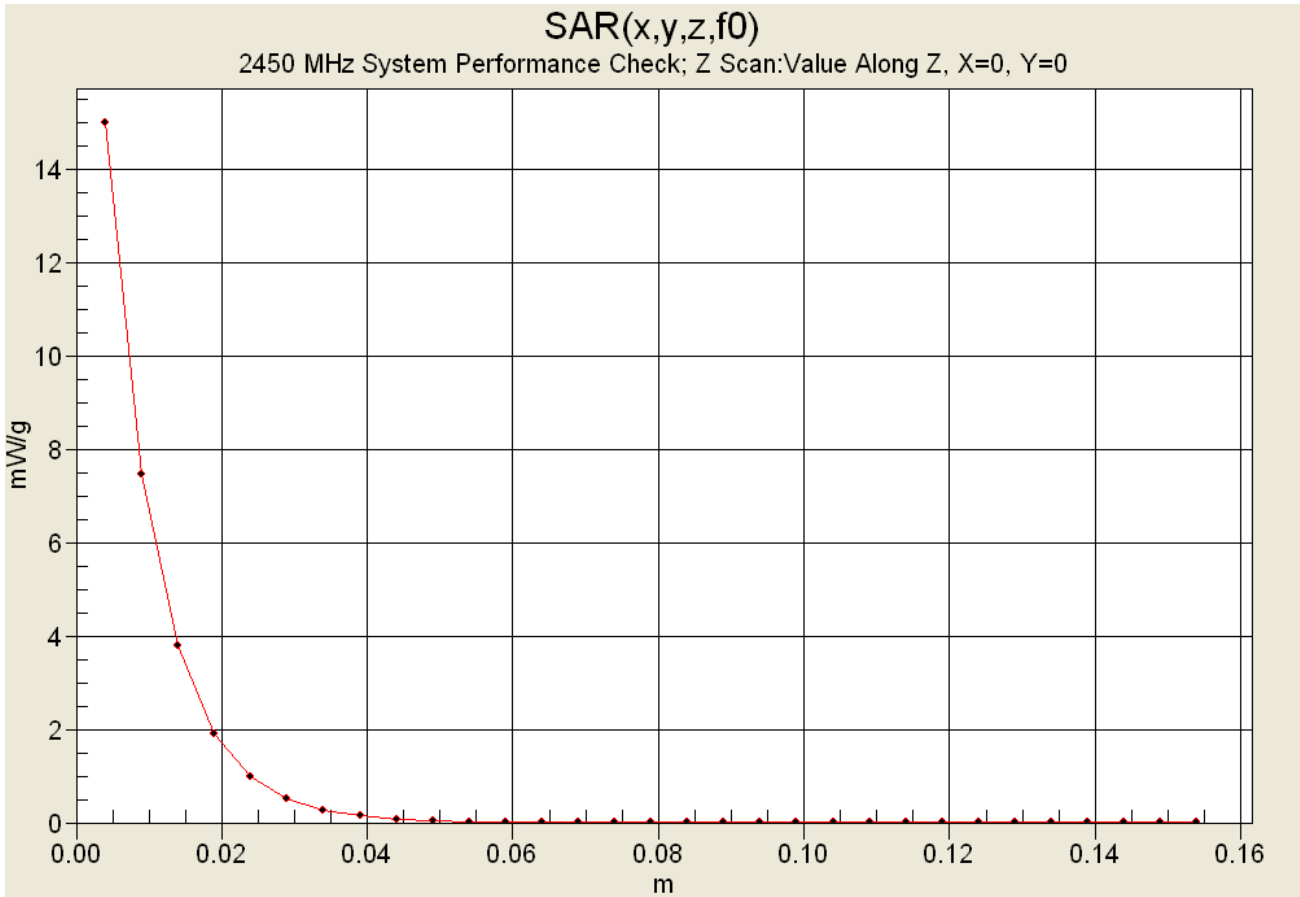

|                         |                                |  |              |                 |   |
|-------------------------|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>       | Zebra Technologies Corporation | <b>FCC ID:</b>   | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>        | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN   |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |              |                 |   |

Date: 11/19/04

### System Performance Check - 2450 MHz Dipole

**DUT: Dipole 2450 MHz; Model: D2450V2; Type: System Performance Check; Serial: 150; Calibrated: 09/30/2004**

Ambient Temp: 24.4 °C; Fluid Temp: 23.9 °C; Barometric Pressure: 103.0 kPa; Humidity: 30%

Communication System: CW  
 Forward Conducted Power: 250mW  
 Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium: HSL2450 ( $\sigma = 1.86 \text{ mho/m}$ ;  $\epsilon_r = 38.1$ ;  $\rho = 1000 \text{ kg/m}^3$ )


- Probe: ET3DV6 - SN1387; ConvF(4.77, 4.77, 4.77); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASy4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127


#### 2450 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm


#### 2450 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 96.8 V/m; Power Drift = -0.0 dB  
 Peak SAR (extrapolated) = 29 W/kg  
**SAR(1 g) = 13.5 mW/g; SAR(10 g) = 6.21 mW/g**

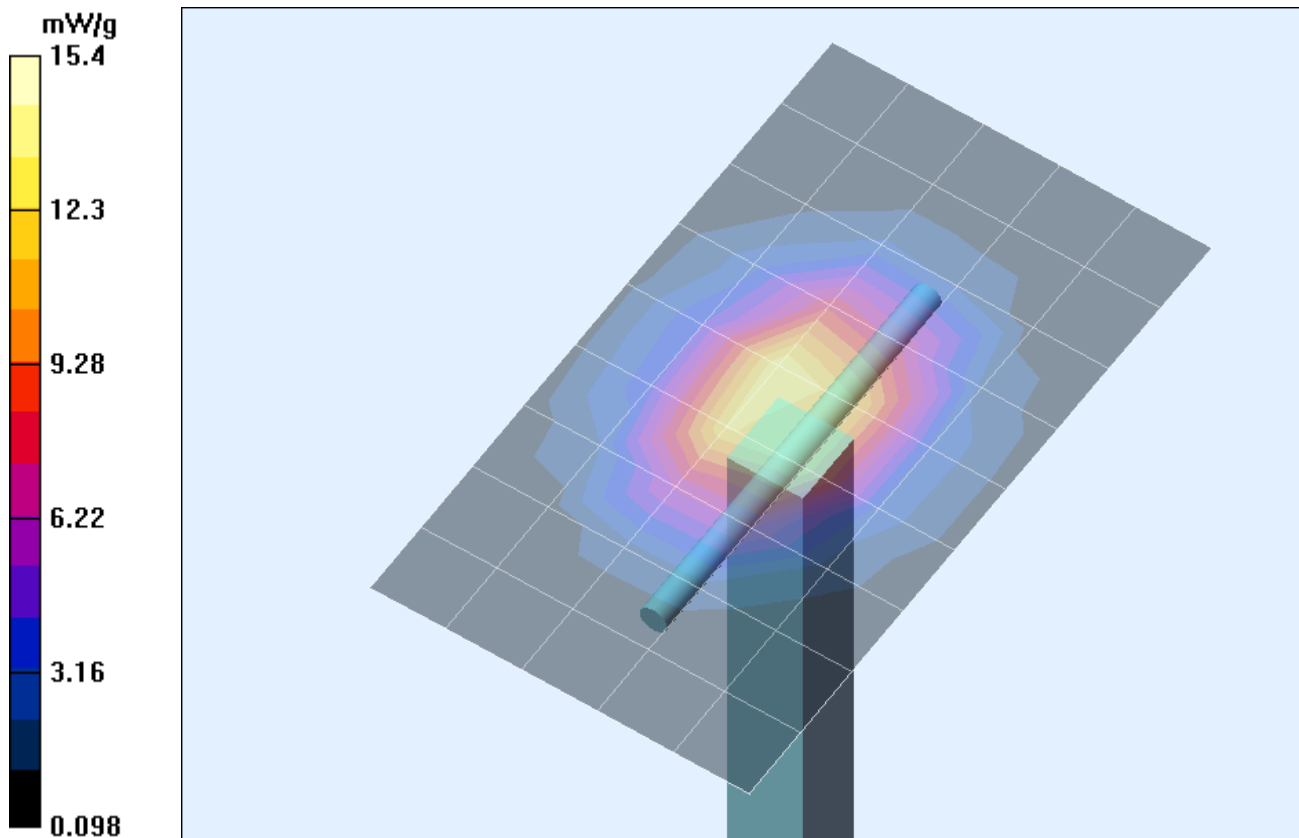

|  |                                |  |              |                 |   |
|--|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>  | Zebra Technologies Corporation | <b>FCC ID:</b>                           | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>   | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                                |  |              |                 |   |

### Z-Axis Scan

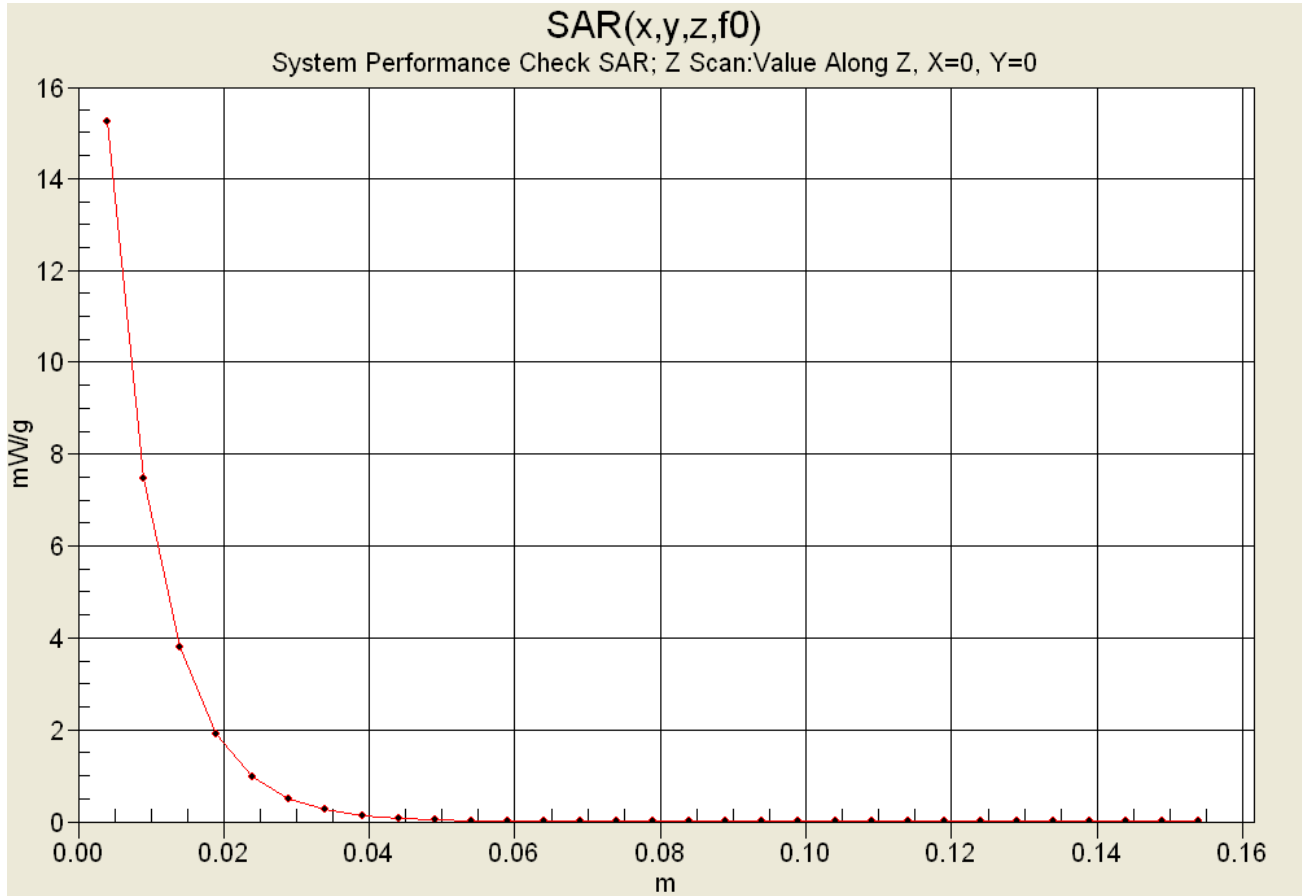

|                         |                                |  |              |                 |   |
|-------------------------|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>       | Zebra Technologies Corporation | <b>FCC ID:</b>   | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>        | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN   |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |              |                 |   |

Date Tested: 11/26/04

### System Performance Check - 2450 MHz Dipole

**DUT: Dipole 2450 MHz; Model: D2450V2; Type: System Performance Check; Serial: 150; Calibrated: 09/30/2004**

Ambient Temp: 25.5 °C; Fluid Temp: 23.9 °C; Barometric Pressure: 102.2 kPa; Humidity: 30%

Communication System: CW  
 Forward Conducted Power: 250mW  
 Frequency: 2450 MHz; Duty Cycle: 1:1  
 Medium: HSL2450 ( $\sigma = 1.87 \text{ mho/m}$ ;  $\epsilon_r = 38.4$ ;  $\rho = 1000 \text{ kg/m}^3$ )


- Probe: ET3DV6 - SN1387; ConvF(4.77, 4.77, 4.77); Calibrated: 18/03/2004
- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)
- Electronics: DAE3 Sn370; Calibrated: 14/05/2004
- Phantom: SAM 4.0; Type: Fiberglas; Serial: 1033
- Measurement SW: DASy4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build


#### 2450 MHz Dipole - System Performance Check/Area Scan (6x10x1):

Measurement grid: dx=10mm, dy=10mm

#### 2450 MHz Dipole - System Performance Check/Zoom Scan (7x7x7)/Cube 0:


Measurement grid: dx=5mm, dy=5mm, dz=5mm  
 Reference Value = 95.8 V/m; Power Drift = -0.0 dB  
 Peak SAR (extrapolated) = 28.6 W/kg  
**SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.35 mW/g**

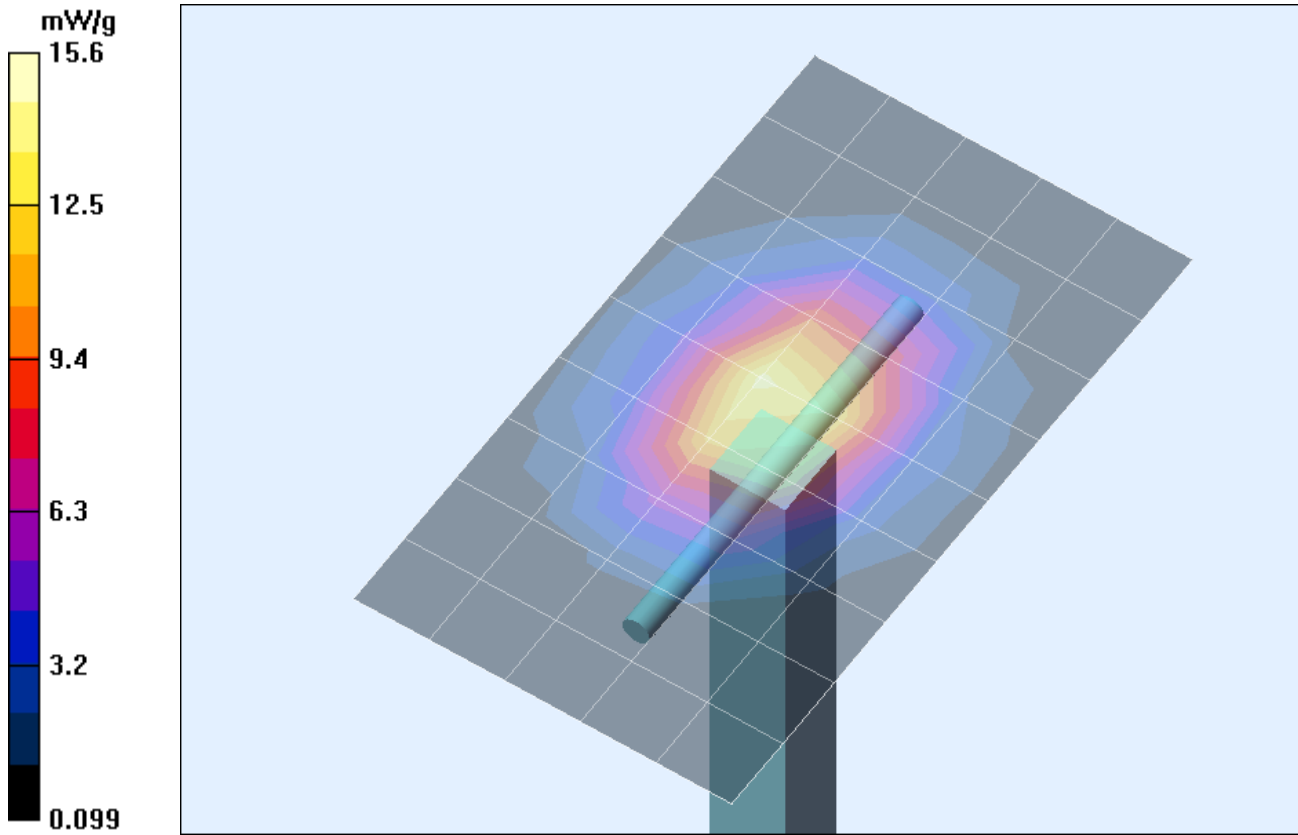


|  |                                |  |              |                 |   |
|--|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>  | Zebra Technologies Corporation | <b>FCC ID:</b>                           | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>   | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |                                |  |              |                 |   |




### Z-Axis Scan

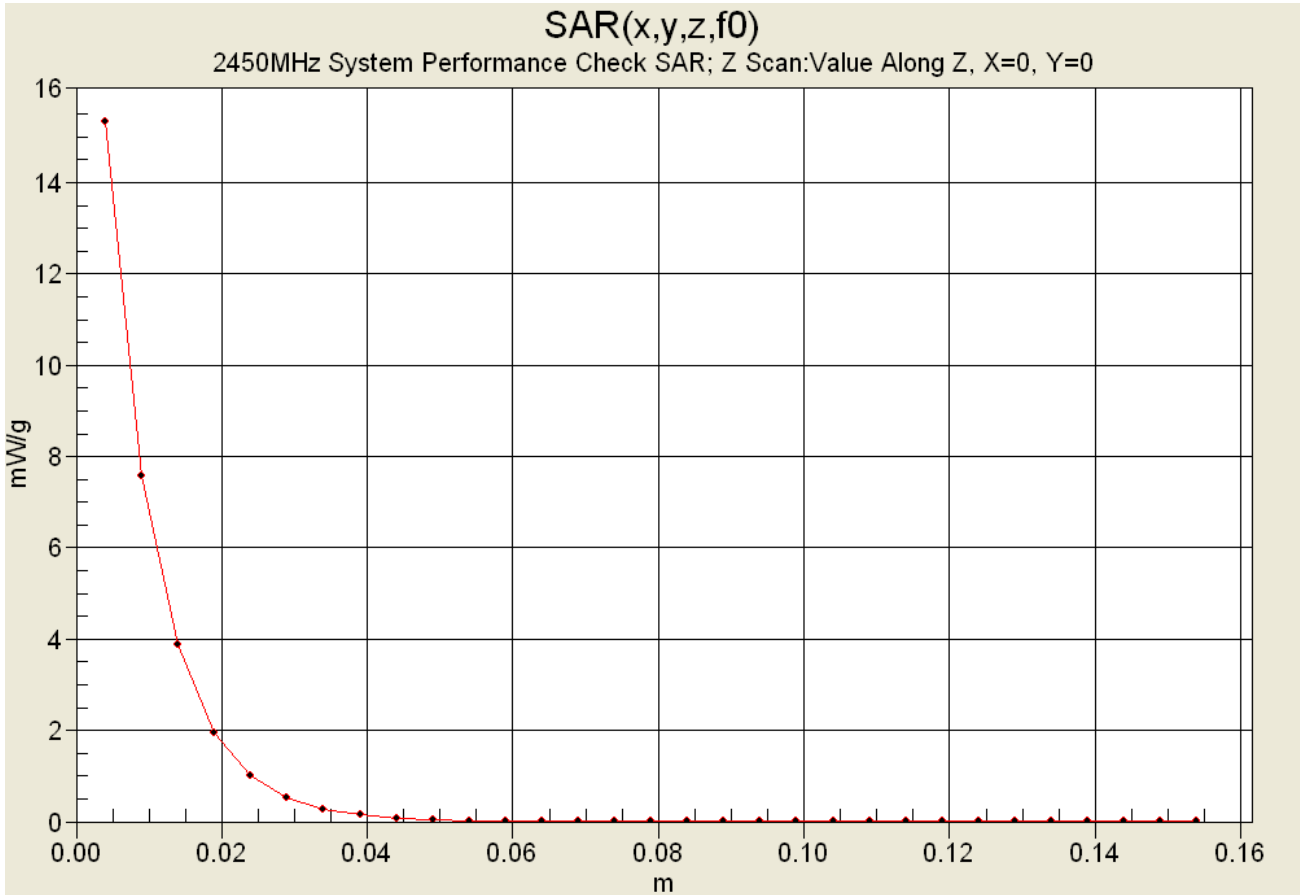

|                         |                                |  |              |                 |   |
|-------------------------|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>       | Zebra Technologies Corporation | <b>FCC ID:</b>   | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>        | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN   |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |              |                 |   |

|                  |                           |
|------------------|---------------------------|
| Test Report S/N: | 110804I28-T583-586-S15W   |
| Test Date(s):    | November 17-19 & 26, 2004 |
| Test Type:       | FCC/IC SAR Evaluation     |

**APPENDIX C - SYSTEM VALIDATION**

|                         |                                |  |              |                 |   |
|-------------------------|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>       | Zebra Technologies Corporation | <b>FCC ID:</b>   | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>        | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN   |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |              |                 | 18 of 23  |

## 2450 MHz SYSTEM VALIDATION DIPOLE

Type:

2450 MHz Validation Dipole

Serial Number:

150

Place of Calibration:

Celltech Labs Inc.

Date of Calibration:

September 30, 2004

Celltech Labs Inc. hereby certifies that this device has been calibrated on the date indicated above.

Calibrated by:

*Spencer Watson*


Approved by:

*Russell W. Pipe*

## 1. Dipole Construction & Electrical Characteristics

The validation dipole was constructed in accordance with the IEEE Std “Recommended Practice for Determining the Spatial-Peak Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques”. The electrical properties were measured using an HP 8753E Network Analyzer. The network analyzer was calibrated to the validation dipole N-type connector feed point using an HP85032E Type N calibration kit. The dipole was placed parallel to a planar phantom at a separation distance of 10.0mm from the simulating fluid using a loss-less dielectric spacer. The measured input impedance is:

|                                  |                                 |
|----------------------------------|---------------------------------|
| Feed point impedance at 2450 MHz | $\text{Re}\{Z\} = 48.246\Omega$ |
|                                  | $\text{Im}\{Z\} = 1.0996\Omega$ |
| Return Loss at 2450 MHz          | -33.519 dB                      |

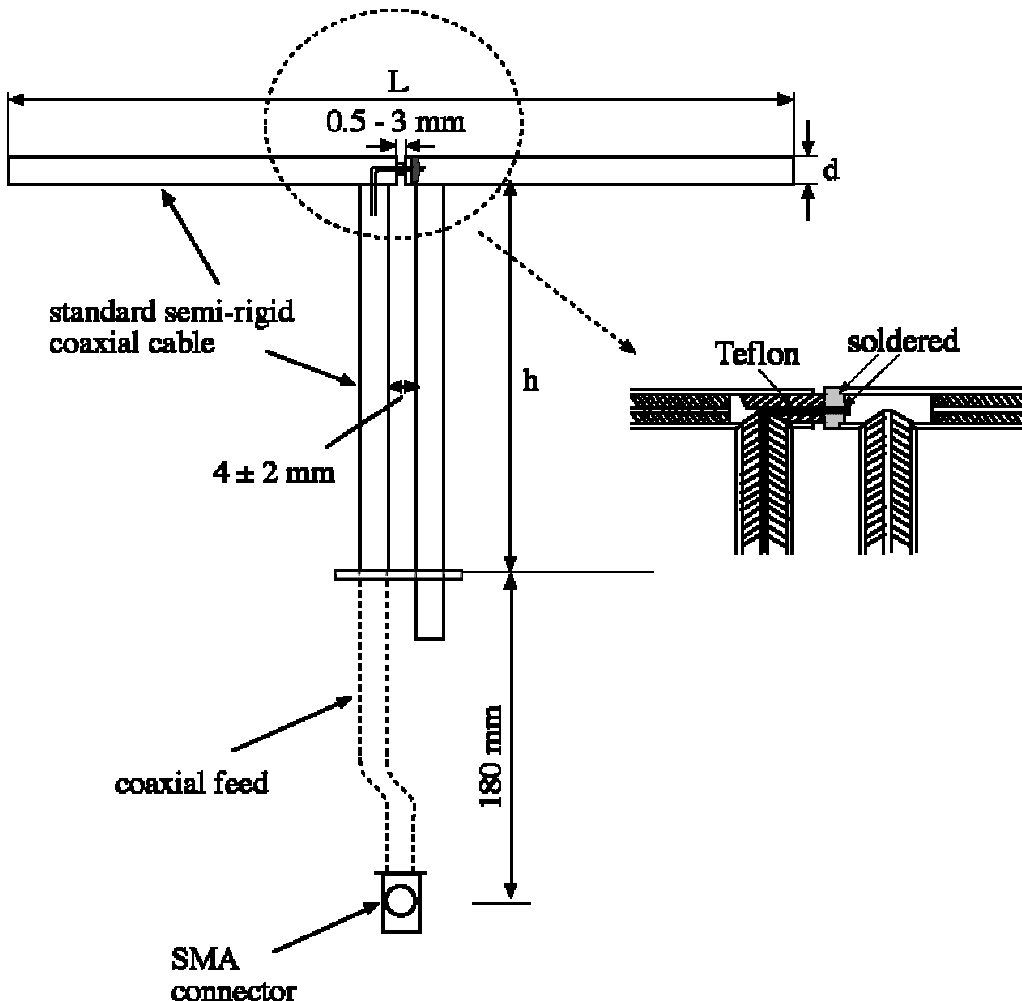

30 Sep 2004 16:29:23

MEM 1 U FS


1: 48.246  $\Omega$  1.0996  $\Omega$  71.432 pH

2 450.000 000 MHz

PRm

Cor

↑

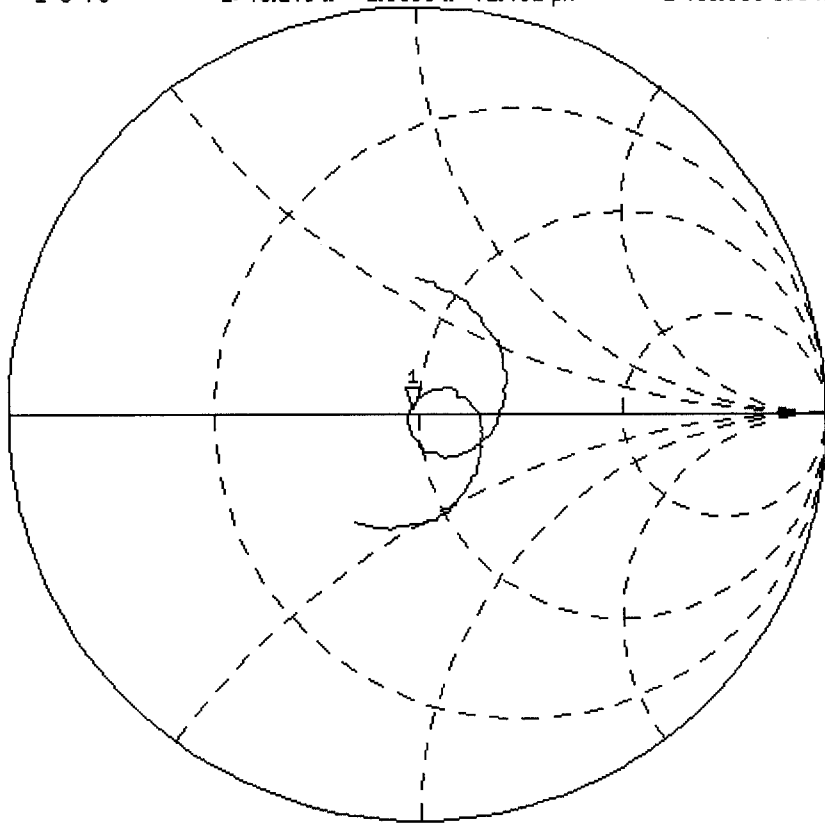


CENTER 2 450.000 000 MHz

SPAN 400.000 000 MHz

30 Sep 2004 16:28:38

CH1 MEM LOG 10 dB/REF 0 dB 1:-33.519 dB 2 450.000 000 MHz

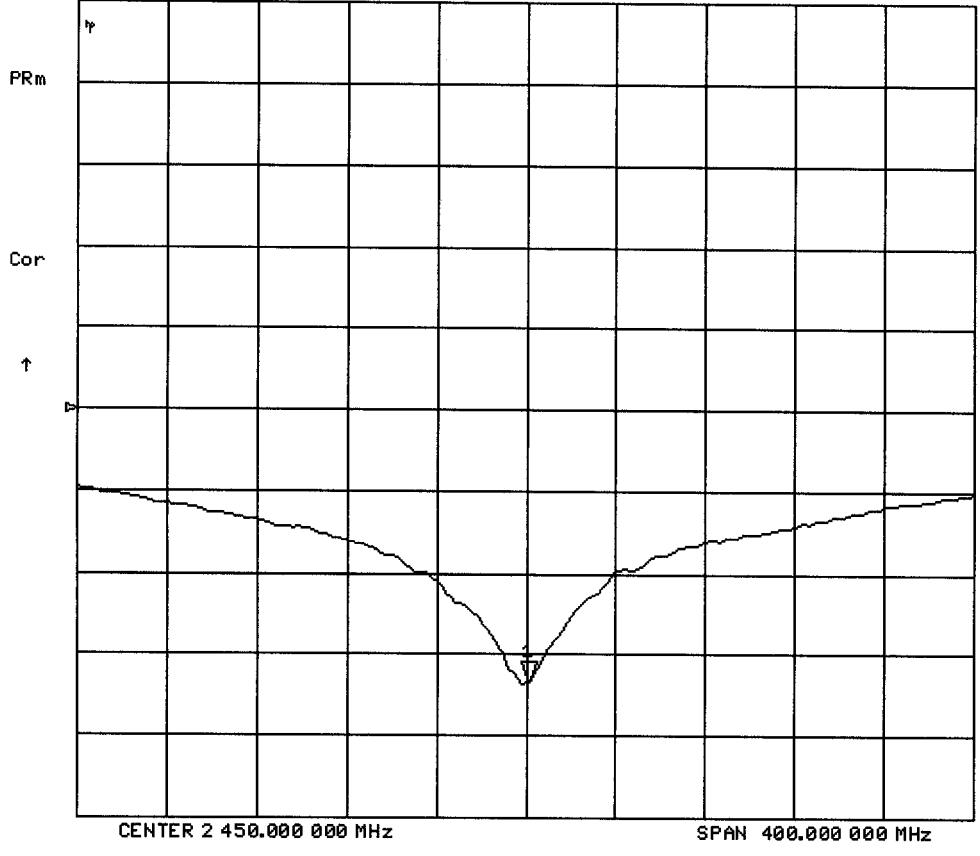

## 2. Validation Dipole Dimensions

| Frequency (MHz) | L (mm) | h (mm) | d (mm) |
|-----------------|--------|--------|--------|
| 300             | 420.0  | 250.0  | 6.2    |
| 450             | 288.0  | 167.0  | 6.2    |
| 835             | 161.0  | 89.8   | 3.6    |
| 900             | 149.0  | 83.3   | 3.6    |
| 1450            | 89.1   | 51.7   | 3.6    |
| 1800            | 72.0   | 41.7   | 3.6    |
| 1900            | 68.0   | 39.5   | 3.6    |
| 2000            | 64.5   | 37.5   | 3.6    |
| 2450            | 51.8   | 30.6   | 3.6    |
| 3000            | 41.5   | 25.0   | 3.6    |

## 3. Validation Phantom

The validation phantom is the SAM (Specific Anthropomorphic Mannequin) phantom manufactured by Schmid & Partner Engineering AG. The SAM phantom is a Fiberglass shell integrated in a wooden table. The shape of the shell corresponds to the phantom defined by SCC34-SC2. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by manually teaching three points in the robot.

**Shell Thickness:** 2.0 ± 0.1 mm  
**Filling Volume:** Approx. 25 liters  
**Dimensions:** 50 cm (W) x 100 cm (L)



**4. 2450 MHz System Validation Setup**



**5. 2450 MHz Dipole Setup**



## 6. Measurement Conditions

The phantom was filled with brain simulating tissue having the following electrical parameters at 2450 MHz:

|                        |            |
|------------------------|------------|
| Relative Permittivity: | 38.5       |
| Conductivity:          | 1.86 mho/m |
| Fluid Temperature:     | 23.7 °C    |
| Fluid Depth:           | ≥ 15.0 cm  |

Environmental Conditions:


|                      |           |
|----------------------|-----------|
| Ambient Temperature: | 25.3 °C   |
| Humidity:            | 32 %      |
| Barometric Pressure: | 102.7 kPa |

The 2450 MHz simulated brain tissue mixture consists of the following ingredients:

| <b>Ingredient</b>                       | <b>Percentage by weight</b>                                |
|---|--|
| Water                                   | 52.00%   |
| Glycol Monobutyl                        | 48.00%   |
| Target Dielectric Parameters<br>at 22°C | $\epsilon_r = 39.2$ (+/-5%)<br>$\sigma = 1.80$ S/m (+/-5%) |

## 7. SAR Measurement

The SAR measurement was performed with the E-field probe in mechanical detection mode only. The setup and determination of the forward power into the dipole was performed using the following procedures.

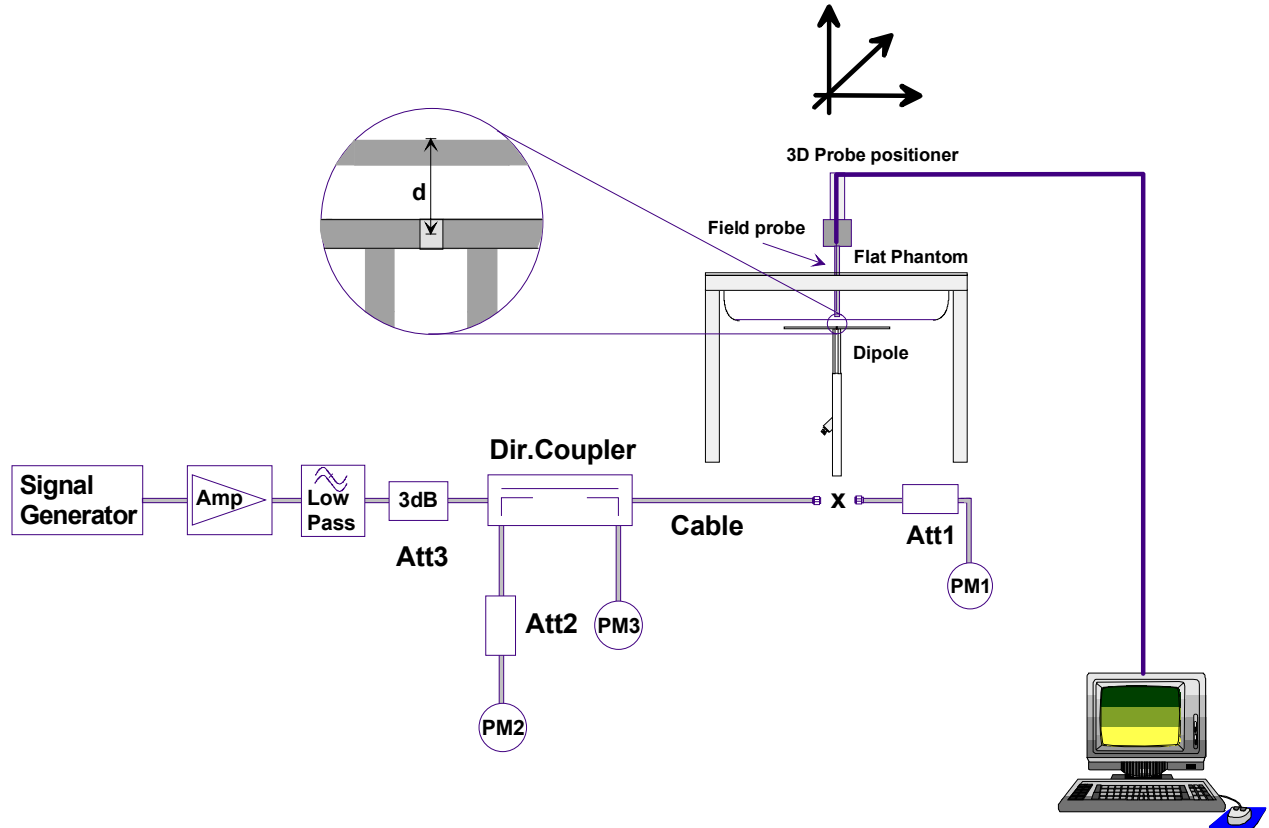

First, the power meter PM1 (including attenuator Att1) is connected to the cable to measure the forward power at the location of the dipole connector (X). The signal generator is adjusted for the desired forward power at the dipole connector (taking into account the attenuation of Att1) as read by power meter PM2. After connecting the cable to the dipole, the signal generator is readjusted for the same reading at power meter PM2. If the signal generator does not allow adjustment in 0.01dB steps, the remaining difference at PM2 must be taken into consideration. PM3 records the reflected power from the dipole to ensure that the value is not changed from the previous value. The reflected power should be 20dB below the forward power.

## 8. Validation Dipole SAR Test Results

Ten SAR measurements were performed in order to achieve repeatability and to establish an average target value.

| Validation Measurement | SAR @ 0.25W Input averaged over 1g | SAR @ 1W Input averaged over 1g | SAR @ 0.25W Input averaged over 10g | SAR @ 1W Input averaged over 10g | Peak SAR @ 0.25W Input |
|------------------------|------------------------------------|---------------------------------|-------------------------------------|----------------------------------|------------------------|
| Test 1                 | 14.2                               | 56.8                            | 6.58                                | 26.32                            | 30.4                   |
| Test 2                 | 14.1                               | 56.4                            | 6.54                                | 26.16                            | 30.2                   |
| Test 3                 | 14.1                               | 56.4                            | 6.54                                | 26.16                            | 30.4                   |
| Test 4                 | 14.1                               | 56.4                            | 6.51                                | 26.04                            | 30.6                   |
| Test 5                 | 14.0                               | 56.0                            | 6.51                                | 26.04                            | 29.8                   |
| Test 6                 | 14.0                               | 56.0                            | 6.49                                | 25.96                            | 29.6                   |
| Test 7                 | 14.1                               | 56.4                            | 6.54                                | 26.16                            | 30.0                   |
| Test 8                 | 14.1                               | 56.4                            | 6.53                                | 26.12                            | 30.1                   |
| Test 9                 | 14.0                               | 56.0                            | 6.50                                | 26.00                            | 29.8                   |
| Test10                 | 14.0                               | 56.0                            | 6.47                                | 25.88                            | 30.0                   |
| Average Value          | 14.07                              | 56.28                           | 6.52                                | 26.08                            | 30.09                  |

The results have been normalized to 1W (forward power) into the dipole.

IEEE Target over 1cm<sup>3</sup> (1g) of tissue: 52.4 mW/g (+/- 10%)

Averaged over 1cm (1g) of tissue: 56.28 mW/g (+ 7.4% deviation)

IEEE Target over 10cm<sup>3</sup> (10g) of tissue: 24.0 mW/g (+/- 10%)

Averaged over 10cm (10g) of tissue: 26.08 mW/g (+ 8.7% deviation)



## 2540 MHz System Validation - September 30, 2004

**DUT: Dipole 2450 MHz; Model: D2450V2; Serial: 150; Calibrated: 09/30/2004**

Ambient Temp: 25.3 °C; Fluid Temp: 23.7 °C; Barometric Pressure: 102.7 kPa; Humidity: 32%

Communication System: CW

Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL2450 ( $\sigma = 1.86$  mho/m;  $\epsilon_r = 38.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>)

- Probe: ET3DV6 - SN1590; ConvF(4.44, 4.44, 4.44); Calibrated: 24/05/2004

- Sensor-Surface: 4mm (Mechanical And Optical Surface Detection)

- Electronics: DAE3 Sn370; Calibrated: 14/05/2004

- Phantom: SAM 4.0; Type: Fiberglass; Serial: 1033

- Measurement SW: DASY4, V4.3 Build 22; Postprocessing SW: SEMCAD, V1.8 Build 127

**2450 MHz System Validation/Area Scan (6x10x1):** Measurement grid: dx=10mm, dy=10mm

**2450 MHz System Validation/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.9 V/m; Power Drift = 0.0 dB

Peak SAR (extrapolated) = 30.4 W/kg

**SAR(1 g) = 14.2 mW/g; SAR(10 g) = 6.58 mW/g**

**2450 MHz System Validation/Zoom Scan 2 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.9 V/m; Power Drift = -0.002 dB

Peak SAR (extrapolated) = 30.2 W/kg

**SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.54 mW/g**

**2450 MHz System Validation/Zoom Scan 3 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.5 V/m; Power Drift = -0.001 dB

Peak SAR (extrapolated) = 30.4 W/kg

**SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.54 mW/g**

**2450 MHz System Validation/Zoom Scan 4 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 94.1 V/m; Power Drift = 0.008 dB

Peak SAR (extrapolated) = 30.6 W/kg

**SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.51 mW/g**

**2450 MHz System Validation/Zoom Scan 5 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.9 V/m; Power Drift = -0.009 dB

Peak SAR (extrapolated) = 29.8 W/kg

**SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.51 mW/g**

**2450 MHz System Validation/Zoom Scan 6 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.4 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 29.6 W/kg

**SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.49 mW/g**

**2450 MHz System Validation/Zoom Scan 7 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.4 V/m; Power Drift = -0.008 dB

Peak SAR (extrapolated) = 30 W/kg

**SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.54 mW/g**

**2450 MHz System Validation/Zoom Scan 8 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.4 V/m; Power Drift = -0.004 dB

Peak SAR (extrapolated) = 30.1 W/kg

**SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.53 mW/g**

**2450 MHz System Validation/Zoom Scan 9 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 96.3 V/m; Power Drift = -0.0 dB

Peak SAR (extrapolated) = 29.8 W/kg


**SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.5 mW/g**

**2450 MHz System Validation/Zoom Scan 10 (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm


Reference Value = 96.4 V/m; Power Drift = -0.1 dB

Peak SAR (extrapolated) = 30 W/kg

**SAR(1 g) = 14.0 mW/g; SAR(10 g) = 6.47 mW/g**

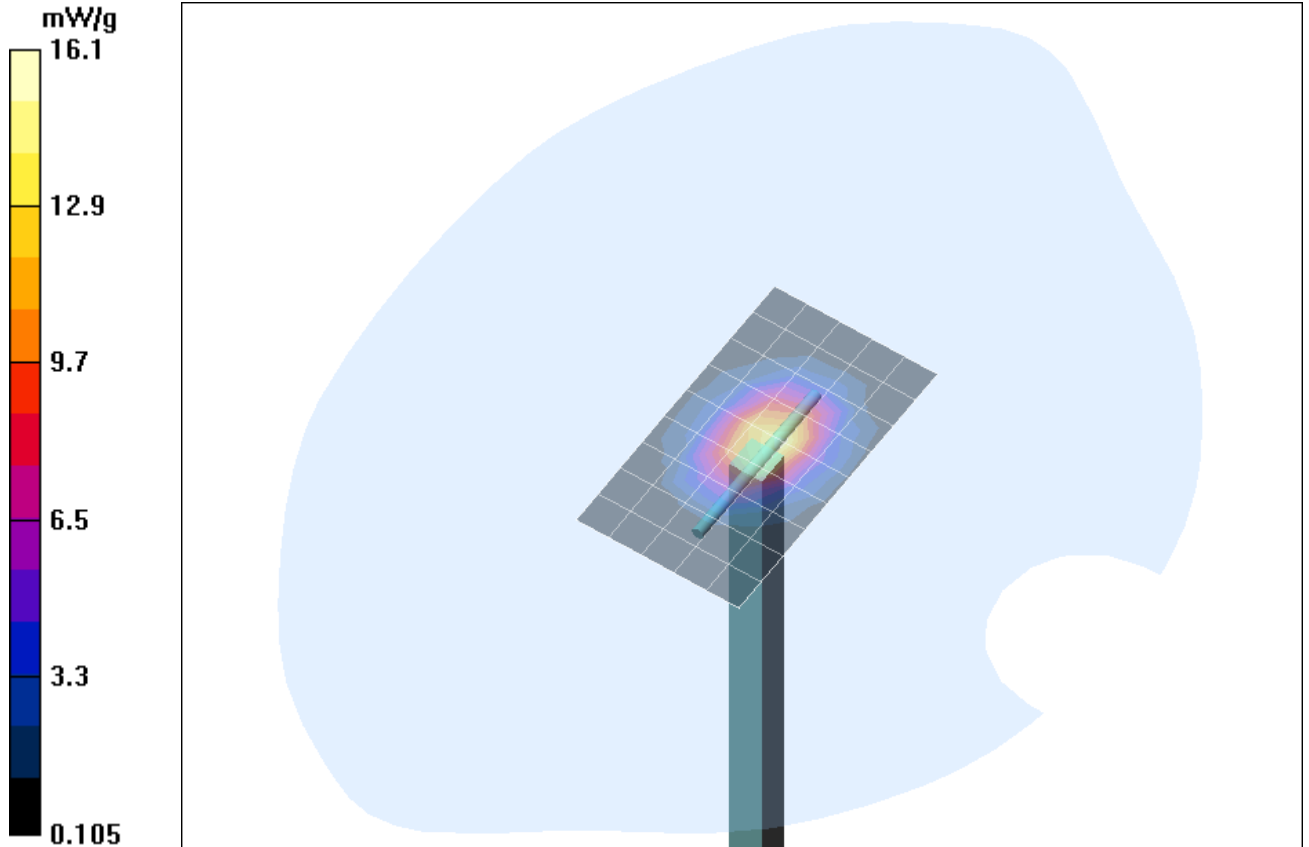

1 g average of 10 measurements: 14.07 mW/g  
10 g average of 10 measurements: 6.521 mW/g

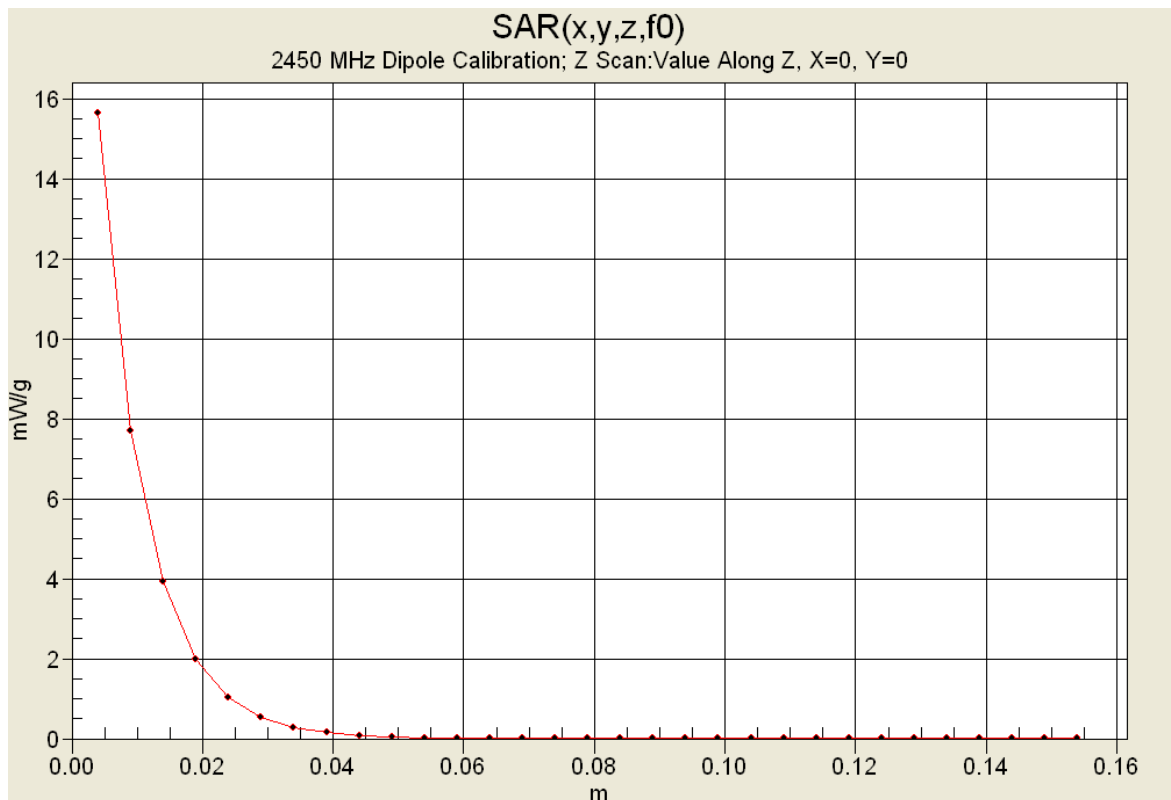



# 2450 MHz System Validation


## Measured Fluid Dielectric Parameters (Brain)

September 30, 2004

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 2.350000000 GHz | 38.9044     | 13.2920      |
| 2.360000000 GHz | 38.8598     | 13.3262      |
| 2.370000000 GHz | 38.8346     | 13.3589      |
| 2.380000000 GHz | 38.7702     | 13.3903      |
| 2.390000000 GHz | 38.7465     | 13.4360      |
| 2.400000000 GHz | 38.6987     | 13.4546      |
| 2.410000000 GHz | 38.6553     | 13.4975      |
| 2.420000000 GHz | 38.6023     | 13.5376      |
| 2.430000000 GHz | 38.5771     | 13.5800      |
| 2.440000000 GHz | 38.5403     | 13.6072      |
| 2.450000000 GHz | 38.5010     | 13.6535      |
| 2.460000000 GHz | 38.4824     | 13.6770      |
| 2.470000000 GHz | 38.4488     | 13.7080      |
| 2.480000000 GHz | 38.4153     | 13.7445      |
| 2.490000000 GHz | 38.3700     | 13.7692      |
| 2.500000000 GHz | 38.3378     | 13.7887      |
| 2.510000000 GHz | 38.2798     | 13.8028      |
| 2.520000000 GHz | 38.2288     | 13.8500      |
| 2.530000000 GHz | 38.1683     | 13.8945      |
| 2.540000000 GHz | 38.1113     | 13.9420      |
| 2.550000000 GHz | 38.0791     | 13.9851      |

|                  |                           |
|------------------|---------------------------|
| Test Report S/N: | 110804I28-T583-586-S15W   |
| Test Date(s):    | November 17-19 & 26, 2004 |
| Test Type:       | FCC/IC SAR Evaluation     |

**APPENDIX D - PROBE CALIBRATION**

|                         |                                |  |              |                 |   |
|-------------------------|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>       | Zebra Technologies Corporation | <b>FCC ID:</b>   | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>        | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN   |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |              |                 | 19 of 23  |

**Client**      **Celltech**

**CALIBRATION CERTIFICATE**

Object(s)                      **ET3DV6 - SN:1387**

Calibration procedure(s)      **QA CAL-01.v2  
Calibration procedure for dosimetric E-field probes**

Calibration date:              **March 18, 2004**



Condition of the calibrated item      **In Tolerance (according to the specific calibration document)**

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI).  
The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature 22 +/- 2 degrees Celsius and humidity < 75%.

Calibration Equipment used (M&TE critical for calibration)

| Model Type                        | ID #           | Cal Date (Calibrated by, Certificate No.) | Scheduled Calibration  |
|-----------------------------------|----------------|---|------------------------|
| Power meter EPM E4419B            | GB41293874     | 2-Apr-03 (METAS, No 252-0250)             | Apr-04                 |
| Power sensor E4412A               | MY41495277     | 2-Apr-03 (METAS, No 252-0250)             | Apr-04                 |
| Reference 20 dB Attenuator        | SN: 5086 (20b) | 3-Apr-03 (METAS, No. 251-0340)            | Apr-04                 |
| Fluke Process Calibrator Type 702 | SN: 6295803    | 8-Sep-03 (Sintrel SCS No. E-030020)       | Sep-04                 |
| Power sensor HP 8481A             | MY41092180     | 18-Sep-02 (SPEAG, in house check Oct-03)  | In house check: Oct 05 |
| RF generator HP 8684C             | US3642U01700   | 4-Aug-99 (SPEAG, in house check Aug-02)   | In house check: Aug-05 |
| Network Analyzer HP 8753E         | US37390585     | 18-Oct-01 (SPEAG, in house check Oct-03)  | In house check: Oct 05 |

|                | Name          | Function            | Signature   |
|----------------|---------------|---------------------|---|
| Calibrated by: | Nico Vetterli | Technician          |  |
| Approved by:   | Katja Pokovic | Laboratory Director |  |

Date issued: March 18, 2004

This calibration certificate is issued as an intermediate solution until the accreditation process (based on ISO/IEC 17025 International Standard) for Calibration Laboratory of Schmid & Partner Engineering AG is completed.

# Probe ET3DV6

**SN:1387**

|                         |                           |
|-------------------------|---------------------------|
| <b>Manufactured:</b>    | <b>September 21, 1999</b> |
| <b>Last calibrated:</b> | <b>February 26, 2003</b>  |
| <b>Recalibrated:</b>    | <b>March 18, 2004</b>     |

**Calibrated for DASY Systems**

**(Note: non-compatible with DASY2 system!)**

## DASY - Parameters of Probe: ET3DV6 SN:1387

### Sensitivity in Free Space

|       |  |
|-------|--|
| NormX | 1.62 $\mu\text{V}/(\text{V}/\text{m})^2$ |
| NormY | 1.71 $\mu\text{V}/(\text{V}/\text{m})^2$ |
| NormZ | 1.71 $\mu\text{V}/(\text{V}/\text{m})^2$ |

### Diode Compression<sup>A</sup>

|       |    |    |
|-------|----|----|
| DCP X | 92 | mV |
| DCP Y | 92 | mV |
| DCP Z | 92 | mV |

### Sensitivity in Tissue Simulating Liquid (Conversion Factors)

Please see Page 7.

### Boundary Effect

Head                    900 MHz      Typical SAR gradient: 5 % per mm

|   |                              |        |        |
|---|------------------------------|--------|--------|
| Sensor Center to Phantom Surface Distance |                              | 3.7 mm | 4.7 mm |
| SAR <sub>be</sub> [%]                     | Without Correction Algorithm | 9.3    | 4.4    |
| SAR <sub>be</sub> [%]                     | With Correction Algorithm    | 0.0    | 0.1    |

Head                    1800 MHz      Typical SAR gradient: 10 % per mm

|                            |                              |        |        |
|----------------------------|------------------------------|--------|--------|
| Sensor to Surface Distance |                              | 3.7 mm | 4.7 mm |
| SAR <sub>be</sub> [%]      | Without Correction Algorithm | 14.8   | 10.0   |
| SAR <sub>be</sub> [%]      | With Correction Algorithm    | 0.2    | 0.0    |

### Sensor Offset


|                            |              |
|----------------------------|--------------|
| Probe Tip to Sensor Center | 2.7 mm       |
| Optical Surface Detection  | in tolerance |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor  $k=2$ , which for a normal distribution corresponds to a coverage probability of approximately 95%.




<sup>A</sup> numerical linearization parameter: uncertainty not required

# Frequency Response of E-Field

( TEM-Cell:ifi110, Waveguide R22)

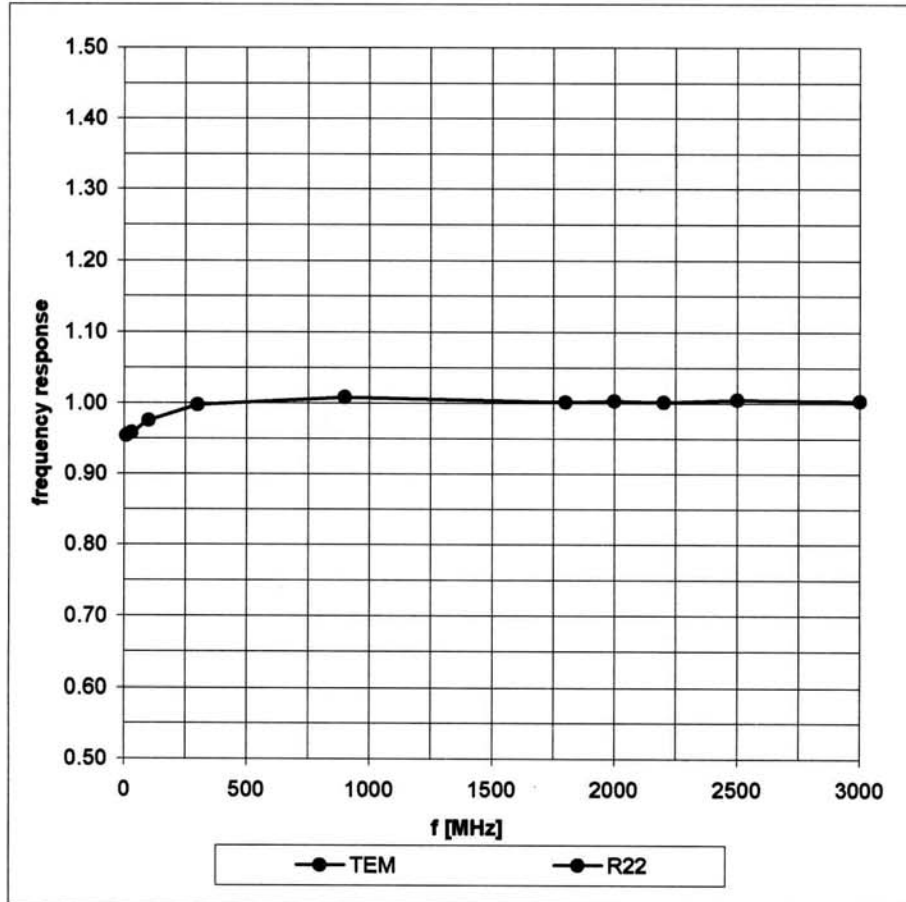



### Receiving Pattern ( $\phi$ ), $\theta = 0^\circ$

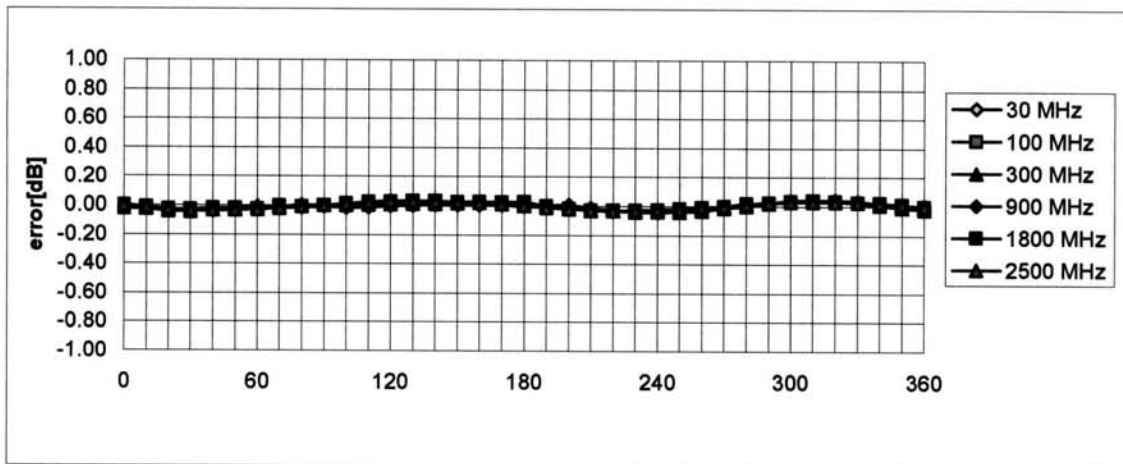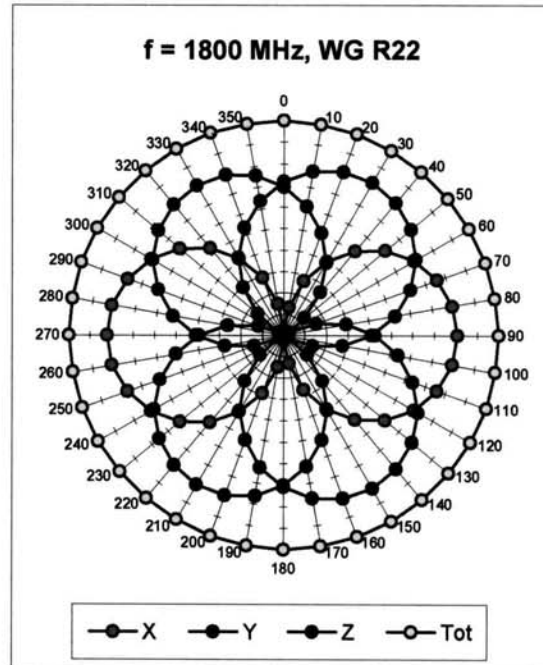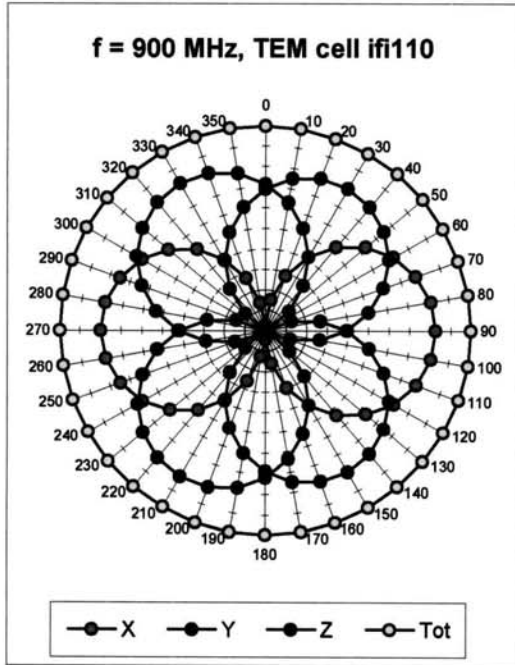

**Axial Isotropy Error <math>\lt; \pm 0.2 \text{ dB}</math>**





### Dynamic Range f(SAR<sub>head</sub>) ( Waveguide R22 )

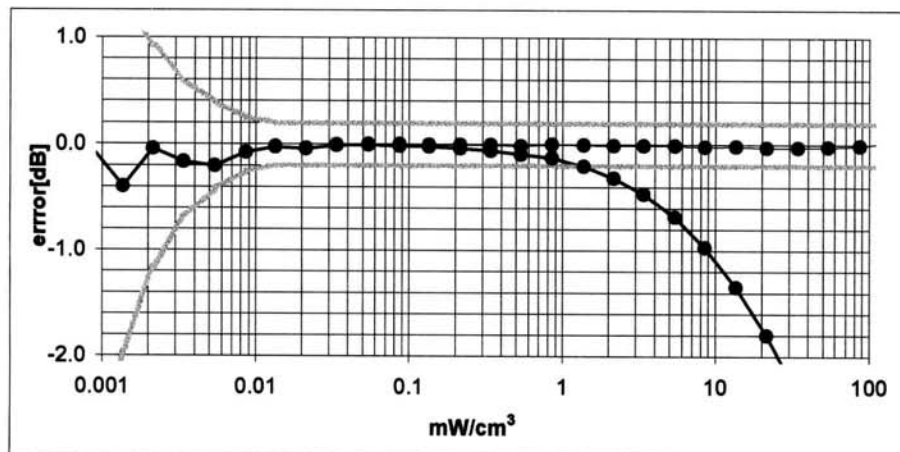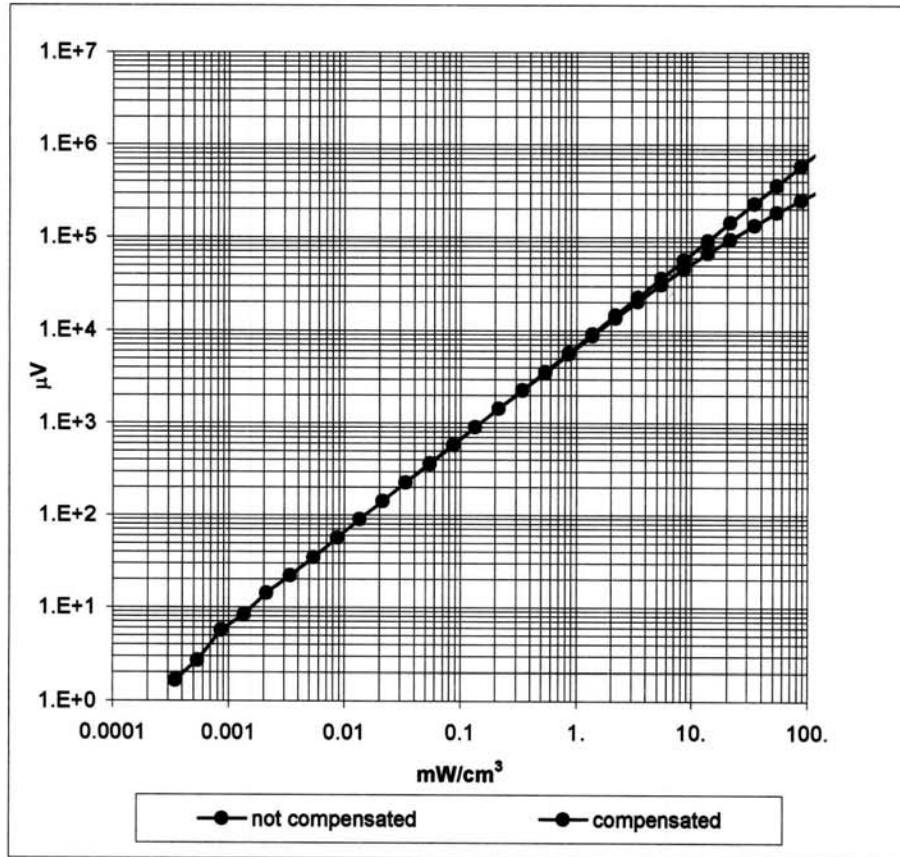

Probe Linearity < ± 0.2 dB

## Conversion Factor Assessment

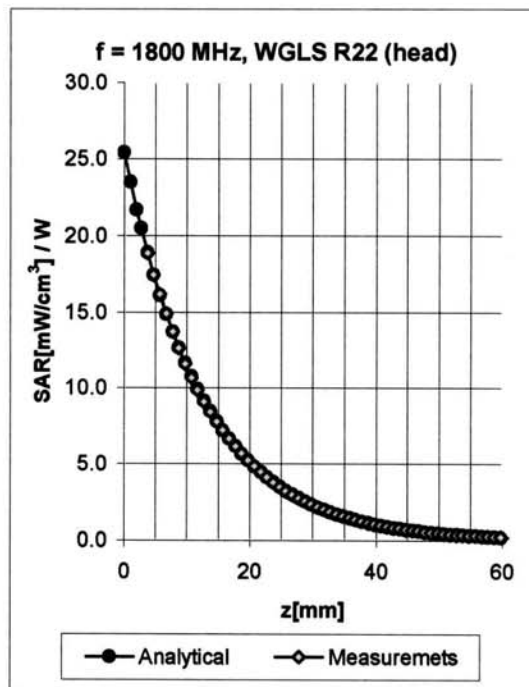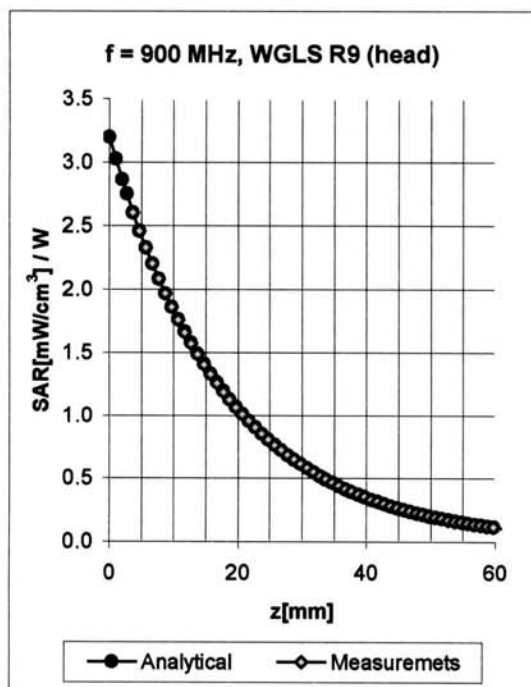


| f [MHz] | Validity [MHz] <sup>B</sup> | Tissue | Permittivity | Conductivity | Alpha | Depth | ConvF        | Uncertainty |
|---------|-----------------------------|--------|--------------|--------------|-------|-------|--------------|-------------|
| 835     | 750-950                     | Head   | 41.5 ± 5%    | 0.90 ± 5%    | 0.72  | 1.78  | 6.71 ± 11.9% | (k=2)       |
| 1750    | 1700-1800                   | Head   | 40.0 ± 5%    | 1.40 ± 5%    | 0.51  | 2.67  | 5.38 ± 9.7%  | (k=2)       |
| 1900    | 1850-1950                   | Head   | 40.0 ± 5%    | 1.40 ± 5%    | 0.55  | 2.66  | 5.25 ± 9.7%  | (k=2)       |
| 2450    | 2400-2500                   | Head   | 39.2 ± 5%    | 1.80 ± 5%    | 0.99  | 1.89  | 4.77 ± 9.7%  | (k=2)       |
| 835     | 750-950                     | Body   | 55.2 ± 5%    | 0.97 ± 5%    | 0.56  | 2.04  | 6.24 ± 11.9% | (k=2)       |
| 1750    | 1700-1800                   | Body   | 53.3 ± 5%    | 1.52 ± 5%    | 0.58  | 2.82  | 4.68 ± 9.7%  | (k=2)       |
| 1900    | 1850-1950                   | Body   | 53.3 ± 5%    | 1.52 ± 5%    | 0.62  | 2.77  | 4.57 ± 9.7%  | (k=2)       |
| 2450    | 2400-2500                   | Body   | 52.7 ± 5%    | 1.95 ± 5%    | 1.75  | 1.28  | 4.50 ± 9.7%  | (k=2)       |

<sup>B</sup> The total standard uncertainty is calculated as root-sum-square of standard uncertainty of the Conversion Factor at calibration frequency and the standard uncertainty for the indicated frequency band.

# Deviation from Isotropy in HSL

Error ( $\theta, \phi$ ),  $f = 900$  MHz

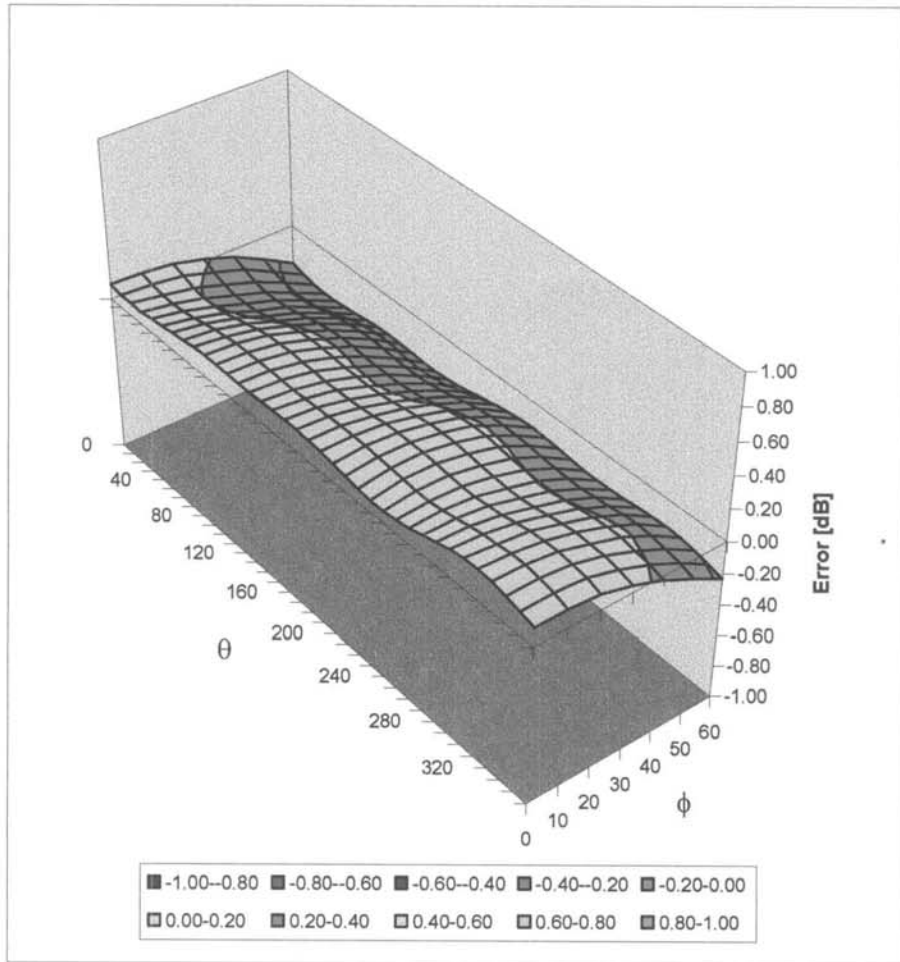

**Spherical Isotropy Error <math>\lt; \pm 0.4 dB**

## Additional Conversion Factors

for Dosimetric E-Field Probe

Type:

**ET3DV6**

Serial Number:

**1387**

Place of Assessment:

**Zurich**

Date of Assessment:


**March 22, 2004**

Probe Calibration Date:

**March 18, 2004**

Schmid & Partner Engineering AG hereby certifies that conversion factor(s) of this probe have been evaluated on the date indicated above. The assessment was performed using the FDTD numerical code SEMCAD of Schmid & Partner Engineering AG. Since the evaluation is coupled with measured conversion factors, it has to be recalculated yearly, i.e., following the re-calibration schedule of the probe. The uncertainty of the numerical assessment is based on the extrapolation from measured value at 900 MHz or at 1800 MHz.

Assessed by:



## Dosimetric E-Field Probe ET3DV6 SN:1387

Conversion factor ( $\pm$  standard deviation)

|         |       |              |   |
|---------|-------|--------------|---|
| 150 MHz | ConvF | 9.1 $\pm$ 8% | $\epsilon_r = 52.3 \pm 5\%$<br>$\sigma = 0.76 \pm 5\%$ mho/m<br>(head tissue) |
| 300 MHz | ConvF | 7.8 $\pm$ 8% | $\epsilon_r = 45.3 \pm 5\%$<br>$\sigma = 0.87 \pm 5\%$ mho/m<br>(head tissue) |
| 450 MHz | ConvF | 7.5 $\pm$ 8% | $\epsilon_r = 43.5 \pm 5\%$<br>$\sigma = 0.87 \pm 5\%$ mho/m<br>(head tissue) |
| 150 MHz | ConvF | 8.7 $\pm$ 8% | $\epsilon_r = 61.9 \pm 5\%$<br>$\sigma = 0.80 \pm 5\%$ mho/m<br>(body tissue) |
| 450 MHz | ConvF | 7.6 $\pm$ 8% | $\epsilon_r = 56.7 \pm 5\%$<br>$\sigma = 0.94 \pm 5\%$ mho/m<br>(body tissue) |


### Important Note:

For numerically assessed probe conversion factors, parameters Alpha and Delta in the DASY software must have the following entries: Alpha = 0 and Delta = 1.

Please see also Section 4.7 of the DASY4 Manual.

|                  |                           |
|------------------|---------------------------|
| Test Report S/N: | 110804I28-T583-586-S15W   |
| Test Date(s):    | November 17-19 & 26, 2004 |
| Test Type:       | FCC/IC SAR Evaluation     |

**APPENDIX E - MEASURED FLUID DIELECTRIC PARAMETERS**

|                         |                                |  |              |                 |   |
|-------------------------|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>       | Zebra Technologies Corporation | <b>FCC ID:</b>   | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>        | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN   |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |              |                 | 20 of 23  |

# 2450 MHz System Performance Check

## Measured Fluid Dielectric Parameters (Brain)

November 17, 2004

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 2.350000000 GHz | 39.0298     | 13.5765      |
| 2.360000000 GHz | 38.9895     | 13.6011      |
| 2.370000000 GHz | 38.9405     | 13.6412      |
| 2.380000000 GHz | 38.9113     | 13.6599      |
| 2.390000000 GHz | 38.8707     | 13.6771      |
| 2.400000000 GHz | 38.8301     | 13.7001      |
| 2.410000000 GHz | 38.7839     | 13.7253      |
| 2.420000000 GHz | 38.7463     | 13.7632      |
| 2.430000000 GHz | 38.7027     | 13.7924      |
| 2.440000000 GHz | 38.6654     | 13.8417      |
| 2.450000000 GHz | 38.6314     | 13.8635      |
| 2.460000000 GHz | 38.5812     | 13.9214      |
| 2.470000000 GHz | 38.5630     | 13.9499      |
| 2.480000000 GHz | 38.5286     | 13.9812      |
| 2.490000000 GHz | 38.4972     | 14.0019      |
| 2.500000000 GHz | 38.4424     | 14.0233      |
| 2.510000000 GHz | 38.3895     | 14.0491      |
| 2.520000000 GHz | 38.3300     | 14.0726      |
| 2.530000000 GHz | 38.2719     | 14.1257      |
| 2.540000000 GHz | 38.2336     | 14.1622      |
| 2.550000000 GHz | 38.1933     | 14.1952      |



# 2450 MHz DUT Evaluation (Body)

## Measured Fluid Dielectric Parameters (Muscle)

November 17, 2004

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 2.350000000 GHz | 51.1755     | 14.4154      |
| 2.360000000 GHz | 51.1296     | 14.4434      |
| 2.370000000 GHz | 51.1025     | 14.4862      |
| 2.380000000 GHz | 51.0825     | 14.5212      |
| 2.390000000 GHz | 51.0505     | 14.5785      |
| 2.400000000 GHz | 51.0038     | 14.6283      |
| 2.410000000 GHz | 50.9660     | 14.6535      |
| 2.420000000 GHz | 50.9315     | 14.6864      |
| 2.430000000 GHz | 50.9160     | 14.7337      |
| 2.440000000 GHz | 50.8860     | 14.7588      |
| 2.450000000 GHz | 50.8502     | 14.7989      |
| 2.460000000 GHz | 50.8108     | 14.8258      |
| 2.470000000 GHz | 50.7899     | 14.8636      |
| 2.480000000 GHz | 50.7729     | 14.9121      |
| 2.490000000 GHz | 50.7365     | 14.9557      |
| 2.500000000 GHz | 50.6671     | 15.0191      |
| 2.510000000 GHz | 50.6298     | 15.0506      |
| 2.520000000 GHz | 50.5632     | 15.0902      |
| 2.530000000 GHz | 50.5291     | 15.1601      |
| 2.540000000 GHz | 50.5055     | 15.1727      |
| 2.550000000 GHz | 50.4538     | 15.2147      |

# 2450 MHz System Performance Check

## Measured Fluid Dielectric Parameters (Brain)

November 18, 2004

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 2.350000000 GHz | 38.6286     | 13.5458      |
| 2.360000000 GHz | 38.5867     | 13.5924      |
| 2.370000000 GHz | 38.5595     | 13.6247      |
| 2.380000000 GHz | 38.5063     | 13.6477      |
| 2.390000000 GHz | 38.4659     | 13.6716      |
| 2.400000000 GHz | 38.4417     | 13.6801      |
| 2.410000000 GHz | 38.3773     | 13.7132      |
| 2.420000000 GHz | 38.3476     | 13.7570      |
| 2.430000000 GHz | 38.3004     | 13.7850      |
| 2.440000000 GHz | 38.2581     | 13.8313      |
| 2.450000000 GHz | 38.2268     | 13.8661      |
| 2.460000000 GHz | 38.1921     | 13.9124      |
| 2.470000000 GHz | 38.1610     | 13.9585      |
| 2.480000000 GHz | 38.1304     | 13.9742      |
| 2.490000000 GHz | 38.0877     | 13.9975      |
| 2.500000000 GHz | 38.0427     | 14.0038      |
| 2.510000000 GHz | 37.9890     | 14.0315      |
| 2.520000000 GHz | 37.9484     | 14.0705      |
| 2.530000000 GHz | 37.8843     | 14.0968      |
| 2.540000000 GHz | 37.8281     | 14.1442      |
| 2.550000000 GHz | 37.8034     | 14.1761      |

# 2450 MHz DUT Evaluation (Body)

## Measured Fluid Dielectric Parameters (Muscle)

November 18, 2004

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 2.350000000 GHz | 50.4517     | 14.3720      |
| 2.360000000 GHz | 50.4228     | 14.4122      |
| 2.370000000 GHz | 50.3927     | 14.4471      |
| 2.380000000 GHz | 50.3443     | 14.4894      |
| 2.390000000 GHz | 50.3175     | 14.5182      |
| 2.400000000 GHz | 50.2794     | 14.5391      |
| 2.410000000 GHz | 50.2287     | 14.5970      |
| 2.420000000 GHz | 50.1979     | 14.6430      |
| 2.430000000 GHz | 50.1453     | 14.6723      |
| 2.440000000 GHz | 50.1226     | 14.7316      |
| 2.450000000 GHz | 50.0828     | 14.7722      |
| 2.460000000 GHz | 50.0736     | 14.8309      |
| 2.470000000 GHz | 50.0434     | 14.8650      |
| 2.480000000 GHz | 50.0106     | 14.8956      |
| 2.490000000 GHz | 49.9610     | 14.9291      |
| 2.500000000 GHz | 49.9262     | 14.9380      |
| 2.510000000 GHz | 49.8716     | 14.9829      |
| 2.520000000 GHz | 49.8378     | 15.0318      |
| 2.530000000 GHz | 49.7665     | 15.0844      |
| 2.540000000 GHz | 49.7318     | 15.1360      |
| 2.550000000 GHz | 49.7059     | 15.1702      |

# 2450 MHz System Performance Check

## Measured Fluid Dielectric Parameters (Brain)

November 19, 2004

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 2.350000000 GHz | 38.5606     | 13.3694      |
| 2.360000000 GHz | 38.5113     | 13.3864      |
| 2.370000000 GHz | 38.4717     | 13.4179      |
| 2.380000000 GHz | 38.4419     | 13.4502      |
| 2.390000000 GHz | 38.4142     | 13.4700      |
| 2.400000000 GHz | 38.3646     | 13.4993      |
| 2.410000000 GHz | 38.3109     | 13.5325      |
| 2.420000000 GHz | 38.2676     | 13.5739      |
| 2.430000000 GHz | 38.2300     | 13.6109      |
| 2.440000000 GHz | 38.1784     | 13.6598      |
| 2.450000000 GHz | 38.1494     | 13.6848      |
| 2.460000000 GHz | 38.1003     | 13.7075      |
| 2.470000000 GHz | 38.0772     | 13.7309      |
| 2.480000000 GHz | 38.0416     | 13.7678      |
| 2.490000000 GHz | 38.0127     | 13.7855      |
| 2.500000000 GHz | 37.9703     | 13.8120      |
| 2.510000000 GHz | 37.9250     | 13.8276      |
| 2.520000000 GHz | 37.8576     | 13.8841      |
| 2.530000000 GHz | 37.7993     | 13.9114      |
| 2.540000000 GHz | 37.7569     | 13.9693      |
| 2.550000000 GHz | 37.7187     | 13.9858      |

# 2450 MHz DUT Evaluation (Body)

## Measured Fluid Dielectric Parameters (Muscle)

November 19, 2004

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 2.350000000 GHz | 51.1252     | 14.1548      |
| 2.360000000 GHz | 51.0951     | 14.1789      |
| 2.370000000 GHz | 51.0746     | 14.2282      |
| 2.380000000 GHz | 51.0546     | 14.2703      |
| 2.390000000 GHz | 51.0298     | 14.3041      |
| 2.400000000 GHz | 50.9863     | 14.3390      |
| 2.410000000 GHz | 50.9467     | 14.3882      |
| 2.420000000 GHz | 50.9100     | 14.4382      |
| 2.430000000 GHz | 50.8902     | 14.4829      |
| 2.440000000 GHz | 50.8342     | 14.5176      |
| 2.450000000 GHz | 50.8266     | 14.5635      |
| 2.460000000 GHz | 50.7866     | 14.5909      |
| 2.470000000 GHz | 50.7667     | 14.6273      |
| 2.480000000 GHz | 50.7484     | 14.6697      |
| 2.490000000 GHz | 50.7216     | 14.7158      |
| 2.500000000 GHz | 50.6699     | 14.7497      |
| 2.510000000 GHz | 50.6402     | 14.7823      |
| 2.520000000 GHz | 50.5710     | 14.8176      |
| 2.530000000 GHz | 50.5159     | 14.8804      |
| 2.540000000 GHz | 50.4671     | 14.9324      |
| 2.550000000 GHz | 50.4498     | 14.9671      |

# 2450 MHz System Performance Check

## Measured Fluid Dielectric Parameters (Brain)

November 26, 2004

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 2.350000000 GHz | 38.7582     | 13.4536      |
| 2.360000000 GHz | 38.6970     | 13.4904      |
| 2.370000000 GHz | 38.6447     | 13.5232      |
| 2.380000000 GHz | 38.6120     | 13.5515      |
| 2.390000000 GHz | 38.5656     | 13.5857      |
| 2.400000000 GHz | 38.5303     | 13.6084      |
| 2.410000000 GHz | 38.5062     | 13.6471      |
| 2.420000000 GHz | 38.4902     | 13.6710      |
| 2.430000000 GHz | 38.4532     | 13.7151      |
| 2.440000000 GHz | 38.4513     | 13.7471      |
| 2.450000000 GHz | 38.4029     | 13.7485      |
| 2.460000000 GHz | 38.3661     | 13.7960      |
| 2.470000000 GHz | 38.3247     | 13.8171      |
| 2.480000000 GHz | 38.2708     | 13.8518      |
| 2.490000000 GHz | 38.2195     | 13.8819      |
| 2.500000000 GHz | 38.1404     | 13.8973      |
| 2.510000000 GHz | 38.0786     | 13.9453      |
| 2.520000000 GHz | 38.0280     | 13.9761      |
| 2.530000000 GHz | 37.9761     | 14.0302      |
| 2.540000000 GHz | 37.9510     | 14.0565      |
| 2.550000000 GHz | 37.9233     | 14.0852      |

# 2450 MHz DUT Evaluation (Body)


## Measured Fluid Dielectric Parameters (Muscle)

November 26, 2004

| Frequency       | $\epsilon'$ | $\epsilon''$ |
|-----------------|-------------|--------------|
| 2.350000000 GHz | 50.9770     | 14.3601      |
| 2.360000000 GHz | 50.9219     | 14.3961      |
| 2.370000000 GHz | 50.8992     | 14.4491      |
| 2.380000000 GHz | 50.8493     | 14.4838      |
| 2.390000000 GHz | 50.8040     | 14.5394      |
| 2.400000000 GHz | 50.7649     | 14.5775      |
| 2.410000000 GHz | 50.7477     | 14.6264      |
| 2.420000000 GHz | 50.7206     | 14.6477      |
| 2.430000000 GHz | 50.7077     | 14.7036      |
| 2.440000000 GHz | 50.6988     | 14.7222      |
| 2.450000000 GHz | 50.6504     | 14.7492      |
| 2.460000000 GHz | 50.6298     | 14.7978      |
| 2.470000000 GHz | 50.5926     | 14.8197      |
| 2.480000000 GHz | 50.5435     | 14.8754      |
| 2.490000000 GHz | 50.4792     | 14.9176      |
| 2.500000000 GHz | 50.4027     | 14.9429      |
| 2.510000000 GHz | 50.3545     | 15.0073      |
| 2.520000000 GHz | 50.3115     | 15.0366      |
| 2.530000000 GHz | 50.2654     | 15.1150      |
| 2.540000000 GHz | 50.2529     | 15.1369      |
| 2.550000000 GHz | 50.2328     | 15.1691      |

|                  |                           |
|------------------|---------------------------|
| Test Report S/N: | 110804I28-T583-586-S15W   |
| Test Date(s):    | November 17-19 & 26, 2004 |
| Test Type:       | FCC/IC SAR Evaluation     |

**APPENDIX F - SAM PHANTOM CERTIFICATE OF CONFORMITY**

|                         |                                |  |              |                 |   |
|-------------------------|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>       | Zebra Technologies Corporation | <b>FCC ID:</b>   | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>        | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN   |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |              |                 | 21 of 23  |



# Schmid & Partner Engineering AG

Zeughausstrasse 43, 8004 Zurich, Switzerland, Phone +41 1 245 97 00, Fax +41 1 245 97 79

## Certificate of conformity / First Article Inspection

|                       |  |
|-----------------------|--|
| Item                  | SAM Twin Phantom V4.0  |
| Type No               | QD 000 P40 BA  |
| Series No             | TP-1002 and higher   |
| Manufacturer / Origin | Untersee Composites<br>Hauptstr. 69<br>CH-8559 Fruthwilen<br>Switzerland |

### Tests

The series production process used allows the limitation to test of first articles. Complete tests were made on the pre-series Type No. QD 000 P40 AA, Serial No. TP-1001 and on the series first article Type No. QD 000 P40 BA, Serial No. TP-1006. Certain parameters have been retested using further series units (called samples).

| Test                 | Requirement   | Details  | Units tested              |
|----------------------|---|--|---------------------------|
| Shape                | Compliance with the geometry according to the CAD model.                                | IT'IS CAD File (*)   | First article, Samples    |
| Material thickness   | Compliant with the requirements according to the standards                              | 2mm +/- 0.2mm in specific areas                                      | First article, Samples    |
| Material parameters  | Dielectric parameters for required frequencies  | 200 MHz – 3 GHz<br>Relative permittivity < 5<br>Loss tangent < 0.05. | Material sample TP 104-5  |
| Material resistivity | The material has been tested to be compatible with the liquids defined in the standards | Liquid type HSL 1800 and others according to the standard.           | Pre-series, First article |

### Standards

- [1] CENELEC EN 50361
- [2] IEEE P1528-200x draft 6.5
- [3] IEC PT 62209 draft 0.9
- (\*) The IT'IS CAD file is derived from [2] and is also within the tolerance requirements of the shapes of [1] and [3].

### Conformity

Based on the sample tests above, we certify that this item is in compliance with the uncertainty requirements of SAR measurements specified in standard [1] and draft standards [2] and [3].

Date 18.11.2001

Signature / Stamp




**Schmid & Partner  
Engineering AG**



Zeughausstrasse 43, CH-8004 Zurich  
Tel. +41 1 245 97 00, Fax +41 1 245 97 79

|                  |                           |
|------------------|---------------------------|
| Test Report S/N: | 110804I28-T583-586-S15W   |
| Test Date(s):    | November 17-19 & 26, 2004 |
| Test Type:       | FCC/IC SAR Evaluation     |

**APPENDIX G - PLANAR PHANTOM CERTIFICATE OF CONFORMITY**

|                         |                                |  |              |                 |   |
|-------------------------|--------------------------------|--|--------------|-----------------|---|
| <b>Applicant:</b>       | Zebra Technologies Corporation | <b>FCC ID:</b>   | I28MD-RW4137 | <b>IC ID:</b>   | 3798A-RW4137  |
| <b>Model(s):</b>        | QL220, QL320, QL420, RW420     | Wireless Portable Printer with DSSS WLAN   |              | 2412 - 2462 MHz |  |
| 2004 Celltech Labs Inc. |                                | This document is not to be reproduced in whole or in part without the written permission of Celltech Labs Inc. |              |                 | 22 of 23  |

2378 Westlake Road  
Kelowna, B.C. Canada  
V1Z-2V2



Ph. # 250-769-6848  
Fax # 250-769-6334  
E-mail: [barskiind@shaw.ca](mailto:barskiind@shaw.ca)  
Web: [www.bcfiberglass.com](http://www.bcfiberglass.com)

## FIBERGLASS FABRICATORS

### Certificate of Conformity

Item : Flat Planar Phantom Unit # 03-01  
Date: June 16, 2003  
Manufacturer: Barski Industries (1985 Ltd)

| Test                | Requirement  | Details   |
|---------------------|--|---|
| Shape               | Compliance to geometry according to drawing  | Supplied CAD drawing  |
| Material Thickness  | Compliant with the requirements  | 2mm +/- 0.2mm in measurement area                                 |
| Material Parameters | Dielectric parameters for required frequencies<br>Based on Dow Chemical technical data | 100 MHz-5 GHz<br>Relative permittivity < 5<br>Loss Tangent < 0.05 |

#### Conformity

Based on the above information, we certify this product to be compliant to the requirements specified.

Signature: 

Daniel Chailier



**Fiberglass Planar Phantom - Top View**



**Fiberglass Planar Phantom - Front View**




**Fiberglass Planar Phantom - Back View**



**Fiberglass Planar Phantom - Bottom View**

## Dimensions of Fiberglass Planar Phantom

(Manufactured by Barski Industries Ltd. - Unit# 03-01)

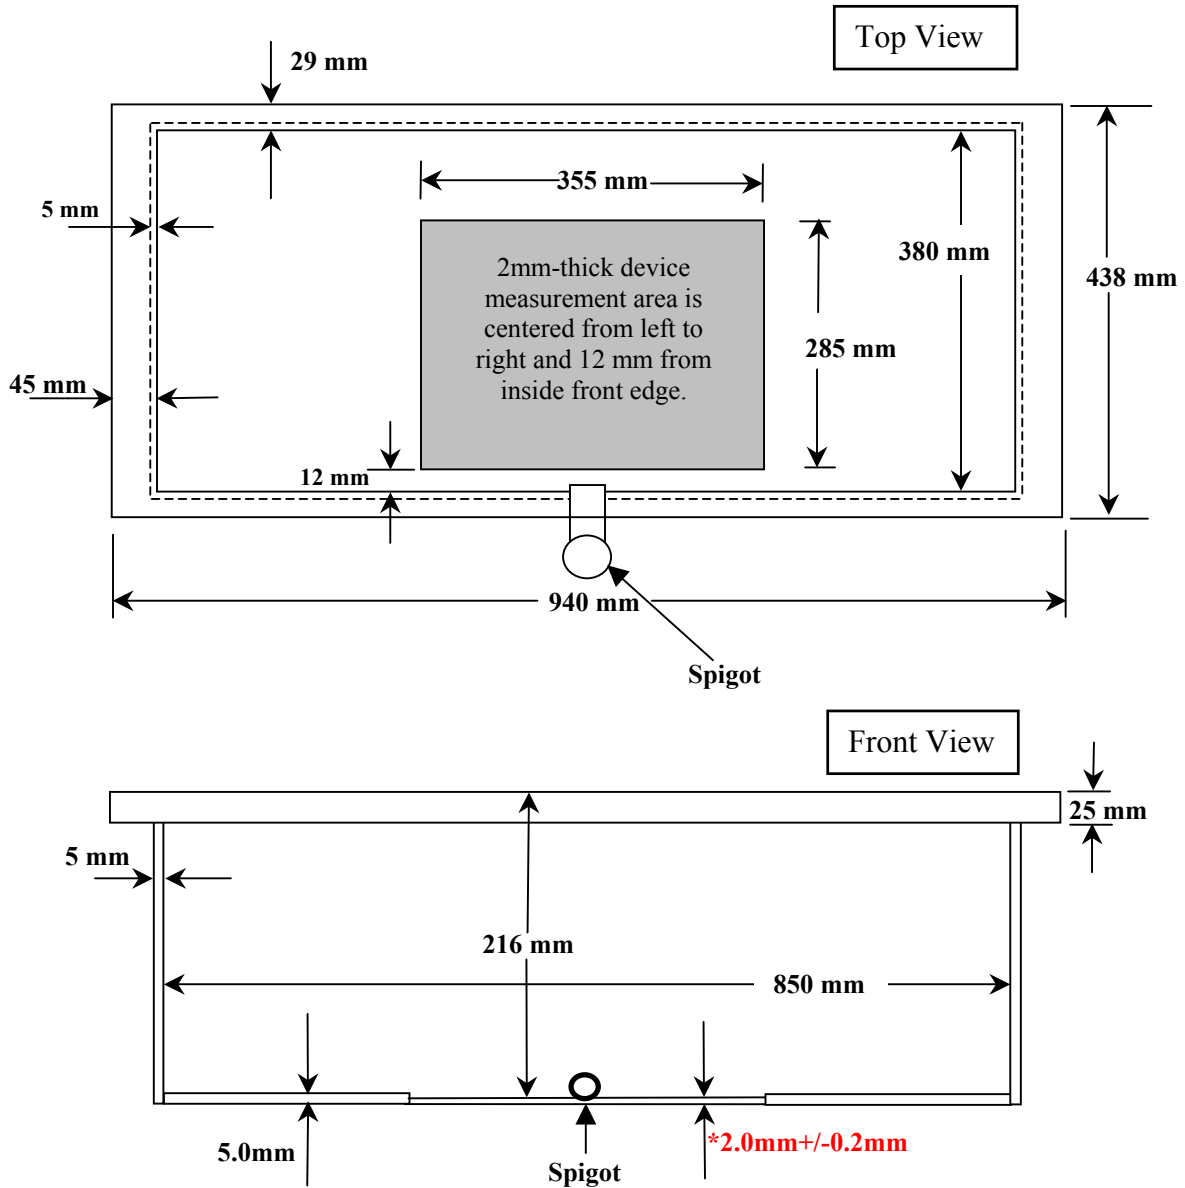

**Note: Measurements that aren't repeated for the opposite sides are the same as the side measured.  
This drawing is not to scale.**