




RP4T RFID Coupler 27245 Rev A

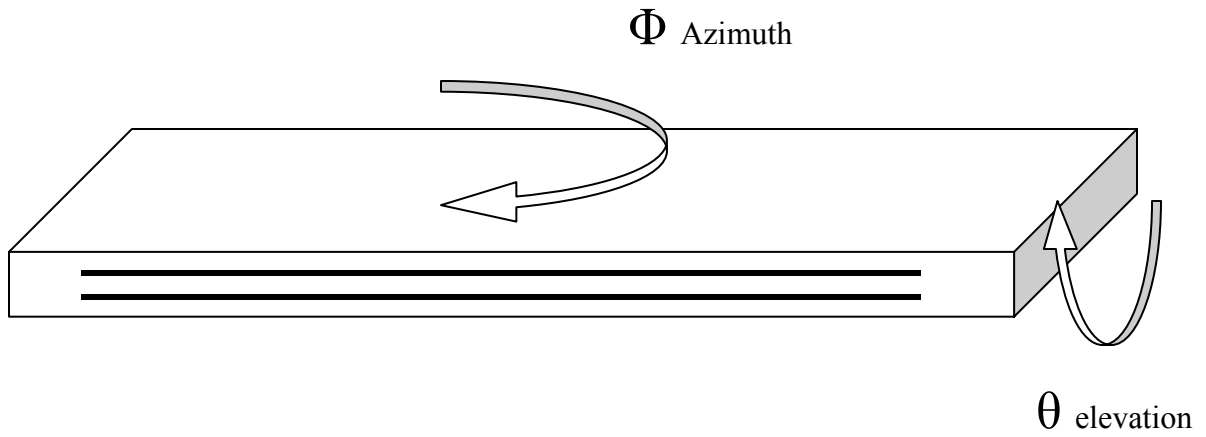


870 MHz - Φ (azimuth)
-20.8 dBi

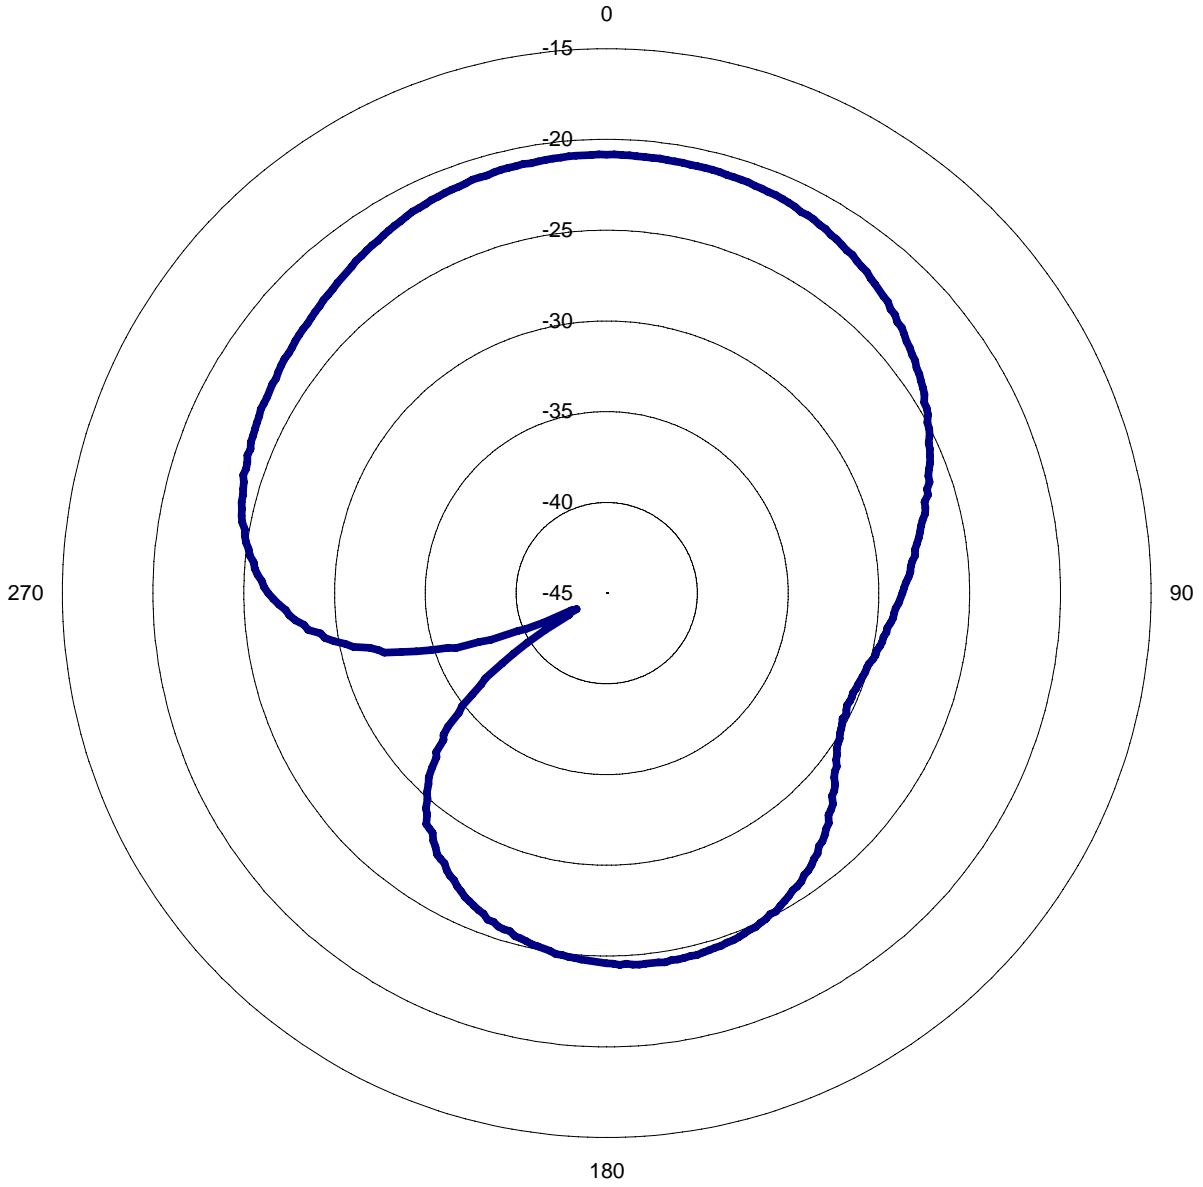


870 MHz - θ (elevation)
-21.3 dBi

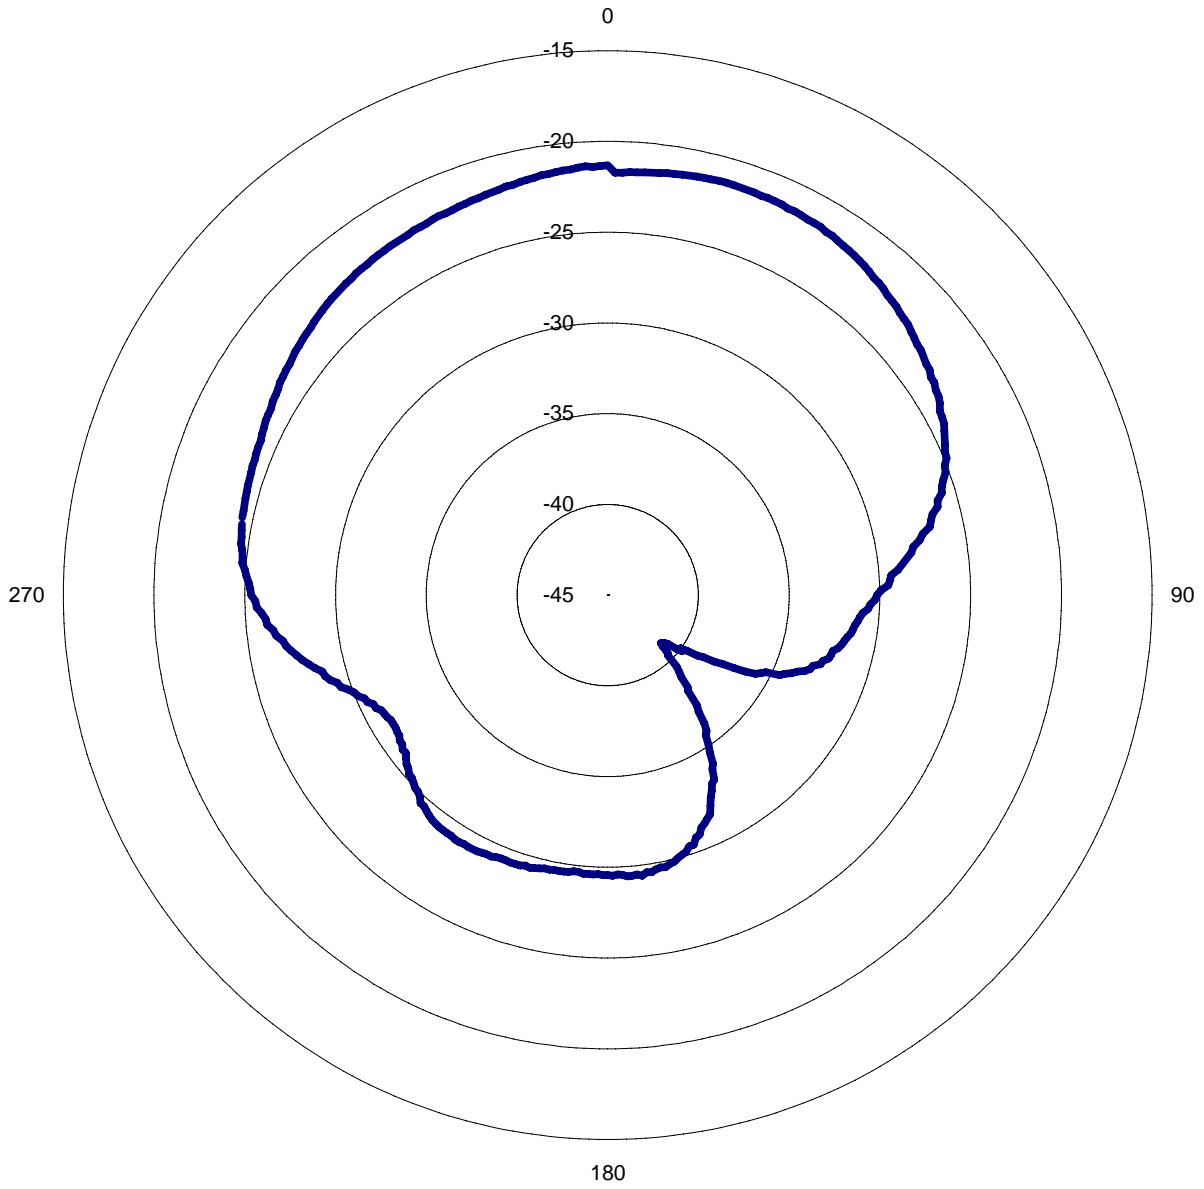


910 MHz - Φ (azimuth)
-21.7 dBi

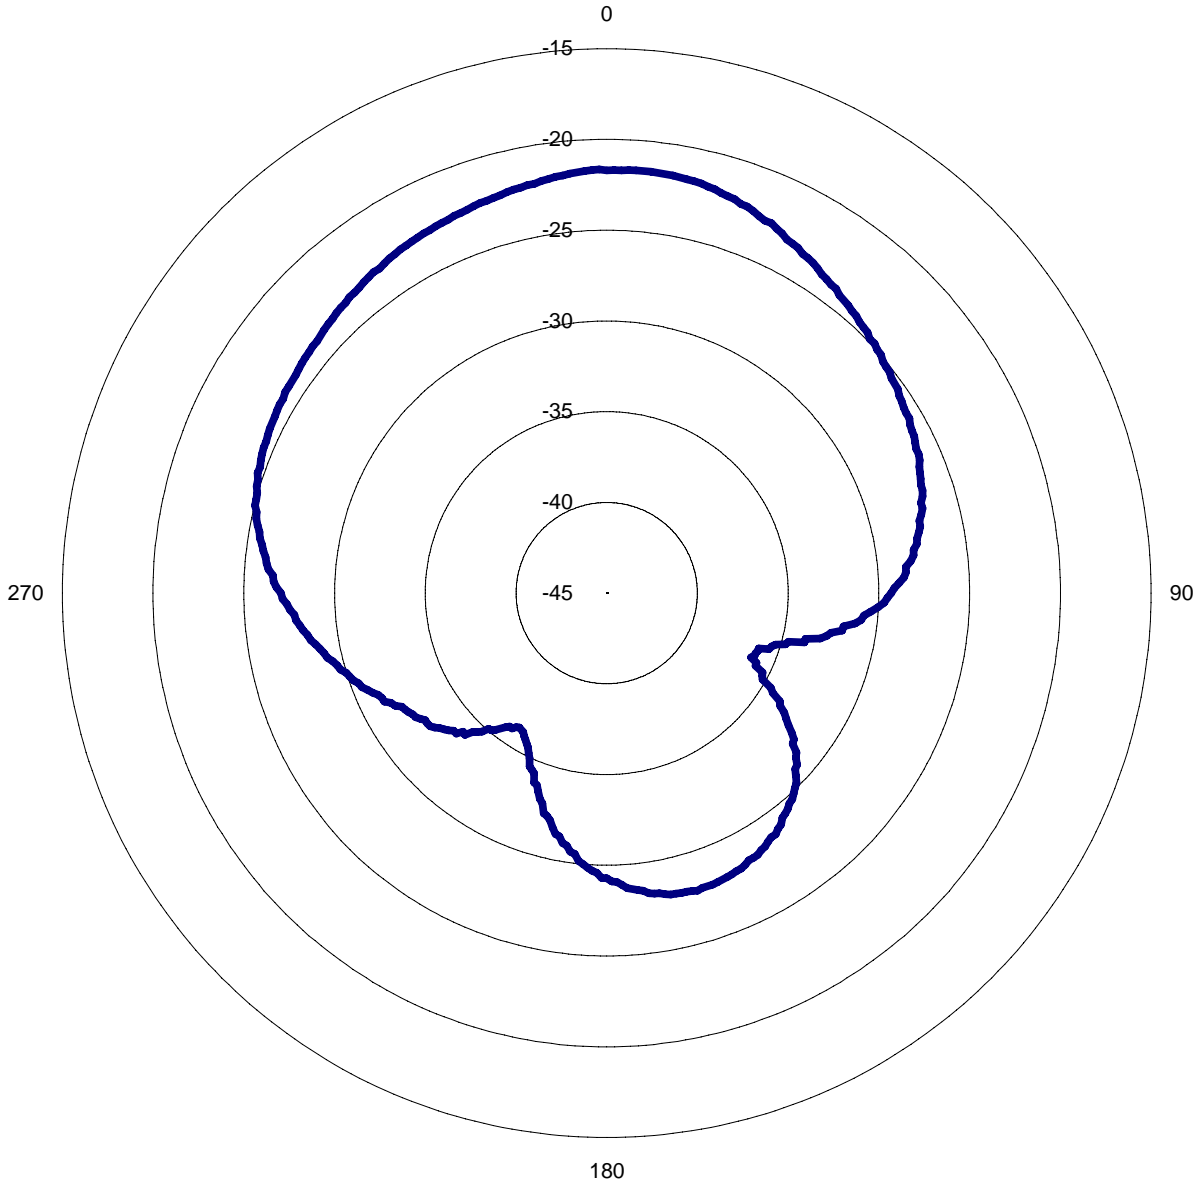

910 MHz - θ (elevation)
-19.5 dBi

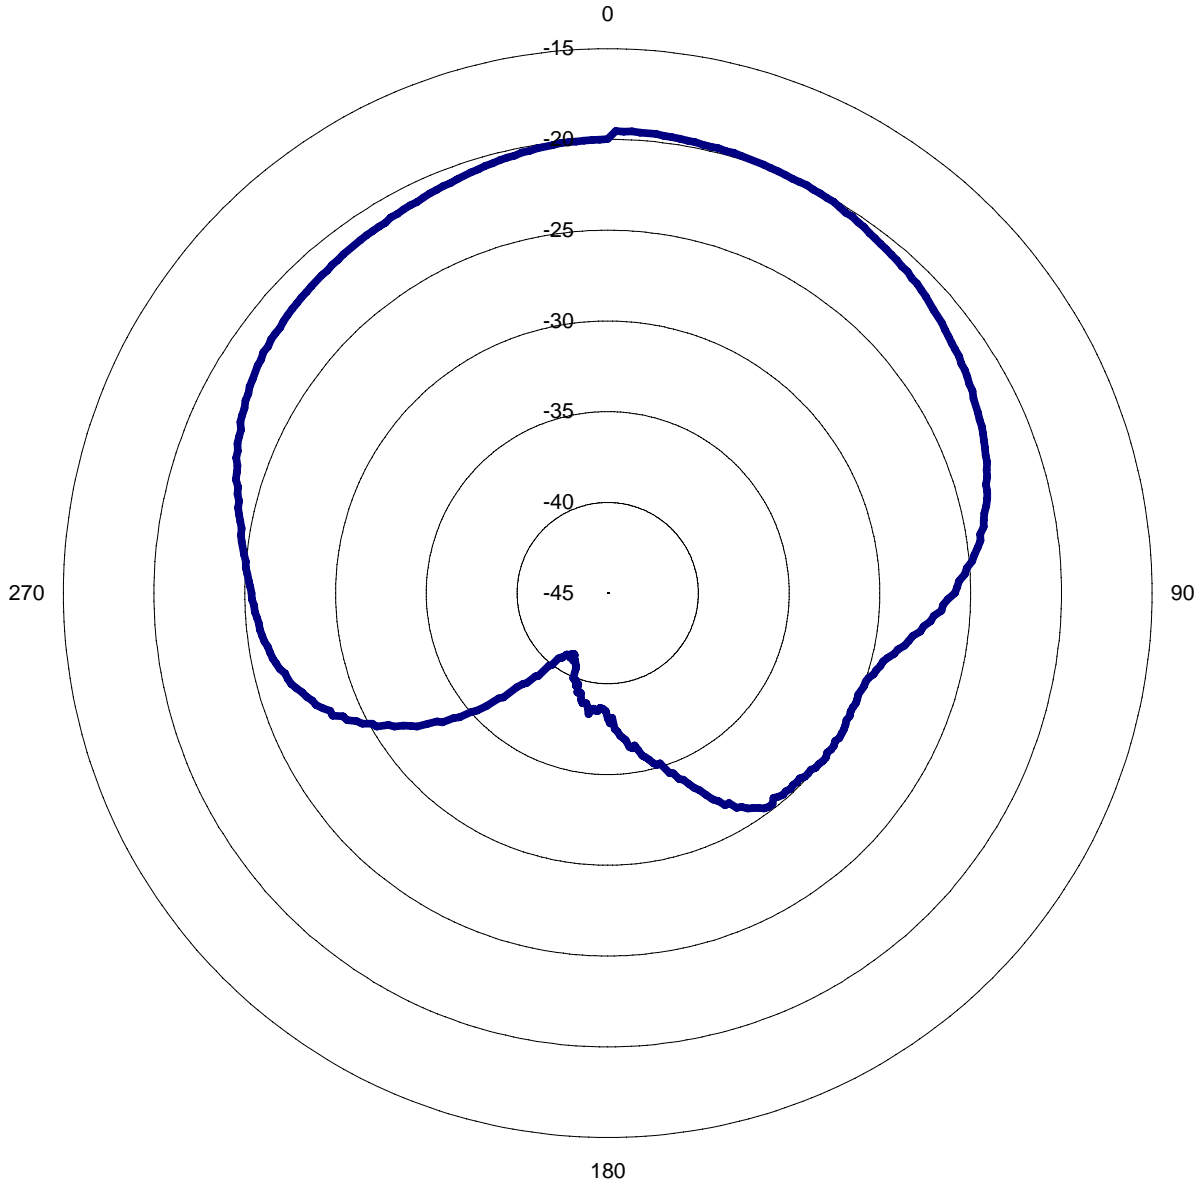

950 MHz - Φ (azimuth)
-20.5 dBi

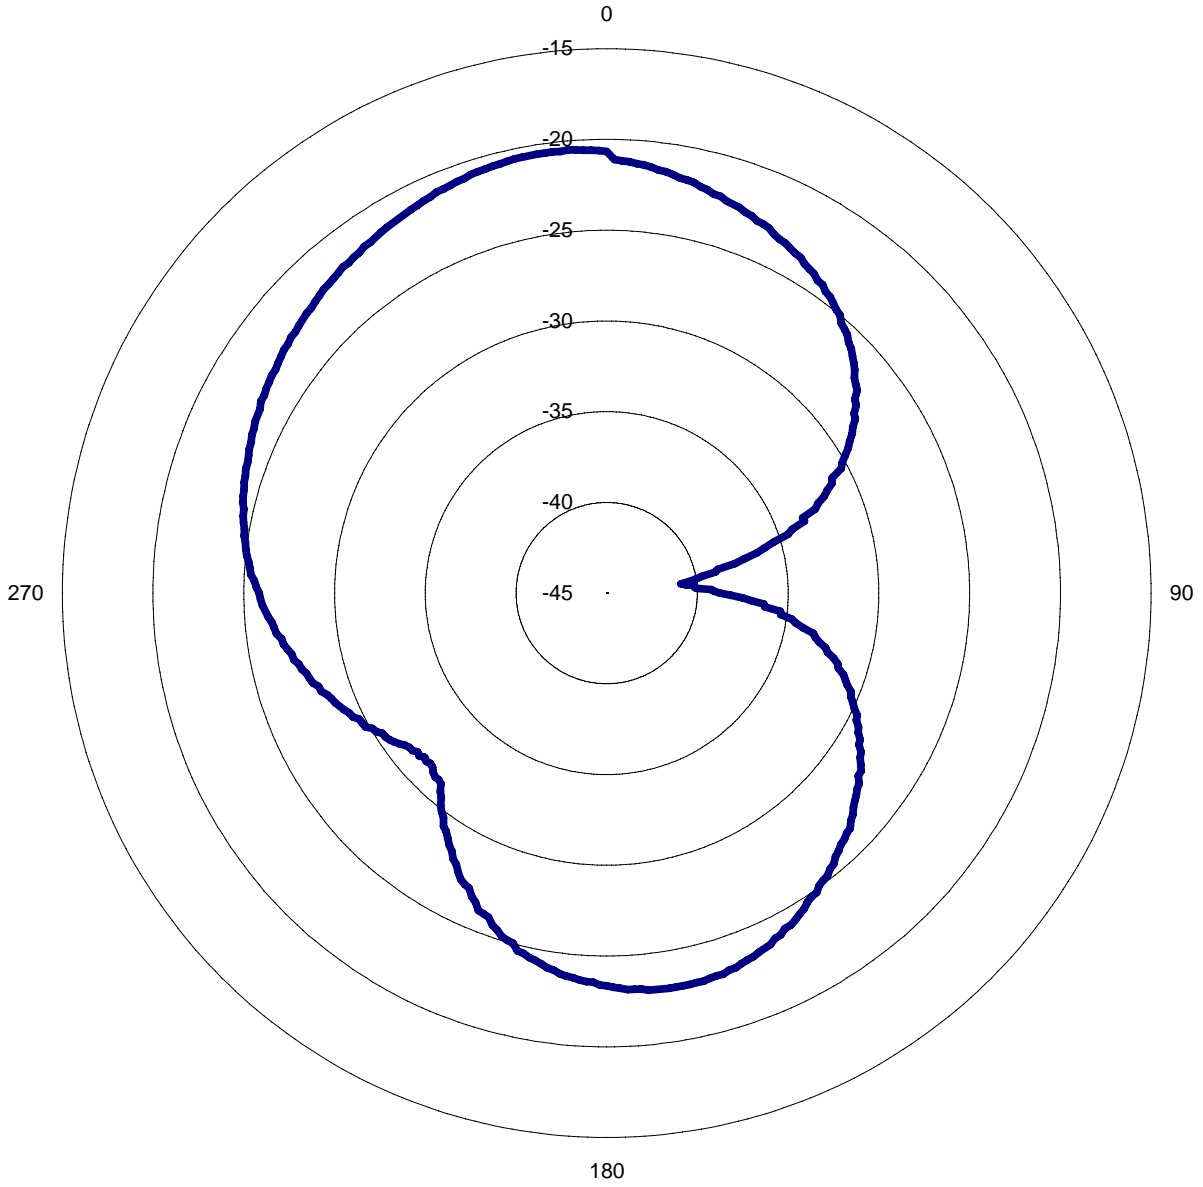

950 MHz - θ (elevation)
-21.3 dBi

