


ZEBRA TECHNOLOGIES CORP.

RFID ENCODER

Model: M5e


12 May 2008

Report No.: SL08041701-ZBR-027 (15.247) (M5e)
(This report supersedes NONE)

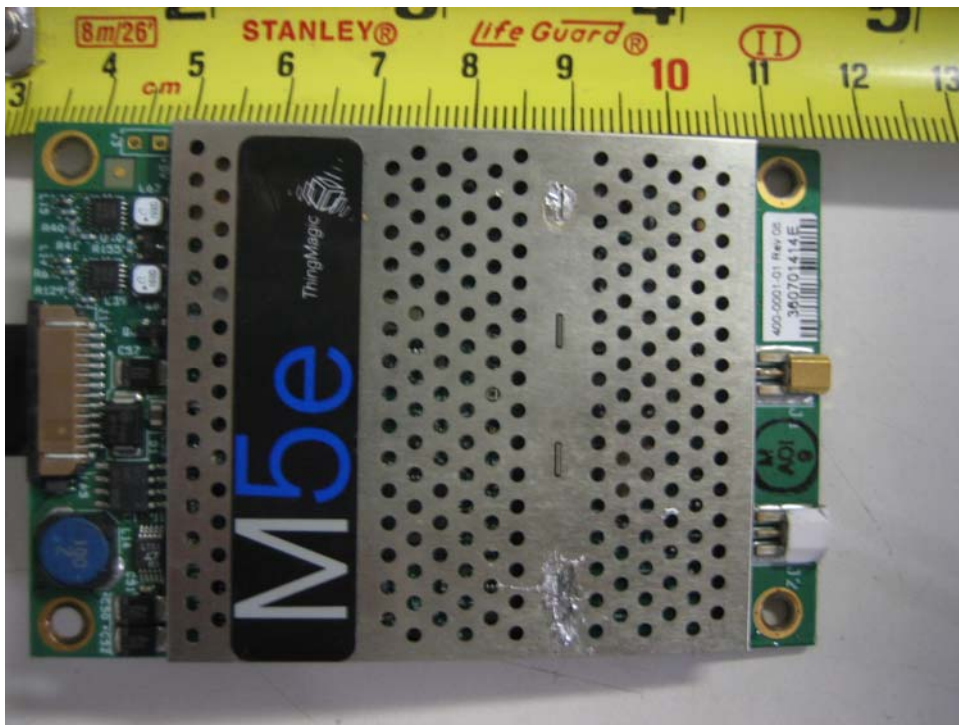

Modifications made to the product : None

This Test Report is Issued Under the Authority of:

| | |
|---------------------------------|--|
| |  |
| Choon Sian Ooi Test Engineer | Leslie Bai Engineering Reviewer |

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.


EMC Test Report

To: FCC Part 15.247 & IC RSS210

SIEMIC, INC.
Accessing global markets



A

| | | |
|--|--|---|
|  | | SIEMIC, Inc. Accessing global markets |
| Title: | RF Test Report of Zebra Technologies Corp. | Serial# SL08041701-ZBR-027 (15.247) (M5e) |
| | Model M5e | Issue Date 12 May 2008 |
| To | FCC 15.247 2007, IC RSS210 Issue 7: 2007 | Page 2 of 66 |
| | | www.sieminc.com |

SIEMIC ACREDITATION DETAILS: NVLAP Lab Code: 200729-0

| | |
|---|--|
| United States Department of Commerce National Institute of Standards and Technology | |
|  | |
| Certificate of Accreditation to ISO/IEC 17025:2005 | |
| NVLAP LAB CODE: 200729-0 | |
| SIEMIC Laboratories San Jose, CA | |
| <i>is accredited by the National Voluntary Laboratory Accreditation Program for specific services, listed on the Scope of Accreditation, for:</i> | |
| ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS | |
| <i>This laboratory is accredited in accordance with the recognized International Standard ISO/IEC 17025:2005. This accreditation demonstrates technical competence for a defined scope and the operation of a laboratory quality management system (refer to joint ISO-ILAC-IAF Communiqué dated 18 June 2005).</i> | |
| 2008-01-01 through 2008-12-31 Effective dates |   For the National Institute of Standards and Technology |

NVLAP-01C (REV. 2006-09-13)

**SIEMIC, Inc.**

Accessing global markets

Title: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007

Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 3 of 66
www.siemic.com

SIEMIC ACREDITATION DETAILS: FCC Registration No. 783147**FEDERAL COMMUNICATIONS COMMISSION**

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

January 27, 2005

Registration Number: 783147

SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131

Attention: Leslie Bai

Re: Measurement facility located at San Jose
3 & 10 meter site
Date of Renewal: January 27, 2005

Dear Sir or Madam:

Your request for renewal of the registration of the subject measurement facility has been received. The information submitted has been placed in your file and the registration has been renewed. The name of your organization will remain on the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Rhylis Parrish
Information Technician

SIEMIC ACREDITATION DETAILS: Industry of Canada Registration No. 4842-1



April 28, 2006

OUR FILE: 46405-4842
Submission No: 114591

Siemic Inc.
2206 Ringwood Ave.,
San Jose, CA 95131

Dear Sir/Madame:

The Bureau has received your application for the Alternate Test Site and the filing is satisfactory to Industry Canada.

Please reference to the file number (4842-1) in the body of all test reports containing measurements performed on the site.

Renewal of the filing is required every two years.

If you have any questions, you may contact the Bureau at the telephone number below or by e-mail at certification.bureau@ic.gc.ca Please reference our file number above for all correspondence.

Yours sincerely,



Robert Corey
Manager Certification
Certification and Engineering Bureau
3701 Carling Ave., Building 94
Ottawa, Ontario
K2H 8S2
Tel. No. (613) 990-3869

SIEMIC ACREDITATION DETAILS: Japan VCCI Registration No. 2195



Voluntary Control Council for Interference
by Information Technology Equipment
1F NOA Bldg. 2-3-5, Azabudai,
Minato-Ku, Tokyo, Japan, 106-0041
Tel+81-3-5575-3138
Fax+81-3-5575-3137
<http://www.vccij.or.jp>

February 12, 2004

TO: SIEMIC, INC.

Membership NO: 2195

We confirmed your payment for annual membership fee and admission fee. Thank you very much for your remitting.

Please find enclosed VCCI documents. As admission fee and annual membership fee were confirmed, your company registered as VCCI official member.

From now on, it is possible for your company to submit conformity verification report or/and application for registration of measurement facilities.

Please find necessary forms for your submission from VCCI web-site.
www.vccij.or.jp

When you submit conformity verification report, please submit to Ms. Yoko Inagaki / inagaki@vccij.or.jp and application for registration of measurement facilities, please submit to Mr. Masaru Denda / denda@vccij.or.jp

Their address, phone and fax number are absolutely same as I. Please refer address indicated on top right-hand corner of this page.

If you have any other questions regarding membership, feel free to contact me. Thank you very much.

Best Regards,

Naoko Hori (Ms.)
VCCI
hori@vccij.or.jp

Enclosure



SIEMIC, Inc.
Accessing global markets

Title: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007

Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 6 of 66
www.siemic.com

SIEMIC ACREDITATION DETAILS: Japan RF Technologies Accreditation No. MRF050927

| | |
|--|---|
| RFT | |
| <h1>Certificate</h1> | |
| This is to certify that the Quality Management System of | |
| SIEMIC , Inc. 2206 Ringwood Avenue San Jose, California 95131 U.S.A | |
| has been authorized to carry out Japan Specified Radio Equipment test by order and under supervision of RF Technologies Co., Ltd. according to Notification No.88 of Radio Law. | |
| An assessment of the laboratory was conducted according to the "Procedure and Conditions for Appointments of 2.4GHz Band Low power data communications system that Bluetooth and Wireless LAN test with reference to ISO/IEC 17025 by an RF Technologies Co., Ltd. auditor. | |
| Audit Report No. MRF050927 | |
|  Kazuyuki Sarashina Auditor RF Technologies Co., Ltd. |  Toshihiro Hiegami President RF Technologies Co., Ltd. |
| Audit Date September 27th, 2005 | Issued Date October 5th, 2005 |
| This Certificate is valid until September 26th 2006 or next schedule audit. | |
| No:006 Registered Certification Body RF Technologies Co., Ltd. 472, Nippa-cho,Kohoku-ku, Yokohama, 223-0057, Japan | |
|  | |

SIEMIC ACREDITATION DETAILS: Korea MIC Lab Code: KR0032

시험기관지정서

Certificate

of Designated Testing Laboratory

지정번호(No.) : KR0032

시험기관명 : (주)현대고정인증기술원

(Name of Lab.) (Hyundai Calibration & Certification Technologies Co., Ltd)

주 소 : 경기도 이천시 부발읍 아미리 산136-1

(Address) (136-1, Ami-ri, Bubal-eup, Icheon-si, Kyunggi-Do, Korea)
2206 Ringwood Avenue San Jose, CA, USA.

시험분야 및 범위 : 유선(Telecommunication Part)

(Area & Category) 무선(Radio Communication Part)

전자파장해(EMD) : 미국지사 포함

전자파내성(EMS) : 미국지사 포함

전기안전(Safety)

전자파흡수율(SAR)

위 기관을 정보통신기기시험기관지정및관리등에관한규칙에
의해 정보통신기기시험기관으로 지정합니다.


*This is to certify that
the above mentioned laboratory is designated
as the testing laboratory in accordance with
the Regulations on Designation of Testing Laboratory
for Information and Communication Equipment.*

2005년(Year) 7월(Month) 5일(Date)

전파연구소장

Director General of Radio Research Laboratory
Ministry of Information and Communication
Republic of Korea

SIEMIC ACREDITATION DETAILS: Korea CAB ID: US0160



UNITED STATES DEPARTMENT OF COMMERCE
National Institute of Standards and Technology
Gaithersburg, Maryland 20899

April 17, 2006

Mr. Leslie Bai
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131

Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Ministry of Information and Communication's Radio Research Laboratory (RRL) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA. The pertinent information about your laboratory's designation is as follows:


CAB Name: **SIEMIC Laboratories**
Identification No.: **US0160**
Scope:

| Coverage | Standards | Date of Recognition |
|---------------------------------|---|---------------------|
| Electro Magnetic Interference | 1. RRL Notice No. 2005-82: Technical Requirements for Electromagnetic Interference 2. Annex 8(KN-22), RRL Notice No. 2005-131: Conformity Assessment Procedure for Electromagnetic Interference | April 13, 2006 |
| Electro Magnetic Susceptibility | 1. RRL Notice No. 2005-130: Technical Requirements for Electromagnetic Susceptibility 2. Annex 1-7(KN-61000-4-2, -4-3, -4-4, -4-5, -4-6, -4-8, -4-11), RRL Notice No. 2005-132: Conformity Assessment Procedure for Electromagnetic Susceptibility | April 13, 2006 |

You may submit test data to RRL to verify that the equipment to be imported into Korea satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements.


The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions please contact Mr. Jogindar (Joe) Dhillon at (301) 975-5521. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,




David F. Alderman
Group Leader, Standards Coordination and Conformity Group

cc: Jogindar Dhillon



SIEMIC ACREDITATION DETAILS: Taiwan BSMI Accreditation No. SL2-IN-E-1130R

 **UNITED STATES DEPARTMENT OF COMMERCE**
National Institute of Standards and Technology
Gaithersburg, Maryland 20888

May 3, 2006

Mr. Leslie Bai
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131


Dear Mr. Bai:

I am pleased to inform you that your laboratory has been recognized by the Chinese Taipei's Bureau of Standards, Metrology, and Inspection (BSMI) under the Asia Pacific Economic Cooperation (APEC) Mutual Recognition Arrangement (MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, Phase 1 Procedures, of the APEC Tel MRA. You may submit test data to BSMI to verify that the equipment to be imported into Chinese Taipei satisfies the applicable requirements. The designation of your organization will remain in force as long as its accreditation for the designated scope remains valid and comply with the designation requirements. The pertinent designation information is as follows:

- BSMI number: **SL2-IN-E-1130R** (Must be applied to the test reports)
- U.S. Identification No: **US0160**
- Scope of Designation: **CNS 13438**
- Authorized signatory: **Mr. Leslie Bai**

The names of all recognized CABs will be posted on the NIST website at <http://ts.nist.gov/mra>. If you have any questions, please contact Mr. Dhillon at 301-975-5521. We appreciate your continued interest in our international conformity assessment activities.


Sincerely,


David F. Alderman
Group Leader, Standards Coordination and Conformity Group


cc: Jogindar Dhillon

NIST

A

| | | |
|--|---|--|
|  SIEMIC, Inc. Accessing global markets | | Serial# SL08041701-ZBR-027 (15.247) (M5e) |
| Title: | RF Test Report of Zebra Technologies Corp. | Issue Date 12 May 2008 |
| To | Model M5e FCC 15.247 2007, IC RSS210 Issue 7: 2007 | Page 10 of 66 www.siemic.com |

SIEMIC ACREDITATION DETAILS: Taiwan NCC CAB ID: US0160

| | |
|---|--|
|  | UNITED STATES DEPARTMENT OF COMMERCE National Institute of Standards and Technology Gaithersburg, Maryland 20899 |
|---|--|

August 8, 2006

Mr. Leslie Bai
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, CA 95131

Dear Mr. Bai:


I am pleased to inform you that SIEMIC Laboratories has been recognized by the Chinese Taipei's National Communications Commission (NCC) under the Asia Pacific Economic Cooperation for Telecommunications and Information, Mutual Recognition Arrangement (APEC Tel MRA). Your laboratory is now designated to act as a Conformity Assessment Body (CAB) under Appendix B, **Phase I** Procedures, of the APEC Tel MRA.

You may submit test data to NCC to verify that the equipment to be imported into Chinese Taipei satisfies their applicable requirements using the following guidelines:


- Your laboratory's assigned 6-digit U.S. identification number is **US0160**. You should reference this number in your correspondence.
- The scope of designation is limited to **LP0002**. Your designation will remain in force as long as your accreditation remains valid for the scope of designation.

If you have any questions please contact Mr. Jogindar Dhillon via email at dhillon@nist.gov or via fax at 301-975-5414. The names of all recognized laboratories will be posted on the NIST website at <http://ts.nist.gov/mra>. We appreciate your continued interest in our international conformity assessment activities.

Sincerely,


David F. Alderman
Group Leader, Standards Coordination and Conformity Group

cc: Jogindar Dhillon



**SIEMIC ACREDITATION DETAILS: Mexico NOM Recognition**

CAMARA NACIONAL
DE LA INDUSTRIA
ELECTRONICA, DE
TELECOMUNICACIONES
E INFORMATICA

Laboratorio Valentín V. Rivero

México D.F. a 16 de octubre de 2006.


**LESLIE BAI
DIRECTOR OF CERTIFICATION
SIEMIC LABORATORIES, INC.
ACCESSING GLOBAL MARKETS
P R E S E N T E**

En contestación a su escrito de fecha 5 de septiembre del año en curso, le comento que estamos muy interesados en su intención de firmar un Acuerdo de Reconocimiento Mutuo, para lo cual adjunto a este escrito encontrara el Acuerdo en idioma inglés y español prellenado de los cuales le pido sea revisado y en su caso corregido, para que si esta de acuerdo poder firmarlo para mandarlo con las autoridades Mexicanas para su visto bueno y así poder ejercer dicho acuerdo.

Aprovecho este escrito para mencionarle que nuestro intermediario gestor será la empresa Isabel de México, S. A. de C. V., empresa que ha colaborado durante mucho tiempo con nosotros en lo relacionado a la evaluación de la conformidad y que cuenta con amplia experiencia en la gestión de la certificación de cumplimiento con Normas Oficiales Mexicanas de producto en México.

Me despido de usted enviándole un cordial saludo y esperando sus comentarios al Acuerdo que nos ocupa.

Atentamente:


**Ing. Faustino Gómez González
Gerente Técnico del Laboratorio de
CANIETI.**

Calle 71
Hidráulica Condessa
06100 México, D.F.
Tel. 5264-0908 con 12 líneas
Fax 5264-0498
www.canieti.org

Title: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007

Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 12 of 66
www.siemic.com

SIEMIC ACREDITATION DETAILS: Hong Kong OFTA Recognition No. D23/16V



Your Ref 來函編號 : D23/16 V
Our Ref 本局編號 :

Telephone 電話 : (852) 2961 6320
Fax No 圖文傳真 : (852) 2838 5004
E-mail 電郵地址 : 20 July 2005

Mr. Leslie Bai
Director of Certification,
SIEMIC Laboratories
2206 Ringwood Avenue
San Jose, California 95131
USA

Dear Mr. Bai,

Application of Recognised Testing Agency (RTA)

Referring your submission of 28 June 2005 in relation to the application of RTA, I am pleased to inform you that OFTA has appointed SIEMIC Laboratories (SIEMIC) as a Recognised Testing Agency (RTA) :

Please note that, under the Hong Kong Telecommunications Equipment Evaluation and Certification (HKTEC) Scheme, SIEMIC is authorized to conduct evaluation tests on telecommunications equipment against the following HKTA specifications :

Scope of recognition (HKTA Specifications) :

1001, 1002, 1004, 1006, 1007, 1008
1010, 1015, 1016
1022, 1026, 1027, 1029
1030, 1031, 1032, 1033, 1034, 1035, 1039
1041, 1042, 1043, 1045, 1047, 1048
2001

You are requested to refer to and comply with the code of practice and guidelines for RTA as given in the Information Note OFTA I 411 "Recognised Testing Agency (RTA) for Conducting Evaluation Test of Telecommunications Equipment", which can be downloaded from OFTA's homepage at <http://www.ofta.gov.hk/tec/information-notes.html>.

If you have any queries, please do not hesitate to contact me.

Yours sincerely,

(K K Sin)
for Director-General
of Telecommunications

Office of the Telecommunications Authority
29/F Wu Chung House 213 Queen's Road East Wan Chai Hong Kong
電訊管理局
香港灣仔皇后大道東 213 號胡忠大廈 29 字樓

<http://www.ofta.gov.hk>

This page has been left blank intentionally.

CONTENTS

| | | |
|---|---|----|
| 1 | EXECUTIVE SUMMARY & EUT INFORMATION | 16 |
| 2 | TECHNICAL DETAILS..... | 17 |
| 3 | MODIFICATION..... | 18 |
| 4 | TEST SUMMARY..... | 19 |
| 5 | MEASUREMENTS, EXAMINATION AND DERIVED RESULTS | 20 |
| | ANNEX A. TEST INSTRUMENT & METHOD | 58 |
| | ANNEX B EUT AND TEST SETUP PHOTOGRAPHS..... | 62 |
| | ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT | 62 |
| | ANNEX D USER MANUAL, BLOCK & CIRCUIT DIAGRAM | 66 |

This page has been left blank intentionally.

1 Executive Summary & EUT information

The purpose of this test programme was to demonstrate compliance of the Zebra Technologies Corp., model:M5e against the current Stipulated Standards. The RFID Encoder have demonstrated compliance with the FCC 15.247 2007 & IC RSS210 Issue 7: 2007.

EUT Information

EUT Description : The Zebra M5e is a RFID encoder that can read and encode RFID smart tags. Smart tags carry embedded ultra-thin UHF RFID transponders. Transponders contain thin antennas and integrated circuits that can be read, programmed, and reprogrammed using non-contact radio waves. RFID smart tags allow for non- line of sight reading of the data contained in the IC and feature anti collision technology, which allows RFID readers to scan and identify several objects simultaneously, such as totes of supplies. The RFID subsystem is comprised of a ThingMagic Mercury 5e multi protocol UHF RFID encoder, a coupler/antenna connected to the encoder via a coaxial cable and an adaptor PCB that provides the operating voltage and communications to the RFID encoder.

The RFID encoder powers and communicates with RFID smart cards via the coupler/antenna. The encoder contains a digital processor and analog signal conditioning circuitry. Instructions from the host system to encode/read a smart label are sent to the RFID encoder via a serial communication link. The encoder responds to the host with data read and/or a status message. The UHF RF signals generated by the encoder are turned on only during a host commanded read or encode operation. The RF signal is an amplitude-modulated frequency-hopping carrier operating between 902MHz and 928MHz. The modulation pattern is governed by the selected UHF RFID protocol. The reader supports EPC Class1 Gen 2/ISO18000-6C UHF RFID protocols.

Model No : M5e
Serial No : N/A
Input Power : 5 VDC
Classification Per Stipulated Test Standard : Frequency Hopping Spread Spectrum / Device

2 TECHNICAL DETAILS

| | |
|---------------------------------|---|
| Purpose | Compliance testing of RFID Encoder with stipulated standard |
| Applicant / Client | ZEBRA TECHNOLOGIES CORP. |
| Manufacturer | Zebra Technologies Corp. 333 Corporate Woods Parkway Vernon Hills, IL 60061 USA |
| Laboratory performing the tests | SIEMIC Laboratories |
| Test report reference number | SL08041701-ZBR-027 (15.247) (M5e) |
| Date EUT received | 25 February 2008 |
| Standard applied | 47 CFR §15.247: 2007 & RSS 210 Issue 7: 2007 |
| Dates of test (from – to) | 21 April 2008 – 25 April 2008 |
| No of Units: | 2 |
| Equipment Category: | DSS |
| Trade Name: | Zebra Technologies Corp. |
| Model : | M5e |
| RF Operating Frequency (ies) | 902.75 MHz to 927.25 MHz |
| Number of Channels : | 50 |
| Modulation : | ISO 18000-6C |
| FCC ID : | I28-URFIDM5E |
| IC ID : | 3798B-URFIDM5E |

3 MODIFICATION

NONE

4 TEST SUMMARY

The product was tested in accordance with the following specifications. All testing has been performed according to below product classification:

Frequency Hopping Spread Spectrum / Device

Test Results Summary

| Test Standard | | Description | Pass / Fail |
|----------------------------|-----------------------|---|-------------|
| 47 CFR Part 15.247: 2008 | RSS 210 Issue 7: 2007 | | |
| 15.203 | | Antenna Requirement | Pass |
| 15.205 | RSS210(A8.5) | Restricted Band of Operation | Pass |
| 15.207(a) | RSS Gen (7.2.2) | AC Line Conducted Emissions Voltage | Pass |
| 15.247(a) (1) | RSS210(A8.1) | Channel Separation | Pass |
| 15.247(a)(1) | RSS210(A8.1) | Occupied Bandwidth | Pass |
| 15.247(a) (2) | RSS210 (A8.2) | 6dB Bandwidth | N/A |
| 15.247(a) (1) (i) | RSS210(A8.1) | Number of Hopping Channels | Pass |
| 15.247(a) (1) (i) | RSS210(A8.1) | Time of Occupancy | Pass |
| 15.247(b) (2) | RSS210(A8.4) | Output Power | Pass |
| 15.247(c) | RSS210(A8.4) | Antenna Gain > 6 dBi | Pass |
| 15.247(d) | RSS210(A8.5) | Antenna Port Conducted Spurious Emissions | Pass |
| 15.209; 15.247(d) | RSS210(A8.5) | Radiated Spurious Emissions | Pass |
| 15.247(e) | RSS210(A8.3) | Power Spectral Density | N/A |
| 15.247(f) | RSS210(A8.3) | Hybrid System Requirement | N/A |
| 15.247(g) | RSS210(A8.1) | Hopping Capability | Pass |
| 15.247(h) | RSS210(A8.1) | Hopping Coordination Requirement | Pass |
| 15.247(i) §2.1091& §2.1093 | RSSGen(5.5) | Maximum Permissible Exposure | Pass |
| 15.247 (d) | | 100 kHz Bandwidth of Frequency Band Edge | Pass |
| | RSSGen(4.8) | Receiver Spurious Emissions | Pass |

ANSI C63.4: 2003/ RSS-Gen Issue 2: 2007

PS: All measurement uncertainties are not taken into consideration for all presented test result.

5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 Antenna Requirement

Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
 - b) Antenna must use a unique type of connector to attach to the device.
 - c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.
- 1) The UHF antenna has a unique connector and installed inside on the chassis with a gain of -20dBi which meets the requirement.

5.2 Conducted Emissions Voltage

Requirement:

| Frequency of emission (MHz) | Conducted limit (dBμV) | |
|-----------------------------|------------------------|-----------|
| | Quasi-peak | Average |
| 0.15–0.5 | 66 to 56* | 56 to 46* |
| 0.5–5 | 56 | 46 |
| 5–30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

Procedures:

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
 2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
 3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ±3.5dB.
 4. Environmental Conditions

| | |
|----------------------|-------------|
| Temperature | 23°C - 25°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
- Test Date : Feb 21 to Feb 25, 2008
Tested By :Choon Sian Ooi


Host EUT-RAZOR 600

Results:

Note –

Average Limit


Quasi-Peak Limit

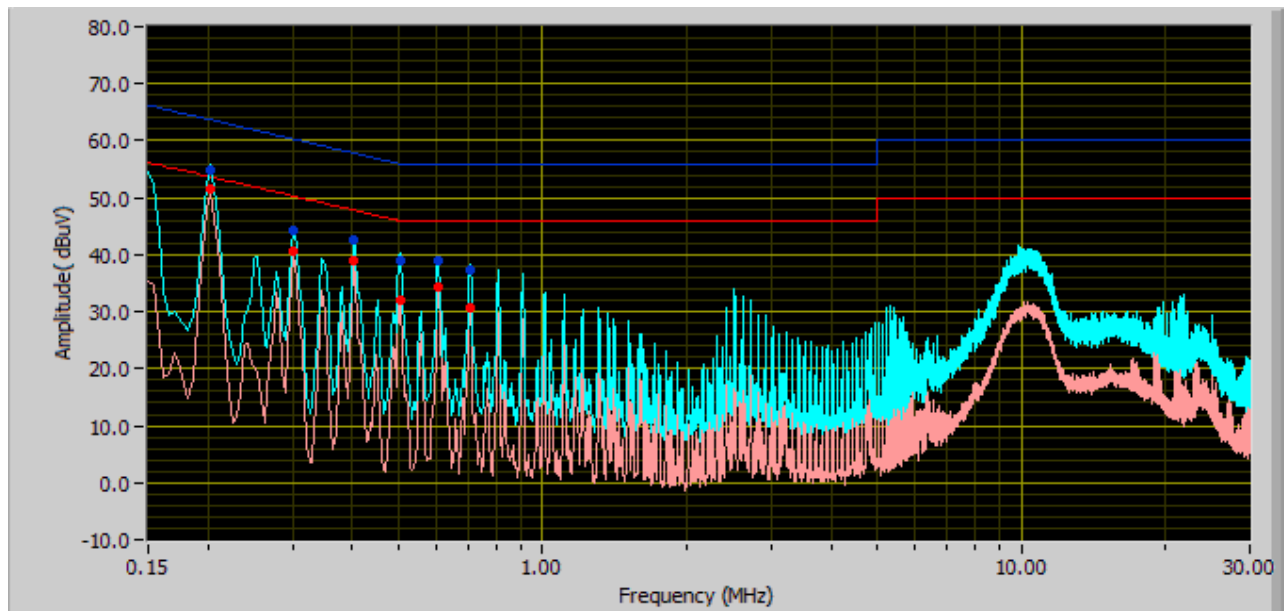

Phase Line Plot at 120Vac, 60Hz

| Line Under Test | Frequency (MHz) | Corrected Amplitude (dBuV) QP | Limit (dBuV) QP | Margin (dB) QP | Corrected Amplitude (dBuV) AVG | Limit (dBuV) AVG | Margin (dB) AVG |
|-----------------|-----------------|-------------------------------|-----------------|----------------|--------------------------------|------------------|-----------------|
| Phase | 0.20 | 54.79 | 63.67 | -8.88 | 51.58 | 53.67 | -2.08 |
| Phase | 0.40 | 42.50 | 57.84 | -15.34 | 38.81 | 47.84 | -9.03 |
| Phase | 0.30 | 44.22 | 60.26 | -16.05 | 40.48 | 50.26 | -9.78 |
| Phase | 0.51 | 38.95 | 56.00 | -17.05 | 31.90 | 46.00 | -14.10 |
| Phase | 0.61 | 38.83 | 56.00 | -17.17 | 34.18 | 46.00 | -11.82 |
| Phase | 0.71 | 37.38 | 56.00 | -18.62 | 30.64 | 46.00 | -15.36 |

Results: **Note –** Average Limit Quasi-Peak Limit

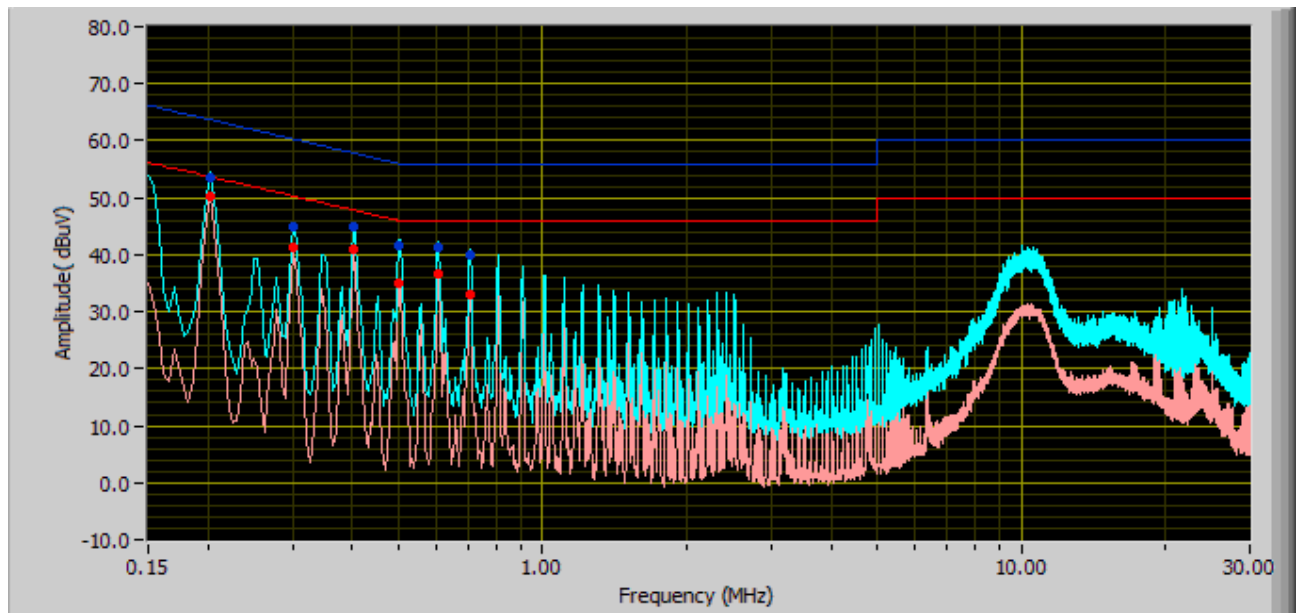

Neutral Line Plot at 120Vac, 60Hz

| Line Under Test | Frequency (MHz) | Corrected Amplitude (dBuV) QP | Limit (dBuV) QP | Margin (dB) QP | Corrected Amplitude (dBuV) AVG | Limit (dBuV) AVG | Margin (dB) AVG |
|-----------------|-----------------|-------------------------------|-----------------|----------------|--------------------------------|------------------|-----------------|
| Neutral | 0.20 | 53.42 | 63.67 | -10.25 | 50.35 | 53.67 | -3.32 |
| Neutral | 0.40 | 44.79 | 57.84 | -13.05 | 40.94 | 47.84 | -6.90 |
| Neutral | 0.50 | 41.65 | 56.00 | -14.35 | 34.92 | 46.00 | -11.08 |
| Neutral | 0.61 | 41.19 | 56.00 | -14.81 | 36.60 | 46.00 | -9.40 |
| Neutral | 0.30 | 45.02 | 60.26 | -15.24 | 41.34 | 50.26 | -8.92 |
| Neutral | 0.71 | 39.82 | 56.00 | -16.18 | 33.13 | 46.00 | -12.87 |

5.3 Channel Separation

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Environmental Conditions



| | |
|----------------------|-------------|
| Temperature | 23°C - 25°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is $\pm 1.5\text{dB}$.
4. Test Date : Feb 21 to Feb 25, 2008
Tested By :Choon Sian Ooi


Requirement(s): 47 CFR §15.247(a)(1)(i)

Procedures: The Channel Separation was measured conducted using a spectrum analyzer at low, mid, and hi channels.

Frequency hopping systems in the 902-928 MHz shall have, hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. The system shall hop to channel frequencies that are selected at the system hopping rate from a pseudo randomly ordered list of hopping frequencies.

| Channel | Channel Frequency (MHz) | Channel Separation (MHz) | 20 dB Channel Bandwidth (KHz) |
|---------|-------------------------|--------------------------|-------------------------------|
| Low | 902.750 | 0.500 | 73.00 |
| Mid | 915.250 | 0.503 | 73.00 |
| High | 927.250 | 0.500 | 73.00 |

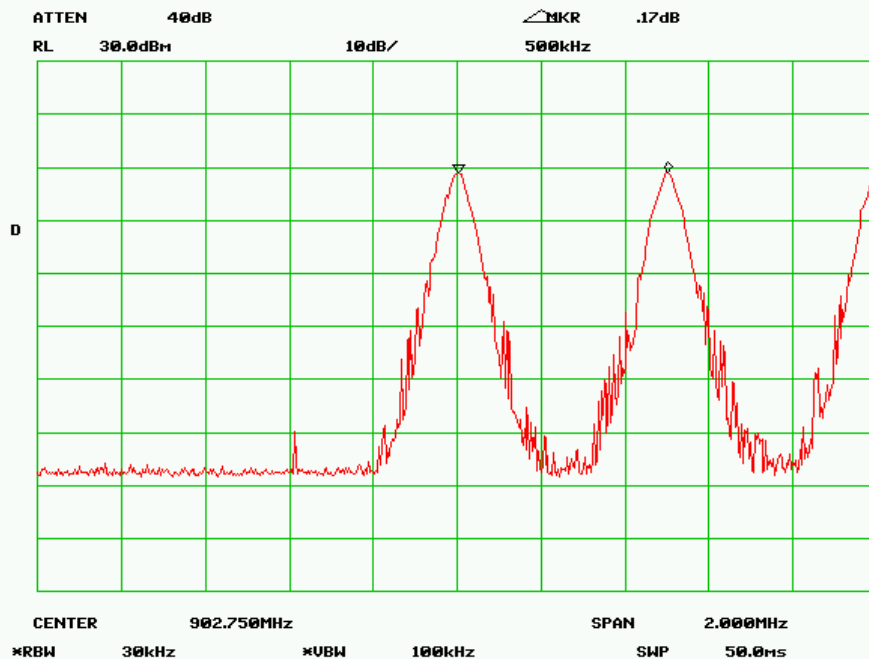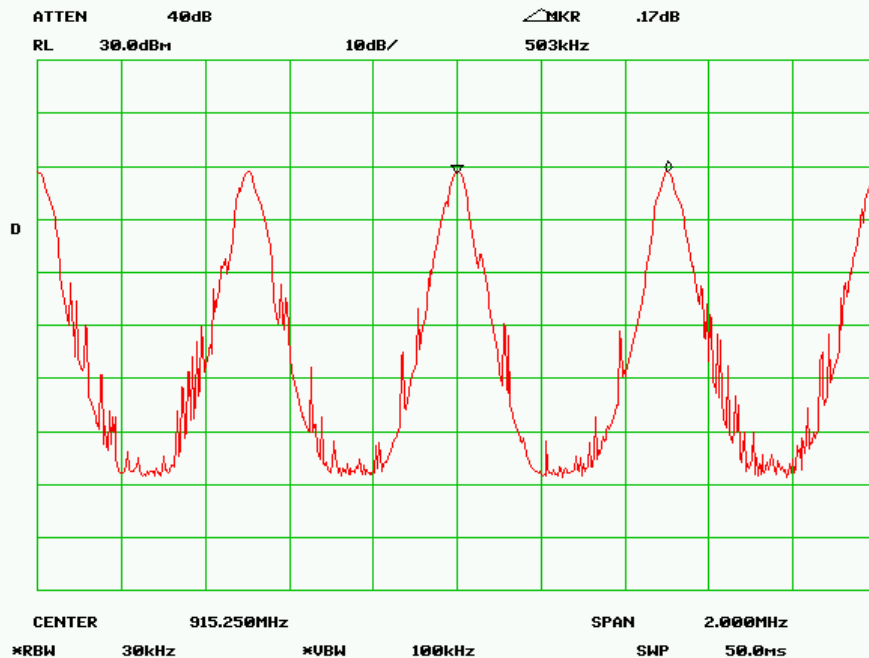Channel Separation - Low Channel**Channel Separation - Mid Channel**

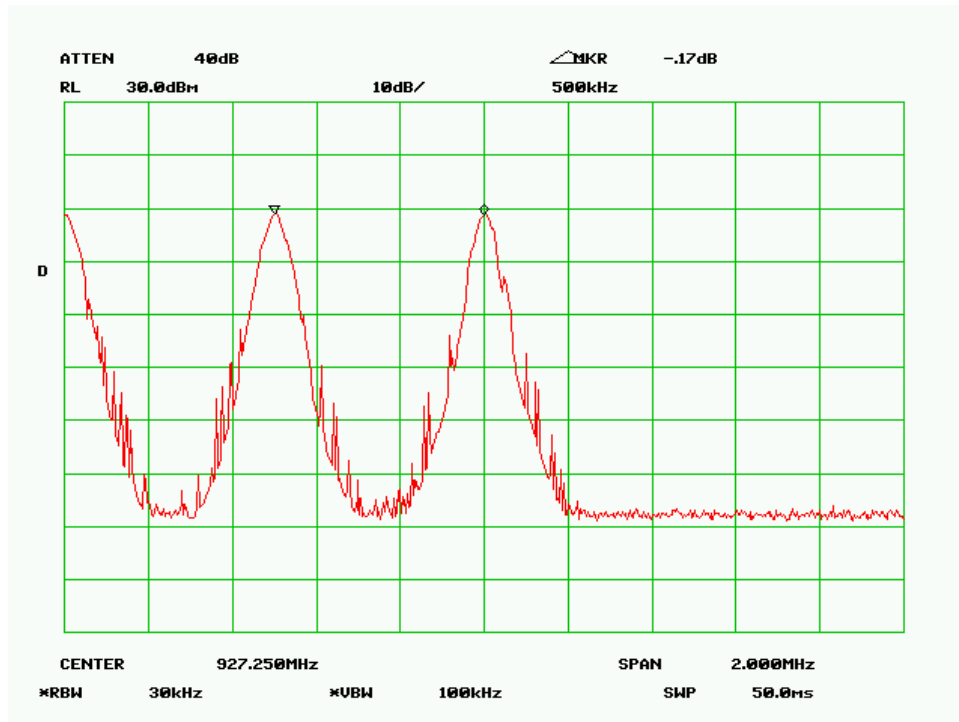Channel Separation – High Channel

5.4 20dB Occupied Bandwidth

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Environmental Conditions

| | |
|----------------------|-------------|
| Temperature | 23°C - 25°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is ± 1.5 dB.
4. Test Date : Feb 21 to Feb 25, 2008
Tested By :Choon Sian Ooi

Requirement(s): 47 CFR §15.247(a)(1)(i)



Procedures: The 20dB bandwidths were measured conducted using a spectrum analyzer at low, mid, and hi channels.

Note: The maximum allowed 20 dB bandwidth of the hopping is 500 kHz.

| Channel | Channel Frequency (MHz) | 20 dB Channel Bandwidth (KHz) | 99% Channel Bandwidth (KHz) |
|---------|-------------------------|-------------------------------|-----------------------------|
| Low | 902.750 | 73.00 | 70.80 |
| Mid | 915.250 | 73.00 | 69.00 |
| High | 927.250 | 73.00 | 70.10 |

Refer to the attached plots.


A

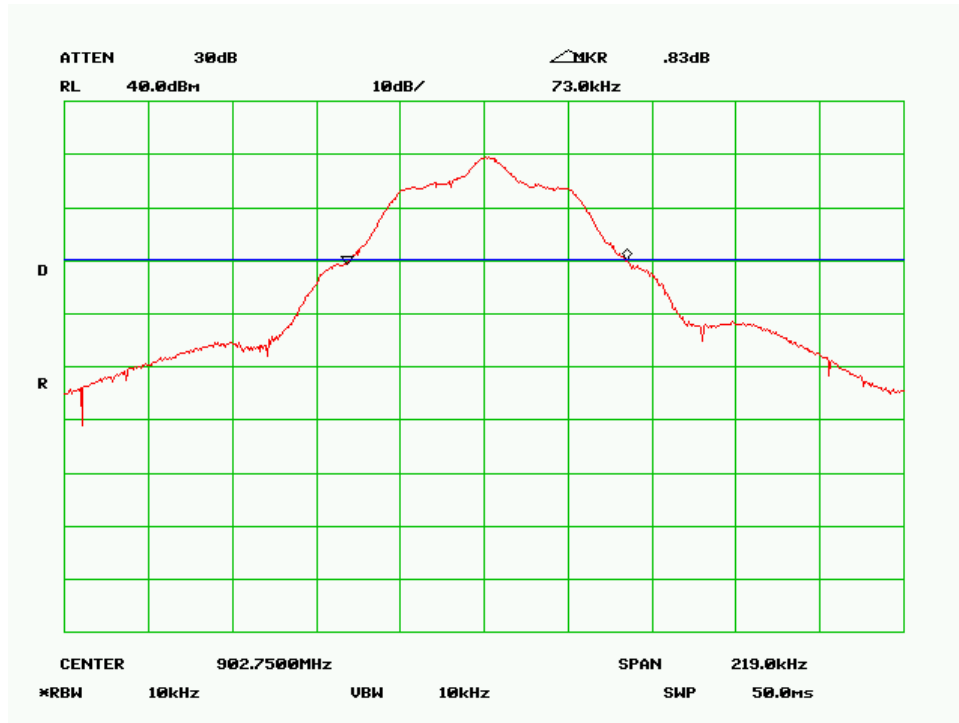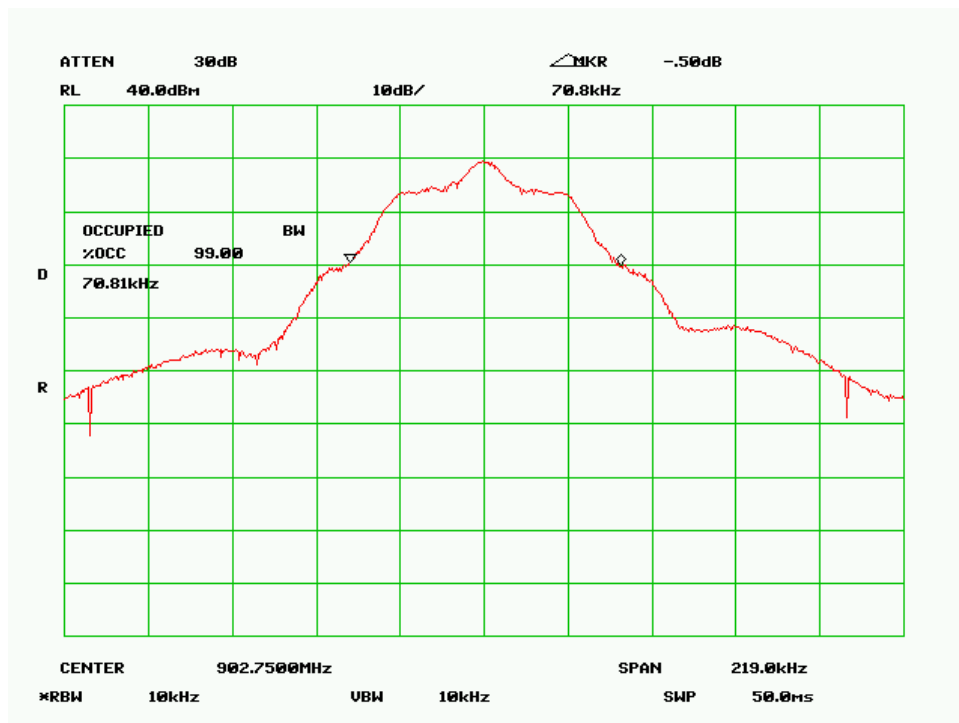SIEMIC, INC.
Accessing global marketsTitle: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 28 of 66
www.siemic.com**20dB Bandwidth - Low Channel****99% Bandwidth - Low Channel**


A

SIEMIC, Inc.
Accessing global marketsTitle: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 29 of 66
www.siemic.com



20dB Bandwidth – Mid Channel

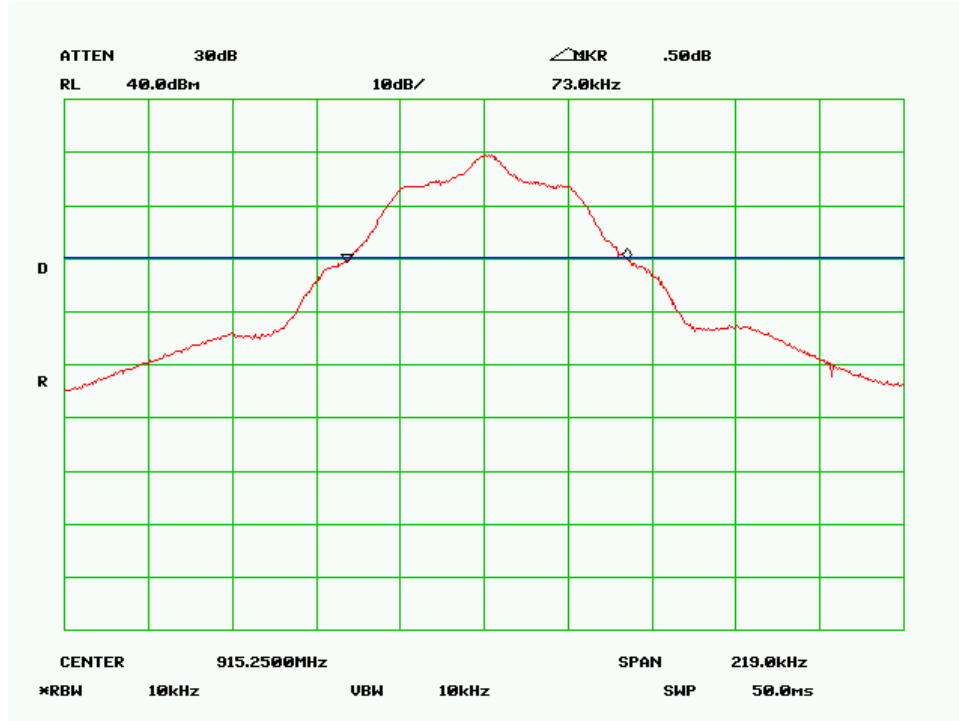

99% Bandwidth - Mid Channel

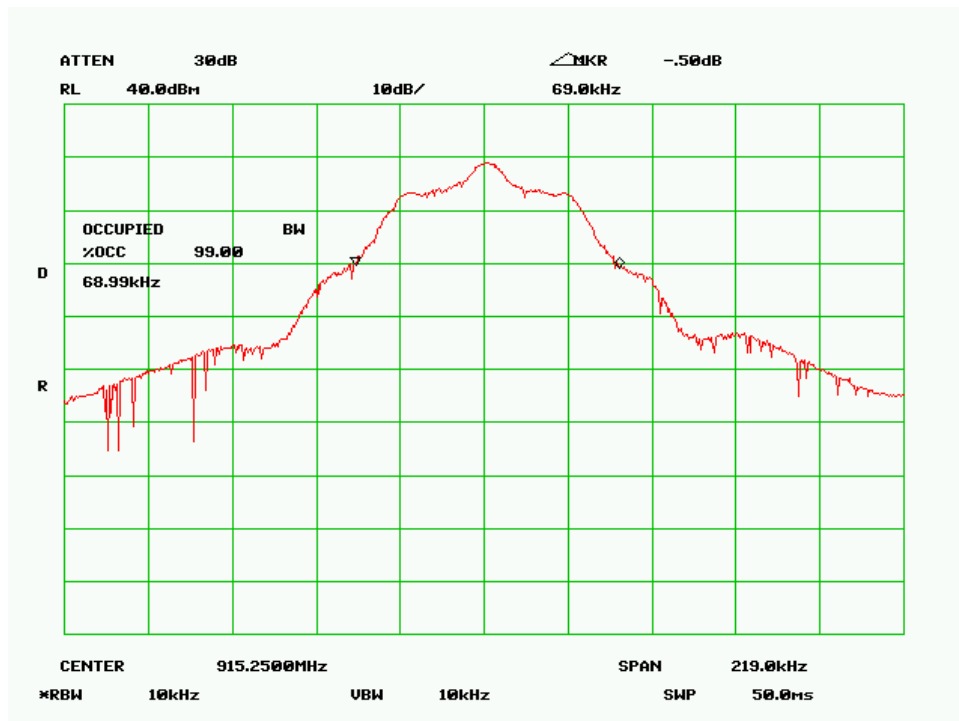

A

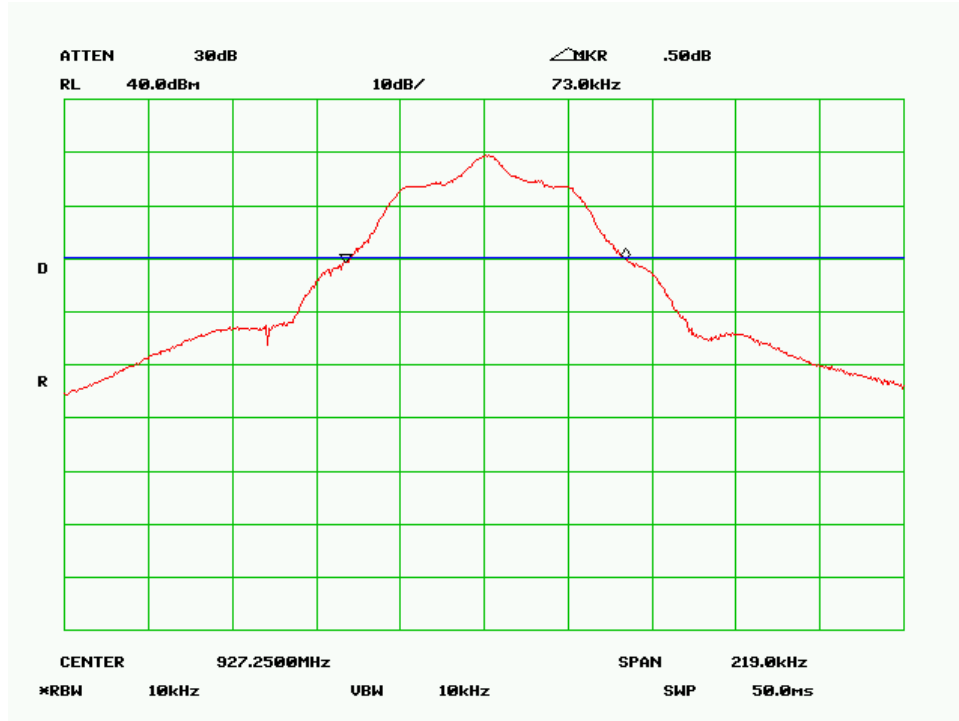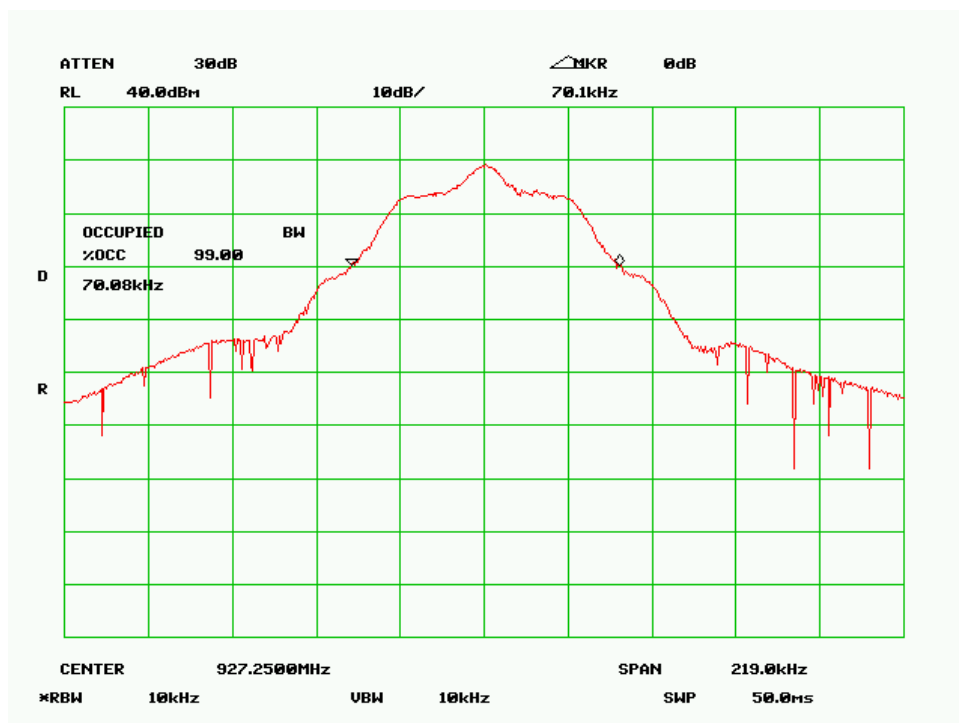SIEMIC, INC.
Accessing global marketsTitle: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 30 of 66
www.siemic.com**20dB Bandwidth - High Channel****99% Bandwidth - High Channel**

5.5 Number of Hopping Channel

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

| | |
|----------------------|-------------|
| Temperature | 23°C - 25°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
4. Test Date : Feb 21 to Feb 25, 2008
Tested By : Choon Sian Ooi

Standard Requirement: 47 CFR §15.247(a)(1)(iii)

For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period. The maximum allowed 20 dB bandwidth of the hopping channel is 500 kHz.

Procedures: The Number of Hopping Channel measurement was taken conducted using a spectrum analyzer.

RBW=300 KHz, VBW > RBW

Test Result:

Total Channel: 50 Channels

A


SIEMIC, Inc.
Accessing global markets

Title: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007

Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 32 of 66
www.siemic.com

Number of Hopping Channel

902 – 928 MHz: 50 Channels

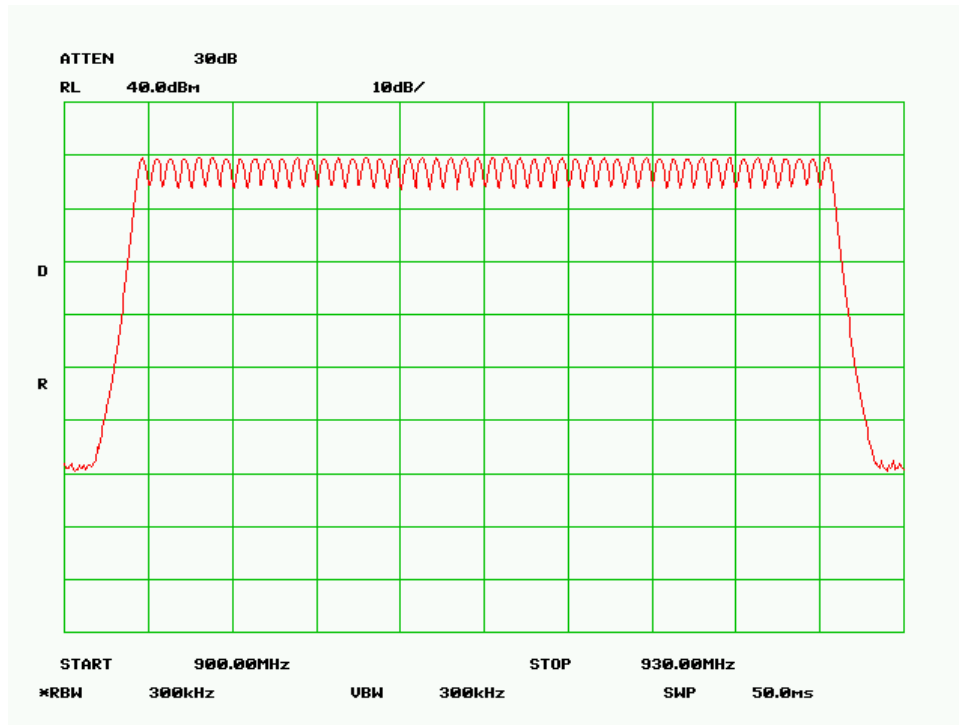

5.6 Time of Occupancy

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

| | |
|----------------------|-------------|
| Temperature | 23°C - 25°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
4. Test Date : Feb 21 to Feb 25, 2008
Tested By :Choon Sian Ooi

Standard Requirement: 47 CFR §15.247(a)(1)

For frequency hopping systems operating in the 902–928 MHz band: if the 20 dB bandwidth of the hopping channel is less than 250 kHz, the system shall use at least 50 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 20 second period; if the 20 dB bandwidth of the hopping channel is 250 kHz or greater, the system shall use at least 25 hopping frequencies and the average time of occupancy on any frequency shall not be greater than 0.4 seconds within a 10 second period.

Procedures: The Time of Occupancy measurement was taken conducted using a spectrum analyzer.



Test Result:

| Channel | Channel Frequency (MHz) | Dwell Time (sec) | Limit (sec) |
|---------|-------------------------|------------------|-------------|
| Low | 902.750 | 0.231 | 0.4 |
| Mid | 915.250 | 0.229 | 0.4 |
| High | 927.250 | 0.245 | 0.4 |

A

SIEMIC, INC.
Accessing global marketsTitle: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 34 of 66
www.siemic.com



Low Channel

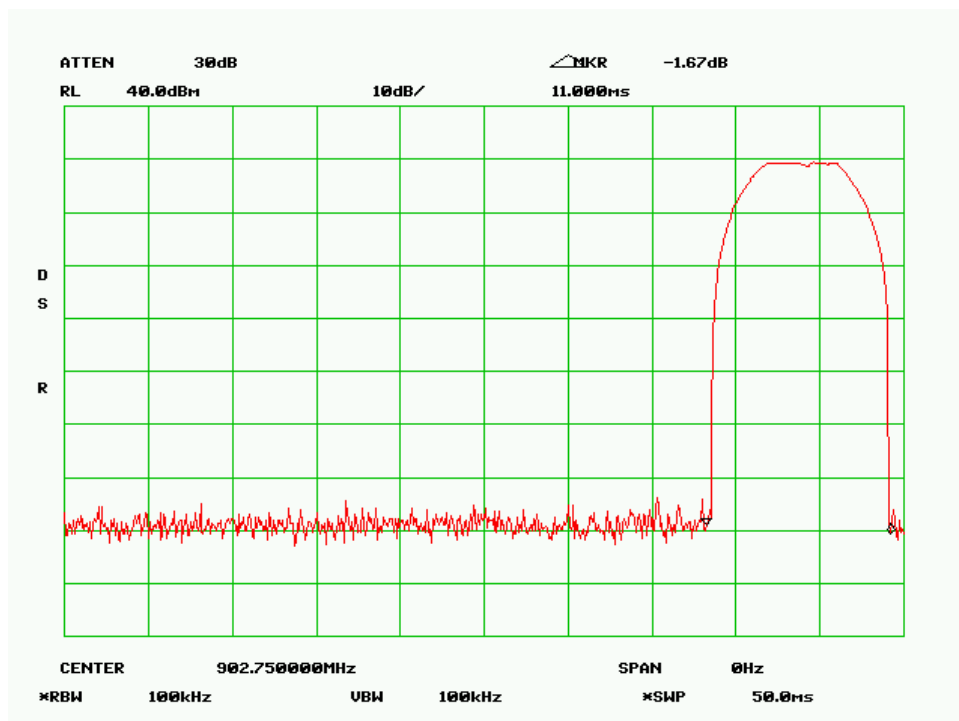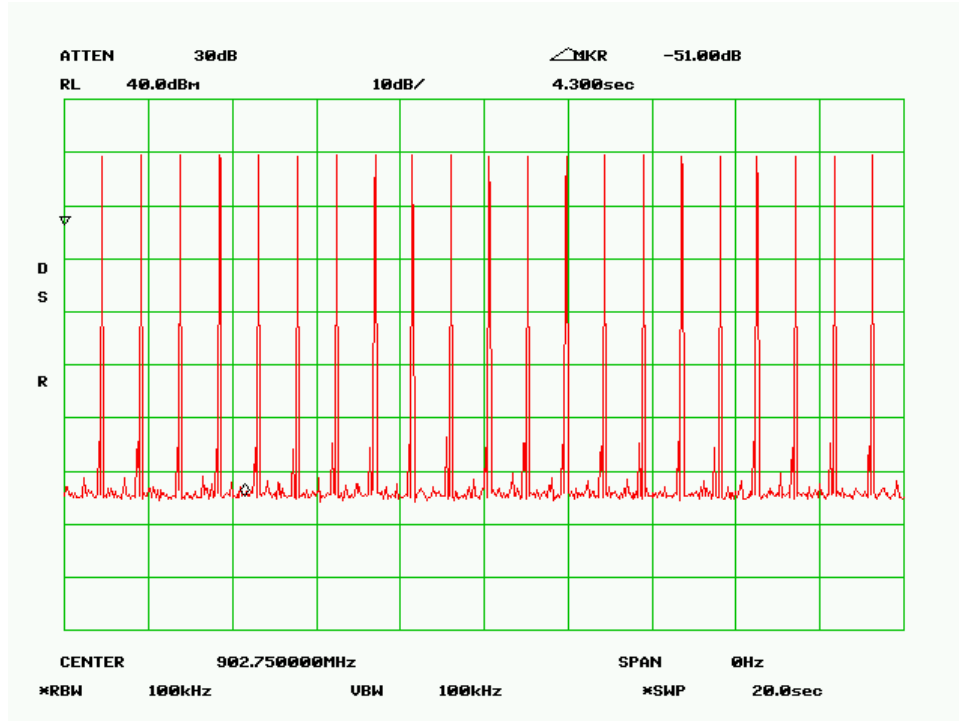

A

SIEMIC, INC.
Accessing global marketsTitle: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 35 of 66
www.siemic.com



Mid Channel

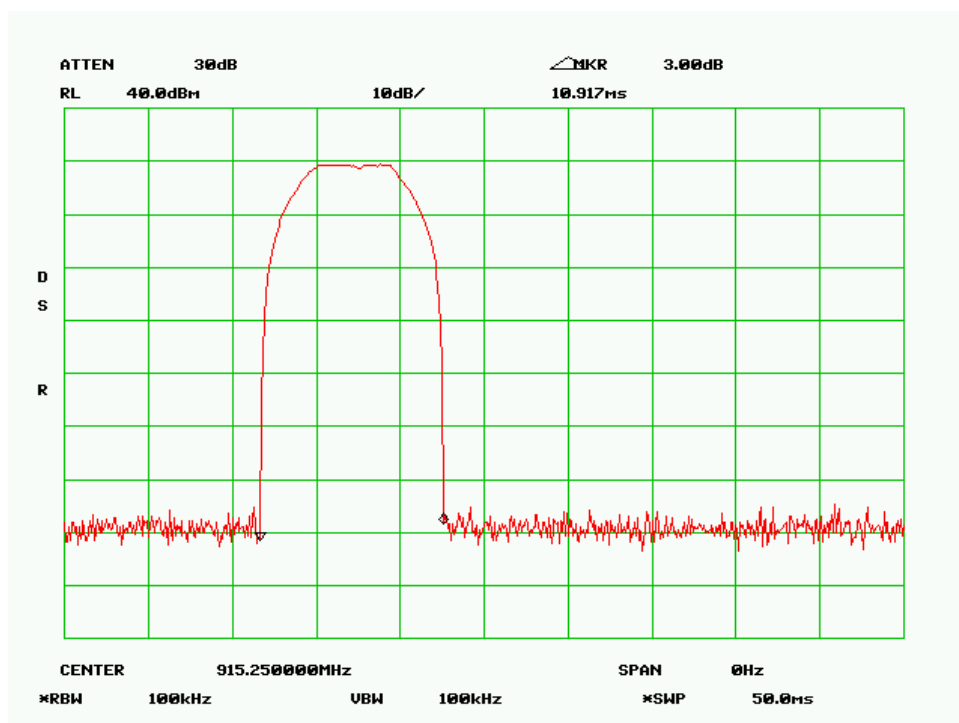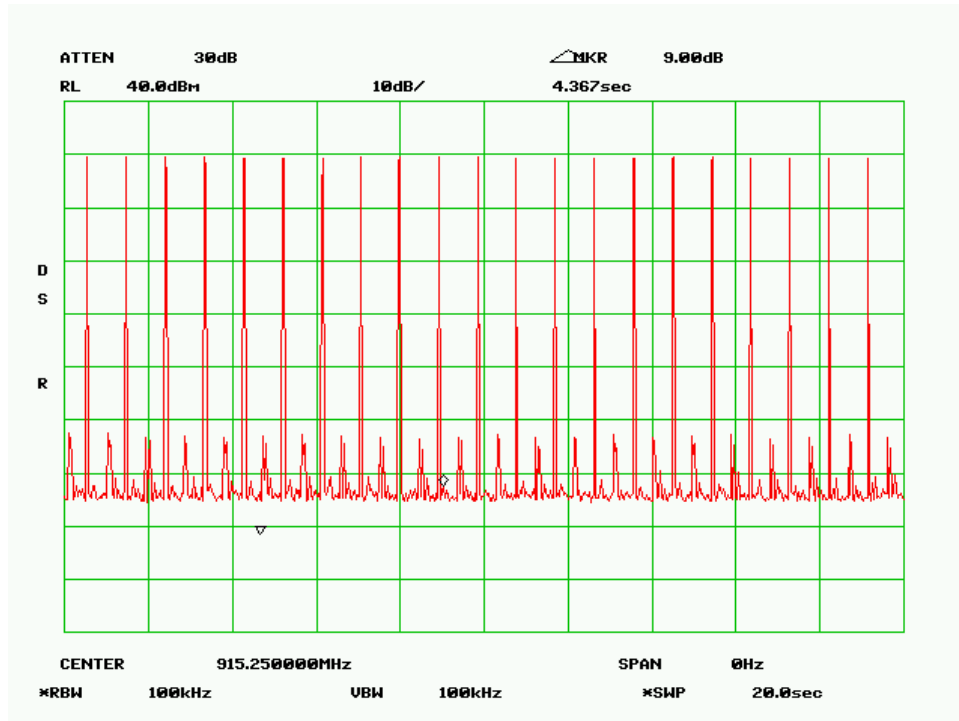

A

SIEMIC, INC.
Accessing global marketsTitle: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 36 of 66
www.siemic.com

High Channel

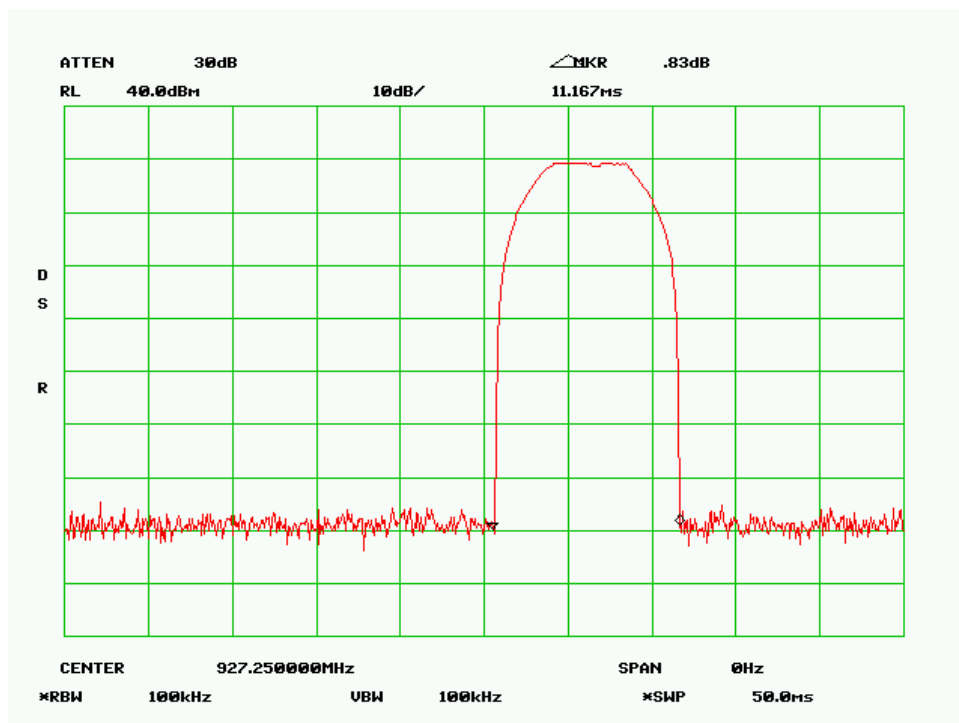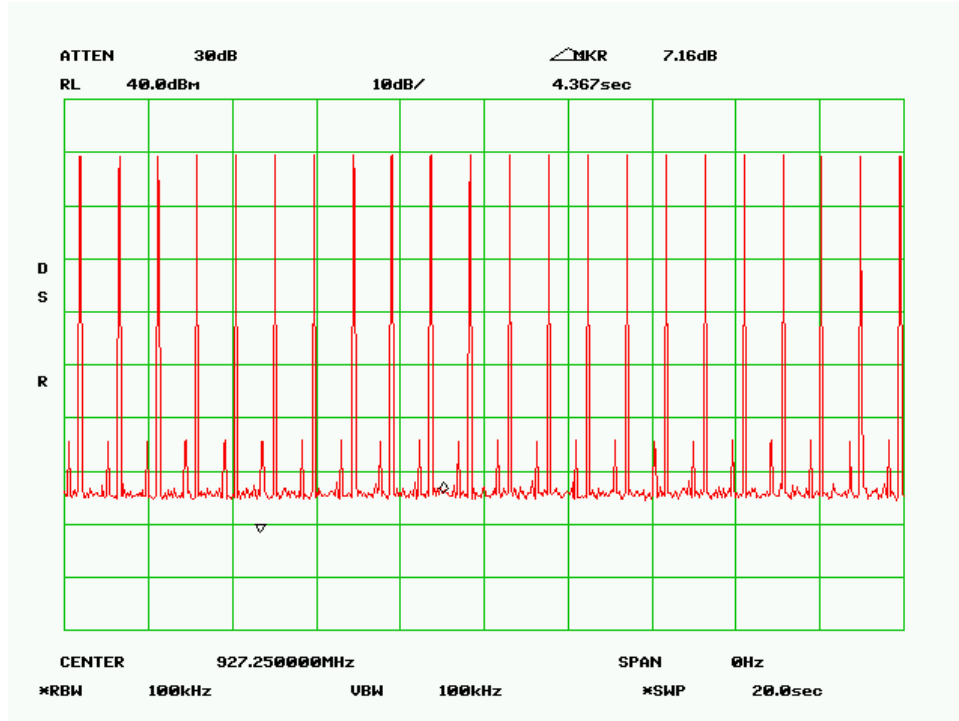

5.7 Peak Output Power

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

| | |
|----------------------|-------------|
| Temperature | 23°C - 25°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
4. Test Date : Feb 21 to Feb 25, 2008
Tested By :Choon Sian Ooi

Standard Requirement : 47 CFR §15.247(b)


Procedures: The peak output power was measured conducted using a spectrum analyzer at low, mid, and hi channels. Peak detector was set to measure the power output. The power is converted from watt to dBm, therefore, 1 watt = 30 dBm. The highest antenna gain that will be used is -20dBi.

Note: For frequency hopping systems operating in the 902–928 MHz band: 1 watt for systems employing at least 50 hopping channels; and, 0.25 watts for systems employing less than 50 hopping channels, but at least 25 hopping channels, as permitted under paragraph (a)(1)(i) of this section.


Test Result :

| Channel | Channel Frequency (MHz) | Measured Output Power (dBm) | Peak Output Power Limit (dBm) |
|---------|-------------------------|-----------------------------|-------------------------------|
| Low | 902.750 | 29.50 | 30 |
| Mid | 915.250 | 29.50 | 30 |
| High | 927.250 | 29.67 | 30 |

Output Power Low Channel

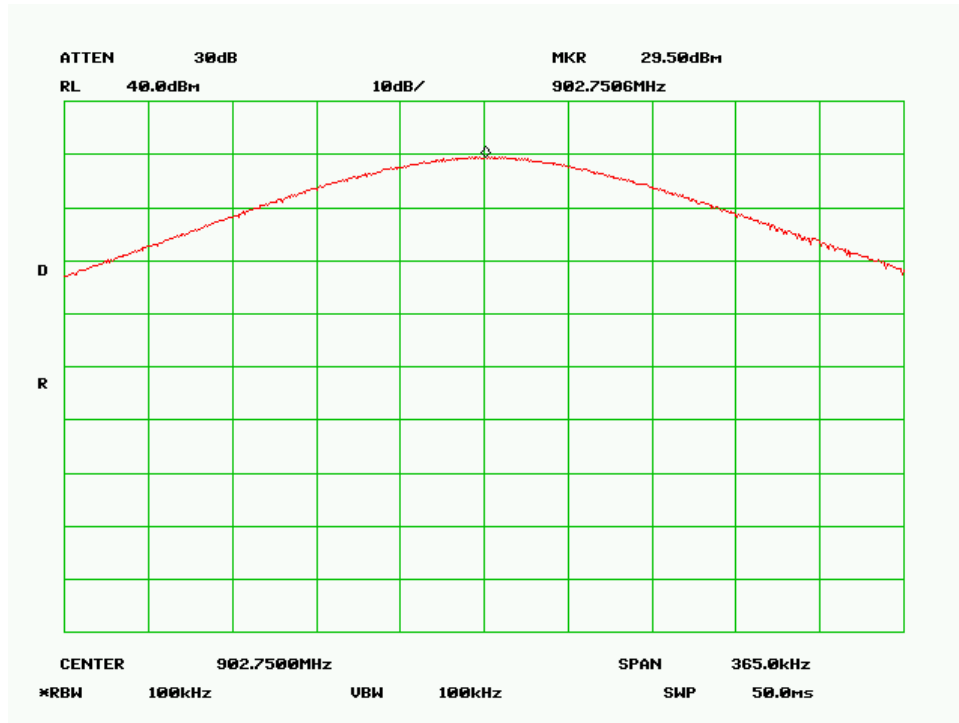


Output Power Mid Channel

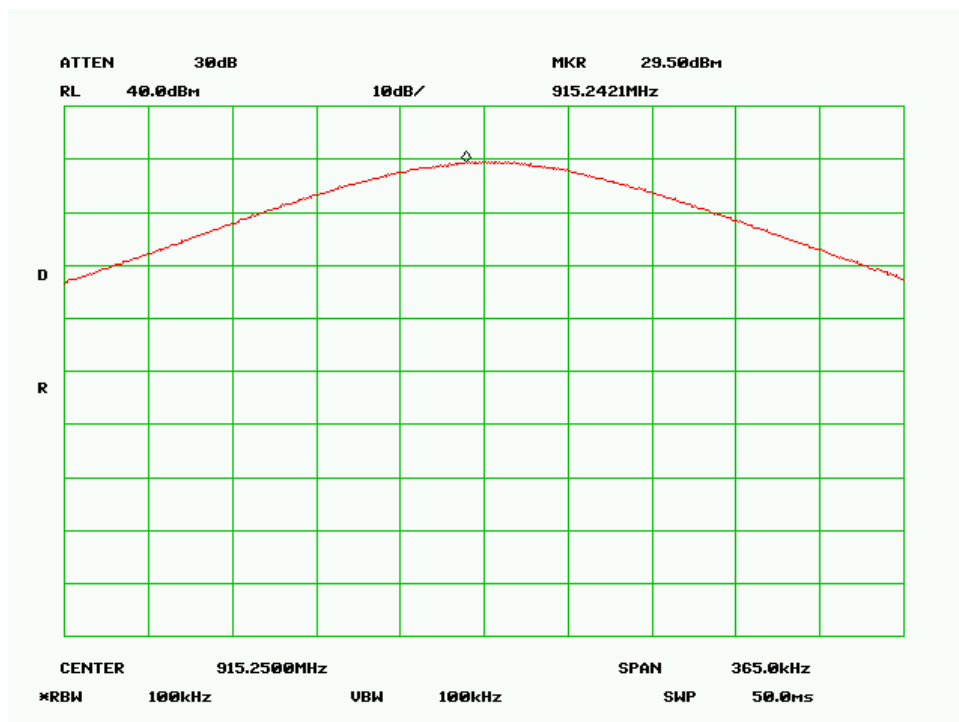


A

SIEMIC, Inc.
Accessing global marketsTitle: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 39 of 66
www.siemic.com


Output Power High Channel

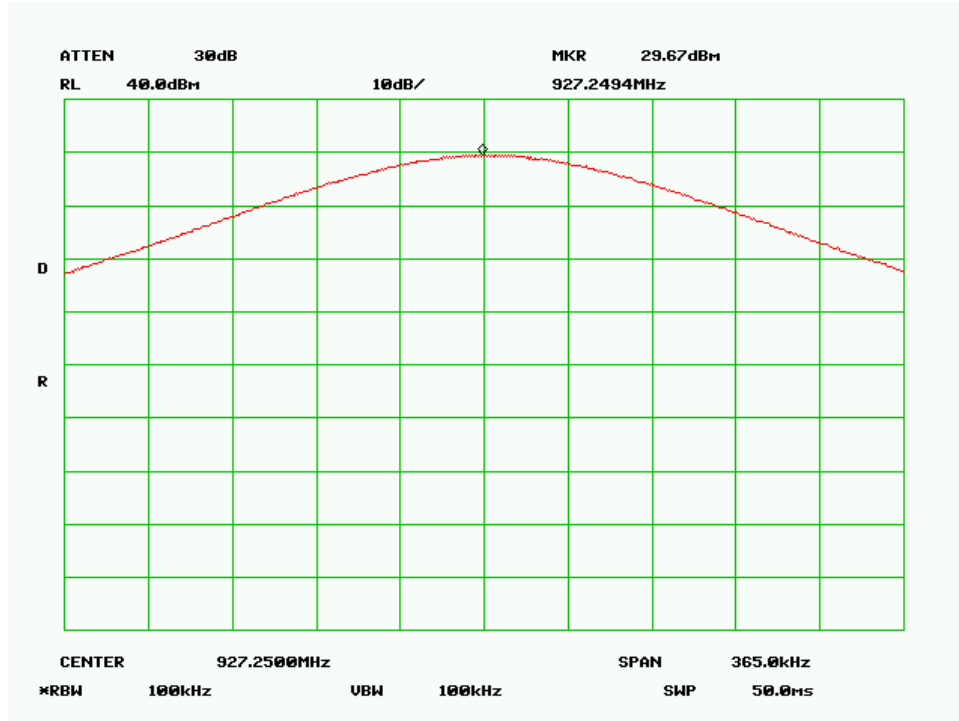

Low Channel

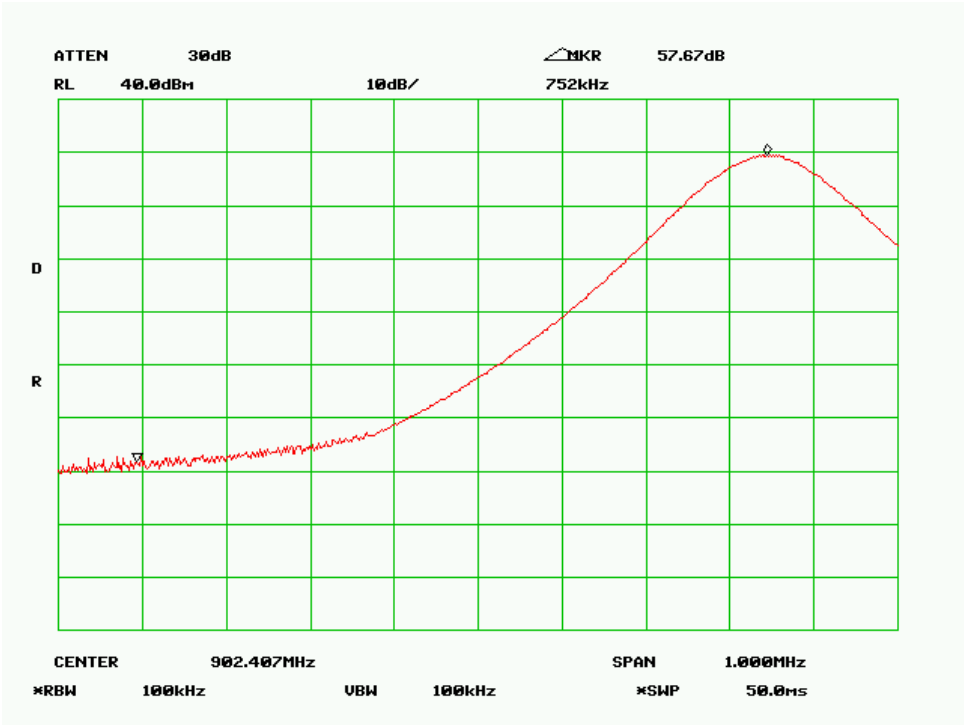

High Channel

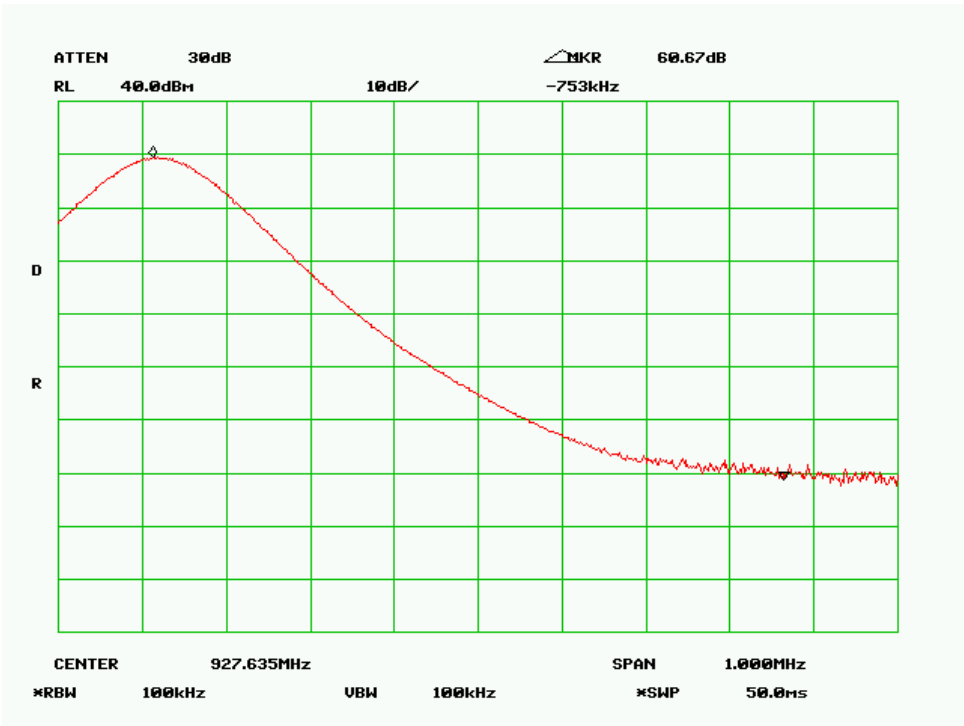

5.9 Antenna Port Emission

1. Conducted Measurement
EUT was set for low , mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 20GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions


| | |
|----------------------|-------------|
| Temperature | 23°C - 25°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
4. Test Date : Feb 21 to Feb 25, 2008
Tested By :Choon Sian Ooi

Standard Requirement : 47 CFR §15.247(c)


Procedures: The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels. The limit was determined by attenuating 20 dB of the RF peak power output

Test Result:

Low Channel -1

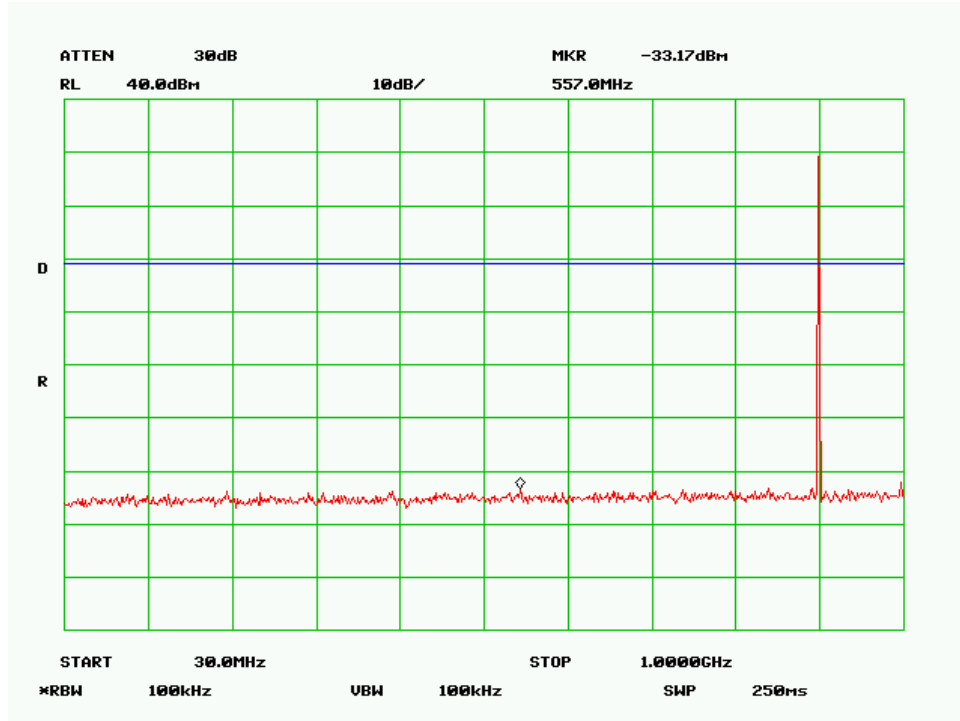


Low Channel -2

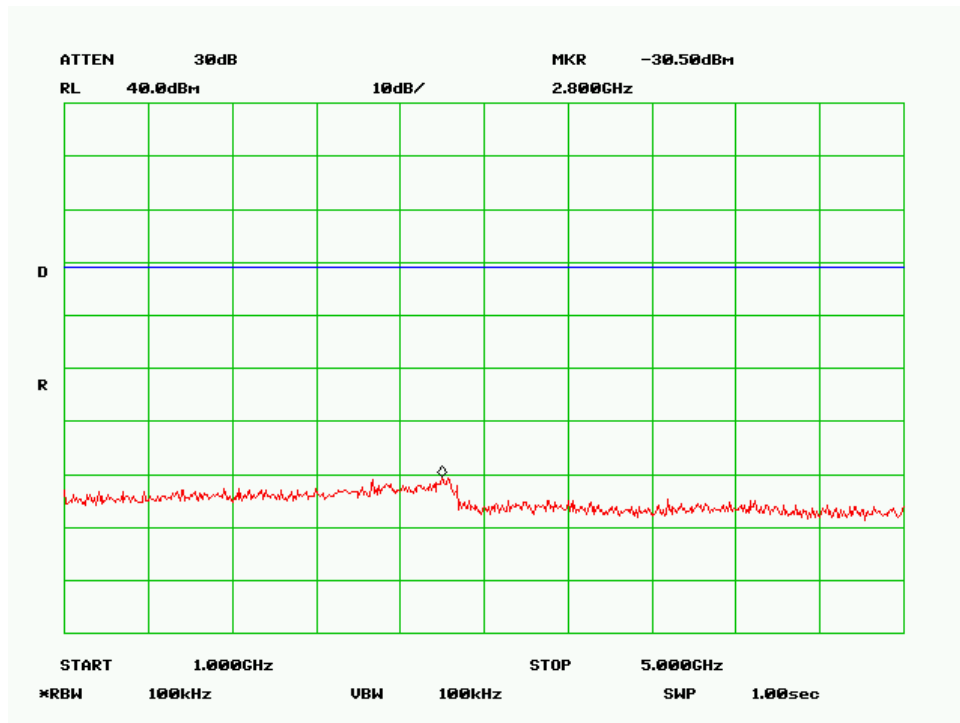


A

SIEMIC, INC.
Accessing global marketsTitle: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 44 of 66
www.siemic.com

Low Channel -3

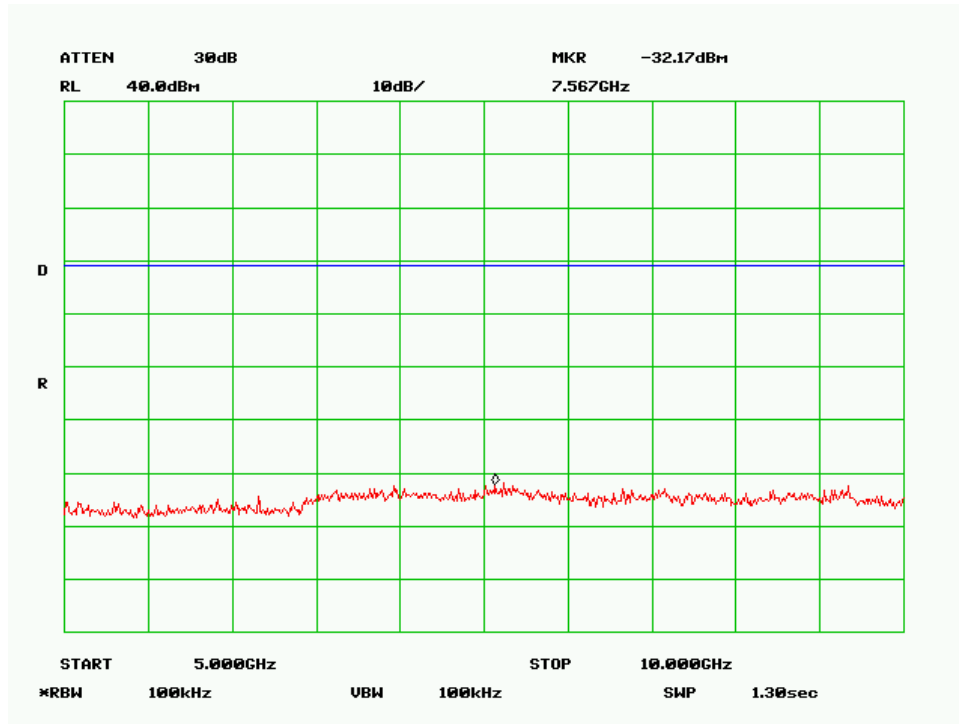

Mid Channel -1

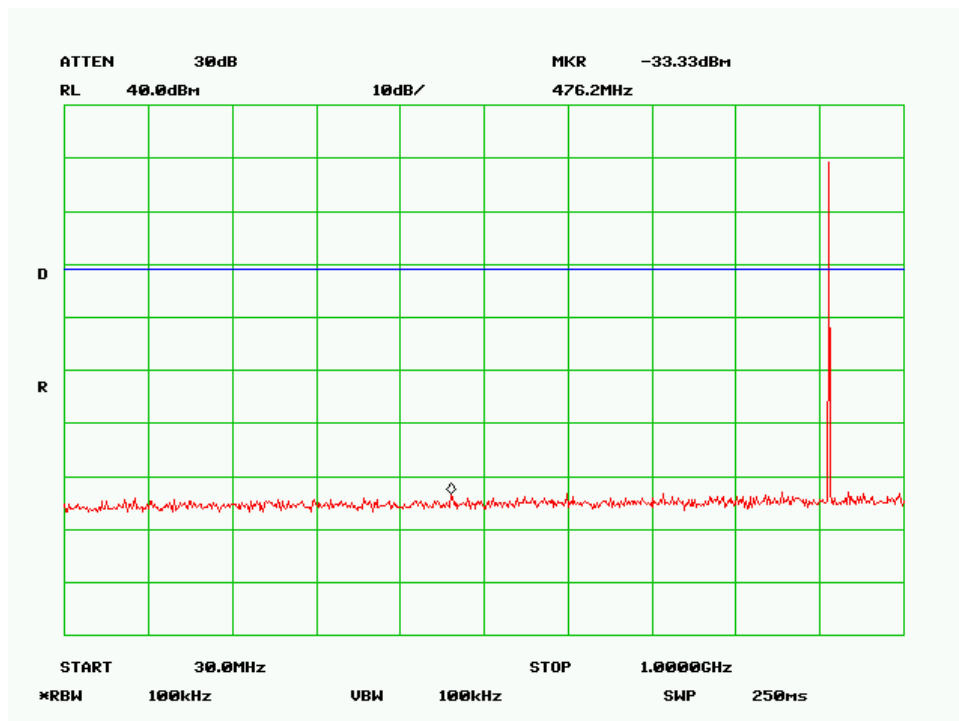


A

SIEMIC, INC.
Accessing global markets


Title: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007

Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 45 of 66
www.siemic.com

Mid Channel - 2

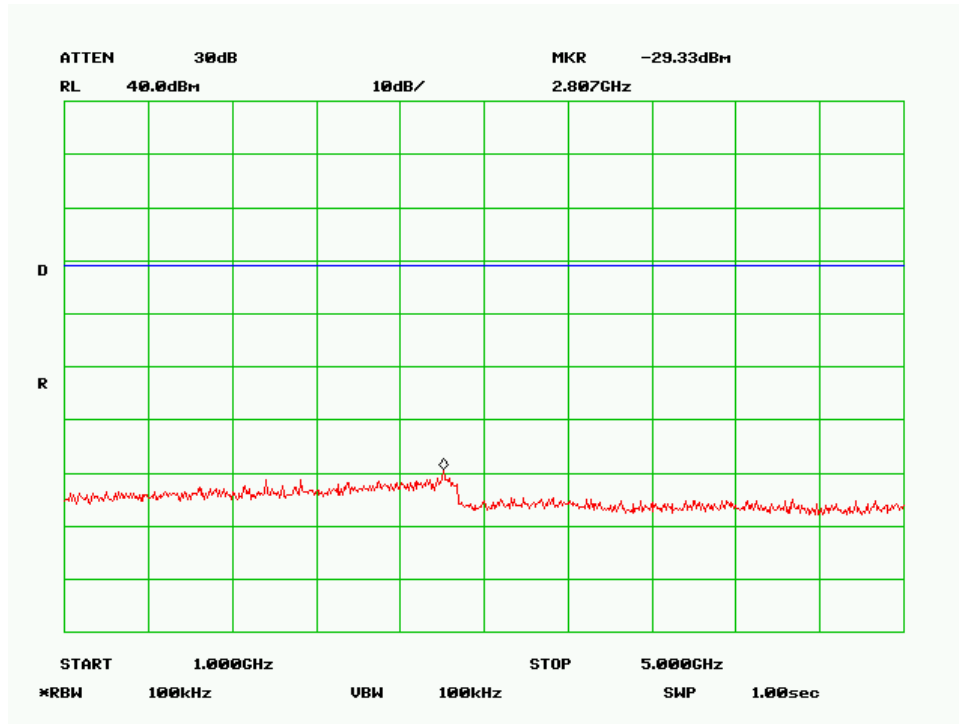


Mid Channel - 3

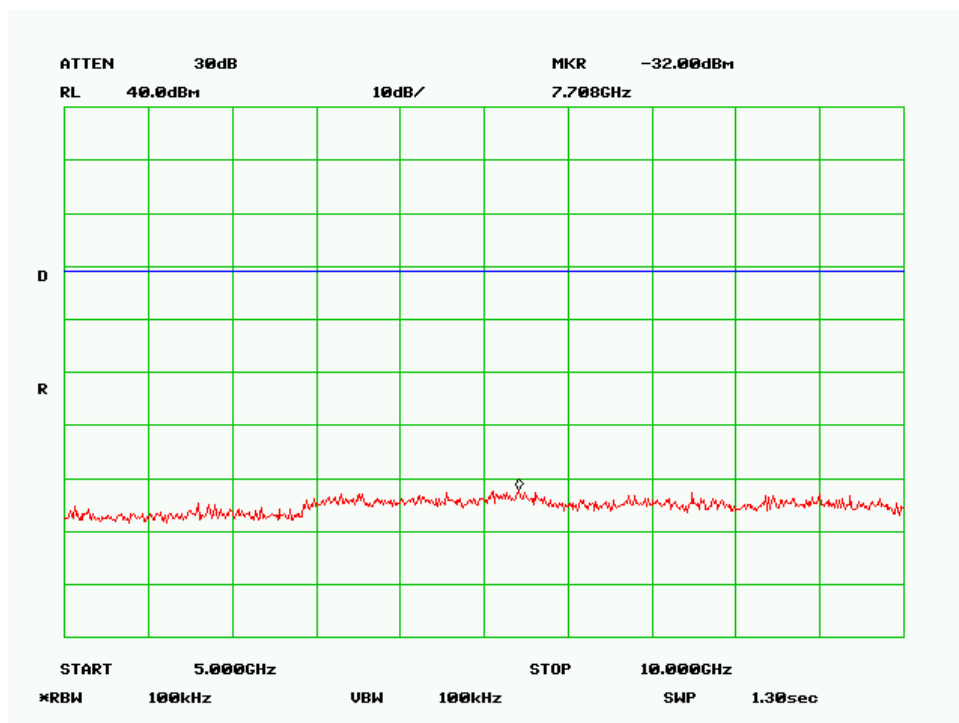


A

SIEMIC, Inc.
Accessing global marketsTitle: RF Test Report of Zebra Technologies Corp.
Model M5e
To: FCC 15.247 2007, IC RSS210 Issue 7: 2007Serial# SL08041701-ZBR-027 (15.247) (M5e)
Issue Date 12 May 2008
Page 46 of 66
www.siemic.com

High Channel -1

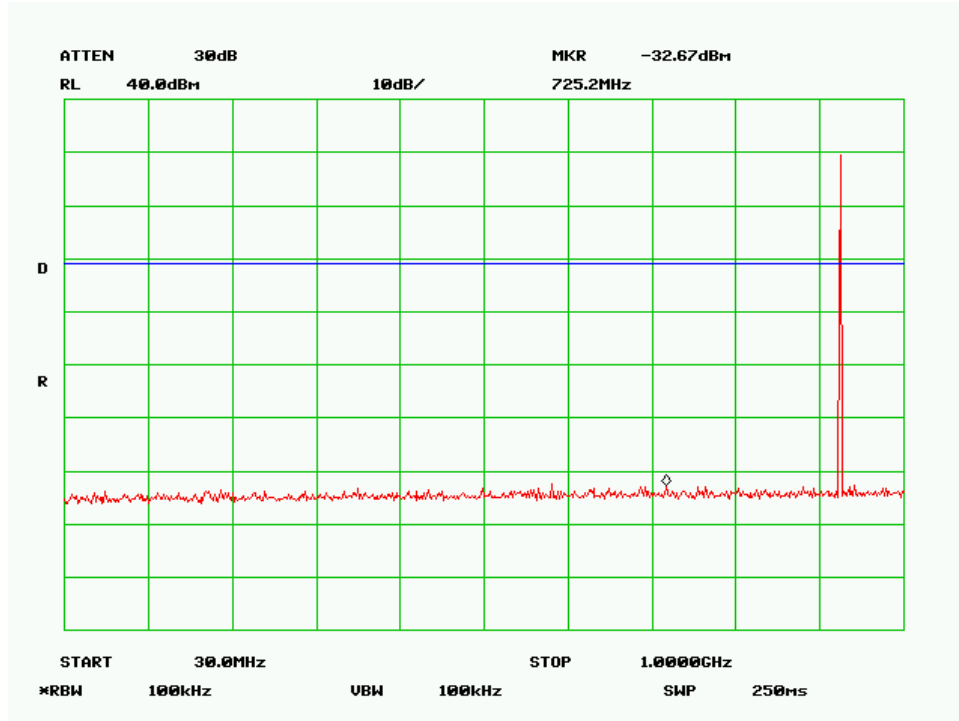


High Channel -2

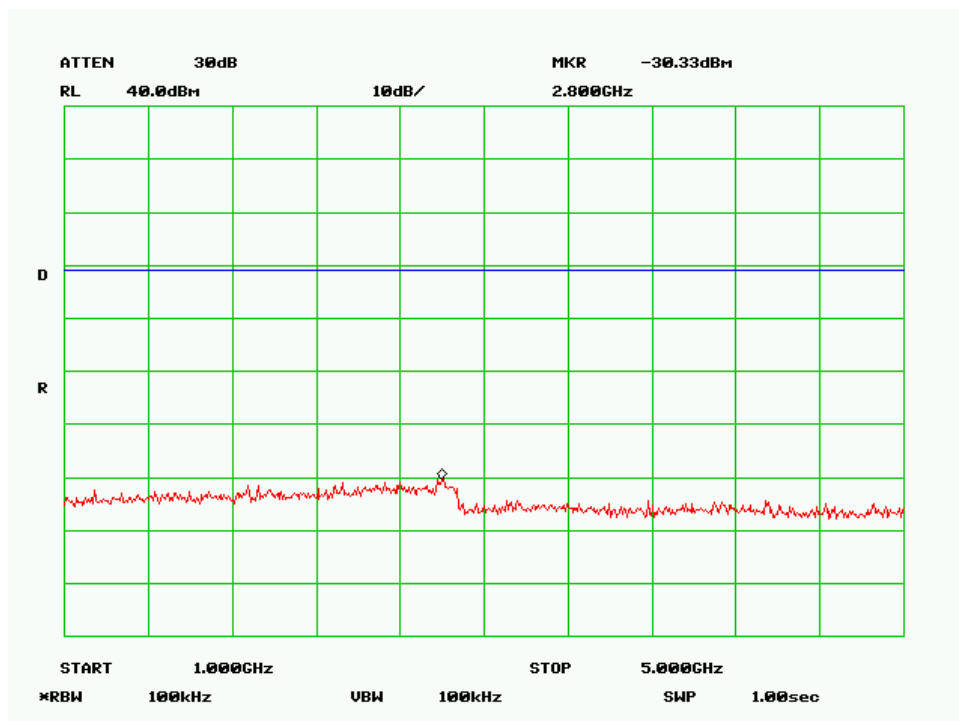

A

High Channel -3

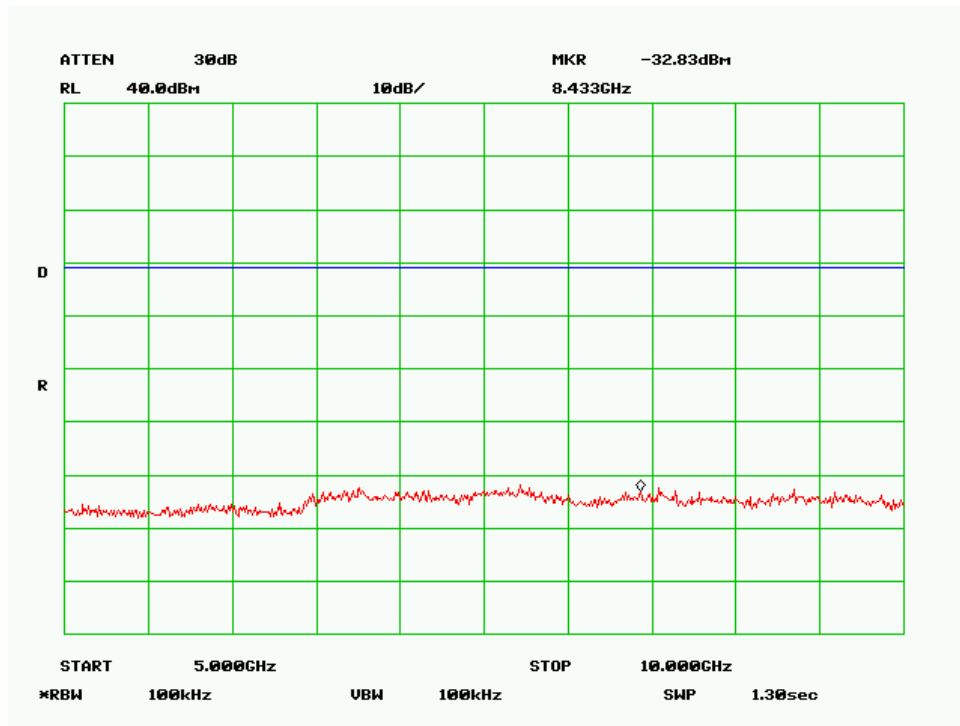

5.10 Radiated Spurious Emission < 1GHz

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz (QP only @ 3m & 10m) is +5.6dB/-4.5dB (for EUTs < 0.5m X 0.5m X 0.5m).
4. Environmental Conditions

| | |
|----------------------|-------------|
| Temperature | 23°C - 25°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |

Test Date : Feb 21 to Feb 25, 2008
Tested By :Choon Sian Ooi

Standard Requirement : 47 CFR §15.247(c)

Procedures: Radiated emissions were measured according to ANSI C63.4. The EUT was set to transmit at the highest output power. The EUT was set to transmit at mid channel. Note that setting the channel other than mid, the spurious emissions are the same.


The limit is converted from microvolts/meter to decibel microvolts/meter.

Sample Calculation: Corrected Amplitude = Raw Amplitude (dBμV/m) + ACF(dB) + Cable Loss(dB)

Test Result:

Host EUT-RAZOR 400


Radiated Emission Plot (Receive mode)

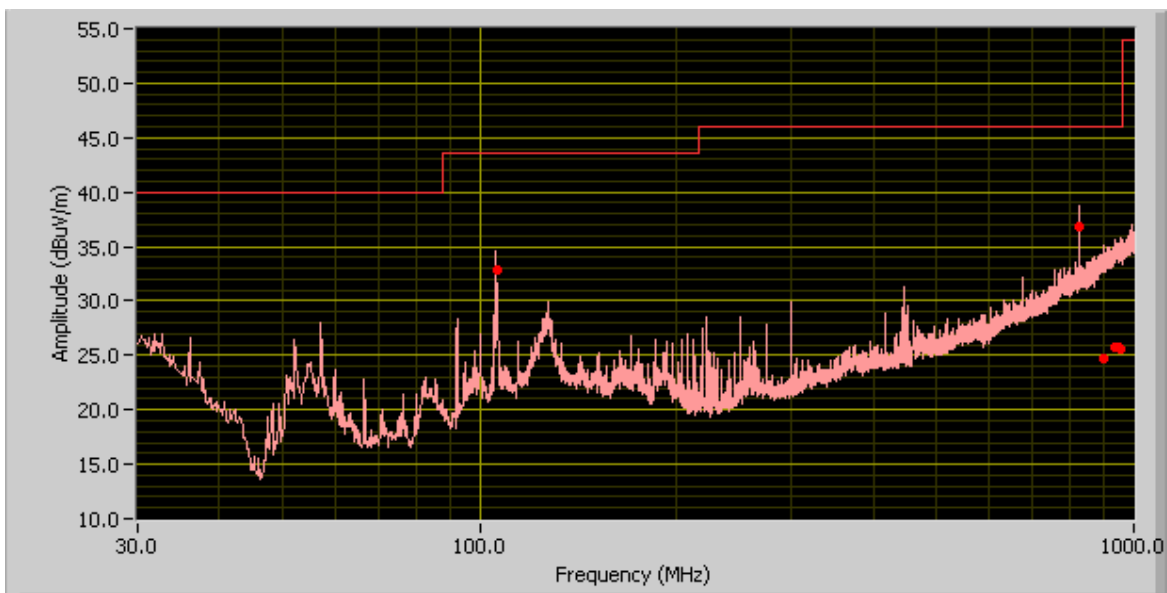

Test Data

| Frequency (MHz) | Quasi-Peak (dBµV/m) | Antenna height (cm) | Polarity | Turntable position (deg) | Limit (dBµV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|----------|--------------------------|----------------|-------------|
| 826.76 | 36.75 | 100.00 | V | 316.00 | 46.00 | -9.26 |
| 105.66 | 32.78 | 100.00 | V | 257.00 | 43.50 | -10.72 |
| 953.83 | 25.56 | 300.00 | V | 90.00 | 46.00 | -20.44 |
| 936.56 | 25.67 | 300.00 | V | 357.00 | 46.00 | -20.33 |
| 950.92 | 25.78 | 99.00 | H | 286.00 | 46.00 | -20.22 |
| 901.84 | 24.67 | 100.00 | V | 46.00 | 46.00 | -21.33 |

Radiated Emission Plot (Transmit mode)

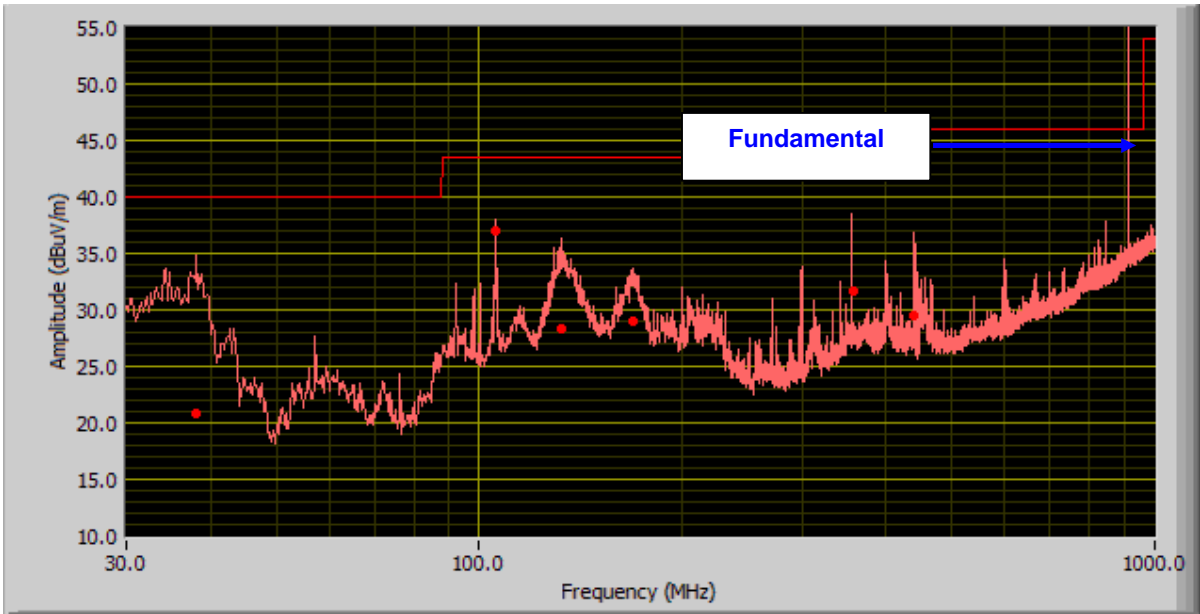


Test Data

| Frequency (MHz) | Quasi-Peak (dBµV/m) | Antenna height (cm) | Polarity | Turntable position (deg) | Limit (dBµV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|----------|--------------------------|----------------|-------------|
| 168.46 | 29.08 | 114.00 | H | 154.00 | 43.50 | -14.42 |
| 440.98 | 29.54 | 51.00 | V | 183.00 | 46.00 | -16.46 |
| 38.12 | 20.85 | 85.00 | V | 211.00 | 40.00 | -19.15 |
| 105.70 | 37.03 | 316.00 | V | 122.00 | 43.50 | -6.47 |
| 132.41 | 28.28 | 261.00 | H | 398.00 | 43.50 | -15.22 |
| 355.69 | 31.70 | 150.00 | H | 314.00 | 46.00 | -14.30 |

Host EUT-RAZOR 600


Radiated Emission Plot (Receive mode)

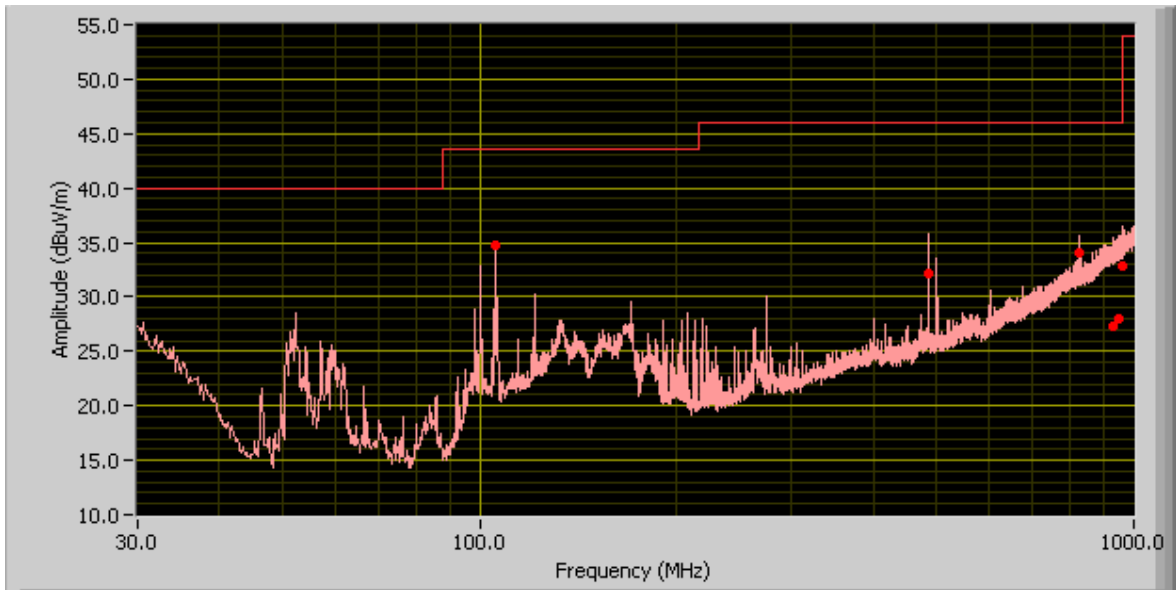

Test Data

| Frequency (MHz) | Quasi-Peak (dBµV/m) | Antenna height (cm) | Polarity | Turntable position (deg) | Limit (dBµV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|----------|--------------------------|----------------|-------------|
| 105.66 | 34.75 | 100.00 | V | 359.00 | 43.50 | -8.76 |
| 959.45 | 32.78 | 396.00 | H | 359.00 | 46.00 | -13.22 |
| 484.93 | 32.16 | 100.00 | V | 11.00 | 46.00 | -13.84 |
| 945.49 | 27.92 | 100.00 | H | 222.00 | 46.00 | -18.08 |
| 824.04 | 34.11 | 100.00 | V | 359.00 | 46.00 | -11.89 |
| 927.25 | 27.23 | 396.00 | H | 30.00 | 46.00 | -18.77 |

Radiated Emission Plot (Transmit mode)

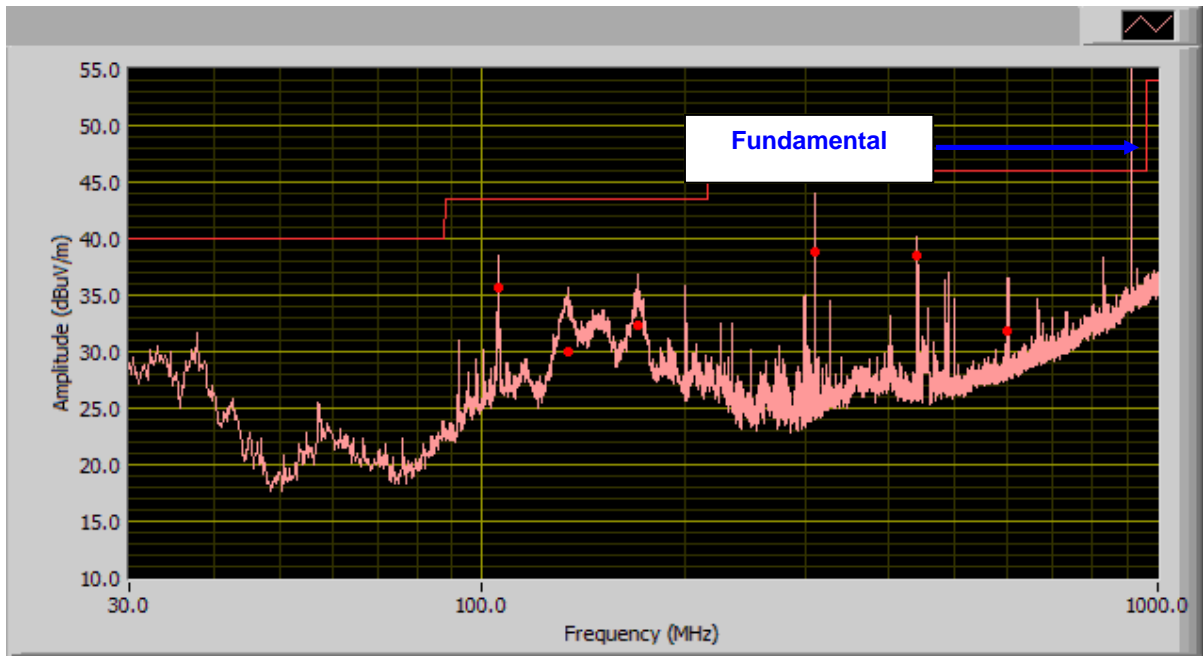

Test Data

| Frequency (MHz) | Quasi-Peak (dBμV/m) | Antenna height (cm) | Polarity | Turntable position (deg) | Limit (dBμV/m) | Margin (dB) |
|-----------------|---------------------|---------------------|----------|--------------------------|----------------|-------------|
| 133.60 | 30.01 | 234.00 | H | 237.00 | 43.50 | -13.49 |
| 310.99 | 38.80 | 375.00 | H | 298.00 | 46.00 | -7.20 |
| 105.70 | 35.68 | 103.00 | V | 296.00 | 43.50 | -7.82 |
| 441.02 | 38.58 | 236.00 | V | 27.00 | 46.00 | -7.42 |
| 169.86 | 32.34 | 125.00 | H | 110.00 | 43.50 | -11.16 |
| 599.24 | 31.77 | 132.00 | H | 90.00 | 46.00 | -14.23 |

5.12 Radiated Spurious Emissions > 1GHz

1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 1GHz – 20GH is +5.6dB/-4.5dB (for EUTs < 0.5m X 0.5m X 0.5m).
4. Environmental Conditions

| | |
|----------------------|-------------|
| Temperature | 23°C - 25°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |

Test Date : Feb 21 to Feb 25, 2008
Tested By :Choon Sian Ooi

Standard Requirement : 47 CFR §15.247(d)

Procedures: Equipment was setup in a semi-anechoic chamber. For measurements above 1 GHz an average measurement was taken with a 10Hz video bandwidth. The EUT was tested at low, mid and high with the highest output power. Investigated up to 10th harmonics of the operating frequency.

Sample Calculation:

EUT Field Strength = Raw Amplitude(dBμV/m) – Amplifier Gain(dB) + Antenna Factor(dB) + Cable Loss(dB) + Filter Attenuation(dB, if used)

Test Result:

Host EUT RAZOR 600

@ 902.750MHz @ 3 Meter

| Frequency | Reading | Direction | Height | Polar | Antenna Loss | Cable loss | Amplifier | Corrected Reading | Limit | Margin | |
|-----------|---------|-----------|--------|-------|--------------|------------|-----------|-------------------|-------|--------|------|
| 1.81 | 42.72 | 180.00 | 155.00 | v | 26.40 | 2.16 | 31.98 | 39.30 | 74.00 | -34.70 | Peak |
| 1.81 | 41.56 | 180.00 | 155.00 | h | 26.40 | 2.16 | 31.98 | 38.14 | 74.00 | -35.86 | Peak |
| 1.81 | 28.52 | 180.00 | 155.00 | v | 26.40 | 2.16 | 31.98 | 25.10 | 54.00 | -28.90 | Ave |
| 1.81 | 27.45 | 180.00 | 155.00 | h | 26.40 | 2.16 | 31.98 | 24.03 | 54.00 | -29.97 | Ave |
| 2.71 | 40.89 | 180.00 | 155.00 | v | 29.80 | 2.72 | 32.08 | 41.33 | 74.00 | -32.67 | Peak |
| 2.71 | 39.67 | 180.00 | 155.00 | h | 29.80 | 2.72 | 32.08 | 40.11 | 74.00 | -33.89 | Peak |
| 2.71 | 28.67 | 180.00 | 155.00 | v | 29.80 | 2.72 | 32.08 | 29.11 | 54.00 | -24.89 | Ave |
| 2.71 | 27.45 | 180.00 | 155.00 | h | 29.80 | 2.72 | 32.08 | 27.89 | 54.00 | -26.11 | Ave |
| 3.61 | 39.56 | 180.00 | 155.00 | v | 32.50 | 3.44 | 32.37 | 43.13 | 74.00 | -30.88 | Peak |
| 3.61 | 39.67 | 180.00 | 155.00 | h | 32.50 | 3.44 | 32.37 | 43.24 | 74.00 | -30.77 | Peak |
| 3.61 | 27.79 | 180.00 | 155.00 | v | 32.50 | 3.44 | 32.37 | 31.36 | 54.00 | -22.65 | Ave |
| 3.61 | 27.84 | 180.00 | 155.00 | h | 32.50 | 3.44 | 32.37 | 31.41 | 54.00 | -22.60 | Ave |

Emission was scanned up to 10GHz.

@ 915.250MHz @ 3Meter

| Frequency | Reading | Direction | Height | Polar | Antenna Loss | Cable loss | Amplifier | Corrected Reading | Limit | Margin | |
|-----------|---------|-----------|--------|-------|--------------|------------|-----------|-------------------|-------|---------|------|
| 1.83 | 44.01 | 180 | 155 | v | 26.4 | 2.16 | 31.98 | 40.59 | 74 | -33.41 | Peak |
| 1.83 | 41.67 | 180 | 155 | h | 26.4 | 2.16 | 31.98 | 38.25 | 74 | -35.75 | Peak |
| 1.83 | 31.93 | 180 | 155 | v | 26.4 | 2.16 | 31.98 | 28.51 | 54 | -25.49 | Ave |
| 1.83 | 30.56 | 180 | 155 | h | 26.4 | 2.16 | 31.98 | 27.14 | 54 | -26.86 | Ave |
| 2.74 | 40.23 | 180 | 155 | v | 29.8 | 2.72 | 32.08 | 40.67 | 74 | -33.33 | Peak |
| 2.74 | 40.14 | 180 | 155 | h | 29.8 | 2.72 | 32.08 | 40.58 | 74 | -33.42 | Peak |
| 2.74 | 29.56 | 180 | 155 | v | 29.8 | 2.72 | 32.08 | 30 | 54 | -24.0 | Ave |
| 2.74 | 29.45 | 180 | 155 | h | 29.8 | 2.72 | 32.08 | 29.89 | 54 | -24.11 | Ave |
| 3.66 | 40.67 | 180 | 155 | v | 32.5 | 3.435 | 32.37 | 44.235 | 74 | -29.765 | Peak |
| 3.66 | 40.23 | 180 | 155 | h | 32.5 | 3.435 | 32.37 | 43.795 | 74 | -30.205 | Peak |
| 3.66 | 29.61 | 180 | 155 | v | 32.5 | 3.435 | 32.37 | 33.175 | 54 | -20.825 | Ave |
| 3.66 | 29.12 | 180 | 155 | h | 32.5 | 3.435 | 32.37 | 32.685 | 54 | -21.315 | Ave |

Emission was scanned up to 10GHz.

@ 927.250MHz @ 3Meter

| Frequency | Reading | Direction | Height | Polar | Antenna Loss | Cable loss | Amplifier | Corrected Reading | Limit | Margin | |
|-----------|---------|-----------|--------|-------|--------------|------------|-----------|-------------------|-------|--------|------|
| 1.85 | 40.23 | 180.00 | 155.00 | v | 26.40 | 2.16 | 31.98 | 36.81 | 74.00 | -37.19 | Peak |
| 1.85 | 40.01 | 180.00 | 155.00 | h | 26.40 | 2.16 | 31.98 | 36.59 | 74.00 | -37.41 | Peak |
| 1.85 | 28.56 | 180.00 | 155.00 | v | 26.40 | 2.16 | 31.98 | 25.14 | 54.00 | -28.86 | Ave |
| 1.85 | 28.01 | 180.00 | 155.00 | h | 26.40 | 2.16 | 31.98 | 24.59 | 54.00 | -29.41 | Ave |
| 2.78 | 40.34 | 180.00 | 155.00 | v | 29.80 | 2.72 | 32.08 | 40.78 | 74.00 | -33.22 | Peak |
| 2.78 | 40.01 | 180.00 | 155.00 | h | 29.80 | 2.72 | 32.08 | 40.45 | 74.00 | -33.55 | Peak |
| 2.78 | 29.67 | 180.00 | 155.00 | v | 29.80 | 2.72 | 32.08 | 30.11 | 54.00 | -23.89 | Ave |
| 2.78 | 28.45 | 180.00 | 155.00 | h | 29.80 | 2.72 | 32.08 | 28.89 | 54.00 | -25.11 | Ave |
| 3.71 | 40.21 | 180.00 | 155.00 | v | 32.50 | 3.44 | 32.37 | 43.78 | 74.00 | -30.23 | Peak |
| 3.71 | 40.12 | 180.00 | 155.00 | h | 32.50 | 3.44 | 32.37 | 43.69 | 74.00 | -30.32 | Peak |
| 3.71 | 28.34 | 180.00 | 155.00 | v | 32.50 | 3.44 | 32.37 | 31.91 | 54.00 | -22.10 | Ave |
| 3.71 | 28.01 | 180.00 | 155.00 | h | 32.50 | 3.44 | 32.37 | 31.58 | 54.00 | -22.43 | Ave |

Emission was scanned up to 10GHz.

Host EUT RAZOR 600

@ 902.750MHz @ 3 Meter

| Frequency | Reading | Direction | Height | Polar | Antenna Loss | Cable loss | Amplifier | Corrected Reading | Limit | Margin | |
|-----------|---------|-----------|--------|-------|--------------|------------|-----------|-------------------|-------|--------|------|
| 1.81 | 46.81 | 180.00 | 155.00 | v | 26.40 | 2.16 | 31.98 | 43.39 | 74.00 | -30.61 | Peak |
| 1.81 | 45.34 | 180.00 | 155.00 | h | 26.40 | 2.16 | 31.98 | 41.92 | 74.00 | -32.08 | Peak |
| 1.81 | 33.27 | 180.00 | 155.00 | v | 26.40 | 2.16 | 31.98 | 29.85 | 54.00 | -24.15 | Ave |
| 1.81 | 33.33 | 180.00 | 155.00 | h | 26.40 | 2.16 | 31.98 | 29.91 | 54.00 | -24.09 | Ave |
| 2.71 | 41.02 | 180.00 | 155.00 | v | 29.80 | 2.72 | 32.08 | 41.46 | 74.00 | -32.54 | Peak |
| 2.71 | 30.14 | 180.00 | 155.00 | h | 29.80 | 2.72 | 32.08 | 30.58 | 74.00 | -43.42 | Peak |
| 2.71 | 29.88 | 180.00 | 155.00 | v | 29.80 | 2.72 | 32.08 | 30.32 | 54.00 | -23.68 | Ave |
| 2.71 | 29.03 | 180.00 | 155.00 | h | 29.80 | 2.72 | 32.08 | 29.47 | 54.00 | -24.53 | Ave |
| 3.61 | 39.10 | 180.00 | 155.00 | v | 32.50 | 3.44 | 32.37 | 42.67 | 74.00 | -31.34 | Peak |
| 3.61 | 38.61 | 180.00 | 155.00 | h | 32.50 | 3.44 | 32.37 | 42.18 | 74.00 | -31.83 | Peak |
| 3.61 | 27.11 | 180.00 | 155.00 | v | 32.50 | 3.44 | 32.37 | 30.68 | 54.00 | -23.33 | Ave |
| 3.61 | 27.04 | 180.00 | 155.00 | h | 32.50 | 3.44 | 32.37 | 30.61 | 54.00 | -23.40 | Ave |

Emission was scanned up to 10GHz.

@ 915.250MHz @ 3Meter

| Frequency | Reading | Direction | Height | Polar | Antenna Loss | Cable loss | Amplifier | Corrected Reading | Limit | Margin | |
|-----------|---------|-----------|--------|-------|--------------|------------|-----------|-------------------|-------|--------|------|
| 1.83 | 42.17 | 180.00 | 155.00 | v | 26.40 | 2.16 | 31.98 | 38.75 | 74.00 | -35.25 | Peak |
| 1.83 | 41.29 | 180.00 | 155.00 | h | 26.40 | 2.16 | 31.98 | 37.87 | 74.00 | -36.13 | Peak |
| 1.83 | 31.10 | 180.00 | 155.00 | v | 26.40 | 2.16 | 31.98 | 27.68 | 54.00 | -26.32 | Ave |
| 1.83 | 31.16 | 180.00 | 155.00 | h | 26.40 | 2.16 | 31.98 | 27.74 | 54.00 | -26.26 | Ave |
| 2.74 | 40.59 | 180.00 | 155.00 | v | 29.80 | 2.72 | 32.08 | 41.03 | 74.00 | -32.97 | Peak |
| 2.74 | 40.29 | 180.00 | 155.00 | h | 29.80 | 2.72 | 32.08 | 40.73 | 74.00 | -33.27 | Peak |
| 2.74 | 28.18 | 180.00 | 155.00 | v | 29.80 | 2.72 | 32.08 | 28.62 | 54.00 | -25.38 | Ave |
| 2.74 | 28.12 | 180.00 | 155.00 | h | 29.80 | 2.72 | 32.08 | 28.56 | 54.00 | -25.44 | Ave |
| 3.66 | 40.29 | 180.00 | 155.00 | v | 32.50 | 3.44 | 32.37 | 43.86 | 74.00 | -30.15 | Peak |
| 3.66 | 39.81 | 180.00 | 155.00 | h | 32.50 | 3.44 | 32.37 | 43.38 | 74.00 | -30.63 | Peak |
| 3.66 | 28.91 | 180.00 | 155.00 | v | 32.50 | 3.44 | 32.37 | 32.48 | 54.00 | -21.53 | Ave |
| 3.66 | 28.78 | 180.00 | 155.00 | h | 32.50 | 3.44 | 32.37 | 32.35 | 54.00 | -21.66 | Ave |

Emission was scanned up to 10GHz.

A

@ 927.250MHz @ 3Meter

| Frequency | Reading | Direction | Height | Polar | Antenna Loss | Cable loss | Amplifier | Corrected Reading | Limit | Margin | |
|-----------|---------|-----------|--------|-------|--------------|------------|-----------|-------------------|-------|--------|------|
| 1.85 | 41.72 | 180.00 | 155.00 | v | 26.40 | 2.16 | 31.98 | 38.30 | 74.00 | -35.70 | Peak |
| 1.85 | 40.86 | 180.00 | 155.00 | h | 26.40 | 2.16 | 31.98 | 37.44 | 74.00 | -36.56 | Peak |
| 1.85 | 29.12 | 180.00 | 155.00 | v | 26.40 | 2.16 | 31.98 | 25.70 | 54.00 | -28.30 | Ave |
| 1.85 | 29.26 | 180.00 | 155.00 | h | 26.40 | 2.16 | 31.98 | 25.84 | 54.00 | -28.16 | Ave |
| 2.78 | 41.24 | 180.00 | 155.00 | v | 29.80 | 2.72 | 32.08 | 41.68 | 74.00 | -32.32 | Peak |
| 2.78 | 40.34 | 180.00 | 155.00 | h | 29.80 | 2.72 | 32.08 | 40.78 | 74.00 | -33.22 | Peak |
| 2.78 | 29.12 | 180.00 | 155.00 | v | 29.80 | 2.72 | 32.08 | 29.56 | 54.00 | -24.44 | Ave |
| 2.78 | 28.83 | 180.00 | 155.00 | h | 29.80 | 2.72 | 32.08 | 29.27 | 54.00 | -24.73 | Ave |
| 3.71 | 40.34 | 180.00 | 155.00 | v | 32.50 | 3.44 | 32.37 | 43.91 | 74.00 | -30.10 | Peak |
| 3.71 | 40.24 | 180.00 | 155.00 | h | 32.50 | 3.44 | 32.37 | 43.81 | 74.00 | -30.20 | Peak |
| 3.71 | 29.45 | 180.00 | 155.00 | v | 32.50 | 3.44 | 32.37 | 33.02 | 54.00 | -20.99 | Ave |
| 3.71 | 29.21 | 180.00 | 155.00 | h | 32.50 | 3.44 | 32.37 | 32.78 | 54.00 | -21.23 | Ave |

Emission was scanned up to 10GHz.

Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

| Instrument | Manufacturer | Model | CAL Due Date |
|---------------------------------|-----------------|-----------|--------------|
| Spectrum Analyzer | HP | 8564E | 05/01/2008 |
| EMI Receiver | Rohde & Schwarz | ESIB 40 | 04/25/2008 |
| R&S LISN | R&S | ESH2-Z5 | 04/24/2008 |
| CHASE LISN | Chase | MN2050B | 04/26/2008 |
| Antenna (1 ~18GHz) | Emco | 3115 | 08/17/2008 |
| Antenna (30MHz~2GHz) | Sunol Sciences | JB1 | 10/04/2008 |
| Chamber | Lingren | 3m | 09/28/2009 |
| Pre-Amplifier(1 ~ 26GHz) | HP | 8449 | 05/01/2008 |
| DMM | Fluke | 73III | 05/01/2008 |
| Variac | KRM | AEEC-2090 | See Note |
| DMM | Fluke | 51II | See Note |
| Horn Antenna (18~40GHz) | Com Power | AH-840 | 5/21/2008 |
| Microwave Pre-Amp (18~40GHz) | Com Power | PA-840 | 5/21/2008 |

Note: No calibration required.

Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a 50Ω/50μH EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 KHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

Sample Calculation Example

| | |
|--|---------------------------------|
| At 20 MHz | limit = 250 μV = 47.96 dBμV |
| Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB | |
| Q-P reading obtained directly from EMI Receiver = 40.00 dBμV (Calibrated for system losses) | |
| Therefore, Q-P margin = 47.96 – 40.00 = 7.96 | i.e. 7.96 dB below limit |

Annex A. iii RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10th Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

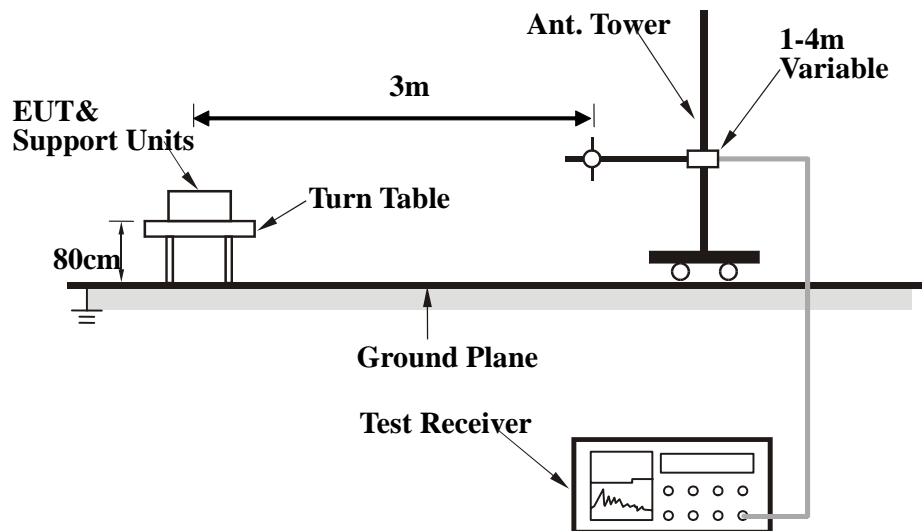

Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000 | Peak | 100 kHz | 100 kHz |
| Above 1000 | Peak | 1 MHz | 1 MHz |
| | Average | 1 MHz | 10 Hz |

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

Corr. Factor = Antenna Factor + Cable Factor - Amplifier Gain (if any)

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor or}$$

$$\text{Set RBW} = 1\text{MHz, VBW} = 10\text{Hz.}$$

Note :

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.

Annex B EUT AND TEST SETUP PHOTOGRAPHS

Please see the attachment

Annex C. TEST SETUP AND SUPPORTING EQUIPMENT


EUT TEST CONDITIONS

Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION


The following is a description of supporting equipment and details of cables used with the EUT.

| Equipment Description (Including Brand Name) | Model & Serial Number | Cable Description (List Length, Type & Purpose) |
|---|-----------------------|--|
| PC Laptop / DELL | Latitude DS520 | Serial Cable , 1meter From PC Laptop to EUT |
| | | |

Block Configuration Diagram for Radiated Emission

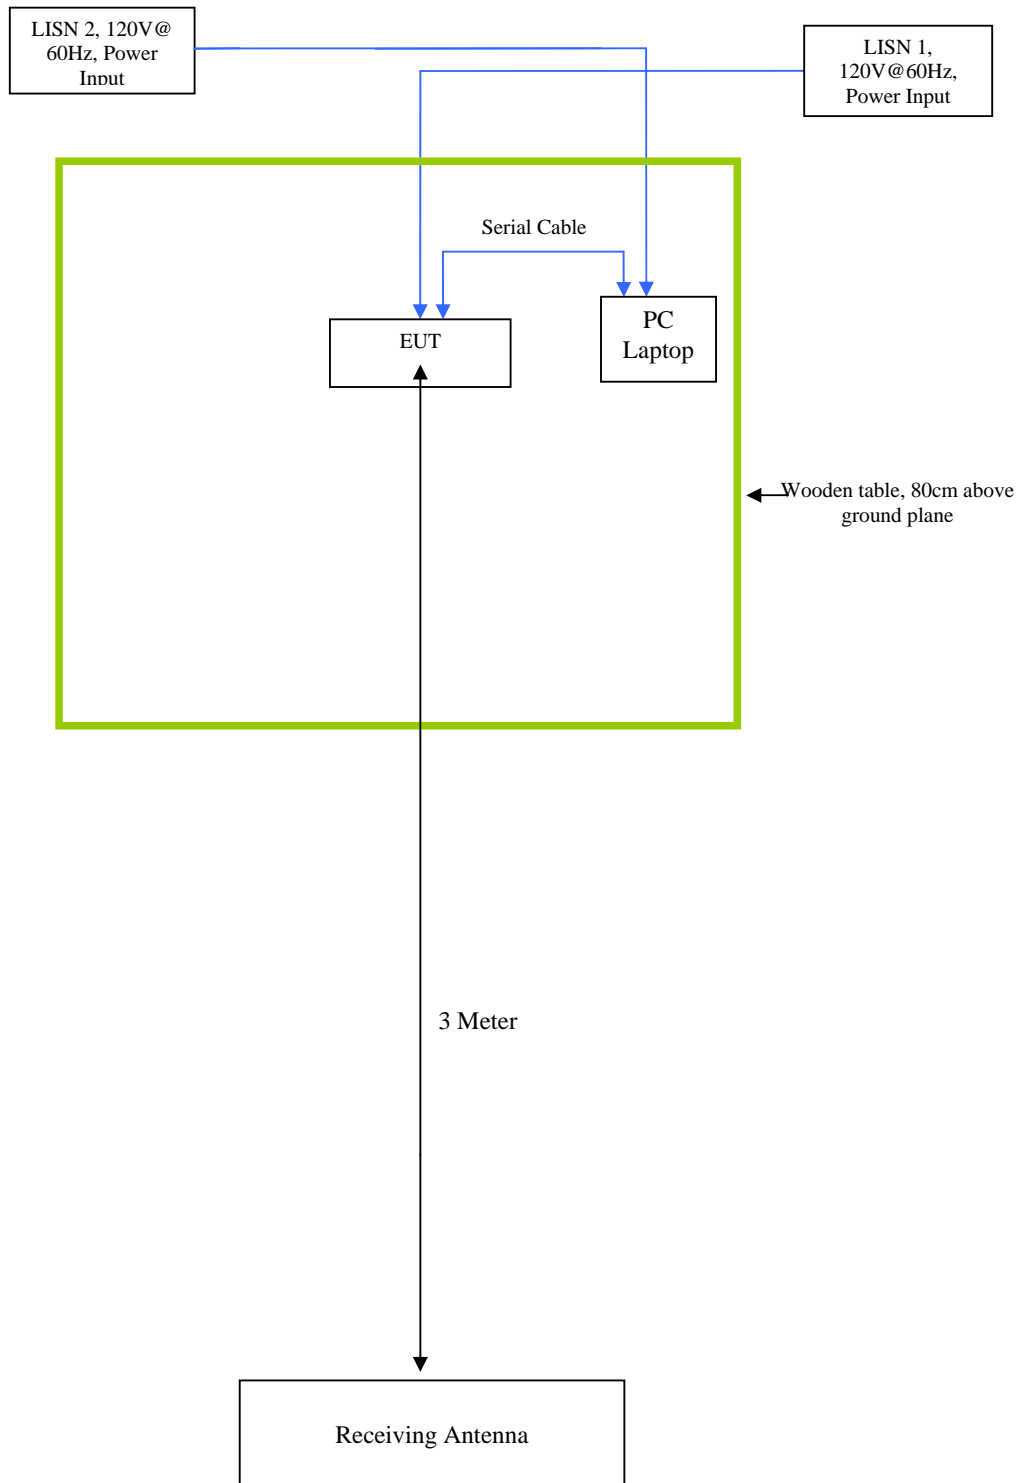

Block Configuration Diagram for Conducted Emission

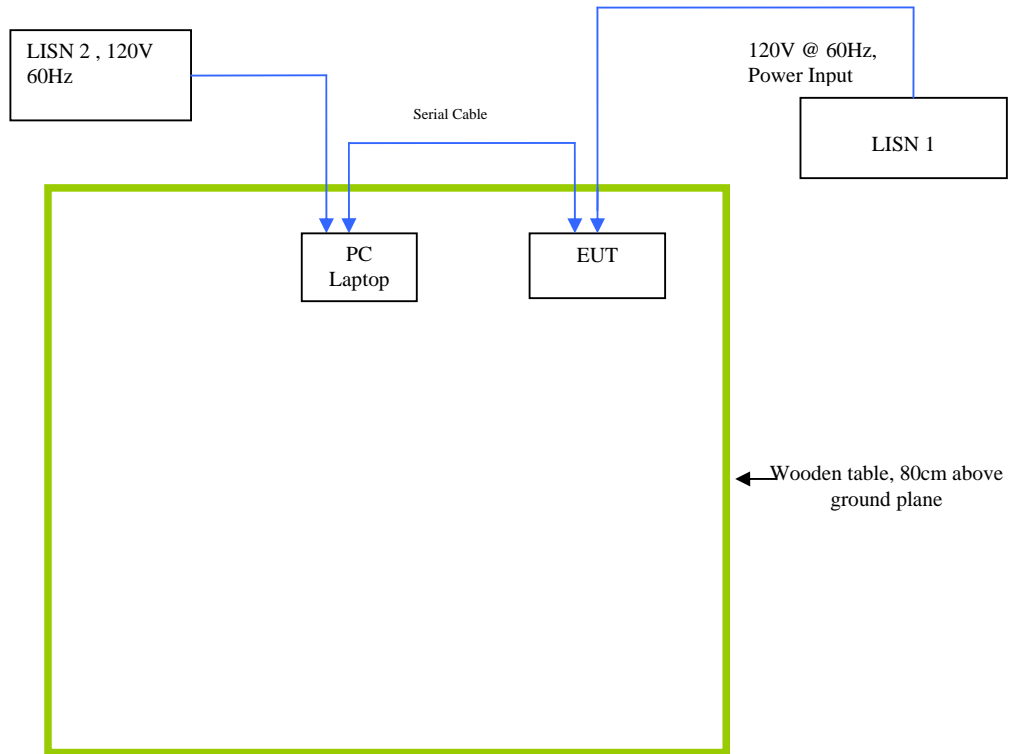

Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

| Test | Description Of Operation |
|-------------------|--|
| Emissions Testing | The EUT was controlled via PC Laptop using Agency Testing Program provided by applicant. |
| Others Testing | The EUT was controlled via PC Laptop using Agency Testing Program provided by applicant. |

Annex D USER MANUAL, BLOCK & CIRCUIT DIAGRAM

Please see attachment