

FCC Part 15.247

TEST REPORT

For

Leadtek Research Inc**18F, No. 166, Jian-Yi Rd., Chung Ho Dist., New Taipei City Taiwan, R.O.C****FCC ID: I2I8Z71**

Report Type: Original Report	Product Type: Stethoscope Recording Device
Report Number : <u>RXZ220124002RF01</u>	
Report Date : <u>2022-03-30</u>	
Reviewed By : <u>Andy Shih</u> <i>Andy Shih</i>	
Prepared By: Bay Area Compliance Laboratories Corp.(Taiwan) No. 6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.) Tel: +886 (3)3961072; Fax: +886 (3) 3961027 www.bacl.com.tw	

Revision History

Revision	No.	Report Number	Issue Date	Description	Author/ Revised by
0.0	RXZ220124002	RXZ220124002RF01	2022-03-30	Original Report	Jojo Lu

TABLE OF CONTENTS

1	General Information.....	5
1.1	Product Description for Equipment under Test (EUT)	5
1.2	Objective	6
1.3	Related Submittal(s)/Grant(s).....	6
1.4	Test Methodology.....	6
1.5	Statement of Compliance	6
1.6	Measurement Uncertainty	7
1.7	Environmental Conditions.....	7
1.8	Test Facility.....	7
2	System Test Configuration.....	8
2.1	Description of Test Configuration.....	8
2.2	Equipment Modifications	8
2.3	EUT Exercise Software	8
2.4	Support Equipment List and Details.....	8
2.5	External Cable List and Details.....	8
2.6	Test Mode.....	9
2.7	Block Diagram of Test Setup	9
2.8	Duty Cycle.....	10
3	Summary of Test Results.....	12
4	Test Equipment List and Details	13
5	FCC §15.247(i), §1.1307(b)(3)(i) – RF Exposure.....	15
5.1	Applicable Standard	15
5.2	RF Exposure Evaluation Result.....	16
6	FCC §15.203 – Antenna Requirements.....	17
6.1	Applicable Standard	17
6.2	Antenna Information	17
7	FCC §15.207(a) – AC Line Conducted Emissions	18
7.1	Applicable Standard	18
7.2	EUT Setup	18
7.3	EMI Test Receiver Setup	19
7.4	Test Procedure.....	19
7.5	Corrected Factor & Margin Calculation.....	19
7.9	Test Results	20
8	FCC §15.209, §15.205 , §15.247(d) – Spurious Emissions	21
8.1	Applicable Standard.....	21
8.2	EUT Setup	22
8.3	EMI Test Receiver & Spectrum Analyzer Setup.....	23
8.4	Test Procedure.....	23
8.5	Corrected Factor & Margin Calculation	23
8.6	Test Results	24
9	FCC §15.247(a)(2) – 6 dB Emission Bandwidth.....	31
9.1	Applicable Standard.....	31
9.2	Test Procedure	31
9.3	Test Results	31

10	FCC §15.247(b)(3) – Maximum Output Power	35
10.1	Applicable Standard.....	35
10.2	Test Procedure.....	35
10.3	Test Results	35
11	FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge	36
11.1	Applicable Standard.....	36
11.2	Test Procedure.....	36
11.3	Test Results	36
12	FCC §15.247(e) – Power Spectral Density	39
12.2	Applicable Standard.....	39
12.3	Test Procedure.....	39
12.4	Test Results	39

1 General Information

1.1 Product Description for Equipment under Test (EUT)

Applicant	Leadtek Research Inc 18F, No. 166, Jian-Yi Rd., Chung Ho Dist., New Taipei City Taiwan, R.O.C
Manufacturer	Leadtek Research Inc 18F, No. 166, Jian-Yi Rd., Chung Ho Dist., New Taipei City Taiwan, R.O.C
Brand(Trade) Name	amor or 
Product (Equipment)	Stethoscope Recording Device
Main Model Name	8Z71
Frequency Range	BLE(1M) / BLE(2M) : 2402 ~ 2480 MHz
Transmit Power	BLE(1M) Mode : 2.57 dBm BLE(2M) Mode : 2.63 dBm
Modulation Technique	BLE(1M) / BLE(2M) : GFSK
Channel Separation	BLE(1M) / BLE(2M) : 2 MHz
Power Operation (Voltage Range)	<input checked="" type="checkbox"/> AC <input checked="" type="checkbox"/> Adapter (Not for sale) <input type="checkbox"/> By AC Power Cord <input type="checkbox"/> PoE <input checked="" type="checkbox"/> DC Type <input checked="" type="checkbox"/> Battery 3.7v/150mA <input type="checkbox"/> DC Power Supply: <input type="checkbox"/> External from USB Cable <input type="checkbox"/> External DC Adapter <input type="checkbox"/> Host System
Received Date	Feb 21, 2022
Date of Test	Mar 21, 2022 ~ Mar 28, 2022

*All measurement and test data in this report was gathered from production sample serial number:

RLK220124002-1. Assigned by BACL, Linkou Laboratory.

1.2 Objective

This report is prepared on behalf of *Leadtek Research Inc* in accordance with Part 2, Subpart J, Part 15, Subparts A and C of the Federal Communication Commission's rules.

1.3 Related Submittal(s)/Grant(s)

N/A.

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices.

558074 D01 15.247 Meas Guidance v05r02

1.5 Statement of Compliance

Decision Rule: No, (The test results do not include MU judgment)

It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. (Linkou Laboratory).

Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

The determination of the test results does not require consideration of the uncertainty of the measurement, unless the assessment is required by customer agreement, regulation or standard document specification.

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) is not responsible for the authenticity of the information provided by the applicant that affects the test results.

1.6 Measurement Uncertainty

Parameter	Uncertainty
AC Mains	+/- 2.36 dB
RF output power, conducted	+/- 0.77 dB
Power Spectral Density, conducted	+/- 1.05 dBm
Occupied Bandwidth	\pm 0.94 MHz
Unwanted Emissions, conducted	+/- 2.57 dBm
Emissions, radiated	30 MHz~1GHz
	1 GHz~18 GHz
	18 GHz~40 GHz
Temperature	+/- 1.71 °C
Humidity	+/- 3.00 %

1.7 Environmental Conditions

Test Site	Test Data	Temperature (°C)	Relative Humidity (%)	ATM Pressure (hPa)	Test Engineer
AC Line Conducted Emissions	2022/3/14	24.5	60	1010	Allen Cheng
Radiation Spurious Emissions	2022/3/15~2022/3/21	20.0	59~64	1010	Allen Cheng
Conducted Spurious Emissions	2022/3/14	24.2	63	1010	David Lee
6 dB Emission Bandwidth	2022/3/28	22.3	58	1010	David Lee
Maximum Output Power	2022/3/28	22.3	58	1010	David Lee
100 kHz Bandwidth of Frequency Band Edge	2022/3/28	22.3	58	1010	David Lee
Power Spectral Density	2022/3/28	22.3	58	1010	David Lee

1.8 Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Linkou Laboratory) to collect test data is located on

No.6, Wende 2Rd., Guishan Dist., Taoyuan City 33382, Taiwan (R.O.C.).

Bay Area Compliance Laboratories Corp. (Linkou Laboratory) Lab is accredited to ISO 17025 by Taiwan Accreditation Foundation (TAF code: 3546) and the FCC designation No.TW3546 under the Mutual Recognition Agreement (MRA) in FCC Test.

2 System Test Configuration

2.1 Description of Test Configuration

For BLE mode, there are totally 40 channels.

Channel	Frequency (MHz)	Channel	Frequency (MHz)
0	2402	20	2442
1	2404	--	--
2	2406	--	--
3	2408	37	2476
--	--	38	2478
19	2440	39	2480

For BLE Modes were tested with channel 0, 19 and 39.

The system was configured for testing in engineering mode, which was provided by manufacturer.

2.2 Equipment Modifications

No modification was made to the EUT.

2.3 EUT Exercise Software

The test software was used “Direct Test Mode V2.0.1”

Test Frequency	Low	Mid	High
Power Level Setting	BLE 1M	2	2
	BLE 2M	2	2

2.4 Support Equipment List and Details

Description	Manufacturer	Model Number	S/N
NB	DELL	E6410	8N7PXN1
Mico SD	Team	TUSDH8GCL10BK	N/A
Fixture	Leadtek	Fixture01	N/A
adapter	Sunml	TPA-23A050200UU01	N/A

2.5 External Cable List and Details

Cable Description	Length (m)	From	To
Cable	0.7	Adapter	EUT

2.6 Test Mode


Model : 8Z71 for all test item.

2.7 Block Diagram of Test Setup


See test photographs attached in setup photos for the actual connections between EUT and support equipment.

Radiation:


Below 1GHz:

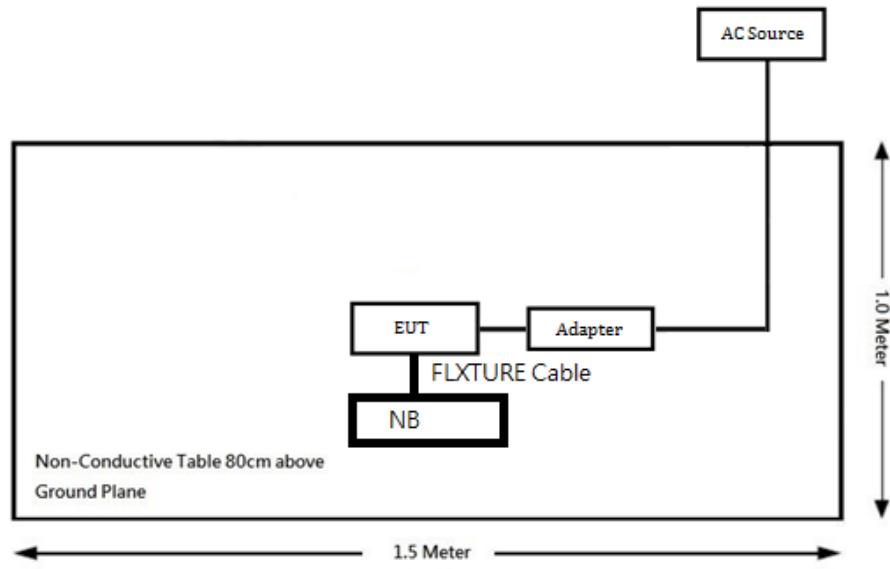

Above 1GHz:

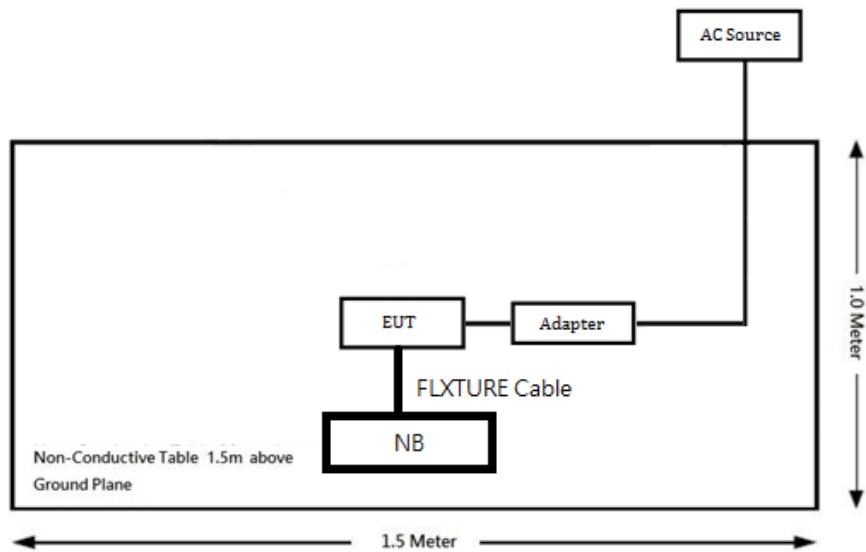

Conduction:

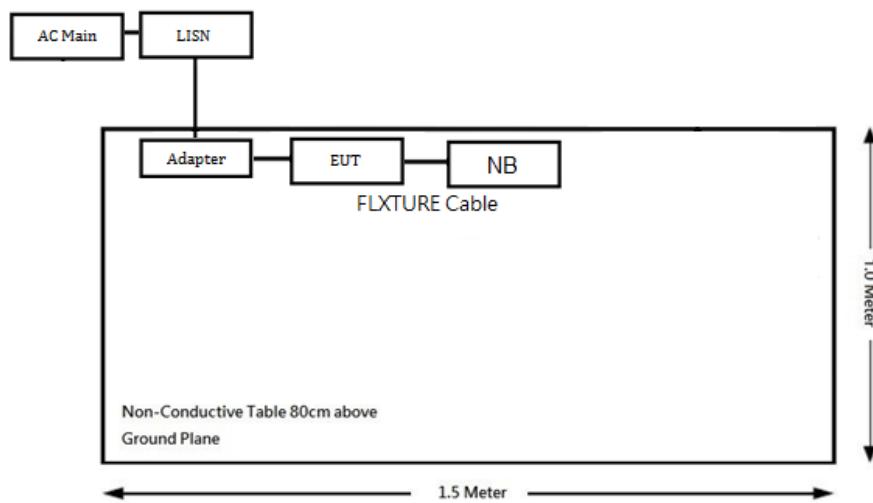


2.8 Duty Cycle


The duty cycle as below:

Radio Mode	On Time (ms)	On+Off Time (ms)	Duty Cycle (%)
BLE(1M)	0.391	0.638	61
BLE(2M)	1.073	1.884	57

Please refer to the following plots.

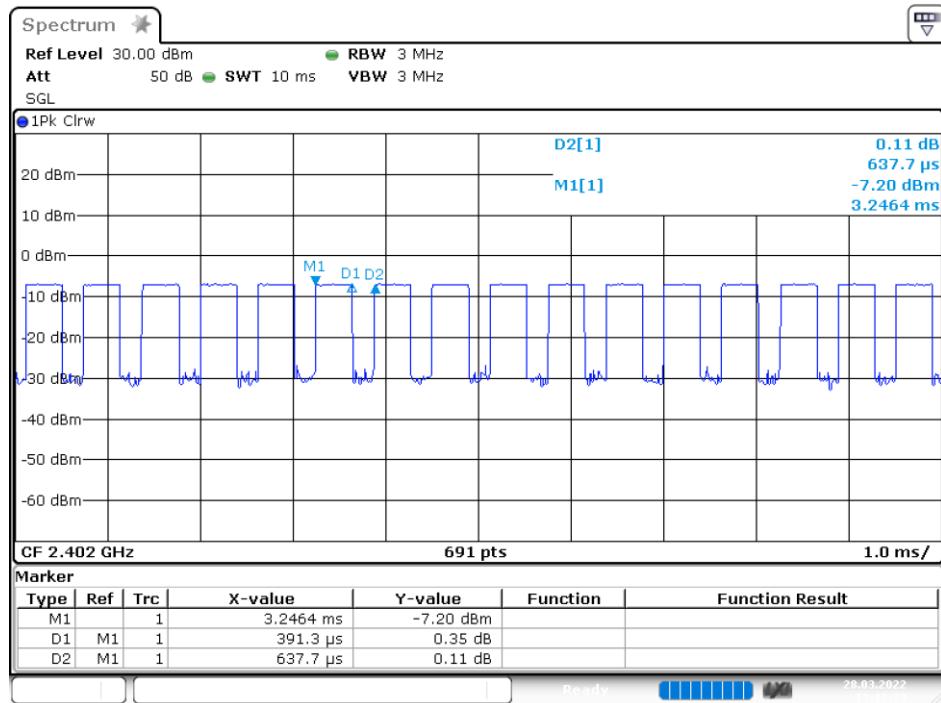BLE(1M) Mode

Date: 28.MAR.2022 13:12:33

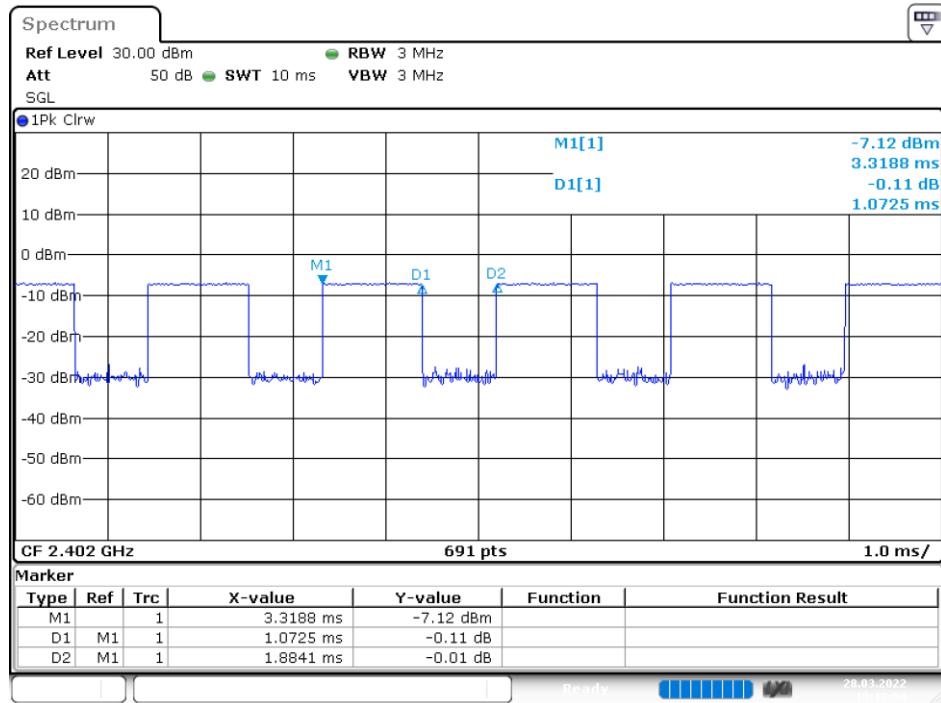BLE(2M) Mode

Date: 28.MAR.2022 13:13:54

3 Summary of Test Results

FCC Rules	Description of Test	Results
§15.247(i), §1.1307(b)(3)(i)	RF Exposure	Compliance
§15.203	Antenna Requirement	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Spurious Emissions	Compliance
§15.247(a)(2)	6 dB Emission Bandwidth	Compliance
§15.247(b)(3)	Maximum Peak Output Power	Compliance
§15.247(d)	100 kHz Bandwidth of Frequency Band Edge	Compliance
§15.247(e)	Power Spectral Density	Compliance

4 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conduction Room (CON-A)					
Two-Line V-Network	Rohde & Schwarz	ENV216	100037	2021/9/10	2022/9/9
LISN	ETS-Lindgren	3810/2NM	00106000	N.C.R	N.C.R
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102430	2021/5/5	2022/5/4
Pulse Limiter	SCHWARZBEC K	VTSD 9561-F	00432	2021/9/1	2022/8/31
RF Cable	EMCI	EMCCFD300-B M-BM-8000	180526	2021/8/17	2022/8/16
Software	Audix	e3 v9	E3LK-03	N.C.R	N.C.R
Radiated Room (966-A)					
Bilog Antenna & 6 dB Attenuator	SUNOL SCIENCES & EMCI	JB3 & N-6-06	A111513 & AT-N0668	2021/03/30	2022/03/29
Horn Antenna	ETS-Lindgren	3115	109141	2021/07/12	2022/07/11
Horn Antenna	ETS-Lindgren	3160-09	123852	2021/07/13	2022/07/12
Signal and Spectrum Analyzer	Rohde & Schwarz	FSV40	101434	2021/05/12	2022/05/11
ESR EMI Test Receiver	Rohde & Schwarz	ESR3	102448	2021/09/28	2022/09/27
Active Loop Antenna	ETS-Lindgren	6502	0001-3322	2022/03/18	2023/03/17
Preamplifier	A.H. Systems	PAM-0118P	478	2021/05/12	2022/05/11
Preamplifier	A.H. Systems	PAM-1840VH	174	2022/03/23	2023/03/22
Microflex Cable (1m)	MTJ	00000-MT26A-100	H0919	2021/08/07	2022/08/06
Microflex Cable (2m)	EMCI	EMC106-SM-SM-2000	180515	2021/08/07	2022/08/06
Microflex Cable (8m)	UTIFLEX	UFA210A-1-3149-300300	MFR 64639 232490-001	2021/08/07	2022/08/06
Band Reject Filter	Xi'an Xingbo	XBLBQ-DZA81	190329-1-08	2021/05/07	2022/05/06
Turn Table	Chaintek	T-200-S-1	003501	N.C.R	N.C.R
Antenna Tower	Chaintek	MBD-400-1	003504	N.C.R	N.C.R
Controller	Chaintek	3000-1	003507	N.C.R	N.C.R
Software	Audix	e3 v9	E3LK-01	N.C.R	N.C.R
Temperature and Humidity Recorder	N/A	HTC-1	N/A	2021/11/05	2022/11/04
Conducted Room					
Signal Analyzer 40GHz	Rohde & Schwarz	FSV40-N	102248	2021/09/09	2022/09/08

USB Wideband Power Sensor	AGILENT	U2021XA	MY54250024	2021/10/29	2022/10/28
Reference Cable	MTJ	MT40S	620620-MT40 S-100	2021/12/22	2022/12/21
Temperature and Humidity Recorder	N/A	HTC-1	N/A	2021/11/05	2022/11/04
Signal and Spectrum Analyzer (with B21)	Rohde & Schwarz	FSV40	1321.3008K40 -101938-Gt	2021/12/07	2022/12/06
USB Wideband Power Sensor	KEYSIGHT	U2021XA	MY56120026	2021/09/07	2022/09/06
EXA Signal Analyzer	AGILENT	N9010A	US47140126	2021/05/04	2022/05/03
10dB Attenuator	MCL	BW-S10W5+	605	2022/03/09	2023/03/08
50ohm Terminator	WOKEN	WTER-18S	N/A	2022/03/09	2023/03/08
2Way Power Divider	WOKEN	0120A02056002D	DDT912K1G3	2022/03/14	2023/03/13

***Statement of Traceability:** BACL Corp. attests that all of the calibrations on the equipment items listed above were traceable to the SI System of Units via the R.O.C. Center for Measurement Standards of the Electronics Testing Center, Taiwan (ETC) or to another internationally recognized National Metrology Institute (NMI), and were compliant with the current Taiwan Accreditation Foundation (TAF) requirements

5 FCC §15.247(i), §1.1307(b)(3)(i) – RF Exposure

5.1 Applicable Standard

According to subpart 15.247(i) and subpart §1.1307(b)(3)(i), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines.

For single RF sources (*i.e.*, any single fixed RF source, mobile device, or portable device, as defined in paragraph (b)(2) of this section): A single RF source is exempt if:

(A) The available maximum time-averaged power is no more than 1 mW, regardless of separation distance. This exemption may not be used in conjunction with other exemption criteria other than those in paragraph (b)(3)(ii)(A) of this section. Medical implant devices may only use this exemption and that in paragraph (b)(3)(ii)(A);

(B) Or the available maximum time-averaged power or effective radiated power (ERP), whichever is greater, is less than or equal to the threshold P_{th} (mW) described in the following formula. This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive). P_{th} is given by:

$$P_{th} \text{ (mW)} = \begin{cases} ERP_{20 \text{ cm}} (d/20 \text{ cm})^x & d \leq 20 \text{ cm} \\ ERP_{20 \text{ cm}} & 20 \text{ cm} < d \leq 40 \text{ cm} \end{cases}$$

Where

$$x = -\log_{10} \left(\frac{60}{ERP_{20 \text{ cm}} \sqrt{f}} \right) \text{ and } f \text{ is in GHz;}$$

and

$$ERP_{20 \text{ cm}} \text{ (mW)} = \begin{cases} 2040f & 0.3 \text{ GHz} \leq f < 1.5 \text{ GHz} \\ 3060 & 1.5 \text{ GHz} \leq f \leq 6 \text{ GHz} \end{cases}$$

5.2 RF Exposure Evaluation Result

Project info

Band	Freq (MHz)	Target Power (dBm)	Ant Gain (dBi)	ERP (dBm)	Distances (mm)	Duty (%)	AVGP (mW)	ERP (mW)
BLE (1M)	2480	3	-1.5	-0.65	5	61%	2.00	0.86
BLE (2M)	2480	3	-1.5	-0.65	5	57%	2.00	0.86

*AVGP is time-averaged power

Option A The available maximum time-averaged power is no more than 1 mW

Band	Freq (MHz)	Result Option A
BLE (1M)	2480	not exempt
BLE (2M)	2480	not exempt

Option B The available maximum time-averaged power or effective radiated power (ERP), whichever is greater

This method shall only be used at separation distances (cm) from 0.5 centimeters to 40 centimeters and at frequencies from 0.3 GHz to 6 GHz (inclusive).

Band	Freq (MHz)	Pth (mW)	X	ERP 20cm (mW)	Ratio	Result Option B
BLE (1M)	2480	2.72	1.905	3060	0.45	exempt
BLE (2M)	2480	2.72	1.905	3060	0.42	exempt

Conclusion: The device meets the exemption requirement.

6 FCC §15.203 – Antenna Requirements

6.1 Applicable Standard

According to § 15.203,

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna does not exceed 6dBi.

6.2 Antenna Information

Manufacturer	Model	Type	Antenna Gain
Johanson	2450AT42B100	Chip Antenna	-1.5 dBi

Result: Compliance

7 FCC §15.207(a) – AC Line Conducted Emissions

7.1 Applicable Standard


According to §15.207

For an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequencies ranges.

Frequency of Emission (MHz)	Conducted Limit (dBuV)	
	Quasi-Peak	Average
0.15-0.5	66 to 56 ^{Note 1}	56 to 46 ^{Note 1}
0.5-5	56	46
5-30	60	50

Note 1: Decreases with the logarithm of the frequency.

7.2 EUT Setup

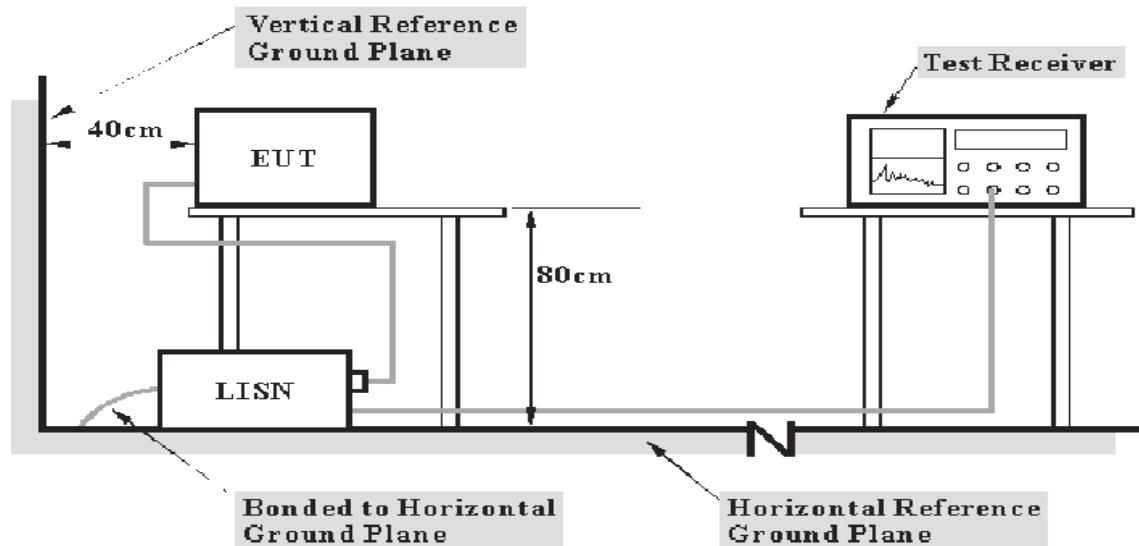

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMIN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.10-2013 measurement procedure. The specification used was with the FCC Part 15.207 limits.

7.3 EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150kHz to 30MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations

Frequency Range	IF B/W
150kHz – 30MHz	9kHz

7.4 Test Procedure

During the conducted emission test, the adapter was connected to the outlet of the LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

7.5 Corrected Factor & Margin Calculation

The factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$


The “Over Limit” column of the following data tables indicates the degree of compliance with the applicable limit. For example, an over limit of -7 dB means the emission is 7 dB below the limit. The equation for Over Limit calculation is as follows:

$$\text{Over Limit} = \text{Level} - \text{Limit Line}$$

7.9 Test Results

Test Mode: Transmitting

Main: AC120 V, 60 Hz

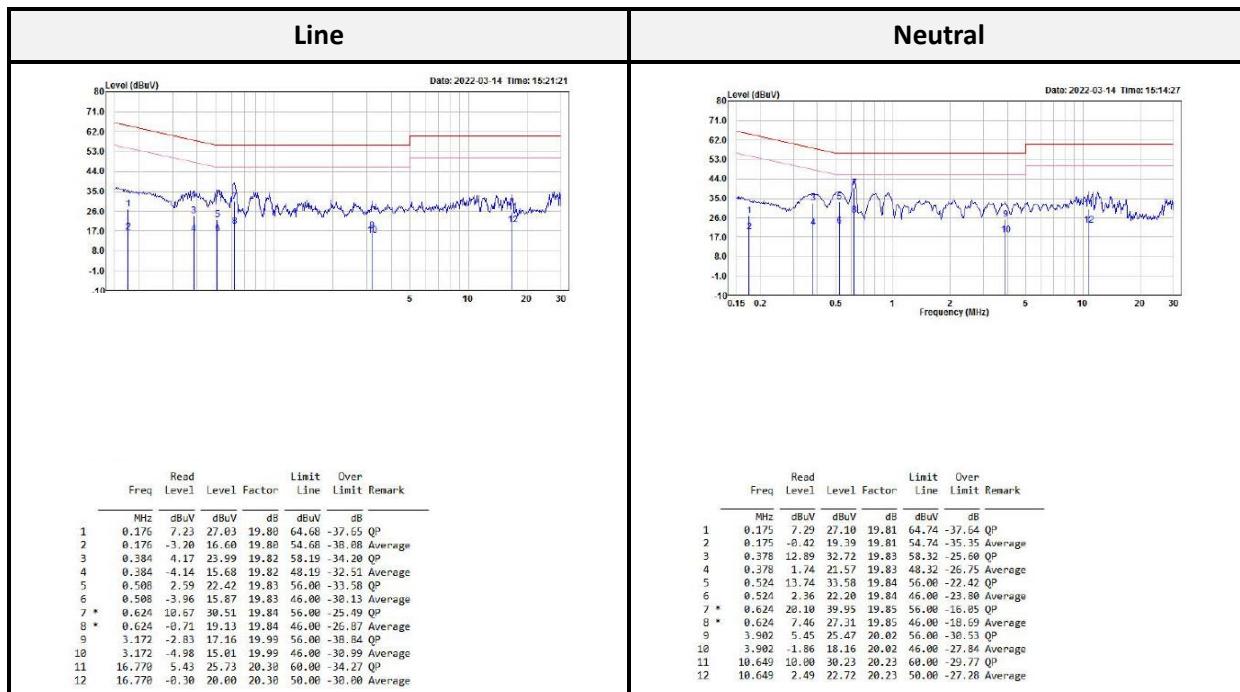

Note:

Level = Read Level + Factor

Over Limit = Level – Limit Line

Factor = (LISN, ISN, PLC or current probe) Factor + Cable Loss + Attenuator

8 FCC §15.209, §15.205, §15.247(d) – Spurious Emissions

8.1 Applicable Standard

As per FCC §15.35(d): Unless otherwise specified, on any frequency or frequencies above 1000 MHz, the radiated emission limits are based on the use of measurement instrumentation employing an average detector function. Unless otherwise specified, measurements above 1000 MHz shall be performed using a minimum resolution bandwidth of 1MHz.

As Per FCC §15.205(a) except as show in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz
0.090 – 0.110	16.42 – 16.423	608 – 614	4. 5 – 5. 15
0.495 – 0.505	16.69475 – 16.69525	960 – 1240	5. 35 – 5. 46
2.1735 – 2.1905	16.80425 – 16.80475	1300 – 1427	7.25 – 7.75
4.125 – 4.128	25.5 – 25.67	1435 – 1626.5	8.025 – 8.5
4.17725 – 4.17775	37.5 – 38.25	1645.5 – 1646.5	9.0 – 9.2
4.20725 – 4.20775	73 – 74.6	1660 – 1710	9.3 – 9.5
6.215 – 6.218	74.8 – 75.2	1718.8 – 1722.2	10.6 – 12.7
6.26775 – 6.26825	108 – 121.94	2200 – 2300	13.25 – 13.4
6.31175 – 6.31225	123 – 138	2310 – 2390	14.47 – 14.5
8.291 – 8.294	149.9 – 150.05	2483.5 – 2500	15.35 – 16.2
8.362 – 8.366	156.52475 – 156.52525	2690 – 2900	17.7 – 21.4
8.37625 – 8.38675	156.7 – 156.9	3260 – 3267	22.01 – 23.12
8.41425 – 8.41475	162.0125 – 167.17	3.332 – 3.339	23.6 – 24.0
12.29 – 12.293	167.72 – 173.2	3 3458 – 3 358	31.2 – 31.8
12.51975 – 12.52025	240 – 285	3.600 – 4.400	36.43 – 36.5
12.57675 – 12.57725	322 – 335.4		Above 38.6
13.36 – 13.41	399.9 – 410		

As per FCC §15.209(a): Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:


Frequency (MHz)	Field Strength (micro volts/meter)	Measurement Distance (meters)
0.009 - 0.490	2400/F(kHz)	300
0.490 - 1.705	24000/F(kHz)	30
1.705 - 30.0	30	30
30 - 88	100**	3
88 - 216	150**	3
216 - 960	200**	3
Above 960	500	3

** Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.


As per FCC §15.247 (d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

8.2 EUT Setup

Below 1 GHz:

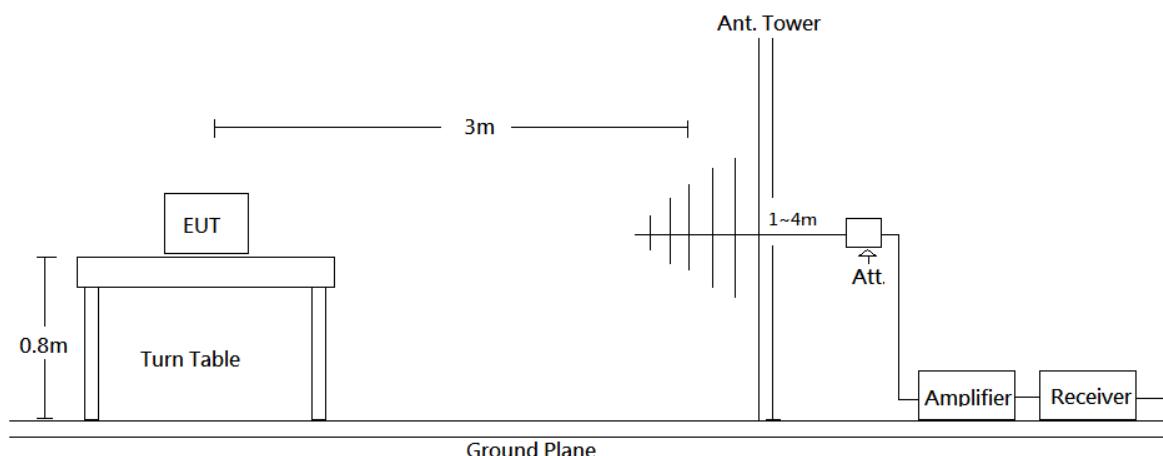

Above 1 GHz:

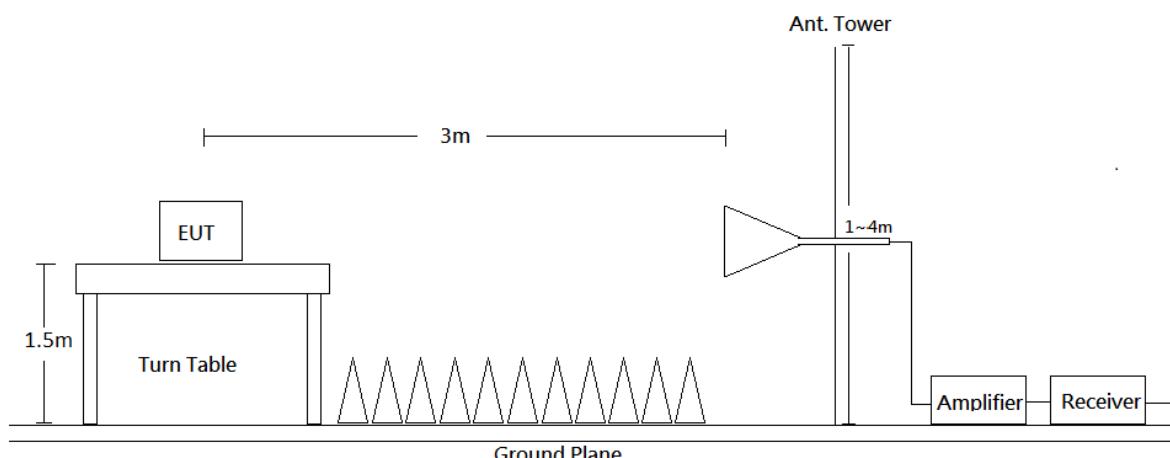

Radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.10-2013. The specification used was the FCC Part 15.209 and FCC 15.247 Limits.

8.3 EMI Test Receiver & Spectrum Analyzer Setup

The system was investigated from 30 MHz to 26.5 GHz. During the radiated emission test, the EMI test receiver was set with the following configurations measurement method 6.3 in ANSI C63.10.

Frequency Range	RBW	VBW	Duty cycle	Measurement method
30-1000 MHz	120 kHz	/	/	QP
Above 1 GHz	1 MHz	3 MHz	/	PK
	1 MHz	10 Hz	>98%	Ave
	1 MHz	1/T	<98%	Ave

Note: T is minimum transmission duration

8.4 Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

8.5 Corrected Factor & Margin Calculation

The Correct Factor is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Correct Factor} = \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$


The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Result} - \text{Limit}$$

8.6 Test Results

Test Mode: Transmitting (Pre-scan with three orthogonal axis, and worse case as Y axis.)

30MHz-1GHz:

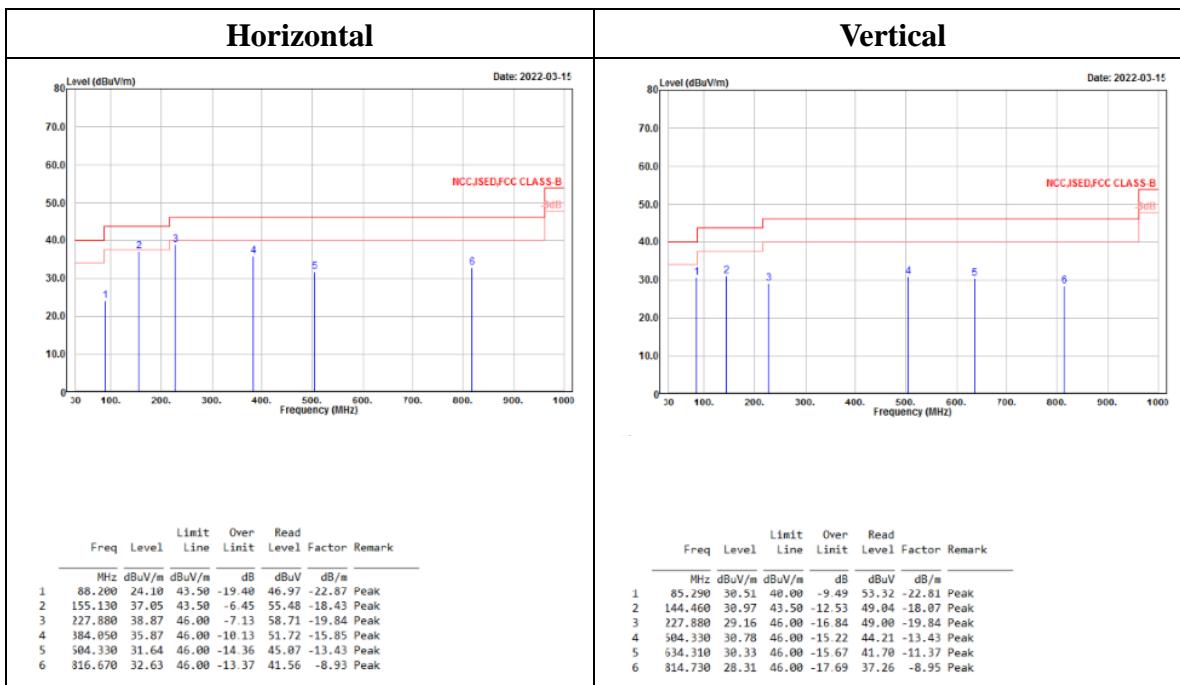

Level (Result) = Reading + Factor.

Over Limit (Margin) = Level – Limit Line.

Factor = Antenna Factor + Cable Loss – Amplifier Gain.

Spurious emissions more than 20 dB below the limit were not reported.

BLE(1M) Mode (1GHz-26.5GHz)

Low channel																																																																																													
Horizontal					Vertical																																																																																								
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 2361.400</td><td>33.97</td><td>54.00</td><td>-20.03</td><td>41.52</td><td>-7.55</td><td>Average</td></tr> <tr> <td>2 2361.400</td><td>44.98</td><td>74.00</td><td>-29.02</td><td>52.53</td><td>-7.55</td><td>Peak</td></tr> <tr> <td>3 * 2402.000</td><td>91.47</td><td>54.00</td><td>37.47</td><td>98.89</td><td>-7.42</td><td>Average</td></tr> <tr> <td>4 * 2402.000</td><td>92.08</td><td>74.00</td><td>18.00</td><td>99.56</td><td>-7.42</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 2361.400	33.97	54.00	-20.03	41.52	-7.55	Average	2 2361.400	44.98	74.00	-29.02	52.53	-7.55	Peak	3 * 2402.000	91.47	54.00	37.47	98.89	-7.42	Average	4 * 2402.000	92.08	74.00	18.00	99.56	-7.42	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 4304.000</td><td>31.99</td><td>54.00</td><td>-22.01</td><td>32.22</td><td>-0.23</td><td>Average</td></tr> <tr> <td>2 4304.000</td><td>42.15</td><td>74.00</td><td>-31.85</td><td>42.38</td><td>-0.23</td><td>Peak</td></tr> <tr> <td>3 7206.000</td><td>33.65</td><td>54.00</td><td>-20.35</td><td>28.19</td><td>5.46</td><td>Average</td></tr> <tr> <td>4 7206.000</td><td>44.97</td><td>74.00</td><td>-29.03</td><td>39.51</td><td>5.46</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 4304.000	31.99	54.00	-22.01	32.22	-0.23	Average	2 4304.000	42.15	74.00	-31.85	42.38	-0.23	Peak	3 7206.000	33.65	54.00	-20.35	28.19	5.46	Average	4 7206.000	44.97	74.00	-29.03	39.51	5.46	Peak
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 2361.400	33.97	54.00	-20.03	41.52	-7.55	Average																																																																																							
2 2361.400	44.98	74.00	-29.02	52.53	-7.55	Peak																																																																																							
3 * 2402.000	91.47	54.00	37.47	98.89	-7.42	Average																																																																																							
4 * 2402.000	92.08	74.00	18.00	99.56	-7.42	Peak																																																																																							
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 4304.000	31.99	54.00	-22.01	32.22	-0.23	Average																																																																																							
2 4304.000	42.15	74.00	-31.85	42.38	-0.23	Peak																																																																																							
3 7206.000	33.65	54.00	-20.35	28.19	5.46	Average																																																																																							
4 7206.000	44.97	74.00	-29.03	39.51	5.46	Peak																																																																																							
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 19216.000</td><td>43.13</td><td>54.00</td><td>-10.87</td><td>30.01</td><td>13.12</td><td>Average</td></tr> <tr> <td>2 19216.000</td><td>52.13</td><td>74.00</td><td>-21.87</td><td>39.01</td><td>13.12</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 19216.000	43.13	54.00	-10.87	30.01	13.12	Average	2 19216.000	52.13	74.00	-21.87	39.01	13.12	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 19216.000</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>29.26</td><td>13.12</td><td>Average</td></tr> <tr> <td>2 19216.000</td><td>52.60</td><td>74.00</td><td>-21.40</td><td>39.48</td><td>13.12</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 19216.000	42.38	54.00	-11.62	29.26	13.12	Average	2 19216.000	52.60	74.00	-21.40	39.48	13.12	Peak																												
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 19216.000	43.13	54.00	-10.87	30.01	13.12	Average																																																																																							
2 19216.000	52.13	74.00	-21.87	39.01	13.12	Peak																																																																																							
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 19216.000	42.38	54.00	-11.62	29.26	13.12	Average																																																																																							
2 19216.000	52.60	74.00	-21.40	39.48	13.12	Peak																																																																																							
Middle channel																																																																																													
Horizontal					Vertical																																																																																								
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 * 2440.000</td><td>93.30</td><td>54.00</td><td>39.30</td><td>100.59</td><td>-7.29</td><td>Average</td></tr> <tr> <td>2 * 2440.000</td><td>94.33</td><td>74.00</td><td>20.33</td><td>101.62</td><td>-7.29</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 * 2440.000	93.30	54.00	39.30	100.59	-7.29	Average	2 * 2440.000	94.33	74.00	20.33	101.62	-7.29	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 * 2440.000</td><td>97.43</td><td>54.00</td><td>43.43</td><td>104.72</td><td>-7.29</td><td>Average</td></tr> <tr> <td>2 * 2440.000</td><td>98.49</td><td>74.00</td><td>24.49</td><td>105.78</td><td>-7.29</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 * 2440.000	97.43	54.00	43.43	104.72	-7.29	Average	2 * 2440.000	98.49	74.00	24.49	105.78	-7.29	Peak																												
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 * 2440.000	93.30	54.00	39.30	100.59	-7.29	Average																																																																																							
2 * 2440.000	94.33	74.00	20.33	101.62	-7.29	Peak																																																																																							
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 * 2440.000	97.43	54.00	43.43	104.72	-7.29	Average																																																																																							
2 * 2440.000	98.49	74.00	24.49	105.78	-7.29	Peak																																																																																							
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 4880.000</td><td>31.66</td><td>54.00</td><td>-22.34</td><td>31.74</td><td>-0.08</td><td>Average</td></tr> <tr> <td>2 4880.000</td><td>41.59</td><td>74.00</td><td>-32.41</td><td>41.67</td><td>-0.08</td><td>Peak</td></tr> <tr> <td>3 1 7320.000</td><td>36.60</td><td>54.00</td><td>-17.40</td><td>30.94</td><td>5.66</td><td>Average</td></tr> <tr> <td>4 7320.000</td><td>49.20</td><td>74.00</td><td>-24.80</td><td>43.54</td><td>5.66</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 4880.000	31.66	54.00	-22.34	31.74	-0.08	Average	2 4880.000	41.59	74.00	-32.41	41.67	-0.08	Peak	3 1 7320.000	36.60	54.00	-17.40	30.94	5.66	Average	4 7320.000	49.20	74.00	-24.80	43.54	5.66	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 4880.000</td><td>30.86</td><td>54.00</td><td>-23.14</td><td>30.94</td><td>-0.08</td><td>Average</td></tr> <tr> <td>2 4880.000</td><td>42.46</td><td>74.00</td><td>-31.54</td><td>42.54</td><td>-0.08</td><td>Peak</td></tr> <tr> <td>3 1 7320.000</td><td>34.32</td><td>54.00</td><td>-19.68</td><td>28.66</td><td>5.66</td><td>Average</td></tr> <tr> <td>4 7320.000</td><td>45.68</td><td>74.00</td><td>-28.32</td><td>40.02</td><td>5.66</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 4880.000	30.86	54.00	-23.14	30.94	-0.08	Average	2 4880.000	42.46	74.00	-31.54	42.54	-0.08	Peak	3 1 7320.000	34.32	54.00	-19.68	28.66	5.66	Average	4 7320.000	45.68	74.00	-28.32	40.02	5.66	Peak
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 4880.000	31.66	54.00	-22.34	31.74	-0.08	Average																																																																																							
2 4880.000	41.59	74.00	-32.41	41.67	-0.08	Peak																																																																																							
3 1 7320.000	36.60	54.00	-17.40	30.94	5.66	Average																																																																																							
4 7320.000	49.20	74.00	-24.80	43.54	5.66	Peak																																																																																							
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 4880.000	30.86	54.00	-23.14	30.94	-0.08	Average																																																																																							
2 4880.000	42.46	74.00	-31.54	42.54	-0.08	Peak																																																																																							
3 1 7320.000	34.32	54.00	-19.68	28.66	5.66	Average																																																																																							
4 7320.000	45.68	74.00	-28.32	40.02	5.66	Peak																																																																																							
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 19520.000</td><td>42.61</td><td>54.00</td><td>-11.39</td><td>29.89</td><td>12.72</td><td>Average</td></tr> <tr> <td>2 19520.000</td><td>52.28</td><td>74.00</td><td>-21.72</td><td>39.56</td><td>12.72</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 19520.000	42.61	54.00	-11.39	29.89	12.72	Average	2 19520.000	52.28	74.00	-21.72	39.56	12.72	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 19520.000</td><td>43.31</td><td>54.00</td><td>-10.69</td><td>30.59</td><td>12.72</td><td>Average</td></tr> <tr> <td>2 19520.000</td><td>52.49</td><td>74.00</td><td>-21.51</td><td>39.77</td><td>12.72</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 19520.000	43.31	54.00	-10.69	30.59	12.72	Average	2 19520.000	52.49	74.00	-21.51	39.77	12.72	Peak																												
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 19520.000	42.61	54.00	-11.39	29.89	12.72	Average																																																																																							
2 19520.000	52.28	74.00	-21.72	39.56	12.72	Peak																																																																																							
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 19520.000	43.31	54.00	-10.69	30.59	12.72	Average																																																																																							
2 19520.000	52.49	74.00	-21.51	39.77	12.72	Peak																																																																																							
High channel																																																																																													
Horizontal					Vertical																																																																																								
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 * 2480.000</td><td>93.85</td><td>54.00</td><td>39.85</td><td>101.02</td><td>-7.17</td><td>Average</td></tr> <tr> <td>2 * 2480.000</td><td>94.82</td><td>74.00</td><td>20.82</td><td>101.99</td><td>-7.17</td><td>Peak</td></tr> <tr> <td>3 2183.530</td><td>36.21</td><td>54.00</td><td>-17.79</td><td>43.36</td><td>-7.15</td><td>Average</td></tr> <tr> <td>4 2483.530</td><td>48.78</td><td>74.00</td><td>-25.22</td><td>55.93</td><td>-7.15</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 * 2480.000	93.85	54.00	39.85	101.02	-7.17	Average	2 * 2480.000	94.82	74.00	20.82	101.99	-7.17	Peak	3 2183.530	36.21	54.00	-17.79	43.36	-7.15	Average	4 2483.530	48.78	74.00	-25.22	55.93	-7.15	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 * 2480.000</td><td>99.09</td><td>54.00</td><td>45.09</td><td>106.26</td><td>-7.17</td><td>Average</td></tr> <tr> <td>2 * 2480.000</td><td>100.08</td><td>74.00</td><td>26.08</td><td>107.25</td><td>-7.17</td><td>Peak</td></tr> <tr> <td>3 2183.530</td><td>39.22</td><td>54.00</td><td>-14.78</td><td>46.37</td><td>-7.15</td><td>Average</td></tr> <tr> <td>4 2483.530</td><td>53.81</td><td>74.00</td><td>-20.19</td><td>60.96</td><td>-7.15</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 * 2480.000	99.09	54.00	45.09	106.26	-7.17	Average	2 * 2480.000	100.08	74.00	26.08	107.25	-7.17	Peak	3 2183.530	39.22	54.00	-14.78	46.37	-7.15	Average	4 2483.530	53.81	74.00	-20.19	60.96	-7.15	Peak
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 * 2480.000	93.85	54.00	39.85	101.02	-7.17	Average																																																																																							
2 * 2480.000	94.82	74.00	20.82	101.99	-7.17	Peak																																																																																							
3 2183.530	36.21	54.00	-17.79	43.36	-7.15	Average																																																																																							
4 2483.530	48.78	74.00	-25.22	55.93	-7.15	Peak																																																																																							
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 * 2480.000	99.09	54.00	45.09	106.26	-7.17	Average																																																																																							
2 * 2480.000	100.08	74.00	26.08	107.25	-7.17	Peak																																																																																							
3 2183.530	39.22	54.00	-14.78	46.37	-7.15	Average																																																																																							
4 2483.530	53.81	74.00	-20.19	60.96	-7.15	Peak																																																																																							
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 4960.000</td><td>31.31</td><td>54.00</td><td>-22.69</td><td>31.23</td><td>0.08</td><td>Average</td></tr> <tr> <td>2 4960.000</td><td>41.62</td><td>74.00</td><td>-32.38</td><td>41.54</td><td>0.08</td><td>Peak</td></tr> <tr> <td>3 1 7440.000</td><td>36.13</td><td>54.00</td><td>-17.87</td><td>30.30</td><td>5.83</td><td>Average</td></tr> <tr> <td>4 7440.000</td><td>48.21</td><td>74.00</td><td>-25.79</td><td>42.38</td><td>5.83</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 4960.000	31.31	54.00	-22.69	31.23	0.08	Average	2 4960.000	41.62	74.00	-32.38	41.54	0.08	Peak	3 1 7440.000	36.13	54.00	-17.87	30.30	5.83	Average	4 7440.000	48.21	74.00	-25.79	42.38	5.83	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 4960.000</td><td>30.17</td><td>54.00</td><td>-23.83</td><td>30.09</td><td>0.08</td><td>Average</td></tr> <tr> <td>2 4960.000</td><td>42.63</td><td>74.00</td><td>-31.37</td><td>42.55</td><td>0.08</td><td>Peak</td></tr> <tr> <td>3 1 7440.000</td><td>35.20</td><td>54.00</td><td>-18.80</td><td>29.37</td><td>5.83</td><td>Average</td></tr> <tr> <td>4 7440.000</td><td>48.47</td><td>74.00</td><td>-25.53</td><td>42.64</td><td>5.83</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 4960.000	30.17	54.00	-23.83	30.09	0.08	Average	2 4960.000	42.63	74.00	-31.37	42.55	0.08	Peak	3 1 7440.000	35.20	54.00	-18.80	29.37	5.83	Average	4 7440.000	48.47	74.00	-25.53	42.64	5.83	Peak
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 4960.000	31.31	54.00	-22.69	31.23	0.08	Average																																																																																							
2 4960.000	41.62	74.00	-32.38	41.54	0.08	Peak																																																																																							
3 1 7440.000	36.13	54.00	-17.87	30.30	5.83	Average																																																																																							
4 7440.000	48.21	74.00	-25.79	42.38	5.83	Peak																																																																																							
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 4960.000	30.17	54.00	-23.83	30.09	0.08	Average																																																																																							
2 4960.000	42.63	74.00	-31.37	42.55	0.08	Peak																																																																																							
3 1 7440.000	35.20	54.00	-18.80	29.37	5.83	Average																																																																																							
4 7440.000	48.47	74.00	-25.53	42.64	5.83	Peak																																																																																							
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 119840.000</td><td>43.35</td><td>54.00</td><td>-10.65</td><td>31.29</td><td>12.06</td><td>Average</td></tr> <tr> <td>2 19840.000</td><td>52.35</td><td>74.00</td><td>-21.65</td><td>40.29</td><td>12.06</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 119840.000	43.35	54.00	-10.65	31.29	12.06	Average	2 19840.000	52.35	74.00	-21.65	40.29	12.06	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Over Limit</th><th>Read Level</th><th>Factor</th><th>Remark</th></tr> <tr> <th>MHz</th><th>dBuV/m</th><th>dBuV/m</th><th>dB</th><th>dBuV</th><th>dB/m</th><th></th></tr> </thead> <tbody> <tr> <td>1 119840.000</td><td>41.96</td><td>54.00</td><td>-12.04</td><td>29.90</td><td>12.06</td><td>Average</td></tr> <tr> <td>2 19840.000</td><td>51.96</td><td>74.00</td><td>-22.04</td><td>39.90</td><td>12.06</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Line	Over Limit	Read Level	Factor	Remark	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		1 119840.000	41.96	54.00	-12.04	29.90	12.06	Average	2 19840.000	51.96	74.00	-22.04	39.90	12.06	Peak																												
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 119840.000	43.35	54.00	-10.65	31.29	12.06	Average																																																																																							
2 19840.000	52.35	74.00	-21.65	40.29	12.06	Peak																																																																																							
Freq	Level	Line	Over Limit	Read Level	Factor	Remark																																																																																							
MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m																																																																																								
1 119840.000	41.96	54.00	-12.04	29.90	12.06	Average																																																																																							
2 19840.000	51.96	74.00	-22.04	39.90	12.06	Peak																																																																																							

Level (Result) = Reading + Factor.

Over Limit (Margin) = Level - Limit Line.

Factor = Antenna Factor + Cable Loss - Amplifier Gain.

*: Main frequency, unlimited value.

Spurious emissions more than 20 dB below the limit were not reported.

BLE(2M) Mode (1GHz-26.5GHz)

Low channel																																																																																																	
Horizontal					Vertical																																																																																												
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>2387.800</td><td>32.98</td><td>54.00</td><td>-21.02</td><td>40.44</td><td>-7.46</td><td>Average</td></tr> <tr> <td>2</td><td>2387.800</td><td>44.85</td><td>74.00</td><td>-29.15</td><td>52.31</td><td>-7.46</td><td>Peak</td></tr> <tr> <td>3</td><td>* 2402.000</td><td>91.63</td><td>54.00</td><td>37.63</td><td>99.05</td><td>-7.42</td><td>Average</td></tr> <tr> <td>4</td><td>* 2402.000</td><td>94.11</td><td>74.00</td><td>20.11</td><td>101.53</td><td>-7.42</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	2387.800	32.98	54.00	-21.02	40.44	-7.46	Average	2	2387.800	44.85	74.00	-29.15	52.31	-7.46	Peak	3	* 2402.000	91.63	54.00	37.63	99.05	-7.42	Average	4	* 2402.000	94.11	74.00	20.11	101.53	-7.42	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>4304.000</td><td>29.80</td><td>54.00</td><td>-24.20</td><td>30.03</td><td>-0.23</td><td>Average</td></tr> <tr> <td>2</td><td>4304.000</td><td>41.22</td><td>74.00</td><td>-32.78</td><td>41.45</td><td>-0.23</td><td>Peak</td></tr> <tr> <td>3</td><td>7206.000</td><td>32.83</td><td>54.00</td><td>-21.17</td><td>27.37</td><td>5.46</td><td>Average</td></tr> <tr> <td>4</td><td>7206.000</td><td>45.25</td><td>74.00</td><td>-28.75</td><td>39.79</td><td>5.46</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	4304.000	29.80	54.00	-24.20	30.03	-0.23	Average	2	4304.000	41.22	74.00	-32.78	41.45	-0.23	Peak	3	7206.000	32.83	54.00	-21.17	27.37	5.46	Average	4	7206.000	45.25	74.00	-28.75	39.79	5.46	Peak
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	2387.800	32.98	54.00	-21.02	40.44	-7.46	Average																																																																																										
2	2387.800	44.85	74.00	-29.15	52.31	-7.46	Peak																																																																																										
3	* 2402.000	91.63	54.00	37.63	99.05	-7.42	Average																																																																																										
4	* 2402.000	94.11	74.00	20.11	101.53	-7.42	Peak																																																																																										
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	4304.000	29.80	54.00	-24.20	30.03	-0.23	Average																																																																																										
2	4304.000	41.22	74.00	-32.78	41.45	-0.23	Peak																																																																																										
3	7206.000	32.83	54.00	-21.17	27.37	5.46	Average																																																																																										
4	7206.000	45.25	74.00	-28.75	39.79	5.46	Peak																																																																																										
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>19216.000</td><td>43.25</td><td>54.00</td><td>-10.75</td><td>30.13</td><td>13.12</td><td>Average</td></tr> <tr> <td>2</td><td>19216.000</td><td>52.36</td><td>74.00</td><td>-21.64</td><td>39.24</td><td>13.12</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	19216.000	43.25	54.00	-10.75	30.13	13.12	Average	2	19216.000	52.36	74.00	-21.64	39.24	13.12	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>19216.000</td><td>42.71</td><td>54.00</td><td>-11.29</td><td>29.59</td><td>13.12</td><td>Average</td></tr> <tr> <td>2</td><td>19216.000</td><td>52.83</td><td>74.00</td><td>-21.17</td><td>39.71</td><td>13.12</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	19216.000	42.71	54.00	-11.29	29.59	13.12	Average	2	19216.000	52.83	74.00	-21.17	39.71	13.12	Peak																																
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	19216.000	43.25	54.00	-10.75	30.13	13.12	Average																																																																																										
2	19216.000	52.36	74.00	-21.64	39.24	13.12	Peak																																																																																										
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	19216.000	42.71	54.00	-11.29	29.59	13.12	Average																																																																																										
2	19216.000	52.83	74.00	-21.17	39.71	13.12	Peak																																																																																										
Middle channel																																																																																																	
Horizontal					Vertical																																																																																												
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>* 2440.000</td><td>91.84</td><td>54.00</td><td>37.84</td><td>99.13</td><td>-7.29</td><td>Average</td></tr> <tr> <td>2</td><td>* 2440.000</td><td>94.66</td><td>74.00</td><td>20.66</td><td>101.95</td><td>-7.29</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	* 2440.000	91.84	54.00	37.84	99.13	-7.29	Average	2	* 2440.000	94.66	74.00	20.66	101.95	-7.29	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>4380.000</td><td>30.39</td><td>54.00</td><td>-23.61</td><td>30.47</td><td>-0.08</td><td>Average</td></tr> <tr> <td>2</td><td>4380.000</td><td>42.06</td><td>74.00</td><td>-31.94</td><td>42.14</td><td>-0.08</td><td>Peak</td></tr> <tr> <td>3</td><td>1 7320.000</td><td>34.71</td><td>54.00</td><td>-19.29</td><td>29.05</td><td>5.66</td><td>Average</td></tr> <tr> <td>4</td><td>7320.000</td><td>46.41</td><td>74.00</td><td>-27.59</td><td>40.75</td><td>5.66</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	4380.000	30.39	54.00	-23.61	30.47	-0.08	Average	2	4380.000	42.06	74.00	-31.94	42.14	-0.08	Peak	3	1 7320.000	34.71	54.00	-19.29	29.05	5.66	Average	4	7320.000	46.41	74.00	-27.59	40.75	5.66	Peak																
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	* 2440.000	91.84	54.00	37.84	99.13	-7.29	Average																																																																																										
2	* 2440.000	94.66	74.00	20.66	101.95	-7.29	Peak																																																																																										
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	4380.000	30.39	54.00	-23.61	30.47	-0.08	Average																																																																																										
2	4380.000	42.06	74.00	-31.94	42.14	-0.08	Peak																																																																																										
3	1 7320.000	34.71	54.00	-19.29	29.05	5.66	Average																																																																																										
4	7320.000	46.41	74.00	-27.59	40.75	5.66	Peak																																																																																										
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>19520.000</td><td>42.74</td><td>54.00</td><td>-11.26</td><td>30.02</td><td>12.72</td><td>Average</td></tr> <tr> <td>2</td><td>19520.000</td><td>52.83</td><td>74.00</td><td>-21.17</td><td>40.11</td><td>12.72</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	19520.000	42.74	54.00	-11.26	30.02	12.72	Average	2	19520.000	52.83	74.00	-21.17	40.11	12.72	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>19520.000</td><td>43.53</td><td>54.00</td><td>-10.47</td><td>30.81</td><td>12.72</td><td>Average</td></tr> <tr> <td>2</td><td>19520.000</td><td>52.68</td><td>74.00</td><td>-21.32</td><td>39.96</td><td>12.72</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	19520.000	43.53	54.00	-10.47	30.81	12.72	Average	2	19520.000	52.68	74.00	-21.32	39.96	12.72	Peak																																
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	19520.000	42.74	54.00	-11.26	30.02	12.72	Average																																																																																										
2	19520.000	52.83	74.00	-21.17	40.11	12.72	Peak																																																																																										
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	19520.000	43.53	54.00	-10.47	30.81	12.72	Average																																																																																										
2	19520.000	52.68	74.00	-21.32	39.96	12.72	Peak																																																																																										
High channel																																																																																																	
Horizontal					Vertical																																																																																												
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>* 2480.000</td><td>91.68</td><td>54.00</td><td>37.68</td><td>98.85</td><td>-7.17</td><td>Average</td></tr> <tr> <td>2</td><td>* 2480.000</td><td>94.22</td><td>74.00</td><td>20.22</td><td>101.39</td><td>-7.17</td><td>Peak</td></tr> <tr> <td>3</td><td>2483.500</td><td>38.62</td><td>54.00</td><td>-15.38</td><td>45.77</td><td>-7.15</td><td>Average</td></tr> <tr> <td>4</td><td>2483.500</td><td>48.25</td><td>74.00</td><td>-25.75</td><td>55.40</td><td>-7.15</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	* 2480.000	91.68	54.00	37.68	98.85	-7.17	Average	2	* 2480.000	94.22	74.00	20.22	101.39	-7.17	Peak	3	2483.500	38.62	54.00	-15.38	45.77	-7.15	Average	4	2483.500	48.25	74.00	-25.75	55.40	-7.15	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>4360.000</td><td>30.30</td><td>54.00</td><td>-23.70</td><td>30.22</td><td>0.08</td><td>Average</td></tr> <tr> <td>2</td><td>4360.000</td><td>42.38</td><td>74.00</td><td>-31.62</td><td>42.30</td><td>0.08</td><td>Peak</td></tr> <tr> <td>3</td><td>1 7440.000</td><td>35.44</td><td>54.00</td><td>-18.56</td><td>29.61</td><td>5.83</td><td>Average</td></tr> <tr> <td>4</td><td>7440.000</td><td>44.91</td><td>74.00</td><td>-29.09</td><td>39.08</td><td>5.83</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	4360.000	30.30	54.00	-23.70	30.22	0.08	Average	2	4360.000	42.38	74.00	-31.62	42.30	0.08	Peak	3	1 7440.000	35.44	54.00	-18.56	29.61	5.83	Average	4	7440.000	44.91	74.00	-29.09	39.08	5.83	Peak
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	* 2480.000	91.68	54.00	37.68	98.85	-7.17	Average																																																																																										
2	* 2480.000	94.22	74.00	20.22	101.39	-7.17	Peak																																																																																										
3	2483.500	38.62	54.00	-15.38	45.77	-7.15	Average																																																																																										
4	2483.500	48.25	74.00	-25.75	55.40	-7.15	Peak																																																																																										
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	4360.000	30.30	54.00	-23.70	30.22	0.08	Average																																																																																										
2	4360.000	42.38	74.00	-31.62	42.30	0.08	Peak																																																																																										
3	1 7440.000	35.44	54.00	-18.56	29.61	5.83	Average																																																																																										
4	7440.000	44.91	74.00	-29.09	39.08	5.83	Peak																																																																																										
<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>19840.000</td><td>43.59</td><td>54.00</td><td>-10.41</td><td>31.53</td><td>12.06</td><td>Average</td></tr> <tr> <td>2</td><td>19840.000</td><td>52.69</td><td>74.00</td><td>-21.31</td><td>40.63</td><td>12.06</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	19840.000	43.59	54.00	-10.41	31.53	12.06	Average	2	19840.000	52.69	74.00	-21.31	40.63	12.06	Peak	<table border="1"> <thead> <tr> <th>Freq</th><th>Level</th><th>Limit</th><th>Over</th><th>Read</th></tr> <tr> <th>Freq</th><th>Level</th><th>Line</th><th>Limit</th><th>Level</th><th>Factor</th><th>Remark</th></tr> </thead> <tbody> <tr> <td>1</td><td>19840.000</td><td>42.38</td><td>54.00</td><td>-11.62</td><td>30.32</td><td>12.06</td><td>Average</td></tr> <tr> <td>2</td><td>19840.000</td><td>52.24</td><td>74.00</td><td>-21.76</td><td>40.18</td><td>12.06</td><td>Peak</td></tr> </tbody> </table>					Freq	Level	Limit	Over	Read	Freq	Level	Line	Limit	Level	Factor	Remark	1	19840.000	42.38	54.00	-11.62	30.32	12.06	Average	2	19840.000	52.24	74.00	-21.76	40.18	12.06	Peak																																
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	19840.000	43.59	54.00	-10.41	31.53	12.06	Average																																																																																										
2	19840.000	52.69	74.00	-21.31	40.63	12.06	Peak																																																																																										
Freq	Level	Limit	Over	Read																																																																																													
Freq	Level	Line	Limit	Level	Factor	Remark																																																																																											
1	19840.000	42.38	54.00	-11.62	30.32	12.06	Average																																																																																										
2	19840.000	52.24	74.00	-21.76	40.18	12.06	Peak																																																																																										

Level (Result) = Reading + Factor.

Over Limit (Margin) = Level - Limit Line.

Factor = Antenna Factor + Cable Loss - Amplifier Gain.

*: Main frequency, unlimited value.


Spurious emissions more than 20 dB below the limit were not reported.

Conducted Spurious Emissions:


Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BLE(1M) Mode				
Low	2402	51.07	≥ 20	PASS
Middle	2440	47.48	≥ 20	PASS
High	2480	47.89	≥ 20	PASS
BLE(2M) Mode				
Low	2402	49.16	≥ 20	PASS
Middle	2440	48.97	≥ 20	PASS
High	2480	45.51	≥ 20	PASS

Please refer to the following plots


BLE(1M) Mode Low Channel

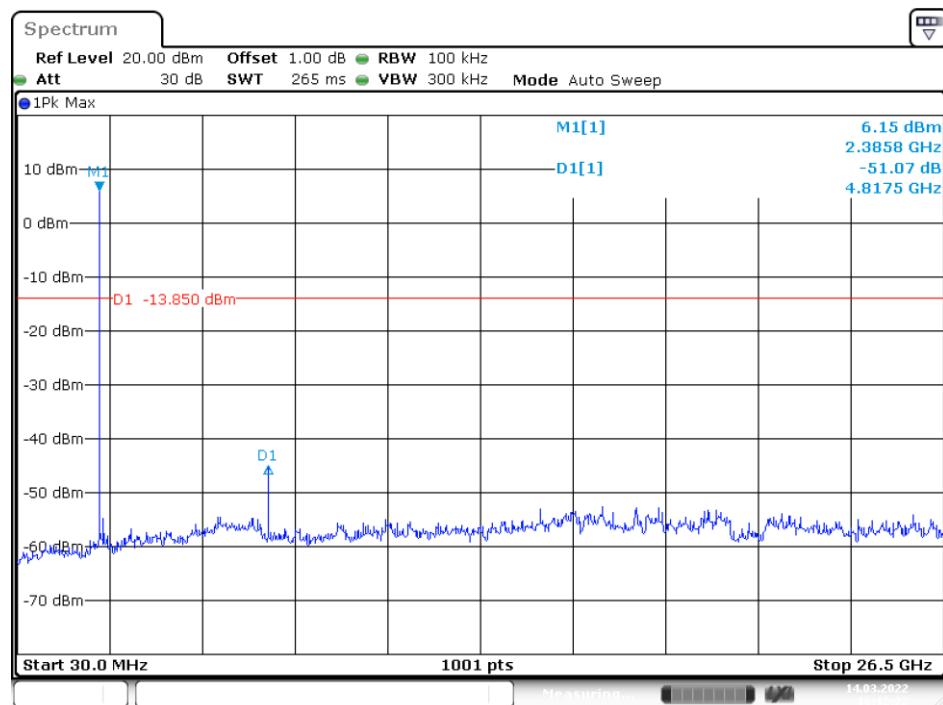

Middle Channel

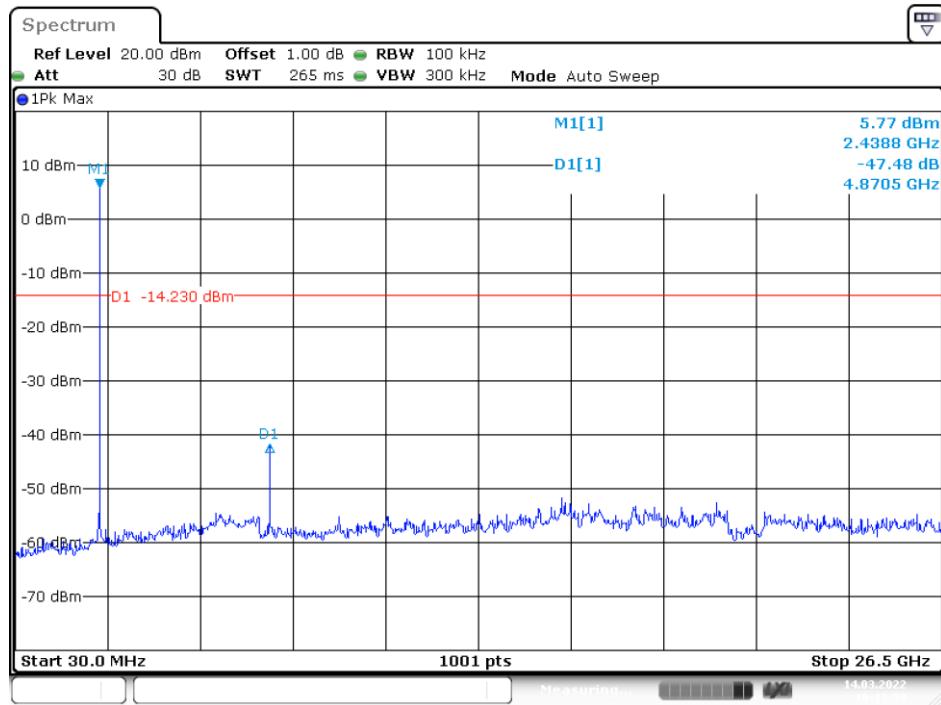


High Channel

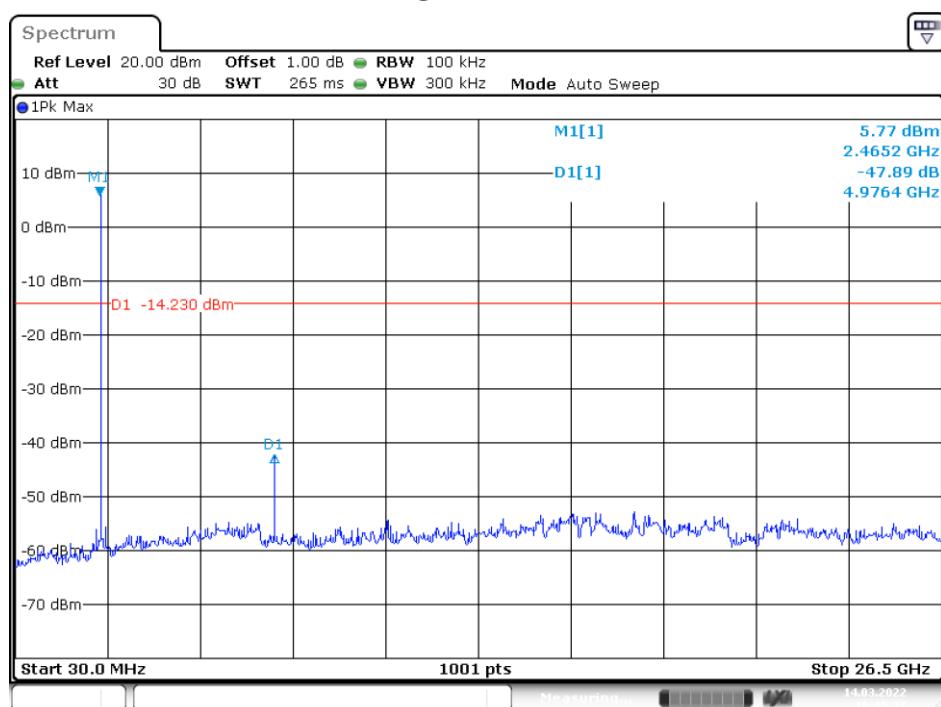


BLE(2M) Mode

Low Channel

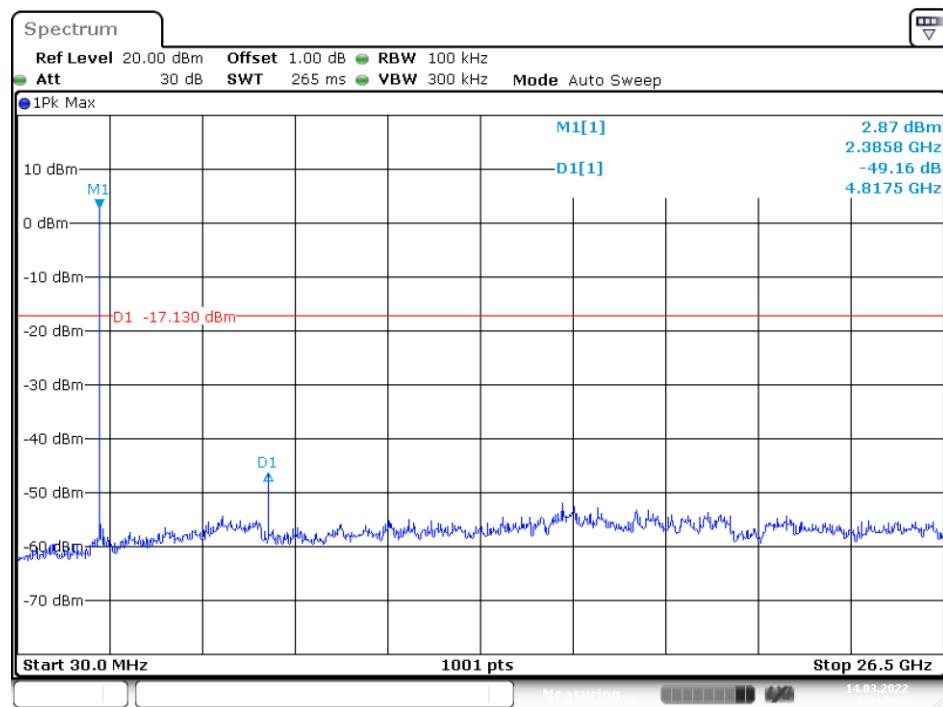


Date: 14.MAR.2022 16:17:53

Middle Channel

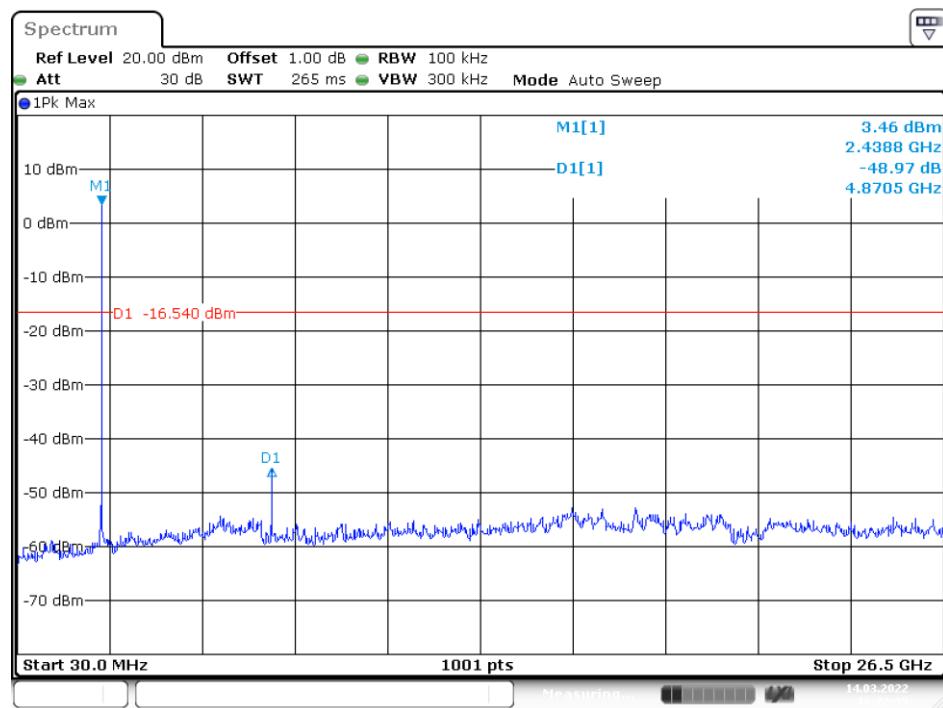

Date: 14.MAR.2022 16:22:35

High Channel

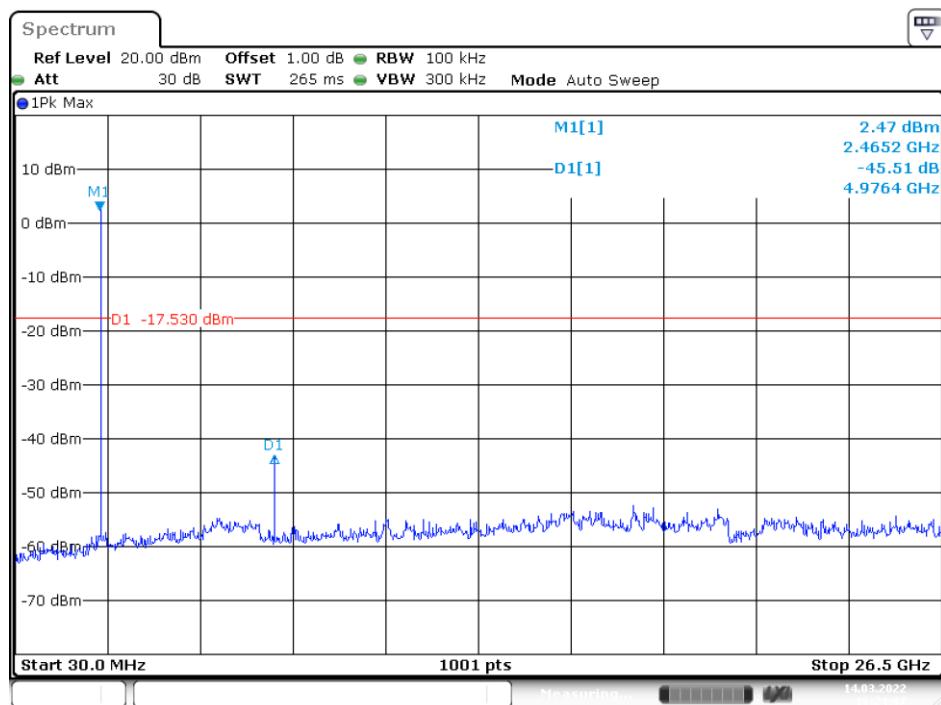

9 FCC §15.247(a)(2) – 6 dB Emission Bandwidth

9.1 Applicable Standard

According to FCC §15.247(a)(2).

Systems using digital modulation techniques may operate in the 902–928 MHz, 2400–2483.5 MHz, and 5725–5850 MHz bands. The minimum 6 dB bandwidth shall be at least 500 kHz.

9.2 Test Procedure

The steps for the first option are as follows:

- a) Set RBW = 100 kHz.
- b) Set the VBW $\geq [3 \times \text{RBW}]$.
- c) Detector = peak.
- d) Trace mode = max hold.
- e) Sweep = auto couple.
- f) Allow the trace to stabilize.
- g) Measure the maximum width of the emission that is constrained by the frequencies associated with the two outermost amplitude points (upper and lower frequencies) that are attenuated by 6 dB relative to the maximum level measured in the fundamental emission.


9.3 Test Results

Channel	Frequency (MHz)	6 dB Emission Bandwidth (kHz)	Limit (kHz)	Result
BLE(1M) Mode				
Low	2402	726	> 500	Compliance
Middle	2440	735	> 500	Compliance
High	2480	732	> 500	Compliance
BLE(2M) Mode				
Low	2402	1164	> 500	Compliance
Middle	2440	1167	> 500	Compliance
High	2480	1167	> 500	Compliance

Please refer to the following plots


BLE(1M) Mode

Low Channel

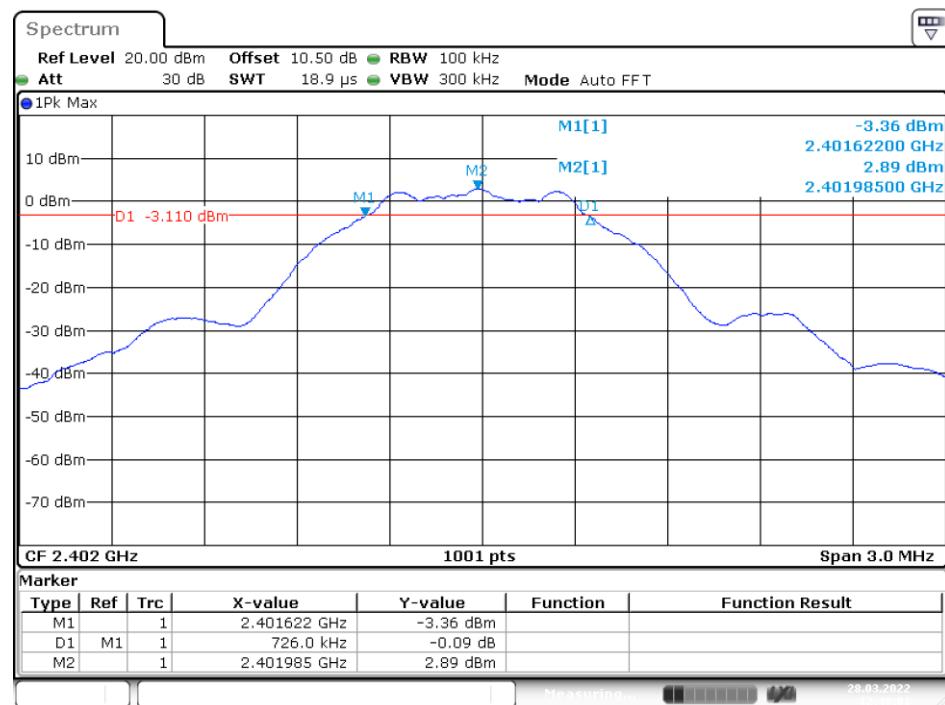


Date: 28.MAR.2022 12:48:01

Middle Channel

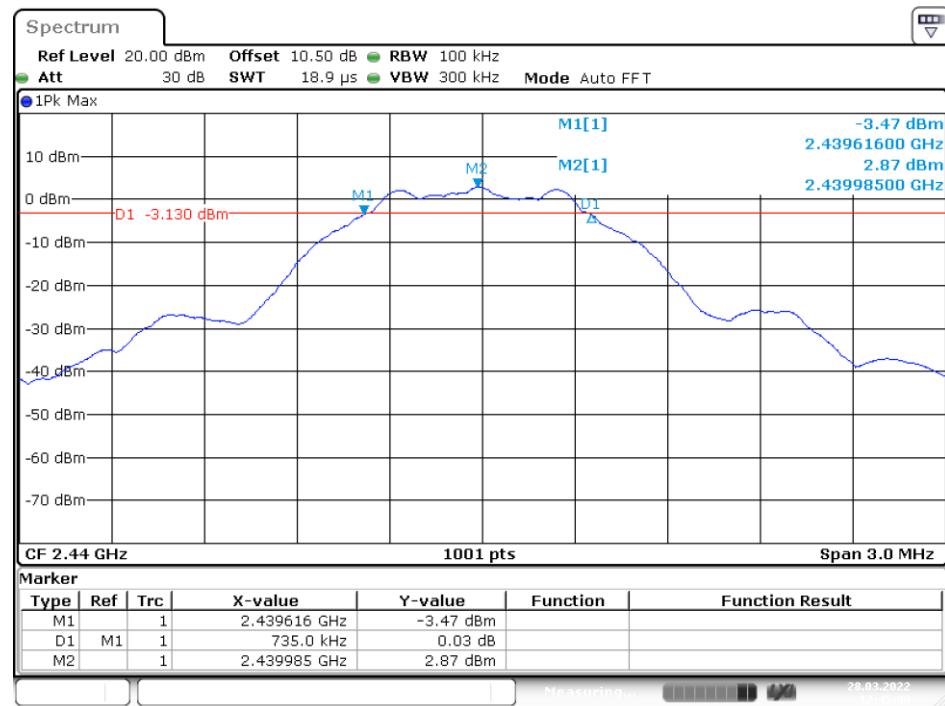

Date: 28.MAR.2022 12:45:40


High Channel

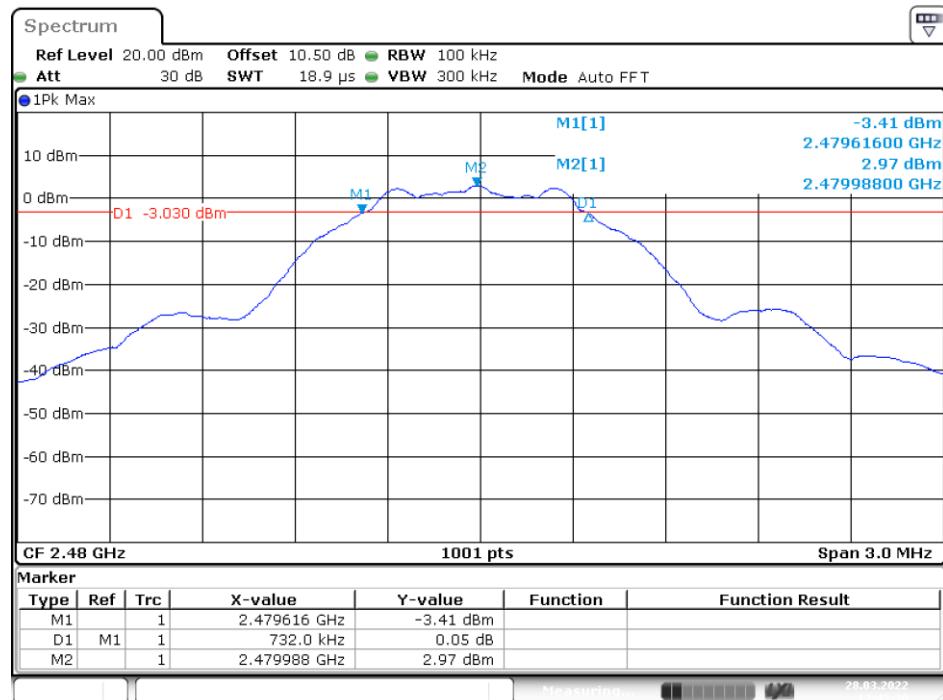

Date: 28.MAR.2022 12:43:36


BLE(2M) Mode

Low Channel

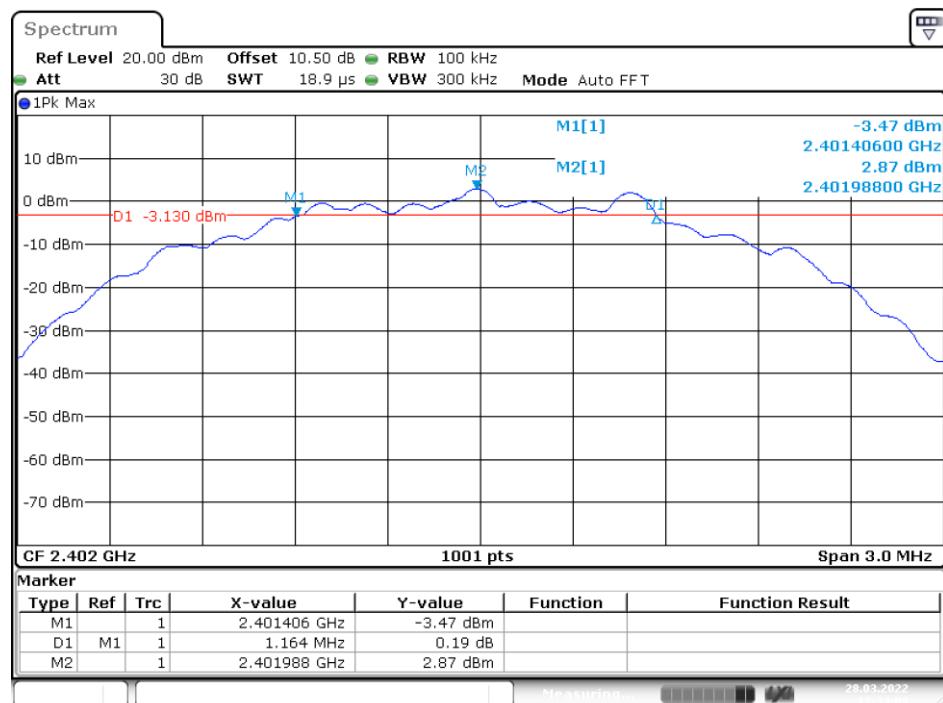


Date: 28.MAR.2022 12:34:08

Middle Channel

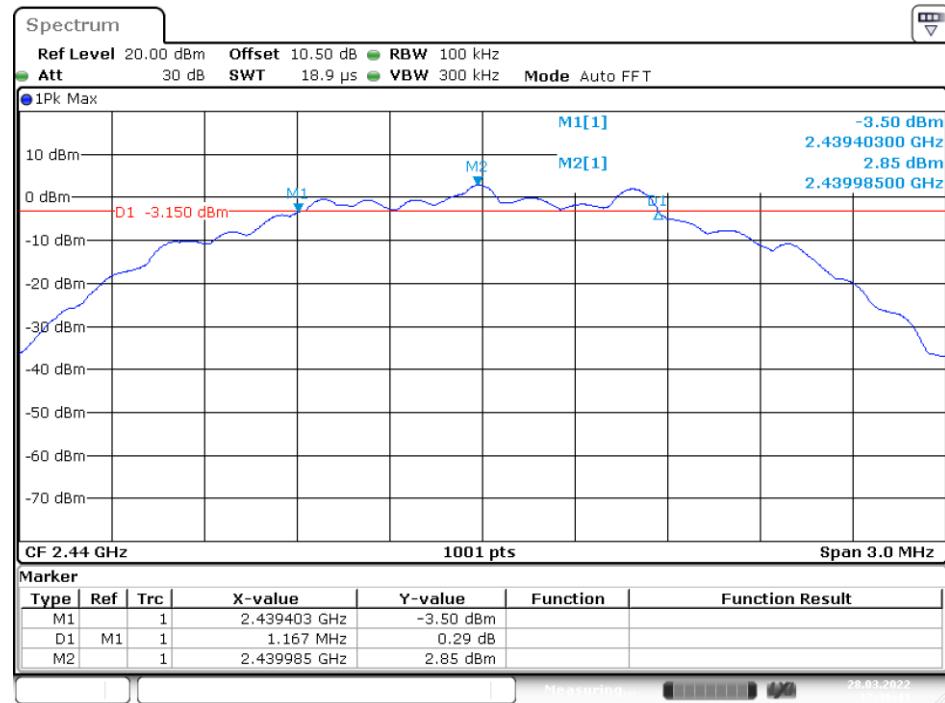

Date: 28.MAR.2022 12:36:41

High Channel

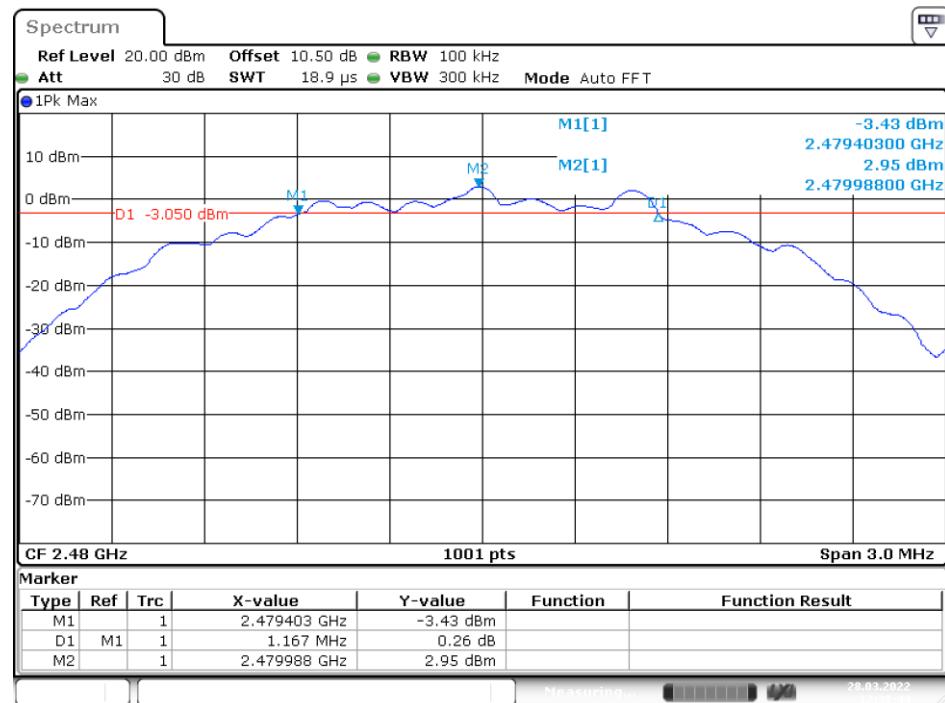

Date: 28.MAR.2022 12:38:44

10FCC §15.247(b)(3) – Maximum Output Power

10.1 Applicable Standard

According to FCC §15.247(b) (3).

Systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling alphabet when the transmitter is operating at its maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total transmit power occurring in any mode.

10.2 Test Procedure

1. Place the EUT on a bench and set it in transmitting mode.
2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to measuring equipment.

10.3 Test Results

Channel	Frequency	Maximum peak Conducted Output Power		Limit	Result
	(MHz)	(dBm)	(W)		
BLE(1M) Mode					
Low	2402	2.54	0.002	1	PASS
Middle	2440	2.57	0.002	1	PASS
High	2480	2.44	0.002	1	PASS
BLE(2M) Mode					
Low	2402	2.54	0.002	1	PASS
Middle	2440	2.63	0.002	1	PASS
High	2480	2.57	0.002	1	PASS

11 FCC§15.247(d) – 100 kHz Bandwidth of Frequency Band Edge

11.1 Applicable Standard

According to FCC §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a) (see §15.205(c)).

11.2 Test Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range, and make sure the instrument is operated in its linear range.
3. Set RBW to 100 kHz and VBW of spectrum analyzer to 300 kHz with a convenient frequency span including 100 kHz bandwidth from band edge.
4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency.
5. Repeat above procedures until all measured frequencies were complete.


11.3 Test Results

Channel	Frequency (MHz)	Delta Peak to Band Emission (dBc)	Limit (dBc)	Result
BLE(1M) Mode				
Low	2402	49.71	≥ 20	PASS
High	2480	51.53	≥ 20	PASS
BLE(2M) Mode				
Low	2402	32.40	≥ 20	PASS
High	2480	50.83	≥ 20	PASS

Please refer to the following plots


BLE(1M) Mode

Band Edge, Left Side

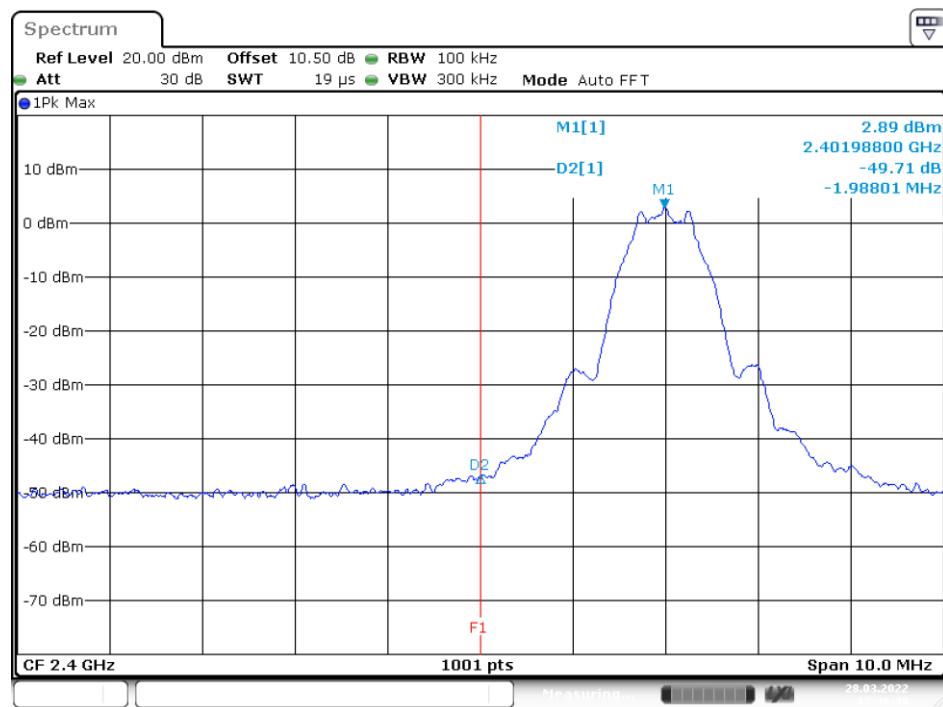

Date: 28.MAR.2022 12:48:48


Band Edge, Right Side

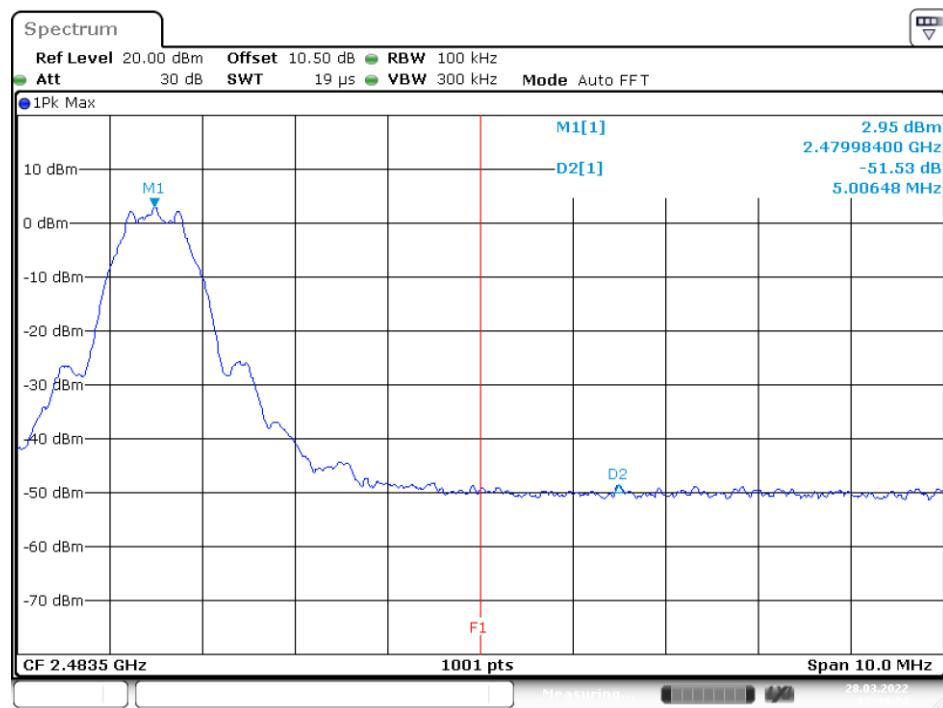


Date: 28.MAR.2022 12:44:24

BLE(2M) Mode

Band Edge, Left Side

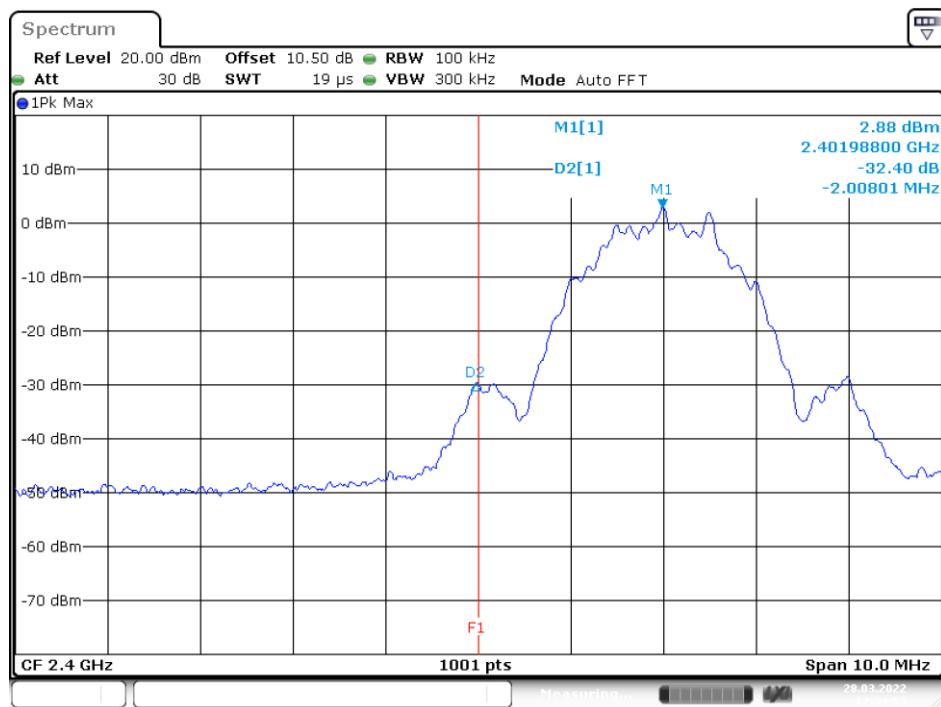

Band Edge, Right Side

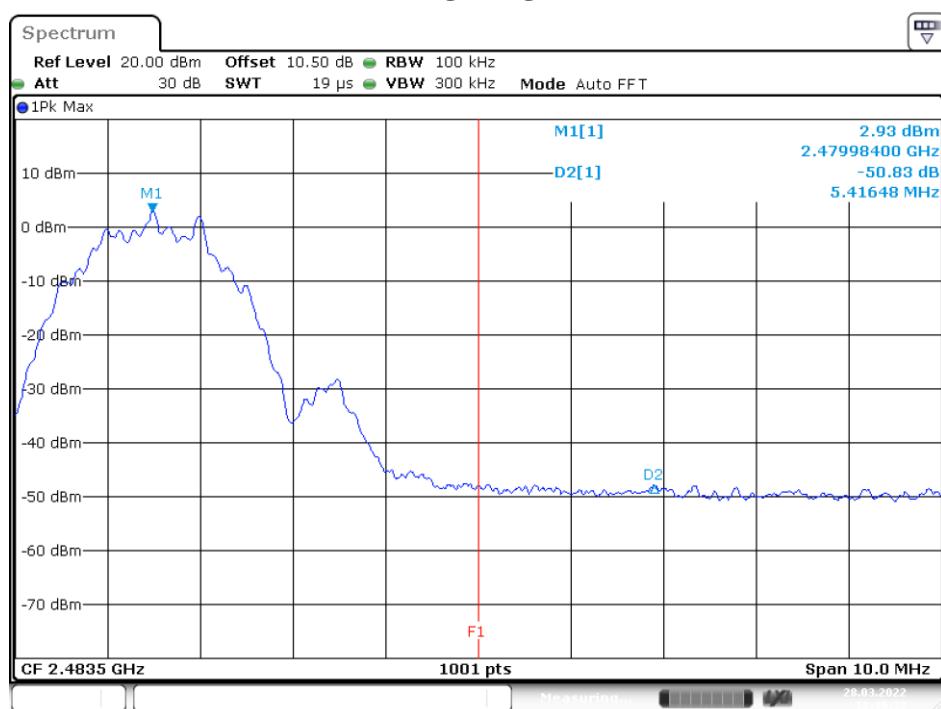

12 FCC §15.247(e) – Power Spectral Density

12.2Applicable Standard

According to FCC §15.247(e).

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8 dBm in any 3 kHz band during any time interval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph (b) of this section. The same method of determining the conducted output power shall be used to determine the power spectral density.

12.3Test Procedure

- a) Set analyzer center frequency to DTS channel center frequency.
- b) Set the span to 1.5 times the DTS bandwidth.
- c) Set the RBW to $3 \text{ kHz} \leq \text{RBW} \leq 100 \text{ kHz}$.
- d) Set the VBW $\geq [3 \times \text{RBW}]$.
- e) Detector = peak.
- f) Sweep time = auto couple.
- g) Trace mode = max hold.
- h) Allow trace to fully stabilize.
- i) Use the peak marker function to determine the maximum amplitude level within the RBW.
- j) If measured value exceeds requirement, then reduce RBW (but no less than 3 kHz) and repeat


12.4Test Results

Channel	Frequency (MHz)	Power Spectral Density (dBm/3 kHz)	Limit (dBm/3 kHz)	Result
BLE(1M) Mode				
Low	2402	-12.40	8	Compliance
Middle	2440	-12.43	8	Compliance
High	2480	-12.46	8	Compliance
BLE(2M) Mode				
Low	2402	-14.92	8	Compliance
Middle	2440	-14.84	8	Compliance
High	2480	-14.86	8	Compliance

Please refer to the following plots


BLE(1M) Mode

Low Channel

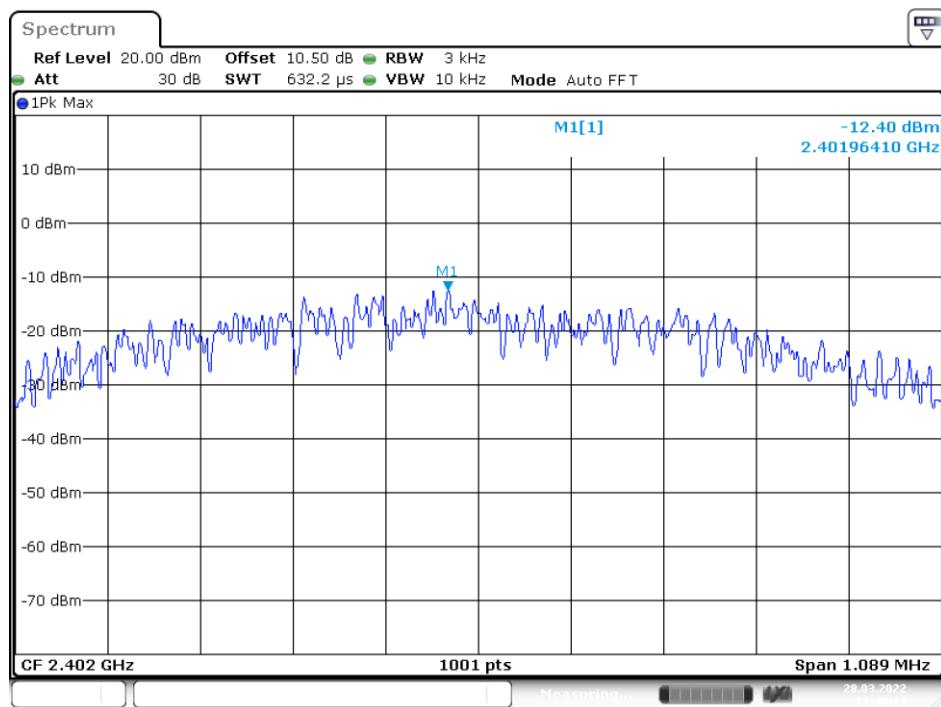


Date: 28.MAR.2022 12:48:11

Middle Channel

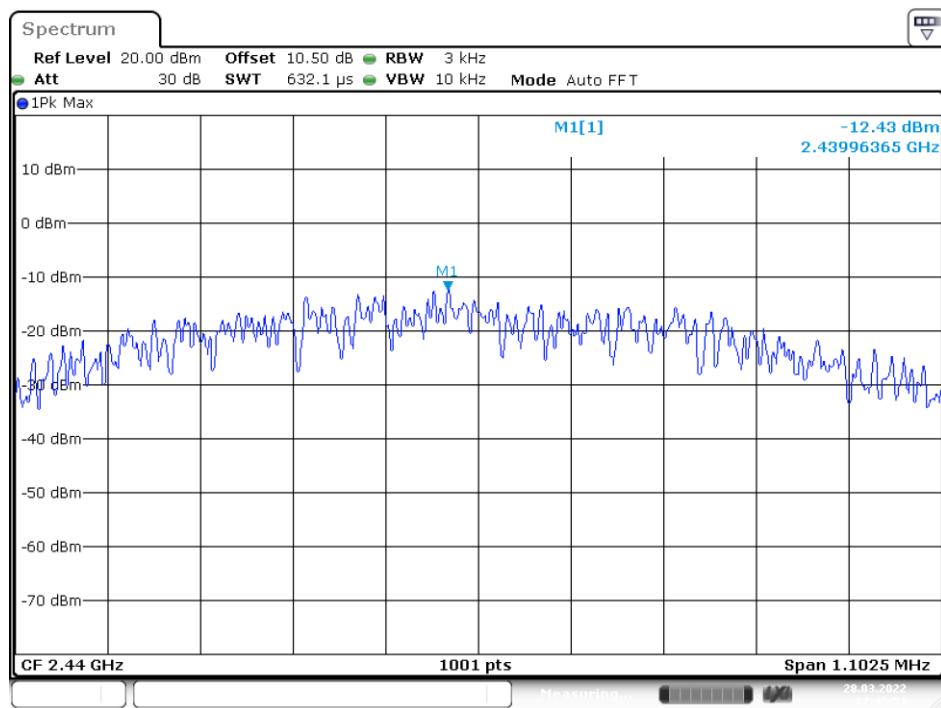


Date: 28.MAR.2022 12:45:51


High Channel

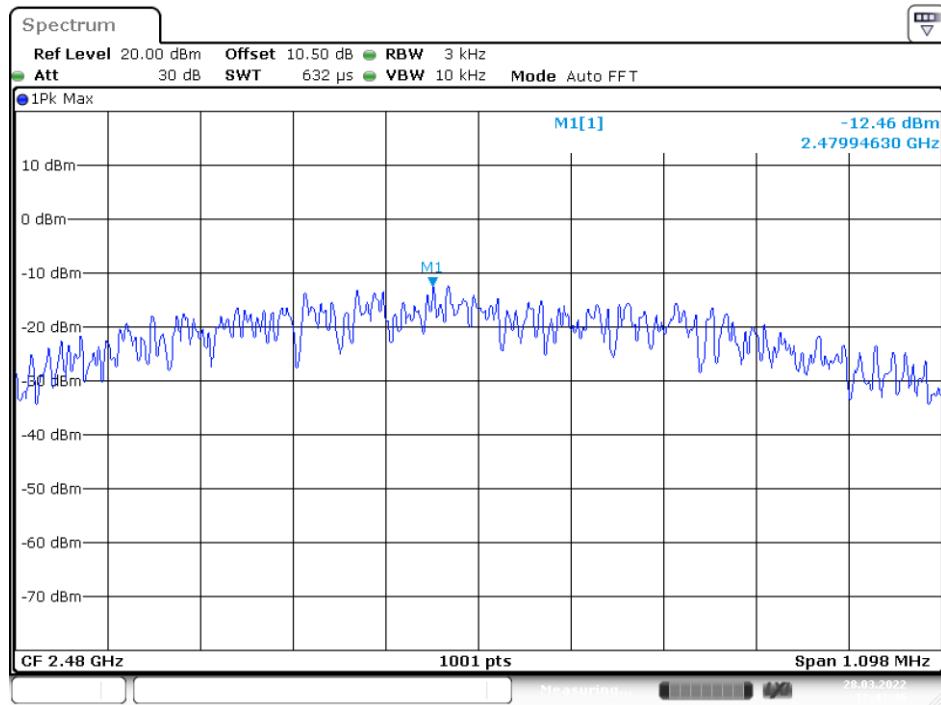


BLE(2M) Mode Low Channel

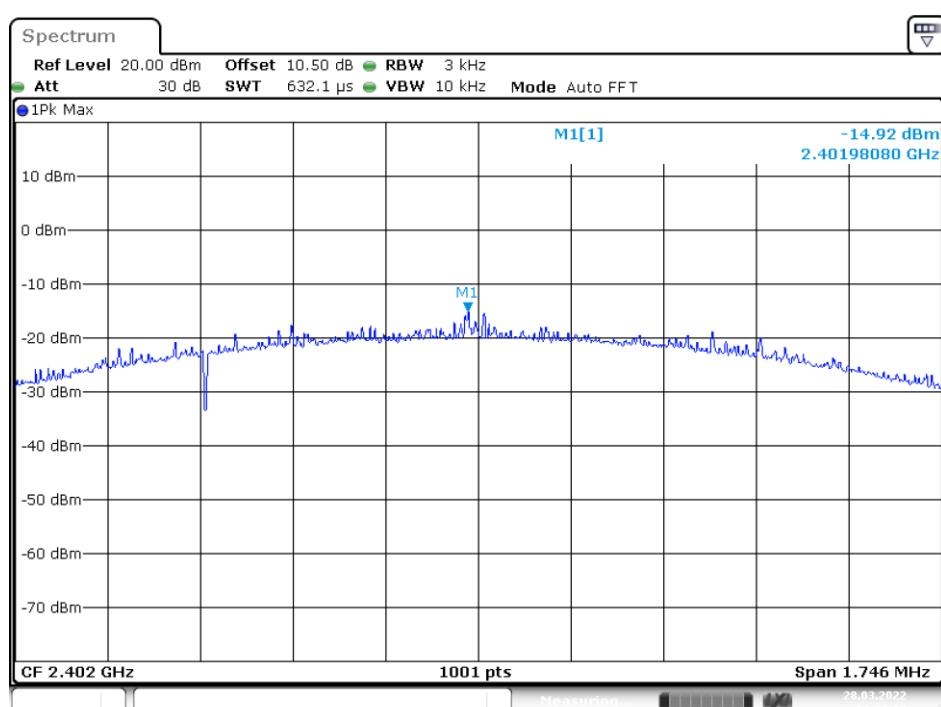

Middle Channel

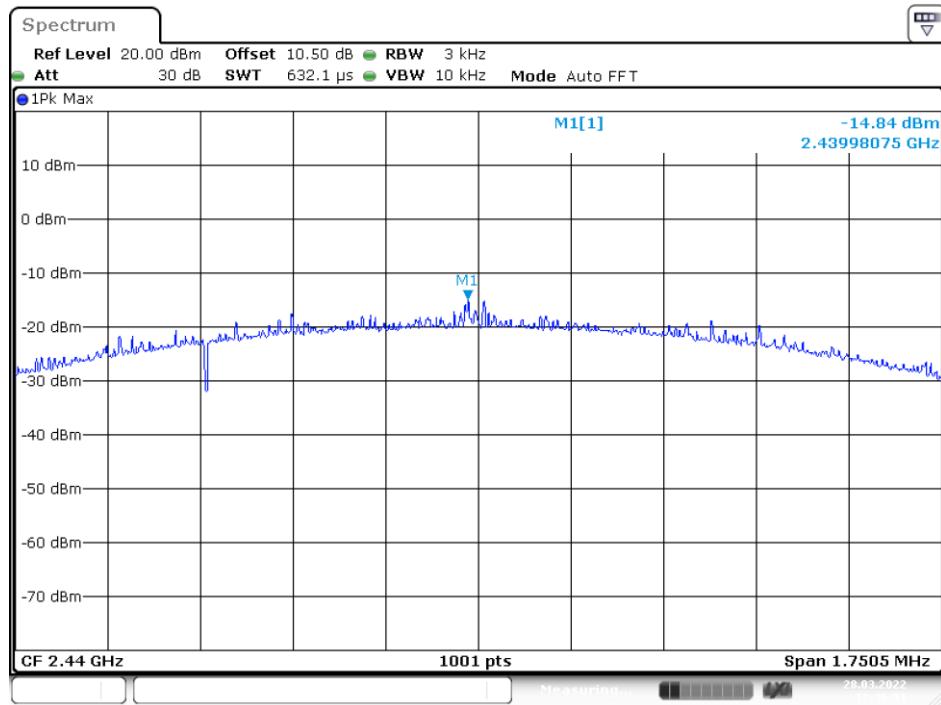

High Channel

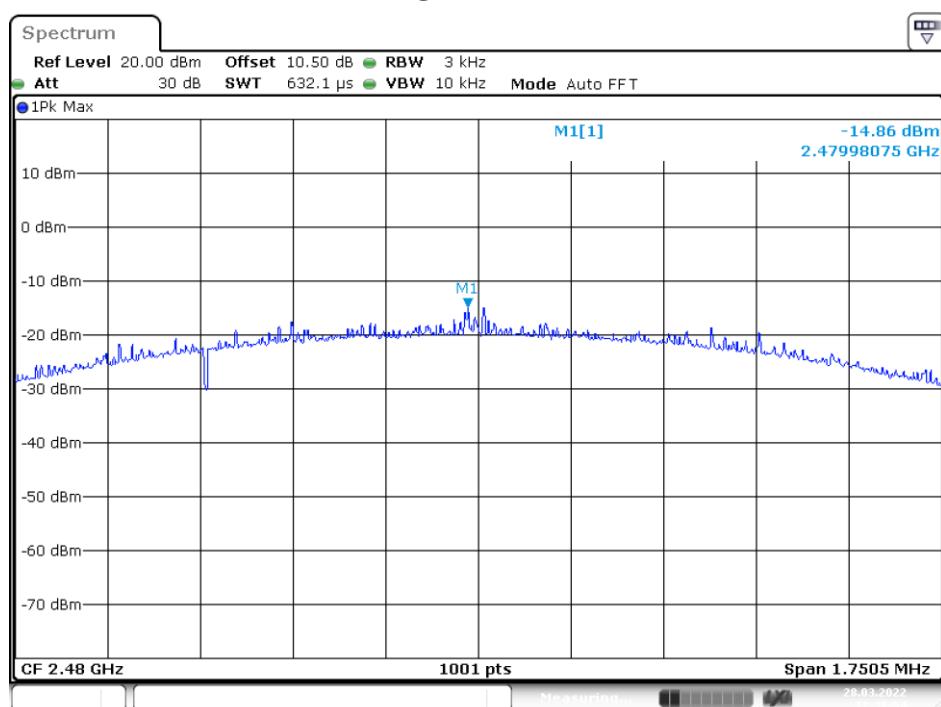

***** END OF REPORT *****