


802.11g mode:

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24℃ Humi: 57%

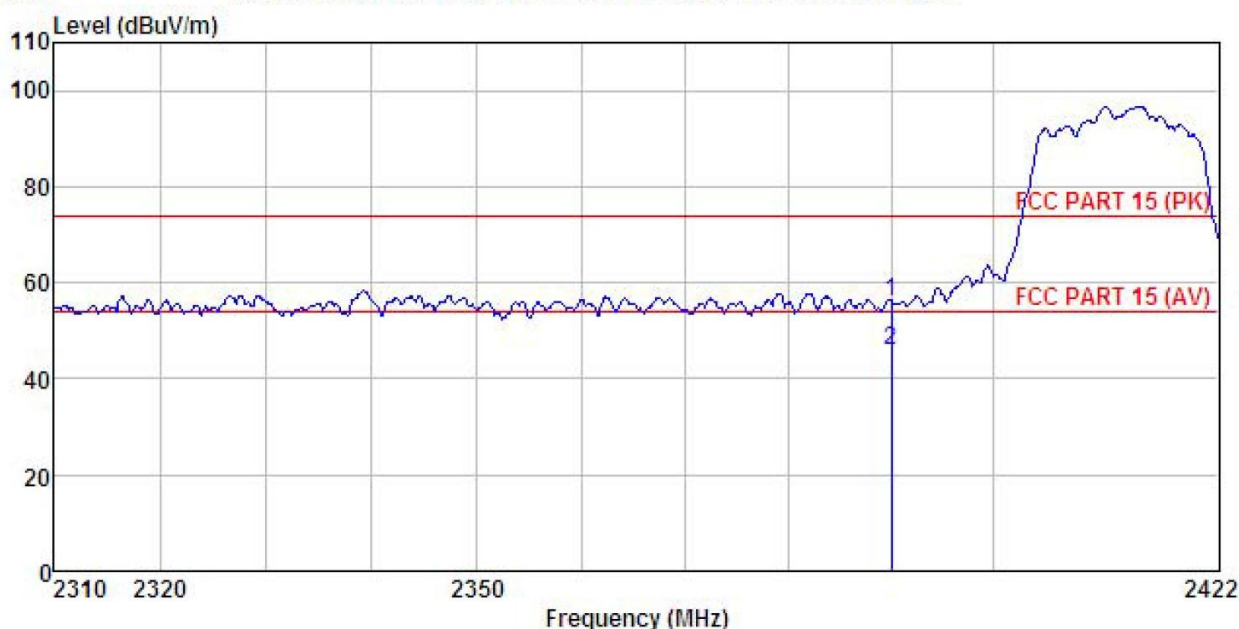


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.51	27.07	4.69	0.00	55.95	74.00	-18.05	Peak
2	2390.000	12.44	27.07	4.69	0.00	45.88	54.00	-8.12	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24℃ Humi: 57%

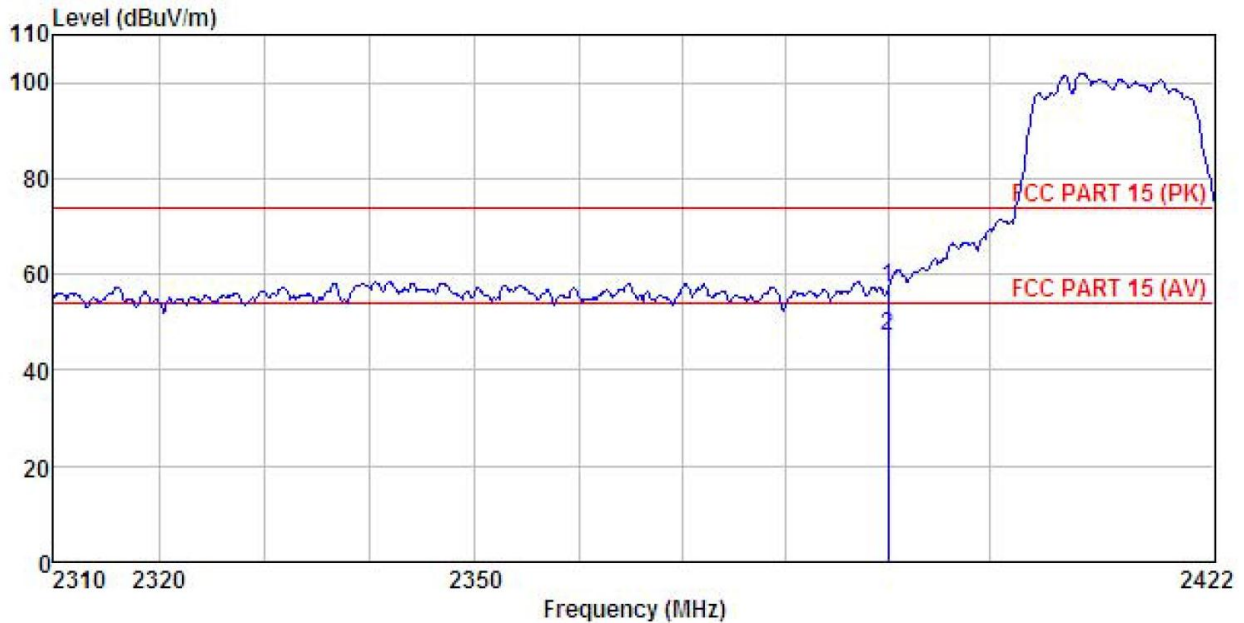


	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	23.94	27.08	4.69	0.00	57.39	74.00	-16.61	Peak
2	2390.000	13.59	27.08	4.69	0.00	47.04	54.00	-6.96	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24℃ Humi: 57%

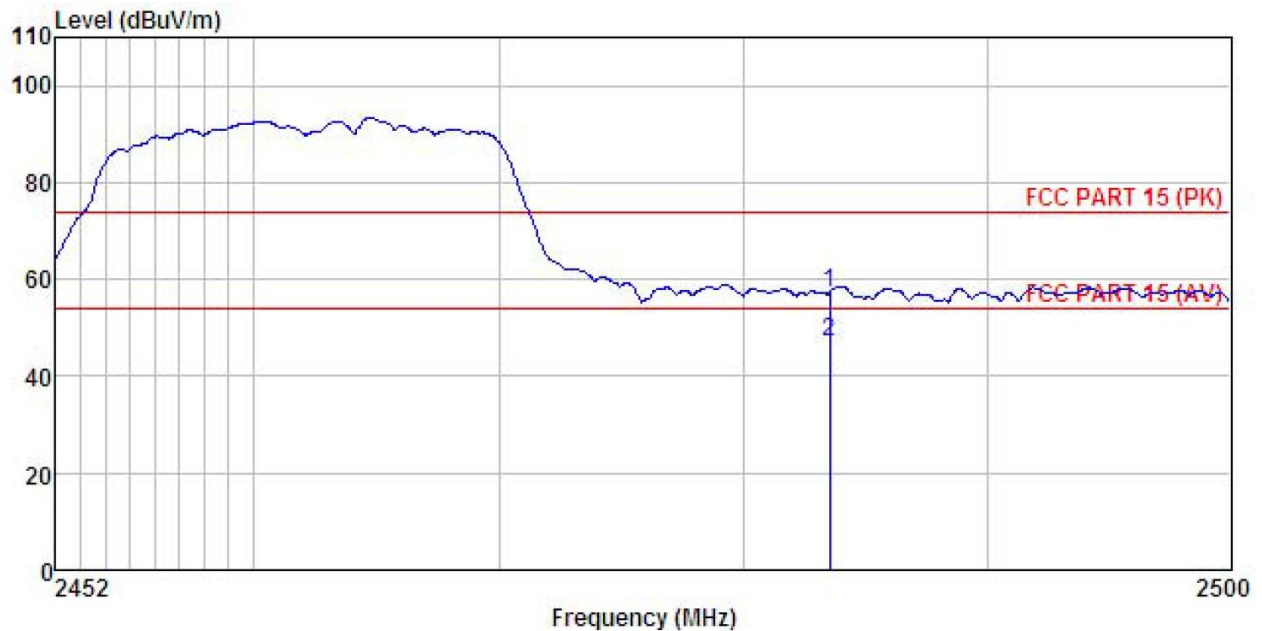


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.49	27.36	4.81	0.00	57.36	74.00	-16.64	Peak
2	2483.500	13.23	27.36	4.81	0.00	47.10	54.00	-6.90	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11g Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Humi: 57%

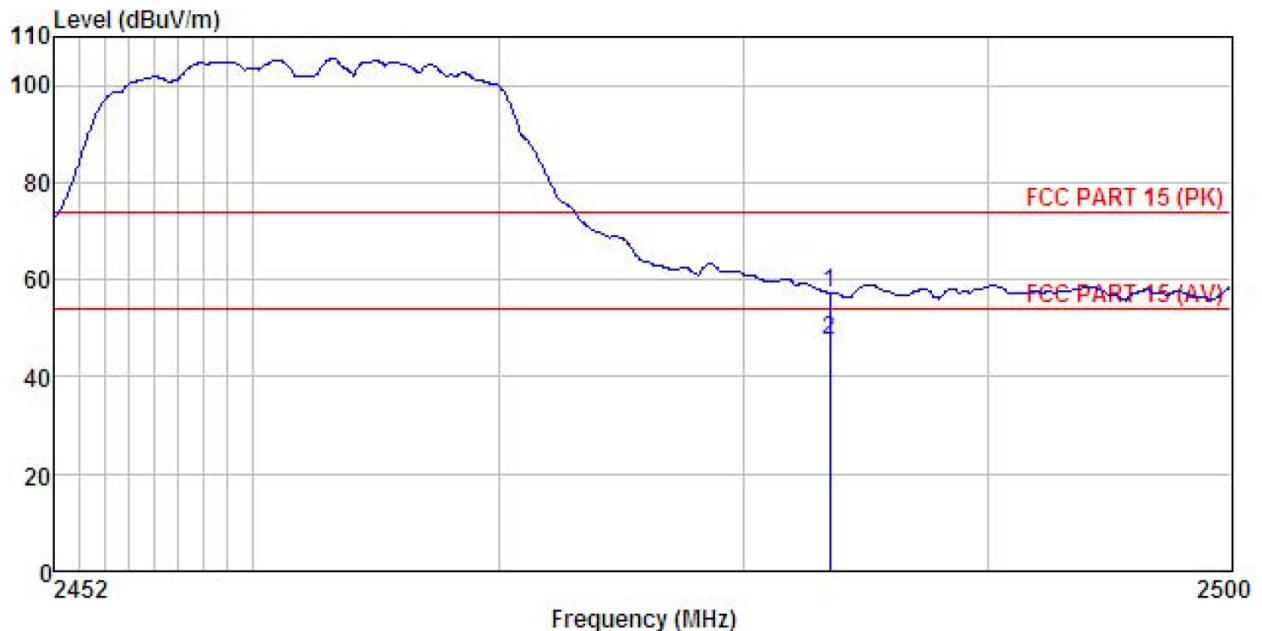


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.44	27.35	4.81	0.00	57.30	74.00	-16.70	Peak
2	2483.500	13.67	27.35	4.81	0.00	47.53	54.00	-6.47	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n(HT20):

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24℃ Humi: 57%

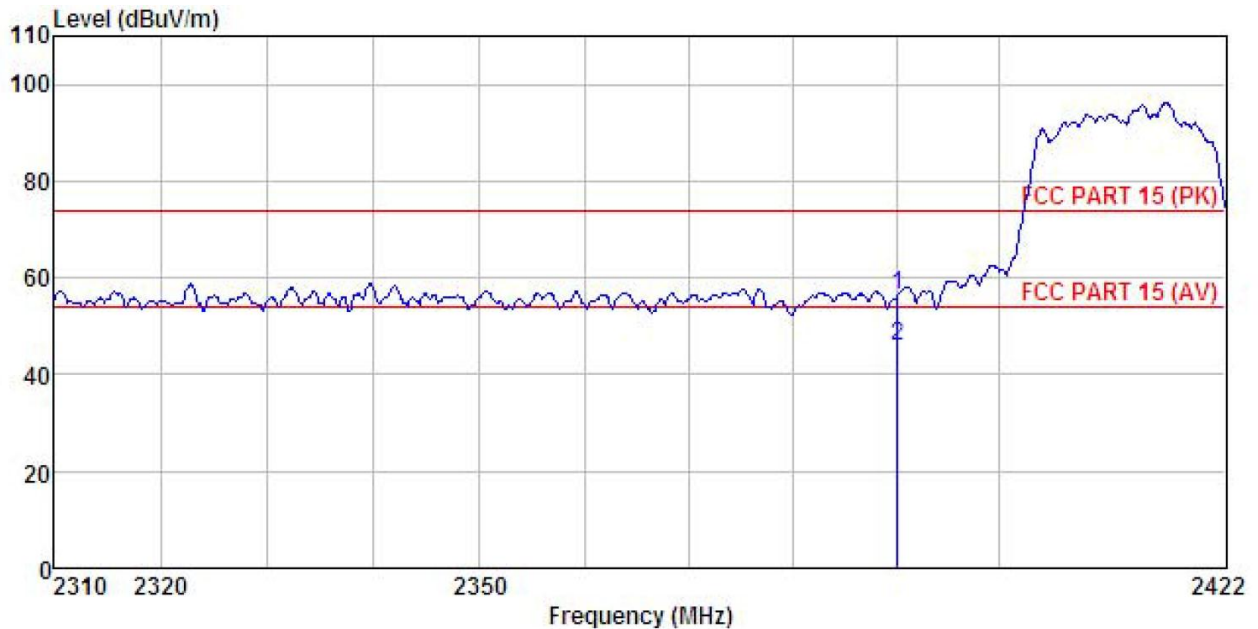


	Freq	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.104	22.92	27.07	4.69	0.00	56.36	74.00	-17.64	Peak
2	2390.104	12.42	27.07	4.69	0.00	45.86	54.00	-8.14	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Humi: 57%

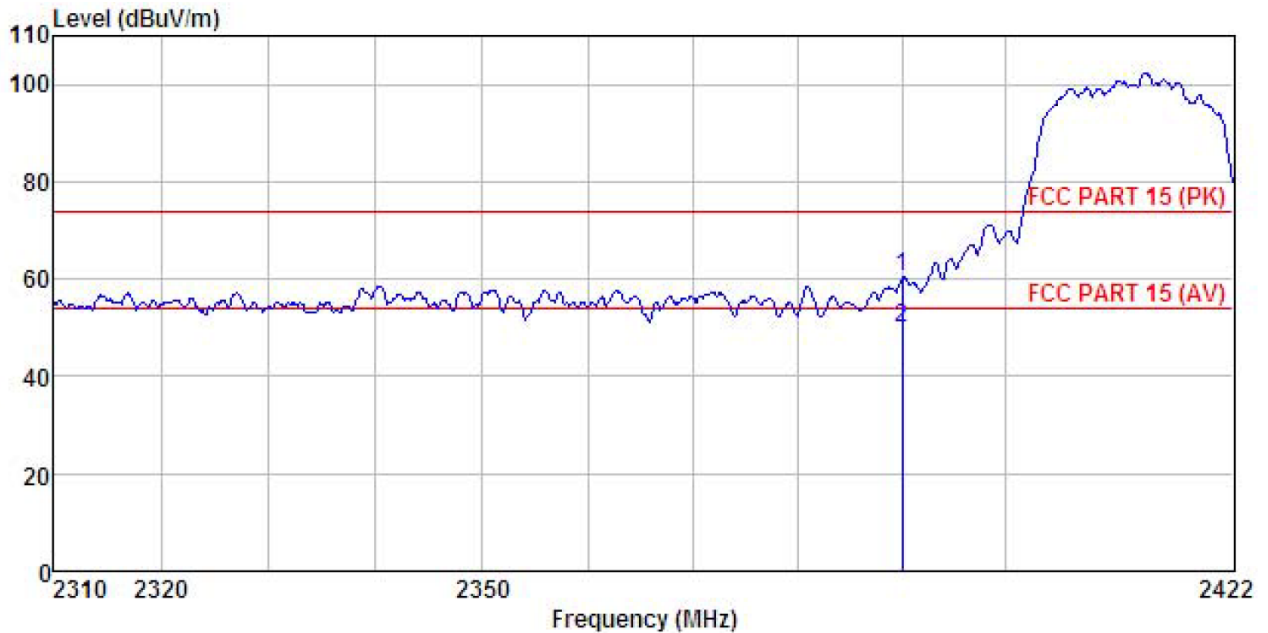


	Freq	ReadLevel	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	26.95	27.08	4.69	0.00	60.40	74.00	-13.60	Peak
2	2390.000	16.32	27.08	4.69	0.00	49.77	54.00	-4.23	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24℃ Humi: 57%

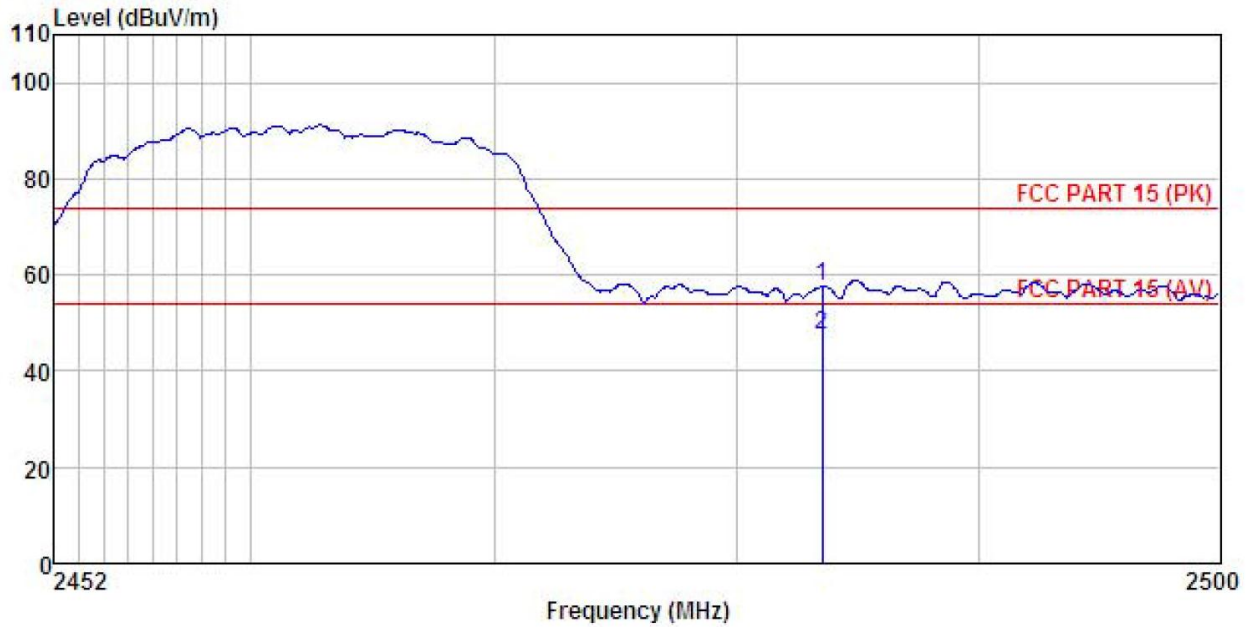


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.83	27.36	4.81	0.00	57.70	74.00	-16.30	Peak
2	2483.500	13.45	27.36	4.81	0.00	47.32	54.00	-6.68	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11n(HT20) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24℃ Humi: 57%

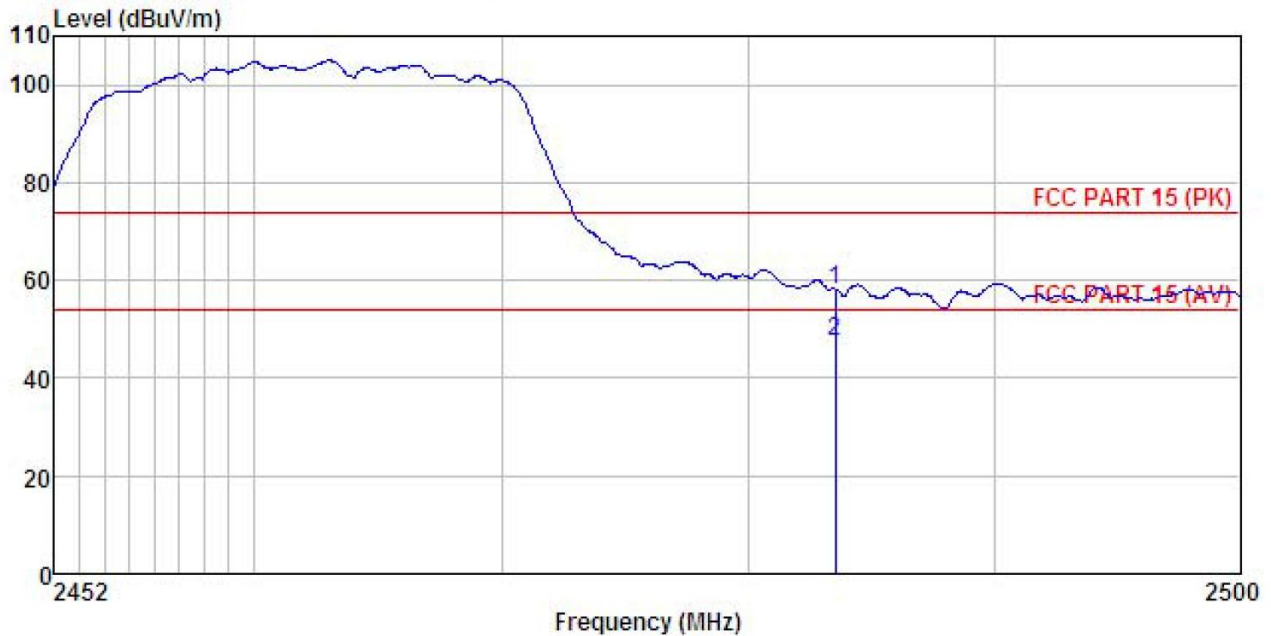


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	24.34	27.35	4.81	0.00	58.20	74.00	-15.80	Peak
2	2483.500	13.46	27.35	4.81	0.00	47.32	54.00	-6.68	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

802.11n(HT40):

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24℃ Humi: 57%

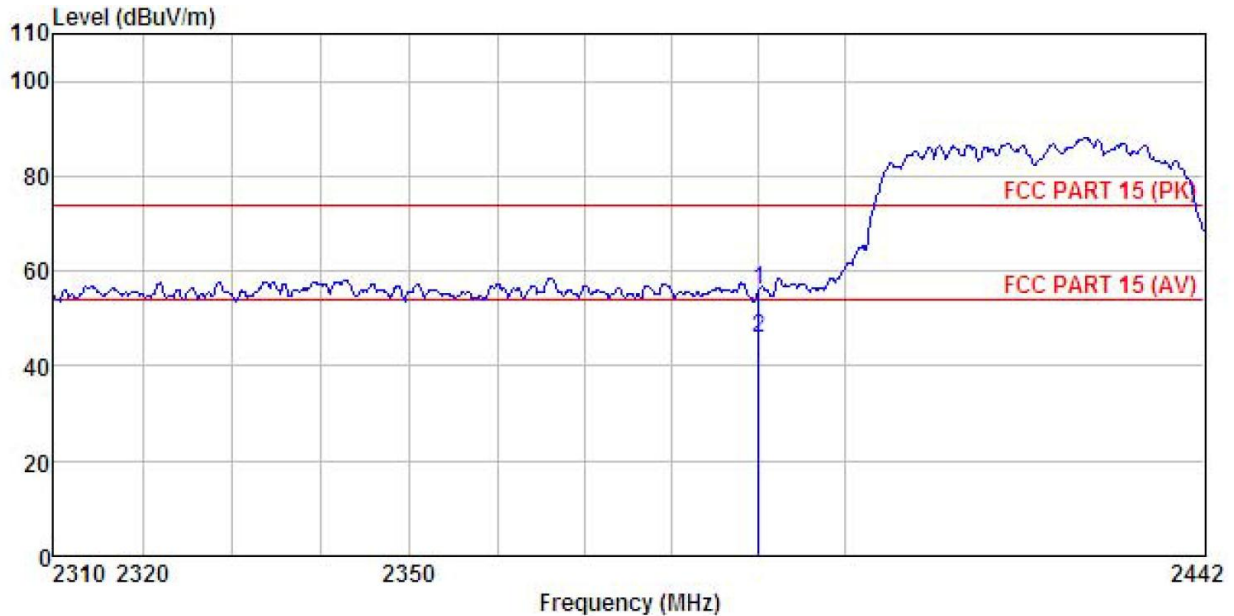


	Freq	Read Level	Antenna Factor	Cable Loss	Preamplifier Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	22.72	27.07	4.69	0.00	56.16	74.00	-17.84	Peak
2	2390.000	12.46	27.07	4.69	0.00	45.90	54.00	-8.10	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Lowest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24℃ Humi: 57%

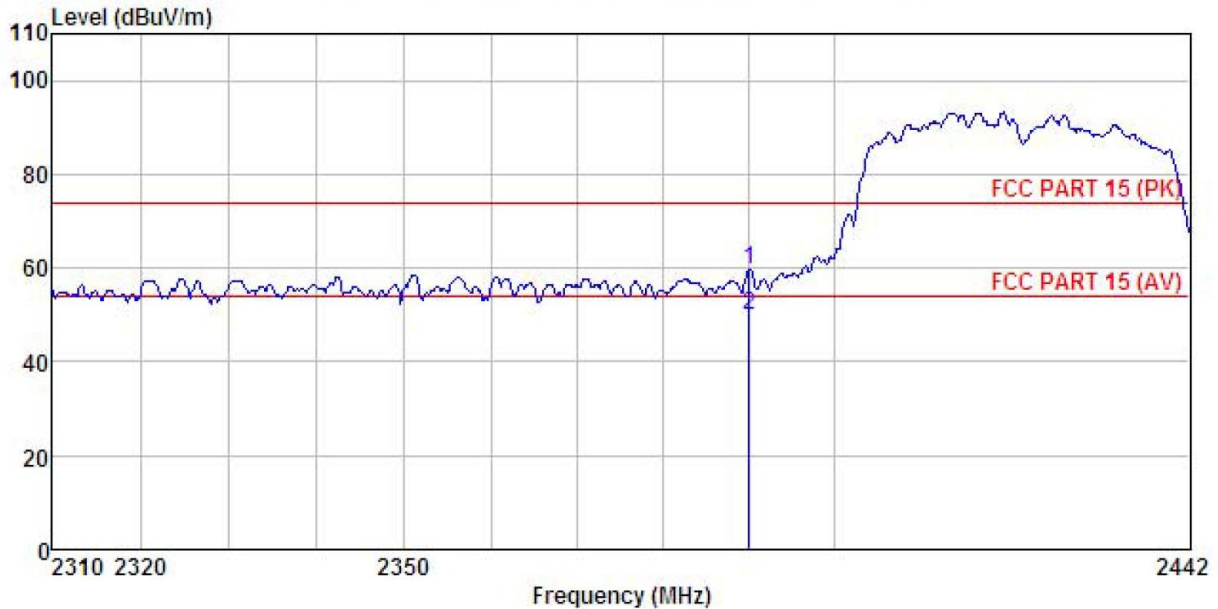


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2390.000	26.19	27.08	4.69	0.00	59.64	74.00	-14.36	Peak
2	2390.000	16.42	27.08	4.69	0.00	49.87	54.00	-4.13	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Humi: 57%

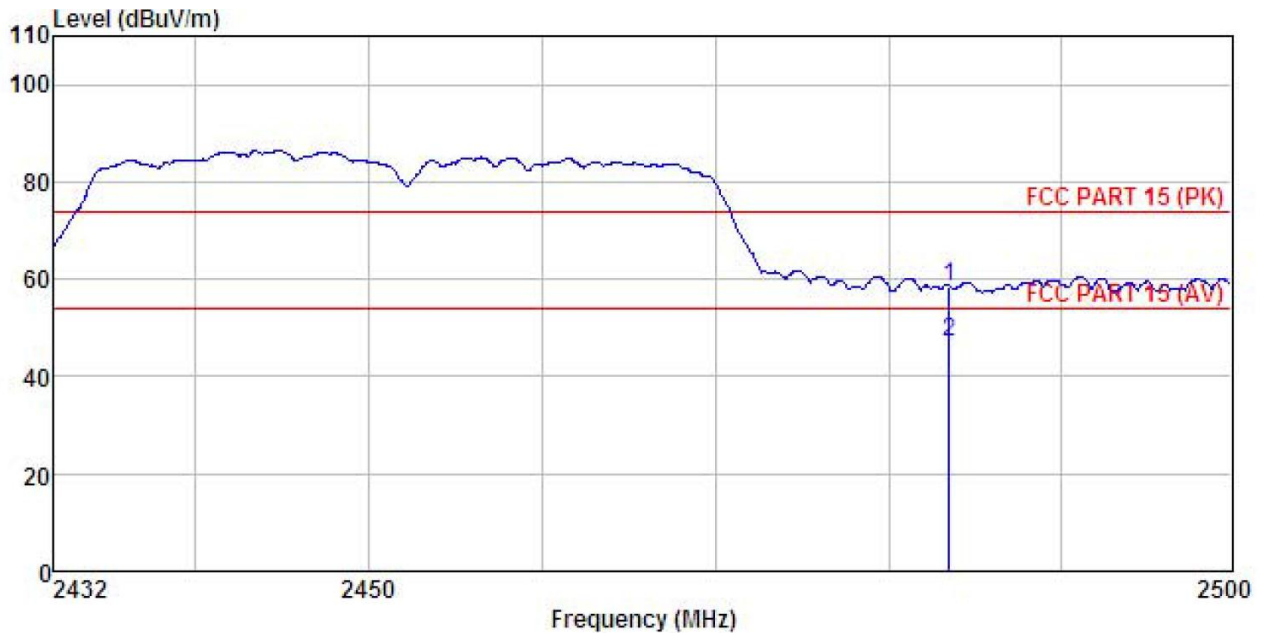


	Freq	ReadAntenna	Cable	Preamp	Level	Limit	Over	Remark
	MHz	Level	Factor	Loss	Factor	Line	Limit	
		dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB
1	2483.500	24.74	27.36	4.81	0.00	58.61	74.00	-15.39 Peak
2	2483.500	13.10	27.36	4.81	0.00	46.97	54.00	-7.03 Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	802.11n(HT40) Tx mode
Test Channel:	Highest channel	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24°C Humi: 57%

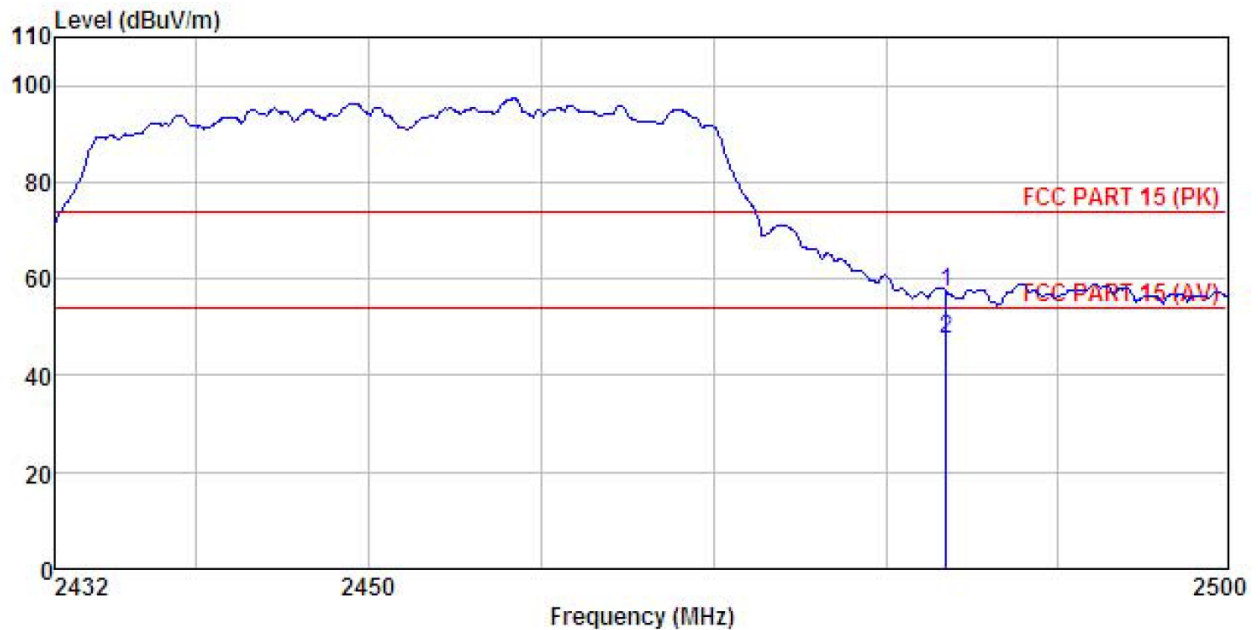


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit Line	Over Limit	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	2483.500	23.23	27.35	4.81	0.00	57.09	74.00	-16.91	Peak
2	2483.500	13.81	27.35	4.81	0.00	47.67	54.00	-6.33	Average

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Pre-amplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.


6.7 Spurious Emission

6.7.1 Conducted Emission Method

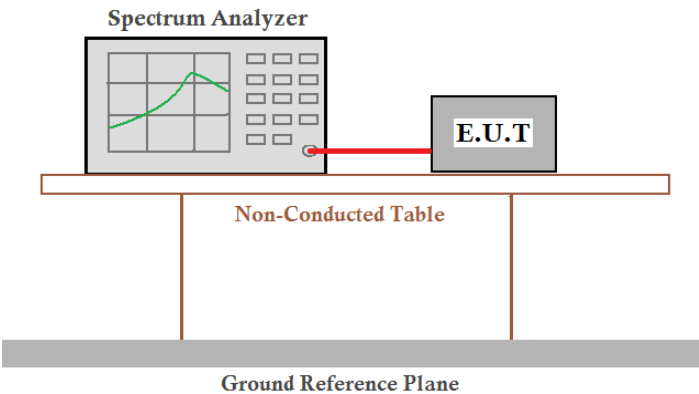Test Requirement:	FCC Part 15 C Section 15.247 (d)
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph(b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB.
Test setup:	 The diagram illustrates the test setup for conducted emissions. A Spectrum Analyzer is connected to an Equipment Under Test (E.U.T.) via a red cable. Both the Spectrum Analyzer and the E.U.T. are placed on a Non-Conducted Table. The table is supported by a Ground Reference Plane.
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed


Test plot as follows:

Test mode: 802.11b
Lowest channel

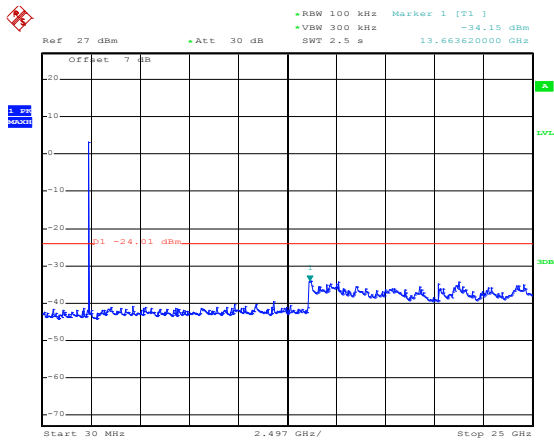


Date: 14.AUG.2019 14:34:26

Test mode: 802.11g
Lowest channel

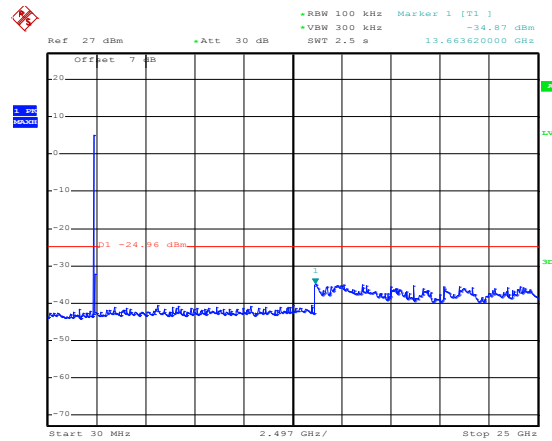


Date: 14.AUG.2019 14:35:50

Middle channel

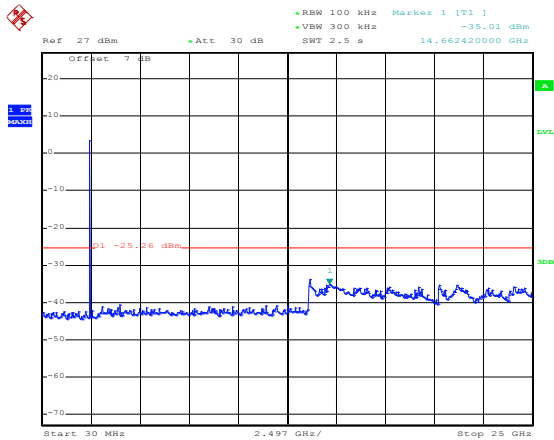


Date: 14.AUG.2019 14:34:59

Middle channel

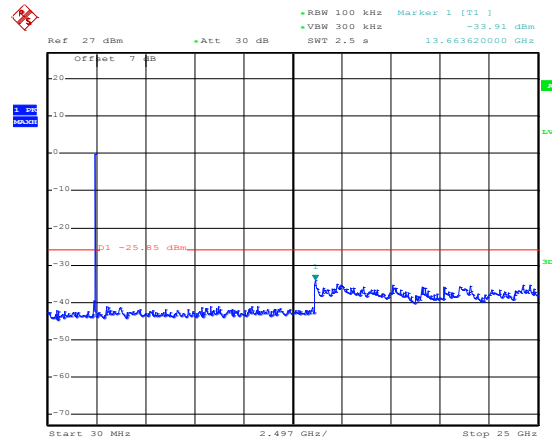


Date: 14.AUG.2019 14:36:15

Highest channel

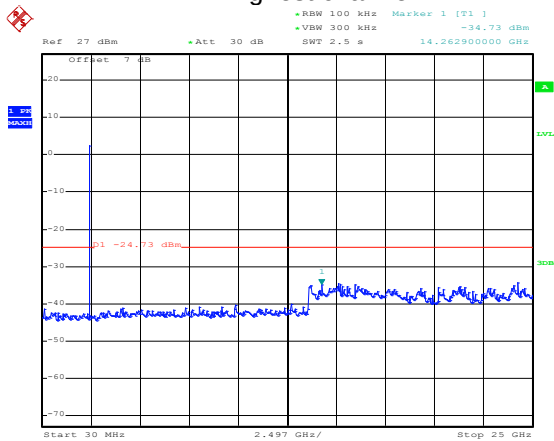

Date: 14.AUG.2019 14:35:23


Highest channel

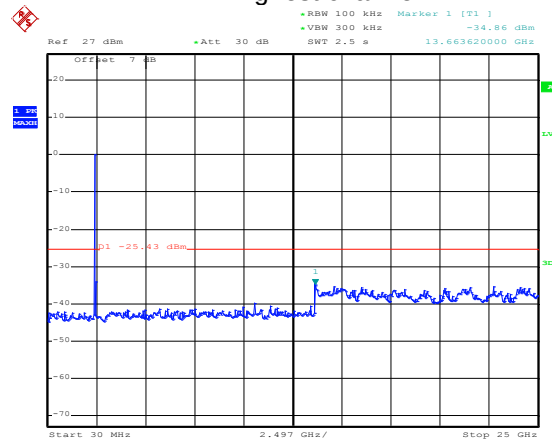

Date: 14.AUG.2019 14:36:37

Test mode: 802.11n(H20)


Lowest channel

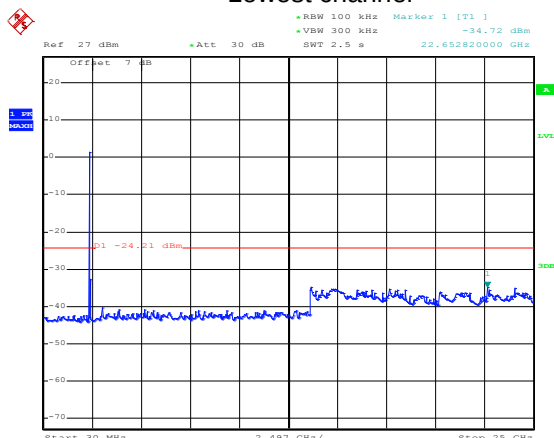

Date: 14.AUG.2019 14:37:05


Test mode: 802.11n(H40)

Lowest channel

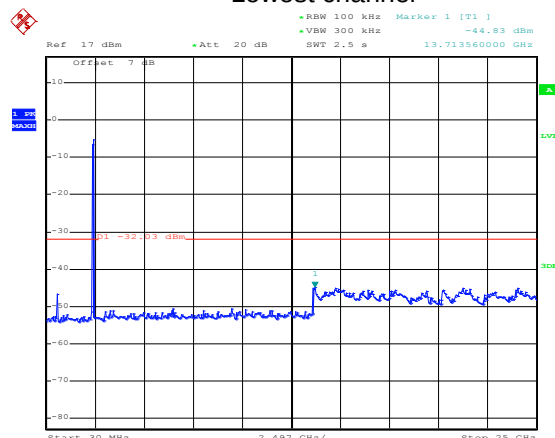


Date: 14.AUG.2019 14:43:25

Middle channel

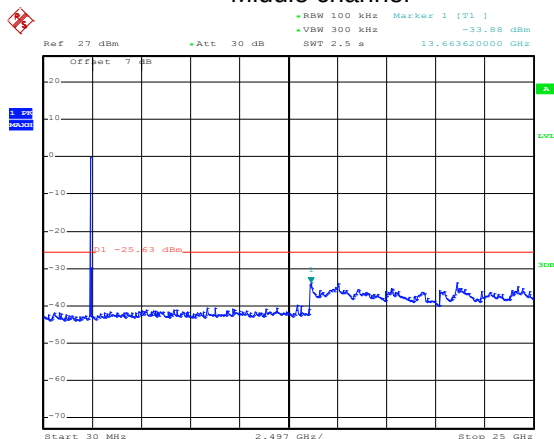


Date: 14.AUG.2019 14:38:24

Middle channel

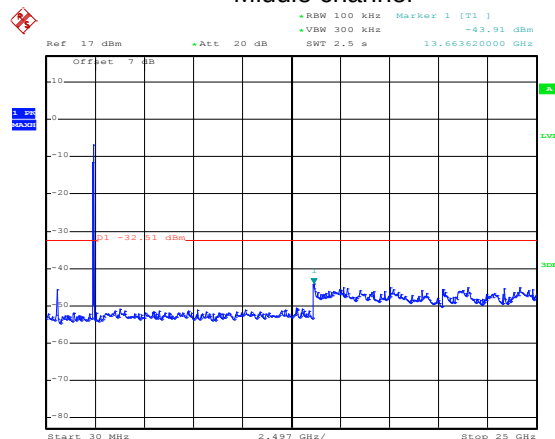


Date: 14.AUG.2019 14:44:01

Highest channel

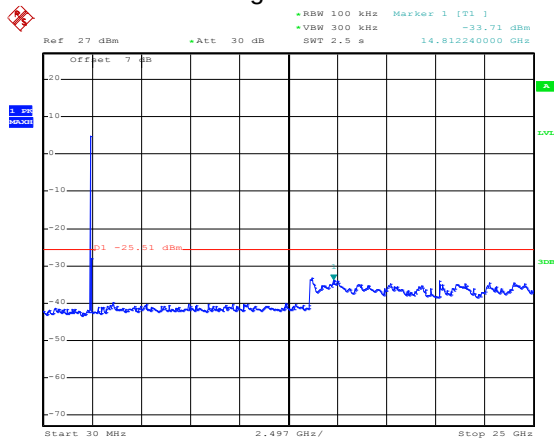


Date: 14.AUG.2019 14:40:38


Highest channel

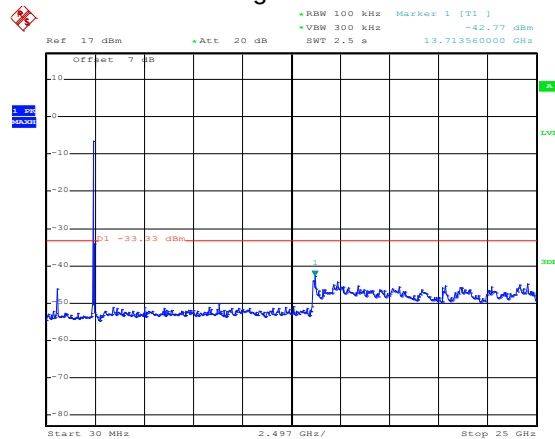

Date: 14.AUG.2019 14:44:30

6.7.2 Radiated Emission Method

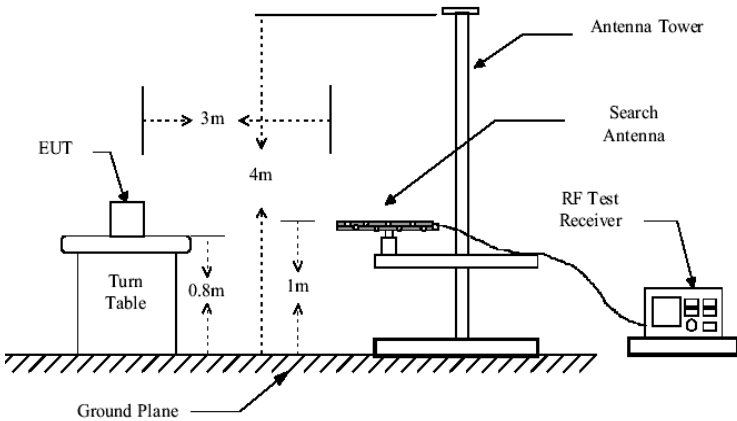
Test Requirement:	FCC Part 15 C Section 15.209 and 15.205				
Test Frequency Range:	9kHz to 25GHz				
Test Distance:	3m				
Receiver setup:	Frequency	Detector	RBW	VBW	Remark
	30MHz-1GHz	Quasi-peak	120KHz	300KHz	Quasi-peak Value
	Above 1GHz	Peak	1MHz	3MHz	Peak Value
		RMS	1MHz	3MHz	Average Value
Limit:	Frequency	Limit (dBuV/m @3m)			Remark
	30MHz-88MHz	40.0			Quasi-peak Value
	88MHz-216MHz	43.5			Quasi-peak Value
	216MHz-960MHz	46.0			Quasi-peak Value
	960MHz-1GHz	54.0			Quasi-peak Value
	Above 1GHz	54.0			Average Value
		74.0			Peak Value
Test Procedure:	1. The EUT was placed on the top of a rotating table 0.8m(below 1GHz)/1.5m(above 1GHz) above the ground at a 3 meter chamber. The table was rotated 360 degrees to determine the position of the highest radiation. 2. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower. 3. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement. 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rota table was turned from 0 degrees to 360 degrees to find the maximum reading. 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. 6. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.				
Test setup:	Below 1GHz  Above 1GHz				

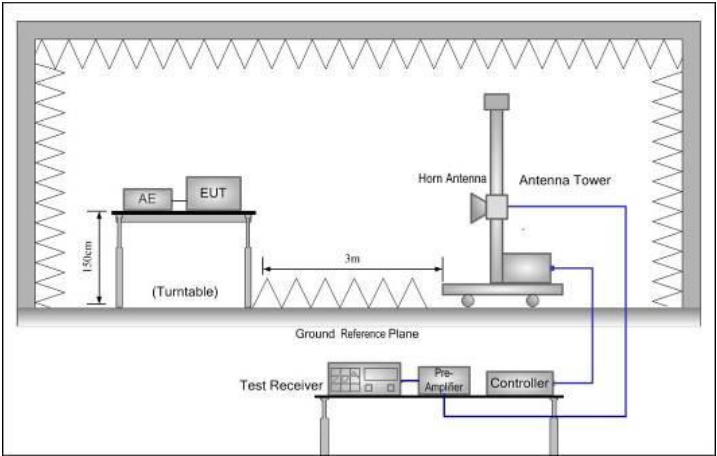	
Test Instruments:	Refer to section 5.8 for details
Test mode:	Refer to section 5.3 for details
Test results:	Passed
Remark:	1. Pre-scan all kind of the place mode (X-axis, Y-axis, Z-axis), and found the Y-axis is the worst case. 2. 9 kHz to 30MHz is too low, so only shows the data of above 30MHz in this report.

Measurement Data (worst case):

Below 1GHz:

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Vertical
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24℃ Humi: 57%

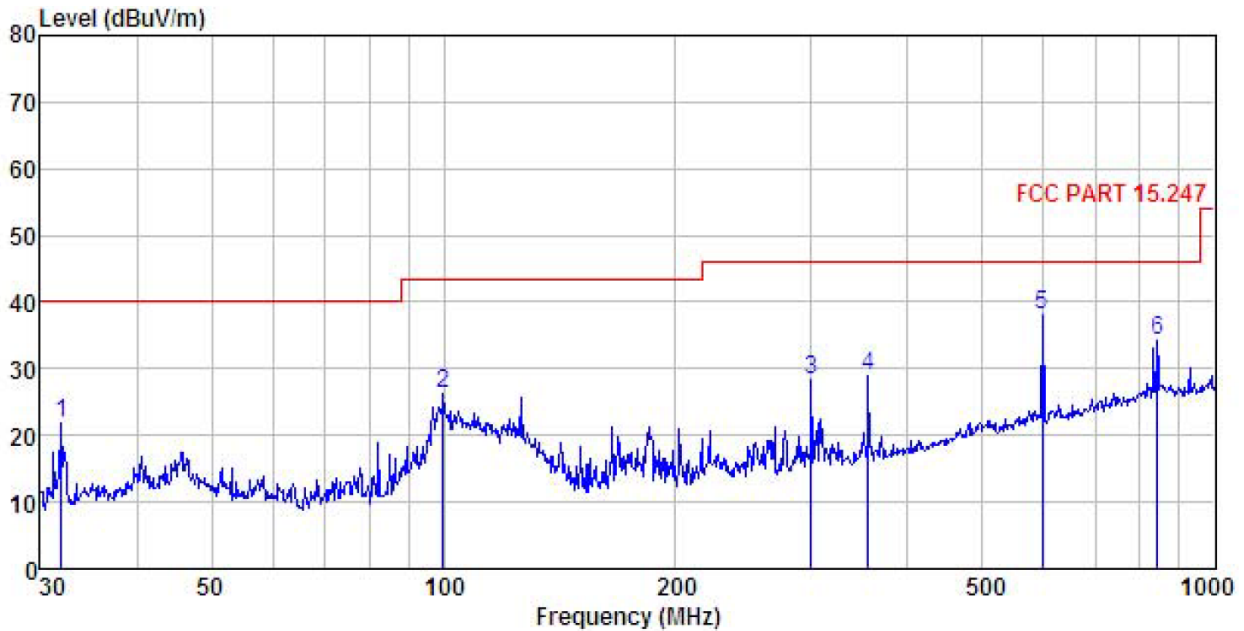


	Freq	Read Level	Antenna Factor	Cable Loss	Preamp Factor	Level	Limit	Over	Remark
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.955	40.23	10.84	0.85	29.97	21.95	40.00	-18.05	QP
2	99.878	41.51	12.41	1.94	29.53	26.33	43.50	-17.17	QP
3	299.316	40.38	13.60	2.94	28.45	28.47	46.00	-17.53	QP
4	355.427	39.68	14.69	3.10	28.58	28.89	46.00	-17.11	QP
5	597.223	43.63	19.44	3.94	28.95	38.06	46.00	-7.94	QP
6	842.130	35.49	22.44	4.22	28.03	34.12	46.00	-11.88	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Product Name:	ZigBee Hub	Product model:	KHUB-210-ZB
Test By:	YT	Test mode:	Wi-Fi Tx mode
Test Frequency:	30 MHz ~ 1 GHz	Polarization:	Horizontal
Test Voltage:	AC 120V/60Hz	Environment:	Temp: 24℃ Humi: 57%

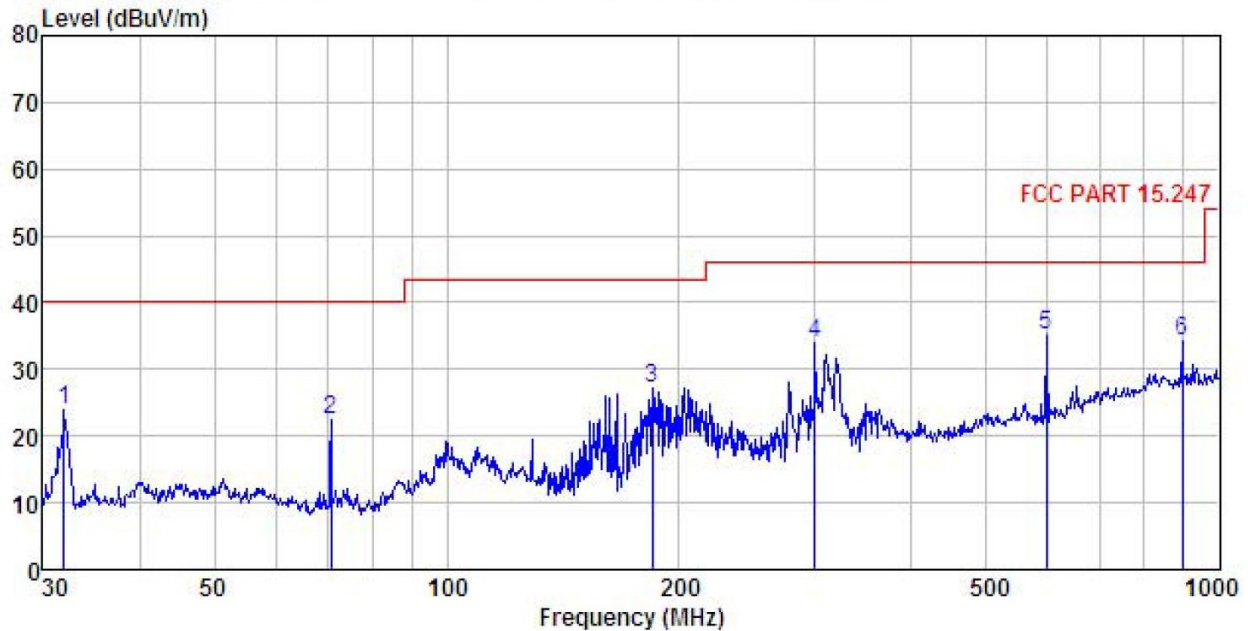

	Freq	ReadAntenna Level Factor	Cable Preamp Loss Factor	Level	Limit Line	Over Limit	Remark		
	MHz	dBuV	dB/m	dB	dB	dBuV/m	dBuV/m	dB	
1	31.955	42.10	10.84	0.85	29.97	23.82	40.00	-16.18	QP
2	70.832	42.36	8.37	1.54	29.71	22.56	40.00	-17.44	QP
3	184.490	43.20	10.13	2.76	28.94	27.15	43.50	-16.35	QP
4	299.316	45.85	13.60	2.94	28.45	33.94	46.00	-12.06	QP
5	597.223	40.63	19.44	3.94	28.95	35.06	46.00	-10.94	QP
6	896.997	35.75	22.51	3.74	27.89	34.11	46.00	-11.89	QP

Remark:

1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.
2. The emission levels of other frequencies are very lower than the limit and not show in test report.

Above 1GHz

802.11b								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	52.55	30.94	6.81	41.82	48.48	74.00	-25.52	Vertical
4824.00	50.69	30.94	6.81	41.82	46.62	74.00	-27.38	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	48.96	30.94	6.81	41.82	44.89	54.00	-9.11	Vertical
4824.00	45.22	30.94	6.81	41.82	41.15	54.00	-12.85	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	51.42	31.20	6.85	41.84	47.63	74.00	-26.37	Vertical
4874.00	52.33	31.20	6.85	41.84	48.54	74.00	-25.46	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	49.63	31.20	6.85	41.84	45.84	54.00	-8.16	Vertical
4874.00	48.55	31.20	6.85	41.84	44.76	54.00	-9.24	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	52.45	31.46	6.89	41.86	48.94	74.00	-25.06	Vertical
4924.00	53.32	31.46	6.89	41.86	49.81	74.00	-24.19	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	46.63	31.46	6.89	41.86	43.12	54.00	-10.88	Vertical
4924.00	47.85	31.46	6.89	41.86	44.34	54.00	-9.66	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

802.11g								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	50.33	30.94	6.81	41.82	46.26	74.00	-27.74	Vertical
4824.00	51.58	30.94	6.81	41.82	47.51	74.00	-26.49	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	46.36	30.94	6.81	41.82	42.29	54.00	-11.71	Vertical
4824.00	48.52	30.94	6.81	41.82	44.45	54.00	-9.55	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	52.45	31.20	6.85	41.84	48.66	74.00	-25.34	Vertical
4874.00	51.39	31.20	6.85	41.84	47.60	74.00	-26.40	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	47.63	31.20	6.85	41.84	43.84	54.00	-10.16	Vertical
4874.00	49.68	31.20	6.85	41.84	45.89	54.00	-8.11	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	52.26	31.46	6.89	41.86	48.75	74.00	-25.25	Vertical
4924.00	51.48	31.46	6.89	41.86	47.97	74.00	-26.03	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	48.26	31.46	6.89	41.86	44.75	54.00	-9.25	Vertical
4924.00	47.22	31.46	6.89	41.86	43.71	54.00	-10.29	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

802.11n(HT20)								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	52.33	36.06	6.81	41.82	53.38	74.00	-20.62	Vertical
4824.00	51.42	36.06	6.81	41.82	52.47	74.00	-21.53	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4824.00	49.63	36.06	6.81	41.82	50.68	54.00	-3.32	Vertical
4824.00	48.55	36.06	6.81	41.82	49.60	54.00	-4.40	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	52.63	36.32	6.85	41.84	53.96	74.00	-20.04	Vertical
4874.00	51.47	36.32	6.85	41.84	52.80	74.00	-21.20	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.63	36.32	6.85	41.84	49.96	54.00	-4.04	Vertical
4874.00	49.88	36.32	6.85	41.84	51.21	54.00	-2.79	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	52.25	36.58	6.89	41.86	53.86	74.00	-20.14	Vertical
4924.00	51.44	36.58	6.89	41.86	53.05	74.00	-20.95	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4924.00	49.63	36.58	6.89	41.86	51.24	54.00	-2.76	Vertical
4924.00	46.55	36.58	6.89	41.86	48.16	54.00	-5.84	Horizontal
Remark:								
1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor.								
2. The emission levels of other frequencies are very lower than the limit and not show in test report.								

802.11n(HT40)								
Test channel: Lowest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	53.32	36.06	6.81	41.82	54.37	74.00	-19.63	Vertical
4844.00	54.15	36.06	6.81	41.82	55.20	74.00	-18.80	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4844.00	49.63	36.06	6.81	41.82	50.68	54.00	-3.32	Vertical
4844.00	48.55	36.06	6.81	41.82	49.60	54.00	-4.40	Horizontal
Test channel: Middle channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	52.26	36.32	6.85	41.84	53.59	74.00	-20.41	Vertical
4874.00	53.45	36.32	6.85	41.84	54.78	74.00	-19.22	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4874.00	48.56	36.32	6.85	41.84	49.89	54.00	-4.11	Vertical
4874.00	47.58	36.32	6.85	41.84	48.91	54.00	-5.09	Horizontal
Test channel: Highest channel								
Detector: Peak Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	53.36	36.45	6.87	41.85	54.83	74.00	-19.17	Vertical
4904.00	52.98	36.45	6.87	41.85	54.45	74.00	-19.55	Horizontal
Detector: Average Value								
Frequency (MHz)	Read Level (dBuV)	Antenna Factor (dB/m)	Cable Loss (dB)	Preamplifier Factor (dB)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	Polarization
4904.00	47.63	36.45	6.87	41.85	49.10	54.00	-4.90	Vertical
4904.00	45.82	36.45	6.87	41.85	47.29	54.00	-6.71	Horizontal
Remark: 1. Final Level = Receiver Read level + Antenna Factor + Cable Loss – Preamplifier Factor. 2. The emission levels of other frequencies are very lower than the limit and not show in test report.								