

Dynamic Frequency Selection (DFS)

Test Report

Product Name	RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
Model No.	GRAXE66
FCC ID	I4L-GRAXE66

Applicant	Micro-Star Int'l Co., Ltd.
Address	No.69, Lide St., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)

Date of Receipt	Jan. 11, 2022
Issued Date	Jul. 19, 2022
Report No.	2210313R-RFUSDFSV02-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

DFS Test Report

Issued Date: Jul. 19, 2022

Report No.: 2210313R-RFUSDFSV02-A



Product Name	RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
Applicant	Micro-Star Int'l Co., Ltd.
Address	No.69, Lide St., Zhonghe Dist., New Taipei City 235, Taiwan (R.O.C.)
Manufacturer	LEADER ELECTRONICS INC.
Model No.	GRAXE66
FCC ID	I4L-GRAXE66
EUT Rated Voltage	AC 100-240V, 50/60Hz
EUT Test Voltage	AC 120V / 60Hz
Trade Name	msi
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E 15.407 (h) KDB 905462
Test Result	Complied

Documented By


:



(Senior Project Specialist / Joanne Lin)

Tested By


:



(Senior Engineer / Benjamin Pan)

Approved By

:



(Senior Engineer / Jack Hsu)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. Standard Requirement	5
1.2. EUT Description	6
1.3. UNII Device Description.....	8
1.4. Test Facility	9
1.5. Test Equipment.....	10
1.6. Uncertainty	11
1.7. Test Setup	12
1.8. DFS Detection Thresholds	12
1.9. Radar Test Waveforms.....	14
1.10. Radar Waveform Calibration.....	17
1.11. Radar Waveform Calibration Result.....	18
1.12. Master Data Traffic Plot Result.....	30
2. UNII Detection Bandwidth	33
2.1. Test Procedure	33
2.2. Test Requirement.....	33
2.3. Test Result of UNII Detection Bandwidth	36
3. Initial Channel Availability Check Time	42
3.1. Test Procedure	42
3.2. Test Requirement.....	42
3.3. Test Result of Initial Channel Availability Check Time	43
4. Radar Burst at the Beginning of the Channel Availability Check Time	44
4.1. Test Procedure	44
4.2. Test Requirement.....	44
4.3. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time	45
5. Radar Burst at the End of the Channel Availability Check Time	46
5.1. Test Procedure	46
5.2. Test Requirement.....	46
5.3. Test Result of Radar Burst at the End of the Channel Availability Check Time	47
6. In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	48
6.1. Test Procedure	48
6.2. Test Requirement.....	48
6.3. Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	49
7. Statistical Performance Check	51
7.1. Test Procedure	51
7.2. Test Requirement.....	51
7.3. Test Result of Statistical Performance Check.....	53

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 2210313R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
2210313R-RFUSDFSV02-A	V1.0	Initial issue of report.	Jul. 19, 2022

1. GENERAL INFORMATION

1.1. Standard Requirement

FCC Part 15.407:

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm. A TPC mechanism is not required for systems with an E.I.R.P. of less than 500mW.

U-NII devices operating in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

1.2. EUT Description

Product Name	RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
Trade Name	msi
FCC ID	I4L-GRAXE66
Model No.	GRAXE66
Frequency Range	802.11a/n/ac/ax-20MHz: 5180-5320MHz, 5500-5720MHz, 5745-5825MHz 802.11n/ac/ax-40MHz: 5190-5310MHz, 5510-5710MHz, 5755-5795MHz 802.11ac/ax-80MHz: 5210-5290MHz, 5530-5690MHz, 5775MHz
Number of Channels	802.11a/n/ac/ax-20MHz: 25CH, 802.11n/ac/ax-40MHz: 12CH 802.11ac/ax-80MHz: 6CH
Data Rate	802.11a: 6 - 54Mbps, 802.11n: up to 1300MHz 802.11ac: up to 1733.3MHz, 802.11ax: up to 2402MHz
Type of Modulation	OFDM, BPSK, QPSK, 16QAM, 64QAM, 256QAM OFDMA, BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Channel Control	Auto
Channel Bandwidth	20/40/80MHz
DFS Function	<input checked="" type="checkbox"/> Master <input type="checkbox"/> Slave
TPC Function	<input type="checkbox"/> <500mW not required <input checked="" type="checkbox"/> $\geq 500\text{mW}$ employ a TPC*
Communication Mode	<input checked="" type="checkbox"/> IP Based Systems <input type="checkbox"/> Frame Based System <input type="checkbox"/> Other System
Antenna Gain	Refer to the table "Antenna List"

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	WIESON	ARY121-0350-005-00	Dipole antenna	4.83dBi for 5250-5350MHz 5.64dBi for 5470-5725MHz
2	WIESON	ARY121-0350-006-00	Dipole antenna	3.67dBi for 5250-5350MHz 4.68dBi for 5470-5725MHz

802.11a/n/ac/ax -20MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 36:	5180 MHz	Channel 40:	5200 MHz	Channel 44:	5220 MHz	Channel 48:	5240 MHz
Channel 52:	5260 MHz	Channel 56:	5280 MHz	Channel 60:	5300 MHz	Channel 64:	5320 MHz
Channel 100:	5500 MHz	Channel 104:	5520 MHz	Channel 108:	5540 MHz	Channel 112:	5560 MHz
Channel 116:	5580 MHz	Channel 120:	5600 MHz	Channel 124:	5620 MHz	Channel 128:	5640 MHz
Channel 132:	5660 MHz	Channel 136:	5680 MHz	Channel 140:	5700 MHz	Channel 144:	5720 MHz
Channel 149:	5745 MHz	Channel 153:	5765 MHz	Channel 157:	5785 MHz	Channel 161:	5805 MHz
Channel 165:	5825 MHz						

802.11n/ac/ax -40MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 38:	5190 MHz	Channel 46:	5230 MHz	Channel 54:	5270 MHz	Channel 62:	5310 MHz
Channel 102:	5510 MHz	Channel 110:	5550 MHz	Channel 118:	5590 MHz	Channel 126:	5630 MHz
Channel 134:	5670 MHz	Channel 142:	5710 MHz	Channel 151:	5755 MHz	Channel 159:	5795 MHz

802.11ac/ax -80MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 42:	5210 MHz	Channel 58:	5290 MHz	Channel 106:	5530 MHz	Channel 122:	5610 MHz
Channel 138:	5690 MHz	Channel 155:	5775 MHz				

Test Mode	Mode 1: Transmit (802.11ax-20BW) Mode 2: Transmit (802.11ax-40BW) Mode 3: Transmit (802.11ax-80BW)
-----------	--

1.3. UNII Device Description

(1) The EUT operates in the following DFS band:

1. 5250-5350MHz
2. 5470-5725MHz

(2) The U-NII device maximum power is 29.61dBm(E.I.R.P).

Master mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -61 dBm threshold level (-62dBm +1 dB) during calibration of the test setup.

Slave mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -63 dBm threshold level (-64dBm +1 dB) during calibration of the test setup.

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	WIESON	ARY121-0350-005-00	Dipole antenna	4.83dBi for 5250-5350MHz 5.64dBi for 5470-5725MHz
2	WIESON	ARY121-0350-006-00	Dipole antenna	3.67dBi for 5250-5350MHz 4.68dBi for 5470-5725MHz

(3) WLAN traffic is generated by the test software “Iperf.exe” from the Master device to the Slave device in the transfer data rate >17%.

(4) For the 5250-5350MHz and 5470-5725MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

(5) Master mode:

The client device is a Notebook pc contains Intel WLAN radio Module card

(Model: AX200NGW). The Intel WLAN Module card FCC ID: PD9AX200NG.

(6) This device does not support partial RU function.

1.4. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	21.8 °C
	Humidity (%RH)	10~90 %	61.2 %

USA : FCC Registration Number: TW0033

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 5-22, Ruishukeng Linkou District, New Taipei City, 24451, Taiwan
Performed : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan,
Location : R.O.C.
Phone number : +886-3-275-7255
Fax number : +866-3-327-8031
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.5. Test Equipment

Dynamic Frequency Selection (DFS) / HY-SR06

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Spectrum Analyzer	R&S	FSV30	103467	2022.04.26
Vector Signal Generator	R&S	SMBV100	261871	2022.04.22
Horn Antenna	ETS-Lindgren	3117	00201259	2021.11.09
Horn Antenna	ETS-Lindgren	3117	00227709	2021.11.09

Instrument	Manufacturer	Type No.	Serial No
Notebook Pc	Dell	Inspiron 14 5459	1599Q72
RF Cable	WOKEN	L1406-031C	S02-130729-305
RF Cable	SUHNER	SUCOFLEX 106	3474516
Access Point	ASUS	RT-AX88U	JCITHP000040

Software	Manufacturer	Function
R&S Pulse Sequencer DFS V 2.3,7.3.2022 Build: 8101 Rev: 6527	R&S	Radar Signal Generation Software
Iperf v2.0.8	iperf.fr	Streaming data

1.6. Uncertainty


Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
UNII Detection Bandwidth	± 2.31 ms
Initial Channel Availability Check Time	± 2.31 ms
Radar Burst at the Beginning of the Channel Availability Check Time	± 2.31 ms
Radar Burst at the End of the Channel Availability Check Time	± 2.31 ms
In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	± 2.31 ms
Statistical Performance Check	± 2.31 ms

2. Test Setup

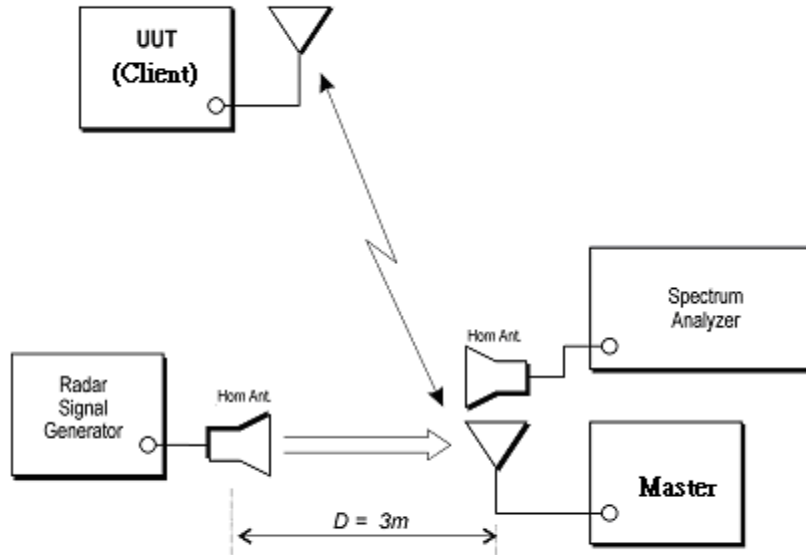

2.1. DFS Detection Thresholds

(1) Interference Threshold value, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64dBm
<p>Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna.</p> <p>Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response.</p> <p>Note 3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.</p>	

(2) DFS Response requirement values

Parameter	Value
Non-Occupancy Period	Minimum 30 Minutes
Channel Availability Check Time	60 Seconds
Channel Move Time	10 Seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period (See Notes 1 and 2)
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

2.2. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

(1) Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right), \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

(2) Long Pulse Radar Test Signal

Radar Waveform	Bursts	Number of Pulses Per Burst	Pulse Width (usec)	Chirp Width (MHz)	PRI (usec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the long pulse radar test signal. If more than 30 waveforms are used for the long pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical Representation of a Long Pulse radar Test Waveform

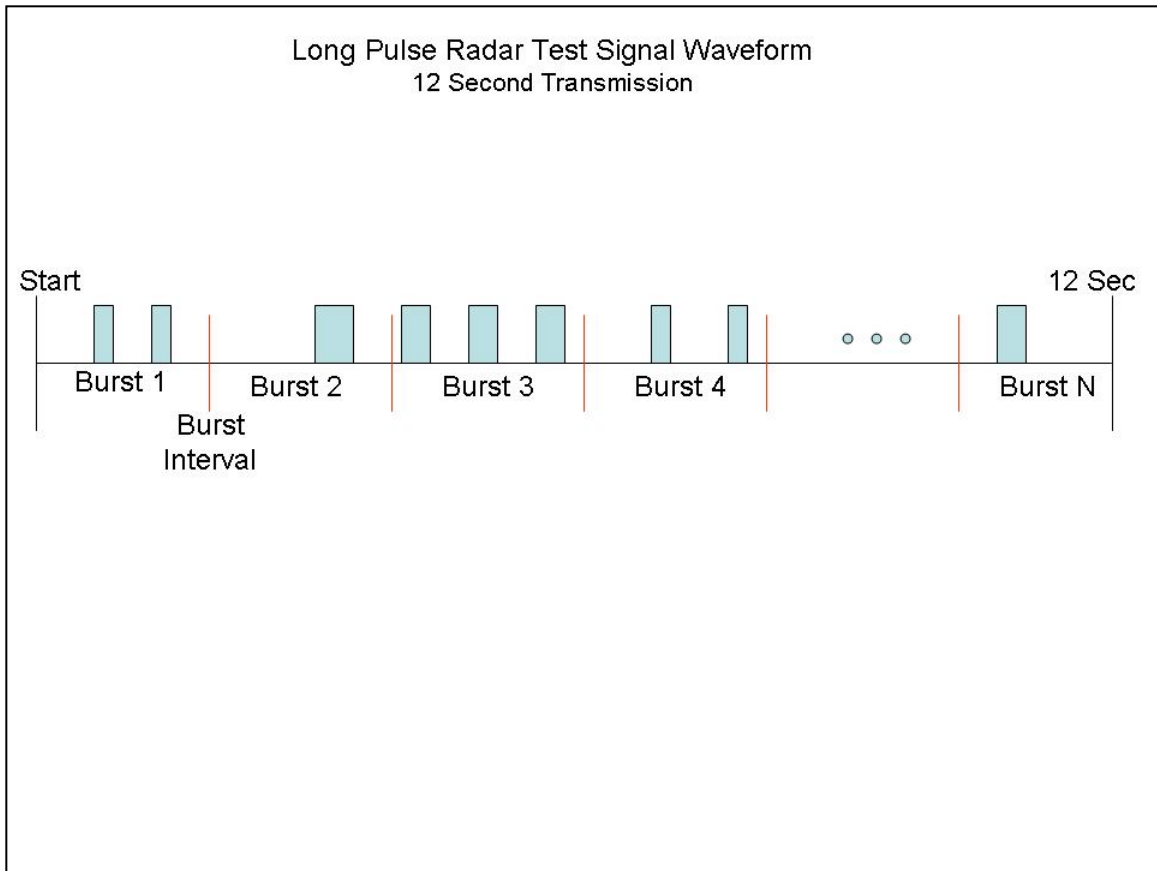

(3) Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μSEC)	PRI (μSEC)	Hopping Sequence Length (msec)	Pulses Per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

2.3. Radar Waveform Calibration

The following equipment setup was used to calibrate the conducted radar waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were replace 50ohm terminal from master and client device and no transmissions by either the master or client device. The spectrum analyzer was switched to the zero span (time domain) at the frequency of the radar waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz and 3 MHz.


The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm due to the interference threshold level is not required.

Radiated Calibration Setup

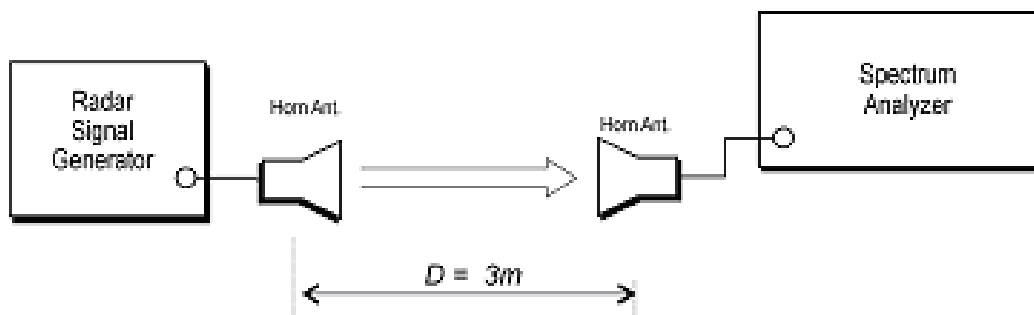


2.4. Radar Waveform Calibration Result

Radar Type 0 Calibration Plot (5500MHz)

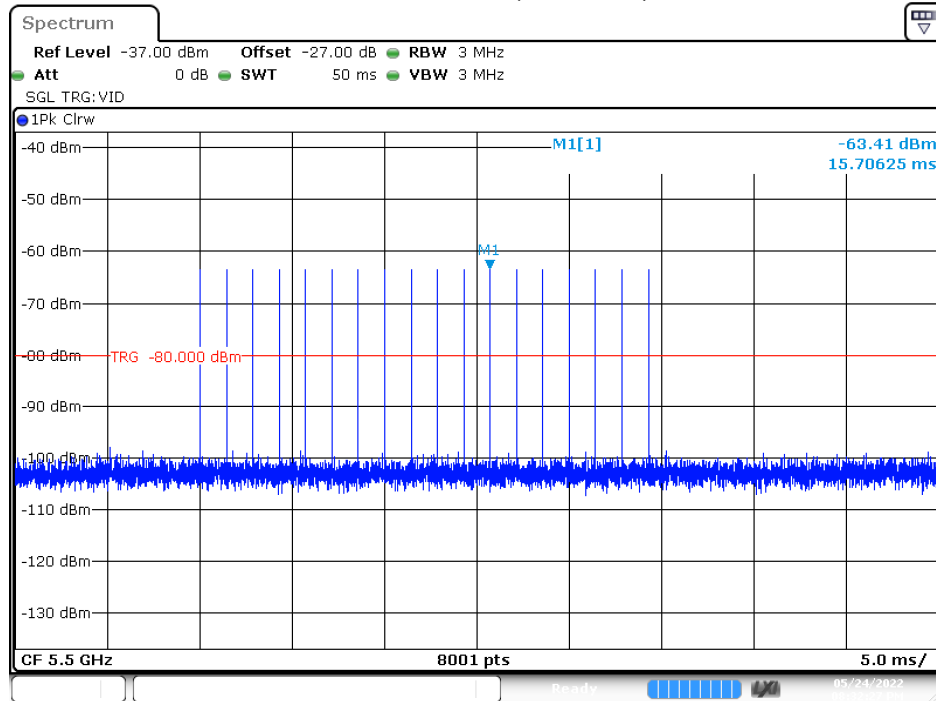


Date: 24.MAY.2022 20:32:27

Calibration Plot (5510MHz)

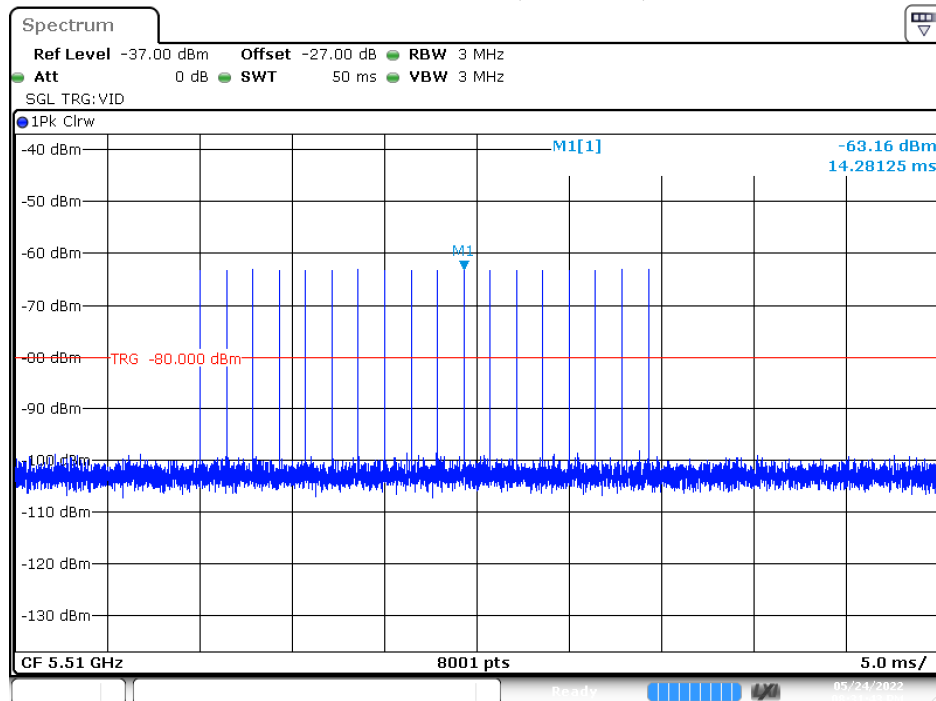

Date: 24.MAY.2022 20:31:44


Calibration Plot (5530MHz)

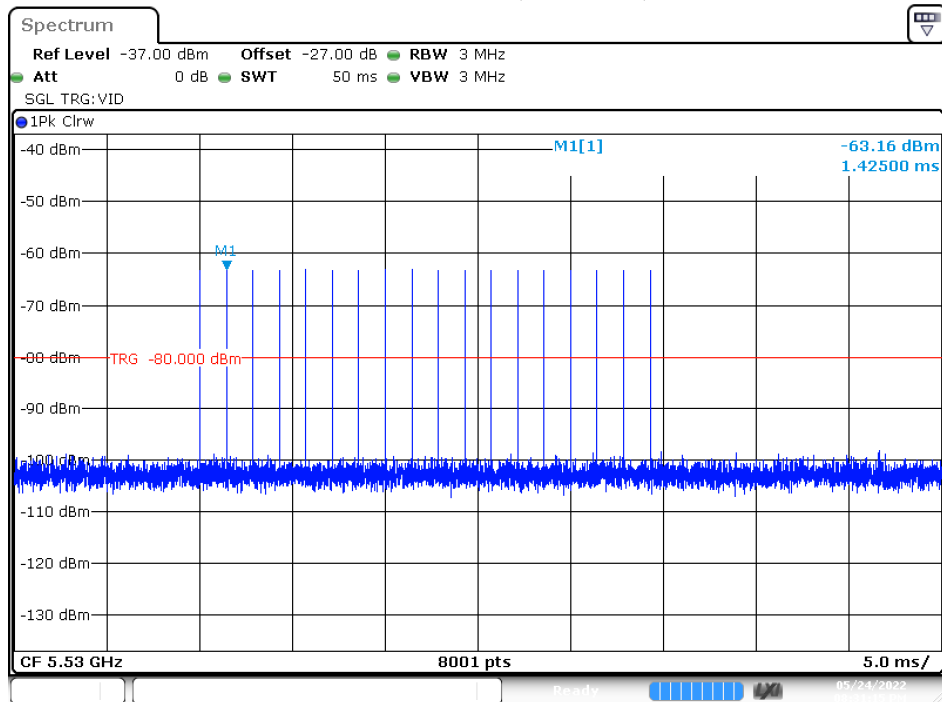

Date: 24.MAY.2022 20:31:15


Radar Type 1-A

Calibration Plot (5500MHz)

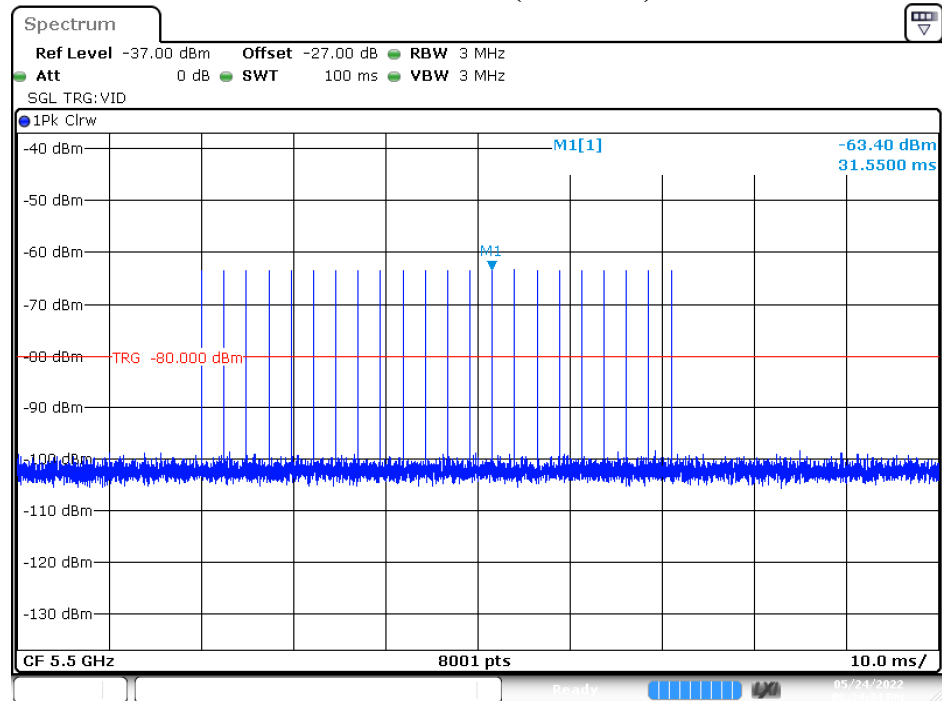


Date: 24.MAY.2022 20:34:34

Calibration Plot (5510MHz)

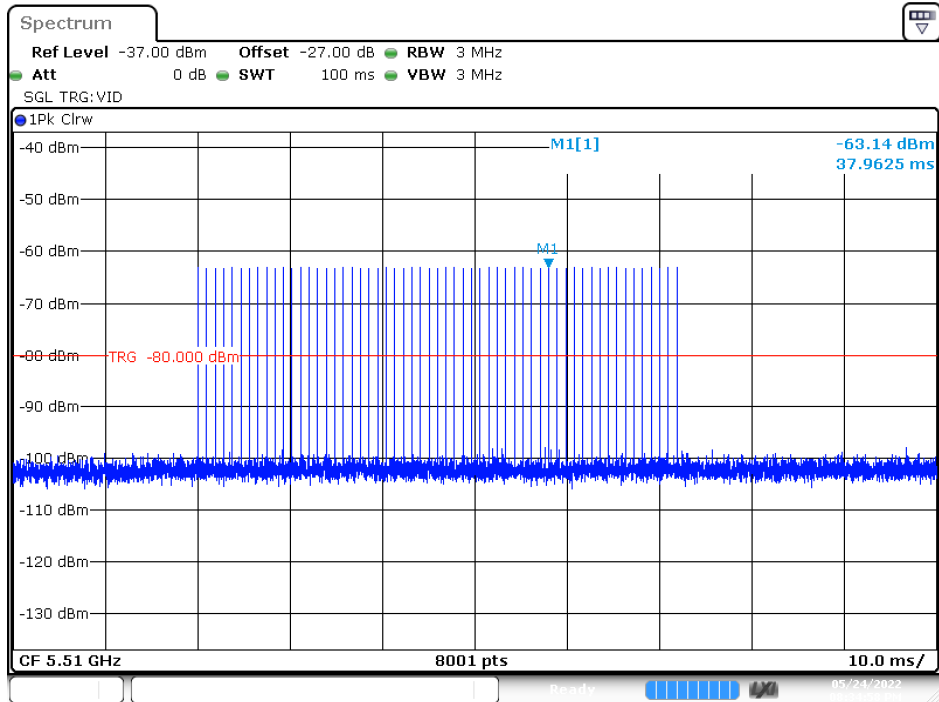

Date: 24.MAY.2022 20:34:59


Calibration Plot (5530MHz)

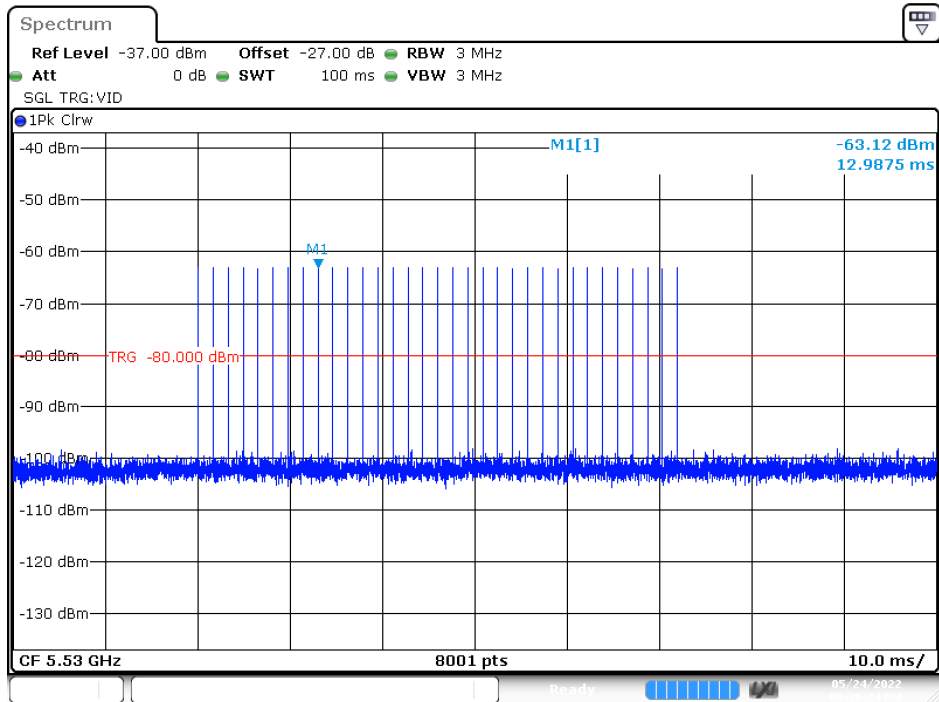

Date: 24.MAY.2022 20:36:24


Radar Type 1-B

Calibration Plot (5500MHz)

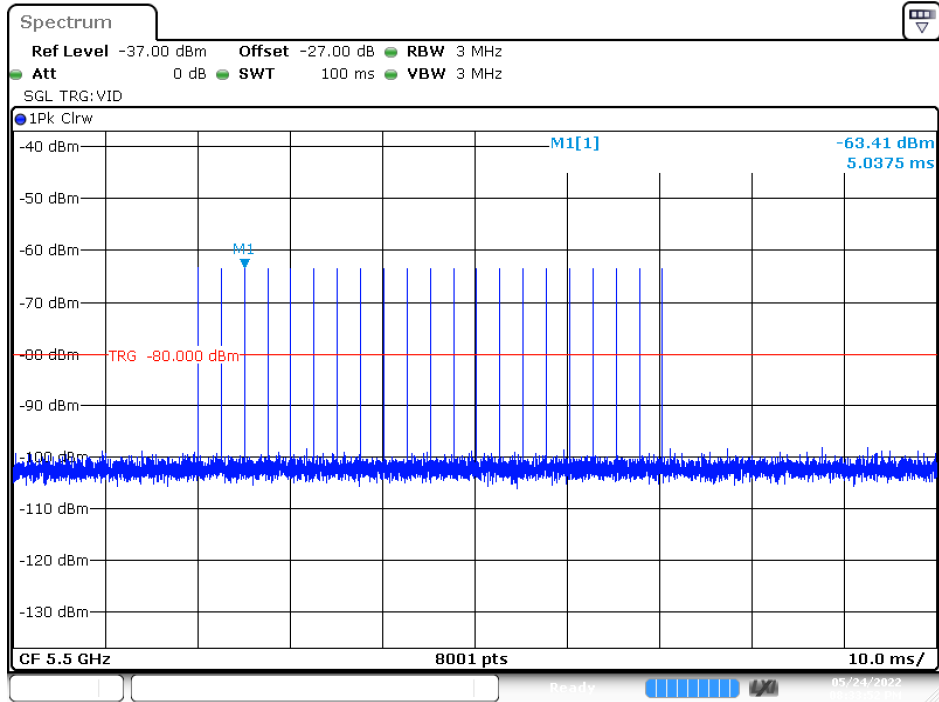


Date: 24.MAY.2022 20:33:52

Calibration Plot (5510MHz)

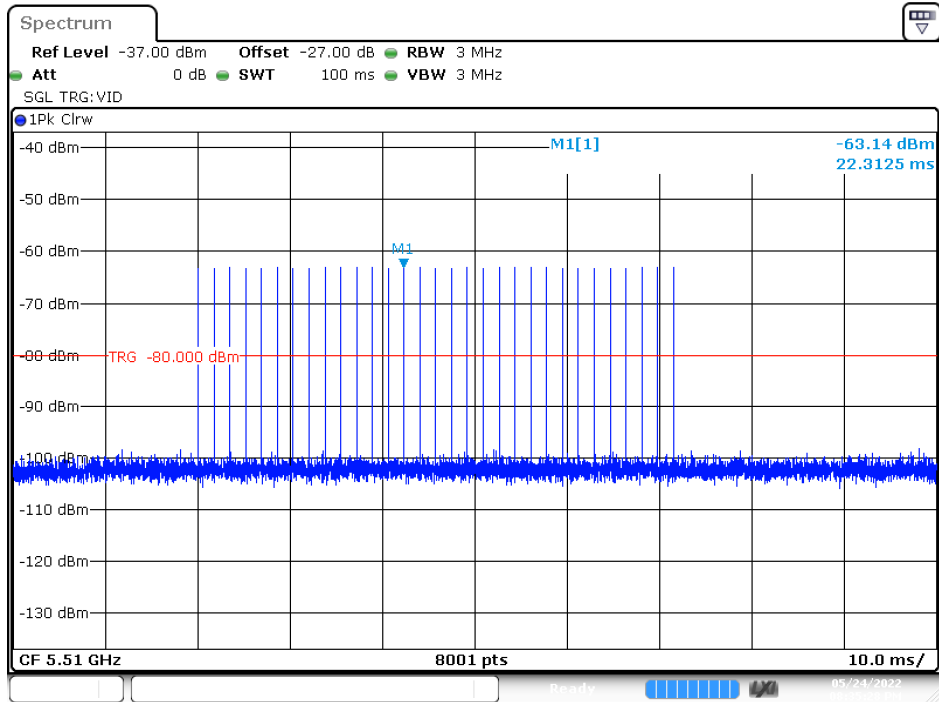

Date: 24.MAY.2022 20:35:29


Calibration Plot (5530MHz)

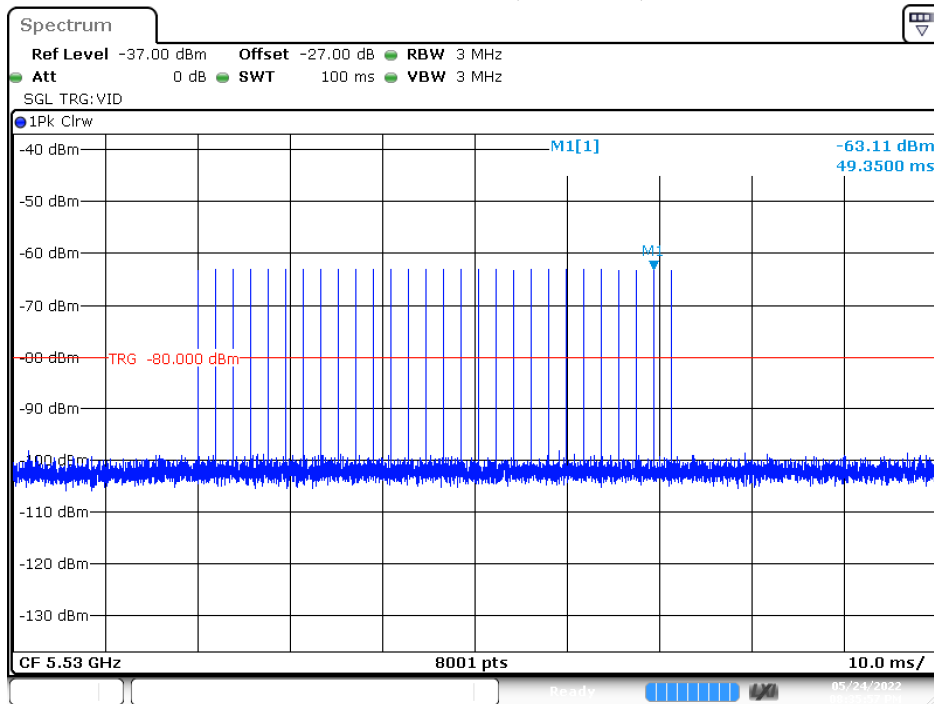

Date: 24.MAY.2022 20:35:57


Radar Type 2

Calibration Plot (5500MHz)

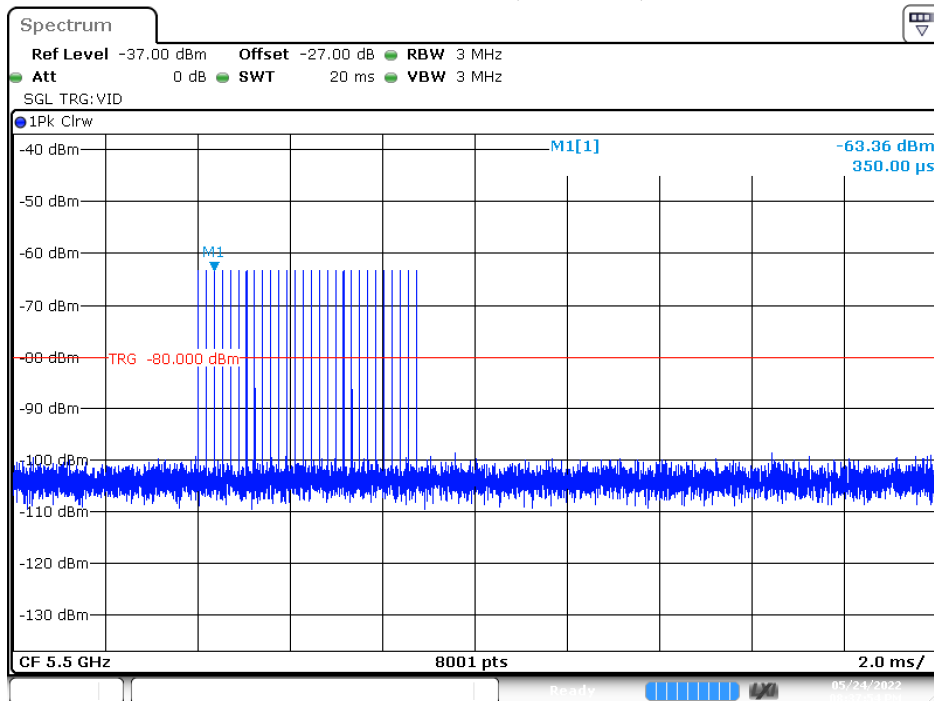


Date: 24.MAY.2022 20:37:55

Calibration Plot (5510MHz)

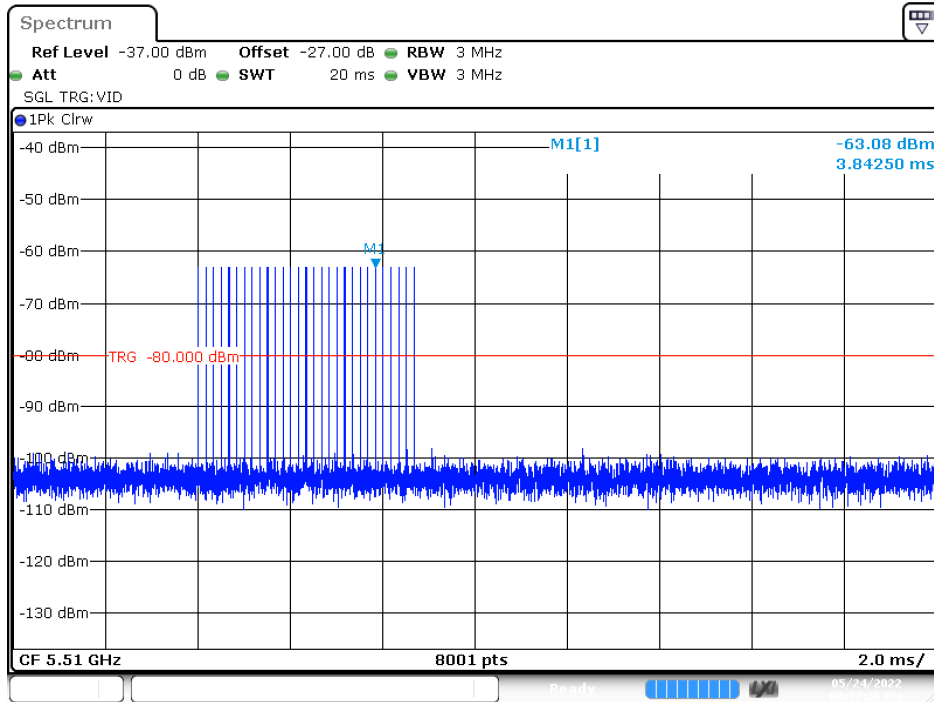


Date: 24.MAY.2022 20:37:27

Calibration Plot (5530MHz)

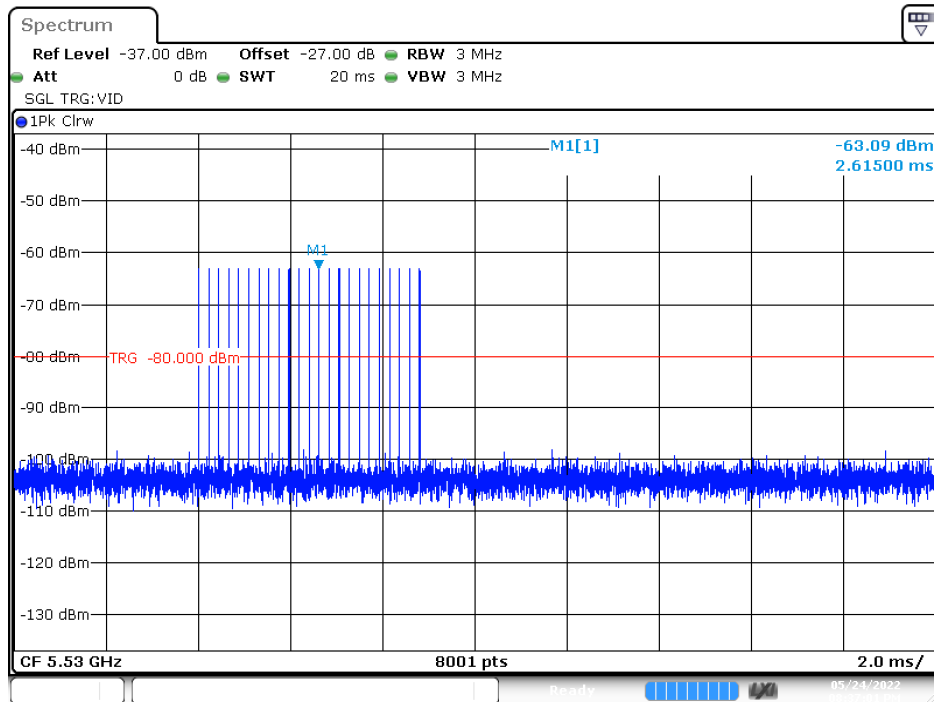


Date: 24.MAY.2022 20:37:01

Radar Type 3 Calibration Plot (5500MHz)

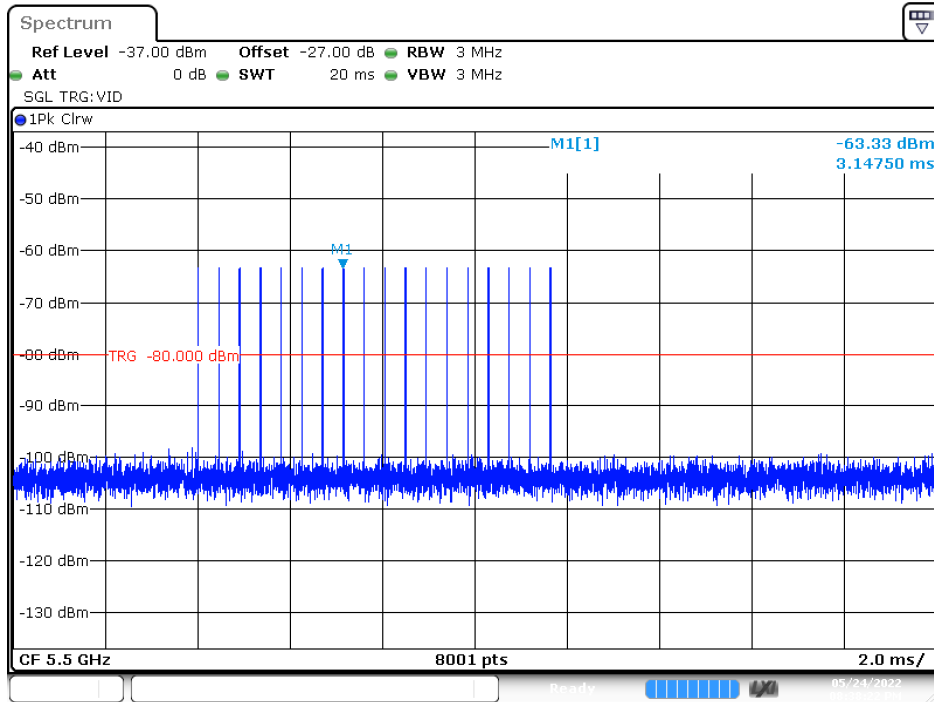


Date: 24.MAY.2022 20:38:22

Calibration Plot (5510MHz)

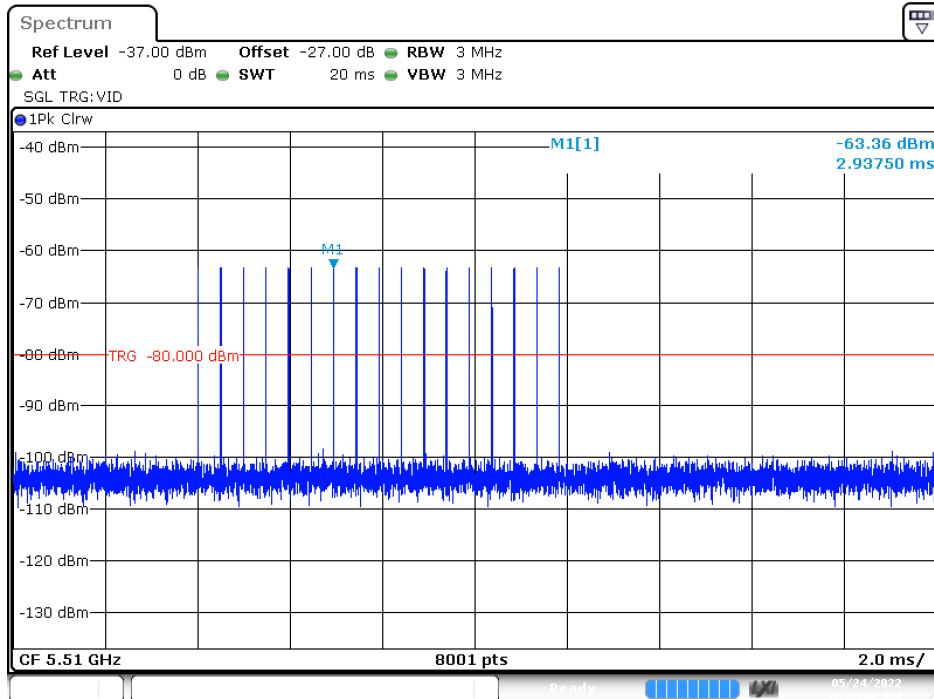


Date: 24.MAY.2022 20:39:03

Calibration Plot (5530MHz)

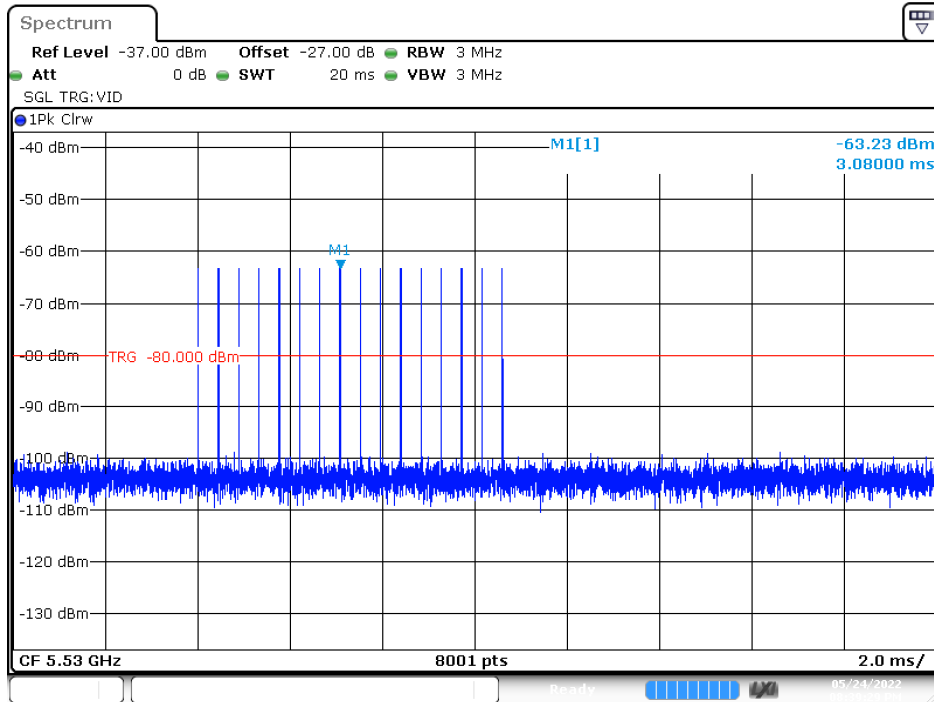


Date: 24.MAY.2022 20:39:29

Radar Type 4 Calibration Plot (5500MHz)

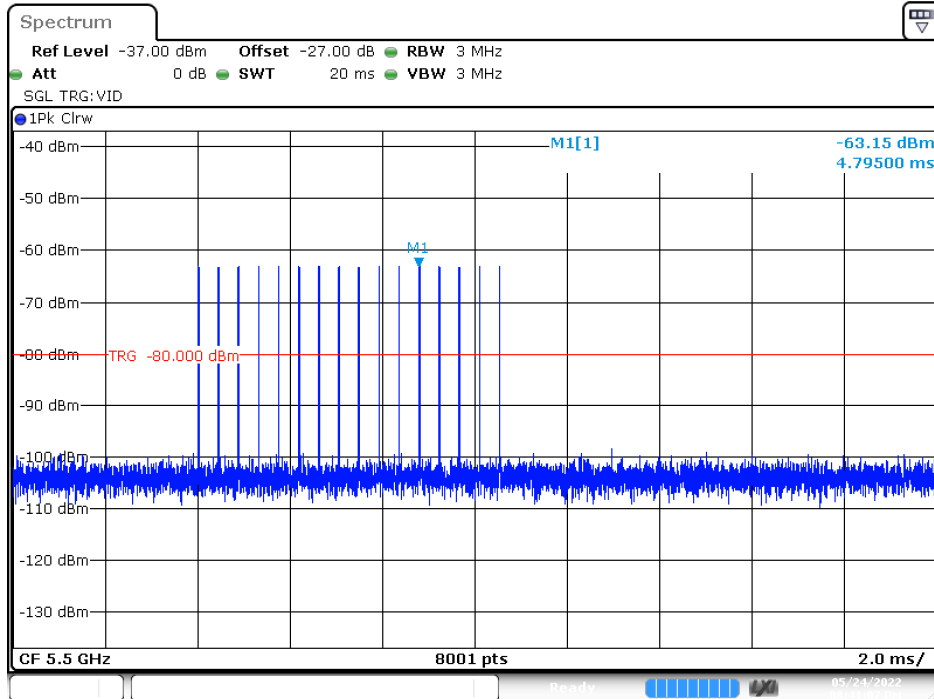


Date: 24.MAY.2022 20:41:07

Calibration Plot (5510MHz)

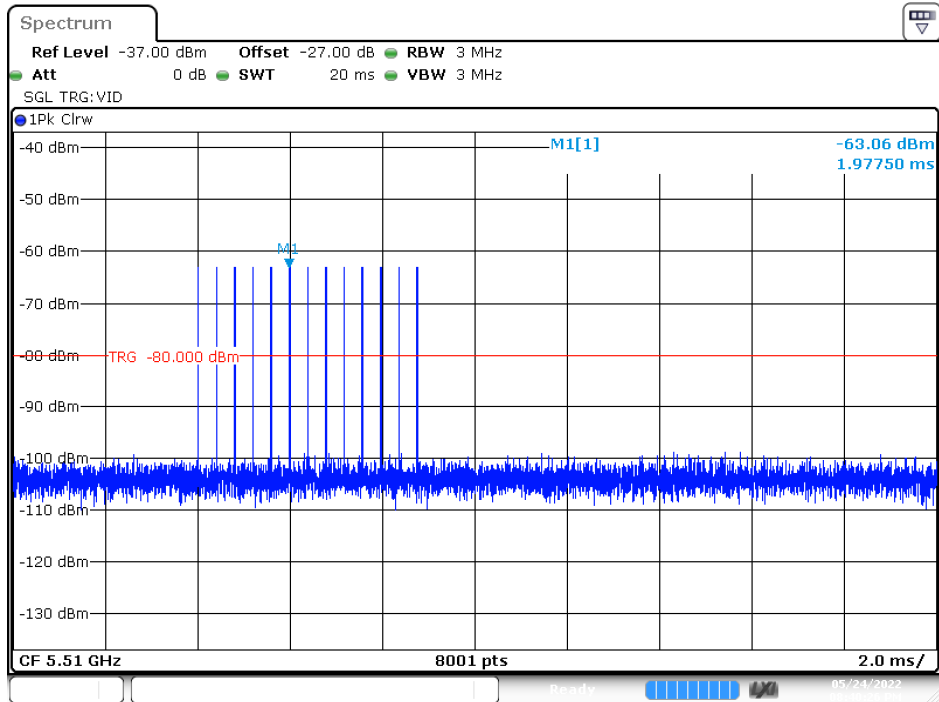


Date: 24.MAY.2022 20:40:26

Calibration Plot (5530MHz)

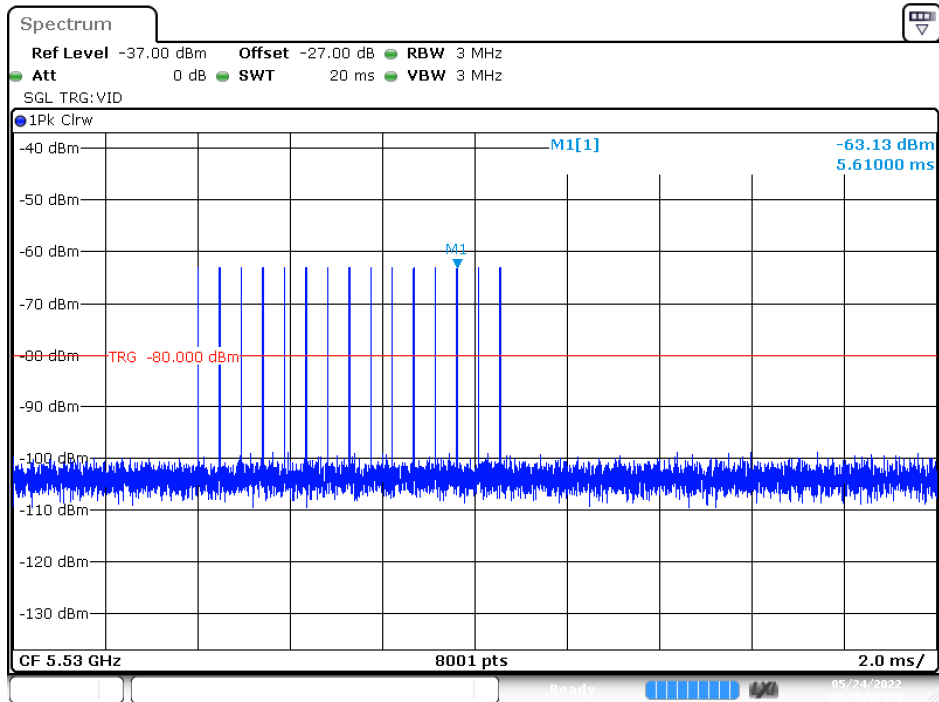


Date: 24.MAY.2022 20:39:57

Radar Type 5 Calibration Plot (5500MHz)

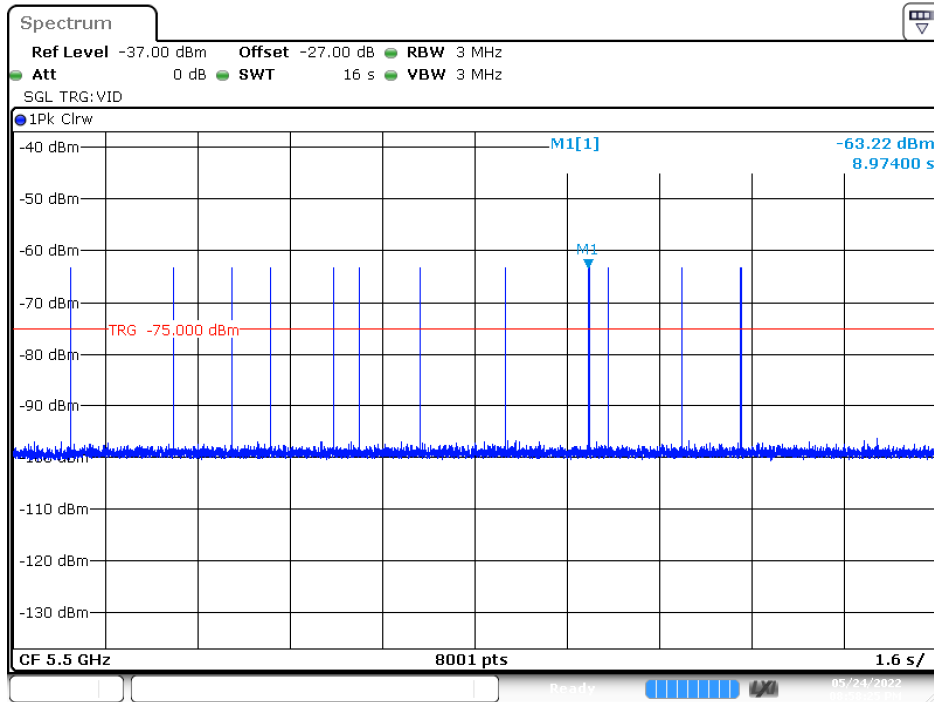


Date: 24.MAY.2022 20:58:26

Calibration Plot (5510MHz)

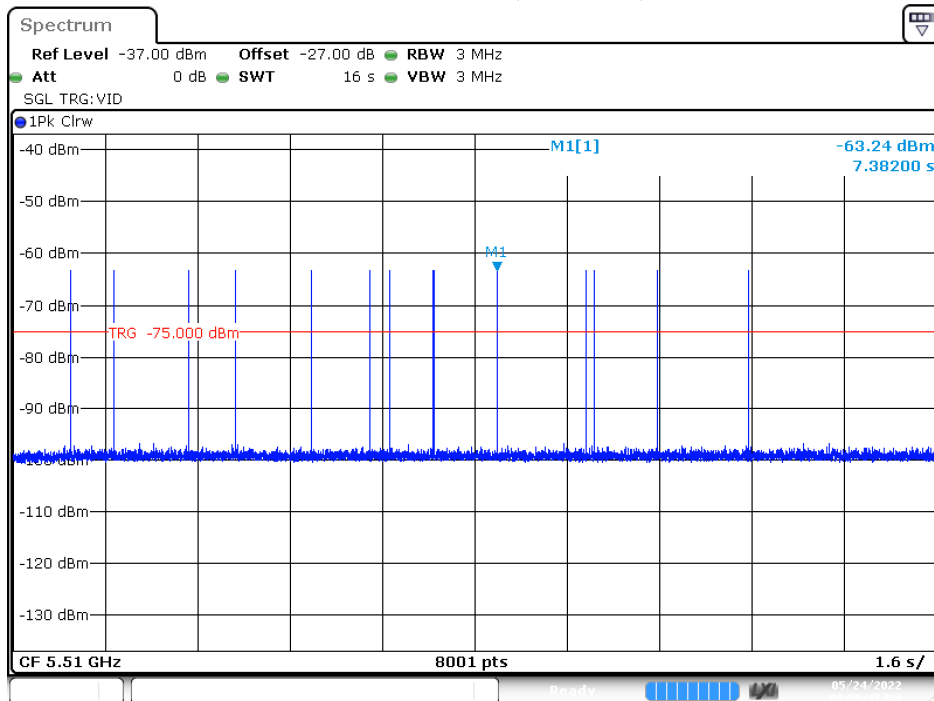

Date: 24.MAY.2022 20:55:48


Calibration Plot (5530MHz)

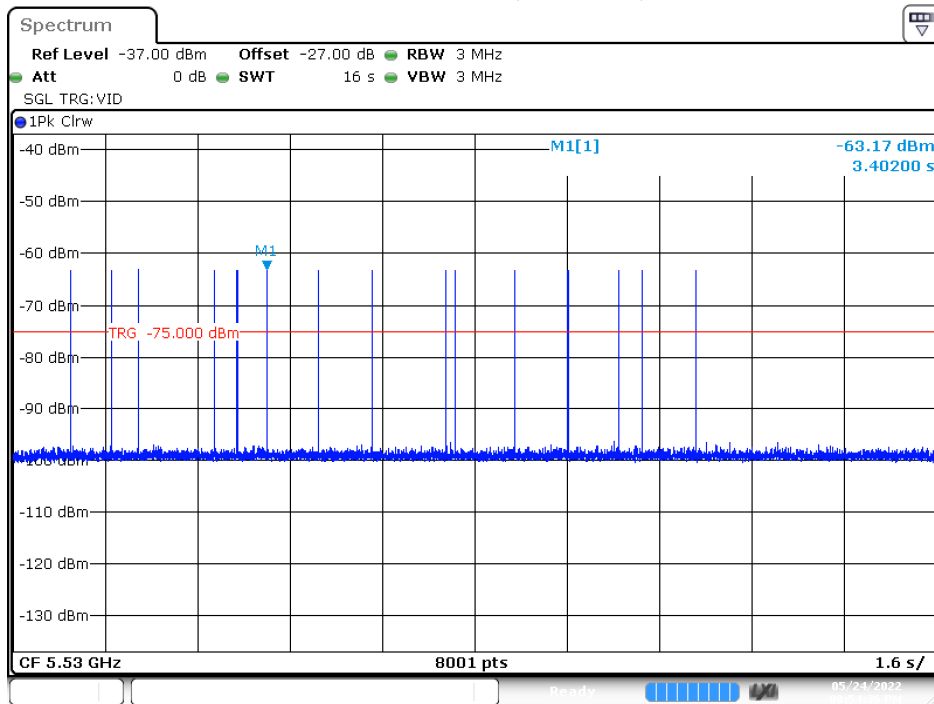

Date: 24.MAY.2022 20:54:37


Radar Type 6

Calibration Plot (5500MHz)

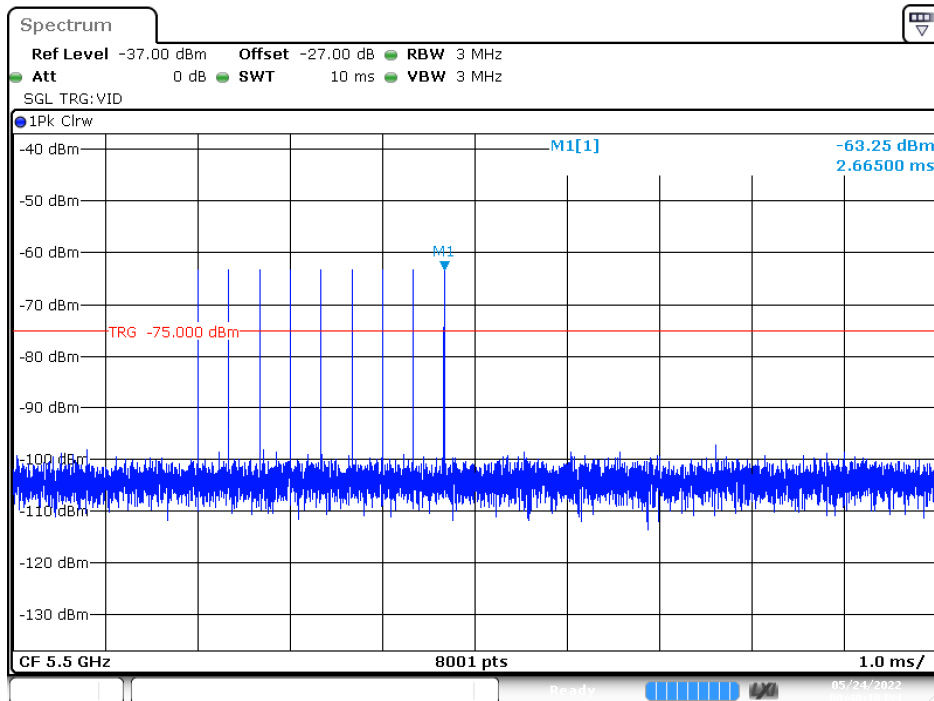


Date: 24.MAY.2022 20:48:19

Calibration Plot (5510MHz)

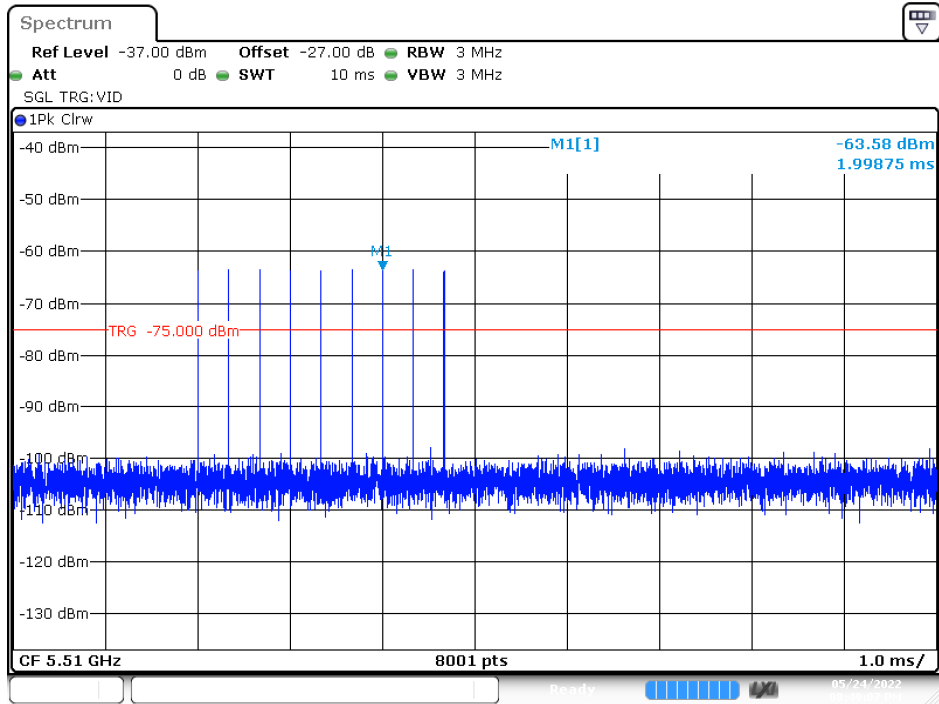


Date: 24.MAY.2022 20:49:08

Calibration Plot (5530MHz)

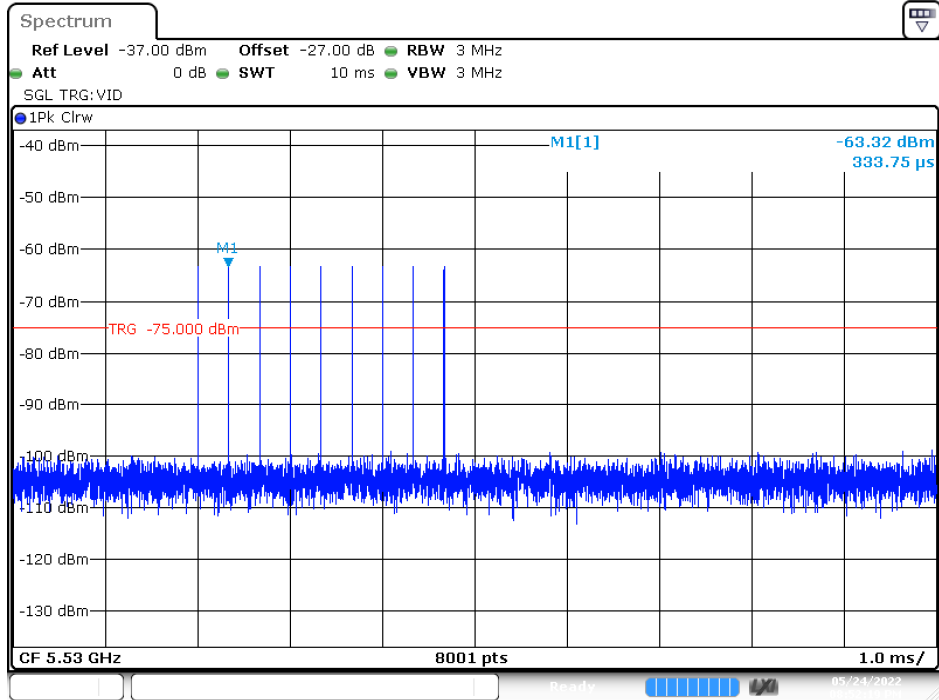


Date: 24.MAY.2022 20:52:20

2.5. Master Data Traffic Plot Result

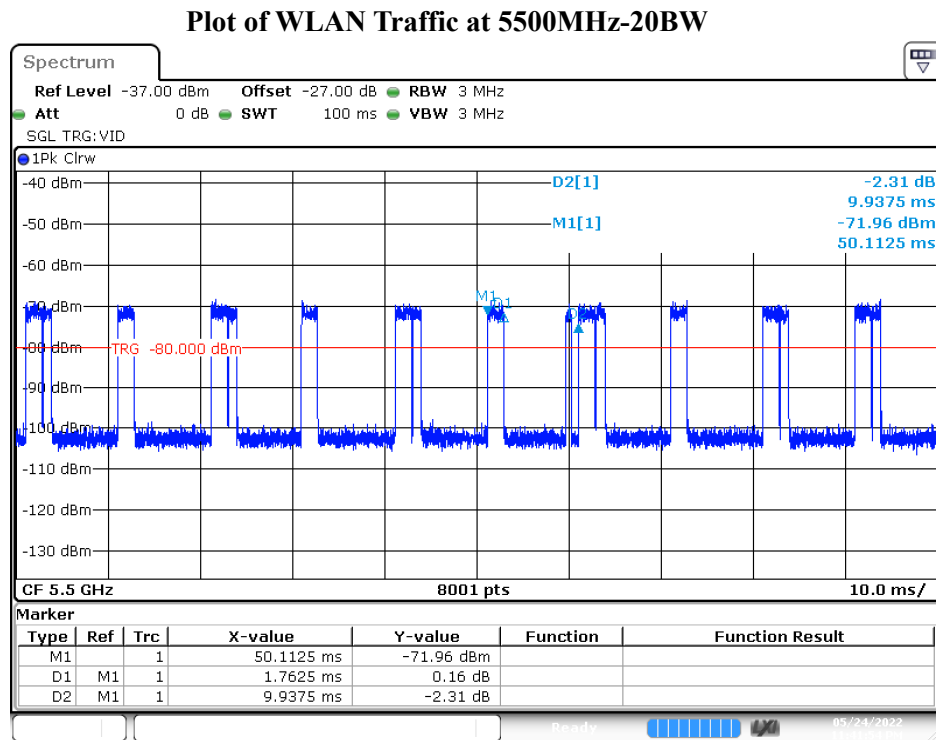


Date: 24.MAY.2022 23:41:55

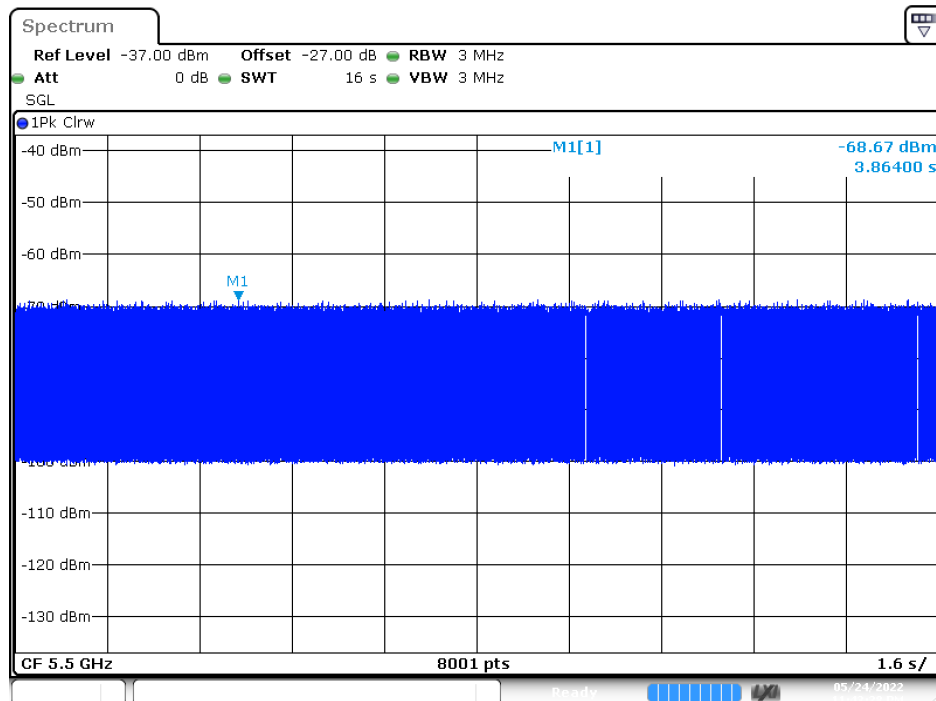


Date: 24.MAY.2022 23:43:29

Channel loading	Requirement loading
17.7358%	>17%

Plot of WLAN Traffic at 5510MHz-40BW

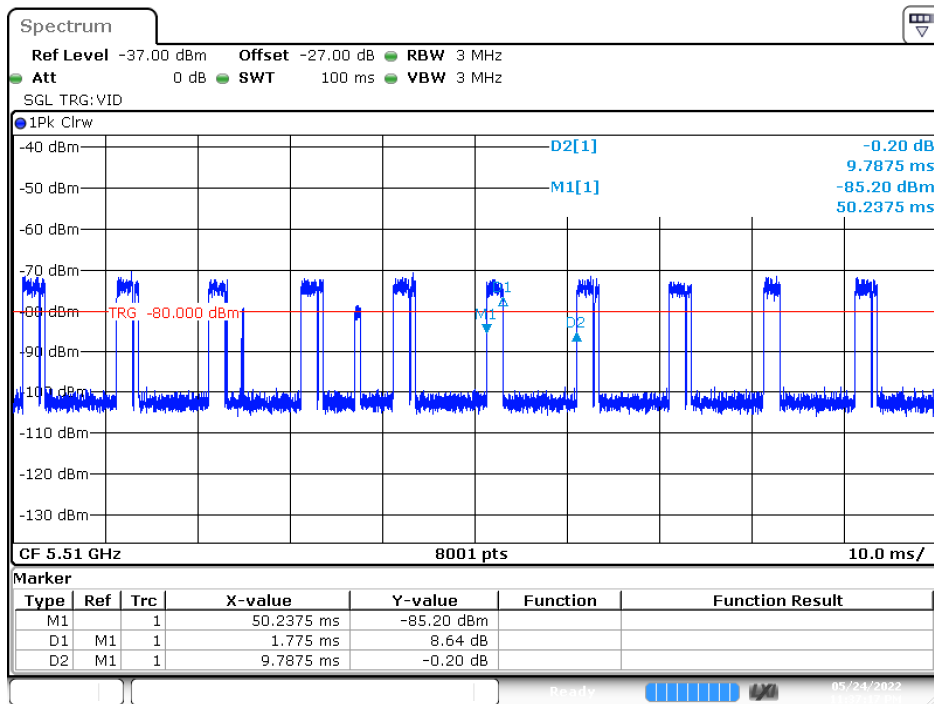


Date: 24.MAY.2022 23:37:18

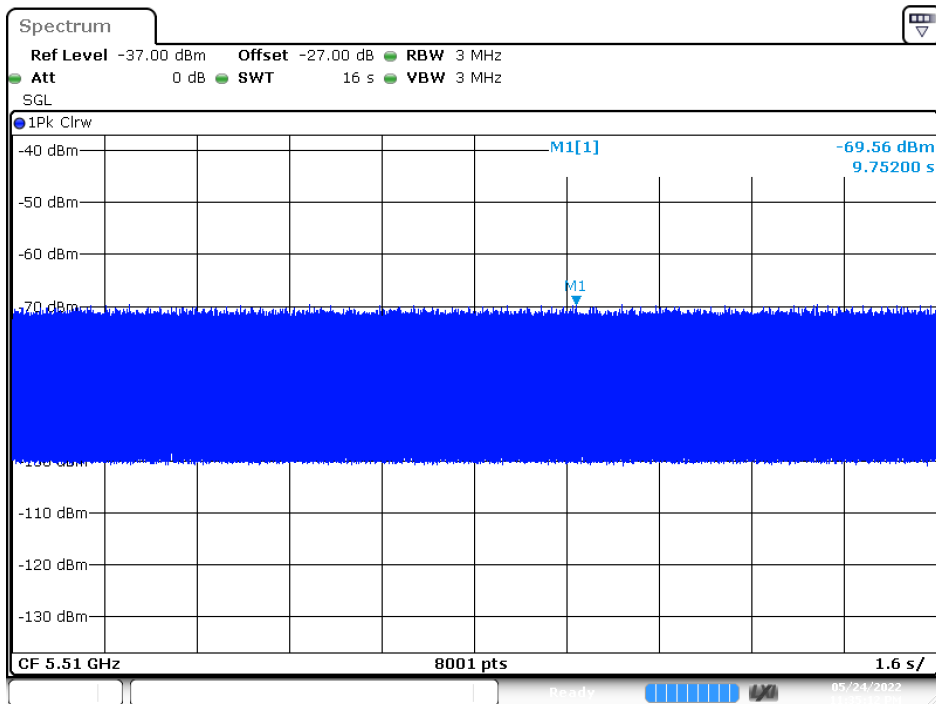


Date: 24.MAY.2022 23:35:13

Channel loading	Requirement loading
18.1354%	>17%

Plot of WLAN Traffic at 5530MHz-80BW

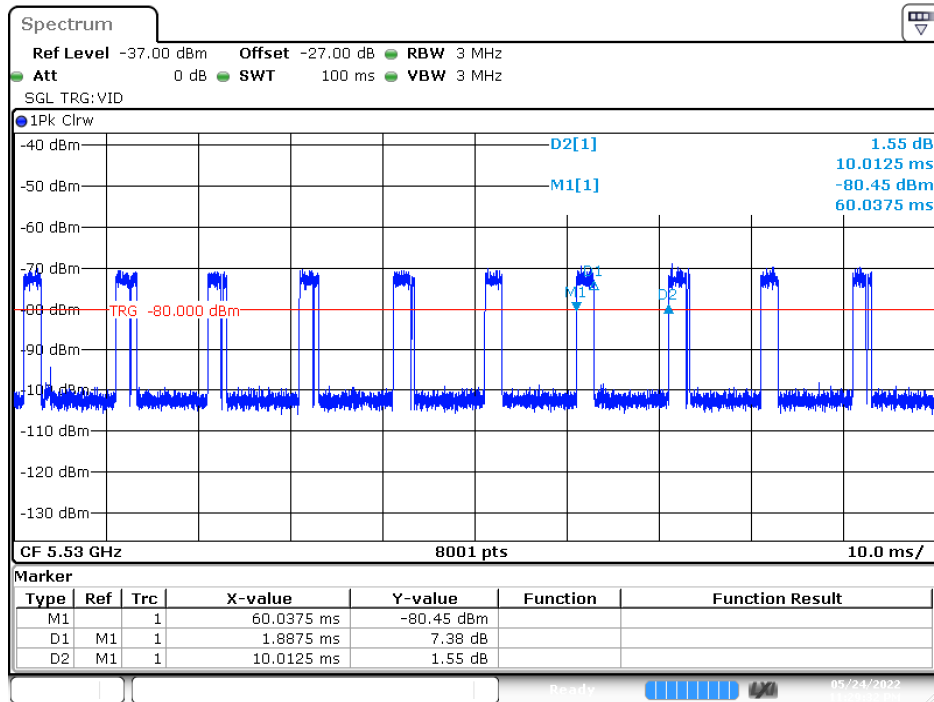

Date: 24.MAY.2022 23:29:32

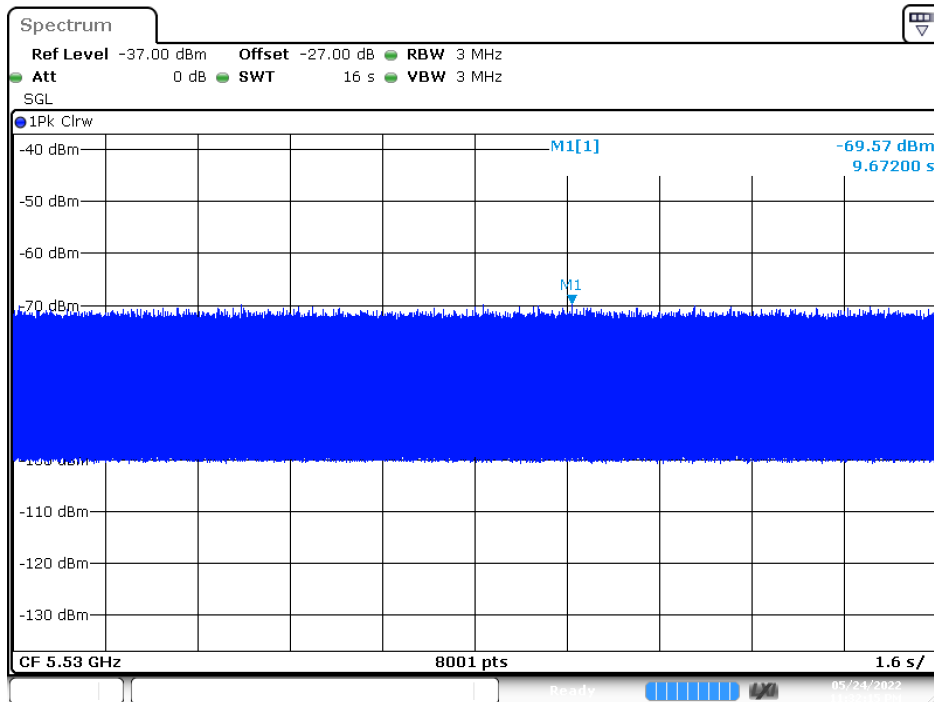

Date: 24.MAY.2022 23:32:16

Channel loading	Requirement loading
18.8514%	>17%

3. UNII Detection Bandwidth

3.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The generating equipment is configured as shown in the radiated Test Setup above. A single *Burst* of the short pulse radar type 0 is produced at 5300MHz and 5510 at a -63dBm level. The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted.

The EUT must detect the Radar Waveform 90% or more of the time. The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L .

The U-NII Detection Bandwidth is calculated as follows:


$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.

3.2. Test Requirement


All UNII 20/40MHz and 80MHz channels for this device have identical Channel bandwidths. All UNII 20/40/80MHz channels for this device also have identical Channel bandwidths. Therefore, all DFS testing was done at 5300MHz, 5500MHz, 5510MHz and 5530MHz. The 99% channel bandwidth for 20MHz signals is 17.43 MHz, and the 99% channel bandwidth for 40MHz signals is 35.96 MHz and 80MHz signals is 75.12MHz. Uncertainty

802.11ax-20 BW

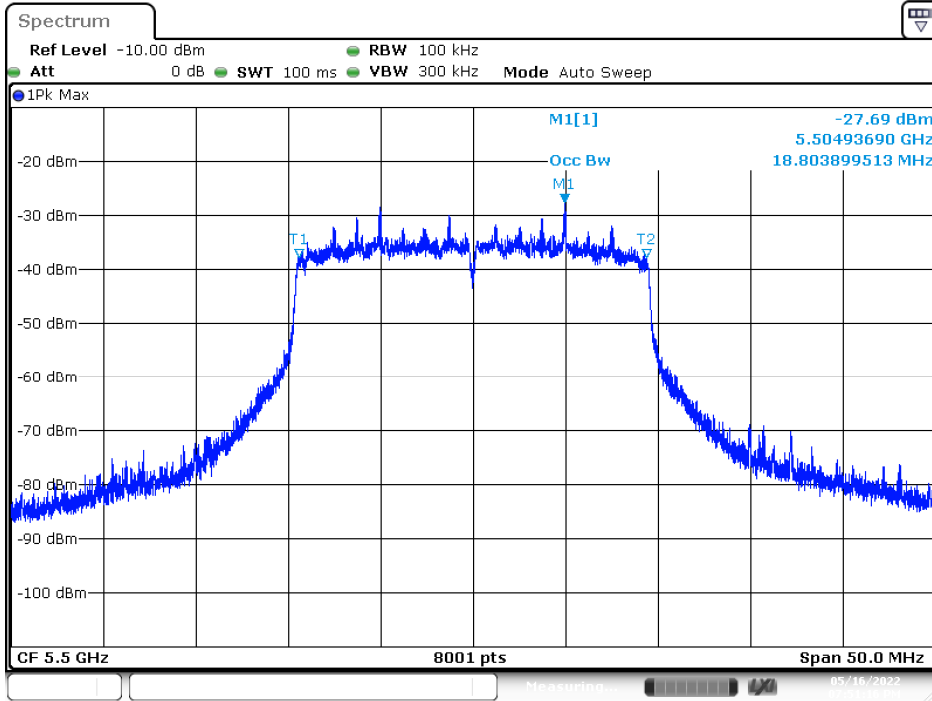


Date: 16.MAY.2022 19:51:16

802.11ax-40 BW

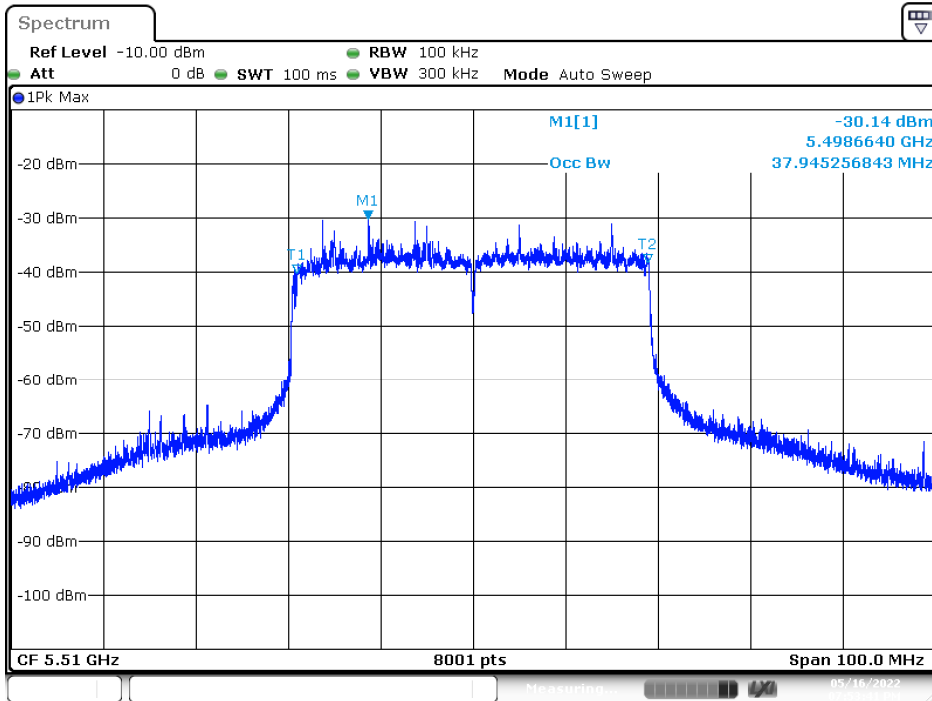

Date: 16.MAY.2022 19:53:41

802.11ax80 BW

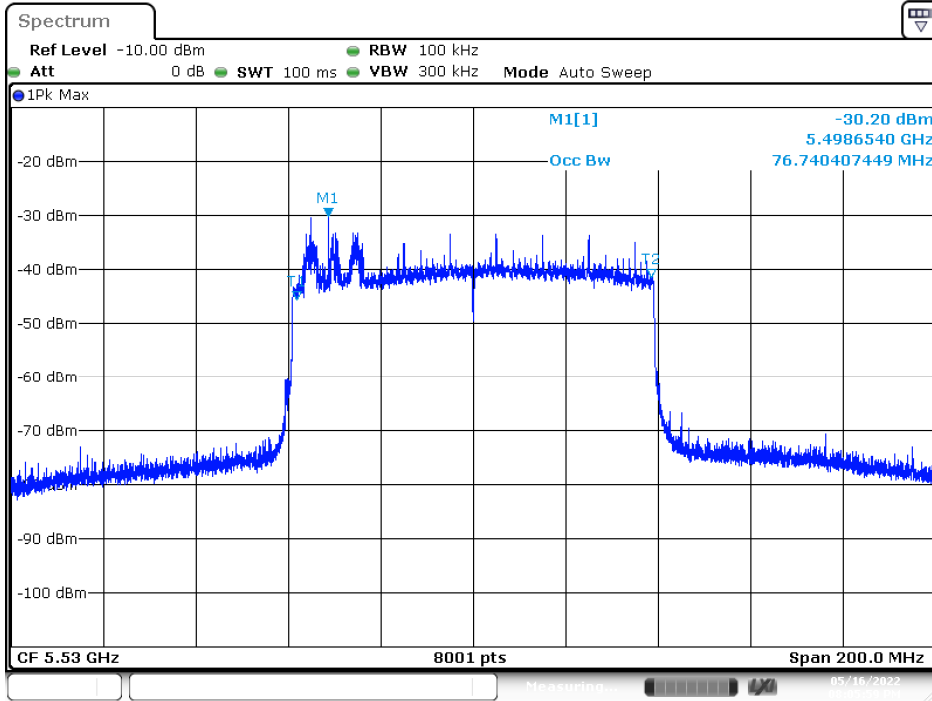

Date: 16.MAY.2022 20:06:00

3.3. Test Result of UNII Detection Bandwidth

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Mode 1: Transmit (802.11ax-20BW)
 Test Date : 2022/05/24

Test Channel: 5500MHz (ax-20BW)											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	0	1	1	1	1	1	1	0	1	1	80.00
5491 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510 (FH)	1	1	1	1	1	1	1	1	1	1	100.00
Detection Bandwidth = FH - FL = 5510MHz - 5491MHz = 19MHz											
EUT 99% Bandwidth = 18.8039MHz											
UNII Detection Bandwidth Min. Limit = 18.8039MHz X 100% = 18.8039MHz											

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Mode 2: Transmit (802.11ax-40BW)
 Test Date : 2022/05/24

Test Channel: 5510MHz (ax-40BW)											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	1	1	0	0	1	1	1	1	0	1	70.00
5491 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529	1	1	1	1	1	1	1	1	1	1	100.00
5530 (FH)	1	1	0	1	1	0	1	1	1	1	80.00
Detection Bandwidth = FH - FL = 5529MHZ - 5491MHZ = 38MHZ											
EUT 99% Bandwidth = 37.9453MHZ											
UNII Detection Bandwidth Min. Limit = 37.9453MHZ X 100% = 37.9453MHZ											

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ax-80BW)
 Test Date : 2022/05/24

Test Channel: 5530MHz (ax-80BW)											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	1	0	0	1	1	1	0	1	0	1	60.00
5491	1	1	1	1	1	1	1	1	1	1	100.00
5492 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529	1	1	1	1	1	1	1	1	1	1	100.00
5530	1	1	1	1	1	1	1	1	1	1	100.00
5531	1	1	1	1	1	1	1	1	1	1	100.00
5532	1	1	1	1	1	1	1	1	1	1	100.00
5533	1	1	1	1	1	1	1	1	1	1	100.00
5534	1	1	1	1	1	1	1	1	1	1	100.00
5535	1	1	1	1	1	1	1	1	1	1	100.00
5536	1	1	1	1	1	1	1	1	1	1	100.00
5537	1	1	1	1	1	1	1	1	1	1	100.00
5538	1	1	1	1	1	1	1	1	1	1	100.00
5539	1	1	1	1	1	1	1	1	1	1	100.00
5540	1	1	1	1	1	1	1	1	1	1	100.00
5541	1	1	1	1	1	1	1	1	1	1	100.00
5542	1	1	1	1	1	1	1	1	1	1	100.00
5543	1	1	1	1	1	1	1	1	1	1	100.00
5544	1	1	1	1	1	1	1	1	1	1	100.00
5545	1	1	1	1	1	1	1	1	1	1	100.00
5546	1	1	1	1	1	1	1	1	1	1	100.00
5547	1	1	1	1	1	1	1	1	1	1	100.00
5548	1	1	1	1	1	1	1	1	1	1	100.00
5549	1	1	1	1	1	1	1	1	1	1	100.00
5550	1	1	1	1	1	1	1	1	1	1	100.00
5551	1	1	1	1	1	1	1	1	1	1	100.00
5552	1	1	1	1	1	1	1	1	1	1	100.00
5553	1	1	1	1	1	1	1	1	1	1	100.00

5554	1	1	1	1	1	1	1	1	1	1	100.00
5555	1	1	1	1	1	1	1	1	1	1	100.00
5556	1	1	1	1	1	1	1	1	1	1	100.00
5557	1	1	1	1	1	1	1	1	1	1	100.00
5558	1	1	1	1	1	1	1	1	1	1	100.00
5559	1	1	1	1	1	1	1	1	1	1	100.00
5560	1	1	1	1	1	1	1	1	1	1	100.00
5561	1	1	1	1	1	1	1	1	1	1	100.00
5562	1	1	1	1	1	1	1	1	1	1	100.00
5563	1	1	1	1	1	1	1	1	1	1	100.00
5564	1	1	1	1	1	1	1	1	1	1	100.00
5565	1	1	1	1	1	1	1	1	1	1	100.00
5566	1	1	1	1	1	1	1	1	1	1	100.00
5567	1	1	1	1	1	1	1	1	1	1	100.00
5568	1	1	1	1	1	1	1	1	1	1	100.00
5569	1	1	1	1	1	1	1	1	1	1	100.00
5570 (FH)	1	1	0	1	1	1	1	0	1	1	80.00
Detection Bandwidth = FH - FL = 5569MHZ - 5491MHZ = 78MHZ											
EUT 99% Bandwidth = 76.7404MHZ											
UNII Detection Bandwidth Min. Limit = 76.7404MHZ X 100% = 76.7404MHZ											

4. Initial Channel Availability Check Time

4.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The U-NII device is powered on and instructed to operate at 5530MHz. At the same time the UUT is powered on, the spectrum analyzer is set to zero span mode with a 3 MHz resolution bandwidth at 5530MHz with a 2.5minute sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

The initial power up time of the EUT is indicated by marker1 in the plot, Initial beacons/data transmissions are indicated by marker 1R.


4.2. Test Requirement

The EUT shall perform a channel availability check to ensure that there is no radar operation on the channel, after power-up sequence, receiver at least 1 minute on the intended operation frequency.

4.3. Test Result of Initial Channel Availability Check Time

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Initial Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

The EUT does not transmit any beacon or data transmission until at least 1 minute after the completion of the power-on cycle (129.27sec). The initial power up time of the EUT is indicated by Marker 1 (189.27 sec) – CAC (60 sec). Initial beacons/data transmission is indicated by Marker 1 (189.27 sec)

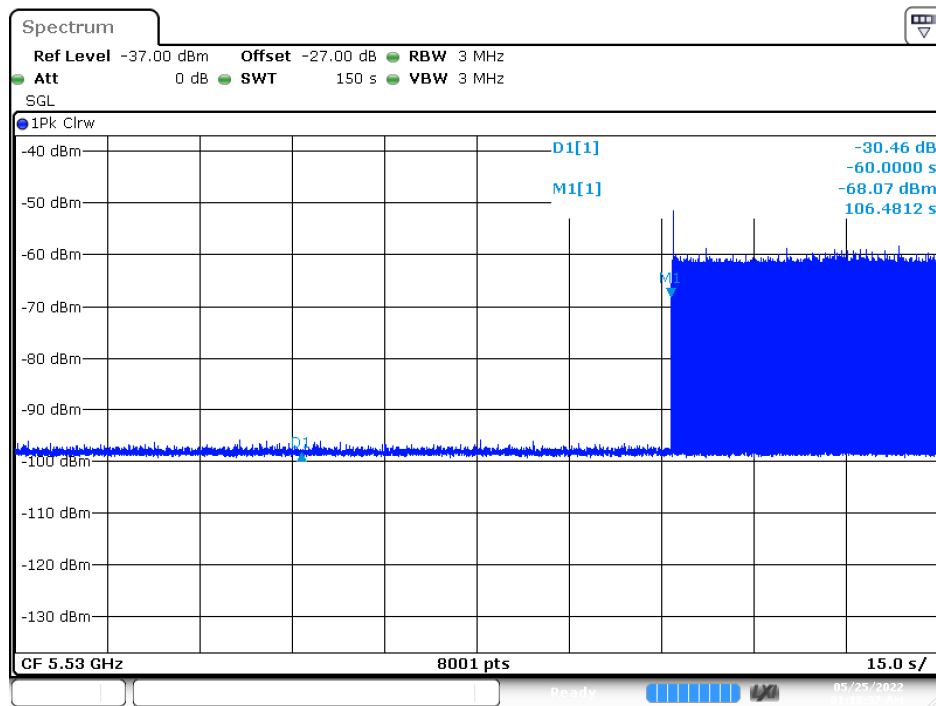

Date: 25.MAY.2022 01:18:38

5. Radar Burst at the Beginning of the Channel Availability Check Time

5.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the beginning of the Channel Availability Check Time.

The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds.

A single Burst of short pulse of radar type 1 at -63dBm will commence within a 6 second window starting at T1.


Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst, Verify that during the 2.5 minute measurement window no EUT transmissions occurred at 5530MHz.

5.2. Test Requirement

In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

5.3. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Radar Burst at the Beginning of the Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

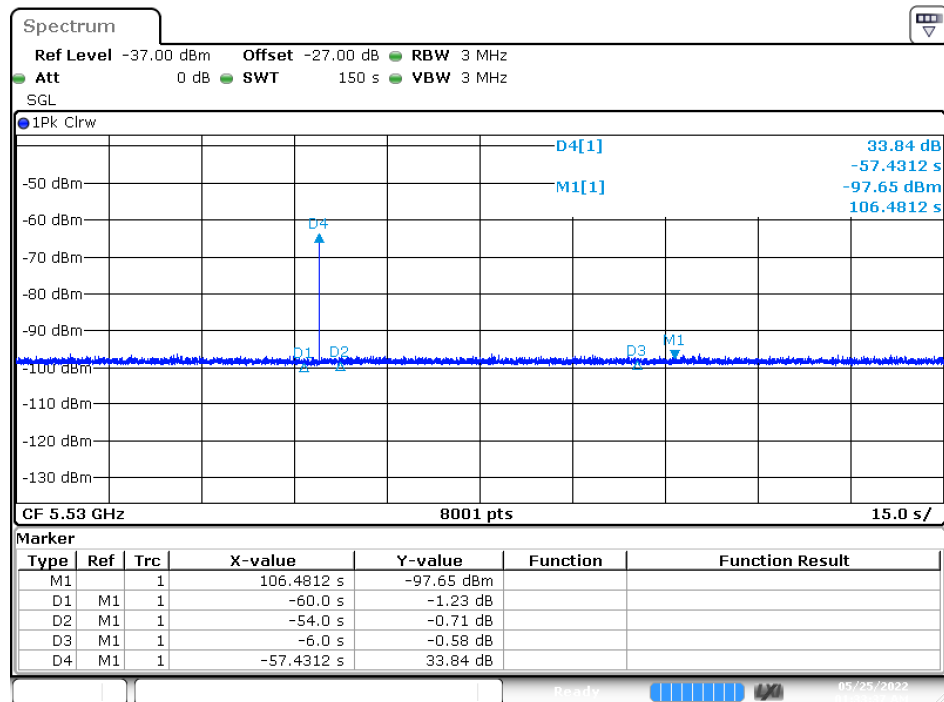

Date: 25.MAY.2022 01:33:37

6. Radar Burst at the End of the Channel Availability Check Time

6.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the end of the Channel Availability Check Time.

The UUT is powered on at T0. T1 denotes the instant when the UUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds. A single Burst of short pulse of radar type 1 at -61 dBm will commence within a 6 second window starting at T1+ 54 seconds.

Visual indication on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst has been generated.


Verify that during the 2.5 minute measurement window no UUT transmissions occurred at 5530Hz.

6.2. Test Requirement

In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

6.3. Test Result of Radar Burst at the End of the Channel Availability Check Time

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Radar Burst at the End of the Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

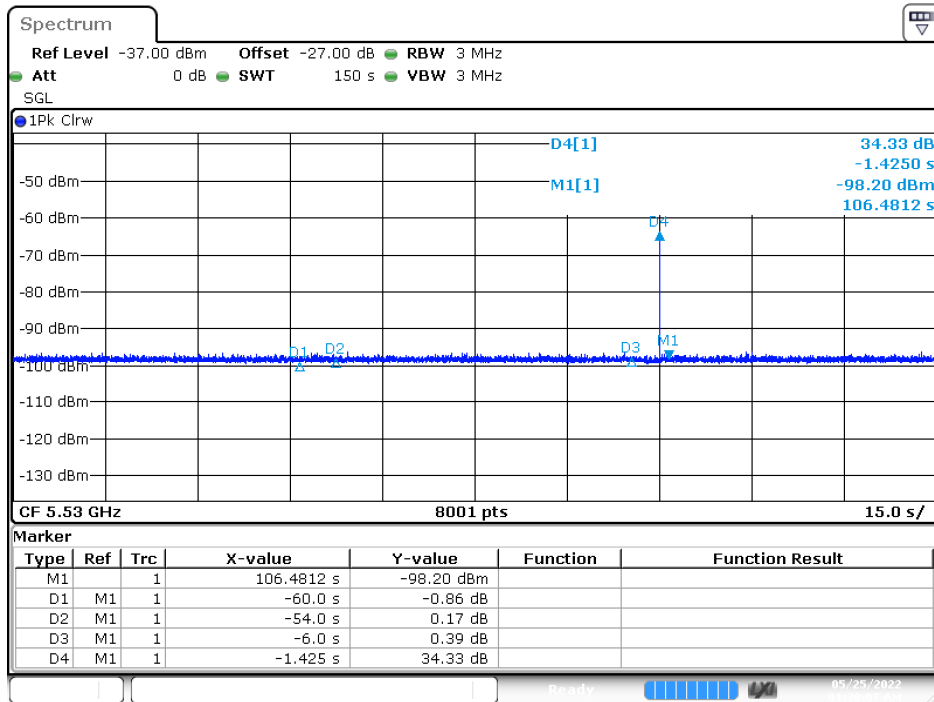

Date: 25.MAY.2022 01:30:07

7. In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

7.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

These tests define how the following DFS parameters are verified during In-Service Monitoring;

Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.. The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5530MHz..

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at -61dBm.

Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing

Transmission Time results to the limits defined in the DFS Response requirement values table.

Measure the UUT for more than 30 minutes following the channel close/move time to verify that the UUT does not resume any transmissions on this Channel.


7.2. Test Requirement

Parameter	Value
Channel Move Time	10 Seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period
Non-Occupancy Period	Minimum 30 minutes

7.3. Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Channel Move Time and Channel Closing Transmission Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Channel Closing Transmission Time and Channel Move Time for Radar Test Type 0 at 5530 MHz

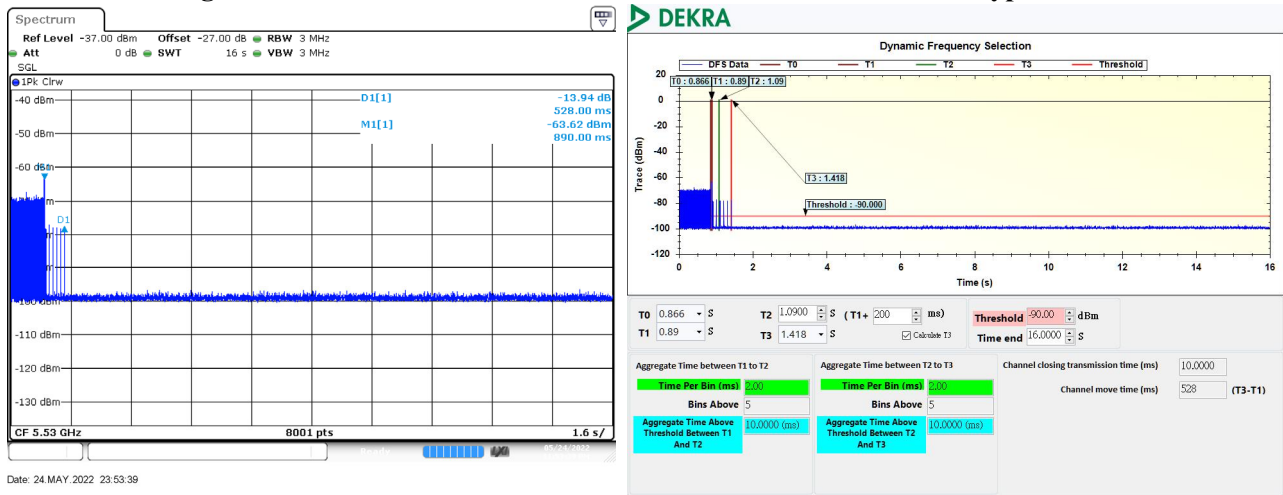


Test Item	Test Result (ms)	Limit
Channel Closing Transmission Time	10	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period
Channel Move Time	528	10 seconds

Note:

- 1.The results showed that after radar signal injected the channel transmission closing time less than 200 milliseconds and an aggregate of no more than 60 milliseconds.
- 2.The results showed that after radar signal injected the channel move time was less than 10 seconds.

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Non-Occupancy Period
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Non-Occupancy Period at 5530 MHz

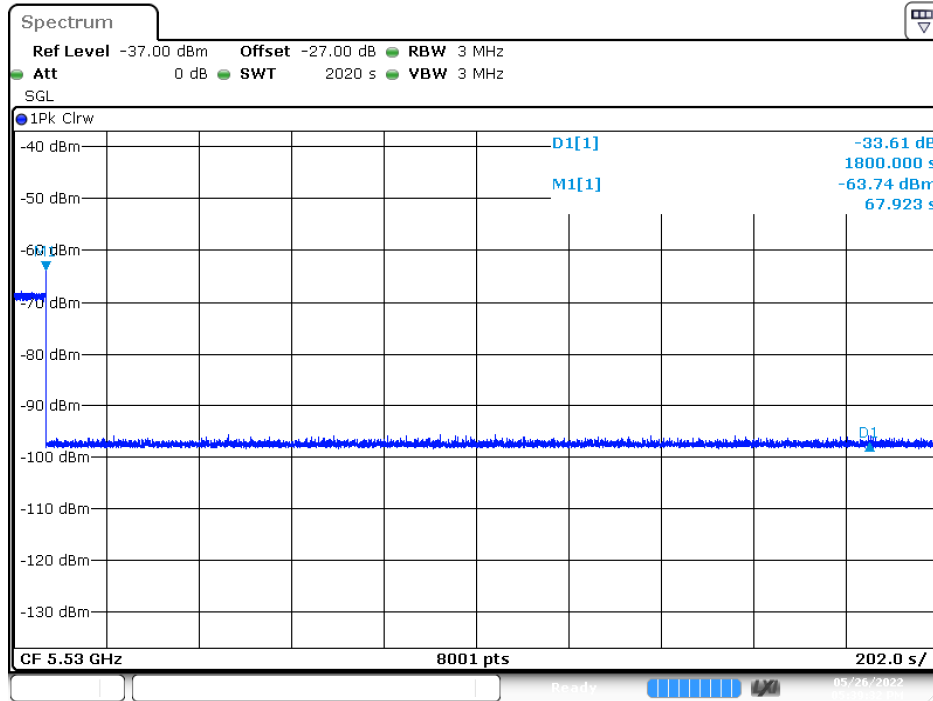

Date: 26.MAY.2022 17:39:32

Test Item	Test Result (Minutes)	Limit (Minutes)
Non-Occupancy Period	>30	>30

*No EUT transmissions were observed on the test channel during 30 minutes observation time.

8. Statistical Performance Check

8.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5500MHz, 5510MHz and 5530MHz.

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6 at -62dbm. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.

8.2. Test Requirement

The minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Minimum percentage of successful detections

Radar Type	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	60%	30
2	60%	30
3	60%	30
4	60%	30
Aggregate (Radar Types 1-4)	80%	120
5	80%	30
6	70%	30

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100 = \text{Probability of Detection Radar Waveform}$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$$

8.3. Test Result of Statistical Performance Check

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Mode 1: Transmit (802.11ax-20BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	30	1	1788	1
2	5500	26	1	2102	1
3	5500	49	1	1096	1
4	5500	21	1	2595	1
5	5500	35	1	1538	1
6	5500	33	1	1599	1
7	5500	71	1	748	0
8	5500	34	1	1566	1
9	5500	23	1	2377	1
10	5500	50	1	1074	1
11	5500	25	1	2169	1
12	5500	18	1	2981	1
13	5500	26	1	2053	1
14	5500	66	1	802	1
15	5500	32	1	1668	1
16	5500	23	1	2301	1
17	5500	30	1	1761	0
18	5500	26	1	2070	1
19	5500	30	1	1765	1
20	5500	20	1	2672	1
21	5500	24	1	2236	1
22	5500	18	1	3005	1
23	5500	48	1	1115	1
24	5500	18	1	3008	1
25	5500	39	1	1360	0
26	5500	35	1	1519	1
27	5500	54	1	983	1
28	5500	24	1	2283	1
29	5500	60	1	887	1
30	5500	40	1	1329	1
Detection Percentage (%)					90.00%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Mode 1: Transmit (802.11ax-20BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	28	2.60	163	0
2	5500	28	2.90	221	1
3	5500	23	4.20	205	1
4	5500	27	2.90	201	1
5	5500	28	3.20	229	1
6	5500	28	3.90	178	0
7	5500	28	1.40	220	1
8	5500	27	4.80	185	1
9	5500	24	3.70	225	1
10	5500	27	2.70	202	1
11	5500	26	1.80	225	1
12	5500	27	1.90	160	1
13	5500	28	3.60	194	1
14	5500	28	1.90	155	1
15	5500	26	2.40	153	1
16	5500	29	2.60	173	0
17	5500	28	4.80	157	1
18	5500	29	3.60	210	1
19	5500	28	2.50	151	1
20	5500	25	2.30	206	0
21	5500	29	3.60	162	1
22	5500	28	2.60	178	1
23	5500	26	4.50	192	1
24	5500	25	3.30	167	1
25	5500	25	3.80	202	1
26	5500	24	2.80	192	1
27	5500	25	4.70	200	1
28	5500	23	3.00	211	1
29	5500	28	1.60	208	1
30	5500	24	1.40	194	1
Detection Percentage (%)					86.67 %

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Mode 1: Transmit (802.11ax-20BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	16	6.80	493	1
2	5500	17	7.70	226	1
3	5500	17	8.80	316	0
4	5500	16	7.30	275	1
5	5500	18	7.90	320	0
6	5500	16	7.70	270	1
7	5500	17	8.60	407	1
8	5500	17	6.40	361	1
9	5500	18	8.80	280	1
10	5500	17	9.10	370	1
11	5500	17	6.90	364	0
12	5500	18	9.40	467	1
13	5500	17	8.80	352	1
14	5500	17	6.20	406	1
15	5500	17	6.40	232	1
16	5500	18	8.50	262	1
17	5500	17	6.40	280	0
18	5500	18	9.80	334	0
19	5500	16	7.00	384	1
20	5500	17	9.60	466	1
21	5500	16	8.70	310	0
22	5500	16	9.60	257	1
23	5500	18	7.10	297	0
24	5500	17	9.90	324	1
25	5500	16	9.50	334	1
26	5500	17	6.60	434	1
27	5500	18	7.40	426	1
28	5500	16	6.10	259	1
29	5500	17	9.80	402	1
30	5500	18	6.90	413	1
Detection Percentage (%)					76.67%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Mode 1: Transmit (802.11ax-20BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	12	14.10	459	1
2	5500	12	11.50	408	0
3	5500	16	12.80	447	1
4	5500	15	11.10	360	1
5	5500	13	18.00	496	1
6	5500	16	18.60	394	1
7	5500	13	16.60	348	1
8	5500	15	17.60	260	1
9	5500	16	11.80	383	0
10	5500	13	19.20	460	1
11	5500	13	16.90	441	1
12	5500	13	19.20	334	1
13	5500	13	15.50	286	1
14	5500	14	15.00	336	0
15	5500	15	13.20	414	1
16	5500	15	14.60	429	1
17	5500	15	18.00	318	1
18	5500	14	18.40	318	1
19	5500	15	16.90	269	1
20	5500	15	16.30	449	1
21	5500	14	19.70	228	1
22	5500	13	19.70	386	0
23	5500	14	14.70	444	1
24	5500	14	12.00	255	1
25	5500	13	11.90	230	1
26	5500	14	19.80	494	1
27	5500	12	17.80	412	1
28	5500	13	18.50	285	1
29	5500	14	18.20	422	1
30	5500	16	18.80	347	0
Detection Percentage (%)					83.33%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Mode 2: Transmit (802.11ax-40BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	22	1	2450	1
2	5510	38	1	1402	1
3	5510	19	1	2888	1
4	5510	78	1	679	1
5	5510	37	1	1462	1
6	5510	21	1	2572	1
7	5510	21	1	2550	1
8	5510	24	1	2276	1
9	5510	21	1	2542	1
10	5510	74	1	718	0
11	5510	40	1	1323	1
12	5510	22	1	2492	1
13	5510	26	1	2027	1
14	5510	80	1	661	1
15	5510	79	1	672	1
16	5510	22	1	2464	1
17	5510	18	1	3051	1
18	5510	74	1	717	0
19	5510	20	1	2659	1
20	5510	36	1	1489	1
21	5510	20	1	2681	1
22	5510	18	1	3045	1
23	5510	25	1	2139	1
24	5510	29	1	1841	1
25	5510	21	1	2622	1
26	5510	73	1	728	1
27	5510	62	1	858	1
28	5510	39	1	1354	1
29	5510	20	1	2741	1
30	5510	52	1	1032	1
Detection Percentage (%)					93.33%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Mode 2: Transmit (802.11ax-40BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	28	1.1	220	1	28
2	25	2.4	180	1	25
3	24	4.7	157	1	24
4	24	1.2	184	1	24
5	26	2.9	225	1	26
6	25	3.7	180	1	25
7	27	4.1	194	1	27
8	26	1.5	190	1	26
9	26	4.2	157	1	26
10	24	1.9	220	1	24
11	28	2	169	1	28
12	29	4.8	192	1	29
13	25	4.6	226	1	25
14	25	2.4	158	0	25
15	29	2.4	209	1	29
16	28	4.4	156	1	28
17	27	1.1	181	1	27
18	28	4.8	171	1	28
19	24	4.7	201	1	24
20	28	2.2	159	1	28
21	29	4.7	192	0	29
22	29	4	227	1	29
23	28	2.3	188	1	28
24	29	2.4	165	1	29
25	28	2.3	173	0	28
26	25	4.4	155	0	25
27	29	4.9	168	1	29
28	25	3.9	156	0	25
29	26	2.6	213	1	26
30	25	3.6	228	1	25
Detection Percentage (%)					83.33%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Mode 2: Transmit (802.11ax-40BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	17	8.2	331	0
2	5510	16	8.6	359	1
3	5510	17	8.1	254	1
4	5510	17	8.8	447	1
5	5510	17	9.8	371	0
6	5510	17	7.1	425	1
7	5510	17	9.3	373	1
8	5510	18	6.9	405	1
9	5510	17	8.2	444	0
10	5510	17	6.2	362	1
11	5510	18	7.2	352	1
12	5510	16	7.1	306	1
13	5510	17	7.7	485	1
14	5510	16	8.3	246	0
15	5510	16	7.3	206	1
16	5510	18	6.2	271	1
17	5510	17	9	450	1
18	5510	18	8.7	207	1
19	5510	17	9.3	499	1
20	5510	18	7.8	220	1
21	5510	16	6.6	228	1
22	5510	18	8.6	306	1
23	5510	16	9.4	250	0
24	5510	17	8.8	361	1
25	5510	16	8.9	391	1
26	5510	17	6	238	1
27	5510	17	8	293	0
28	5510	16	6.5	353	1
29	5510	17	6.9	315	1
30	5510	17	9.5	217	1
Detection Percentage (%)					80.00%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Mode 2: Transmit (802.11ax-40BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	16	18.5	378	1
2	5510	13	14.4	205	0
3	5510	13	12.2	220	1
4	5510	13	13.9	214	1
5	5510	14	11	204	1
6	5510	12	12.8	468	1
7	5510	12	18.7	295	0
8	5510	12	13.6	458	1
9	5510	13	14.5	385	0
10	5510	14	14.9	458	1
11	5510	15	11.3	396	0
12	5510	13	12.2	414	1
13	5510	13	13.7	398	1
14	5510	12	18.9	251	1
15	5510	15	17.3	473	1
16	5510	15	19.2	400	0
17	5510	16	11.5	431	1
18	5510	15	13.3	410	1
19	5510	15	11.7	374	0
20	5510	12	15.2	411	0
21	5510	15	12.1	460	1
22	5510	16	12.9	400	1
23	5510	13	12.9	378	1
24	5510	14	18.3	456	1
25	5510	15	11.1	472	0
26	5510	14	18	369	1
27	5510	15	17.1	400	1
28	5510	15	19.4	218	1
29	5510	16	13.7	338	1
30	5510	12	18.4	265	0
Detection Percentage (%)					70.00%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Mode : Mode 3: Transmit (802.11ax-80BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	37	1	1425	1
2	5530	36	1	1475	1
3	5530	96	1	549	1
4	5530	21	1	2604	1
5	5530	36	1	1488	1
6	5530	33	1	1629	1
7	5530	25	1	2117	1
8	5530	18	1	2999	1
9	5530	18	1	3027	0
10	5530	42	1	1283	0
11	5530	24	1	2258	1
12	5530	22	1	2495	1
13	5530	21	1	2610	0
14	5530	23	1	2304	1
15	5530	19	1	2862	1
16	5530	20	1	2694	1
17	5530	20	1	2680	1
18	5530	40	1	1320	1
19	5530	25	1	2172	1
20	5530	41	1	1310	1
21	5530	70	1	757	1
22	5530	18	1	2937	1
23	5530	25	1	2190	1
24	5530	22	1	2398	1
25	5530	18	1	2939	1
26	5530	23	1	2365	1
27	5530	29	1	1838	1
28	5530	21	1	2547	1
29	5530	24	1	2214	1
30	5530	32	1	1680	1
Detection Percentage (%)					90.00%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Mode : Mode 3: Transmit (802.11ax-80BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	27	2	228	0
2	5530	28	2.1	181	1
3	5530	26	1.2	201	1
4	5530	25	4.3	179	1
5	5530	24	4.4	153	1
6	5530	28	2.1	216	1
7	5530	24	2.9	200	1
8	5530	25	3.4	228	1
9	5530	25	4.3	205	1
10	5530	28	4.8	169	1
11	5530	24	1.9	161	0
12	5530	24	1.1	185	1
13	5530	27	4.9	182	1
14	5530	27	3.2	164	1
15	5530	26	3.4	165	0
16	5530	27	2.8	206	1
17	5530	27	3.8	224	1
18	5530	24	2.3	180	1
19	5530	25	1.7	172	1
20	5530	28	1.6	174	1
21	5530	26	4.3	218	1
22	5530	26	1.1	224	1
23	5530	27	2.3	156	1
24	5530	26	3	215	1
25	5530	27	4.2	222	1
26	5530	28	4.4	165	1
27	5530	28	3.6	224	1
28	5530	28	1.2	191	1
29	5530	26	1	168	1
30	5530	28	3.5	210	0
Detection Percentage (%)					86.67%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Mode : Mode 3: Transmit (802.11ax-80BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	17	6.7	410	0
2	5530	17	9.5	435	1
3	5530	16	6	394	1
4	5530	16	9.3	469	1
5	5530	17	6.3	232	1
6	5530	18	9.9	236	0
7	5530	16	7.4	345	1
8	5530	17	9	460	1
9	5530	16	8.4	321	1
10	5530	16	9.5	248	0
11	5530	16	9.1	413	1
12	5530	18	8.9	368	1
13	5530	16	8.6	250	1
14	5530	16	6.6	369	1
15	5530	17	8.2	272	1
16	5530	16	9.2	307	1
17	5530	17	6.2	261	1
18	5530	18	9.8	423	1
19	5530	17	8.5	395	1
20	5530	18	9.3	461	1
21	5530	18	9.2	383	1
22	5530	17	6.1	433	1
23	5530	16	9.7	287	1
24	5530	18	8.3	236	0
25	5530	18	9.6	383	1
26	5530	18	6.3	462	0
27	5530	17	6	379	1
28	5530	18	7.8	334	0
29	5530	17	9.6	365	1
30	5530	17	7.6	321	1
Detection Percentage (%)					80.00%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Mode : Mode 3: Transmit (802.11ax-80BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	13	17.6	457	0
2	5530	13	15.2	494	1
3	5530	14	14.8	483	1
4	5530	12	12	303	1
5	5530	12	15.4	469	0
6	5530	15	18.8	353	1
7	5530	14	13.7	455	1
8	5530	13	14.7	497	1
9	5530	14	15.5	445	1
10	5530	13	12.2	438	1
11	5530	14	17.8	229	1
12	5530	15	18.4	241	1
13	5530	12	12.5	367	1
14	5530	15	14	294	0
15	5530	12	15.4	270	1
16	5530	14	16.5	371	1
17	5530	15	14	289	1
18	5530	16	14.7	207	0
19	5530	13	11.4	363	1
20	5530	13	18	239	0
21	5530	15	12.1	439	1
22	5530	13	17.4	495	1
23	5530	12	18.5	461	1
24	5530	14	12.4	358	0
25	5530	12	11.3	386	0
26	5530	12	11.9	342	1
27	5530	15	11.9	260	1
28	5530	16	14.7	328	1
29	5530	13	19.1	226	1
30	5530	14	13.5	395	1
Detection Percentage (%)					76.67%

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Mode 1: Transmit (802.11ax-20BW)
 Test Date : 2022/05/24

Center Freq: 5500MHz			Low Edge: 5491MHz	High Edge: 5510MHz	
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5		5500	Statistical_Check_RandParm_For_Radar_Type_5_1_trail	1
2	19		5500	Statistical_Check_RandParm_For_Radar_Type_5_2_trail	0
3	13		5500	Statistical_Check_RandParm_For_Radar_Type_5_3_trail	1
4	16		5500	Statistical_Check_RandParm_For_Radar_Type_5_4_trail	1
5	15		5500	Statistical_Check_RandParm_For_Radar_Type_5_5_trail	1
6	15		5500	Statistical_Check_RandParm_For_Radar_Type_5_6_trail	1
7	15		5500	Statistical_Check_RandParm_For_Radar_Type_5_7_trail	1
8	5		5500	Statistical_Check_RandParm_For_Radar_Type_5_8_trail	1
9	16		5500	Statistical_Check_RandParm_For_Radar_Type_5_9_trail	1
10	9		5500	Statistical_Check_RandParm_For_Radar_Type_5_10_trail	1
11	17	6.8	5497.8	Statistical_Check_RandParm_For_Radar_Type_5_11_trail	0
12	6	2.4	5493.4	Statistical_Check_RandParm_For_Radar_Type_5_12_trail	1
13	16	6.4	5497.4	Statistical_Check_RandParm_For_Radar_Type_5_13_trail	0
14	10	4	5495	Statistical_Check_RandParm_For_Radar_Type_5_14_trail	0
15	7	2.8	5493.8	Statistical_Check_RandParm_For_Radar_Type_5_15_trail	1
16	6	2.4	5493.4	Statistical_Check_RandParm_For_Radar_Type_5_16_trail	1
17	11	4.4	5495.4	Statistical_Check_RandParm_For_Radar_Type_5_17_trail	0
18	17	6.8	5497.8	Statistical_Check_RandParm_For_Radar_Type_5_18_trail	0
19	8	3.2	5494.2	Statistical_Check_RandParm_For_Radar_Type_5_19_trail	1
20	8	3.2	5494.2	Statistical_Check_RandParm_For_Radar_Type_5_20_trail	1
21	17	6.8	5503.2	Statistical_Check_RandParm_For_Radar_Type_5_21_trail	1
22	6	2.4	5507.6	Statistical_Check_RandParm_For_Radar_Type_5_22_trail	1
23	8	3.2	5506.8	Statistical_Check_RandParm_For_Radar_Type_5_23_trail	1
24	9	3.6	5506.4	Statistical_Check_RandParm_For_Radar_Type_5_24_trail	1
25	8	3.2	5506.8	Statistical_Check_RandParm_For_Radar_Type_5_25_trail	1
26	16	6.4	5503.6	Statistical_Check_RandParm_For_Radar_Type_5_26_trail	1
27	14	5.6	5504.4	Statistical_Check_RandParm_For_Radar_Type_5_27_trail	1
28	7	2.8	5507.2	Statistical_Check_RandParm_For_Radar_Type_5_28_trail	1
29	9	3.6	5506.4	Statistical_Check_RandParm_For_Radar_Type_5_29_trail	1
30	17	6.8	5503.2	Statistical_Check_RandParm_For_Radar_Type_5_30_trail	1
Detection Percentage (%)					80.00
Limit					≥ 80

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	88.6	5	1699	1910	625.672
2	3	63.8	5	1055	1437	18.428
3	3	97.8	5	1821	1243	145.095
4	2	75	5	1020		169.393
5	2	62.4	5	1866		648.681
6	2	92.3	5	1651		380.738
7	2	76.9	5	1937		90.176
8	1	99.1	5			544.334
9	3	53.4	5	1137	1577	460.801
10	1	50	5			97.249
11	2	60.3	5	1122		653.676
12	2	69.7	5	1668		587.784
13	1	72.4	5			110.342
14	1	94.2	5			603.689
15	2	56.4	5	1023		497.147
16	2	86	5	1766		328.065
17	2	76.1	5	1867		299.482



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	57.3	19	1813	1075	839.759
2	2	70.6	19	1464		326.05
3	2	56.8	19	1798		10.88
4	2	83.4	19	1876		128.13
5	3	71.6	19	1299	1231	980.45
6	3	67.7	19	1685	1991	767.43
7	2	84	19	1654		522.59
8	2	55.6	19	1738		666.23
9	1	52.1	19			1100.4
10	3	55.1	19	1049	1017	1046.5




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	87	13	1968		79.083
2	2	82.2	13	1143		383.173
3	2	53.5	13	1356		248.487
4	2	69.9	13	1868		636.99
5	1	83.8	13			85.723
6	2	69.9	13	1314		647.797
7	1	85.1	13			175.71
8	1	65.6	13			246.013
9	2	85.7	13	1134		580.137
10	2	96.6	13	1357		483.44
11	2	79.3	13	1215		20.913
12	2	82.2	13	1019		651.997
13	2	75.4	13	1140		619.34
14	2	73.4	13	1690		606.413
15	2	82.7	13	1247		541.477
16	2	57.4	13	1479		131.9
17	1	95.2	13			55.433
18	3	77.1	13	1185	1091	65.967




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	71.6	16	1836		6.479
2	2	57	16	1725		32.472
3	1	94.7	16			720.79
4	2	69.3	16	1716		716.67
5	2	60.9	16	1112		445.4
6	1	60.2	16			715.58
7	2	78.8	16	1683		449.93
8	2	54.3	16	1777		742.71
9	3	67.9	16	1371	1036	326.08
10	2	98.5	16	1549		212.01
11	2	95.6	16	1354		94.02
12	3	69.7	16	1528	1039	422.73
13	2	79.3	16	1178		192.09
14	3	72	16	1917	1247	215.89
15	3	69	16	1954	1087	76.7
16	2	86.3	16	1379		84.9



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	51.9	15	1112		323.412
2	1	56.6	15			519.587
3	1	50.8	15			142.164
4	1	86.4	15			428.981
5	2	61.4	15	1055		796.029
6	2	94.8	15	1681		627.376
7	1	58.7	15			111.993
8	3	75.4	15	1170	1921	848.01
9	2	62.5	15	1179		460.527
10	2	91.8	15	1747		31.164
11	2	74.2	15	1554		601.511
12	3	69.3	15	1932	1449	107.659
13	1	78.5	15			413.986
14	2	86.5	15	1235		683.743



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	2	62.8	15	1587		938.464
2	2	79.6	15	1612		737.817
3	3	70.4	15	1960	1411	1089.153
4	3	53.4	15	1369	1637	337.35
5	2	51.1	15	1253		163.277
6	3	61.6	15	1332	1179	116.243
7	2	76	15	1681		1068.55
8	3	93.3	15	1967	1646	712.967
9	2	57.9	15	1132		974.433



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	50.3	15	1830		560.718
2	2	95.4	15	1226		317.66
3	2	78.7	15	1874		315.13
4	3	67.8	15	1128	1822	179.17
5	2	75.2	15	1196		364.49
6	2	57.6	15	1016		959.23
7	2	99.7	15	1380		573.75
8	1	85.4	15			227.93
9	2	81	15	1744		719.14
10	1	90.5	15			892.4
11	1	77	15			82.1
12	1	73.1	15			895.1




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	52.7	5	1780		242.784
2	1	64	5			244.507
3	1	96.1	5			584.022
4	1	77.4	5			346.093
5	2	81.5	5	1538		2.484
6	2	82.5	5	1160		215.425
7	2	81.4	5	1727		35.256
8	1	66.9	5			124.897
9	3	66.7	5	1795	1666	587.778
10	2	88	5	1101		303.259
11	2	50.2	5	1798		450.661
12	3	77.9	5	1513	1330	287.512
13	2	56.6	5	1638		243.403
14	2	93.4	5	1908		579.154
15	3	59.2	5	1911	1246	490.965
16	2	89.5	5	1487		240.996
17	3	93.8	5	1598	1604	333.537
18	1	93.7	5			85.558
19	1	75.3	5			607.579



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 8

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	60.4	16	1330	1245	1061.45
2	2	52.3	16	1584		212.86
3	3	61.1	16	1207	1719	690.66
4	2	70.1	16	1749		288.95
5	3	59.4	16	1652	1973	1011.41
6	1	78.8	16			832.99
7	2	85.3	16	1323		702.65
8	1	65.8	16			1134.7




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	84.9	9	1276		568.711
2	1	50.6	9			586.347
3	3	82.2	9	1699	1748	807.384
4	1	87.5	9			148.641
5	2	59.9	9	1702		329.409
6	3	68.5	9	1553	1468	465.556
7	2	75.8	9	1415		818.953
8	2	82.5	9	1203		580.17
9	1	96.5	9			613.637
10	2	65	9	1268		32.394
11	2	55.8	9	1613		661.271
12	1	55.2	9			297.749
13	2	53.5	9	1923		358.486
14	2	93	9	1466		489.243




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	60.5	17	1817		1119.65
2	3	63.2	17	1557	1988	165.07
3	2	91.8	17	1810		1015.5
4	2	61.8	17	1821		329.73
5	2	65.1	17	1794		1125.97
6	1	96	17			141.23
7	1	63.5	17			771.73
8	3	88.9	17	1271	1884	552.76
9	1	59.2	17			122.46
10	2	65.4	17	1798		51.2



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	72	6	1122		277.781
2	1	63.5	6			364.193
3	1	96.5	6			61.646
4	1	66.3	6			854.159
5	2	77.3	6	1289		842.142
6	2	58.7	6	1759		415.895
7	2	97.5	6	1179		883.808
8	1	53.9	6			607.322
9	3	85.5	6	1432	1745	40.265
10	3	50.7	6	1799	1348	751.728
11	2	99.9	6	1432		629.301
12	1	73.2	6			37.954
13	3	83.5	6	1008	1847	680.377




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	97.3	16	1992		107.585
2	1	57.7	16			153.108
3	2	57.2	16	1743		3.31
4	3	58.7	16	1382	1120	341.54
5	2	51.1	16	1689		512.61
6	2	66	16	1772		504.41
7	3	64.4	16	1270	1945	495.49
8	3	52.1	16	1108	1416	169.77
9	1	79.8	16			584.68
10	3	58.7	16	1042	1134	224.76
11	1	67.3	16			570.97
12	1	90.9	16			272.27
13	1	72.7	16			355.19
14	2	76.3	16	1888		298.8
15	1	70.2	16			590.69
16	1	78.1	16			268.46
17	2	57	16	1246		381.9
18	2	93.8	16	1499		209.3
19	2	77.9	16	1808		542.8
20	3	68.1	16	1590	1691	37.6




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	65.5	10	1749	1936	369.456
2	2	50.1	10	1280		149.057
3	1	62.7	10			57.51
4	3	51.2	10	1467	1002	347.35
5	2	54.2	10	1986		592.07
6	2	64.5	10	1764		318.4
7	1	72.4	10			514.88
8	1	51	10			312.65
9	2	98.9	10	1131		119.72
10	1	85.3	10			745.13
11	2	60.8	10	1177		765.32
12	3	72.2	10	1086	1948	410.81
13	2	56.5	10	1964		649.2
14	1	75.6	10			571.7
15	2	60.3	10	1111		537.8




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	67.8	7	1918	1039	408.187
2	2	67.8	7	1967		222.02
3	2	98.8	7	1970		494.502
4	2	69	7	1545		278.243
5	1	72.4	7			210.304
6	1	51.4	7			359.385
7	2	84.2	7	1477		505.166
8	2	93.6	7	1740		564.747
9	3	51.7	7	1378	1163	240.288
10	1	71.4	7			95.449
11	3	77.4	7	1894	1632	540.931
12	1	58.1	7			186.632
13	1	74.2	7			448.913
14	3	54.5	7	1215	1181	572.694
15	1	80.4	7			99.625
16	2	54.2	7	1325		269.586
17	1	95	7			12.737
18	3	51.3	7	1602	1377	295.858
19	1	70.4	7			616.679



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	66	6	1494		308.592
2	2	69.3	6	1906		499.31
3	3	52	6	1353	1563	443.75
4	3	93.1	6	1799	1372	710.54
5	1	90.3	6			204.51
6	1	90.3	6			59.07
7	2	80.9	6	1419		447.23
8	2	65.4	6	1936		432.45
9	1	56.5	6			472.56
10	2	79.7	6	1945		1.24
11	3	97.5	6	1662	1854	735.92
12	2	64.5	6	1047		148.99
13	3	57.9	6	1023	1046	622.96
14	3	76.3	6	1157	1175	738.5
15	2	74.9	6	1762		367.6
16	2	73.7	6	1732		303.5




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	68.2	11	1145		188.308
2	1	59.5	11			1127.82
3	3	65.5	11	1090	1594	139.55
4	2	96.6	11	1497		23.46
5	2	94.7	11	1483		728.1
6	1	80.5	11			1077.64
7	3	99.7	11	1046	1394	1163.1
8	2	57.4	11	1819		403.23
9	1	72.6	11			338.52
10	2	80.3	11	1488		577.5




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	78.8	17	1420		322.359
2	2	63.9	17	1718		183.872
3	2	74.9	17	1356		348.755
4	1	75	17			321.493
5	1	93.2	17			669.711
6	3	69.3	17	1898	1825	391.018
7	3	94.2	17	1049	1506	158.016
8	2	69.8	17	1573		307.674
9	1	57.1	17			342.171
10	1	57.8	17			140.429
11	1	68.9	17			143.996
12	2	68.4	17	1777		379.154
13	3	71.7	17	1463	1070	170.732
14	3	86.8	17	1556	1708	284.209
15	2	76.4	17	1615		539.847
16	2	78.1	17	1229		320.665
17	1	99.8	17			586.582



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	78.7	8			131.047
2	1	70.9	8			370.978
3	3	54.6	8	1801	1606	522.725
4	3	52.7	8	1426	1424	53.103
5	2	59.2	8	1151		577.241
6	2	54.5	8	1724		493.818
7	1	63.5	8			667.196
8	2	76.3	8	1466		351.654
9	1	62.2	8			448.421
10	2	66.7	8	1966		390.039
11	3	57.1	8	1957	1110	87.186
12	1	50.1	8			252.434
13	2	71.4	8	1059		73.422
14	2	89.8	8	1150		134.129
15	1	79.6	8			494.947
16	2	86.3	8	1789		430.665
17	2	74.1	8	1118		520.282




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	57	8	1244	1031	293.431
2	2	99.7	8	1207		487.881
3	3	58.6	8	1731	1816	621.762
4	1	72	8			576.463
5	1	93	8			384.414
6	1	92.8	8			297.195
7	2	55.2	8	1383		348.396
8	3	80.2	8	1853	1565	368.077
9	2	74.8	8	1313		337.078
10	1	72.8	8			227.229
11	2	83.8	8	1432		124.701
12	3	89.2	8	1685	1034	174.062
13	1	51.9	8			108.443
14	2	52	8	1267		311.554
15	2	86.4	8	1227		378.845
16	3	68.9	8	1389	1526	407.576
17	1	88.2	8			350.137
18	3	81.2	8	1314	1846	114.258
19	1	75.9	8			285.779



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	51.1	17			207.714
2	1	94.2	17			142.222
3	3	97.6	17	1426	1332	543.935
4	2	63.4	17	1756		376.713
5	2	98.8	17	1070		461.701
6	2	64.6	17	1160		224.548
7	1	73.4	17			325.316
8	2	57.5	17	1341		455.834
9	3	83.9	17	1110	1587	132.071
10	3	52.6	17	1180	1375	566.009
11	2	61.4	17	1592		64.366
12	2	96	17	1579		676.944
13	1	76.6	17			237.212
14	2	89.2	17	1013		184.859
15	2	77.6	17	1978		279.147
16	2	91.8	17	1709		58.865
17	2	87.5	17	1155		606.982




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	89.8	6			251.476
2	2	56.5	6	1752		517.661
3	3	56.9	6	1289	1795	402.702
4	2	80.4	6	1297		427.443
5	2	97	6	1600		172.704
6	3	71.2	6	1416	1684	573.635
7	2	53.4	6	1180		347.076
8	2	83.1	6	1987		214.127
9	3	50.3	6	1068	1251	63.178
10	2	65.4	6	1895		394.349
11	2	99.2	6	1470		397.911
12	1	59.2	6			356.972
13	2	65.4	6	1305		206.633
14	1	72.6	6			257.374
15	1	53.9	6			295.615
16	3	74.9	6	1640	1681	350.076
17	3	74.8	6	1775	1264	283.537
18	2	79.9	6	1617		89.358
19	2	62.7	6	1359		348.379



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	97.9	8	1114		822.38
2	3	53.1	8	1615	1033	774.5
3	1	50.4	8			415.45
4	3	88.3	8	1316	1571	730.28
5	2	76.8	8	1499		815.86
6	2	88	8	1510		135.81
7	2	95.3	8	1804		21.7
8	2	85.3	8	1740		943.99
9	2	64.2	8	1964		531.05
10	3	52.2	8	1467	1725	71.72
11	3	93.4	8	1691	1784	639.4
12	2	57.4	8	1328		514.5




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	71.9	9	1415	1332	188.211
2	3	87.1	9	1639	1423	362.493
3	1	68.3	9			198.427
4	1	91.2	9			80.62
5	2	78.6	9	1188		84.763
6	2	74.7	9	1027		514.077
7	1	94.8	9			189.33
8	2	88.3	9	1178		122.373
9	3	55.4	9	1635	1078	124.977
10	2	82.9	9	1493		106.58
11	2	65.7	9	1002		60.383
12	1	58.2	9			384.677
13	3	54.2	9	1031	1053	206.25
14	1	68.8	9			80.593
15	3	94.2	9	1142	1378	467.557
16	3	60.5	9	1491	1343	305.7
17	2	93.6	9	1926		116.833
18	1	76.4	9			220.867



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	68.8	8	1267	1298	700.078
2	3	90.7	8	1102	1010	225.363
3	2	58.1	8	1496		532.916
4	2	57.1	8	1456		430.999
5	1	81.8	8			329.222
6	2	51.6	8	1862		399.195
7	2	72	8	1019		4.858
8	1	59.8	8			497.532
9	2	51.3	8	1654		134.915
10	2	66.5	8	1120		314.538
11	1	62.6	8			207.771
12	2	52.3	8	1014		178.554
13	3	96.2	8	1467	1766	294.977




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	59.5	14	1600	1389	267.056
2	2	58.7	14	1061		160.817
3	1	64.4	14			361.017
4	2	92.3	14	1139		186.52
5	2	83.8	14	1666		602.373
6	2	65.5	14	1228		482.857
7	1	97.2	14			534.36
8	2	55.8	14	1976		263.333
9	2	70.1	14	1265		415.077
10	2	75.5	14	1030		162.41
11	1	80.7	14			305.773
12	2	58.7	14	1025		169.137
13	1	54.3	14			392.04
14	2	57.1	14	1393		95.973
15	2	74.6	14	1415		380.897
16	3	85.2	14	1233	1299	660.3
17	3	99.3	14	1796	1139	590.933
18	2	90	14	1151		51.067



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	72.2	7			278.326
2	2	50	7	1755		546.048
3	2	92.4	7	1125		192.915
4	2	54.8	7	1860		288.043
5	1	79.2	7			212.571
6	2	99.7	7	1008		253.848
7	2	61	7	1676		599.936
8	3	70.1	7	1091	1396	431.104
9	2	59.9	7	1282		188.601
10	3	84.1	7	1083	1154	225.729
11	1	75.2	7			557.766
12	2	92.3	7	1249		328.684
13	2	63.7	7	1029		614.292
14	2	69.4	7	1518		80.819
15	2	59	7	1740		187.547
16	2	82	7	1973		631.265
17	2	57.1	7	1230		193.982



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	73.2	9	1025		581.584
2	1	93.6	9			376.711
3	1	90.5	9			1042.492
4	2	89.3	9	1288		118.283
5	1	98.8	9			713.624
6	3	73.7	9	1571	1837	431.565
7	3	92.2	9	1248	1363	1016.825
8	2	78.1	9	1072		819.016
9	3	75.2	9	1811	1242	304.317
10	2	88.5	9	1865		286.618
11	2	94.5	9	1119		608.209




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	87.5	17			311.092
2	1	51.3	17			575.27
3	1	68.8	17			142.43
4	2	79	17	1740		50.47
5	2	95.4	17	1598		223.6
6	2	53.1	17	1279		129.37
7	1	83.7	17			119.78
8	1	62.1	17			551.49
9	1	62.5	17			331.78
10	3	85.7	17	1684	1510	179.43
11	1	99	17			346.53
12	2	54	17	1407		494.83
13	2	92.9	17	1389		749.5
14	2	61.3	17	1069		615.6
15	3	56.2	17	1740	1331	533.1



Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Mode 2: Transmit (802.11ax-40BW)
 Test Date : 2022/05/24

Center Freq: 5510MHz			Low Edge: 5491MHz		High Edge: 5530MHz	
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection	
1	9		5510	Statistical Check RandParm For Radar Type 5 1 trail	1	
2	16		5510	Statistical Check RandParm For Radar Type 5 2 trail	1	
3	12		5510	Statistical Check RandParm For Radar Type 5 3 trail	1	
4	6		5510	Statistical Check RandParm For Radar Type 5 4 trail	1	
5	11		5510	Statistical Check RandParm For Radar Type 5 5 trail	1	
6	13		5510	Statistical Check RandParm For Radar Type 5 6 trail	1	
7	12		5510	Statistical Check RandParm For Radar Type 5 7 trail	1	
8	10		5510	Statistical Check RandParm For Radar Type 5 8 trail	1	
9	10		5510	Statistical Check RandParm For Radar Type 5 9 trail	1	
10	15		5510	Statistical Check RandParm For Radar Type 5 10 trail	1	
11	8	3.2	5494.2	Statistical Check RandParm For Radar Type 5 11 trail	1	
12	12	4.8	5495.8	Statistical Check RandParm For Radar Type 5 12 trail	1	
13	17	6.8	5497.8	Statistical Check RandParm For Radar Type 5 13 trail	0	
14	17	6.8	5497.8	Statistical Check RandParm For Radar Type 5 14 trail	1	
15	14	5.6	5496.6	Statistical Check RandParm For Radar Type 5 15 trail	0	
16	18	7.2	5498.2	Statistical Check RandParm For Radar Type 5 16 trail	0	
17	16	6.4	5497.4	Statistical Check RandParm For Radar Type 5 17 trail	1	
18	18	7.2	5498.2	Statistical Check RandParm For Radar Type 5 18 trail	0	
19	14	5.6	5496.6	Statistical Check RandParm For Radar Type 5 19 trail	0	
20	9	3.6	5494.6	Statistical Check RandParm For Radar Type 5 20 trail	1	
21	15	6	5523	Statistical Check RandParm For Radar Type 5 21 trail	1	
22	14	5.6	5523.4	Statistical Check RandParm For Radar Type 5 22 trail	1	
23	18	7.2	5521.8	Statistical Check RandParm For Radar Type 5 23 trail	1	
24	15	6	5523	Statistical Check RandParm For Radar Type 5 24 trail	1	
25	10	4	5525	Statistical Check RandParm For Radar Type 5 25 trail	1	
26	14	5.6	5523.4	Statistical Check RandParm For Radar Type 5 26 trail	1	
27	11	4.4	5524.6	Statistical Check RandParm For Radar Type 5 27 trail	1	
28	6	2.4	5526.6	Statistical Check RandParm For Radar Type 5 28 trail	1	
29	11	4.4	5524.6	Statistical Check RandParm For Radar Type 5 29 trail	1	
30	14	5.6	5523.4	Statistical Check RandParm For Radar Type 5 30 trail	1	
Detection Percentage (%)					83.33	
Limit					≥ 80	

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	84.8	9	1369		476.893
2	1	62	9			24.421
3	3	95.4	9	1169	1671	535.362
4	2	80.6	9	1532		454.933
5	1	95.2	9			1068.434
6	2	87.2	9	1098		1069.715
7	2	50.1	9	1343		672.725
8	3	89.9	9	1263	1898	450.506
9	1	51.7	9			1037.707
10	2	76.5	9	1008		984.618
11	1	72.2	9			498.609



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	85	16	1702		734.608
2	1	68	16			517.63
3	2	99.7	16	1649		145.29
4	1	96.2	16			503.69
5	3	74.3	16	1127	1055	672.01
6	2	66.6	16	1364		81.27
7	1	73.6	16			387.61
8	1	57	16			377.08
9	1	72	16			522.21
10	2	69.2	16	1268		133.22
11	3	65.5	16	1045	1946	299.39
12	2	61.8	16	1840		698.69
13	3	97.6	16	1415	1127	631.1
14	1	92.3	16			171.3
15	2	93.9	16	1761		477.5



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	74.6	12	1726		200.077
2	2	64	12	1738		357.87
3	1	71.5	12			32.57
4	2	68.2	12	1652		791.87
5	2	78.4	12	1823		355.05
6	1	84	12			22.45
7	2	95.8	12	1611		721.34
8	2	80.8	12	1195		653.35
9	2	78.3	12	1898		403.48
10	3	73.8	12	1358	1646	51.62
11	2	94.7	12	1609		223.7
12	1	61.8	12			460.6




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	71.9	6			350.065
2	3	88.8	6	1199	1333	646.71
3	2	54.1	6	1728		912.26
4	3	64.2	6	1748	1408	353.57
5	2	76.8	6	1077		961.21
6	3	60.6	6	1878	1422	121.43
7	3	92.8	6	1323	1533	532.39
8	2	62.1	6	1101		535.88
9	2	91.2	6	1181		197.48
10	1	59.7	6			220.96
11	2	77.8	6	1992		60.2
12	2	95.8	6	1339		648.3



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	64.3	11	1951	1738	368.028
2	2	97.1	11	1895		1109.737
3	3	70.9	11	1963	1535	930.173
4	2	79.8	11	1778		98.05
5	1	53.3	11			833.307
6	2	77.9	11	1242		622.493
7	2	96.6	11	1397		1217.52
8	3	90.3	11	1934	1190	571.817
9	1	96.7	11			1160.433



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	73.9	13			781.787
2	1	67.7	13			586.623
3	2	50.4	13	1317		815.416
4	2	68.5	13	1163		595.239
5	1	94.8	13			593.892
6	2	94.6	13	1646		549.635
7	2	78	13	1879		760.738
8	2	96.1	13	1096		435.192
9	2	81.8	13	1111		284.455
10	1	82.8	13			283.308
11	2	52.1	13	1721		311.391
12	2	70.2	13	1814		652.654
13	1	89.4	13			784.277



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	80.3	12	1096		191.543
2	2	62.7	12	1005		97.78
3	2	75.9	12	1005		1060.23
4	2	98	12	1916		130.03
5	2	59.2	12	1260		1093.6
6	3	91.9	12	1448	1531	26.32
7	2	79.3	12	1226		722.14
8	1	85.4	12			227.62
9	3	97.5	12	1752	1562	212.91
10	1	73.9	12			1010.8



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	66.4	10			237.549
2	2	68	10	1419		619.048
3	3	61.7	10	1081	1819	72.435
4	3	95.7	10	1930	1405	217.903
5	2	55.2	10	1939		532.771
6	3	85.3	10	1323	1716	536.428
7	3	95.4	10	1481	1030	362.876
8	3	58.6	10	1592	1549	353.104
9	2	96.2	10	1641		91.171
10	1	62.6	10			642.249
11	2	92.8	10	1136		262.526
12	2	97.7	10	1220		533.964
13	2	71.5	10	1437		103.692
14	2	58	10	1125		190.779
15	2	69.5	10	1765		31.647
16	2	89.6	10	1683		600.965
17	2	65.1	10	1348		159.482



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	61.2	10			534.064
2	2	61.4	10	1733		568.2
3	3	92.6	10	1426	1227	378.13
4	2	71.4	10	1299		0.33
5	3	90.1	10	1227	1036	608
6	3	57.8	10	1607	1596	293.99
7	2	88.5	10	1002		205.98
8	2	52.9	10	1795		705.3
9	2	69.9	10	1675		705.81
10	1	59.1	10			6.87
11	2	50.4	10	1967		463.46
12	1	64.2	10			177.78
13	1	52.7	10			520.99
14	2	72.4	10	1531		23.68
15	1	76.6	10			68
16	2	93.7	10	1198		521.4



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	90.7	15	1863	1117	199.986
2	2	66	15	1573		562.92
3	2	82.4	15	1847		385.88
4	2	76.3	15	1508		990.98
5	2	59.2	15	1121		1025.66
6	2	73.6	15	1070		46.08
7	2	65.9	15	1666		818.24
8	3	55.9	15	1757	1844	1085.71
9	2	61.3	15	1301		336.42
10	2	55.4	15	1193		638.2



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	57.6	8	1945		98.104
2	2	90.5	8	1256		801.547
3	2	91.3	8	1455		235.363
4	2	54.3	8	1996		522.53
5	2	65.4	8	1076		193.117
6	2	79.6	8	1219		344.343
7	1	61	8			711.35
8	1	66.8	8			752.967
9	3	63.5	8	1068	1216	423.533




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (μ sec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (μ sec)	Pulse 2-to-3 PRI (μ sec)	Start Location Within Interval (msec)
1	3	65.4	17	1658	1975	787.815
2	2	56.9	17	1481		475.7
3	2	63.9	17	1330		596.69
4	1	60.4	17			795.07
5	2	80.4	17	1772		811.63
6	2	58.1	17	1197		812.78
7	2	68	17	1958		781.48
8	3	59.7	17	1892	1938	315.49
9	2	89.2	17	1158		123.92
10	2	90	17	1271		814.05
11	2	61.9	17	1652		400.2
12	2	54	17	1775		880.7




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	88.3	17	1760		781.39
2	2	63.5	17	1640		449.787
3	3	80	17	1115	1932	635.994
4	2	69.1	17	1492		314.531
5	1	80.4	17			242.959
6	3	56.7	17	1434	1833	553.746
7	2	57.6	17	1541		54.773
8	2	64.7	17	1977		422.58
9	2	75.2	17	1348		301.307
10	3	50.3	17	1742	1611	199.764
11	2	86.8	17	1265		526.851
12	1	84.9	17			376.209
13	2	63.5	17	1423		432.586
14	1	56.3	17			239.843



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	91.5	14	1880		982.742
2	2	79.1	14	1998		288.217
3	3	85.5	14	1447	1147	106.463
4	1	74.4	14			1132.58
5	3	81.8	14	1652	1289	775.307
6	3	76.1	14	1570	1864	577.513
7	1	65.6	14			1009.93
8	2	81.4	14	1843		671.567
9	1	86.8	14			462.833

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	91.5	18	1687	1193	343.199
2	3	81.4	18	1681	1966	473.253
3	1	88.2	18			289.177
4	2	78.2	18	1473		404.54
5	2	72.9	18	1470		110.533
6	2	51.3	18	1094		437.517
7	2	81	18	1848		58.7
8	3	82.7	18	1368	1154	390.253
9	2	51.1	18	1049		99.727
10	3	97.8	18	1251	1834	56.06
11	3	69.1	18	1514	1833	3.153
12	2	67	18	1728		137.877
13	3	66.7	18	1006	1624	656.55
14	3	74.6	18	1146	1262	607.033
15	1	74.5	18			373.687
16	1	62	18			42.3
17	2	64.4	18	1157		280.633
18	2	84.2	18	1391		41.467



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	77.4	18			556.607
2	3	96.6	18	1851	1847	345.251
3	1	64.8	18			351.852
4	2	58.3	18	1146		530.333
5	1	57.4	18			49.224
6	2	55.2	18	1420		703.455
7	2	84.5	18	1816		749.735
8	1	94.6	18			849.526
9	2	79.8	18	1418		70.877
10	2	97	18	1342		888.718
11	1	81.1	18			1033.409




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	3	97	9	1547	1430	639.418
2	2	72.3	9	1714		825.253
3	3	69.4	9	1757	1611	46.656
4	2	89	9	1609		720.169
5	3	82.9	9	1557	1890	374.412
6	3	60.4	9	1682	1387	678.185
7	2	87.6	9	1676		761.808
8	2	54.8	9	1880		299.502
9	1	92.5	9			103.465
10	2	90.2	9	1768		64.218
11	3	99.9	9	1464	1090	821.231
12	1	53.4	9			60.354
13	2	74.7	9	1198		247.377




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	77.9	15	1660		698.964
2	1	67.2	15			365.921
3	2	79.8	15	1781		549.222
4	1	62.7	15			114.303
5	1	77.4	15			432.174
6	2	66.1	15	1669		1058.295
7	2	75.4	15	1414		320.055
8	2	74.5	15	1698		372.716
9	2	67.1	15	1541		974.597
10	1	66.5	15			457.418
11	3	71.1	15	1352	1050	508.209



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	90	14	1224	1766	1308.45
2	2	77.3	14	1228		265.667
3	3	69	14	1362	1530	237.333
4	2	59.2	14	1833		1140.88
5	3	93.3	14	1796	1659	895.647
6	2	93.9	14	1453		145.263
7	1	87.6	14			581.26
8	1	81	14			327.427
9	1	78.2	14			1005.033


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	65.1	18			458.452
2	1	56.8	18			453.853
3	2	58.5	18	1674		561.297
4	2	84.8	18	1641		110.21
5	2	91.5	18	1222		524.233
6	3	75	18	1692	1553	469.737
7	1	61.4	18			179.23
8	1	69.7	18			620.713
9	3	65.3	18	1166	1134	127.637
10	3	77.8	18	1829	1141	216.08
11	2	58.5	18	1554		304.783
12	2	50	18	1717		268.417
13	1	50.3	18			660.54
14	1	93.3	18			301.623
15	3	72.6	18	1870	1124	411.087
16	2	94	18	1482		544.2
17	2	67.6	18	1919		30.233
18	3	85.1	18	1796	1373	384.967



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	73.7	15	1965	1665	566.398
2	2	98.9	15	1479		309.968
3	2	65.2	15	1442		469.425
4	2	79.4	15	1046		276.873
5	2	94.2	15	1027		370.121
6	1	90.7	15			458.658
7	2	80.3	15	1302		220.766
8	3	87.1	15	1713	1350	148.064
9	2	86.4	15	1191		569.241
10	2	98	15	1505		159.799
11	2	74.8	15	1379		62.876
12	3	52.1	15	1800	1066	134.444
13	2	70.7	15	1104		613.372
14	2	99.4	15	1641		330.319
15	2	50.2	15	1113		691.247
16	3	83.4	15	1377	1938	318.665
17	1	55.2	15			629.882




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	53.1	10	1075	1756	96.591
2	3	69.3	10	1361	1087	519.62
3	1	78.1	10			346.24
4	2	81.8	10	1697		376.03
5	1	62.6	10			512.66
6	1	90.9	10			505.39
7	3	83.3	10	1822	1724	450.76
8	1	97.8	10			126.05
9	2	88.9	10	1304		142.3
10	1	65.8	10			563.94
11	1	81.2	10			501.4
12	2	98.9	10	1624		197.53
13	2	58.4	10	1753		461.73
14	2	88.4	10	1990		308.17
15	2	75.1	10	1237		55.85
16	2	77.4	10	1125		155.19
17	1	94.4	10			440.9
18	2	56.3	10	1138		196.9
19	1	64	10			458.4
20	3	85.8	10	1101	1640	52.6



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	92.4	14			590.918
2	3	89.9	14	1743	1919	7.889
3	3	74.5	14	1877	1750	657.485
4	1	69.2	14			585.973
5	1	86.4	14			455.861
6	2	69.6	14	1777		636.588
7	2	81.9	14	1360		74.356
8	1	64.5	14			55.224
9	1	96.1	14			80.391
10	2	53	14	1424		60.069
11	2	85.6	14	1021		562.626
12	1	90.1	14			573.194
13	2	88.4	14	1968		88.572
14	1	50.8	14			228.119
15	1	68.3	14			245.947
16	1	79.1	14			555.165
17	3	79.4	14	1247	1195	524.782




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	68.6	6			57.487
2	3	81.3	6	1519	1385	454.77
3	2	50.4	6	1583		262.93
4	2	85.9	6	1225		173.24
5	2	94.9	6	1241		433.54
6	2	67.8	6	1767		452.63
7	2	82.8	6	1487		260.24
8	3	51.3	6	1794	1149	443.82
9	1	76.9	6			412.09
10	2	78.8	6	1717		53.97
11	2	95.9	6	1835		138.05
12	2	57.2	6	1444		78.42
13	2	93.9	6	1172		426.66
14	2	86.6	6	1807		161.76
15	2	78.5	6	1577		370.58
16	1	85.4	6			501.54
17	1	77.5	6			276.28
18	3	87.3	6	1111	1231	314.2
19	2	64.9	6	1302		248.4
20	2	91	6	1797		529.5



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	62.6	11	1554		1117.48
2	2	71.7	11	1441		243.33
3	1	83.8	11			560.62
4	2	75	11	1619		38.95
5	2	89.6	11	1787		200.98
6	2	76.7	11	1412		24.51
7	3	59.5	11	1650	1883	48.01
8	2	94.3	11	1515		971.67
9	1	90.6	11			746.5
10	2	82.6	11	1982		813.1

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	50.1	14	1333		922.956
2	2	75.5	14	1007		13.837
3	2	57.2	14	1225		495.913
4	2	56.5	14	1818		12.67
5	2	64.2	14	1395		789.447
6	2	80.7	14	1989		215.583
7	3	55.8	14	1684	1647	588.65
8	1	51	14			640.117
9	1	65.7	14			1199.733

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Mode : Mode 3: Transmit (802.11ax-80BW)
 Test Date : 2022/05/24

Center Freq: 5530MHz			Low Edge: 5492MHz		High Edge: 5567MHz	
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection	
1	15		5530	Statistical_Check_RandParm_For_Radar_Type_5_1_trail	1	
2	9		5530	Statistical_Check_RandParm_For_Radar_Type_5_2_trail	1	
3	18		5530	Statistical_Check_RandParm_For_Radar_Type_5_3_trail	1	
4	12		5530	Statistical_Check_RandParm_For_Radar_Type_5_4_trail	1	
5	10		5530	Statistical_Check_RandParm_For_Radar_Type_5_5_trail	1	
6	18		5530	Statistical_Check_RandParm_For_Radar_Type_5_6_trail	1	
7	6		5530	Statistical_Check_RandParm_For_Radar_Type_5_7_trail	1	
8	17		5530	Statistical_Check_RandParm_For_Radar_Type_5_8_trail	1	
9	19		5530	Statistical_Check_RandParm_For_Radar_Type_5_9_trail	1	
10	15		5530	Statistical_Check_RandParm_For_Radar_Type_5_10_trail	1	
11	11	4.4	5494.4	Statistical_Check_RandParm_For_Radar_Type_5_11_trail	0	
12	18	7.2	5497.2	Statistical_Check_RandParm_For_Radar_Type_5_12_trail	0	
13	16	6.4	5496.4	Statistical_Check_RandParm_For_Radar_Type_5_13_trail	1	
14	6	2.4	5492.4	Statistical_Check_RandParm_For_Radar_Type_5_14_trail	1	
15	7	2.8	5492.8	Statistical_Check_RandParm_For_Radar_Type_5_15_trail	1	
16	6	2.4	5492.4	Statistical_Check_RandParm_For_Radar_Type_5_16_trail	0	
17	17	6.8	5496.8	Statistical_Check_RandParm_For_Radar_Type_5_17_trail	0	
18	6	2.4	5492.4	Statistical_Check_RandParm_For_Radar_Type_5_18_trail	1	
19	5	2	5492	Statistical_Check_RandParm_For_Radar_Type_5_19_trail	1	
20	15	6	5496	Statistical_Check_RandParm_For_Radar_Type_5_20_trail	1	
21	18	7.2	5562.8	Statistical_Check_RandParm_For_Radar_Type_5_21_trail	1	
22	15	6	5564	Statistical_Check_RandParm_For_Radar_Type_5_22_trail	1	
23	13	5.2	5564.8	Statistical_Check_RandParm_For_Radar_Type_5_23_trail	1	
24	16	6.4	5563.6	Statistical_Check_RandParm_For_Radar_Type_5_24_trail	1	
25	18	7.2	5562.8	Statistical_Check_RandParm_For_Radar_Type_5_25_trail	1	
26	19	7.6	5562.4	Statistical_Check_RandParm_For_Radar_Type_5_26_trail	1	
27	13	5.2	5564.8	Statistical_Check_RandParm_For_Radar_Type_5_27_trail	1	
28	18	7.2	5562.8	Statistical_Check_RandParm_For_Radar_Type_5_28_trail	1	
29	12	4.8	5565.2	Statistical_Check_RandParm_For_Radar_Type_5_29_trail	1	
30	6	2.4	5567.6	Statistical_Check_RandParm_For_Radar_Type_5_30_trail	1	
Detection Percentage (%)					86.67	
Limit					≥ 80	


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	88.2	15	1705		208.47
2	1	69.6	15			28.881
3	2	73.1	15	1024		106.687
4	1	50.3	15			70.36
5	2	66.5	15	1362		496.433
6	1	57.3	15			193.657
7	2	51.6	15	1963		475.59
8	3	52.3	15	1450	1879	135.893
9	3	96.3	15	1840	1339	65.677
10	1	81.2	15			109.65
11	3	76.7	15	1789	1213	340.523
12	2	57.3	15	1232		257.417
13	1	70.8	15			53.48
14	3	75	15	1891	1997	613.093
15	3	97.5	15	1887	1195	641.787
16	2	73.7	15	1311		503.5
17	2	96.9	15	1084		187.133
18	3	76	15	1574	1418	279.967




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	3	68.6	9	1214	1029	108.023
2	3	74.3	9	1670	1069	140.914
3	2	80	9	1992		555.61
4	2	64.4	9	1036		264.86
5	2	72.6	9	1798		4.53
6	1	75.5	9			650.26
7	2	68	9	1693		357.91
8	2	58.5	9	1820		258.53
9	3	76.3	9	1108	1327	281.36
10	3	54.2	9	1230	1096	619.38
11	2	62.1	9	1750		537.24
12	3	66	9	1380	1824	493.05
13	3	86.7	9	1168	1262	72.75
14	1	52	9			530.6
15	2	91.5	9	1626		91.2




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	69.9	18			461.831
2	3	82	18	1145	1063	18.285
3	3	85.8	18	1062	1614	184.582
4	2	62.2	18	1643		469.793
5	2	66.5	18	1874		79.534
6	2	87.2	18	1553		386.755
7	2	61.6	18	1172		88.616
8	2	85.3	18	1053		426.377
9	2	75.9	18	1916		259.948
10	2	85	18	1991		305.559
11	1	60.8	18			569.931
12	1	94.2	18			377.702
13	3	80.7	18	1356	1203	320.923
14	2	66.7	18	1990		461.994
15	2	77.7	18	1309		81.095
16	3	91.2	18	1922	1907	464.946
17	2	55.1	18	1745		190.537
18	2	60.4	18	1777		268.658
19	3	58.6	18	1891	1062	547.079



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	97.5	12	1728		686.451
2	2	78.6	12	1645		393.78
3	3	56.8	12	1554	1767	715.82
4	2	78.6	12	1220		611.09
5	1	52.7	12			555.98
6	1	69.2	12			72.77
7	1	61.1	12			200.99
8	2	69.8	12	1432		304.7
9	1	95.5	12			491.43
10	1	97.4	12			89.19
11	2	98.8	12	1817		104.09
12	1	73.9	12			216.48
13	3	67.9	12	1985	1132	473.07
14	2	65.6	12	1866		210.95
15	3	64.3	12	1931	1676	99
16	2	88	12	1464		295.3




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	85.8	10	1794		32.732
2	1	62.8	10			554.403
3	2	90.9	10	1958		552.267
4	2	68	10	1246		191.24
5	3	73.9	10	1011	1050	656.303
6	2	74.9	10	1712		145.337
7	2	93.8	10	1824		640.99
8	1	59.2	10			320.203
9	2	70.9	10	1224		339.597
10	1	89.7	10			140.36
11	2	79.8	10	1564		290.363
12	1	68.1	10			628.977
13	2	78.4	10	1394		656.84
14	2	75.7	10	1566		452.333
15	2	84.6	10	1839		225.207
16	2	83.7	10	1241		216.4
17	2	86.6	10	1117		628.533
18	3	83.4	10	1940	1111	321.567



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	93.4	18	1555	1524	453.101
2	2	80.1	18	1171		172.38
3	2	53.6	18	1769		823.25
4	1	63.5	18			20.47
5	3	70.8	18	1958	1090	2.13
6	2	71.2	18	1724		36.19
7	1	52.4	18			56.7
8	3	99.5	18	1292	1536	453.14
9	2	83.3	18	1939		318.49
10	2	65.3	18	1867		1096.6



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	97.7	6	1838		564.348
2	2	55	6	1056		440.49
3	2	96.1	6	1282		246.99
4	3	96.2	6	1874	1373	43.08
5	1	63.1	6			710.19
6	2	68	6	1690		88.42
7	3	99.9	6	1474	1745	59.82
8	3	80.1	6	1225	1333	756.62
9	2	98.4	6	1076		36.08
10	2	86.9	6	1724		161.77
11	3	61.9	6	1272	1117	583.77
12	3	63.2	6	1941	1845	35.42
13	2	77.9	6	1467		385.93
14	3	59.8	6	1725	1728	2
15	2	96.3	6	1144		126.3



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	3	64.3	17	1048	1011	409.394
2	2	54.2	17	1673		390.977
3	2	64.3	17	1352		557.683
4	1	76.2	17			331.81
5	1	95.3	17			261.237
6	2	60.2	17	1512		756.843
7	2	65.7	17	1647		869.37
8	2	69	17	1396		423.487
9	2	56.9	17	1376		620.233


TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	74.3	19	1632		184.423
2	1	89.4	19			128.399
3	1	59.8	19			413.272
4	1	50	19			355.773
5	2	91.9	19	1021		59.844
6	3	50.6	19	1323	1571	346.525
7	2	53.7	19	1942		609.106
8	3	75	19	1775	1418	539.827
9	1	60	19			147.798
10	1	66.1	19			531.129
11	2	73.5	19	1964		183.981
12	2	90.2	19	1148		318.392
13	1	62.1	19			273.133
14	1	72.5	19			171.914
15	3	88.4	19	1849	1046	330.035
16	1	98.6	19			580.916
17	3	93.1	19	1281	1190	206.037
18	2	66.9	19	1378		17.058
19	2	84	19	1833		207.579



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	76.5	11			10.959
2	2	81.1	11	1730		449.943
3	2	52.1	11	1314		560.996
4	2	57.2	11	1416		500.349
5	2	80.9	11	1758		780.322
6	2	62.1	11	1842		725.075
7	2	50.1	11	1625		801.808
8	2	77.4	11	1764		112.392
9	1	72.1	11			639.705
10	2	83.7	11	1756		327.848
11	1	96.4	11			329.401
12	3	58	11	1253	1705	86.654
13	2	52.7	11	1804		817.477




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	90	18	1414		86.222
2	2	65.3	18	1714		629.25
3	3	95.6	18	1505	1315	583.75
4	3	95.6	18	1921	1296	939.09
5	2	61.9	18	1291		342.38
6	1	90.8	18			962.04
7	2	96.8	18	1851		911.66
8	2	52.7	18	1192		189.97
9	2	64.2	18	1832		3.39
10	2	65.6	18	1036		758.87
11	1	82	18			637.9
12	3	73.1	18	1820	1899	808.9



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	56.8	16	1304		316.094
2	3	88.1	16	1146	1798	507.953
3	2	58.2	16	1983		206.636
4	1	56.3	16			115.679
5	1	59.3	16			619.822
6	3	87.2	16	1997	1653	462.485
7	2	98.3	16	1042		387.918
8	2	84.8	16	1542		346.492
9	2	95	16	1677		646.995
10	2	93.1	16	1724		160.598
11	1	99.7	16			21.981
12	2	98.4	16	1161		650.754
13	3	65.9	16	1769	1522	780.077




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	69.8	7			360.173
2	3	95.3	7	1234	1066	302.391
3	1	93.8	7			187.452
4	2	89.6	7	1144		221.613
5	2	97.6	7	1308		381.554
6	2	99.2	7	1646		210.255
7	2	60.2	7	1713		315.816
8	1	58.8	7			618.677
9	2	82.3	7	1316		218.278
10	2	85.2	7	1561		621.079
11	2	66	7	1047		316.541
12	2	65	7	1519		422.772
13	3	68.2	7	1541	1981	292.493
14	2	63.5	7	1792		387.794
15	2	62.6	7	1245		446.715
16	3	79.5	7	1659	1950	233.166
17	2	74.1	7	1917		454.737
18	2	89	7	1131		578.258
19	1	75.2	7			195.279



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	62	6			97.414
2	2	92.8	6	1145		882.73
3	2	81.3	6	1186		479.65
4	1	93.6	6			293.03
5	3	95.6	6	1275	1027	104.5
6	1	82.5	6			334.07
7	2	55.5	6	1020		957.23
8	2	83.4	6	1916		122.87
9	1	96.8	6			949.18
10	1	87.1	6			30.19
11	2	75.7	6	1021		946.5
12	2	67.8	6	1620		520



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	64.3	6	1043		677.491
2	3	59.8	6	1808	1753	219.092
3	3	99.8	6	1613	1959	390.455
4	1	99.6	6			694.923
5	2	83.6	6	1267		55.111
6	1	61.3	6			32.728
7	2	74.8	6	1820		61.766
8	3	71.4	6	1472	1132	155.394
9	3	96.5	6	1425	1186	329.921
10	3	98.9	6	1015	1116	324.439
11	2	76.5	6	1540		555.006
12	1	77.3	6			416.064
13	2	80.8	6	1326		604.382
14	1	81.7	6			638.159
15	1	80.8	6			76.197
16	3	67.2	6	1774	1211	431.965
17	2	93.7	6	1679		112.382



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	91.2	5			311.78
2	2	52.7	5	1732		275.62
3	2	75.3	5	1521		614.22
4	2	76.3	5	1874		417.76
5	3	73.3	5	1583	1533	162.63
6	2	61.7	5	1050		903.37
7	3	73.1	5	1833	1807	849.3
8	2	96.3	5	1718		385.05
9	3	84.1	5	1944	1430	155.98
10	2	96.5	5	1148		966.8



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	76.4	15	1839	1745	205.062
2	2	54.8	15	1182		292.42
3	2	69.8	15	1022		618.49
4	1	65.5	15			2.22
5	2	81.4	15	1583		595.6
6	2	84.7	15	1290		720.87
7	2	89.9	15	1833		351.43
8	2	69.4	15	1775		69.34
9	1	77.7	15			410.49
10	2	67.6	15	1014		733.68
11	3	83.3	15	1264	1473	435.39
12	2	97.4	15	1388		735.05
13	3	94.8	15	1420	1859	278.68
14	2	55.1	15	1409		287.8
15	3	90.3	15	1832	1845	53.1
16	2	77.9	15	1289		597.3



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	78.8	18	1870		162.754
2	1	56.7	18			240.107
3	2	62.3	18	1394		209.534
4	3	88.8	18	1916	1721	802.731
5	2	88.5	18	1618		289.099
6	3	50.3	18	1776	1008	383.096
7	2	62.7	18	1483		53.923
8	2	86.4	18	1440		229.8
9	1	73.7	18			396.317
10	2	55.8	18	1915		496.874
11	1	83.2	18			8.521
12	1	86.4	18			821.629
13	2	93.7	18	1579		435.686
14	3	65	18	1139	1316	737.043




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	72.7	15	1908		115.876
2	3	96.2	15	1088	1959	434
3	2	88.6	15	1392		365.07
4	2	83.5	15	1760		419.46
5	2	67.3	15	1380		488.69
6	3	72.1	15	1520	1027	250.85
7	2	53.5	15	1137		526.85
8	1	51.7	15			487.9
9	2	80.7	15	1088		393.18
10	1	79	15			148.09
11	2	53.8	15	1865		288.92
12	3	91.2	15	1319	1283	38.09
13	2	57.4	15	1917		278.14
14	2	61.4	15	1370		561.99
15	1	52.8	15			467.07
16	1	51.2	15			461.32
17	2	74.9	15	1781		132.78
18	1	90.2	15			118.4
19	2	66	15	1408		178.5
20	1	95.9	15			85.1



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	95.3	13			319.449
2	2	57.4	13	1421		479.78
3	2	80.7	13	1876		358.29
4	1	80.6	13			172.64
5	2	95.2	13	1787		566.5
6	1	76.5	13			258.79
7	2	98.9	13	1142		590.17
8	2	57.5	13	1469		732.71
9	1	94.7	13			130.29
10	1	80.6	13			43.56
11	2	79.8	13	1007		487.83
12	3	59.2	13	1692	1688	377.37
13	1	69.1	13			154.1
14	3	59.4	13	1147	1109	586.4
15	3	64.3	13	1535	1795	718.7
16	1	83.1	13			334.9




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	56.2	16	1461		509.771
2	2	54.5	16	1224		738.79
3	3	61.4	16	1611	1700	129.01
4	3	61.9	16	1900	1199	244.11
5	3	80.5	16	1879	1791	850.07
6	3	72.9	16	1948	1216	757.06
7	1	93.2	16			706.37
8	3	97.8	16	1366	1393	628.26
9	3	71.9	16	1952	1794	86.17
10	2	61.1	16	1928		35.57
11	1	92.4	16			438.3
12	3	57.2	16	1266	1790	56.2




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	89.4	18	1406	1665	456.916
2	2	82.7	18	1908		335.374
3	3	93.1	18	1420	1992	397.3
4	1	62.5	18			212.93
5	3	70.8	18	1431	1657	113.14
6	1	62.4	18			352.3
7	1	69.7	18			170.47
8	1	81.3	18			437.02
9	1	54.8	18			285.96
10	3	65.4	18	1247	1624	78.25
11	2	73.7	18	1284		392.3
12	2	82.7	18	1134		405.49
13	2	76.6	18	1679		289.83
14	3	92.4	18	1353	1134	142.83
15	2	60.7	18	1614		431.78
16	2	96.7	18	1908		268.56
17	2	87.1	18	1421		378.47
18	2	79	18	1329		1.1
19	2	82.6	18	1358		230.1
20	1	68.9	18			228.4




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	67.7	19	1515		1008.55
2	1	59.1	19			285.36
3	1	96.7	19			59.62
4	2	65.1	19	1271		53.68
5	3	68.4	19	1729	1992	1148.86
6	2	91.5	19	1136		795.9
7	1	63.6	19			30.46
8	1	86.4	19			497.79
9	2	86.3	19	1627		690.6
10	2	69.8	19	1079		628.5



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	88.8	13	1803		384.889
2	3	85.5	13	1426	1325	802.253
3	2	85.9	13	1849		653.246
4	2	59	13	1913		690.999
5	2	59.2	13	1896		775.592
6	1	50.1	13			13.265
7	1	78.1	13			604.258
8	3	52.3	13	1226	1730	378.402
9	3	94.8	13	1213	1315	821.995
10	1	90.8	13			753.108
11	2	70.7	13	1578		869.731
12	3	54.8	13	1762	1083	397.154
13	2	56.5	13	1279		310.477



TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	98.2	18	1699		55.709
2	1	98.2	18			189.944
3	3	70.9	18	1268	1508	394.41
4	2	98.2	18	1267		32.43
5	2	68.9	18	1877		407.08
6	2	89.3	18	1275		205.46
7	2	56.6	18	1419		691.21
8	1	94.5	18			605.92
9	2	74.8	18	1344		125.2
10	2	89.8	18	1762		513.85
11	1	73.2	18			557.15
12	2	50.5	18	1061		523.37
13	2	80.5	18	1202		496.3
14	2	61.7	18	1414		77.1
15	2	85.5	18	1040		275




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	54.4	12	1038	1821	166.187
2	2	78.2	12	1034		144.003
3	2	65.2	12	1650		107.97
4	3	76.1	12	1103	1304	380.53
5	2	89.2	12	1314		497.23
6	2	60.6	12	1206		326.39
7	2	95.3	12	1352		59.01
8	3	72.1	12	1588	1774	342.54
9	1	88.1	12			337.55
10	3	74.5	12	1733	1467	246.49
11	1	82.4	12			260.08
12	2	70.2	12	1192		280.59
13	3	60	12	1587	1204	235.17
14	2	50.8	12	1988		541.81
15	3	69.7	12	1512	1311	555.72
16	1	70.2	12			255
17	1	74.3	12			470.1
18	2	69.3	12	1995		250
19	2	99.7	12	1438		200.4
20	2	99.3	12	1799		101




TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	82.6	6	1615		101.521
2	3	89.3	6	1187	1125	344.223
3	2	52.9	6	1870		214.05
4	2	52.5	6	1693		306.78
5	2	73.4	6	1697		536.11
6	3	98.1	6	1910	1642	585.41
7	2	99.7	6	1720		402.84
8	3	75.2	6	1578	1933	225.61
9	2	91.7	6	1513		450.08
10	3	69.5	6	1065	1915	287.63
11	1	82	6			181.06
12	3	90.1	6	1382	1444	482.09
13	2	86.9	6	1692		36.98
14	3	84	6	1693	1189	572.41
15	1	50.3	6			433.59
16	3	51	6	1462	1812	356.35
17	3	72.7	6	1768	1486	489.6
18	2	83.5	6	1030		480
19	1	87.5	6			179.4
20	3	91.2	6	1023	1198	195.3



Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Mode 1: Transmit (802.11ax-20BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	0
20	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	0
26	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			93.33
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.607	20	
2	5.5	5.709	20	
3	5.5	5.639	20	
4	5.5	5.399	20	
5	5.5	5.714	20	
6	5.5	5.262	20	
7	5.5	5.37	20	
8	5.5	5.472	20	
9	5.5	5.488	20	
10	5.5	5.264	20	
11	5.5	5.525	20	
12	5.5	5.515	20	
13	5.5	5.438	20	
14	5.5	5.532	20	
15	5.5	5.324	20	
16	5.5	5.531	20	
17	5.5	5.576	20	
18	5.5	5.356	20	
19	5.5	5.561	20	
20	5.5	5.699	20	
21	5.5	5.272	20	
22	5.5	5.395	20	
23	5.5	5.603	20	
24	5.5	5.266	20	
25	5.5	5.384	20	
26	5.5	5.486	20	
27	5.5	5.325	20	
28	5.5	5.548	20	
29	5.5	5.32	20	
30	5.5	5.348	20	
31	5.5	5.541	20	
32	5.5	5.675	20	
33	5.5	5.434	20	
34	5.5	5.609	20	
35	5.5	5.517	20	
36	5.5	5.352	20	
37	5.5	5.578	20	
38	5.5	5.666	20	
39	5.5	5.431	20	
40	5.5	5.293	20	
41	5.5	5.512	20	
42	5.5	5.671	20	
43	5.5	5.713	20	
44	5.5	5.508	20	*
45	5.5	5.328	20	
46	5.5	5.274	20	
47	5.5	5.261	20	
48	5.5	5.481	20	
49	5.5	5.44	20	

50	5.5	5.557	20	
51	5.5	5.418	20	
52	5.5	5.535	20	
53	5.5	5.497	20	*
54	5.5	5.298	20	
55	5.5	5.707	20	
56	5.5	5.614	20	
57	5.5	5.556	20	
58	5.5	5.591	20	
59	5.5	5.46	20	
60	5.5	5.719	20	
61	5.5	5.71	20	
62	5.5	5.538	20	
63	5.5	5.485	20	
64	5.5	5.63	20	
65	5.5	5.39	20	
66	5.5	5.265	20	
67	5.5	5.403	20	
68	5.5	5.401	20	
69	5.5	5.339	20	
70	5.5	5.411	20	
71	5.5	5.471	20	
72	5.5	5.365	20	
73	5.5	5.346	20	
74	5.5	5.528	20	
75	5.5	5.426	20	
76	5.5	5.522	20	
77	5.5	5.456	20	
78	5.5	5.38	20	
79	5.5	5.692	20	
80	5.5	5.562	20	
81	5.5	5.423	20	
82	5.5	5.306	20	
83	5.5	5.296	20	
84	5.5	5.484	20	
85	5.5	5.5	20	*
86	5.5	5.682	20	
87	5.5	5.552	20	
88	5.5	5.504	20	*
89	5.5	5.43	20	
90	5.5	5.362	20	
91	5.5	5.593	20	
92	5.5	5.645	20	
93	5.5	5.655	20	
94	5.5	5.585	20	
95	5.5	5.616	20	
96	5.5	5.708	20	
97	5.5	5.396	20	
98	5.5	5.693	20	
99	5.5	5.568	20	
100	5.5	5.453	20	

TYPE 6 PARAMETER SHEET

Trial Number : 2

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.265	20	
2	5.5	5.675	20	
3	5.5	5.339	20	
4	5.5	5.29	20	
5	5.5	5.27	20	
6	5.5	5.287	20	
7	5.5	5.608	20	
8	5.5	5.416	20	
9	5.5	5.306	20	
10	5.5	5.342	20	
11	5.5	5.52	20	
12	5.5	5.353	20	
13	5.5	5.569	20	
14	5.5	5.391	20	
15	5.5	5.452	20	
16	5.5	5.602	20	
17	5.5	5.573	20	
18	5.5	5.279	20	
19	5.5	5.612	20	
20	5.5	5.677	20	
21	5.5	5.549	20	
22	5.5	5.395	20	
23	5.5	5.567	20	

TYPE 6 PARAMETER SHEET

Trial Number : 3

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.642	20	
2	5.5	5.54	20	
3	5.5	5.661	20	
4	5.5	5.312	20	
5	5.5	5.401	20	
6	5.5	5.422	20	
7	5.5	5.675	20	
8	5.5	5.485	20	
9	5.5	5.297	20	
10	5.5	5.371	20	
11	5.5	5.419	20	
12	5.5	5.387	20	
13	5.5	5.314	20	
14	5.5	5.7	20	
15	5.5	5.341	20	
16	5.5	5.719	20	
17	5.5	5.662	20	
18	5.5	5.714	20	
19	5.5	5.573	20	
20	5.5	5.508	20	*
21	5.5	5.48	20	
22	5.5	5.443	20	
23	5.5	5.572	20	

TYPE 6 PARAMETER SHEET

Trial Number : 4

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.271	20	
2	5.5	5.635	20	
3	5.5	5.689	20	
4	5.5	5.548	20	
5	5.5	5.587	20	
6	5.5	5.55	20	
7	5.5	5.514	20	
8	5.5	5.499	20	*
9	5.5	5.341	20	
10	5.5	5.609	20	
11	5.5	5.588	20	
12	5.5	5.331	20	
13	5.5	5.351	20	
14	5.5	5.324	20	
15	5.5	5.538	20	
16	5.5	5.535	20	
17	5.5	5.266	20	
18	5.5	5.263	20	
19	5.5	5.495	20	*
20	5.5	5.296	20	
21	5.5	5.38	20	
22	5.5	5.459	20	
23	5.5	5.576	20	

TYPE 6 PARAMETER SHEET

Trial Number : 5

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.279	20	
2	5.5	5.688	20	
3	5.5	5.57	20	
4	5.5	5.417	20	
5	5.5	5.69	20	
6	5.5	5.422	20	
7	5.5	5.54	20	
8	5.5	5.288	20	
9	5.5	5.706	20	
10	5.5	5.266	20	
11	5.5	5.473	20	
12	5.5	5.675	20	
13	5.5	5.405	20	
14	5.5	5.463	20	
15	5.5	5.578	20	
16	5.5	5.586	20	
17	5.5	5.514	20	
18	5.5	5.42	20	
19	5.5	5.309	20	
20	5.5	5.559	20	
21	5.5	5.419	20	
22	5.5	5.447	20	
23	5.5	5.442	20	

TYPE 6 PARAMETER SHEET

Trial Number : 6

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.349	20	
2	5.5	5.47	20	
3	5.5	5.719	20	
4	5.5	5.319	20	
5	5.5	5.413	20	
6	5.5	5.517	20	
7	5.5	5.598	20	
8	5.5	5.408	20	
9	5.5	5.545	20	
10	5.5	5.493	20	*
11	5.5	5.653	20	
12	5.5	5.577	20	
13	5.5	5.463	20	
14	5.5	5.558	20	
15	5.5	5.681	20	
16	5.5	5.333	20	
17	5.5	5.398	20	
18	5.5	5.717	20	
19	5.5	5.339	20	
20	5.5	5.373	20	
21	5.5	5.482	20	
22	5.5	5.566	20	
23	5.5	5.453	20	

TYPE 6 PARAMETER SHEET

Trial Number : 7

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.302	20	
2	5.5	5.31	20	
3	5.5	5.387	20	
4	5.5	5.262	20	
5	5.5	5.495	20	*
6	5.5	5.619	20	
7	5.5	5.482	20	
8	5.5	5.481	20	
9	5.5	5.705	20	
10	5.5	5.545	20	
11	5.5	5.447	20	
12	5.5	5.669	20	
13	5.5	5.286	20	
14	5.5	5.427	20	
15	5.5	5.271	20	
16	5.5	5.325	20	
17	5.5	5.388	20	
18	5.5	5.521	20	
19	5.5	5.449	20	
20	5.5	5.603	20	
21	5.5	5.51	20	*
22	5.5	5.541	20	
23	5.5	5.304	20	

TYPE 6 PARAMETER SHEET

Trial Number : 8

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.434	20	
2	5.5	5.472	20	
3	5.5	5.352	20	
4	5.5	5.537	20	
5	5.5	5.594	20	
6	5.5	5.694	20	
7	5.5	5.48	20	
8	5.5	5.336	20	
9	5.5	5.399	20	
10	5.5	5.722	20	
11	5.5	5.607	20	
12	5.5	5.491	20	*
13	5.5	5.622	20	
14	5.5	5.715	20	
15	5.5	5.7	20	
16	5.5	5.293	20	
17	5.5	5.599	20	
18	5.5	5.328	20	
19	5.5	5.584	20	
20	5.5	5.471	20	
21	5.5	5.387	20	
22	5.5	5.676	20	
23	5.5	5.666	20	

TYPE 6 PARAMETER SHEET

Trial Number : 9

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.374	20	
2	5.5	5.625	20	
3	5.5	5.606	20	
4	5.5	5.676	20	
5	5.5	5.655	20	
6	5.5	5.636	20	
7	5.5	5.67	20	
8	5.5	5.688	20	
9	5.5	5.35	20	
10	5.5	5.436	20	
11	5.5	5.324	20	
12	5.5	5.286	20	
13	5.5	5.323	20	
14	5.5	5.263	20	
15	5.5	5.339	20	
16	5.5	5.519	20	
17	5.5	5.566	20	
18	5.5	5.284	20	
19	5.5	5.376	20	
20	5.5	5.343	20	
21	5.5	5.493	20	*
22	5.5	5.663	20	
23	5.5	5.389	20	

TYPE 6 PARAMETER SHEET

Trial Number : 10

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.619	20	
2	5.5	5.71	20	
3	5.5	5.618	20	
4	5.5	5.685	20	
5	5.5	5.27	20	
6	5.5	5.642	20	
7	5.5	5.64	20	
8	5.5	5.546	20	
9	5.5	5.711	20	
10	5.5	5.426	20	
11	5.5	5.448	20	
12	5.5	5.63	20	
13	5.5	5.366	20	
14	5.5	5.646	20	
15	5.5	5.545	20	
16	5.5	5.283	20	
17	5.5	5.562	20	
18	5.5	5.322	20	
19	5.5	5.336	20	
20	5.5	5.463	20	
21	5.5	5.651	20	
22	5.5	5.35	20	
23	5.5	5.709	20	

TYPE 6 PARAMETER SHEET

Trial Number : 11

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.662	20	
2	5.5	5.306	20	
3	5.5	5.25	20	
4	5.5	5.664	20	
5	5.5	5.627	20	
6	5.5	5.341	20	
7	5.5	5.553	20	
8	5.5	5.418	20	
9	5.5	5.304	20	
10	5.5	5.478	20	
11	5.5	5.332	20	
12	5.5	5.593	20	
13	5.5	5.485	20	
14	5.5	5.682	20	
15	5.5	5.669	20	
16	5.5	5.646	20	
17	5.5	5.312	20	
18	5.5	5.336	20	
19	5.5	5.596	20	
20	5.5	5.534	20	
21	5.5	5.575	20	
22	5.5	5.708	20	
23	5.5	5.554	20	

TYPE 6 PARAMETER SHEET

Trial Number : 12

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.603	20	
2	5.5	5.658	20	
3	5.5	5.714	20	
4	5.5	5.346	20	
5	5.5	5.623	20	
6	5.5	5.569	20	
7	5.5	5.296	20	
8	5.5	5.452	20	
9	5.5	5.49	20	*
10	5.5	5.388	20	
11	5.5	5.376	20	
12	5.5	5.592	20	
13	5.5	5.47	20	
14	5.5	5.28	20	
15	5.5	5.548	20	
16	5.5	5.288	20	
17	5.5	5.399	20	
18	5.5	5.463	20	
19	5.5	5.492	20	*
20	5.5	5.662	20	
21	5.5	5.274	20	
22	5.5	5.488	20	
23	5.5	5.41	20	

TYPE 6 PARAMETER SHEET

Trial Number : 13

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.33	20	
2	5.5	5.523	20	
3	5.5	5.581	20	
4	5.5	5.524	20	
5	5.5	5.489	20	
6	5.5	5.691	20	
7	5.5	5.314	20	
8	5.5	5.717	20	
9	5.5	5.429	20	
10	5.5	5.626	20	
11	5.5	5.503	20	*
12	5.5	5.401	20	
13	5.5	5.265	20	
14	5.5	5.517	20	
15	5.5	5.521	20	
16	5.5	5.251	20	
17	5.5	5.252	20	
18	5.5	5.286	20	
19	5.5	5.567	20	
20	5.5	5.563	20	
21	5.5	5.353	20	
22	5.5	5.551	20	
23	5.5	5.455	20	

TYPE 6 PARAMETER SHEET

Trial Number : 14

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.687	20	
2	5.5	5.326	20	
3	5.5	5.368	20	
4	5.5	5.267	20	
5	5.5	5.345	20	
6	5.5	5.629	20	
7	5.5	5.659	20	
8	5.5	5.506	20	*
9	5.5	5.709	20	
10	5.5	5.625	20	
11	5.5	5.339	20	
12	5.5	5.333	20	
13	5.5	5.287	20	
14	5.5	5.583	20	
15	5.5	5.366	20	
16	5.5	5.445	20	
17	5.5	5.276	20	
18	5.5	5.48	20	
19	5.5	5.391	20	
20	5.5	5.386	20	
21	5.5	5.685	20	
22	5.5	5.532	20	
23	5.5	5.318	20	

TYPE 6 PARAMETER SHEET

Trial Number : 15

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.367	20	
2	5.5	5.459	20	
3	5.5	5.421	20	
4	5.5	5.31	20	
5	5.5	5.32	20	
6	5.5	5.712	20	
7	5.5	5.524	20	
8	5.5	5.653	20	
9	5.5	5.334	20	
10	5.5	5.61	20	
11	5.5	5.388	20	
12	5.5	5.609	20	
13	5.5	5.436	20	
14	5.5	5.709	20	
15	5.5	5.271	20	
16	5.5	5.28	20	
17	5.5	5.593	20	
18	5.5	5.54	20	
19	5.5	5.557	20	
20	5.5	5.66	20	
21	5.5	5.418	20	
22	5.5	5.473	20	
23	5.5	5.527	20	

TYPE 6 PARAMETER SHEET

Trial Number : 16

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.478	20	
2	5.5	5.604	20	
3	5.5	5.579	20	
4	5.5	5.482	20	
5	5.5	5.538	20	
6	5.5	5.49	20	*
7	5.5	5.654	20	
8	5.5	5.593	20	
9	5.5	5.271	20	
10	5.5	5.537	20	
11	5.5	5.682	20	
12	5.5	5.384	20	
13	5.5	5.523	20	
14	5.5	5.417	20	
15	5.5	5.711	20	
16	5.5	5.266	20	
17	5.5	5.606	20	
18	5.5	5.395	20	
19	5.5	5.602	20	
20	5.5	5.694	20	
21	5.5	5.67	20	
22	5.5	5.393	20	
23	5.5	5.267	20	

TYPE 6 PARAMETER SHEET

Trial Number : 17

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.54	20	
2	5.5	5.489	20	
3	5.5	5.647	20	
4	5.5	5.479	20	
5	5.5	5.516	20	
6	5.5	5.558	20	
7	5.5	5.382	20	
8	5.5	5.394	20	
9	5.5	5.351	20	
10	5.5	5.626	20	
11	5.5	5.462	20	
12	5.5	5.415	20	
13	5.5	5.694	20	
14	5.5	5.311	20	
15	5.5	5.697	20	
16	5.5	5.263	20	
17	5.5	5.478	20	
18	5.5	5.285	20	
19	5.5	5.281	20	
20	5.5	5.463	20	
21	5.5	5.553	20	
22	5.5	5.389	20	
23	5.5	5.349	20	

TYPE 6 PARAMETER SHEET

Trial Number : 18

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.571	20	
2	5.5	5.511	20	
3	5.5	5.674	20	
4	5.5	5.269	20	
5	5.5	5.364	20	
6	5.5	5.596	20	
7	5.5	5.592	20	
8	5.5	5.697	20	
9	5.5	5.564	20	
10	5.5	5.291	20	
11	5.5	5.538	20	
12	5.5	5.401	20	
13	5.5	5.637	20	
14	5.5	5.558	20	
15	5.5	5.275	20	
16	5.5	5.258	20	
17	5.5	5.468	20	
18	5.5	5.369	20	
19	5.5	5.606	20	
20	5.5	5.694	20	
21	5.5	5.469	20	
22	5.5	5.648	20	
23	5.5	5.608	20	

TYPE 6 PARAMETER SHEET

Trial Number : 19

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.569	20	
2	5.5	5.408	20	
3	5.5	5.492	20	*
4	5.5	5.441	20	
5	5.5	5.353	20	
6	5.5	5.301	20	
7	5.5	5.583	20	
8	5.5	5.699	20	
9	5.5	5.299	20	
10	5.5	5.264	20	
11	5.5	5.715	20	
12	5.5	5.657	20	
13	5.5	5.6	20	
14	5.5	5.449	20	
15	5.5	5.275	20	
16	5.5	5.388	20	
17	5.5	5.442	20	
18	5.5	5.594	20	
19	5.5	5.622	20	
20	5.5	5.603	20	
21	5.5	5.688	20	
22	5.5	5.479	20	
23	5.5	5.563	20	

TYPE 6 PARAMETER SHEET

Trial Number : 20

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.465	20	
2	5.5	5.608	20	
3	5.5	5.604	20	
4	5.5	5.575	20	
5	5.5	5.692	20	
6	5.5	5.65	20	
7	5.5	5.679	20	
8	5.5	5.453	20	
9	5.5	5.458	20	
10	5.5	5.254	20	
11	5.5	5.435	20	
12	5.5	5.507	20	*
13	5.5	5.723	20	
14	5.5	5.279	20	
15	5.5	5.333	20	
16	5.5	5.464	20	
17	5.5	5.613	20	
18	5.5	5.45	20	
19	5.5	5.548	20	
20	5.5	5.583	20	
21	5.5	5.448	20	
22	5.5	5.47	20	
23	5.5	5.594	20	

TYPE 6 PARAMETER SHEET

Trial Number : 21

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.698	20	
2	5.5	5.272	20	
3	5.5	5.646	20	
4	5.5	5.704	20	
5	5.5	5.519	20	
6	5.5	5.413	20	
7	5.5	5.305	20	
8	5.5	5.319	20	
9	5.5	5.288	20	
10	5.5	5.263	20	
11	5.5	5.482	20	
12	5.5	5.414	20	
13	5.5	5.502	20	*
14	5.5	5.255	20	
15	5.5	5.281	20	
16	5.5	5.388	20	
17	5.5	5.512	20	
18	5.5	5.613	20	
19	5.5	5.639	20	
20	5.5	5.455	20	
21	5.5	5.42	20	
22	5.5	5.49	20	*
23	5.5	5.425	20	

TYPE 6 PARAMETER SHEET

Trial Number : 22

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.272	20	
2	5.5	5.363	20	
3	5.5	5.642	20	
4	5.5	5.461	20	
5	5.5	5.518	20	
6	5.5	5.588	20	
7	5.5	5.575	20	
8	5.5	5.508	20	*
9	5.5	5.678	20	
10	5.5	5.279	20	
11	5.5	5.371	20	
12	5.5	5.321	20	
13	5.5	5.27	20	
14	5.5	5.373	20	
15	5.5	5.514	20	
16	5.5	5.414	20	
17	5.5	5.382	20	
18	5.5	5.622	20	
19	5.5	5.433	20	
20	5.5	5.681	20	
21	5.5	5.709	20	
22	5.5	5.513	20	
23	5.5	5.359	20	

TYPE 6 PARAMETER SHEET

Trial Number : 23

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.652	20	
2	5.5	5.494	20	*
3	5.5	5.251	20	
4	5.5	5.506	20	*
5	5.5	5.643	20	
6	5.5	5.72	20	
7	5.5	5.287	20	
8	5.5	5.697	20	
9	5.5	5.648	20	
10	5.5	5.694	20	
11	5.5	5.4	20	
12	5.5	5.326	20	
13	5.5	5.43	20	
14	5.5	5.376	20	
15	5.5	5.38	20	
16	5.5	5.559	20	
17	5.5	5.575	20	
18	5.5	5.634	20	
19	5.5	5.426	20	
20	5.5	5.513	20	
21	5.5	5.403	20	
22	5.5	5.576	20	
23	5.5	5.347	20	

TYPE 6 PARAMETER SHEET

Trial Number : 24

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.573	20	
2	5.5	5.622	20	
3	5.5	5.47	20	
4	5.5	5.489	20	
5	5.5	5.638	20	
6	5.5	5.707	20	
7	5.5	5.724	20	
8	5.5	5.583	20	
9	5.5	5.275	20	
10	5.5	5.457	20	
11	5.5	5.586	20	
12	5.5	5.51	20	*
13	5.5	5.42	20	
14	5.5	5.407	20	
15	5.5	5.497	20	*
16	5.5	5.662	20	
17	5.5	5.619	20	
18	5.5	5.429	20	
19	5.5	5.332	20	
20	5.5	5.373	20	
21	5.5	5.549	20	
22	5.5	5.679	20	
23	5.5	5.648	20	

TYPE 6 PARAMETER SHEET

Trial Number : 25

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.309	20	
2	5.5	5.403	20	
3	5.5	5.551	20	
4	5.5	5.418	20	
5	5.5	5.353	20	
6	5.5	5.486	20	
7	5.5	5.305	20	
8	5.5	5.441	20	
9	5.5	5.438	20	
10	5.5	5.552	20	
11	5.5	5.42	20	
12	5.5	5.327	20	
13	5.5	5.448	20	
14	5.5	5.527	20	
15	5.5	5.626	20	
16	5.5	5.407	20	
17	5.5	5.617	20	
18	5.5	5.272	20	
19	5.5	5.692	20	
20	5.5	5.429	20	
21	5.5	5.51	20	*
22	5.5	5.29	20	
23	5.5	5.439	20	

TYPE 6 PARAMETER SHEET

Trial Number : 26

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.545	20	
2	5.5	5.662	20	
3	5.5	5.658	20	
4	5.5	5.452	20	
5	5.5	5.506	20	*
6	5.5	5.675	20	
7	5.5	5.646	20	
8	5.5	5.561	20	
9	5.5	5.524	20	
10	5.5	5.601	20	
11	5.5	5.333	20	
12	5.5	5.42	20	
13	5.5	5.376	20	
14	5.5	5.487	20	
15	5.5	5.273	20	
16	5.5	5.71	20	
17	5.5	5.351	20	
18	5.5	5.651	20	
19	5.5	5.301	20	
20	5.5	5.512	20	
21	5.5	5.706	20	
22	5.5	5.325	20	
23	5.5	5.557	20	

TYPE 6 PARAMETER SHEET

Trial Number : 27

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.579	20	
2	5.5	5.425	20	
3	5.5	5.679	20	
4	5.5	5.485	20	
5	5.5	5.584	20	
6	5.5	5.472	20	
7	5.5	5.496	20	*
8	5.5	5.264	20	
9	5.5	5.532	20	
10	5.5	5.387	20	
11	5.5	5.616	20	
12	5.5	5.278	20	
13	5.5	5.478	20	
14	5.5	5.63	20	
15	5.5	5.309	20	
16	5.5	5.352	20	
17	5.5	5.409	20	
18	5.5	5.3	20	
19	5.5	5.313	20	
20	5.5	5.404	20	
21	5.5	5.252	20	
22	5.5	5.64	20	
23	5.5	5.529	20	

TYPE 6 PARAMETER SHEET

Trial Number : 28

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.458	20	
2	5.5	5.465	20	
3	5.5	5.486	20	
4	5.5	5.645	20	
5	5.5	5.422	20	
6	5.5	5.471	20	
7	5.5	5.565	20	
8	5.5	5.688	20	
9	5.5	5.432	20	
10	5.5	5.564	20	
11	5.5	5.285	20	
12	5.5	5.318	20	
13	5.5	5.592	20	
14	5.5	5.533	20	
15	5.5	5.699	20	
16	5.5	5.372	20	
17	5.5	5.338	20	
18	5.5	5.559	20	
19	5.5	5.663	20	
20	5.5	5.271	20	
21	5.5	5.325	20	
22	5.5	5.435	20	
23	5.5	5.635	20	

TYPE 6 PARAMETER SHEET

Trial Number : 29

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.324	20	
2	5.5	5.434	20	
3	5.5	5.364	20	
4	5.5	5.601	20	
5	5.5	5.514	20	
6	5.5	5.68	20	
7	5.5	5.72	20	
8	5.5	5.274	20	
9	5.5	5.261	20	
10	5.5	5.444	20	
11	5.5	5.379	20	
12	5.5	5.711	20	
13	5.5	5.483	20	
14	5.5	5.549	20	
15	5.5	5.351	20	
16	5.5	5.579	20	
17	5.5	5.515	20	
18	5.5	5.421	20	
19	5.5	5.58	20	
20	5.5	5.567	20	
21	5.5	5.32	20	
22	5.5	5.507	20	*
23	5.5	5.394	20	

TYPE 6 PARAMETER SHEET

Trial Number : 30

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.381	20	
2	5.5	5.352	20	
3	5.5	5.711	20	
4	5.5	5.509	20	*
5	5.5	5.368	20	
6	5.5	5.497	20	*
7	5.5	5.277	20	
8	5.5	5.69	20	
9	5.5	5.366	20	
10	5.5	5.553	20	
11	5.5	5.58	20	
12	5.5	5.335	20	
13	5.5	5.536	20	
14	5.5	5.625	20	
15	5.5	5.351	20	
16	5.5	5.655	20	
17	5.5	5.65	20	
18	5.5	5.296	20	
19	5.5	5.654	20	
20	5.5	5.593	20	
21	5.5	5.327	20	
22	5.5	5.511	20	
23	5.5	5.626	20	

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Mode 2: Transmit (802.11ax-40BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	0
7	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	0
17	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	0
26	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			90.00
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.558	40	
2	5.51	5.598	40	
3	5.51	5.362	40	
4	5.51	5.348	40	
5	5.51	5.64	40	
6	5.51	5.56	40	
7	5.51	5.506	40	*
8	5.51	5.518	40	*
9	5.51	5.618	40	
10	5.51	5.571	40	
11	5.51	5.696	40	
12	5.51	5.27	40	
13	5.51	5.656	40	
14	5.51	5.329	40	
15	5.51	5.302	40	
16	5.51	5.503	40	*
17	5.51	5.555	40	
18	5.51	5.516	40	*
19	5.51	5.467	40	
20	5.51	5.612	40	
21	5.51	5.717	40	
22	5.51	5.368	40	
23	5.51	5.521	40	*
24	5.51	5.478	40	
25	5.51	5.47	40	
26	5.51	5.493	40	*
27	5.51	5.342	40	
28	5.51	5.283	40	
29	5.51	5.359	40	
30	5.51	5.295	40	
31	5.51	5.328	40	
32	5.51	5.38	40	
33	5.51	5.318	40	
34	5.51	5.703	40	
35	5.51	5.384	40	
36	5.51	5.267	40	
37	5.51	5.259	40	
38	5.51	5.501	40	*
39	5.51	5.631	40	
40	5.51	5.479	40	
41	5.51	5.315	40	
42	5.51	5.625	40	
43	5.51	5.29	40	
44	5.51	5.332	40	
45	5.51	5.403	40	
46	5.51	5.387	40	
47	5.51	5.42	40	
48	5.51	5.367	40	
49	5.51	5.552	40	

50	5.51	5.675	40	
51	5.51	5.585	40	
52	5.51	5.287	40	
53	5.51	5.257	40	
54	5.51	5.578	40	
55	5.51	5.405	40	
56	5.51	5.433	40	
57	5.51	5.425	40	
58	5.51	5.711	40	
59	5.51	5.389	40	
60	5.51	5.473	40	
61	5.51	5.43	40	
62	5.51	5.519	40	*
63	5.51	5.369	40	
64	5.51	5.524	40	*
65	5.51	5.541	40	
66	5.51	5.635	40	
67	5.51	5.632	40	
68	5.51	5.484	40	
69	5.51	5.582	40	
70	5.51	5.251	40	
71	5.51	5.383	40	
72	5.51	5.258	40	
73	5.51	5.643	40	
74	5.51	5.647	40	
75	5.51	5.511	40	*
76	5.51	5.256	40	
77	5.51	5.497	40	*
78	5.51	5.654	40	
79	5.51	5.52	40	*
80	5.51	5.447	40	
81	5.51	5.351	40	
82	5.51	5.549	40	
83	5.51	5.5	40	*
84	5.51	5.574	40	
85	5.51	5.607	40	
86	5.51	5.486	40	
87	5.51	5.311	40	
88	5.51	5.434	40	
89	5.51	5.546	40	
90	5.51	5.54	40	
91	5.51	5.344	40	
92	5.51	5.538	40	
93	5.51	5.597	40	
94	5.51	5.323	40	
95	5.51	5.279	40	
96	5.51	5.642	40	
97	5.51	5.335	40	
98	5.51	5.347	40	
99	5.51	5.414	40	
100	5.51	5.338	40	

TYPE 6 PARAMETER SHEET

Trial Number : 2

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.647	40	
2	5.51	5.331	40	
3	5.51	5.298	40	
4	5.51	5.257	40	
5	5.51	5.385	40	
6	5.51	5.291	40	
7	5.51	5.564	40	
8	5.51	5.547	40	
9	5.51	5.535	40	
10	5.51	5.403	40	
11	5.51	5.256	40	
12	5.51	5.689	40	
13	5.51	5.478	40	
14	5.51	5.594	40	
15	5.51	5.548	40	
16	5.51	5.278	40	
17	5.51	5.718	40	
18	5.51	5.649	40	
19	5.51	5.549	40	
20	5.51	5.413	40	
21	5.51	5.371	40	
22	5.51	5.25	40	
23	5.51	5.477	40	

TYPE 6 PARAMETER SHEET

Trial Number : 3

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.462	40	
2	5.51	5.65	40	
3	5.51	5.342	40	
4	5.51	5.474	40	
5	5.51	5.372	40	
6	5.51	5.29	40	
7	5.51	5.575	40	
8	5.51	5.637	40	
9	5.51	5.56	40	
10	5.51	5.303	40	
11	5.51	5.43	40	
12	5.51	5.664	40	
13	5.51	5.485	40	
14	5.51	5.382	40	
15	5.51	5.498	40	*
16	5.51	5.295	40	
17	5.51	5.477	40	
18	5.51	5.589	40	
19	5.51	5.352	40	
20	5.51	5.568	40	
21	5.51	5.411	40	
22	5.51	5.654	40	
23	5.51	5.594	40	

TYPE 6 PARAMETER SHEET

Trial Number : 4

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.307	40	
2	5.51	5.368	40	
3	5.51	5.488	40	
4	5.51	5.521	40	*
5	5.51	5.628	40	
6	5.51	5.673	40	
7	5.51	5.542	40	
8	5.51	5.35	40	
9	5.51	5.274	40	
10	5.51	5.451	40	
11	5.51	5.549	40	
12	5.51	5.72	40	
13	5.51	5.697	40	
14	5.51	5.29	40	
15	5.51	5.36	40	
16	5.51	5.323	40	
17	5.51	5.626	40	
18	5.51	5.283	40	
19	5.51	5.678	40	
20	5.51	5.292	40	
21	5.51	5.49	40	*
22	5.51	5.473	40	
23	5.51	5.533	40	

TYPE 6 PARAMETER SHEET

Trial Number : 5

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.567	40	
2	5.51	5.38	40	
3	5.51	5.455	40	
4	5.51	5.659	40	
5	5.51	5.342	40	
6	5.51	5.288	40	
7	5.51	5.46	40	
8	5.51	5.501	40	*
9	5.51	5.272	40	
10	5.51	5.724	40	
11	5.51	5.535	40	
12	5.51	5.701	40	
13	5.51	5.315	40	
14	5.51	5.638	40	
15	5.51	5.625	40	
16	5.51	5.683	40	
17	5.51	5.334	40	
18	5.51	5.471	40	
19	5.51	5.263	40	
20	5.51	5.594	40	
21	5.51	5.528	40	*
22	5.51	5.527	40	*
23	5.51	5.651	40	

TYPE 6 PARAMETER SHEET

Trial Number : 6

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.322	40	
2	5.51	5.639	40	
3	5.51	5.261	40	
4	5.51	5.485	40	
5	5.51	5.527	40	*
6	5.51	5.484	40	
7	5.51	5.603	40	
8	5.51	5.479	40	
9	5.51	5.393	40	
10	5.51	5.601	40	
11	5.51	5.707	40	
12	5.51	5.557	40	
13	5.51	5.289	40	
14	5.51	5.382	40	
15	5.51	5.539	40	
16	5.51	5.339	40	
17	5.51	5.286	40	
18	5.51	5.676	40	
19	5.51	5.524	40	*
20	5.51	5.598	40	
21	5.51	5.532	40	
22	5.51	5.711	40	
23	5.51	5.625	40	

TYPE 6 PARAMETER SHEET

Trial Number : 7

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.512	40	*
2	5.51	5.597	40	
3	5.51	5.557	40	
4	5.51	5.591	40	
5	5.51	5.408	40	
6	5.51	5.473	40	
7	5.51	5.34	40	
8	5.51	5.543	40	
9	5.51	5.487	40	
10	5.51	5.644	40	
11	5.51	5.657	40	
12	5.51	5.532	40	
13	5.51	5.685	40	
14	5.51	5.521	40	*
15	5.51	5.389	40	
16	5.51	5.267	40	
17	5.51	5.393	40	
18	5.51	5.675	40	
19	5.51	5.492	40	*
20	5.51	5.328	40	
21	5.51	5.576	40	
22	5.51	5.632	40	
23	5.51	5.549	40	

TYPE 6 PARAMETER SHEET

Trial Number : 8

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.482	40	
2	5.51	5.674	40	
3	5.51	5.511	40	*
4	5.51	5.339	40	
5	5.51	5.635	40	
6	5.51	5.521	40	*
7	5.51	5.51	40	*
8	5.51	5.273	40	
9	5.51	5.291	40	
10	5.51	5.599	40	
11	5.51	5.28	40	
12	5.51	5.416	40	
13	5.51	5.264	40	
14	5.51	5.577	40	
15	5.51	5.598	40	
16	5.51	5.254	40	
17	5.51	5.562	40	
18	5.51	5.538	40	
19	5.51	5.326	40	
20	5.51	5.431	40	
21	5.51	5.46	40	
22	5.51	5.283	40	
23	5.51	5.439	40	

TYPE 6 PARAMETER SHEET

Trial Number : 9

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.486	40	
2	5.51	5.255	40	
3	5.51	5.699	40	
4	5.51	5.476	40	
5	5.51	5.583	40	
6	5.51	5.579	40	
7	5.51	5.456	40	
8	5.51	5.544	40	
9	5.51	5.538	40	
10	5.51	5.552	40	
11	5.51	5.522	40	*
12	5.51	5.665	40	
13	5.51	5.667	40	
14	5.51	5.263	40	
15	5.51	5.402	40	
16	5.51	5.306	40	
17	5.51	5.613	40	
18	5.51	5.56	40	
19	5.51	5.482	40	
20	5.51	5.378	40	
21	5.51	5.32	40	
22	5.51	5.298	40	
23	5.51	5.654	40	

TYPE 6 PARAMETER SHEET

Trial Number : 10

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.688	40	
2	5.51	5.311	40	
3	5.51	5.667	40	
4	5.51	5.353	40	
5	5.51	5.325	40	
6	5.51	5.46	40	
7	5.51	5.546	40	
8	5.51	5.332	40	
9	5.51	5.674	40	
10	5.51	5.664	40	
11	5.51	5.356	40	
12	5.51	5.334	40	
13	5.51	5.3	40	
14	5.51	5.627	40	
15	5.51	5.409	40	
16	5.51	5.488	40	
17	5.51	5.354	40	
18	5.51	5.393	40	
19	5.51	5.448	40	
20	5.51	5.437	40	
21	5.51	5.605	40	
22	5.51	5.61	40	
23	5.51	5.618	40	

TYPE 6 PARAMETER SHEET

Trial Number : 11

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.286	40	
2	5.51	5.553	40	
3	5.51	5.335	40	
4	5.51	5.441	40	
5	5.51	5.255	40	
6	5.51	5.284	40	
7	5.51	5.39	40	
8	5.51	5.46	40	
9	5.51	5.397	40	
10	5.51	5.653	40	
11	5.51	5.509	40	*
12	5.51	5.304	40	
13	5.51	5.646	40	
14	5.51	5.262	40	
15	5.51	5.391	40	
16	5.51	5.265	40	
17	5.51	5.59	40	
18	5.51	5.319	40	
19	5.51	5.535	40	
20	5.51	5.702	40	
21	5.51	5.401	40	
22	5.51	5.506	40	*
23	5.51	5.693	40	

TYPE 6 PARAMETER SHEET

Trial Number : 12

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.347	40	
2	5.51	5.498	40	*
3	5.51	5.291	40	
4	5.51	5.518	40	*
5	5.51	5.572	40	
6	5.51	5.541	40	
7	5.51	5.505	40	*
8	5.51	5.333	40	
9	5.51	5.522	40	*
10	5.51	5.63	40	
11	5.51	5.575	40	
12	5.51	5.634	40	
13	5.51	5.54	40	
14	5.51	5.683	40	
15	5.51	5.378	40	
16	5.51	5.649	40	
17	5.51	5.477	40	
18	5.51	5.44	40	
19	5.51	5.709	40	
20	5.51	5.499	40	*
21	5.51	5.65	40	
22	5.51	5.391	40	
23	5.51	5.615	40	

TYPE 6 PARAMETER SHEET

Trial Number : 13

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.297	40	
2	5.51	5.324	40	
3	5.51	5.475	40	
4	5.51	5.61	40	
5	5.51	5.294	40	
6	5.51	5.279	40	
7	5.51	5.42	40	
8	5.51	5.63	40	
9	5.51	5.379	40	
10	5.51	5.651	40	
11	5.51	5.339	40	
12	5.51	5.606	40	
13	5.51	5.267	40	
14	5.51	5.276	40	
15	5.51	5.361	40	
16	5.51	5.684	40	
17	5.51	5.594	40	
18	5.51	5.419	40	
19	5.51	5.481	40	
20	5.51	5.671	40	
21	5.51	5.407	40	
22	5.51	5.273	40	
23	5.51	5.462	40	

TYPE 6 PARAMETER SHEET

Trial Number : 14

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.718	40	
2	5.51	5.619	40	
3	5.51	5.577	40	
4	5.51	5.656	40	
5	5.51	5.598	40	
6	5.51	5.639	40	
7	5.51	5.389	40	
8	5.51	5.37	40	
9	5.51	5.402	40	
10	5.51	5.61	40	
11	5.51	5.68	40	
12	5.51	5.317	40	
13	5.51	5.357	40	
14	5.51	5.69	40	
15	5.51	5.684	40	
16	5.51	5.671	40	
17	5.51	5.583	40	
18	5.51	5.47	40	
19	5.51	5.486	40	
20	5.51	5.677	40	
21	5.51	5.447	40	
22	5.51	5.634	40	
23	5.51	5.621	40	

TYPE 6 PARAMETER SHEET

Trial Number : 15

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.297	40	
2	5.51	5.456	40	
3	5.51	5.496	40	*
4	5.51	5.642	40	
5	5.51	5.717	40	
6	5.51	5.507	40	*
7	5.51	5.269	40	
8	5.51	5.688	40	
9	5.51	5.663	40	
10	5.51	5.502	40	*
11	5.51	5.694	40	
12	5.51	5.606	40	
13	5.51	5.281	40	
14	5.51	5.295	40	
15	5.51	5.426	40	
16	5.51	5.375	40	
17	5.51	5.724	40	
18	5.51	5.514	40	*
19	5.51	5.347	40	
20	5.51	5.587	40	
21	5.51	5.381	40	
22	5.51	5.418	40	
23	5.51	5.42	40	

TYPE 6 PARAMETER SHEET

Trial Number : 16

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.333	40	
2	5.51	5.441	40	
3	5.51	5.666	40	
4	5.51	5.484	40	
5	5.51	5.326	40	
6	5.51	5.542	40	
7	5.51	5.317	40	
8	5.51	5.465	40	
9	5.51	5.568	40	
10	5.51	5.319	40	
11	5.51	5.531	40	
12	5.51	5.574	40	
13	5.51	5.292	40	
14	5.51	5.624	40	
15	5.51	5.541	40	
16	5.51	5.532	40	
17	5.51	5.495	40	*
18	5.51	5.708	40	
19	5.51	5.458	40	
20	5.51	5.499	40	*
21	5.51	5.698	40	
22	5.51	5.352	40	
23	5.51	5.399	40	

TYPE 6 PARAMETER SHEET

Trial Number : 17

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.629	40	
2	5.51	5.658	40	
3	5.51	5.478	40	
4	5.51	5.384	40	
5	5.51	5.305	40	
6	5.51	5.411	40	
7	5.51	5.591	40	
8	5.51	5.679	40	
9	5.51	5.55	40	
10	5.51	5.657	40	
11	5.51	5.709	40	
12	5.51	5.408	40	
13	5.51	5.641	40	
14	5.51	5.516	40	*
15	5.51	5.395	40	
16	5.51	5.609	40	
17	5.51	5.41	40	
18	5.51	5.528	40	*
19	5.51	5.357	40	
20	5.51	5.428	40	
21	5.51	5.482	40	
22	5.51	5.318	40	
23	5.51	5.397	40	

TYPE 6 PARAMETER SHEET

Trial Number : 18

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.483	40	
2	5.51	5.636	40	
3	5.51	5.393	40	
4	5.51	5.718	40	
5	5.51	5.4	40	
6	5.51	5.312	40	
7	5.51	5.53	40	*
8	5.51	5.569	40	
9	5.51	5.72	40	
10	5.51	5.6	40	
11	5.51	5.575	40	
12	5.51	5.688	40	
13	5.51	5.577	40	
14	5.51	5.571	40	
15	5.51	5.472	40	
16	5.51	5.595	40	
17	5.51	5.641	40	
18	5.51	5.462	40	
19	5.51	5.649	40	
20	5.51	5.565	40	
21	5.51	5.309	40	
22	5.51	5.476	40	
23	5.51	5.377	40	

TYPE 6 PARAMETER SHEET

Trial Number : 19

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.327	40	
2	5.51	5.58	40	
3	5.51	5.349	40	
4	5.51	5.382	40	
5	5.51	5.63	40	
6	5.51	5.376	40	
7	5.51	5.494	40	*
8	5.51	5.398	40	
9	5.51	5.694	40	
10	5.51	5.533	40	
11	5.51	5.427	40	
12	5.51	5.577	40	
13	5.51	5.265	40	
14	5.51	5.375	40	
15	5.51	5.308	40	
16	5.51	5.283	40	
17	5.51	5.391	40	
18	5.51	5.685	40	
19	5.51	5.719	40	
20	5.51	5.604	40	
21	5.51	5.53	40	*
22	5.51	5.514	40	*
23	5.51	5.615	40	

TYPE 6 PARAMETER SHEET

Trial Number : 20

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.694	40	
2	5.51	5.585	40	
3	5.51	5.537	40	
4	5.51	5.436	40	
5	5.51	5.548	40	
6	5.51	5.385	40	
7	5.51	5.335	40	
8	5.51	5.543	40	
9	5.51	5.262	40	
10	5.51	5.38	40	
11	5.51	5.686	40	
12	5.51	5.437	40	
13	5.51	5.622	40	
14	5.51	5.343	40	
15	5.51	5.47	40	
16	5.51	5.671	40	
17	5.51	5.281	40	
18	5.51	5.522	40	*
19	5.51	5.375	40	
20	5.51	5.589	40	
21	5.51	5.28	40	
22	5.51	5.263	40	
23	5.51	5.663	40	

TYPE 6 PARAMETER SHEET

Trial Number : 21

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.283	40	
2	5.51	5.573	40	
3	5.51	5.673	40	
4	5.51	5.701	40	
5	5.51	5.546	40	
6	5.51	5.625	40	
7	5.51	5.408	40	
8	5.51	5.618	40	
9	5.51	5.288	40	
10	5.51	5.558	40	
11	5.51	5.622	40	
12	5.51	5.556	40	
13	5.51	5.675	40	
14	5.51	5.543	40	
15	5.51	5.356	40	
16	5.51	5.351	40	
17	5.51	5.32	40	
18	5.51	5.331	40	
19	5.51	5.279	40	
20	5.51	5.637	40	
21	5.51	5.285	40	
22	5.51	5.621	40	
23	5.51	5.538	40	

TYPE 6 PARAMETER SHEET

Trial Number : 22

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.504	40	*
2	5.51	5.345	40	
3	5.51	5.395	40	
4	5.51	5.697	40	
5	5.51	5.619	40	
6	5.51	5.253	40	
7	5.51	5.536	40	
8	5.51	5.682	40	
9	5.51	5.363	40	
10	5.51	5.277	40	
11	5.51	5.492	40	*
12	5.51	5.456	40	
13	5.51	5.701	40	
14	5.51	5.381	40	
15	5.51	5.254	40	
16	5.51	5.538	40	
17	5.51	5.615	40	
18	5.51	5.527	40	*
19	5.51	5.325	40	
20	5.51	5.549	40	
21	5.51	5.533	40	
22	5.51	5.412	40	
23	5.51	5.493	40	*

TYPE 6 PARAMETER SHEET

Trial Number : 23

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.447	40	
2	5.51	5.316	40	
3	5.51	5.267	40	
4	5.51	5.526	40	*
5	5.51	5.252	40	
6	5.51	5.357	40	
7	5.51	5.436	40	
8	5.51	5.678	40	
9	5.51	5.67	40	
10	5.51	5.393	40	
11	5.51	5.61	40	
12	5.51	5.455	40	
13	5.51	5.698	40	
14	5.51	5.444	40	
15	5.51	5.451	40	
16	5.51	5.319	40	
17	5.51	5.625	40	
18	5.51	5.693	40	
19	5.51	5.577	40	
20	5.51	5.311	40	
21	5.51	5.476	40	
22	5.51	5.477	40	
23	5.51	5.634	40	

TYPE 6 PARAMETER SHEET

Trial Number : 24

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.54	40	
2	5.51	5.467	40	
3	5.51	5.463	40	
4	5.51	5.462	40	
5	5.51	5.704	40	
6	5.51	5.534	40	
7	5.51	5.344	40	
8	5.51	5.713	40	
9	5.51	5.554	40	
10	5.51	5.68	40	
11	5.51	5.625	40	
12	5.51	5.469	40	
13	5.51	5.283	40	
14	5.51	5.433	40	
15	5.51	5.378	40	
16	5.51	5.565	40	
17	5.51	5.643	40	
18	5.51	5.718	40	
19	5.51	5.303	40	
20	5.51	5.296	40	
21	5.51	5.483	40	
22	5.51	5.57	40	
23	5.51	5.347	40	

TYPE 6 PARAMETER SHEET

Trial Number : 25

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.428	40	
2	5.51	5.317	40	
3	5.51	5.406	40	
4	5.51	5.566	40	
5	5.51	5.618	40	
6	5.51	5.644	40	
7	5.51	5.27	40	
8	5.51	5.407	40	
9	5.51	5.571	40	
10	5.51	5.301	40	
11	5.51	5.537	40	
12	5.51	5.37	40	
13	5.51	5.481	40	
14	5.51	5.424	40	
15	5.51	5.598	40	
16	5.51	5.334	40	
17	5.51	5.328	40	
18	5.51	5.447	40	
19	5.51	5.657	40	
20	5.51	5.433	40	
21	5.51	5.563	40	
22	5.51	5.641	40	
23	5.51	5.372	40	

TYPE 6 PARAMETER SHEET

Trial Number : 26

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.634	40	
2	5.51	5.714	40	
3	5.51	5.455	40	
4	5.51	5.682	40	
5	5.51	5.42	40	
6	5.51	5.353	40	
7	5.51	5.412	40	
8	5.51	5.663	40	
9	5.51	5.671	40	
10	5.51	5.33	40	
11	5.51	5.434	40	
12	5.51	5.55	40	
13	5.51	5.597	40	
14	5.51	5.379	40	
15	5.51	5.554	40	
16	5.51	5.376	40	
17	5.51	5.43	40	
18	5.51	5.497	40	*
19	5.51	5.687	40	
20	5.51	5.552	40	
21	5.51	5.657	40	
22	5.51	5.486	40	
23	5.51	5.607	40	

TYPE 6 PARAMETER SHEET

Trial Number : 27

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.584	40	
2	5.51	5.601	40	
3	5.51	5.564	40	
4	5.51	5.723	40	
5	5.51	5.363	40	
6	5.51	5.664	40	
7	5.51	5.352	40	
8	5.51	5.655	40	
9	5.51	5.639	40	
10	5.51	5.468	40	
11	5.51	5.42	40	
12	5.51	5.581	40	
13	5.51	5.419	40	
14	5.51	5.386	40	
15	5.51	5.365	40	
16	5.51	5.675	40	
17	5.51	5.253	40	
18	5.51	5.41	40	
19	5.51	5.49	40	*
20	5.51	5.552	40	
21	5.51	5.356	40	
22	5.51	5.615	40	
23	5.51	5.326	40	

TYPE 6 PARAMETER SHEET

Trial Number : 28

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.676	40	
2	5.51	5.546	40	
3	5.51	5.715	40	
4	5.51	5.468	40	
5	5.51	5.585	40	
6	5.51	5.672	40	
7	5.51	5.498	40	*
8	5.51	5.566	40	
9	5.51	5.674	40	
10	5.51	5.512	40	*
11	5.51	5.67	40	
12	5.51	5.403	40	
13	5.51	5.411	40	
14	5.51	5.572	40	
15	5.51	5.456	40	
16	5.51	5.318	40	
17	5.51	5.491	40	*
18	5.51	5.469	40	
19	5.51	5.34	40	
20	5.51	5.594	40	
21	5.51	5.525	40	*
22	5.51	5.252	40	
23	5.51	5.451	40	

TYPE 6 PARAMETER SHEET

Trial Number : 29

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.609	40	
2	5.51	5.356	40	
3	5.51	5.692	40	
4	5.51	5.621	40	
5	5.51	5.543	40	
6	5.51	5.714	40	
7	5.51	5.324	40	
8	5.51	5.624	40	
9	5.51	5.708	40	
10	5.51	5.723	40	
11	5.51	5.333	40	
12	5.51	5.467	40	
13	5.51	5.391	40	
14	5.51	5.374	40	
15	5.51	5.446	40	
16	5.51	5.506	40	*
17	5.51	5.533	40	
18	5.51	5.615	40	
19	5.51	5.31	40	
20	5.51	5.617	40	
21	5.51	5.313	40	
22	5.51	5.635	40	
23	5.51	5.342	40	

TYPE 6 PARAMETER SHEET

Trial Number : 30

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.63	40	
2	5.51	5.533	40	
3	5.51	5.541	40	
4	5.51	5.712	40	
5	5.51	5.478	40	
6	5.51	5.601	40	
7	5.51	5.689	40	
8	5.51	5.301	40	
9	5.51	5.463	40	
10	5.51	5.304	40	
11	5.51	5.466	40	
12	5.51	5.376	40	
13	5.51	5.703	40	
14	5.51	5.482	40	
15	5.51	5.685	40	
16	5.51	5.606	40	
17	5.51	5.379	40	
18	5.51	5.632	40	
19	5.51	5.383	40	
20	5.51	5.439	40	
21	5.51	5.522	40	*
22	5.51	5.523	40	*
23	5.51	5.561	40	

Product : RadiX AXE6600 WiFi 6E Tri-Band Gaming Router
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Mode : Mode 3: Transmit (802.11ax-80BW)
 Test Date : 2022/05/24

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	0
11	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	0
22	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			93.33
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.493	80	*
2	5.53	5.579	80	
3	5.53	5.376	80	
4	5.53	5.643	80	
5	5.53	5.688	80	
6	5.53	5.417	80	
7	5.53	5.312	80	
8	5.53	5.679	80	
9	5.53	5.646	80	
10	5.53	5.582	80	
11	5.53	5.697	80	
12	5.53	5.539	80	*
13	5.53	5.426	80	
14	5.53	5.724	80	
15	5.53	5.68	80	
16	5.53	5.283	80	
17	5.53	5.315	80	
18	5.53	5.473	80	
19	5.53	5.448	80	
20	5.53	5.504	80	*
21	5.53	5.661	80	
22	5.53	5.536	80	*
23	5.53	5.274	80	
24	5.53	5.581	80	
25	5.53	5.438	80	
26	5.53	5.414	80	
27	5.53	5.557	80	*
28	5.53	5.628	80	
29	5.53	5.337	80	
30	5.53	5.608	80	
31	5.53	5.532	80	*
32	5.53	5.556	80	*
33	5.53	5.566	80	*
34	5.53	5.624	80	
35	5.53	5.537	80	*
36	5.53	5.307	80	
37	5.53	5.707	80	
38	5.53	5.623	80	
39	5.53	5.715	80	
40	5.53	5.269	80	
41	5.53	5.699	80	
42	5.53	5.708	80	
43	5.53	5.483	80	
44	5.53	5.57	80	*
45	5.53	5.592	80	
46	5.53	5.511	80	*
47	5.53	5.522	80	*
48	5.53	5.317	80	
49	5.53	5.342	80	

50	5.53	5.721	80	
51	5.53	5.252	80	
52	5.53	5.509	80	*
53	5.53	5.529	80	*
54	5.53	5.572	80	
55	5.53	5.642	80	
56	5.53	5.578	80	
57	5.53	5.398	80	
58	5.53	5.626	80	
59	5.53	5.367	80	
60	5.53	5.691	80	
61	5.53	5.314	80	
62	5.53	5.272	80	
63	5.53	5.589	80	
64	5.53	5.443	80	
65	5.53	5.7	80	
66	5.53	5.615	80	
67	5.53	5.597	80	
68	5.53	5.356	80	
69	5.53	5.273	80	
70	5.53	5.723	80	
71	5.53	5.268	80	
72	5.53	5.396	80	
73	5.53	5.377	80	
74	5.53	5.638	80	
75	5.53	5.645	80	
76	5.53	5.346	80	
77	5.53	5.534	80	*
78	5.53	5.515	80	*
79	5.53	5.526	80	*
80	5.53	5.389	80	
81	5.53	5.568	80	*
82	5.53	5.681	80	
83	5.53	5.437	80	
84	5.53	5.404	80	
85	5.53	5.378	80	
86	5.53	5.278	80	
87	5.53	5.59	80	
88	5.53	5.361	80	
89	5.53	5.405	80	
90	5.53	5.251	80	
91	5.53	5.291	80	
92	5.53	5.67	80	
93	5.53	5.371	80	
94	5.53	5.686	80	
95	5.53	5.477	80	
96	5.53	5.411	80	
97	5.53	5.348	80	
98	5.53	5.373	80	
99	5.53	5.55	80	*
100	5.53	5.323	80	

TYPE 6 PARAMETER SHEET

Trial Number : 2

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.623	80	
2	5.53	5.639	80	
3	5.53	5.294	80	
4	5.53	5.585	80	
5	5.53	5.278	80	
6	5.53	5.357	80	
7	5.53	5.686	80	
8	5.53	5.653	80	
9	5.53	5.715	80	
10	5.53	5.553	80	*
11	5.53	5.328	80	
12	5.53	5.393	80	
13	5.53	5.498	80	*
14	5.53	5.572	80	
15	5.53	5.669	80	
16	5.53	5.437	80	
17	5.53	5.264	80	
18	5.53	5.521	80	*
19	5.53	5.482	80	
20	5.53	5.656	80	
21	5.53	5.37	80	
22	5.53	5.452	80	
23	5.53	5.701	80	

TYPE 6 PARAMETER SHEET

Trial Number : 3

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.261	80	
2	5.53	5.458	80	
3	5.53	5.623	80	
4	5.53	5.344	80	
5	5.53	5.288	80	
6	5.53	5.559	80	*
7	5.53	5.354	80	
8	5.53	5.598	80	
9	5.53	5.706	80	
10	5.53	5.368	80	
11	5.53	5.286	80	
12	5.53	5.496	80	*
13	5.53	5.691	80	
14	5.53	5.715	80	
15	5.53	5.36	80	
16	5.53	5.265	80	
17	5.53	5.594	80	
18	5.53	5.428	80	
19	5.53	5.438	80	
20	5.53	5.696	80	
21	5.53	5.531	80	*
22	5.53	5.319	80	
23	5.53	5.556	80	*

TYPE 6 PARAMETER SHEET

Trial Number : 4

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.467	80	
2	5.53	5.452	80	
3	5.53	5.378	80	
4	5.53	5.341	80	
5	5.53	5.723	80	
6	5.53	5.346	80	
7	5.53	5.415	80	
8	5.53	5.687	80	
9	5.53	5.681	80	
10	5.53	5.64	80	
11	5.53	5.575	80	
12	5.53	5.495	80	*
13	5.53	5.689	80	
14	5.53	5.271	80	
15	5.53	5.332	80	
16	5.53	5.32	80	
17	5.53	5.338	80	
18	5.53	5.46	80	
19	5.53	5.3	80	
20	5.53	5.622	80	
21	5.53	5.458	80	
22	5.53	5.391	80	
23	5.53	5.635	80	

TYPE 6 PARAMETER SHEET

Trial Number : 5

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.456	80	
2	5.53	5.49	80	*
3	5.53	5.606	80	
4	5.53	5.494	80	*
5	5.53	5.669	80	
6	5.53	5.443	80	
7	5.53	5.718	80	
8	5.53	5.437	80	
9	5.53	5.311	80	
10	5.53	5.522	80	*
11	5.53	5.345	80	
12	5.53	5.358	80	
13	5.53	5.716	80	
14	5.53	5.317	80	
15	5.53	5.398	80	
16	5.53	5.647	80	
17	5.53	5.482	80	
18	5.53	5.531	80	*
19	5.53	5.713	80	
20	5.53	5.672	80	
21	5.53	5.68	80	
22	5.53	5.298	80	
23	5.53	5.666	80	

TYPE 6 PARAMETER SHEET

Trial Number : 6

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.385	80	
2	5.53	5.383	80	
3	5.53	5.63	80	
4	5.53	5.503	80	*
5	5.53	5.607	80	
6	5.53	5.646	80	
7	5.53	5.602	80	
8	5.53	5.627	80	
9	5.53	5.384	80	
10	5.53	5.272	80	
11	5.53	5.488	80	
12	5.53	5.696	80	
13	5.53	5.292	80	
14	5.53	5.612	80	
15	5.53	5.674	80	
16	5.53	5.615	80	
17	5.53	5.699	80	
18	5.53	5.695	80	
19	5.53	5.267	80	
20	5.53	5.697	80	
21	5.53	5.541	80	*
22	5.53	5.455	80	
23	5.53	5.454	80	

TYPE 6 PARAMETER SHEET

Trial Number : 7

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.524	80	*
2	5.53	5.635	80	
3	5.53	5.669	80	
4	5.53	5.487	80	
5	5.53	5.693	80	
6	5.53	5.326	80	
7	5.53	5.408	80	
8	5.53	5.713	80	
9	5.53	5.503	80	*
10	5.53	5.355	80	
11	5.53	5.55	80	*
12	5.53	5.259	80	
13	5.53	5.59	80	
14	5.53	5.31	80	
15	5.53	5.61	80	
16	5.53	5.526	80	*
17	5.53	5.276	80	
18	5.53	5.515	80	*
19	5.53	5.464	80	
20	5.53	5.529	80	*
21	5.53	5.616	80	
22	5.53	5.289	80	
23	5.53	5.675	80	

TYPE 6 PARAMETER SHEET

Trial Number : 8

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.321	80	
2	5.53	5.485	80	
3	5.53	5.696	80	
4	5.53	5.611	80	
5	5.53	5.252	80	
6	5.53	5.298	80	
7	5.53	5.357	80	
8	5.53	5.565	80	*
9	5.53	5.374	80	
10	5.53	5.498	80	*
11	5.53	5.554	80	*
12	5.53	5.721	80	
13	5.53	5.668	80	
14	5.53	5.501	80	*
15	5.53	5.606	80	
16	5.53	5.675	80	
17	5.53	5.526	80	*
18	5.53	5.317	80	
19	5.53	5.699	80	
20	5.53	5.394	80	
21	5.53	5.311	80	
22	5.53	5.608	80	
23	5.53	5.625	80	

TYPE 6 PARAMETER SHEET

Trial Number : 9

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.391	80	
2	5.53	5.357	80	
3	5.53	5.596	80	
4	5.53	5.439	80	
5	5.53	5.393	80	
6	5.53	5.371	80	
7	5.53	5.552	80	*
8	5.53	5.619	80	
9	5.53	5.358	80	
10	5.53	5.681	80	
11	5.53	5.65	80	
12	5.53	5.316	80	
13	5.53	5.509	80	*
14	5.53	5.428	80	
15	5.53	5.408	80	
16	5.53	5.646	80	
17	5.53	5.611	80	
18	5.53	5.441	80	
19	5.53	5.377	80	
20	5.53	5.547	80	*
21	5.53	5.583	80	
22	5.53	5.304	80	
23	5.53	5.321	80	

TYPE 6 PARAMETER SHEET

Trial Number : 10

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.479	80	
2	5.53	5.471	80	
3	5.53	5.493	80	*
4	5.53	5.683	80	
5	5.53	5.71	80	
6	5.53	5.258	80	
7	5.53	5.635	80	
8	5.53	5.542	80	*
9	5.53	5.267	80	
10	5.53	5.641	80	
11	5.53	5.448	80	
12	5.53	5.7	80	
13	5.53	5.276	80	
14	5.53	5.64	80	
15	5.53	5.608	80	
16	5.53	5.393	80	
17	5.53	5.391	80	
18	5.53	5.306	80	
19	5.53	5.668	80	
20	5.53	5.631	80	
21	5.53	5.42	80	
22	5.53	5.704	80	
23	5.53	5.679	80	

TYPE 6 PARAMETER SHEET

Trial Number : 11

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.279	80	
2	5.53	5.456	80	
3	5.53	5.638	80	
4	5.53	5.33	80	
5	5.53	5.448	80	
6	5.53	5.631	80	
7	5.53	5.29	80	
8	5.53	5.458	80	
9	5.53	5.577	80	
10	5.53	5.386	80	
11	5.53	5.505	80	*
12	5.53	5.701	80	
13	5.53	5.292	80	
14	5.53	5.718	80	
15	5.53	5.617	80	
16	5.53	5.401	80	
17	5.53	5.416	80	
18	5.53	5.406	80	
19	5.53	5.298	80	
20	5.53	5.355	80	
21	5.53	5.275	80	
22	5.53	5.403	80	
23	5.53	5.254	80	

TYPE 6 PARAMETER SHEET

Trial Number : 12

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.691	80	
2	5.53	5.488	80	
3	5.53	5.694	80	
4	5.53	5.584	80	
5	5.53	5.418	80	
6	5.53	5.567	80	*
7	5.53	5.383	80	
8	5.53	5.606	80	
9	5.53	5.288	80	
10	5.53	5.469	80	
11	5.53	5.541	80	*
12	5.53	5.634	80	
13	5.53	5.396	80	
14	5.53	5.675	80	
15	5.53	5.702	80	
16	5.53	5.545	80	*
17	5.53	5.417	80	
18	5.53	5.639	80	
19	5.53	5.693	80	
20	5.53	5.322	80	
21	5.53	5.705	80	
22	5.53	5.591	80	
23	5.53	5.279	80	

TYPE 6 PARAMETER SHEET

Trial Number : 13

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.355	80	
2	5.53	5.685	80	
3	5.53	5.595	80	
4	5.53	5.662	80	
5	5.53	5.269	80	
6	5.53	5.289	80	
7	5.53	5.721	80	
8	5.53	5.287	80	
9	5.53	5.398	80	
10	5.53	5.66	80	
11	5.53	5.405	80	
12	5.53	5.267	80	
13	5.53	5.608	80	
14	5.53	5.429	80	
15	5.53	5.716	80	
16	5.53	5.271	80	
17	5.53	5.528	80	*
18	5.53	5.33	80	
19	5.53	5.653	80	
20	5.53	5.532	80	*
21	5.53	5.59	80	
22	5.53	5.586	80	
23	5.53	5.455	80	

TYPE 6 PARAMETER SHEET

Trial Number : 14

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.644	80	
2	5.53	5.603	80	
3	5.53	5.634	80	
4	5.53	5.576	80	
5	5.53	5.583	80	
6	5.53	5.716	80	
7	5.53	5.554	80	*
8	5.53	5.35	80	
9	5.53	5.396	80	
10	5.53	5.289	80	
11	5.53	5.673	80	
12	5.53	5.44	80	
13	5.53	5.453	80	
14	5.53	5.312	80	
15	5.53	5.375	80	
16	5.53	5.444	80	
17	5.53	5.338	80	
18	5.53	5.28	80	
19	5.53	5.594	80	
20	5.53	5.29	80	
21	5.53	5.586	80	
22	5.53	5.292	80	
23	5.53	5.55	80	*

TYPE 6 PARAMETER SHEET

Trial Number : 15

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.585	80	
2	5.53	5.636	80	
3	5.53	5.262	80	
4	5.53	5.499	80	*
5	5.53	5.304	80	
6	5.53	5.618	80	
7	5.53	5.584	80	
8	5.53	5.703	80	
9	5.53	5.507	80	*
10	5.53	5.706	80	
11	5.53	5.59	80	
12	5.53	5.32	80	
13	5.53	5.64	80	
14	5.53	5.529	80	*
15	5.53	5.559	80	*
16	5.53	5.488	80	
17	5.53	5.285	80	
18	5.53	5.518	80	*
19	5.53	5.463	80	
20	5.53	5.49	80	*
21	5.53	5.276	80	
22	5.53	5.489	80	
23	5.53	5.532	80	*

TYPE 6 PARAMETER SHEET

Trial Number : 16

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.503	80	*
2	5.53	5.336	80	
3	5.53	5.515	80	*
4	5.53	5.541	80	*
5	5.53	5.4	80	
6	5.53	5.456	80	
7	5.53	5.483	80	
8	5.53	5.472	80	
9	5.53	5.697	80	
10	5.53	5.548	80	*
11	5.53	5.603	80	
12	5.53	5.257	80	
13	5.53	5.28	80	
14	5.53	5.301	80	
15	5.53	5.682	80	
16	5.53	5.481	80	
17	5.53	5.447	80	
18	5.53	5.499	80	*
19	5.53	5.601	80	
20	5.53	5.62	80	
21	5.53	5.38	80	
22	5.53	5.578	80	
23	5.53	5.445	80	

TYPE 6 PARAMETER SHEET

Trial Number : 17

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.349	80	
2	5.53	5.502	80	*
3	5.53	5.579	80	
4	5.53	5.665	80	
5	5.53	5.47	80	
6	5.53	5.298	80	
7	5.53	5.476	80	
8	5.53	5.275	80	
9	5.53	5.448	80	
10	5.53	5.33	80	
11	5.53	5.303	80	
12	5.53	5.254	80	
13	5.53	5.609	80	
14	5.53	5.29	80	
15	5.53	5.443	80	
16	5.53	5.252	80	
17	5.53	5.506	80	*
18	5.53	5.602	80	
19	5.53	5.503	80	*
20	5.53	5.51	80	*
21	5.53	5.35	80	
22	5.53	5.583	80	
23	5.53	5.593	80	

TYPE 6 PARAMETER SHEET

Trial Number : 18

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.273	80	
2	5.53	5.396	80	
3	5.53	5.544	80	*
4	5.53	5.597	80	
5	5.53	5.491	80	*
6	5.53	5.414	80	
7	5.53	5.671	80	
8	5.53	5.348	80	
9	5.53	5.29	80	
10	5.53	5.3	80	
11	5.53	5.718	80	
12	5.53	5.44	80	
13	5.53	5.595	80	
14	5.53	5.386	80	
15	5.53	5.402	80	
16	5.53	5.422	80	
17	5.53	5.408	80	
18	5.53	5.345	80	
19	5.53	5.465	80	
20	5.53	5.362	80	
21	5.53	5.66	80	
22	5.53	5.329	80	
23	5.53	5.552	80	*

TYPE 6 PARAMETER SHEET

Trial Number : 19

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.27	80	
2	5.53	5.287	80	
3	5.53	5.617	80	
4	5.53	5.612	80	
5	5.53	5.493	80	*
6	5.53	5.53	80	*
7	5.53	5.25	80	
8	5.53	5.57	80	*
9	5.53	5.377	80	
10	5.53	5.423	80	
11	5.53	5.532	80	*
12	5.53	5.562	80	*
13	5.53	5.545	80	*
14	5.53	5.335	80	
15	5.53	5.51	80	*
16	5.53	5.701	80	
17	5.53	5.685	80	
18	5.53	5.272	80	
19	5.53	5.513	80	*
20	5.53	5.282	80	
21	5.53	5.447	80	
22	5.53	5.378	80	
23	5.53	5.293	80	

TYPE 6 PARAMETER SHEET

Trial Number : 20

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.54	80	*
2	5.53	5.423	80	
3	5.53	5.322	80	
4	5.53	5.526	80	*
5	5.53	5.541	80	*
6	5.53	5.366	80	
7	5.53	5.291	80	
8	5.53	5.339	80	
9	5.53	5.369	80	
10	5.53	5.556	80	*
11	5.53	5.484	80	
12	5.53	5.351	80	
13	5.53	5.28	80	
14	5.53	5.452	80	
15	5.53	5.706	80	
16	5.53	5.455	80	
17	5.53	5.613	80	
18	5.53	5.317	80	
19	5.53	5.515	80	*
20	5.53	5.543	80	*
21	5.53	5.459	80	
22	5.53	5.553	80	*
23	5.53	5.603	80	

TYPE 6 PARAMETER SHEET

Trial Number : 21

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.587	80	
2	5.53	5.498	80	*
3	5.53	5.436	80	
4	5.53	5.469	80	
5	5.53	5.351	80	
6	5.53	5.515	80	*
7	5.53	5.68	80	
8	5.53	5.558	80	*
9	5.53	5.354	80	
10	5.53	5.614	80	
11	5.53	5.465	80	
12	5.53	5.661	80	
13	5.53	5.399	80	
14	5.53	5.367	80	
15	5.53	5.686	80	
16	5.53	5.264	80	
17	5.53	5.664	80	
18	5.53	5.286	80	
19	5.53	5.425	80	
20	5.53	5.653	80	
21	5.53	5.303	80	
22	5.53	5.578	80	
23	5.53	5.504	80	*

TYPE 6 PARAMETER SHEET

Trial Number : 22

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.527	80	*
2	5.53	5.533	80	*
3	5.53	5.377	80	
4	5.53	5.332	80	
5	5.53	5.717	80	
6	5.53	5.349	80	
7	5.53	5.682	80	
8	5.53	5.37	80	
9	5.53	5.415	80	
10	5.53	5.449	80	
11	5.53	5.3	80	
12	5.53	5.638	80	
13	5.53	5.435	80	
14	5.53	5.655	80	
15	5.53	5.585	80	
16	5.53	5.261	80	
17	5.53	5.411	80	
18	5.53	5.314	80	
19	5.53	5.538	80	*
20	5.53	5.715	80	
21	5.53	5.306	80	
22	5.53	5.272	80	
23	5.53	5.278	80	

TYPE 6 PARAMETER SHEET

Trial Number : 23

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.289	80	
2	5.53	5.479	80	
3	5.53	5.278	80	
4	5.53	5.263	80	
5	5.53	5.311	80	
6	5.53	5.45	80	
7	5.53	5.567	80	*
8	5.53	5.506	80	*
9	5.53	5.271	80	
10	5.53	5.718	80	
11	5.53	5.382	80	
12	5.53	5.447	80	
13	5.53	5.681	80	
14	5.53	5.553	80	*
15	5.53	5.644	80	
16	5.53	5.665	80	
17	5.53	5.292	80	
18	5.53	5.701	80	
19	5.53	5.444	80	
20	5.53	5.374	80	
21	5.53	5.602	80	
22	5.53	5.524	80	*
23	5.53	5.579	80	

TYPE 6 PARAMETER SHEET

Trial Number : 24

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.355	80	
2	5.53	5.406	80	
3	5.53	5.689	80	
4	5.53	5.326	80	
5	5.53	5.537	80	*
6	5.53	5.596	80	
7	5.53	5.314	80	
8	5.53	5.348	80	
9	5.53	5.496	80	*
10	5.53	5.576	80	
11	5.53	5.72	80	
12	5.53	5.488	80	
13	5.53	5.434	80	
14	5.53	5.354	80	
15	5.53	5.41	80	
16	5.53	5.643	80	
17	5.53	5.587	80	
18	5.53	5.468	80	
19	5.53	5.316	80	
20	5.53	5.392	80	
21	5.53	5.574	80	
22	5.53	5.301	80	
23	5.53	5.313	80	

TYPE 6 PARAMETER SHEET

Trial Number : 25

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.386	80	
2	5.53	5.716	80	
3	5.53	5.29	80	
4	5.53	5.336	80	
5	5.53	5.39	80	
6	5.53	5.447	80	
7	5.53	5.534	80	*
8	5.53	5.335	80	
9	5.53	5.592	80	
10	5.53	5.535	80	*
11	5.53	5.305	80	
12	5.53	5.257	80	
13	5.53	5.619	80	
14	5.53	5.635	80	
15	5.53	5.357	80	
16	5.53	5.44	80	
17	5.53	5.418	80	
18	5.53	5.395	80	
19	5.53	5.259	80	
20	5.53	5.718	80	
21	5.53	5.532	80	*
22	5.53	5.514	80	*
23	5.53	5.435	80	

TYPE 6 PARAMETER SHEET

Trial Number : 26

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.629	80	
2	5.53	5.451	80	
3	5.53	5.57	80	*
4	5.53	5.487	80	
5	5.53	5.55	80	*
6	5.53	5.289	80	
7	5.53	5.378	80	
8	5.53	5.48	80	
9	5.53	5.603	80	
10	5.53	5.381	80	
11	5.53	5.69	80	
12	5.53	5.691	80	
13	5.53	5.26	80	
14	5.53	5.49	80	*
15	5.53	5.29	80	
16	5.53	5.318	80	
17	5.53	5.666	80	
18	5.53	5.717	80	
19	5.53	5.577	80	
20	5.53	5.713	80	
21	5.53	5.426	80	
22	5.53	5.312	80	
23	5.53	5.338	80	

TYPE 6 PARAMETER SHEET

Trial Number : 27

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.388	80	
2	5.53	5.395	80	
3	5.53	5.328	80	
4	5.53	5.334	80	
5	5.53	5.618	80	
6	5.53	5.644	80	
7	5.53	5.589	80	
8	5.53	5.708	80	
9	5.53	5.274	80	
10	5.53	5.33	80	
11	5.53	5.312	80	
12	5.53	5.271	80	
13	5.53	5.295	80	
14	5.53	5.292	80	
15	5.53	5.571	80	
16	5.53	5.573	80	
17	5.53	5.335	80	
18	5.53	5.408	80	
19	5.53	5.495	80	*
20	5.53	5.686	80	
21	5.53	5.426	80	
22	5.53	5.417	80	
23	5.53	5.366	80	

TYPE 6 PARAMETER SHEET

Trial Number : 28

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.293	80	
2	5.53	5.265	80	
3	5.53	5.699	80	
4	5.53	5.494	80	*
5	5.53	5.485	80	
6	5.53	5.603	80	
7	5.53	5.331	80	
8	5.53	5.451	80	
9	5.53	5.544	80	*
10	5.53	5.343	80	
11	5.53	5.647	80	
12	5.53	5.314	80	
13	5.53	5.546	80	*
14	5.53	5.529	80	*
15	5.53	5.55	80	*
16	5.53	5.287	80	
17	5.53	5.428	80	
18	5.53	5.407	80	
19	5.53	5.423	80	
20	5.53	5.373	80	
21	5.53	5.666	80	
22	5.53	5.707	80	
23	5.53	5.368	80	

TYPE 6 PARAMETER SHEET

Trial Number : 29

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.636	80	
2	5.53	5.588	80	
3	5.53	5.5	80	*
4	5.53	5.573	80	
5	5.53	5.537	80	*
6	5.53	5.467	80	
7	5.53	5.388	80	
8	5.53	5.488	80	
9	5.53	5.33	80	
10	5.53	5.553	80	*
11	5.53	5.256	80	
12	5.53	5.562	80	*
13	5.53	5.423	80	
14	5.53	5.598	80	
15	5.53	5.412	80	
16	5.53	5.627	80	
17	5.53	5.31	80	
18	5.53	5.452	80	
19	5.53	5.638	80	
20	5.53	5.642	80	
21	5.53	5.48	80	
22	5.53	5.435	80	
23	5.53	5.395	80	

TYPE 6 PARAMETER SHEET

Trial Number : 30

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.253	80	
2	5.53	5.669	80	
3	5.53	5.257	80	
4	5.53	5.474	80	
5	5.53	5.271	80	
6	5.53	5.724	80	
7	5.53	5.442	80	
8	5.53	5.415	80	
9	5.53	5.413	80	
10	5.53	5.706	80	
11	5.53	5.665	80	
12	5.53	5.521	80	*
13	5.53	5.278	80	
14	5.53	5.329	80	
15	5.53	5.467	80	
16	5.53	5.468	80	
17	5.53	5.512	80	*
18	5.53	5.568	80	*
19	5.53	5.626	80	
20	5.53	5.409	80	
21	5.53	5.347	80	
22	5.53	5.39	80	
23	5.53	5.401	80	

Mode 1 – 802.11ax20

Total Type 1~4 Radar Statistical Performance (5500MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	90.00	>60%	Pass
2	86.67	>60%	Pass
3	76.67	>60%	Pass
4	83.33	>60%	Pass
Total Type 1~4	84.17	>80%	Pass
5	80.00	≥80%	Pass
6	93.33	≥70%	Pass

Mode 2 – 802.11ax40

Total Type 1~4 Radar Statistical Performance (5510MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	93.33	>60%	Pass
2	83.33	>60%	Pass
3	80.00	>60%	Pass
4	70.00	>60%	Pass
Total Type 1~4	81.67	>80%	Pass
5	83.33	≥80%	Pass
6	90.00	≥70%	Pass

Mode 3 – 802.11ax80

Total Type 1~4 Radar Statistical Performance (5530MHz)			
Radar Type	Detection Percentage (%)	Limit (%)	Result
1	90.00	>60%	Pass
2	86.67	>60%	Pass
3	80.00	>60%	Pass
4	76.67	>60%	Pass
Total Type 1~4	83.33	>80%	Pass
5	86.67	≥80%	Pass
6	93.33	≥70%	Pass