

FCC TEST REPORT

for

47 CFR, Part 15, Subpart C

Equipment : WIRELESS 11B USB ADAPTER

Model No. : UB11B, MS-6823

FCC ID. : I4L-MS6823

Filing Type : Certification

Applicant : **Micro-Star Int'l Co., Ltd.**
No. 69, Li-De St., Jung-He City, Taipei Hsien, Taiwan

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

Table of Contents

History of this test report	ii
CERTIFICATE OF COMPLIANCE.....	1
1. General Description of Equipment under Test.....	2
1.1. Applicant.....	2
1.2. Manufacturer	2
1.3. Basic Description of Equipment under Test	2
1.4. Feature of Equipment under Test	3
2. Test Configuration of Equipment under Test.....	4
2.1. Test Manner	4
2.2. Description of Test System	4
2.3. Connection Diagram of Test System	6
3. Test Software	7
4. General Information of Test.....	8
4.1. Test Voltage	8
4.2. Standard for Methods of Measurement.....	8
4.3. Test in Compliance with	8
4.4. Frequency Range Investigated	8
4.5. Test Distance	8
5. Report of Measurements and Examinations	9
5.1. List of Measurements and Examinations	9
5.2. 6dB Bandwidth	10
5.3. Peak Output Power	11
5.4. Power Spectral Density	12
5.5. Test of Conducted Emission	13
5.6. Test of Radiated Emission	17
5.7. Band Edges Measurement.....	30
5.8. Antenna Requirements	31
6. EMI Suppression Component List.....	32
7. Antenna Factor & Cable Loss	33
8. List of Measuring Equipments Used	34
9. Uncertainty of Test Site	35

History of this test report

Original Report Issue Date: Oct. 14, 2003

No additional attachment.

Additional attachment were issued as following record:

Attachment No.	Issue Date	Description

CERTIFICATE OF COMPLIANCE

for

47 CFR, Part 15, Subpart C

Equipment : WIRELESS 11B USB ADAPTER

Model No. : UB11B, MS-6823

FCC ID. : I4L-MS6823

Filing Type : Certification

Applicant : **Micro-Star Int'l Co., Ltd.**

No. 69, Li-De St., Jung-He City, Taipei Hsien, Taiwan

I HEREBY CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 2001** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Oct. 06, 2003 at **SPORTON International Inc.** LAB.



Alex Chen
Manager

SPORTON International Inc.

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

1. General Description of Equipment under Test

1.1. Applicant

Micro-Star Int'l Co., Ltd.
No. 69, Li-De St., Jung-He City, Taipei Hsien, Taiwan

1.2. Manufacturer

1. Micro-Star Int'l Co., Ltd.
No. 488, Ban-Nan Rd., Jung-He City, Taipei Hsien, Taiwan
2. MSI COMPUTER (SHENZHEN) Co., Ltd.
Longma Information Technology Industrial Park, Shiyan, Tangtou Village, Shenzhen

1.3. Basic Description of Equipment under Test

Equipment : WIRELESS 11B USB ADAPTER
Model No. : UB11B, MS-6823
FCC ID. : I4L-MS6823
Trade Name : MSI
Power Supply Type : From PC
AC Power Cord : N/A

1.4. Feature of Equipment under Test

Product Feature & Specification	
1. Host/Radio Interface	DSSS
2. Type of Modulation	DSSS (PBCC, CCK)
3. Number of Channels	11
4. Frequency Band	2.4 ~ 2.5GHz
5. Carrier Frequency of each channel	2412MHz (5MHz)
6. Bandwidth of each channel	22MHz
7. Maximum Output Power to Antenna	12.34dBm
8. Antenna Type / Class and Gain	Chip Antenna, 2dBi
9. Function Type	Transceiver
10. Power Rating (DC/AC, Voltage)	DC 5V
11. Duty Cycle	44MHz
12. Basic function of product	WLAN 11B

2. Test Configuration of Equipment under Test

2.1. Test Manner

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-2001 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included HP PC, VIEWSONIC Monitor, LOGITECH PS/2 Keyboard, LOGITECH USB Mouse, EPSON Printer, ACEEX Modem and EUT for EMI test.
- c. The following modes were pretested:
 - Mode 1. CH01 (2412MHz)
 - Mode 2. CH06 (2437MHz)
 - Mode 3. CH11 (2462MHz)
- b. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 25000MHz.

2.2. Description of Test System

Support Unit 1. -- Monitor (VIEWSONIC)

FCC ID	: N/A
Model No.	: VCDTS21553-3P
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0051
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity

Support Unit 2. -- PS/2 Keyboard (LOGITECH)

FCC ID	: N/A
Model No.	: Y-SJ17
Serial No.	: SP0054
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 3. – USB Mouse (LOGITECH)

FCC ID : N/A
Model No. : M-BE58
Serial No. : SP0041
Data Cable : Shielded, 1.7m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

Support Unit 4. -- Printer (EPSON)

FCC ID : N/A
Model No. : STYLUS COLOR S680
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0048
Data Cable : Shielded, 1.35m
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.


Support Unit 5. -- Modem (ACEEX)

FCC ID : IFAXDM1414
Model No. : DM1414
Power Supply Type : Linear
Power Cord : Non-Shielded
Serial No. : SP0015
Data Cable : Shielded, 360 degree via metal backshells, 1.15m

Support Unit 6. -- Personal Computer (HP)

FCC ID : N/A
Model No. : VECTRA VL420 DT
Power Supply Type : Switching
Power Cord : Non-Shielded
Serial No. : SP0040
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

2.3. Connection Diagram of Test System

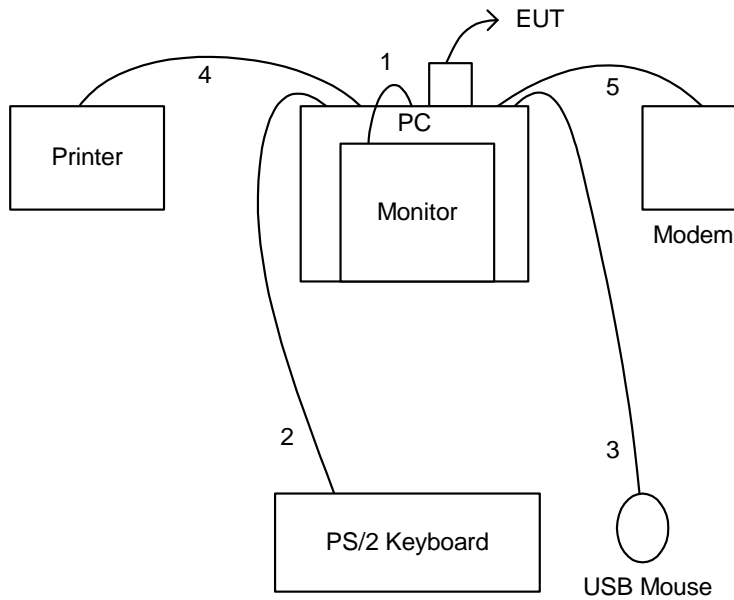

1. The I/O cable is connected from PC to the support unit 1.
2. The I/O cable is connected from PC to the support unit 2.
3. The I/O cable is connected from PC to the support unit 3.
4. The I/O cable is connected from PC to the support unit 4.
5. The I/O cable is connected from PC to the support unit 5.

3. Test Software

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends " H" messages to the monitor, and the monitor displays " H" patterns on the screen.
- d. The PC sends " H" messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H" messages to the modem.
- f. The PC sends " H" messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from c to f.

At the same time, "QATEST.EXE" was executed to keep transmitting signals at fixed frequency.

4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.
TEL : 886-3-327-3456
FAX : 886-3-318-0055
Test Site No : CO01-HY, 03CH03-HY

4.1. Test Voltage

110V/60Hz

4.2. Standard for Methods of Measurement

ANSI C63.4-2001 for conducted power line test and radiated emission test,
FCC 97-114 for test of 6dB Bandwidth
FCC 97-114 for test of Maximum Peak Output Power
FCC 97-114 for test of 100kHz Bandwidth of Frequency Band Edges
FCC 97-114 for test of Power Spectral Density

4.3. Test in Compliance with

FCC Part 15, Subpart C 15.247

4.4. Frequency Range Investigated

- a. Conduction: from 150 KHz to 30 MHz
- b. Radiation: from 30 MHz to 25000MHz

4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

5. Report of Measurements and Examinations

5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
<u>15.247(a)(2)</u>	6dB Bandwidth	Pass
<u>15.247(b)</u>	Maximum Peak Output Power	Pass
<u>15.247(d)</u>	Power Spectral Density	Pass
15.207	Conducted Emission	Pass
15.209	Radiated Emission	Pass
<u>15.247(c)</u>	100kHz Bandwidth of Frequency Band Edges	Pass
<u>15.203</u>	Antenna Requirement	Pass
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	Pass

5.2. 6dB Bandwidth


5.2.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

5.2.3. Test Setup Layout :



5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature : 26°C
- Relative Humidity : 67 %

Channel	Frequency (MHz)	6dB Emission bandwidth (MHz)	Limits (MHz)	Plot Ref. No.
1	2412	10.04	0.5	1
6	2437	10.00	0.5	2
11	2462	10.04	0.5	3

5.3. Peak Output Power


5.3.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.3.2. Test Procedure :

The antenna port (RF output) of the EUT was connected to the input (RF input) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

5.3.3. Test Setup Layout :



5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 67 %
- Antenna Gain: 2 dBi

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limits (Watt/dBm)
1	2412	12.34	17.13957308	1W/30 dBm
6	2437	12.14	16.36816521	1W/30 dBm
11	2462	12.30	16.98243652	1W/30 dBm

- Comments : Maximum Peak Output Power < 30dBm (1Watt)

5.4. Power Spectral Density


5.4.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.4.2. Test Procedure :

1. The transmitter output was connected to spectrum analyzer through an attenuator.
2. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
3. The power spectral density was measured and recorded.
4. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

5.4.3. Test Setup Layout :



5.4.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 67 %

Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
1	2412	-12.71	8	1
6	2437	-12.98	8	2
11	2462	-12.73	8	3

5.5. Test of Conducted Emission

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-2001 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

5.5.1. Major Measuring Instruments :

• Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

5.5.2. Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.5.3. Test Result of Conducted Emission :

- Test Mode: Mode 1
- Frequency Range of Test: from 150KHz to 30 MHz
- 6dB Bandwidth: 9KHz
- Temperature: 27.8°C
- Relative Humidity: 59 %


The test was passed at the minimum margin that marked by a frame in the following data

Site : C001-HY
 Condition : CISPR CLASS-B 2003 2001/008 LINE
 EUT : USB adapter
 Power : 110V/60Hz
 Model : MS-6823
 Memo : TX CH01

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	42.73	-13.16	55.89	42.59	0.10	0.04	Average
2	0.152	46.11	-19.78	65.89	45.97	0.10	0.04	QP
3	0.190	45.89	-8.15	54.04	45.75	0.10	0.04	Average
4	0.190	46.05	-17.99	64.04	45.91	0.10	0.04	QP
5	0.459	40.47	-16.24	56.71	40.26	0.10	0.11	QP
6	0.459	40.94	-5.77	46.71	40.73	0.10	0.11	Average
7	0.538	41.09	-4.91	46.00	40.89	0.10	0.10	Average
8	0.538	40.41	-15.59	56.00	40.21	0.10	0.10	QP
9	0.611	39.62	-6.38	46.00	39.43	0.10	0.09	Average
10	0.611	38.90	-17.10	56.00	38.71	0.10	0.09	QP
11	8.920	37.61	-22.39	60.00	37.13	0.19	0.29	QP
12	8.920	23.09	-26.91	50.00	22.61	0.19	0.29	Average

Site : C001-HY
 Condition : CISPR CLASS-B 2003 2001/008 NEUTRAL
 EUT : USB adapter
 Power : 110V/60Hz
 Model : MS-6823
 Memo : TX CH01

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.156	46.35	-9.32	55.67	46.21	0.10	0.04	Average
2	0.156	46.78	-18.89	65.67	46.64	0.10	0.04	QP
3	0.383	38.56	-19.65	58.21	38.35	0.10	0.11	QP
4	0.383	39.20	-9.01	48.21	38.99	0.10	0.11	Average
5	0.459	42.34	-4.37	46.71	42.13	0.10	0.11	Average
6	0.459	42.56	-14.15	56.71	42.35	0.10	0.11	QP
7	0.538	39.29	-6.71	46.00	39.09	0.10	0.10	Average
8	0.538	38.57	-17.43	56.00	38.37	0.10	0.10	QP
9	0.611	38.30	-17.70	56.00	38.11	0.10	0.09	QP
10	0.611	39.08	-6.92	46.00	38.89	0.10	0.09	Average
11	9.300	35.09	-24.91	60.00	34.59	0.20	0.30	QP
12	9.300	21.46	-28.54	50.00	20.96	0.20	0.30	Average

Test Engineer: 
 John Huang

- Test Mode: Mode 2
- Frequency Range of Test: from 150KHz to 30 MHz
- 6dB Bandwidth: 9KHz
- Temperature: 27.8°C
- Relative Humidity: 59 %


The test was passed at the minimum margin that marked by a frame in the following data

Site : C001-HY
 Condition : CISPR CLASS-B 2003 2001/008 LINE
 EUT : USB adapter
 Power : 110V/60Hz
 Model : MS-6823
 Memo : TX CH06

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.154	46.03	-19.75	65.78	45.89	0.10	0.04	QP
2	0.154	42.77	-13.01	55.78	42.63	0.10	0.04	Average
3	0.190	46.13	-17.91	64.04	45.99	0.10	0.04	QP
4	0.190	45.94	-8.10	54.04	45.80	0.10	0.04	Average
5	0.461	40.59	-6.08	46.67	40.38	0.10	0.11	Average
6	0.461	40.18	-16.49	56.67	39.97	0.10	0.11	QP
7	0.538	41.25	-4.75	46.00	41.05	0.10	0.10	Average
8	0.538	40.64	-15.36	56.00	40.44	0.10	0.10	QP
9	0.611	39.48	-6.52	46.00	39.29	0.10	0.09	Average
10	0.611	38.76	-17.24	56.00	38.57	0.10	0.09	QP
11	8.805	40.89	-19.11	60.00	40.41	0.19	0.29	QP
12	8.805	27.83	-22.17	50.00	27.35	0.19	0.29	Average

Site : C001-HY
 Condition : CISPR CLASS-B 2003 2001/008 NEUTRAL
 EUT : USB adapter
 Power : 110V/60Hz
 Model : MS-6823
 Memo : TX CH06

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.153	47.65	-8.19	55.84	47.51	0.10	0.04	Average
2	0.153	48.12	-17.72	65.84	47.98	0.10	0.04	QP
3	0.383	38.56	-19.65	58.21	38.35	0.10	0.11	QP
4	0.383	39.25	-8.96	48.21	39.04	0.10	0.11	Average
5	0.459	42.34	-4.37	46.71	42.13	0.10	0.11	Average
6	0.459	42.56	-14.15	56.71	42.35	0.10	0.11	QP
7	0.541	34.42	-11.58	46.00	34.22	0.10	0.10	Average
8	0.541	33.76	-22.24	56.00	33.56	0.10	0.10	QP
9	0.611	38.26	-17.74	56.00	38.07	0.10	0.09	QP
10	0.611	39.03	-6.97	46.00	38.84	0.10	0.09	Average
11	0.686	33.53	-22.47	56.00	33.35	0.10	0.08	QP
12	0.686	33.96	-12.04	46.00	33.78	0.10	0.08	Average

Test Engineer: 
 John Huang

- Test Mode: Mode 3
- Frequency Range of Test: from 150KHz to 30 MHz
- 6dB Bandwidth: 9KHz
- Temperature: 27.8°C
- Relative Humidity: 59 %


The test was passed at the minimum margin that marked by a frame in the following data

Site : C001-HY
 Condition : CISPR CLASS-B 2003 2001/008 LINE
 EUT : USB adapter
 Power : 110V/60Hz
 Model : MS-6823
 Memo : TX CH11

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.154	46.03	-19.75	65.78	45.89	0.10	0.04	QP
2	0.154	42.85	-12.93	55.78	42.71	0.10	0.04	Average
3	0.190	46.15	-17.89	64.04	46.01	0.10	0.04	QP
4	0.190	45.98	-8.06	54.04	45.84	0.10	0.04	Average
5	0.461	40.59	-6.08	46.67	40.38	0.10	0.11	Average
6	0.461	40.18	-16.49	56.67	39.97	0.10	0.11	QP
7	0.538	41.33	-4.67	46.00	41.13	0.10	0.10	Average
8	0.538	40.64	-15.36	56.00	40.44	0.10	0.10	QP
9	0.611	39.43	-6.57	46.00	39.24	0.10	0.09	Average
10	0.611	38.70	-17.30	56.00	38.51	0.10	0.09	QP
11	8.960	40.56	-19.44	60.00	40.08	0.19	0.29	QP
12	8.960	23.57	-26.43	50.00	23.09	0.19	0.29	Average

Site : C001-HY
 Condition : CISPR CLASS-B 2003 2001/008 NEUTRAL
 EUT : USB adapter
 Power : 110V/60Hz
 Model : MS-6823
 Memo : TX CH11

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.152	48.08	-17.81	65.89	47.94	0.10	0.04	QP
2	0.152	47.69	-8.20	55.89	47.55	0.10	0.04	Average
3	0.459	42.34	-4.37	46.71	42.13	0.10	0.11	Average
4	0.459	42.54	-14.17	56.71	42.33	0.10	0.11	QP
5	0.538	38.69	-17.31	56.00	38.49	0.10	0.10	QP
6	0.538	39.39	-6.61	46.00	39.19	0.10	0.10	Average
7	0.611	38.88	-7.12	46.00	38.69	0.10	0.09	Average
8	0.611	38.12	-17.88	56.00	37.93	0.10	0.09	QP
9	9.060	36.80	-23.20	60.00	36.31	0.20	0.29	QP
10	9.060	23.66	-26.34	50.00	23.17	0.20	0.29	Average
11	10.577	27.55	-22.45	50.00	27.02	0.21	0.32	Average
12	10.577	38.06	-21.94	60.00	37.53	0.21	0.32	QP

Test Engineer: 
 John Huang

5.6. Test of Radiated Emission

Radiated emissions from 30 MHz to 25 GHz were measured according to the methods defines in ANSI C63.4-2001. The EUT was placed on a nonmetallic stand, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions

5.6.1. Major Measuring Instruments

- Amplifier (HP 8447D)
 - RF Gain 30 dB
 - Signal Input 100 KHz to 1.3 GHz

- Amplifier (MITEQ AFS44)
 - RF Gain 40 dB
 - Signal Input 100 MHz to 26.5 GHz


- Spectrum analyzer (R&S FSEK30)
 - Attenuation 10 dB
 - Start Frequency 30 MHz
 - Stop Frequency 25 GHz
 - Resolution Bandwidth 120 KHz for below 1GHz
1 MHz for above 1GHz
 - Video Bandwidth 1 MHz
 - Signal Input 20 Hz to 40 GHz

- Test Receiver (SCHAFFNER SCR3501)
 - Resolution Bandwidth 120 KHz
 - Frequency Band 9 K – 1 GHz
 - Quasi-Peak Detector ON for Quasi-Peak Mode
OFF for Peak Mode

5.6.2. Test Procedures

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3. Typical Test Setup Layout of Radiated Emission

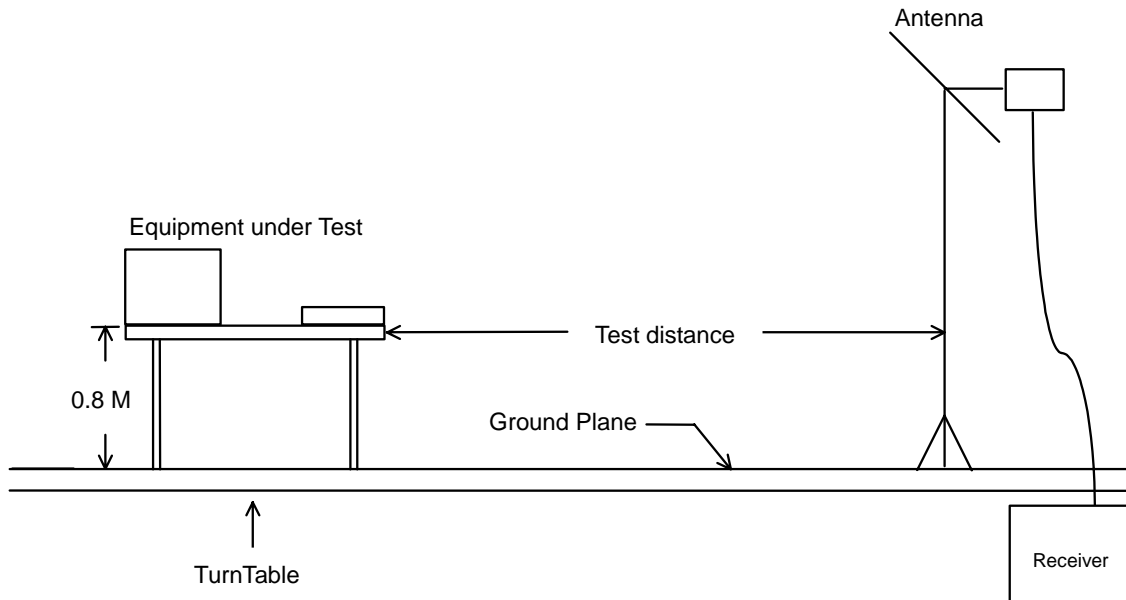

5.6.4. Test Result of Radiated Emission

- Test Mode: Mode 1
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 67 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Antenna (Probe) Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

```

Site      : 03CH03-HY
Condition : 3m 03CH03-MAT HORIZONTAL
EUT       : USB ADAPTER
Power     : FOR PC
MODEL     : MS-6823
MEMO     : TX CH01 2412MHz
          : F370202
    
```

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	120.180	26.88	-16.62	43.50	42.01	10.00	1.79	26.92	Peak	---	---
2	127.740	26.18	-17.32	43.50	40.75	10.42	1.90	26.09	Peak	---	---
3	135.570	23.11	-20.39	43.50	37.57	10.39	2.01	26.86	Peak	---	---

```

Site      : 03CH03-HY
Condition : 3m 03CH03-MAT HORIZONTAL
EUT       : USB ADAPTER
Power     : FOR PC
MODEL     : MS-6823
MEMO     : TX CH01 2412MHz
          : F370202
    
```

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	436.500	33.17	-12.83	46.00	41.87	15.14	3.54	27.38	Peak	---	---
2	968.500	35.78	-18.22	54.00	37.94	19.65	5.78	27.59	Peak	---	---
3	999.300	40.38	-33.62	74.00	42.55	19.75	5.58	27.50	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH01 2412MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	43.770	24.86	-15.14	40.00	41.59	9.14	1.23	27.10	Peak	---	---
2	120.180	22.97	-20.53	43.50	38.10	10.00	1.79	26.92	Peak	---	---
3	234.660	20.54	-25.46	46.00	34.16	10.47	2.51	26.60	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH01 2412MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	436.500	34.95	-11.05	46.00	43.65	15.14	3.54	27.38	Peak	---	---
2	895.000	35.96	-10.04	46.00	39.00	19.39	5.38	27.81	Peak	100	96
3	999.300	40.24	-33.76	74.00	42.41	19.75	5.58	27.50	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH01 2412MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3956.000	57.10	-16.90	74.00	42.71	32.52	9.26	27.39	Peak	---	---

- For 5GHz ~ 25GHz
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Cable Loss	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2414.000	H	28.25	6.23	61.75	-	-	96.23	64788.81		Peak
2414.000	H	28.25	6.23	56.34	-	-	90.82	34753.62		A.V.
4822.000	H	33.06	9.06	15.45	74.00	5011.87	57.57	755.96	-16.43	Peak
4822.000	H	33.06	9.06	9.60	54.00	501.19	51.72	385.48	-2.28	A.V.
2414.000	V	28.25	6.23	59.03	-	-	93.51	47369.63		Peak
2414.000	V	28.25	6.23	53.94	-	-	88.42	26363.31		A.V.
4824.000	V						-			Peak, A.V.
7236.000	V/H						-			Peak, A.V.
9648.000	V/H						-			Peak, A.V.
12060.000	V/H						-			Peak, A.V.
14472.000	V/H						-			Peak, A.V.
16884.000	V/H						-			Peak, A.V.
19296.000	V/H						-			Peak, A.V.
21708.000	V/H						-			Peak, A.V.
24120.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer : Steve
Steve Chen

- Test Mode: Mode 2
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 67 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Antenna (Probe) Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH06 2437MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	43.770	20.32	-19.68	40.00	37.05	9.14	1.23	27.10	Peak	---	---
2	91.020	20.95	-22.55	43.50	37.62	8.84	1.51	27.02	Peak	---	---
3	120.180	19.47	-24.03	43.50	34.60	10.00	1.79	26.92	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH06 2437MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	436.500	36.87	-9.13	46.00	45.57	15.14	3.54	27.38	Peak	---	---
2	968.500	30.79	-23.21	54.00	32.95	19.65	5.78	27.59	Peak	---	---
3	999.300	37.68	-36.32	74.00	39.85	19.75	5.58	27.50	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH06 2437MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	43.770	25.64	-14.36	40.00	42.37	9.14	1.23	27.10	Peak	---	---
2	149.340	24.40	-19.10	43.50	39.64	9.47	2.09	26.80	Peak	---	---
3	233.850	19.59	-26.41	46.00	33.29	10.39	2.51	26.60	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH06 2437MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	436.500	33.66	-12.34	46.00	42.36	15.14	3.54	27.38	Peak	---	---
2	813.800	33.07	-12.93	46.00	37.08	18.87	5.09	27.97	Peak	---	---
3	999.300	40.59	-33.41	74.00	42.76	19.75	5.50	27.50	Peak	---	---

Site : 03CH03-HY
 Condition : 3m HORN-ANT-6741 VERTICAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH06 2437MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	3924.000	57.29	-16.71	74.00	43.07	32.43	9.18	27.39	Peak	---	---
2	3924.000	50.33	-3.67	54.00	36.11	32.43	9.18	27.39	Average	100	70

- For 5GHz ~ 25GHz
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Cable Loss	Reading (dBuV)	Limits (dBuV/m)	Emission (uV/m)	Level (dBuV/m)	Margin (uV/m)	Detect (dB)	Mode
2436.000	H	28.29	6.26	61.46	-	-	96.01	63168.42		Peak
2436.000	H	28.29	6.26	55.18	-	-	89.73	30654.91		A.V.
4876.000	H	33.17	9.09	15.04	74.00	5011.87	57.30	732.82	-16.70	Peak
4876.000	H	33.17	9.09	7.18	54.00	501.19	49.44	296.48	-4.56	A.V.
2436.000	V	28.29	6.26	59.07	-	-	93.62	47973.34		Peak
2436.000	V	28.29	6.26	53.47	-	-	88.02	25176.77		A.V.
4874.000	V						-			Peak, A.V.
7311.000	V/H						-			Peak, A.V.
9748.000	V/H						-			Peak, A.V.
12185.000	V/H						-			Peak, A.V.
14622.000	V/H						-			Peak, A.V.
17059.000	V/H						-			Peak, A.V.
19496.000	V/H						-			Peak, A.V.
21933.000	V/H						-			Peak, A.V.
24370.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer : Steve
Steve Chen

- Test Mode: Mode 3
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 67 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Antenna (Probe) Factor + Cable Loss + Read Level - Preamp Factor = Level

The test was passed at the minimum margin that marked by the frame in the following test record

■ Spurious Emission

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH11 2462MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	81.900	30.13	-9.87	40.00	49.11	6.48	1.58	27.04	Peak	---	---
2	85.620	30.19	-9.81	40.00	47.93	7.70	1.59	27.03	Peak	---	---
3	143.940	27.29	-16.21	43.50	42.11	9.93	2.07	26.82	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT HORIZONTAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH11 2462MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	436.500	35.76	-10.24	46.00	44.46	15.14	3.54	27.38	Peak	---	---
2	943.900	39.11	-6.89	46.00	41.37	19.56	5.85	27.67	Peak	---	---
3	999.300	41.46	-32.54	74.00	43.63	19.75	5.50	27.50	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH11 2462MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	30.540	31.59	-8.41	40.00	42.74	14.93	1.02	27.10	Peak	---	---
2	38.370	35.11	-4.89	40.00	49.60	11.53	1.08	27.10	Peak	100	97
3	97.770	27.99	-15.51	43.50	44.03	9.23	1.73	27.00	Peak	---	---

Site : 03CH03-HY
 Condition : 3m 03CH03-MAT VERTICAL
 EUT : USB ADAPTER
 Power : FOR PC
 MODEL : MS-6823
 MEMO : TX CH11 2462MHz
 : F370202

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	436.500	35.62	-10.38	46.00	44.32	15.14	3.54	27.38	Peak	---	---
2	951.700	38.60	-7.40	46.00	40.76	19.59	5.90	27.65	Peak	---	---
3	999.300	40.79	-33.21	74.00	42.96	19.75	5.58	27.50	Peak	---	---

- For 1GHz ~ 25GHz
 Remark: Frequency from 1000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency (MHz)	Antenna Polarity	Cable Factor	Reading Loss	Limits (dBuV)	Emission (dBuV/m)	Level (uV/m)	Margin (dB)	Detect Mode		
2460.000	H	28.34	6.29	60.67	-	-	95.30	58210.32	Peak	
2460.000	H	28.34	6.29	55.50	-	-	90.13	32099.63	A.V.	
4926.000	H	33.28	9.12	18.14	74.00	5011.87	60.54	1064.14	-13.46	Peak
4926.000	H	33.28	9.12	5.94	54.00	501.19	48.34	261.22	-5.66	A.V.
2462.000	V	28.35	6.29	62.76	-	-	97.40	74131.02		Peak
2462.000	V	28.35	6.29	56.50	-	-	91.14	36057.86		A.V.
4884.000	V	33.19	9.10	13.76	74.00	5011.87	56.05	634.60	-17.95	Peak
4884.000	V	33.19	9.10	7.83	54.00	501.19	50.12	320.63	-3.88	A.V.
7386.000	V/H						-			Peak, A.V.
9848.000	V/H						-			Peak, A.V.
12310.000	V/H						-			Peak, A.V.
14772.000	V/H						-			Peak, A.V.
17234.000	V/H						-			Peak, A.V.
19696.000	V/H						-			Peak, A.V.
22158.000	V/H						-			Peak, A.V.
24620.000	V/H						-			Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer : Steve
Steve Chen

5.7. Band Edges Measurement

5.7.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.7.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3. Test Result :

- Test Result in lower band (Channel 1) : PASS
- Test Result in higher band(Channel 11) : PASS

5.7.4. Note on Band edge Emission

The band edge emission plot on appendix B page B8. shows 57.18dB delta between carrier maximum power and local maximum emission in the restricted band (2.4835GHz).

Polarity	The emission of carrier power strength (dB μ V/m)	The maximum field strength in restrict band (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)	Result
H	97.40	40.22	74.00	-33.78	Peak
H	91.14	33.96	54.00	-20.04	Average
V	95.30	38.12	74.00	-35.88	Peak
V	90.13	32.95	54.00	-21.05	Average

* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.

5.8. Antenna Requirements

The EUT use a Chip antenna. It is considered meet antenna requirement of FCC.

5.8.1. Standard Applicable

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

5.8.2. Antenna Connected Construction

The maximum Gain antenna used in this product is a chip antenna. The antenna is soldered on the PCB, No antenna connected construction.

6. EMI Suppression Component List

No EMI suppression components.

7. Antenna Factor & Cable Loss

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.35	1.01	1000	24.10	3.92
35	13.63	1.04	2000	27.40	5.66
40	11.11	1.09	3000	30.00	7.20
45	10.59	1.24	4000	32.60	9.36
50	6.47	1.43	5000	33.40	9.16
55	5.83	1.39	6000	34.20	10.70
60	5.18	1.59	7000	35.30	12.16
65	4.81	1.41	8000	36.90	13.12
70	4.43	1.43	9000	38.10	13.81
75	5.10	1.55	10000	39.00	14.83
80	5.91	1.56	11000	38.60	15.83
85	7.33	1.62	12000	39.50	17.11
90	8.74	1.41	13000	39.30	17.62
95	9.05	1.81	14000	41.60	18.37
100	9.36	1.68	15000	40.60	19.10
110	9.65	1.73	16000	37.20	19.72
120	9.97	1.79	17000	40.20	21.98
130	10.51	1.93	18000	48.90	21.22
140	10.32	2.06	19000	37.60	23.90
150	9.42	2.09	20000	37.30	24.07
160	8.09	2.12	21000	37.00	25.49
170	7.43	2.12	22000	38.00	24.92
180	7.60	2.12	23000	38.70	25.60
190	7.43	2.21	24000	38.60	25.70
200	7.26	2.29	25000	38.90	26.54
220	9.11	2.42			
240	10.88	2.54			
260	11.75	2.66			
280	11.55	2.76			
300	11.36	2.85			
320	12.03	3.10			
340	12.69	3.36			
360	13.33	3.49			
380	14.00	3.50			
400	14.63	3.51			
450	15.33	3.55			
500	16.03	3.81			
550	16.65	4.05			
600	17.29	4.23			
650	17.64	4.63			
700	18.00	4.74			
750	18.39	4.95			
800	18.79	5.06			
850	19.10	5.18			
900	19.42	5.40			
950	19.58	5.91			
1000	19.75	5.58			

8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9 KHz – 2.75 GHz	Dec. 12, 2002	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Jan. 07, 2003	Conduction (CO01-HY)
50 ohm BNC type Terminal	NOBLE	50ohm	TM013	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30MHz~1GHz 3m	Jun. 21, 2003	Radiation (03CH03-HY)
Spectrum analyzer	R&S	FSEK30	100189	20Hz~40GHz	Aug. 04, 2003	Radiation (03CH03-HY)
Receiver	SCHAFFNER	SCR 3501	417	9 KHz – 1GHz	Feb. 20, 2003	Radiation (03CH03-HY)
Amplifier	HP	8447D	2944A09072	100KHz – 1.3GHz	Oct. 21, 2002	Radiation (03CH03-HY)
Bilog Antenna	SCHAFFNER	CBL6112B	2687	30MHz – 2GHz	Dec. 21, 2002	Radiation (03CH03-HY)
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz~1GHz	Jan. 02, 2003	Radiation (03CH03-HY)
Amplifier	MITEQ	NSP2650-NF	805858	100MHz~26.5GHz	Jul. 10, 2003	Radiation (03CH03-HY)
Horn Antenna	COM-POWER	AH-118	10094	1GHz – 18GHz	Apr. 10, 2003	Radiation (03CH03-HY)
Turn Table	HD	DS 420	420/650/00	0 ~ 360 degree	N/A	Radiation (03CH03-HY)
Antenna Mast	HD	MA 240	240/560/00	1 m - 4 m	N/A	Radiation (03CH03-HY)
Horn Antenna	Schwarzbeck	BBHA9170	BBHA9170154	15GHz~40GHz	Jun. 02, 2003	Radiation (03CH03-HY)
RF Cable-HIGH	Jye Bao	RG142	CB030-HIGH	1GHz~29.5GHz	Mar. 14, 2003	Radiation (03CH03-HY)
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 01, 2003	Conducted

Calibration Interval of instruments listed above is one year.

9. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m	10m
Antenna factor calibration	normal(k=2)	±1	±1
cable loss calibration	normal(k=2)	±0.3	±0.3
RCV/SPA specification	rectangular	±2	±2
Antenna Directivity	rectangular	±3	±0.5
Antenna Factor V.S. Height	rectangular	±2	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25	±0.25
site imperfection	rectangular	±2	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	±0.54	±0.54
combined standard uncertainty $U_e(y)$	normal	±2.7	±2.2
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±5.4	±4.4

$U = \{((1/2)^2+(0.3/2)^2+(2^2+0.5^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\}^{1/2}=2.2$ for 10m test distance

$U = \{((1/2)^2+(0.3/2)^2+(2^2+3^2+2^2+0.25^2+2^2)/3+(0.54)^2/2)\}^{1/2}=2.7$ for 3m test distance

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty $U_e(y)$	normal	±1.66
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±3.32

$U = \{(0.3/2)^2+(2^2+1.5^2+0.2^2)/3+(0.2)^2/2\}^{1/2}=1.66$