

# FCC TEST REPORT

for

## 47 CFR, Part 15, Subpart C

Equipment : WIRELESS 11B PCI CARD

Model No. : PC11B2, MS-6828

FCC ID. : I4L-MS6828

Filing Type : Certification

Applicant : **Micro-Star Int'l Co., Ltd.**  
No. 69, Li-De St., Jung-He City, Taipei Hsien, Taiwan

- The test result refers exclusively to the test presented test model / sample.
- Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.
- **Certificate or Test Report must not be used by the applicant to claim the product in this test report endorsement by NVLAP or any agency of U.S. government.**

### ***SPORTON International Inc.***

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## Table of Contents

**History of this test report .....ii**

**CERTIFICATE OF COMPLIANCE..... 1**

**1. General Description of Equipment under Test..... 2**

    1.1. Applicant..... 2

    1.2. Manufacturer ..... 2

    1.3. Basic Description of Equipment under Test ..... 2

    1.4. Feature of Equipment under Test ..... 3

**2. Test Configuration of Equipment under Test ..... 4**

    2.1. Test Manner ..... 4

    2.2. Description of Test System ..... 4

    2.3. Connection Diagram of Test System ..... 6

**3. Test Software ..... 7**

**4. General Information of Test..... 8**

    4.1. Test Voltage ..... 8

    4.2. Standard for Methods of Measurement..... 8

    4.3. Test in Compliance with ..... 8

    4.4. Frequency Range Investigated ..... 8

    4.5. Test Distance ..... 8

**5. Report of Measurements and Examinations ..... 9**

    5.1. List of Measurements and Examinations ..... 9

    5.2. 6dB Bandwidth ..... 10

    5.3. Peak Output Power ..... 14

    5.4. Power Spectral Density ..... 15

    5.5. Test of Conducted Emission ..... 19

    5.6. Test of Radiated Emission ..... 23

    5.7. Band Edges Measurement..... 38

    5.8. Antenna Requirements ..... 41

    5.9. RF Exposure ..... 42

**6. EMI Suppression Component List..... 44**

**7. Antenna Factor & Cable Loss ..... 45**

**8. List of Measuring Equipments Used ..... 46**

**9. Uncertainty of Test Site ..... 47**



# CERTIFICATE OF COMPLIANCE

for

**47 CFR, Part 15, Subpart C**

Equipment : WIRELESS 11B PCI CARD

Model No. : PC11B2, MS-6828

FCC ID. : I4L-MS6828

Filing Type : Certification

Applicant : **Micro-Star Int'l Co., Ltd.**

No. 69, Li-De St., Jung-He City, Taipei Hsien, Taiwan

I **HEREBY** CERTIFY THAT :

The measurements shown in this test report were made in accordance with the procedures given in **ANSI C63.4 - 1992** and the equipment under test was **passed** all test items required in FCC Part 15 subpart C, relative to the equipment under test. Testing was carried out on Jul. 03, 2003 at **SPORTON International Inc. LAB.**



Alex Chen  
Manager

**SPORTON International Inc.**

6F, No.106, Sec. 1, Hsin Tai Wu Rd., Hsi Chih, Taipei Hsien, Taiwan, R.O.C.

## **1. General Description of Equipment under Test**

### **1.1. Applicant**

Micro-Star Int'l Co., Ltd.  
No. 69, Li-De St., Jung-He City, Taipei Hsien, Taiwan

### **1.2. Manufacturer**

1. Micro-Star Int'l Co., Ltd.  
No. 488, Ban-Nan Rd., Jung-He City, Taipei Hsien, Taiwan
2. MSI COMPUTER (SHENZHEN) Co., Ltd.  
Longma Information Technology Industrial Park, Shiyan, Tangtou Village, Shenzhen

### **1.3. Basic Description of Equipment under Test**

Equipment	: WIRELESS 11B PCI CARD
Model No.	: PC11B2, MS-6828
FCC ID.	: I4L-MS6828
Trade Name	: MSI
RP- SMA Cable	: Shielded, 0.5m
RP- SMA Cable	: Shielded, 1m
Power Supply Type	: From PC
AC Power Cord	: N/A

**1.4. Feature of Equipment under Test**

Product Feature & Specification	
1. Host/Radio Interface	PCI
2. Type of Modulation	PBCC, CCK
3. Number of Channels	USA/Canada: 11
4. Frequency Band	2.4~2.5 GHz
5. Carrier Frequency of each channel	2412MHz (5MHz)
6. Bandwidth of each channel	22MHz
7. Maximum Output Power to Antenna	17.5dBm
8. IF & L.O. frequency	374MHz
9. Type of Antenna Connector (Ex: SMA,TNC, MCX, MMCX, UFC.....etc)	RP-SMA
10. Antenna Type / Class and Gain	Dipole Antenna / 3dBi
11. Function Type	Transceiver
12. Power Rating (DC/AC, Voltage)	DC 3.3 V
13. Duty Cycle	100%
14. Basic function of product	WLAN 11B

## **2. Test Configuration of Equipment under Test**

### **2.1. Test Manner**

- a. The EUT has been associated with personal computer and peripherals pursuant to ANSI C63.4-1992 and configuration operated in a manner, which tended to maximize its emission characteristics in a typical application.
- b. The complete test system included COMPAQ PC, VIEWSONIC Monitor, LOGITECH PS/2 Keyboard, LOGITECH PS/2 Mouse, EPSON Printer, ACEEX Modem and EUT for EMI test.
- c. The EUT equipped five types of antenna, the following modes were pretested:
  - 1. CH01 (2412MHz), RP-SMA Cable: 0.5m
  - 2. CH01 (2412MHz), RP-SMA Cable: 1m
 cause "0.5m antenna cable" generated the worst test result, it was selected to measured the other two channels (one near middle and one near bottom), according to 15.31(m), as following:
  - Mode 1. CH01 (2412MHz), RP-SMA cable: 0.5m
  - Mode 2. CH06 (2437MHz), RP-SMA cable: 0.5m
  - Mode 3. CH11 (2462MHz), RP-SMA cable: 0.5m
- b. Frequency range investigated: conduction 150 KHz to 30 MHz, radiation 30 MHz to 24620MHz.

### **2.2. Description of Test System**

Support Unit 1. -- Monitor (VIEWSONIC)

FCC ID	: N/A
Model No.	: VCDTS21553-3P
Power Supply Type	: Switching
Power Cord	: Non-Shielded
Serial No.	: SP0051
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity

Support Unit 2. -- PS/2 Keyboard (LOGITECH)

FCC ID	: N/A
Model No.	: Y-SJ17
Serial No.	: SP0054
Data Cable	: Shielded, 1.7m
Remark	: This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

## Support Unit 3. – PS/2 Mouse (LOGITECH)

FCC ID : DZL211029  
Model No. : M-S34  
Serial No. : SP0041  
Data Cable : Shielded, 1.7m

## Support Unit 4. -- Printer (EPSON)

FCC ID : N/A  
Model No. : STYLUS COLRO S680  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0048  
Data Cable : Shielded, 1.35m  
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.

## Support Unit 5. -- Modem (ACEEX)


FCC ID : IFAXDM1414  
Model No. : DM1414  
Power Supply Type : Linear  
Power Cord : Non-Shielded  
Serial No. : SP0015  
Data Cable : Shielded, 1.15m

## Support Unit 6. – Personal Computer (COMPAQ)

FCC ID : N/A  
Model No. : Evo D380mx  
Power Supply Type : Switching  
Power Cord : Non-Shielded  
Serial No. : SP0036  
Remark : This support device was tested to comply with FCC standards and authorized under a declaration of conformity.



2.3. Connection Diagram of Test System

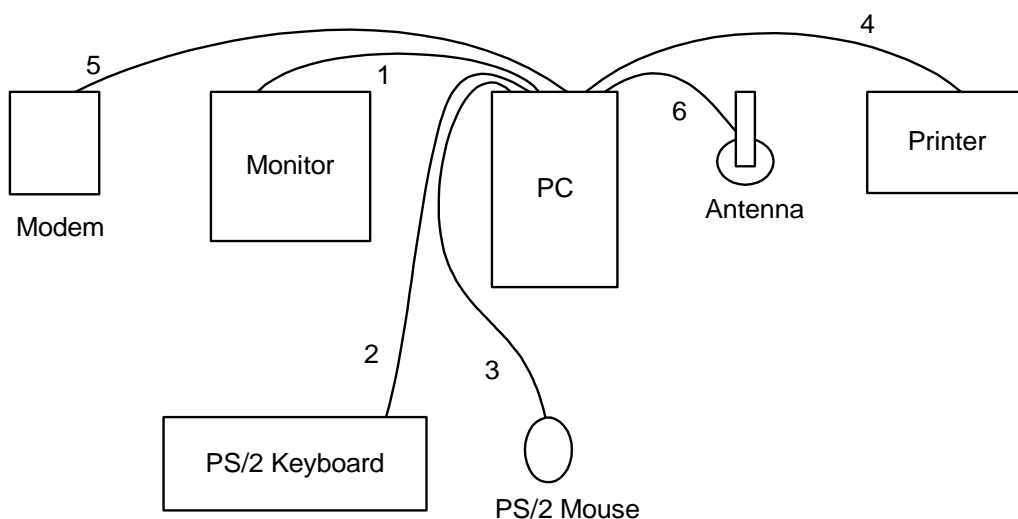

1. The I/O cable is connected from PC to the support unit 1.
2. The I/O cable is connected from PC to the support unit 2.
3. The I/O cable is connected from PC to the support unit 3.
4. The I/O cable is connected from PC to the support unit 4.
5. The I/O cable is connected from PC to the support unit 5.
6. The RP- SMA cable is connected from EUT to the Antenna.

**3. Test Software**

An executive program, EMCTEST.EXE under WIN XP, which generates a complete line of continuously repeating " H " pattern was used as the test software.

The program was executed as follows:

- a. Turn on the power of all equipment.
- b. The PC reads the test program from the hard disk drive and runs it.
- c. The PC sends " H " messages to the monitor, and the monitor displays " H " patterns on the screen.
- d. The PC sends " H " messages to the printer, then the printer prints them on the paper.
- e. The PC sends " H " messages to the modem.
- f. The PC sends " H " messages to the internal Hard Disk, and the Hard Disk reads and writes the message.
- g. Repeat the steps from c to f.

At the same time, "QA Test" was executed to keep transmitting signals at fixed frequency.

## 4. General Information of Test

Test Site Location : No. 52, Hwa Ya 1st Rd., Hwa Ya Technology Park,  
Kwei-Shan Hsiag, Tao Yuan Hsien, Taiwan, R.O.C.  
TEL : 886-3-327-3456  
FAX : 886-3-318-0055

Test Site No : CO01-HY, 10CH02-HY, 03CH03-HY

### 4.1. Test Voltage

110V/60Hz

### 4.2. Standard for Methods of Measurement

ANSI C63.4-2001 for conducted power line test and radiated emission test,  
["Guidance on Measurements for Direct Sequence Spread Spectrum Systems"](#) for test of 6dB Bandwidth  
["Guidance on Measurements for Direct Sequence Spread Spectrum Systems"](#) for test of Maximum Peak Output Power  
["Guidance on Measurements for Direct Sequence Spread Spectrum Systems"](#) for test of 100kHz Bandwidth of Frequency Band Edges  
["Guidance on Measurements for Direct Sequence Spread Spectrum Systems"](#) for test of Power Spectral Density

### 4.3. Test in Compliance with

FCC Part 15, Subpart C 15.247

### 4.4. Frequency Range Investigated

- a. Conduction: from 150 KHz to 30 MHz
- b. Radiation: from 30 MHz to 24385MHz

### 4.5. Test Distance

The test distance of radiated emission from antenna to EUT is 3 M.

## 5. Report of Measurements and Examinations

### 5.1. List of Measurements and Examinations

FCC Rule	Description of Test	Result
<u>15.247(a)(2)</u>	6dB Bandwidth	Pass
<u>15.247(b)</u>	Maximum Peak Output Power	Pass
<u>15.247(d)</u>	Power Spectral Density	Pass
15.207	Conducted Emission	Pass
15.209	Radiated Emission	Pass
<u>15.247(c)</u>	100kHz Bandwidth of Frequency Band Edges	Pass
<u>15.203</u>	Antenna Requirement	Pass
1.1307 1.1310 2.1091 2.1093	RF Exposure Compliance	Pass

**5.2. 6dB Bandwidth**


5.2.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.2.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer through an attenuator.
2. Set RBW of spectrum analyzer to 100KHz and VBW to 100KHz.
3. The 6 dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6 dB.

5.2.3. Test Setup Layout :

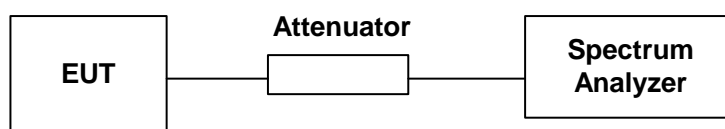


5.2.4. Test Result : The spectrum analyzer plots are attached as below

- Temperature : 26°C
- Relative Humidity : 63 %

Channel	Frequency ( MHz )	6dB Emission bandwidth ( MHz )	Limits ( MHz )	Plot Ref. No.
1	2412	11.40	0.5	1
6	2437	11.44	0.5	2
11	2462	10.64	0.5	3


Plot1(Channel 1) :

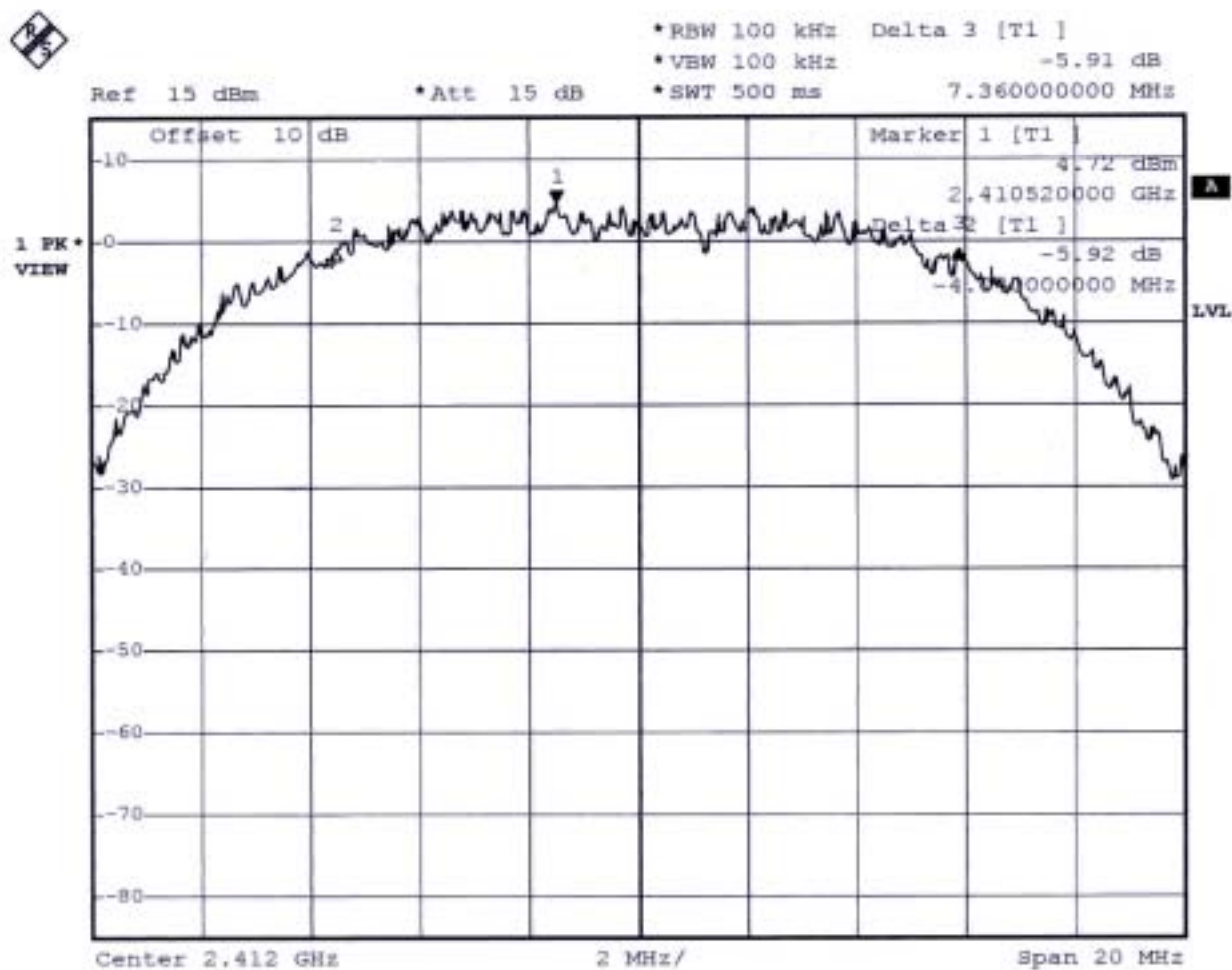

Date: 1.JUL.2003 18:15:01



Plot3(Channel 11) :

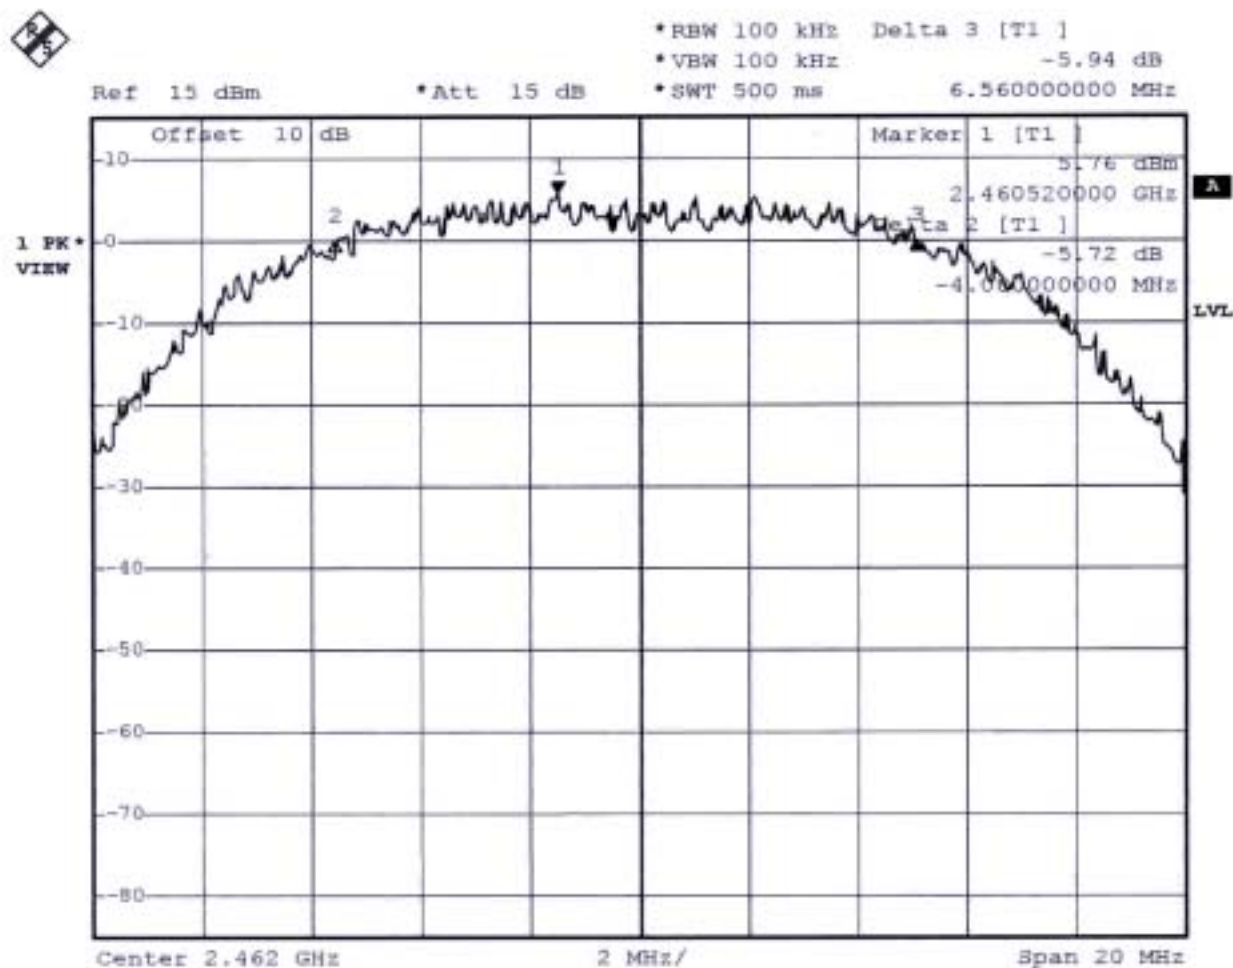

Date: 1.JUL.2003 18:19:44

Comments : 6dB Emission bandwidth>500kHz



**5.3. Peak Output Power**


5.3.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.3.2. Test Procedure :

The antenna port ( RF output ) of the EUT was connected to the input ( RF input ) of a power meter. Power was read directly from the meter and cable loss connection was added to the reading to obtain power at the EUT antenna terminal. The EUT Output Power was set to maximum to produce the worse case test result.

5.3.3. Test Setup Layout :



5.3.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 63 %
- Antenna Gain: 3 dBi

Channel	Frequency (MHz)	Output Power (dBm)	Output Power (mW)	Limits (Watt/dBm )
1	2412	16.90	48.79988194	1W/30 dBm
6	2437	16.91	49.09078762	1W/30 dBm
11	2462	16.85	48.41723676	1W/30 dBm

- Comments : Maximum Peak Output Power < 30dBm ( 1Watt)

**5.4. Power Spectral Density**


5.4.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.4.2. Test Procedure :

1. The transmitter output was connected to spectrum analyzer through an attenuator.
2. The spectrum analyzer's resolution bandwidth were set at 3KHz RBW and 30KHz VBW as that of the fundamental frequency. Set the sweep time=span/3KHz.
3. The power spectral density was measured and recorded.
4. The Sweep time is allowed to be longer than span/3KHz for a full response of the mixer in the spectrum analyzer.

5.4.3. Test Setup Layout :




5.4.4. Test Result : See spectrum analyzer plots below

- Temperature: 26°C
- Relative Humidity: 63 %


Channel	Frequency (MHz)	Power Spectral Density (dBm)	Limits (dBm)	Plot Ref. No.
1	2412	-10.84	8	1
6	2437	-9.67	8	2
11	2462	-8.75	8	3

Plot1(Channel 1):

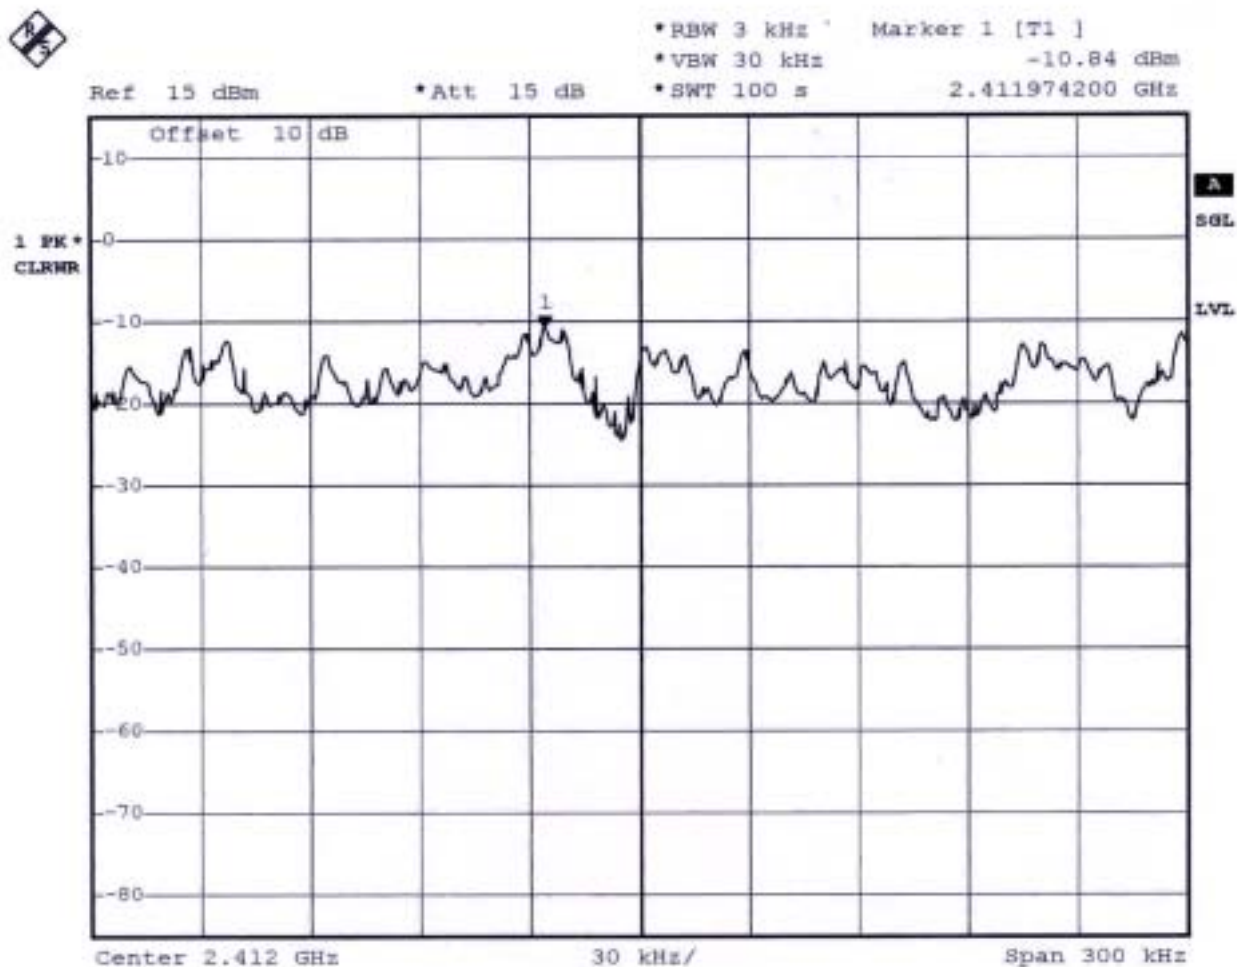


Date: 1.JUL.2003 18:14:14

Plot2(Channel 6):

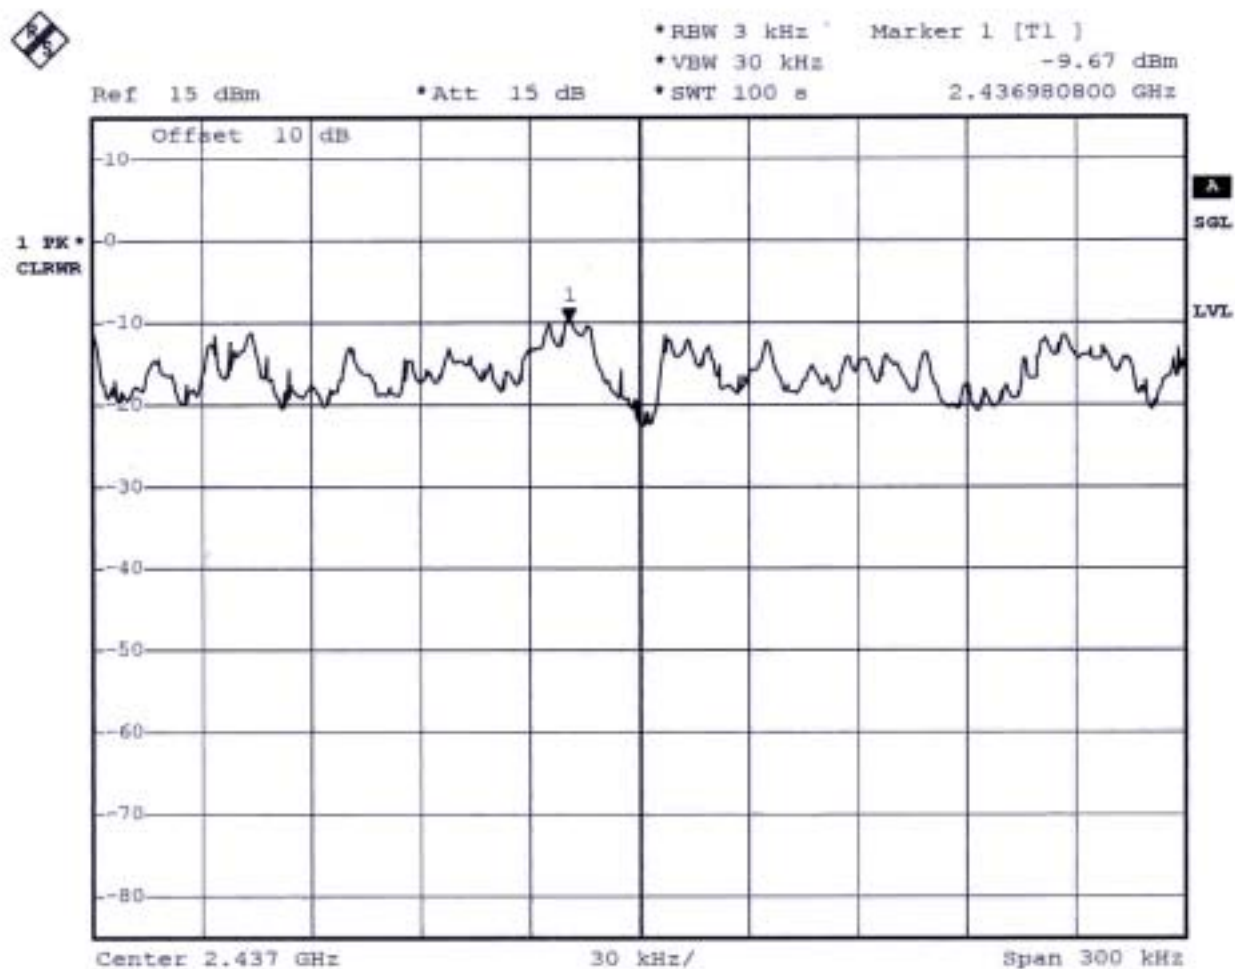

Date: 1.JUL.2003 18:18:46

Plot3(Channel 11):

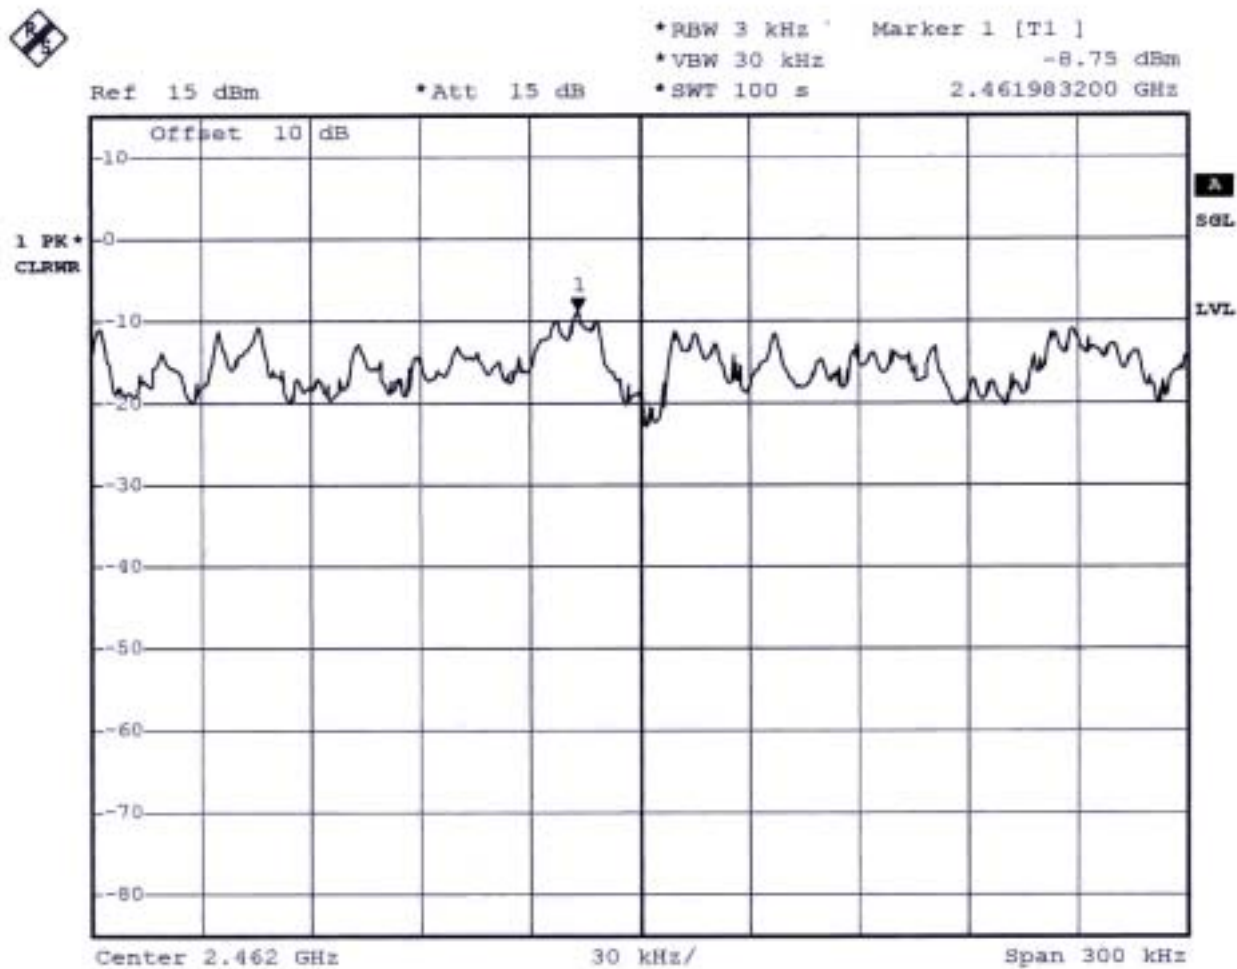

Date: 1.JUL.2003 18:22:37

## 5.5. Test of Conducted Emission

Conducted Emissions were measured from 150 KHz to 30 MHz with a bandwidth of 9 KHz and return leads of the EUT according to the methods defined in ANSI C63.4-1992 Section 3.1. The EUT was placed on a nonmetallic stand in a shielded room 0.8 meters above the ground plane. The interface cables and equipment positioning were varied within limits of reasonable applications to determine the position produced maximum conducted emissions.

### 5.5.1. Major Measuring Instruments :

• Test Receiver	(R&S ESCS 30)
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

### 5.5.2. Test Procedures :

- a. The EUT was placed 0.4 meter from the conducting wall of the shielding room was kept at least 80 centimeters from any other grounded conducting surface.
- b. Connect EUT to the power mains through a line impedance stabilization network (LISN).
- c. All the support units are connect to the other LISN.
- d. The LISN provides 50 ohm coupling impedance for the measuring instrument.
- e. The FCC states that a 50 ohm, 50 microhenry LISN should be used.
- f. Both sides of AC line were checked for maximum conducted interference.
- g. The frequency range from 150 KHz to 30 MHz was searched.
- h. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

5.5.3. Test Result of Conducted Emission :

- Test Mode: Mode 1
- Frequency Range of Test: from 150KHz to 30 MHz
- 6dB Bandwidth: 9KHz
- Temperature: 30.4°C
- Relative Humidity: 52 %
- Test Date: 2003-07-03

**The test was passed at the minimum margin that marked by a frame in the following data**

Line

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.185	48.07	-16.19	64.26	47.95	0.10	0.02	QP
2	0.185	48.61	-5.65	54.26	48.49	0.10	0.02	Average
3	0.369	43.11	-5.41	48.52	42.94	0.10	0.07	Average
4	0.369	43.60	-14.92	58.52	43.43	0.10	0.07	QP
5	0.463	39.70	-16.94	56.64	39.52	0.10	0.08	QP
6	0.463	39.99	-6.65	46.64	39.81	0.10	0.08	Average
7	0.645	39.26	-16.74	56.00	39.08	0.10	0.08	QP
8	0.645	37.69	-8.31	46.00	37.51	0.10	0.08	Average
9	0.739	38.76	-17.24	56.00	38.58	0.10	0.08	QP
10	0.739	37.56	-8.44	46.00	37.38	0.10	0.08	Average
11	0.923	35.41	-10.59	46.00	35.23	0.10	0.08	Average
12	0.923	38.12	-17.88	56.00	37.94	0.10	0.08	QP

Neutral

1	0.185	45.89	-18.36	64.25	45.77	0.10	0.02	QP
2	0.185	46.48	-7.77	54.25	46.36	0.10	0.02	Average
3	0.277	38.09	-12.82	50.91	37.94	0.10	0.05	Average
4	0.277	37.72	-23.19	60.91	37.57	0.10	0.05	QP
5	0.647	32.00	-14.00	46.00	31.82	0.10	0.08	Average
6	0.647	35.97	-20.03	56.00	35.79	0.10	0.08	QP
7	0.922	36.81	-19.19	56.00	36.63	0.10	0.08	QP
8	0.922	33.38	-12.62	46.00	33.20	0.10	0.08	Average
9	1.479	33.50	-12.50	46.00	33.30	0.10	0.10	Average
10	1.479	35.88	-20.12	56.00	35.68	0.10	0.10	QP
11	2.030	33.75	-12.25	46.00	33.52	0.10	0.13	Average
12	2.030	37.11	-18.89	56.00	36.88	0.10	0.13	QP

Test Engineer: \_\_\_\_\_

  
Joke Yang

- Test Mode: Mode 2
- Frequency Range of Test: from 150KHz to 30 MHz
- 6dB Bandwidth: 9KHz
- Temperature: 30.4°C
- Relative Humidity: 52 %
- Test Date: 2003-07-03

**The test was passed at the minimum margin that marked by a frame in the following data**

Line

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.185	48.13	-16.13	64.26	48.01	0.10	0.02	QP
2	0.185	48.74	-5.52	54.26	48.62	0.10	0.02	Average
3	0.369	43.11	-5.41	48.52	42.94	0.10	0.07	Average
4	0.369	43.58	-14.94	58.52	43.41	0.10	0.07	QP
5	0.462	39.92	-16.74	56.66	39.74	0.10	0.08	QP
6	0.462	40.22	-6.44	46.66	40.04	0.10	0.08	Average
7	0.645	37.58	-8.42	46.00	37.40	0.10	0.08	Average
8	0.645	39.33	-16.67	56.00	39.15	0.10	0.08	QP
9	0.923	38.01	-17.99	56.00	37.83	0.10	0.08	QP
10	0.923	35.18	-10.82	46.00	35.00	0.10	0.08	Average
11	1.016	36.86	-9.14	46.00	36.68	0.10	0.08	Average
12	1.016	38.39	-17.61	56.00	38.21	0.10	0.08	QP

Neutral

1	0.185	45.93	-18.33	64.26	45.81	0.10	0.02	QP
2	0.185	46.57	-7.69	54.26	46.45	0.10	0.02	Average
3	0.277	38.04	-12.85	50.89	37.89	0.10	0.05	Average
4	0.277	37.70	-23.19	60.89	37.55	0.10	0.05	QP
5	0.922	36.68	-19.32	56.00	36.50	0.10	0.08	QP
6	0.922	33.38	-12.62	46.00	33.20	0.10	0.08	Average
7	1.110	32.82	-13.18	46.00	32.63	0.10	0.09	Average
8	1.110	35.34	-20.66	56.00	35.15	0.10	0.09	QP
9	1.753	33.40	-12.60	46.00	33.19	0.10	0.11	Average
10	1.753	35.92	-20.08	56.00	35.71	0.10	0.11	QP
11	2.030	33.46	-12.54	46.00	33.23	0.10	0.13	Average
12	2.030	37.15	-18.85	56.00	36.92	0.10	0.13	QP

Test Engineer:

  
 Joke Yang



- Test Mode: Mode 3
- Frequency Range of Test: from 150KHz to 30 MHz
- 6dB Bandwidth: 9KHz
- Temperature: 30.4°C
- Relative Humidity: 52 %
- Test Date: 2003-07-03

**The test was passed at the minimum margin that marked by a frame in the following data**

Line

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.184	48.21	-16.09	64.30	48.09	0.10	0.02	QP
2	0.184	48.81	-5.49	54.30	48.69	0.10	0.02	Average
3	0.369	43.17	-5.35	48.52	43.00	0.10	0.07	Average
4	0.369	43.56	-14.96	58.52	43.39	0.10	0.07	QP
5	0.461	39.99	-16.68	56.67	39.81	0.10	0.08	QP
6	0.461	40.22	-6.45	46.67	40.04	0.10	0.08	Average
7	0.647	37.69	-8.31	46.00	37.51	0.10	0.08	Average
8	0.647	39.18	-16.82	56.00	39.00	0.10	0.08	QP
9	0.739	37.62	-8.38	46.00	37.44	0.10	0.08	Average
10	0.739	38.78	-17.22	56.00	38.60	0.10	0.08	QP
11	0.923	35.18	-10.82	46.00	35.00	0.10	0.08	Average
12	0.923	38.16	-17.84	56.00	37.98	0.10	0.08	QP

Neutral

1	0.185	45.97	-18.30	64.27	45.85	0.10	0.02	QP
2	0.185	46.57	-7.70	54.27	46.45	0.10	0.02	Average
3	0.277	38.15	-12.77	50.92	38.00	0.10	0.05	Average
4	0.277	37.82	-23.10	60.92	37.67	0.10	0.05	QP
5	0.645	35.67	-20.33	56.00	35.49	0.10	0.08	QP
6	0.645	31.47	-14.53	46.00	31.29	0.10	0.08	Average
7	0.921	36.75	-19.25	56.00	36.57	0.10	0.08	QP
8	0.921	33.38	-12.62	46.00	33.20	0.10	0.08	Average
9	1.477	33.50	-12.50	46.00	33.30	0.10	0.10	Average
10	1.477	36.18	-19.82	56.00	35.98	0.10	0.10	QP
11	2.030	33.70	-12.30	46.00	33.47	0.10	0.13	Average
12	2.030	37.23	-18.77	56.00	37.00	0.10	0.13	QP

Test Engineer: \_\_\_\_\_

  
Joke Yang

## 5.6. Test of Radiated Emission

Radiated emissions from 30 MHz to 24.62 GHz were measured according to the methods defines in ANSI C63.4-1992. The EUT was placed on a nonmetallic stand, 0.8 meter above the ground plane, as shown in section 5.6.3. The interface cables and equipment positions were varied within limits of reasonable applications to determine the positions producing maximum radiated emissions


### 5.6.1. Major Measuring Instruments

- Amplifier (SCHAFFNER CPA9231A)
  - RF Gain 30 dB
  - Signal Input 9 KHz to 2 GHz
  
- Spectrum Analyzer (R&S FSP7)
  - Attenuation 10 dB
  - Start Frequency 30 MHz
  - Stop Frequency 1000 MHz
  - Resolution Bandwidth 120 KHz for below 1GHz  
1 MHz for above 1GHz
  - Signal Input 9 KHz to 7 GHz
  
- Test Receiver (R&S ESI7)
  - Attenuation 10 dB
  - Start Frequency 30 MHz
  - Stop Frequency 1000 MHz
  - Resolution Bandwidth 120 KHz for below 1GHz  
1 MHz for above 1GHz
  - Signal Input 20 Hz to 7 GHz

**5.6.2. Test Procedures**

1. The EUT was placed on a rotatable table top 0.8 meter above ground.
2. The EUT was set 3 meters from the interference receiving antenna which was mounted on the top of a variable height antenna tower.
3. The table was rotated 360 degrees to determine the position of the highest radiation.
4. The antenna is a broadband antenna and its height is varied between one meter and four meters above ground to find the maximum value of the field strength both horizontal polarization and vertical polarization of the antenna are set to make the measurement.
5. For each suspected emission the EUT was arranged to its worst case and then tune the antenna tower (from 1 M to 4 M) and turn table (from 0 degree to 360 degrees) to find the maximum reading.
6. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function and specified bandwidth with Maximum Hold Mode.
7. If the emission level of the EUT in peak mode was 3 dB lower than the limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method and reported.
8. For testing above 1GHz, the emission level of the EUT in peak mode was 20dB lower than average limit (that means the emission level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.

5.6.3. Typical Test Setup Layout of Radiated Emission

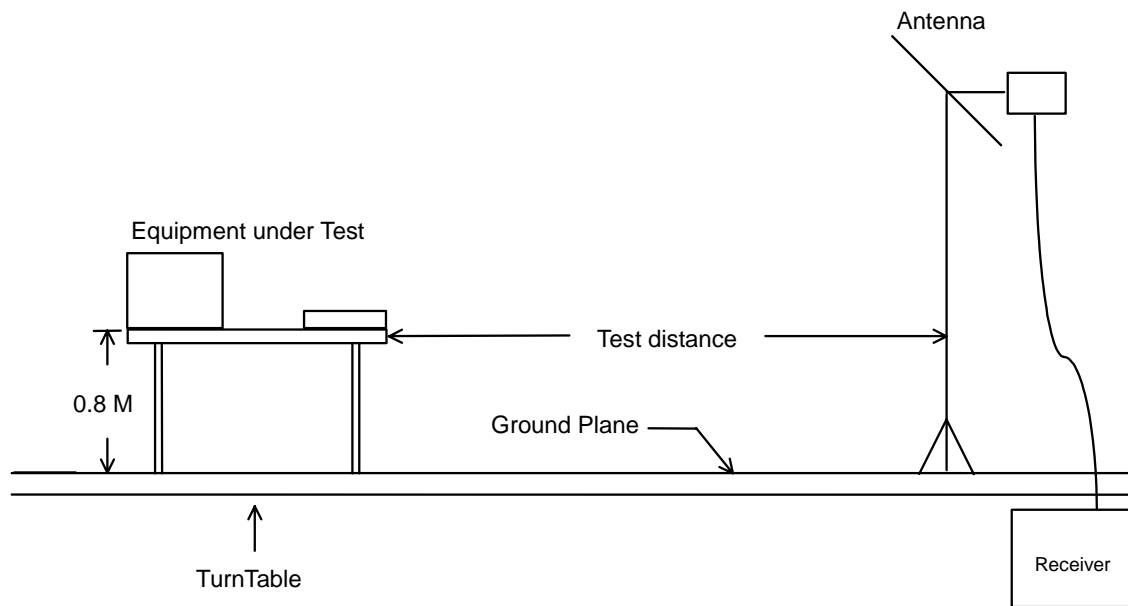

5.6.4. Test Result of Radiated Emission

- Test Mode: Mode 1
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 63 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Antenna (Probe) Factor + Cable Loss + Read Level - Preamp Factor = Level
- Test Date: 2003-07-02

**The test was passed at the minimum margin that marked by the frame in the following test record**

■ Spurious Emission

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M HORIZONTAL  
 EUT : PCI Card  
 POWER: For PC  
 MODEL : MS-6828  
 MEMO : TX CH01 2412MHz  
       : 0.5m Antenna  
       : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	37.290	31.29	-8.71	40.00	47.31	12.92	1.26	30.20		100	---
2	97.770	32.74	-10.76	43.50	49.69	10.78	2.49	30.22		100	---
3	249.780	30.93	-15.07	46.00	45.38	11.75	4.20	30.40		100	---

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M HORIZONTAL  
 EUT : PCI Card  
 POWER: For PC  
 MODEL : MS-6828  
 MEMO : TX CH01 2412MHz  
       : 0.5m Antenna  
       : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	632.500	29.05	-16.95	46.00	33.80	18.69	6.70	30.14		100	---
2	666.100	31.29	-14.71	46.00	35.55	18.89	6.92	30.07		100	---
3	799.800	32.89	-13.11	46.00	35.78	19.89	7.32	30.10		100	---

**FCC TEST REPORT**

Report No. : F362802

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M VERTICAL  
 EUT : PCI Card  
 POWER: For PC  
 MODEL : MS-6828  
 MEMO : TX CH01 2412MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 !	41.610	36.18	-3.82	40.00	52.46	12.34	1.59	30.21	QP	---	---
2 !	44.850	36.78	-3.22	40.00	53.21	12.09	1.73	30.25	QP	400	78
3 !	49.980	35.66	-4.34	40.00	56.26	7.77	1.93	30.30		---	---

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M VERTICAL  
 EUT : PCI Card  
 POWER: For PC  
 MODEL : MS-6828  
 MEMO : TX CH01 2412MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	665.400	29.21	-16.79	46.00	33.47	18.89	6.92	30.07		---	---
2	844.600	29.62	-16.38	46.00	31.96	20.13	7.54	30.01		---	---
3	979.700	30.62	-23.38	54.00	31.64	20.76	8.12	29.90		---	---

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 HORIZONTAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH01 2412MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
3	2534.000	52.49	-21.51	74.00	43.18	30.09	6.40	27.18	Peak	---	---
4	2534.000	41.21	-12.79	54.00	31.90	30.09	6.40	27.18	Average	---	---
5	2606.000	51.08	-22.92	74.00	41.66	30.08	6.53	27.19	Peak	---	---
6	2606.000	39.89	-14.11	54.00	30.47	30.08	6.53	27.19	Average	---	---

**FCC TEST REPORT**

Report No. : F362802

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 HORIZONTAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH01 2412MHz  
 : 0.5m Antenna  
 : F362802

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 VERTICAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH01 2412MHz  
 : 0.5m Antenna  
 : F362802

Line	Freq	Level	Over Limit	Limit	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
3	2500.000	55.76	-18.24	74.00	46.50	30.10	6.34	27.18	Peak	---	---
4	2500.000	43.97	-10.03	54.00	34.71	30.10	6.34	27.18	Average	---	---
5	2540.000	57.49	-16.51	74.00	48.17	30.09	6.41	27.18	Peak	---	---
6	2540.000	47.43	-6.57	54.00	38.11	30.09	6.41	27.18	Average	---	---
7	2606.000	54.08	-19.92	74.00	44.66	30.08	6.53	27.19	Peak	---	---
8	2606.000	43.92	-10.08	54.00	34.50	30.08	6.53	27.19	Average	---	---

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 VERTICAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH01 2412MHz  
 : 0.5m Antenna  
 : F362802

- For 5GHz ~ 25GHz  
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency ( MHz )	Antenna Polarity	Cable Factor	Reading Loss	Limits	Emission	Level	Margin	Detect	
( dB/m )	( dB )	( dBuV )	( dBuV/m )	( uV/m )	( dBuV/m )	( uV/m )	( dB )	Mode	
2414.000	H	30.18	6.23	67.84	-	-	104.25	163117.29	Peak
2414.000	H	30.18	6.23	59.77	-	-	96.18	64416.93	A.V.
2414.000	V	30.18	6.23	76.69	-	-	113.10	451855.94	Peak
2414.000	V	30.18	6.23	68.98	-	-	105.39	185994.46	A.V.
4824.000	V/H						-		Peak, A.V.
7236.000	V/H						-		Peak, A.V.
9648.000	V/H						-		Peak, A.V.
12060.000	V/H						-		Peak, A.V.
14472.000	V/H						-		Peak, A.V.
16884.000	V/H						-		Peak, A.V.
19296.000	V/H						-		Peak, A.V.
21708.000	V/H						-		Peak, A.V.
24120.000	V/H						-		Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer : Jay  
Jay Zhong



- Test Mode: Mode 2
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 63 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Antenna (Probe) Factor + Cable Loss + Read Level - Preamp Factor = Level
- Test Date: 2003-07-02

**The test was passed at the minimum margin that marked by the frame in the following test record**

■ Spurious Emission

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M HORIZONTAL  
 EUT : PCI Card  
 POWER : For PC  
 MODEL : MS-6828  
 MEMO : TX CH06 2437MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	37.290	31.33	-8.67	40.00	47.35	12.92	1.26	30.20		100	---
2	97.770	33.13	-10.37	43.50	50.08	10.78	2.49	30.22		100	---
3	247.890	31.47	-14.53	46.00	46.08	11.63	4.16	30.40		100	---

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M HORIZONTAL  
 EUT : PCI Card  
 POWER : For PC  
 MODEL : MS-6828  
 MEMO : TX CH06 2437MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	640.900	33.83	-12.17	46.00	38.44	18.74	6.77	30.12		100	---
2	668.900	30.78	-15.22	46.00	34.99	18.91	6.94	30.06		100	---
3	799.800	32.82	-13.18	46.00	35.71	19.89	7.32	30.10		100	---

**FCC TEST REPORT**

Report No. : F362802

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M VERTICAL  
 EUT : PCI Card  
 POWER : For PC  
 MODEL : MS-6828  
 MEMO : TX CH06 2437MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	37.290	34.28	-5.72	40.00	50.30	12.92	1.26	30.20		100	---
2 @	45.660	36.00	-4.00	40.00	53.20	11.37	1.69	30.26		100	69
3 @	49.980	35.70	-4.30	40.00	56.30	7.77	1.93	30.30		100	---

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M VERTICAL  
 EUT : PCI Card  
 POWER : For PC  
 MODEL : MS-6828  
 MEMO : TX CH06 2437MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	665.400	29.27	-16.73	46.00	33.53	18.89	6.92	30.07		100	---
2	799.800	29.79	-16.21	46.00	32.68	19.89	7.32	30.10		100	---
3	979.700	31.11	-22.89	54.00	32.13	20.76	8.12	29.90		100	---

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 HORIZONTAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH06 2437MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
3	2566.000	51.98	-22.02	74.00	42.63	30.08	6.46	27.19	Peak	---	---
4	2566.000	40.03	-13.17	54.00	31.48	30.08	6.46	27.19	Average	---	---

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 HORIZONTAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH06 2437MHz  
 : 0.5m Antenna  
 : F362802

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 VERTICAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH06 2437MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
3	2564.000	57.24	-16.76	74.00	47.88	30.09	6.46	27.19	Peak	---	---
4	2564.000	47.07	-6.93	54.00	37.71	30.09	6.46	27.19	Average	---	---


Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 VERTICAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH06 2437MHz  
 : 0.5m Antenna  
 : F362802

- For 5GHz ~ 25GHz  
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency ( MHz )	Antenna Polarity	Cable Factor	Reading Loss	Limits ( dBuV )	Emission ( dBuV/m )	Level ( uV/m )	Margin ( dB )	Detect Mode	
2436.000	H	30.15	6.26	66.22	-	-	102.63	135363.01	Peak
2436.000	H	30.15	6.26	58.50	-	-	94.91	55654.46	A.V.
2436.000	V	30.15	6.26	75.25	-	-	111.66	382824.74	Peak
2436.000	V	30.15	6.26	67.85	-	-	104.26	163305.19	A.V.
4874.000	V/H						-		Peak, A.V.
7311.000	V/H						-		Peak, A.V.
9748.000	V/H						-		Peak, A.V.
12185.000	V/H						-		Peak, A.V.
14622.000	V/H						-		Peak, A.V.
17059.000	V/H						-		Peak, A.V.
19496.000	V/H						-		Peak, A.V.
21933.000	V/H						-		Peak, A.V.
24370.000	V/H						-		Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer :   
Jay Zhong

- Test Mode: Mode 3
- Test Distance: 3 M
- Temperature: 26 °C
- Relative Humidity: 63 %
- Emission level (dBuV/m) = 20 log Emission level (uV/m)
- Corrected Reading: Antenna (Probe) Factor + Cable Loss + Read Level - Preamp Factor = Level
- Test Date: 2003-07-02

**The test was passed at the minimum margin that marked by the frame in the following test record**

■ Spurious Emission

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M HORIZONTAL  
 EUT : PCI Card  
 POWER : For PC  
 MODEL : MS-6828  
 MEMO : TX CH11 2462MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	37.290	31.10	-8.90	40.00	47.12	12.92	1.26	30.20		100	---
2	97.770	32.80	-10.70	43.50	49.75	10.78	2.49	30.22		100	---
3	243.570	31.77	-14.23	46.00	46.71	11.32	4.13	30.39		100	---

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M HORIZONTAL  
 EUT : PCI Card  
 POWER : For PC  
 MODEL : MS-6828  
 MEMO : TX CH11 2462MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	624.100	30.66	-15.34	46.00	35.55	18.63	6.63	30.15		100	---
2	665.400	32.25	-13.75	46.00	36.51	18.89	6.92	30.07		100	---
3	799.800	33.78	-12.22	46.00	36.67	19.89	7.32	30.10		100	---

**FCC TEST REPORT**

Report No. : F362802

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M VERTICAL  
 EUT : PCI Card  
 POWER : For PC  
 MODEL : MS-6828  
 MEMO : TX CH11 2462MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1 @	37.020	33.35	-6.65	40.00	49.17	13.12	1.26	30.20	Peak	100	---
2 @	50.250	36.07	-3.93	40.00	56.66	7.77	1.93	30.29	Peak	100	78
3	97.770	28.92	-14.58	43.50	45.87	10.78	2.49	30.22	Peak	100	---

Site : 10CH02-HY  
 Condition : FCC CLASS-B 3m ATN2722-3M VERTICAL  
 EUT : PCI Card  
 POWER : For PC  
 MODEL : MS-6828  
 MEMO : TX CH11 2462MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	ReadAntenna Level	Antenna Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB/m	dB	dB		cm	deg
1	433.000	31.63	-14.37	46.00	41.05	15.75	5.33	30.50	Peak	100	---
2	665.400	31.21	-14.79	46.00	35.47	18.89	6.92	30.07	Peak	100	---
3	979.700	32.14	-21.86	54.00	33.16	20.76	8.12	29.90	Peak	100	---

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 HORIZONTAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH11 2462MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
3	2590.000	51.65	-22.35	74.00	42.25	30.08	6.51	27.19	Peak	---	---
4	2590.000	40.54	-13.46	54.00	31.14	30.08	6.51	27.19	Average	---	---

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 HORIZONTAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH11 2462MHz  
 : 0.5m Antenna  
 : F362802

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 VERTICAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH11 2462MHz  
 : 0.5m Antenna  
 : F362802

	Freq	Level	Over Limit	Limit Line	Read Level	Probe Factor	Cable Loss	Preamp Factor	Remark	Ant Pos	Table Pos
	MHz	dBuV/m	dB	dBuV/m	dBuV	dB	dB	dB		cm	deg
1	2086.000	51.93	-22.07	74.00	42.73	30.51	5.80	27.11	Peak	---	---
2	2086.000	42.32	-11.68	54.00	33.12	30.51	5.80	27.11	Average	---	---
3	2340.000	55.31	-18.69	74.00	46.08	30.25	6.13	27.15	Peak	---	---
4	2340.000	40.47	-13.53	54.00	31.24	30.25	6.13	27.15	Average	---	---
5	2372.000	56.38	-17.62	74.00	47.15	30.22	6.17	27.16	Peak	---	---
6	2372.000	40.98	-13.02	54.00	31.75	30.22	6.17	27.16	Average	---	---
9	2556.000	43.67	-10.33	54.00	34.32	30.09	6.44	27.18	Average	---	---
10	2556.000	53.76	-20.24	74.00	44.41	30.09	6.44	27.18	Peak	---	---
11	2590.000	54.14	-19.86	74.00	44.74	30.08	6.51	27.19	Peak	---	---
12	2590.000	43.18	-10.82	54.00	33.78	30.08	6.51	27.19	Average	---	---
13	2838.000	51.29	-22.71	74.00	41.54	30.03	6.95	27.23	Peak	---	---
14	2838.000	41.32	-12.68	54.00	31.57	30.03	6.95	27.23	Average	---	---

Site : 03CH03-HY  
 Condition : 3m HORN-ANT-10094-0417 VERTICAL  
 EUT : PCI Card  
 Power : For PC  
 MODEL : MS-6828  
 MEMO : TX CH11 2462MHz  
 : 0.5m Antenna  
 : F362802

- For 5GHz ~ 25GHz  
 Remark: Frequency from 5000MHz to 25000MHz, the emission emitted by the EUT is too low to be measured

■ Field strength of fundamental and harmonics

Frequency ( MHz )	Antenna Polarity	Cable Factor	Reading Loss	Limits ( dBuV )	Emission ( dBuV/m )	Level ( uV/m )	Margin ( dB )	Detect Mode	
2462.000	H	30.13	6.29	67.14	-	-	103.56	150660.71	Peak
2462.000	H	30.13	6.29	59.34	-	-	95.76	61376.20	A.V.
2462.000	V	30.13	6.29	76.48	-	-	112.90	441570.45	Peak
2462.000	V	30.13	6.29	66.04	-	-	102.46	132739.45	A.V.
4924.000	V/H						-		Peak, A.V.
7386.000	V/H						-		Peak, A.V.
9848.000	V/H						-		Peak, A.V.
12310.000	V/H						-		Peak, A.V.
14772.000	V/H						-		Peak, A.V.
17234.000	V/H						-		Peak, A.V.
19696.000	V/H						-		Peak, A.V.
22158.000	V/H						-		Peak, A.V.
24620.000	V/H						-		Peak, A.V.

Remark: The emission emitted by the EUT is too low to be measured except the emission listed above

Test Engineer : Jay  
Jay Zhong



**5.7. Band Edges Measurement**

5.7.1. Measuring Instruments :

As described in chapter 7 of this test report.

5.7.2. Test Procedure :

1. The transmitter output was connected to the spectrum analyzer via a low lose cable.
2. Set both RBW and VBW of spectrum analyzer to 100KHz with convenient frequency span including 100 KHz bandwidth from band edge.
3. The band edges was measured and recorded.

5.7.3. Test Result :

- Test Result in lower band (Channel 1) : PASS
- Test Result in higher band(Channel 11) : PASS

5.7.4. Note on Band edge Emission


The band edge emission plot on page 61. shows 49.23dB delta between carrier maximum power and local maximum emission in the restricted band (2.4835GHz).

Polarity	The emission of carrier power strength (dB $\mu$ V/m)	The maximum field strength in restrict band (dB $\mu$ V/m)	Limit (dB $\mu$ V/m)	Margin (dB)	Result
H	103.56	54.33	74.00	-19.67	Peak
H	95.76	46.53	54.00	-7.47	Average
V	112.90	63.67	74.00	-10.33	Peak
V	102.46	53.23	54.00	-0.77	Average

\* The maximum field strength in restricted band is the emission of carrier power strength subtract to the delta between carrier maximum power and local maximum emission in the restricted band.


The spectrum analyzer plots are attached as below :

Plot1 (Channel 1) :

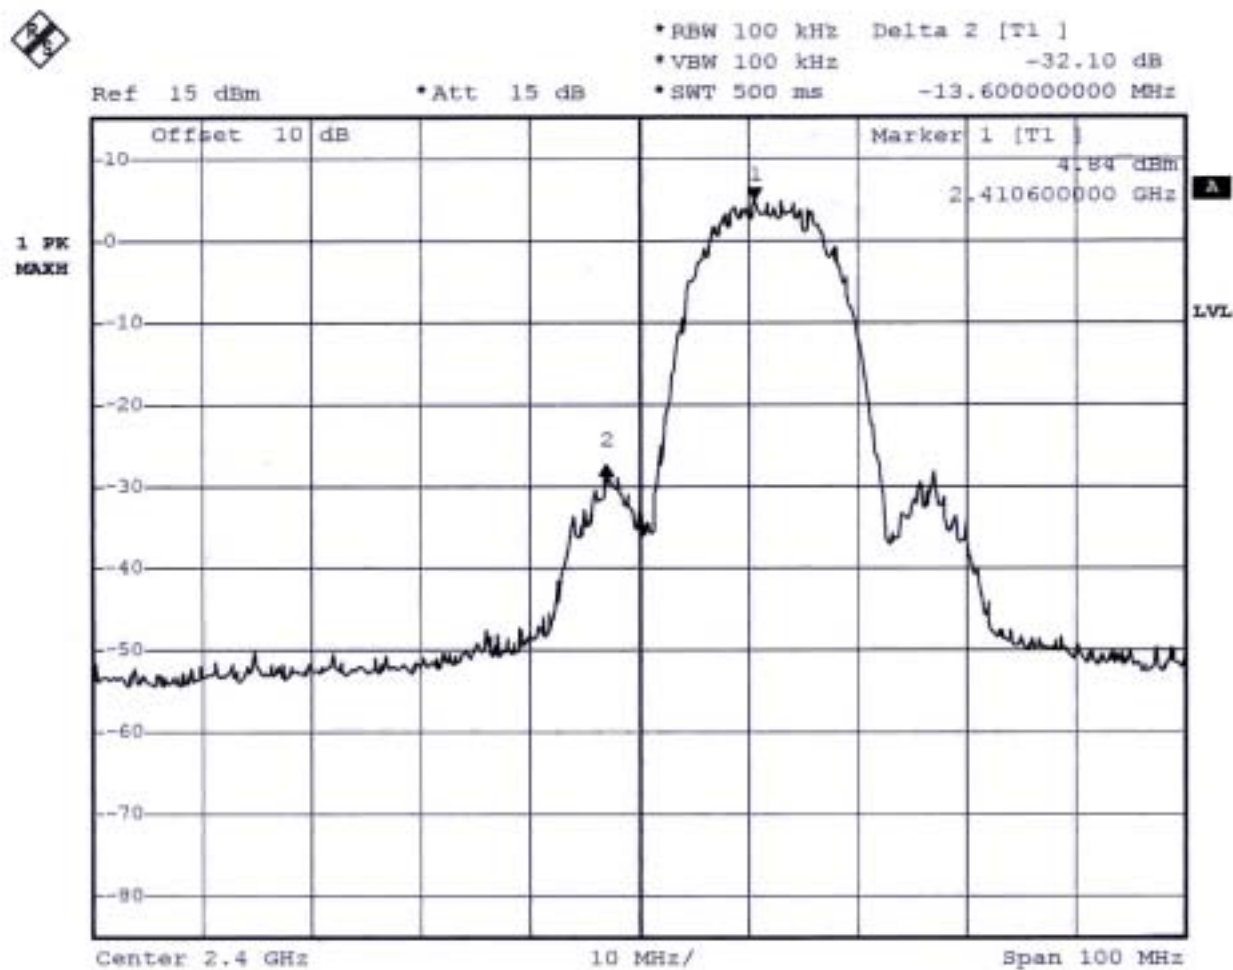

Date: 1.JUL.2003 18:15:31

Plot2 (Channel 11) :

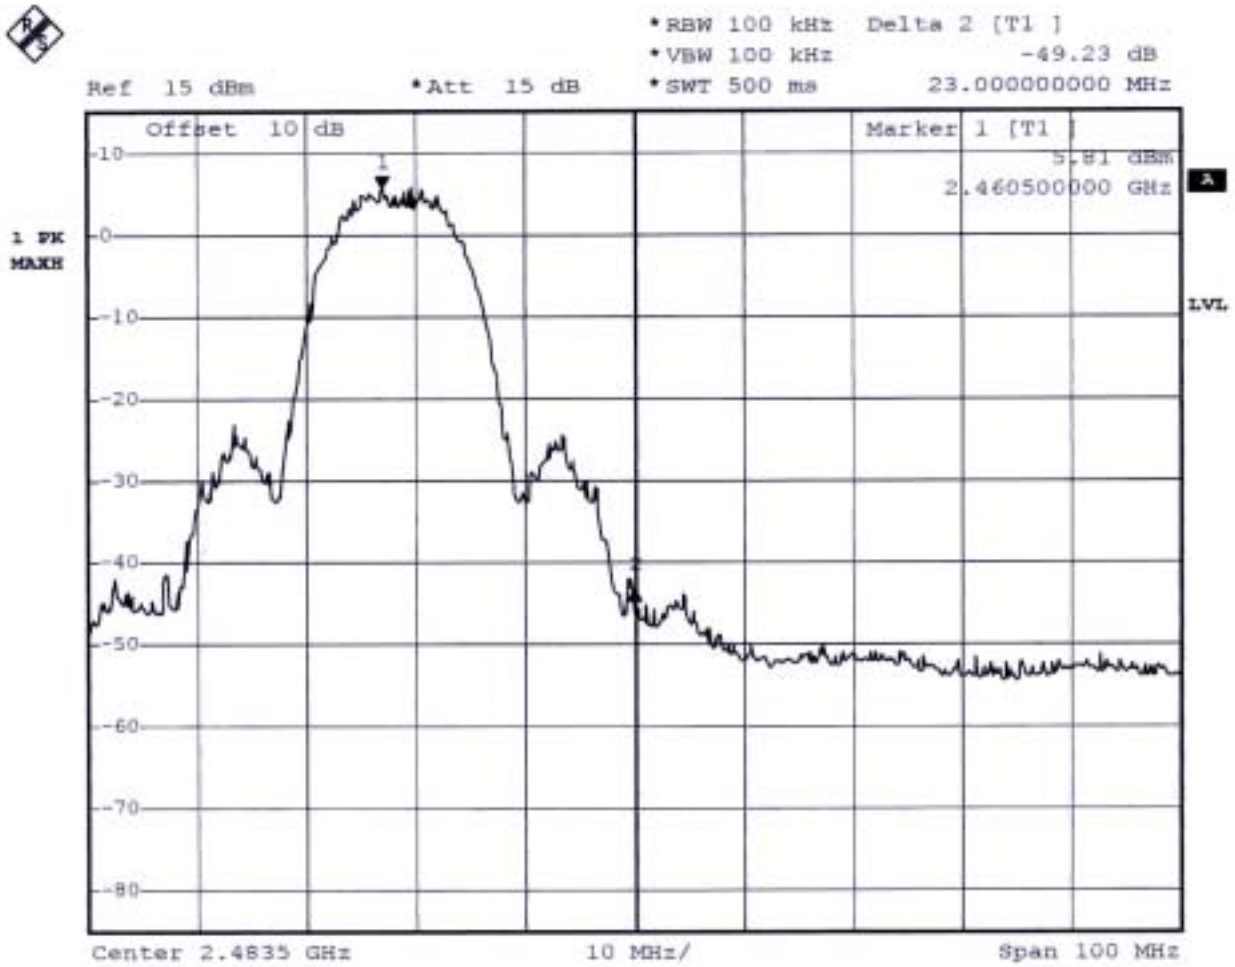

Date: 1.JUL.2003 18:20:32

Comments : All emissions in any 100kHz bandwidth outside the band edge are attenuated more then 20dB from the carrier.

## **5.8. Antenna Requirements**

The EUT use a undetachable antenna via SMA-reversed external connector. It is considered meet antenna requirement of FCC.

### **5.8.1. Standard Applicable**

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

### **5.8.2. Antenna Connected Construction**

The maximum Gain antenna used in this product is dipole antenna. The antenna connector type is SMA. The coaxial cable of the antenna is fixed to the antenna.

**5.9. RF Exposure**

FCC Rules and Regulations Part 1.1307,1.1310,2.1091,2.1093:

RF Exposure Compliance

5.9.1. Limit For Maximum Permissible Exposure (MPE)

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842/f	4.89/f	(900/f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/cm <sup>2</sup> )	Averaging Time  E  <sup>2</sup> , H  <sup>2</sup> or S ( minutes )
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

F=frequency in MHz

\*Plane-wave equivalent power density

5.9.2. MPE Calculations

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (mW/cm}^2\text{)} = \frac{E^2}{3770}$$

- E = Electric field (V/m)
- P = Peak output power (mW)
- G = Antenna numeric gain (numeric)
- d = Separation distance (m)

Because the EUT is belong to General Population/ Uncontrolled Exposure. So the Limit of Power Density is 1.0 mW/cm<sup>2</sup>. We can change the formula to:

$$d = \sqrt{\frac{30 \times P \times G}{3770}}$$

Channel NO.	Antenna Gain (dBi)	Antenna Gain (numeric)	Peak Output Power (dBm)	Peak Output Power ( mW )	Calculated RF Exposure Separation Distance ( cm )	Minimum RF Exposure Separation Distance ( cm )
Channel 1	3.00	2.00	16.90	48.8	2.79	20
Channel 6	3.00	2.00	16.91	49.1	2.79	20
Channel 11	3.00	2.00	16.85	48.4	2.77	20

5.9.3. FCC Radiation Exposure Statement

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. In order to avoid the possibility of exceeding the FCC radio frequency exposure limits, human proximity to the antenna shall not be less than 20cm (8 inches) during normal operation. Proposed RF exposure safety information to include in User's Manual.

## **6. EMI Suppression Component List**

No EMI suppression components.

**7. Antenna Factor & Cable Loss**

Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)	Frequency (MHz)	Antenna Factor (dB)	Cable Loss (dB)
30	15.15	1.11	1000	24.30	3.89
35	13.53	1.26	2000	31.10	5.41
40	12.51	1.50	3000	29.60	6.92
45	12.09	1.69	4000	30.80	8.24
50	7.77	1.93	5000	34.20	9.22
55	6.68	2.06	6000	33.30	10.25
60	5.58	1.97	7000	37.80	11.61
65	5.81	2.20	8000	39.40	11.78
70	6.03	2.27	9000	38.40	12.59
75	6.61	2.09	10000	38.90	13.84
80	7.31	2.23	11000	41.10	14.64
85	8.48	2.18	12000	42.70	14.12
90	9.64	2.42	13000	43.90	16.01
95	10.35	2.48	14000	43.70	13.76
100	11.08	2.50	15000	43.40	14.30
110	11.02	2.80	16000	40.90	15.16
120	10.97	3.09	17000	44.40	15.88
130	10.91	3.16	18000	47.10	16.09
140	11.32	3.22	19000	37.60	16.98
150	10.22	3.18	20000	37.30	16.21
160	9.29	3.13	21000	37.00	20.13
170	8.83	3.25	22000	38.00	19.24
180	9.20	3.41	23000	38.70	19.64
190	8.88	3.48	24000	38.60	20.54
200	8.56	3.56	25000	38.90	20.14
220	9.85	3.82	14000	43.70	13.76
240	11.08	4.09	15000	43.40	14.30
260	11.83	4.26	16000	40.90	15.16
280	12.00	4.41	17000	44.40	15.88
300	12.16	4.55	18000	47.10	16.09
320	12.77	4.65	19000	37.60	16.98
340	13.37	4.74	20000	37.30	16.21
360	13.95	4.85	21000	37.00	20.13
380	14.55	4.89	22000	38.00	19.24
400	15.13	5.13	23000	38.70	19.64
450	16.08	5.41	24000	38.60	20.54
500	17.03	5.97	25000	38.90	20.14
550	17.75	6.04			
600	18.49	6.43			
650	18.79	8.85			
700	19.10	7.11			
750	19.49	7.30			
800	19.89	7.32			
850	20.15	7.57			
900	20.42	7.85			
950	20.63	8.25			
1000	20.85	8.04			



## 8. List of Measuring Equipments Used

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMC Receiver	R&S	ESCS 30	100174	9 KHz – 2.75 GHz	Dec. 12, 2002	Conduction (CO01-HY)
LISN	MessTec	NNB-2/16Z	2001-008	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
LISN (Support Unit)	MessTec	NNB-2/16Z	2001-009	9 KHz – 30 MHz	Apr. 29, 2003	Conduction (CO01-HY)
EMI Filter	LINDGREN	LRE-2060	1004	< 450 Hz	N/A	Conduction (CO01-HY)
EMI Filter	LINDGREN	N6006	201052	0 ~ 60 Hz	N/A	Conduction (CO01-HY)
RF Cable-CON	Suhner Switzerland	RG223/U	CB029	9KHz~30MHz	Jan. 07, 2003	Conduction (CO01-HY)
50 ohm BNC type Terminal	NOBLE	50ohm	TM013	50 ohm	Apr. 24, 2003	Conduction (CO01-HY)
10m Semi Anechoic Chamber	TDK	SAC-10M	10CH02-HY	30MHz~1GHz 10m,3m	Mar. 15, 2003	Radiation (10CH02-HY)
Spectrum Analyzer	R&S	FSP7	100644/007	9KHz – 7GHz	May 26, 2003	Radiation (10CH02-HY)
Receiver	R&S	ESI7	838496/008	20Hz – 7GHz	Feb. 11, 2003	Radiation (10CH02-HY)
Biconical Antenna	SCHWARZBECK	VHBB 9124	287	30MHz –200MHz	Jan. 09, 2003	Radiation (10CH02-HY)
Log Antenna	SCHWARZBECK	VUSLP 9111	207	200MHz -1GHz	Jan. 09, 2003	Radiation (10CH02-HY)
Amplifier	SCHAFFNER	CPA9231A	3565	9KHz – 2GHz	Aug. 13, 2002	Radiation (10CH02-HY)
Amplifier	SCHAFFNER	CPA9231A	3566	9KHz – 2GHz	Aug. 13, 2002	Radiation (10CH02-HY)
Turn Table	HD	DS 430	430/360	0 ~ 360 degree	N/A	Radiation (10CH02-HY)
Antenna Mast	HD	MA240	240/664	1 m - 4 m	N/A	Radiation (10CH02-HY)
Antenna Mast	HD	MA240	240/667	1 m - 4 m	N/A	Radiation (10CH02-HY)
RF Cable-R10m	Jye Bao	RG142	CB027-INSIDE	30MHz~1GHz	Jan. 08, 2003	Radiation (10CH02-HY)
RF Cable-R10m	Suhner Switzerland + BELDEN	RG223/U + RG8/U	CB026-DOOR	30MHz~1GHz	Jan. 08, 2003	Radiation (10CH02-HY)
Power meter	R&S	NRVS	100444	DC~40GHz	May 28, 2003	Conducted
Power sensor	R&S	NRV-Z55	100049	DC~40GHz	May 28, 2003	Conducted
Power Sensor	R&S	NRV-Z32	100057	30MHz-6GHz	May 28, 2003	Conducted
AC power source	HPC	HPA-500W	HPA-9100024	AC 0~300V	May 27, 2003	Conducted
Temp. and Humidity Chamber	KSON	THS-C3L	612	N/A	Oct. 02, 2002	Conducted

Calibration Interval of instruments listed above is one year.

### 9. Uncertainty of Test Site

Uncertainty of Radiated Emission Measurement

Contribution	Probability Distribution	3m	10m
Antenna factor calibration	normal(k=2)	±1	±1
cable loss calibration	normal(k=2)	±0.3	±0.3
RCV/SPA specification	rectangular	±2	±2
Antenna Directivity	rectangular	±3	±0.5
Antenna Factor V.S. Height	rectangular	±2	±2
Antenna Factor Interpolation for Frequency	rectangular	±0.25	±0.25
site imperfection	rectangular	±2	±2
Mismatch Receiver VSWR $\Gamma_1=0.09$ Antenna VSWR $\Gamma_2=0.67$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	±0.54	±0.54
combined standard uncertainty $U_e(y)$	normal	±2.7	±2.2
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±5.4	±4.4

$U = \{((1/2)^2 + (0.3/2)^2 + (2^2 + 0.5^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2)\} = 2.2$  for 10m test distance

$U = \{((1/2)^2 + (0.3/2)^2 + (2^2 + 3^2 + 2^2 + 0.25^2 + 2^2)/3 + (0.54)^2/2)\} = 2.7$  for 3m test distance

Uncertainty of Conducted Emission Measurement

Contribution	Probability Distribution	150KHz – 30MHz
Cable and I/P attenuator calibration	normal(k=2)	±0.3
RCV/SPA specification	rectangular	±2
LISN coupling specification	rectangular	±1.5
Transducer factor frequency interpolation	rectangular	±0.2
Mismatch Receiver VSWR $\Gamma_1=0.09$ LISN VSWR $\Gamma_2=0.33$ Uncertainty= $20\log(1-\Gamma_1*\Gamma_2)$	U-shaped	0.2
combined standard uncertainty $U_e(y)$	normal	±1.66
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	normal (k=2)	±3.32

$U = \{(0.3/2)^2 + (2^2 + 1.5^2 + 0.2^2)/3 + (0.2)^2/2\} = 1.66$