



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page: 1 of 58
Date: Apr. 07, 2006

Product Name: Bluetooth Stereo Headset
Model Number: MS-6868I
Marketing Name: FS310
Applicant: MICRO-STAR INT'L CO., LTD.
No69, Li-De St, Jung-Ho City, Taipei Hsien, Taiwan.
Date of Receipt: Mar. 24, 2006
Finished date of Test: Mar. 29, 2006
Applicable Standards: 47 CFR Part 15, Subpart C
47 CFR Part 15, Subpart B
ANSI C63.4: 2003

We, **Spectrum Research & Testing Laboratory Inc.**, hereby certify that one sample of the above was tested in our laboratory with positive results according to the above-mentioned standards. The records in the report are an accurate account of the results. Details of the results are given in the subsequent pages of this report.

Checked By : Nick Hsieh , Date: 2006-4-7
(Nick Hsieh)

Approved By : JH , Date: 4/7/2006
(Johnson Ho, Director)

NVLAQ[®]

Lab Code: 200099-0



TABLE OF CONTENTS

1. DOCUMENT POLICY AND TEST STATEMENT	4
1.1 DOCUMENT POLICY	4
1.2 TEST STATEMENT	4
1.3 EUT MODIFICATION	4
2. DESCRIPTION OF EUT AND TEST MODE	5
2.1 GENERAL DESCRIPTION OF EUT	5
2.2 DESCRIPTION OF SUPPORT UNIT	6
2.3 DESCRIPTION OF TEST MODE	6
3. DESCRIPTION OF APPLIED STANDARDS	7
4. TECHNICAL CHARACTERISTICS TEST	8
4.1 CHANNEL SEPARATION TEST	8
4.1.1 LIMIT	8
4.1.2 TEST EQUIPMENT	8
4.1.3 TEST SET-UP	8
4.1.4 TEST PROCEDURE	8
4.1.5 EUT OPERATING CONDITION	9
4.1.6 TEST RESULT	9
4.2 20DB BANDWIDTH	13
4.2.1 LIMIT	13
4.2.2 TEST EQUIPMENT	13
4.2.3 TEST SET-UP	13
4.2.4 TEST PROCEDURE	13
4.2.5 EUT OPERATING CONDITION	13
4.2.6 TEST RESULT	14
4.3 QUANTITY OF HOPPING CHANNEL TEST	18
4.3.1 LIMIT	18
4.3.2 TEST EQUIPMENT	18
4.3.3 TEST SET-UP	18
4.3.4 TEST PROCEDURE	18
4.3.5 EUT OPERATING CONDITION	18
4.3.6 TEST RESULT	19
4.4 TIME OF OCCUPANCY (DWELL TIME)	20
4.4.1 LIMIT	20
4.4.2 TEST EQUIPMENT	20
4.4.3 TEST SET-UP	20
4.4.4 TEST PROCEDURE	20
4.4.5 EUT OPERATING CONDITION	20
4.4.6 TEST RESULT	21
4.5 PEAK POWER TEST	25
4.5.1 LIMIT	25
4.5.2 TEST EQUIPMENT	25
4.5.3 TEST SET-UP	26
4.5.4 TEST PROCEDURE	26



4.5.5 EUT OPERATING CONDITION	26
4.5.6 TEST RESULT	26
4.6 BAND EDGE TEST	29
4.6.1 LIMIT	29
4.6.2 TEST EQUIPMENT	30
4.6.3 TEST SET-UP	31
4.6.4 TEST PROCEDURE	32
4.6.5 EUT OPERATING CONDITION	32
4.6.6 TEST RESULT	32
4.7 SPURIOUS RADIATED EMISSION TEST	35
4.7.1 LIMIT	35
4.7.2 TEST EQUIPMENT	36
4.7.3 TEST SET-UP	37
4.7.4 TEST PROCEDURE	39
4.7.5 EUT OPERATING CONDITION	39
4.7.6 TEST RESULT	40
4.8 CONDUCTED EMISSION TEST FOR POWER PORT	47
4.8.1 CONDUCTED EMISSION LIMIT	47
4.8.2 TEST EQUIPMENT	47
4.8.3 TEST SETUP	48
4.8.4 TEST PROCEDURE	48
4.8.5 TEST RESULT	49
5. ANTENNA APPLICATION	53
5.1 ANTENNA REQUIREMENT	53
5.2 RESULT	53
6. PHOTOS OF TESTING	54
7. TERMS OF ABRIVATION	58



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:4 of 58
Date: Apr. 07, 2006

1. DOCUMENT POLICY AND TEST STATEMENT

1.1 DOCUMENT POLICY

- The report shall not be reproduced except in full, without the written approval of SRT Lab, Inc.

1.2 TEST STATEMENT

- The test results in the report apply only to the unit tested by SRT Lab.
- There was no deviation from the requirements of test standards during the test.
- AC power source, 120 VAC/60 Hz, was used during the test.

1.3 EUT MODIFICATION

- No modification in SRT Lab.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:5 of 58
Date: Apr. 07, 2006

2. DESCRIPTION OF EUT AND TEST MODE

2.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Bluetooth Stereo Headset
MODEL NO.	MS-6868I
MARKETING NAME	FS310
POWER SUPPLY	DC 3.3 V, 40~60 mA, AC 5V, 500mA
FREQUENCY BAND	2.402~2.480GHz
CARRIER FREQUENCY	2.402~2.480GHz
NUMBER OF CHANNEL	79
CHANNEL SPACING	1 MHz
RATED RF OUTPUT POWER	-6~+4 dBm (0.25~2.3mW)
I.F. & L.O.	L.O.:12 MHz
MODULATION TYPE	GFSK
BIT RATE OF TRANSMISSION	1Mbps
DUTY CYCLE	Max 1600 hops/sec
ANTENNA TYPE	Multilayer Ceramic Antenna
ANTENNA GAIN	Max 2 dBi
OPERATING TEMPERATURE	-10~70°C
CHANNEL BANDWIDTH	1MHz

NOTE :

The EUT has two model numbers as below on market. They are identical in all aspects except for the color of case.



2.2 DESCRIPTION OF SUPPORT UNIT

The transmitter part of EUT was tested with a PC system and configured by the requirement of ANSI C63.4. All interface ports were connected to the appropriate support units via specific cables. The support units and cables are listed below.

NO	DEVICE	BRAND	MODEL #	FCC ID/DOC	CABLE
1	CD Player	NEC	ZE- 2001(11)	DOC	N/A
2	BT Audio transmitter	MSI	MS-6868H	I4L-MS6868H	N/A

NOTE :

For the actual test configuration, please refer to the photos of testing.

2.3 DESCRIPTION OF TEST MODE

This EUT is a FHSS system, we use BlueTest to control the EUT with RS232, Let EUT hopping on and transmit at every channel with highest power, Only output power use conducted method, others are using radiated method. After Sirfdemo330R1 send the command to EUT, it can be removed, and the EUT keep hopping.79 channels are provided by EUT. The 3 channels of lower, medium and higher were chosen for test.

Channel	Frequency(MHz)
0	2402
39	2441
78	2480

NOTE :

1. Below 1 GHz, the channel 0, 39 and 78 were pre-tested in chamber. The channel 78, worst case one, was chosen for conducted and radiated emission test.
2. Above 1 GHz, the channel 0, 39 and 78 were tested individually.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:7 of 58
Date: Apr. 07, 2006

3. DESCRIPTION OF APPLIED STANDARDS

The EUT is a kind of wireless product and to be connected with a PC system for normal use. According to the specifications provided by the applicant, it must comply with the requirements of the following standards:

47 CFR Part 15, Subpart C

47 CFR Part 15, Subpart B

ANSI C63.4: 2003

Public DA00-705 (March 2000)

All tests have been performed and recorded as the above standards.



4. TECHNICAL CHARACTERISTICS TEST

4.1 CHANNEL SEPARATION TEST

4.1.1 LIMIT

FCC Part15, Subpart C Section 15.247(a)(1). Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

FREQUENCY RANGE (MHz)	Limit(kHz)
902-928	>25kHz
2400-2483.5	>25kHz
5725-5850	>25kHz


4.1.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :

EQUIPMENT/FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2006 R&S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.1.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

4.1.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:9 of 58
Date: Apr. 07, 2006

4.1.5 EUT OPERATING CONDITION

1. Connect with CD Player and AC Adapter. CD Player set Audio signal to EUT, then EUT link the BT Audio Receiver.

- Color Monitor
- RS232
- Printer
- FDD
- HDD

4.1.6 TEST RESULT

Temperature:	<u>20°C</u>	Humidity:	<u>55%RH</u>
Spectrum Detector:	<u>PK</u>	Tested by:	<u>Julian Chiang</u>
Test Result:	<u>PASS</u>	Tested Date:	<u>Mar. 28, 2006</u>

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	SEPARATION READ VALUE (kHz)	SEPARATION LIMIT (kHz)
0	2402	1004.000	>25kHz
39	2441	1004.000	>25kHz
78	2480	1004.000	>25kHz




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:10 of 58
Date: Apr. 07, 2006

CH0:

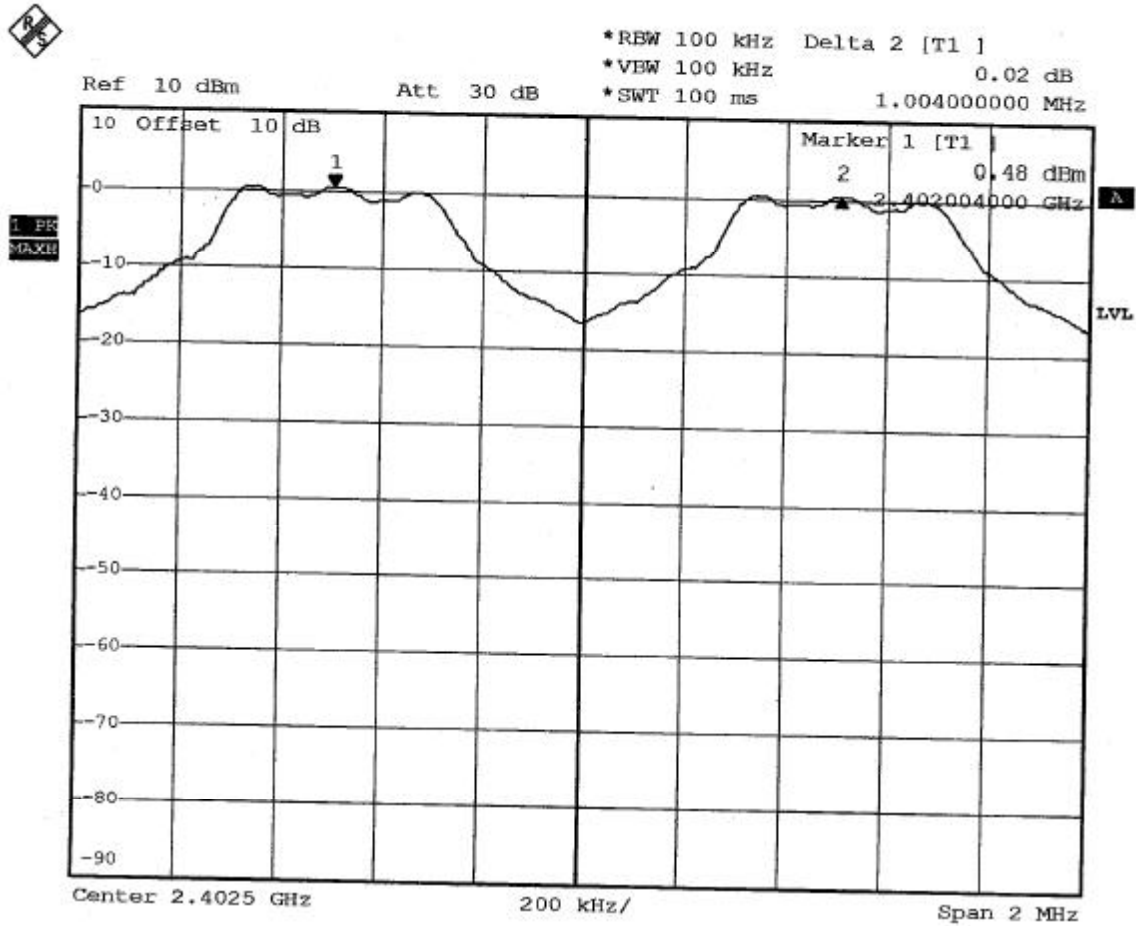




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:11 of 58
Date: Apr. 07, 2006

CH39:

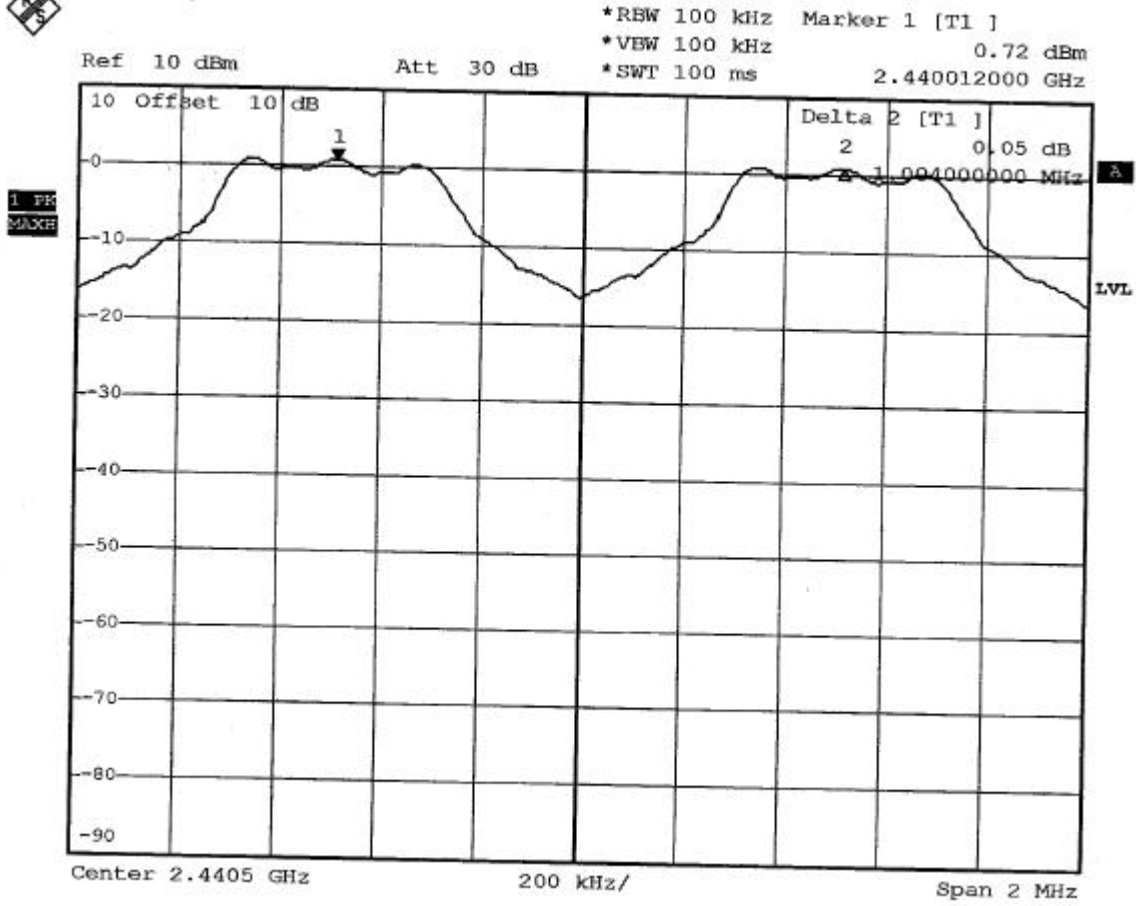




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:12 of 58
Date: Apr. 07, 2006

CH78:

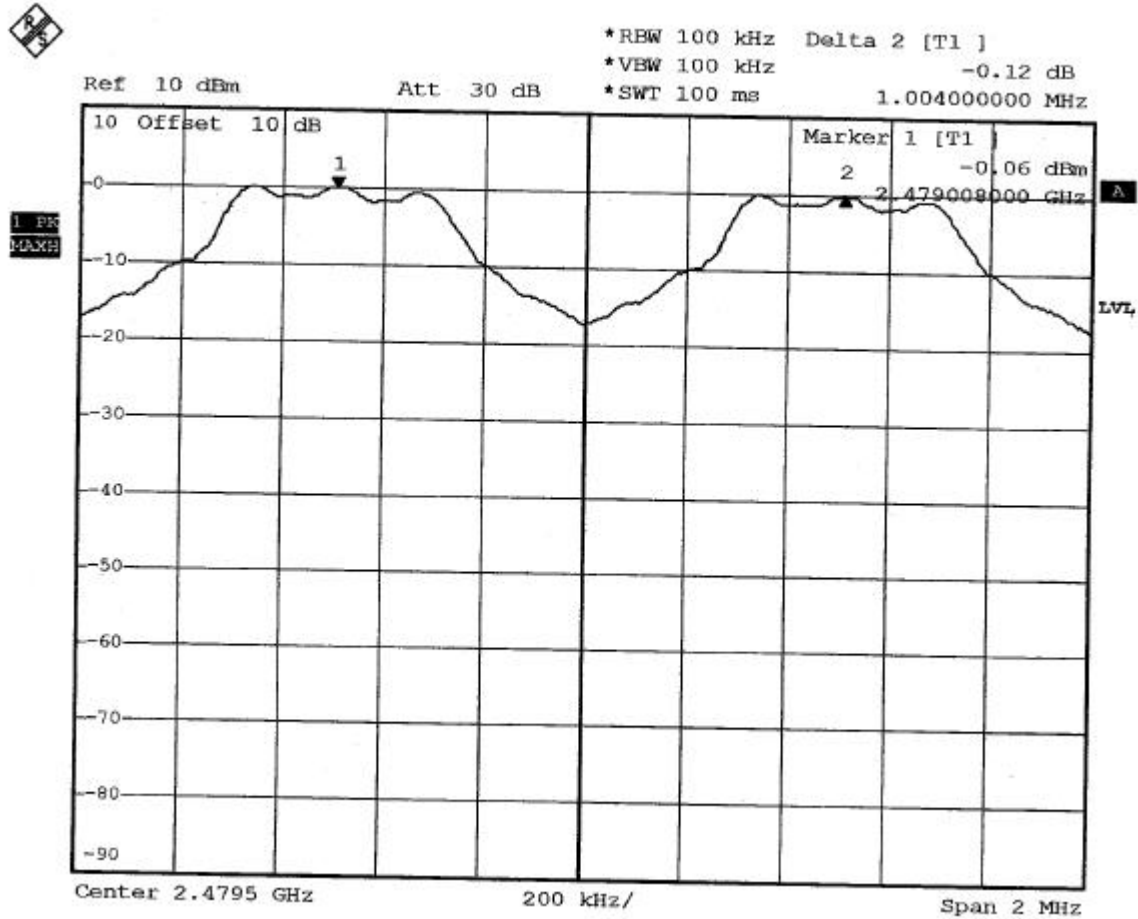



4.2 20dB Bandwidth

4.2.1 LIMIT

Frequency Range (MHz)	Quantity of Hopping Channel	Limit(kHz)			
		50	25	15	75
902-928		<250	>250	NA	NA
2400-2483.5		NA	NA	>1000	<1000


4.2.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2006 R&S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

4.2.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

4.2.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:14 of 58
Date: Apr. 07, 2006

4.2.6 TEST RESULT

Temperature:	<u>20°C</u>	Humidity:	<u>55%RH</u>
Spectrum Detector:	<u>PK</u>	Tested by:	<u>Julian Chiang</u>
Test Result:	<u>PASS</u>	Tested Date:	<u>Mar. 28, 2006</u>

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	20dB DOWN BW (kHz)
0	2402	804
39	2441	820
78	2480	792




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:15 of 58
Date: Apr. 07, 2006

CH0:

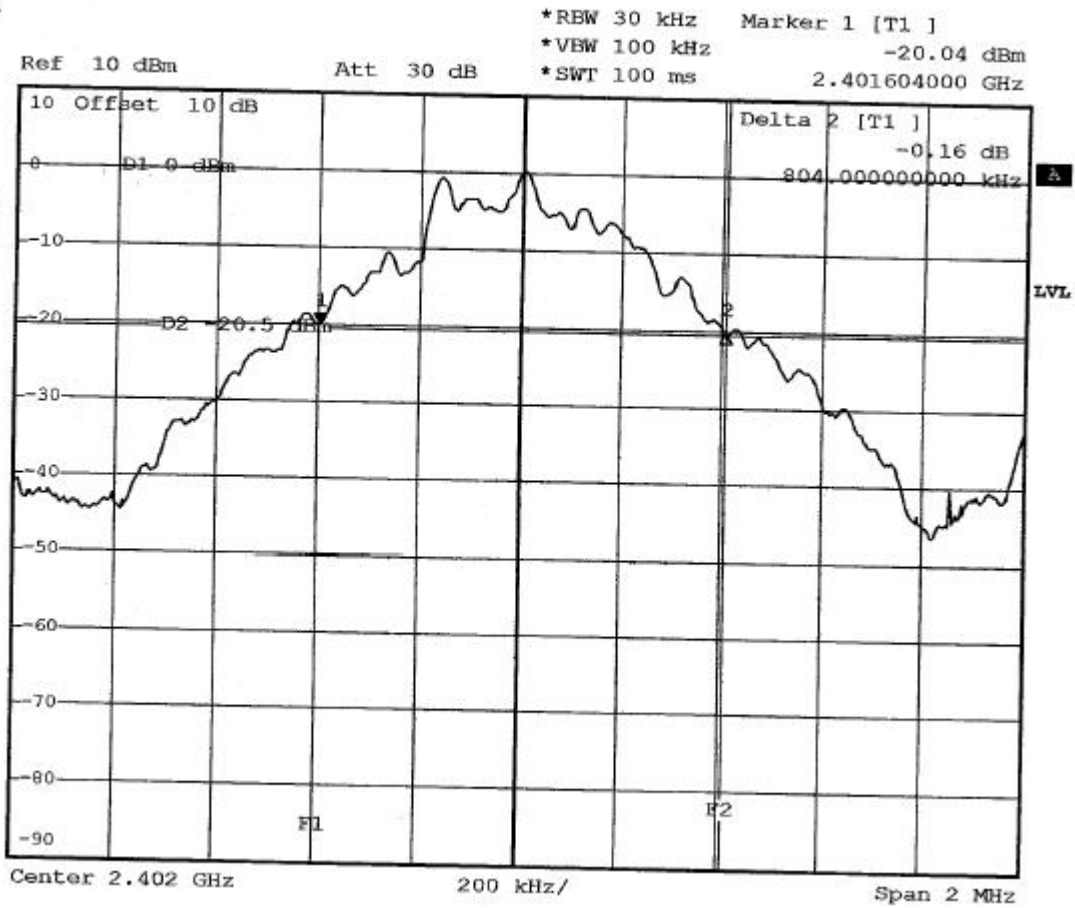




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:16 of 58
Date: Apr. 07, 2006

Ch39:

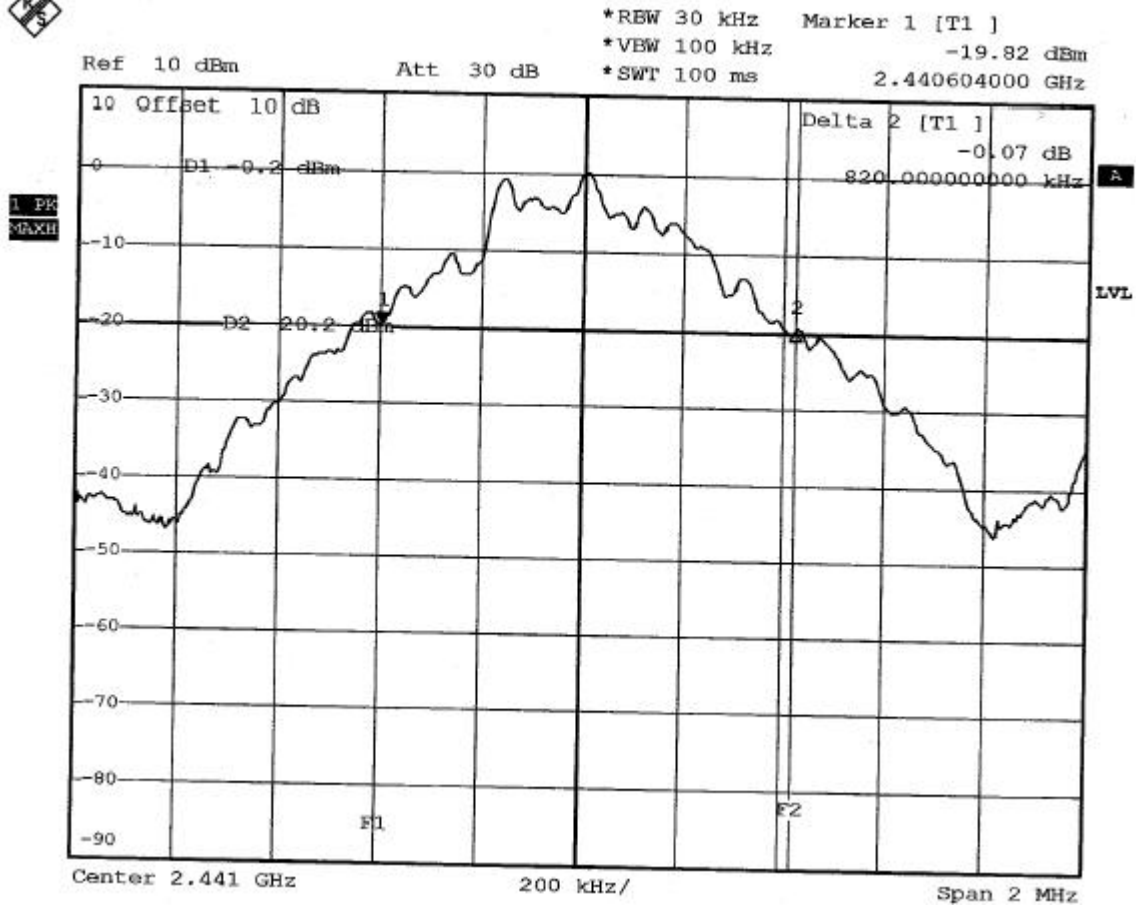




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:17 of 58
Date: Apr. 07, 2006

CH78:

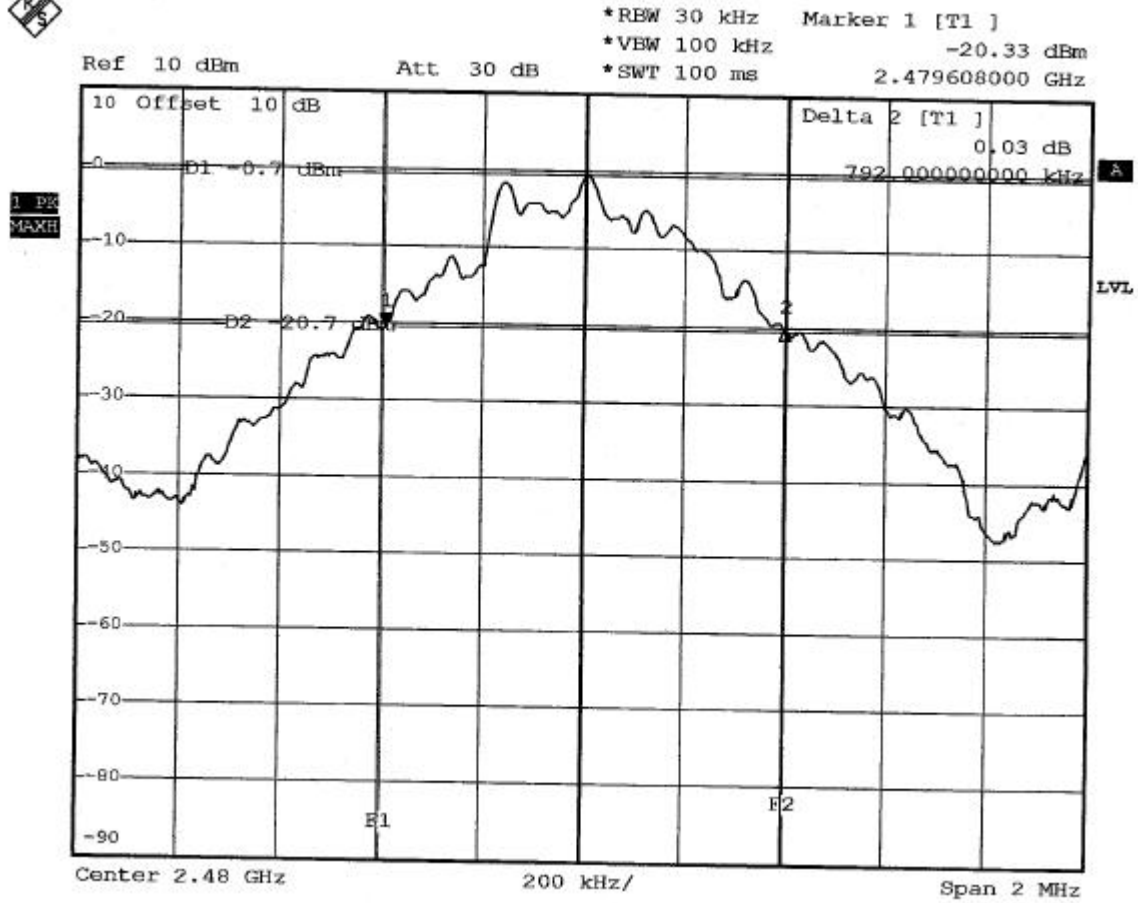



4.3 QUANTITY OF HOPPING CHANNEL TEST

4.3.1 LIMIT

FCC Part15, Subpart C Section 15.247.

FREQUENCY RANGE (MHz)	Limit (Quantity of Hopping Channel)			
	20dB bandwidth <250kHz	20dB bandwidth >250kHz	20dB bandwidth <1MHz	20dB bandwidth >1MHz
902-928	50	25	N/A	N/A
2400-2483.5	N/A	N/A	75	15
5725-5850	N/A	N/A	75	N/A


4.3.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2006 R&S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

4.3.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

4.3.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT


Reference No.: C06032204
 Report No.: FCCC06032204
 FCCID: I4L-MS6868I
 Page:19 of 58
 Date: Apr. 07, 2006

4.3.6 TEST RESULT

Temperature:	<u>20°C</u>	Humidity:	<u>55%RH</u>
Spectrum Detector:	<u>PK</u>	Tested by:	<u>Julian Chiang</u>
Test Result:	<u>PASS</u>	Tested Date:	<u>Mar. 28, 2006</u>

HOPPING CHANNEL FREQUENCY RANGE	QUANTITY OF HOPPING CHANNEL READ VALUE	QUANTITY OF HOPPING CHANNEL LIMIT
2402~2480	79	75

CH0-CH78

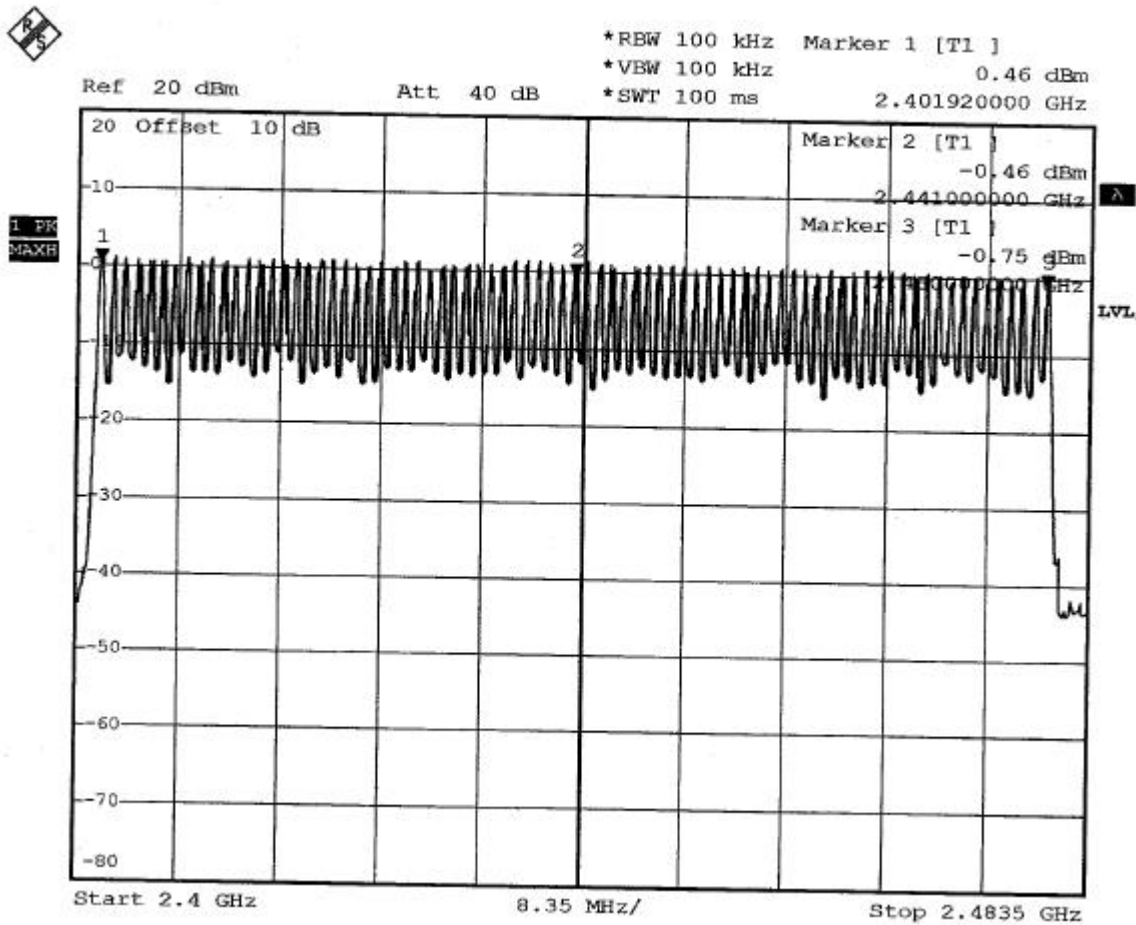



4.4 Time of occupancy (Dwell Time)

4.4.1 LIMIT

FCC Part15, Subpart C Section 15.247.

FREQUENCY RANGE (MHz)	LIMIT (ms)		
	20dB bandwidth <250kHz(50Channel)	20dB bandwidth >250kHz(25Channel)	20dB bandwidth <1MHz(75Channel)
902-928	400(20s)	400(10s)	NA
2400-2483.5	NA	NA	400(30s)
5725-5850	NA	NA	400(30s)

NOTE: The “()” is all channel’s average time of occupancy.


4.4.2 TEST EQUIPMENT

The following test equipment was used during the test:

EQUIPMENT/FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2006 R&S

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST SET-UP



The EUT was connected to a spectrum through a 50Ω RF cable.

4.4.4 TEST PROCEDURE

The EUT was operating in hopping mode or could be controlled its channel. Printed out the test result from the spectrum by hard copy function.

4.4.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:21 of 58
Date: Apr. 07, 2006

4.4.6 TEST RESULT



Temperature: 20°C Humidity: 55%RH
Spectrum Detector: PK Tested by: Julian Chiang
Test Result: PASS Tested Date: Mar. 28, 2006

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	Pulse Time (μs)	Burts (in 1 sec.)	Time of occupancy (Dwell Time) (ms)	Average time of occupancy LIMIT (ms)
0	2402.00	396	10	118.8	400
39	2441.00	396	10	118.8	400
78	2480.00	391	10	117.3	400

NOTE: Dwell Time: Pulse Time*Burts*0.4*79





CH0:

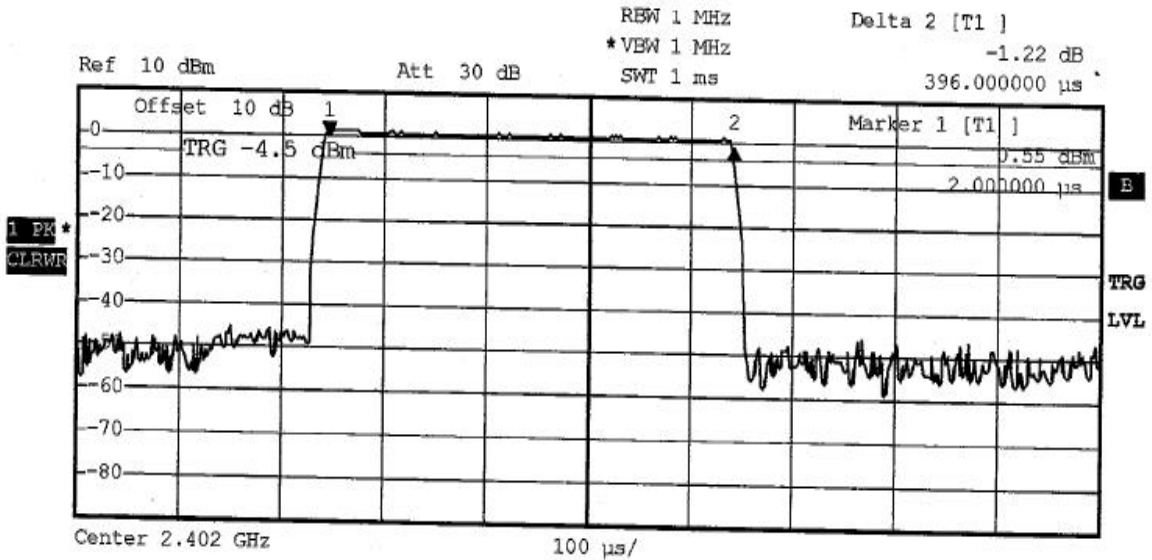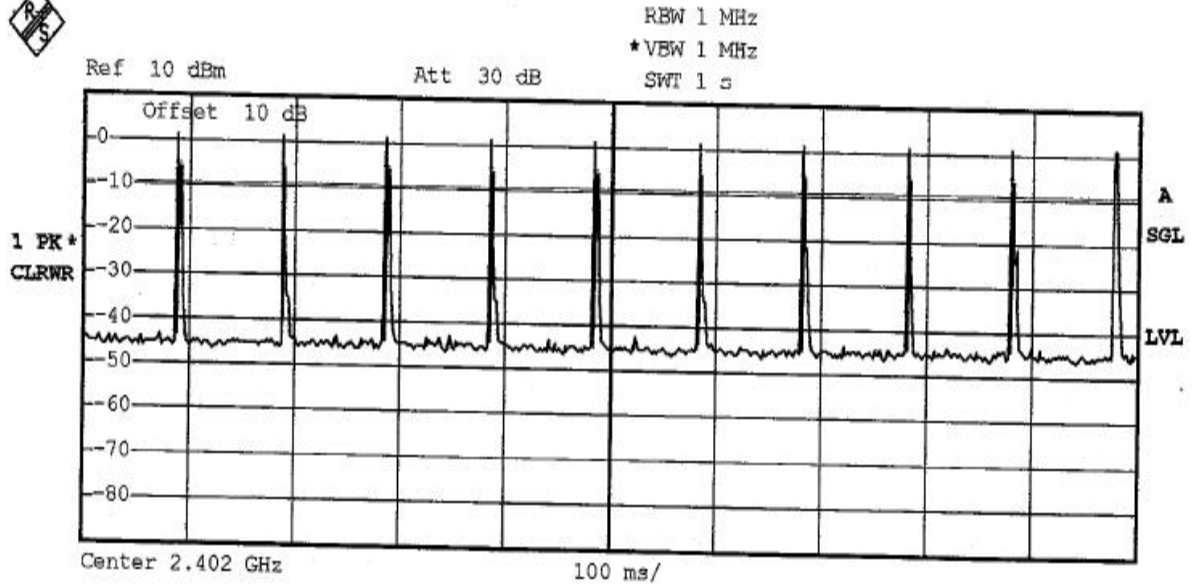





Ch39:

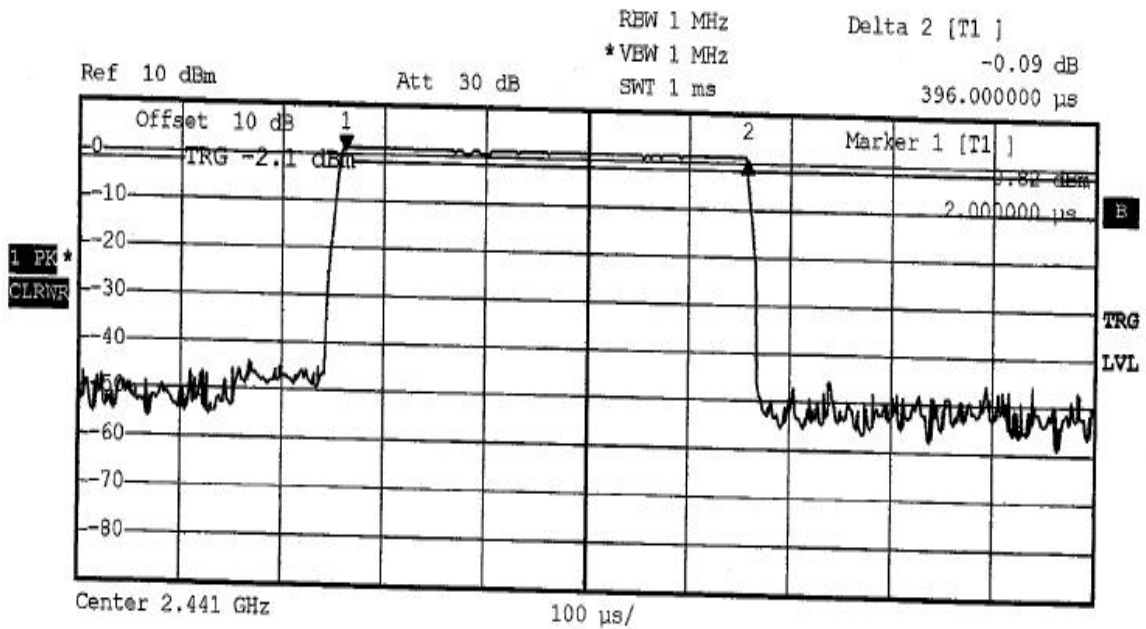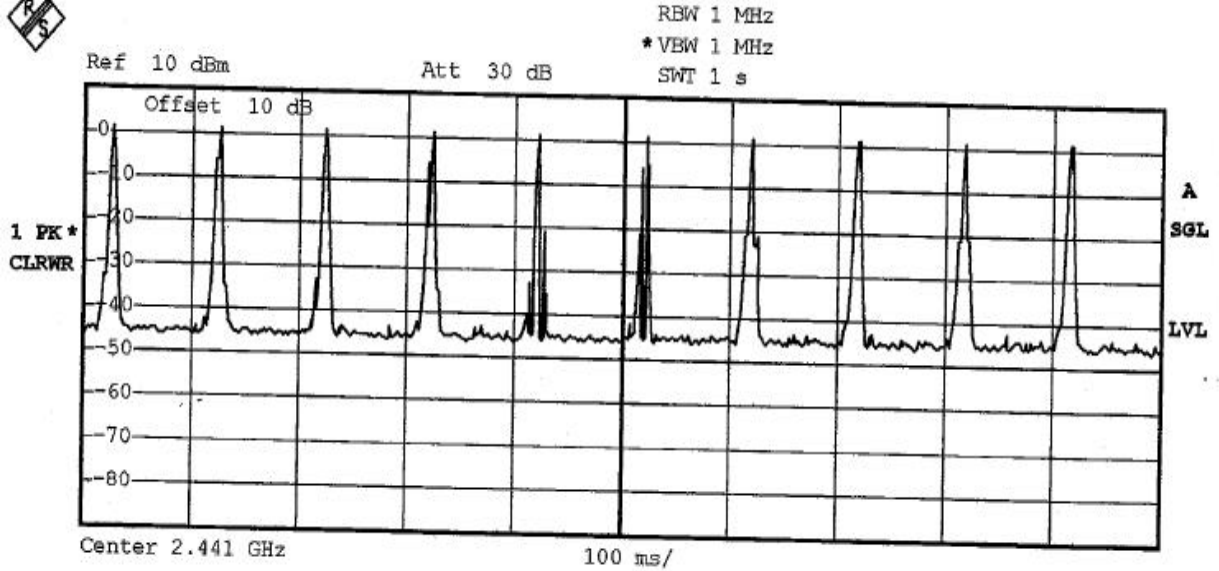



CH78:

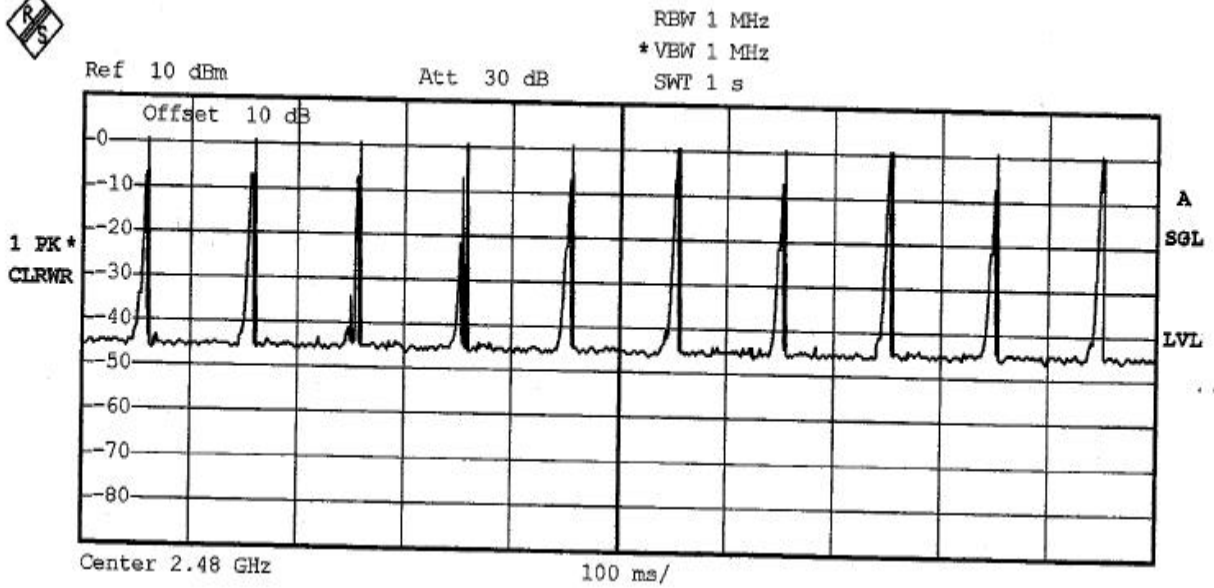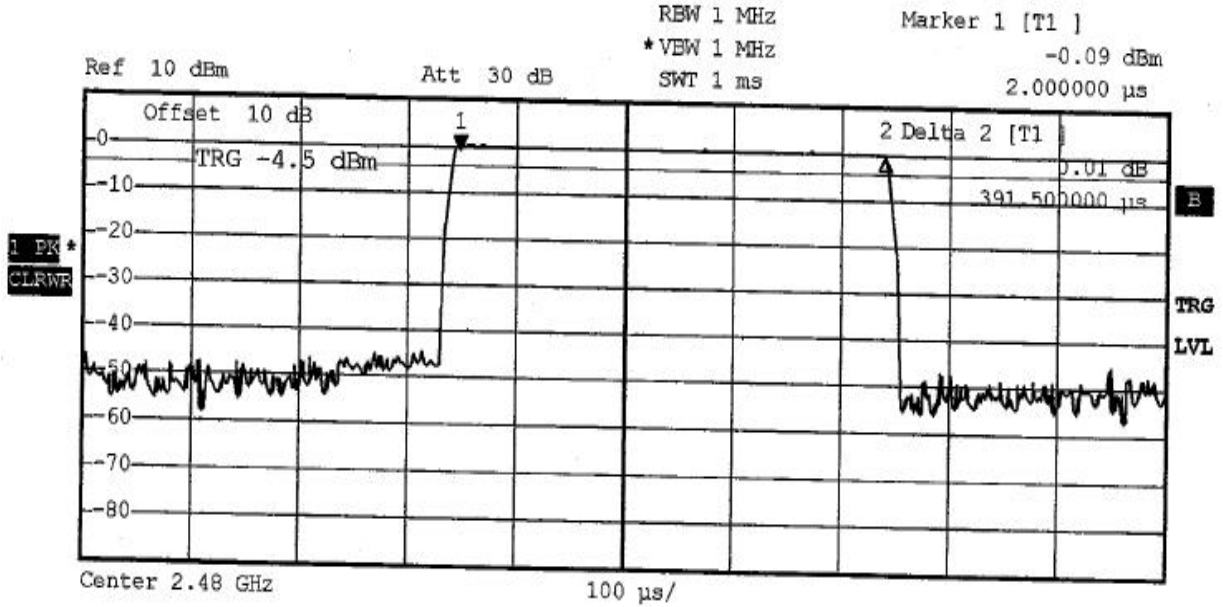



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:25 of 58
Date: Apr. 07, 2006

4.5 PEAK POWER TEST

4.5.1 LIMIT

FCC Part15, Subpart C Section 15.247.

FREQUENCY RANGE (MHz)	Quantity of Hopping Channel	LIMIT (W)			
		50	25	15	75
902-928		1(30dBm)	0.125(21dBm)	NA	NA
2400-2483.5		NA	NA	0.125(21dBm)	1(30dBm)
5725-5850		NA	NA	NA	1(30dBm)

4.5.2 TEST EQUIPMENT


The following test equipment was used during the test :

EQUIPMENT/FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2006 R&S
POWER METER	N/A	BOONTON	4232A/ 29001	MAY 2006 ETC
POWER SENSOR	DC-18GHz 0.3 μ W-100mW 50 Ω	BOONTON	51011-EMC/ 31184	JUN. 2006 ETC

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.5.3 TEST SET-UP

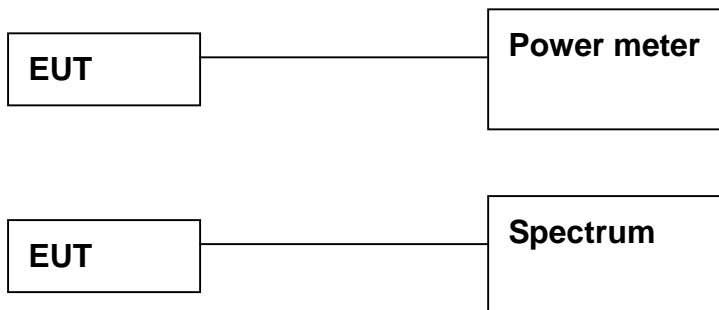

The EUT was connected to a spectrum through a 50Ω RF cable.

4.5.4 TEST PROCEDURE

The EUT was operating in hopping mode or could control its channel.
 Printed out the test result from the spectrum by hard copy function.
 Recorded the read value of the power meter.

4.5.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.

4.5.6 TEST RESULT

Temperature:	<u>20°C</u>	Humidity:	<u>55%RH</u>
Spectrum Detector:	<u>PK</u>	Tested by:	<u>Julian Chiang</u>
Test Result:	<u>PASS</u>	Tested Date:	<u>Mar. 28, 2006</u>

CHANNEL NUMBER	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)
0	2402.0000	-0.27	30
39	2441.0000	0.15	30
78	2480.0000	-0.85	30




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan


TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:27 of 58
Date: Apr. 07, 2006

CH0:

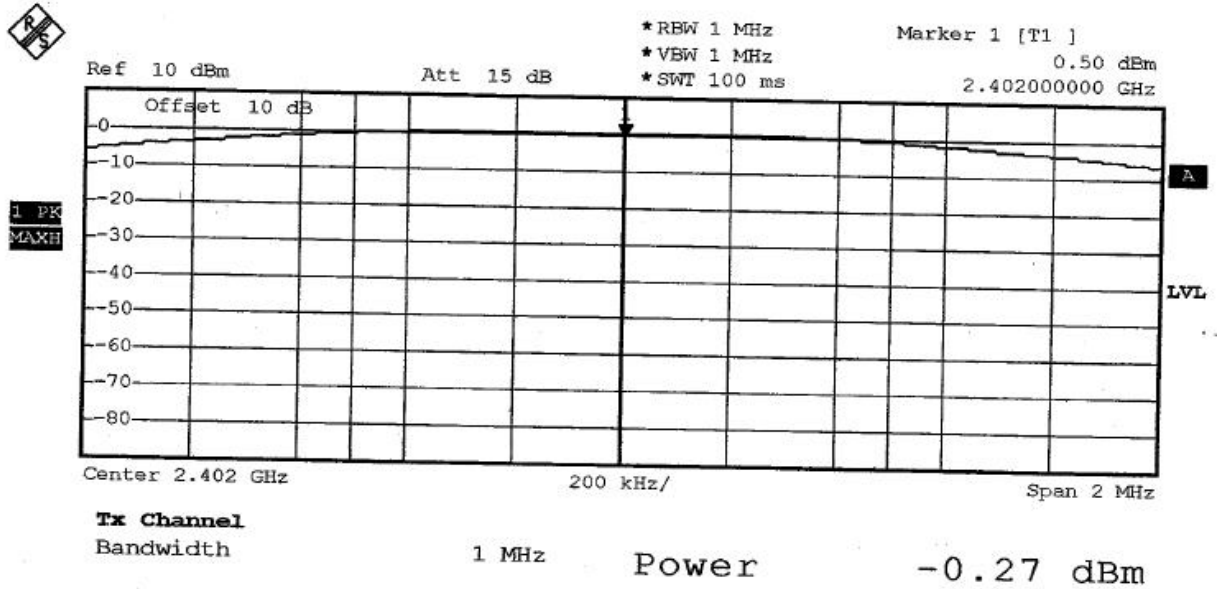

CH39:

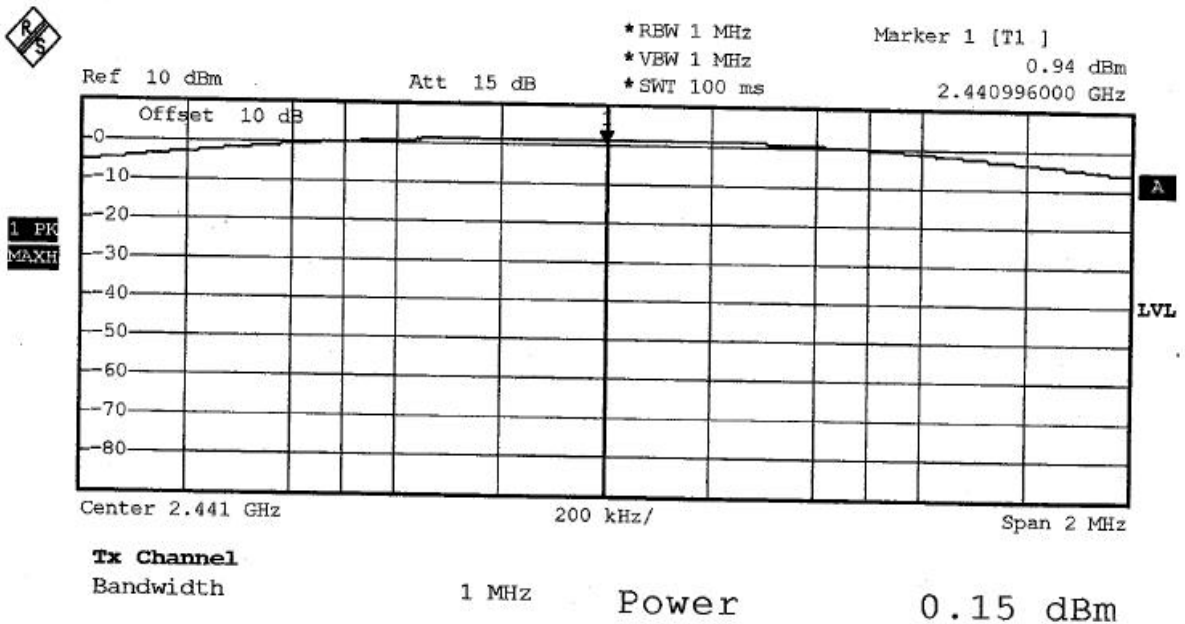




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:28 of 58
Date: Apr. 07, 2006

CH78:

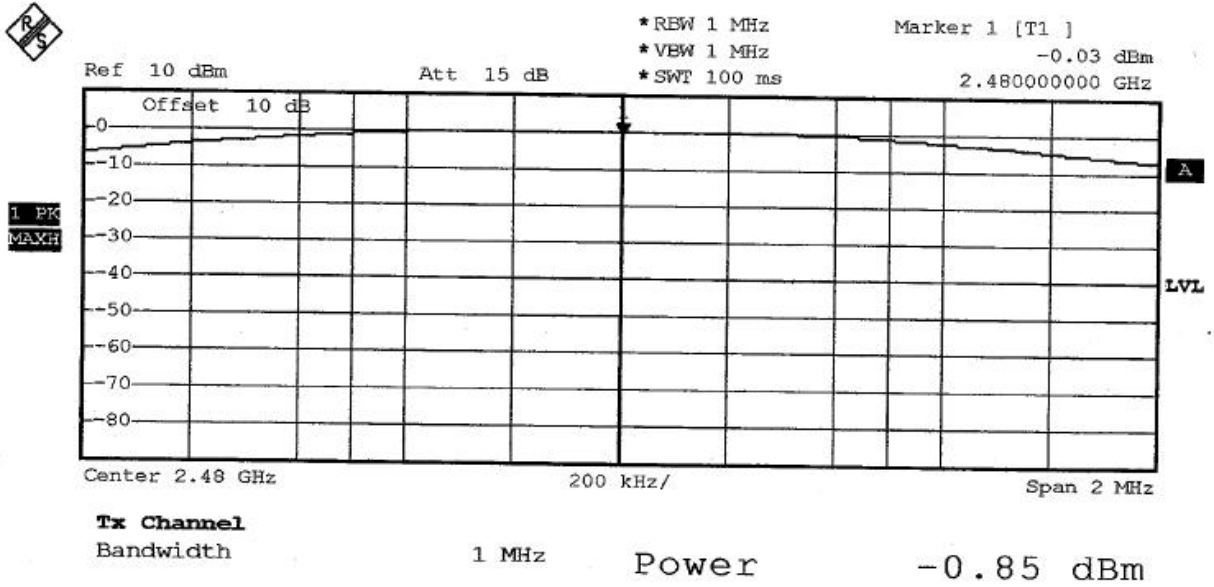



4.6 BAND EDGE TEST

4.6.1 LIMIT

FCC Part15, Subpart C Section 15.247. In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement. Attenuation below the general limits specified in Section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).

OPERATING FREQUENCY RANGE (MHz)	SPURIOUS EMISSION FREQUENCY (MHz)	LIMIT	
		Peak power ration to emission(dBc)	Emission level(dBuV/m)
902-928	<902	>20	NA
	>928	>20	NA
	960-1240	NA	54
2400-2483.5	<2400	>20	NA
	>2483.5-2500	NA	54
5725-5850	<5350-5460	NA	54
	<5725	>20	NA
	>5850	>20	NA



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:30 of 58
Date: Apr. 07, 2006

4.6.2 TEST EQUIPMENT

The following test equipment was used during the test :


EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
SPECTRUM	9kHz-7GHz	ROHDE & SCHWARZ	FSP7/ 839511/010	APR. 2006 R&S
EMI TEST RECEIVER	9 kHz TO 2750 MHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	AUG. 2006 R&S
SPECTRUM	9KHz-26.5GHz	HP	8593E/ 3710A03220	MAY 2006 ETC
PRE-AMPLIFIER	1GHz-26.5GHz Gain:30dB	HP	8449B/ 3008A01019	NOV. 2006 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3142/ 9701-1124	FEB. 2007 SRT
HORN ANTENNA	1GHz to 18GHz	EMCO	3115/ 9602-4681	DEC. 2006 ETC
OATS	3 - 10 M measurement	SRT	SRT-1	APR. 2006 SRT

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.




4.6.3 TEST SET-UP

FOR RF CONDUCTED TEST (dBc)



The EUT was connected to the spectrum through a 50 Ω RF cable.

FOR RADIATED EMISSION TEST

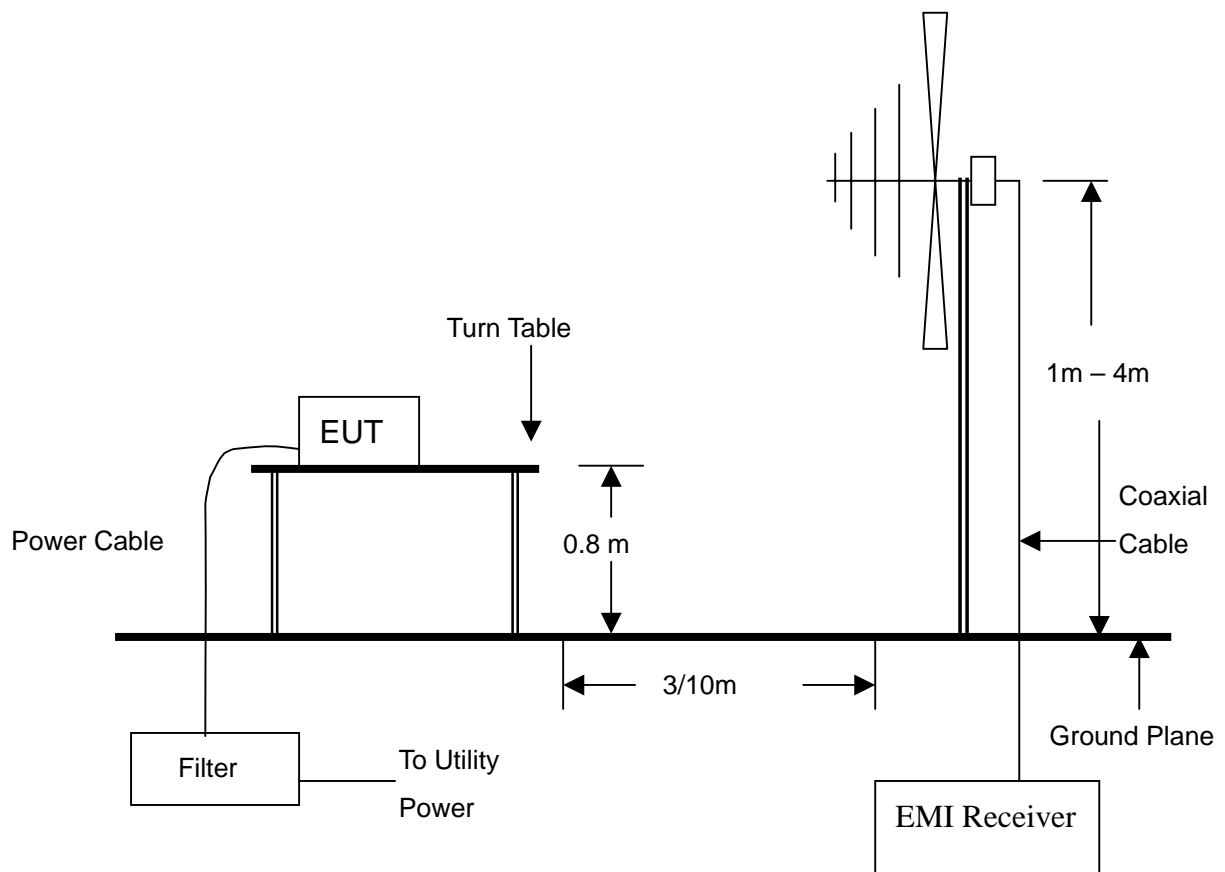

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



4.6.4 TEST PROCEDURE

- The EUT was operating in hopping mode or could be controlled its channel.
Printed out the test result from the spectrum by hard copy function.
- The EUT was tested according to the requirement of ANSI C63.4 and CISPR 22.
The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz. All readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak and average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

4.6.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.

4.6.6 TEST RESULT

Temperature:	20°C	Humidity:	55%RH
Spectrum Detector:	PK & AV	Tested by:	Julian Chiang
Test Result:	PASS	Tested Date:	Mar. 28, 2006

1. Conducted test

Frequency (MHz)	PEAK POWER OUTPUT (dBm)	Emission read Value(dBm)	Result of Band edge (dBc)	Band edge LIMIT (dBc)
<2400	0.54	-43.51	-42.97	>20dBc
>2483.5	-0.22	-47.53	-47.75	>20dBc

2. Radiated emission test

Frequency (MHz)	Antenna polarization (H/V)	Reading (dBuV)		Emission (dBuV/m)		Band edge Limit (dBuV/m)	
		PK	AV	PK	AV	PK	AV
<2400	H	36.4	*	32.3	*	74.0	54.0
>2483.5	V	33.8	*	29.8	*	74.0	54.0




Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:33 of 58
Date: Apr. 07, 2006

<2400MHz:

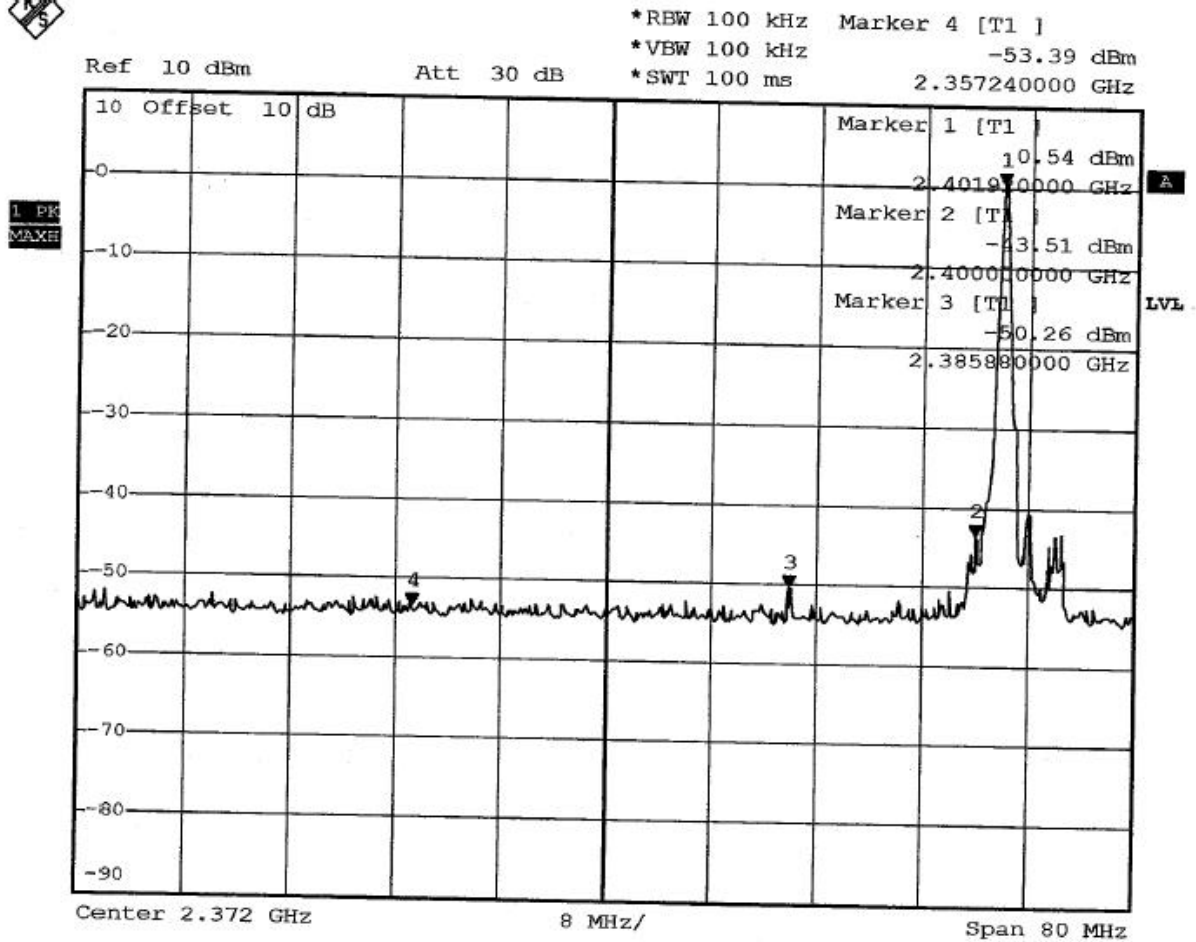




Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
 Report No.: FCCC06032204
 FCCID: I4L-MS68681
 Page:34 of 58
 Date: Apr. 07, 2006

>2483.5MHz

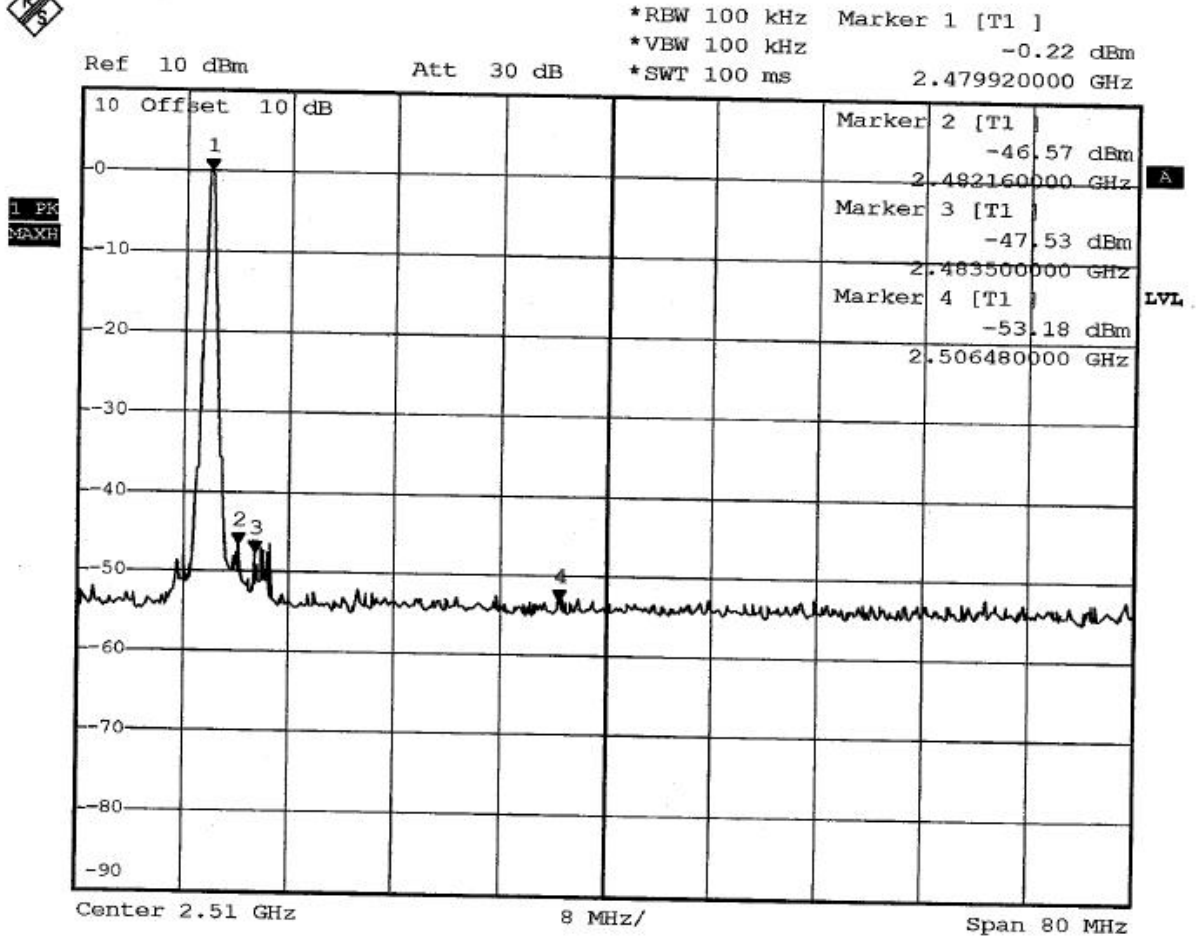



4.7 SPURIOUS RADIATED EMISSION TEST

4.7.1 LIMIT

FCC Part15, Subpart C Section 15.209 limit of radiated emission for frequency below1000MHz. The emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

FREQUENCY (MHz)	DISTANCE (m)	FIELD STRENGTH (dB μ V/m)
30 - 88	3	40.0
88 - 216	3	43.5
216 - 960	3	46.0
ABOVE 960	3	54.0

- NOTE** :
1. In the emission tables above , the tighter limit applies at the band edges.
 2. Distance refers to the distance between measuring instrument , antenna , and the closest point of any part of the device or system.

FCC Part 15, Section15.35(b) limit of radiated emission for frequency above 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
Above 1000	80.0	60.0	74.0	54.0

FCC Part 15, Subpart C Section 15.249. The field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

FUNDAMENTAL FREQUENCY (MHz)	FIELD STRENGTH OF FUNDAMENTAL (dBuV/m) (at 3m)		FIELD STRENGTH OF HARMONICS (dBuV/m) (at 3m)	
	PEAK	AVERAGE	PEAK	AVERAGE
902-928	114	94	74.0	54.0
2400-2483.5	114	94	74.0	54.0
5725-5875	114	94	74.0	54.0
24000-24250	128	108	88.0	68.0



4.7.2 TEST EQUIPMENT

The following test equipment was used during the radiated emission test :

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	20 kHz TO 1 GHz	ROHDE & SCHWARZ	ESCS30/ 830245/012	OCT. 2006 ETC
SPECTRUM ANALYZER	9KHz TO 26.5GHz	HP	8593E/ 3710A03220	MAY 10,2006 ETC
DOUBLE RIDGE WAVEGUIDE ANTENNA	18GHz TO 40GHz	ETS	3116/00032255	OCT 05,2006 DBN
HORN ANTENNA	1GHz TO 18GHz	EMCO	3115/9012-3619	JAN. 09,2007 ETC
PREAMPLIFIER	1GHz TO 26.5GHz	HP	8449B/ 3008A01019	NOV. 15,2006 ETC
BI-LOG ANTENNA	25 MHz TO 2 GHz	EMCO	3143/ 9509-1141	SEP. 2006 SRT
OATS	3 – 10 M MEASUREMENT	SRT	SRT-1	DEC. 2006 SRT
COAXIAL CABLE	25M	SUNCITY	J400/ 25M	AUG. 2006 SRT
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 869	N/A
FREQUENCY CONVERTER	N/A	APC	AFC-2KBB/ F100030031	AUG. 2006 SRT


NOTE:

1. The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.
2. The Open Area Test Site (SRT-1) is registered by FCC with No. 90957 and VCCI with No. R-1081.
3. The Open Area Test Site (SRT-2) is registered by FCC with No. 98458 and VCCI with No. R-1168.



4.7.3 TEST SET-UP

(30-1000MHz)

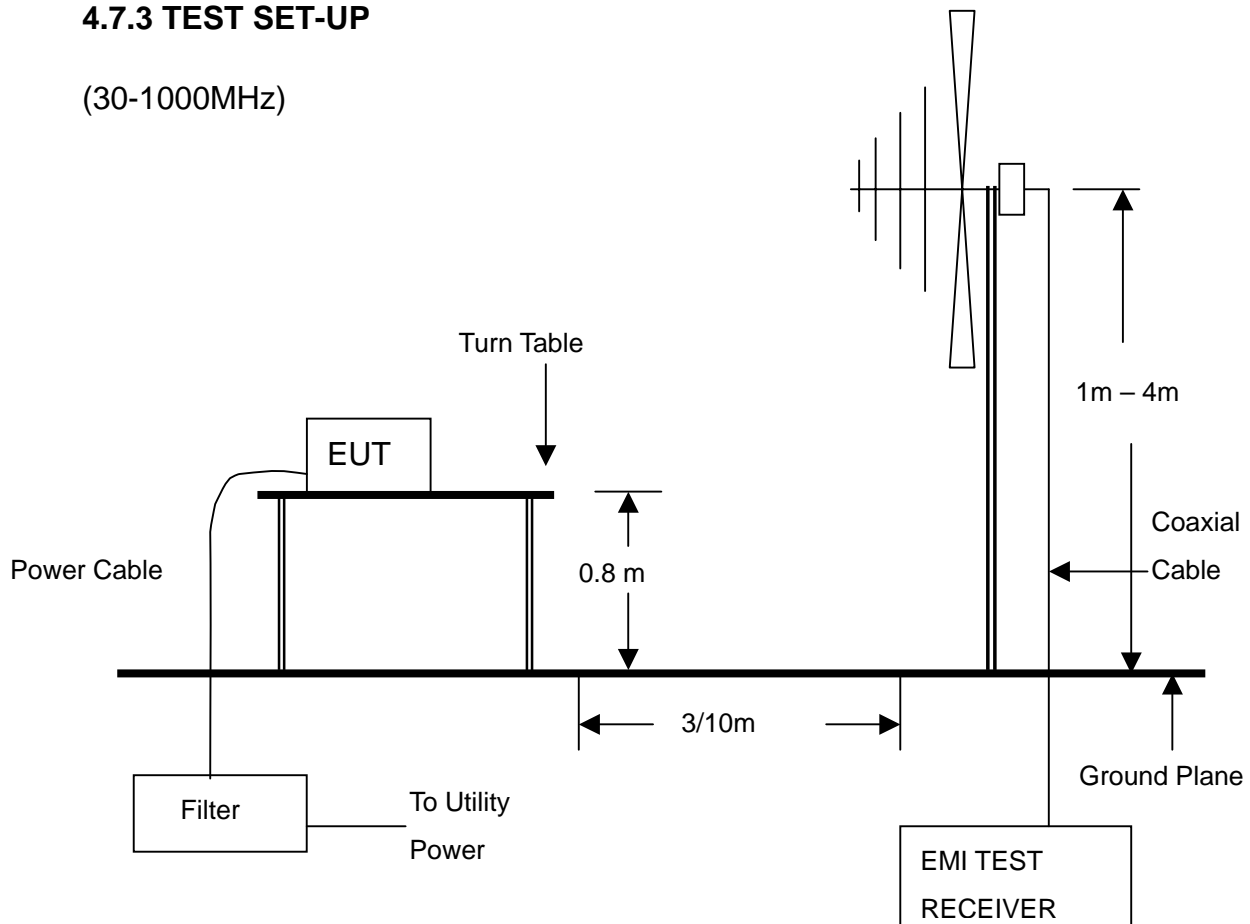


NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



(1-25GHz)

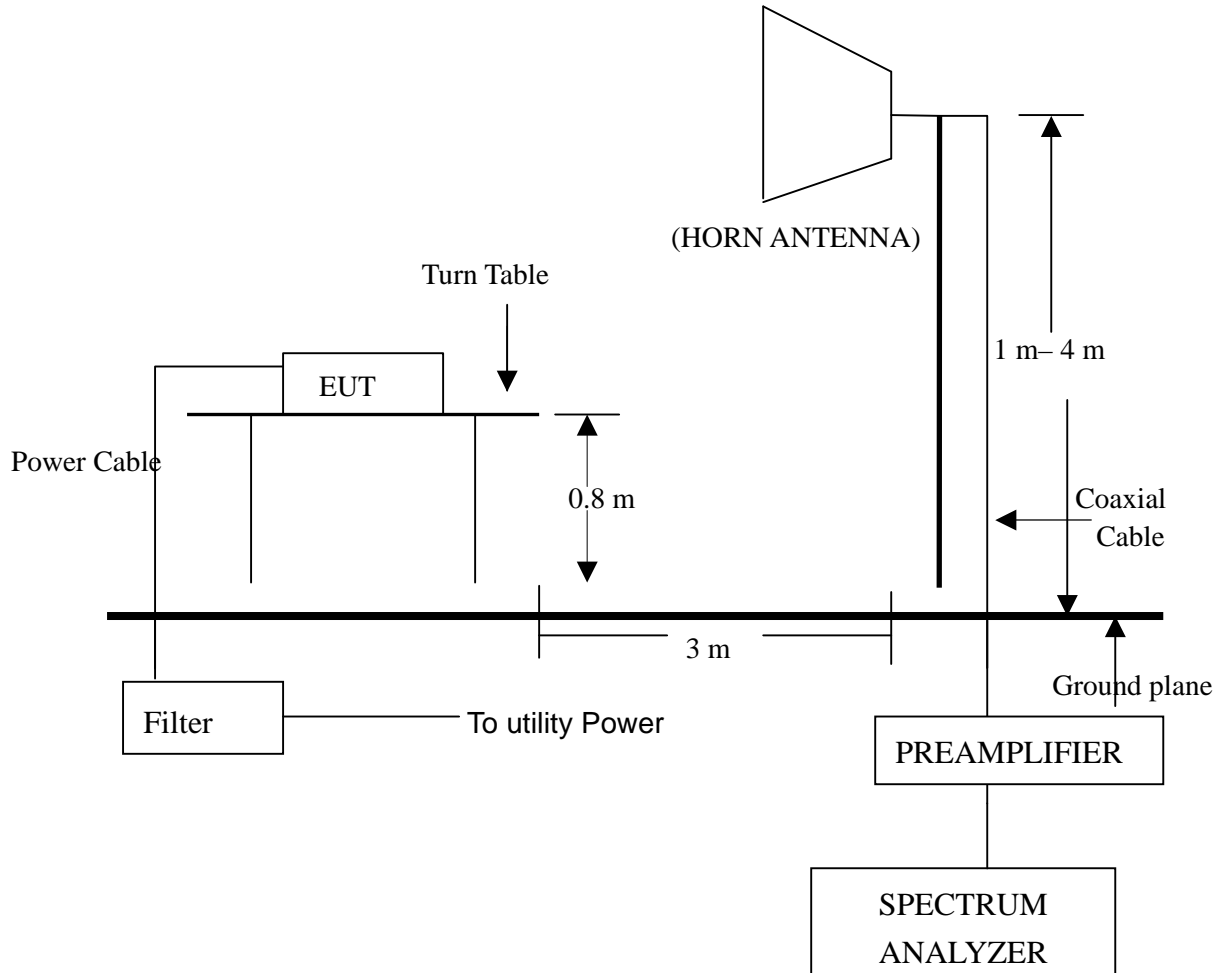

NOTE :

1. The EUT system was put on a wooden table with 0.8m heights above a ground plane.
2. For the actual test configuration, please refer to the photos of testing.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:39 of 58
Date: Apr. 07, 2006

4.7.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4 and CISPR 22. The measurements were made at an open area test site with 10 meter measurement distance under 1 GHz and with 3m distance above 1GHz. The frequency spectrum measured started from 30 MHz. Under 1 GHz. All readings were quasi-peak values with 120 kHz resolution bandwidth of the test receiver. Above 1 GHz, the measurements were made at an open area test site with 3 meter measurement distance and all readings were peak and average values with 1 MHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. The cables connected to EUT and support units were moved to find the maximum emission levels for each frequency.

4.7.5 EUT OPERATING CONDITION

Same as section 4.1.5 of this report.



4.7.6 TEST RESULT

Temperature:	22 °C	Humidity:	75 %RH
Frequency Range:	30 – 1000 MHz	Measured Distance:	3m
Receiver Detector:	Q.P.	Tested Mode:	Link+charge
Tested By:	Julian Chiang	Tested Date:	Mar. 29, 2006

Antenna Polarization: Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
62.6620	1.47	4.06	14.5	20.0	40.0	-20.0	268.4	1.58
204.0170	2.51	8.68	18.0	29.2	43.5	-14.3	347.5	1.41
216.0150	2.59	9.20	24.6	36.4	46.0	-9.6	91.5	1.14
228.0180	2.65	9.73	22.5	34.9	46.0	-11.1	346.5	1.30
360.0290	3.34	16.40	20.1	39.8	46.0	-6.2	358.5	1.00
648.0520	4.75	21.82	4.1	30.7	46.0	-15.3	357.5	1.24

Antenna Polarization: Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Margin (dB)	AZ(°)	EL(m)
33.0250	1.17	11.52	15.6	28.3	40.0	-11.7	248.5	1.00
110.7030	1.84	7.40	12.4	21.6	43.5	-21.9	265.5	1.00
204.0030	2.51	8.68	11.2	22.4	43.5	-21.1	312.5	1.00
216.0010	2.59	9.20	20.2	32.0	46.0	-14.0	92.5	1.00
384.0010	3.49	17.00	10.6	31.1	46.0	-14.9	97.6	1.00
651.2510	4.77	21.87	3.2	29.8	46.0	-16.2	127.5	1.00

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. The field strength of other emission frequencies were very low against the limit.



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
 Report No.: FCCC06032204
 FCCID: I4L-MS6868I
 Page:41 of 58
 Date: Apr. 07, 2006

Temperature: 26 °C Humidity: 62 %RH
 Frequency Range: 1 – 25 GHz Test mode: TX:CH0
 Receiver Detector: PK. or AV. Measured Distance: 3m
 Tested by: Julian Chiang Tested Date: Mar. 29, 2006

Antenna Polarization: Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ(°)	EL(m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2402.00(F)	-32.16	28.54	88.3	84.1	84.7	80.5	N/A	N/A	N/A	N/A	165.5	1.21
4804.00	-30.47	33.64	42.2	35.0	45.4	38.1	74.0	54.0	-28.6	-15.9	135.5	1.32
7206.00	-28.90	36.26	33.2	*	40.6	*	74.0	54.0	-33.4	*	147.0	1.34
2399.16	-32.16	28.00	36.5	*	32.3	*	74.0	54.0	-41.7	*	153.5	1.25
2420.36	-32.19	28.04	36.7	*	32.6	*	74.0	54.0	-41.4	*	164.5	1.30
2471.23	-32.21	28.14	32.1	*	28.1	*	74.0	54.0	-45.9	*	94.5	1.20
9608.00	*	*	*	*	*	*	*	*	*	*	*	*
12010.00	*	*	*	*	*	*	*	*	*	*	*	*
14412.00	*	*	*	*	*	*	*	*	*	*	*	*
16814.00	*	*	*	*	*	*	*	*	*	*	*	*
19216.00	*	*	*	*	*	*	*	*	*	*	*	*
21618.00	*	*	*	*	*	*	*	*	*	*	*	*
24020.00	*	*	*	*	*	*	*	*	*	*	*	*

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "**": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. Margin=Emission-Limit
5. The field strength of other emission frequencies (Above 8GHz)were very low against the limit.



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
 Report No.: FCCC06032204
 FCCID: I4L-MS6868I
 Page:42 of 58
 Date: Apr. 07, 2006

Temperature:	<u>26 °C</u>	Humidity:	<u>62 %RH</u>
Frequency Range:	<u>1 – 25 GHz</u>	Test mode:	<u>TX:CH0</u>
Receiver Detector:	<u>PK. or AV.</u>	Measured Distance:	<u>3m</u>
Tested by:	<u>Julian Chiang</u>	Tested Date:	<u>Mar. 29, 2006</u>

Antenna Polarization: Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBµV)		Emission Level (dBµV/m)		Limit (dBµV/m)		Margin (dB)		AZ(°)	EL(m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2402.00(F)	-32.16	28.00	87.4	82.6	83.2	78.5	N/A	N/A	N/A	N/A	327.5	2.65
4804.00	-30.47	33.64	45.3	37.2	48.4	40.4	74.0	54.0	-25.6	-13.6	175.5	2.63
7206.00	-28.90	36.26	32.5	*	39.8	*	74.0	54.0	-34.2	*	168.0	2.31
2348.16	-32.35	27.90	32.7	*	28.3	*	74.0	54.0	-45.7	*	227.5	2.20
2398.13	-32.17	28.00	33.6	*	29.4	*	74.0	54.0	-44.6	*	134.0	2.12
2521.36	-32.01	28.32	34.8	*	31.1	*	74.0	54.0	-42.9	*	169.5	1.89
9608.0000	*	*	*	*	*	*	*	*	*	*	*	*
12010.00	*	*	*	*	*	*	*	*	*	*	*	*
14412.00	*	*	*	*	*	*	*	*	*	*	*	*
16814.00	*	*	*	*	*	*	*	*	*	*	*	*
19216.00	*	*	*	*	*	*	*	*	*	*	*	*
21618.00	*	*	*	*	*	*	*	*	*	*	*	*
24020.00	*	*	*	*	*	*	*	*	*	*	*	*

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "**": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. Margin=Emission-Limit
5. The field strength of other emission frequencies (Above 8GHz)were very low against the limit.



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
 Report No.: FCCC06032204
 FCCID: I4L-MS6868I
 Page:43 of 58
 Date: Apr. 07, 2006

Temperature:	26°C	Humidity:	62 %RH
Frequency Range:	1 – 25 GHz	Test mode:	TX:CH39
Receiver Detector:	PK. or AV.	Measured Distance:	3m
Tested by:	Julian Chiang	Tested Date:	Mar. 29, 2006

Antenna Polarization: Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ(°)	EL(m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2441.00(F)	-32.23	28.62	87.6	84.5	84.0	80.9	N/A	N/A	N/A	N/A	124.5	1.11
4882.00	-30.26	33.71	46.3	32.6	49.7	36.0	74.0	54.0	-24.3	-18.0	163.0	1.28
7323.00	-29.04	36.36	32.4	*	39.7	*	74.0	54.0	-34.3	*	185.5	1.24
2403.16	-32.16	28.01	33.6	*	29.4	*	74.0	54.0	-44.6	*	155.5	1.29
2469.72	-32.21	28.14	37.1	*	33.0	*	74.0	54.0	-41.0	*	168.5	1.32
2503.62	-32.14	28.22	35.4	*	31.5	*	74.0	54.0	-42.5	*	258.0	1.21
9764.00	*	*	*	*	*	*	*	*	*	*	*	*
12205.00	*	*	*	*	*	*	*	*	*	*	*	*
14646.00	*	*	*	*	*	*	*	*	*	*	*	*
17087.00	*	*	*	*	*	*	*	*	*	*	*	*
19528.00	*	*	*	*	*	*	*	*	*	*	*	*
21969.00	*	*	*	*	*	*	*	*	*	*	*	*
24410.00	*	*	*	*	*	*	*	*	*	*	*	*

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. Margin=Emission-Limit
5. The field strength of other emission frequencies (Above 8GHz)were very low against the limit.



Spectrum Research & Testing Lab., Inc.
 No. 101-10, Ling 8,
 Shan-Tong Li, Chung-Li
 City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
 Report No.: FCCC06032204
 FCCID: I4L-MS6868I
 Page:44 of 58
 Date: Apr. 07, 2006

Temperature:	<u>26°C</u>	Humidity:	<u>62 %RH</u>
Frequency Range:	<u>1 – 25 GHz</u>	Test mode:	<u>TX:CH39</u>
Receiver Detector:	<u>PK. or AV.</u>	Measured Distance:	<u>3m</u>
Tested by:	<u>Julian Chiang</u>	Tested Date:	<u>Mar. 29, 2006</u>

Antenna Polarization: Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ(°)	EL(m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2441.00(F)	-32.23	28.08	64.9	58.2	60.8	54.1	N/A	N/A	N/A	N/A	136.5	2.67
4882.00	-30.26	33.71	45.8	31.7	49.2	35.1	74.0	54.0	-24.8	-18.9	24.5	2.28
7323.00	-29.04	36.36	31.9	*	39.2	*	74.0	54.0	-34.8	*	68.0	2.36
2463.79	-32.22	28.13	33.8	*	29.7	*	74.0	54.0	-44.3	*	92.5	2.32
2502.34	-32.15	28.21	32.7	*	28.8	*	74.0	54.0	-45.2	*	335.0	2.21
2578.31	-31.96	28.64	34.6	*	31.3	*	74.0	54.0	-42.7	*	32.0	2.03
9764.00	*	*	*	*	*	*	*	*	*	*	*	*
12205.00	*	*	*	*	*	*	*	*	*	*	*	*
14646.00	*	*	*	*	*	*	*	*	*	*	*	*
17087.00	*	*	*	*	*	*	*	*	*	*	*	*
19528.00	*	*	*	*	*	*	*	*	*	*	*	*
21969.00	*	*	*	*	*	*	*	*	*	*	*	*
24410.00	*	*	*	*	*	*	*	*	*	*	*	*

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. Margin=Emission-Limit
5. The field strength of other emission frequencies (Above 8GHz)were very low against the limit.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:45 of 58
Date: Apr. 07, 2006

Temperature:	<u>26°C</u>	Humidity:	<u>62 %RH</u>
Frequency Range:	<u>1 – 25 GHz</u>	Test mode:	<u>TX:CH78</u>
Receiver Detector:	<u>PK. or AV.</u>	Measured Distance:	<u>3m</u>
Tested by:	<u>Julian Chiang</u>	Tested Date:	<u>Mar. 29, 2006</u>

Antenna Polarization: Horizontal

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ(°)	EL(m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2480.00(F)	-32.19	28.73	88.9	85.0	85.4	81.5	N/A	N/A	N/A	N/A	46.5	1.64
4960.00	-30.26	33.77	46.7	36.4	50.2	39.9	74.0	54.0	-23.8	-14.1	32.5	1.27
7440.00	-28.95	36.45	32.6	*	40.1	*	74.0	54.0	-33.9	*	46.5	1.32
2348.20	-32.35	27.90	35.8	*	31.3	*	74.0	54.0	-42.7	*	47.0	1.28
2426.90	-32.20	28.05	34.7	*	30.6	*	74.0	54.0	-43.4	*	149.5	1.48
2484.10	-32.19	28.17	36.9	*	32.9	*	74.0	54.0	-41.1	*	116.5	1.56
9920.00	*	*	*	*	*	*	*	*	*	*	*	*
12400.00	*	*	*	*	*	*	*	*	*	*	*	*
14880.00	*	*	*	*	*	*	*	*	*	*	*	*
17360.00	*	*	*	*	*	*	*	*	*	*	*	*
19840.00	*	*	*	*	*	*	*	*	*	*	*	*
22320.00	*	*	*	*	*	*	*	*	*	*	*	*
24800.00	*	*	*	*	*	*	*	*	*	*	*	*

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "*": Measurement does not apply for this frequency.
3. Emission Level = Reading Value + Ant. Factor + Cable Loss.
4. Margin=Emission-Limit
5. The field strength of other emission frequencies (Above 8GHz)were very low against the limit.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:46 of 58
Date: Apr. 07, 2006

Temperature:	<u>26°C</u>	Humidity:	<u>62 %RH</u>
Frequency Range:	<u>1 – 25 GHz</u>	Test mode:	<u>TX:CH78</u>
Receiver Detector:	<u>PK. or AV.</u>	Measured Distance:	<u>3m</u>
Tested by:	<u>Julian Chiang</u>	Tested Date:	<u>Mar. 29, 2006</u>

Antenna Polarization: Vertical

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Reading Data (dBμV)		Emission Level (dBμV/m)		Limit (dBμV/m)		Margin (dB)		AZ(°)	EL(m)
			PK.	AV.	PK.	AV.	PK.	AV.	PK.	AV.		
2480.00	-32.19	28.16	65.8	59.2	61.8	55.2	N/A	N/A	N/A	N/A	261.5	2.7
4960.00	-30.26	33.77	48.7	38.2	52.2	41.7	74.0	54.0	-21.8	-12.3	97.0	2.49
7440.00	-28.95	36.45	35.4	*	42.9	*	74.0	54.0	-31.1	*	32.5	2.67
2400.30	-32.16	28.00	32.6	*	28.4	*	74.0	54.0	-45.6	*	279.5	2.58
2486.70	-32.18	28.17	33.8	*	29.8	*	74.0	54.0	-44.2	*	49.5	2.74
2570.60	-31.92	28.59	32.7	*	29.4	*	74.0	54.0	-44.6	*	338.5	2.31
9920.00	*	*	*	*	*	*	*	*	*	*	*	*
12400.00	*	*	*	*	*	*	*	*	*	*	*	*
14880.00	*	*	*	*	*	*	*	*	*	*	*	*
17360.00	*	*	*	*	*	*	*	*	*	*	*	*
19840.00	*	*	*	*	*	*	*	*	*	*	*	*
22320.00	*	*	*	*	*	*	*	*	*	*	*	*
24800.00	*	*	*	*	*	*	*	*	*	*	*	*

NOTE :

1. Measurement uncertainty is +/-2dB.
2. "**": Measurement does not apply for this frequency.
5. Emission Level = Reading Value + Ant. Factor + Cable Loss.
6. Margin=Emission-Limit
5. The field strength of other emission frequencies (Above 8GHz)were very low against the limit.



4.8 CONDUCTED EMISSION TEST FOR POWER PORT

4.8.1 CONDUCTED EMISSION LIMIT

FREQUENCY (MHz)	Class A (dB μ V)		Class B (dB μ V)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.5 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.

4.8.2 TEST EQUIPMENT


The following test equipment was used for the test:

EQUIPMENT/ FACILITIES	SPECIFICATIONS	MANUFACTURER	MODEL#/ SERIAL#	DUE DATE OF CAL. & CAL. CENTER
EMI TEST RECEIVER	9 kHz TO 30 MHz	ROHDE & SCHWARZ	ESHS30/ 826003/008	AUG. 2006 ETC
LISN (for EUT)	50 μ H, 50 ohm	SOLAR ELECTRONICS	8012-50-R-24-BNC / 924839	JUN. 2006 ETC
LISN (for Peripheral)	50 μ H, 50 ohm	SOLAR ELECTRONICS	9252-50-R-24-BNC / 951318	JUN. 2006 ETC
50 ohm TERMINATOR	50 ohm	HP	11593A/ 2	JUN. 2006 ETC
COAXIAL CABLE	3m	SUNCITY	J400/ 3M	JUL. 2006 SRT
ISOLATION TRANSFORMER	N/A	APC	AFC-11015/ F102040016	N/A
FILTER	2 LINE, 30A	FIL.COIL	FC-943/ 771	N/A
GROUND PLANE	2.3M (H) x 2.4M (W)	SRT	N/A	APR. 2006 SRT
GROUND PLANE	2.4M (H) x 2.4M (W)	SRT	N/A	APR. 2006 SRT

NOTE: The calibration interval of the above test equipment is one year and the calibrations are traceable to NML/ROC and NIST/USA.



4.8.3 TEST SETUP

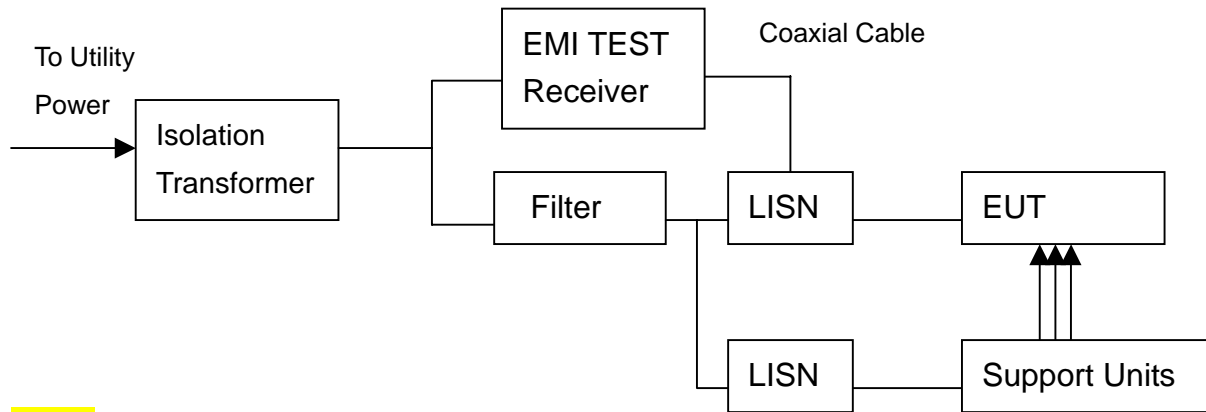

NOTE:

1. The EUT was put on a wooden table with 0.8m heights above ground plane, and 0.4m away from reference ground plane (> 2mx2m).
2. For the actual test configuration, please refer to the photos of testing.
3. The serial no. of the LISN connected to EUT is 01017.
4. The serial no. of the LISN connected to support units is 01018.

4.8.4 TEST PROCEDURE

The EUT was tested according to the requirement of ANSI C63.4:2003 and CISPR22:2003. The frequency spectrum from 0.15 MHz to 30 MHz was investigated. The LISN used was 50 ohm/50 μ H as specified. All readings were quasi-peak and average values with 10 kHz resolution bandwidth of the test receiver. The EUT system was operated in all typical methods by users. Both lines of the power mains of EUT were measured and the cables connected to EUT and support units were moved to find the maximum emission levels for each frequency. First, find the margin or higher points at least 6 points by software, then use manual to find the maximum data. The procedure is referred on the test procedure of SRT LAB.



4.8.5 TEST RESULT

Temperature:	25 °C	Humidity:	65 %RH
Frequency Range:	0.15 – 30 MHz	Tested Mode:	Link+charge
Receiver Detector:	Q.P. and AV.	Tested By:	Julian Chiang
Tested Result:	Pass	Tested Date:	Mar. 29, 2006

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.177	0.30	45.70	31.18	46.00	31.48	64.61	54.61	-18.61	-23.13
0.682	0.23	38.88	29.24	39.11	29.47	56.00	46.00	-16.90	-16.54
1.329	0.14	28.60	19.64	28.74	19.78	56.00	46.00	-27.26	-26.22
2.061	0.11	29.12	20.53	29.23	20.64	56.00	46.00	-26.77	-25.36
5.000	0.10	22.14	16.18	22.24	16.28	56.00	46.00	-33.76	-29.72
15.082	0.10	9.44	2.84	9.54	2.94	60.00	50.00	-50.46	-47.06

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.180	0.30	45.72	34.27	46.02	34.57	64.47	54.47	-18.45	-19.90
0.677	0.23	41.74	33.00	41.97	33.23	56.00	46.00	-14.04	-12.78
2.091	0.11	30.26	22.04	30.37	22.15	56.00	46.00	-25.63	-23.85
5.102	0.10	22.82	15.90	22.92	16.00	60.00	50.00	-37.08	-34.00
5.741	0.10	20.76	12.77	20.86	12.87	60.00	50.00	-39.14	-37.13
26.767	0.10	11.20	4.70	11.30	4.80	60.00	50.00	-48.70	-45.20

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:50 of 58
Date: Apr. 07, 2006

Temperature:	25 °C	Humidity:	65 %RH
Frequency Range:	0.15 – 30 MHz	Tested Mode:	TX: CH0
Receiver Detector:	Q.P. and AV.	Tested By:	Julian Chiang
Tested Result:	Pass	Tested Date:	Mar. 29, 2006

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.156	0.30	51.00	37.29	51.30	37.59	65.66	55.66	-14.36	-18.07
0.879	0.20	37.92	34.45	38.12	34.65	56.00	46.00	-17.89	-11.36
3.289	0.10	41.42	29.77	41.52	29.87	56.00	46.00	-14.48	-16.13
3.299	0.10	41.12	29.77	41.22	29.87	56.00	46.00	-14.78	-16.13
9.466	0.10	32.70	26.86	32.80	26.96	60.00	50.00	-27.20	-23.04
16.363	0.10	26.84	20.41	26.94	20.51	60.00	50.00	-33.06	-29.49

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.159	0.30	49.96	40.19	50.26	40.49	65.50	55.50	-15.24	-15.01
0.879	0.20	38.72	34.92	38.92	35.12	56.00	46.00	-17.09	-10.89
3.091	0.10	40.02	29.07	40.12	29.17	56.00	46.00	-15.88	-16.83
9.405	0.10	33.00	27.09	33.10	27.19	60.00	50.00	-26.90	-22.81
10.836	0.10	31.52	25.31	31.62	25.41	60.00	50.00	-28.38	-24.59
17.255	0.10	27.66	21.31	27.76	21.41	60.00	50.00	-32.24	-28.59

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



TEST REPORT

Temperature:	25 °C	Humidity:	65 %RH
Frequency Range:	0.15 – 30 MHz	Tested Mode:	TX:CH39
Receiver Detector:	Q.P. and AV.	Tested By:	Julian Chiang
Tested Result:	Pass	Tested Date:	Mar. 29, 2006

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.156	0.30	49.14	36.51	49.44	36.81	65.66	55.66	-16.22	-18.85
0.874	0.20	38.78	34.15	38.98	34.35	56.00	46.00	-17.03	-11.66
3.388	0.10	40.72	29.27	40.82	29.37	56.00	46.00	-15.18	-16.63
10.126	0.10	33.76	28.05	33.86	28.15	60.00	50.00	-26.14	-21.85
10.420	0.10	33.24	27.50	33.34	27.60	60.00	50.00	-26.66	-22.40
18.751	0.10	28.28	21.41	28.38	21.51	60.00	50.00	-31.62	-28.49

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.156	0.30	49.06	36.63	49.36	36.93	65.66	55.66	-16.30	-18.73
0.879	0.20	37.58	30.84	37.78	31.04	56.00	46.00	-18.23	-14.97
2.596	0.11	40.02	28.50	40.13	28.61	56.00	46.00	-15.88	-17.40
9.151	0.10	32.84	27.05	32.94	27.15	60.00	50.00	-27.06	-22.85
9.182	0.10	33.16	27.09	33.26	27.19	60.00	50.00	-26.74	-22.81
16.189	0.10	28.56	22.00	28.66	22.10	60.00	50.00	-31.34	-27.90

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:52 of 58
Date: Apr. 07, 2006

Temperature:	25 °C	Humidity:	65 %RH
Frequency Range:	0.15 – 30 MHz	Tested Mode:	TX: CH78
Receiver Detector:	Q.P. and AV.	Tested By:	Julian Chiang
Tested Result:	Pass	Tested Date:	Mar. 29, 2006

Power Line Measured : Line

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.159	0.30	48.64	38.84	48.94	39.14	65.50	55.50	-16.56	-16.36
0.874	0.20	36.74	29.53	36.94	29.73	56.00	46.00	-19.07	-16.28
2.655	0.10	39.86	29.05	39.96	29.15	56.00	46.00	-16.04	-16.85
3.091	0.10	41.08	30.27	41.18	30.37	56.00	46.00	-14.82	-15.63
10.004	0.10	34.36	28.45	34.46	28.55	60.00	50.00	-25.54	-21.45
15.994	0.10	28.28	22.37	28.38	22.47	60.00	50.00	-31.62	-27.53

Power Line Measured : Neutral

Freq. (MHz)	Correct. Factor (dB)	Reading Value (dB μ V)		Emission Level (dB μ V)		Limit (dB μ V)		Margin (dB)	
		Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
0.156	0.30	48.60	36.14	48.90	36.44	65.66	55.66	-16.76	-19.22
1.177	0.15	36.08	23.77	36.23	23.92	56.00	46.00	-19.77	-22.08
3.032	0.10	40.38	29.62	40.48	29.72	56.00	46.00	-15.52	-16.28
9.344	0.10	33.42	27.63	33.52	27.73	60.00	50.00	-26.48	-22.27
9.496	0.10	33.42	27.94	33.52	28.04	60.00	50.00	-26.48	-21.96
17.265	0.10	29.24	22.81	29.34	22.91	60.00	50.00	-30.66	-27.09

NOTE :

1. Measurement uncertainty is +/-1.32dB
2. Emission level = Reading value + Correction factor
3. Correction Factor = Cable loss + Insertion loss of LISN
4. Margin value = Emission level - Limit
5. The emission of other frequencies were very low against the limit.
6. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.



**Spectrum Research &
Testing Lab., Inc.**
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:53 of 58
Date: Apr. 07, 2006

5. Antenna application

5.1 Antenna requirement

The EUT's antenna is met the requirement of FCC part15C section15.203 and 15.204.

FCC part15C section15.247 requirement:

Systems operating in the 2400-2483.5 MHz band that are used exclusively for fixed, point-to-point operations may employ transmitting antennas with directional gain greater than 6 dBi provided the maximum peak output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6 dBi.

5.2 Result

The EUT's antenna used a dipole antenna and integrated on PCB. The antenna's gain is 1dBi and meets the requirement.





6. PHOTOS OF TESTING

- Radiated test (RX)





- Radiated test (TX)

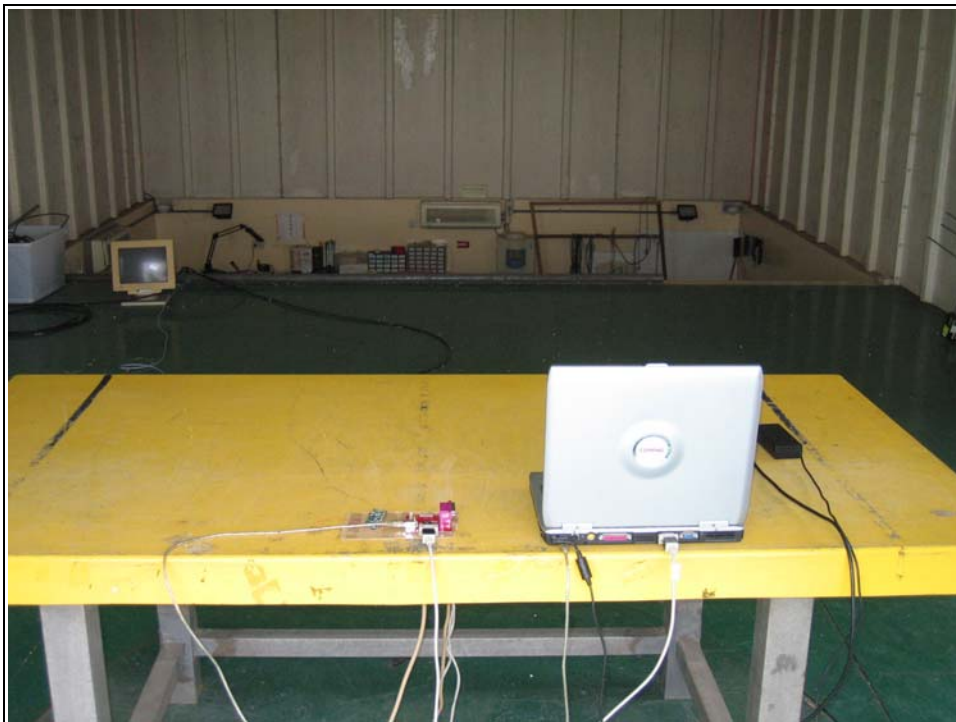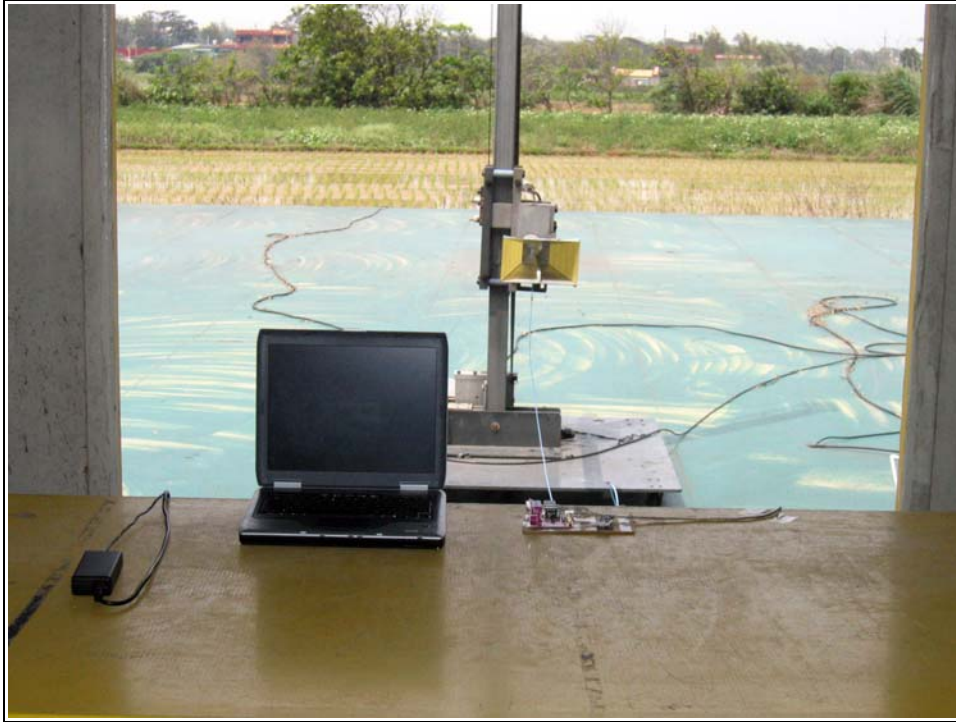



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT


Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:56 of 58
Date: Apr. 07, 2006

- Conducted test (RX)





- Conducted test (TX)

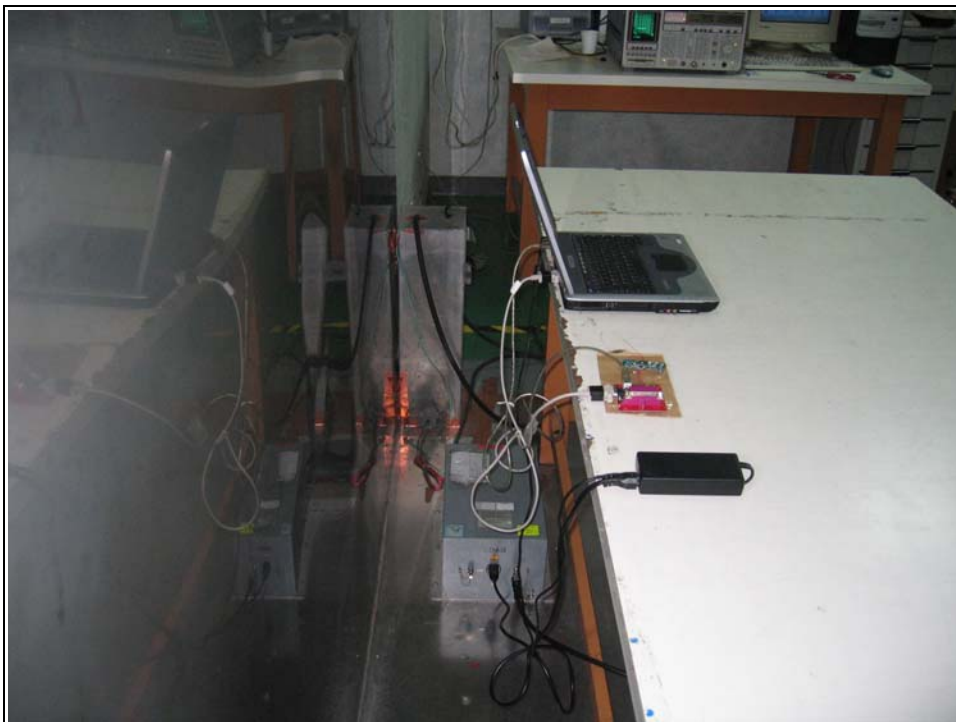



Spectrum Research & Testing Lab., Inc.
No. 101-10, Ling 8,
Shan-Tong Li, Chung-Li
City, Taoyuan, Taiwan

TEST REPORT

Reference No.: C06032204
Report No.: FCCC06032204
FCCID: I4L-MS6868I
Page:58 of 58
Date: Apr. 07, 2006

7. TERMS OF ABRIVATION

AV.	Average detection
AZ(°)	Turn table azimuth
Correct.	Correction
EL(m)	Antenna height (meter)
EUT	Equipment Under Test
Horiz.	Horizontal direction
LISN	Line Impedance Stabilization Network
NSA	Normalized Site Attenuation
Q.P.	Quasi-peak detection
SRT Lab	Spectrum Research & Testing Laboratory, Inc.
Vert.	Vertical direction