

FCC TEST REPORT

FCC ID : I4S-PVI8500
Applicant : Peavey Electronics Corporation
Address : 5022 Hartley Peavey Drive, Meridian, Mississippi, United States, 39302
Manufacturer : Shenzhen Uniwisdom Technologies Co., Ltd
Address : Bldg.91-94 3rd Industrial Zone,Lisonglang,Gongming Town,Bao'an District,Shenzhen,P.R.China

Equipment Under Test (EUT) :

Product Name : Power Mixer Amplifier
Model No. : PVI8500, PVI6500

Standards : FCC CFR47 Part 15 Section 15.247:2010

Date of Test : Feb. 19~Mar.11, 2013

Date of Issue : Mar. 12, 2013

Test Result : **PASS**

Remark:

* The sample described above has been tested to be in compliance with the requirements of ANSI C63.4:2003. The test results have been reviewed and comply with the rules listed above and found to meet their essential requirements.

The results shown in this test report refer only to the sample(s) tested, this test report cannot be reproduced, except in full, without prior written permission of the company.

The report would be invalid without specific stamp of test institute and the signatures of compiler and approver.

Prepared By:

Waltek Services (Shenzhen) Co., Ltd.

1/F, Fukangtai Building, West Baima Rd., Songgang Street, Baoan District,

Shenzhen 518105, China

Tel: +86-755-83551033


Fax: +86-755-83552400

Compiled by:



Zero Zhou / Project Engineer

Approved by:



Philo Zhong / Manager

2 Test Summary

Test Items	Test Requirement	Result
Spurious Radiated Emissions	15.205(a) 15.209 15.247(d)	PASS
Band edge Emissions	15.247(d)	PASS
Spurious RF Conducted Emissions from out of band	15.247(d)	PASS
Duty Cycle	15.35	PASS
Conducted Emissions	15.207	PASS
20dB Bandwidth	15.215c 15.247(a)(1)	PASS
Maximum Peak Output Power	15.247(b)(1)	PASS
Frequency Separation	15.247(a)(1)	PASS
Number of Hopping Frequency	15.247(a)(1)(iii)	PASS
Dwell time	15.247(a)(1)(iii)	PASS
Maximum Permissible Exposure (Exposure of Humans to RF Fields)	1.1307(b)(1)	PASS

3 Contents

	Page
1 COVER PAGE	1
2 TEST SUMMARY	2
3 CONTENTS	3
4 GENERAL INFORMATION	5
4.1 GENERAL DESCRIPTION OF E.U.T.	5
4.2 DETAILS OF E.U.T.	5
4.3 TEST FACILITY	5
4.4 TEST LOCATION	5
5 EQUIPMENT USED DURING TEST	6
5.1 EQUIPMENTS LIST	6
5.2 MEASUREMENT UNCERTAINTY	6
5.3 TEST EQUIPMENT CALIBRATION	6
6 CONDUCTED EMISSION	7
6.1 E.U.T. OPERATION	7
6.2 EUT SETUP	7
6.3 CONDUCTED EMISSION TEST RESULT	8
7 SPURIOUS RADIATED EMISSIONS	16
7.1 EUT OPERATION :	16
7.2 TEST SETUP	17
7.3 SPECTRUM ANALYZER SETUP	18
7.4 TEST PROCEDURE	19
7.5 CORRECTED AMPLITUDE & MARGIN CALCULATION	19
7.6 SUMMARY OF TEST RESULTS	20
8 SPURIOUS RF CONDUCTED EMISSIONS FROM OUT OF BAND	40
8.1 TEST PROCEDURE	40
8.2 TEST RESULT	40
9 DUTY CYCLE	50
9.1 TEST PROCEDURE	50
9.2 TEST RESULT	50
10 BAND EDGE MEASUREMENT	52
10.1 TEST PROCEDURE	52
10.2 TEST RESULT:	53
11 20 DB BANDWIDTH MEASUREMENT	57
11.1 TEST PROCEDURE:	57
11.2 TEST RESULT:	57
12 MAXIMUM PEAK OUTPUT POWER	63
12.1 TEST PROCEDURE:	63
12.2 TEST RESULT:	63
13 HOPPING CHANNEL SEPARATION	69
13.1 TEST PROCEDURE:	69
13.2 TEST RESULT:	69
14 NUMBER OF HOPPING FREQUENCY	75
14.1 TEST PROCEDURE:	75

14.2	TEST RESULT:.....	75
15	DWELL TIME	77
15.1	TEST PROCEDURE:.....	77
15.2	TEST RESULT:.....	77
16	ANTENNA REQUIREMENT	93
17	RF EXPOSURE	94
17.1	REQUIMENTS:	94
17.2	THE PROCEDURES / LIMIT	94
17.3	MPE CALCULATION METHOD.....	95
18	PHOTOGRAPHS – TEST SETUP	96
18.1	CONDUCTED EMISSIONS	96
18.2	RADIATED EMISSIONS.....	96
19	PHOTOGRAPHS - CONSTRUCTIONAL DETAILS.....	98
19.1	EUT – EXTERNAL VIEW	98
19.2	EUT- INTERNAL VIEW.....	101

4 General Information

4.1 General Description of E.U.T.

Product Name	: Power Mixer Amplifier
Model No.	: PVi8500, PVi6500
Model Description	: Circuit principle and bluetooth module of above product models are the same. The model PVi8500 with MIC interface and PVi6500 without interface.
Operation Frequency	: 2402MHz ~ 2480MHz,79 channels in total,separated by 1MHz
Type of Modulation	: GFSK, Pi/4DQPSK, 8DPSK
Oscillator	: Crystal 16MHz
Antenna installation	: PCB Printed Antenna

4.2 Details of E.U.T.

Technical Data	: AC 120V 50/60Hz, 74 Watts Nominal AC 230V 50/60Hz, 74 Watts Nominal
Adapter manufacturer	: N/A
M/N	: N/A

4.3 Test Facility

The test facility has a test site registered with the following organizations:

- **IC – Registration No.: 7760A**

Waltek Services(Shenzhen) Co., Ltd. has been registered and fully described in a report filed with the Industry Canada. The acceptance letter from the Industry Canada is maintained in our files.

Registration 7760A, July 12, 2012.

- **FCC – Registration No.: 880581**

Waltek Services(Shenzhen) Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 880581, May 26, 2011.

4.4 Test Location

All the tests were performed at:

Waltek Services(Shenzhen) Co., Ltd. at 1/F, Fukangtai Building, West Baima Rd.,Songgang Street, Baoan District, Shenzhen, China

5 Equipment Used during Test

5.1 Equipments List

Conducted Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMI Test Receiver	R&S	ESCI	100947	Aug. 13,2012	Aug. 13,2013
2.	LISN	R&S	ENV216	101215	Aug. 13,2012	Aug. 13,2013
3.	Cable	Top	TYPE16(3.5M)	-	Aug.14,2012	Aug. 14,2013
3m Semi-anechoic Chamber for Radiation Emissions						
Item	Equipment	Manufacturer	Model No.	Serial No.	Last Calibration Date	Calibration Due Date
1.	EMC Analyzer	Agilent	E7405A	MY45114943	Aug. 13,2012	Aug. 13,2013
2.	Active Loop Antenna	Beijing Dazhi	ZN30900A	-	Aug. 13,2012	Aug. 13,2013
3.	Trilog Broadband Antenna	SCHWARZBECK	VULB9163	336	Aug. 13,2012	Aug. 13,2013
4.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9120 D	667	Aug. 13,2012	Aug. 13,2013
5.	Broad-band Horn Antenna	SCHWARZBECK	BBHA 9170	399	Aug. 13,2012	Aug. 13,2013
6.	Broadband Preamplifier	COMPLIANCE DIRECTION	PAP-1G18	2004	Feb .23,2012	Feb .23,2013
7.	Broadband Preamplifier	SCHWARZBECK	BBV 9718	9718-148	Aug. 13,2012	Aug. 13,2013
8.	10m Coaxial Cable with N- plug	SCHWARZBECK	AK 9515 H	-	Aug. 13,2012	Aug. 13,2013
9.	10m 50 Ohm Coaxial Cable with N-plug	Top	TYPE16(13M)	-	Aug. 13,2012	Aug. 13,2013

5.2 Measurement Uncertainty

Parameter	Uncertainty
Radio Frequency	$\pm 1 \times 10^{-6}$
Bandwidth	$\pm 1.5 \times 10^{-6}$
RF Power	± 1.0 dB
RF Power Density	± 2.2 dB
Temperature	± 1 °C
DC Source	$\pm 0.05\%$
Radiated Emissions test	± 5.03 dB (Bilog antenna 30M~1000MHz)
	± 4.74 dB (Horn antenna 1000M~25000MHz)
Conducted Spurious Emissions test	± 0.5 dB (9KHz~1000MHz)
	± 1 dB(1000M~26500MHz)
Conducted Emissions test	± 3.64 dB (AC mains 150KHz~30MHz)

5.3 Test Equipment Calibration

All the test equipments used are valid and calibrated by CEPREI Certification Body that address is No.110 Dongguan Zhuang RD. Guangzhou, P.R.China.

6 Conducted Emission

Test Requirement:	FCC CFR 47 Part 15 Section 15.207
Test Method:	ANSI C63.4:2003
Test Result:	PASS
Frequency Range:	150kHz to 30MHz
Class:	Class B
Limit:	66-56 dB μ V between 0.15MHz & 0.5MHz 56 dB μ V between 0.5MHz & 5MHz 60 dB μ V between 5MHz & 30MHz
Detector:	Peak for pre-scan (9kHz Resolution Bandwidth) Quasi-Peak & Average if maximised peak within 6dB of Average Limit

6.1 E.U.T. Operation

Operating Environment:

Temperature: 25.5 °C

Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar

EUT Operation:


The EUT was tested in working mode. The worst data were shown as follow.

The EUT was tested according to ANSI C63.4:2003. The frequency spectrum from 150kHz to 30MHz was investigated.

The maximised peak emissions from the EUT was scanned and measured for both the Live and Neutral Lines. Quasi-peak & average measurements were performed if peak emissions were within 6dB of the average limit line.

6.2 EUT Setup

The EUT was placed on the test table in shielding room.

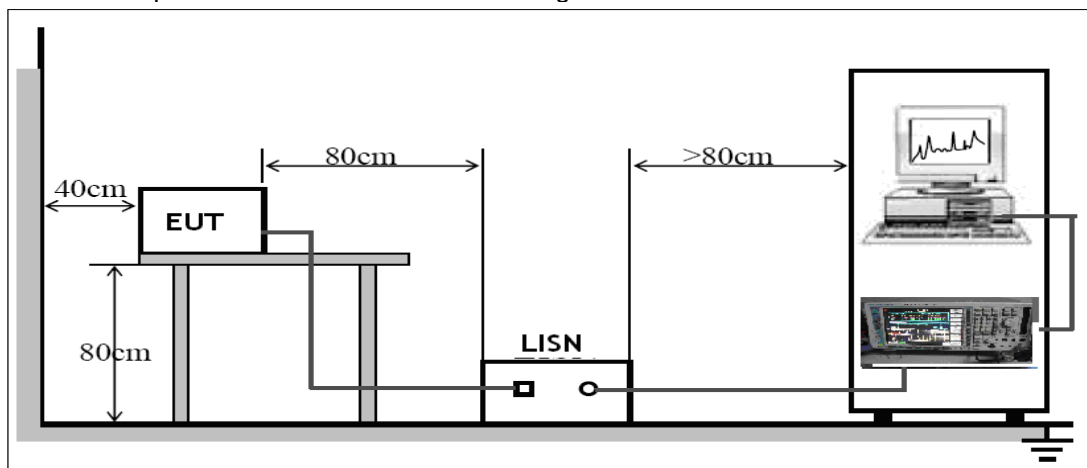


6.3 Conducted Emission Test Result

An initial pre-scan was performed on the live and neutral lines.

Test model: PVi8500


Test Mode: BT linking

Live line:

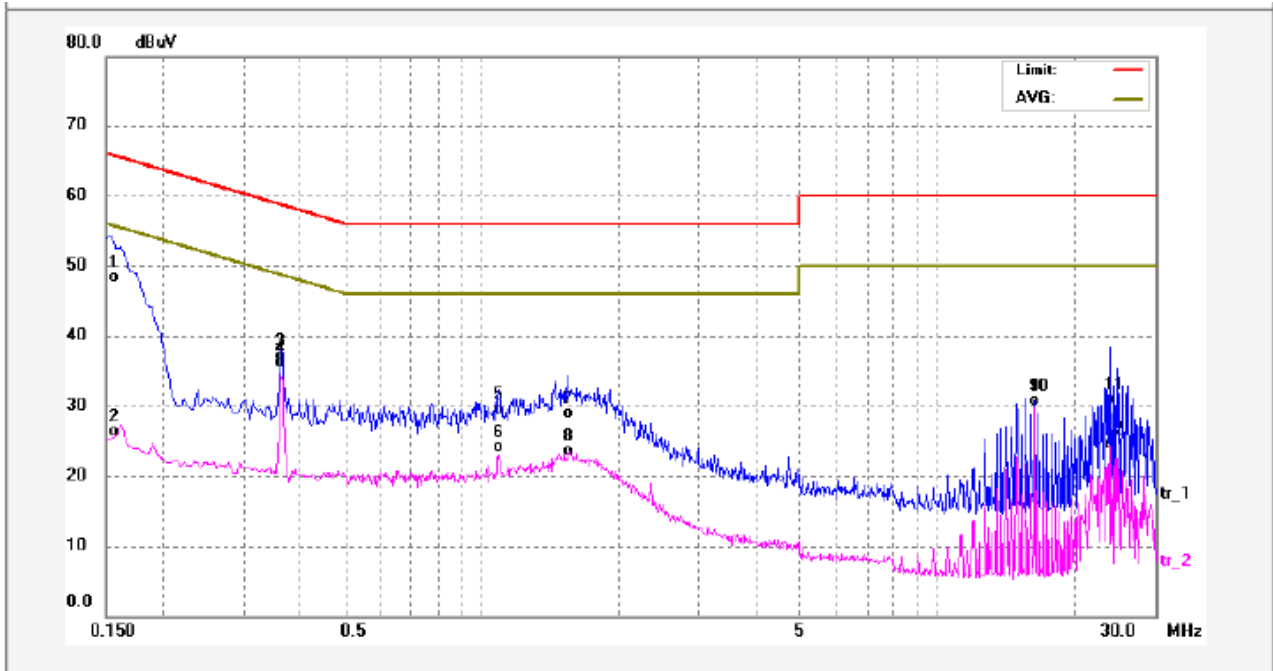

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	36.35	11.18	47.53	65.78	-18.25	QP	
2	0.1539	14.26	11.18	25.44	55.78	-30.34	AVG	
3	0.3620	25.06	11.31	36.37	58.68	-22.31	QP	
4	0.3620	23.98	11.31	35.29	48.68	-13.39	AVG	
5	1.0900	17.55	11.18	28.73	56.00	-27.27	QP	
6	1.0900	12.15	11.18	23.33	46.00	-22.67	AVG	
7	1.5420	16.93	11.19	28.12	56.00	-27.88	QP	
8	1.5420	11.53	11.19	22.72	46.00	-23.28	AVG	
9	16.3860	18.46	11.47	29.93	60.00	-30.07	QP	
10	16.3860	18.44	11.47	29.91	50.00	-20.09	AVG	
11	24.0020	18.65	11.55	30.20	60.00	-29.80	QP	
12	24.0020	12.25	11.55	23.80	50.00	-26.20	AVG	

Neutral line:

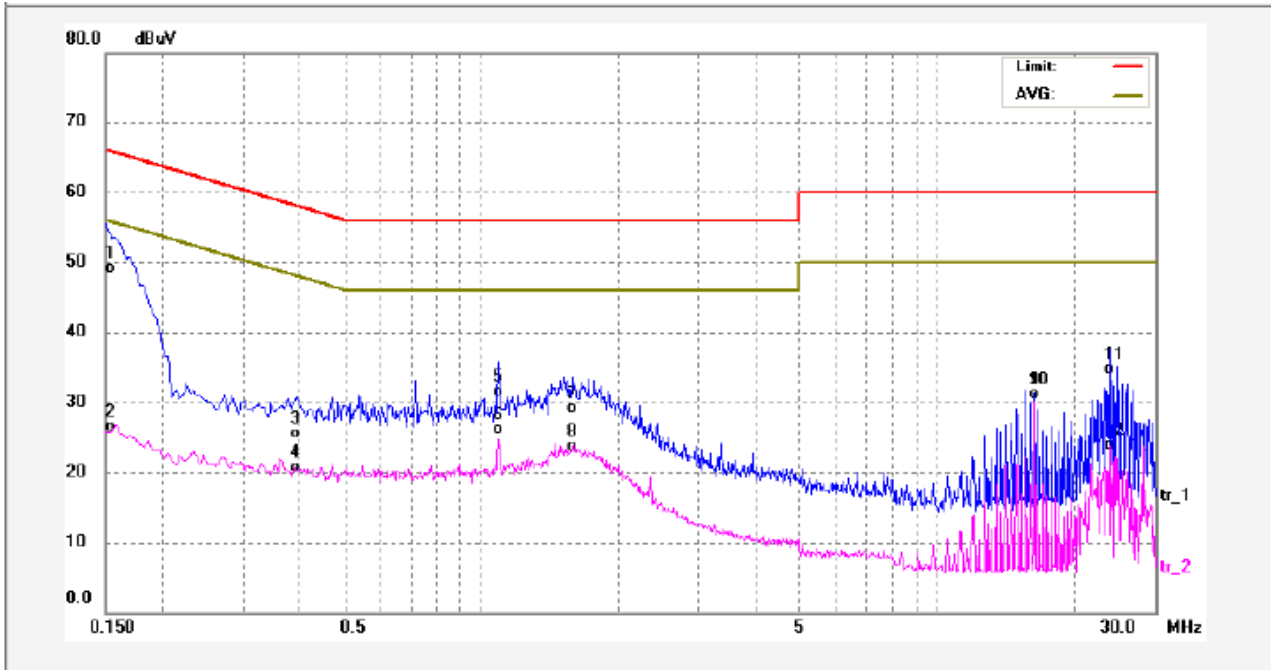


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	37.20	11.17	48.37	65.99	-17.62	QP	
2	0.1500	14.53	11.17	25.70	55.99	-30.29	AVG	
3	0.3940	13.42	11.31	24.73	57.98	-33.25	QP	
4	0.3940	8.56	11.31	19.87	47.98	-28.11	AVG	
5	1.0900	19.49	11.18	30.67	56.00	-25.33	QP	
6	1.0900	14.10	11.18	25.28	46.00	-20.72	AVG	
7	1.5859	17.14	11.19	28.33	56.00	-27.67	QP	
8	1.5859	11.71	11.19	22.90	46.00	-23.10	AVG	
9	16.3860	18.78	11.47	30.25	60.00	-29.75	QP	
10	16.3860	18.79	11.47	30.26	50.00	-19.74	AVG	
11	23.9820	22.26	11.55	33.81	60.00	-26.19	QP	
12	23.9820	11.65	11.55	23.20	50.00	-26.80	AVG	

Test model: PVi8500


Test Mode: SD playing

Live line:

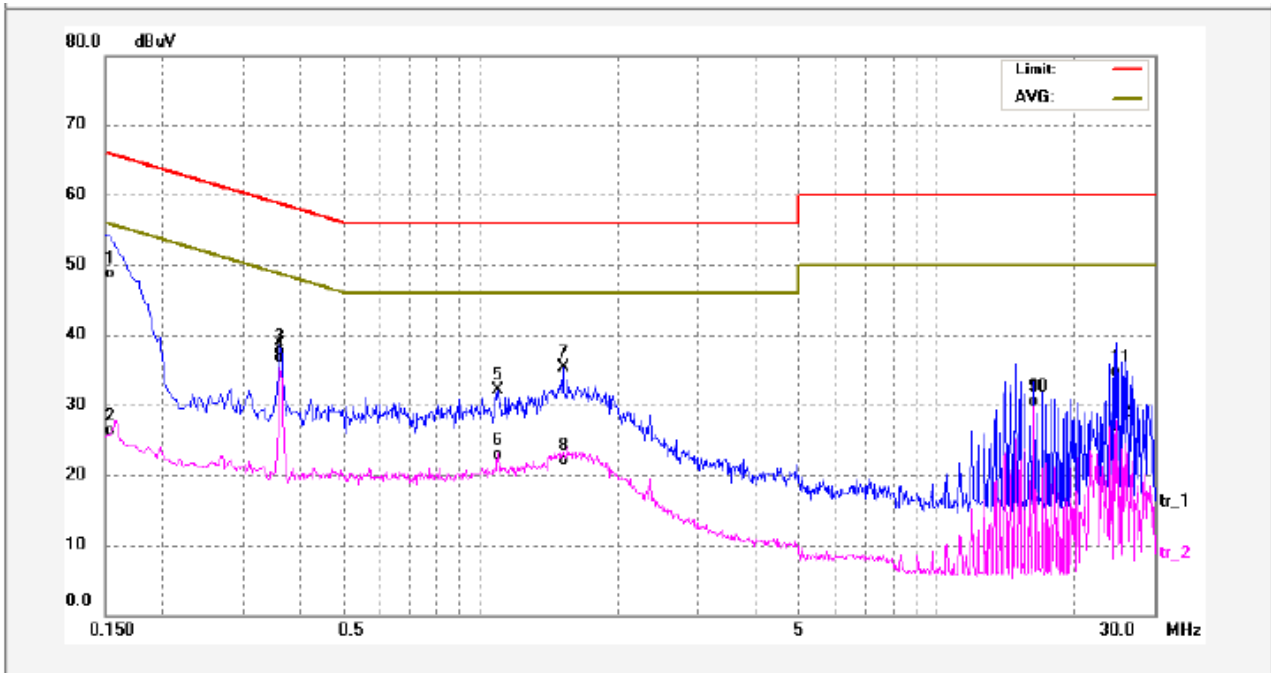

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	36.80	11.17	47.97	65.99	-18.02	QP	
2	0.1500	14.37	11.17	25.54	55.99	-30.45	AVG	
3	0.3620	25.56	11.31	36.87	58.68	-21.81	QP	
4	0.3620	24.56	11.31	35.87	48.68	-12.81	AVG	
5	1.0900	20.96	11.18	32.14	56.00	-23.86	peak	
6	1.0900	10.96	11.18	22.14	46.00	-23.86	AVG	
7	1.5140	24.16	11.19	35.35	56.00	-20.65	peak	
8	1.5140	10.16	11.19	21.35	46.00	-24.65	AVG	
9	16.3860	18.33	11.47	29.80	60.00	-30.20	QP	
10	16.3860	18.32	11.47	29.79	50.00	-20.21	AVG	
11	24.6740	22.36	11.56	33.92	60.00	-26.08	QP	
12	24.6740	14.46	11.56	26.02	50.00	-23.98	AVG	

Neutral line:

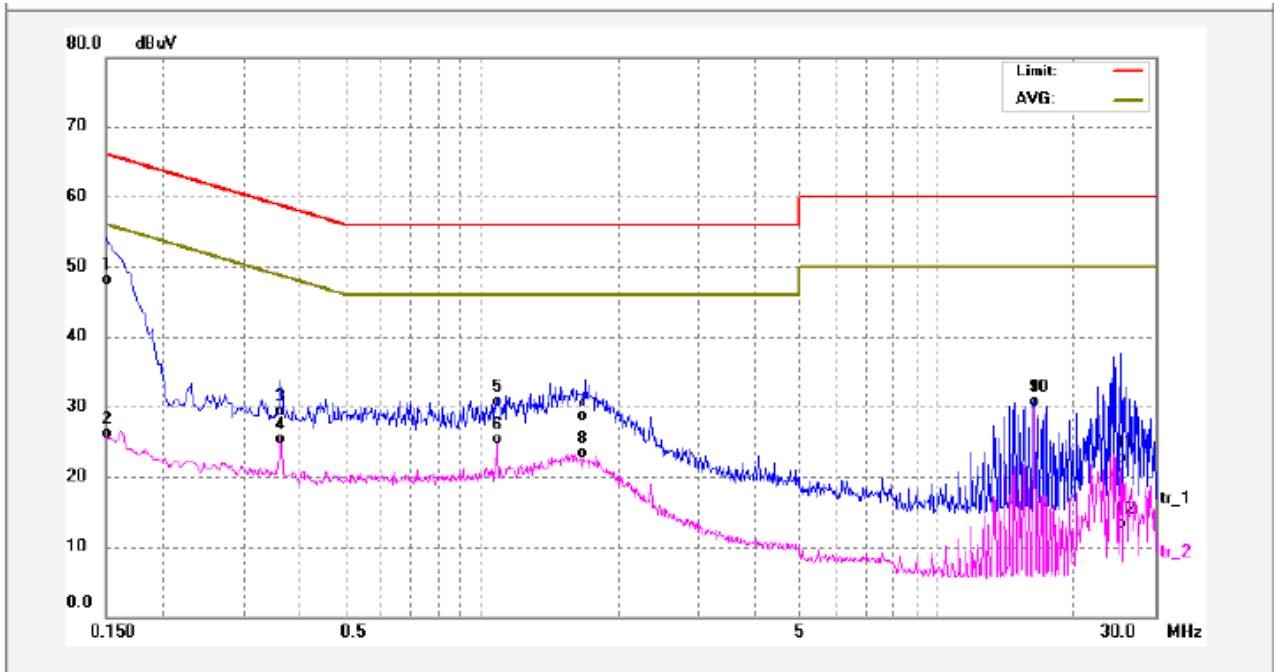


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	36.16	11.17	47.33	65.99	-18.66	QP	
2	0.1500	14.19	11.17	25.36	55.99	-30.63	AVG	
3	0.3620	17.22	11.31	28.53	58.68	-30.15	QP	
4	0.3620	13.26	11.31	24.57	48.68	-24.11	AVG	
5	1.0820	18.82	11.18	30.00	56.00	-26.00	QP	
6	1.0820	13.42	11.18	24.60	46.00	-21.40	AVG	
7	1.6860	16.71	11.19	27.90	56.00	-28.10	QP	
8	1.6860	11.35	11.19	22.54	46.00	-23.46	AVG	
9	16.3860	18.36	11.47	29.83	60.00	-30.17	QP	
10	16.3860	18.39	11.47	29.86	50.00	-20.14	AVG	
11	25.2420	10.37	11.57	21.94	60.00	-38.06	QP	
12	25.2420	0.88	11.57	12.45	50.00	-37.55	AVG	

Test model: PVi8500


Test Mode: MIC input

Live line:

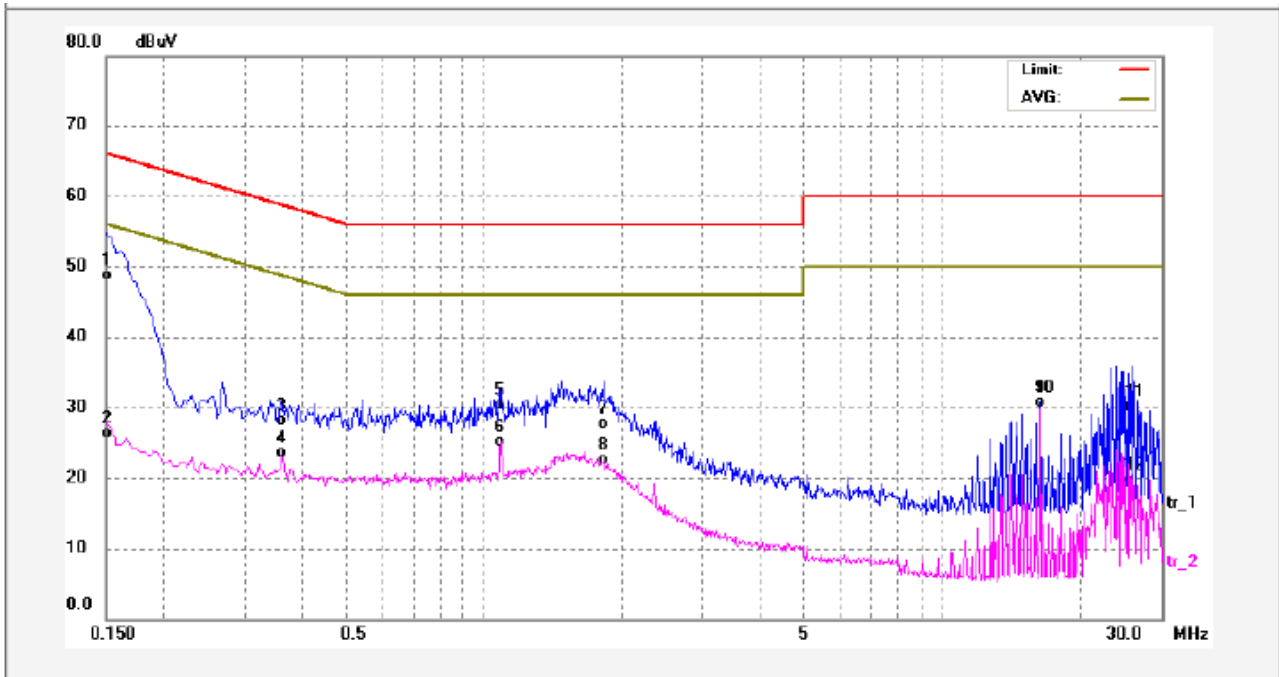

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	36.81	11.17	47.98	65.99	-18.01	QP	
2	0.1500	14.41	11.17	25.58	55.99	-30.41	AVG	
3	0.3620	16.07	11.31	27.38	58.68	-31.30	QP	
4	0.3620	11.33	11.31	22.64	48.68	-26.04	AVG	
5	1.0859	18.42	11.18	29.60	56.00	-26.40	QP	
6	1.0859	13.06	11.18	24.24	46.00	-21.76	AVG	
7	1.8220	15.73	11.20	26.93	56.00	-29.07	QP	
8	1.8220	10.46	11.20	21.66	46.00	-24.34	AVG	
9	16.3860	18.35	11.47	29.82	60.00	-30.18	QP	
10	16.3860	18.36	11.47	29.83	50.00	-20.17	AVG	
11	26.0900	17.77	11.55	29.32	60.00	-30.68	QP	
12	26.0900	7.44	11.55	18.99	50.00	-31.01	AVG	

Neutral line:

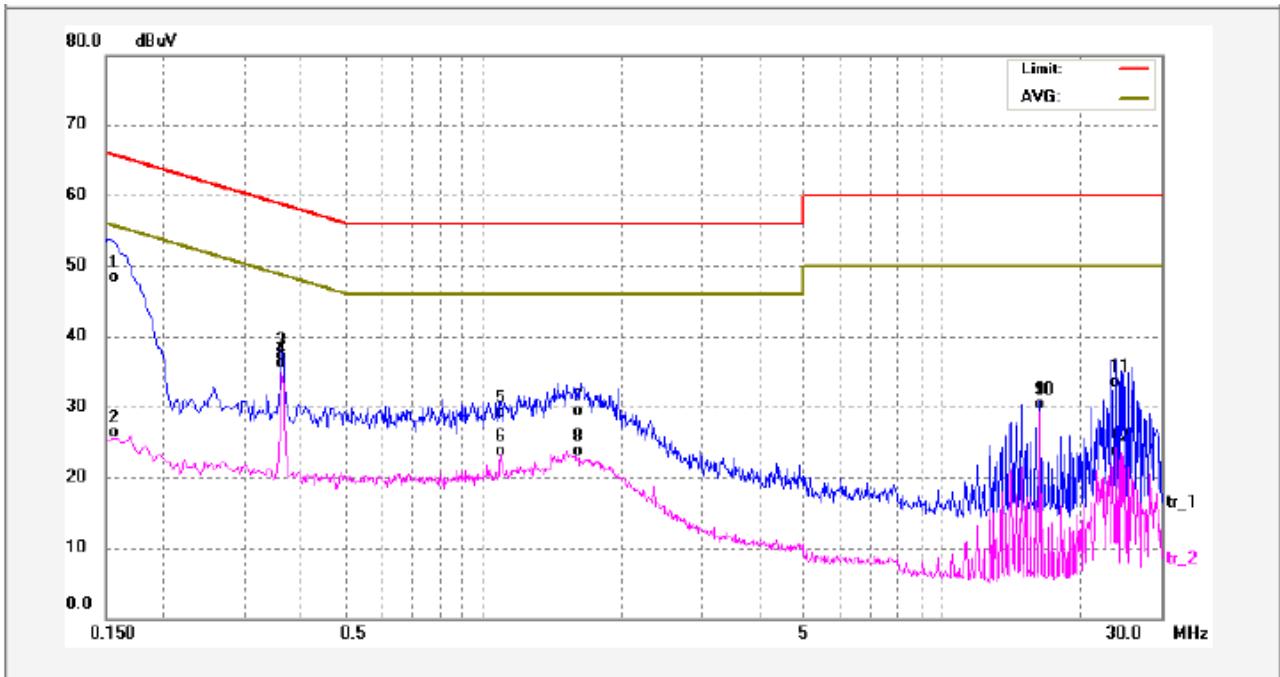


No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	36.24	11.18	47.42	65.78	-18.36	QP	
2	0.1539	14.34	11.18	25.52	55.78	-30.26	AVG	
3	0.3620	25.11	11.31	36.42	58.68	-22.26	QP	
4	0.3620	24.01	11.31	35.32	48.68	-13.36	AVG	
5	1.0900	17.12	11.18	28.30	56.00	-27.70	QP	
6	1.0900	11.64	11.18	22.82	46.00	-23.18	AVG	
7	1.6340	17.27	11.19	28.46	56.00	-27.54	QP	
8	1.6340	11.81	11.19	23.00	46.00	-23.00	AVG	
9	16.3860	18.02	11.47	29.49	60.00	-30.51	QP	
10	16.3860	18.02	11.47	29.49	50.00	-20.51	AVG	
11	23.9540	21.11	11.55	32.66	60.00	-27.34	QP	
12	23.9540	11.40	11.55	22.95	50.00	-27.05	AVG	

Test model: PVi6500


Test Mode: BT linking

Live line:

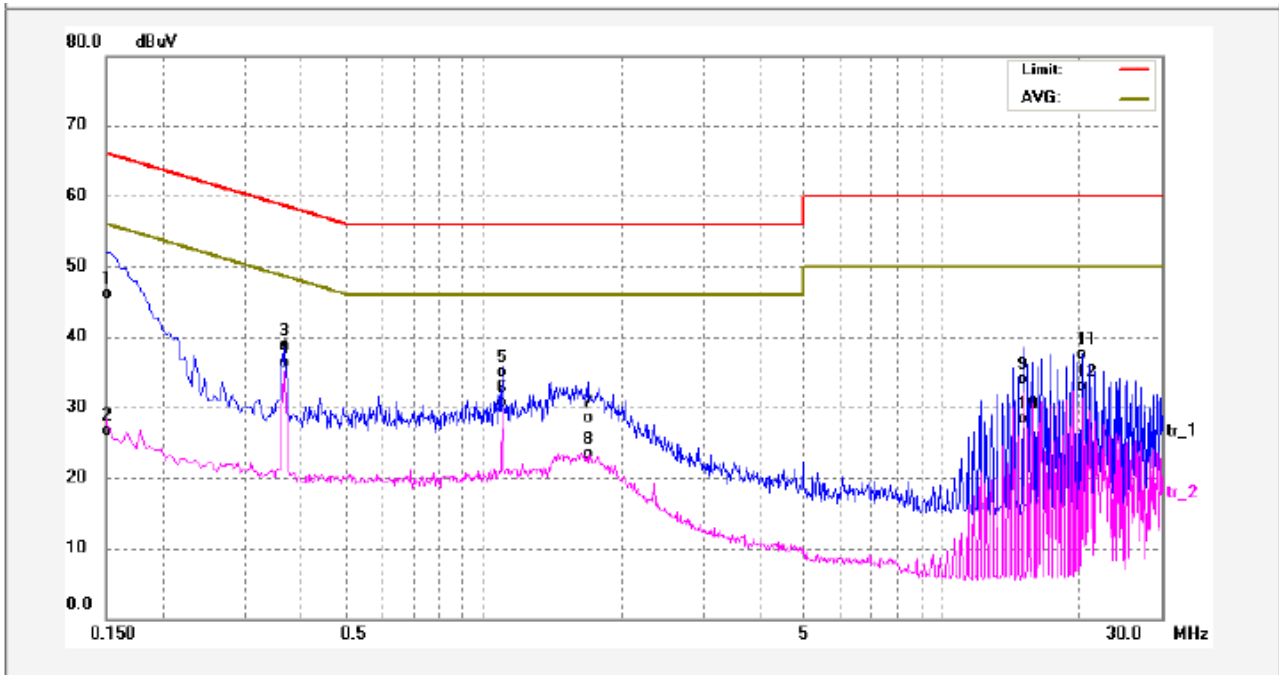

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1500	34.20	11.17	45.37	65.99	-20.62	QP	
2	0.1500	14.69	11.17	25.86	55.99	-30.13	AVG	
3	0.3660	26.50	11.31	37.81	58.59	-20.78	QP	
4	0.3660	24.15	11.31	35.46	48.59	-13.13	AVG	
5	1.0980	22.84	11.18	34.02	56.00	-21.98	QP	
6	1.0980	18.64	11.18	29.82	46.00	-16.18	AVG	
7	1.6820	16.61	11.19	27.80	56.00	-28.20	QP	
8	1.6820	11.30	11.19	22.49	46.00	-23.51	AVG	
9	14.9940	21.71	11.46	33.17	60.00	-26.83	QP	
10	14.9940	15.99	11.46	27.45	50.00	-22.55	AVG	
11	20.1180	25.25	11.49	36.74	60.00	-23.26	QP	
12	20.1180	20.65	11.49	32.14	50.00	-17.86	AVG	

Neutral line:

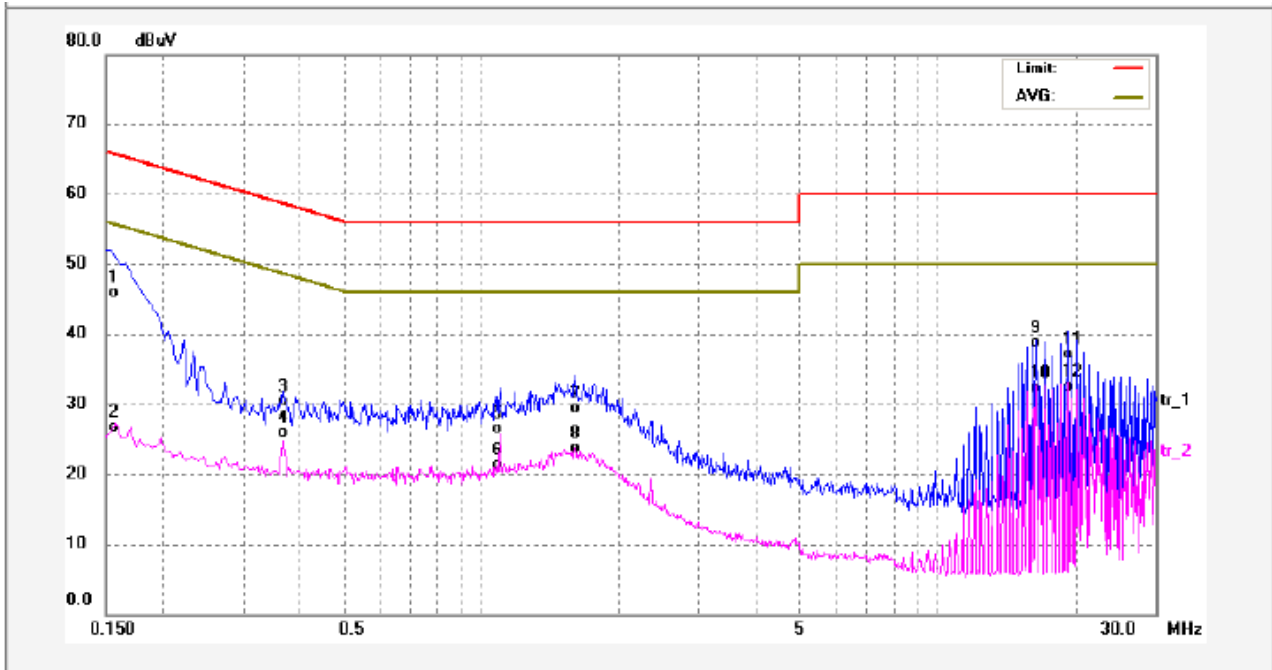

No.	Freq. (MHz)	Reading (dBuV)	Factor (dB)	Result (dBuV)	Limit dBuV	Margin (dB)	Detector	Remark
1	0.1539	33.99	11.18	45.17	65.78	-20.61	QP	
2	0.1539	14.67	11.18	25.85	55.78	-29.93	AVG	
3	0.3660	18.25	11.31	29.56	58.59	-29.03	QP	
4	0.3660	13.82	11.31	25.13	48.59	-23.46	AVG	
5	1.0820	14.58	11.18	25.76	56.00	-30.24	QP	
6	1.0820	9.26	11.18	20.44	46.00	-25.56	AVG	
7	1.6060	17.25	11.19	28.44	56.00	-27.56	QP	
8	1.6060	11.80	11.19	22.99	46.00	-23.01	AVG	
9	16.4619	26.34	11.47	37.81	60.00	-22.19	QP	
10	16.4619	20.08	11.47	31.55	50.00	-18.45	AVG	
11	19.3900	24.80	11.49	36.29	60.00	-23.71	QP	
12	19.3900	20.14	11.49	31.63	50.00	-18.37	AVG	

7 Spurious Radiated Emissions

Test Requirement: FCC CFR47 Part 15 Section 15.209 & 15.247

Test Method: DA 00-705

Test Result: PASS

Frequency Range: 16MHz to 25GHz

Measurement Distance: 3m

Limit:

Frequency (MHz)	Field Strength		Field Strength Limit at 3m Measurement Dist	
	uV/m	Distance (m)	uV/m	dBuV/m
0.009 ~ 0.490	2400/F(kHz)	300	10000 * 2400/F(kHz)	$20\log^{(2400/F(kHz))} + 80$
0.490 ~ 1.705	24000/F(kHz)	30	100 * 24000/F(kHz)	$20\log^{(24000/F(kHz))} + 40$
1.705 ~ 30	30	30	100 * 30	$20\log^{(30)} + 40$
30 ~ 88	100	3	100	$20\log^{(100)}$
88 ~ 216	150	3	150	$20\log^{(150)}$
216 ~ 960	200	3	200	$20\log^{(200)}$
Above 960	500	3	500	$20\log^{(500)}$

7.1 EUT Operation :

Operating Environment:

Temperature: 25.5 °C


Humidity: 51 % RH

Atmospheric Pressure: 1012 mbar


7.2 Test Setup

The radiated emission tests were performed in the 3m Semi- Anechoic Chamber test site, using the setup accordance with the ANSI C63.4: 2003.


The test setup for emission measurement below 30MHz.

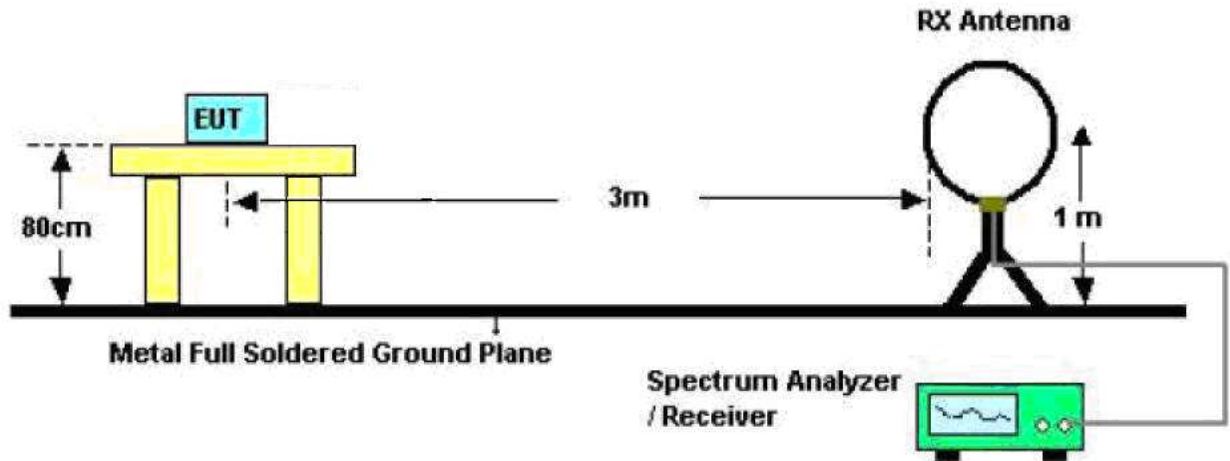

The test setup for emission measurement from 30 MHz to 1 GHz.

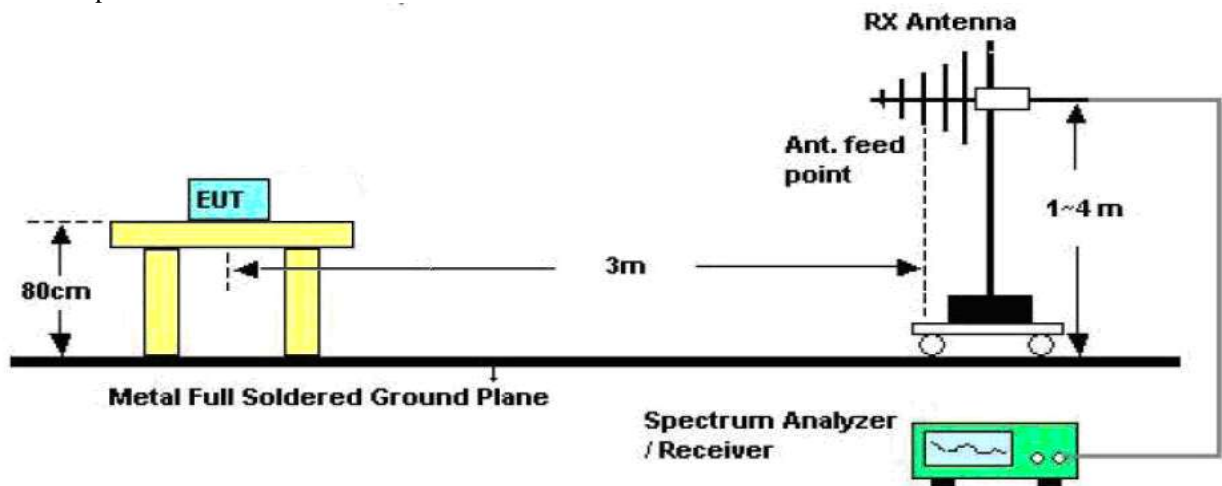

The test setup for emission measurement above 1 GHz.

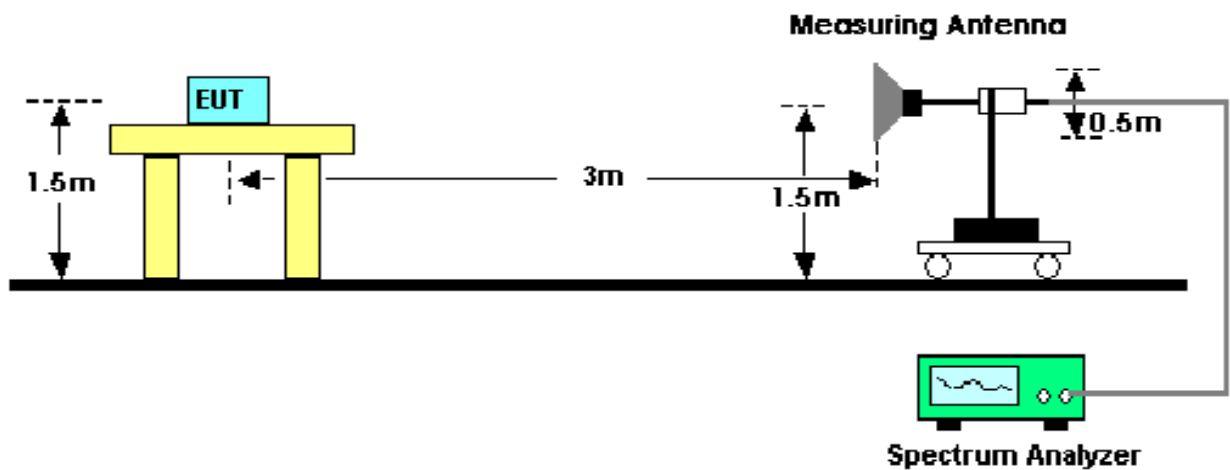

7.3 Spectrum Analyzer Setup

According to FCC Part15 Rules, the system was tested 16MHz to 25000MHz.

Below 30MHz

Sweep SpeedAuto
IF Bandwidth10KHz
Video Bandwidth10KHz
Resolution Bandwidth10KHz

30MHz ~ 1GHz

Sweep SpeedAuto
IF Bandwidth120 KHz
Video Bandwidth100KHz
Quasi-Peak Adapter Bandwidth120 KHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth100KHz

Above 1GHz

Sweep SpeedAuto
IF Bandwidth120 KHz
Video Bandwidth3MHz
Quasi-Peak Adapter Bandwidth120 KHz
Quasi-Peak Adapter ModeNormal
Resolution Bandwidth1MHz

7.4 Test Procedure

1. The EUT is placed on a turntable, which is 0.8m above ground plane.
2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
3. EUT is set 3m away from the receiving antenna, which is moved from 1m to 4m to find out the maximum emissions.
4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
6. Repeat above procedures until the measurements for all frequencies are complete.
7. The radiation measurements are tested under 3-axes(X,Y,Z) position(X denotes lying on the table, Y denotes side stand and Z denotes vertical stand), After pre-test, It was found that the worse radiation emission was get at the X position. So the data shown was the X position only.

7.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain}$$

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -7dB means the emission is 7dB below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{Limit}$$

7.6 Summary of Test Results

Test Frequency :Below 30MHz


All emissions were more than 20 dB below the limit and therefore not reported.

Test Frequency : 30MHz ~ 1000MHz

Test model: PVi8500


Test Mode: BT linking

Antenna polarization: Vertical

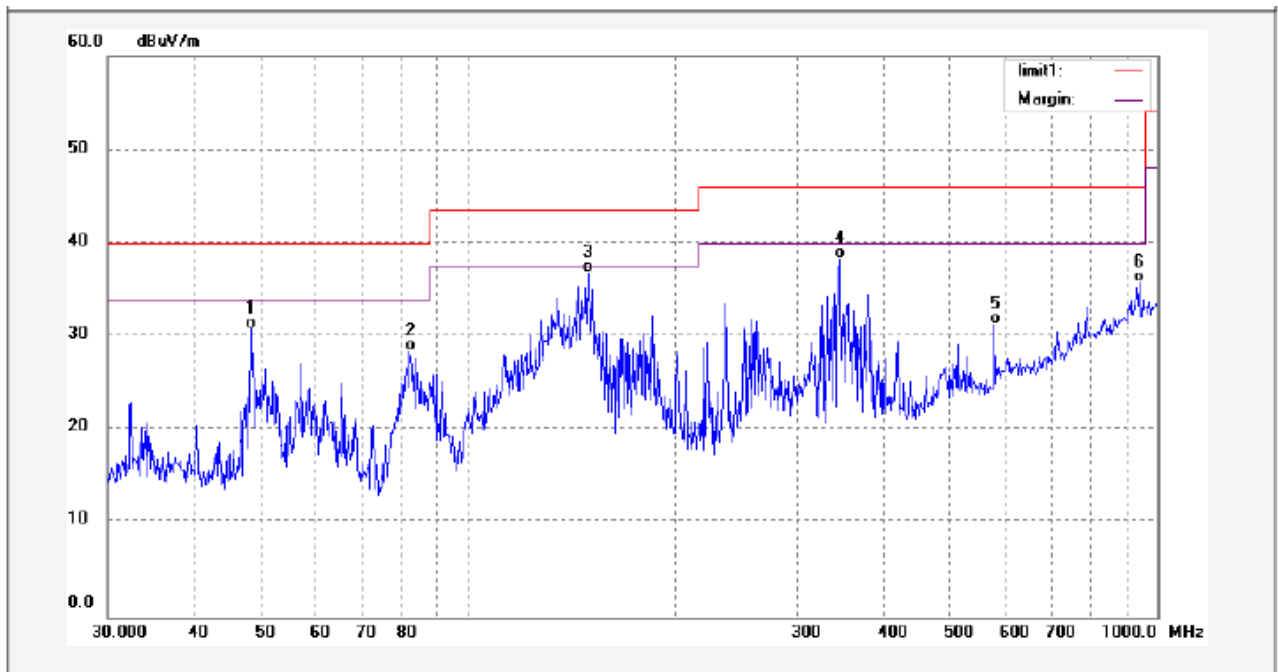

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	48.3780	16.18	14.63	30.81	40.00	-9.19	QP	
2	82.2363	18.90	9.53	28.43	40.00	-11.57	QP	
3	149.4416	25.72	11.09	36.81	43.50	-6.69	QP	
4	346.0740	18.13	20.17	38.30	46.00	-7.70	QP	
5	580.0705	6.90	24.38	31.28	46.00	-14.72	QP	
6	942.0180	3.95	31.77	35.72	46.00	-10.28	QP	

Antenna polarization: Horizontal

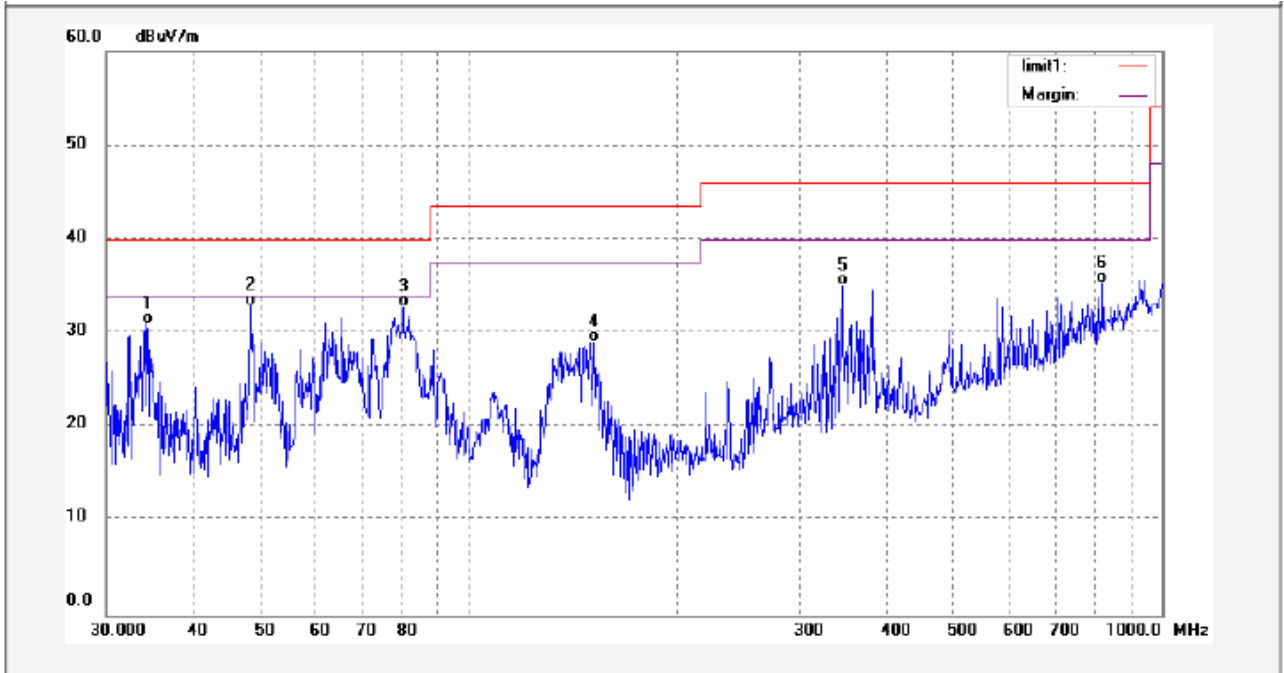


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	34.2852	14.55	16.50	31.05	40.00	-8.95	QP	
2	48.3780	18.24	14.63	32.87	40.00	-7.13	QP	
3	80.5207	23.60	9.23	32.83	40.00	-7.17	QP	
4	151.5567	18.09	11.00	29.09	43.50	-14.41	QP	
5	346.0740	14.88	20.17	35.05	46.00	-10.95	QP	
6	821.3871	5.85	29.53	35.38	46.00	-10.62	QP	

Test model: PVi8500


Test Mode: SD playing

Antenna polarization: Vertical

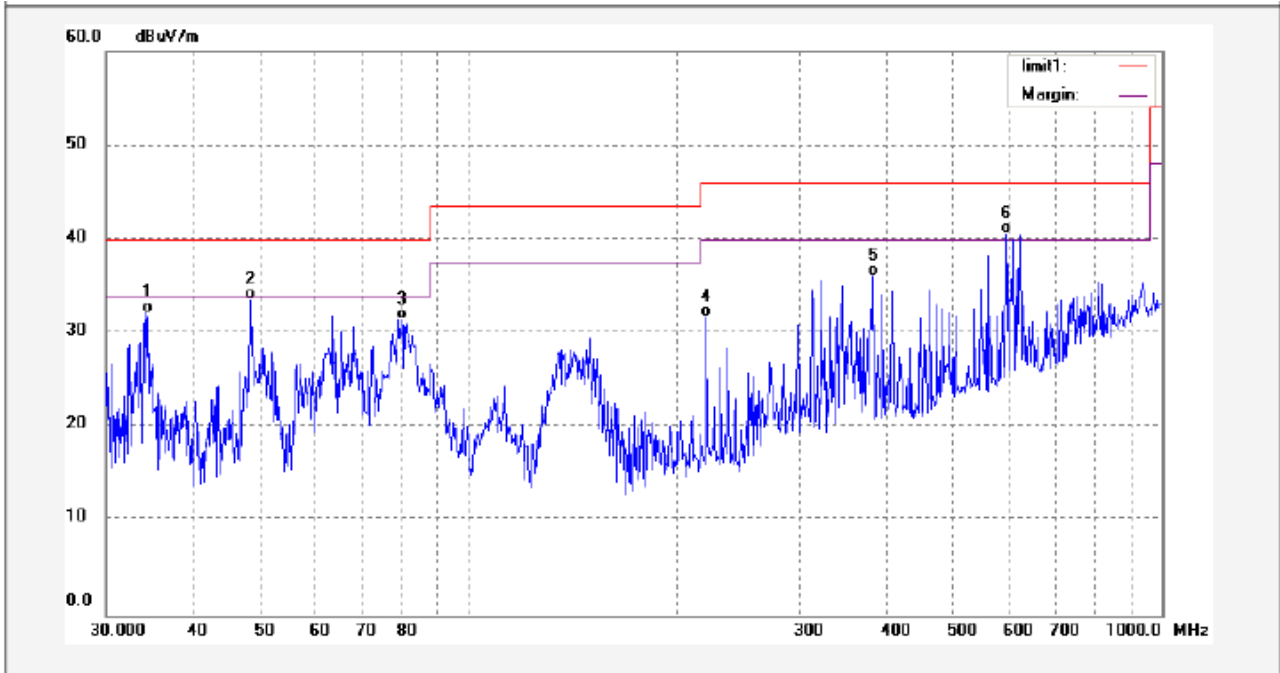

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	34.2852	15.69	16.50	32.19	40.00	-7.81	QP	
2	48.3780	18.94	14.63	33.57	40.00	-6.43	QP	
3	80.2383	22.28	9.19	31.47	40.00	-8.53	QP	
4	220.7241	15.50	16.17	31.67	46.00	-14.33	QP	
5	383.1960	15.90	20.18	36.08	46.00	-9.92	QP	
6	596.6068	15.22	25.43	40.65	46.00	-5.35	QP	

Antenna polarization: Horizontal

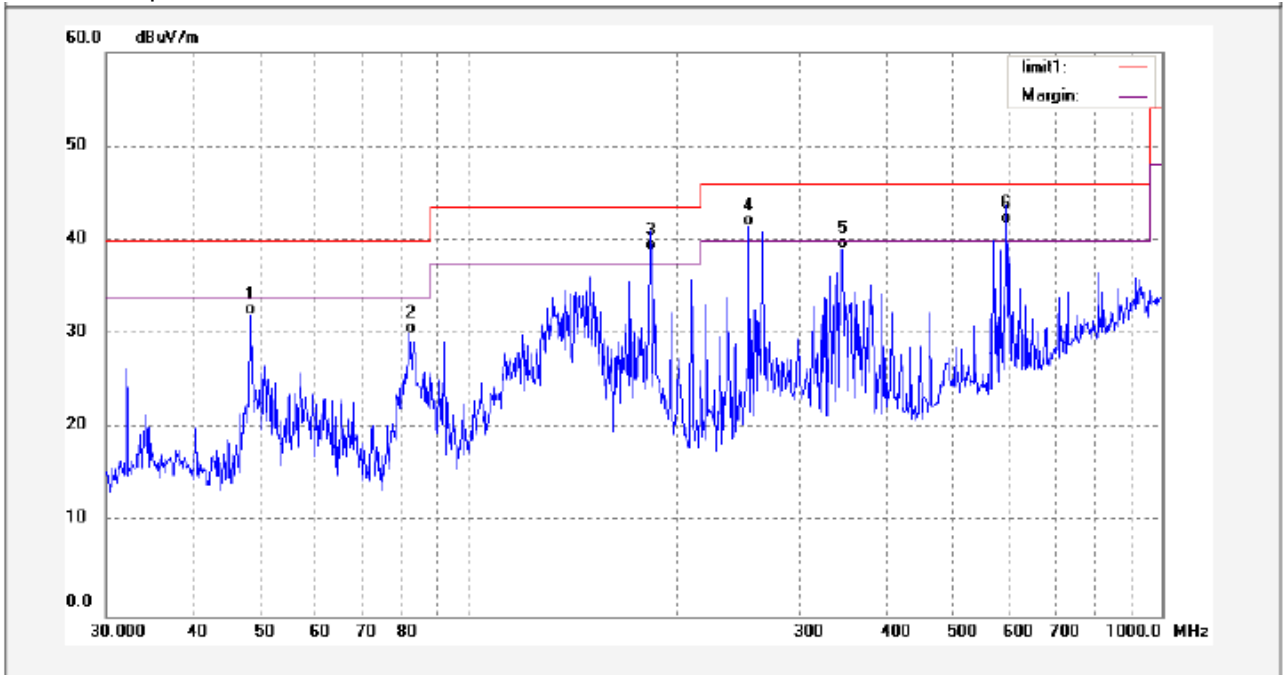


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	48.3780	17.34	14.63	31.97	40.00	-8.03	QP	
2	82.2363	20.48	9.53	30.01	40.00	-9.99	QP	
3	182.5785	25.37	13.58	38.95	43.50	-4.55	QP	
4	254.0312	25.58	15.92	41.50	46.00	-4.50	QP	
5	344.8602	18.89	20.17	39.06	46.00	-6.94	QP	
6	596.6068	16.37	25.43	41.80	46.00	-4.20	QP	

Test model: PVi8500


Test Mode: MIC input

Antenna polarization: Vertical

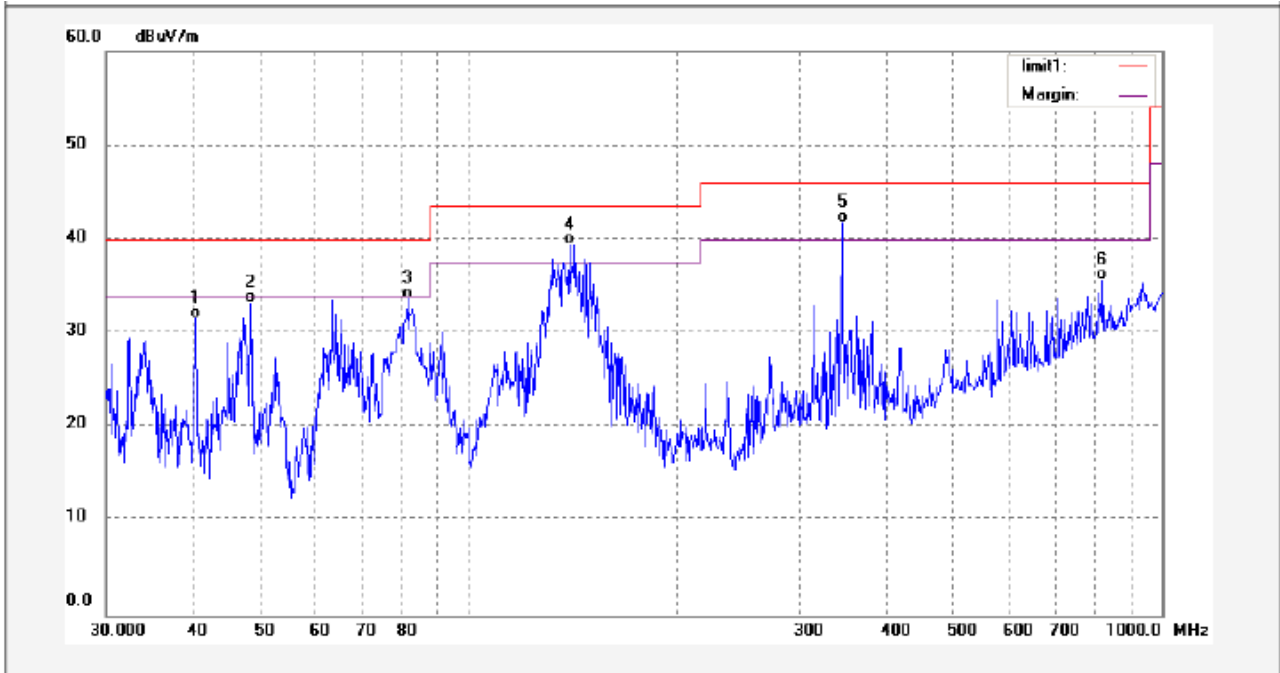

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	40.4413	15.58	15.94	31.52	40.00	-8.48	QP	
2	48.3780	18.59	14.63	33.22	40.00	-6.78	QP	
3	81.6604	24.22	9.44	33.66	40.00	-6.34	QP	
4	139.7909	27.65	11.68	39.33	43.50	-4.17	QP	
5	346.0740	21.54	20.17	41.71	46.00	-4.29	QP	
6	821.3871	6.10	29.53	35.63	46.00	-10.37	QP	

Antenna polarization: Horizontal

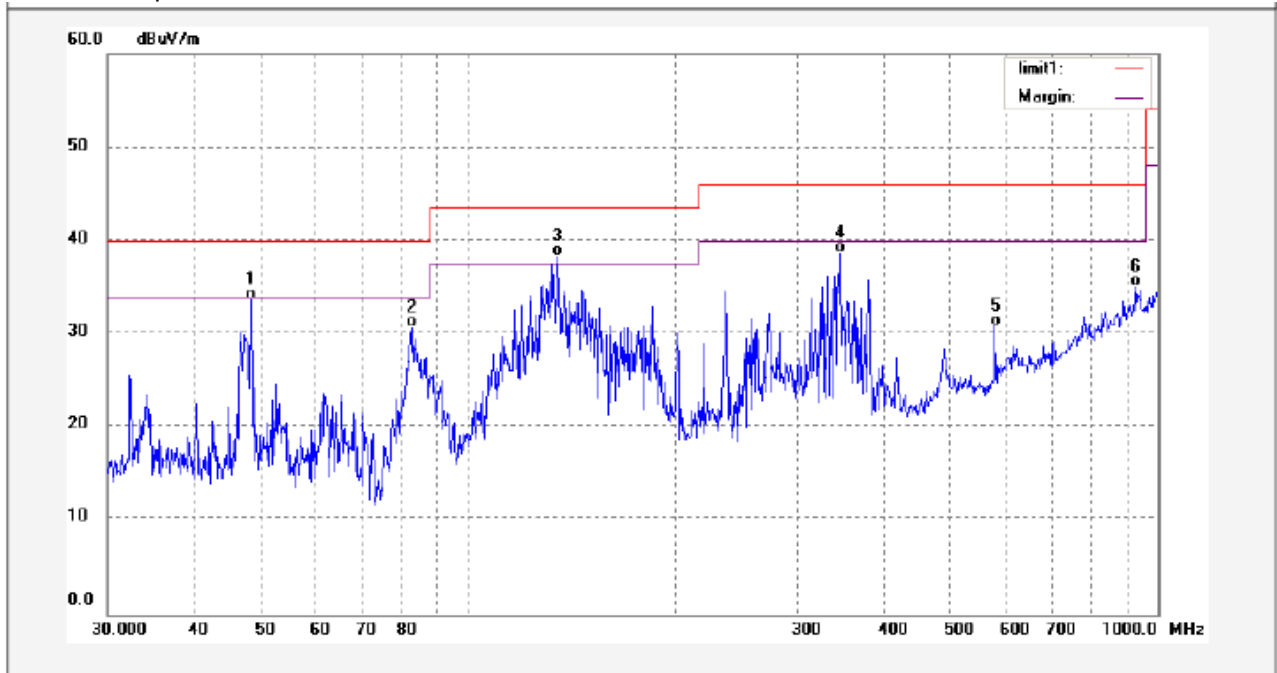


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	48.3780	19.05	14.63	33.68	40.00	-6.32	QP	
2	83.1076	21.03	9.68	30.71	40.00	-9.29	QP	
3	134.9645	26.17	12.12	38.29	43.50	-5.21	QP	
4	346.0740	18.45	20.17	38.62	46.00	-7.38	QP	
5	580.0705	6.49	24.38	30.87	46.00	-15.13	QP	
6	928.8711	3.23	31.85	35.08	46.00	-10.92	QP	

Test model: PVi6500


Test Mode: BT linking

Antenna polarization: Vertical

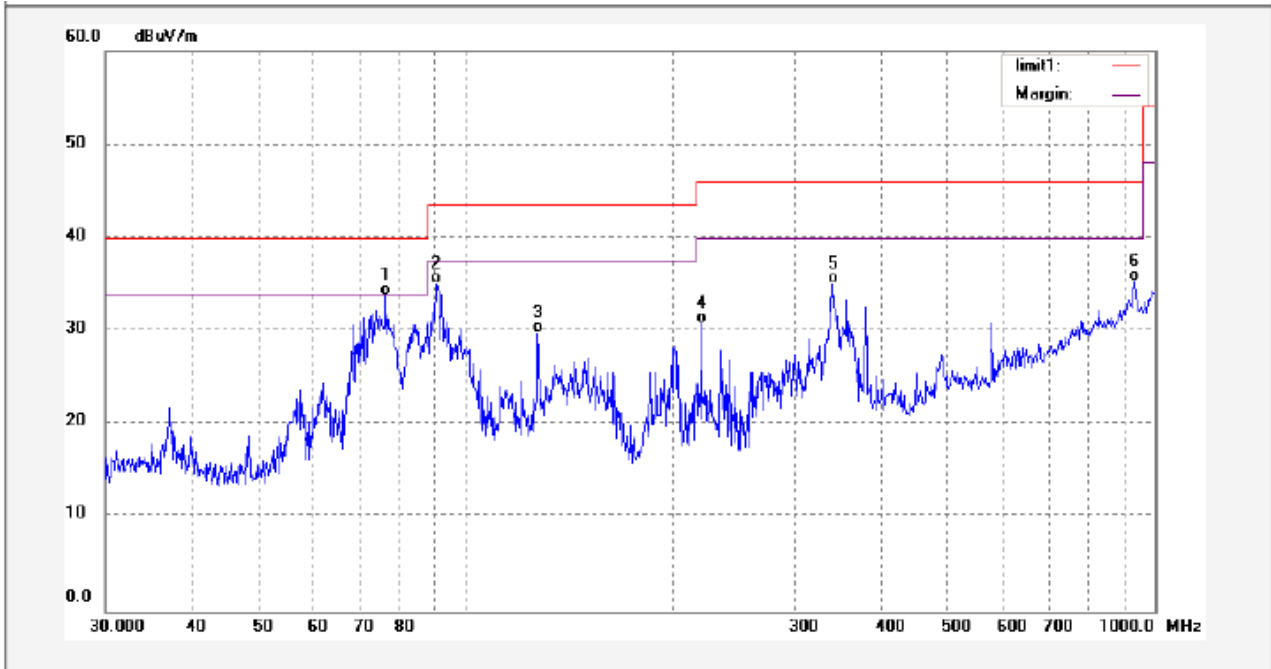

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	76.3869	24.67	9.17	33.84	40.00	-6.16	QP	
2	90.7380	23.17	11.88	35.05	43.50	-8.45	QP	
3	127.1390	18.03	11.74	29.77	43.50	-13.73	QP	
4	219.9500	14.70	16.13	30.83	46.00	-15.17	QP	
5	340.0473	14.73	20.23	34.96	46.00	-11.04	QP	
6	935.4214	3.41	31.89	35.30	46.00	-10.70	QP	

Antenna polarization: Horizontal

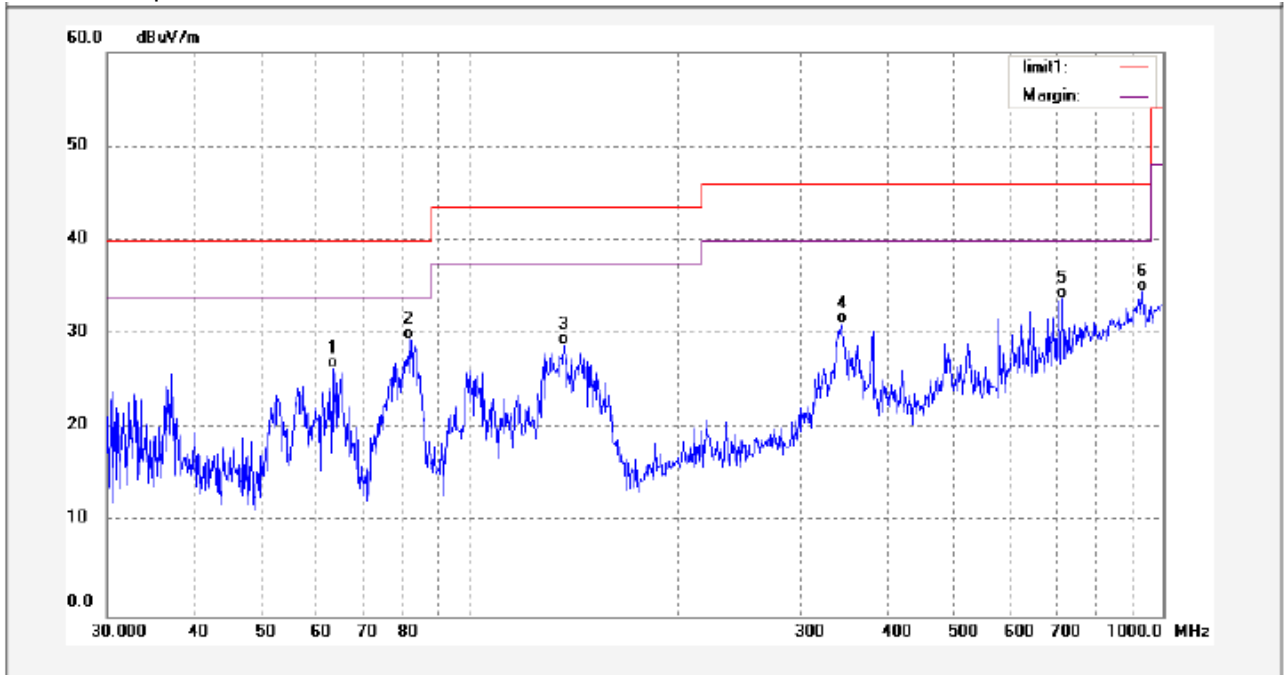


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	63.4080	14.81	11.51	26.32	40.00	-13.68	QP	
2	81.9477	19.95	9.48	29.43	40.00	-10.57	QP	
3	136.8747	16.87	11.94	28.81	43.50	-14.69	QP	
4	344.8601	10.97	20.17	31.14	46.00	-14.86	QP	
5	716.2037	7.37	26.49	33.86	46.00	-12.14	QP	
6	935.4214	2.66	31.89	34.55	46.00	-11.45	QP	

Test mode: transmitting at lower channel


Remark: the EUT was pretested at the upper, middle and lower channel, and the worse case was the low Channel, so the data show was the lower channel only.

Antenna polarization: Vertical

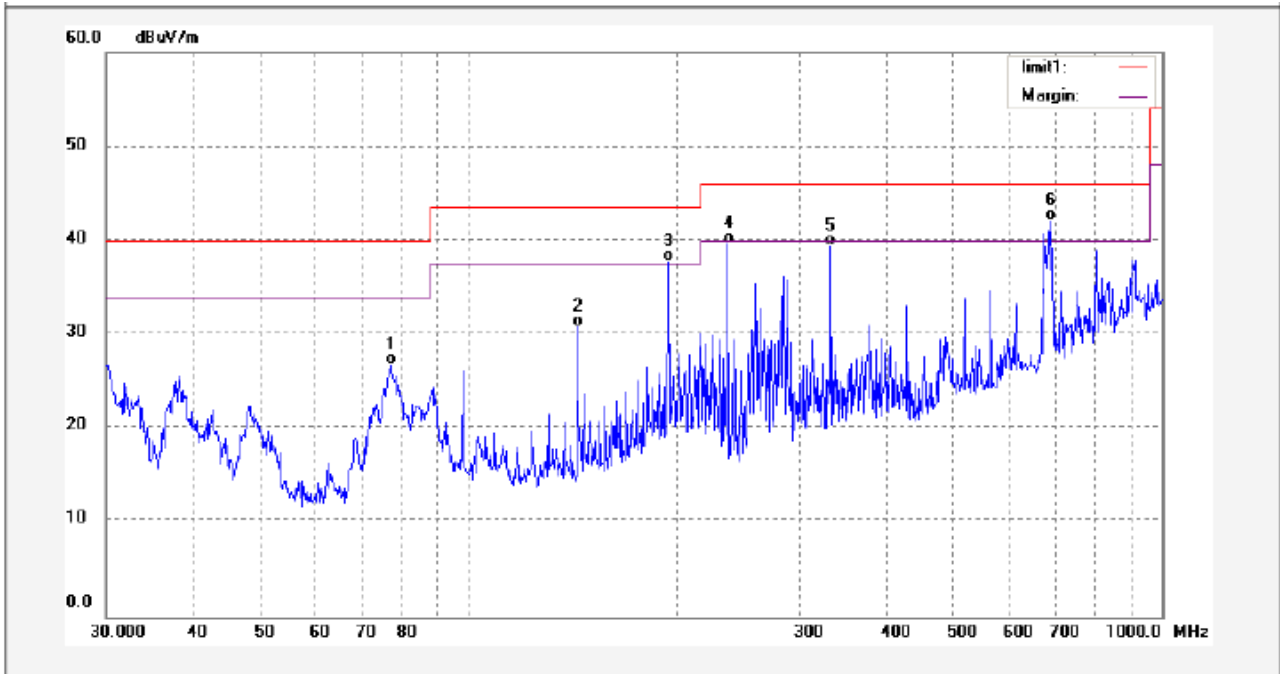

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	77.1963	17.54	9.17	26.71	40.00	-13.29	QP	
2	143.7760	19.47	11.39	30.86	43.50	-12.64	QP	
3	194.4985	22.86	14.81	37.67	43.50	-5.83	QP	
4	236.7928	24.03	15.66	39.69	46.00	-6.31	QP	
5	332.9536	19.97	19.47	39.44	46.00	-6.56	QP	
6	689.0510	15.79	26.26	42.05	46.00	-3.95	QP	


Antenna polarization: Horizontal

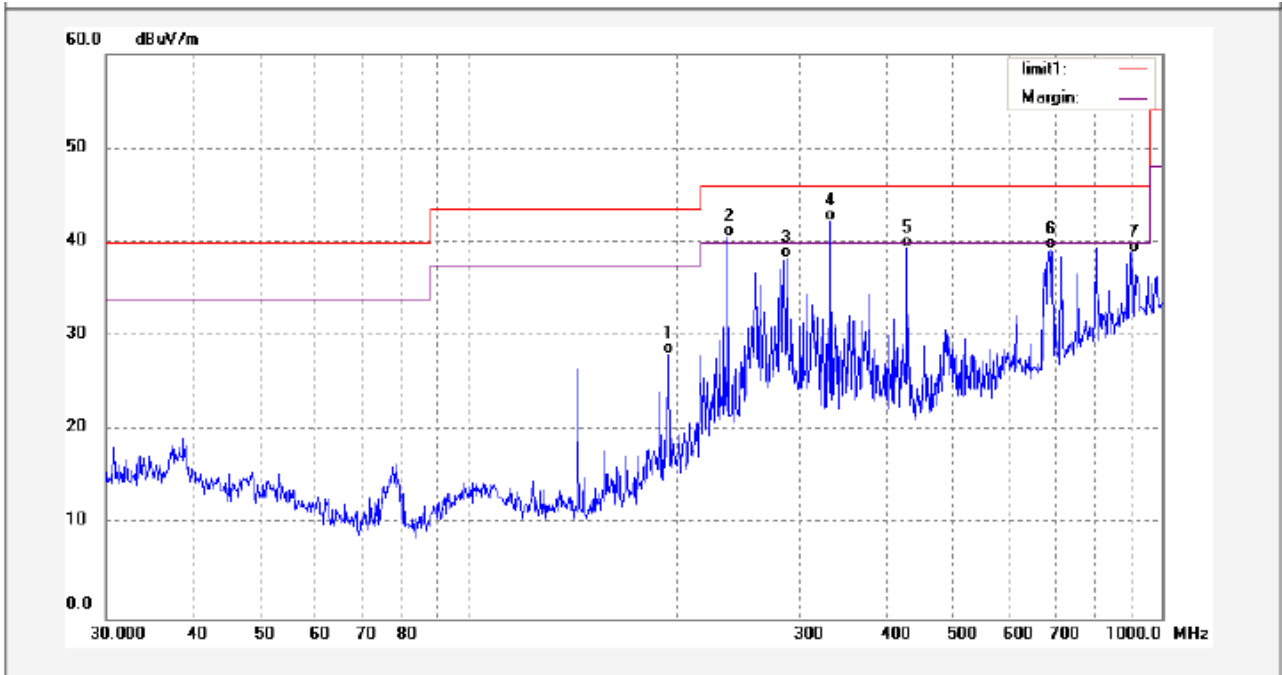

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	194.4985	13.38	14.81	28.19	43.50	-15.31	QP	
2	236.7928	24.92	15.66	40.58	46.00	-5.42	QP	
3	288.2840	21.62	16.64	38.26	46.00	-7.74	QP	
4	332.9536	22.79	19.46	42.25	46.00	-3.75	QP	
5	428.7960	18.83	20.50	39.33	46.00	-6.67	QP	
6	689.0510	13.02	26.26	39.28	46.00	-6.72	QP	
7	909.4941	7.61	31.38	38.99	46.00	-7.01	QP	


Test mode: receiving whole band

Antenna polarization: Vertical

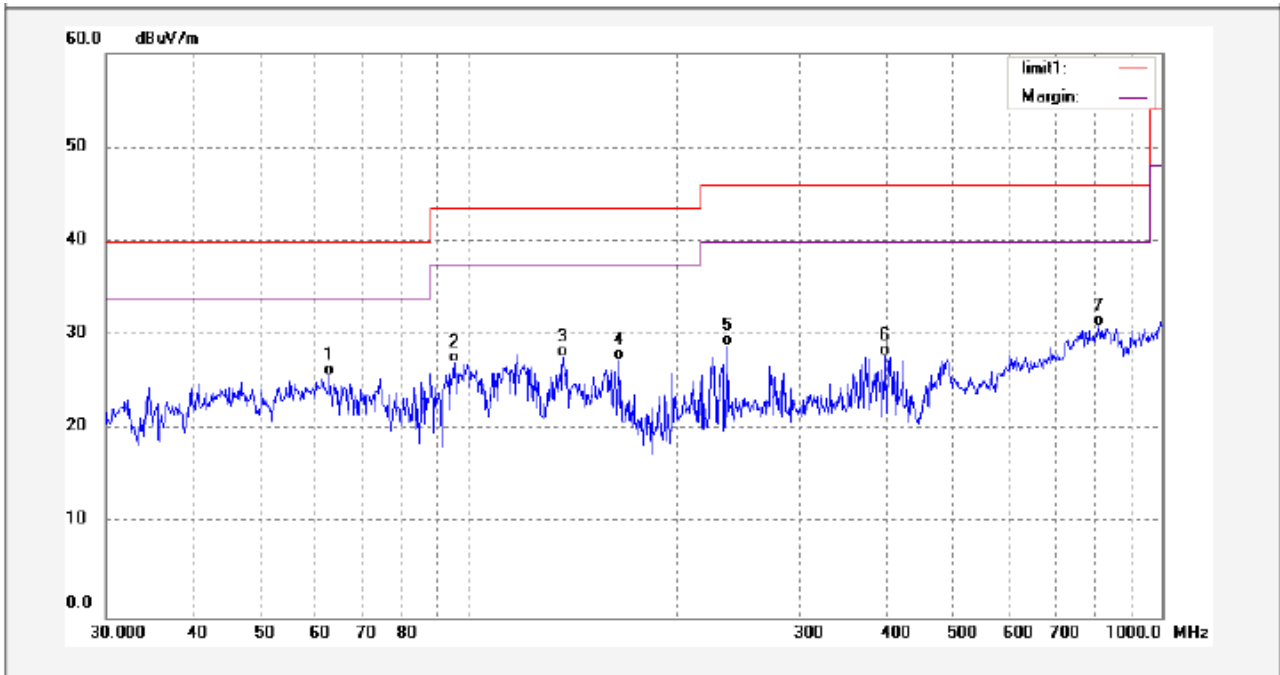

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	62.9639	14.06	11.64	25.70	40.00	-14.30	QP	
2	95.3130	13.89	13.21	27.10	43.50	-16.40	QP	
3	136.8746	15.72	11.94	27.66	43.50	-15.84	QP	
4	164.8911	15.44	11.94	27.38	43.50	-16.12	QP	
5	236.7926	13.26	15.66	28.92	46.00	-17.08	QP	
6	399.6981	6.91	20.91	27.82	46.00	-18.18	QP	
7	812.7744	1.83	29.22	31.05	46.00	-14.95	QP	

Antenna polarization: Horizontal

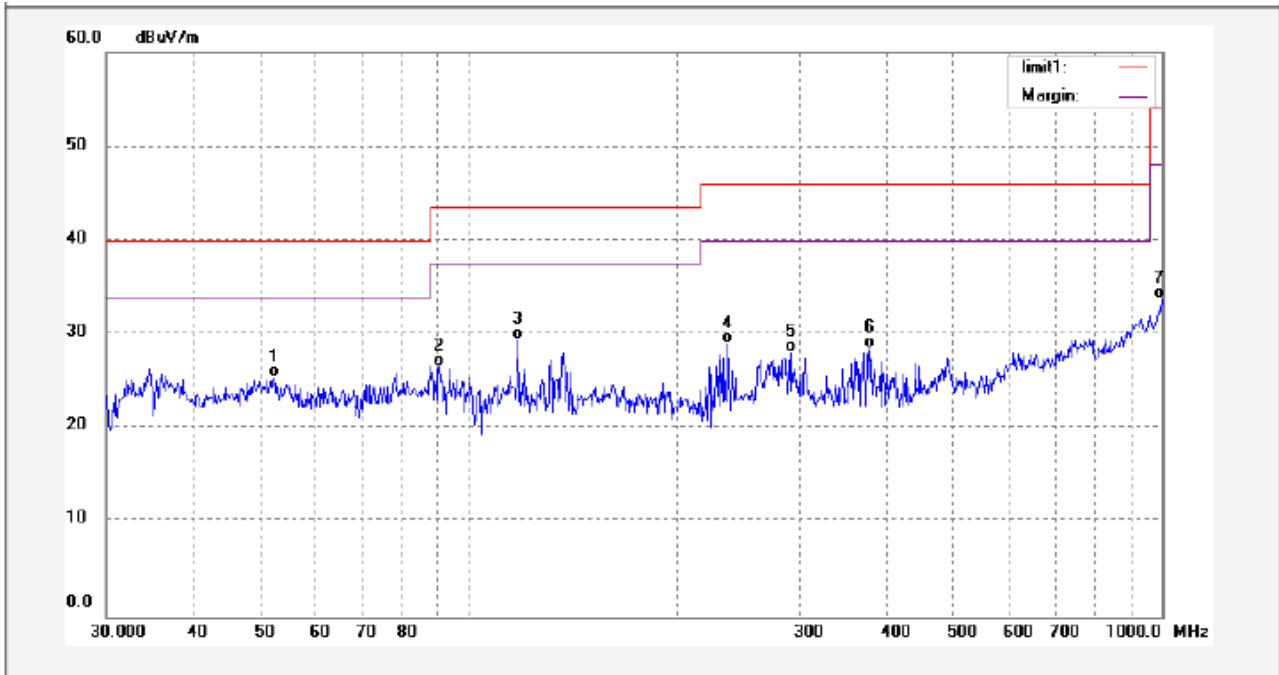

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	52.4498	11.00	14.39	25.39	40.00	-14.61	QP	
2	90.7379	14.80	11.88	26.68	43.50	-16.82	QP	
3	117.6814	17.25	12.24	29.49	43.50	-14.01	QP	
4	236.7926	13.42	15.66	29.08	46.00	-16.92	QP	
5	291.3387	11.43	16.75	28.18	46.00	-17.82	QP	
6	379.1779	8.52	20.05	28.57	46.00	-17.43	QP	
7	1000.0000	1.22	32.55	33.77	54.00	-20.23	QP	


Test Frequency: 1GHz ~ 18GHz

All emissions were more than 20 dB below the limit and therefore not reported.

AV = Peak +20Log₁₀(duty cycle) =PK+(-9)=PK-9 [refer to section 8 for more detail]

Test mode: transmitting at lower channel


Antenna polarization: Vertical

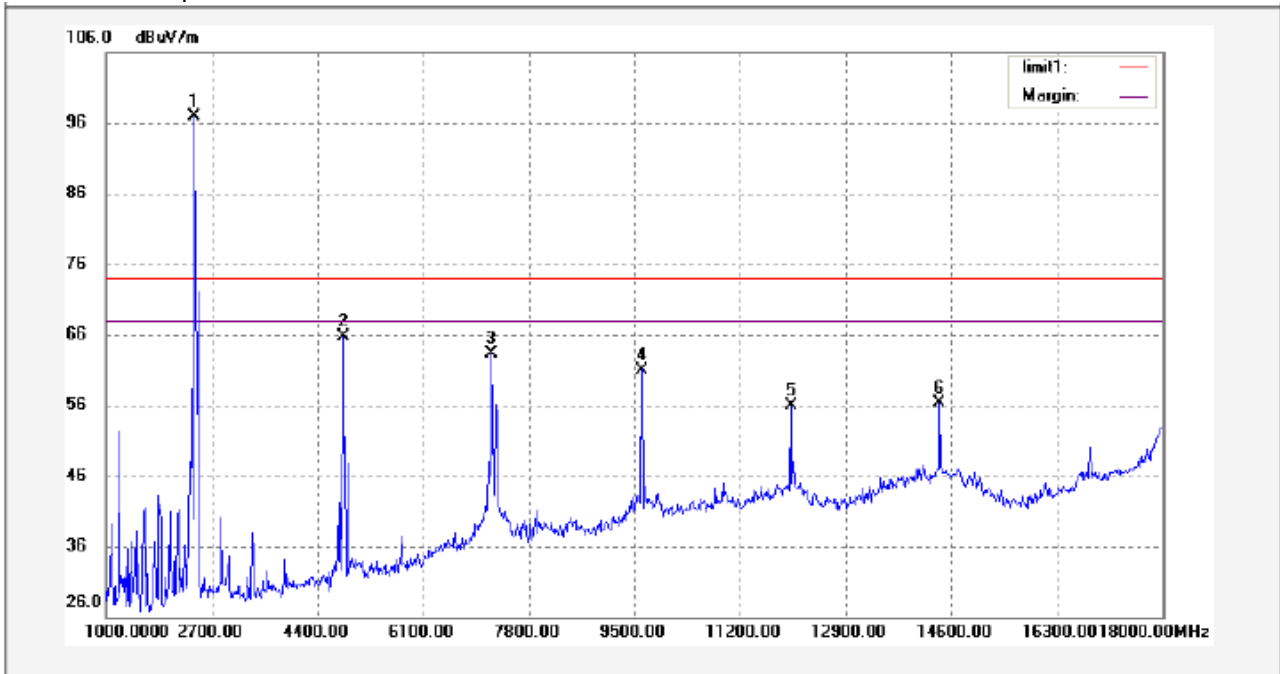

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	112.61	-15.61	97.00	74.00	23.00	peak	
2	4808.000	77.70	-11.97	65.73	74.00	-8.27	peak	
3	7205.000	70.54	-7.21	63.33	74.00	-10.67	peak	
4	9619.000	66.70	-5.70	61.00	74.00	-13.00	peak	
5	12016.000	60.45	-4.47	55.98	74.00	-18.02	peak	
6	14413.000	55.94	0.41	56.35	74.00	-17.65	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2402.000	-9	88	54.00	34.00	AV	
2	4808.000	-9	52.73	54.00	-2.73	AV	
3	7205.000	-9	51.33	54.00	-2.33	AV	
4	9619.000	-9	52	54.00	-2.00	AV	
5	12016.000	-9	46.98	54.00	-7.02	AV	
6	14413.000	-9	47.35	54.00	-6.65	AV	

Antenna polarization: Horizontal

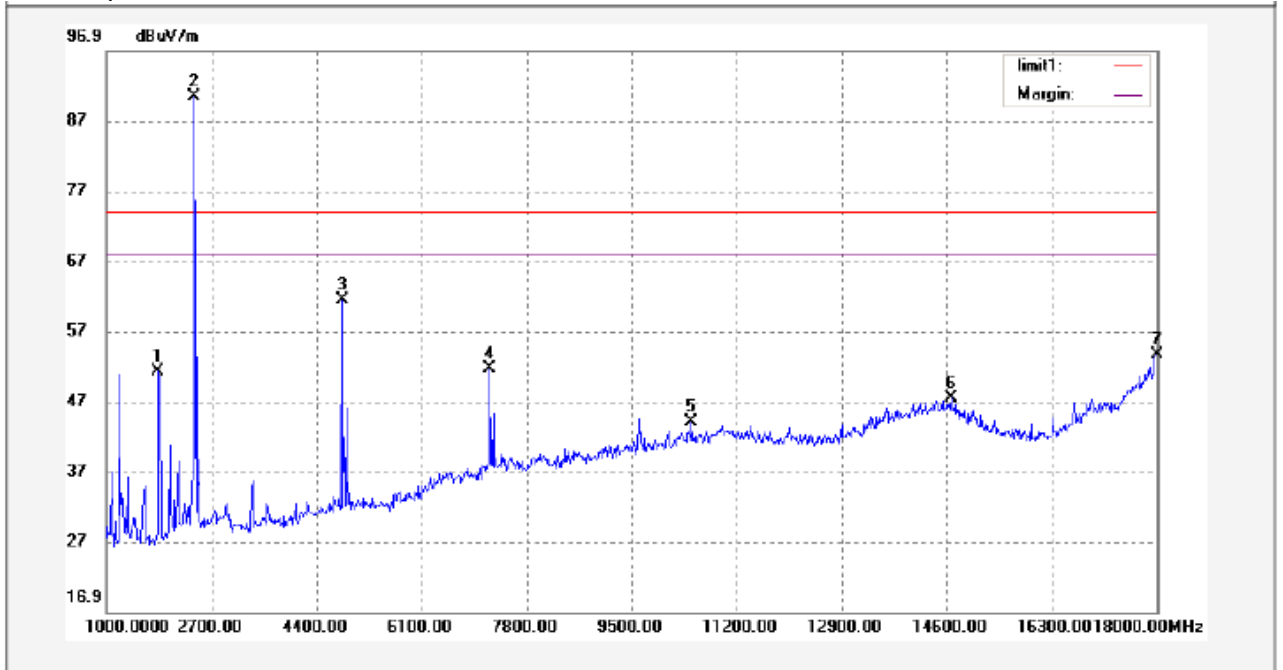


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	68.78	-17.50	51.28	74.00	-22.72	peak	
2	2402.000	106.06	-15.59	90.47	74.00	16.47	peak	
3	4808.000	73.29	-11.97	61.32	74.00	-12.68	peak	
4	7205.000	58.74	-7.21	51.53	74.00	-22.47	peak	
5	10469.000	48.17	-4.26	43.91	74.00	-30.09	peak	
6	14668.000	47.04	0.33	47.37	74.00	-26.63	peak	
7	18000.000	46.60	7.08	53.68	74.00	-20.32	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	-9	42.28	54.00	-11.72	AV	
2	2402.000	-9	81.47	54.00	27.47	AV	
3	4808.000	-9	52.32	54.00	-1.68	AV	
4	7205.000	-9	42.53	54.00	-11.47	AV	
5	10469.000	-9	34.91	54.00	-19.09	AV	
6	14668.000	-9	38.37	54.00	-15.63	AV	
7	18000.000	-9	44.68	54.00	-9.32	AV	

Test Frequency: 1GHz ~ 18GHz

Test mode: transmitting at middle channel


Antenna polarization: Vertical

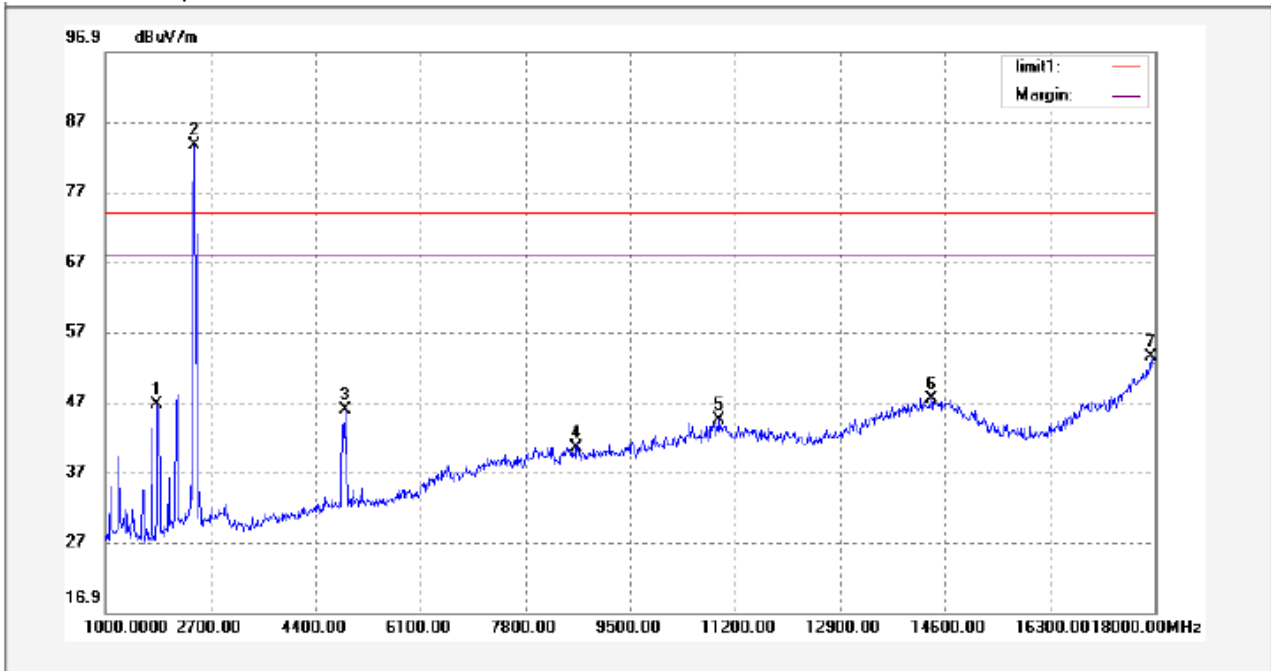

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	64.03	-17.50	46.53	74.00	-27.47	peak	
2	2440.000	99.26	-15.70	83.56	74.00	9.56	peak	
3	4893.000	57.78	-11.91	45.87	74.00	-28.13	peak	
4	8633.000	46.98	-6.62	40.36	74.00	-33.64	peak	
5	10945.000	47.94	-3.48	44.46	74.00	-29.54	peak	
6	14379.000	47.16	0.34	47.50	74.00	-26.50	peak	
7	17932.000	47.43	6.06	53.49	74.00	-20.51	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1833.000	-9	37.53	54.00	-16.47	AV	
2	2440.000	-9	74.56	54.00	20.56	AV	
3	4893.000	-9	36.87	54.00	-17.13	AV	
4	8633.000	-9	31.36	54.00	-22.64	AV	
5	10945.000	-9	35.46	54.00	-18.54	AV	
6	14379.000	-9	38.5	54.00	-15.5	AV	
7	17932.000	-9	44.49	54.00	-9.51	AV	

Antenna polarization: Horizontal

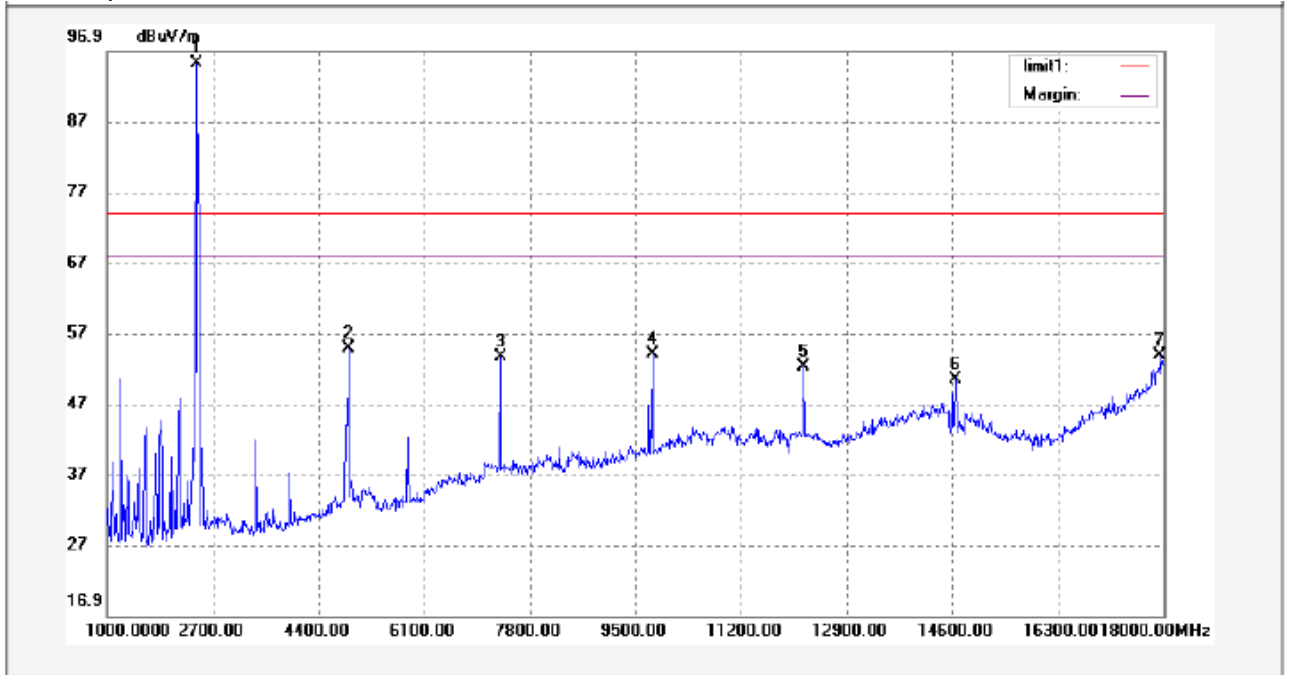


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2440.000	110.86	-15.70	95.16	74.00	21.16	peak	
2	4893.000	66.66	-11.91	54.75	74.00	-19.25	peak	
3	7324.000	60.72	-7.13	53.59	74.00	-20.41	peak	
4	9772.000	59.20	-5.28	53.92	74.00	-20.08	peak	
5	12203.000	56.60	-4.40	52.20	74.00	-21.80	peak	
6	14651.000	50.12	0.37	50.49	74.00	-23.51	peak	
7	17949.000	47.52	6.31	53.83	74.00	-20.17	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2440.000	-9	86.16	54.00	32.16	AV	
2	4893.000	-9	45.75	54.00	-8.25	AV	
3	7324.000	-9	44.59	54.00	-9.41	AV	
4	9772.000	-9	44.92	54.00	-9.08	AV	
5	12203.000	-9	43.2	54.00	-10.8	AV	
6	14651.000	-9	41.49	54.00	-12.51	AV	
7	17949.000	-9	44.83	54.00	-9.17	AV	

Test mode: transmitting at upper channel


Antenna polarization: Vertical

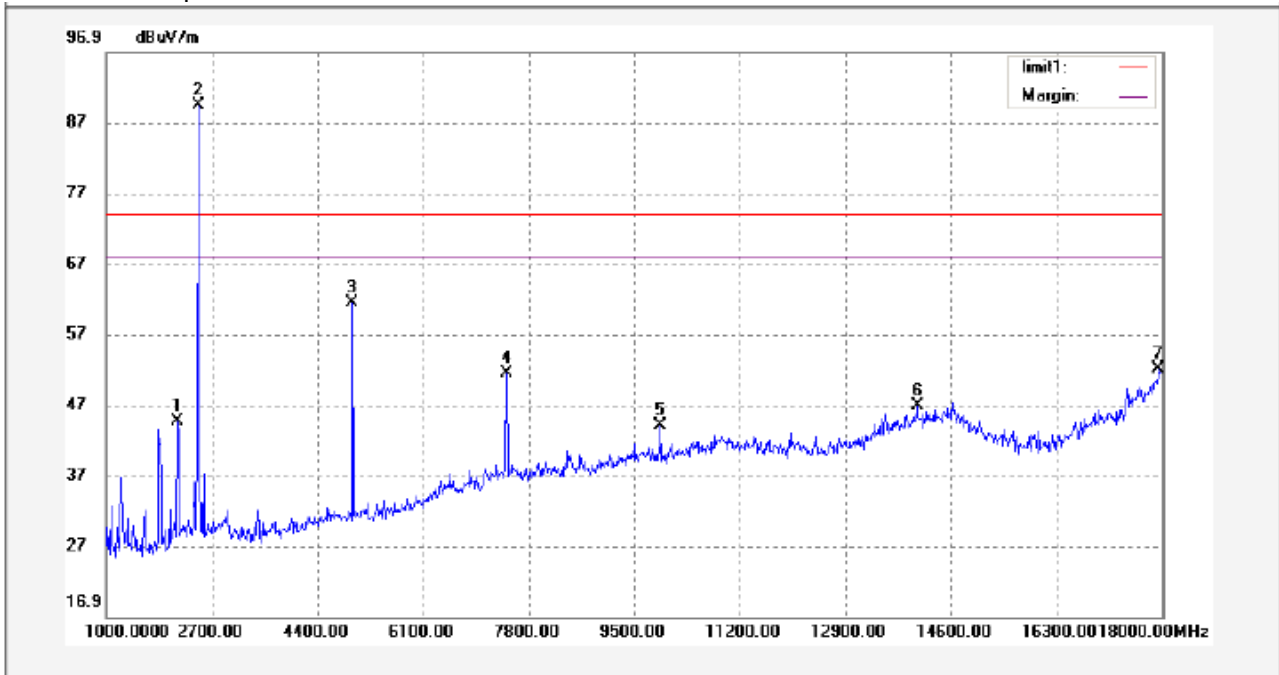

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2139.000	59.93	-15.41	44.52	74.00	-29.48	peak	
2	2478.000	105.16	-15.68	89.48	74.00	15.48	peak	
3	4961.000	73.12	-11.77	61.35	74.00	-12.65	peak	
4	7443.000	58.25	-6.91	51.34	74.00	-22.66	peak	
5	9925.000	49.12	-5.15	43.97	74.00	-30.03	peak	
6	14056.000	47.36	-0.52	46.84	74.00	-27.16	peak	
7	17949.000	45.63	6.31	51.94	74.00	-22.06	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2139.000	-9	35.52	54.00	-18.48	AV	
2	2478.000	-9	80.48	54.00	26.48	AV	
3	4961.000	-9	52.35	54.00	-1.65	AV	
4	7443.000	-9	42.34	54.00	-11.66	AV	
5	9925.000	-9	34.97	54.00	-19.03	AV	
6	14056.000	-9	37.84	54.00	-16.16	AV	
7	17949.000	-9	42.94	54.00	-11.06	AV	

Antenna polarization: Horizontal

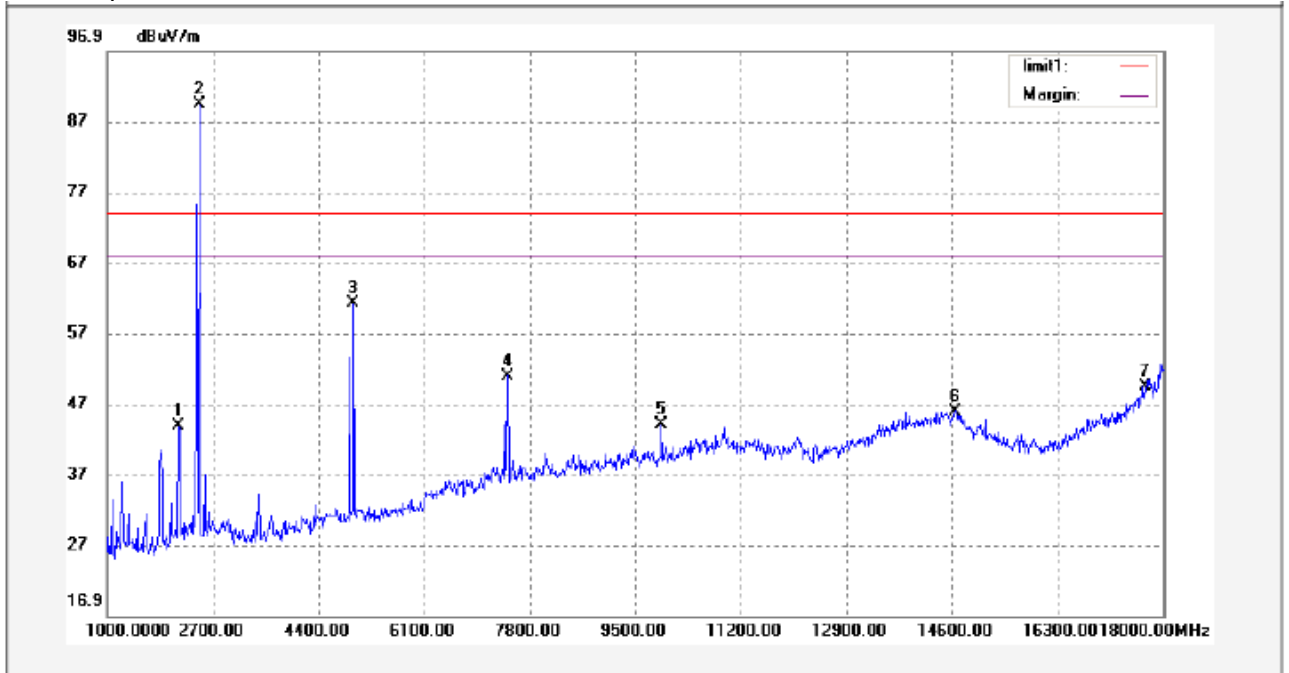


No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2139.000	59.20	-15.41	43.79	74.00	-30.21	peak	
2	2478.000	105.16	-15.68	89.48	74.00	15.48	peak	
3	4961.000	72.89	-11.77	61.12	74.00	-12.88	peak	
4	7443.000	57.81	-6.91	50.90	74.00	-23.10	peak	
5	9925.000	49.20	-5.15	44.05	74.00	-29.95	peak	
6	14651.000	45.53	0.37	45.90	74.00	-28.10	peak	
7	17711.000	45.65	3.71	49.36	74.00	-24.64	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2139.000	-9	34.79	54.00	-19.21	AV	
2	2478.000	-9	80.48	54.00	26.48	AV	
3	4961.000	-9	52.12	54.00	-1.88	AV	
4	7443.000	-9	41.9	54.00	-12.1	AV	
5	9925.000	-9	35.05	54.00	-18.95	AV	
6	14651.000	-9	36.9	54.00	-17.1	AV	
7.	17711.000	-9	40.36	54.00	-13.64	AV	

Test mode: receiving whole band


Antenna polarization: Vertical

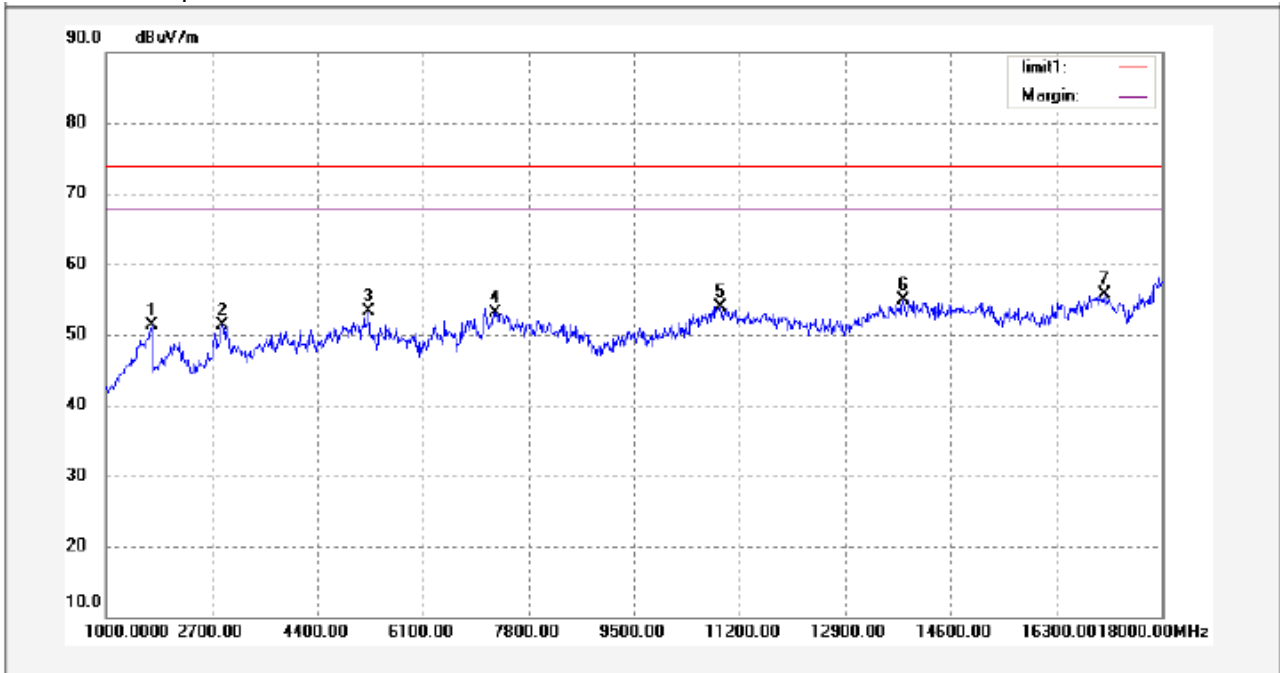

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1731.000	64.10	-12.89	51.21	74.00	-22.79	peak	
2	2870.000	59.15	-7.93	51.22	74.00	-22.78	peak	
3	5233.000	55.88	-2.56	53.32	74.00	-20.68	peak	
4	7256.000	48.96	4.11	53.07	74.00	-20.93	peak	
5	10894.000	42.58	11.35	53.93	74.00	-20.07	peak	
6	13835.000	38.58	16.31	54.89	74.00	-19.11	peak	
7	17082.000	35.18	20.54	55.72	74.00	-18.28	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1731.000	-9	42.21	54.00	-11.79	AV	
2	2870.000	-9	42.22	54.00	-11.78	AV	
3	5233.000	-9	44.32	54.00	-9.68	AV	
4	7256.000	-9	44.07	54.00	-9.93	AV	
5	10894.000	-9	44.93	54.00	-9.07	AV	
6	13835.000	-9	45.89	54.00	-8.11	AV	
7	17082.000	-9	46.72	54.00	-7.28	AV	

Antenna polarization: Horizontal

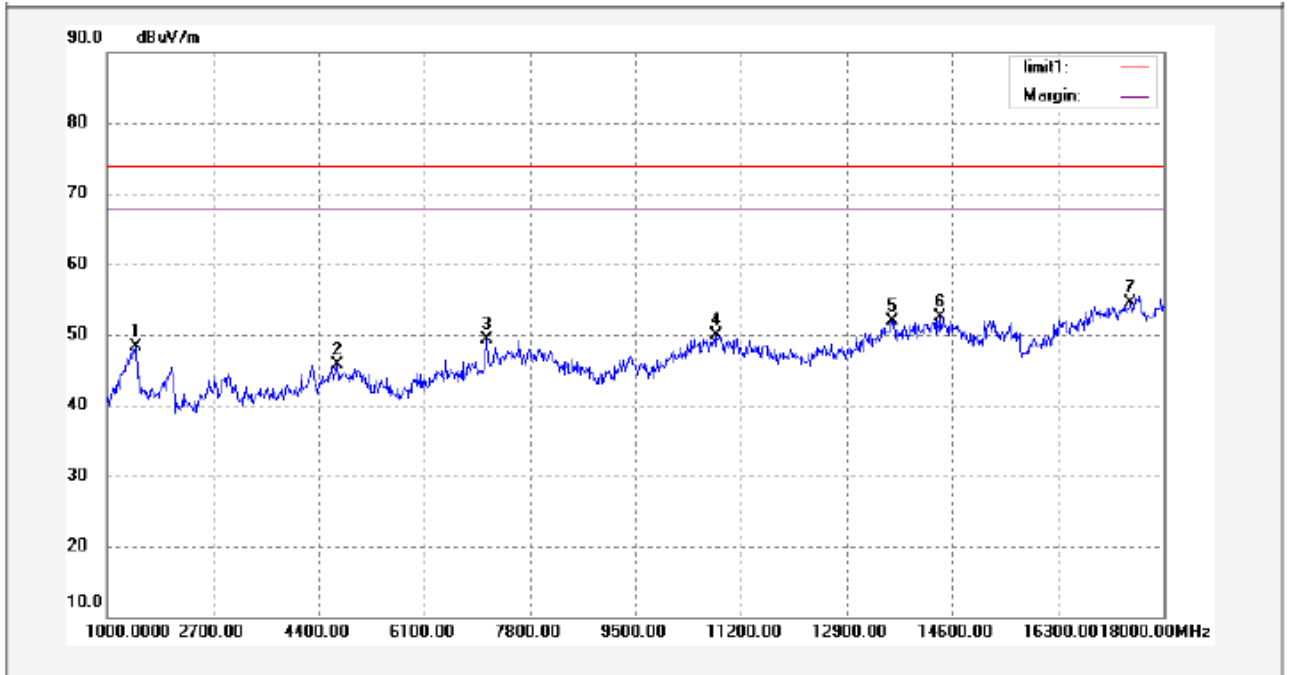

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1459.000	61.19	-12.94	48.25	74.00	-25.75	peak	
2	4706.000	49.24	-3.46	45.78	74.00	-28.22	peak	
3	7103.000	45.83	3.44	49.27	74.00	-24.73	peak	
4	10809.000	38.91	11.02	49.93	74.00	-24.07	peak	
5	13631.000	36.22	15.63	51.85	74.00	-22.15	peak	
6	14396.000	34.15	18.38	52.53	74.00	-21.47	peak	
7	17473.000	31.71	22.70	54.41	74.00	-19.59	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	1459.000	-9	39.25	54.00	-14.75	AV	
2	4706.000	-9	36.78	54.00	-17.22	AV	
3	7103.000	-9	40.27	54.00	-13.73	AV	
4.	10809.000	-9	40.93	54.00	-13.07	AV	
5.	13631.000	-9	42.85	54.00	-11.15	AV	
6.	14396.000	-9	43.53	54.00	-10.47	AV	
7.	17473.000	-9	45.41	54.00	-8.59	AV	

Test Frequency :Above 18GHz

All emissions were more than 20 dB below the limit and therefore not reported.

8 Spurious RF Conducted Emissions from out of band

Test Requirement: FCC Part 15.247(d) In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits.

Test Method: DA 00-705

Test Status: TX mode

8.1 Test Procedure

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set to span from the lowest frequency generated in the device up to and including the tenth harmonic of the highest fundamental frequency.
3. Set RBW = 100kHz and VBW = 300kHz.Sweep =auto.
4. mark the worst point and record.

8.2 Test Result

Test Frequency: Below 30MHz



Remark: All emissions were more than 20 dB below the limit and therefore not reported.

Test Frequency: 30MHz ~ 25GHz



Test result plots shown as follows:

Modulation:GFSK



Lower Channel

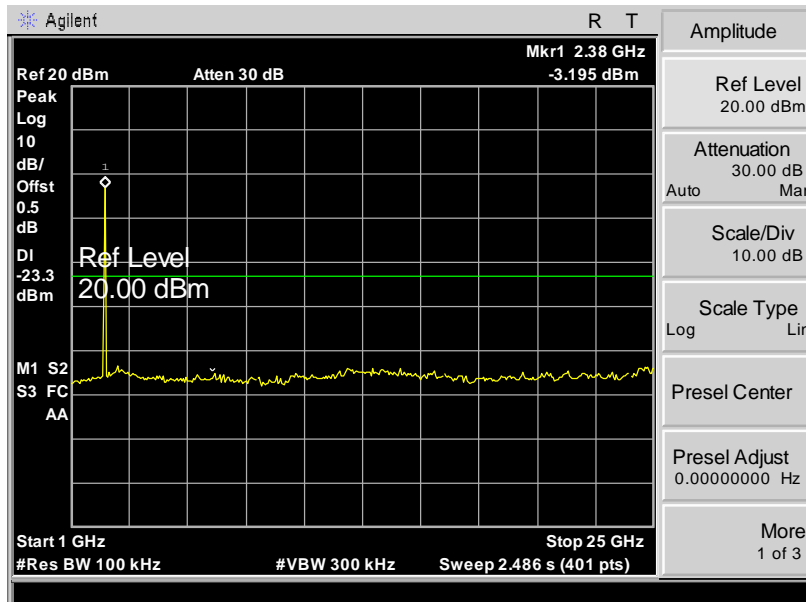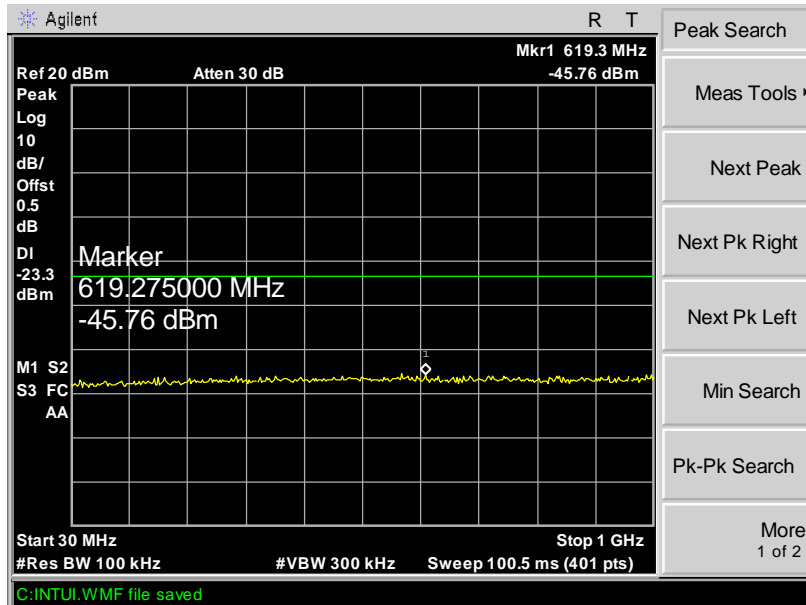

Middle Channel

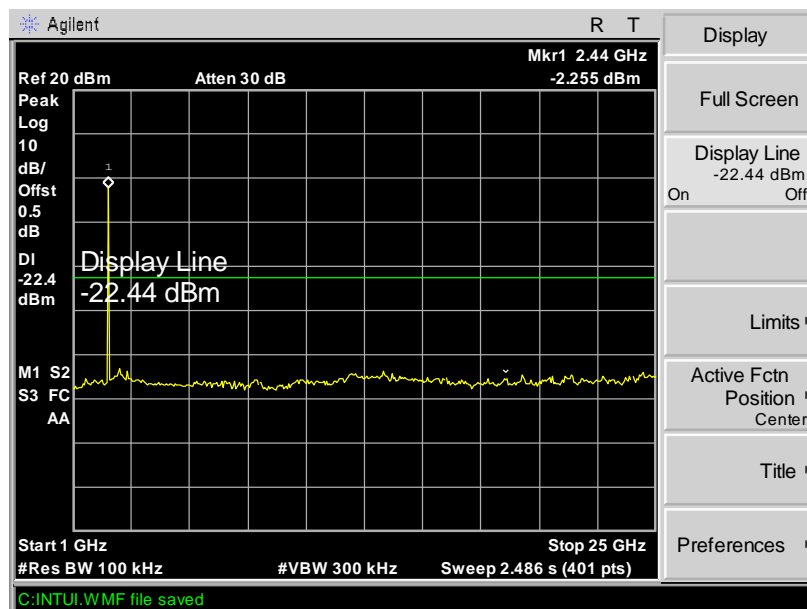
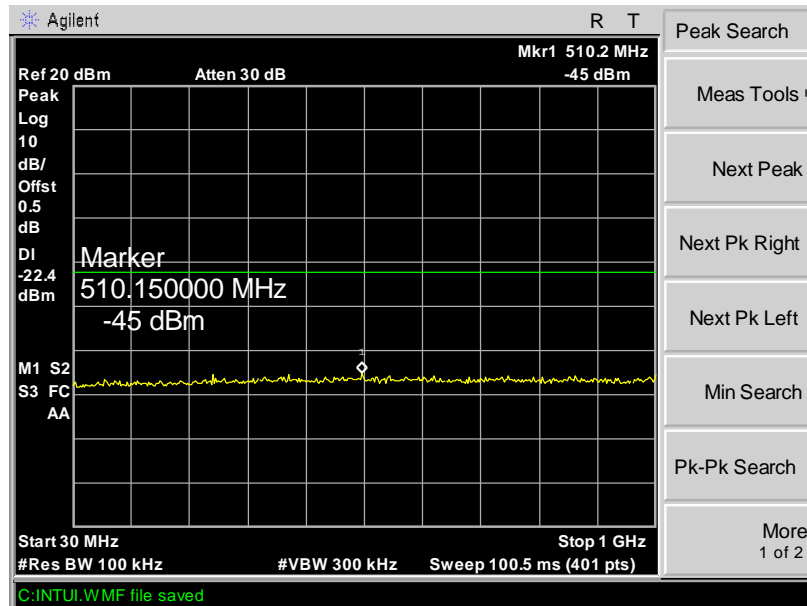


Upper Channel

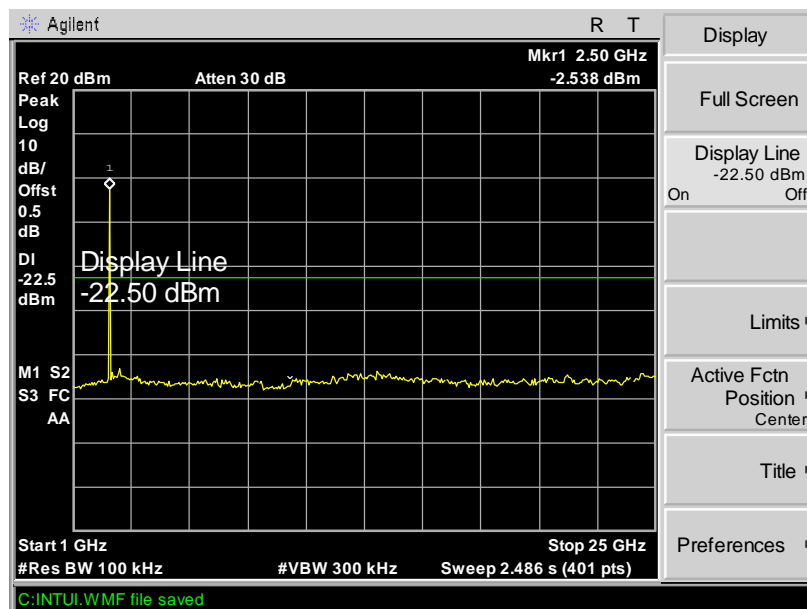
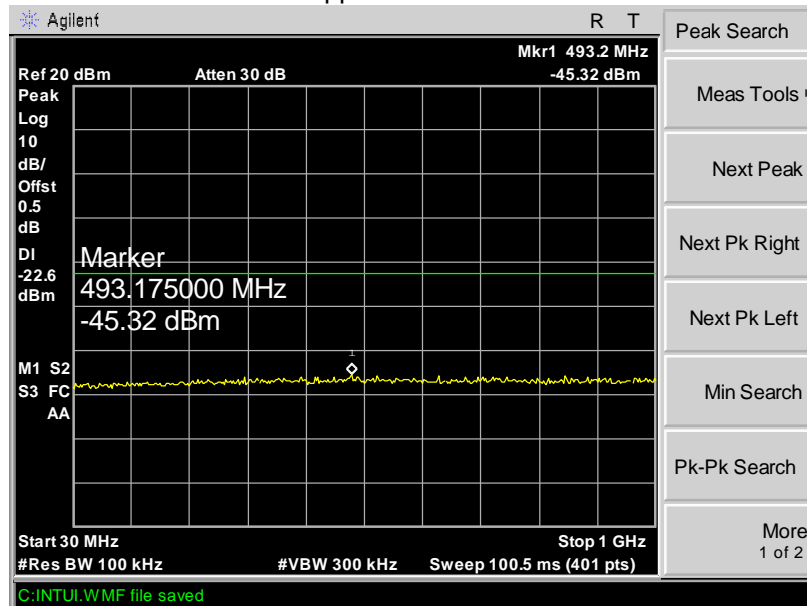


Modulation: Pi/4DQPSK



Lower Channel

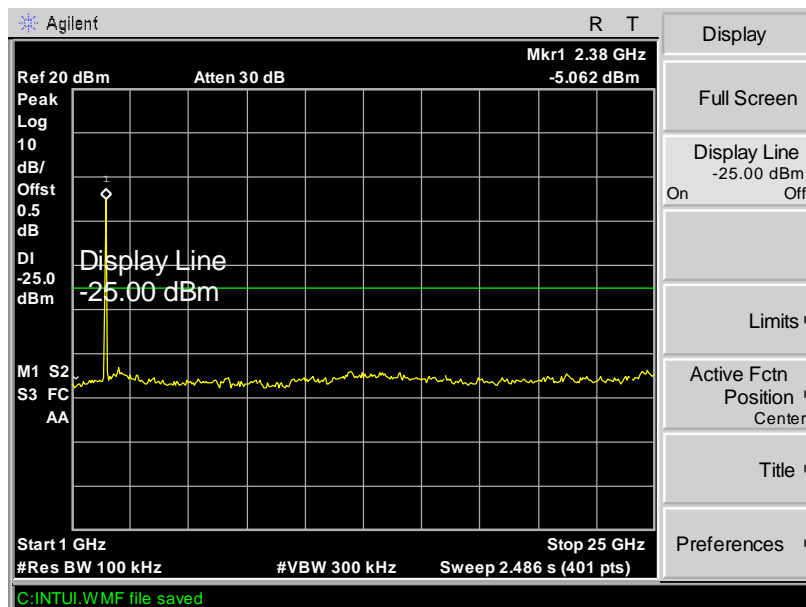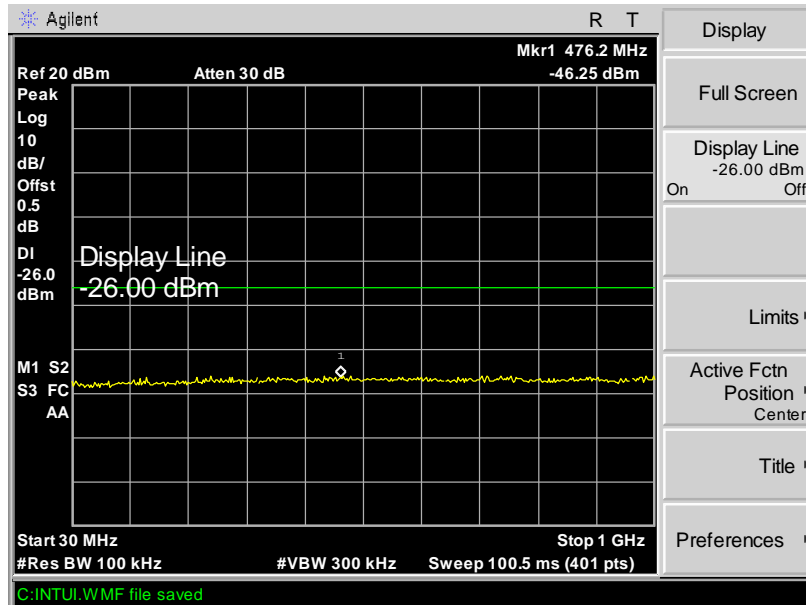

Middle Channel

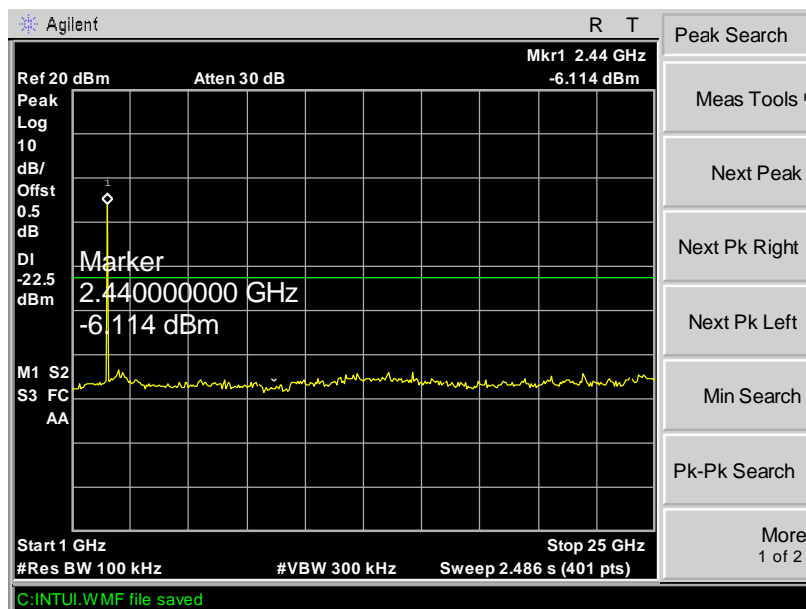
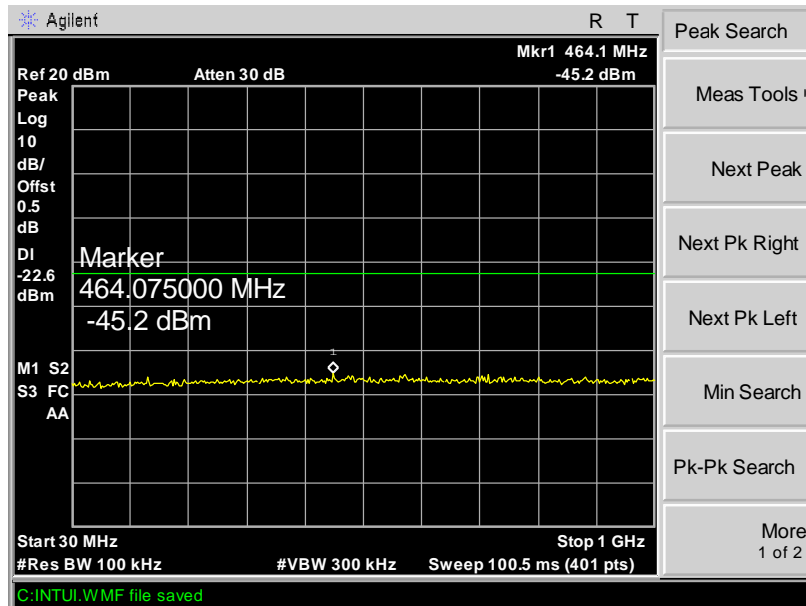


Upper Channel

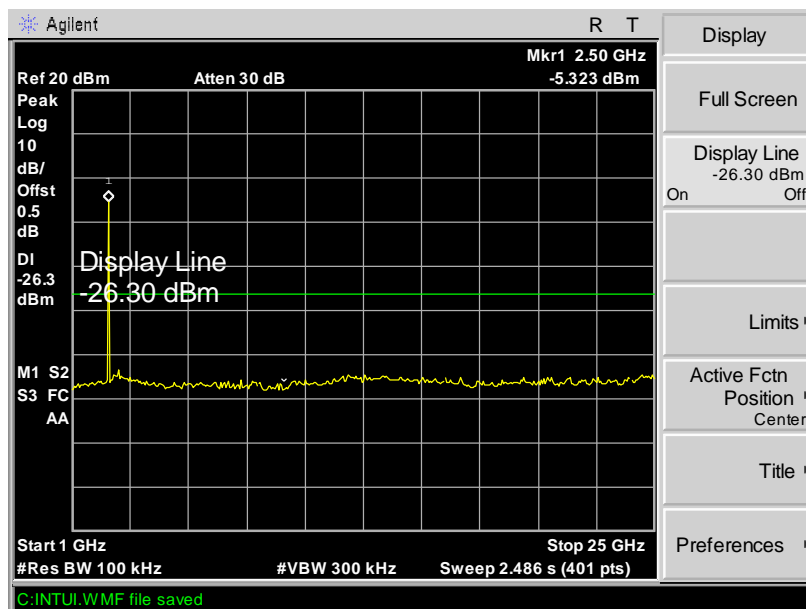
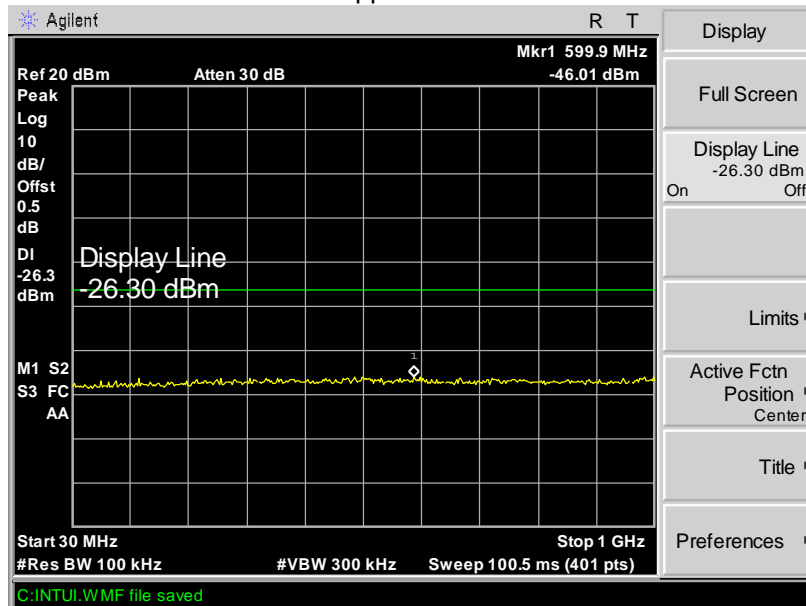


Modulation: 8DPSK



Lower Channel

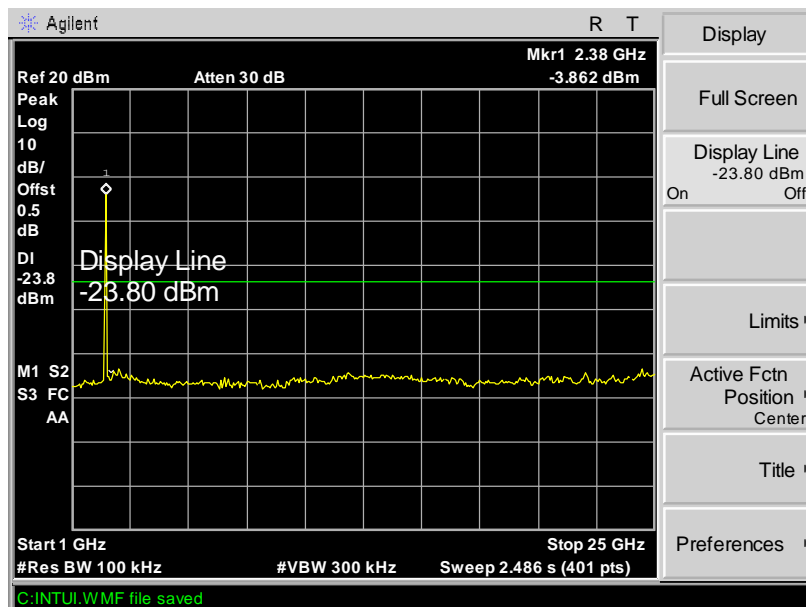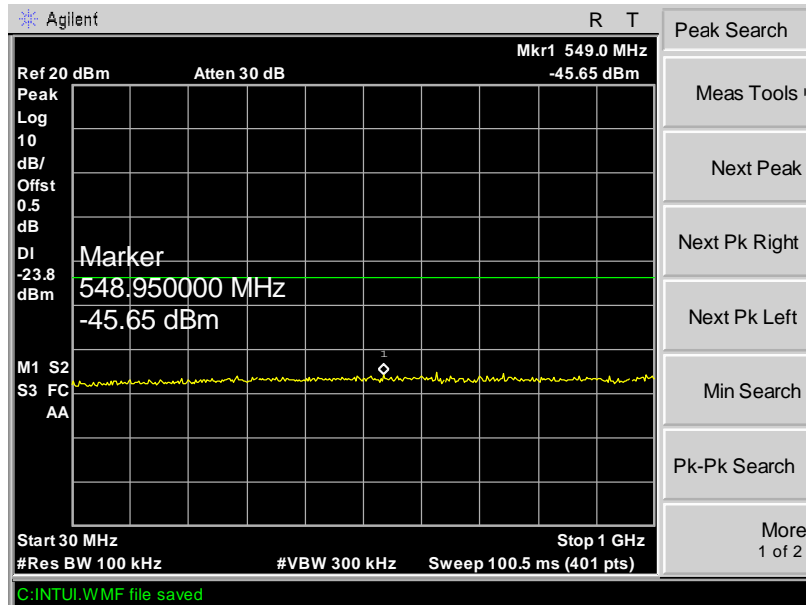

Middle Channel

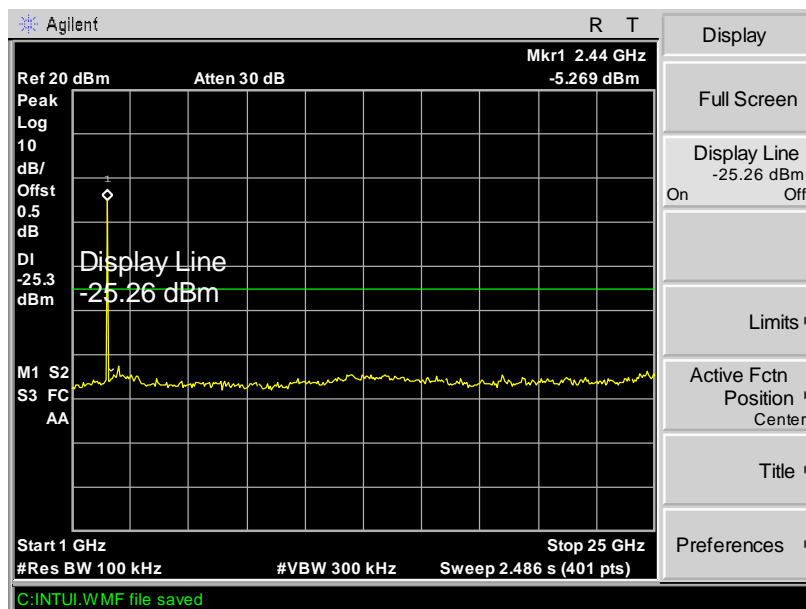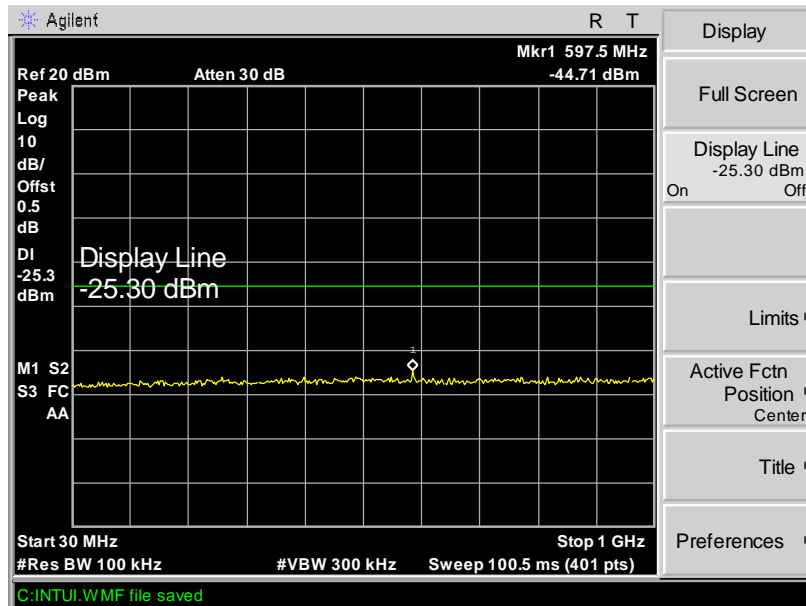

Upper Channel

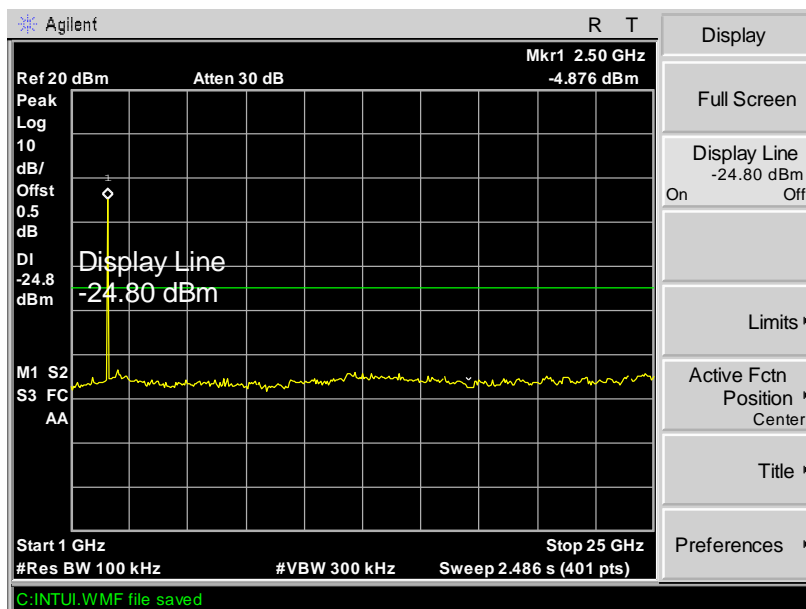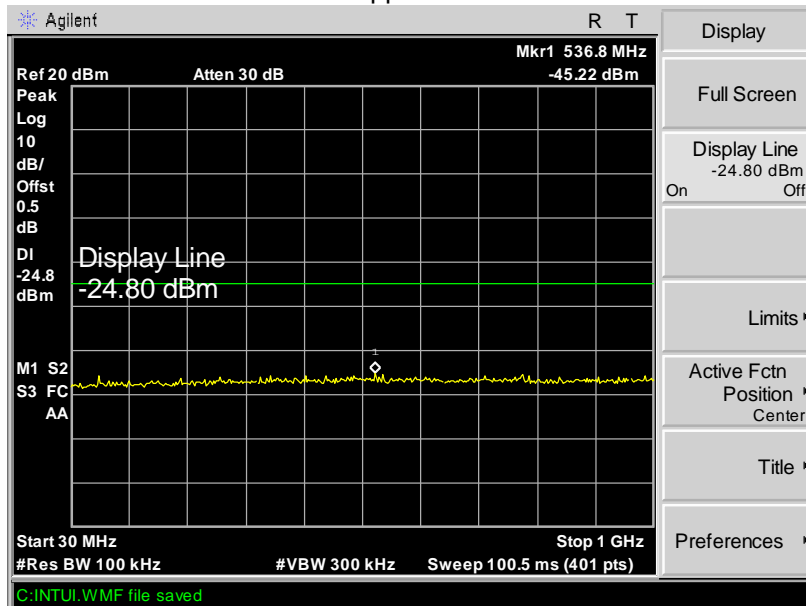

9 Duty Cycle


Test Requirement: FCC Part 15.35
Test Method: ANSI C63.4:2003
Test Status: TX mode.

9.1 Test Procedure


1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Set EUT as normal working mode
3. Set SPA center frequency = fundamental frequency, RBW = 100 kHz, VBW = 100 kHz, Span = 0 Hz, Adjacent sweep time.

9.2 Test Result

(a) transmission period is 0.445ms

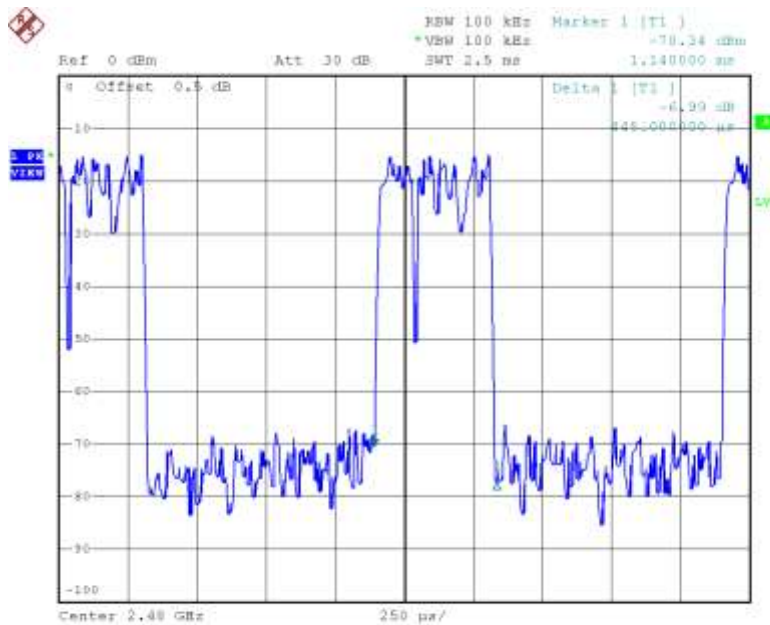

(b) Single pulse time is 1.25ms

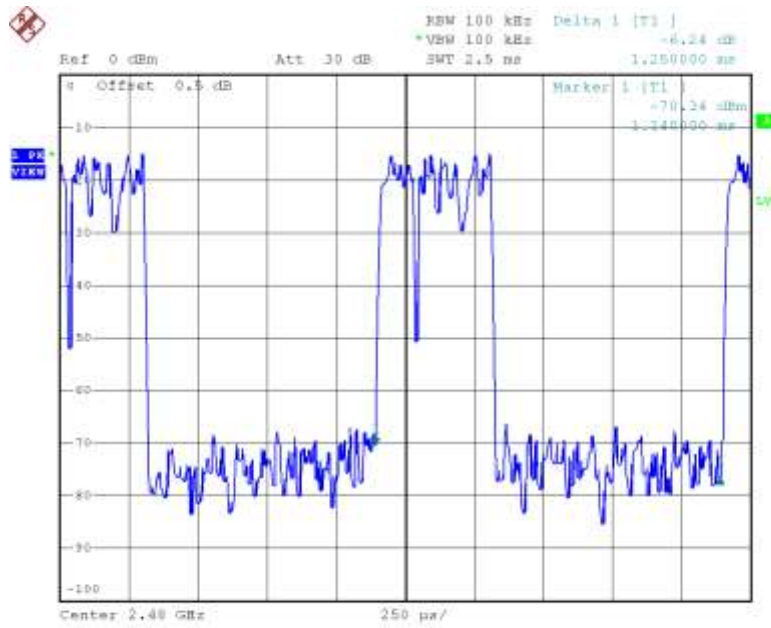

The EUT is auto. operation for transmitter, it is declared by the manufacturer as a duty cycle ratio of less than 100%.

The EUT's work time : T_{on} = pulse time = 0.445 ms

The EUT's work period : $T = T_{ON} + T_{OFF}$ = transmission period = 1.25 ms

The EUT's duty cycle : $D = T_{on} / T = 0.445 / 1.25 * 100\% = 35.6\%$

Duty Cycle Correction Factor(dB) = $20 * \text{Log}_{10}(\text{Duty Cycle}) = 20 * \text{Log}_{10}(35.6\%)$

= -9dB

10 Band Edge Measurement


Test Requirement:	Section 15.247(d) In addition, radiated emissions which fall in the restricted bands. as defined in Section 15.205(a), must also comply with the radiated emission limits specified in Section 15.209(a) (see Section 15.205(c)).
Test Method:	DA 00-705
Limit:	40.0 dBuV/m between 30MHz & 88MHz; 43.5 dBuV/m between 88MHz & 216MHz; 46.0 dBuV/m between 216MHz & 960MHz; 54.0 dBuV/m above 960MHz. 74.0 dBuV/m for peak above 1GHz 54.0 dBuV/m for AVG above 1GHz

10.1 Test Procedure

1. The EUT was placed on a turntable which is 0.8m above ground plane
2. Measurement Distance is 3m
3. Detector:
 - For Peak value:
 - RBW = 1 MHz for $f \geq 1$ GHz
 - VBW \geq RBW; Sweep = auto
 - Detector function = peak
 - Trace = max hold
 - For AVG value:
 - RBW = 1 MHz for $f \geq 1$ GHz
 - VBW = 10Hz; Sweep = auto
 - Detector function = AVG
 - Trace = max hold

10.2 Test Result:


Lower Channel – Peak, Vertical

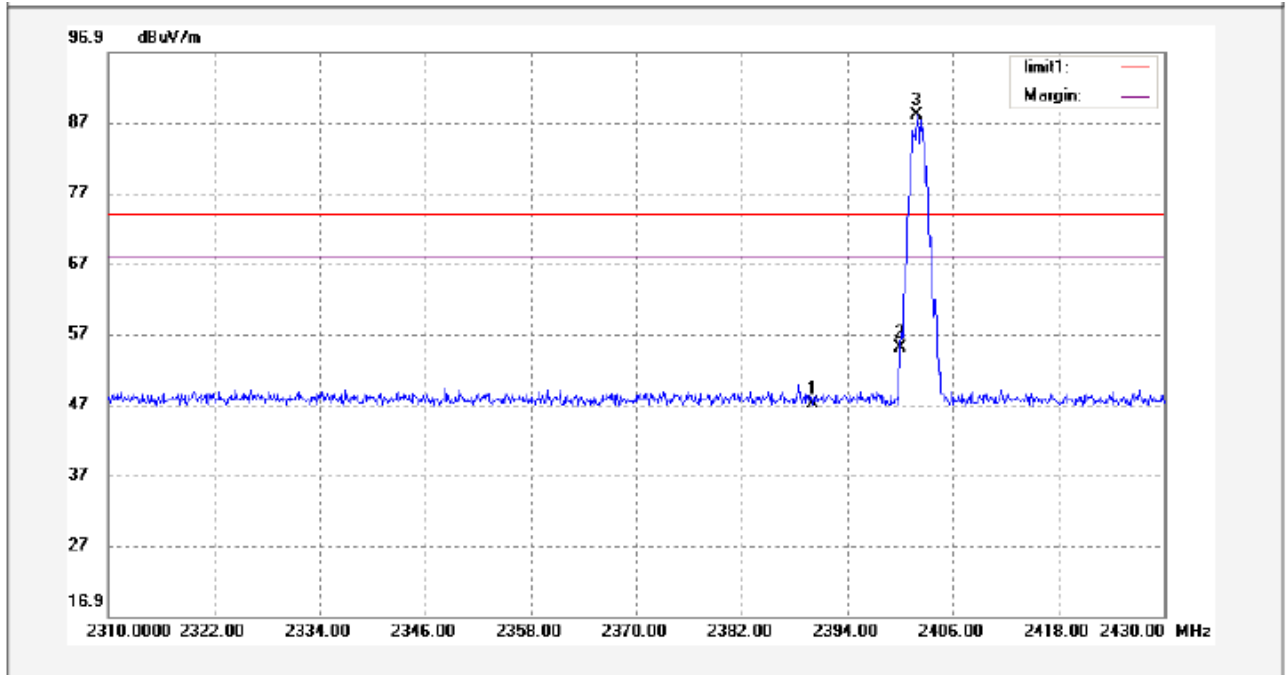

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	44.53	2.53	47.06	74.00	-26.94	peak	
2	2400.000	52.47	2.52	54.99	74.00	-19.01	peak	
3	2401.920	85.53	2.52	88.05	74.00	14.05	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	-9	38.06	54.00	-15.94	AV	
2	2400.000	-9	45.99	54.00	-8.01	AV	
3	2401.920	-9	79.05	54.00	25.05	AV	


Lower Channel – Peak, Horizontal

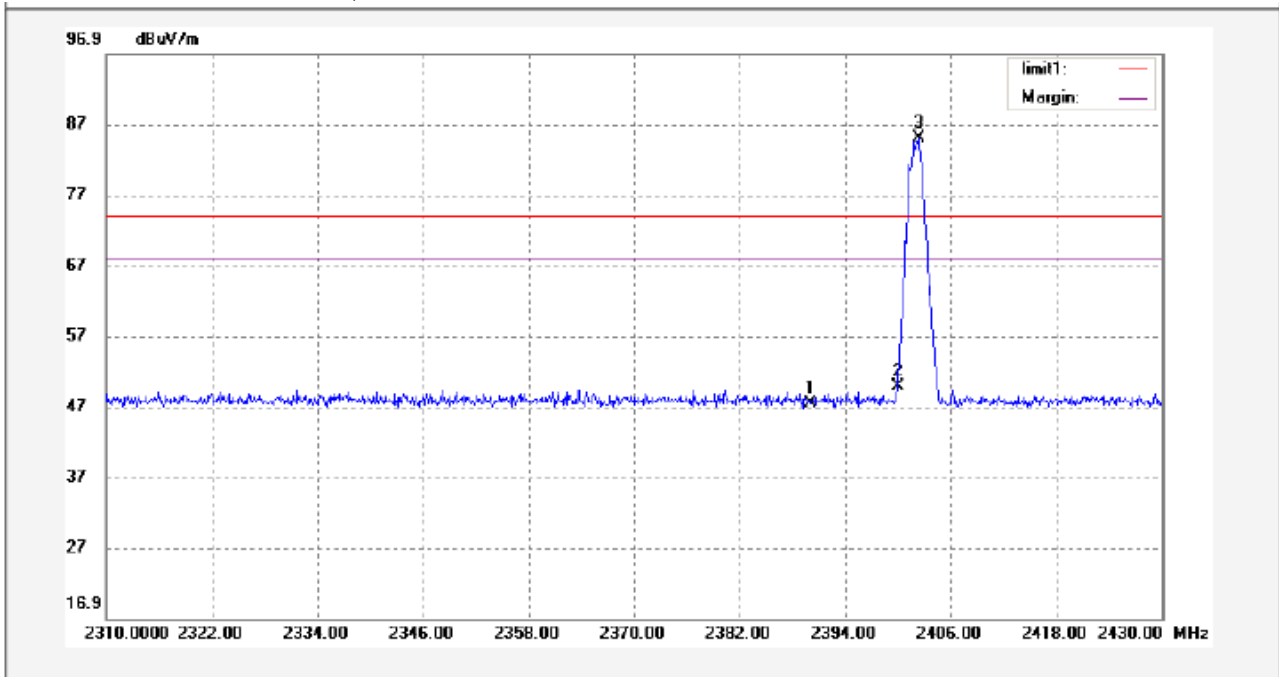

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	44.94	2.53	47.47	74.00	-26.53	peak	
2	2400.000	47.36	2.52	49.88	74.00	-24.12	peak	
3	2402.400	82.41	2.51	84.92	74.00	10.92	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2390.000	-9	38.47	54.00	-15.53	AV	
2	2400.000	-9	40.88	54.00	-13.12	AV	
3	2402.400	-9	75.92	54.00	21.92	AV	


Upper Channel – Peak, Vertical

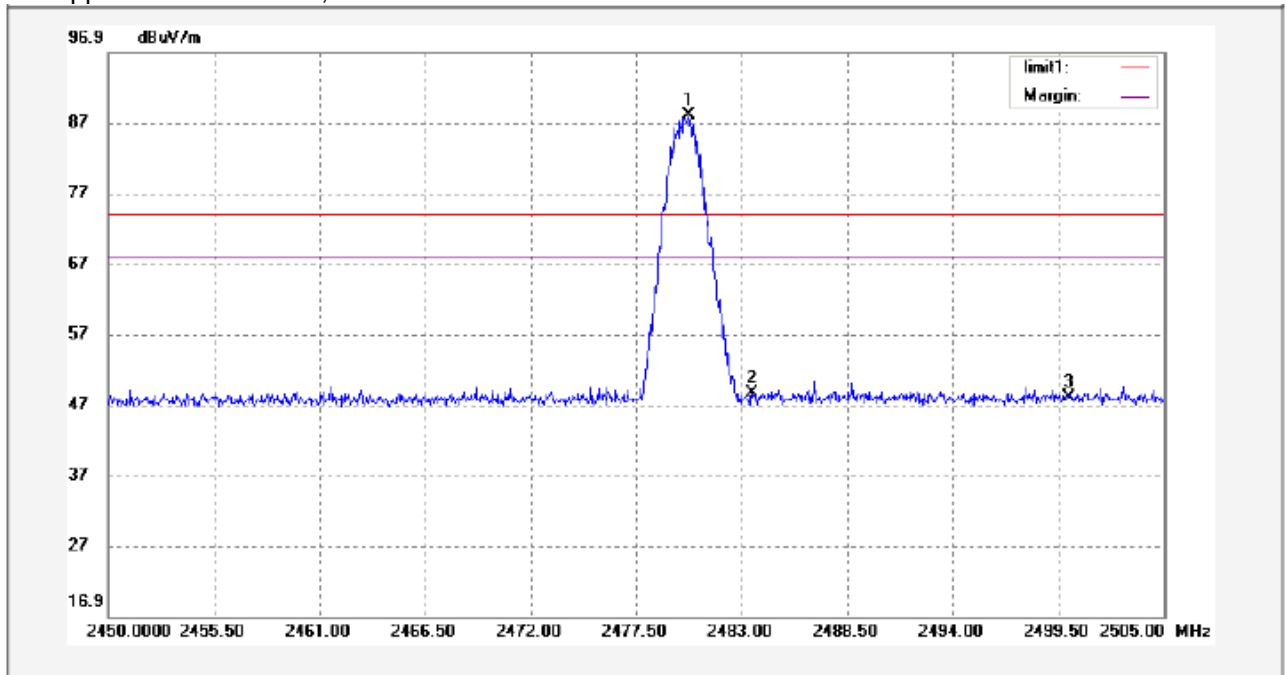

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.250	85.34	2.58	87.92	74.00	13.92	peak	
2	2483.500	45.93	2.60	48.53	74.00	-25.47	peak	
3	2500.000	45.41	2.65	48.06	74.00	-25.94	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.250	-9	78.92	54.00	24.92	AV	
2	2483.500	-9	39.53	54.00	-14.47	AV	
3	2500.00	-9	39.06	54.00	-14.94	AV	

Upper Channel – Peak, Horizontal

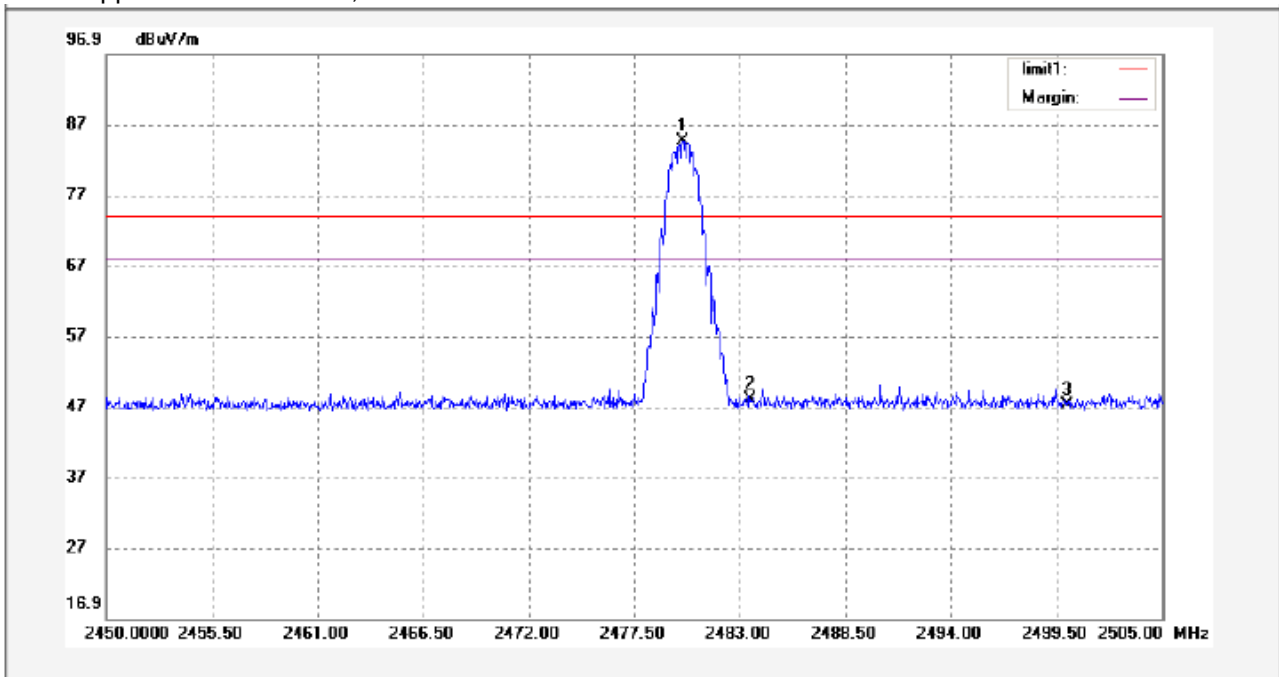

No.	Freq. (MHz)	Reading (dBuV/m)	Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2480.030	81.95	2.58	84.53	74.00	10.53	peak	
2	2483.500	45.33	2.60	47.93	74.00	-26.07	peak	
3	2500.000	44.57	2.65	47.22	74.00	-26.78	peak	

No.	Freq. (MHz)	Duty Factor (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Detector	Remark
1	2478.050	-9	75.53	54.00	21.53	AV	
2	2483.500	-9	38.93	54.00	-15.07	AV	
3	2500.000	-9	38.22	54.00	-15.78	AV	

11 20 dB Bandwidth Measurement

Test Requirement: FCC CFR47 Part 15 Section 15.247
 Test Method: DA 00-705
 Test Mode: Test in fixing operating frequency at low, Middle, high channel.

11.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum;
2. Set the spectrum analyzer: RBW = 100kHz, VBW = 300kHz


11.2 Test Result:

Modulation	Test Channel	Bandwidth(MHz)
GFSK	Lower	1.3749
	Middle	1.3665
	Upper	1.3749
Pi/4DQPSK	Lower	1.4461
	Middle	1.4551
	Upper	1.4551
8DPSK	Lower	1.4451
	Middle	1.4501
	Upper	1.4641

Test result plot as follows:


Modulation:GFSK

Lower Channel

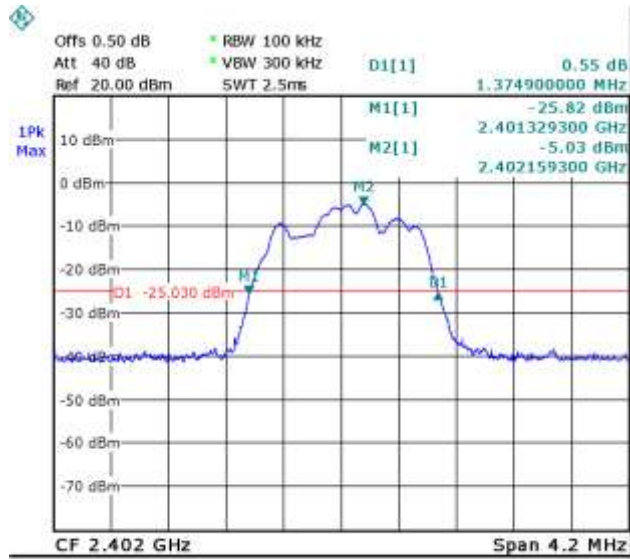


Date: 31.JAN.2013 12:53:38

Middle Channel

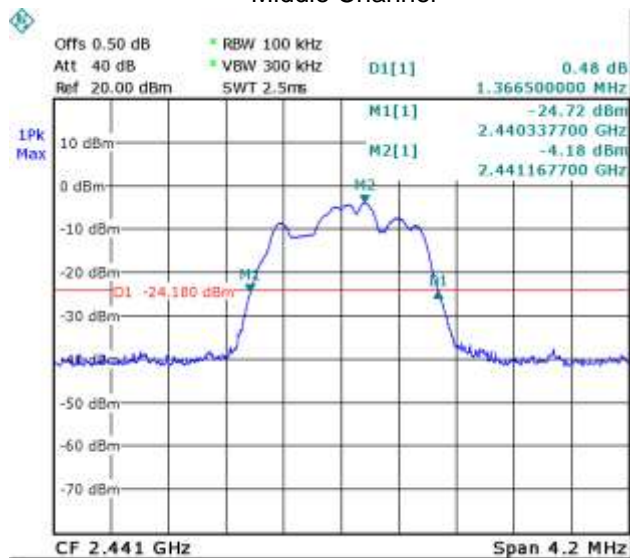

Date: 31.JAN.2013 12:51:17

Upper Channel

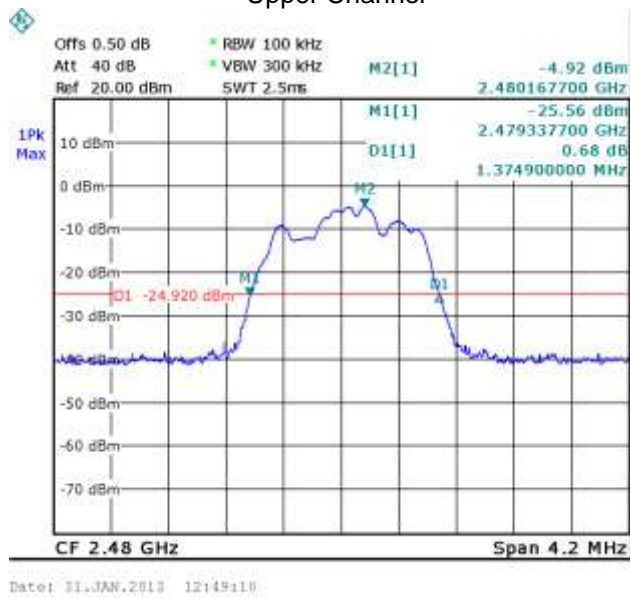

Modulation: Pi/4DQPSK


Lower Channel



Middle Channel




Upper Channel

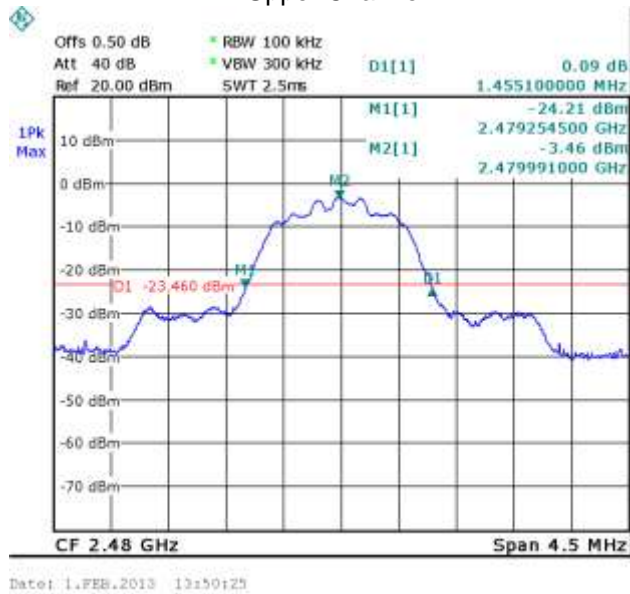


Modulation: 8DPSK

Lower Channel

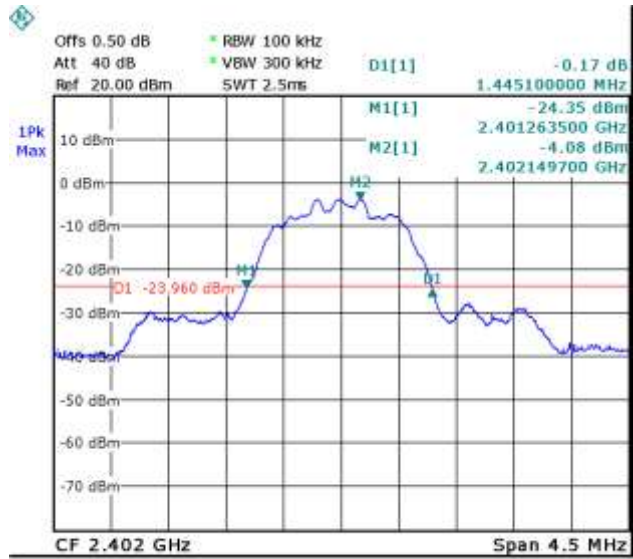


Date: 1.FEB.2013 13:43:57

Middle Channel

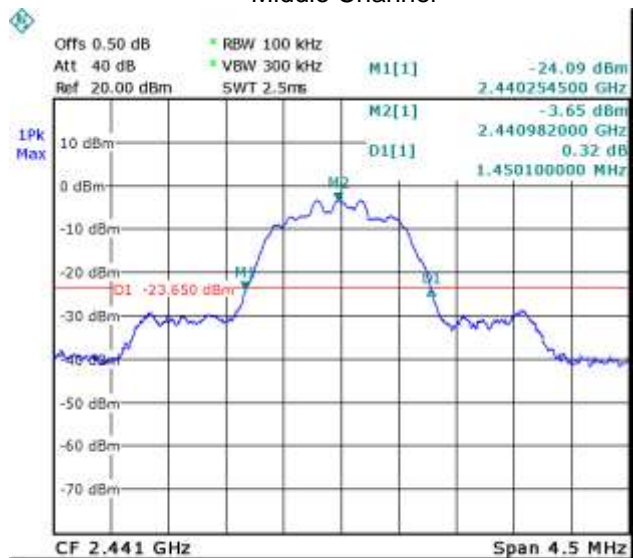

Date: 1.FEB.2013 13:46:53

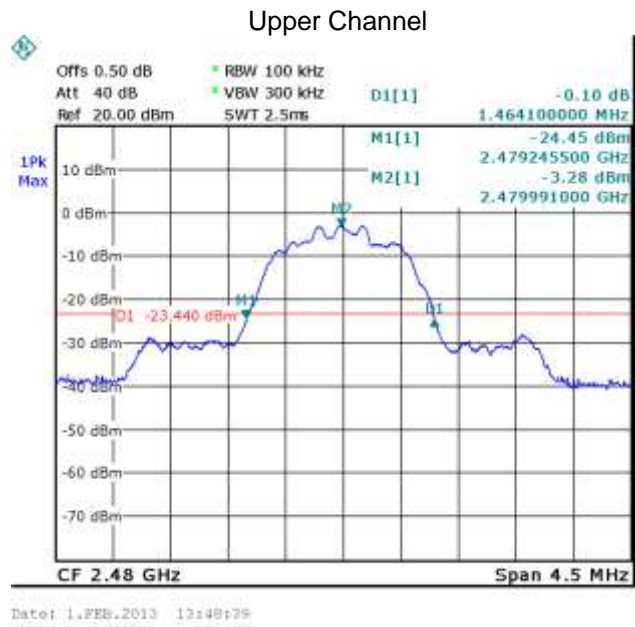

12 Maximum Peak Output Power

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (b)(1), For frequency hopping systems operating in the 2400-2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725-5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400-2483.5 MHz band: 0.125 watts. Refer to the result "Number of Hopping Frequency" of this document. The 1watts (30 dBm) limit applies.
Test mode:	Test in fixing frequency transmitting mode.

12.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1 MHz. VBW = 3 MHz. Sweep = auto; Detector Function = Peak.
3. Keep the EUT in transmitting at lowest, medium and highest channel individually. Record the max value.


12.2 Test Result:

Modulation	Test Channel	Output Power (dBm)	Limit (dBm)
GFSK	Lower	-0.94	30
	Middle	1.23	30
	Upper	4.08	30
Pi/4DQPSK	Lower	-1.61	30
	Middle	1.23	30
	Upper	4.08	30
8DPSK	Lower	-1.35	30
	Middle	1.52	30
	Upper	4.19	30


Test result plot as follows:


Modulation:GFSK

Lower Channel

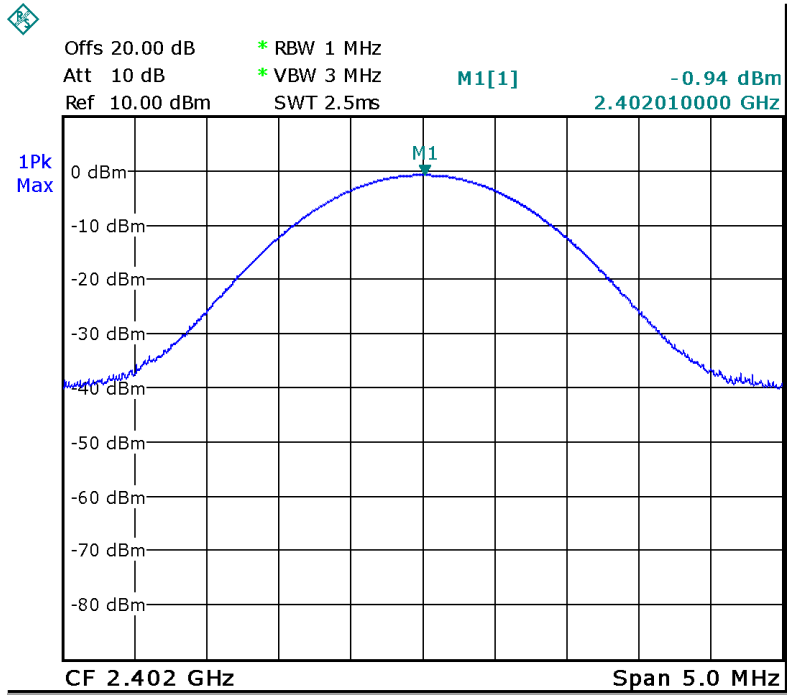




Middle Channel

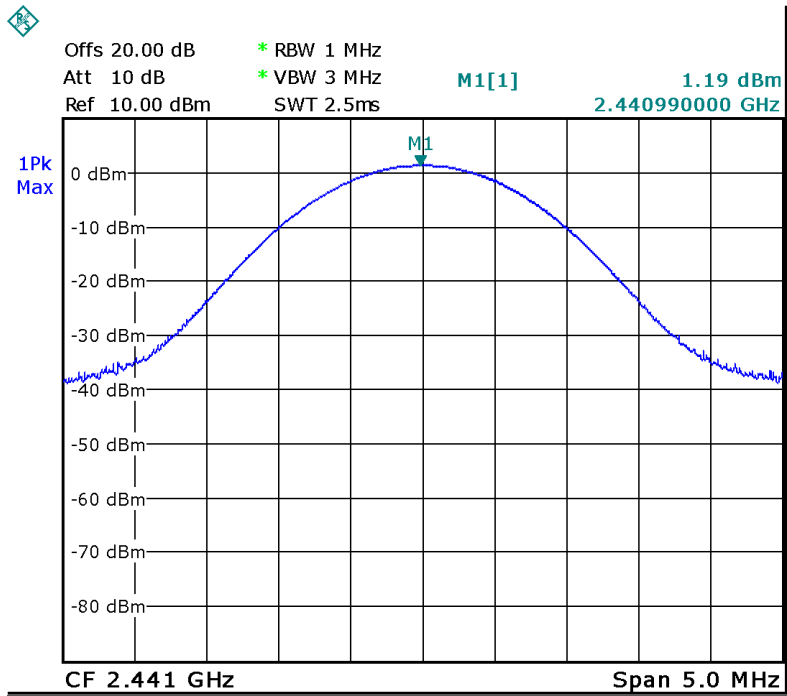

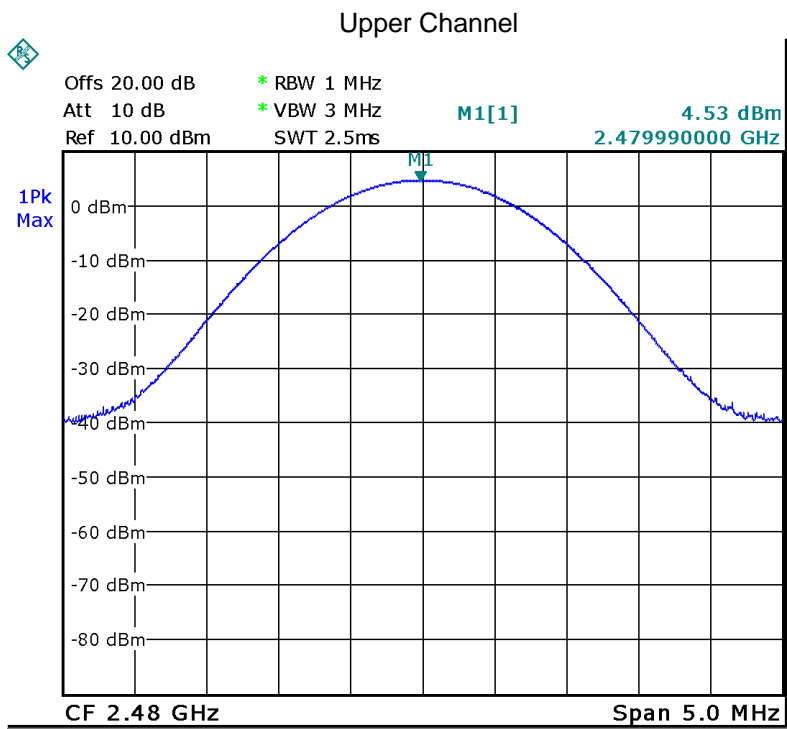


Modulation: Pi/4DQPSK

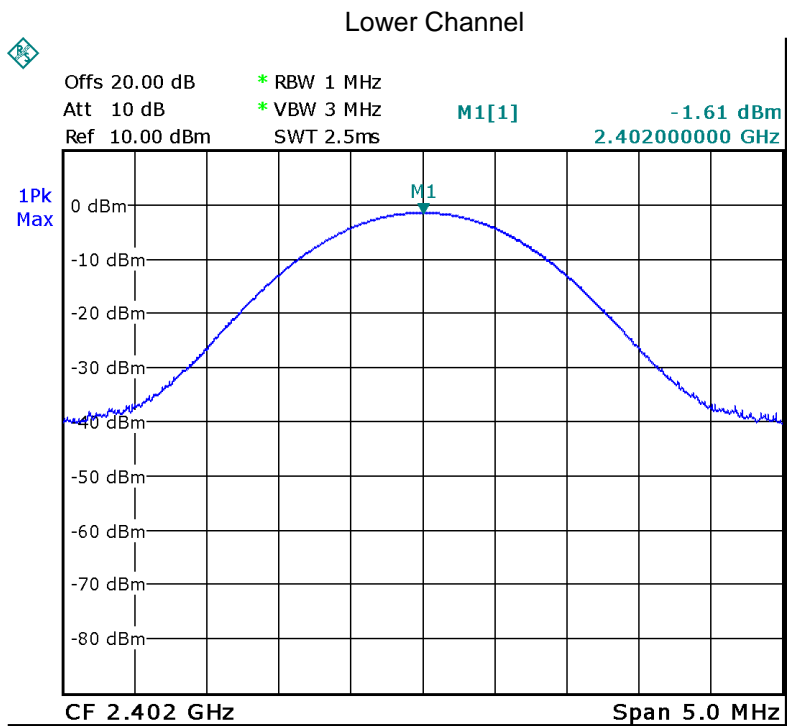

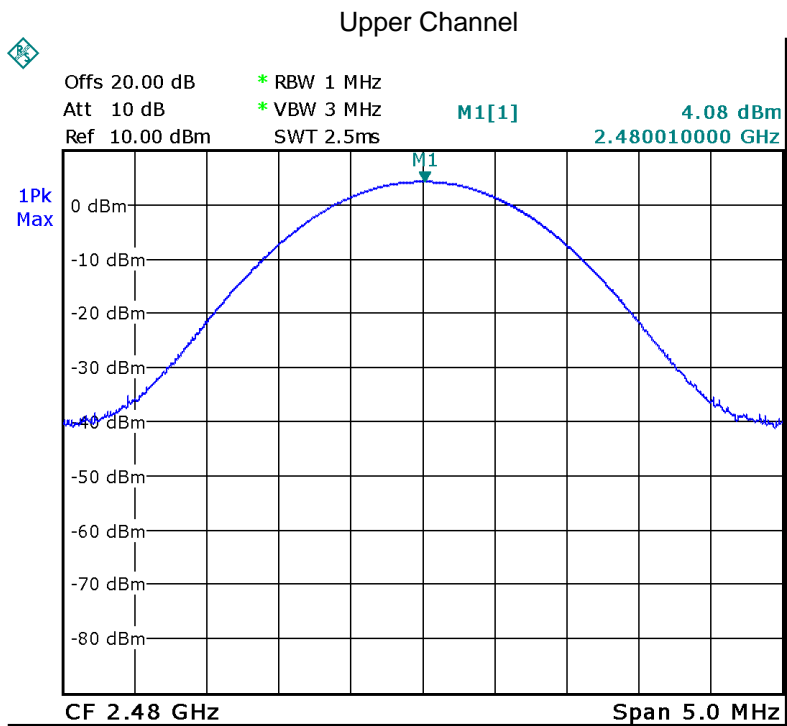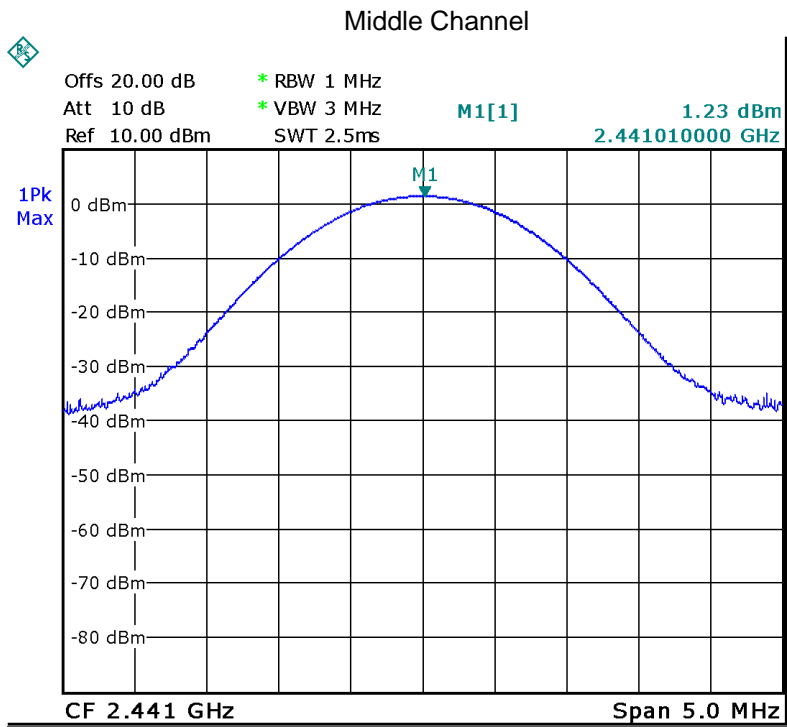



Modulation: 8DPSK

Lower Channel

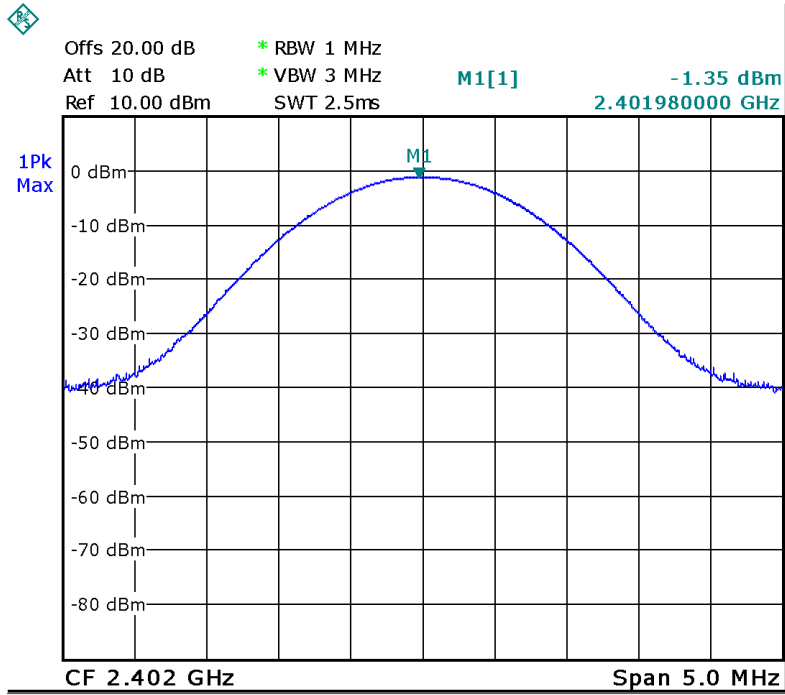

Middle Channel

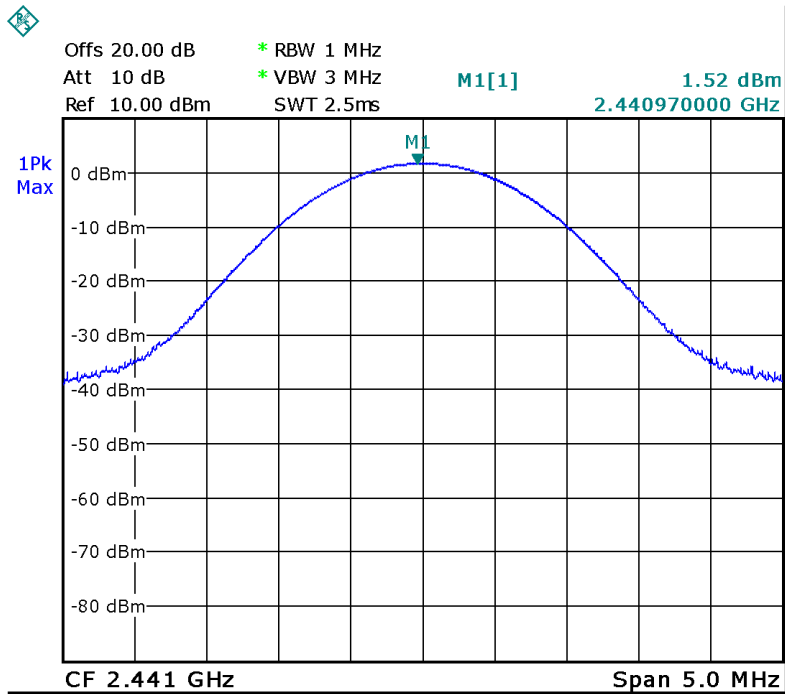

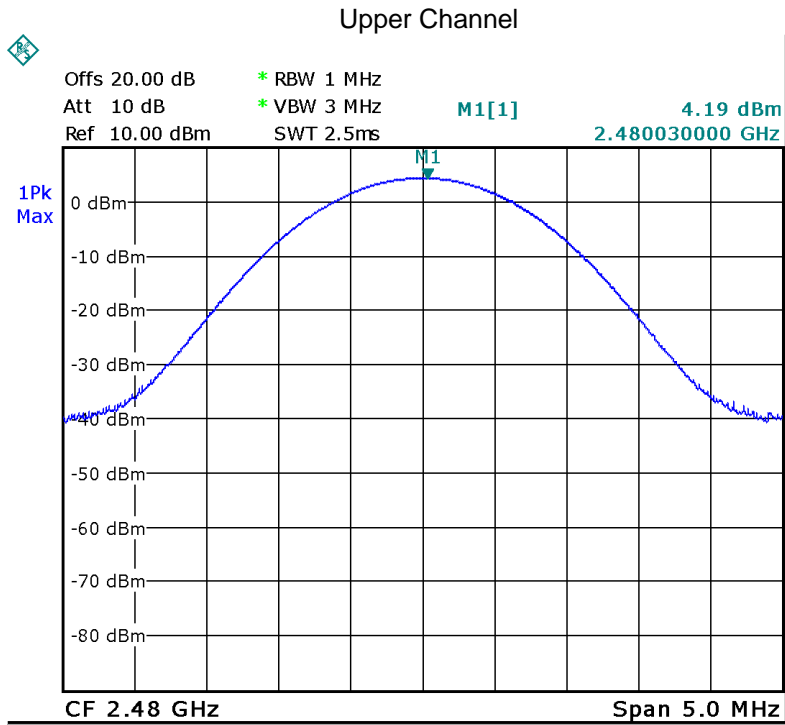

13 Hopping Channel Separation

Test Requirement: FCC CFR47 Part 15 Section 15.247

Test Method: DA 00-705

Test Limit: Regulation 15.247(a)(1) Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 1W.

Test Mode: Test in hopping transmitting operating mode.

13.1 Test Procedure:

1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 100KHz. VBW = 300KHz , Span = 5MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section
Submit this plot.


13.2 Test Result:

Modulation	Test Channel	Separation (MHz)
GFSK	Lower	1.008
	Middle	1.008
	Upper	1.008
Pi/4DQPSK	Lower	1.008
	Middle	1.018
	Upper	1.005
8DPSK	Lower	1.008
	Middle	1.008
	Upper	1.008

Test result plot as follows:


Modulation:GFSK

Lower Channel

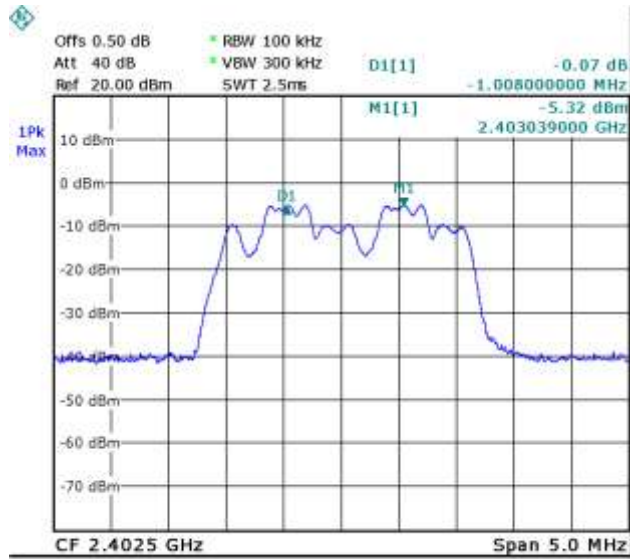


Date: 31.JAN.2013 13:57:34

Middle Channel

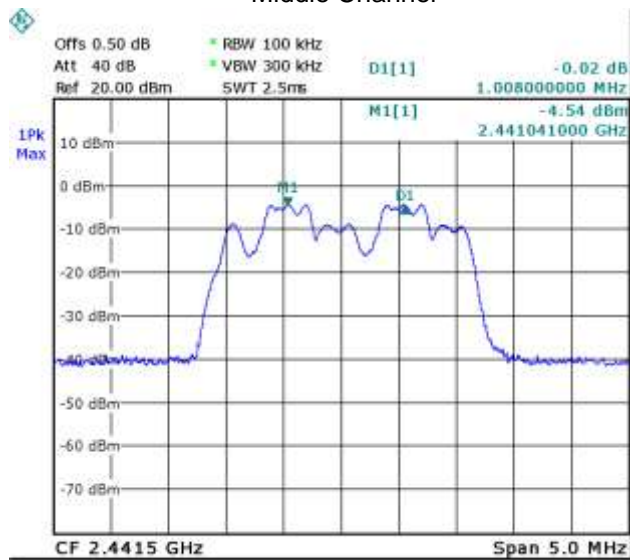

Date: 31.JAN.2013 13:59:21

Upper Channel

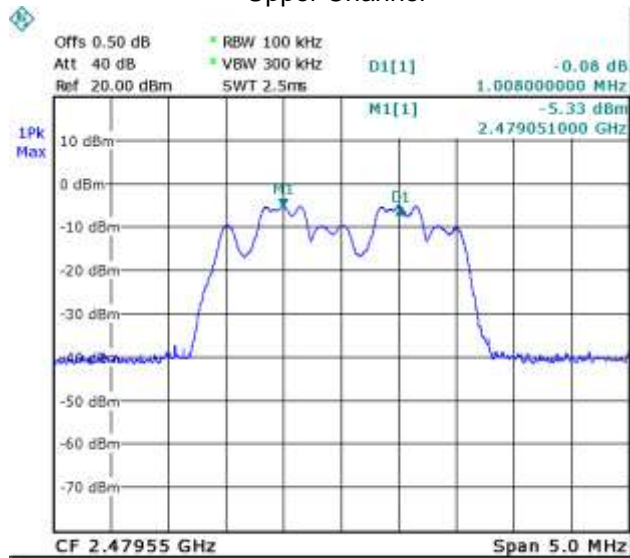

Date: 31.JAN.2013 14:00:45


Modulation: Pi/4DQPSK

Lower Channel




Date: 1.FEB.2013 11:05:28

Middle Channel

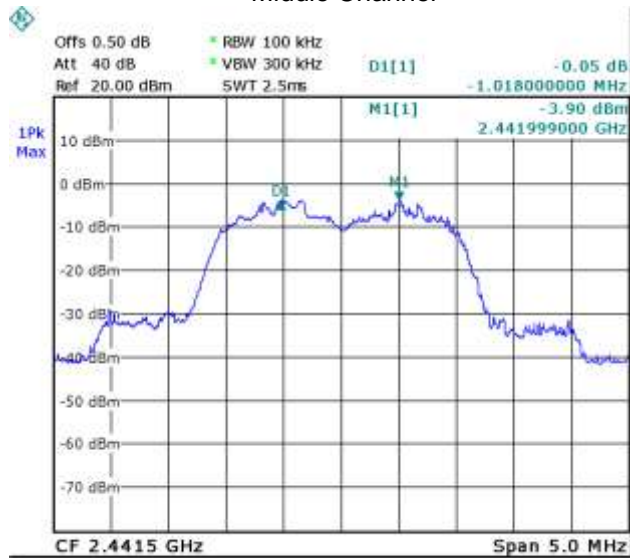

Date: 1.FEB.2013 11:07:24


Upper Channel

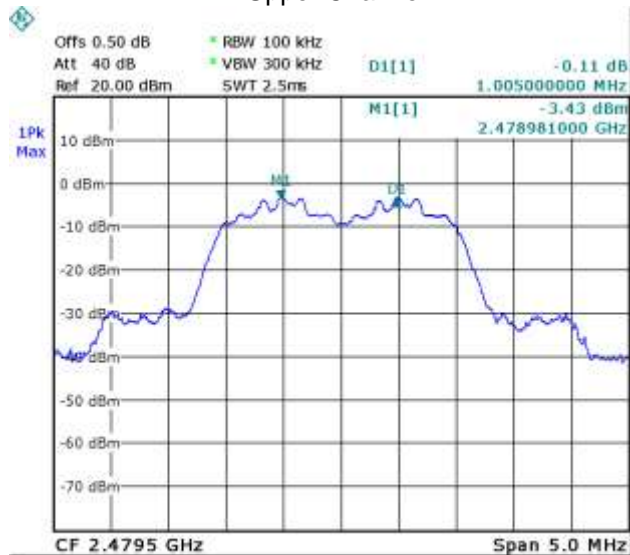

Date: 1.FEB.2013 12:49:28


Modulation: 8DPSK

Lower Channel

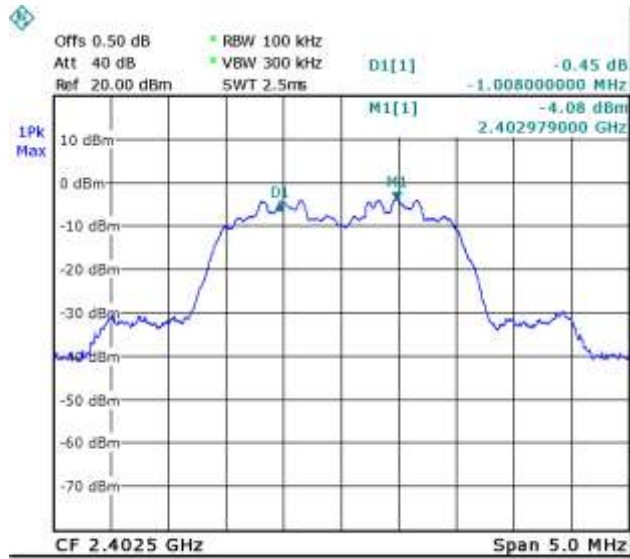


Date: 1.FEB.2013 10:57:09

Middle Channel

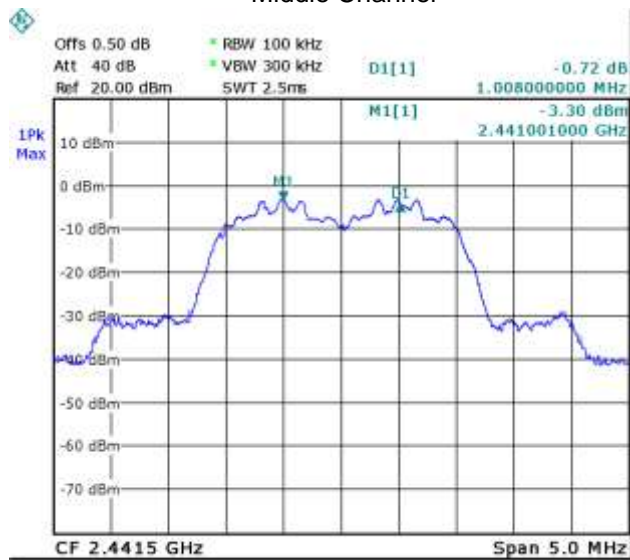

Date: 1.FEB.2013 10:58:34

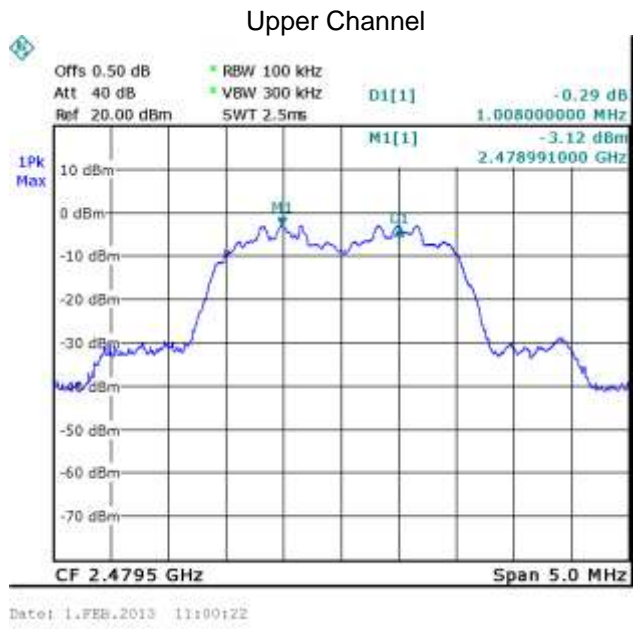

14 Number of Hopping Frequency


Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247 (a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels.
Test Mode:	Test in hopping transmitting operating mode.

14.1 Test Procedure:


1. Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
2. Set the spectrum analyzer: RBW = 1MHz. VBW = 3MHz. Sweep = auto; Detector Function = Peak. Trace = Max hold.
3. Allow the trace to stabilize. It may prove necessary to break the span up to sections. in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section.
4. Set the spectrum analyzer: Centre Frequency = 2.441GHz, Span = 86MHz. Sweep=auto;

14.2 Test Result:


Total Channels are 79 Channels.

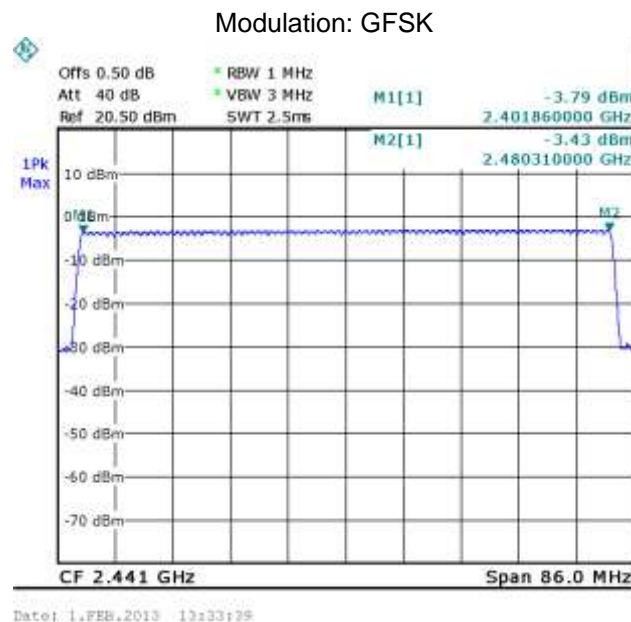

Modulation: Pi/4DQPSK

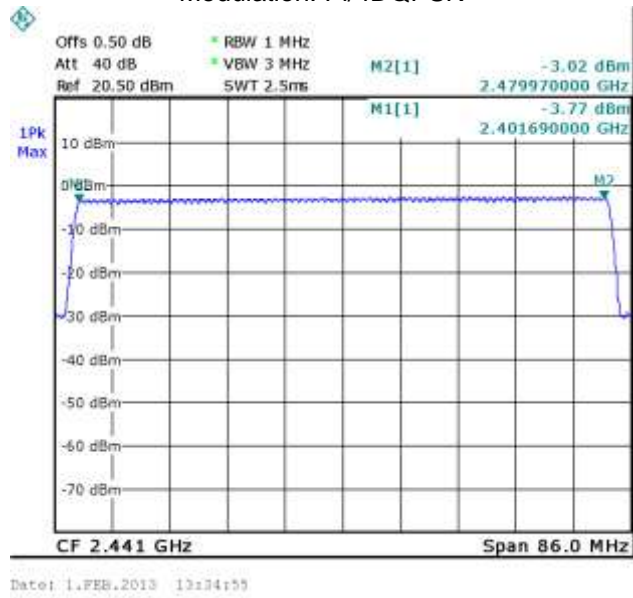

Modulation: 8DPSK

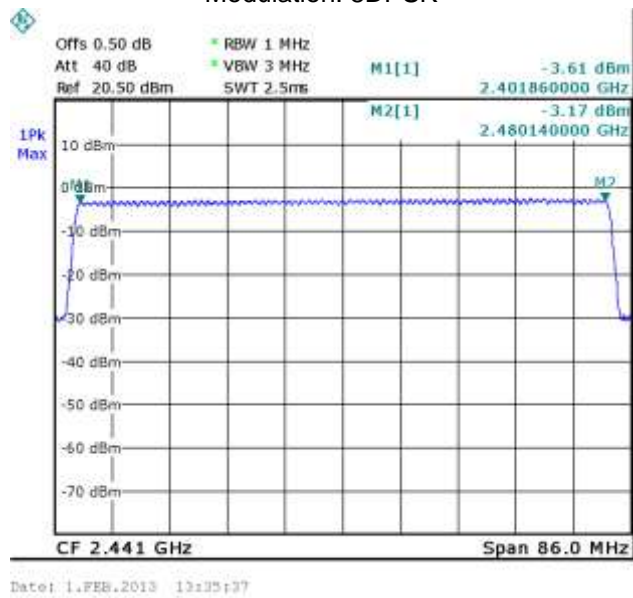

15 Dwell Time

Test Requirement:	FCC CFR47 Part 15 Section 15.247
Test Method:	DA 00-705
Test Limit:	Regulation 15.247(a)(1)(iii) Frequency hopping systems in the 2400-2483.5 MHz band shall use at least 15 channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.
Test Mode:	Test in hopping transmitting operating mode.

15.1 Test Procedure:

- 1.Remove the antenna from the EUT and then connect a low RF cable from the antenna port to the spectrum.
- 2.Set spectrum analyzer span = 0. centered on a hopping channel;
- 3.Set RBW = 1MHz and VBW = 3MHz.Sweep = as necessary to capture the entire dwell time per hopping channel.
- 4.Use the marker-delta function to determine the dwell time. If this value varies with different modes of operation (e.g.. data rate. modulation format. etc.). repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

15.2 Test Result:

Dwell time = Pulse wide x (Hopping rate / Number of channels) x Period

The test period: $T = 0.4(s) * 79 = 31.6 (s)$

DH5 Packet permit maximum $1600 / 79 / 6$ hops per second in each channel (5 time slots RX, 1 time slot TX).

DH3 Packet permit maximum $1600 / 79 / 4$ hops per second in each channel (3 time slots RX, 1 time slot TX).


DH1 Packet permit maximum $1600 / 79 / 2$ hops per second in each channel (1 time slot RX, 1 time slot TX). So, the Dwell Time can be calculated as follows:

Data Packet	Dwell Time(s)
DH5	$1600/79/6*31.6*(MkrDelta)/1000$
DH3	$1600/79/4*31.6*(MkrDelta)/1000$
DH1	$1600/79/2*31.6*(MkrDelta)/1000$
Remark	Mkr Delta is single pulse time.

Modulation	Frequency	Data Packet	Mkr Delta(ms)	Dwell Time(s)	Limits(s)
GFSK	Lower channel	DH1	0.440	0.1408	0.400
	Middle channel		0.420	0.1344	0.400
	Upper channel		0.440	0.1408	0.400
	Lower channel	DH3	1.680	0.2688	0.400
	Middle channel		1.680	0.2688	0.400
	Upper channel		1.700	0.2720	0.400
	Lower channel	DH5	2.940	0.3136	0.400
	Middle channel		2.980	0.3179	0.400
	Upper channel		2.940	0.3136	0.400
Pi/4DQPSK	Lower channel	DH1	0.480	0.1536	0.400
	Middle channel		0.520	0.1664	0.400
	Upper channel		0.480	0.1536	0.400
	Lower channel	DH3	1.720	0.2752	0.400
	Middle channel		1.740	0.2784	0.400
	Upper channel		1.740	0.2784	0.400
	Lower channel	DH5	2.960	0.3157	0.400
	Middle channel		3.020	0.3221	0.400
	Upper channel		3.000	0.3200	0.400
8DPSK	Lower channel	DH1	0.460	0.1472	0.400
	Middle channel		0.460	0.1472	0.400
	Upper channel		0.440	0.1408	0.400
	Lower channel	DH3	1.820	0.2912	0.400
	Middle channel		1.760	0.2816	0.400
	Upper channel		1.700	0.2720	0.400
	Lower channel	DH5	3.020	0.3221	0.400
	Middle channel		3.020	0.3221	0.400
	Upper channel		2.980	0.3179	0.400


Modulation:GFSK

Data Packet:DH1,Lower channel

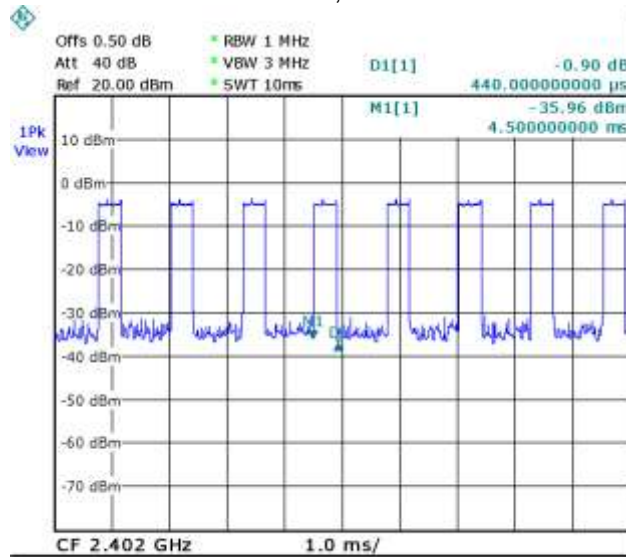


Date: 11.JAN.2013 13:33:36

Data Packet:DH1,Middle channel

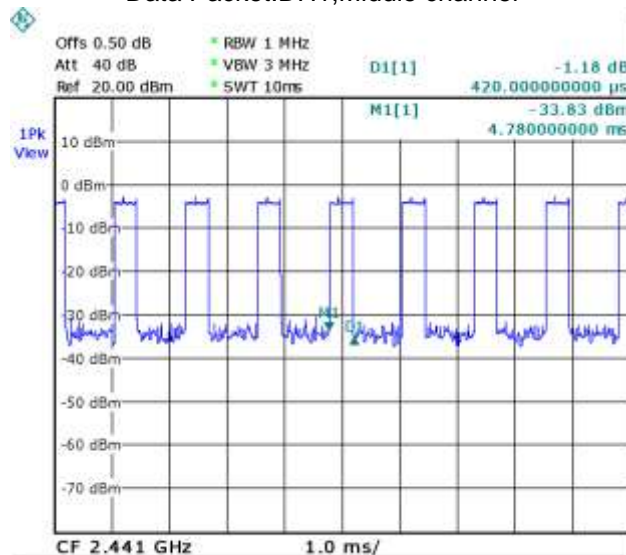


Date: 11.JAN.2013 13:35:08


Data Packet:DH1,Upper channel

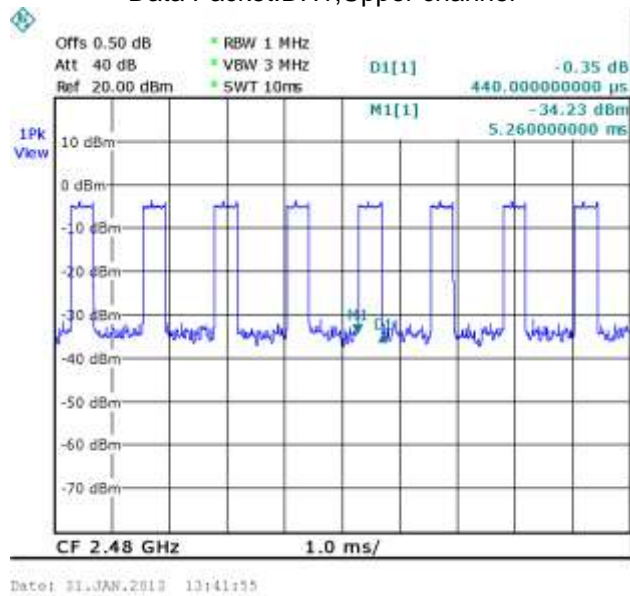


Data Packet:DH3,Lower channel

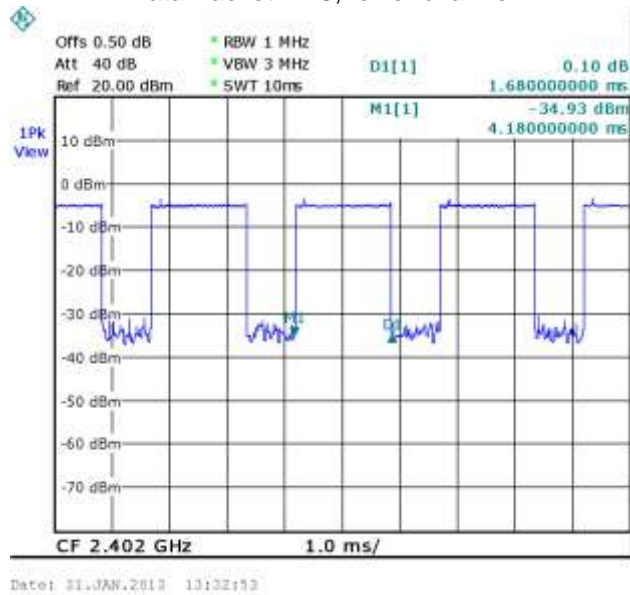


Data Packet:DH3,Middle channel

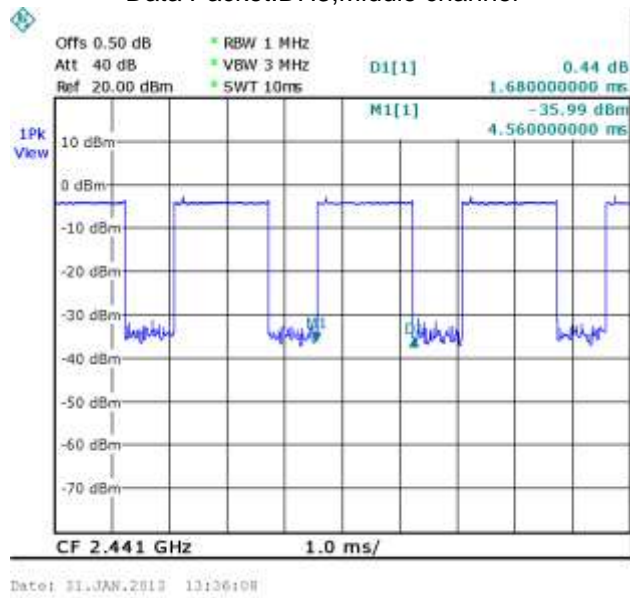


Data Packet:DH3,Upper channel

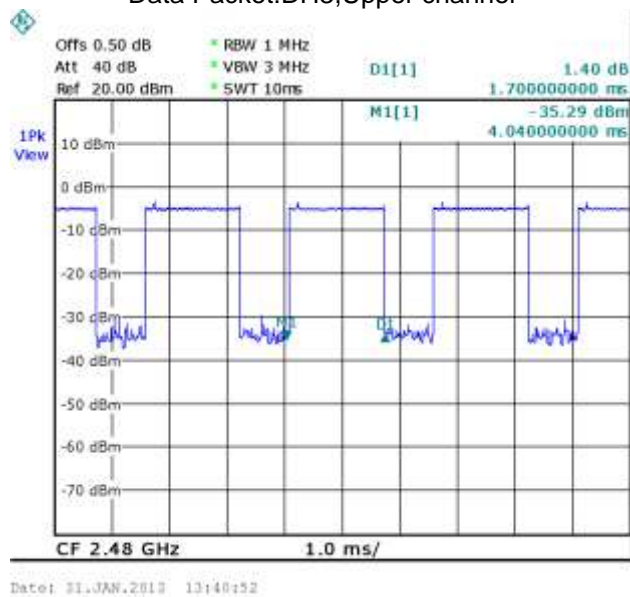


Data Packet:DH5,Lower channel

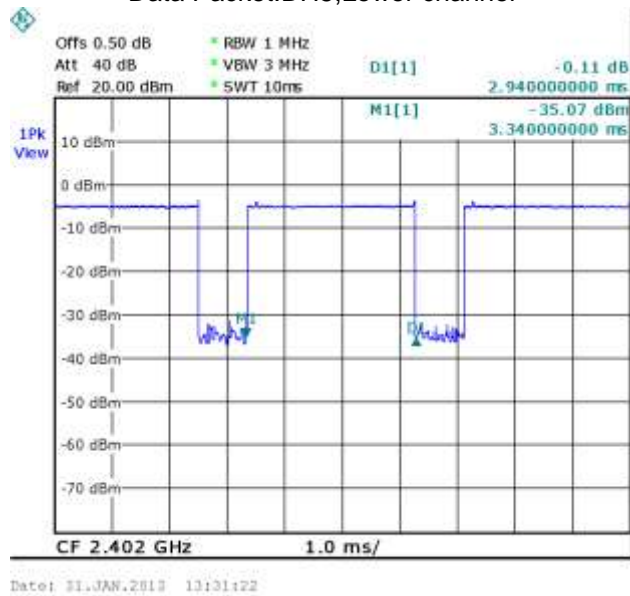

Data Packet:DH5,Middle channel

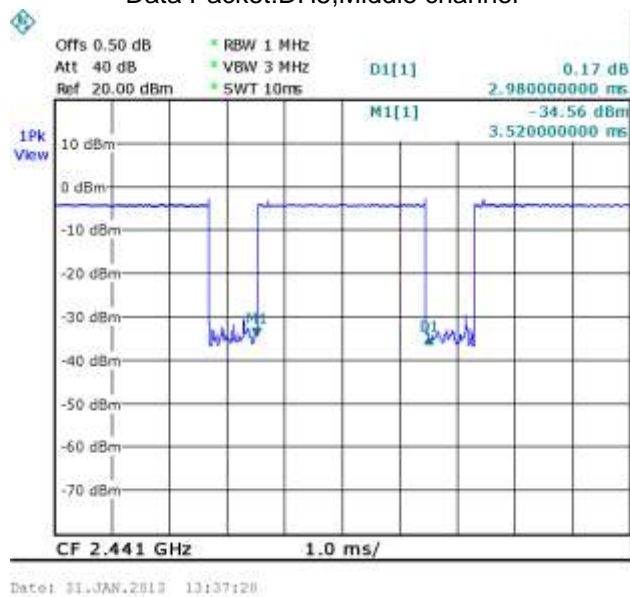


Data Packet:DH5,Upper channel

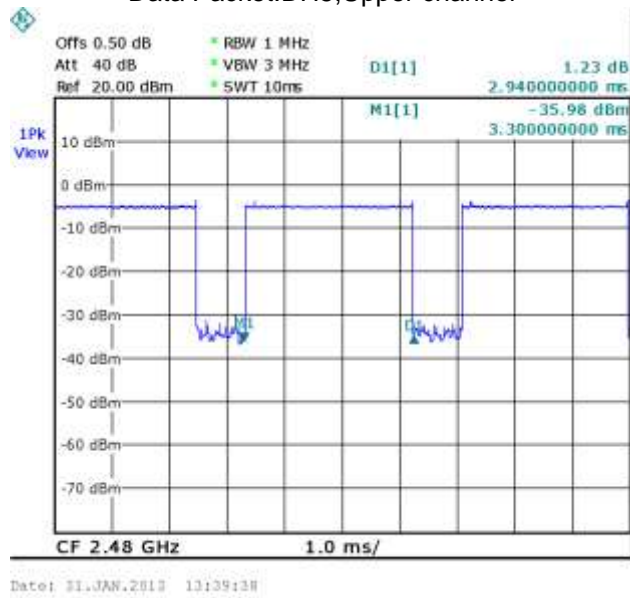


Modulation: Pi/4DQPSK

Data Packet:DH1,Lower channel

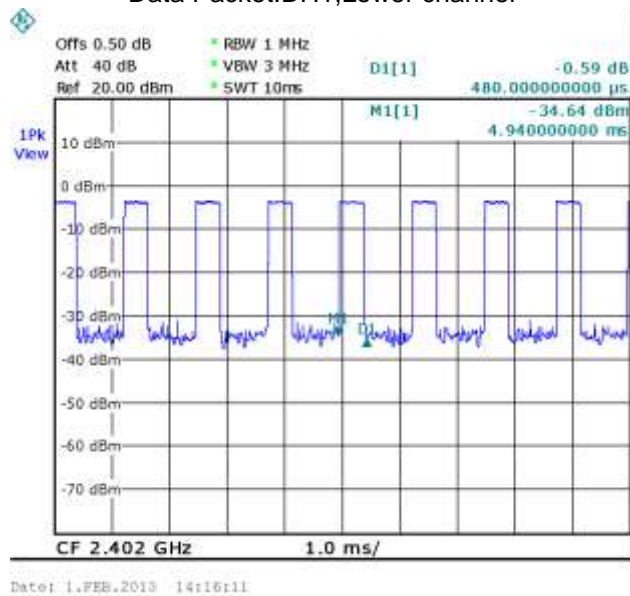


Data Packet:DH1,Middle channel

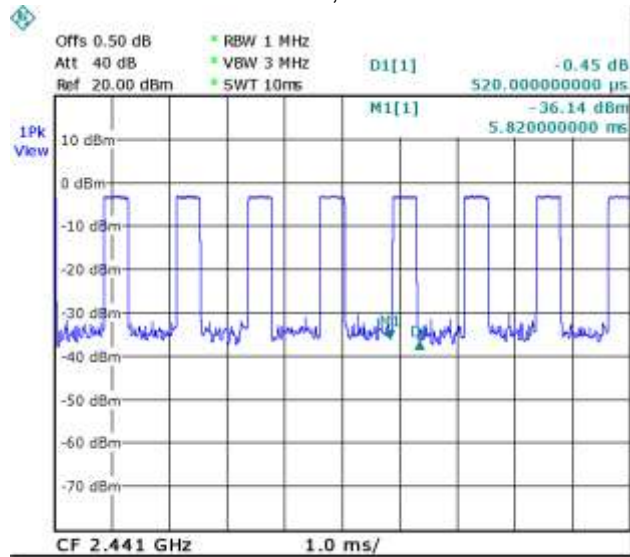


Date: 1.FEB.2013 14:22:22

Data Packet:DH1,Upper channel

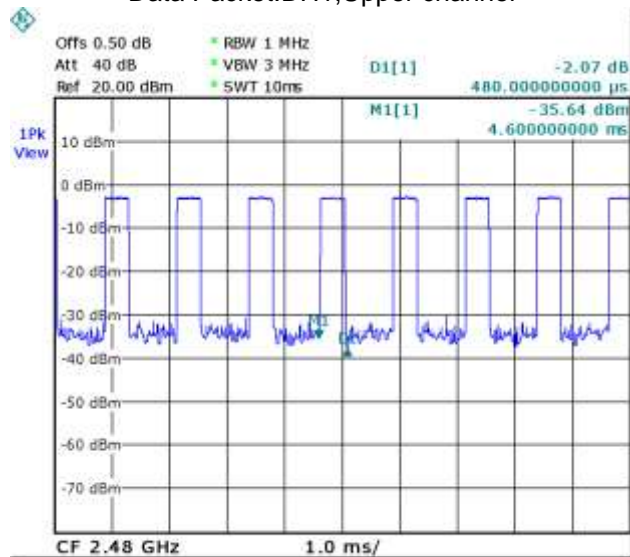


Date: 1.FEB.2013 14:28:49


Data Packet:DH3,Lower channel

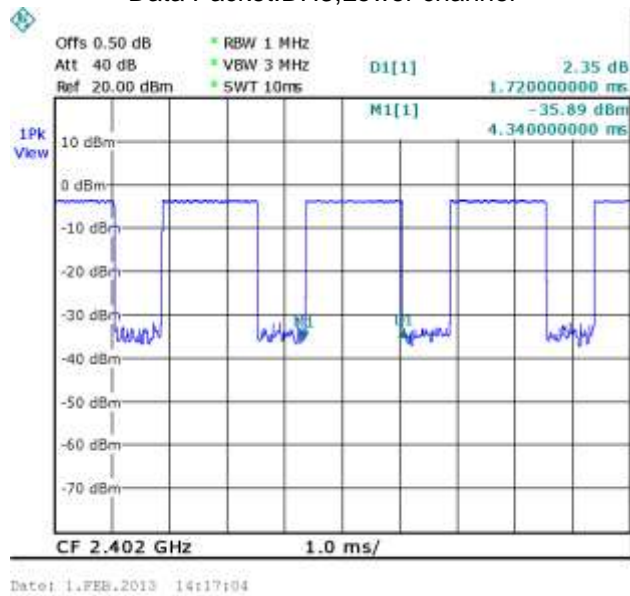

Data Packet:DH3,Middle channel

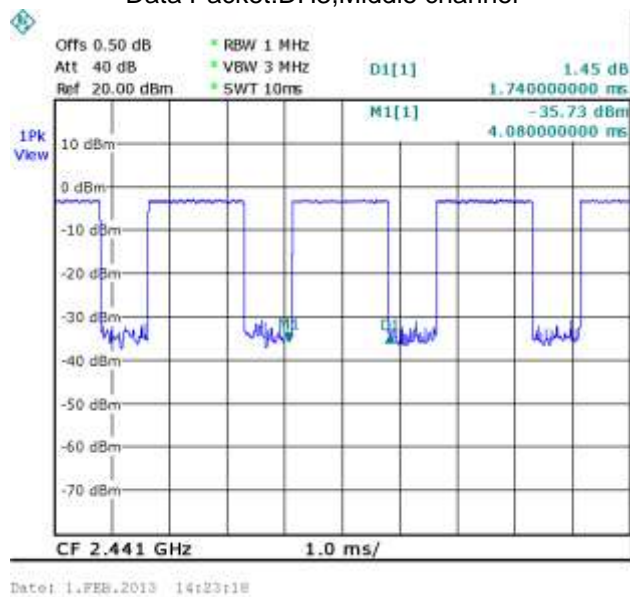


Data Packet:DH3,Upper channel

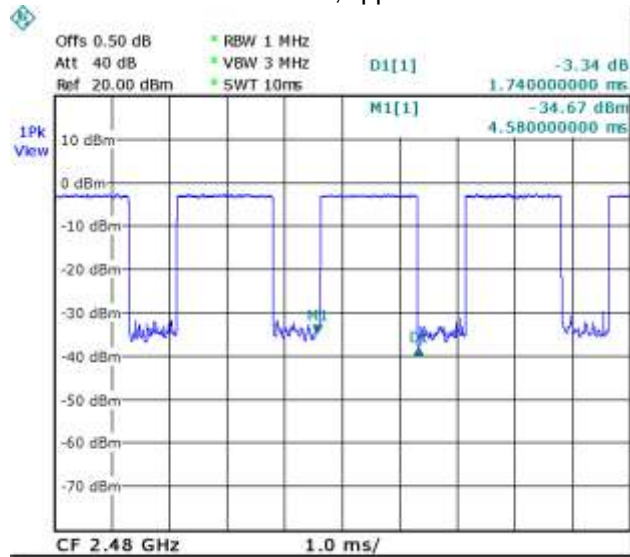


Date: 1.FEB.2013 14:29:49

Data Packet:DH5,Lower channel

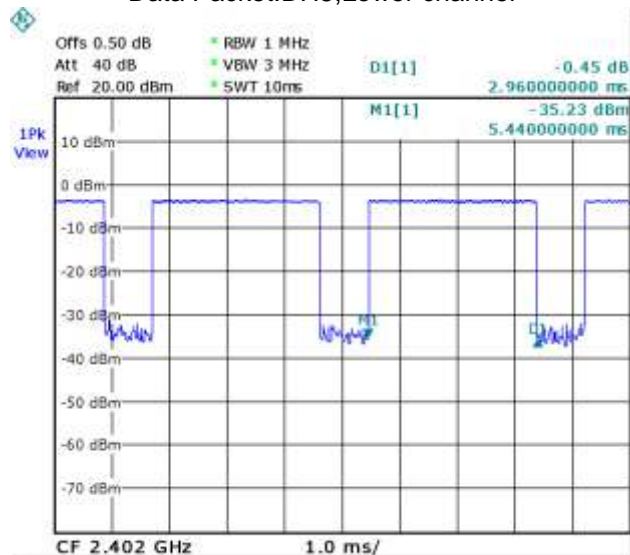


Date: 1.FEB.2013 14:17:57

Data Packet:DH5,Middle channel

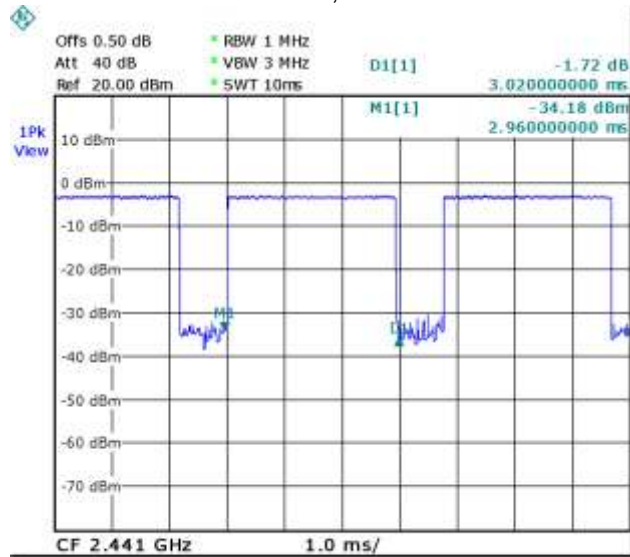

Date: 1.FEB.2013 14:24:14


Data Packet:DH5,Upper channel

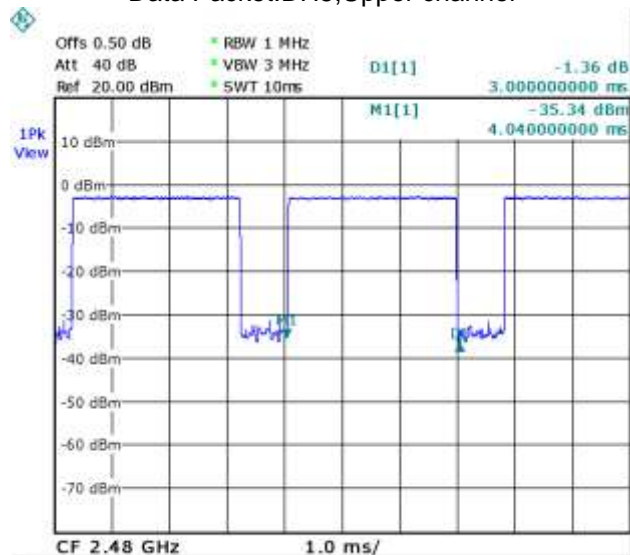

Date: 1.FEB.2013 14:30:49


Modulation: 8DPSK

Data Packet:DH1,Lower channel

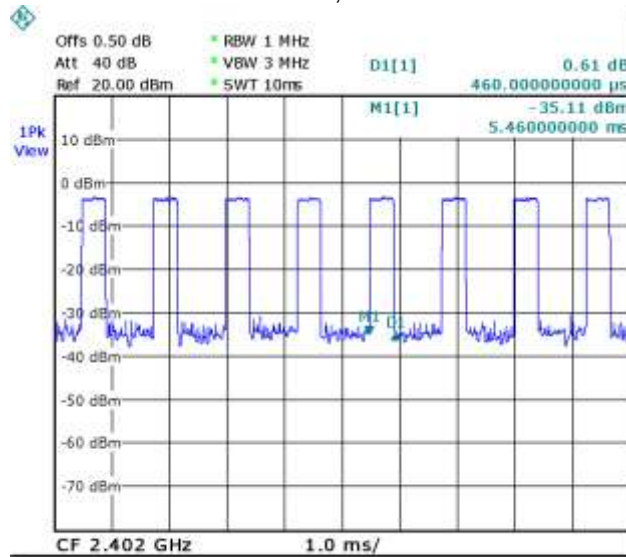


Date: 1.FEB.2013 14:18:19

Data Packet:DH1,Middle channel

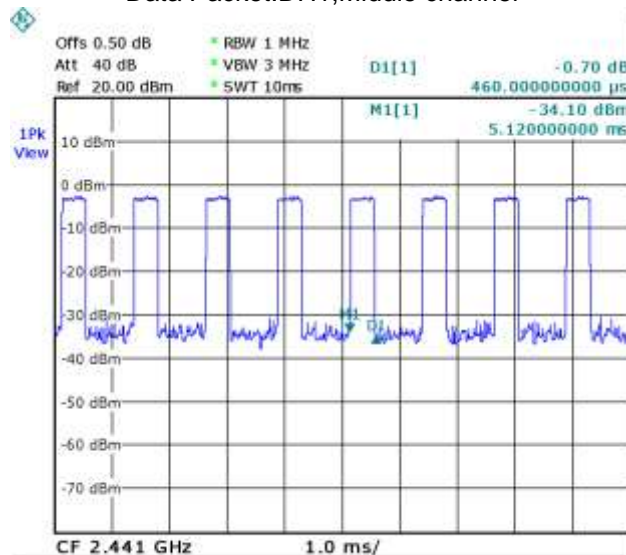


Date: 1.FEB.2013 14:25:10


Data Packet:DH1,Upper channel

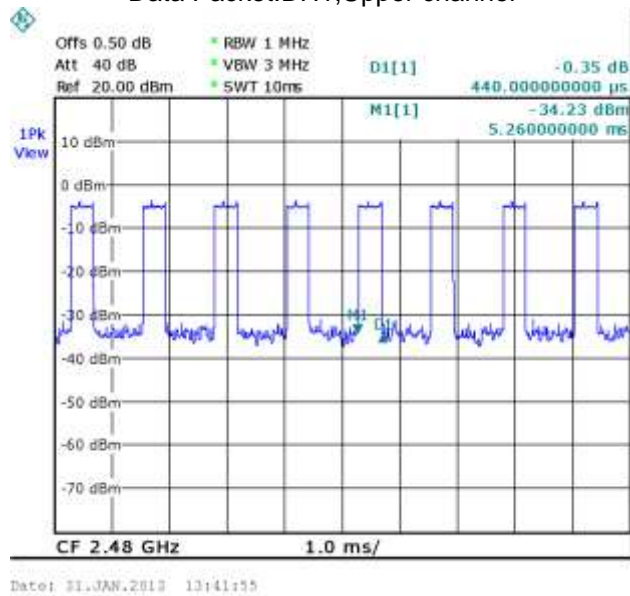


Data Packet:DH3,Lower channel

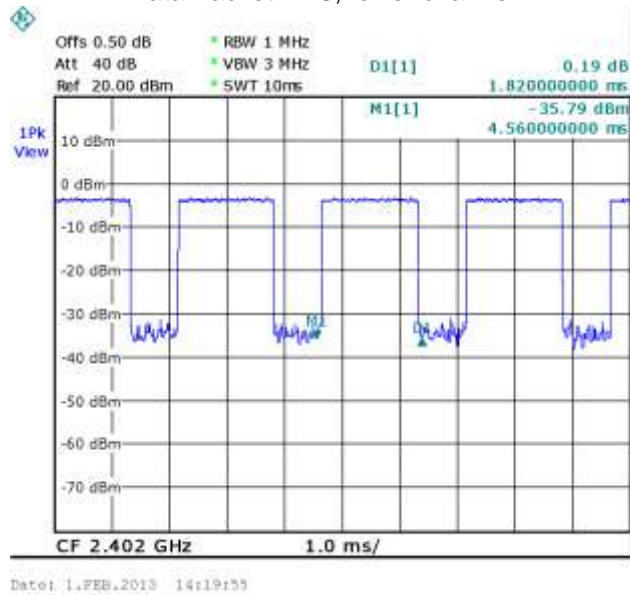


Data Packet:DH3,Middle channel

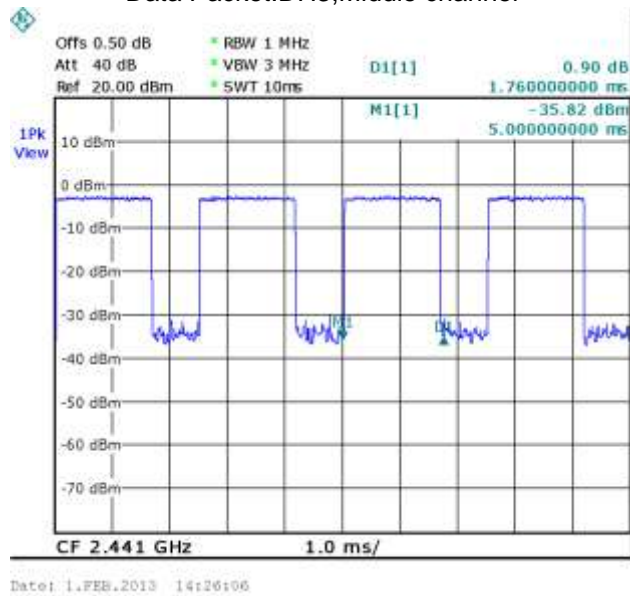


Data Packet:DH3,Upper channel

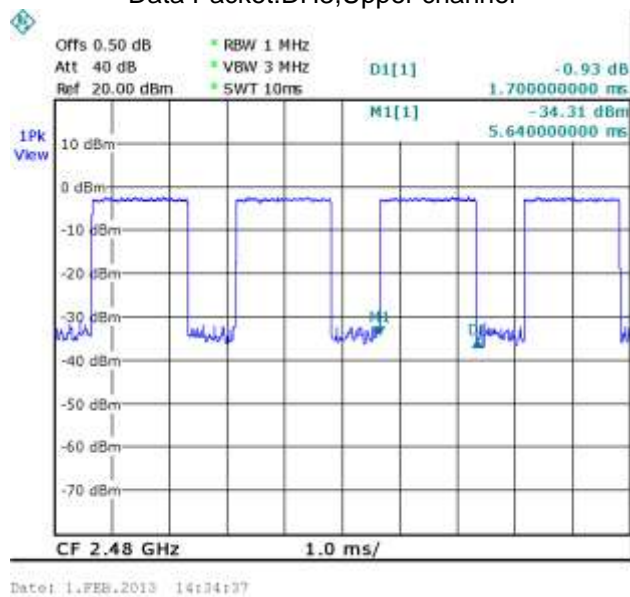


Data Packet:DH5,Lower channel

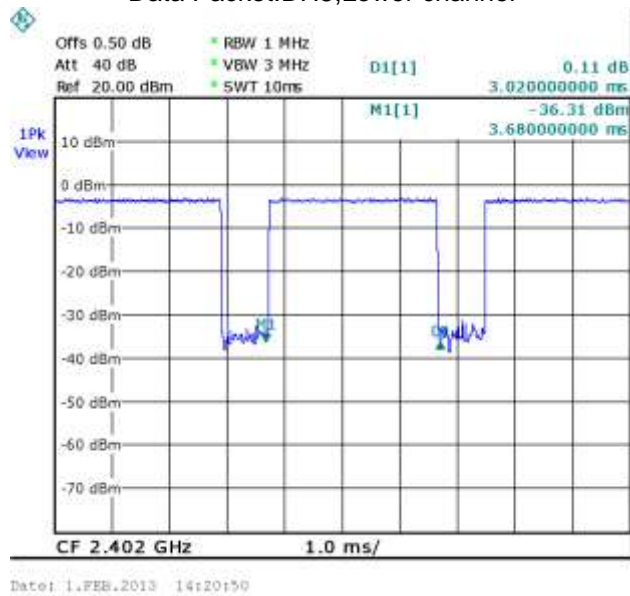

Data Packet:DH5,Middle channel

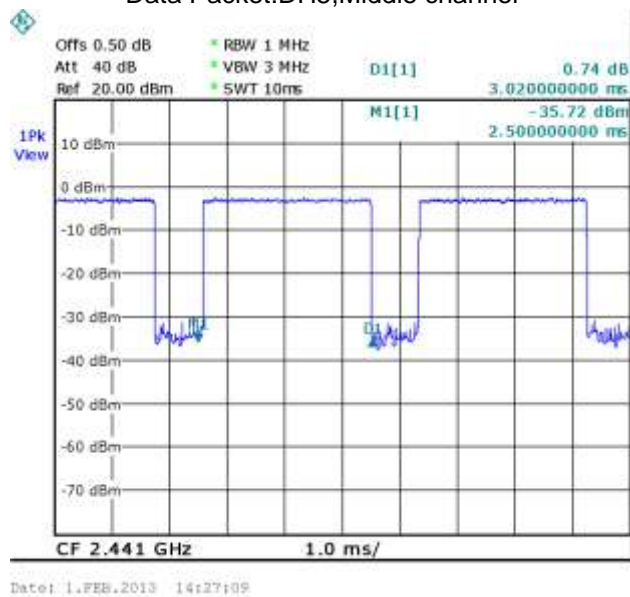

Data Packet:DH5,Upper channel

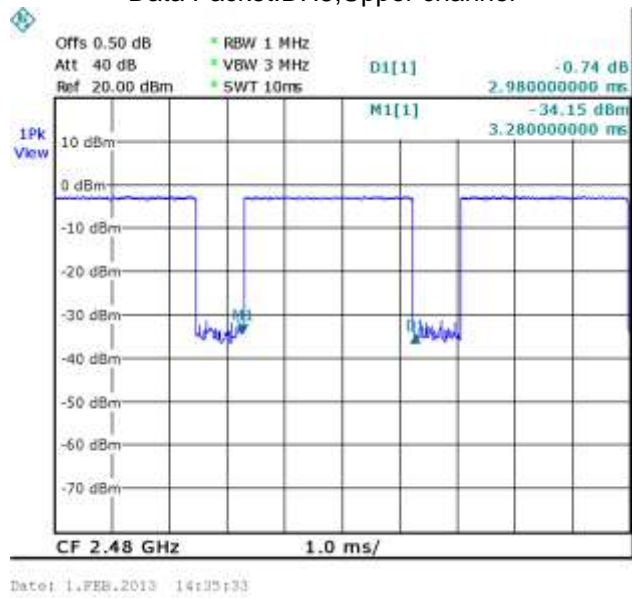

16 Antenna Requirement

According to the FCC Part 15 Paragraph 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. This product has a PCB printed antenna, fulfill the requirement of this section.

17 RF Exposure

Test Requirement: FCC Part 1.1307

Test Mode: The EUT work in test mode(Tx).

17.1 Requirments:

Systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy levels in excess limit for maximum permissible exposure. In accordance with 47 CFR FCC Part 2 Subpart J, section 2.1091 this device has been defined as a mobile device whereby a distance of 0.2 m normally can be maintained between the user and the device.

17.2 The procedures / limit

(A) Limits for Occupational / Controlled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-3.0	614	1.63	(100)*	6
3.0-30	1842 / f	4.89 / f	(900 / f)*	6
30-300	61.4	0.163	1.0	6
300-1500			F/300	6
1500-100,000			5	6

(B) Limits for General Population / Uncontrolled Exposure

Frequency Range (MHz)	Electric Field Strength (E) (V/m)	Magnetic Field Strength (H) (A/m)	Power Density (S) (mW/ cm ²)	Averaging Time E ² , H ² or S (minutes)
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f)*	30
30-300	27.5	0.073	0.2	30
300-1500			F/1500	30
1500-100,000			1.0	30

Note: f = frequency in MHz ; *Plane-wave equivalent power density

17.3 MPE Calculation Method

$$E \text{ (V/m)} = \frac{\sqrt{30 \times P \times G}}{d} \quad \text{Power Density: } Pd \text{ (W/m}^2\text{)} = \frac{E^2}{377}$$

E = Electric field (V/m)

P = Peak RF output power (W)

G = EUT Antenna numeric gain (numeric) ,Gain_{numeric}=10^(dBi/10)

d = Separation distance between radiator and human body (m)

The formula can be changed to

$$Pd = \frac{30 \times P \times G}{377 \times d^2}$$

From the peak EUT RF output power, the minimum mobile separation distance, d=0.2m, as well as the gain of the used antenna, the RF power density can be obtained

Modulation	Antenna Gain (dBi)	Antenna Gain (numeric)	Max. Output Power (dBm)	Peak Output Power (mW)	Power Density (S) (mW/cm ²)	Limit of Power Density (S) (mW/cm ²)
GFSK	0	1	4.53	2.8	0.00056	1
Pi/4DQPSK	0	1	4.08	2.6	0.00051	1
8DPSK	0	1	4.19	2.6	0.00051	1

18 Photographs – Test Setup

18.1 Conducted Emissions




18.2 Radiated Emissions

Below 30MHz



From 30-1000MHz

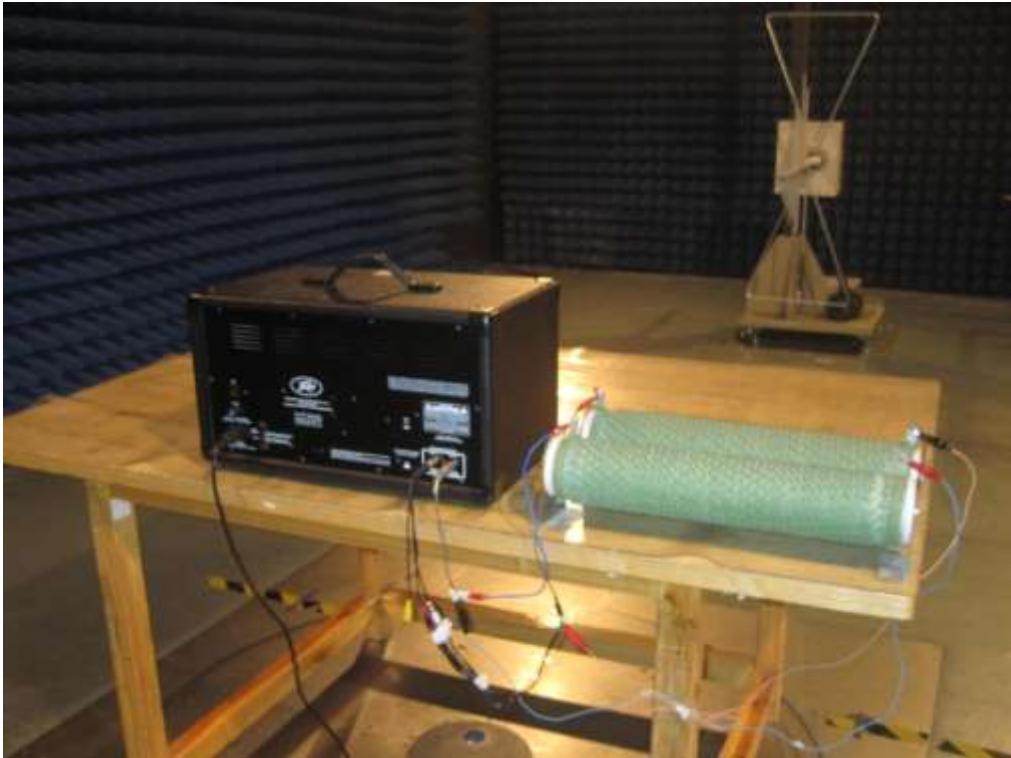

Above 1GHz



19 Photographs - Constructional Details


19.1 EUT – External View












19.2 EUT- Internal View


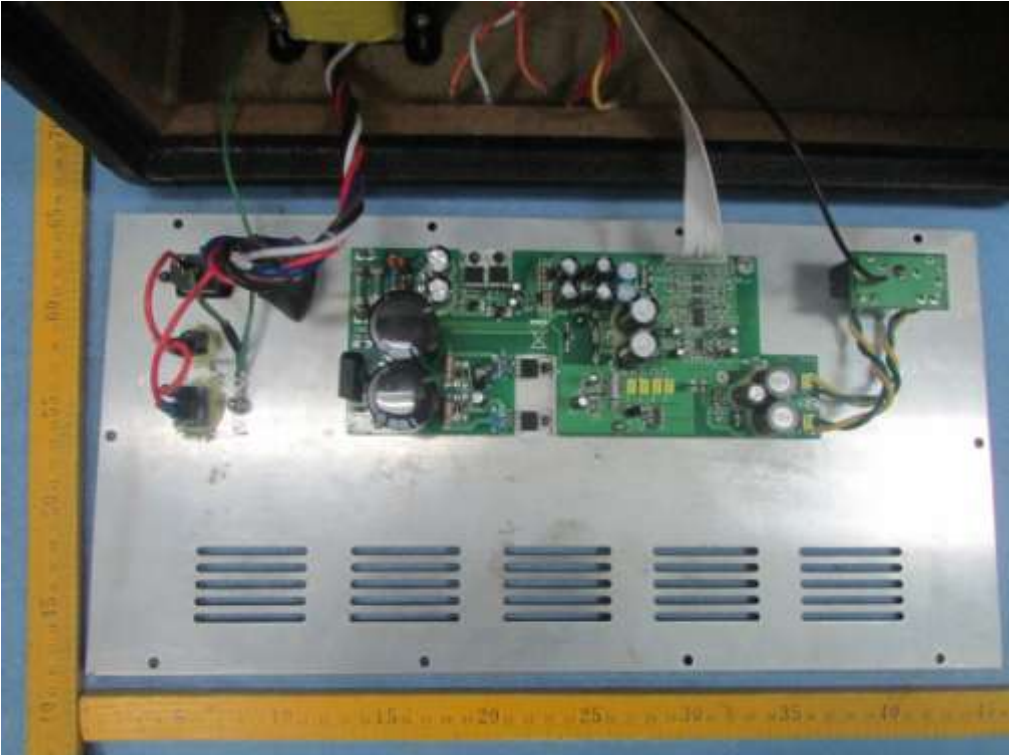


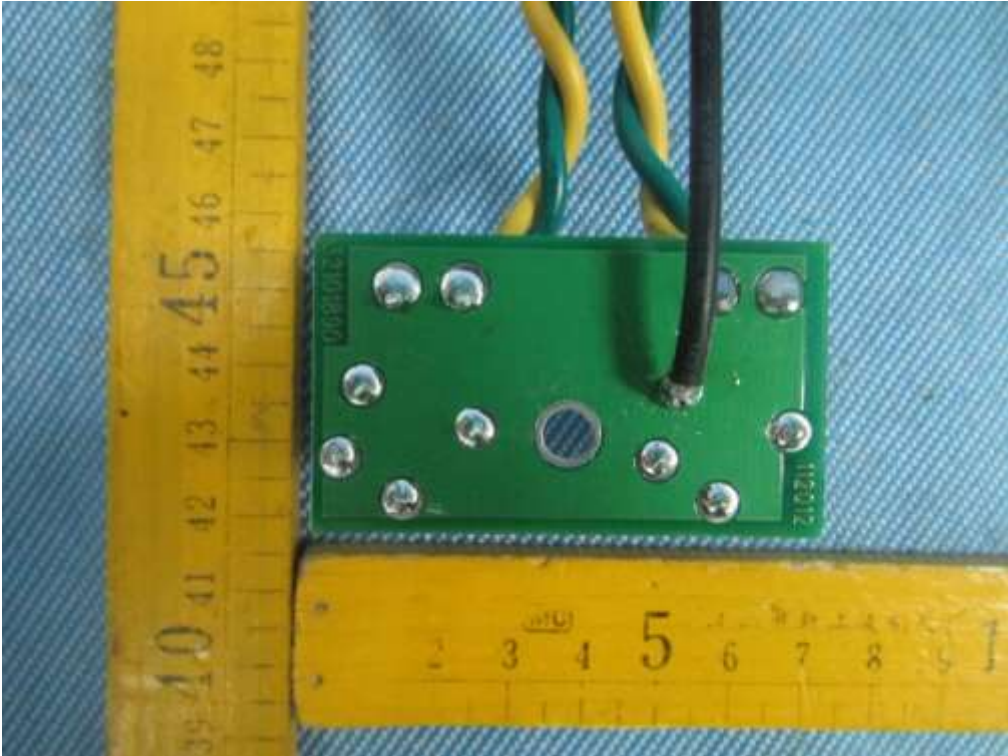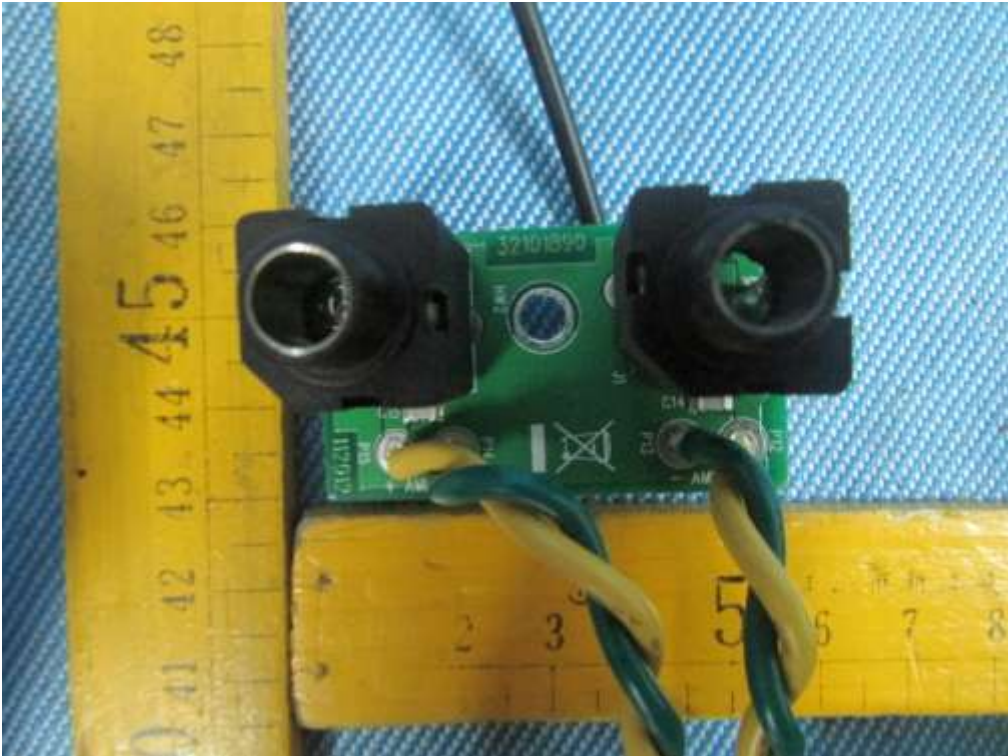





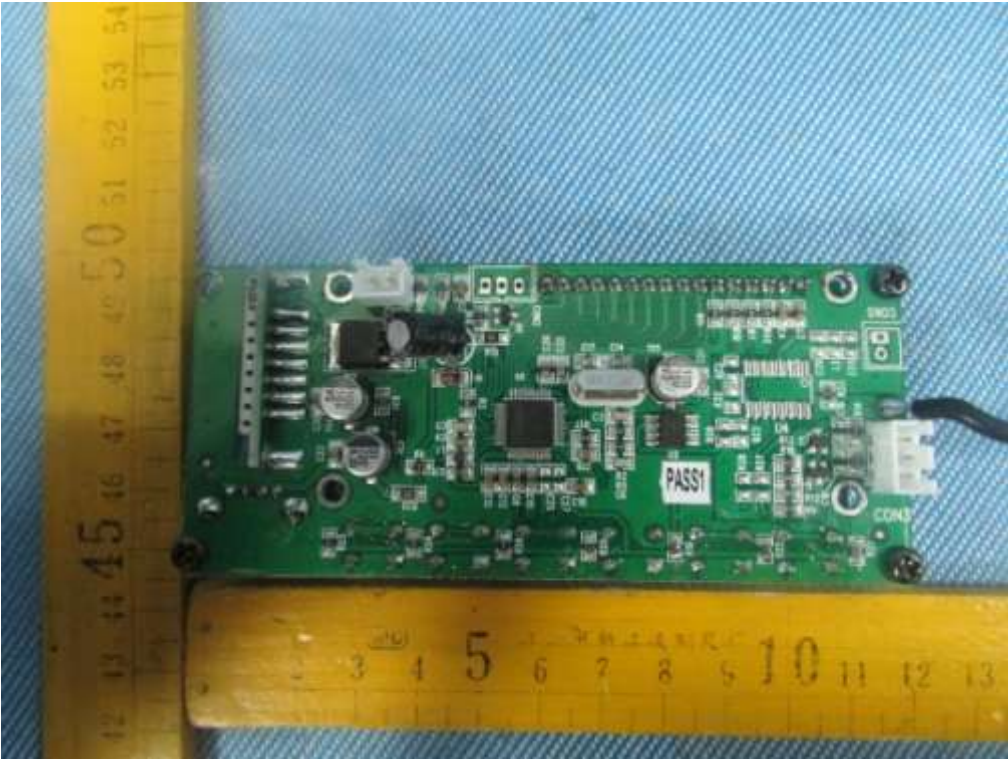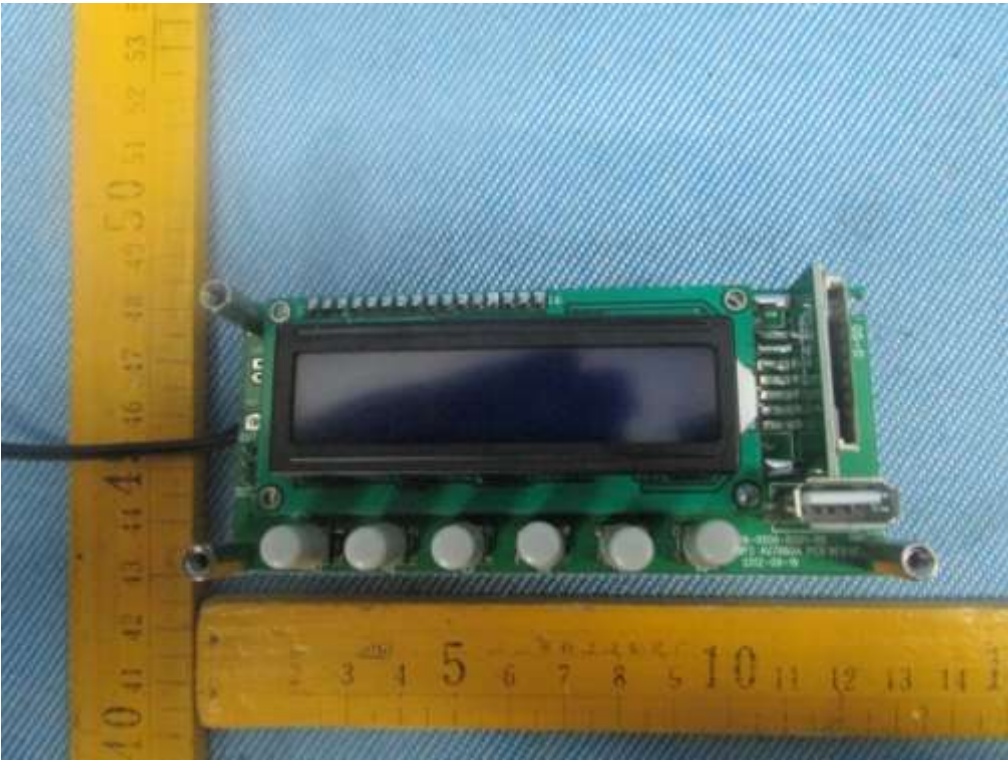


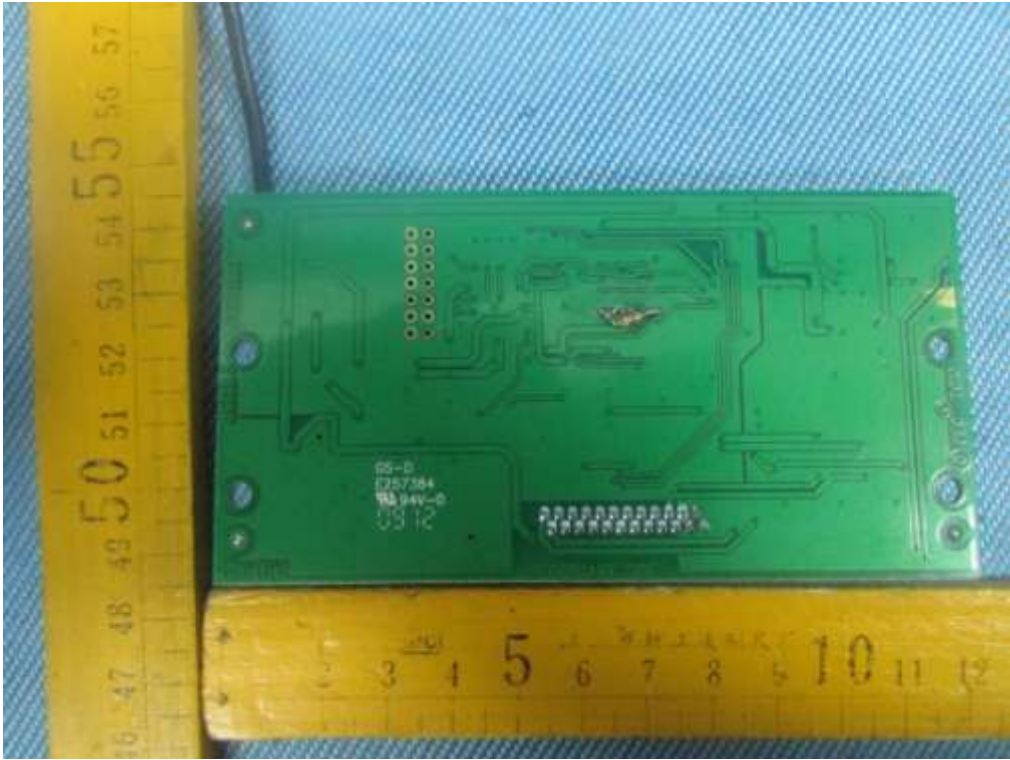

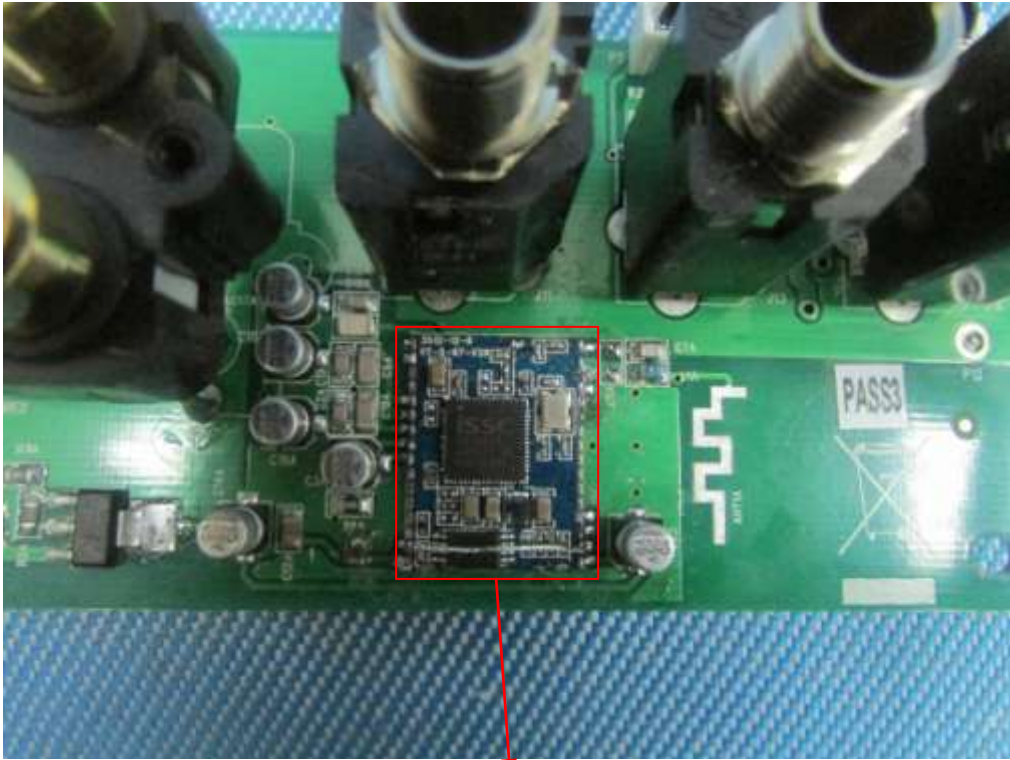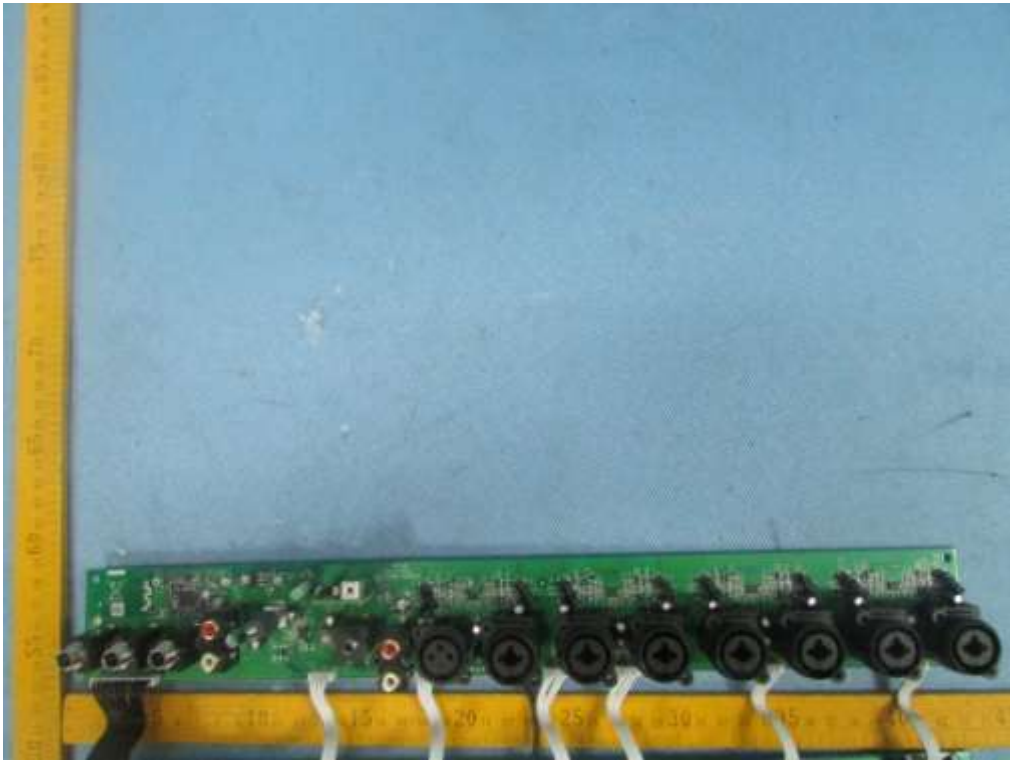

Bluetooth module

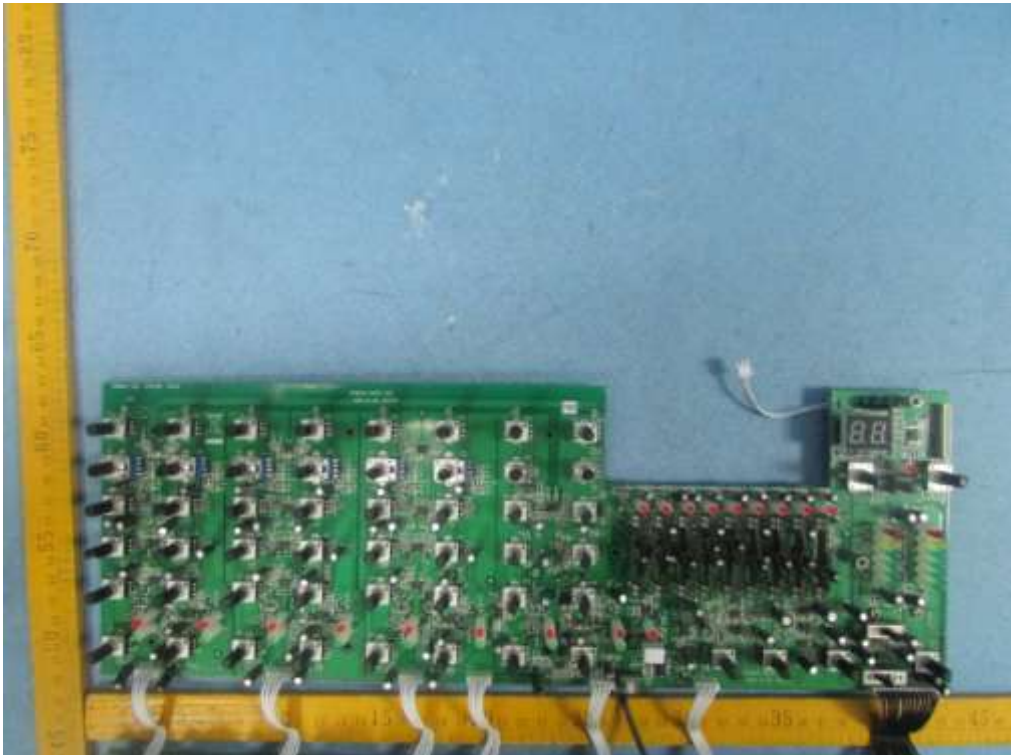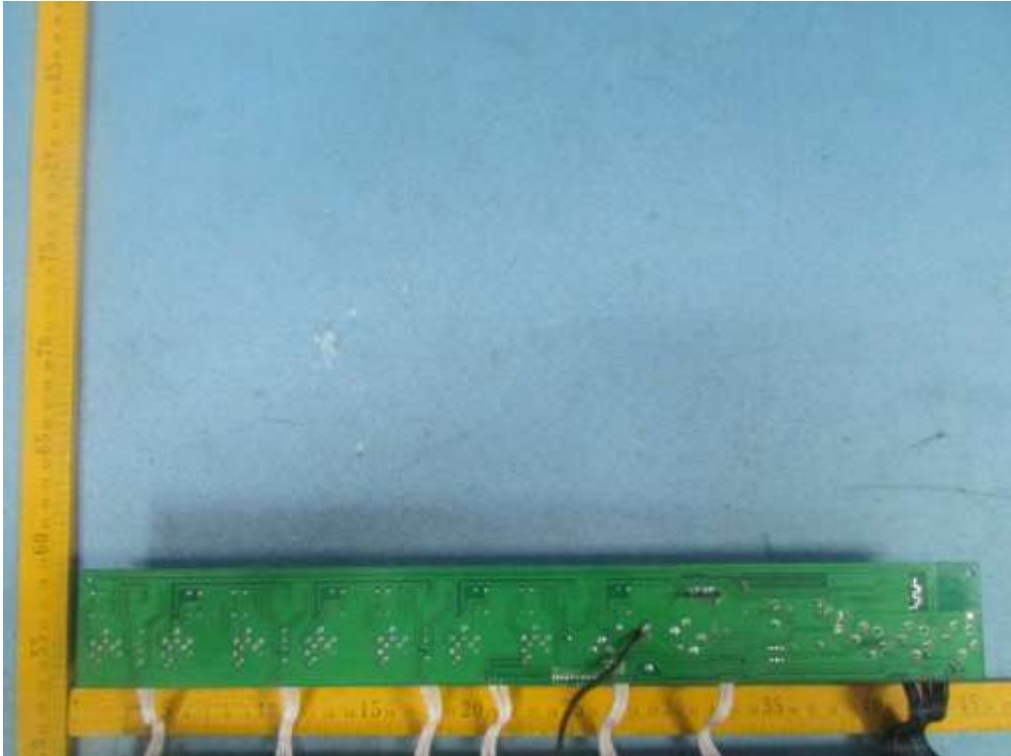

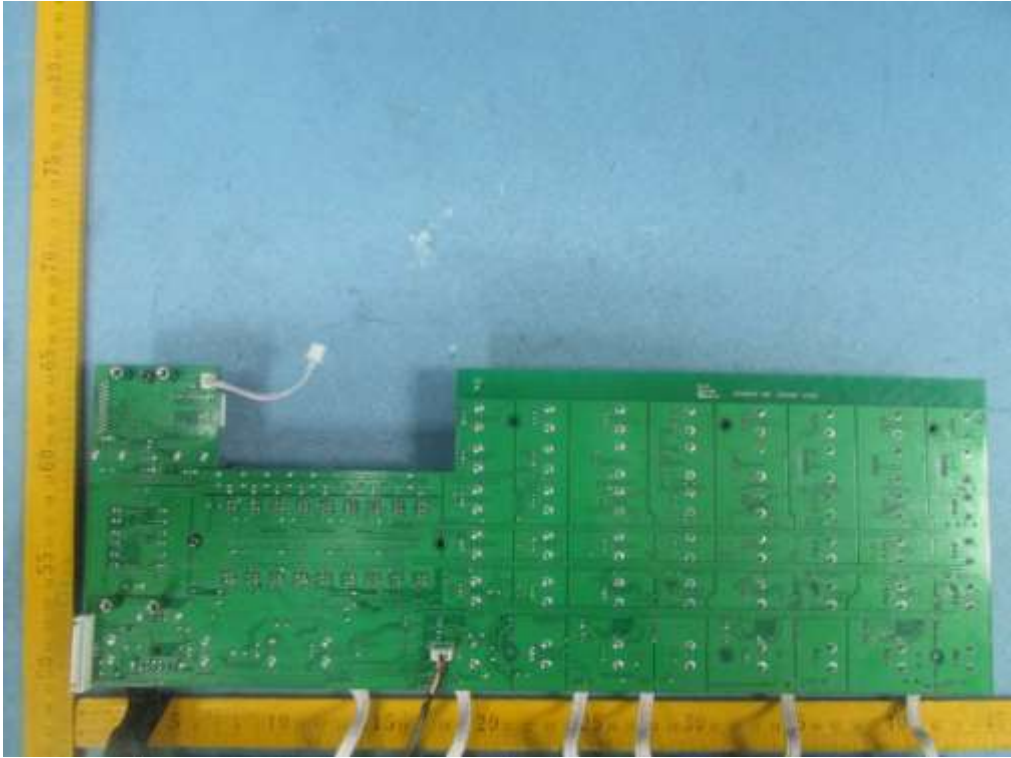

=End of test report=