

INSTRUCTION

MODEL NO. 05-051


5- TRANSISTOR TRANSCEIVER

HOW TO OPERATE YOUR TRANSCEIVER

- 1 OPEN BATTERY COVER AND SNAP IN A 9-VOLT BATTERY.
- 2 TURN ON THE "ON/OFF" SWITCH TO "ON" POSITION. YOUR TRANSCEIVER IS NOW READY TO OPERATE.
- 3 PRESS THE "PUSH-TO-TALK" SWITCH FOR TRANSMITTING.
- 4 RELEASE THE "PUSH-TO-TALK" SWITCH FOR RECEIVING.
- 5 FOR SOUND EFFECT, PRESS THE SOUND EFFECT KEY.
- 6 WHEN TRANSMITTING, SPEAK CLEARLY IN A NORMAL VOICE, HOLDING THE SET ABOUT 3" FROM YOUR MOUTH.
- 7 BEST TRANSMISSION AND RECEPTION ARE OBTAINED WHEN THE ANTENNA IS HELD IN A VERTICAL POSITION.

CAUTION

- 1 YOUR TRANSCEIVER SET HAS BEEN FULLY ADJUSTED PRIOR TO SHIPMENT FROM THE FACTORY AND BE SURE NOT TO TOUCH THE INTERNAL COMPONENTS OTHER THAN REPLACING THE BATTERY.
- 2 WHEN THE SOUND BECOMES WEAK, IT IS TIME TO CHANGE THE BATTERY.
- 3 AFTER USE, ALWAYS RETURN THE "ON / OFF" SWITCH TO THE " OFF " POSITION.
- 4 KEEP YOUR SET IN DRY AND CLEAN PLACE.

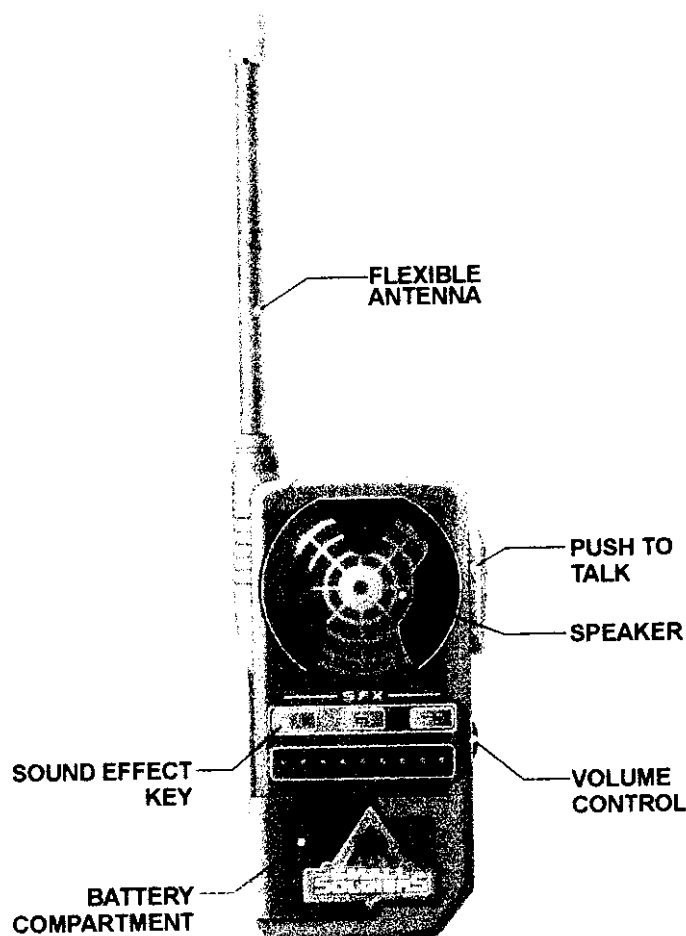

WARNING :

CHANGES OR MODIFICATIONS TO THIS UNIT NOT EXPRESSLY APPROVED BY THE PARTY RESPONSIBLE FOR COMPLIANCE COULD VOID THE USER'S AUTHORITY TO OPERATE THE EQUIPMENT.