

FCC Part 15

EMI TEST REPORT

of

E.U.T. : Bluetooth Dongle

Model : BT-24D, X10DRMD, JD-900B-D

FCC ID : 17OBT-24D

for

APPLICANT : Rexon Technology Corp

ADDRESS : No 261, Jen Hwa Road, Tali, Taichung, Taiwan

Test Performed by

ELECTRONICS TESTING CENTER, TAIWAN

NO. 34. LIN 5. DINGFU, LINKOU DIST.,
NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

Tel:(02)26023052 Fax:(02)26010910
<http://www/etc.org.tw> ; e-mail : emc@etc.org.tw

Report Number : 12-05-RBF-018-04

TEST REPORT CERTIFICATION

Applicant : Rexon Technology Corp
 No 261, Jen Hwa Road, Tali, Taichung, Taiwan
 Manufacture : Rexon Technology Corp
 No 261, Jen Hwa Road, Tali, Taichung, Taiwan

Description of Device :
 a) Type of EUT : Bluetooth Dongle
 b) Trade Name : Rexon, Wireless Pacific, JDI
 c) Model No. : BT-24D, X10DRMD, JD-900B-D
 d) Power Supply : DC 12V

Regulation Applied : FCC Rules and Regulations Part 15 Subpart C

I HEREBY CERTIFY THAT: The data shown in this report were made in accordance with the procedures given in ANSI C63.4, and the energy emitted by the device was founded to be within the limits applicable. I assume full responsibility for accuracy and completeness of these data.

Note: 1. The result of the testing report relate only to the item tested.
 2. The testing report shall not be reproduced expect in full, without the written approval of ETC.

Summary of Tests

Test	Results
Radiated Emission	Pass
Conducted Emission	Pass
Hopping Channel Separation	Pass
Number of Hopping frequencies used	Pass
Hopping Channel Bandwidth	Pass
Dwell Time of each frequency	Pass
Output Power Requirement	Pass
100 kHz Bandwidth of Frequency Band Edges Requirement	Pass
Out-of-Band Conducted Emission Requirement	Pass

Date Test Item Received : *May 03, 2012*
Date Test Campaign Completed : *Aug. 28, 2012*
Date of Issue : *Aug. 29, 2012*

Test Engineer : 
(Vincent Chang, Engineer)

Approve & Authorized : 
S. S. Liou, Section Manager
EMC Dept. II of ELECTRONICS
TESTING CENTER, TAIWAN

Table of Contents	Page
1 GENERAL INFORMATION.....	1
1.1 Product Description.....	1
1.2 Test Methodology	1
1.3 Test Facility.....	1
2 PROVISIONS APPLICABLE.....	2
2.1 Definition	2
2.2 Requirement for Compliance	3
2.3 Restricted Bands of Operation	5
2.4 Labeling Requirement.....	6
2.5 User Information	6
3 SYSTEM TEST CONFIGURATION.....	7
3.1 Justification	7
3.2 Devices for Tested System.....	7
4 RADIATED EMISSION MEASUREMENT	8
4.1 Applicable Standard	8
4.2 Measurement Procedure.....	8
4.3 Measuring Instrument	10
4.4 Radiated Emission Data	11
4.5 Field Strength Calculation.....	19
4.6 Photos of Radiation Measuring Setup.....	20
5 CONDUCTED EMISSION MEASUREMENT	22
5.1 Description	22
6 ANTENNA REQUIREMENT	23
6.1 Standard Applicable	23
6.2 Antenna Construction.....	23
7 HOPPING CHANNEL SEPARATION.....	24
7.1 Standard Applicable	24
7.2 Measurement Procedure.....	24
7.3 Measurement Equipment	25
7.4 Measurement Data	25
8 NUMBER OF HOPPING FREQUENCY USED	32
8.1 Standard Applicable	32
8.2 Measurement Procedure.....	32
8.3 Measurement Equipment	32

8.4 Measurement Data	33
9 CHANNEL BANDWIDTH.....	37
9.1 Standard Applicable	37
9.2 Measurement Procedure.....	37
9.3 Measurement Equipment	38
9.4 Measurement Data	38
10 DWELL TIME ON EACH CHANNEL.....	45
10.1 Standard Applicable	45
10.2 Measurement Procedure.....	45
10.3 Measurement Equipment	45
10.4 Measurement Data	46
11 OUTPUT POWER MEASUREMENT.....	66
11.1 Standard Applicable	66
11.2 Measurement Procedure.....	66
11.3 Measurement Equipment	66
11.4 Measurement Data	67
12 100 KHZ BANDWIDTH OF BAND EDGES MEASUREMENT.....	74
12.1 Standard Applicable	74
12.2 Measurement Procedure.....	74
12.3 Measurement Equipment	75
12.4 Measurement Data	75
13 CONDUCTED SPURIOUS EMISSION MEASUREMENT.....	84
13.1 Standard Applicable	84
13.2 Measurement Procedure.....	84
13.3 Measurement Equipment	85
13.4 Measurement Data	85

1 GENERAL INFORMATION

1.1 Product Description

- a) Type of EUT : Bluetooth Dongle
- b) Trade Name : Rexon, Wireless Pacific, JDI
- c) Model No. : BT-24D, X10DRMD, JD-900B-D
- d) Power Supply : DC 12V
- e) Model Difference : Serial models are the same with main model BT-24D and the only difference is their brand and model name.
- f) Note : The Bluetooth dongle was equipped with a 16dBm bidirectional amplifier with a 10ft RG58A extension cable of 3.2dB cable loss.

1.2 Test Methodology

Both conducted and radiated emissions were performed according to the procedures illustrated in ANSI C63.4 (2003). Other required measurements were illustrated in separate sections of this test report for details.

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located on the roof top of Building at NO. 34. LIN 5. DINGFU, LINKOU DIST., NEW TAIPEI CITY, TAIWAN, 24442, R.O.C.

This site has been fully described in a report submitted to your office, and accepted in a letter dated Jan. 11, 2011.

2 PROVISIONS APPLICABLE

2.1 Definition

Unintentional radiator:

A device that intentionally generates and radio frequency energy for use within the device, or that sends radio frequency signals by conduction to associated equipment via connecting wiring, but which is not intended to emit RF energy by radiation or induction.

Class A Digital Device:

A digital device which is marketed for use in commercial or business environment; exclusive of a device which is market for use by the general public, or which is intended to be used in the home.

Class B Digital Device :

A digital device which is marketed for use in a residential environment notwithstanding use in a commercial, business or industrial environment. Example of such devices that are marketed for the general public.

Note : A manufacturer may also qualify a device intended to be marketed in a commercial, business, or industrial environment as a Class B digital device, and in fact is encouraged to do so, provided the device complies with the technical specifications for a Class B Digital Device. In the event that a particular type of device has been found to repeatedly cause harmful interference to radio communications, the Commission may classify such a digital device as a Class B Digital Device, Regardless of its intended use.

Intentional radiator:

A device that intentionally generates and emits radio frequency energy by radiation or induction.

2.2 Requirement for Compliance

(1) Conducted Emission Requirement

Except as shown in paragraphs (b) and (c) of this section, for an intentional radiator that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150kHz to 30 MHz shall not exceed the limits in the following table, as measured using a 50 μ H/50 ohms line impedance stabilization network (LISN). Compliance with the provisions of this paragraph shall be based on the measurement of the radio frequency voltage between each power line and ground at the power terminal. The lower limit applies at the boundary between the frequency ranges.

Frequency MHz	Quasi Peak dB μ V	Average dB μ V
0.15 - 0.5	66-56*	56-46*
0.5 - 5.0	56	46
5.0 - 30.0	60	50

* Decreases with the logarithm of the frequency

For intentional device, according to §15.207(a) Line Conducted Emission Limits is same as above table.

(2) Radiated Emission Requirement

For unintentional device, according to §15.109(a), except for Class A digital devices, the field strength of radiated emissions from unintentional radiators at a distance of 3 meters shall not exceed the following values:

Frequency MHz	Distance Meters	Radiated dB μ V/m	Radiated μ V/m
30 - 88	3	40.0	100
88 - 216	3	43.5	150
216 - 960	3	46.0	200
Above 960	3	54.0	500

For intentional device, according to §15.209(a), the general requirement of field strength of radiated emissions from intentional radiators at a distance of 3 meters shall not exceed the above table.

(3) Antenna Requirement

For intentional device, according to §15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

(4) Hopping Channel Separation

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

(5) Number of Hopping frequencies used

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

(6) Hopping Channel Bandwidth

For frequency hopping system operating in the 2400–2483.5 MHz band, there is no requirement for the maximum 20dB bandwidth of the hopping channel. The measurement of the hopping channel bandwidth is for the reference of the hopping channel separation requirement.

(7) Dwell Time of each frequency

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400–2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

(8) Output Power Requirement

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

(9) 100 kHz Bandwidth of Frequency Band Edges Requirement

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the

transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

(10) Out-of-Band Conducted Emission Requirement

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

2.3 Restricted Bands of Operation

Only spurious emissions are permitted in any of the frequency bands listed below :

MHz	MHz	MHz	GHz
0.090 - 0.110	16.42-16.423	399.9-410	4.5-5.15
0.495 - 0.505 **	16.69475 - 16.69525	608-614	5.35-5.46
2.1735 - 2.1905	16.80425 - 16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475 - 156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2655-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3360-4400	Above 38.6
13.36-13.41			

** : Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz

2.4 Labeling Requirement

The device shall bear the following statement in a conspicuous location on the device :

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions : (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

2.5 User Information

The users manual or instruction manual for an intentional or unintentional radiator shall caution the user that changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual.

The Federal Communications Commission Radio Frequency Interference Statement includes the following paragraph.

This equipment has been tested and found to comply with the limits for a Class B Digital Device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation.

This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instruction may cause harmful interference to radio communication. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio / TV technician for help.

3 SYSTEM TEST CONFIGURATION

3.1 Justification

For both radiated and conducted emissions below 1 GHz, the system was configured for testing in a typical fashion as a customer would normally use it. The peripherals other than EUT were connected in normally standing by situation. Measurement was performed under the condition that a computer program was exercised to simulate data communication of EUT, and the transmission rate was set to maximum allowed by EUT. Three highest emissions were verified with varying placement of the transmitting antenna connected to EUT (if applicable) to maximize the emission from EUT.

For conducted and radiated emissions, whichever RF channel is operated, the digital circuits' function identically. As the reason, measurement of emissions from digital circuits is performed with the highest, middle and the lowest channel by transmitting mode.

3.2 Devices for Tested System

Device	Manufacture	Model / FCC ID.	Description
Bluetooth Dongle *	Rexon Technology Corp	BT-24D, X10DRMD, JD-900B-D / 17OBT-24D	----

Remark “*” means equipment under test.

4 RADIATED EMISSION MEASUREMENT

4.1 Applicable Standard

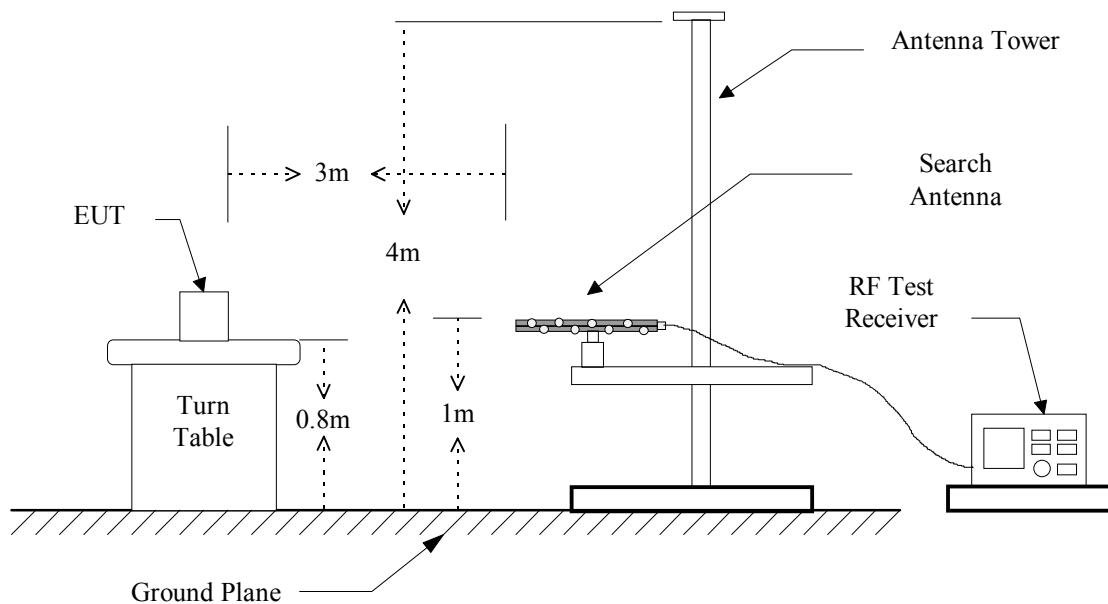
For unintentional radiator, the radiated emission shall comply with §15.109(a).

For intentional radiators, according to §15.247 (a), operation under this provision is limited to frequency hopping and direct sequence spread spectrum, and the out band emission shall be comply with §15.247 (c)

4.2 Measurement Procedure

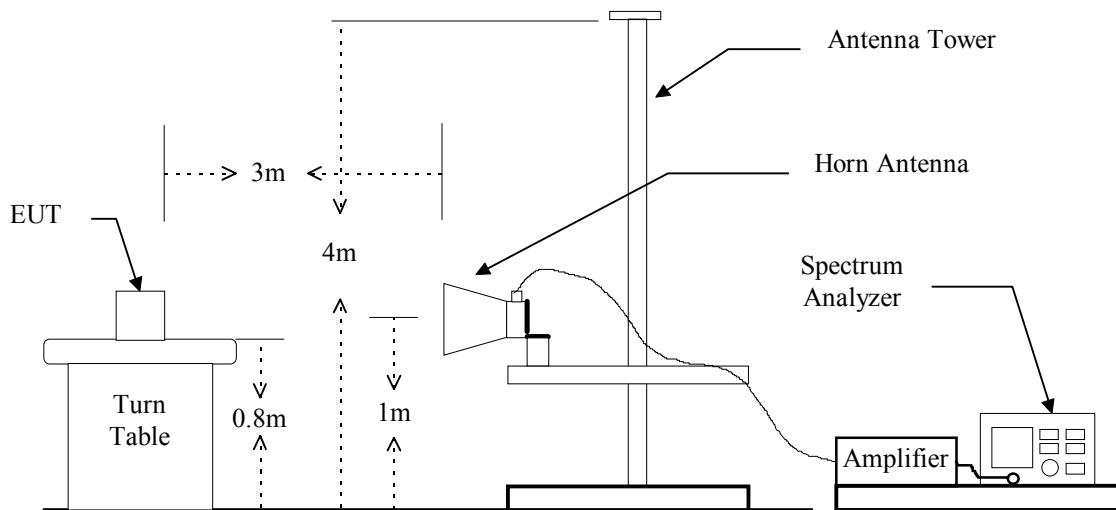
1. Setup the configuration per figure 1 and 2 for frequencies measured below and above 1 GHz respectively.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0 ° to 360 ° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading. A RF test receiver is also used to confirm emissions measured.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.
7. Check the three frequencies of highest emission with varying the placement of cables associated with EUT to obtain the worse case and record the result.

Figure 1 : Frequencies measured below 1 GHz configuration



Note: For substitution method, replace the EUT with a tuned dipole antenna relative to each frequency and connect to a standard signal generator (SG) via a low loss cable.

Figure 2 : Frequencies measured above 1 GHz configuration



Note: For substitution method, replace the EUT with a horn antenna and connect to a standard signal generator (SG) via a low loss cable.

4.3 Measuring Instrument

The following instrument are used for radiated emissions measurement:

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Test Receiver	Rohde & Schwarz	ESVS30	2012/05/07	2013/05/07
Spectrum	Advantest	R3162	2012/03/05	2013/03/08
Bi-Log Antenna	ETC	MCTD 2756	2012/01/10	2013/01/09
Log-periodic Antenna	EMCO	3146	2011/11/04	2012/11/03
Double Ridged Guide Horn Antenna	EMCO	3116	2011/10/24	2012/10/26
Biconical Antenna	EMCO	3110B	2011/11/18	2012/11/17
Double Ridged Antenna	EMCO	3115	2012/05/18	2013/05/17
Amplifier	HP	8449B	2011/12/28	2012/12/27
Amplifier	HP	83051A	2012/05/16	2013/05/15
Amplifier	HP	8447D	2012/05/16	2013/05/15
Spectrum	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20

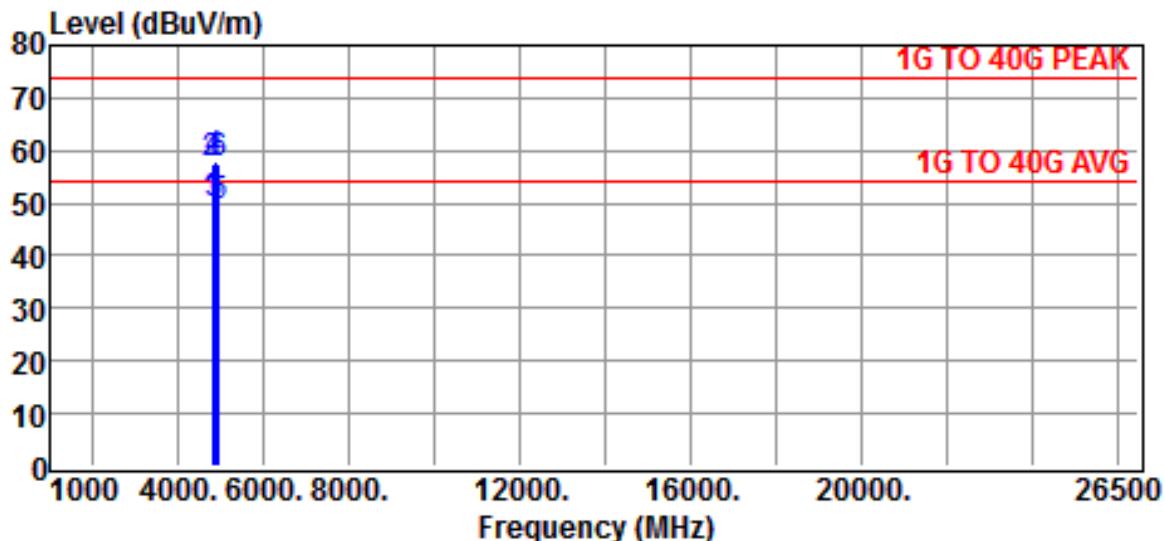
Measuring instrument setup in measured frequency band when specified detector function is used :

Frequency Band (MHz)	Instrument	Function	Resolution bandwidth	Video Bandwidth
30 to 1000	RF Test Receiver	Quasi-Peak	120 kHz	N/A
	Spectrum Analyzer	Peak	100 kHz	100 kHz
Above 1000	Spectrum Analyzer	Peak	1 MHz	1 MHz
	Spectrum Analyzer	Average	1 MHz	10 Hz

4.4 Radiated Emission Data

4.4.1 Tx Portion

(A) Bluetooth Dongle + Amplifier

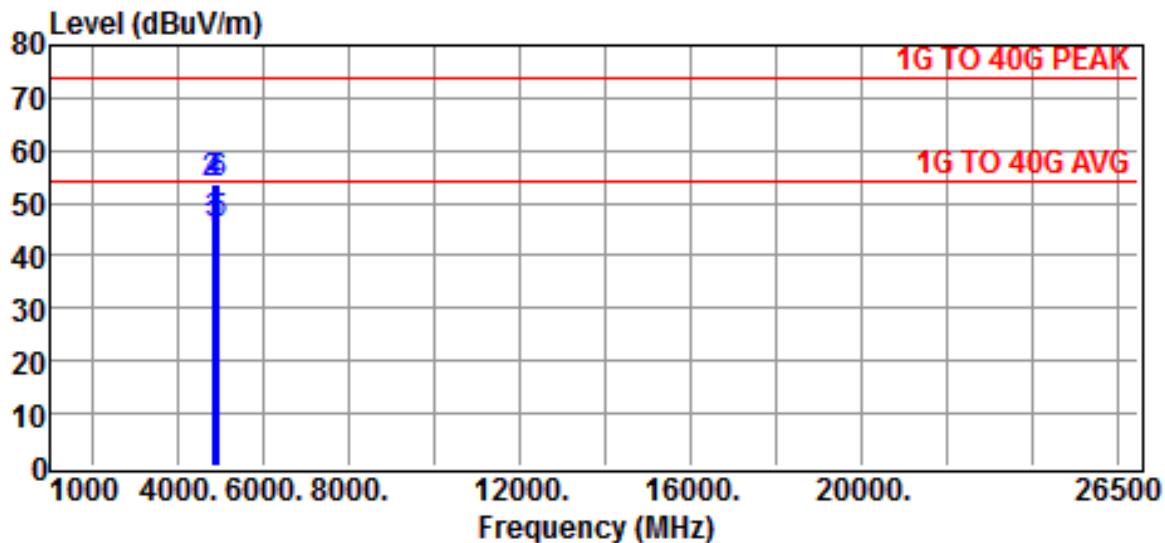


Site :chamber #2 Date :2012-08-28
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT :Bluetooth Dongle Temp. :26
 Power Rating :DC 12V Humi. :65
 Model :BT-24D Engineer. :VC
 Memo :Bluetooth Dongle + Amplifier
 Memo :TXRX-CH LO:2402MHz-MI:2441MHz-HI:2480MHz

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	47.0	0.6	47.6	54.0	-6.4	Average
4804.0000	55.0	0.6	55.6	74.0	-18.4	Peak
4882.0000	47.2	0.7	47.9	54.0	-6.1	Average
4882.0000	55.1	0.7	55.8	74.0	-18.2	Peak
4960.0000	46.3	1.0	47.3	54.0	-6.7	Average
4960.0000	55.0	1.0	56.0	74.0	-18.0	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result



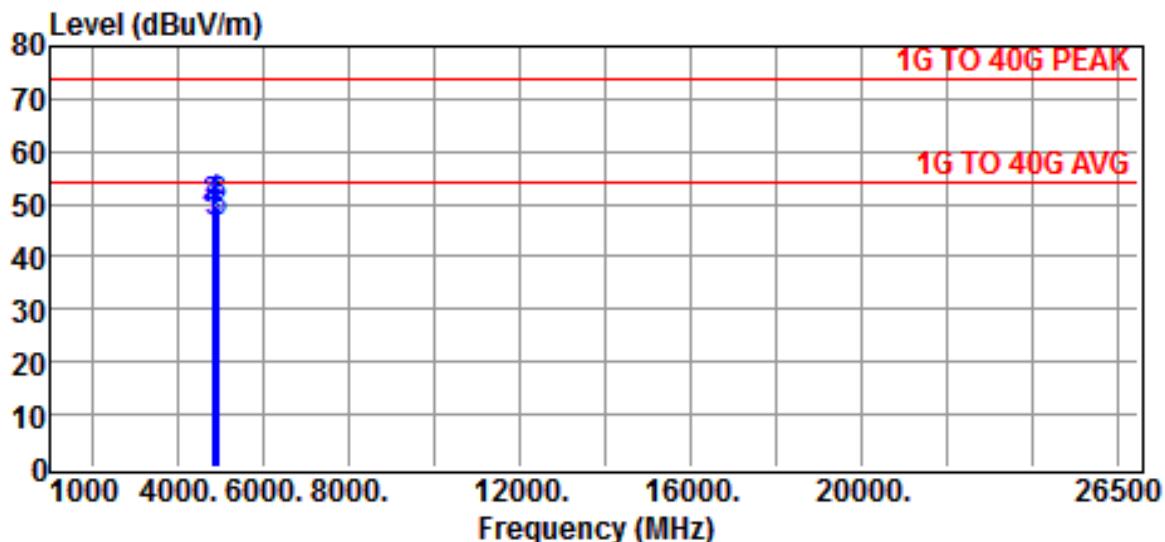
Site :chamber #2 Date :2012-08-28
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT :Bluetooth Dongle Temp. :26
 Power Rating :DC 12V Humi. :65
 Model :BT-24D Engineer. :VC
 Memo :Bluetooth Dongle + Amplifier
 Memo :TXRX-CH LO:2402MHz-MI:2441MHz-HI:2480MHz

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	43.6	0.6	44.2	54.0	-9.8	Average
4804.0000	51.9	0.6	52.5	74.0	-21.5	Peak
4882.0000	44.2	0.7	44.9	54.0	-9.1	Average
4882.0000	52.1	0.7	52.8	74.0	-21.2	Peak
4960.0000	44.0	1.0	45.0	54.0	-9.0	Average
4960.0000	52.0	1.0	53.0	74.0	-21.0	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

(B) Bluetooth Dongle only (without Amplifier)

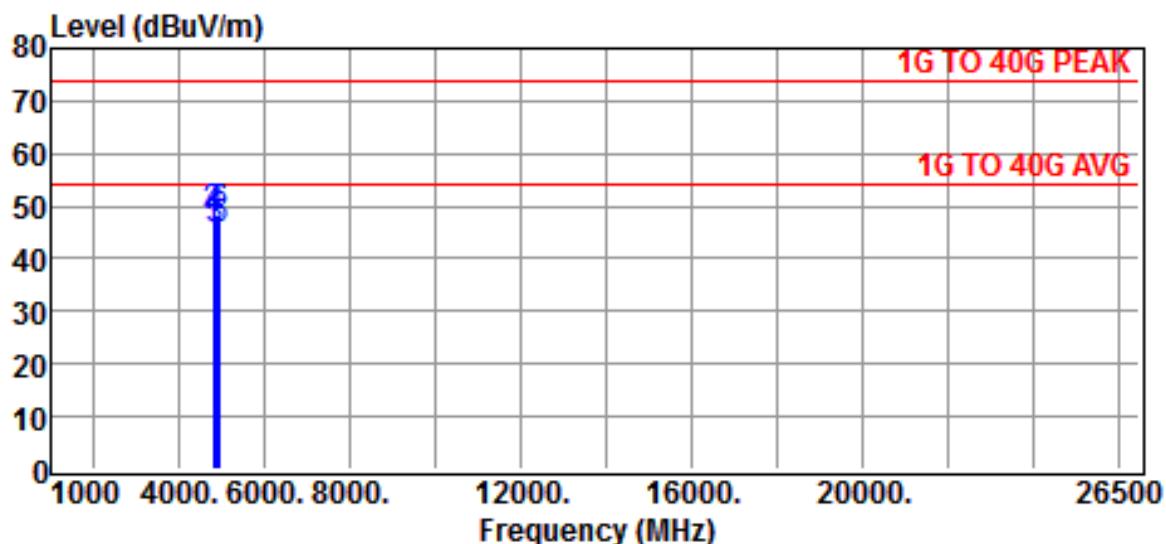


Site :chamber #2 Date :2012-08-28
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT :Bluetooth Dongle Temp. :26
 Power Rating :DC 12V Humi. :65
 Model :BT-24D Engineer. :VC
 Memo :Bluetooth Dongle only (without Amplifier)
 Memo :TXRX-CH LO:2402MHz-MI:2441MHz-HI:2480MHz

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	45.6	0.6	46.2	54.0	-7.8	Average
4804.0000	48.6	0.6	49.2	74.0	-24.8	Peak
4882.0000	45.8	0.7	46.5	54.0	-7.5	Average
4882.0000	49.0	0.7	49.7	74.0	-24.3	Peak
4960.0000	45.7	1.0	46.7	54.0	-7.3	Average
4960.0000	48.5	1.0	49.5	74.0	-24.5	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result



Site :chamber #2 Date :2012-08-28
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT :Bluetooth Dongle Temp. :26
 Power Rating :DC 12V Humi. :65
 Model :BT-24D Engineer. :VC
 Memo :Bluetooth Dongle only (without Amplifier)
 Memo :TXRX-CH LO:2402MHz-MI:2441MHz-HI:2480MHz

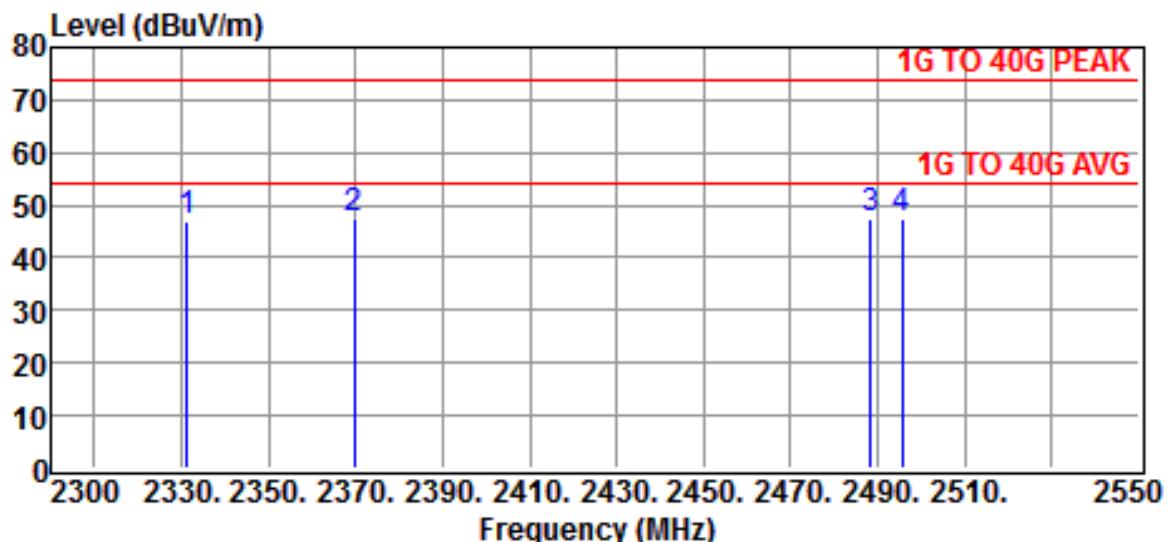
Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
4804.0000	44.6	0.6	45.2	54.0	-8.8	Average
4804.0000	47.6	0.6	48.2	74.0	-25.8	Peak
4882.0000	45.0	0.7	45.7	54.0	-8.3	Average
4882.0000	47.8	0.7	48.5	74.0	-25.5	Peak
4960.0000	44.6	1.0	45.6	54.0	-8.4	Average
4960.0000	47.6	1.0	48.6	74.0	-25.4	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

4.4.2 Radiated Emissions in Restricted Bands

(A) Bluetooth Dongle + Amplifier

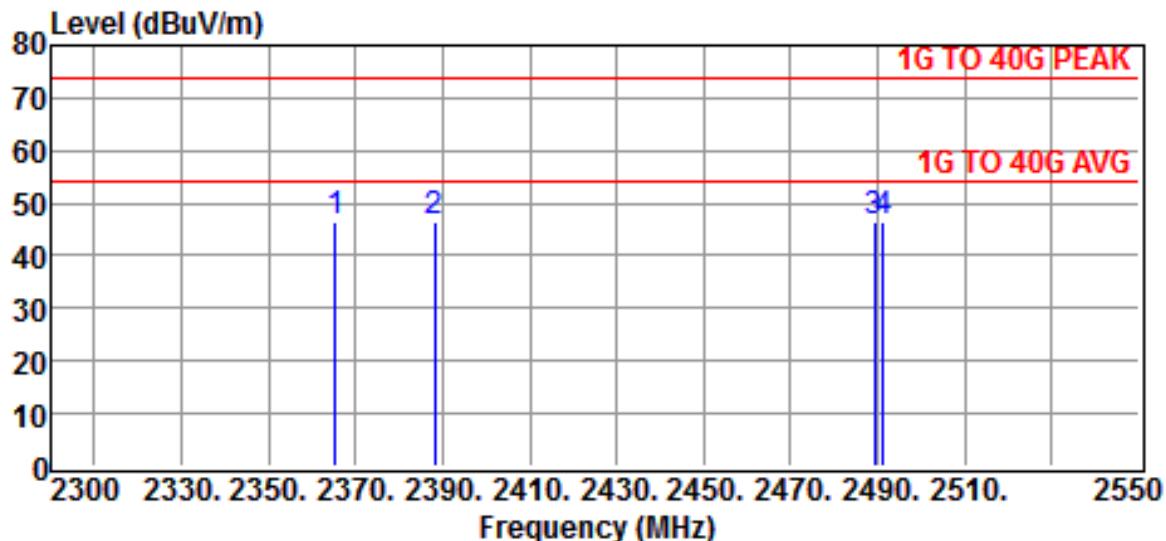


Site :chamber #2 Date :2012-08-28
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT :Bluetooth Dongle Temp. :26
 Power Rating :DC 12V Humi. :65
 Model :BT-24D Engineer. :VC
 Memo :Bluetooth Dongle + Amplifier
 Memo :CH LO & HI - Restricted Bands

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2331.2500	53.5	-6.4	47.1	74.0	-26.9	Peak
2369.5800	53.5	-6.3	47.2	74.0	-26.8	Peak
2488.4500	53.3	-5.9	47.4	74.0	-26.6	Peak
2495.6500	53.2	-5.9	47.3	74.0	-26.7	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result



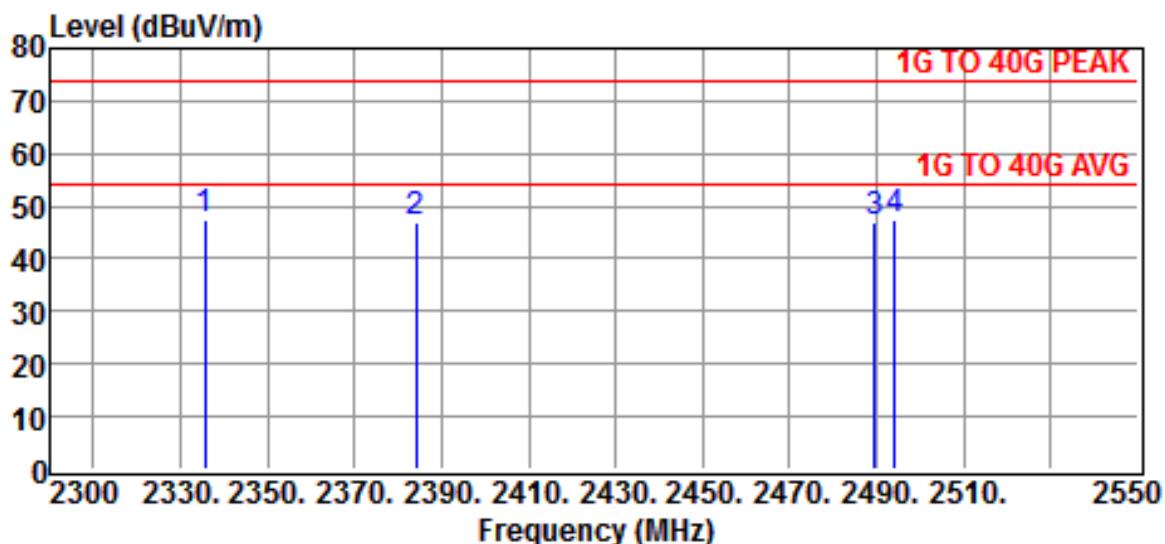
Site :chamber #2 Date :2012-08-28
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT :Bluetooth Dongle Temp. :26
 Power Rating :DC 12V Humi. :65
 Model :BT-24D Engineer. :VC
 Memo :Bluetooth Dongle + Amplifier
 Memo :CH LO & HI - Restricted Bands

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2365.2500	52.8	-6.3	46.5	74.0	-27.5	Peak
2388.1200	52.8	-6.2	46.6	74.0	-27.4	Peak
2489.3550	52.6	-5.9	46.7	74.0	-27.3	Peak
2491.2500	52.4	-5.9	46.5	74.0	-27.5	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

(B) Bluetooth Dongle only (without Amplifier)

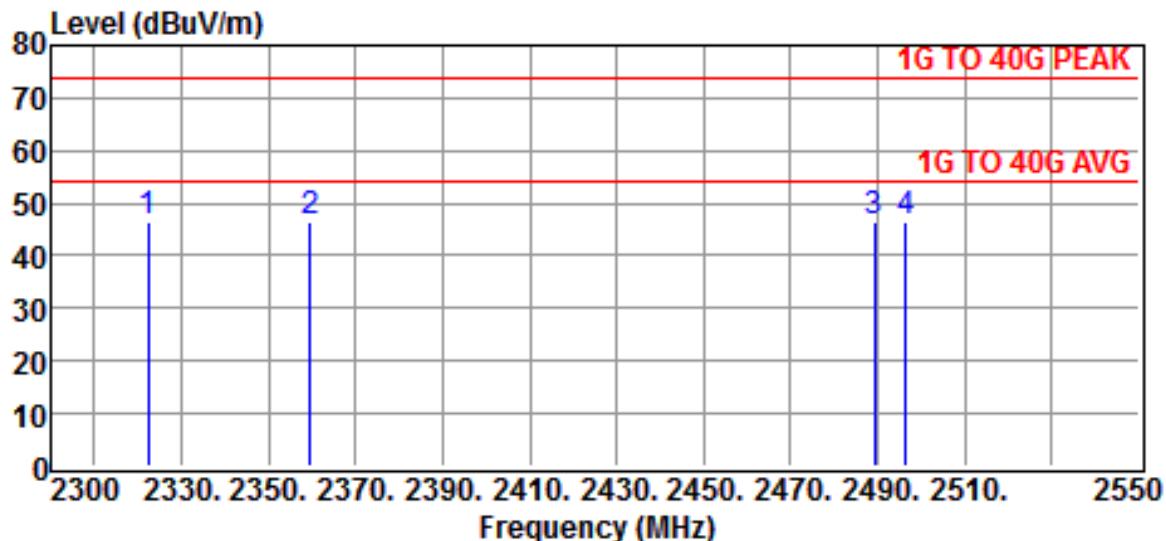


Site :chamber #2 Date :2012-08-28
 Limit :1G TO 40G PEAK Ant. Pol. :HORIZONTAL
 EUT :Bluetooth Dongle Temp. :26
 Power Rating :DC 12V Humi. :65
 Model :BT-24D Engineer. :VC
 Memo :Bluetooth Dongle only (without Amplifier)
 Memo :CH LO & HI - Restricted Bands

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2335.6500	53.5	-6.3	47.2	74.0	-26.8	Peak
2384.2500	53.4	-6.3	47.1	74.0	-26.9	Peak
2489.6200	52.9	-5.9	47.0	74.0	-27.0	Peak
2494.1200	53.4	-5.9	47.5	74.0	-26.5	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result



Site :chamber #2 Date :2012-08-28
 Limit :1G TO 40G PEAK Ant. Pol. :VERTICAL
 EUT :Bluetooth Dongle Temp. :26
 Power Rating :DC 12V Humi. :65
 Model :BT-24D Engineer. :VC
 Memo :Bluetooth Dongle only (without Amplifier)
 Memo :CH LO & HI - Restricted Bands

Freq MHz	Reading dBuV	Correction Factor dB	Result dBuV/m	Limits dBuV/m	Over limit dB	Detector
2322.2500	52.9	-6.4	46.5	74.0	-27.5	Peak
2359.6500	52.9	-6.3	46.6	74.0	-27.4	Peak
2489.3600	52.4	-5.9	46.5	74.0	-27.5	Peak
2496.3500	52.3	-5.9	46.4	74.0	-27.6	Peak

Note :

1. Result = Reading + Corrected Factor
2. Corrected Factor = Antenna Factor + Cable Loss - Amplifier Gain (if any)
3. The expanded uncertainty of the radiated emission tests is 3.53 dB.
4. The margin value=Limit - Result

4.4.3 Other Emissions

a) Emission frequencies below 1 GHz

1. Bluetooth Dongle + Amplifier
Operation Mode : Bluetooth Link

Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
129.90	H	7.6	13.1	20.7	43.5	-22.8	72	1.5
165.25	H	8.0	14.3	22.3	43.5	-21.2	64	1.5
182.36	H	7.6	15.5	23.1	43.5	-20.4	58	1.5
215.25	H	7.8	18.2	26.0	43.5	-17.5	76	1.5
244.38	H	6.8	20.0	26.8	46.0	-19.2	54	1.5
272.46	H	6.7	22.2	28.9	46.0	-17.1	55	1.5

2. Bluetooth Dongle only (without Amplifier)

Operation Mode : Bluetooth Link

Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

Frequency (MHz)	Ant-Pol H/V	Meter Reading (dBuV)	Corrected Factor (dB)	Result @3m (dBuV/m)	Limit @3m (dBuV/m)	Margin (dB)	Table Degree (Deg.)	Ant. High (m)
129.90	H	6.4	13.1	19.5	43.5	-24.0	72	1.5
165.25	H	6.8	14.3	21.1	43.5	-22.4	64	1.5
182.36	H	6.4	15.5	21.9	43.5	-21.6	58	1.5
215.25	H	7.3	18.2	25.5	43.5	-18.0	76	1.5
244.38	H	6.0	20.0	26.0	46.0	-20.0	54	1.5
272.46	H	5.3	22.2	27.5	46.0	-18.5	55	1.5

Note :

1. Remark “---” means that the emissions level is too low to be measured.
2. The expanded uncertainty of the radiated emission tests is 3.53 dB.

4.5 Field Strength Calculation

The field strength is calculated by adding the Antenna Factor, High Pass Filter Loss (if used) and Cable Loss, and subtracting the Amplifier Gain (if any) from the measured reading. The basic equation calculation is as follows:

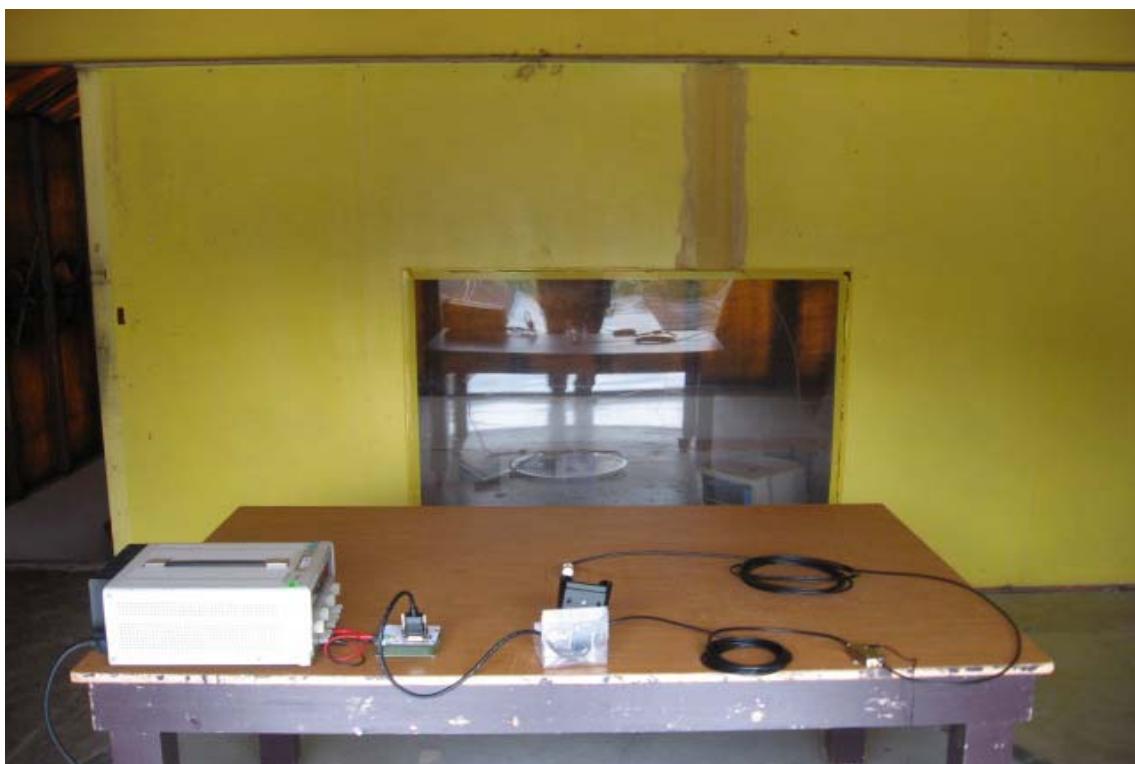
$$\text{Result} = \text{Reading} + \text{Corrected Factor}$$

where Corrected Factor

$$= \text{Antenna FACTOR} + \text{Cable Loss} + \text{High Pass Filter Loss} - \text{Amplifier Gain}$$

4.6 Photos of Radiation Measuring Setup

Bluetooth Dongle + Amplifier



Bluetooth Dongle only (without Amplifier)



5 CONDUCTED EMISSION MEASUREMENT

5.1 Description

This EUT is excused from investigation of conducted emission, for it was powered by DC 12V only. According to §15.207 (d), measurements to demonstrate compliance with the conducted limits are not required for devices which only employ battery power for operation and which do not operate from the AC power lines or contain provisions for operation while connected to the AC power lines.

6 ANTENNA REQUIREMENT

6.1 Standard Applicable

For intentional device, according to 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2 Antenna Construction

A 2.4G 2dBi Multi-Polarity Omni antenna with a 17ft LMR200 reverse SMA to N-Type male cable of 2.8dB cable loss was employed. For power amplifier, the dedicated cable is a 10ft RG58A reverse SMA female to reverse SMA male extension cable of 3.2dB cable loss.

Please see antenna specifications submitted in Exhibits.

7 HOPPING CHANNEL SEPARATION


7.1 Standard Applicable

According to 15.247(a)(1), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
 - Span = wide enough to capture the peaks of two adjacent channels
 - Resolution (or IF) Bandwidth (RBW) \geq 1% of the span
 - Video (or Average) Bandwidth (VBW) \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

Figure 4 : Measurement configuration.



7.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A

7.4 Measurement Data

Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

(A) Bluetooth Dongle + Amplifier

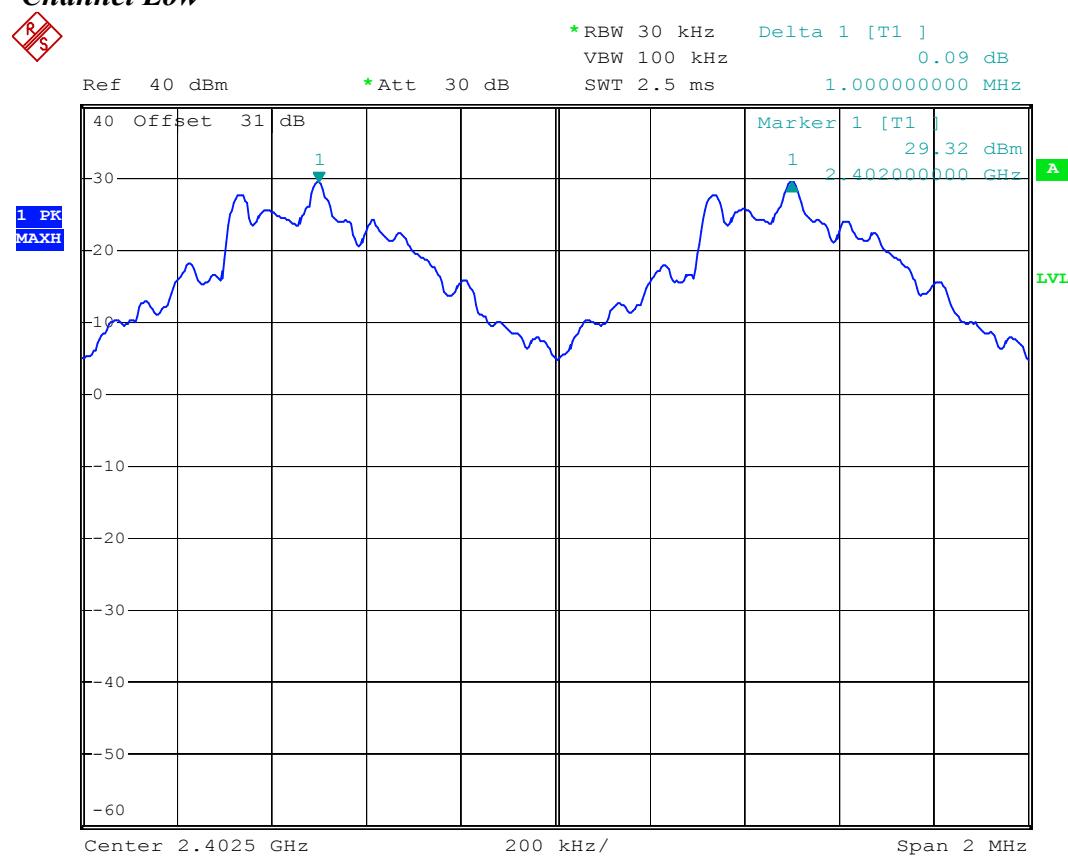
- a) Channel Low : Adjacent Hopping Channel Separation is 1000 MHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1004 MHz
- c) Channel High : Adjacent Hopping Channel Separation is 1000 MHz

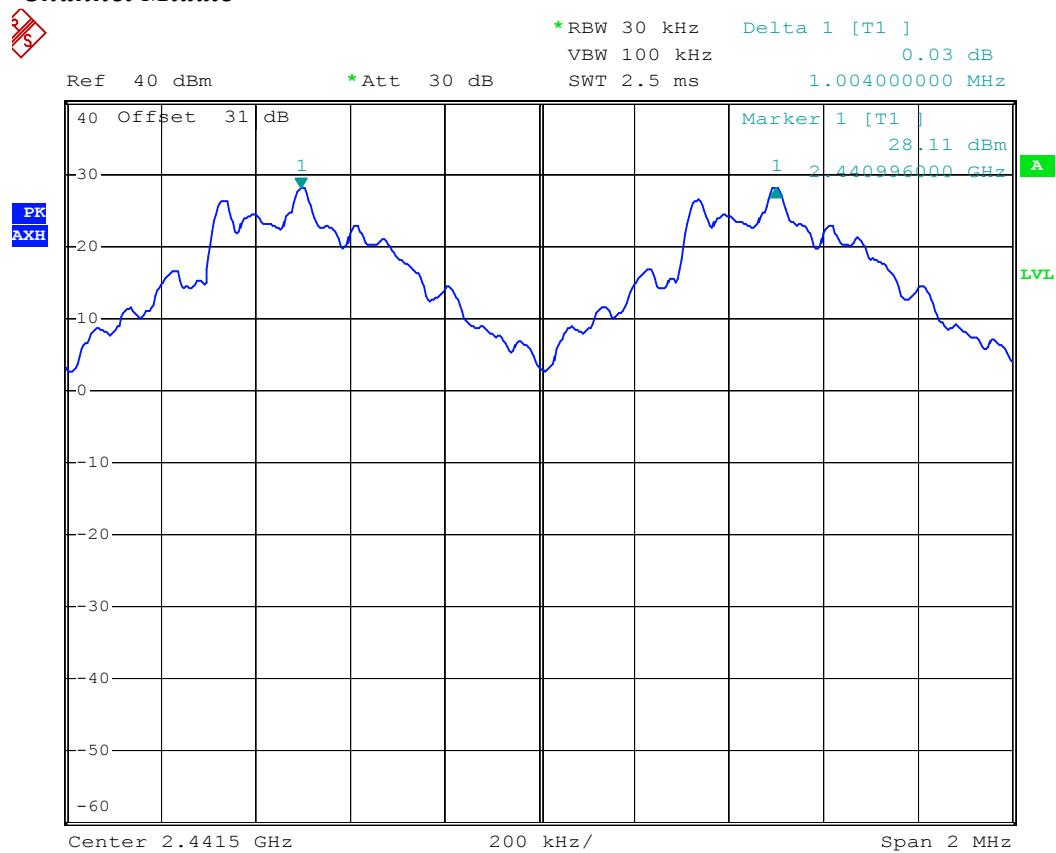
(B) Bluetooth Dongle only (without Amplifier)

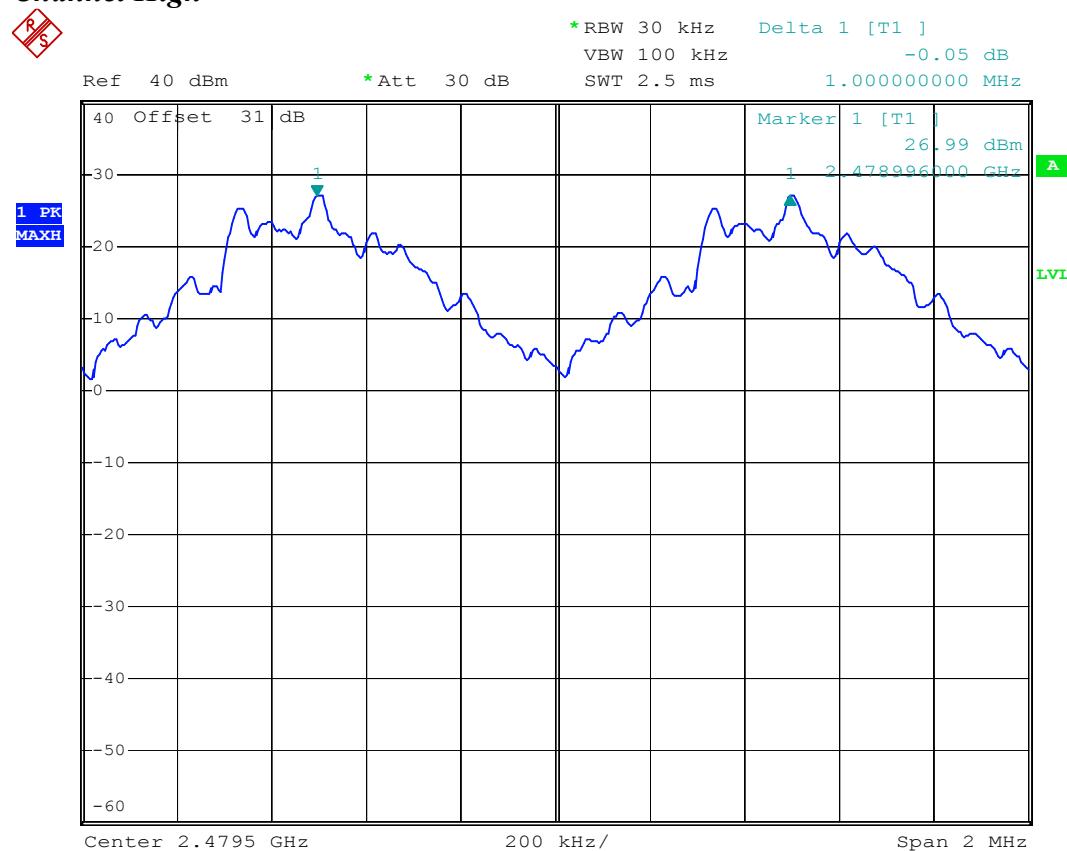
- a) Channel Low : Adjacent Hopping Channel Separation is 1000 MHz
- b) Channel Middle : Adjacent Hopping Channel Separation is 1000 MHz
- c) Channel High : Adjacent Hopping Channel Separation is 1000 MHz

Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

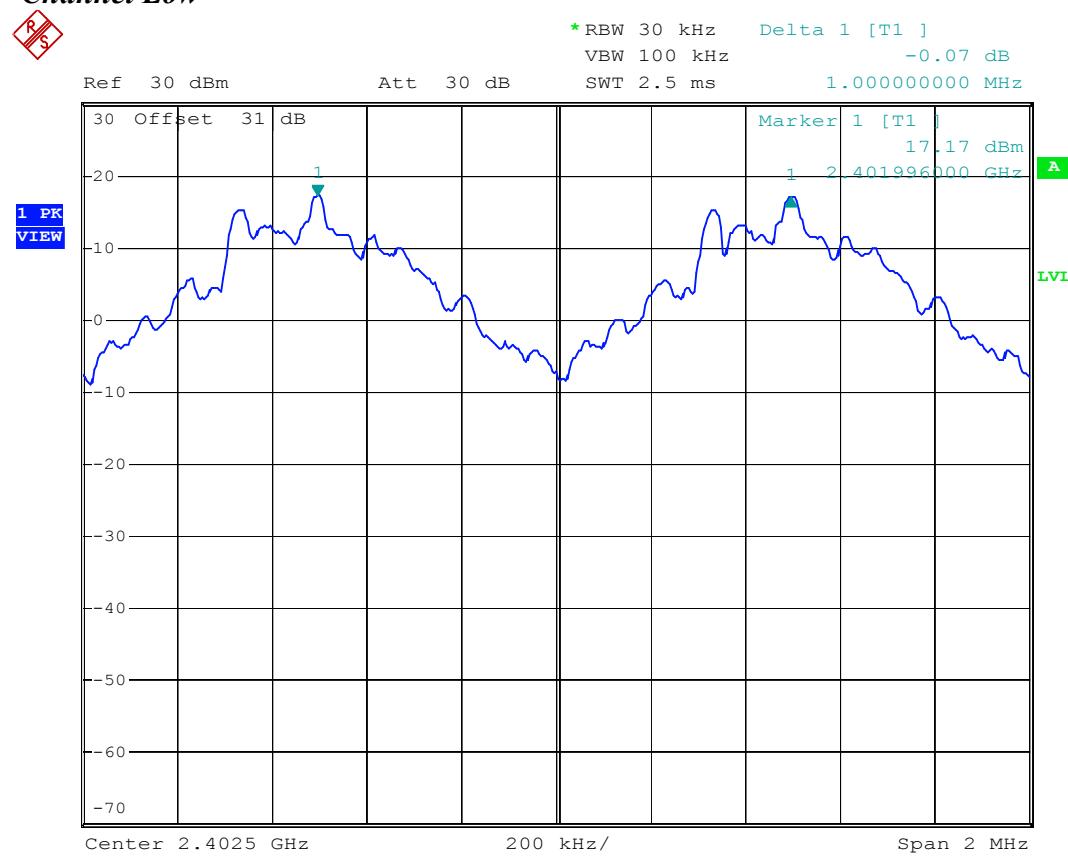
(A) Bluetooth Dongle + Amplifier

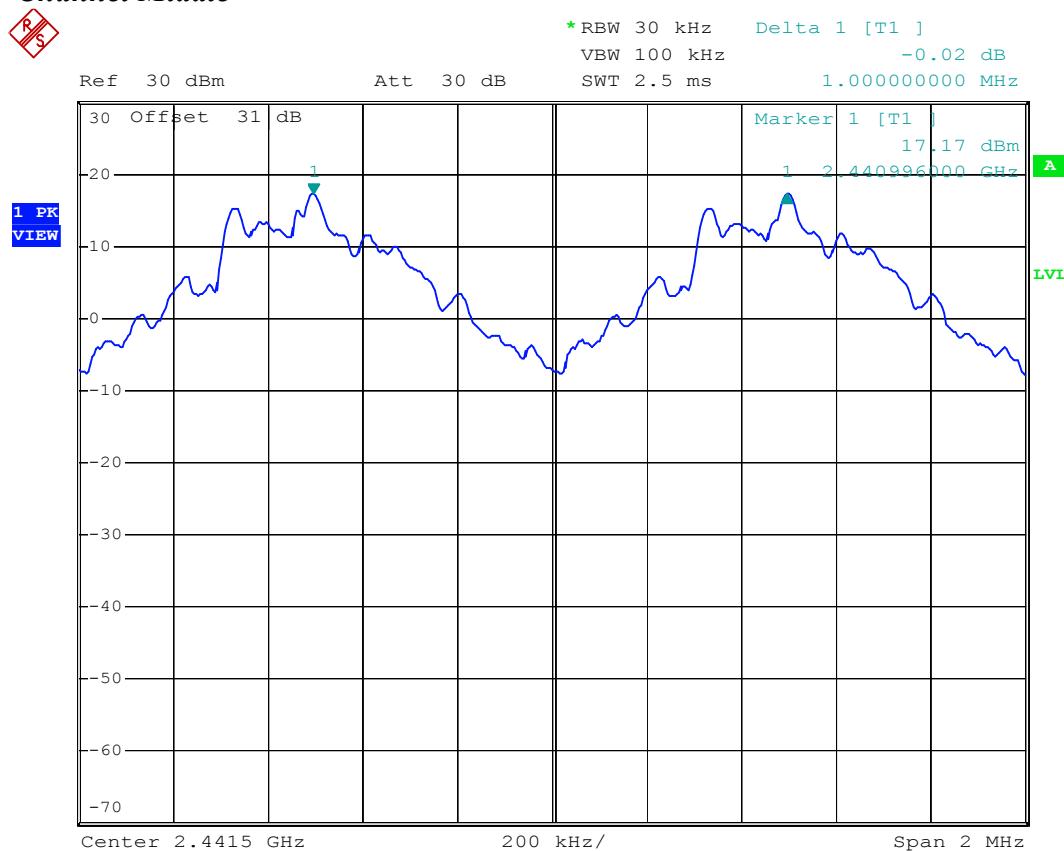
Channel Low

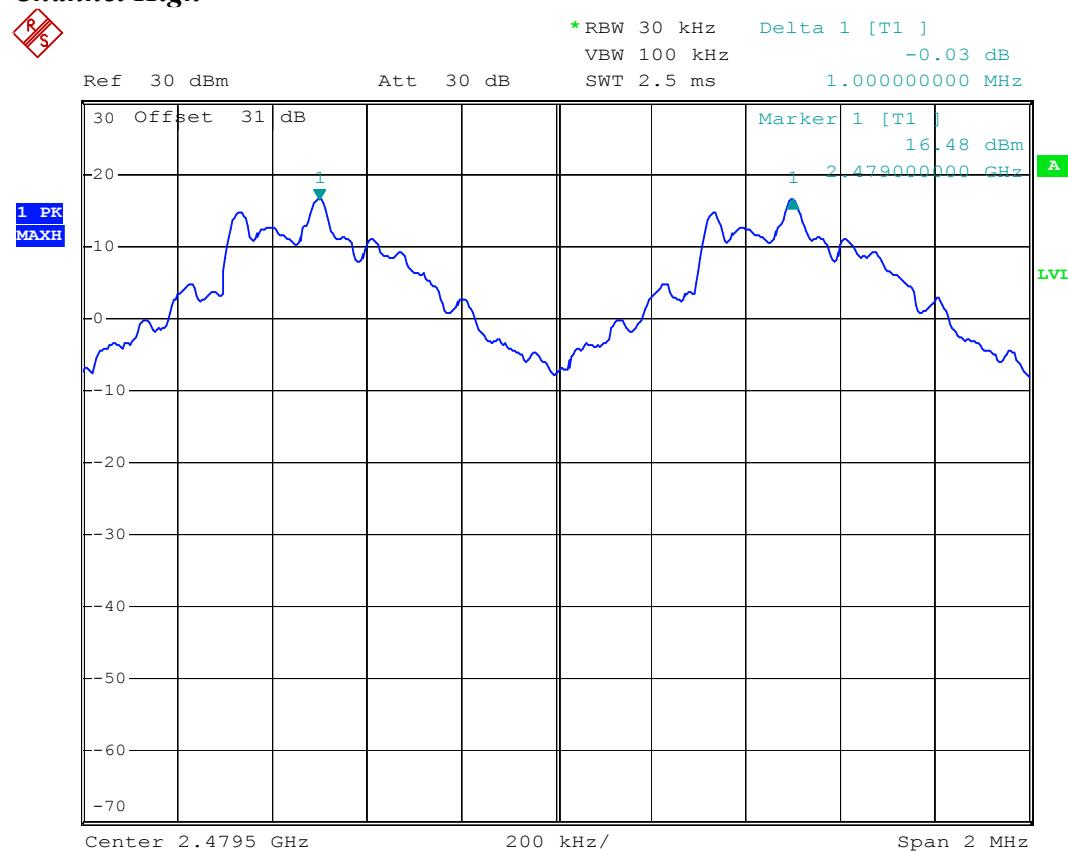
Channel Middle

Channel High

(B) Bluetooth Dongle only (without Amplifier)

Channel Low

Channel Middle

Channel High

8 NUMBER OF HOPPING FREQUENCY USED

8.1 Standard Applicable

According to 15.247(a)(1)(iii), frequency hopping systems in the 2400–2483.5 MHz band shall use at least 15 channels.

8.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
 - Span = the frequency band of operation
 - RBW \geq 1% of the span
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

8.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A

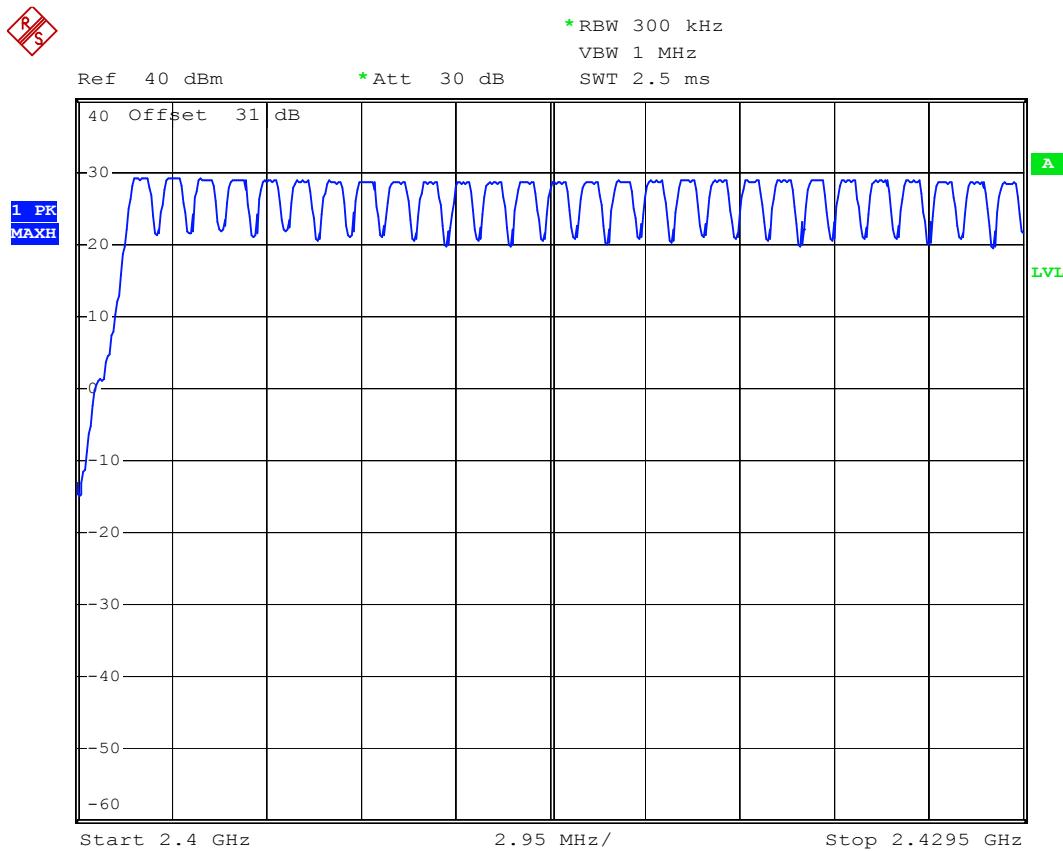
8.4 Measurement Data

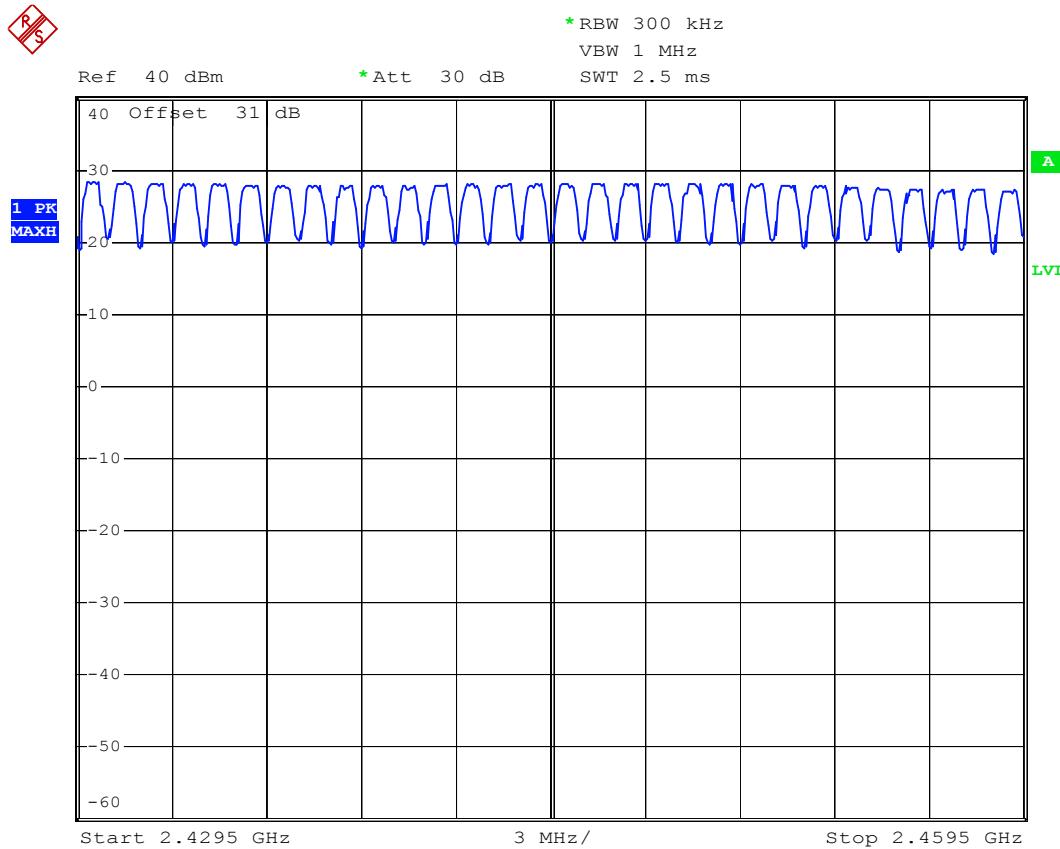
Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

There are 79 hopping frequencies used.

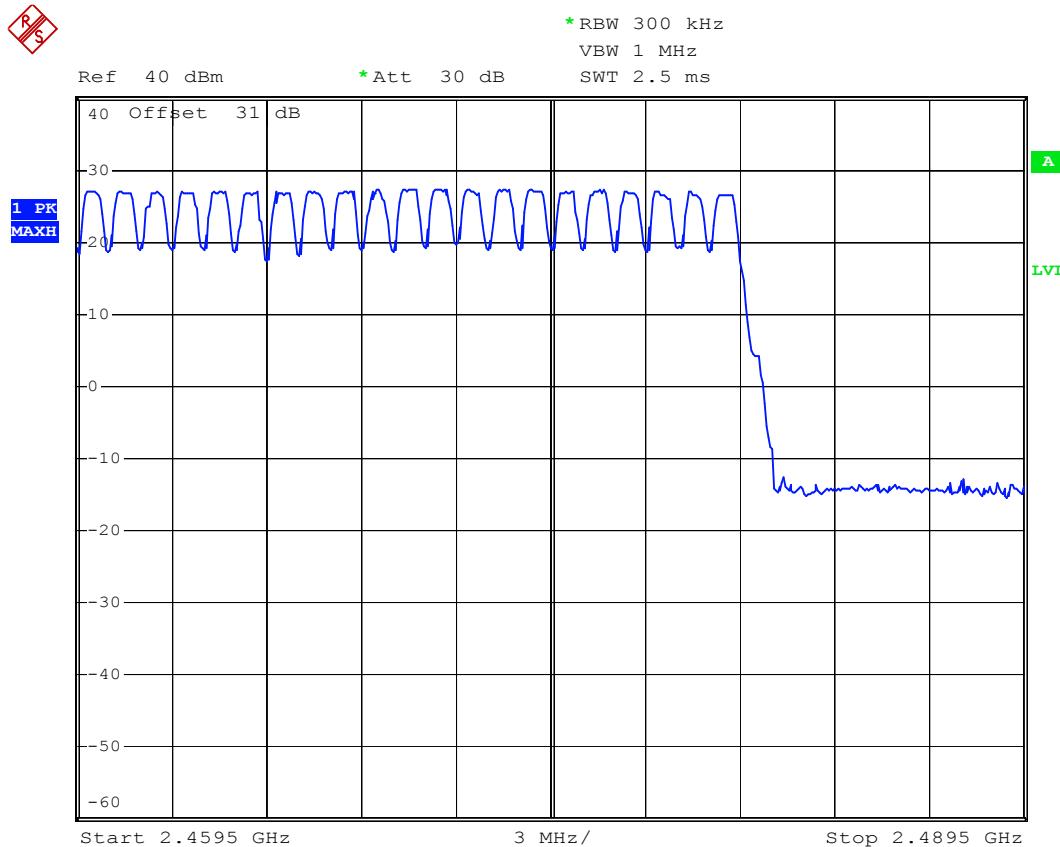
Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

R/S



R
S

RS



9 CHANNEL BANDWIDTH

9.1 Standard Applicable

For frequency hopping system operating in the 2400–2483.5 MHz band, there is no requirement for the maximum 20dB bandwidth of the hopping channel. The measurement of the hopping channel bandwidth is for the reference of the hopping channel separation requirement.

9.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
3. Use the following spectrum analyzer settings:
Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel
RBW \geq 1% of the 20 dB bandwidth
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

9.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A

9.4 Measurement Data

Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

(A) Bluetooth Dongle + Amplifier

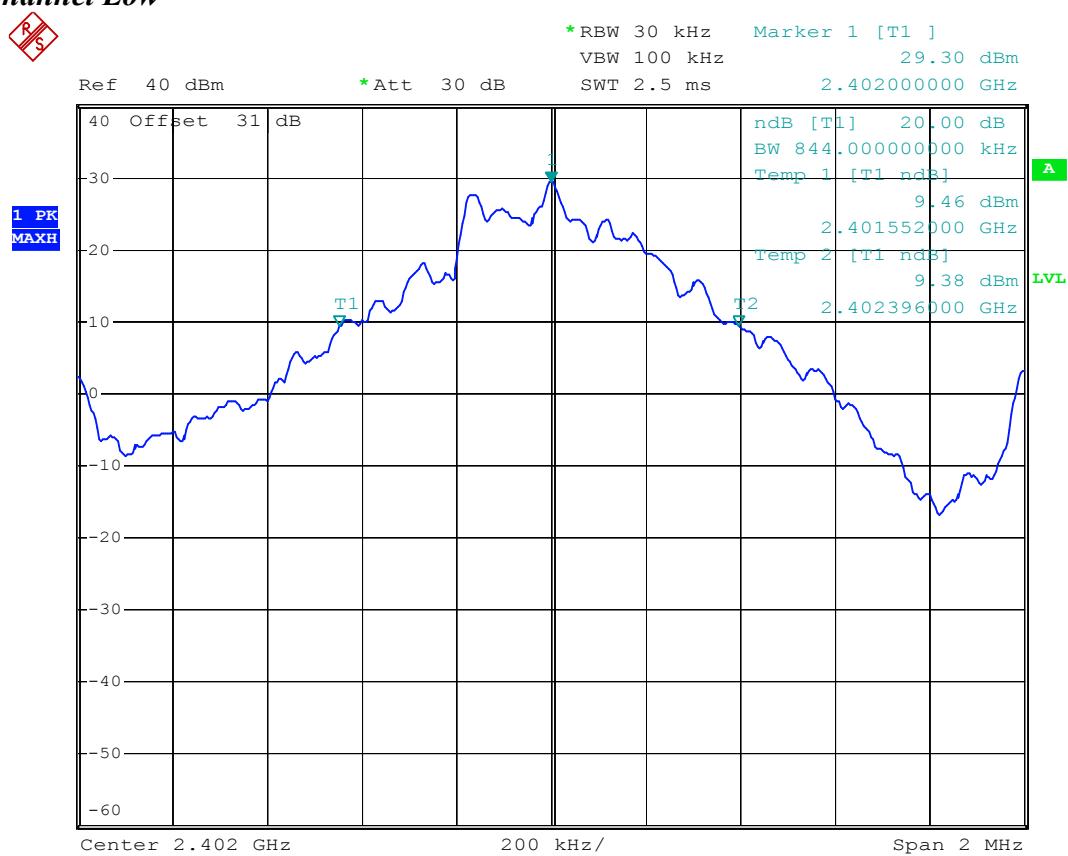
- a) Channel Low : Channel Bandwidth is 844 kHz
- b) Channel Middle : Channel Bandwidth is 792 kHz
- c) Channel High : Channel Bandwidth is 804 kHz

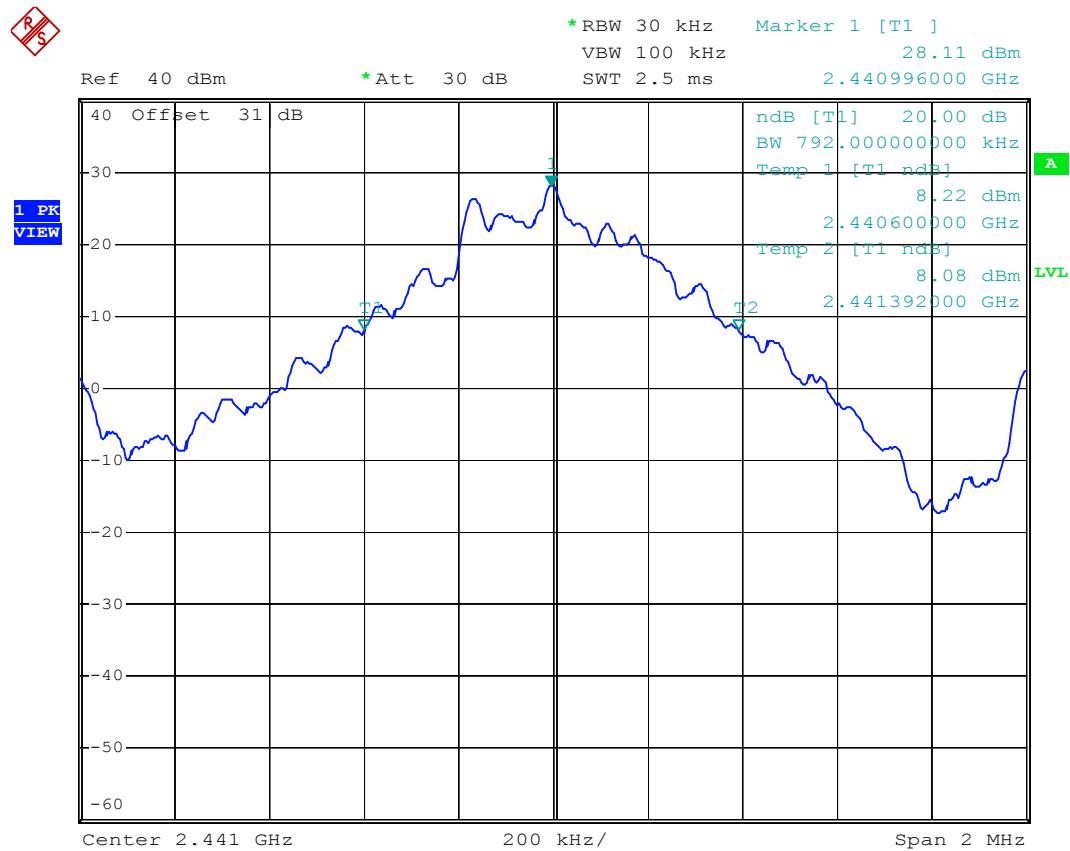
(B) Bluetooth Dongle only (without Amplifier)

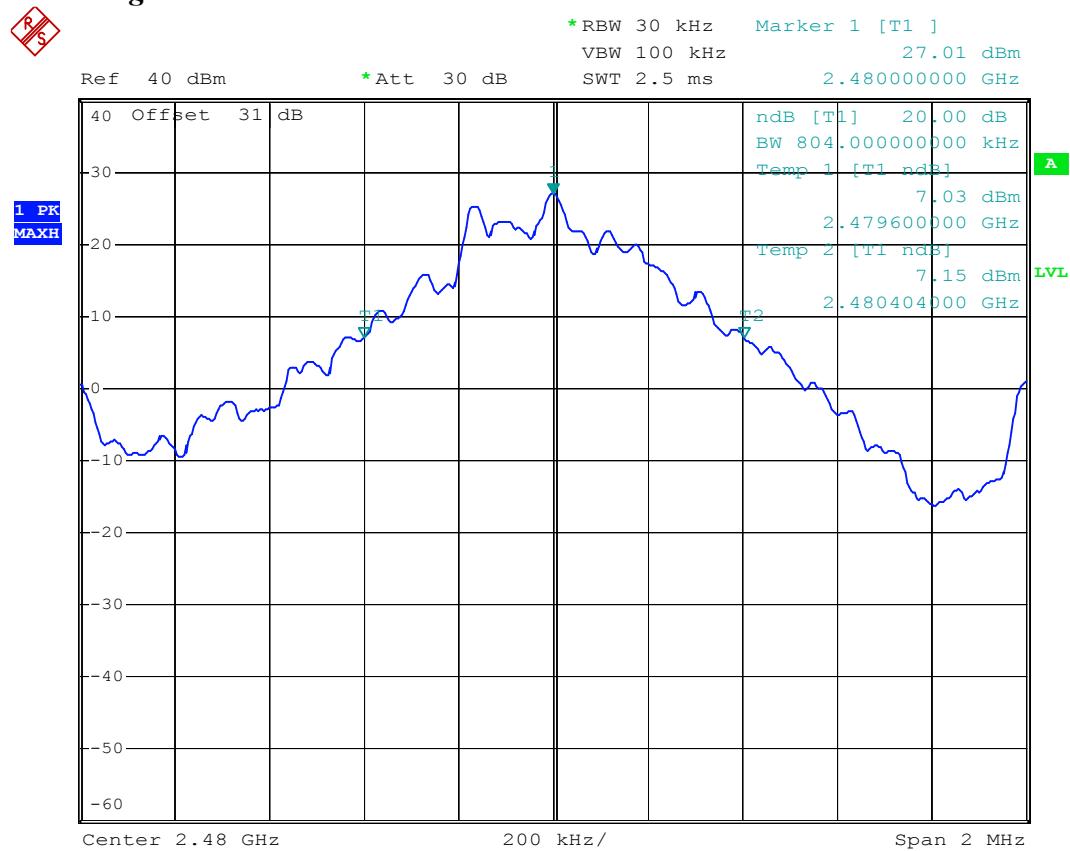
- a) Channel Low : Channel Bandwidth is 776 kHz
- b) Channel Middle : Channel Bandwidth is 792 kHz
- c) Channel High : Channel Bandwidth is 792 kHz

Note : The expanded uncertainty: frequency $\times 1.65 \times 10^{-6}$ (1 GHz $< f \leq 18$ GHz).

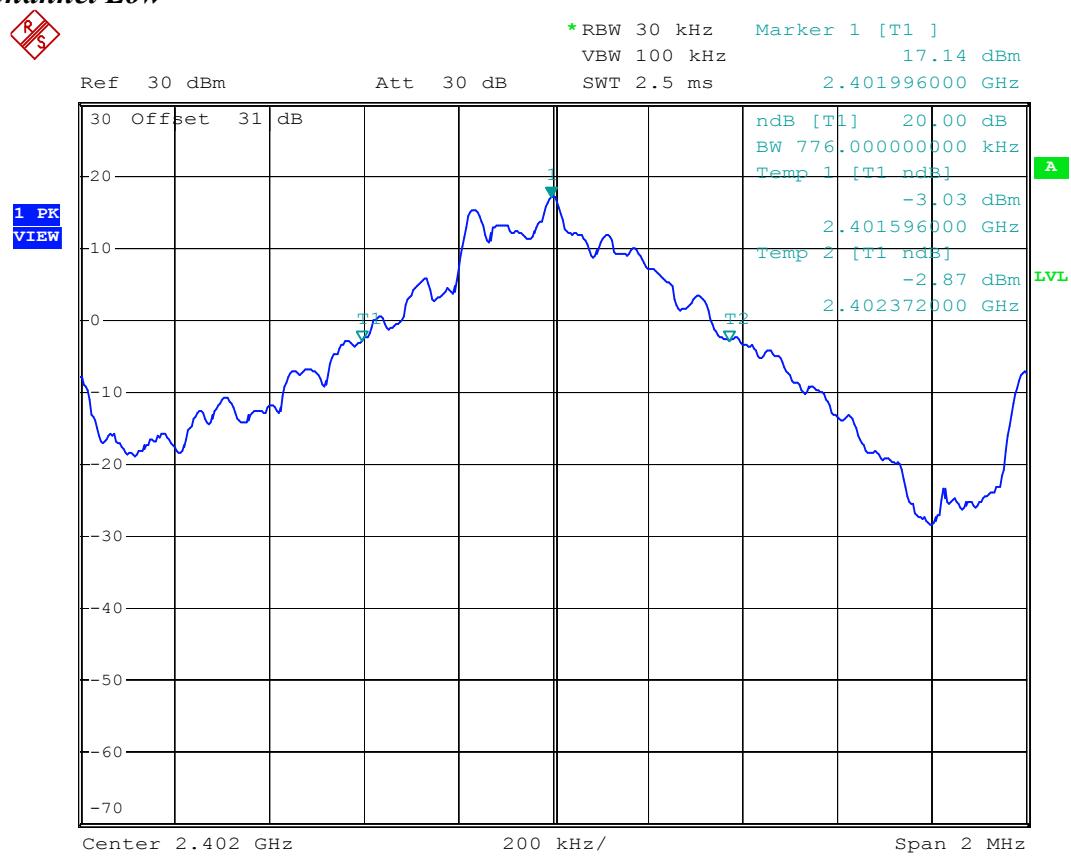
(A) Bluetooth Dongle + Amplifier

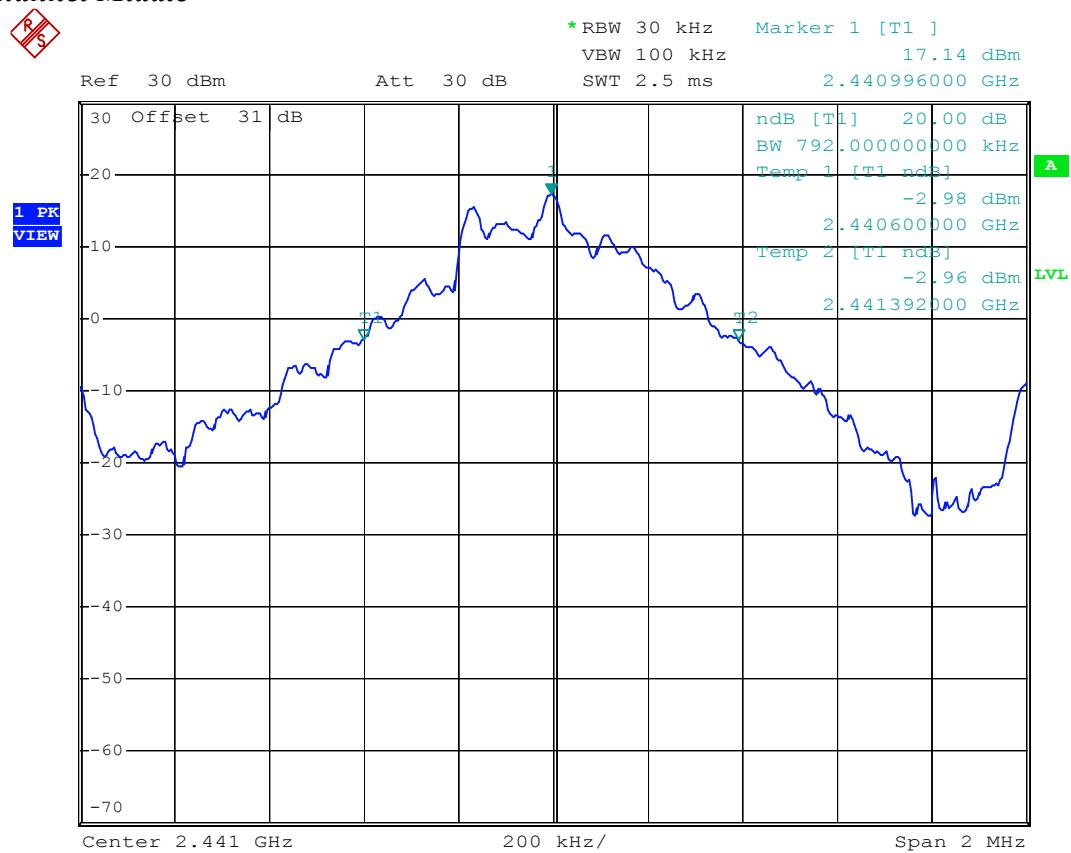
Channel Low

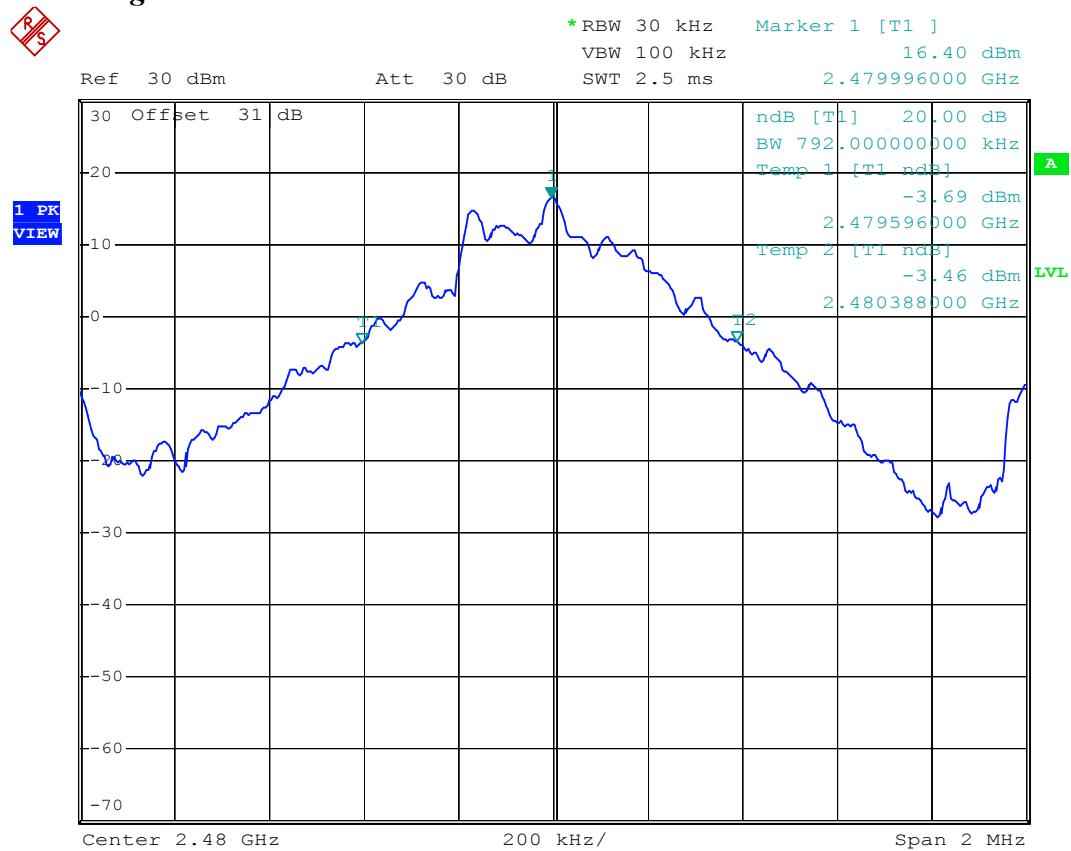
Channel Middle

Channel High

(B) Bluetooth Dongle only (without Amplifier)

Channel Low

Channel Middle

Channel High

10 DWELL TIME ON EACH CHANNEL

10.1 Standard Applicable

According to 15.247(a)(1)(iii), for frequency hopping system operating in the 2400-2483.5 band, the average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

10.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect it to measurement instrument. The EUT must have its hopping function enabled.
3. Use the following spectrum analyzer settings:
Span = zero span, centered on a hopping channel
RBW = 1 MHz
VBW \geq RBW
Sweep = as necessary to capture the entire dwell time per hopping channel
Detector function = peak
Trace = max hold
4. Use the marker-delta function to determine the dwell time. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

10.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A

10.4 Measurement Data

(A) Bluetooth Dongle + Amplifier

Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

Period = 0.4(seconds) x 79(channels) = 31.6 seconds

A. DH1 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are $1600/(1+1) = 800$ transmissions per second. In one period for each particular channel there are $10.13 \times 31.6 = 320.1$ times of transmissions.

- a) Channel Low : the dwell time is $0.48\text{ms} \times 320.1 = 153.648$ ms
- b) Channel Middle : the dwell time is $0.48\text{ms} \times 320.1 = 153.648$ ms
- c) Channel Hi : the dwell time is $0.48\text{ms} \times 320.1 = 153.648$ ms

The maximum time of occupancy for a particular channel is 153.648ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

B. DH3 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are $1600/(3+1) = 400$ transmissions per second. In one period for each particular channel there are $5.06 \times 31.6 = 159.9$ times of transmissions.

- a) Channel Low : the dwell time is $1.86\text{ms} \times 159.9 = 297.414$ ms
- b) Channel Middle : the dwell time is $1.86\text{ms} \times 159.9 = 297.414$ ms
- c) Channel Hi : the dwell time is $1.86\text{ms} \times 159.9 = 297.414$ ms

The maximum time of occupancy for a particular channel is 297.414ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

C. DH5 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are $1600/(5+1) = 266.7$ transmissions per second. In one period for each particular channel there are $3.38 \times 31.6 = 106.81$ times of transmissions.

- a) Channel Low : the dwell time is $3.1\text{ms} \times 106.81 = 331.111$ ms
- b) Channel Middle : the dwell time is $3.1\text{ms} \times 106.81 = 331.111$ ms
- c) Channel Hi : the dwell time is $3.1\text{ms} \times 106.81 = 331.111$ ms

The maximum time of occupancy for a particular channel is 331.111ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

Note : The expanded uncertainty 1 μs.

(B) Bluetooth Dongle only (without Amplifier)

Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

$$\text{Period} = 0.4(\text{seconds}) \times 79(\text{channels}) = 31.6 \text{ seconds}$$

A. DH1 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH1 data rate operates on a one-slot transmission and one-slot receiving basis. Thus there are $1600/(1+1) = 800$ transmissions per second. In one period for each particular channel there are $10.13 \times 31.6 = 320.1$ times of transmissions.

- a) Channel Low : the dwell time is $0.48\text{ms} \times 320.1 = 153.648$ ms
- b) Channel Middle : the dwell time is $0.48\text{ms} \times 320.1 = 153.648$ ms
- c) Channel Hi : the dwell time is $0.48\text{ms} \times 320.1 = 153.648$ ms

The maximum time of occupancy for a particular channel is 153.648ms in any 31.6 second period, which is less than the 400ms allowed by the rules; therefore, it meets the requirements of this section.

B. DH3 Mode

The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH3 data rate operates on a three-slot transmission and one-slot receiving basis. Thus there are $1600/(3+1) = 400$ transmissions per second. In one period for each particular channel there are $5.06 \times 31.6 = 159.9$ times of transmissions.

- a) Channel Low : the dwell time is $1.86\text{ms} \times 159.9 = 297.414$ ms
- b) Channel Middle : the dwell time is $1.86\text{ms} \times 159.9 = 297.414$ ms
- c) Channel Hi : the dwell time is $1.86\text{ms} \times 159.9 = 297.414$ ms

The maximum time of occupancy for a particular channel is 297.414ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

C. DH5 Mode

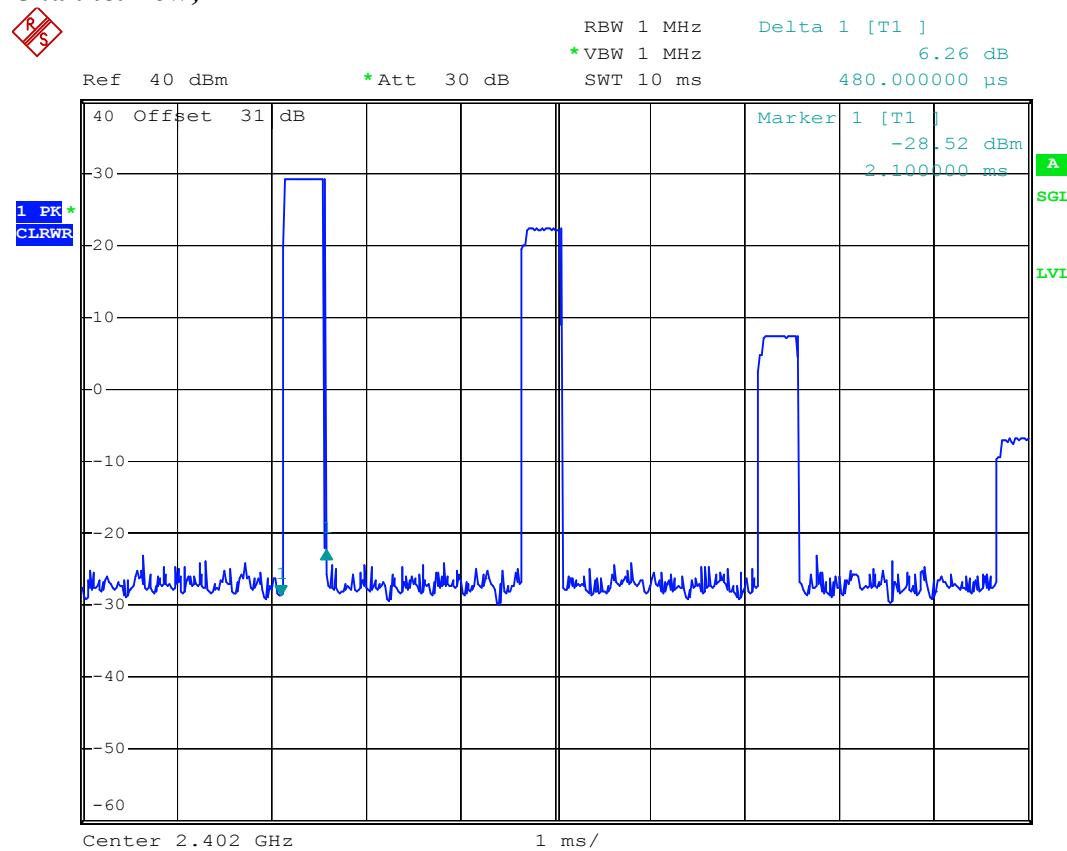
The Bluetooth system hops at a rate of 1600 times per second. This means there are 1600 timeslots in one second. The DH5 data rate operates on a five-slot transmission and one-slot receiving basis. Thus there are $1600/(5+1) = 266.7$ transmissions per second. In one period for each particular channel there are $3.38 \times 31.6 = 106.81$ times of transmissions.

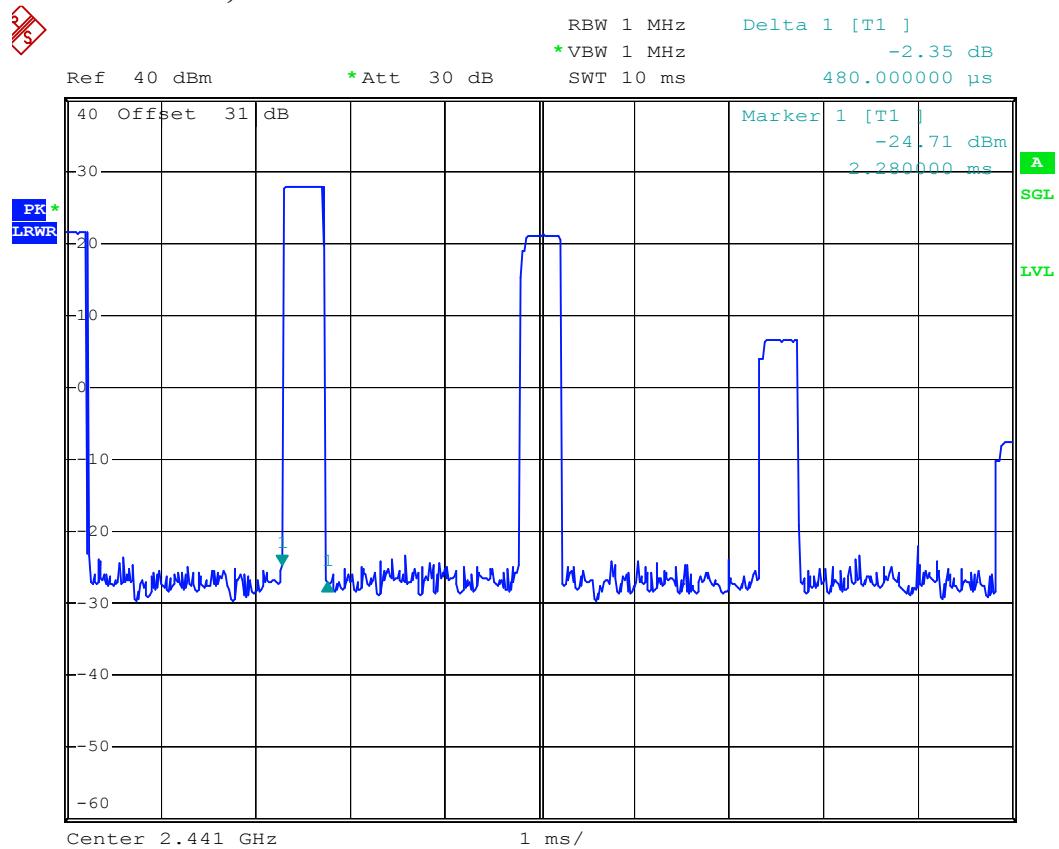
- a) Channel Low : the dwell time is $3.1\text{ms} \times 106.81 = 331.111$ ms
- b) Channel Middle : the dwell time is $3.1\text{ms} \times 106.81 = 331.111$ ms
- c) Channel Hi : the dwell time is $3.1\text{ms} \times 106.81 = 331.111$ ms

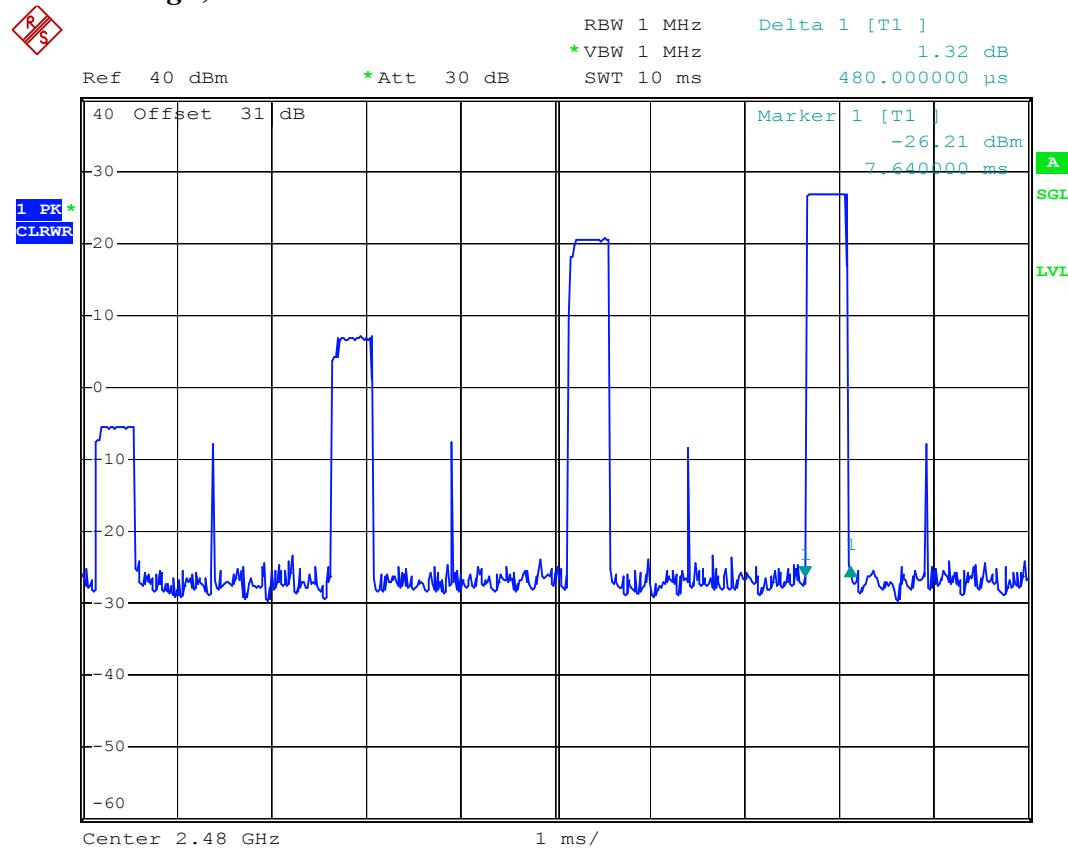
The maximum time of occupancy for a particular channel is 331.111ms in any 31.6 second period, which is less than the 400 ms allowed by the rules; therefore, it meets the requirements of this section.

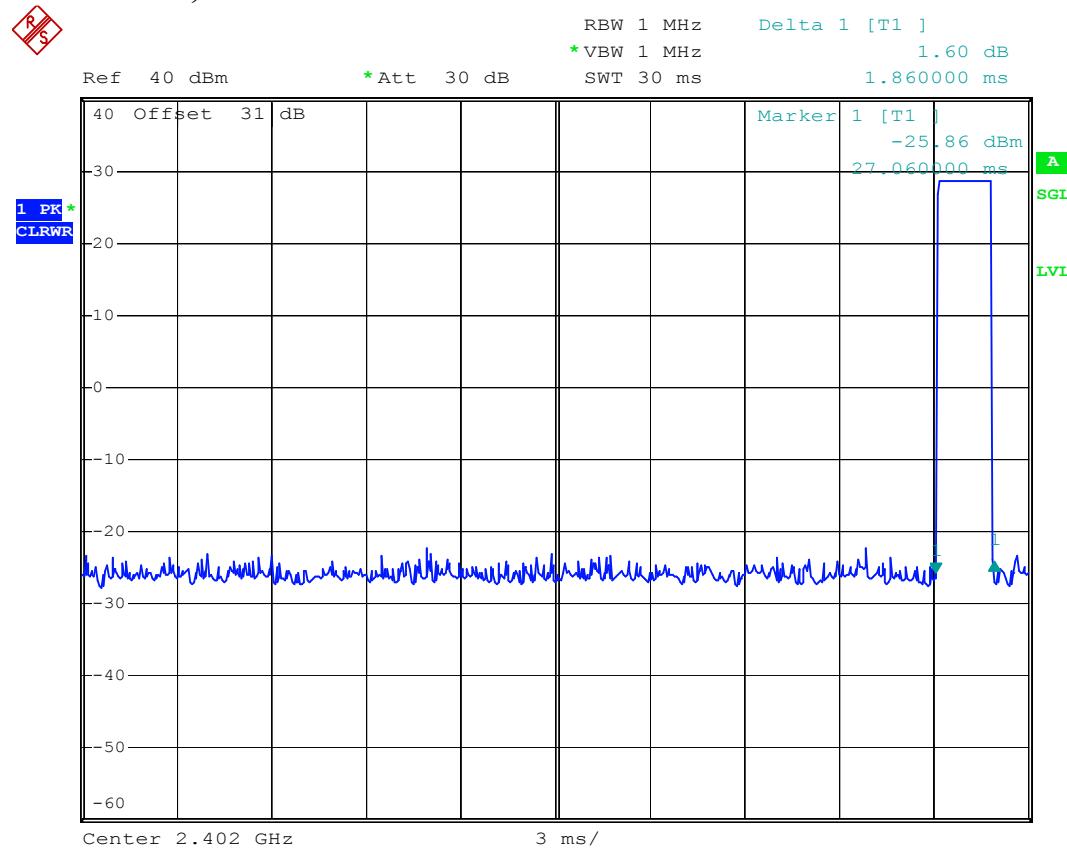
Note : The expanded uncertainty 1 μs.

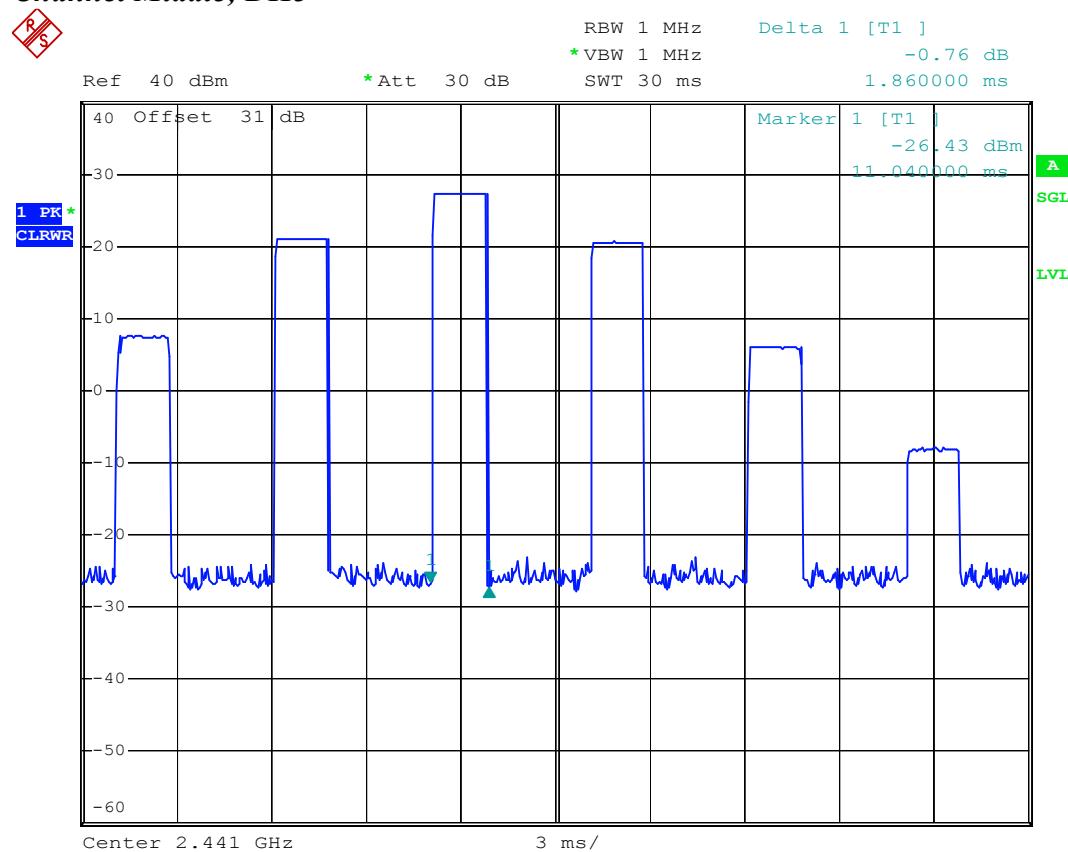
(A) Bluetooth Dongle + Amplifier

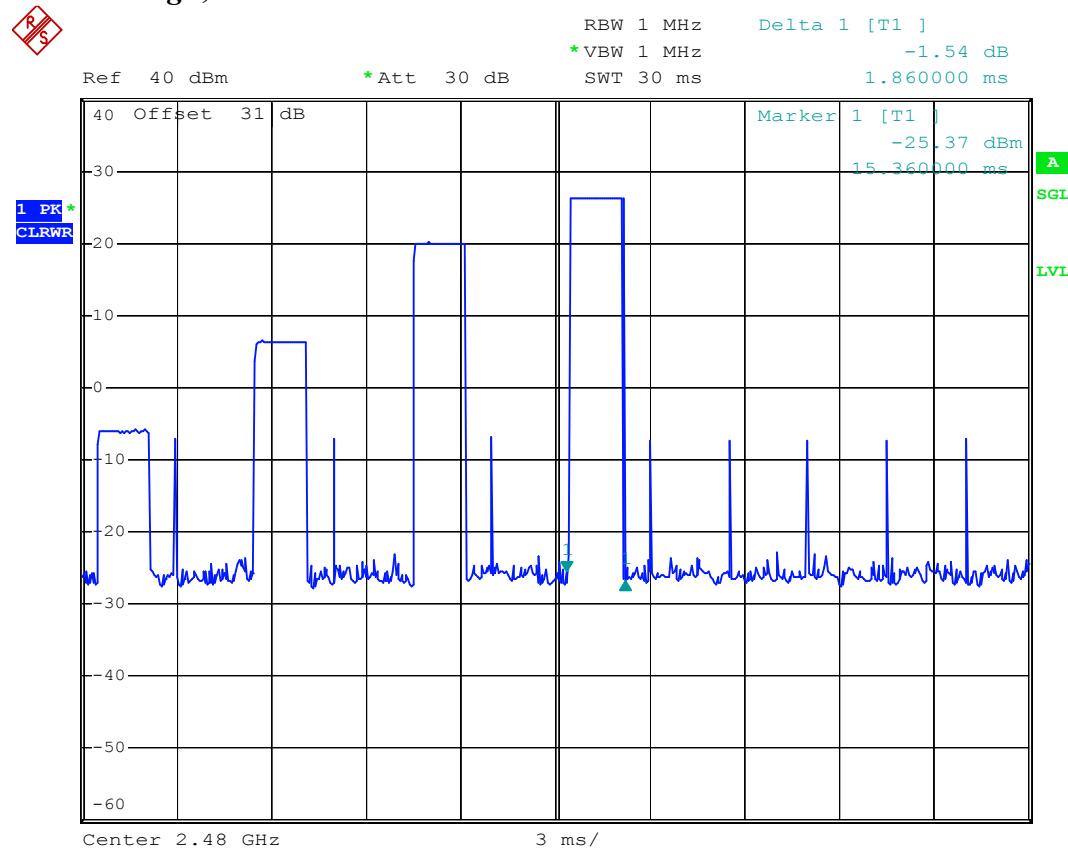
Channel Low; DH1

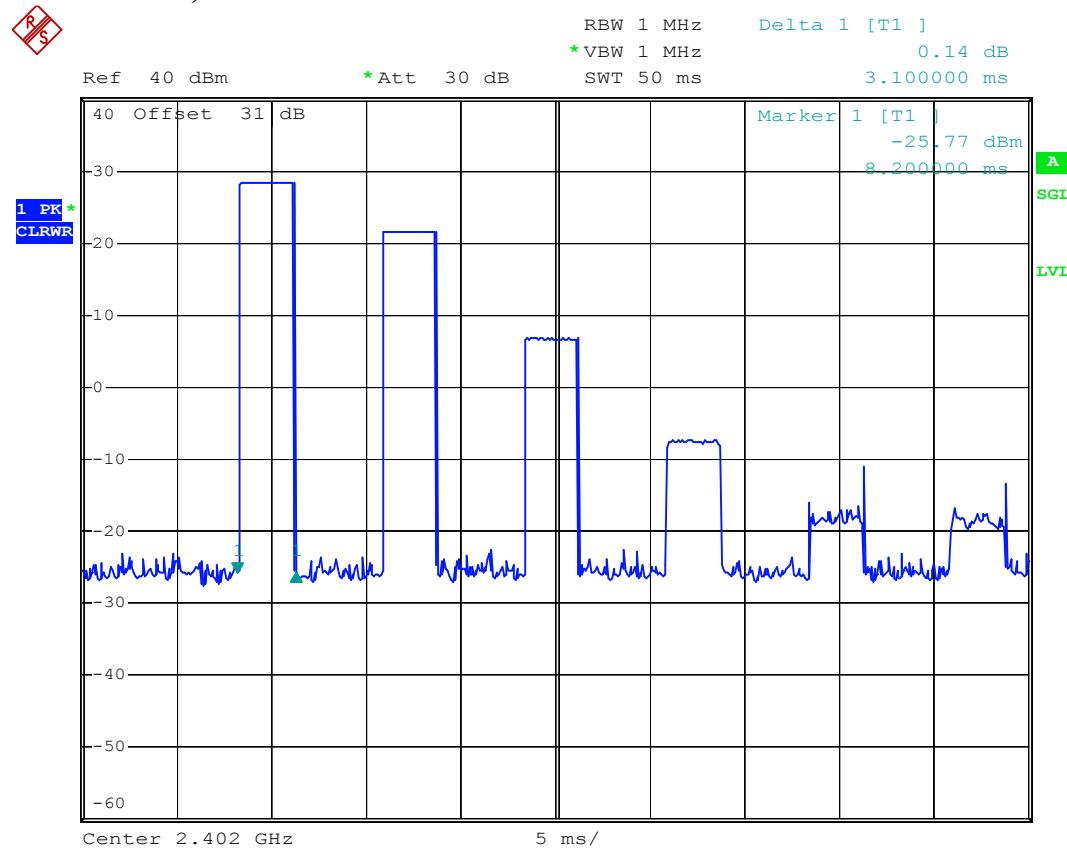
Channel Middle; DH1

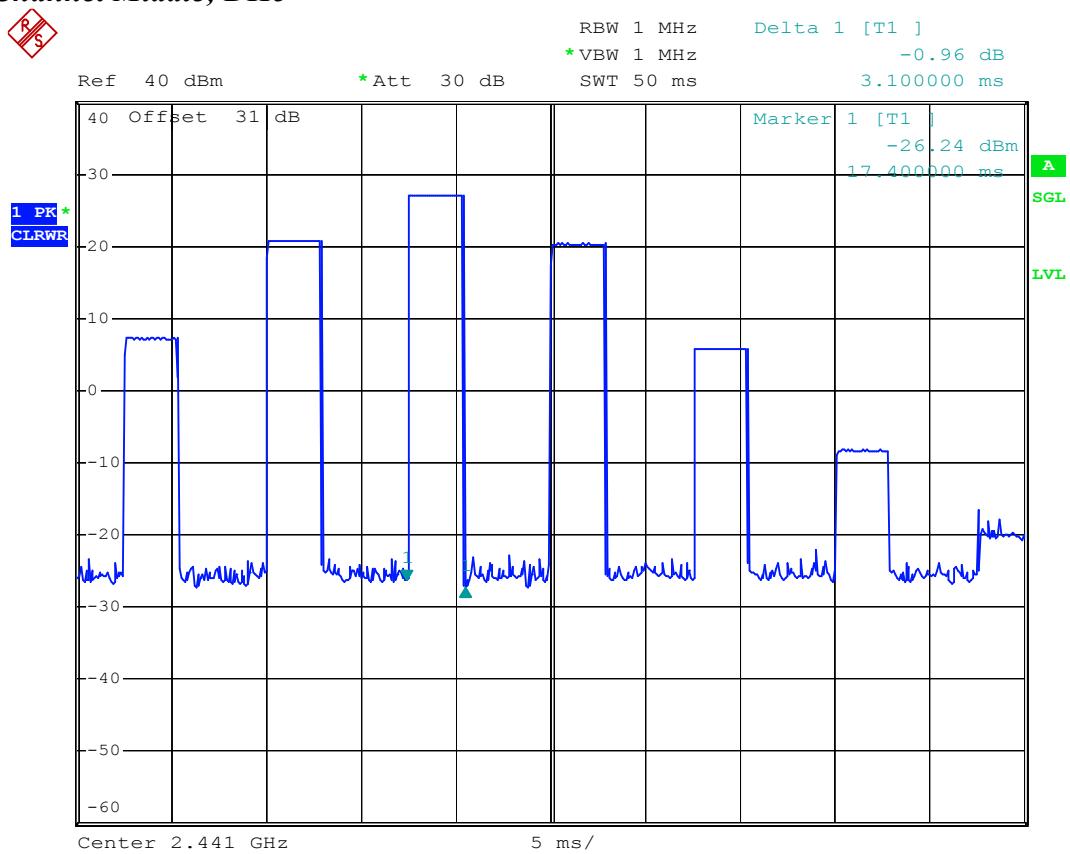
Channel High; DH1

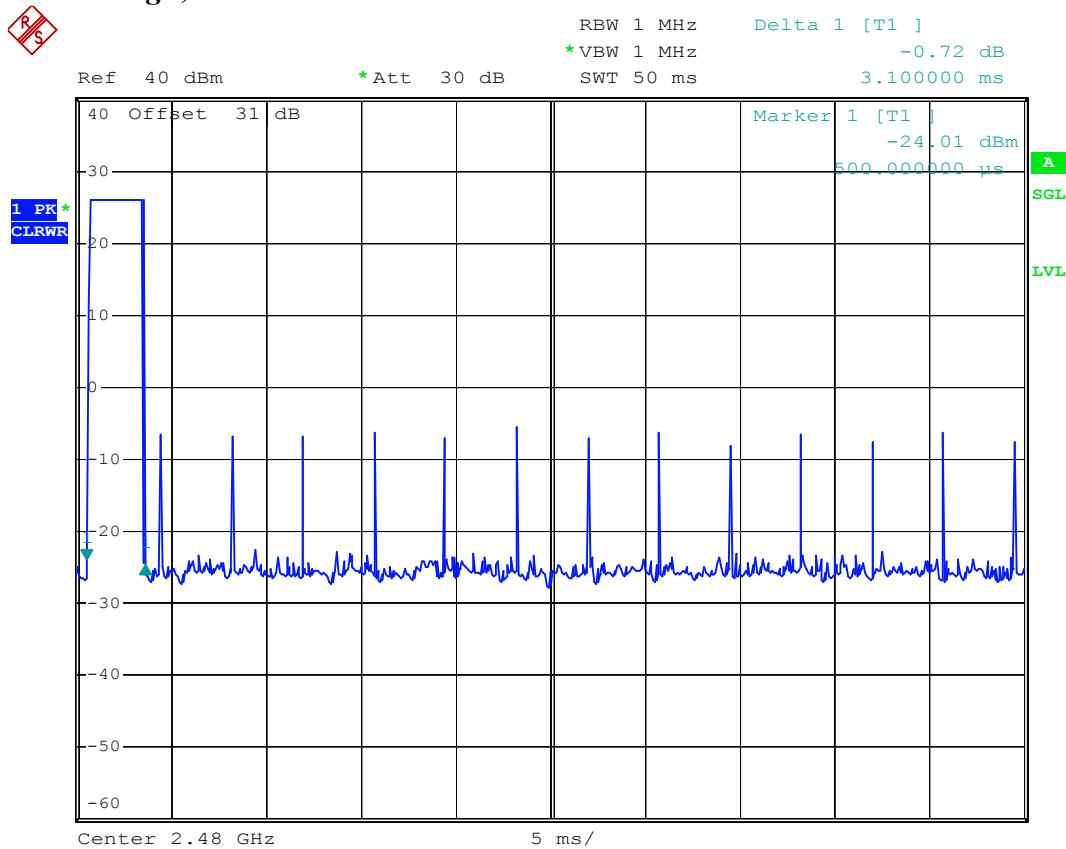
Channel Low; DH3

Channel Middle; DH3

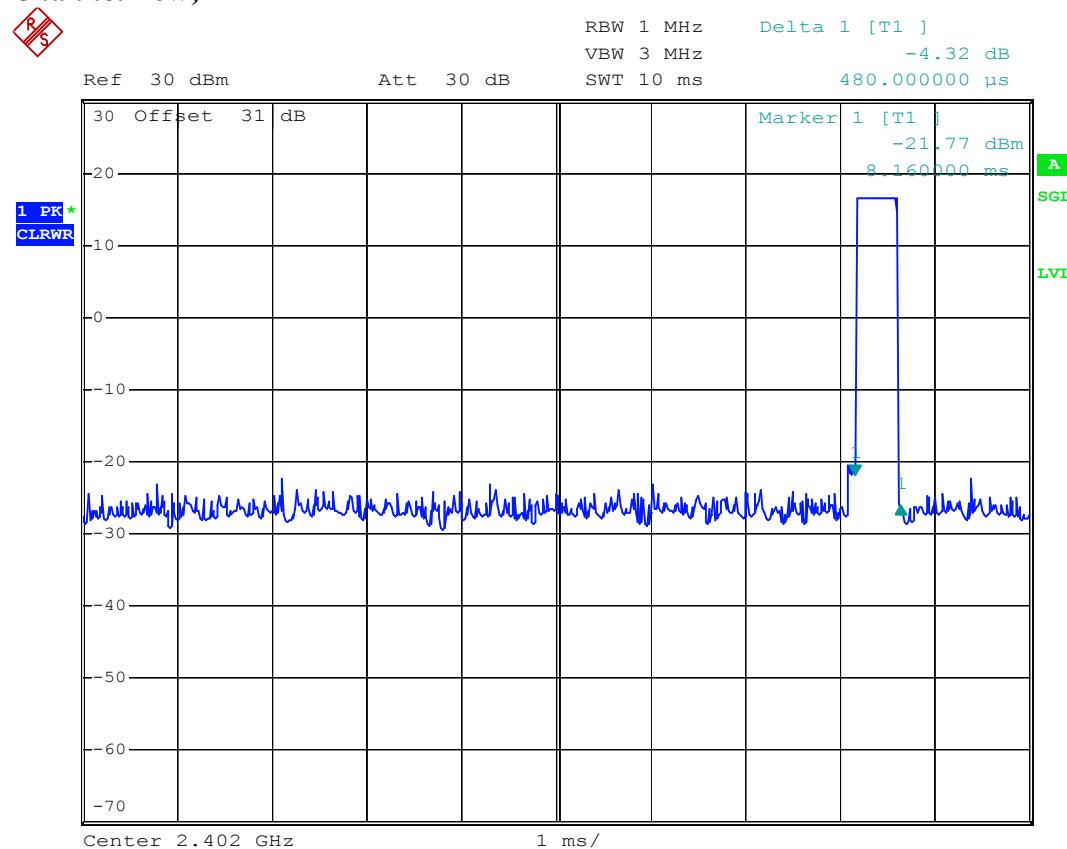
Channel High; DH3

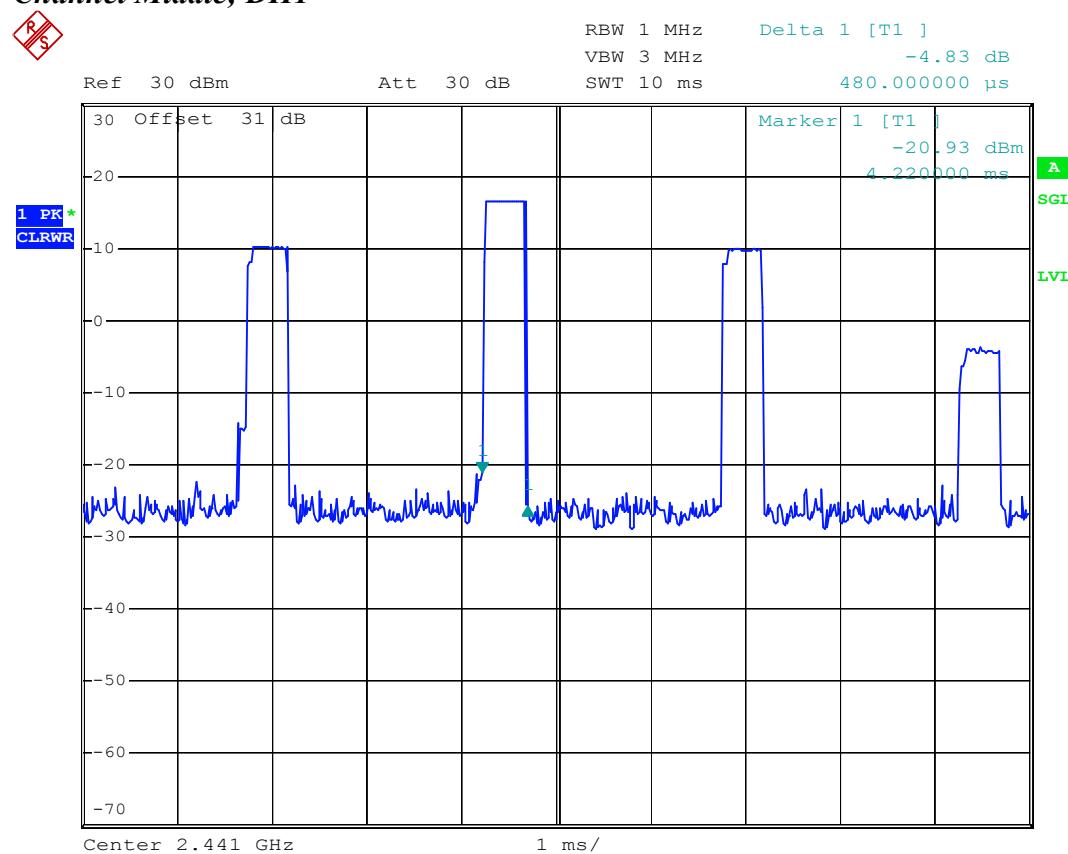
Channel Low; DH5

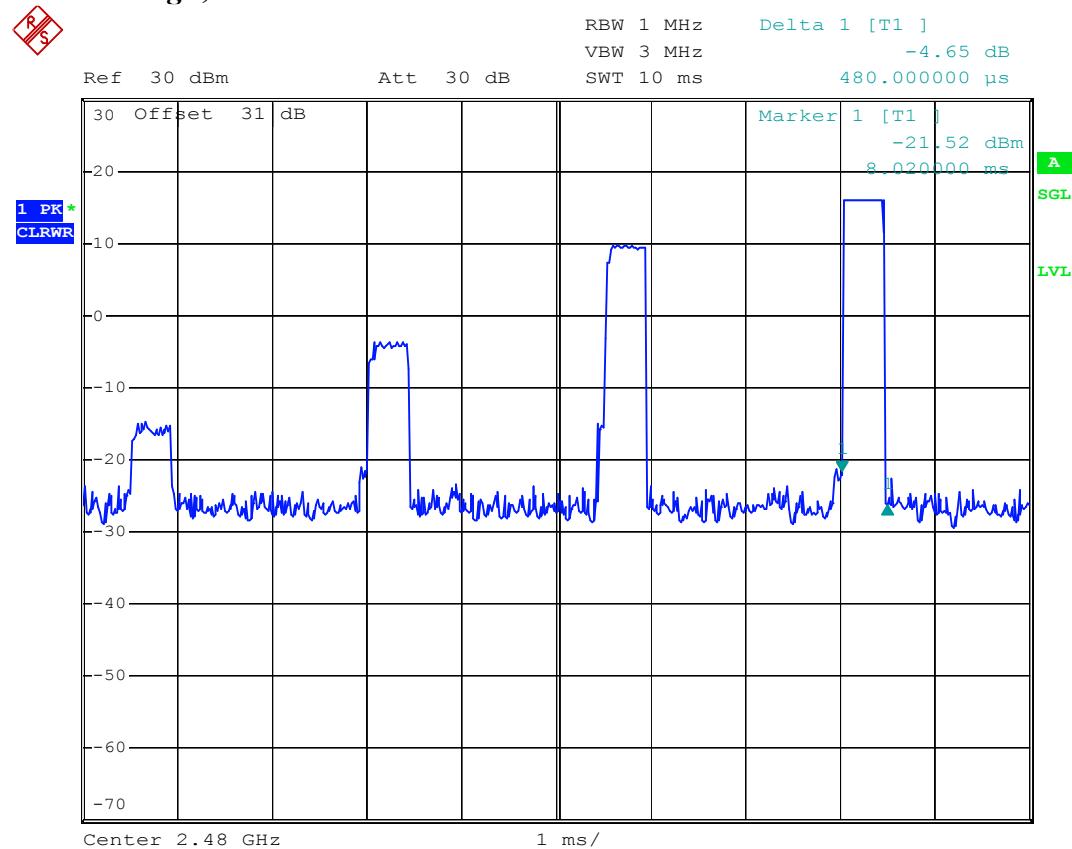
Channel Middle; DH5

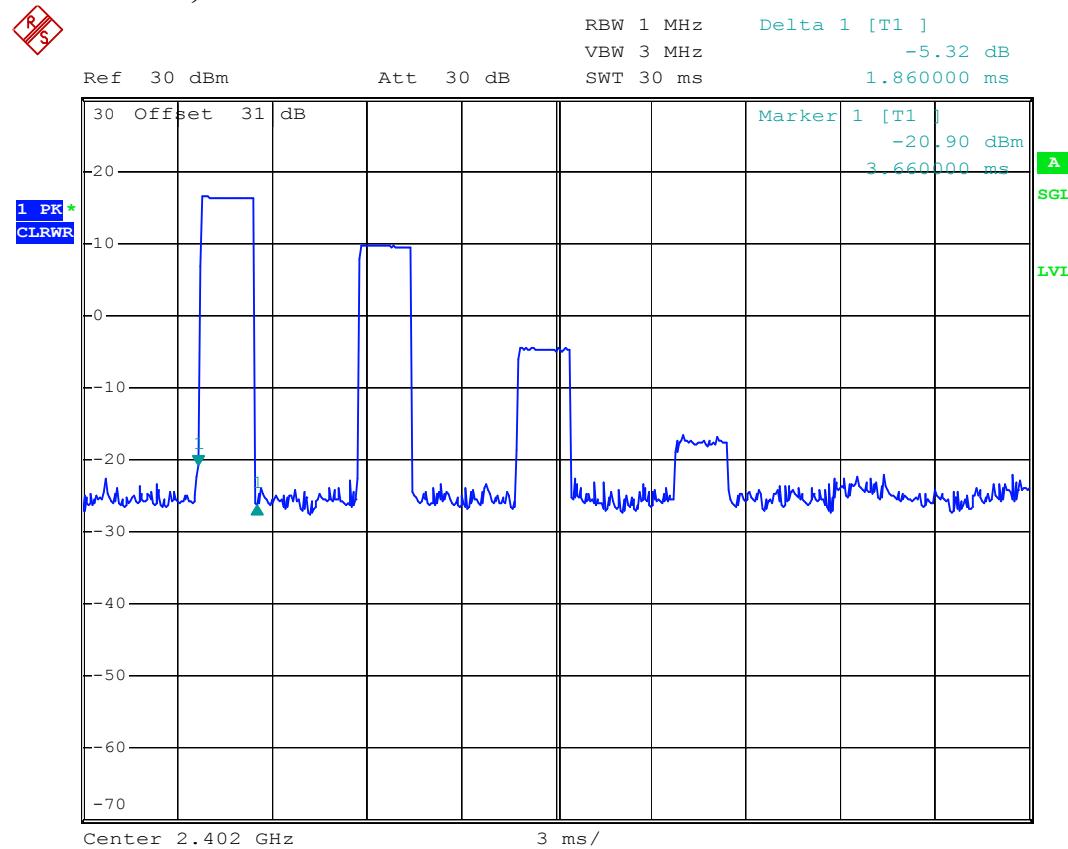
Channel High; DH5

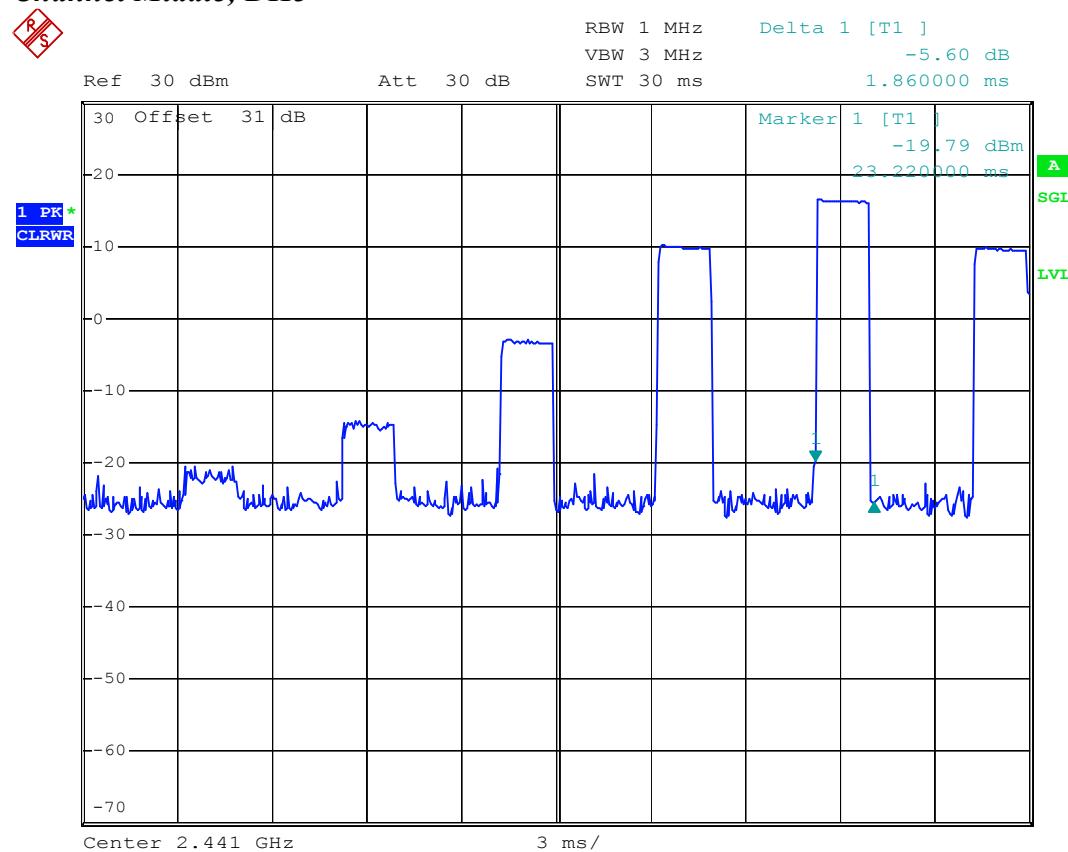
(B) Bluetooth Dongle only (without Amplifier)

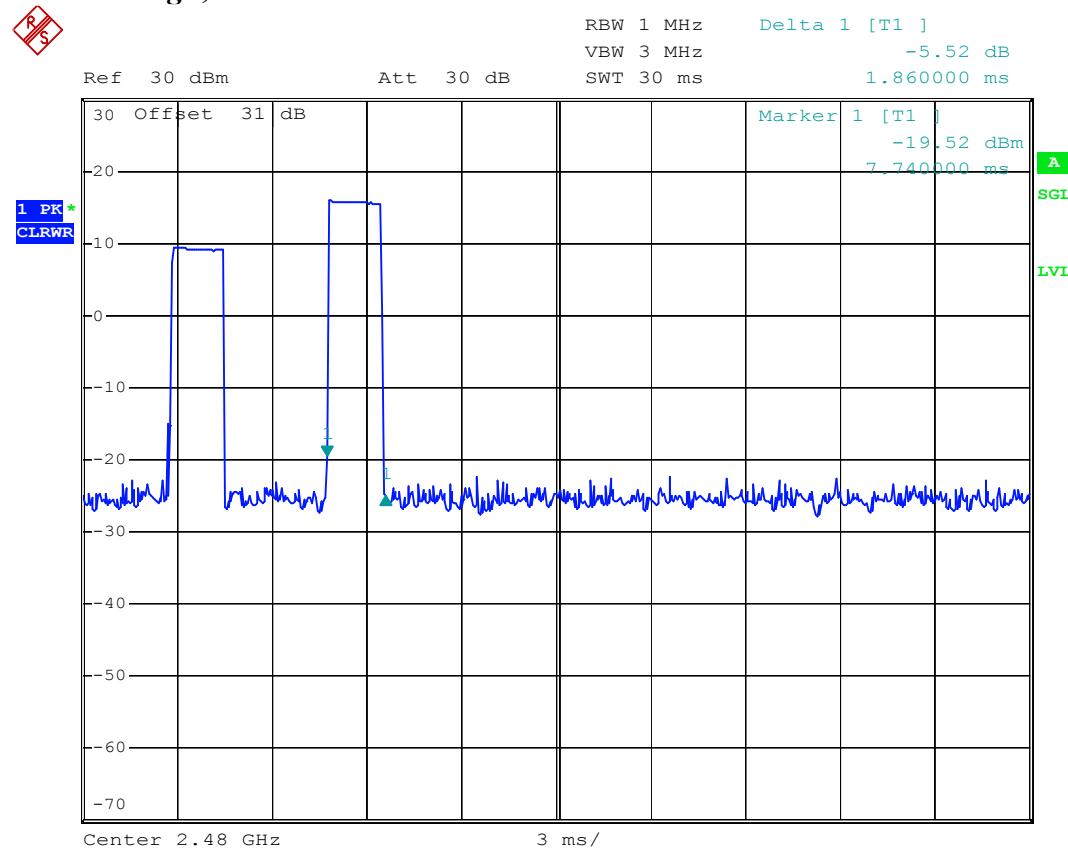
Channel Low; DH1

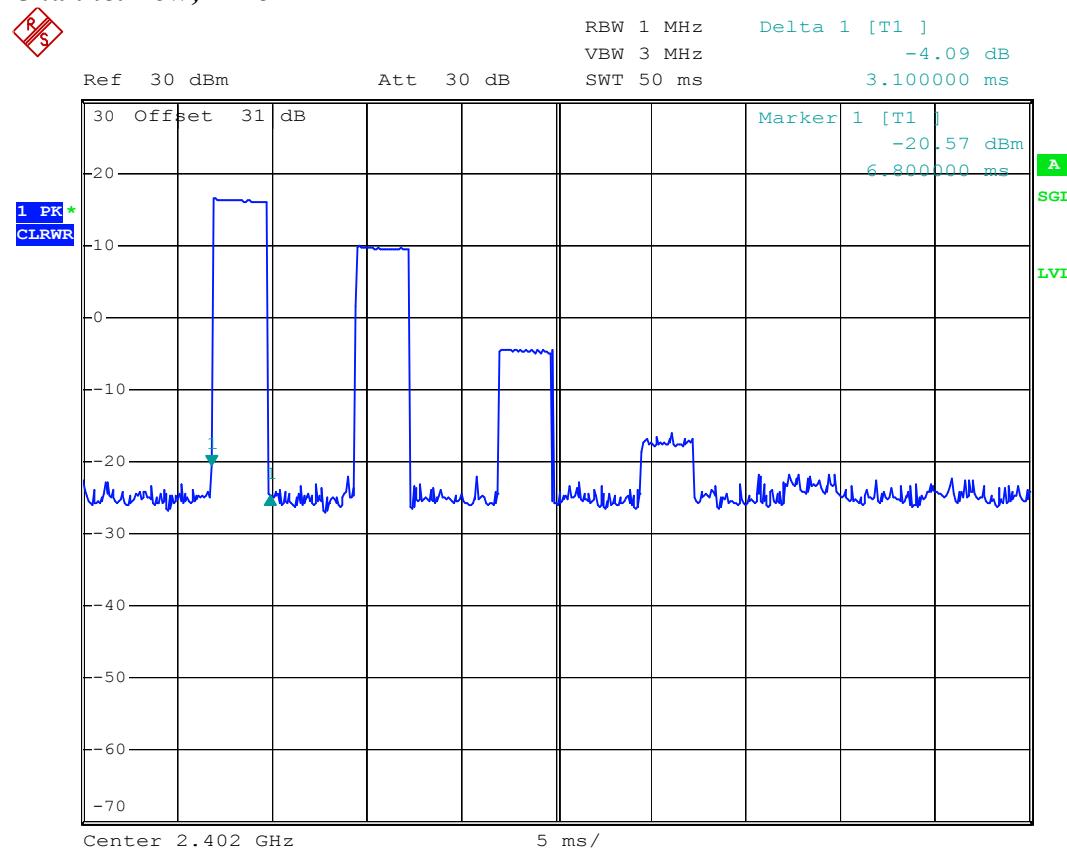
Channel Middle; DH1

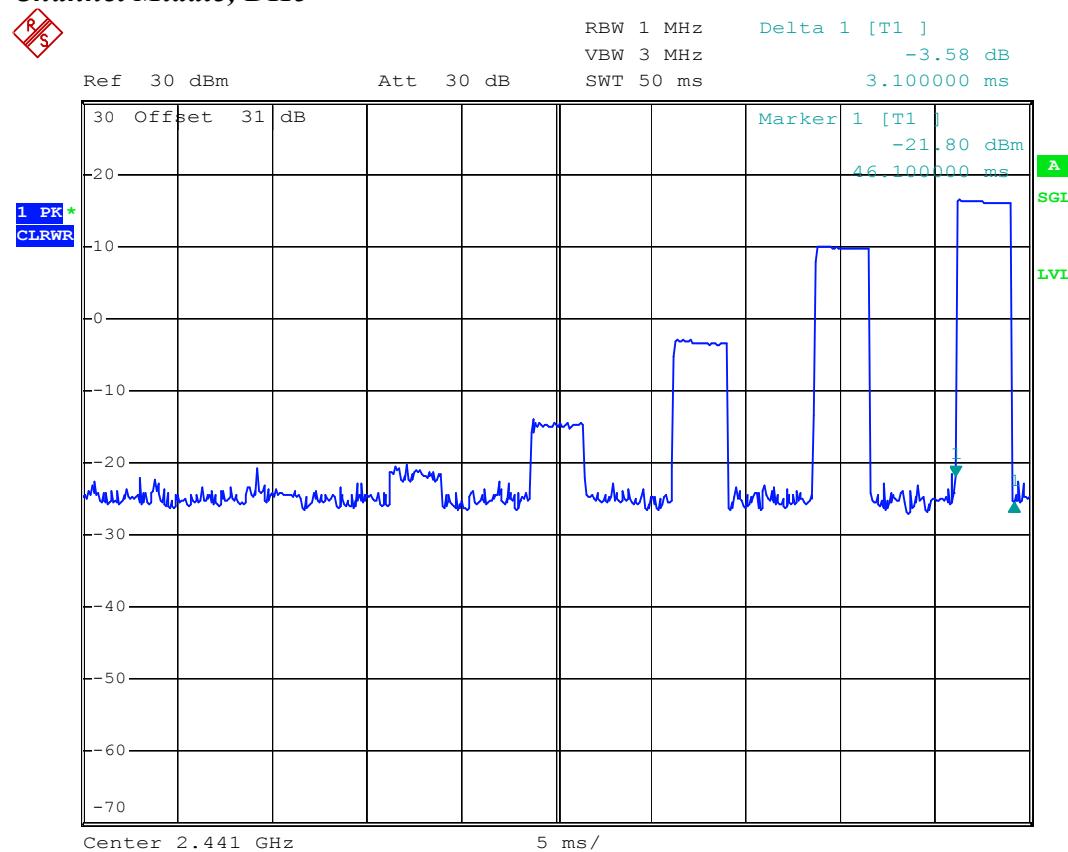
Channel High; DH1

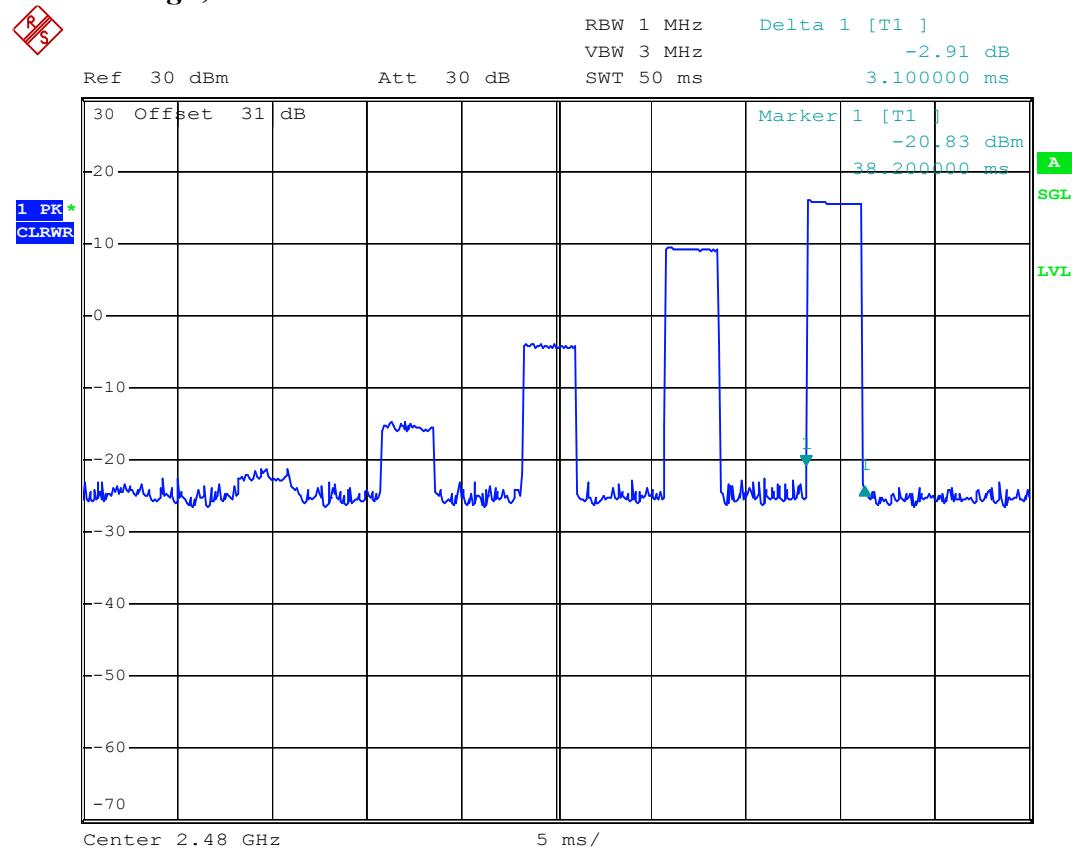
Channel Low; DH3

Channel Middle; DH3

Channel High; DH3

Channel Low; DH5

Channel Middle; DH5

Channel High; DH5

11 OUTPUT POWER MEASUREMENT

11.1 Standard Applicable

According to 15.247(b)(1), for frequency hopping systems operating in the 2400–2483.5 MHz band employing at least 75 non-overlapping hopping channels, and all frequency hopping systems in the 5725–5850 MHz band: 1 watt. For all other frequency hopping systems in the 2400–2483.5 MHz band: 0.125 watts.

11.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
 - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel
 - RBW > the 20 dB bandwidth of the emission being measured
 - VBW \geq RBW
 - Sweep = auto
 - Detector function = peak
 - Trace = max hold
4. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all frequencies measured were complete.

11.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A

11.4 Measurement Data

Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

(A) Bluetooth Dongle + Amplifier

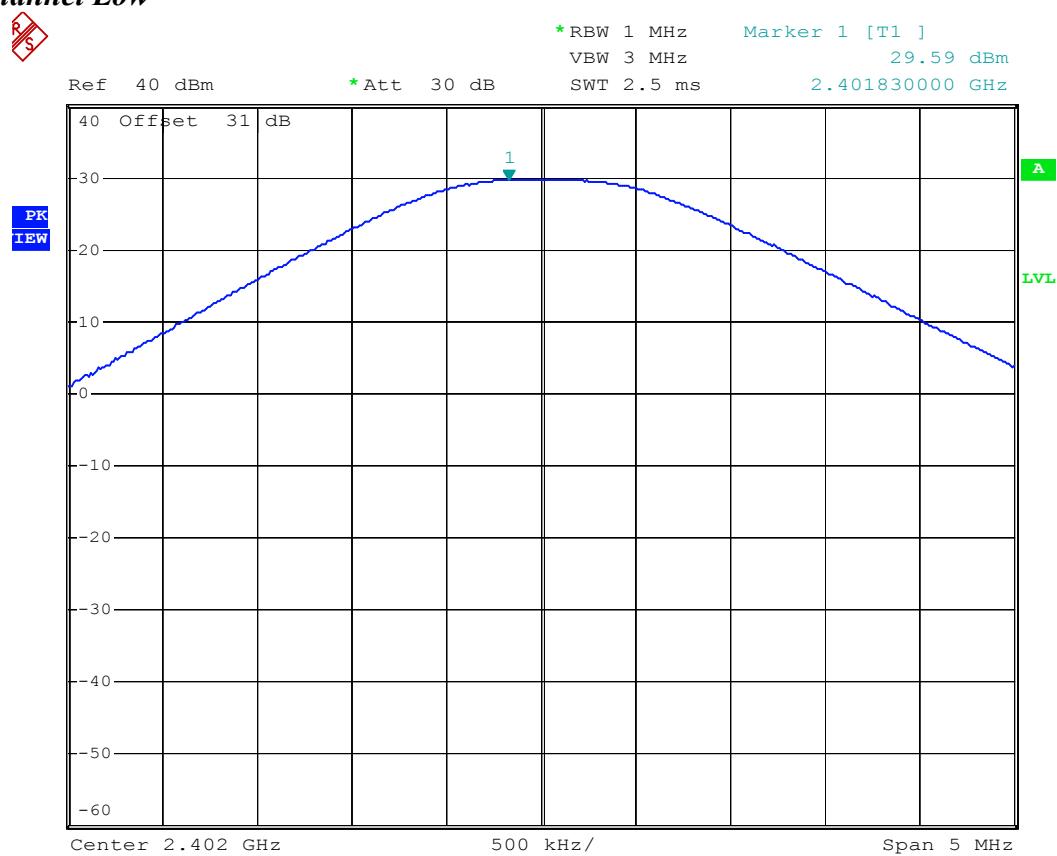
- a) Channel Low : Output Peak Power is 29.59 dBm = **909.913** mW
- b) Channel Middle : Output Peak Power is 27.95 dBm = **623.735** mW
- c) Channel High : Output Peak Power is 26.8 dBm = **478.630** mW

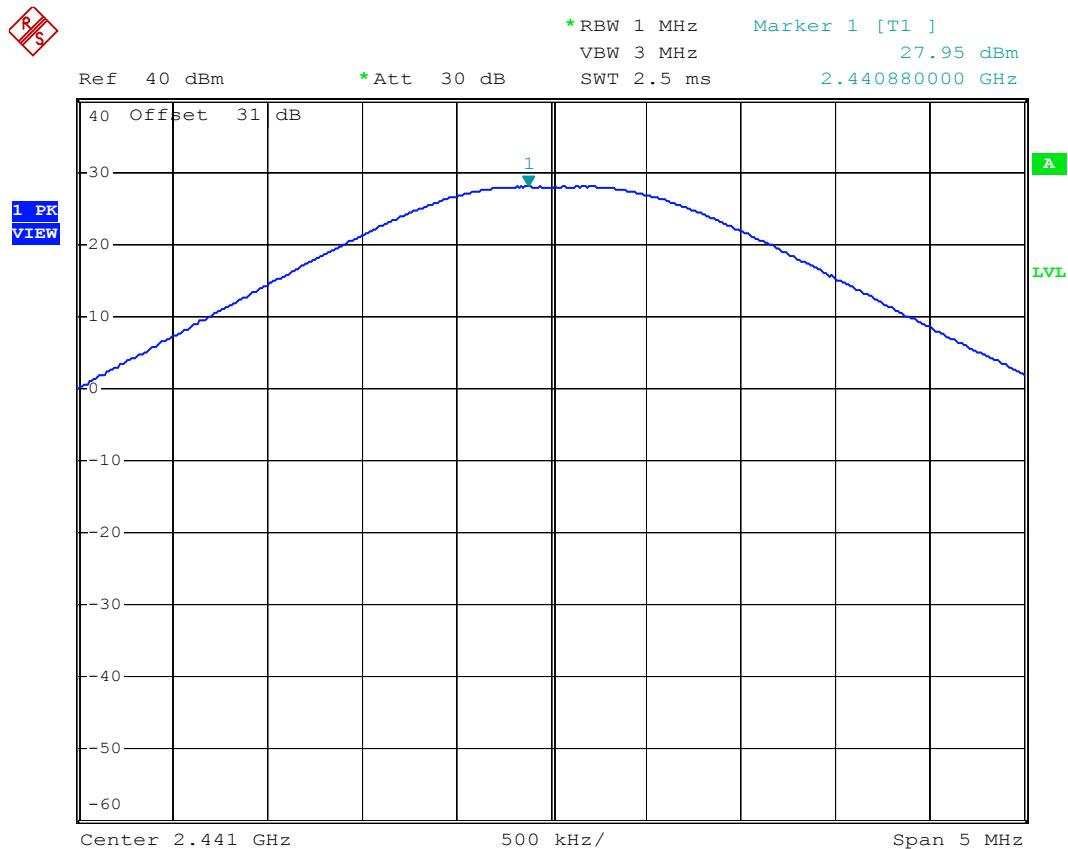
(B) Bluetooth Dongle only (without Amplifier)

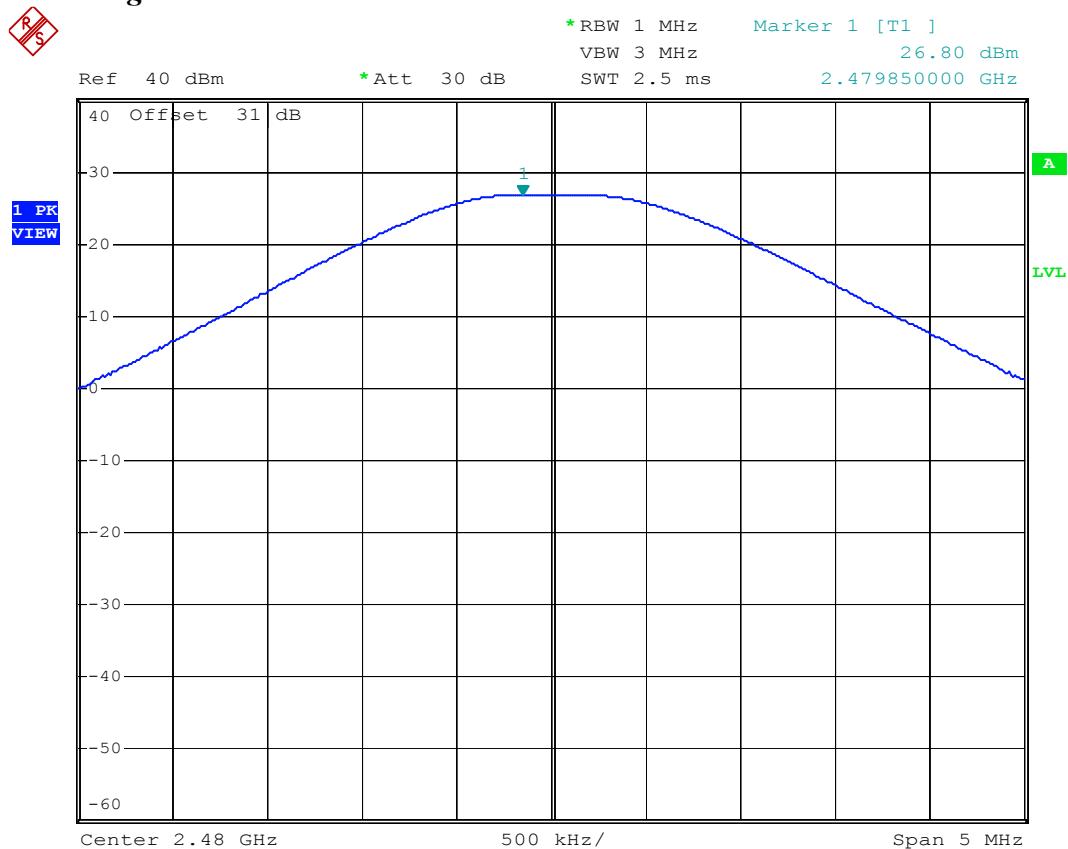
- a) Channel Low : Output Peak Power is 16.8 dBm = **47.863** mW
- b) Channel Middle : Output Peak Power is 16.83 dBm = **48.194** mW
- c) Channel High : Output Peak Power is 16.15 dBm = **41.209** mW

Note : The expanded uncertainty 2dB.

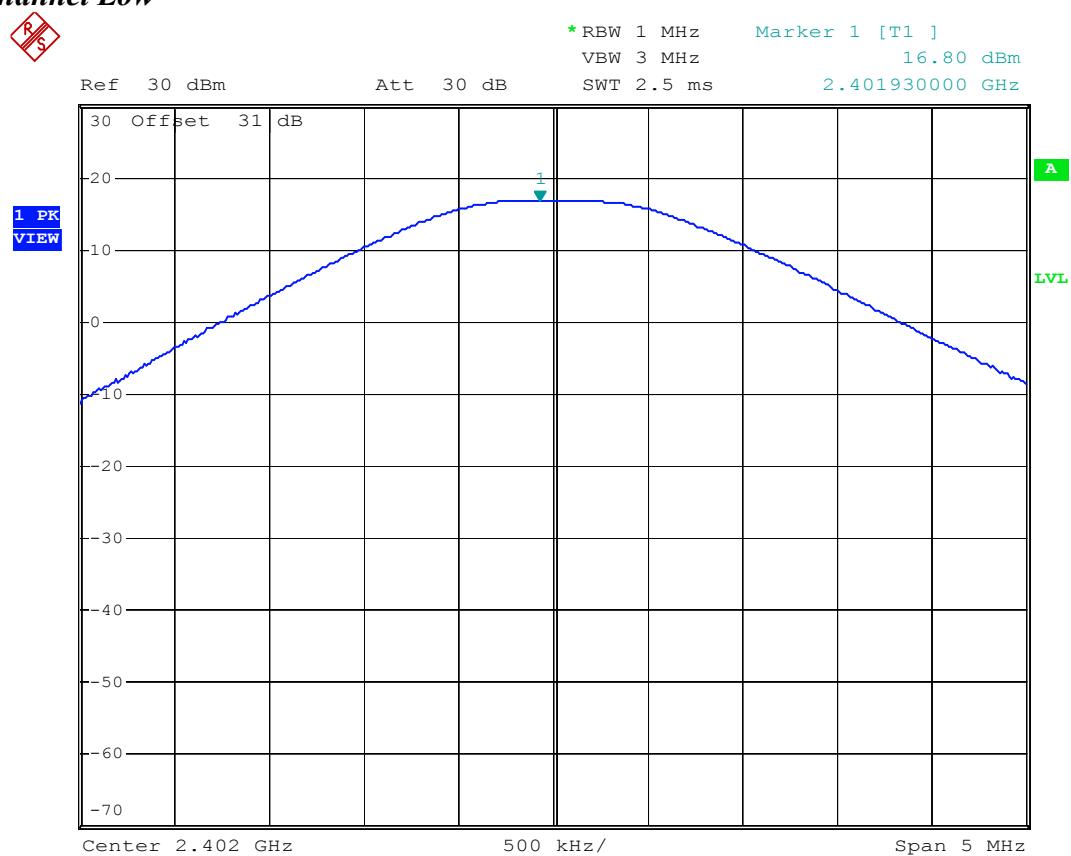
(A) Bluetooth Dongle + Amplifier

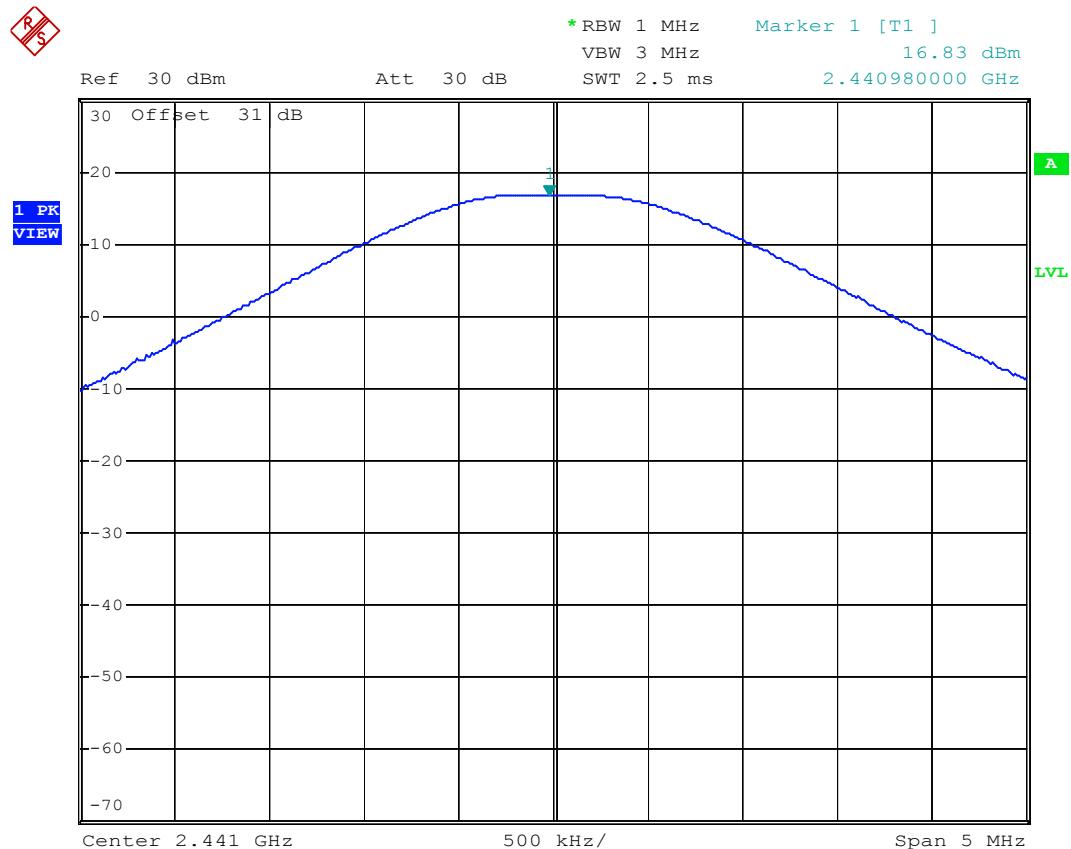
Channel Low

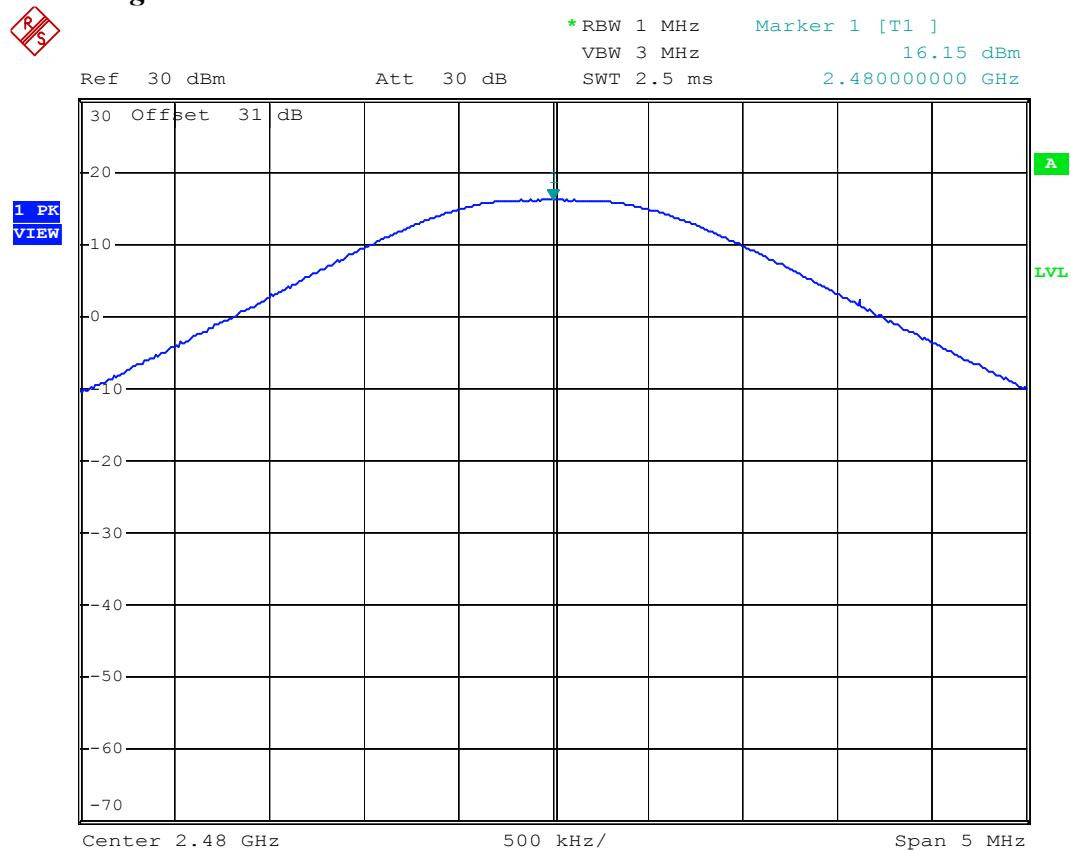
Channel Middle

Channel High

(B) Bluetooth Dongle only (without Amplifier)

Channel Low

Channel Middle

Channel High

12 100 kHz BANDWIDTH OF BAND EDGES MEASUREMENT

12.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

12.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument.
Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:
Span = wide enough to capture the peak level of the emission operating on the channel closest to the bandedge, as well as any modulation products which fall outside of the authorized band of operation
RBW \geq 1% of the span
VBW \geq RBW
Sweep = auto
Detector function = peak
Trace = max hold
4. Allow the trace to stabilize. Set the marker on the emission at the bandedge, or on the highest modulation product outside of the band, if this level is greater than that at the bandedge. Enable the marker-delta function, then use the marker-to-peak function to move the marker to the peak of the in-band emission. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

12.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A

12.4 Measurement Data

Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

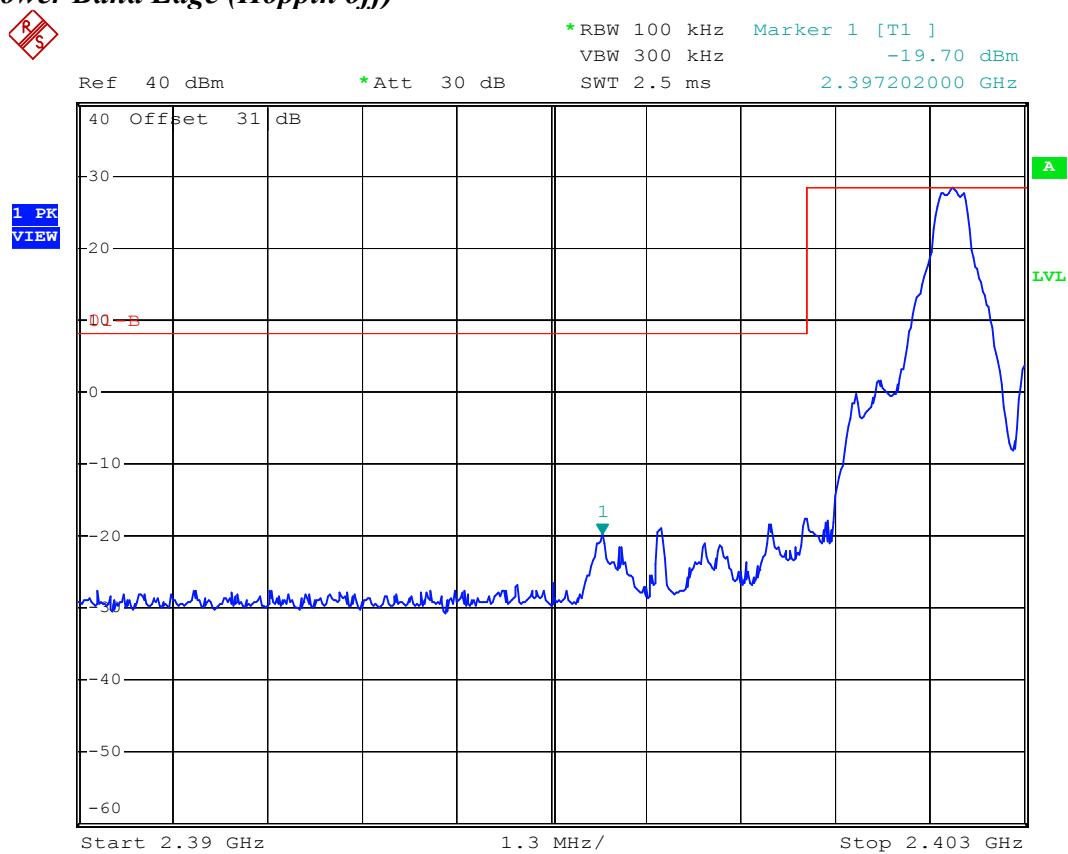
(A) Bluetooth Dongle + Amplifier

- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

(B) Bluetooth Dongle only (without Amplifier)

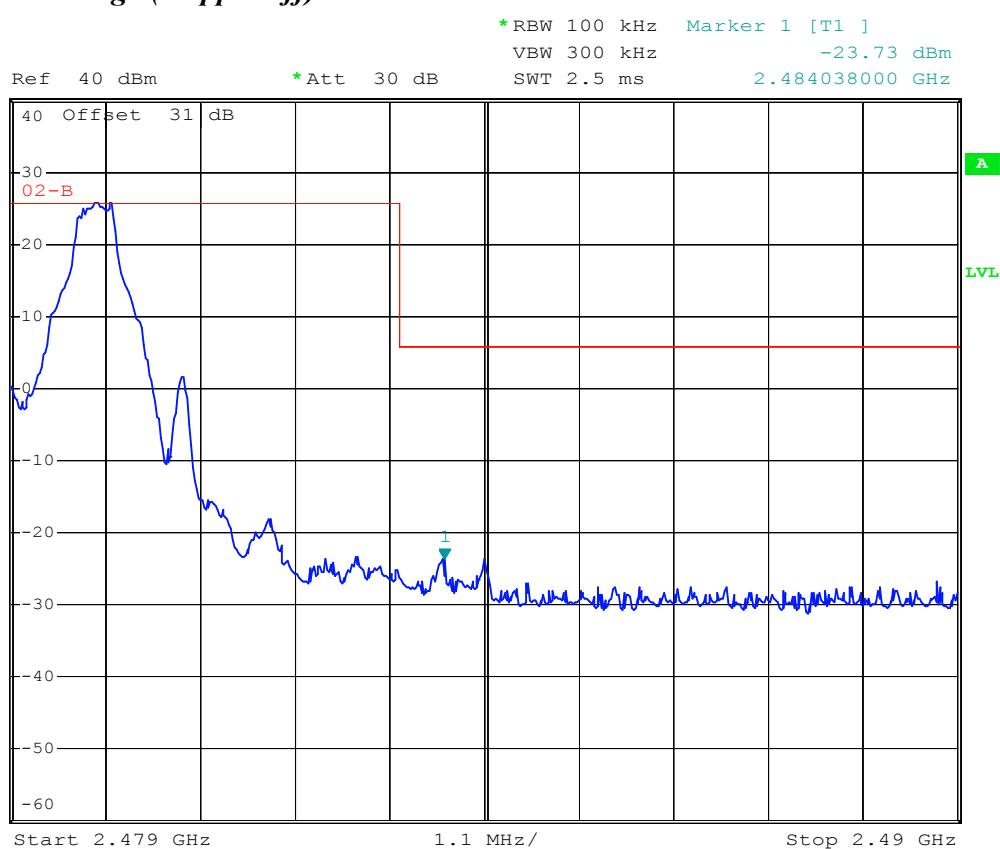
- a) Lower Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.
- b) Upper Band Edge : All emissions in this 100kHz bandwidth are attenuated more than 20dB from the carrier.

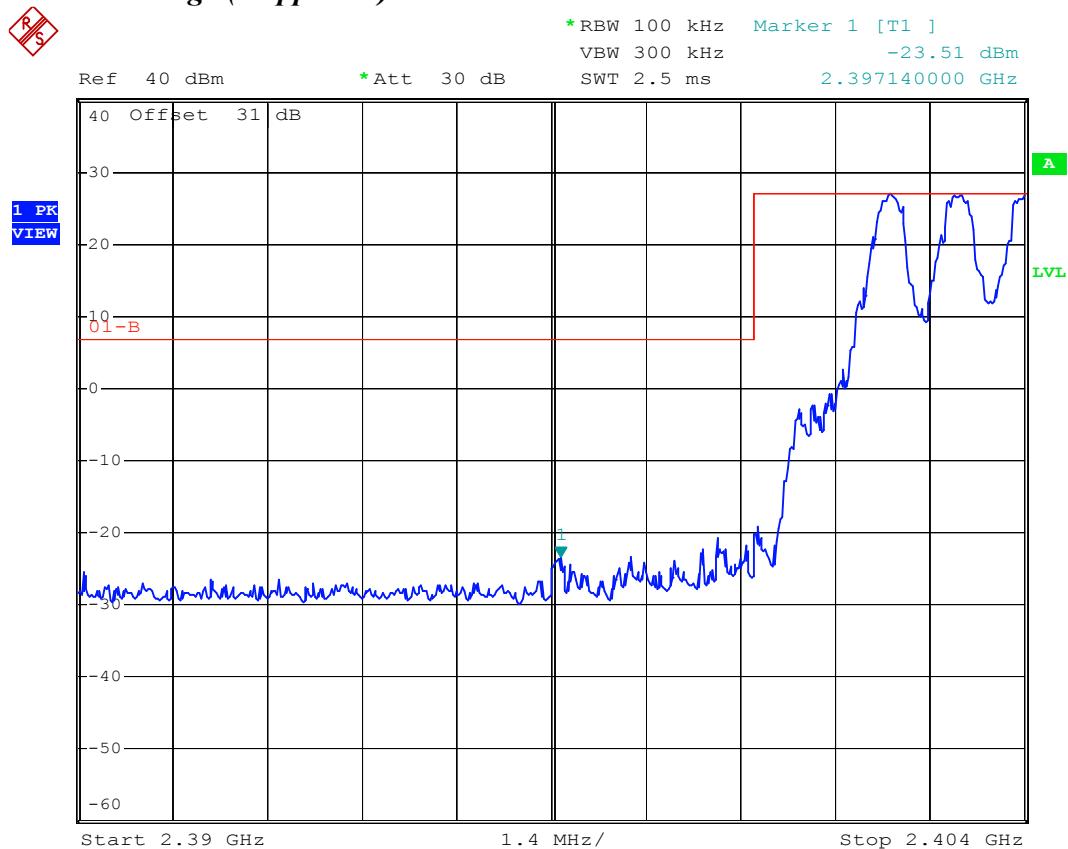
Note : The expanded uncertainty: 2dB.

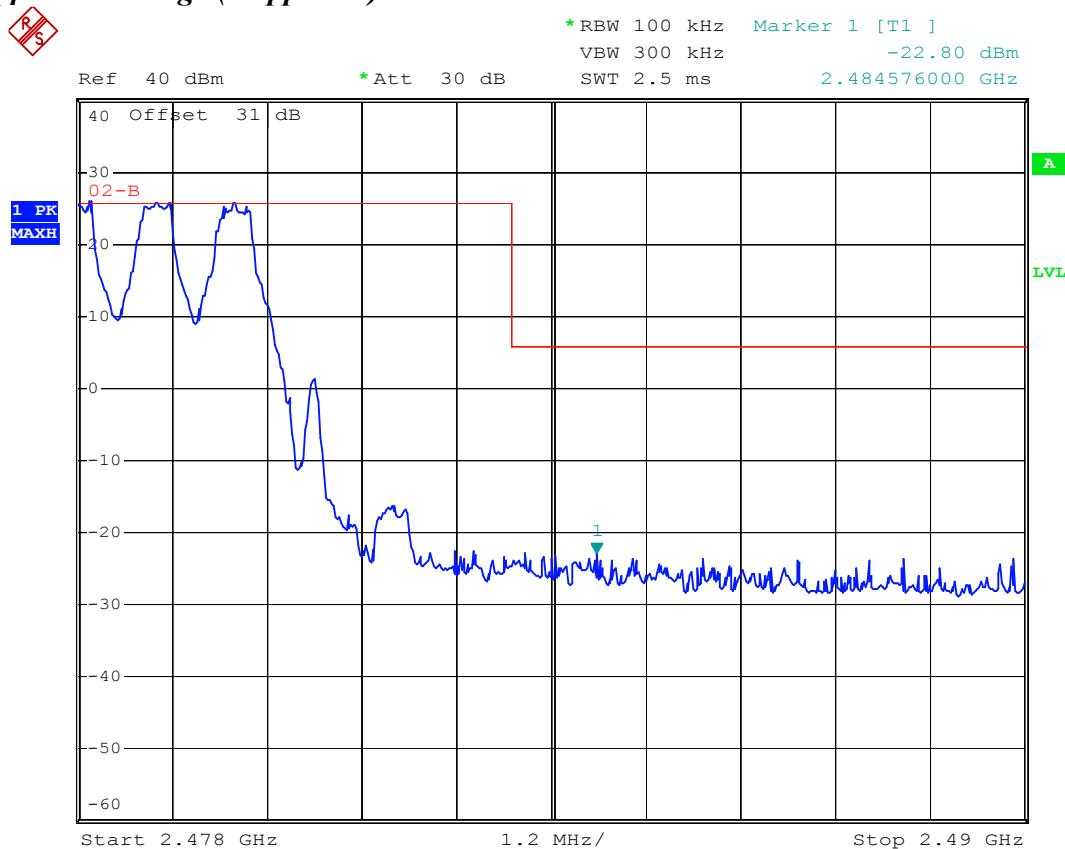
(A) Bluetooth Dongle + Amplifier
Lower Band Edge (Hoppin off)

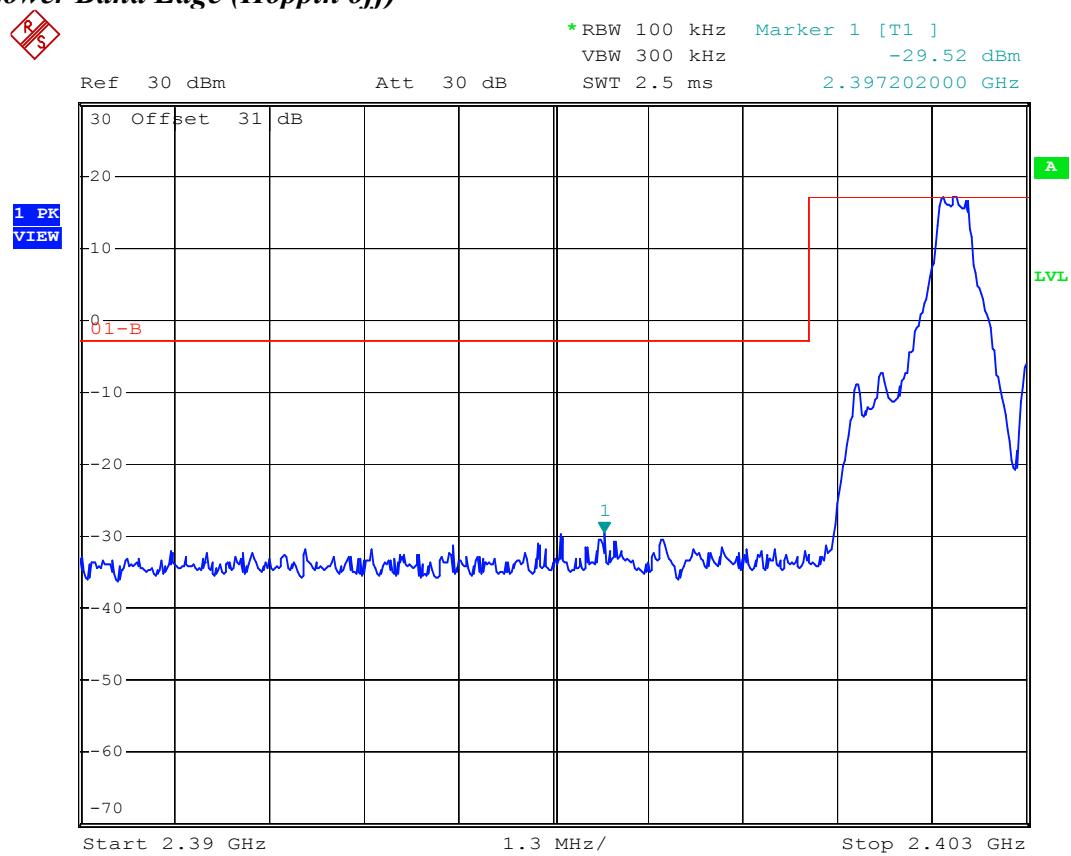
Upper Band Edge (Hoppin off)

REFS

1 PK
VIEW

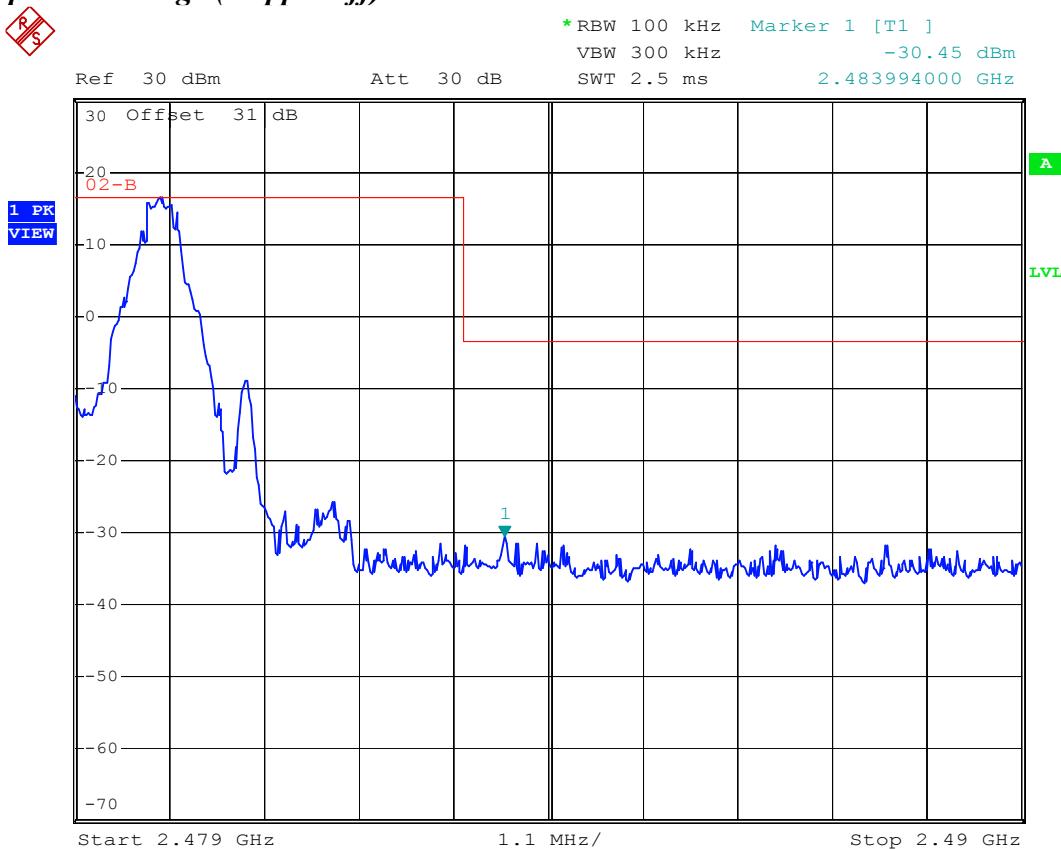
Lower Band Edge (Hoppin on)

Upper Band Edge (Hoppin on)

(B) Bluetooth Dongle only (without Amplifier)
Lower Band Edge (Hoppin off)

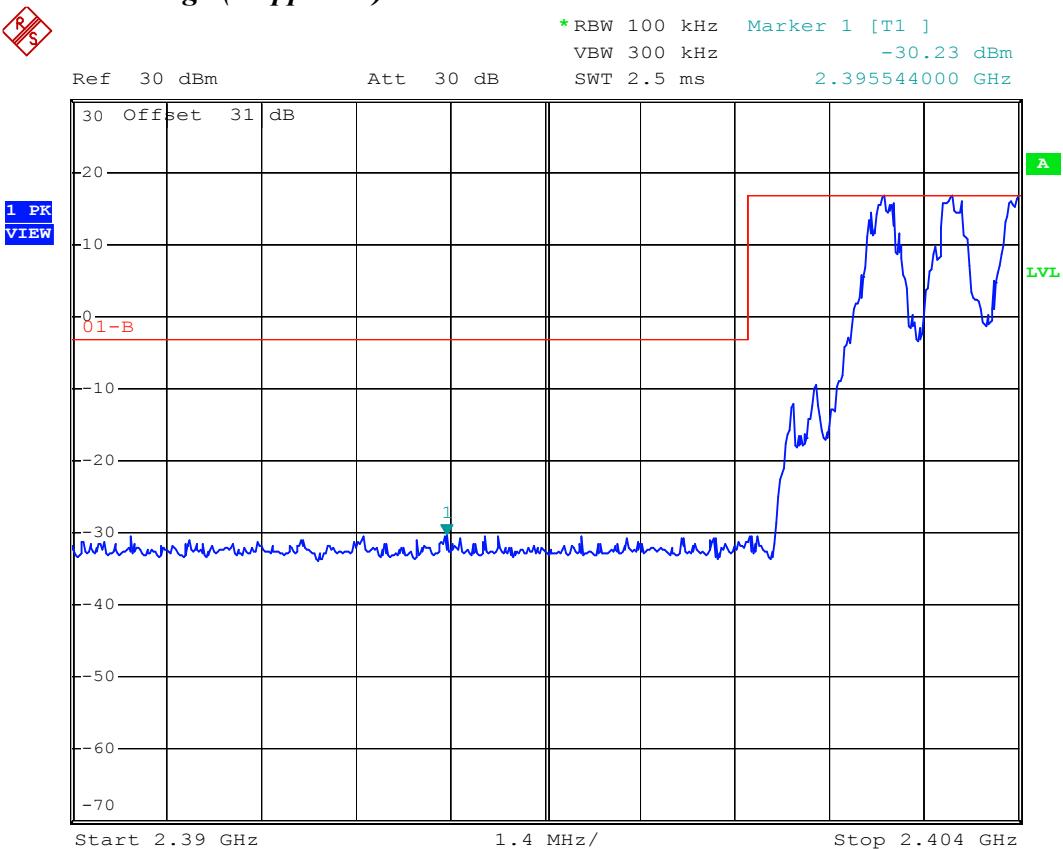
Upper Band Edge (Hoppin off)

65



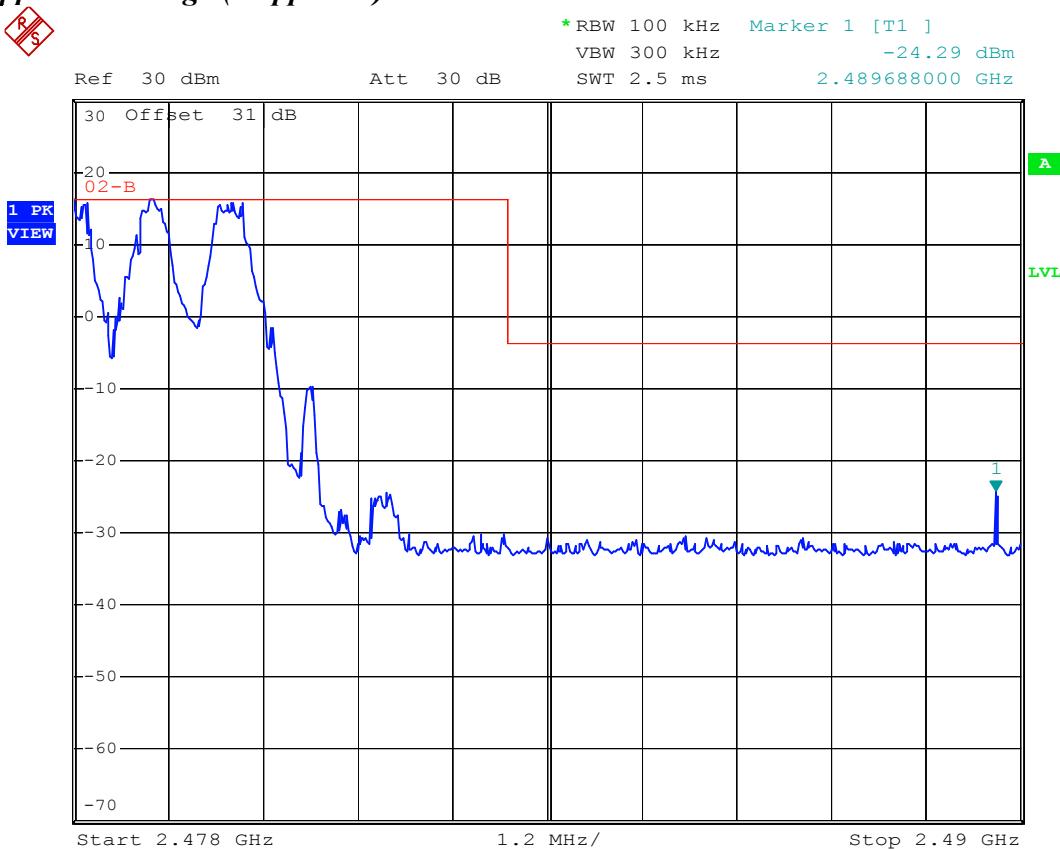
Lower Band Edge (Hoppin on)

65



Upper Band Edge (Hoppin on)

R5



13 CONDUCTED SPURIOUS EMISSION MEASUREMENT

13.1 Standard Applicable

According to 15.247(d), in any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. If the transmitter complies with the conducted power limits based on the use of RMS averaging over a time interval, as permitted under paragraph (b)(3) of this section, the attenuation required under this paragraph shall be 30 dB instead of 20 dB. Attenuation below the general limits specified in §15.209(a) is not required.

13.2 Measurement Procedure

1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
2. Position the EUT as shown in figure 4 without connection to measurement instrument. Turn on the EUT and connect its antenna terminal to measurement instrument via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
3. Use the following spectrum analyzer settings:

Span = wide enough to capture the peak level of the in-band emission and all spurious emissions (e.g., harmonics) from the lowest frequency generated in the EUT up through the 10th harmonic. Typically, several plots are required to cover this entire span.

RBW = 100 kHz

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold.
4. Allow the trace to stabilize. Set the marker on the peak of any spurious emission recorded. Plot the result on the screen of spectrum analyzer.
5. Repeat above procedures until all measured frequencies were complete.

13.3 Measurement Equipment

Equipment	Manufacturer	Model No.	Calibration Date	Next Cal. Date
Spectrum Analyzer	Rohde & Schwarz	FSP40	2011/09/21	2012/09/20
Attenuator	Weinschel Engineering	1	N/A	N/A

13.4 Measurement Data

(A) Bluetooth Dongle + Amplifier

Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

Mode : Low Channel / Middle Channel / High Channel

- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

(B) Bluetooth Dongle only (without Amplifier)

Test Date : Aug. 28, 2012 Temperature : 26 °C Humidity : 65 %

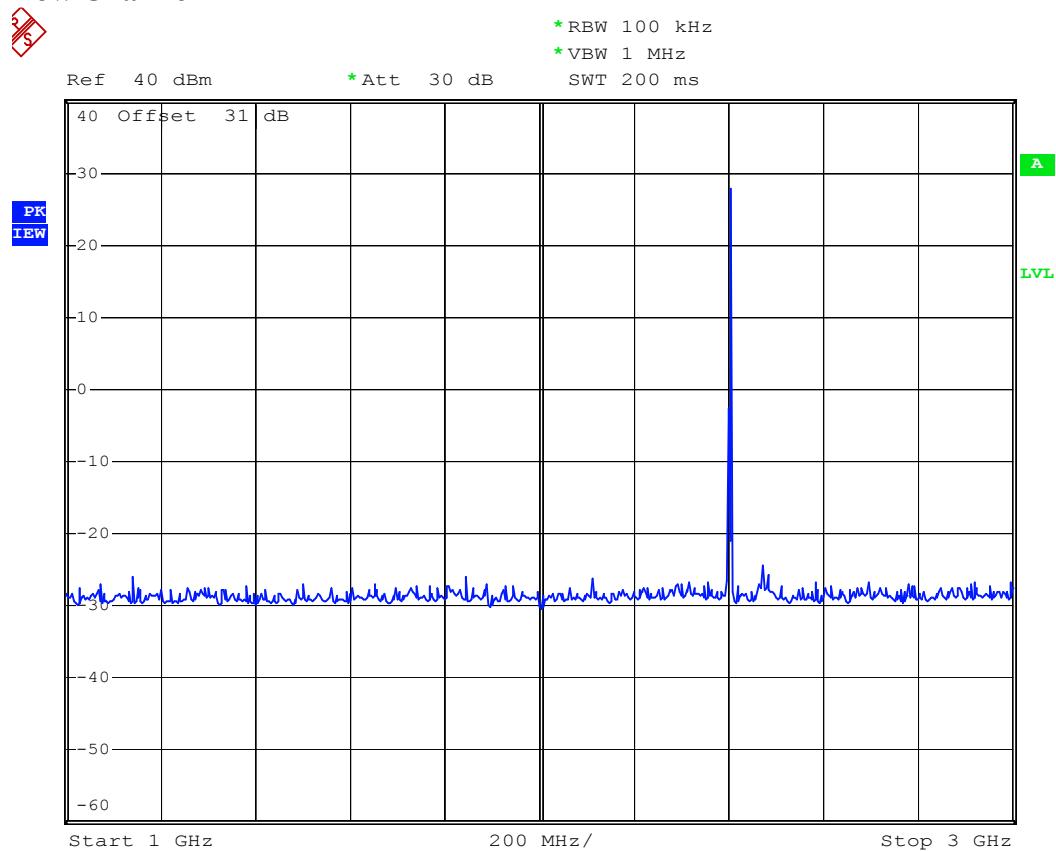
Mode : Low Channel / Middle Channel / High Channel

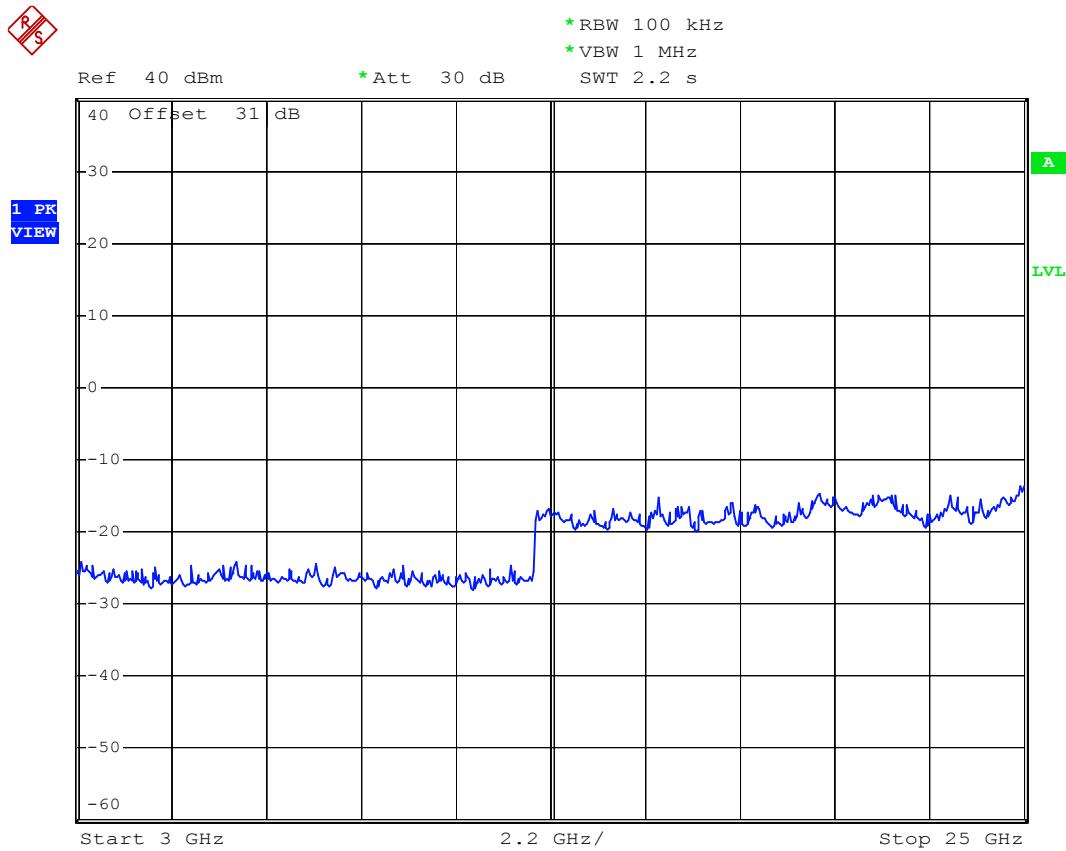
- a) 1 GHz to 3 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.
- b) 3 GHz to 25 GHz frequency band: All emissions are attenuated more than 20dB from the carrier.

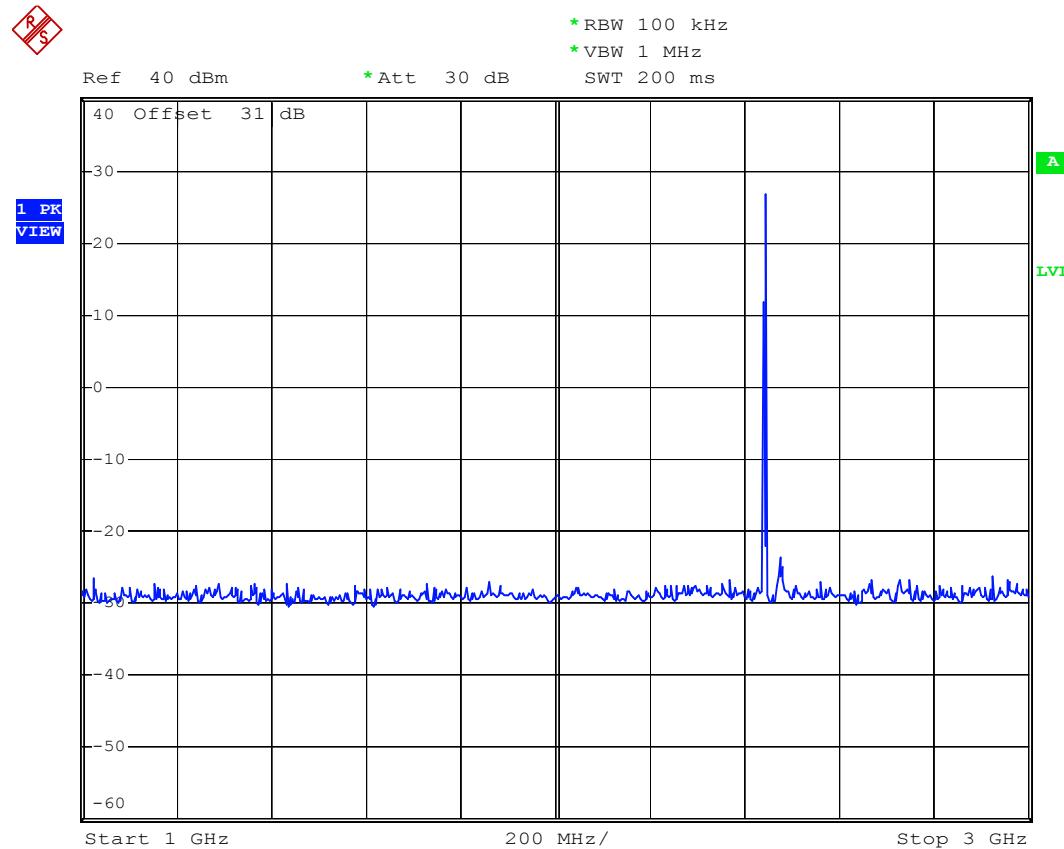
Note : The expanded uncertainty: 2dB.

(A) Bluetooth Dongle + Amplifier

Low Channel

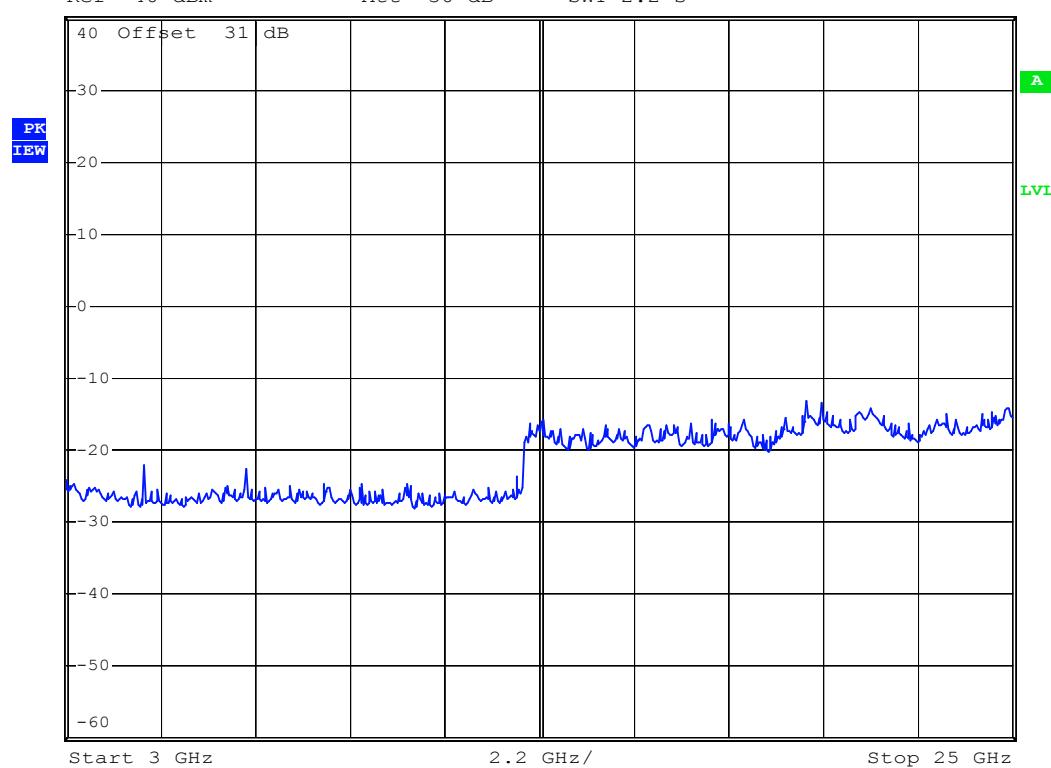


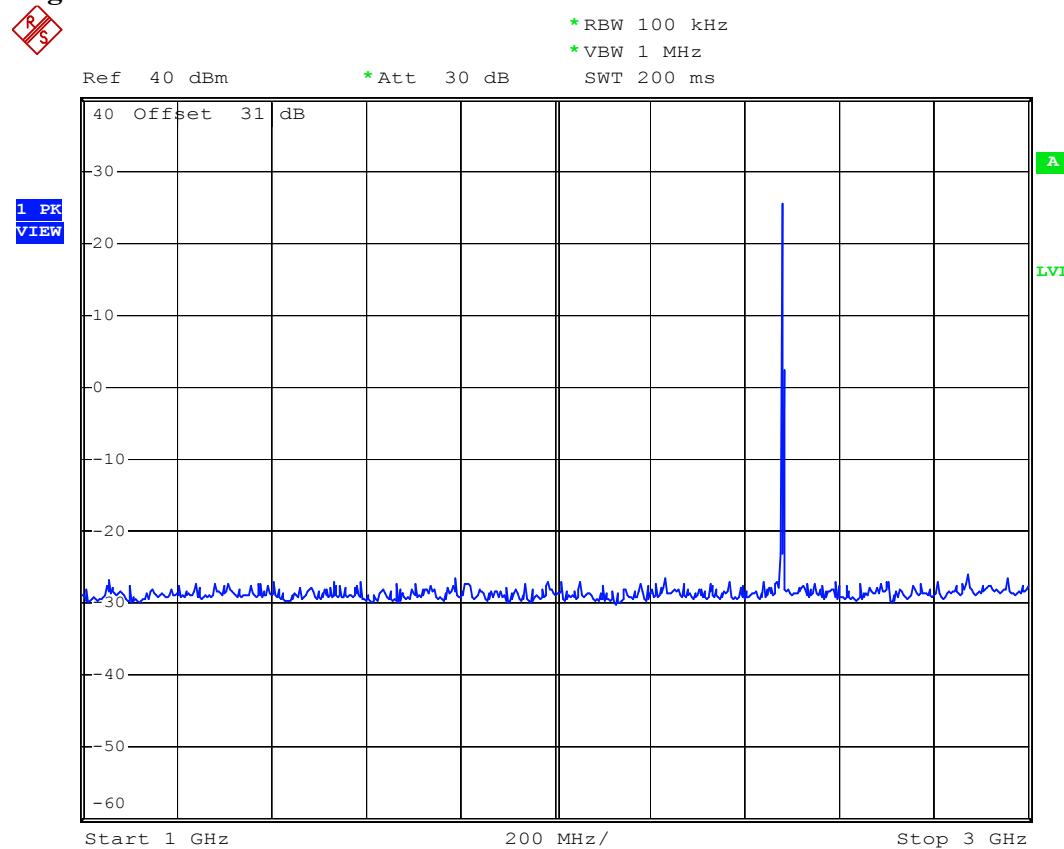
Low Channel

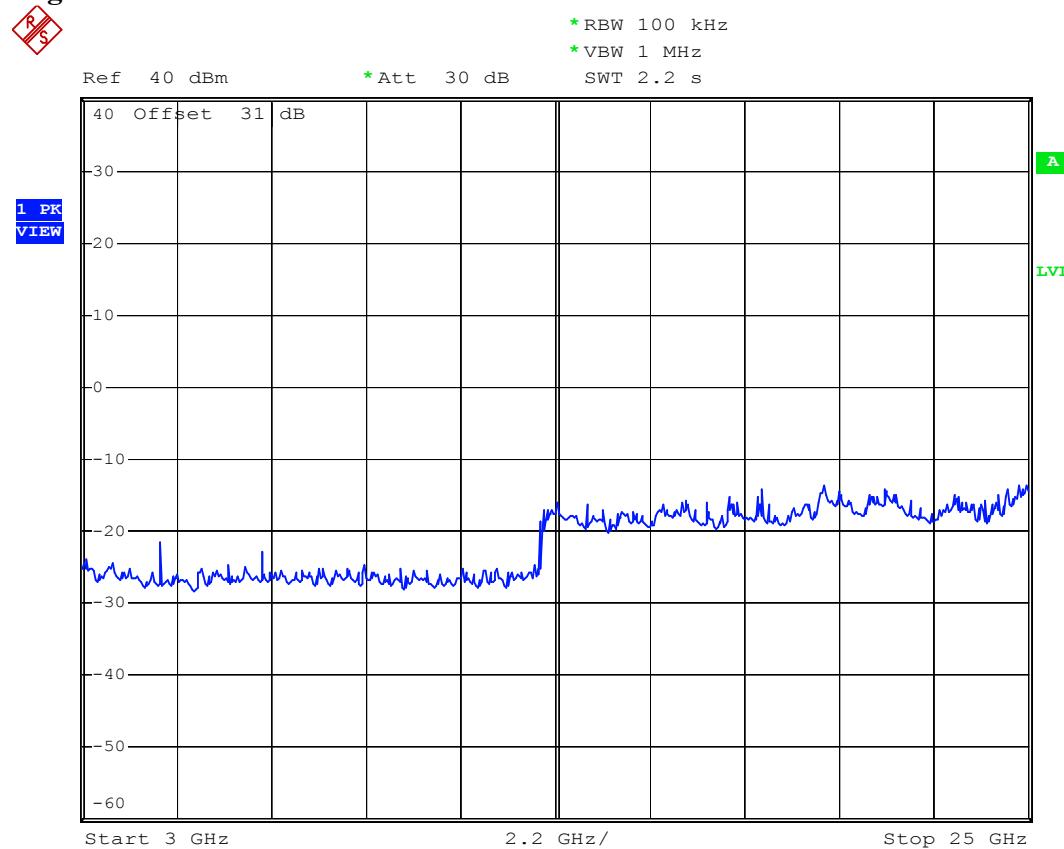
Middle Channel

Middle Channel

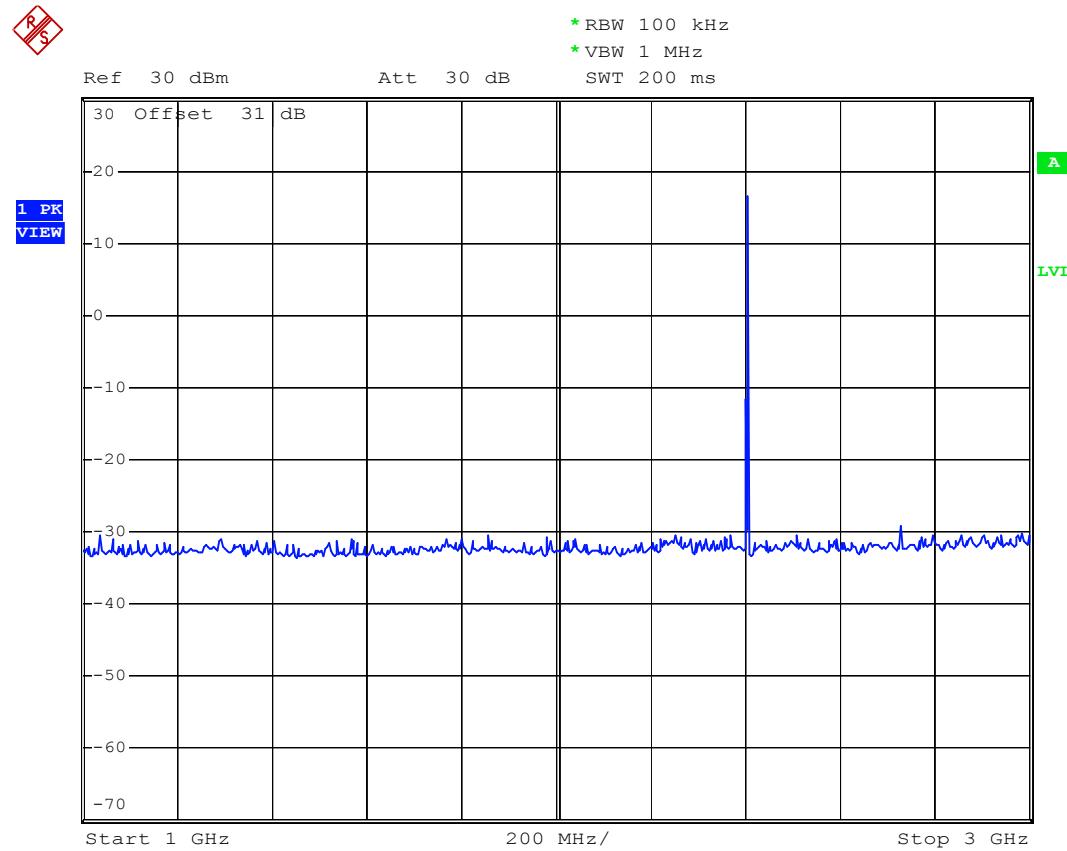
* RBW 100 kHz
* VBW 1 MHz
Ref 40 dBm * Att 30 dB SWT 2.2 s

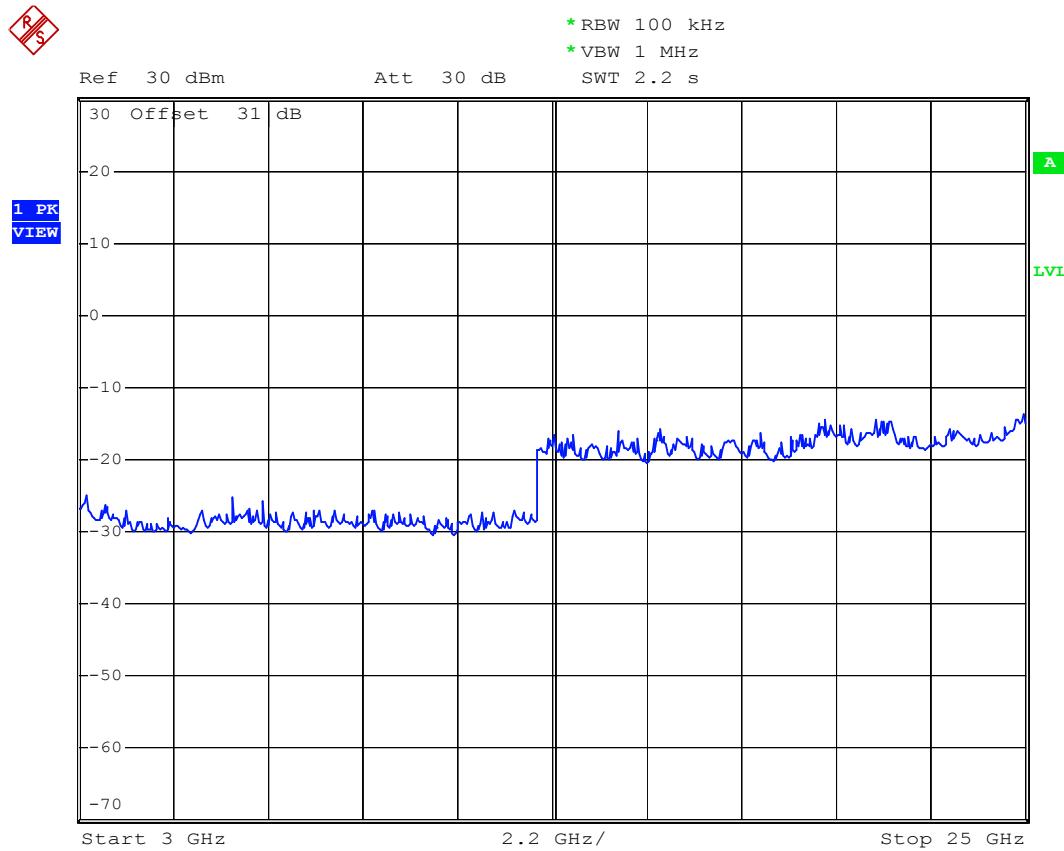


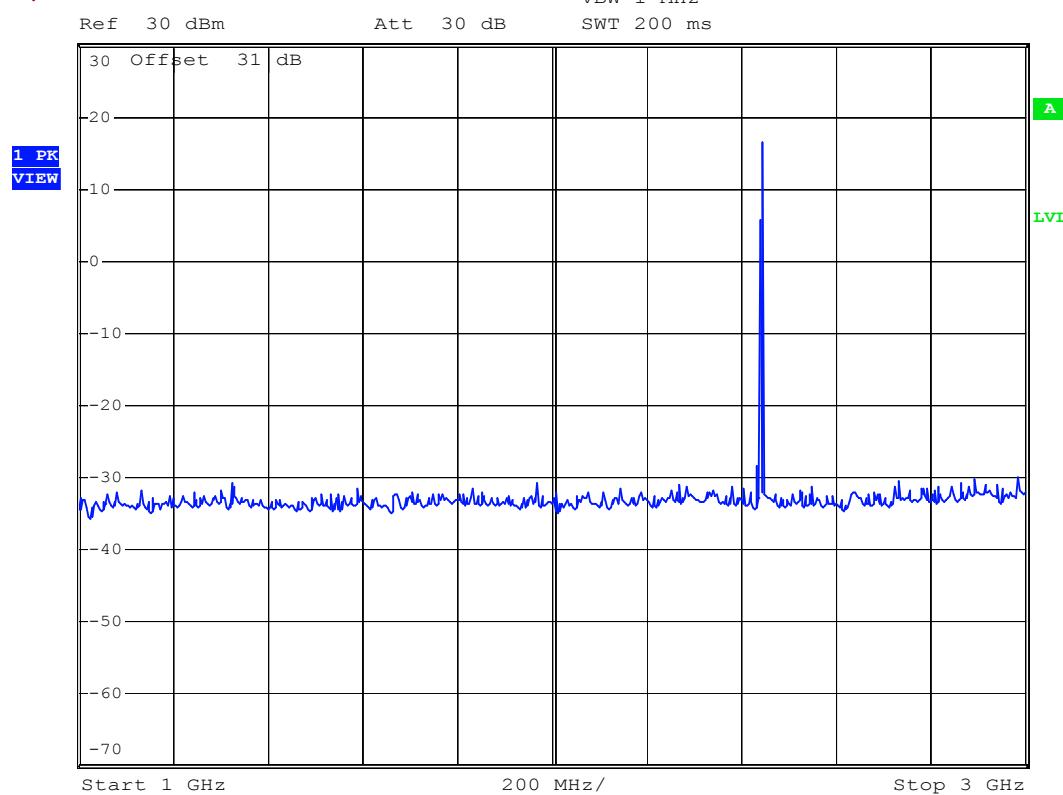
High Channel

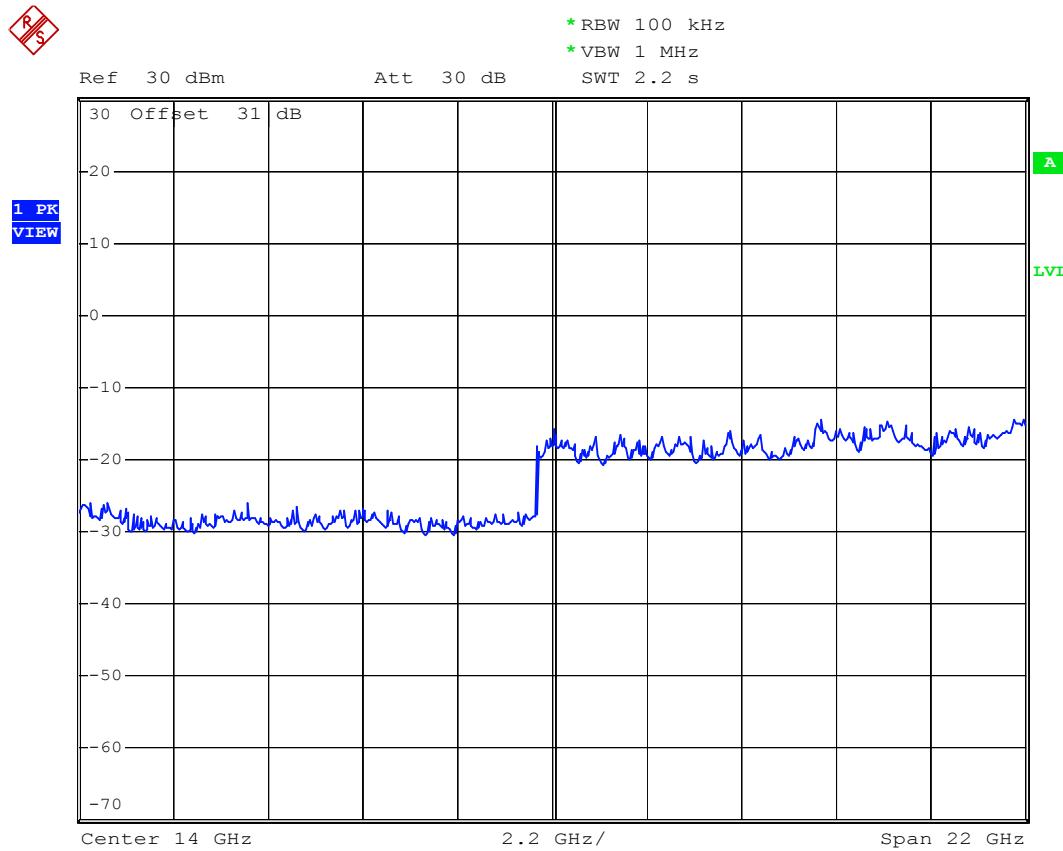
High Channel

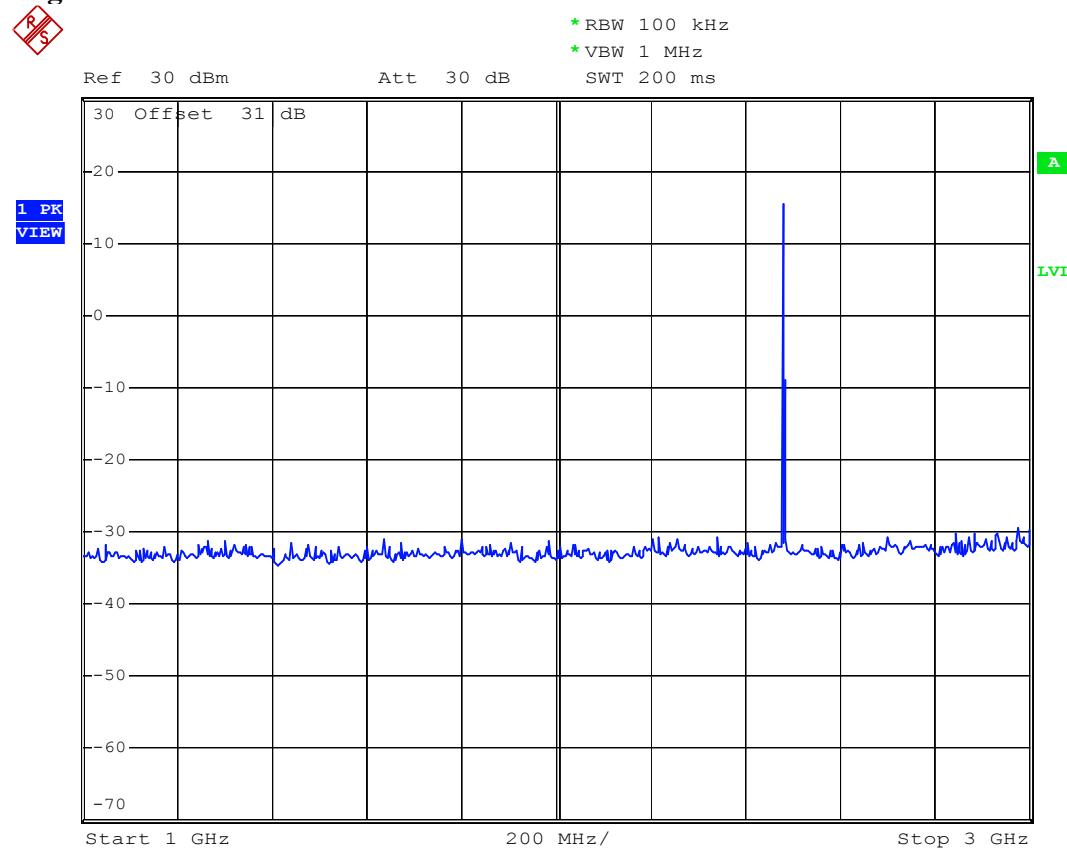
(B) Bluetooth Dongle only (without Amplifier)

Low Channel

Low Channel

Middle Channel

Middle Channel

High Channel

High Channel