

# FCC Co-Location Test Report

**FCC ID** : I8803891  
**Equipment** : AXE5400 Tri-Band WiFi 6E Mesh System  
(Please refer to section 1.1.1 for more details)  
**Model No.** : WSQ65  
(Please refer to section 1.1.1 for more details)  
**Brand Name** : ZYXEL  
**Applicant** : Zyxel Communications Corporation  
**Address** : No.2 Industry East RD. IX, Hsinchu Science  
Park, Hsinchu 30075, Taiwan  
**Standard** : 47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
**Received Date** : Sep. 13, 2022  
**Tested Date** : Sep. 28 ~ Oct. 25, 2022

We, International Certification Corporation, would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

  
\_\_\_\_\_  
Gary Chang / Manager

---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	The Equipment List .....	8
1.3	Test Standards .....	9
1.4	Reference Guidance .....	9
1.5	Deviation from Test Standard and Measurement Procedure.....	9
1.6	Measurement Uncertainty .....	9
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>10</b>
2.1	Testing Facility .....	10
2.2	The Worst Test Modes and Channel Details .....	10
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>11</b>
3.1	Unwanted Emissions into Restricted Frequency Bands .....	11
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>13</b>

### Appendix A. Unwanted Emissions Into Restricted Frequency Bands

---

## Release Record

Report No.	Version	Description	Issued Date
FR291302CO	Rev. 01	Initial issue	Dec. 02, 2022

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d) 15.407(b) 15.407(b)(5) 15.209	Radiated Emissions	[dBuV/m at 3m]: 47.77MHz 34.96 (Margin -5.04dB) - QP	Pass

### Declaration of Conformity:

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

### Comments and Explanations:

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

# 1 General Description

## 1.1 Information

### 1.1.1 Product Details

The following models are provided to this EUT.

Product Name	Model	Description					
		DDR			Flash		
		Brand	Type	Size	Brand	Type	Size
AXE5400 Tri-Band WiFi 6E Mesh System	WSQ65	Kingston	D2516ECMD XGJD	512MB	MXIC	MX35UF1G2 4AD-Z4I	128MB
WiFi Mesh System	WSQ63						
Security Router	SCR 50AXE	ESMT	M15T8G1651 2A-DEBG2S	1024MB	Winbond	W25N02KW ZEIR	256MB

Note 1: The variation of WSQ65 and WSQ63 is for strategy of marketing. The circuit of each model is identical. Model **WSQ65** was selected as a representative for the final test and only its data was recorded in this report.

Note 2:  
 CPU Model No: IPQ5018  
 2.4G Chip Model: IPQ5018  
 5G Chip Model: QCN6102  
 6G Chip Model: QCN6122

### 1.1.2 Specification of the Equipment under Test (EUT)


<b>Operating Frequency</b>	802.11b/g/n/ax: 2412 MHz ~ 2462 MHz 802.11a/n/ac/ax: 5180 MHz ~ 5240 MHz; 5260 MHz ~ 5320 MHz; 5500 MHz ~ 5720 MHz, 5745 MHz ~ 5825 MHz; 5955 MHz ~ 7115 MHz
<b>Modulation Type</b>	802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac/ax: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM / 1024QAM)

### 1.1.3 Antenna Details

Ant. No.	Brand	Model	Type	Connector	Operating Frequencies (MHz) / Gain (dBi)				
					2400~2483.5	5150~5250	5250~5350	5470~5725	5725~5850
1	LYNwave	ALX22P-221AA4-00	Dipole	MHF compatible	2	2.3	2.9	2.6	2
2	LYNwave	ALX22P-221AA4-01	Dipole	MHF compatible	2	2.8	3.2	2.9	2.5

Ant. No.	Brand	Model	Type	Connector	Operating Frequencies (MHz) / Gain (dBi)			
					5925~6425	6425~6525	6525~6875	6875~7125
3	LYNwave	ALX22P-161AA1-00	Dipole	MHF compatible	3	4.7	3.5	3.2
4	LYNwave	ALX22P-161AA2-00	Dipole	MHF compatible	3.5	3.3	3.4	3

### 1.1.4 Antenna Port Location

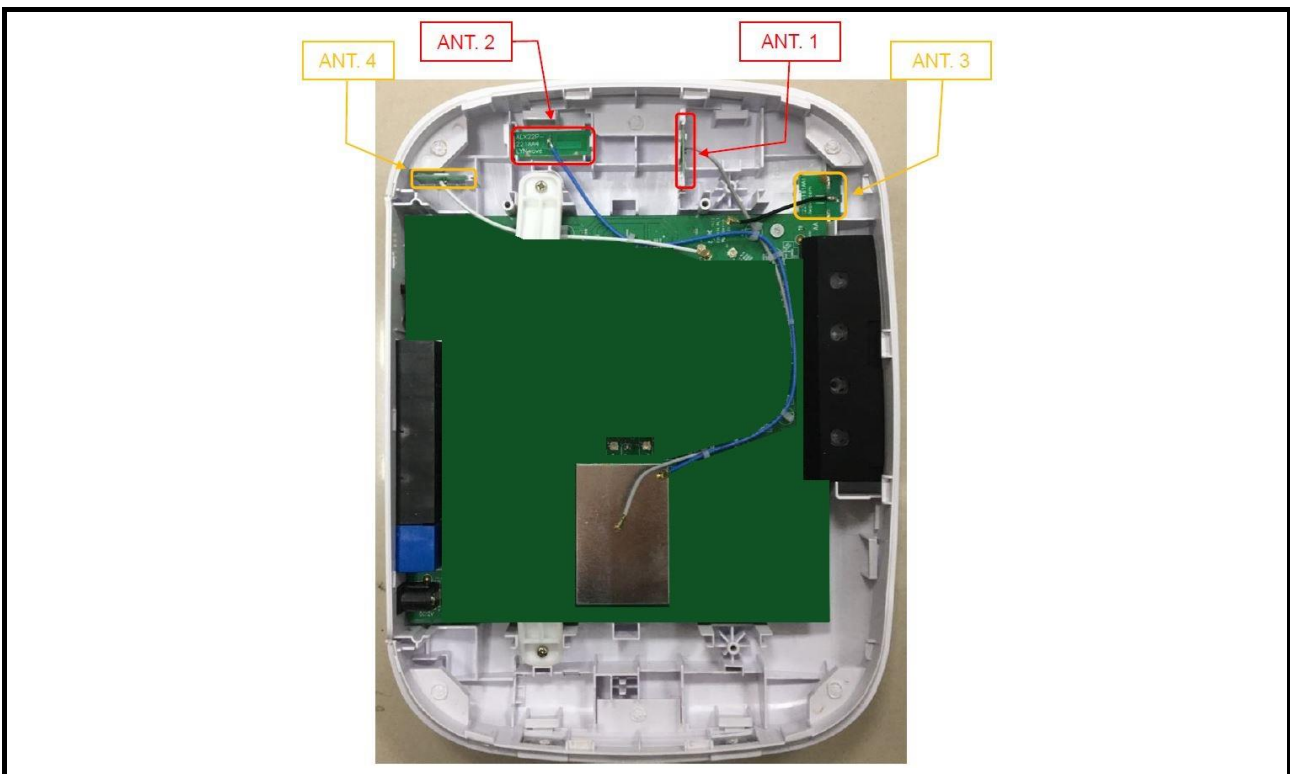

### 1.1.5 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	12Vdc from AC adapter
--------------------------	-----------------------

### 1.1.6 Accessories

Accessories		
No.	Equipment	Description
1	AC adapter	Brand: DVE Model: DSA-24PFS-12 FCA 120200 I/P: 100-240Vac, 50/60Hz, 0.8A O/P: 12V=2.0A, 24.0W Power Line: DC 1.5m non-shielded without core
2	Ethernet Cable	1.5m non-shielded without core

## 1.2 The Equipment List

Test Item	Radiated Emission				
Test Site	966 chamber3 / (03CH03-WS)				
Tested Date	Sep. 28 ~ Sep. 29, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Receiver	R&S	ESR3	101657	Mar. 15, 2022	Mar. 14, 2023
Spectrum Analyzer	R&S	FSV40	101499	Mar. 08, 2022	Mar. 07, 2023
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 08, 2021	Nov. 07, 2022
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Jun. 28, 2022	Jun. 27, 2023
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Dec. 20, 2021	Dec. 19, 2022
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170508	Jan. 11, 2022	Jan. 10, 2023
Preamplifier	EMC	EMC02325	980187	Jul. 16, 2022	Jul. 15, 2023
Preamplifier	EMC	EMC184045SE	980897	Aug. 01, 2022	Jul. 31, 2023
Preamplifier	EMC	EMC184045SE	980903	Jul. 16, 2022	Jul. 15, 2023
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Oct. 05, 2021	Oct. 04, 2022
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Sep. 23, 2022	Sep. 22, 2023
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Sep. 23, 2022	Sep. 22, 2023
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Sep. 23, 2022	Sep. 22, 2023
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Sep. 23, 2022	Sep. 22, 2023
RF cable-8M	EMC	EMC104-SM-SM-8000	181107	Sep. 23, 2022	Sep. 22, 2023
Measurement Software	AUDIX	e3	6.120210g	NA	NA

Note: Calibration Interval of instruments listed above is one year.

Test Item	RF Conducted				
Test Site	(TH01-WS)				
Tested Date	Oct. 20 ~ Oct. 25, 2022				
Instrument	Brand	Model No.	Serial No.	Calibration Date	Calibration Until
Spectrum Analyzer	R&S	FSV40	101910	Apr. 18, 2022	Apr. 17, 2023
Power Meter	Anritsu	ML2495A	1241002	Nov. 07, 2021	Nov. 06, 2022
Power Sensor	Anritsu	MA2411B	1207366	Nov. 07, 2021	Nov. 06, 2022

Note: Calibration Interval of instruments listed above is one year.



### 1.3 Test Standards

47 CFR FCC Part 15.247  
47 CFR FCC Part 15.407  
ANSI C63.10-2013

### 1.4 Reference Guidance

FCC KDB 558074 D01 15.247 Meas Guidance v05r02  
FCC KDB 662911 D01 Multiple Transmitter Output v02r01  
FCC KDB 412172 D01 Determining ERP and EIRP v01r01  
FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

### 1.5 Deviation from Test Standard and Measurement Procedure

None

### 1.6 Measurement Uncertainty

The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ )).

Measurement Uncertainty	
Parameters	Uncertainty
Unwanted Emission $\leq$ 1GHz	$\pm 3.96$ dB
Unwanted Emission $>$ 1GHz	$\pm 4.51$ dB

## 2 Test Configuration

### 2.1 Testing Facility

<b>Test Laboratory</b>	International Certification Corporation
<b>Test Site</b>	TH01-WS
<b>Address of Test Site</b>	No.3-1, Lane 6, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 33381, Taiwan (R.O.C.)
<b>Test Site</b>	03CH03-WS
<b>Address of Test Site</b>	No.14-1, Lane 19, Wen San 3rd St., Kwei Shan Dist., Tao Yuan City 333, Taiwan (R.O.C.)

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- ISED#: 10807C
- CAB identifier: TW2732

### 2.2 The Worst Test Modes and Channel Details

Test item	Modulation Mode
Unwanted Emissions	2.4G 11b 2437MHz + 5G 11a 5785MHz + 6G 11ax HE160 6345 MHz
Conducted Emissions	
<b>NOTE:</b> The selected channel is the maximum power channel of Wi-Fi mode.	

### 3 Transmitter Test Results

#### 3.1 Unwanted Emissions into Restricted Frequency Bands

##### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

##### 3.1.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

**Note:**


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.1.3 Test Setup


#### Radiated Emissions below 1 GHz

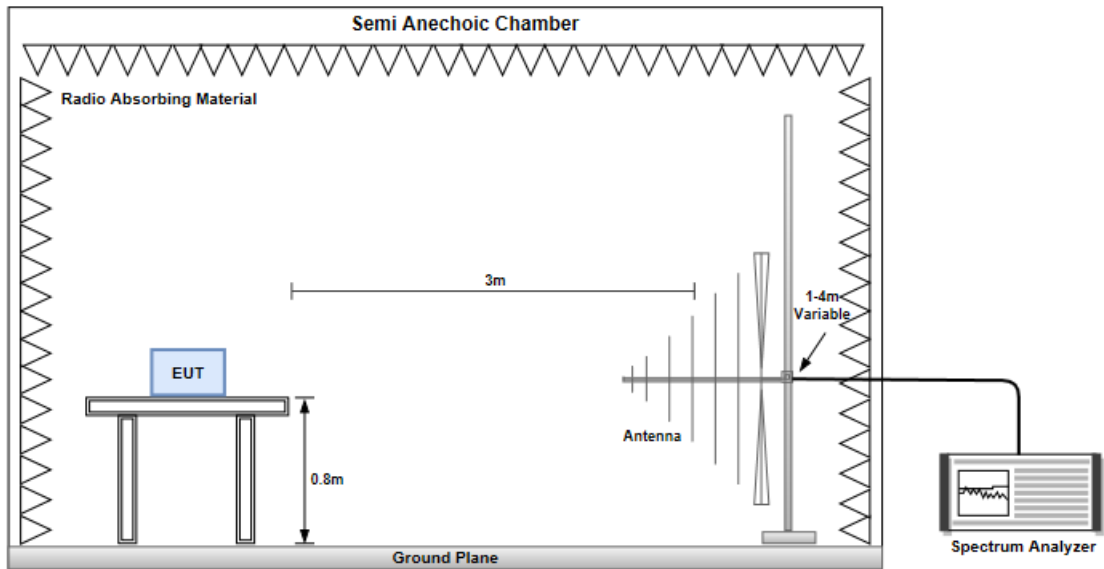

#### Radiated Emissions above 1 GHz

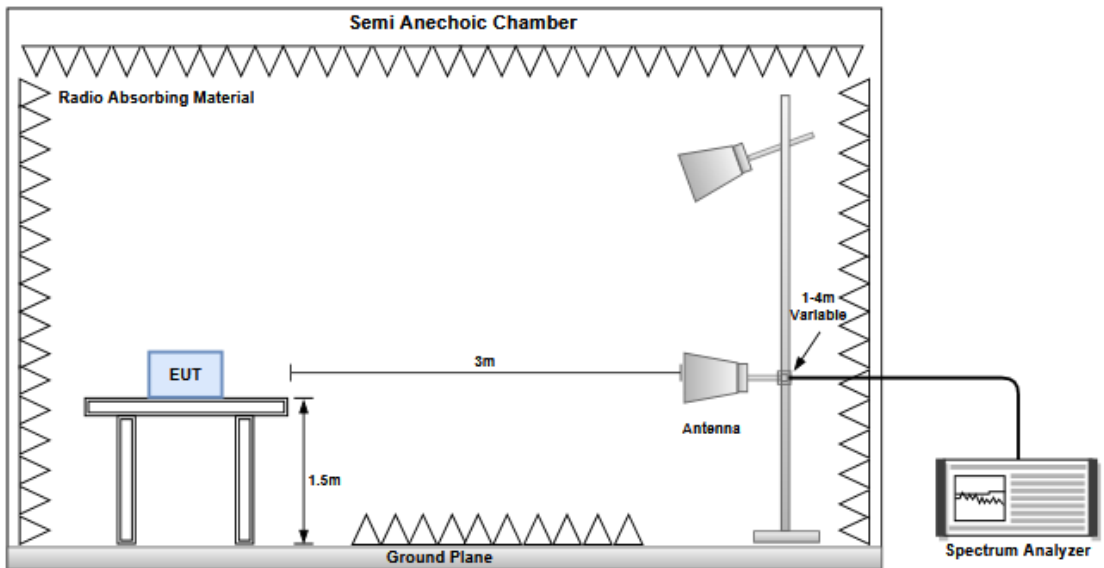

#### Transmitter Conducted Unwanted Emissions (30MHz~40GHz)



### **3.1.4 Test Results**

Refer to Appendix A.

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corporation (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No.30-2, Ding Fwu Tsuen, Lin Kou  
District, New Taipei City, Taiwan  
(R.O.C.)

### **Kwei Shan**

Tel: 886-3-271-8666

No.3-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)  
No.2-1, Lane 6, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 33381, Taiwan (R.O.C.)

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No.14-1, Lane 19, Wen San 3rd  
St., Kwei Shan Dist., Tao Yuan  
City 333, Taiwan (R.O.C.)

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0345

Email: ICC\_Service@icertifi.com.tw

==END==



Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	2.4G 11b 2437MHz + 5G 11a 5785MHz + 6G 11ax HE160 6345 MHz									
<b>Polarization</b>	Horizontal									
Test By : Roger Lu-			Temperature(°C):25			Humidity(%):63				
<p>The graph plots Level (dBuV/m) on the y-axis (0 to 90) against Frequency (MHz) on the x-axis (30 to 1000). A red step function represents the CLASS-B emission limit. Six peaks are marked with blue vertical lines and numbered 1 through 6. Peak 1 is at 38.73 MHz, peak 2 at 69.77 MHz, peak 3 at 126.03 MHz, peak 4 at 163.86 MHz, peak 5 at 499.48 MHz, and peak 6 at 774.96 MHz.</p>										
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
		dBuV/m	dBuV/m		dBuV			cm	deg	
1	38.73	26.28	40.00	-13.72	35.67	-9.39	Peak	---	---	
2	69.77	25.65	40.00	-14.35	36.75	-11.10	Peak	---	---	
3	126.03	34.02	43.50	-9.48	44.55	-10.53	Peak	---	---	
4	163.86	31.62	43.50	-11.88	40.21	-8.59	Peak	---	---	
5	499.48	33.69	46.00	-12.31	36.18	-2.49	Peak	---	---	
6	774.96	34.74	46.00	-11.26	30.92	3.82	Peak	---	---	

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Modulation</b>	2.4G 11b 2437MHz + 5G 11a 5785MHz + 6G 11ax HE160 6345 MHz									
<b>Polarization</b>	Vertical									
Test By : Roger Lu-			Temperature(°C):25			Humidity(%):63				
	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn	
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table	
								cm	deg	
1	39.89	34.15	40.00	-5.85	43.45	-9.30	QP	100	93	
2	47.77	34.96	40.00	-5.04	43.32	-8.36	QP	100	316	
3	124.09	33.71	43.50	-9.79	44.63	-10.92	Peak	---	---	
4	187.14	30.62	43.50	-12.88	41.45	-10.83	Peak	---	---	
5	499.48	35.06	46.00	-10.94	37.55	-2.49	Peak	---	---	
6	796.30	34.71	46.00	-11.29	30.72	3.99	Peak	---	---	

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.





Unwanted Emissions (Above 1GHz)

<b>Modulation</b>	2.4G 11b 2437MHz + 5G 11a 5785MHz + 6G 11ax HE160 6345 MHz									
<b>Polarization</b>	Horizontal									
Test By :Roger Lu-			Temperature(°C):24			Humidity(%):62				
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	
1	3348.00	27.46	54.00	-26.54	30.70	-3.24	Average	100	214	
2	3348.00	41.36	74.00	-32.64	44.60	-3.24	Peak	100	214	
3	8222.00	37.23	54.00	-16.77	31.52	5.71	Average	100	162	
4	8222.00	50.62	74.00	-23.38	44.91	5.71	Peak	100	162	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>										



<b>Modulation</b>	2.4G 11b 2437MHz + 5G 11a 5785MHz + 6G 11ax HE160 6345 MHz									
<b>Polarization</b>	Vertical									
Test By : Roger Lu-			Temperature(°C):24			Humidity(%):62				
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg	
1	3348.00	27.59	54.00	-26.41	30.83	-3.24	Average	100	182	
2	3348.00	41.07	74.00	-32.93	44.31	-3.24	Peak	100	182	
3	8222.00	37.11	54.00	-16.89	31.40	5.71	Average	100	45	
4	8222.00	51.37	74.00	-22.63	45.66	5.71	Peak	100	45	
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB/m)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).</p>										



Ambient Condition	22-24°C / 64-67%	Tested By	Aska Huang
-------------------	------------------	-----------	------------

