






PoE mode

Unwanted Emissions (Below 1GHz)

Modulation	be EHT320	Test Freq. (MHz)	6585
Polarization	Horizontal		

Test By :Paul Lin      Temperature(°C):26      Humidity(%):65

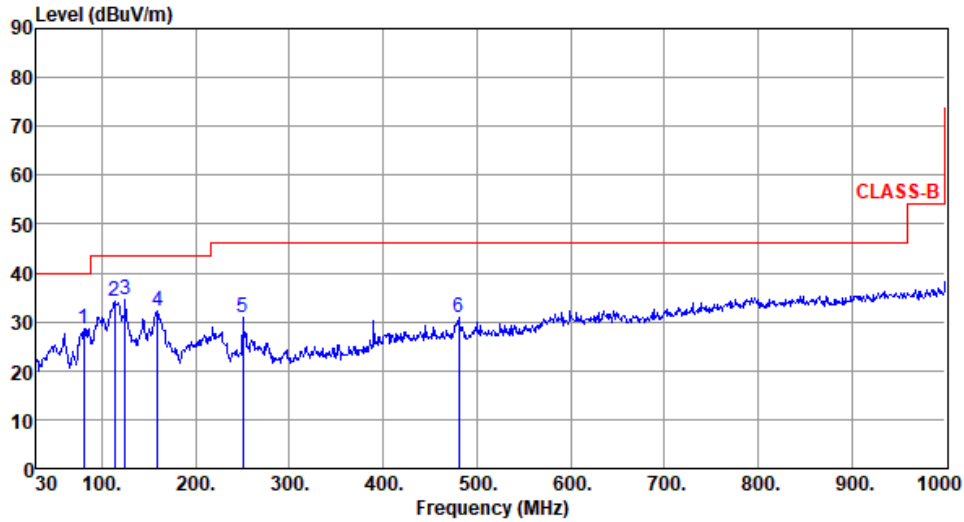

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	80.44	28.51	40.00	-11.49	41.88	-13.37	Peak	---	---
2	113.42	34.28	43.50	-9.22	45.82	-11.54	Peak	---	---
3	125.06	34.64	43.50	-8.86	45.21	-10.57	Peak	---	---
4	159.01	32.29	43.50	-11.21	40.82	-8.53	Peak	---	---
5	250.19	30.73	46.00	-15.27	40.45	-9.72	Peak	---	---
6	481.05	30.78	46.00	-15.22	33.42	-2.64	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT320	Test Freq. (MHz)	6585
Polarization	Vertical		

Test By :Paul Lin      Temperature(°C):26      Humidity(%):65

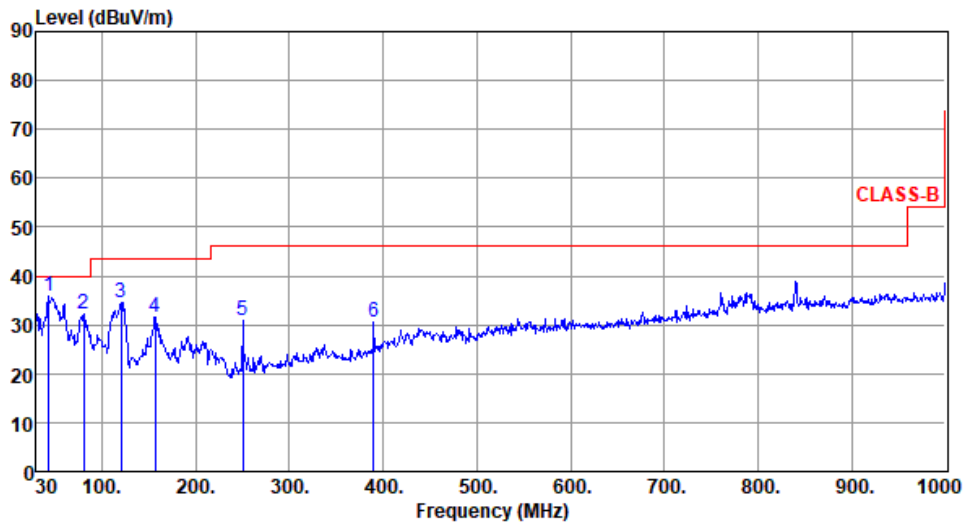

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	43.58	35.86	40.00	-4.14	44.07	-8.21	Peak	---	---
2	80.44	32.36	40.00	-7.64	45.73	-13.37	Peak	---	---
3	120.21	34.70	43.50	-8.80	45.63	-10.93	Peak	---	---
4	157.07	31.60	43.50	-11.90	40.14	-8.54	Peak	---	---
5	250.19	31.05	46.00	-14.95	40.77	-9.72	Peak	---	---
6	389.87	30.58	46.00	-15.42	35.70	-5.12	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.




Adapter mode

Unwanted Emissions (Below 1GHz)

Modulation	be EHT320	Test Freq. (MHz)	6585
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):26      Humidity(%):65

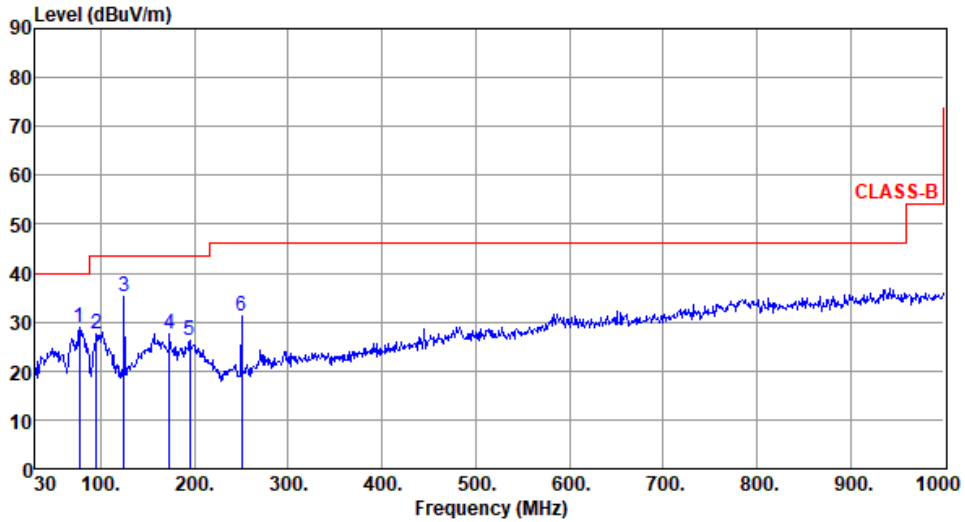

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	77.53	28.83	40.00	-11.17	41.32	-12.49	Peak	---	---
2	94.99	27.42	43.50	-16.08	41.29	-13.87	Peak	---	---
3	125.06	35.27	43.50	-8.23	45.84	-10.57	Peak	---	---
4	173.56	27.62	43.50	-15.88	36.95	-9.33	Peak	---	---
5	194.90	26.36	43.50	-17.14	38.05	-11.69	Peak	---	---
6	250.19	31.35	46.00	-14.65	41.07	-9.72	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT320	Test Freq. (MHz)	6585
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):26      Humidity(%):65

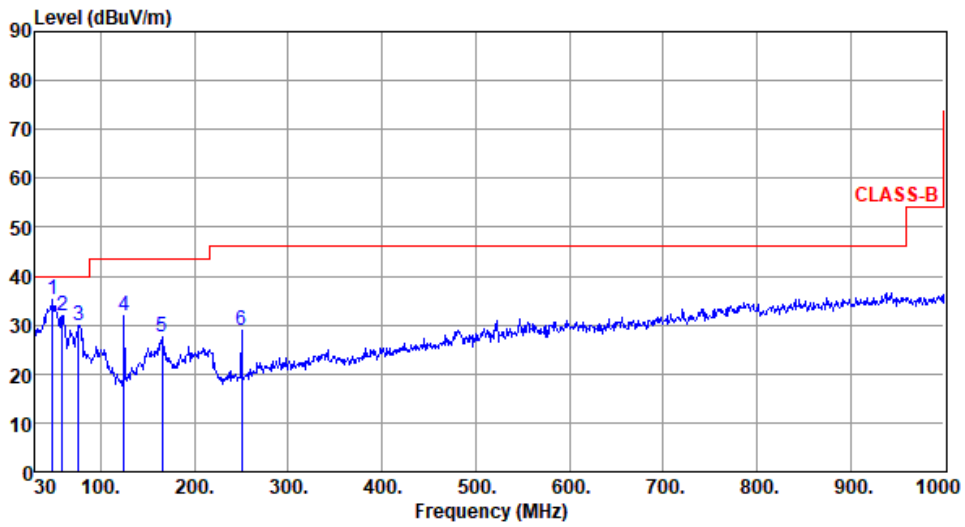

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	48.43	35.12	40.00	-4.88	42.99	-7.87	Peak	---	---
2	59.10	31.96	40.00	-8.04	40.53	-8.57	Peak	---	---
3	76.56	30.02	40.00	-9.98	42.29	-12.27	Peak	---	---
4	125.06	31.83	43.50	-11.67	42.40	-10.57	Peak	---	---
5	165.80	27.51	43.50	-15.99	36.31	-8.80	Peak	---	---
6	250.19	28.80	46.00	-17.20	38.52	-9.72	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5935
Polarization	Horizontal		

Test By :Akun Chung      Temperature(°C):24      Humidity(%):65

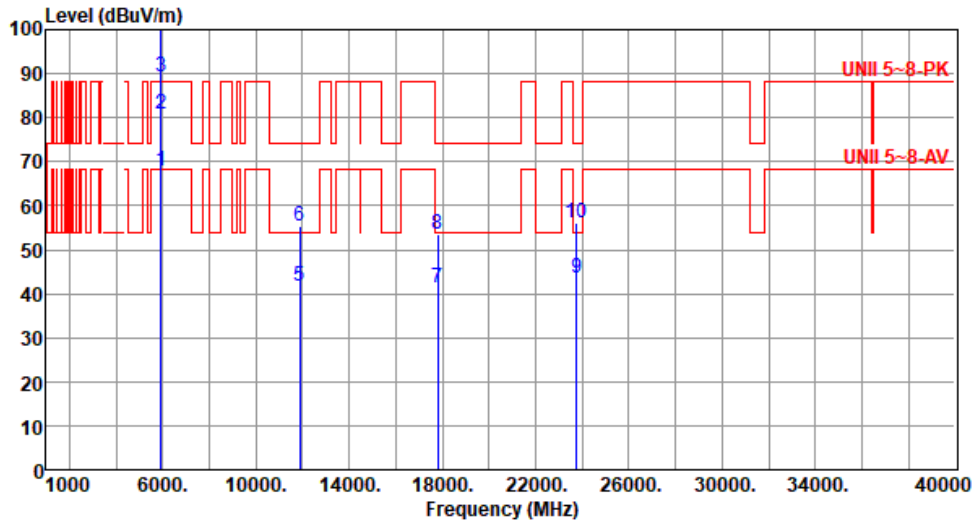

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	68.00	68.20	-0.20	66.49	1.51	Average	154	346
2	5925.00	80.71	88.20	-7.49	79.20	1.51	Peak	154	346
3 *	5935.00	89.20			87.68	1.52	Average	154	346
4 *	5935.00	103.07			101.55	1.52	Peak	154	346
5	11870.00	41.64	54.00	-12.36	34.08	7.56	Average	100	39
6	11870.00	55.18	74.00	-18.82	47.62	7.56	Peak	100	39
7	17805.00	41.15	54.00	-12.85	31.86	9.29	Average	100	26
8	17805.00	53.58	74.00	-20.42	44.29	9.29	Peak	100	26
9	23740.00	43.36	54.00	-10.64	36.13	7.23	Average	100	54
10	23740.00	56.21	74.00	-17.79	48.98	7.23	Peak	100	54

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5935
Polarization	Vertical		

Test By :Akun Chung      Temperature(°C):24      Humidity(%):65

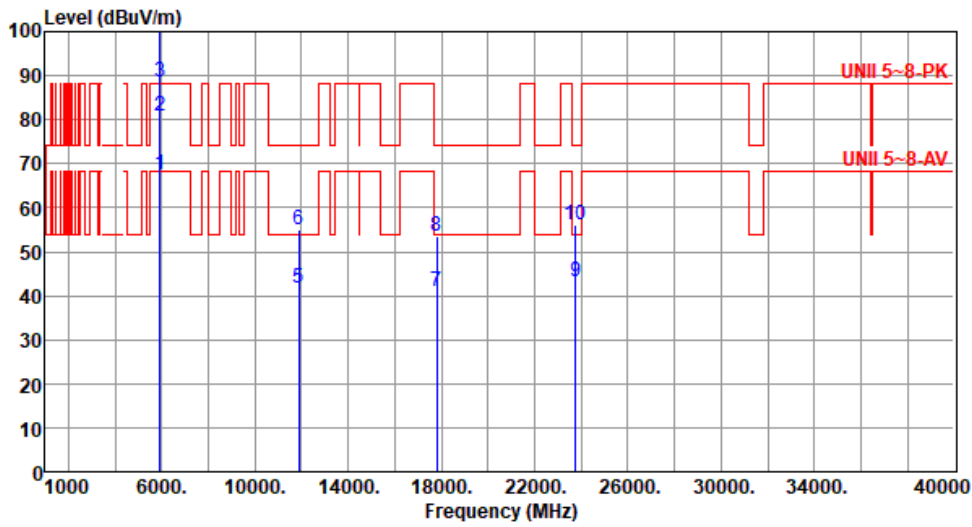

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	67.52	68.20	-0.68	66.01	1.51	Average	196	6
2	5925.00	80.97	88.20	-7.23	79.46	1.51	Peak	196	6
3 *	5935.00	88.48			86.96	1.52	Average	196	6
4 *	5935.00	101.35			99.83	1.52	Peak	196	6
5	11870.00	41.58	54.00	-12.42	34.02	7.56	Average	100	21
6	11870.00	54.96	74.00	-19.04	47.40	7.56	Peak	100	21
7	17805.00	40.92	54.00	-13.08	31.63	9.29	Average	100	28
8	17805.00	53.49	74.00	-20.51	44.20	9.29	Peak	100	28
9	23740.00	43.19	54.00	-10.81	35.96	7.23	Average	100	15
10	23740.00	56.11	74.00	-17.89	48.88	7.23	Peak	100	15

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5955
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

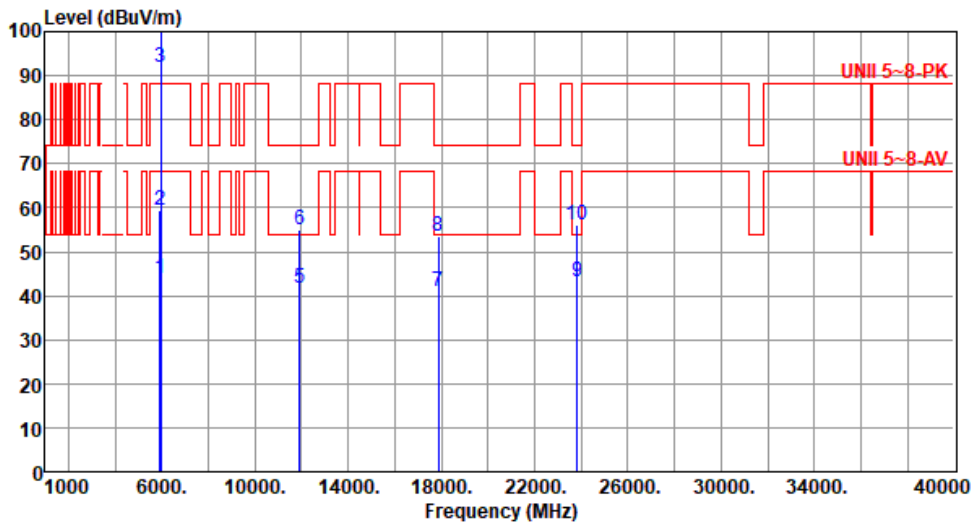

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.80	68.20	-24.40	42.29	1.51	Average	167	3
2	5925.00	59.40	88.20	-28.80	57.89	1.51	Peak	167	3
3 *	5955.00	92.00			90.47	1.53	Average	167	3
4 *	5955.00	105.98			104.45	1.53	Peak	167	3
5	11910.00	41.60	54.00	-12.40	34.06	7.54	Average	100	36
6	11910.00	55.01	74.00	-18.99	47.47	7.54	Peak	100	36
7	17865.00	41.02	54.00	-12.98	30.96	10.06	Average	100	21
8	17865.00	53.54	74.00	-20.46	43.48	10.06	Peak	100	21
9	23820.00	43.24	54.00	-10.76	35.94	7.30	Average	100	48
10	23820.00	56.19	74.00	-17.81	48.89	7.30	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5955
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

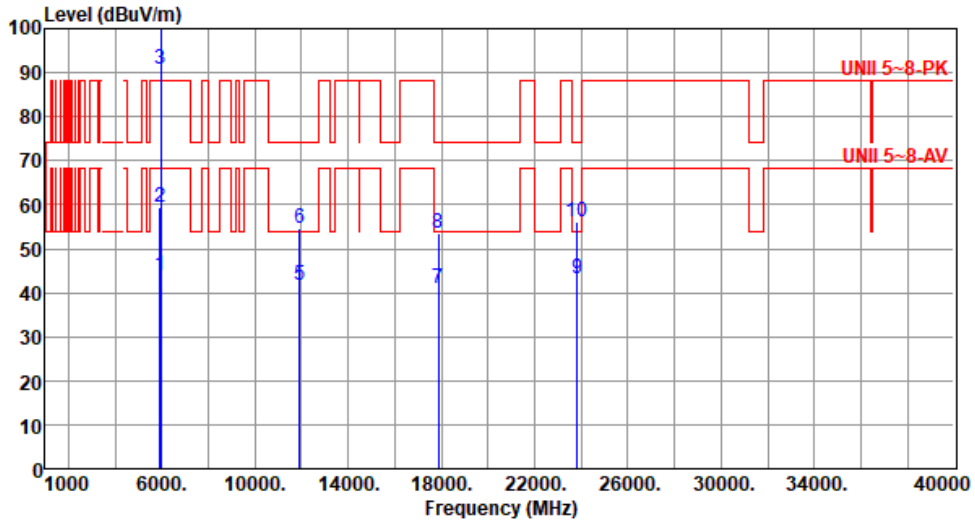

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.76	68.20	-24.44	42.25	1.51	Average	195	8
2	5925.00	59.35	88.20	-28.85	57.84	1.51	Peak	195	8
3 *	5955.00	90.94			89.41	1.53	Average	195	8
4 *	5955.00	104.81			103.28	1.53	Peak	195	8
5	11910.00	41.59	54.00	-12.41	34.05	7.54	Average	100	29
6	11910.00	54.76	74.00	-19.24	47.22	7.54	Peak	100	29
7	17865.00	40.95	54.00	-13.05	30.89	10.06	Average	100	26
8	17865.00	53.48	74.00	-20.52	43.42	10.06	Peak	100	26
9	23820.00	43.18	54.00	-10.82	35.88	7.30	Average	100	51
10	23820.00	56.15	74.00	-17.85	48.85	7.30	Peak	100	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency





Modulation	be EHT20	Test Freq. (MHz)	6175
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

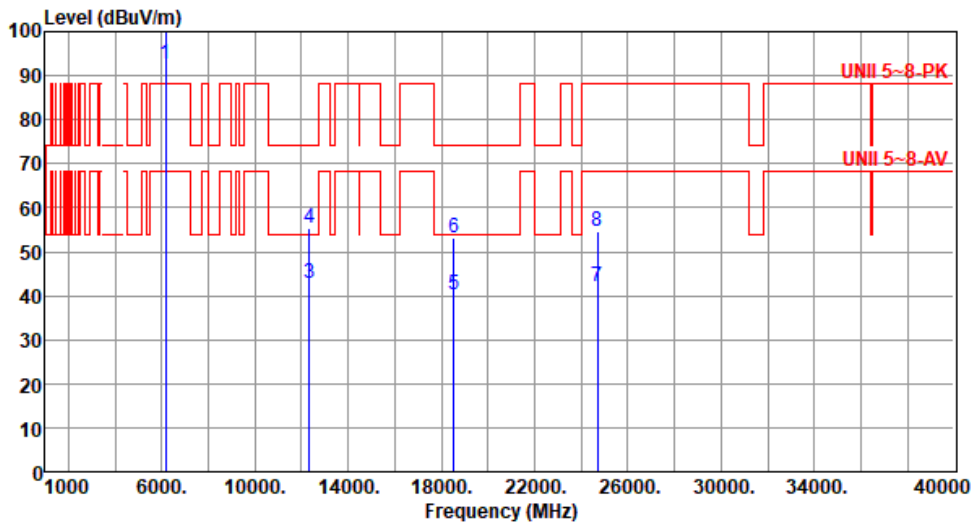


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6175.00	92.52			90.57	1.95	Average	189	358
2 *	6175.00	106.36			104.41	1.95	Peak	189	358
3	12350.00	42.85	54.00	-11.15	35.56	7.29	Average	100	33
4	12350.00	55.21	74.00	-18.79	47.92	7.29	Peak	100	33
5	18525.00	40.39	54.00	-13.61	38.84	1.55	Average	100	14
6	18525.00	53.01	74.00	-20.99	51.46	1.55	Peak	100	14
7	24700.00	42.25	68.20	-25.95	33.89	8.36	Average	100	29
8	24700.00	54.75	88.20	-33.45	46.39	8.36	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6175
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

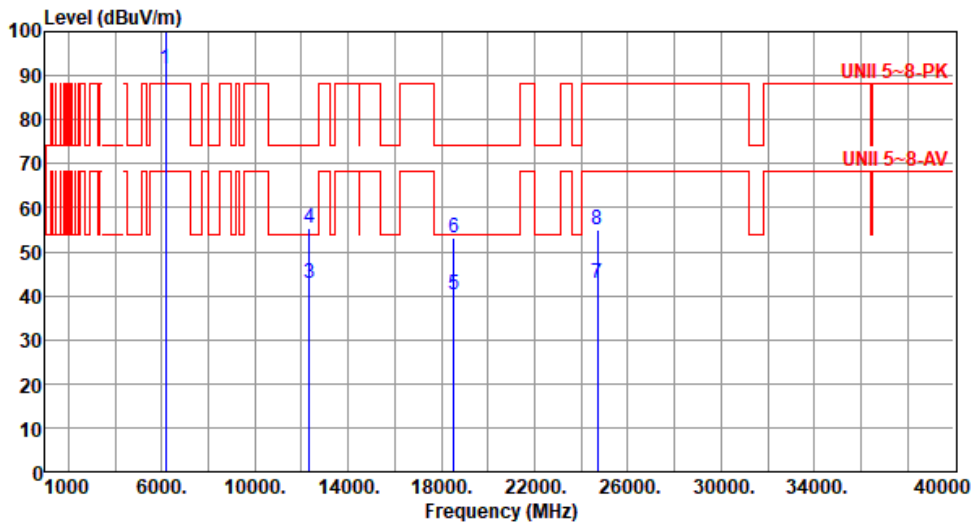

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	6175.00	91.46			89.51	1.95	Average	194	9
2 *	6175.00	105.25			103.30	1.95	Peak	194	9
3	12350.00	42.79	54.00	-11.21	35.50	7.29	Average	100	29
4	12350.00	55.18	74.00	-18.82	47.89	7.29	Peak	100	29
5	18525.00	40.19	54.00	-13.81	38.64	1.55	Average	100	22
6	18525.00	52.96	74.00	-21.04	51.41	1.55	Peak	100	22
7	24700.00	42.71	68.20	-25.49	34.35	8.36	Average	100	41
8	24700.00	55.12	88.20	-33.08	46.76	8.36	Peak	100	41

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6415
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

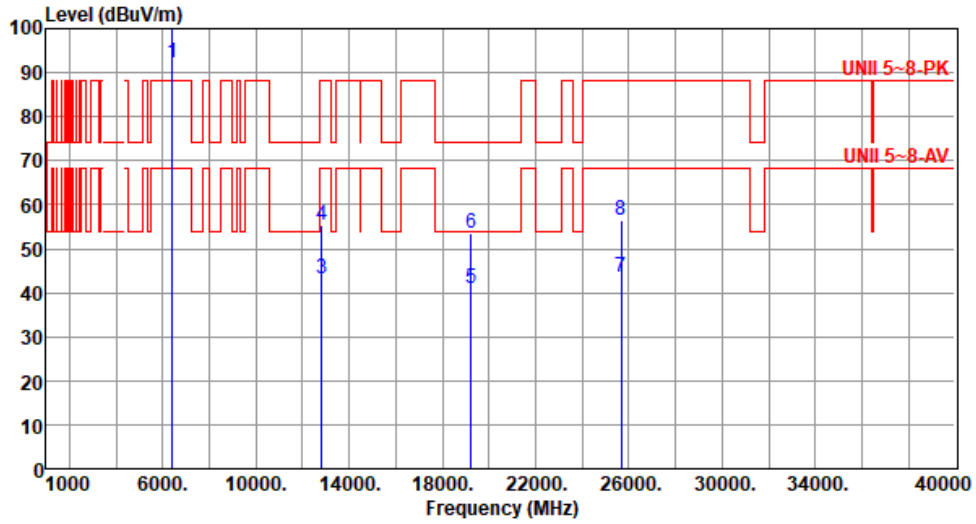

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	
1	*	6415.00	92.20		89.05	3.15	Average	178	341	
2	*	6415.00	105.89		102.74	3.15	Peak	178	341	
3		12830.00	43.16	68.20	-25.04	35.59	7.57	Average	100	31
4		12830.00	55.28	88.20	-32.92	47.71	7.57	Peak	100	31
5		19245.00	41.14	54.00	-12.86	39.39	1.75	Average	100	38
6		19245.00	53.52	74.00	-20.48	51.77	1.75	Peak	100	38
7		25660.00	43.48	68.20	-24.72	35.31	8.17	Average	100	47
8		25660.00	56.39	88.20	-31.81	48.22	8.17	Peak	100	47

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6415
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

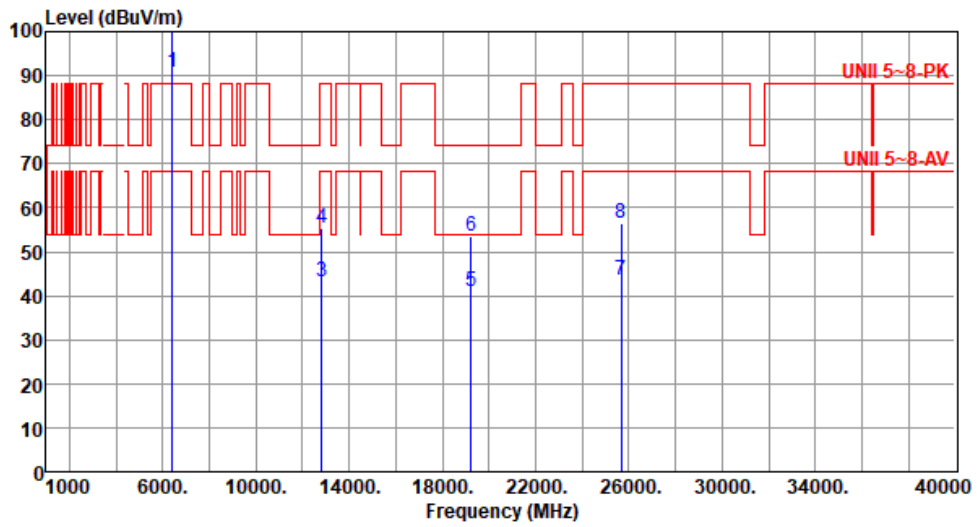


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6415.00	90.85			87.70	3.15	Average	144	356
2 *	6415.00	103.96			100.81	3.15	Peak	144	356
3	12830.00	43.19	68.20	-25.01	35.62	7.57	Average	100	25
4	12830.00	55.31	88.20	-32.89	47.74	7.57	Peak	100	25
5	19245.00	41.08	54.00	-12.92	39.33	1.75	Average	100	42
6	19245.00	53.46	74.00	-20.54	51.71	1.75	Peak	100	42
7	25660.00	43.42	68.20	-24.78	35.25	8.17	Average	100	21
8	25660.00	56.34	88.20	-31.86	48.17	8.17	Peak	100	21

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: "\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6435
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

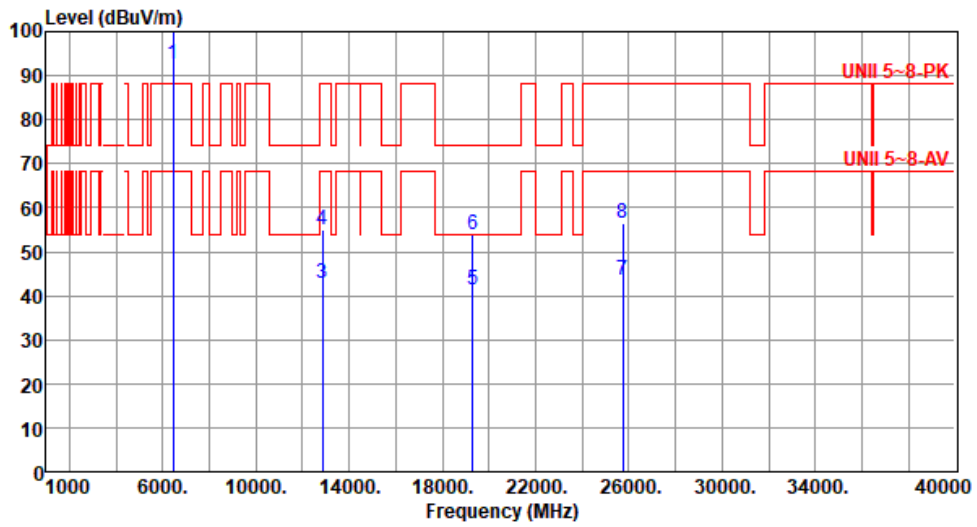

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6435.00	92.69			89.48	3.21	Average	178	342
2 *	6435.00	105.84			102.63	3.21	Peak	178	342
3	12870.00	42.75	68.20	-25.45	35.15	7.60	Average	100	51
4	12870.00	55.04	88.20	-33.16	47.44	7.60	Peak	100	51
5	19305.00	41.46	54.00	-12.54	39.65	1.81	Average	100	22
6	19305.00	53.85	74.00	-20.15	52.04	1.81	Peak	100	22
7	25740.00	43.56	68.20	-24.64	35.41	8.15	Average	100	29
8	25740.00	56.31	88.20	-31.89	48.16	8.15	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6435
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

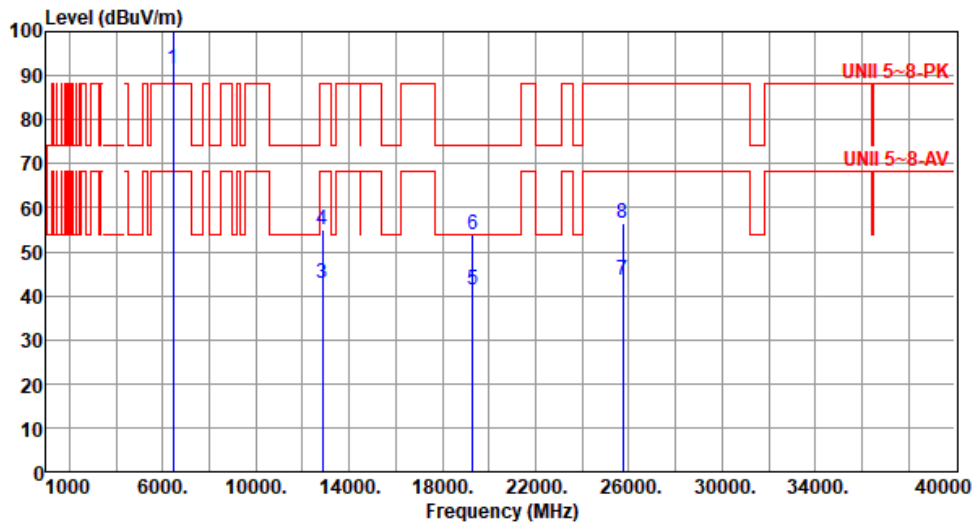

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	
1	*	6435.00	91.62		88.41	3.21	Average	146	351	
2	*	6435.00	104.75		101.54	3.21	Peak	146	351	
3		12870.00	42.65	68.20	-25.55	35.05	7.60	Average	100	43
4		12870.00	54.92	88.20	-33.28	47.32	7.60	Peak	100	43
5		19305.00	41.36	54.00	-12.64	39.55	1.81	Average	100	45
6		19305.00	53.78	74.00	-20.22	51.97	1.81	Peak	100	45
7		25740.00	43.62	68.20	-24.58	35.47	8.15	Average	100	44
8		25740.00	56.35	88.20	-31.85	48.20	8.15	Peak	100	44

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6475
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

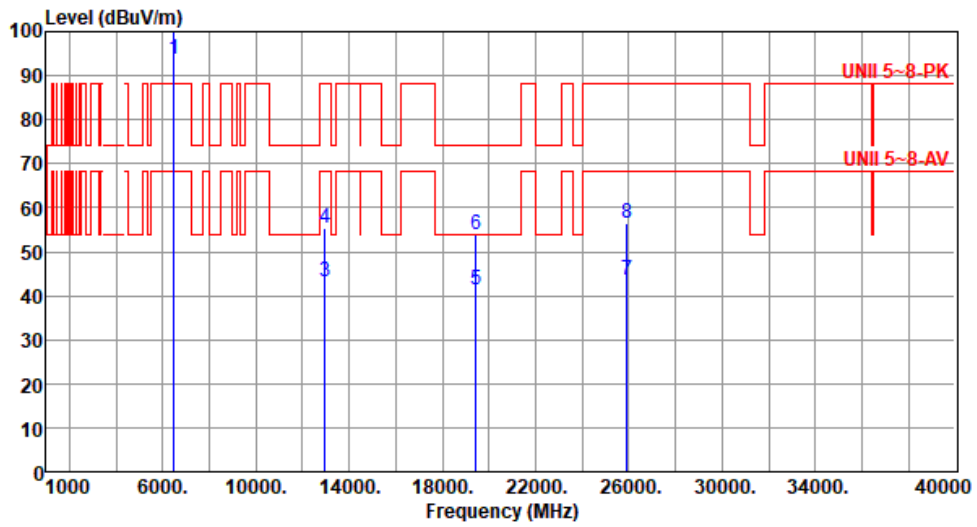

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6475.00	93.60			90.19	3.41	Average	167	5
2 *	6475.00	106.87			103.46	3.41	Peak	167	5
3	12950.00	43.25	68.20	-24.95	35.72	7.53	Average	100	46
4	12950.00	55.48	88.20	-32.72	47.95	7.53	Peak	100	46
5	19425.00	41.46	54.00	-12.54	39.54	1.92	Average	100	51
6	19425.00	53.78	74.00	-20.22	51.86	1.92	Peak	100	51
7	25900.00	43.52	68.20	-24.68	35.34	8.18	Average	100	64
8	25900.00	56.39	88.20	-31.81	48.21	8.18	Peak	100	64

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6475
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

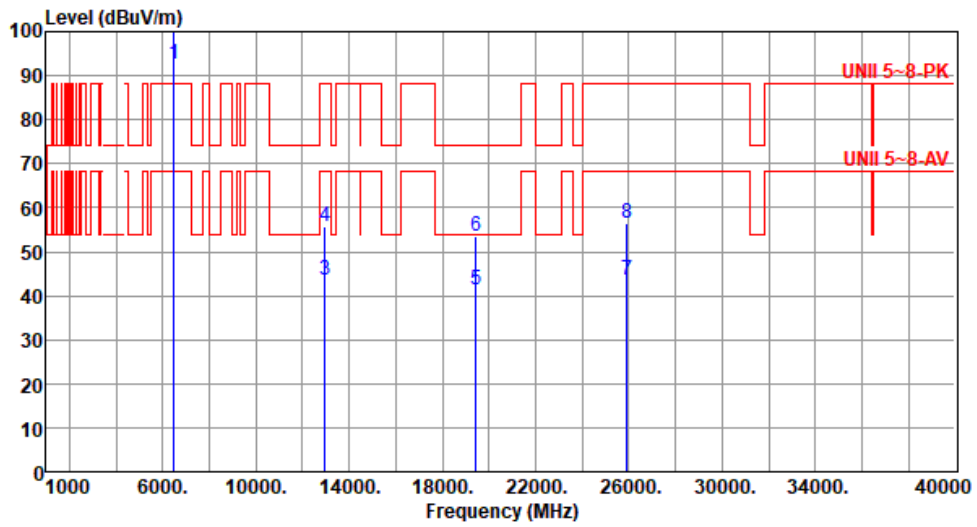

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg	
1	*	6475.00	92.52		89.11	3.41	Average	141	359	
2	*	6475.00	103.74		100.33	3.41	Peak	141	359	
3		12950.00	43.36	68.20	-24.84	35.83	7.53	Average	100	27
4		12950.00	55.56	88.20	-32.64	48.03	7.53	Peak	100	27
5		19425.00	41.35	54.00	-12.65	39.43	1.92	Average	100	24
6		19425.00	53.69	74.00	-20.31	51.77	1.92	Peak	100	24
7		25900.00	43.58	68.20	-24.62	35.40	8.18	Average	100	32
8		25900.00	56.42	88.20	-31.78	48.24	8.18	Peak	100	32

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency





Modulation	be EHT20	Test Freq. (MHz)	6515
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

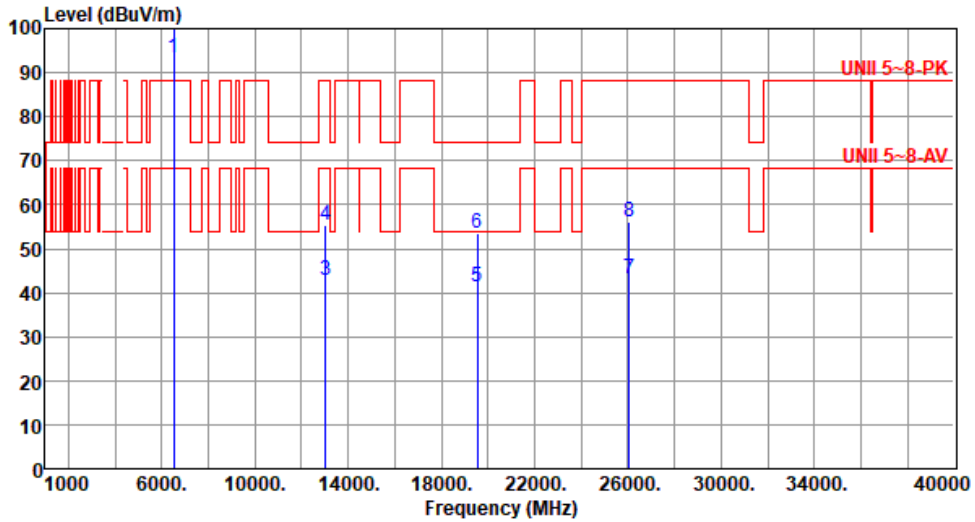

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	*	6515.00	93.47			89.85	3.62	Average	170	2
2	*	6515.00	106.69			103.07	3.62	Peak	170	2
3		13030.00	42.86	68.20	-25.34	35.49	7.37	Average	100	34
4		13030.00	55.25	88.20	-32.95	47.88	7.37	Peak	100	34
5		19545.00	41.16	54.00	-12.84	39.15	2.01	Average	100	28
6		19545.00	53.54	74.00	-20.46	51.53	2.01	Peak	100	28
7		26060.00	43.29	68.20	-24.91	35.04	8.25	Average	100	35
8		26060.00	56.17	88.20	-32.03	47.92	8.25	Peak	100	35

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6515
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

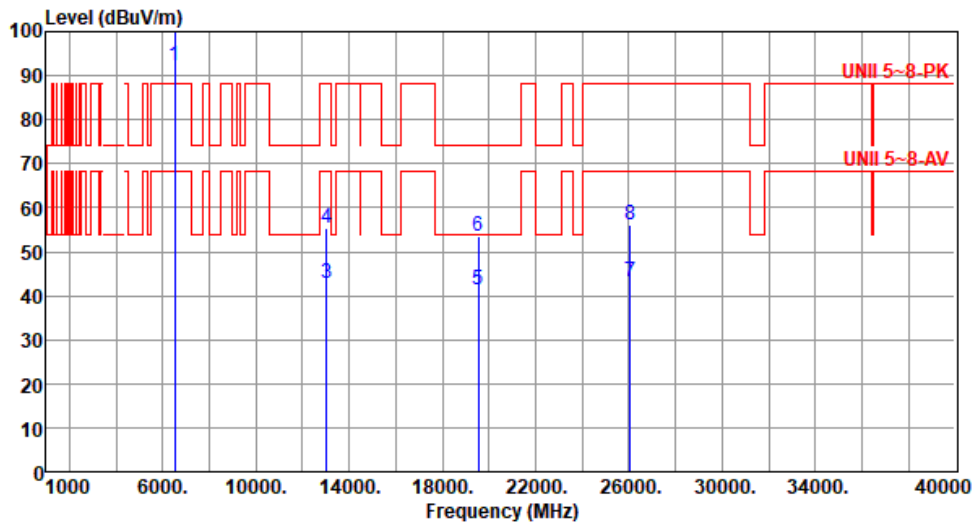

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	6515.00	92.42			88.80	3.62	Average	146	358
2	6515.00	105.58			101.96	3.62	Peak	146	358
3	13030.00	42.75	68.20	-25.45	35.38	7.37	Average	100	21
4	13030.00	55.18	88.20	-33.02	47.81	7.37	Peak	100	21
5	19545.00	41.22	54.00	-12.78	39.21	2.01	Average	100	36
6	19545.00	53.58	74.00	-20.42	51.57	2.01	Peak	100	36
7	26060.00	43.16	68.20	-25.04	34.91	8.25	Average	100	22
8	26060.00	56.09	88.20	-32.11	47.84	8.25	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6535
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

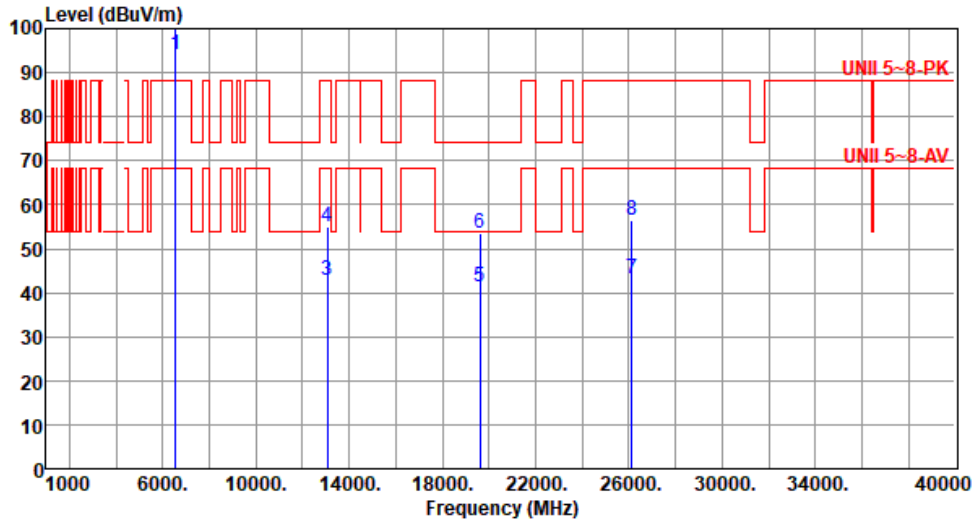

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	6535.00	94.27			90.57	3.70	Average	196	356
2 *	6535.00	108.06			104.36	3.70	Peak	196	356
3	13070.00	42.94	68.20	-25.26	35.68	7.26	Average	100	29
4	13070.00	55.14	88.20	-33.06	47.88	7.26	Peak	100	29
5	19605.00	41.25	54.00	-12.75	39.22	2.03	Average	100	45
6	19605.00	53.67	74.00	-20.33	51.64	2.03	Peak	100	45
7	26140.00	43.35	68.20	-24.85	35.01	8.34	Average	100	41
8	26140.00	56.28	88.20	-31.92	47.94	8.34	Peak	100	41

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6535
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

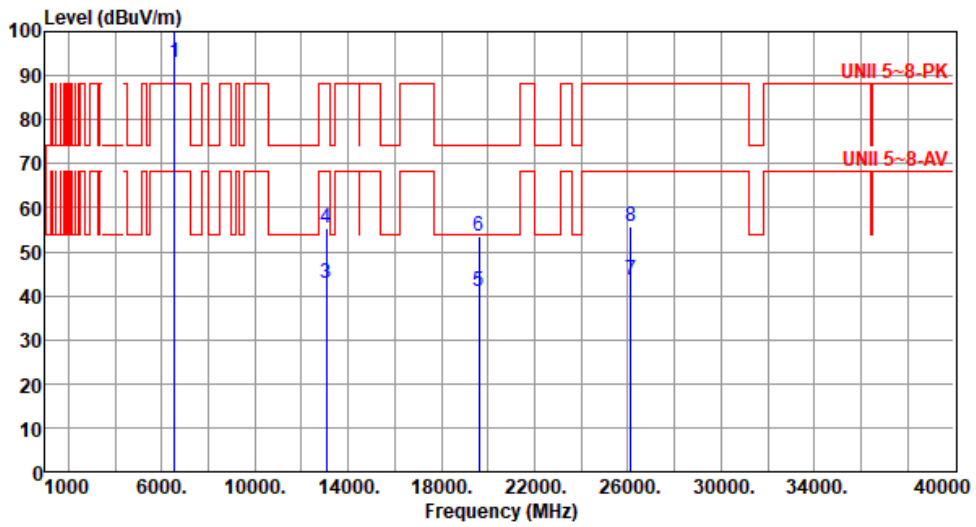

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6535.00	92.98			89.28	3.70	Average	145	353
2 *	6535.00	106.08			102.38	3.70	Peak	145	353
3	13070.00	42.90	68.20	-25.30	35.64	7.26	Average	100	14
4	13070.00	55.26	88.20	-32.94	48.00	7.26	Peak	100	14
5	19605.00	40.92	54.00	-13.08	38.89	2.03	Average	100	25
6	19605.00	53.66	74.00	-20.34	51.63	2.03	Peak	100	25
7	26140.00	43.67	68.20	-24.53	35.33	8.34	Average	100	16
8	26140.00	55.82	88.20	-32.38	47.48	8.34	Peak	100	16

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6715
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

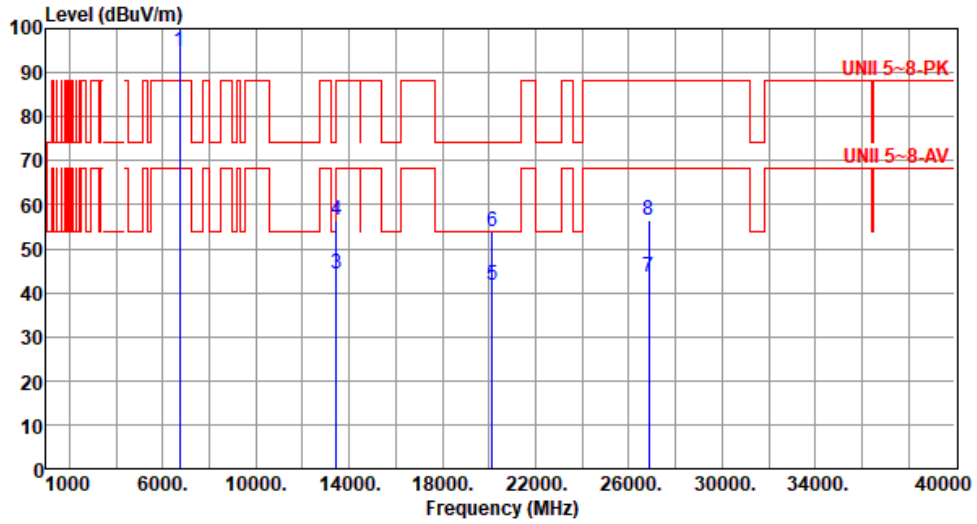

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6715.00	94.85			91.12	3.73	Average	180	359
2 *	6715.00	108.23			104.50	3.73	Peak	180	359
3	13430.00	44.31	68.20	-23.89	36.87	7.44	Average	100	22
4	13430.00	56.46	88.20	-31.74	49.02	7.44	Peak	100	22
5	20145.00	41.52	54.00	-12.48	39.09	2.43	Average	100	36
6	20145.00	53.86	74.00	-20.14	51.43	2.43	Peak	100	36
7	26860.00	43.45	68.20	-24.75	34.51	8.94	Average	100	45
8	26860.00	56.47	88.20	-31.73	47.53	8.94	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6715
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

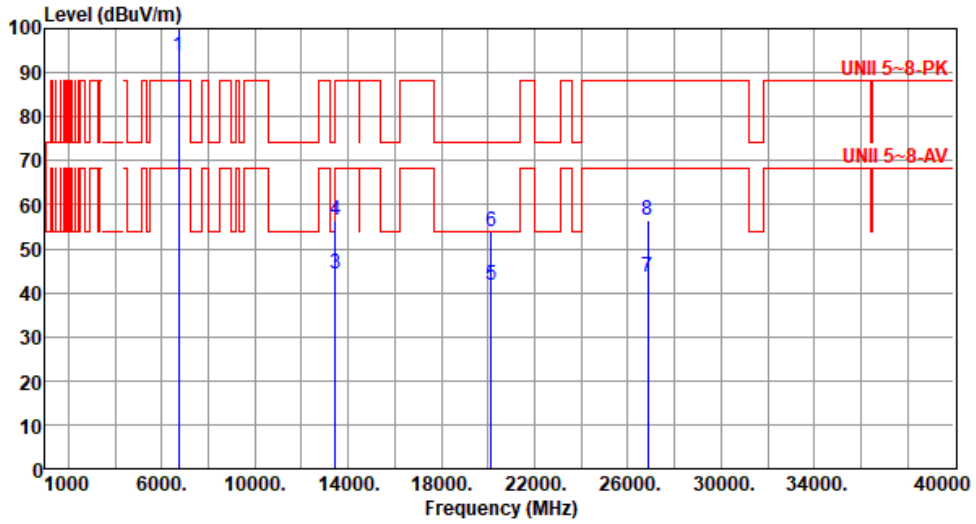

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6715.00	93.72			89.99	3.73	Average	194	352
2 *	6715.00	106.96			103.23	3.73	Peak	194	352
3	13430.00	44.28	68.20	-23.92	36.84	7.44	Average	100	25
4	13430.00	56.41	88.20	-31.79	48.97	7.44	Peak	100	25
5	20145.00	41.56	54.00	-12.44	39.13	2.43	Average	100	21
6	20145.00	53.92	74.00	-20.08	51.49	2.43	Peak	100	21
7	26860.00	43.39	68.20	-24.81	34.45	8.94	Average	100	38
8	26860.00	56.42	88.20	-31.78	47.48	8.94	Peak	100	38

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6855
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

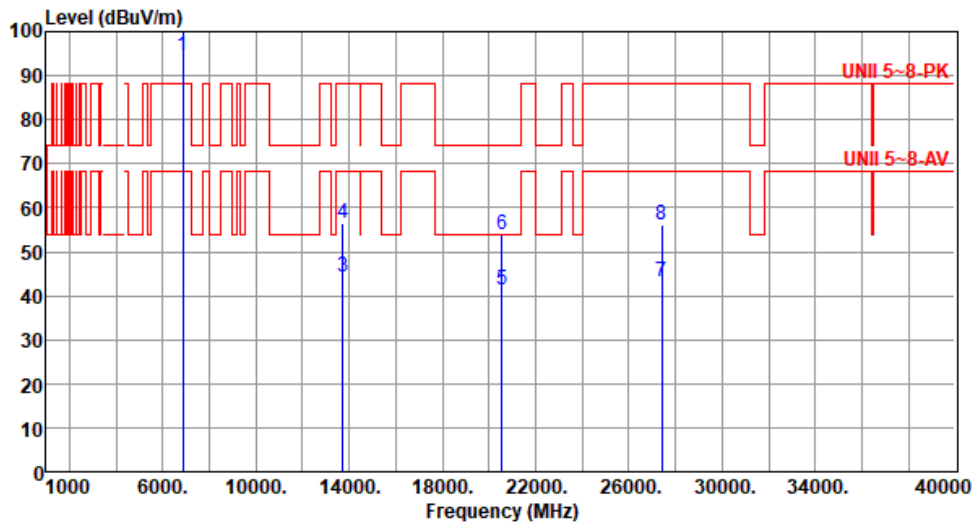

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6855.00	94.32			90.10	4.22	Average	177	1
2 *	6855.00	107.90			103.68	4.22	Peak	177	1
3	13710.00	44.15	68.20	-24.05	36.70	7.45	Average	100	41
4	13710.00	56.32	88.20	-31.88	48.87	7.45	Peak	100	41
5	20565.00	41.38	54.00	-12.62	38.28	3.10	Average	100	27
6	20565.00	53.76	74.00	-20.24	50.66	3.10	Peak	100	27
7	27420.00	43.26	68.20	-24.94	34.32	8.94	Average	100	21
8	27420.00	56.15	88.20	-32.05	47.21	8.94	Peak	100	21

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6855
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

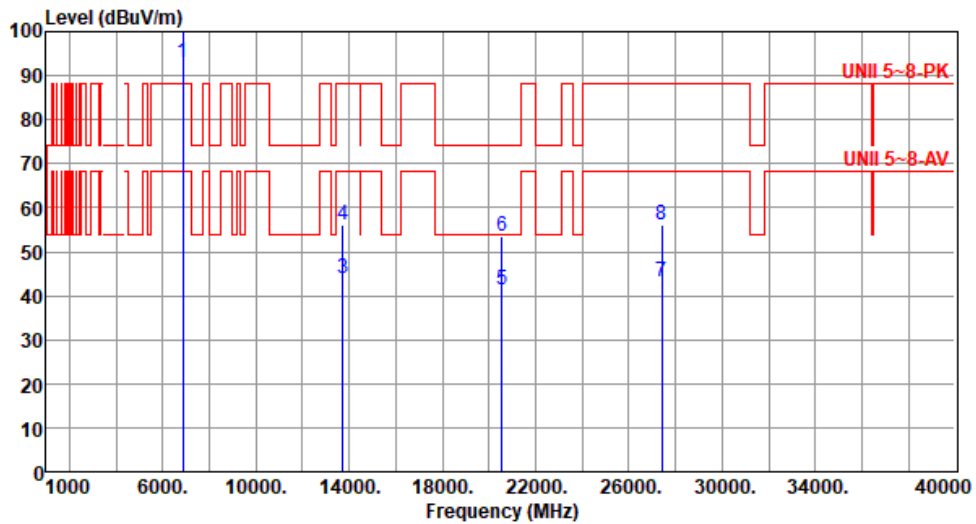

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6855.00	93.16			88.94	4.22	Average	185	355
2 *	6855.00	106.82			102.60	4.22	Peak	185	355
3	13710.00	44.08	68.20	-24.12	36.63	7.45	Average	100	34
4	13710.00	56.25	88.20	-31.95	48.80	7.45	Peak	100	34
5	20565.00	41.32	54.00	-12.68	38.22	3.10	Average	100	45
6	20565.00	53.68	74.00	-20.32	50.58	3.10	Peak	100	45
7	27420.00	43.29	68.20	-24.91	34.35	8.94	Average	100	27
8	27420.00	56.11	88.20	-32.09	47.17	8.94	Peak	100	27

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency





Modulation	be EHT20	Test Freq. (MHz)	6875
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

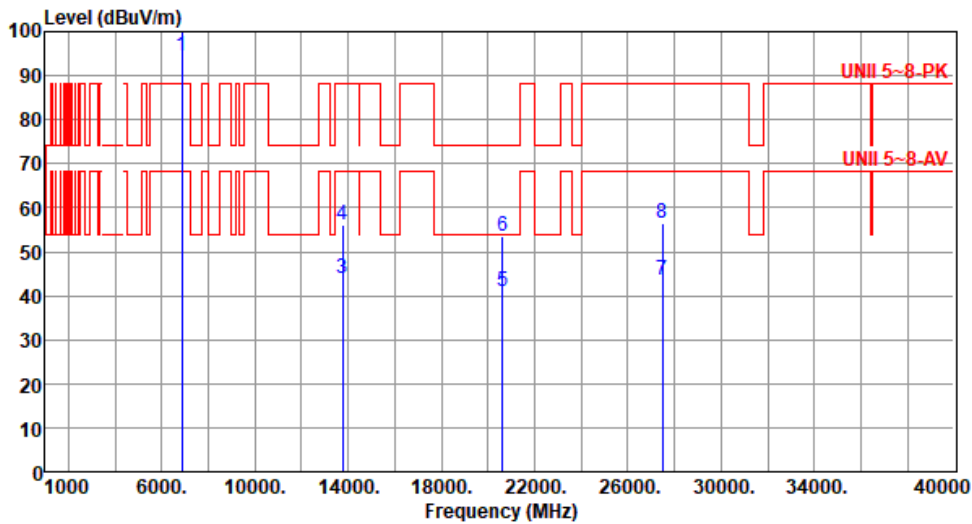

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6875.00	94.61			90.27	4.34	Average	177	2
2 *	6875.00	108.14			103.80	4.34	Peak	177	2
3	13750.00	43.84	68.20	-24.36	36.31	7.53	Average	100	25
4	13750.00	56.09	88.20	-32.11	48.56	7.53	Peak	100	25
5	20625.00	41.08	54.00	-12.92	37.92	3.16	Average	100	64
6	20625.00	53.42	74.00	-20.58	50.26	3.16	Peak	100	64
7	27500.00	43.44	68.20	-24.76	34.48	8.96	Average	100	27
8	27500.00	56.52	88.20	-31.68	47.56	8.96	Peak	100	27

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6875
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

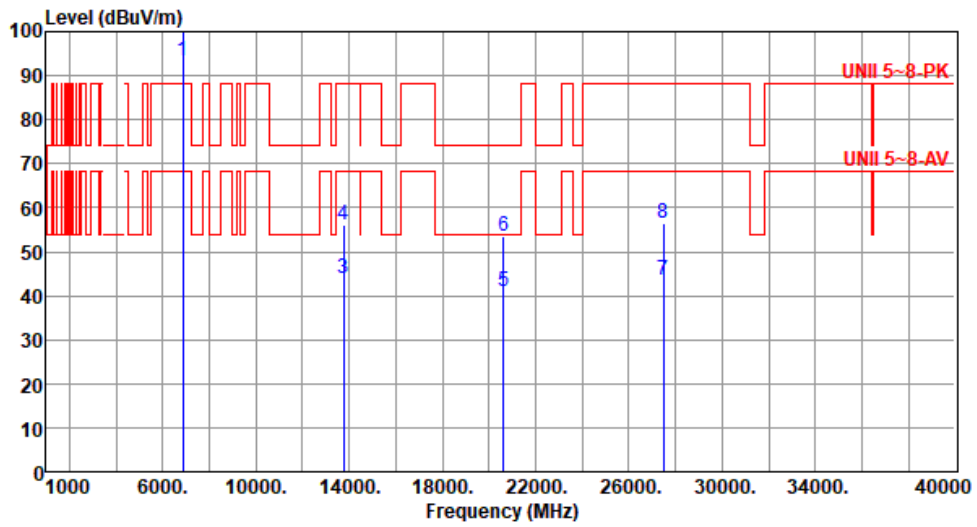

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6875.00	93.42			89.08	4.34	Average	191	9
2 *	6875.00	106.84			102.50	4.34	Peak	191	9
3	13750.00	43.86	68.20	-24.34	36.33	7.53	Average	100	24
4	13750.00	56.13	88.20	-32.07	48.60	7.53	Peak	100	24
5	20625.00	41.14	54.00	-12.86	37.98	3.16	Average	100	15
6	20625.00	53.36	74.00	-20.64	50.20	3.16	Peak	100	15
7	27500.00	43.42	68.20	-24.78	34.46	8.96	Average	100	39
8	27500.00	56.48	88.20	-31.72	47.52	8.96	Peak	100	39

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6895
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

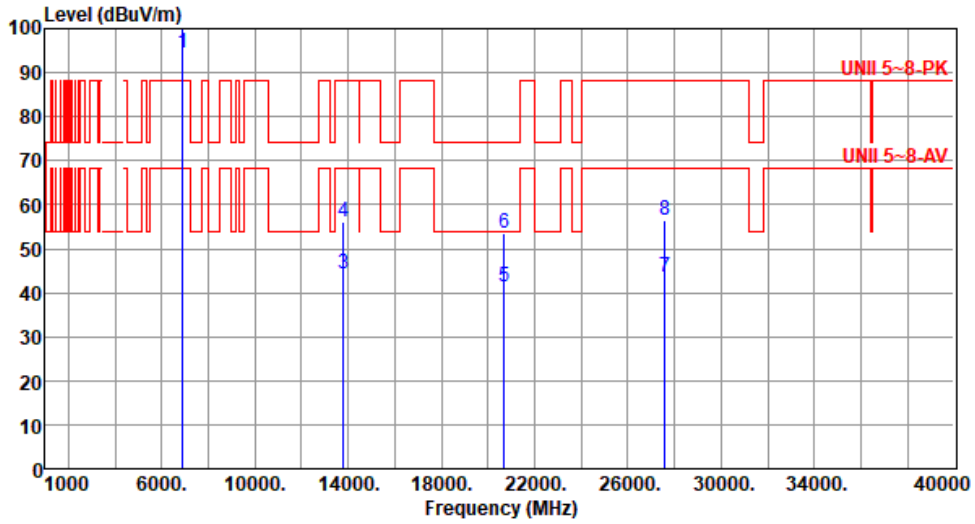

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6895.00	94.40			89.94	4.46	Average	174	359
2 *	6895.00	107.48			103.02	4.46	Peak	174	359
3	13790.00	44.26	68.20	-23.94	36.65	7.61	Average	100	44
4	13790.00	56.27	88.20	-31.93	48.66	7.61	Peak	100	44
5	20685.00	41.31	54.00	-12.69	38.09	3.22	Average	100	56
6	20685.00	53.59	74.00	-20.41	50.37	3.22	Peak	100	56
7	27580.00	43.64	68.20	-24.56	34.61	9.03	Average	100	22
8	27580.00	56.48	88.20	-31.72	47.45	9.03	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	6895
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

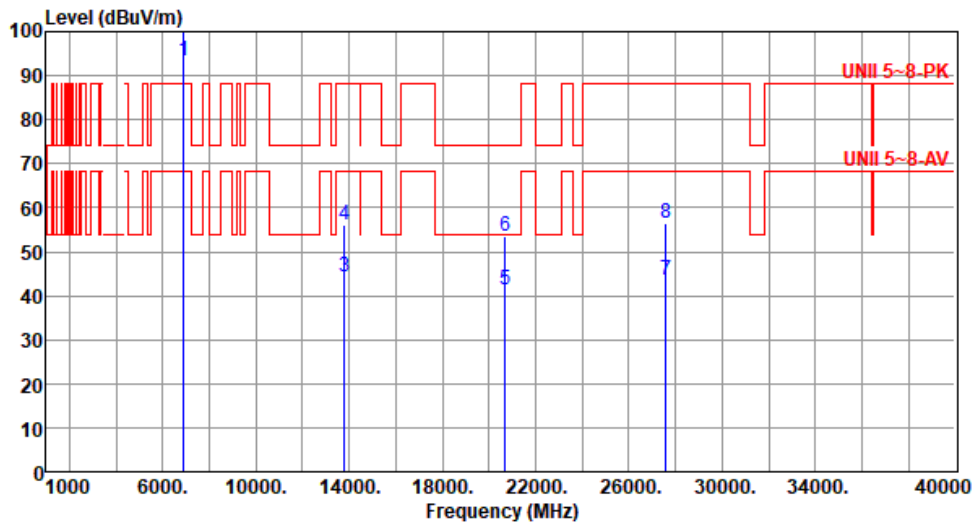

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6895.00	93.25			88.79	4.46	Average	194	5
2 *	6895.00	106.24			101.78	4.46	Peak	194	5
3	13790.00	44.22	68.20	-23.98	36.61	7.61	Average	100	13
4	13790.00	56.21	88.20	-31.99	48.60	7.61	Peak	100	13
5	20685.00	41.25	54.00	-12.75	38.03	3.22	Average	100	31
6	20685.00	53.52	74.00	-20.48	50.30	3.22	Peak	100	31
7	27580.00	43.69	68.20	-24.51	34.66	9.03	Average	100	14
8	27580.00	56.43	88.20	-31.77	47.40	9.03	Peak	100	14

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	7015
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

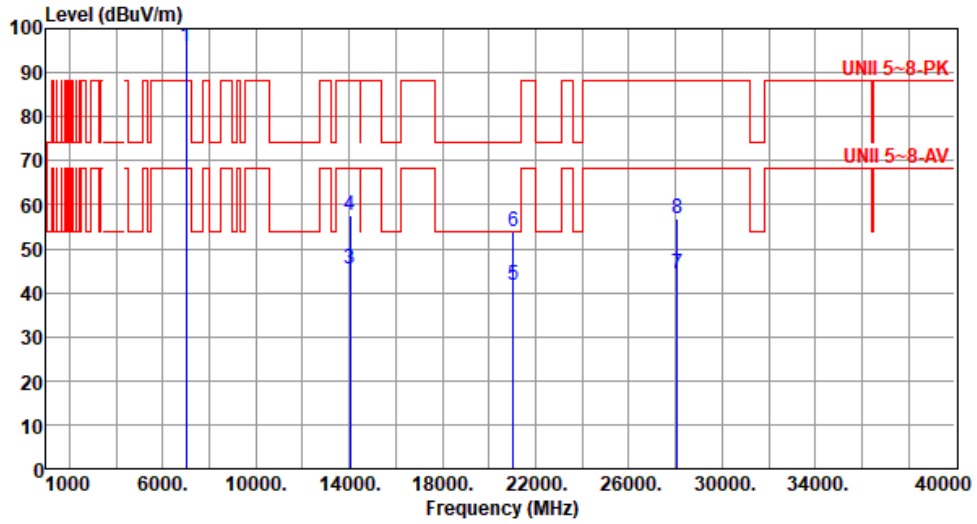

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	7015.00	96.02			90.85	5.17	Average	182	353
2 *	7015.00	109.42			104.25	5.17	Peak	182	353
3	14030.00	45.31	68.20	-22.89	37.29	8.02	Average	100	12
4	14030.00	57.62	88.20	-30.58	49.60	8.02	Peak	100	12
5	21045.00	41.82	54.00	-12.18	37.95	3.87	Average	100	21
6	21045.00	53.86	74.00	-20.14	49.99	3.87	Peak	100	21
7	28060.00	44.36	68.20	-23.84	34.92	9.44	Average	100	53
8	28060.00	56.88	88.20	-31.32	47.44	9.44	Peak	100	53

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	7015
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

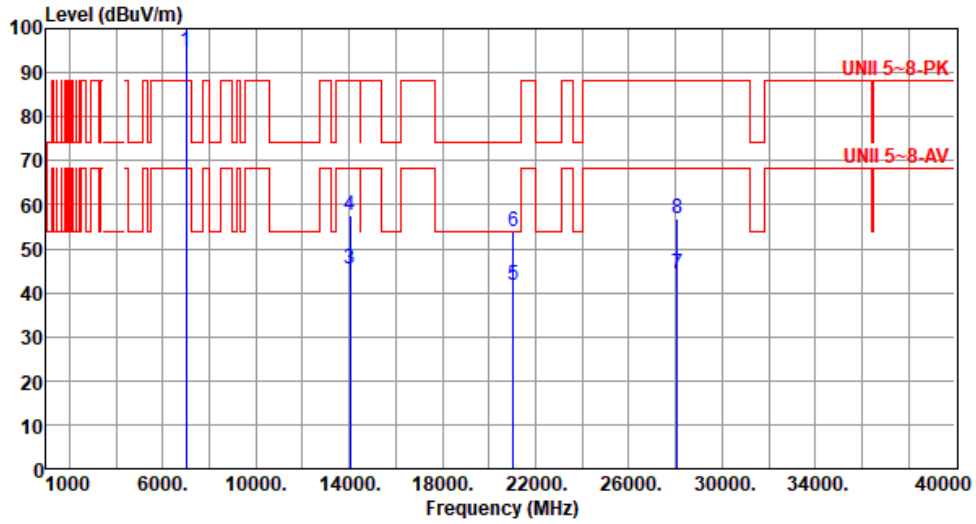

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	7015.00	94.74			89.57	5.17	Average	193	6
2 *	7015.00	108.09			102.92	5.17	Peak	193	6
3	14030.00	45.24	68.20	-22.96	37.22	8.02	Average	100	23
4	14030.00	57.56	88.20	-30.64	49.54	8.02	Peak	100	23
5	21045.00	41.77	54.00	-12.23	37.90	3.87	Average	100	29
6	21045.00	53.81	74.00	-20.19	49.94	3.87	Peak	100	29
7	28060.00	44.32	68.20	-23.88	34.88	9.44	Average	100	47
8	28060.00	56.82	88.20	-31.38	47.38	9.44	Peak	100	47

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	7095
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

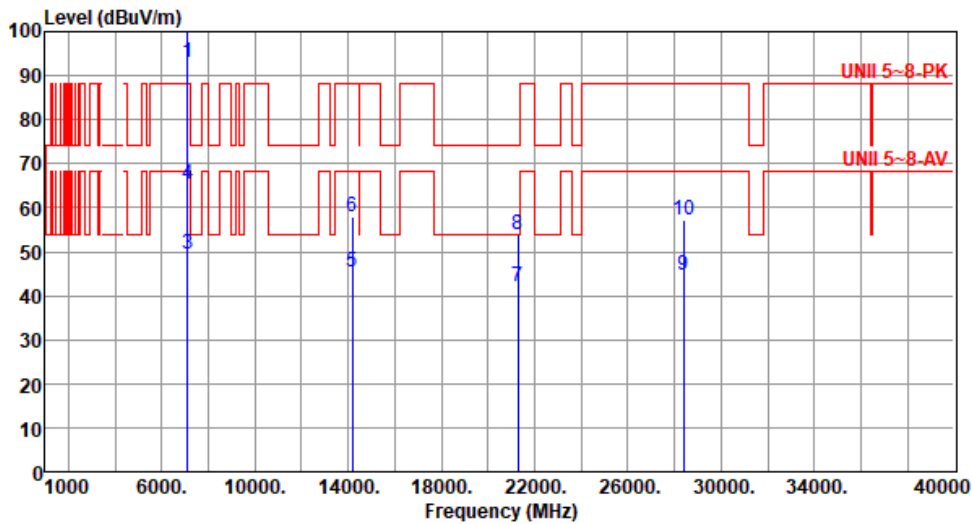

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	7095.00	92.98			87.39	5.59	Average	188	7
2 *	7095.00	106.21			100.62	5.59	Peak	188	7
3	7125.00	49.39	68.20	-18.81	43.70	5.69	Average	188	7
4	7125.00	65.26	88.20	-22.94	59.57	5.69	Peak	188	7
5	14190.00	45.56	68.20	-22.64	37.16	8.40	Average	100	5
6	14190.00	58.02	88.20	-30.18	49.62	8.40	Peak	100	5
7	21285.00	41.93	54.00	-12.07	37.82	4.11	Average	100	9
8	21285.00	53.91	74.00	-20.09	49.80	4.11	Peak	100	9
9	28380.00	44.60	68.20	-23.60	34.87	9.73	Average	100	25
10	28380.00	57.03	88.20	-31.17	47.30	9.73	Peak	100	25

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	7095
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):64

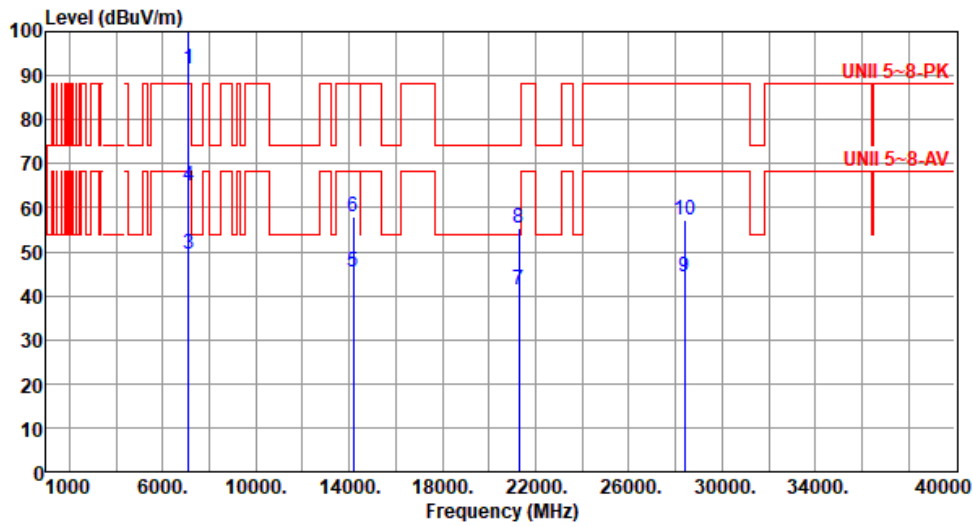

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	7095.00	91.62			86.03	5.59	Average	194	3
2 *	7095.00	104.95			99.36	5.59	Peak	194	3
3	7125.00	49.28	68.20	-18.92	43.59	5.69	Average	194	3
4	7125.00	65.11	88.20	-23.09	59.42	5.69	Peak	194	3
5	14190.00	45.48	68.20	-22.72	37.08	8.40	Average	100	22
6	14190.00	58.03	88.20	-30.17	49.63	8.40	Peak	100	22
7	21285.00	41.35	54.00	-12.65	37.24	4.11	Average	100	17
8	21285.00	55.32	74.00	-18.68	51.21	4.11	Peak	100	17
9	28380.00	44.45	68.20	-23.75	34.72	9.73	Average	100	36
10	28380.00	57.16	88.20	-31.04	47.43	9.73	Peak	100	36

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency





Modulation	be EHT20	Test Freq. (MHz)	7115
Polarization	Horizontal		

Test By :Akun Chung      Temperature(°C):24      Humidity(%):65

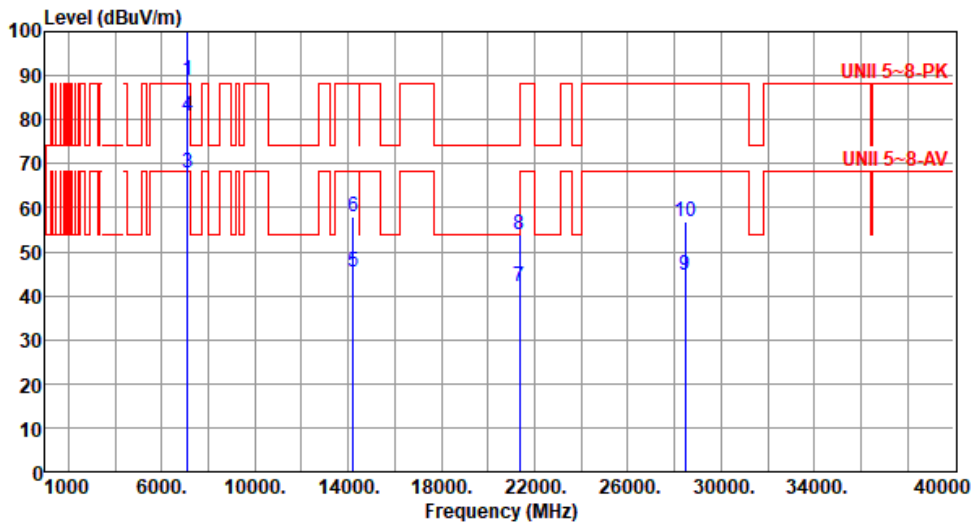


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7115.00	88.89			83.23	5.66	Average	167	359
2	7115.00	101.19			95.53	5.66	Peak	167	359
3	7125.00	67.86	68.20	-0.34	62.17	5.69	Average	167	359
4	7125.00	80.80	88.20	-7.40	75.11	5.69	Peak	167	359
5	14230.00	45.54	68.20	-22.66	37.09	8.45	Average	100	8
6	14230.00	57.96	88.20	-30.24	49.51	8.45	Peak	100	8
7	21345.00	41.89	54.00	-12.11	37.73	4.16	Average	100	22
8	21345.00	53.88	74.00	-20.12	49.72	4.16	Peak	100	22
9	28460.00	44.54	68.20	-23.66	34.70	9.84	Average	100	15
10	28460.00	56.92	88.20	-31.28	47.08	9.84	Peak	100	15

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	7115
Polarization	Vertical		

Test By :Akun Chung      Temperature(°C):24      Humidity(%):65

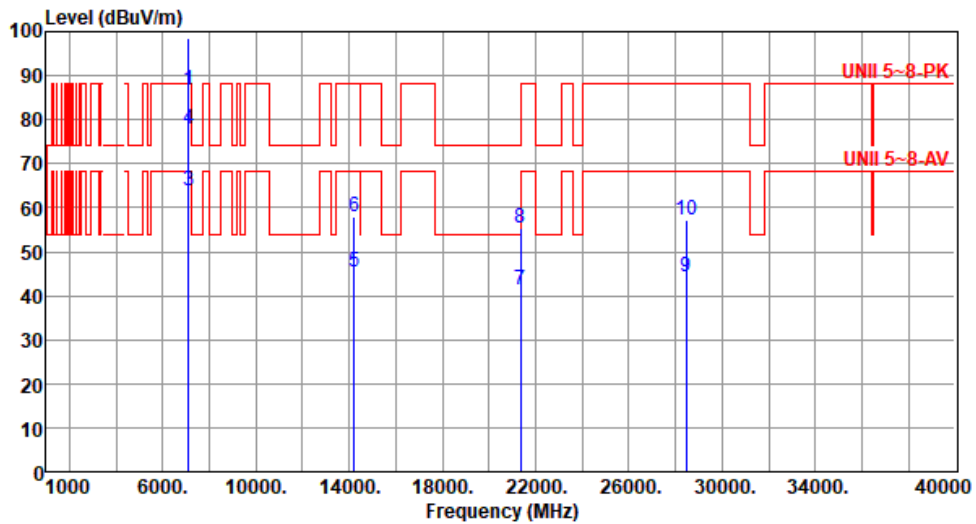

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	7115.00	86.78			81.12	5.66	Average	196	10
2 *	7115.00	98.61			92.95	5.66	Peak	196	10
3	7125.00	64.00	68.20	-4.20	58.31	5.69	Average	196	10
4	7125.00	77.71	88.20	-10.49	72.02	5.69	Peak	196	10
5	14230.00	45.41	68.20	-22.79	36.96	8.45	Average	100	27
6	14230.00	57.98	88.20	-30.22	49.53	8.45	Peak	100	27
7	21345.00	41.39	54.00	-12.61	37.23	4.16	Average	100	14
8	21345.00	55.26	74.00	-18.74	51.10	4.16	Peak	100	14
9	28460.00	44.37	68.20	-23.83	34.53	9.84	Average	100	45
10	28460.00	57.12	88.20	-31.08	47.28	9.84	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5965
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

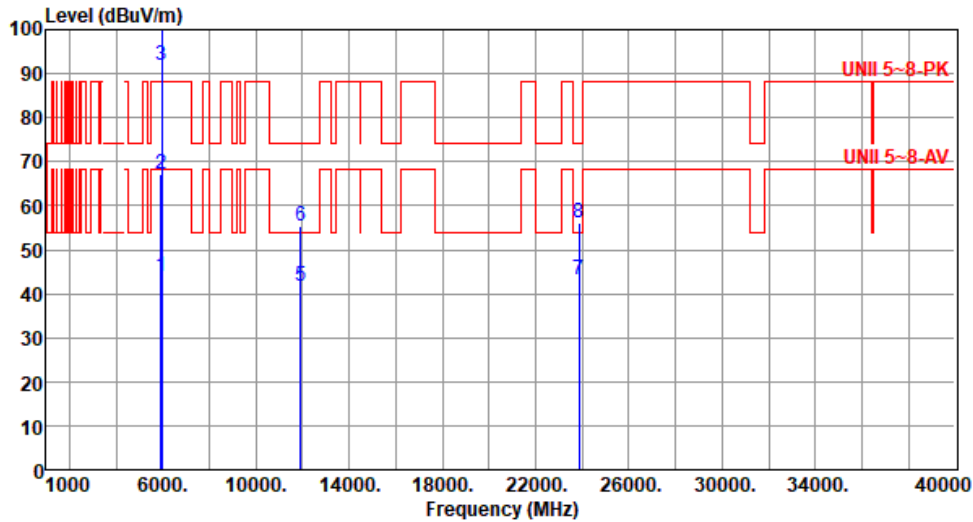

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	44.06	68.20	-24.14	42.55	1.51	Average	160	359
2	5925.00	67.14	88.20	-21.06	65.63	1.51	Peak	160	359
3 *	5965.00	91.93			90.43	1.50	Average	160	359
4 *	5965.00	105.42			103.92	1.50	Peak	160	359
5	11930.00	41.75	54.00	-12.25	34.16	7.59	Average	100	39
6	11930.00	55.26	74.00	-18.74	47.67	7.59	Peak	100	39
7	23860.00	43.22	54.00	-10.78	35.89	7.33	Average	100	53
8	23860.00	56.25	74.00	-17.75	48.92	7.33	Peak	100	53

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5965
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

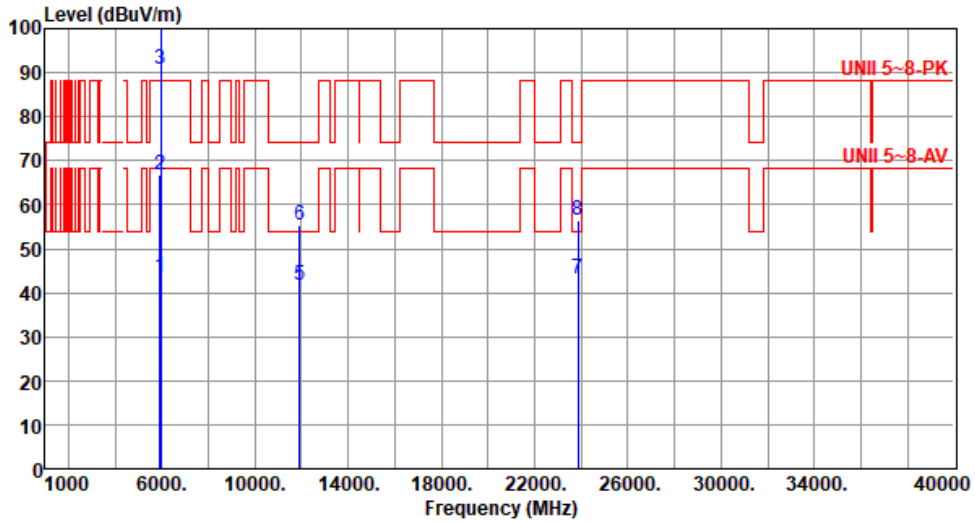

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.68	68.20	-24.52	42.17	1.51	Average	191	6
2	5925.00	66.85	88.20	-21.35	65.34	1.51	Peak	191	6
3 *	5965.00	90.62			89.12	1.50	Average	191	6
4 *	5965.00	104.16			102.66	1.50	Peak	191	6
5	11930.00	41.66	54.00	-12.34	34.07	7.59	Average	100	45
6	11930.00	55.21	74.00	-18.79	47.62	7.59	Peak	100	45
7	23860.00	43.35	54.00	-10.65	36.02	7.33	Average	100	48
8	23860.00	56.32	74.00	-17.68	48.99	7.33	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6165
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

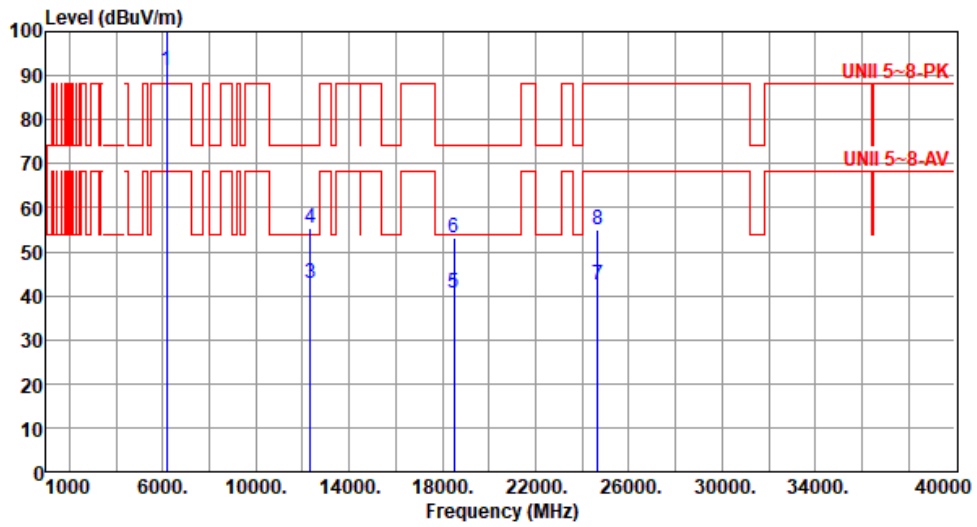

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	6165.00	91.14			89.23	1.91	Average	158	9
2 *	6165.00	104.92			103.01	1.91	Peak	158	9
3	12330.00	42.84	54.00	-11.16	35.46	7.38	Average	100	36
4	12330.00	55.31	74.00	-18.69	47.93	7.38	Peak	100	36
5	18495.00	40.41	54.00	-13.59	38.87	1.54	Average	100	25
6	18495.00	53.16	74.00	-20.84	51.62	1.54	Peak	100	25
7	24660.00	42.34	68.20	-25.86	34.02	8.32	Average	100	45
8	24660.00	54.81	88.20	-33.39	46.49	8.32	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6165
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

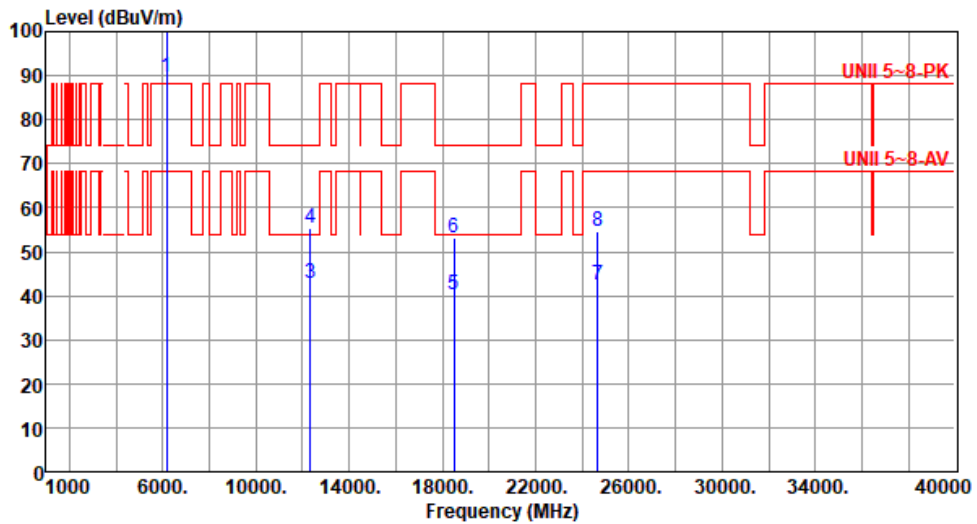

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6165.00	89.82			87.91	1.91	Average	195	8
2 *	6165.00	103.58			101.67	1.91	Peak	195	8
3	12330.00	42.76	54.00	-11.24	35.38	7.38	Average	100	41
4	12330.00	55.24	74.00	-18.76	47.86	7.38	Peak	100	41
5	18495.00	40.35	54.00	-13.65	38.81	1.54	Average	100	21
6	18495.00	53.12	74.00	-20.88	51.58	1.54	Peak	100	21
7	24660.00	42.29	68.20	-25.91	33.97	8.32	Average	100	33
8	24660.00	54.72	88.20	-33.48	46.40	8.32	Peak	100	33

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6405
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

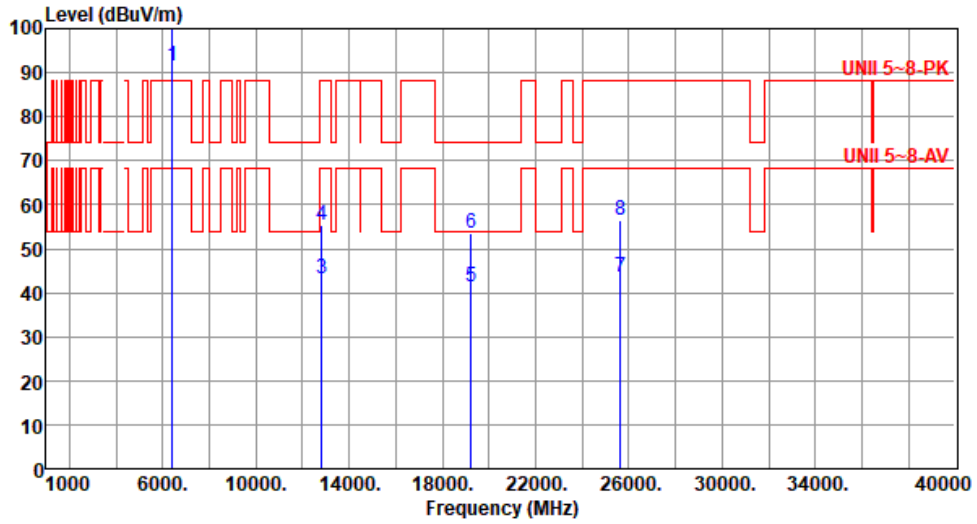


	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	6405.00	91.36			88.23	3.13	Average	151	6
2 *	6405.00	105.17			102.04	3.13	Peak	151	6
3	12810.00	43.25	68.20	-24.95	35.68	7.57	Average	100	38
4	12810.00	55.36	88.20	-32.84	47.79	7.57	Peak	100	38
5	19215.00	41.23	54.00	-12.77	39.46	1.77	Average	100	44
6	19215.00	53.65	74.00	-20.35	51.88	1.77	Peak	100	44
7	25620.00	43.51	68.20	-24.69	35.34	8.17	Average	100	56
8	25620.00	56.44	88.20	-31.76	48.27	8.17	Peak	100	56

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: "\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6405
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

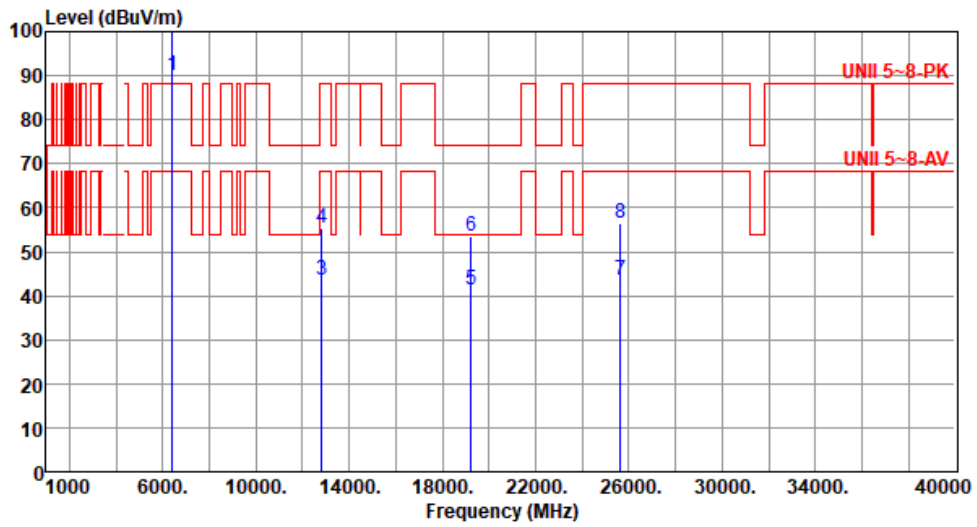

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6405.00	90.01			86.88	3.13	Average	194	3
2 *	6405.00	103.94			100.81	3.13	Peak	194	3
3	12810.00	43.36	68.20	-24.84	35.79	7.57	Average	100	47
4	12810.00	55.42	88.20	-32.78	47.85	7.57	Peak	100	47
5	19215.00	41.16	54.00	-12.84	39.39	1.77	Average	100	39
6	19215.00	53.58	74.00	-20.42	51.81	1.77	Peak	100	39
7	25620.00	43.42	68.20	-24.78	35.25	8.17	Average	100	29
8	25620.00	56.38	88.20	-31.82	48.21	8.17	Peak	100	29


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: "\*" is Peak / Average value of fundamental frequency





Modulation	be EHT40	Test Freq. (MHz)	6445
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

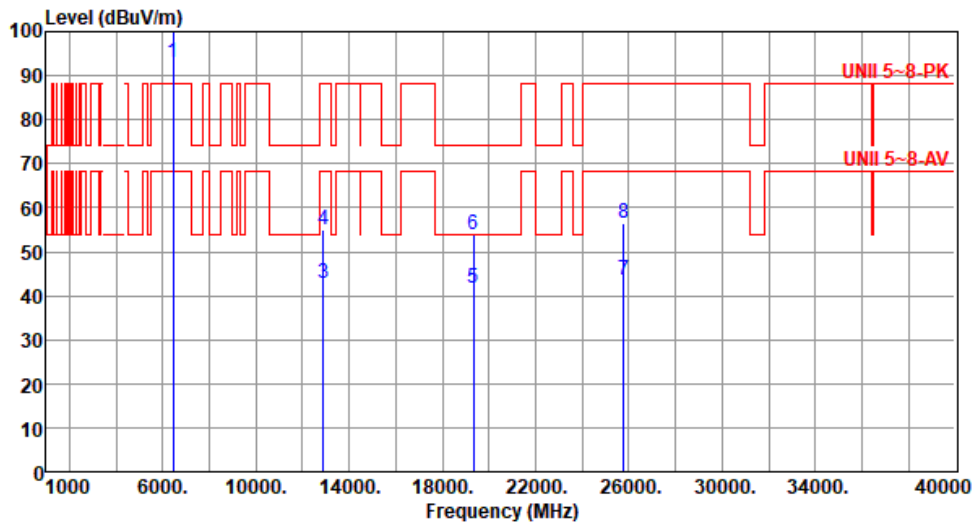

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6445.00	92.87			89.64	3.23	Average	152	5
2 *	6445.00	106.91			103.68	3.23	Peak	152	5
3	12890.00	42.79	68.20	-25.41	35.19	7.60	Average	100	54
4	12890.00	55.16	88.20	-33.04	47.56	7.60	Peak	100	54
5	19335.00	41.54	54.00	-12.46	39.71	1.83	Average	100	28
6	19335.00	53.96	74.00	-20.04	52.13	1.83	Peak	100	28
7	25780.00	43.64	68.20	-24.56	35.49	8.15	Average	100	41
8	25780.00	56.38	88.20	-31.82	48.23	8.15	Peak	100	41

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6445
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

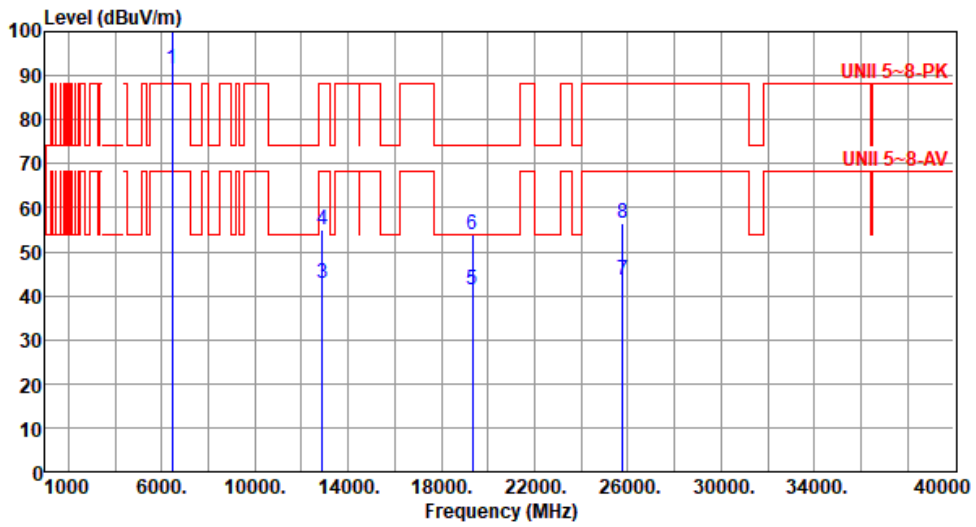

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6445.00	91.42			88.19	3.23	Average	199	11
2 *	6445.00	105.44			102.21	3.23	Peak	199	11
3	12890.00	42.63	68.20	-25.57	35.03	7.60	Average	100	47
4	12890.00	55.08	88.20	-33.12	47.48	7.60	Peak	100	47
5	19335.00	41.49	54.00	-12.51	39.66	1.83	Average	100	25
6	19335.00	53.86	74.00	-20.14	52.03	1.83	Peak	100	25
7	25780.00	43.52	68.20	-24.68	35.37	8.15	Average	100	56
8	25780.00	56.31	88.20	-31.89	48.16	8.15	Peak	100	56

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6485
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

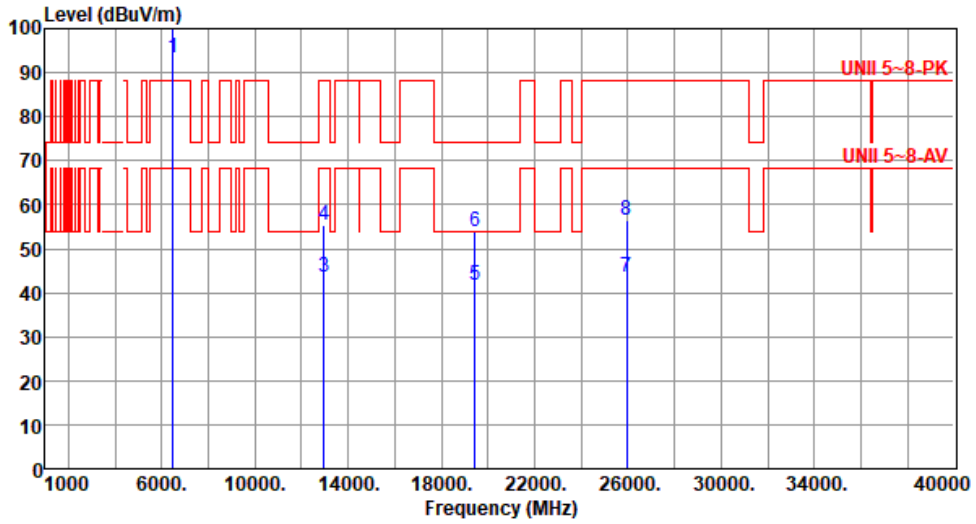

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6485.00	93.29			89.81	3.48	Average	149	4
2 *	6485.00	106.63			103.15	3.48	Peak	149	4
3	12970.00	43.45	68.20	-24.75	35.95	7.50	Average	100	51
4	12970.00	55.52	88.20	-32.68	48.02	7.50	Peak	100	51
5	19455.00	41.55	54.00	-12.45	39.61	1.94	Average	100	38
6	19455.00	53.84	74.00	-20.16	51.90	1.94	Peak	100	38
7	25940.00	43.48	68.20	-24.72	35.29	8.19	Average	100	61
8	25940.00	56.29	88.20	-31.91	48.10	8.19	Peak	100	61

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6485
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

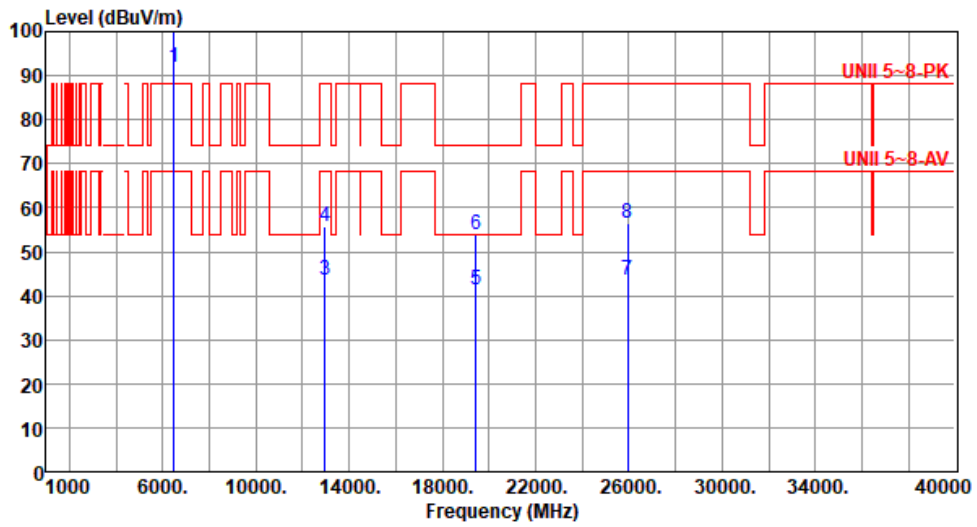

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6485.00	91.92			88.44	3.48	Average	194	356
2 *	6485.00	105.25			101.77	3.48	Peak	194	356
3	12970.00	43.52	68.20	-24.68	36.02	7.50	Average	100	24
4	12970.00	55.58	88.20	-32.62	48.08	7.50	Peak	100	24
5	19455.00	41.46	54.00	-12.54	39.52	1.94	Average	100	25
6	19455.00	53.79	74.00	-20.21	51.85	1.94	Peak	100	25
7	25940.00	43.52	68.20	-24.68	35.33	8.19	Average	100	36
8	25940.00	56.34	88.20	-31.86	48.15	8.19	Peak	100	36

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6525
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

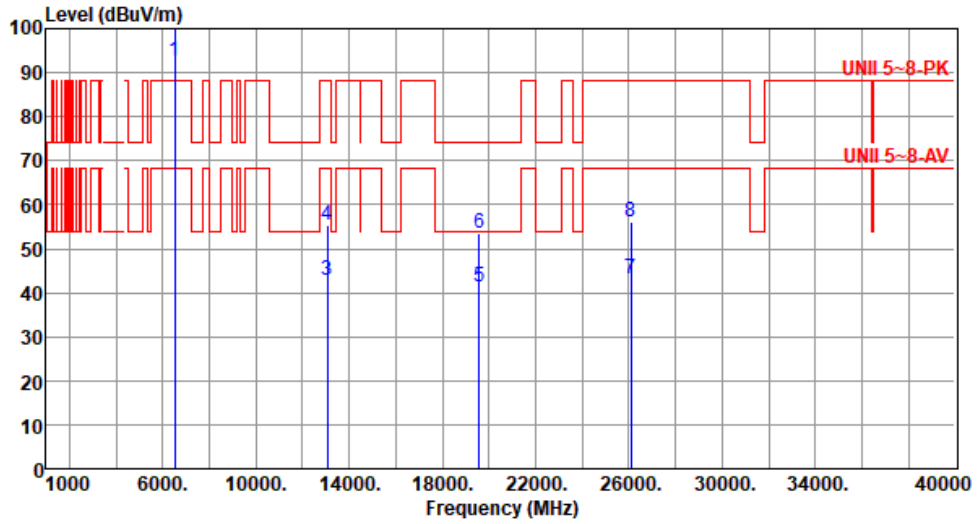

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6525.00	92.51			88.84	3.67	Average	152	2
2 *	6525.00	105.79			102.12	3.67	Peak	152	2
3	13050.00	42.93	68.20	-25.27	35.61	7.32	Average	100	39
4	13050.00	55.34	88.20	-32.86	48.02	7.32	Peak	100	39
5	19575.00	41.28	54.00	-12.72	39.26	2.02	Average	100	31
6	19575.00	53.62	74.00	-20.38	51.60	2.02	Peak	100	31
7	26100.00	43.35	68.20	-24.85	35.05	8.30	Average	100	26
8	26100.00	56.21	88.20	-31.99	47.91	8.30	Peak	100	26

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6525
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

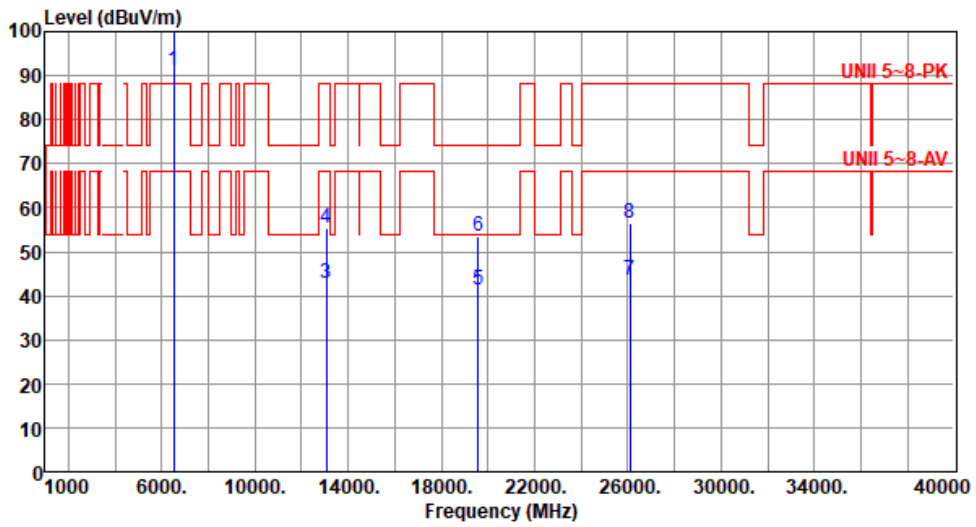

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6525.00	91.22			87.55	3.67	Average	189	4
2 *	6525.00	104.34			100.67	3.67	Peak	189	4
3	13050.00	42.86	68.20	-25.34	35.54	7.32	Average	100	21
4	13050.00	55.29	88.20	-32.91	47.97	7.32	Peak	100	21
5	19575.00	41.33	54.00	-12.67	39.31	2.02	Average	100	22
6	19575.00	53.68	74.00	-20.32	51.66	2.02	Peak	100	22
7	26100.00	43.44	68.20	-24.76	35.14	8.30	Average	100	11
8	26100.00	56.28	88.20	-31.92	47.98	8.30	Peak	100	11

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6565
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

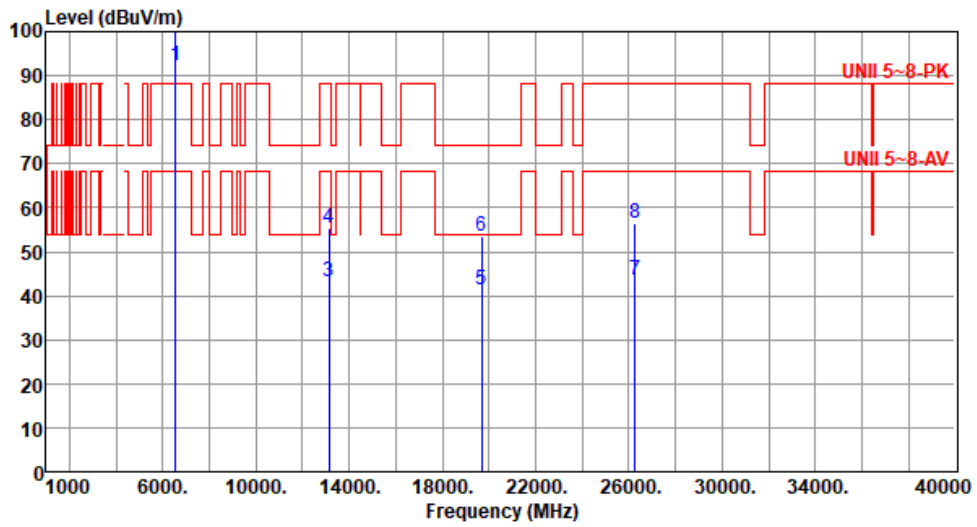

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6565.00	92.41			88.66	3.75	Average	166	5
2 *	6565.00	106.19			102.44	3.75	Peak	166	5
3	13130.00	43.01	68.20	-25.19	35.81	7.20	Average	100	39
4	13130.00	55.23	88.20	-32.97	48.03	7.20	Peak	100	39
5	19695.00	41.18	54.00	-12.82	39.12	2.06	Average	100	58
6	19695.00	53.62	74.00	-20.38	51.56	2.06	Peak	100	58
7	26260.00	43.42	68.20	-24.78	34.96	8.46	Average	100	44
8	26260.00	56.31	88.20	-31.89	47.85	8.46	Peak	100	44

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6565
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

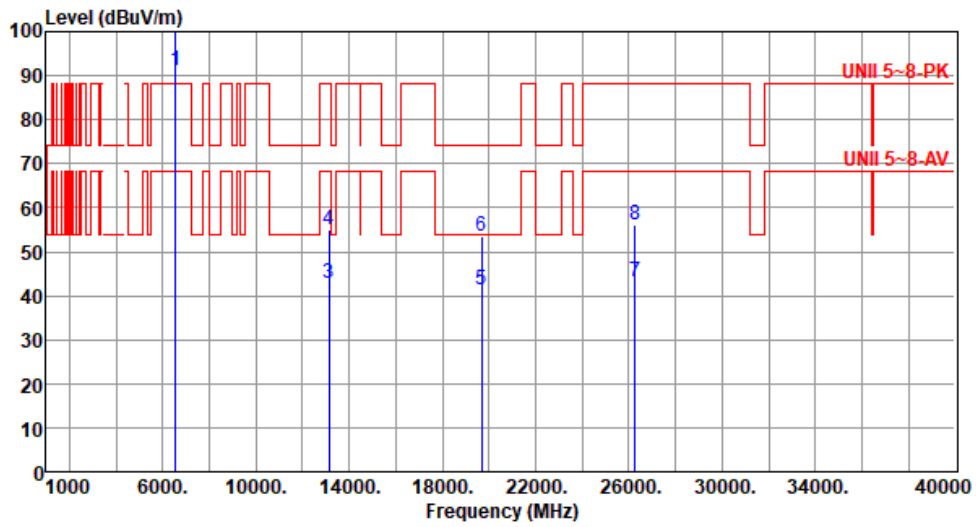

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6565.00	90.96			87.21	3.75	Average	191	2
2 *	6565.00	104.75			101.00	3.75	Peak	191	2
3	13130.00	42.94	68.20	-25.26	35.74	7.20	Average	100	17
4	13130.00	55.13	88.20	-33.07	47.93	7.20	Peak	100	17
5	19695.00	41.26	54.00	-12.74	39.20	2.06	Average	100	35
6	19695.00	53.69	74.00	-20.31	51.63	2.06	Peak	100	35
7	26260.00	43.34	68.20	-24.86	34.88	8.46	Average	100	26
8	26260.00	56.25	88.20	-31.95	47.79	8.46	Peak	100	26

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency





Modulation	be EHT40	Test Freq. (MHz)	6725
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

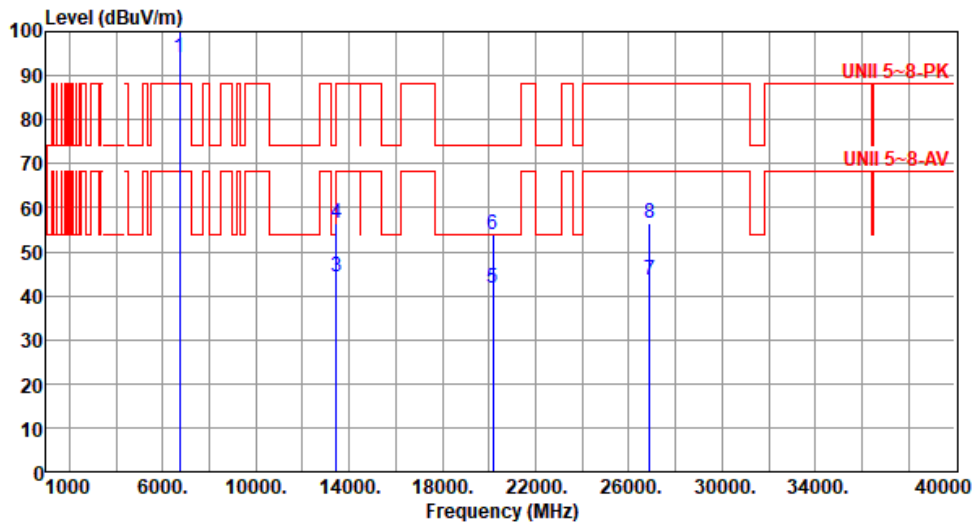

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	6725.00	93.92			90.20	3.72	Average	166	359
2 *	6725.00	107.02			103.30	3.72	Peak	166	359
3	13450.00	44.45	68.20	-23.75	36.99	7.46	Average	100	35
4	13450.00	56.58	88.20	-31.62	49.12	7.46	Peak	100	35
5	20175.00	41.62	54.00	-12.38	39.15	2.47	Average	100	21
6	20175.00	53.91	74.00	-20.09	51.44	2.47	Peak	100	21
7	26900.00	43.52	68.20	-24.68	34.63	8.89	Average	100	55
8	26900.00	56.54	88.20	-31.66	47.65	8.89	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6725
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

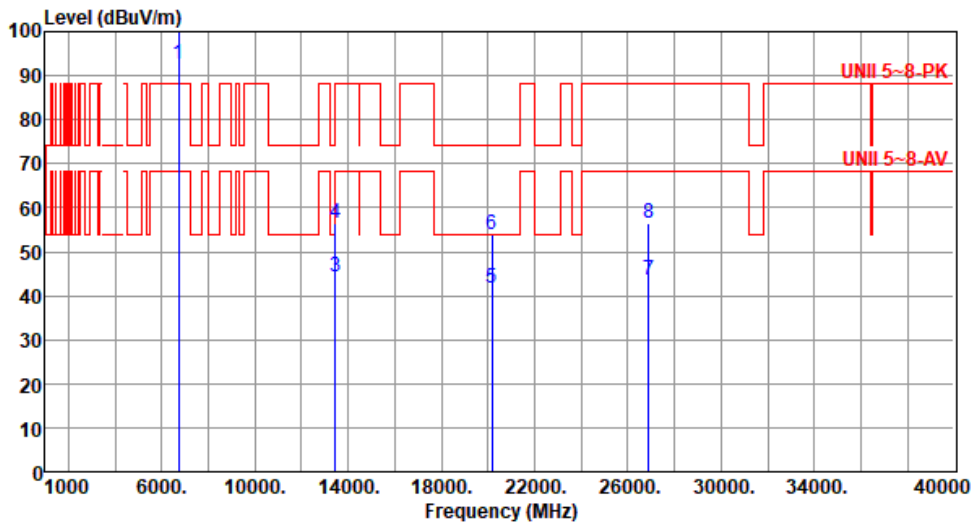

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6725.00	92.64			88.92	3.72	Average	189	3
2 *	6725.00	105.66			101.94	3.72	Peak	189	3
3	13450.00	44.32	68.20	-23.88	36.86	7.46	Average	100	48
4	13450.00	56.49	88.20	-31.71	49.03	7.46	Peak	100	48
5	20175.00	41.54	54.00	-12.46	39.07	2.47	Average	100	35
6	20175.00	53.85	74.00	-20.15	51.38	2.47	Peak	100	35
7	26900.00	43.46	68.20	-24.74	34.57	8.89	Average	100	49
8	26900.00	56.49	88.20	-31.71	47.60	8.89	Peak	100	49

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6845
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

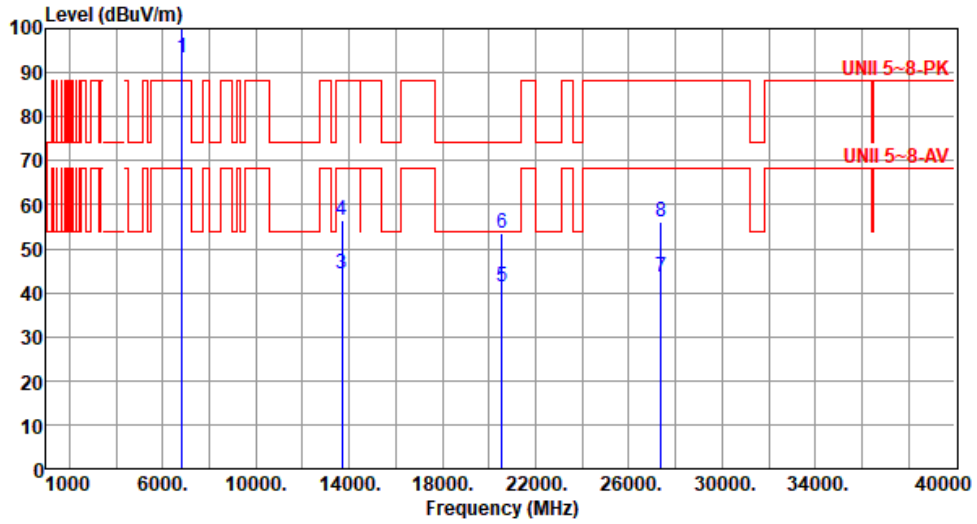

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6845.00	93.36			89.21	4.15	Average	160	358
2 *	6845.00	107.13			102.98	4.15	Peak	160	358
3	13690.00	44.28	68.20	-23.92	36.84	7.44	Average	100	35
4	13690.00	56.41	88.20	-31.79	48.97	7.44	Peak	100	35
5	20535.00	41.24	54.00	-12.76	38.18	3.06	Average	100	18
6	20535.00	53.65	74.00	-20.35	50.59	3.06	Peak	100	18
7	27380.00	43.39	68.20	-24.81	34.46	8.93	Average	100	45
8	27380.00	56.27	88.20	-31.93	47.34	8.93	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6845
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

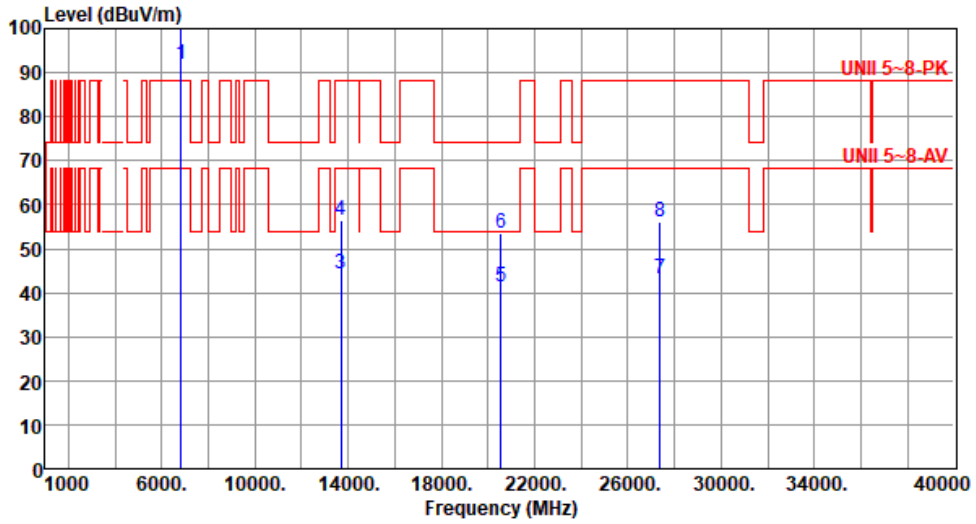

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6845.00	91.92			87.77	4.15	Average	194	355
2 *	6845.00	105.69			101.54	4.15	Peak	194	355
3	13690.00	44.41	68.20	-23.79	36.97	7.44	Average	100	39
4	13690.00	56.53	88.20	-31.67	49.09	7.44	Peak	100	39
5	20535.00	41.19	54.00	-12.81	38.13	3.06	Average	100	22
6	20535.00	53.56	74.00	-20.44	50.50	3.06	Peak	100	22
7	27380.00	43.28	68.20	-24.92	34.35	8.93	Average	100	29
8	27380.00	56.21	88.20	-31.99	47.28	8.93	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6885
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

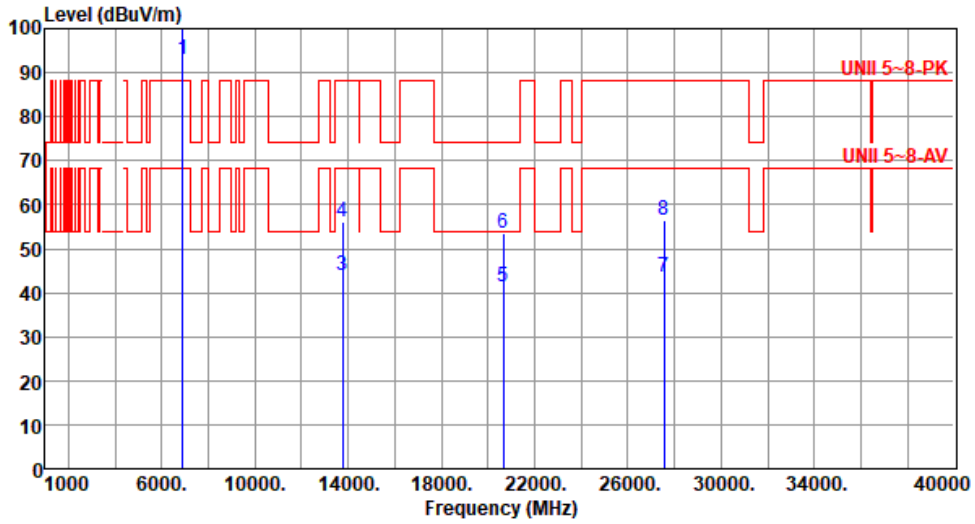

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6885.00	92.88			88.48	4.40	Average	162	356
2 *	6885.00	106.45			102.05	4.40	Peak	162	356
3	13770.00	43.95	68.20	-24.25	36.38	7.57	Average	100	23
4	13770.00	56.12	88.20	-32.08	48.55	7.57	Peak	100	23
5	20655.00	41.19	54.00	-12.81	38.01	3.18	Average	100	68
6	20655.00	53.51	74.00	-20.49	50.33	3.18	Peak	100	68
7	27540.00	43.58	68.20	-24.62	34.58	9.00	Average	100	39
8	27540.00	56.61	88.20	-31.59	47.61	9.00	Peak	100	39

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6885
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

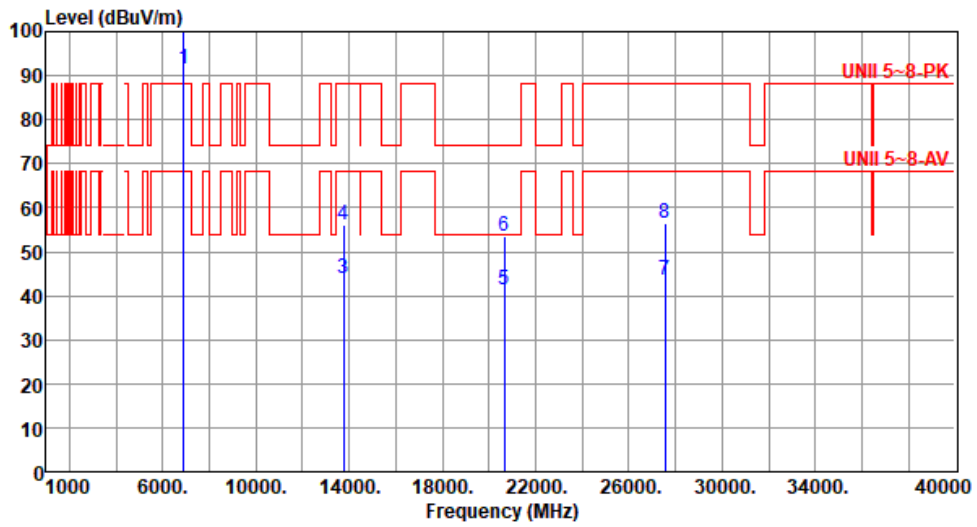

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6885.00	91.42			87.02	4.40	Average	196	9
2 *	6885.00	104.95			100.55	4.40	Peak	196	9
3	13770.00	43.82	68.20	-24.38	36.25	7.57	Average	100	19
4	13770.00	56.04	88.20	-32.16	48.47	7.57	Peak	100	19
5	20655.00	41.25	54.00	-12.75	38.07	3.18	Average	100	51
6	20655.00	53.64	74.00	-20.36	50.46	3.18	Peak	100	51
7	27540.00	43.46	68.20	-24.74	34.46	9.00	Average	100	24
8	27540.00	56.54	88.20	-31.66	47.54	9.00	Peak	100	24

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6925
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

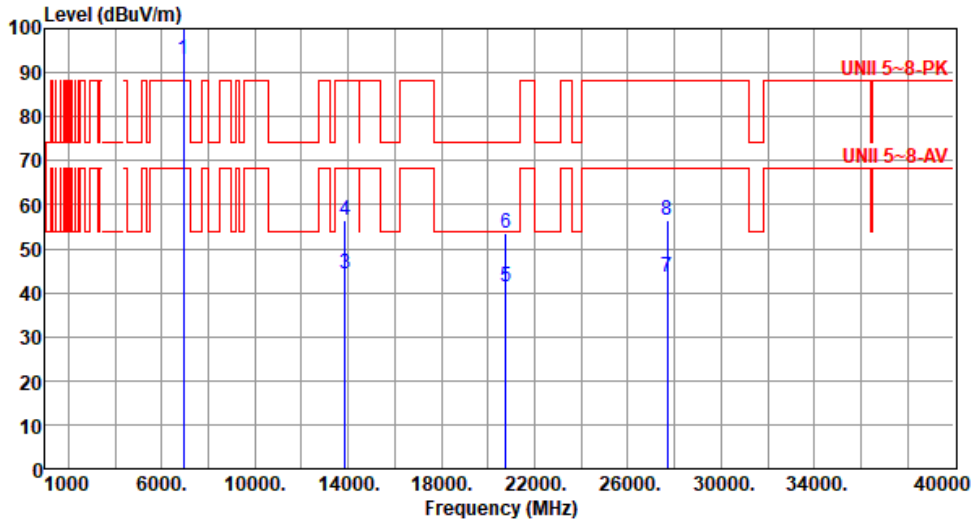

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6925.00	93.16			88.52	4.64	Average	153	355
2 *	6925.00	107.09			102.45	4.64	Peak	153	355
3	13850.00	44.39	68.20	-23.81	36.66	7.73	Average	100	51
4	13850.00	56.42	88.20	-31.78	48.69	7.73	Peak	100	51
5	20775.00	41.49	54.00	-12.51	38.15	3.34	Average	100	60
6	20775.00	53.68	74.00	-20.32	50.34	3.34	Peak	100	60
7	27700.00	43.69	68.20	-24.51	34.56	9.13	Average	100	29
8	27700.00	56.61	88.20	-31.59	47.48	9.13	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	6925
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

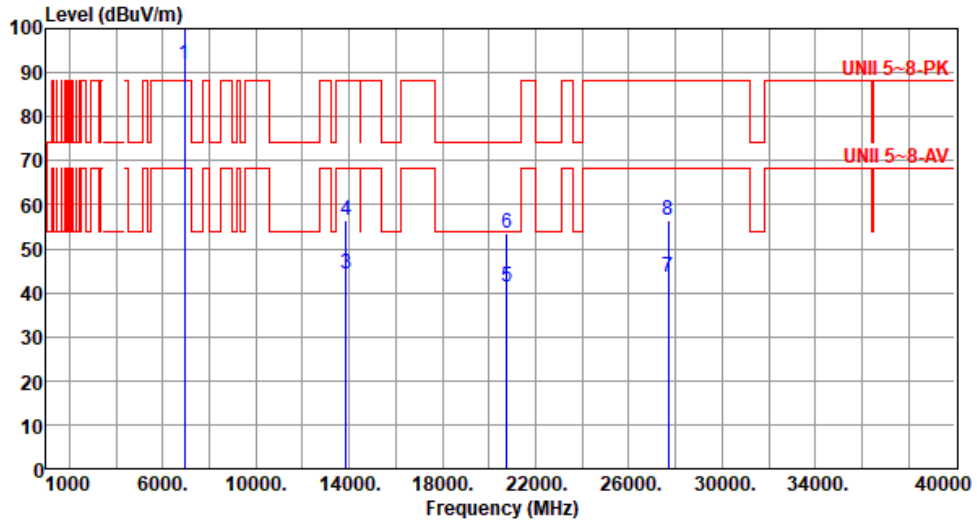

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6925.00	91.75			87.11	4.64	Average	194	5
2 *	6925.00	105.71			101.07	4.64	Peak	194	5
3	13850.00	44.36	68.20	-23.84	36.63	7.73	Average	100	25
4	13850.00	56.35	88.20	-31.85	48.62	7.73	Peak	100	25
5	20775.00	41.35	54.00	-12.65	38.01	3.34	Average	100	27
6	20775.00	53.59	74.00	-20.41	50.25	3.34	Peak	100	27
7	27700.00	43.64	68.20	-24.56	34.51	9.13	Average	100	35
8	27700.00	56.59	88.20	-31.61	47.46	9.13	Peak	100	35

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency





Modulation	be EHT40	Test Freq. (MHz)	7005
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

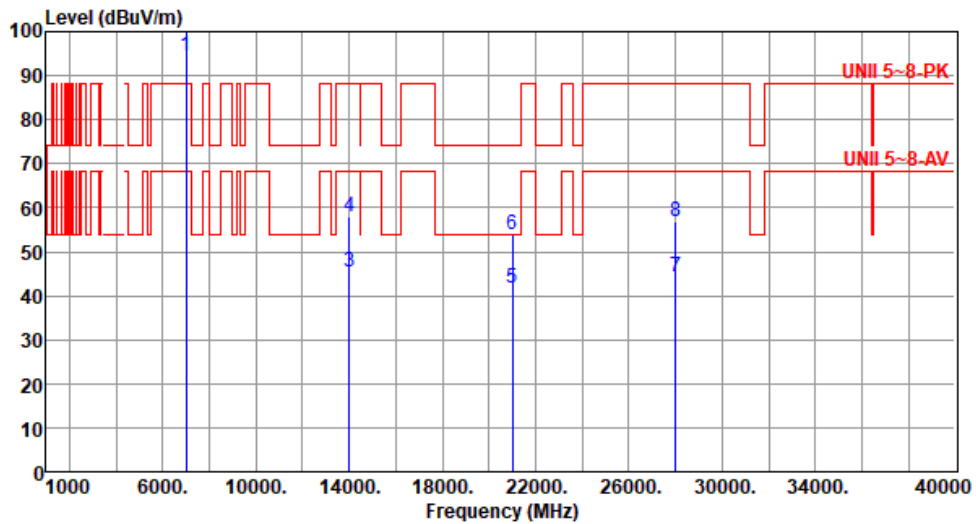

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	7005.00	94.47			89.35	5.12	Average	166	354
2 *	7005.00	108.50			103.38	5.12	Peak	166	354
3	14010.00	45.38	68.20	-22.82	37.42	7.96	Average	100	22
4	14010.00	57.76	88.20	-30.44	49.80	7.96	Peak	100	22
5	21015.00	41.86	54.00	-12.14	38.02	3.84	Average	100	43
6	21015.00	53.75	74.00	-20.25	49.91	3.84	Peak	100	43
7	28020.00	44.42	68.20	-23.78	35.00	9.42	Average	100	62
8	28020.00	56.94	88.20	-31.26	47.52	9.42	Peak	100	62

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	7005
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

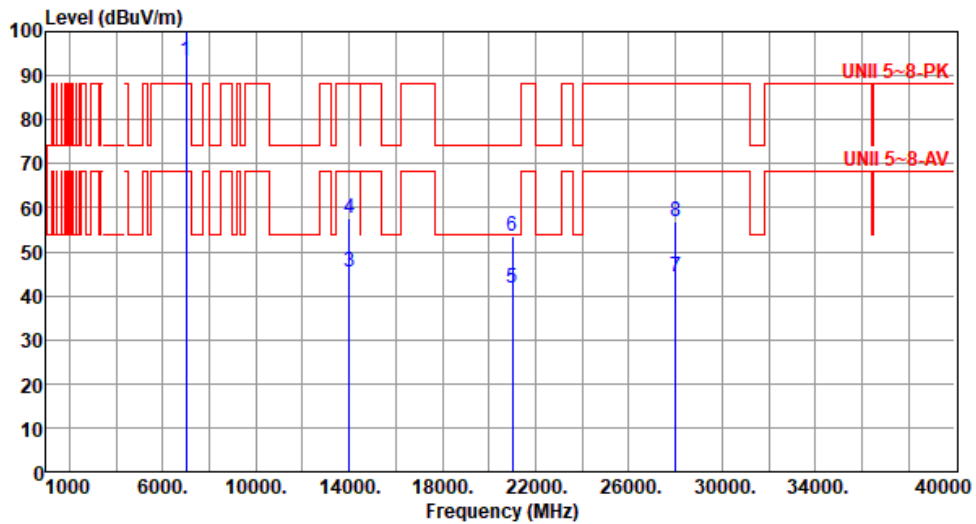

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	7005.00	93.19			88.07	5.12	Average	194	3
2 *	7005.00	107.21			102.09	5.12	Peak	194	3
3	14010.00	45.26	68.20	-22.94	37.30	7.96	Average	100	18
4	14010.00	57.64	88.20	-30.56	49.68	7.96	Peak	100	18
5	21015.00	41.75	54.00	-12.25	37.91	3.84	Average	100	36
6	21015.00	53.68	74.00	-20.32	49.84	3.84	Peak	100	36
7	28020.00	44.35	68.20	-23.85	34.93	9.42	Average	100	51
8	28020.00	56.88	88.20	-31.32	47.46	9.42	Peak	100	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	7085
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

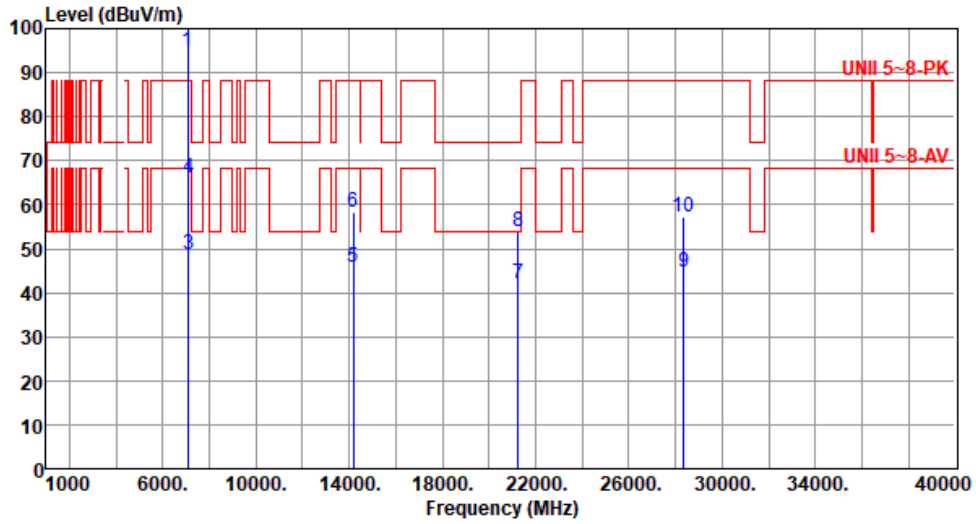

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	7085.00	95.01			89.47	5.54	Average	164	2
2 *	7085.00	108.50			102.96	5.54	Peak	164	2
3	7125.00	48.58	68.20	-19.62	42.89	5.69	Average	164	2
4	7125.00	66.18	88.20	-22.02	60.49	5.69	Peak	164	2
5	14170.00	45.64	68.20	-22.56	37.28	8.36	Average	100	9
6	14170.00	58.13	88.20	-30.07	49.77	8.36	Peak	100	9
7	21255.00	41.95	54.00	-12.05	37.87	4.08	Average	100	16
8	21255.00	53.84	74.00	-20.16	49.76	4.08	Peak	100	16
9	28340.00	44.69	68.20	-23.51	35.00	9.69	Average	100	31
10	28340.00	57.12	88.20	-31.08	47.43	9.69	Peak	100	31

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	7085
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

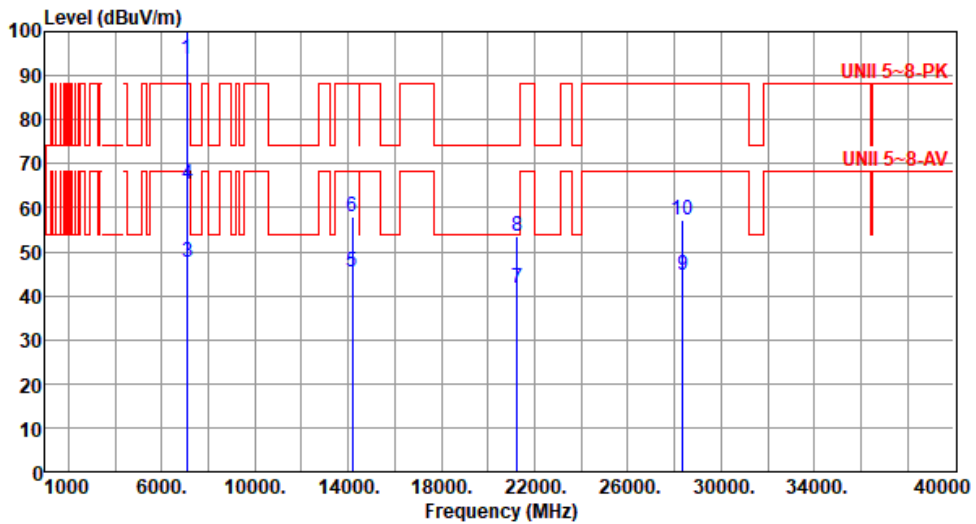

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	7085.00	93.84			88.30	5.54	Average	191	9
2 *	7085.00	107.26			101.72	5.54	Peak	191	9
3	7125.00	47.46	68.20	-20.74	41.77	5.69	Average	191	9
4	7125.00	65.45	88.20	-22.75	59.76	5.69	Peak	191	9
5	14170.00	45.51	68.20	-22.69	37.15	8.36	Average	100	23
6	14170.00	58.09	88.20	-30.11	49.73	8.36	Peak	100	23
7	21255.00	41.86	54.00	-12.14	37.78	4.08	Average	100	38
8	21255.00	53.68	74.00	-20.32	49.60	4.08	Peak	100	38
9	28340.00	44.62	68.20	-23.58	34.93	9.69	Average	100	11
10	28340.00	57.04	88.20	-31.16	47.35	9.69	Peak	100	11

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5985
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

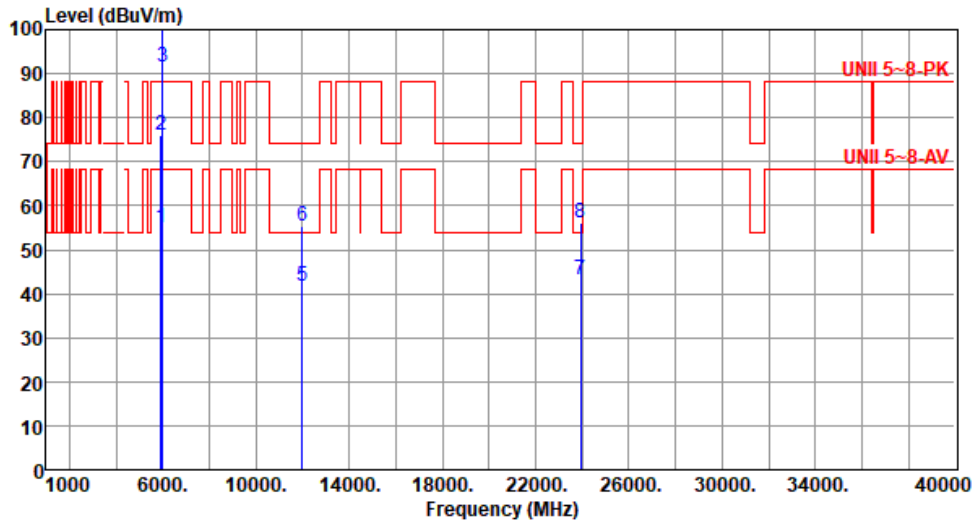

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	54.95	68.20	-13.25	53.44	1.51	Average	152	3
2	5925.00	75.83	88.20	-12.37	74.32	1.51	Peak	152	3
3 *	5985.00	91.59			90.11	1.48	Average	152	3
4 *	5985.00	105.13			103.65	1.48	Peak	152	3
5	11970.00	41.84	54.00	-12.16	34.12	7.72	Average	100	14
6	11970.00	55.36	74.00	-18.64	47.64	7.72	Peak	100	14
7	23940.00	43.11	54.00	-10.89	35.70	7.41	Average	110	58
8	23940.00	56.19	74.00	-17.81	48.78	7.41	Peak	110	58

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5985
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

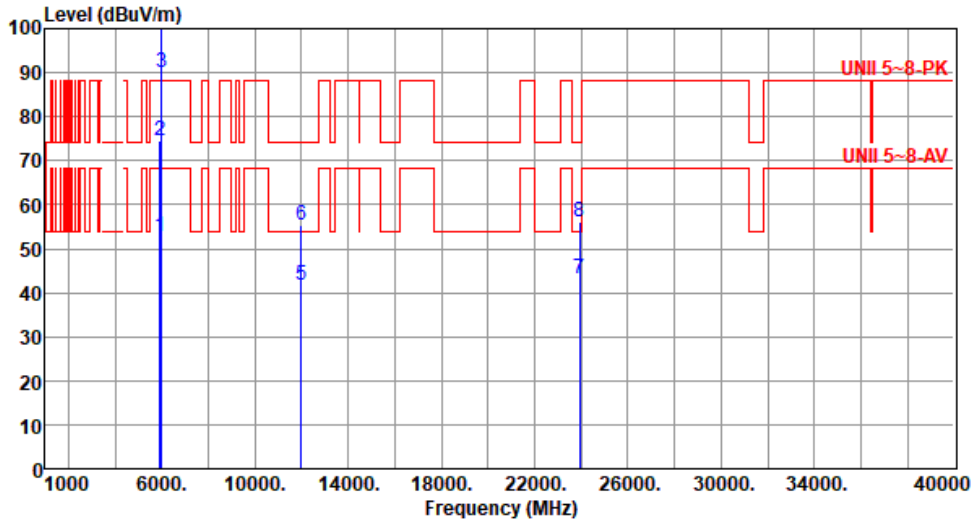

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	52.75	68.20	-15.45	51.24	1.51	Average	192	4
2	5925.00	74.49	88.20	-13.71	72.98	1.51	Peak	192	4
3 *	5985.00	90.21			88.73	1.48	Average	192	4
4 *	5985.00	103.84			102.36	1.48	Peak	192	4
5	11970.00	41.76	54.00	-12.24	34.04	7.72	Average	100	29
6	11970.00	55.24	74.00	-18.76	47.52	7.72	Peak	100	29
7	23940.00	43.02	54.00	-10.98	35.61	7.41	Average	100	45
8	23940.00	56.08	74.00	-17.92	48.67	7.41	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6145
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

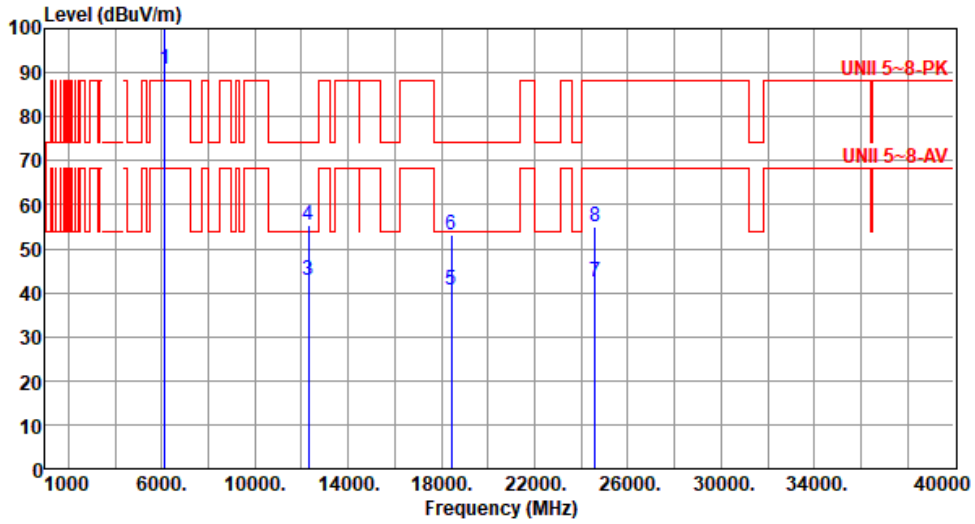

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6145.00	90.71			88.89	1.82	Average	169	9
2 *	6145.00	105.00			103.18	1.82	Peak	169	9
3	12290.00	42.85	54.00	-11.15	35.33	7.52	Average	100	3
4	12290.00	55.36	74.00	-18.64	47.84	7.52	Peak	100	3
5	18435.00	40.46	54.00	-13.54	38.93	1.53	Average	100	22
6	18435.00	53.24	74.00	-20.76	51.71	1.53	Peak	100	22
7	24580.00	42.45	68.20	-25.75	34.22	8.23	Average	100	51
8	24580.00	54.86	88.20	-33.34	46.63	8.23	Peak	100	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6145
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

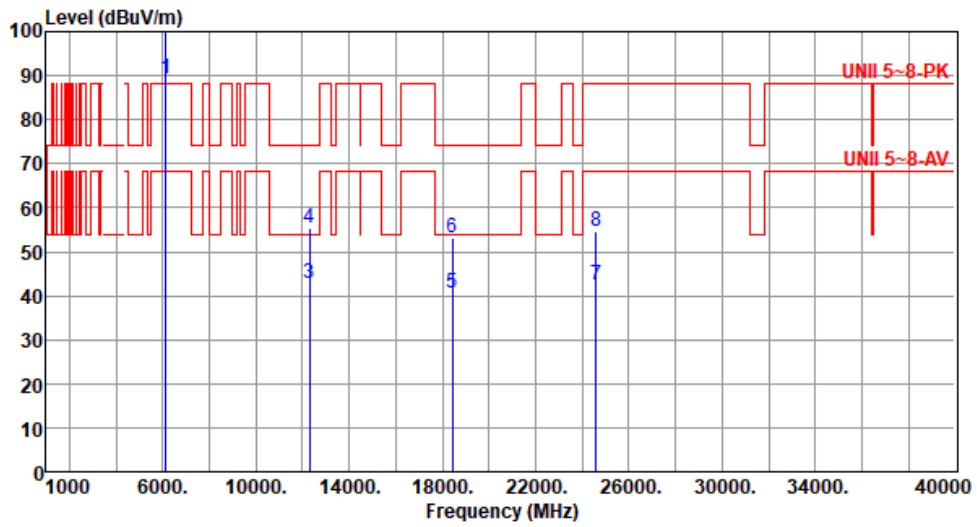

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6145.00	89.45			87.63	1.82	Average	198	11
2 *	6145.00	103.76			101.94	1.82	Peak	198	11
3	12290.00	42.77	54.00	-11.23	35.25	7.52	Average	100	18
4	12290.00	55.31	74.00	-18.69	47.79	7.52	Peak	100	18
5	18435.00	40.54	54.00	-13.46	39.01	1.53	Average	100	39
6	18435.00	53.29	74.00	-20.71	51.76	1.53	Peak	100	39
7	24580.00	42.31	68.20	-25.89	34.08	8.23	Average	100	47
8	24580.00	54.78	88.20	-33.42	46.55	8.23	Peak	100	47

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency





Modulation	be EHT80	Test Freq. (MHz)	6385
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

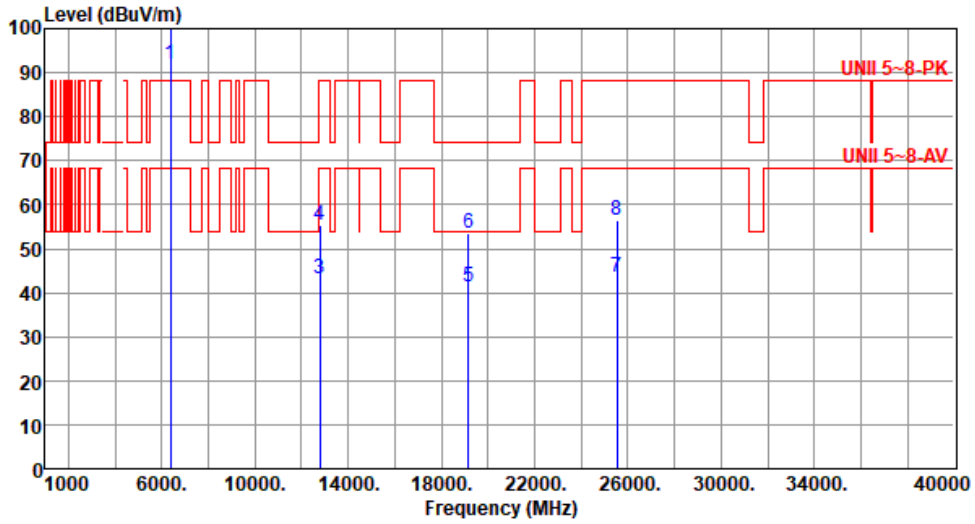

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6385.00	91.70			88.71	2.99	Average	158	356
2 *	6385.00	105.77			102.78	2.99	Peak	158	356
3	12770.00	43.18	68.20	-25.02	35.74	7.44	Average	100	36
4	12770.00	55.29	88.20	-32.91	47.85	7.44	Peak	100	36
5	19155.00	41.26	54.00	-12.74	39.47	1.79	Average	100	19
6	19155.00	53.54	74.00	-20.46	51.75	1.79	Peak	100	19
7	25540.00	43.46	68.20	-24.74	35.27	8.19	Average	100	61
8	25540.00	56.38	88.20	-31.82	48.19	8.19	Peak	100	61

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6385
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

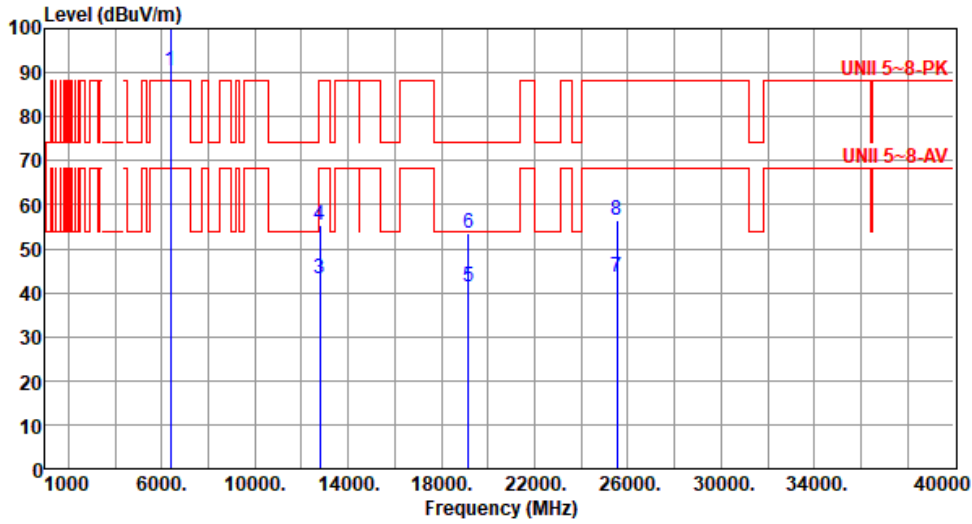

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6385.00	90.42			87.43	2.99	Average	189	7
2 *	6385.00	104.48			101.49	2.99	Peak	189	7
3	12770.00	43.24	68.20	-24.96	35.80	7.44	Average	100	51
4	12770.00	55.35	88.20	-32.85	47.91	7.44	Peak	100	51
5	19155.00	41.18	54.00	-12.82	39.39	1.79	Average	100	21
6	19155.00	53.46	74.00	-20.54	51.67	1.79	Peak	100	21
7	25540.00	43.38	68.20	-24.82	35.19	8.19	Average	100	44
8	25540.00	56.32	88.20	-31.88	48.13	8.19	Peak	100	44

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6465
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

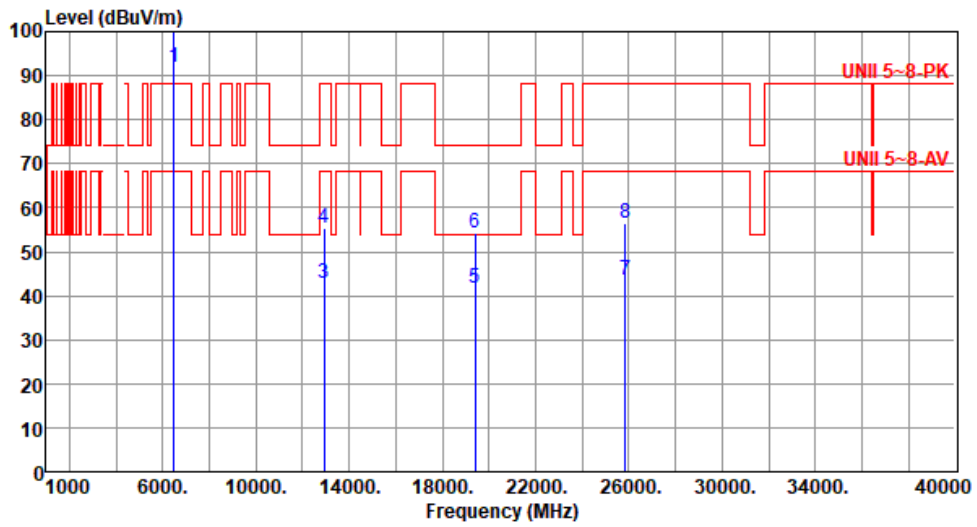

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6465.00	91.98			88.64	3.34	Average	169	355
2 *	6465.00	105.76			102.42	3.34	Peak	169	355
3	12930.00	42.81	68.20	-25.39	35.25	7.56	Average	100	29
4	12930.00	55.24	88.20	-32.96	47.68	7.56	Peak	100	29
5	19395.00	41.62	54.00	-12.38	39.72	1.90	Average	100	35
6	19395.00	54.11	74.00	-19.89	52.21	1.90	Peak	100	35
7	25860.00	43.59	68.20	-24.61	35.43	8.16	Average	100	38
8	25860.00	56.36	88.20	-31.84	48.20	8.16	Peak	100	38

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6465
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

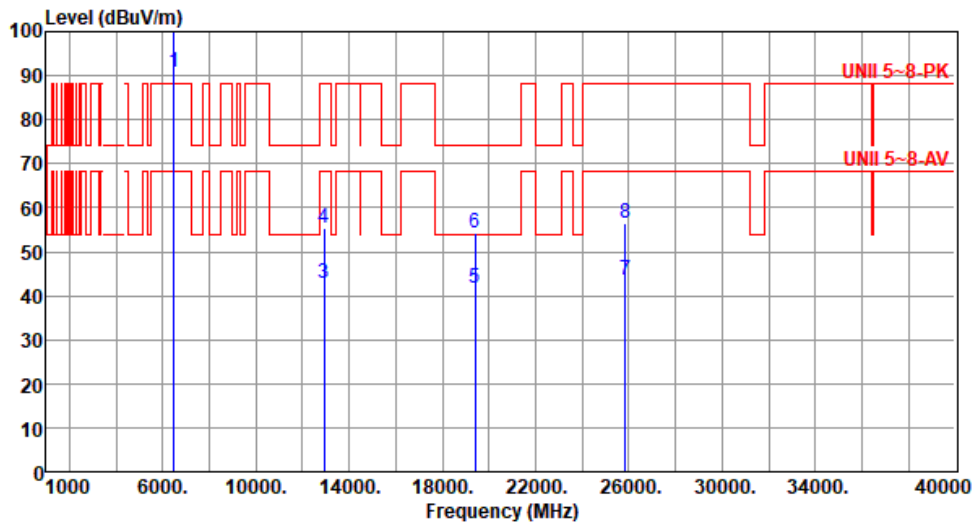

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6465.00	90.64			87.30	3.34	Average	191	357
2 *	6465.00	104.46			101.12	3.34	Peak	191	357
3	12930.00	42.74	68.20	-25.46	35.18	7.56	Average	100	35
4	12930.00	55.19	88.20	-33.01	47.63	7.56	Peak	100	35
5	19395.00	41.54	54.00	-12.46	39.64	1.90	Average	100	28
6	19395.00	54.06	74.00	-19.94	52.16	1.90	Peak	100	28
7	25860.00	43.52	68.20	-24.68	35.36	8.16	Average	100	45
8	25860.00	56.28	88.20	-31.92	48.12	8.16	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6545
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

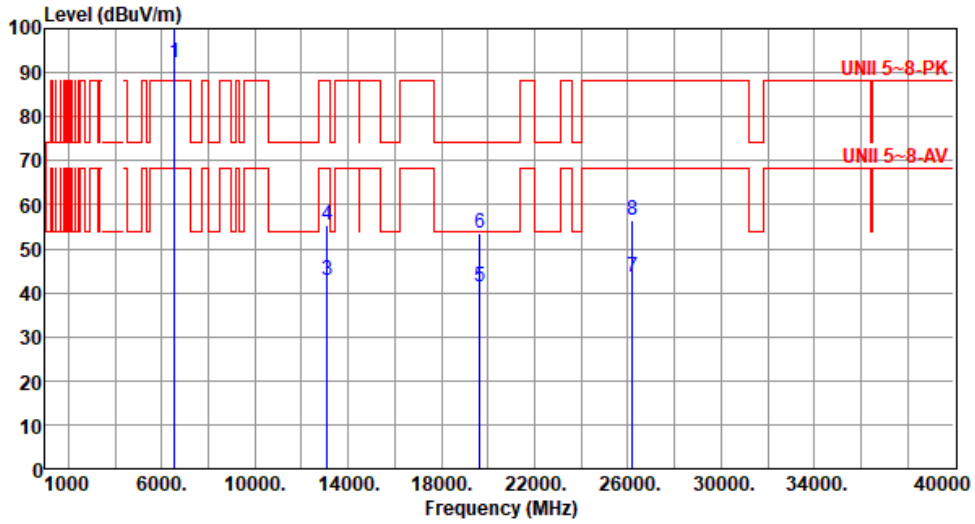

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6545.00	92.14			88.40	3.74	Average	164	4
2 *	6545.00	106.04			102.30	3.74	Peak	164	4
3	13090.00	42.98	68.20	-25.22	35.77	7.21	Average	100	33
4	13090.00	55.41	88.20	-32.79	48.20	7.21	Peak	100	33
5	19635.00	41.34	54.00	-12.66	39.29	2.05	Average	100	25
6	19635.00	53.65	74.00	-20.35	51.60	2.05	Peak	100	25
7	26180.00	43.41	68.20	-24.79	35.04	8.37	Average	100	22
8	26180.00	56.35	88.20	-31.85	47.98	8.37	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6545
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

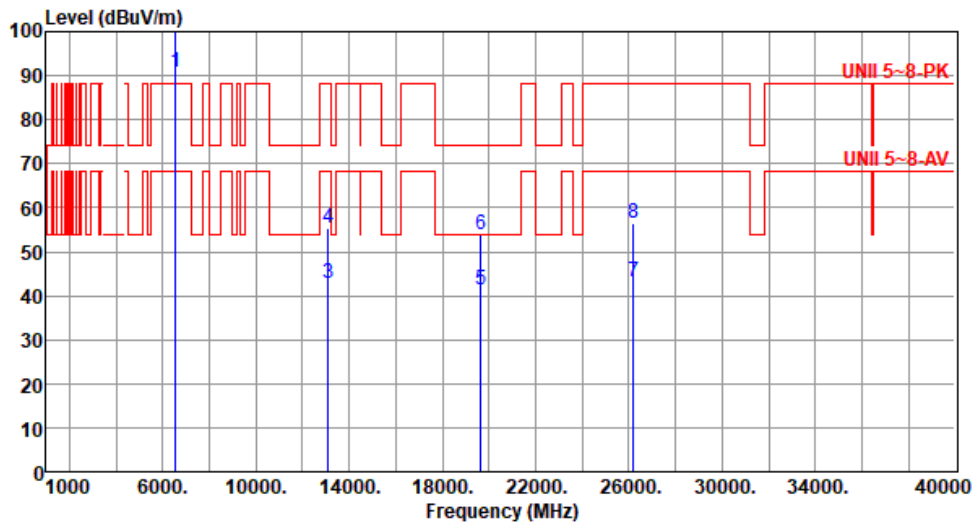

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6545.00	90.76			87.02	3.74	Average	189	355
2 *	6545.00	104.74			101.00	3.74	Peak	189	355
3	13090.00	42.85	68.20	-25.35	35.64	7.21	Average	100	29
4	13090.00	55.36	88.20	-32.84	48.15	7.21	Peak	100	29
5	19635.00	41.42	54.00	-12.58	39.37	2.05	Average	100	39
6	19635.00	53.81	74.00	-20.19	51.76	2.05	Peak	100	39
7	26180.00	43.28	68.20	-24.92	34.91	8.37	Average	100	19
8	26180.00	56.29	88.20	-31.91	47.92	8.37	Peak	100	19

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6625
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

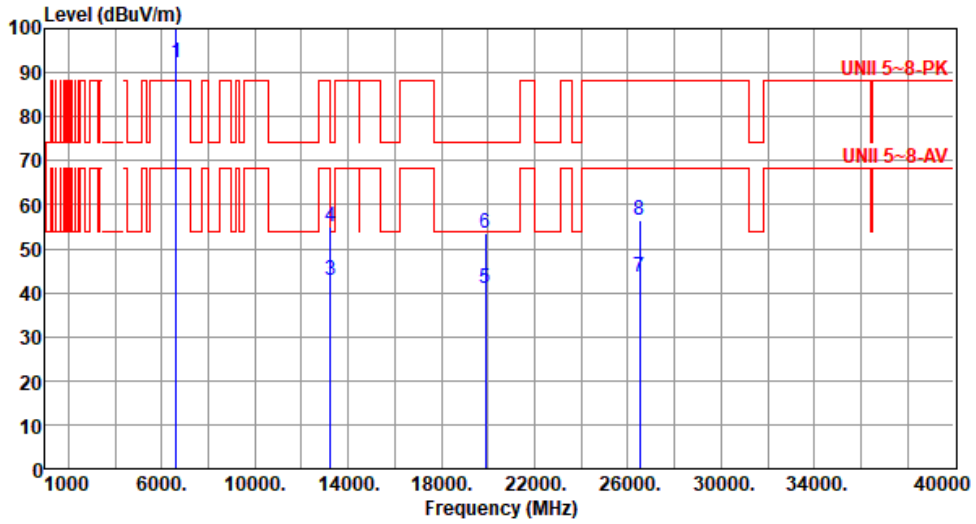

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	6625.00	92.33			88.58	3.75	Average	163	2
2 *	6625.00	106.79			103.04	3.75	Peak	163	2
3	13250.00	42.95	54.00	-11.05	35.76	7.19	Average	100	48
4	13250.00	55.16	74.00	-18.84	47.97	7.19	Peak	100	48
5	19875.00	41.12	54.00	-12.88	38.94	2.18	Average	100	26
6	19875.00	53.55	74.00	-20.45	51.37	2.18	Peak	100	26
7	26500.00	43.54	68.20	-24.66	34.56	8.98	Average	100	41
8	26500.00	56.38	88.20	-31.82	47.40	8.98	Peak	100	41

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6625
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

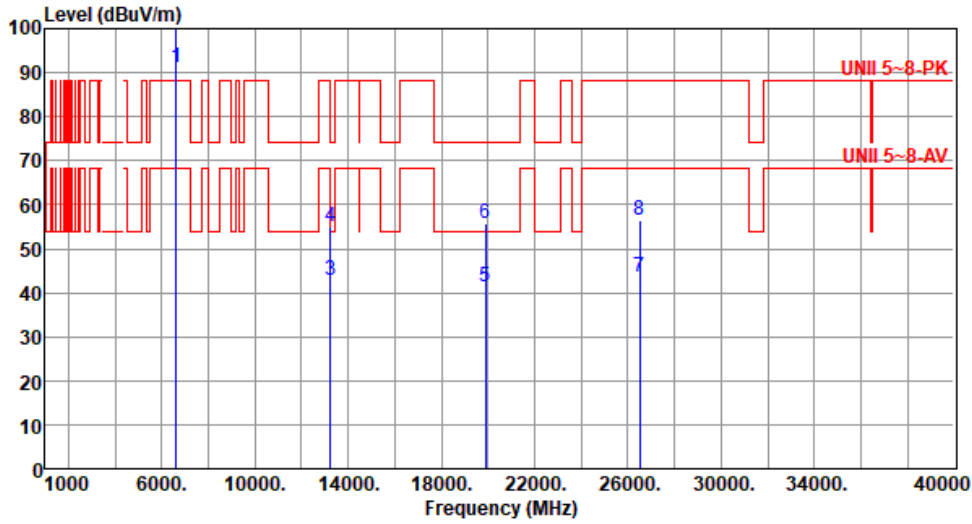

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6625.00	90.96			87.21	3.75	Average	195	3
2 *	6625.00	105.34			101.59	3.75	Peak	195	3
3	13250.00	42.86	54.00	-11.14	35.67	7.19	Average	100	25
4	13250.00	55.07	74.00	-18.93	47.88	7.19	Peak	100	25
5	19875.00	41.29	54.00	-12.71	39.11	2.18	Average	100	38
6	19875.00	55.62	74.00	-18.38	53.44	2.18	Peak	100	38
7	26500.00	43.42	68.20	-24.78	34.44	8.98	Average	100	18
8	26500.00	56.31	88.20	-31.89	47.33	8.98	Peak	100	18

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency





Modulation	be EHT80	Test Freq. (MHz)	6705
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

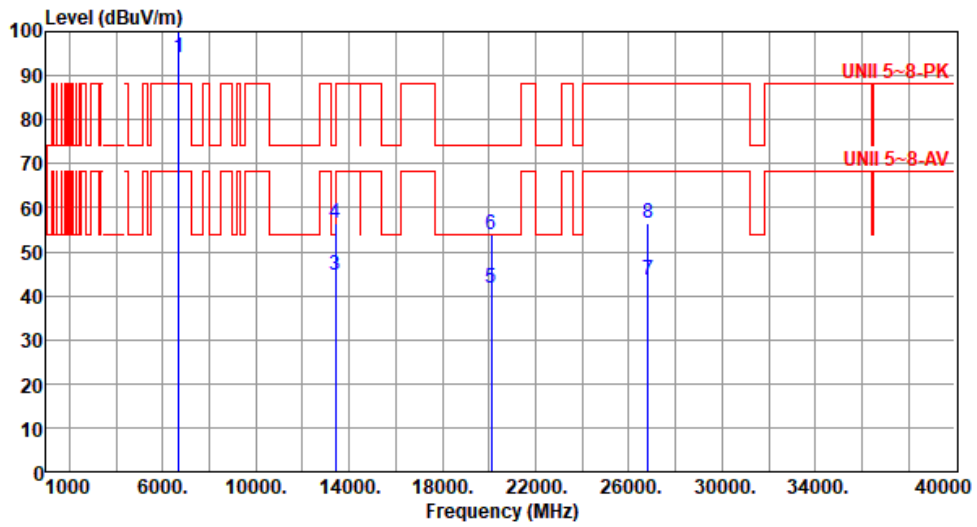

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6705.00	94.09			90.34	3.75	Average	165	1
2 *	6705.00	107.72			103.97	3.75	Peak	165	1
3	13410.00	44.52	68.20	-23.68	37.11	7.41	Average	100	38
4	13410.00	56.61	88.20	-31.59	49.20	7.41	Peak	100	38
5	20115.00	41.74	54.00	-12.26	39.35	2.39	Average	100	41
6	20115.00	53.98	74.00	-20.02	51.59	2.39	Peak	100	41
7	26820.00	43.49	68.20	-24.71	34.50	8.99	Average	100	62
8	26820.00	56.35	88.20	-31.85	47.36	8.99	Peak	100	62

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6705
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

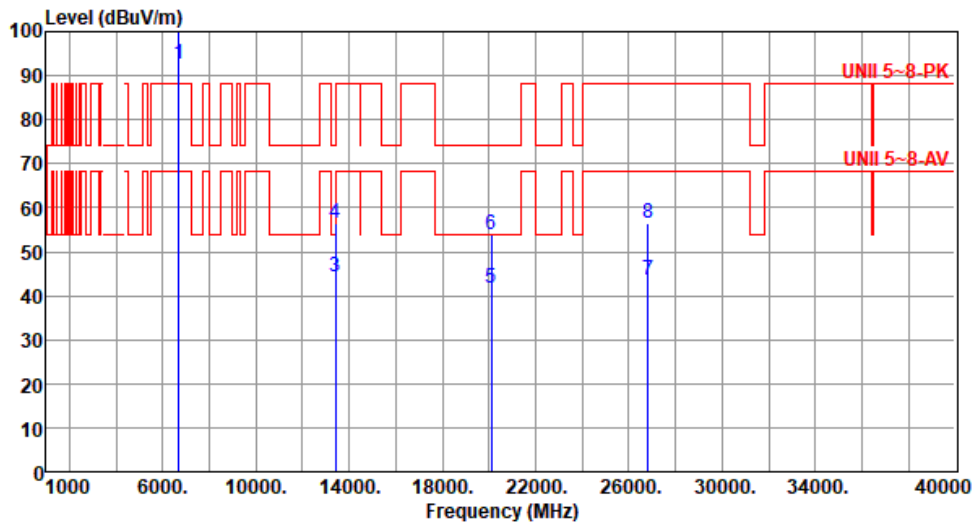


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6705.00	92.62			88.87	3.75	Average	187	358
2 *	6705.00	106.36			102.61	3.75	Peak	187	358
3	13410.00	44.42	68.20	-23.78	37.01	7.41	Average	100	51
4	13410.00	56.53	88.20	-31.67	49.12	7.41	Peak	100	51
5	20115.00	41.68	54.00	-12.32	39.29	2.39	Average	100	33
6	20115.00	53.82	74.00	-20.18	51.43	2.39	Peak	100	33
7	26820.00	43.55	68.20	-24.65	34.56	8.99	Average	100	41
8	26820.00	56.42	88.20	-31.78	47.43	8.99	Peak	100	41

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6785
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

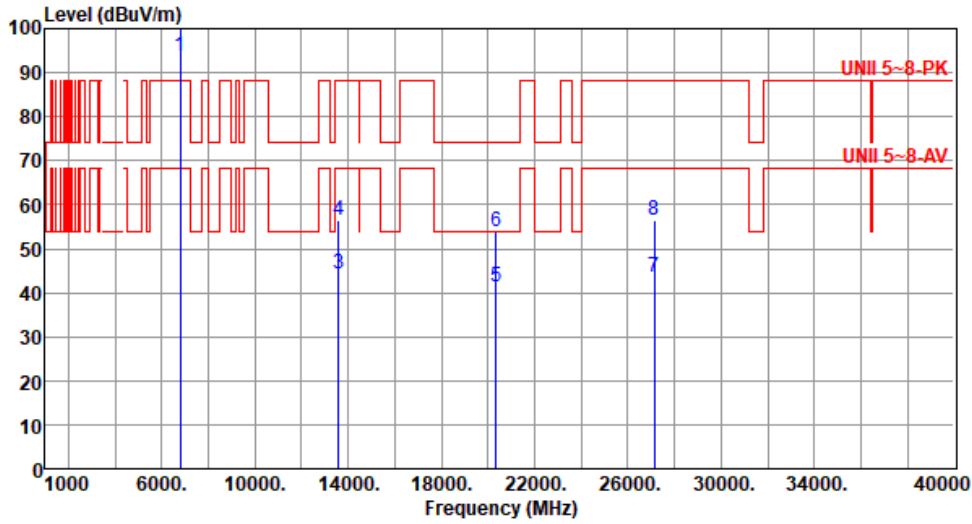

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6785.00	93.56			89.74	3.82	Average	152	2
2 *	6785.00	106.93			103.11	3.82	Peak	152	2
3	13570.00	44.35	68.20	-23.85	36.82	7.53	Average	100	23
4	13570.00	56.48	88.20	-31.72	48.95	7.53	Peak	100	23
5	20355.00	41.29	54.00	-12.71	38.54	2.75	Average	100	16
6	20355.00	53.71	74.00	-20.29	50.96	2.75	Peak	100	16
7	27140.00	43.46	68.20	-24.74	34.62	8.84	Average	100	51
8	27140.00	56.32	88.20	-31.88	47.48	8.84	Peak	100	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6785
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

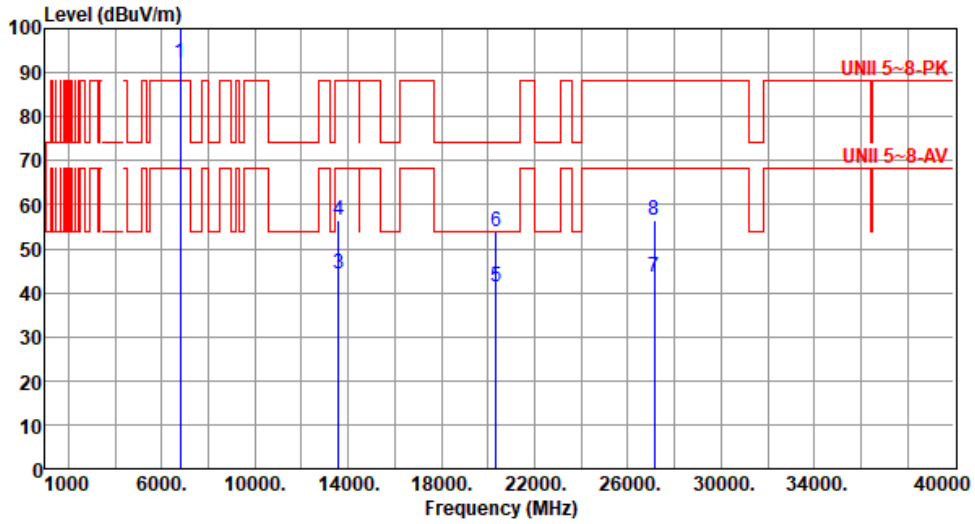

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m	dBuV/m		dBuV			cm	deg
1 *	6785.00	92.16			88.34	3.82	Average	191	7
2 *	6785.00	105.56			101.74	3.82	Peak	191	7
3	13570.00	44.29	68.20	-23.91	36.76	7.53	Average	100	14
4	13570.00	56.39	88.20	-31.81	48.86	7.53	Peak	100	14
5	20355.00	41.34	54.00	-12.66	38.59	2.75	Average	100	29
6	20355.00	53.82	74.00	-20.18	51.07	2.75	Peak	100	29
7	27140.00	43.51	68.20	-24.69	34.67	8.84	Average	100	45
8	27140.00	56.44	88.20	-31.76	47.60	8.84	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6865
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

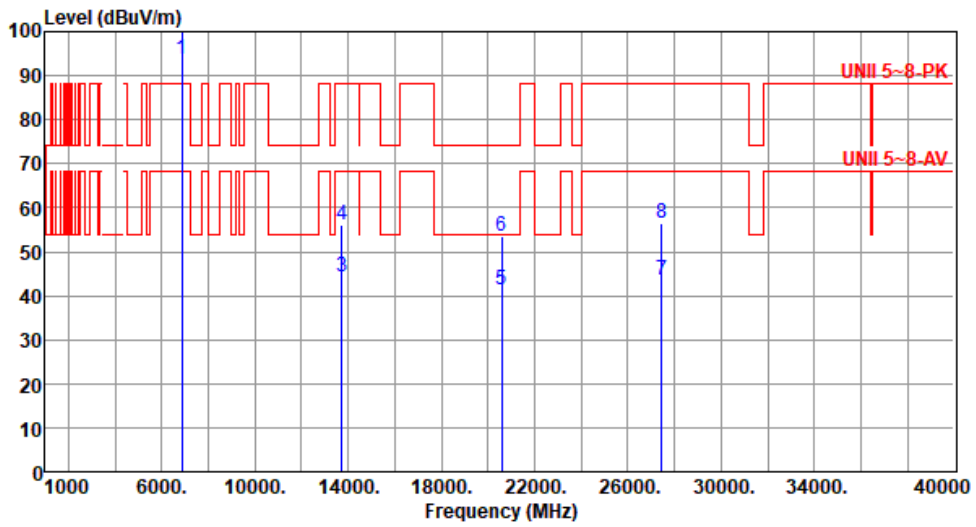

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6865.00	93.58			89.31	4.27	Average	154	359
2 *	6865.00	106.68			102.41	4.27	Peak	154	359
3	13730.00	44.14	68.20	-24.06	36.65	7.49	Average	100	29
4	13730.00	56.25	88.20	-31.95	48.76	7.49	Peak	100	29
5	20595.00	41.22	54.00	-12.78	38.10	3.12	Average	100	45
6	20595.00	53.46	74.00	-20.54	50.34	3.12	Peak	100	45
7	27460.00	43.64	68.20	-24.56	34.69	8.95	Average	100	41
8	27460.00	56.63	88.20	-31.57	47.68	8.95	Peak	100	41

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6865
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

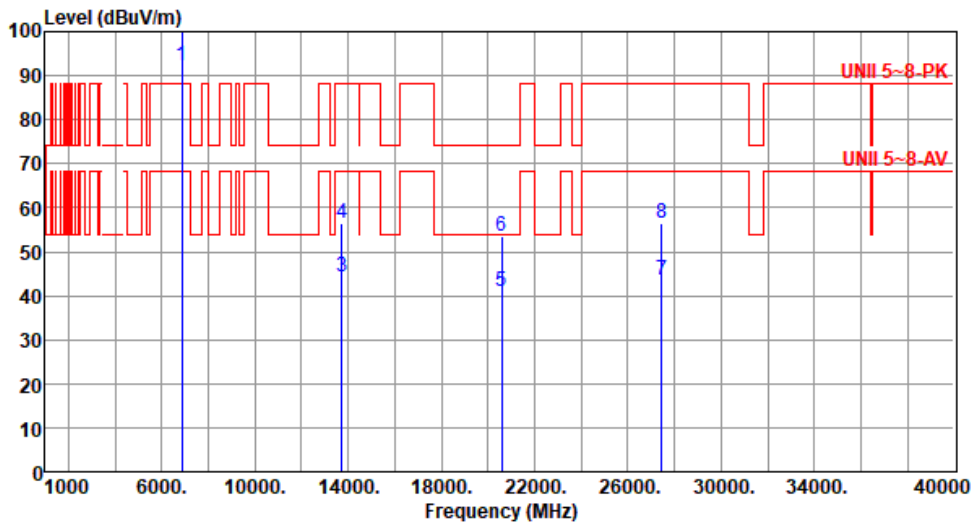

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	6865.00	92.08			87.81	4.27	Average	194	5
2 *	6865.00	105.18			100.91	4.27	Peak	194	5
3	13730.00	44.29	68.20	-23.91	36.80	7.49	Average	100	36
4	13730.00	56.31	88.20	-31.89	48.82	7.49	Peak	100	36
5	20595.00	41.14	54.00	-12.86	38.02	3.12	Average	100	26
6	20595.00	53.38	74.00	-20.62	50.26	3.12	Peak	100	26
7	27460.00	43.57	68.20	-24.63	34.62	8.95	Average	100	11
8	27460.00	56.58	88.20	-31.62	47.63	8.95	Peak	100	11

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6945
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

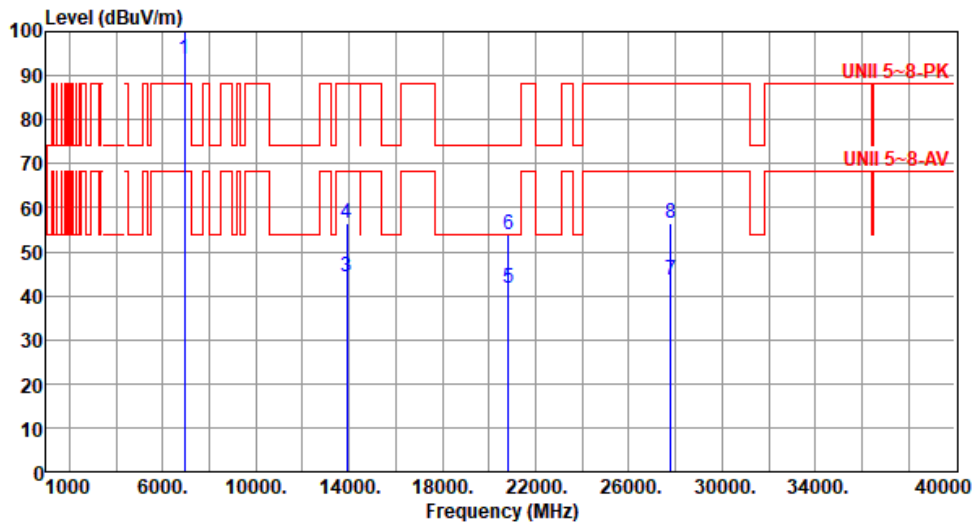

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6945.00	93.69			88.93	4.76	Average	170	359
2 *	6945.00	106.76			102.00	4.76	Peak	170	359
3	13890.00	44.29	68.20	-23.91	36.48	7.81	Average	100	26
4	13890.00	56.32	88.20	-31.88	48.51	7.81	Peak	100	26
5	20835.00	41.55	54.00	-12.45	38.08	3.47	Average	100	44
6	20835.00	53.72	74.00	-20.28	50.25	3.47	Peak	100	44
7	27780.00	43.61	68.20	-24.59	34.41	9.20	Average	100	36
8	27780.00	56.52	88.20	-31.68	47.32	9.20	Peak	100	36

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	6945
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

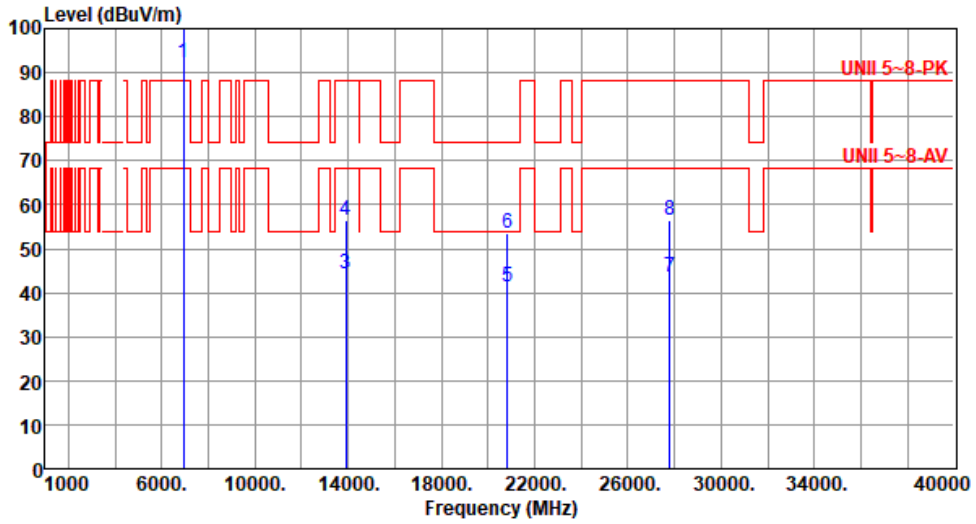

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6945.00	92.16			87.40	4.76	Average	194	359
2 *	6945.00	105.31			100.55	4.76	Peak	194	359
3	13890.00	44.45	68.20	-23.75	36.64	7.81	Average	100	14
4	13890.00	56.48	88.20	-31.72	48.67	7.81	Peak	100	14
5	20835.00	41.49	54.00	-12.51	38.02	3.47	Average	100	27
6	20835.00	53.65	74.00	-20.35	50.18	3.47	Peak	100	27
7	27780.00	43.55	68.20	-24.65	34.35	9.20	Average	100	42
8	27780.00	56.48	88.20	-31.72	47.28	9.20	Peak	100	42

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency





Modulation	be EHT80	Test Freq. (MHz)	7025
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

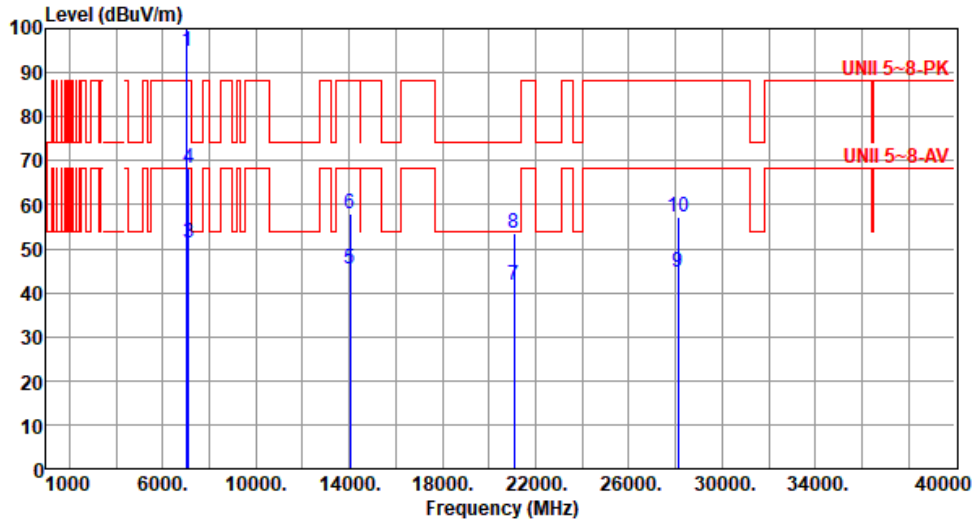


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	7025.00	94.97			89.75	5.22	Average	165	4
2 *	7025.00	108.54			103.32	5.22	Peak	165	4
3	7125.00	51.37	68.20	-16.83	45.68	5.69	Average	165	4
4	7125.00	68.36	88.20	-19.84	62.67	5.69	Peak	165	4
5	14050.00	45.42	68.20	-22.78	37.34	8.08	Average	100	29
6	14050.00	57.83	88.20	-30.37	49.75	8.08	Peak	100	29
7	21075.00	41.82	54.00	-12.18	37.92	3.90	Average	100	51
8	21075.00	53.69	74.00	-20.31	49.79	3.90	Peak	100	51
9	28100.00	44.49	68.20	-23.71	35.01	9.48	Average	100	48
10	28100.00	57.02	88.20	-31.18	47.54	9.48	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	7025
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):23      Humidity(%):66

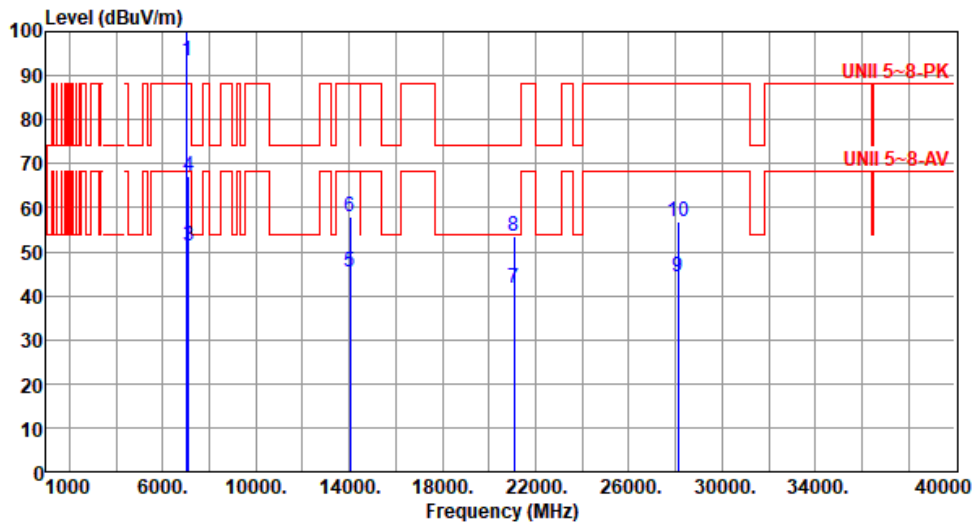

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	7025.00	93.52			88.30	5.22	Average	191	3
2 *	7025.00	105.08			99.86	5.22	Peak	191	3
3	7125.00	51.11	68.20	-17.09	45.42	5.69	Average	191	3
4	7125.00	67.02	88.20	-21.18	61.33	5.69	Peak	191	3
5	14050.00	45.51	68.20	-22.69	37.43	8.08	Average	100	34
6	14050.00	57.86	88.20	-30.34	49.78	8.08	Peak	100	34
7	21075.00	41.69	54.00	-12.31	37.79	3.90	Average	100	22
8	21075.00	53.58	74.00	-20.42	49.68	3.90	Peak	100	22
9	28100.00	44.32	68.20	-23.88	34.84	9.48	Average	100	19
10	28100.00	56.95	88.20	-31.25	47.47	9.48	Peak	100	19


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: "\*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT160

Modulation	be EHT160	Test Freq. (MHz)	6025
Polarization	Horizontal		

Test By :Akun Chung      Temperature(°C):25      Humidity(%):62

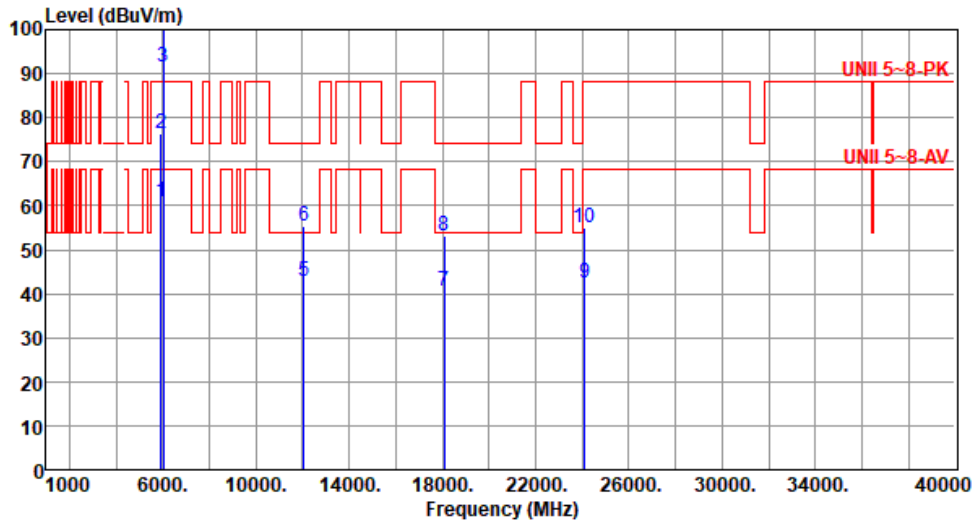

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	61.06	68.20	-7.14	59.55	1.51	Average	169	3
2	5925.00	76.46	88.20	-11.74	74.95	1.51	Peak	169	3
3 *	6025.00	91.55			90.03	1.52	Average	169	3
4 *	6025.00	104.76			103.24	1.52	Peak	169	3
5	12050.00	42.88	54.00	-11.12	35.04	7.84	Average	100	13
6	12050.00	55.36	74.00	-18.64	47.52	7.84	Peak	100	13
7	18075.00	40.49	54.00	-13.51	39.00	1.49	Average	100	28
8	18075.00	53.24	74.00	-20.76	51.75	1.49	Peak	100	28
9	24100.00	42.44	68.20	-25.76	34.86	7.58	Average	100	13
10	24100.00	54.81	88.20	-33.39	47.23	7.58	Peak	100	13

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6025
Polarization	Vertical		

Test By :Akun Chung      Temperature(°C):25      Humidity(%):62

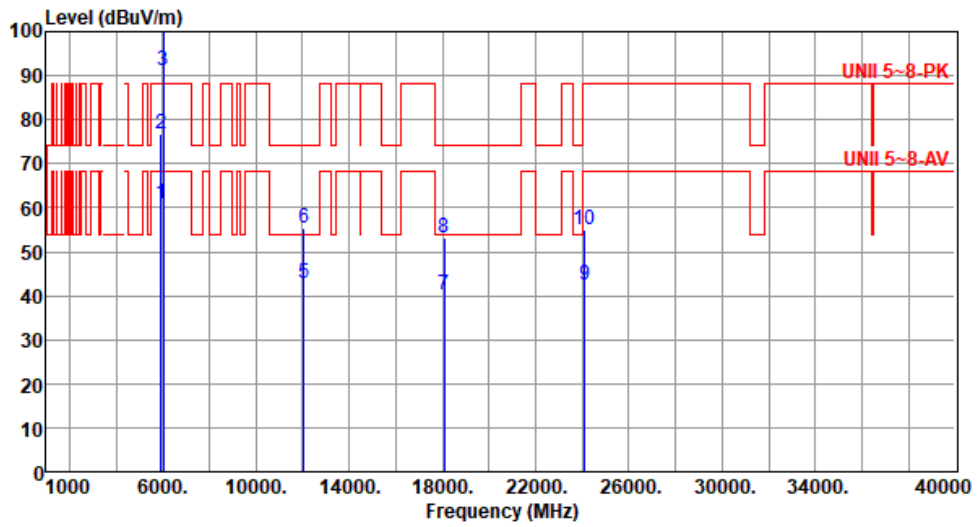


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	61.05	68.20	-7.15	59.54	1.51	Average	158	5
2	5925.00	76.59	88.20	-11.61	75.08	1.51	Peak	158	5
3 *	6025.00	91.01			89.49	1.52	Average	158	5
4 *	6025.00	105.06			103.54	1.52	Peak	158	5
5	12050.00	42.94	54.00	-11.06	35.10	7.84	Average	100	34
6	12050.00	55.46	74.00	-18.54	47.62	7.84	Peak	100	34
7	18075.00	40.39	54.00	-13.61	38.90	1.49	Average	100	18
8	18075.00	53.15	74.00	-20.85	51.66	1.49	Peak	100	18
9	24100.00	42.36	68.20	-25.84	34.78	7.58	Average	100	45
10	24100.00	54.81	88.20	-33.39	47.23	7.58	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: "\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6185
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

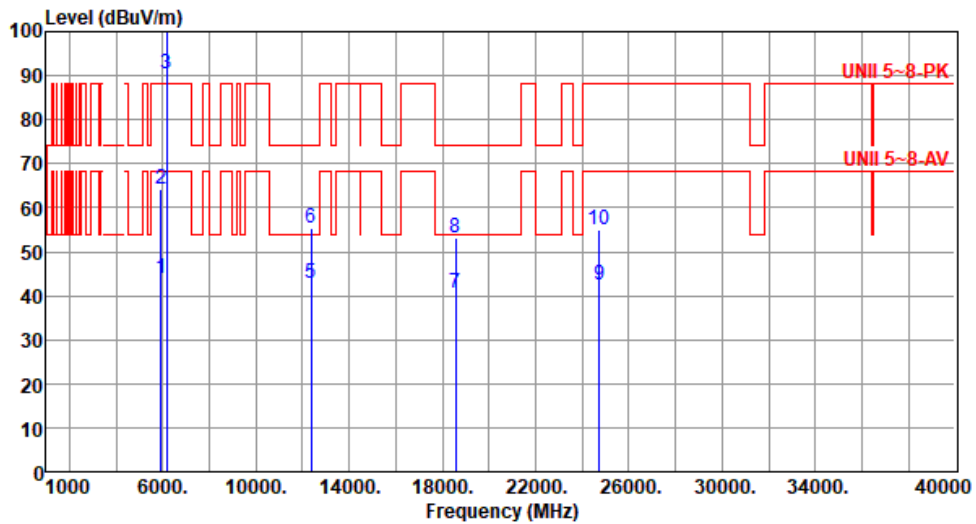

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	43.98	68.20	-24.22	42.47	1.51	Average	161	8
2	5925.00	64.17	88.20	-24.03	62.66	1.51	Peak	161	8
3 *	6185.00	90.39			88.40	1.99	Average	161	8
4 *	6185.00	103.83			101.84	1.99	Peak	161	8
5	12370.00	42.91	54.00	-11.09	35.71	7.20	Average	100	8
6	12370.00	55.44	74.00	-18.56	48.24	7.20	Peak	100	8
7	18555.00	40.52	54.00	-13.48	38.95	1.57	Average	100	34
8	18555.00	53.31	74.00	-20.69	51.74	1.57	Peak	100	34
9	24740.00	42.51	68.20	-25.69	34.11	8.40	Average	100	46
10	24740.00	54.93	88.20	-33.27	46.53	8.40	Peak	100	46

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6185
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

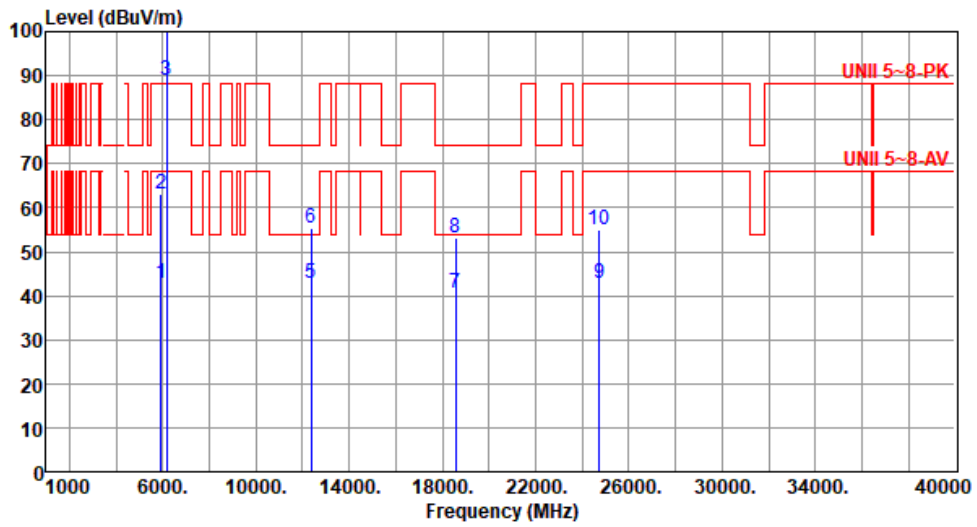

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	42.86	68.20	-25.34	41.35	1.51	Average	196	358
2	5925.00	62.95	88.20	-25.25	61.44	1.51	Peak	196	358
3 *	6185.00	88.95			86.96	1.99	Average	196	358
4 *	6185.00	102.34			100.35	1.99	Peak	196	358
5	12370.00	42.85	54.00	-11.15	35.65	7.20	Average	100	19
6	12370.00	55.31	74.00	-18.69	48.11	7.20	Peak	100	19
7	18555.00	40.41	54.00	-13.59	38.84	1.57	Average	100	46
8	18555.00	53.24	74.00	-20.76	51.67	1.57	Peak	100	46
9	24740.00	42.63	68.20	-25.57	34.23	8.40	Average	100	51
10	24740.00	55.04	88.20	-33.16	46.64	8.40	Peak	100	51

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6345
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

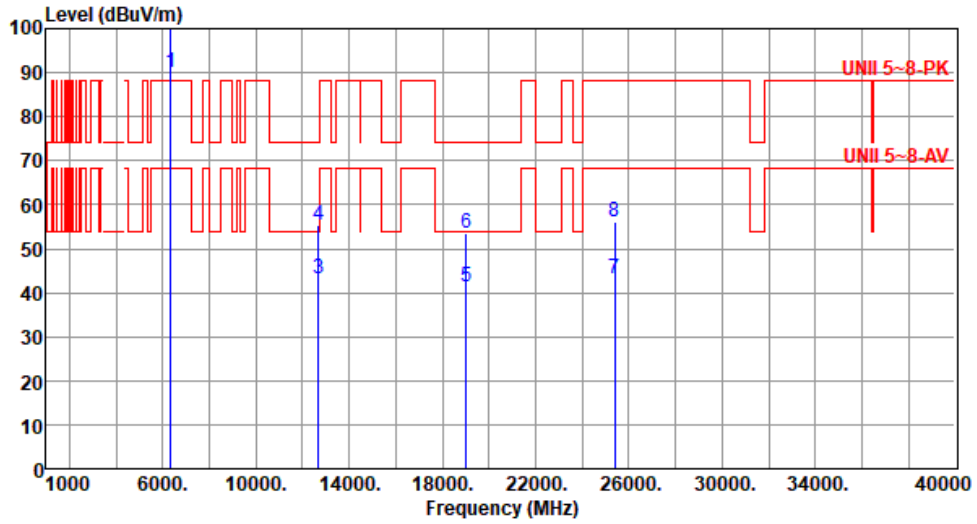

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6345.00	89.96			87.30	2.66	Average	148	6
2 *	6345.00	103.90			101.24	2.66	Peak	148	6
3	12690.00	43.24	54.00	-10.76	36.11	7.13	Average	100	28
4	12690.00	55.31	74.00	-18.69	48.18	7.13	Peak	100	28
5	19035.00	41.36	54.00	-12.64	39.56	1.80	Average	100	12
6	19035.00	53.62	74.00	-20.38	51.82	1.80	Peak	100	12
7	25380.00	43.32	68.20	-24.88	35.11	8.21	Average	100	55
8	25380.00	56.24	88.20	-31.96	48.03	8.21	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6345
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

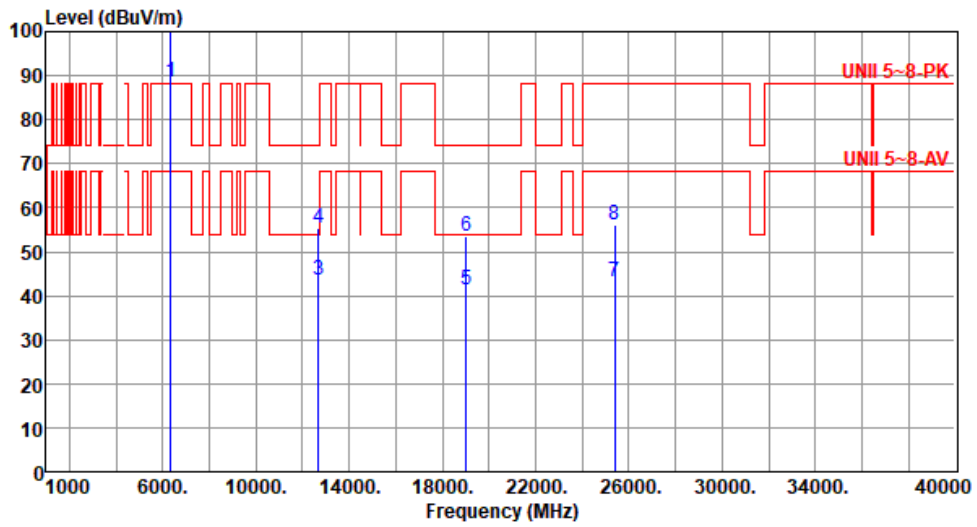

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6345.00	88.56			85.90	2.66	Average	191	5
2 *	6345.00	102.44			99.78	2.66	Peak	191	5
3	12690.00	43.39	54.00	-10.61	36.26	7.13	Average	100	41
4	12690.00	55.48	74.00	-18.52	48.35	7.13	Peak	100	41
5	19035.00	41.22	54.00	-12.78	39.42	1.80	Average	100	27
6	19035.00	53.58	74.00	-20.42	51.78	1.80	Peak	100	27
7	25380.00	43.17	68.20	-25.03	34.96	8.21	Average	100	16
8	25380.00	56.11	88.20	-32.09	47.90	8.21	Peak	100	16

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"\*" is Peak / Average value of fundamental frequency





Modulation	be EHT160	Test Freq. (MHz)	6505
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

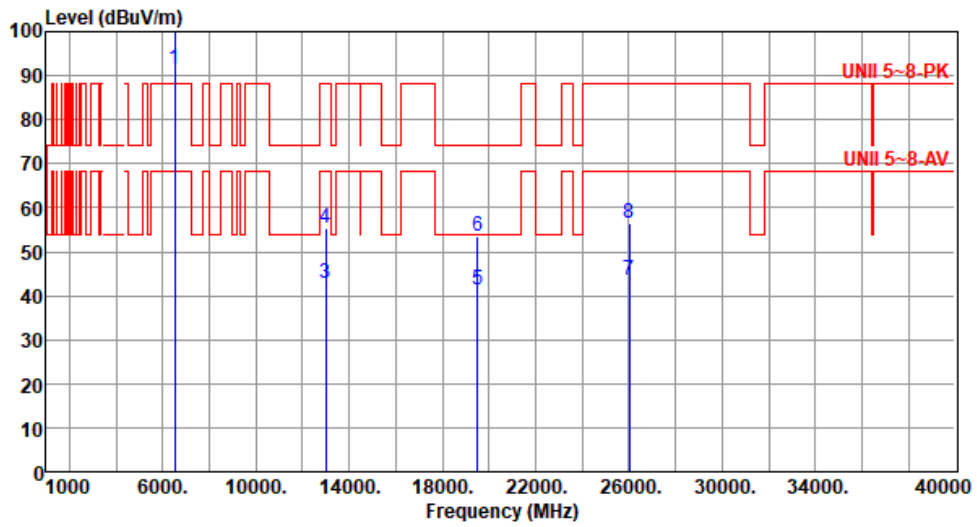

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6505.00	91.66			88.07	3.59	Average	163	6
2 *	6505.00	105.02			101.43	3.59	Peak	163	6
3	13010.00	42.85	68.20	-25.35	35.42	7.43	Average	100	41
4	13010.00	55.34	88.20	-32.86	47.91	7.43	Peak	100	41
5	19515.00	41.44	54.00	-12.56	39.45	1.99	Average	100	27
6	19515.00	53.68	74.00	-20.32	51.69	1.99	Peak	100	27
7	26020.00	43.52	68.20	-24.68	35.30	8.22	Average	100	16
8	26020.00	56.49	88.20	-31.71	48.27	8.22	Peak	100	16

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6505
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

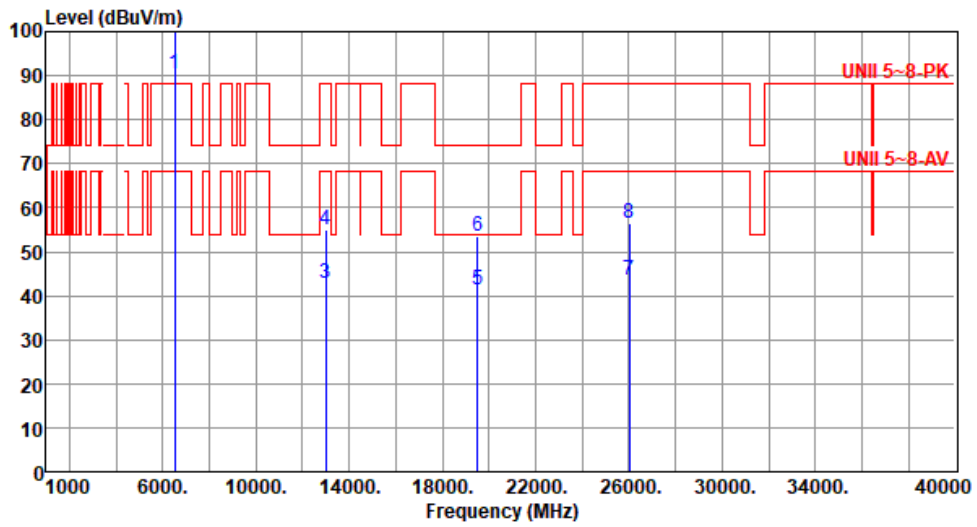

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6505.00	90.24			86.65	3.59	Average	189	354
2 *	6505.00	103.62			100.03	3.59	Peak	189	354
3	13010.00	42.71	68.20	-25.49	35.28	7.43	Average	100	19
4	13010.00	55.08	88.20	-33.12	47.65	7.43	Peak	100	19
5	19515.00	41.29	54.00	-12.71	39.30	1.99	Average	100	36
6	19515.00	53.52	74.00	-20.48	51.53	1.99	Peak	100	36
7	26020.00	43.44	68.20	-24.76	35.22	8.22	Average	100	29
8	26020.00	56.42	88.20	-31.78	48.20	8.22	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6665
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

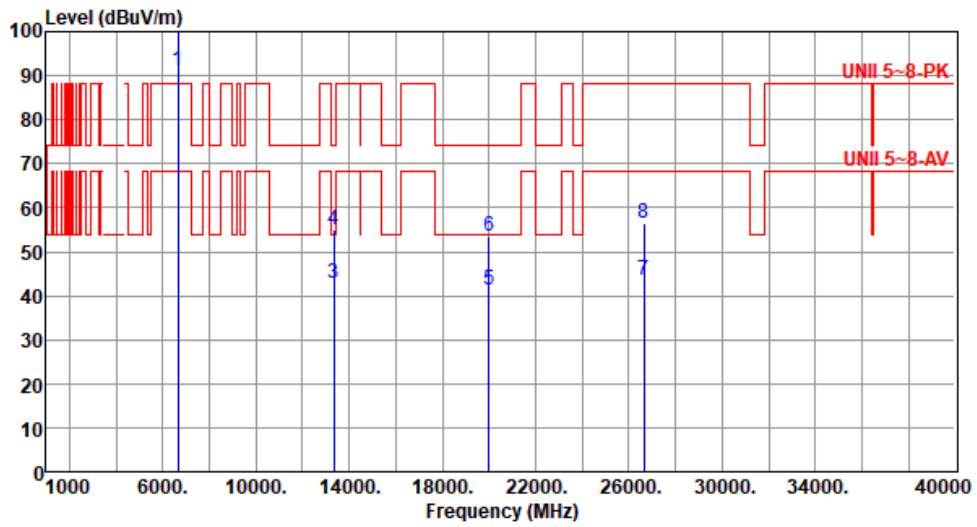

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6665.00	91.26			87.50	3.76	Average	156	14
2 *	6665.00	105.53			101.77	3.76	Peak	156	14
3	13330.00	42.88	54.00	-11.12	35.65	7.23	Average	100	47
4	13330.00	55.14	74.00	-18.86	47.91	7.23	Peak	100	47
5	19995.00	41.22	54.00	-12.78	38.95	2.27	Average	100	11
6	19995.00	53.49	74.00	-20.51	51.22	2.27	Peak	100	11
7	26660.00	43.62	68.20	-24.58	34.58	9.04	Average	100	38
8	26660.00	56.45	88.20	-31.75	47.41	9.04	Peak	100	38

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6665
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

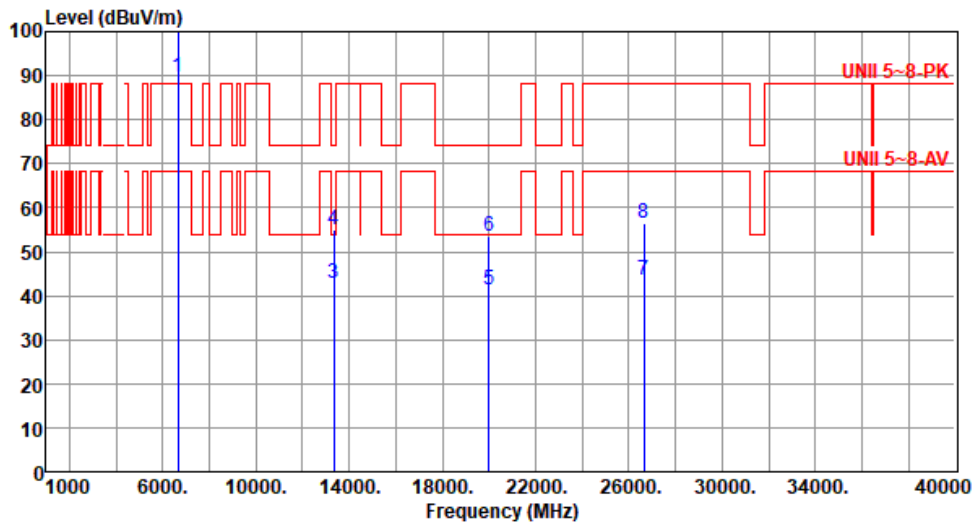

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6665.00	89.84			86.08	3.76	Average	199	4
2 *	6665.00	104.05			100.29	3.76	Peak	199	4
3	13330.00	42.75	54.00	-11.25	35.52	7.23	Average	100	39
4	13330.00	55.08	74.00	-18.92	47.85	7.23	Peak	100	39
5	19995.00	41.34	54.00	-12.66	39.07	2.27	Average	100	26
6	19995.00	53.56	74.00	-20.44	51.29	2.27	Peak	100	26
7	26660.00	43.58	68.20	-24.62	34.54	9.04	Average	100	29
8	26660.00	56.39	88.20	-31.81	47.35	9.04	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6825
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

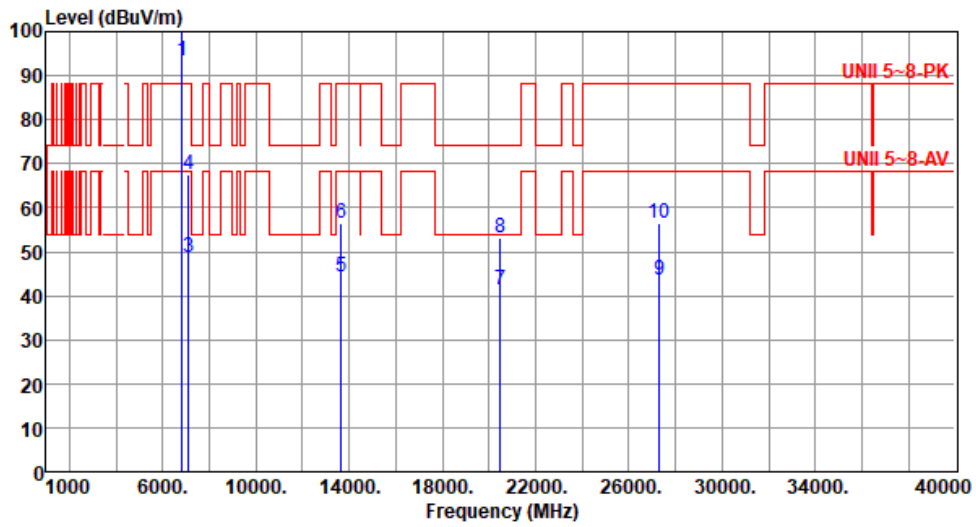

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6825.00	93.42			89.39	4.03	Average	168	1
2 *	6825.00	106.11			102.08	4.03	Peak	168	1
3	7125.00	48.60	68.20	-19.60	42.91	5.69	Average	168	1
4	7125.00	67.44	88.20	-20.76	61.75	5.69	Peak	168	1
5	13650.00	44.26	68.20	-23.94	36.78	7.48	Average	100	34
6	13650.00	56.31	88.20	-31.89	48.83	7.48	Peak	100	34
7	20475.00	41.16	54.00	-12.84	38.17	2.99	Average	100	47
8	20475.00	53.29	74.00	-20.71	50.30	2.99	Peak	100	47
9	27300.00	43.55	68.20	-24.65	34.63	8.92	Average	100	39
10	27300.00	56.52	88.20	-31.68	47.60	8.92	Peak	100	39

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6825
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

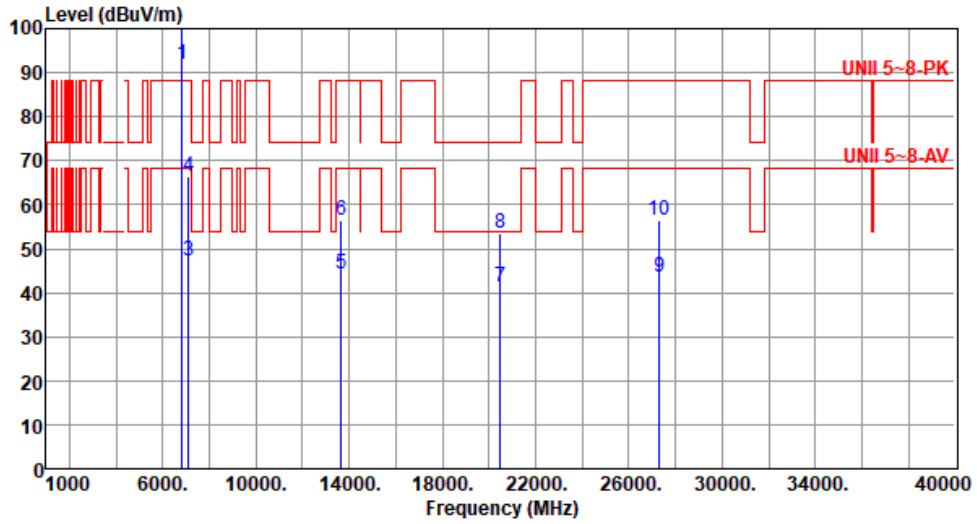


	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6825.00	92.06			88.03	4.03	Average	189	3
2 *	6825.00	104.64			100.61	4.03	Peak	189	3
3	7125.00	47.34	68.20	-20.86	41.65	5.69	Average	189	3
4	7125.00	66.26	88.20	-21.94	60.57	5.69	Peak	189	3
5	13650.00	44.35	68.20	-23.85	36.87	7.48	Average	100	39
6	13650.00	56.42	88.20	-31.78	48.94	7.48	Peak	100	39
7	20475.00	41.29	54.00	-12.71	38.30	2.99	Average	100	56
8	20475.00	53.42	74.00	-20.58	50.43	2.99	Peak	100	56
9	27300.00	43.48	68.20	-24.72	34.56	8.92	Average	100	11
10	27300.00	56.47	88.20	-31.73	47.55	8.92	Peak	100	11

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6985
Polarization	Horizontal		

Test By :Akun Chung      Temperature(°C):25      Humidity(%):62

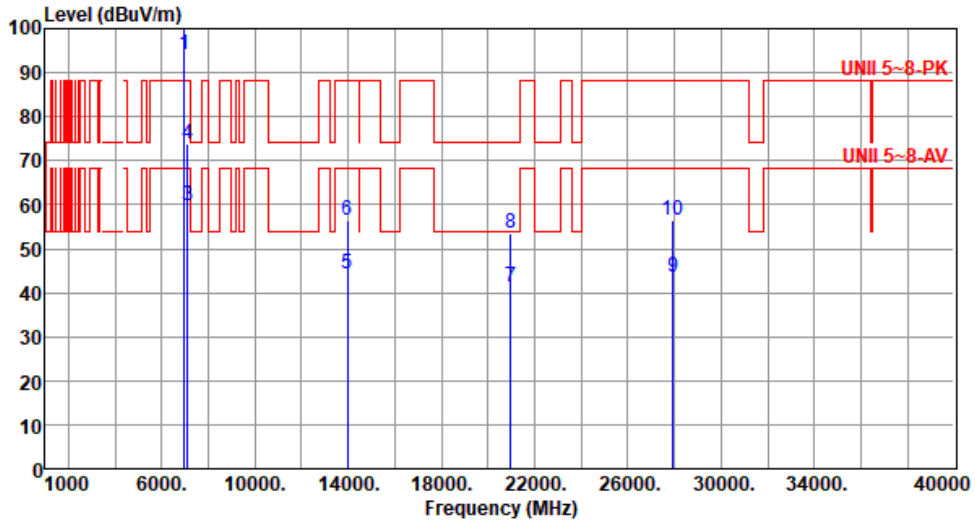

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6985.00	94.16			89.15	5.01	Average	164	358
2 *	6985.00	107.04			102.03	5.01	Peak	164	358
3	7125.00	59.86	68.20	-8.34	54.17	5.69	Average	164	358
4	7125.00	73.77	88.20	-14.43	68.08	5.69	Peak	164	358
5	13970.00	44.33	68.20	-23.87	36.43	7.90	Average	100	45
6	13970.00	56.41	88.20	-31.79	48.51	7.90	Peak	100	45
7	20955.00	41.26	54.00	-12.74	37.53	3.73	Average	100	18
8	20955.00	53.42	74.00	-20.58	49.69	3.73	Peak	100	18
9	27940.00	43.45	68.20	-24.75	34.10	9.35	Average	100	44
10	27940.00	56.49	88.20	-31.71	47.14	9.35	Peak	100	44

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	6985
Polarization	Vertical		

Test By :Akun Chung      Temperature(°C):25      Humidity(%):62

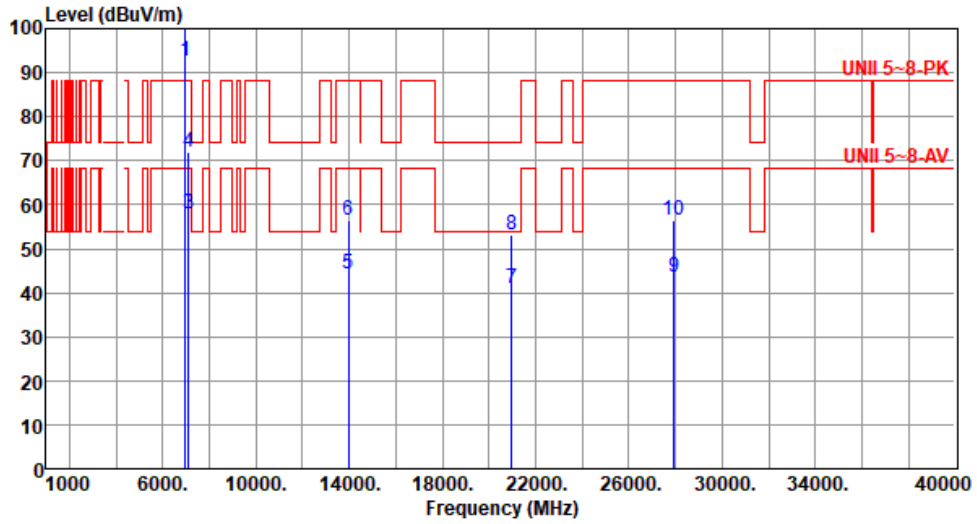

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6985.00	92.64			87.63	5.01	Average	184	11
2 *	6985.00	105.75			100.74	5.01	Peak	184	11
3	7125.00	57.78	68.20	-10.42	52.09	5.69	Average	184	11
4	7125.00	71.80	88.20	-16.40	66.11	5.69	Peak	184	11
5	13970.00	44.21	68.20	-23.99	36.31	7.90	Average	100	35
6	13970.00	56.29	88.20	-31.91	48.39	7.90	Peak	100	35
7	20955.00	41.11	54.00	-12.89	37.38	3.73	Average	100	56
8	20955.00	53.24	74.00	-20.76	49.51	3.73	Peak	100	56
9	27940.00	43.49	68.20	-24.71	34.14	9.35	Average	100	21
10	27940.00	56.44	88.20	-31.76	47.09	9.35	Peak	100	21

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency






Unwanted Emissions (Above 1GHz) for be EHT320

Modulation	be EHT320	Test Freq. (MHz)	6105
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

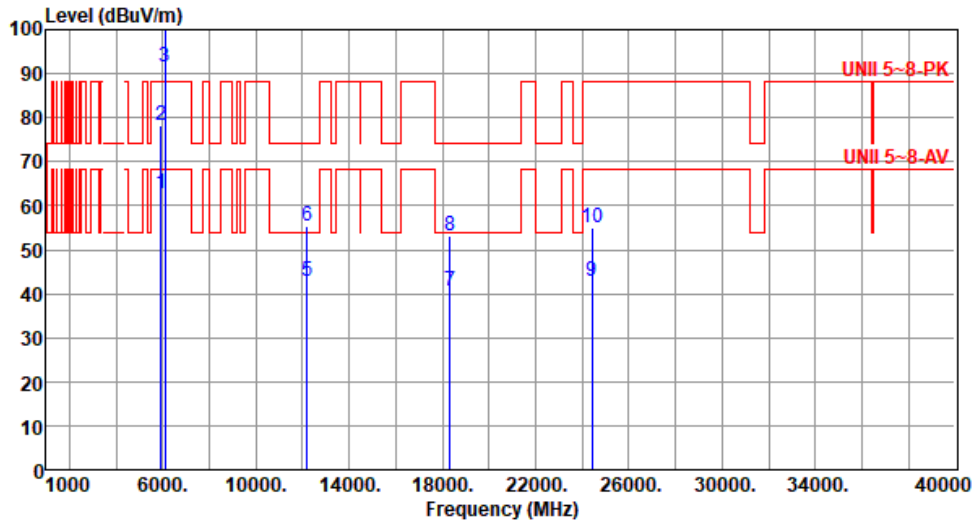

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	62.85	68.20	-5.35	61.34	1.51	Average	153	4
2	5925.00	78.24	88.20	-9.96	76.73	1.51	Peak	153	4
3 *	6105.00	91.54			89.90	1.64	Average	153	4
4 *	6105.00	104.81			103.17	1.64	Peak	153	4
5	12210.00	42.91	54.00	-11.09	35.28	7.63	Average	100	8
6	12210.00	55.43	74.00	-18.57	47.80	7.63	Peak	100	8
7	18315.00	40.51	54.00	-13.49	38.96	1.55	Average	100	14
8	18315.00	53.29	74.00	-20.71	51.74	1.55	Peak	100	14
9	24420.00	42.66	68.20	-25.54	34.63	8.03	Average	100	35
10	24420.00	54.95	88.20	-33.25	46.92	8.03	Peak	100	35

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT320	Test Freq. (MHz)	6105
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

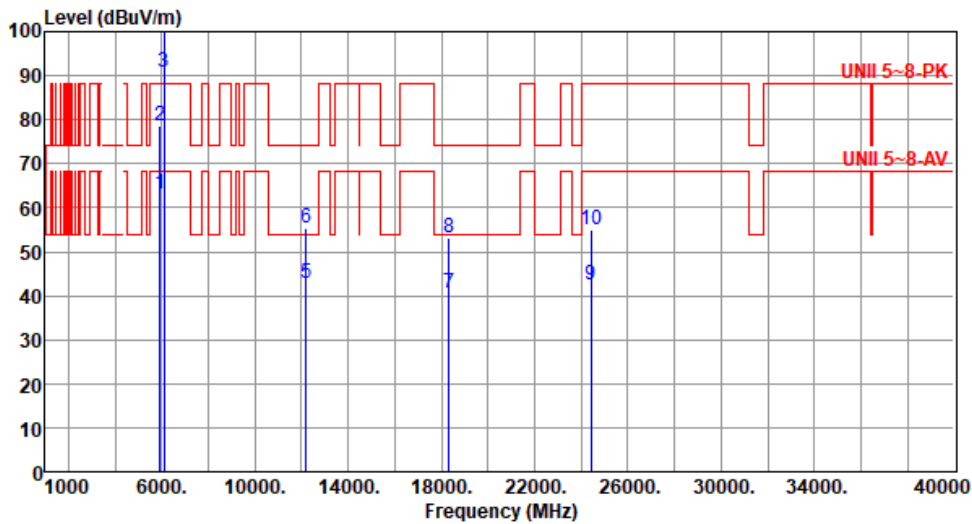

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	63.28	68.20	-4.92	61.77	1.51	Average	162	3
2	5925.00	78.53	88.20	-9.67	77.02	1.51	Peak	162	3
3 *	6105.00	90.95			89.31	1.64	Average	162	3
4 *	6105.00	103.35			101.71	1.64	Peak	162	3
5	12210.00	42.84	54.00	-11.16	35.21	7.63	Average	100	12
6	12210.00	55.36	74.00	-18.64	47.73	7.63	Peak	100	12
7	18315.00	40.42	54.00	-13.58	38.87	1.55	Average	100	26
8	18315.00	53.14	74.00	-20.86	51.59	1.55	Peak	100	26
9	24420.00	42.58	68.20	-25.62	34.55	8.03	Average	100	47
10	24420.00	54.86	88.20	-33.34	46.83	8.03	Peak	100	47

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT320	Test Freq. (MHz)	6265
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

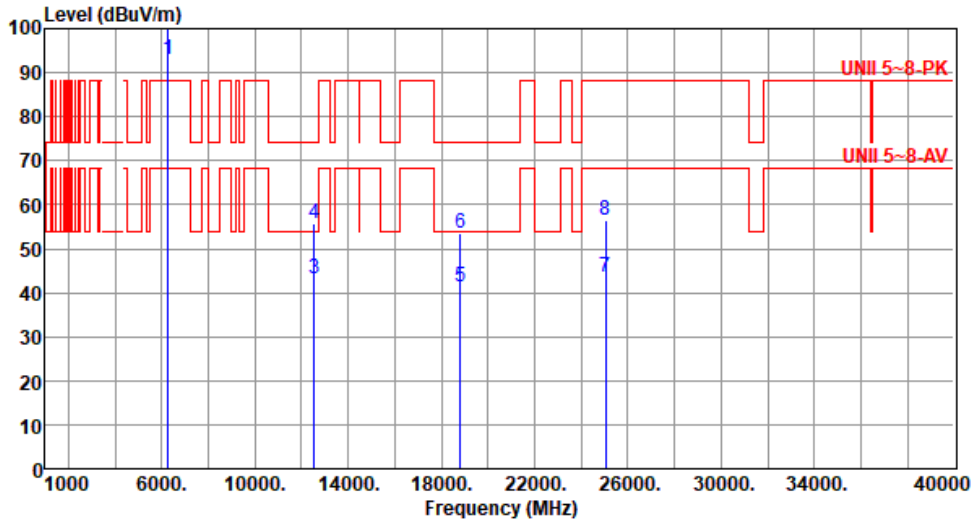

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6265.00	93.15			90.80	2.35	Average	161	8
2 *	6265.00	106.68			104.33	2.35	Peak	161	8
3	12530.00	43.21	54.00	-10.79	36.20	7.01	Average	100	36
4	12530.00	55.62	74.00	-18.38	48.61	7.01	Peak	100	36
5	18795.00	41.44	54.00	-12.56	39.70	1.74	Average	100	25
6	18795.00	53.68	74.00	-20.32	51.94	1.74	Peak	100	25
7	25060.00	43.41	68.20	-24.79	35.08	8.33	Average	100	35
8	25060.00	56.52	88.20	-31.68	48.19	8.33	Peak	100	35

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT320	Test Freq. (MHz)	6265
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

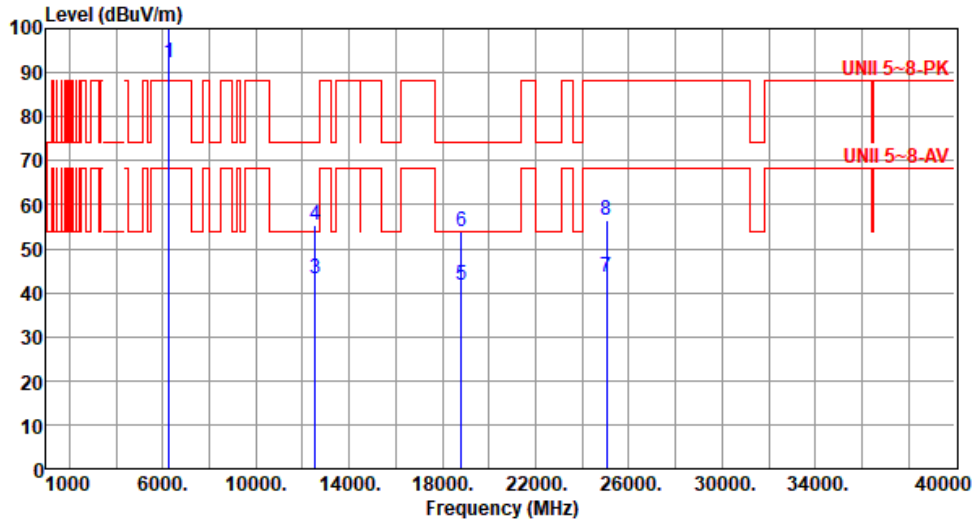

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6265.00	92.21			89.86	2.35	Average	181	349
2 *	6265.00	105.38			103.03	2.35	Peak	181	349
3	12530.00	43.06	54.00	-10.94	36.05	7.01	Average	100	41
4	12530.00	55.49	74.00	-18.51	48.48	7.01	Peak	100	41
5	18795.00	41.58	54.00	-12.42	39.84	1.74	Average	100	15
6	18795.00	53.86	74.00	-20.14	52.12	1.74	Peak	100	15
7	25060.00	43.38	68.20	-24.82	35.05	8.33	Average	100	48
8	25060.00	56.31	88.20	-31.89	47.98	8.33	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Horizontal		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

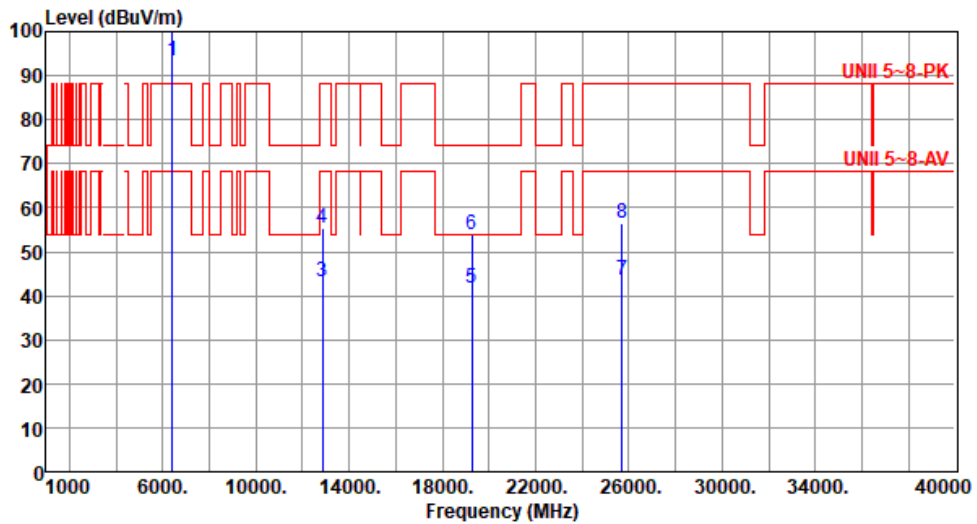

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	6425.00	93.48			90.29	3.19	Average	159	6
2 *	6425.00	106.96			103.77	3.19	Peak	159	6
3	12850.00	43.18	68.20	-25.02	35.59	7.59	Average	100	39
4	12850.00	55.52	88.20	-32.68	47.93	7.59	Peak	100	39
5	19275.00	41.62	54.00	-12.38	39.84	1.78	Average	100	25
6	19275.00	53.94	74.00	-20.06	52.16	1.78	Peak	100	25
7	25700.00	43.41	68.20	-24.79	35.25	8.16	Average	100	46
8	25700.00	56.35	88.20	-31.85	48.19	8.16	Peak	100	46

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Vertical		

Test By :Brad Wu      Temperature(°C):25      Humidity(%):62

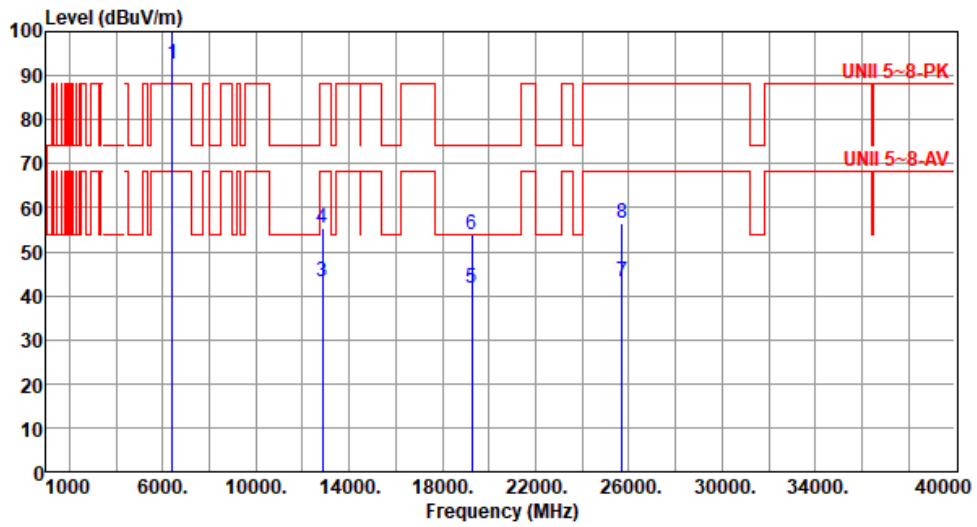

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	6425.00	92.56			89.37	3.19	Average	182	341
2 *	6425.00	105.64			102.45	3.19	Peak	182	341
3	12850.00	43.18	68.20	-25.02	35.59	7.59	Average	100	29
4	12850.00	55.53	88.20	-32.67	47.94	7.59	Peak	100	29
5	19275.00	41.66	54.00	-12.34	39.88	1.78	Average	100	34
6	19275.00	53.92	74.00	-20.08	52.14	1.78	Peak	100	34
7	25700.00	43.34	68.20	-24.86	35.18	8.16	Average	100	11
8	25700.00	56.29	88.20	-31.91	48.13	8.16	Peak	100	11

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor\* (dB/m)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency