




PoE mode

Unwanted Emissions (Below 1GHz)

Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):26 Humidity(%):65

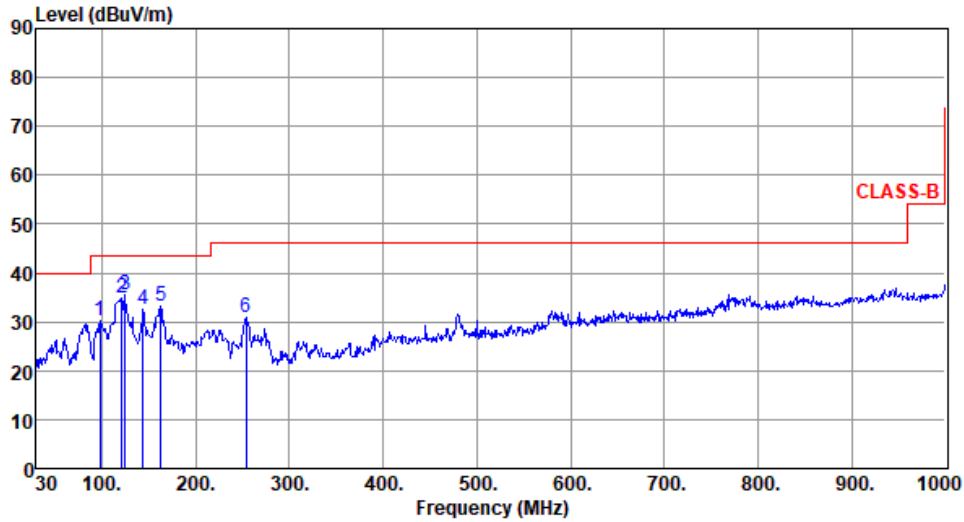

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	97.90	30.10	43.50	-13.40	43.61	-13.51	Peak	---	---
2	121.18	34.75	43.50	-8.75	45.79	-11.04	Peak	---	---
3	125.06	35.59	43.50	-7.91	46.16	-10.57	Peak	---	---
4	143.49	32.47	43.50	-11.03	41.16	-8.69	Peak	---	---
5	162.89	33.12	43.50	-10.38	41.75	-8.63	Peak	---	---
6	254.07	30.88	46.00	-15.12	40.50	-9.62	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):26 Humidity(%):65

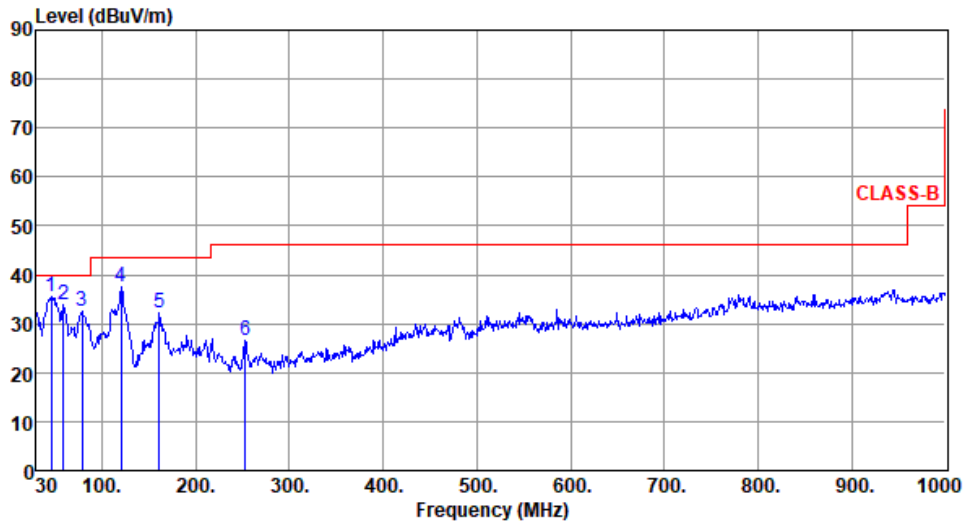

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	45.52	35.54	40.00	-4.46	43.46	-7.92	Peak	---	---
2	59.10	33.72	40.00	-6.28	42.29	-8.57	Peak	---	---
3	78.50	32.58	40.00	-7.42	45.47	-12.89	Peak	---	---
4	120.21	37.40	43.50	-6.10	48.33	-10.93	Peak	---	---
5	160.95	32.23	43.50	-11.27	40.85	-8.62	Peak	---	---
6	253.10	26.50	46.00	-19.50	36.15	-9.65	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):26 Humidity(%):65

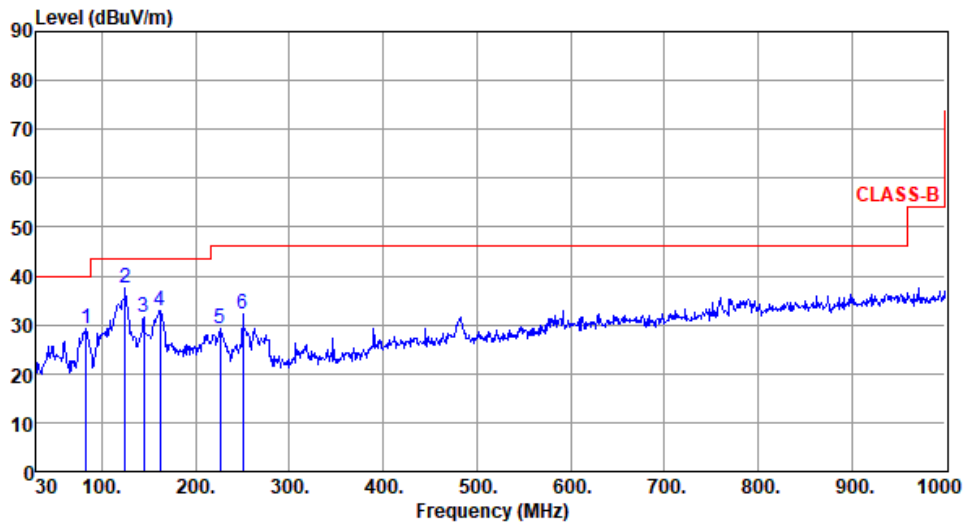

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	83.35	29.11	40.00	-10.89	43.23	-14.12	Peak	---	---
2	125.06	37.59	43.50	-5.91	48.16	-10.57	Peak	---	---
3	144.46	31.42	43.50	-12.08	40.10	-8.68	Peak	---	---
4	161.92	33.02	43.50	-10.48	41.73	-8.71	Peak	---	---
5	225.94	29.12	46.00	-16.88	41.12	-12.00	Peak	---	---
6	250.19	32.19	46.00	-13.81	41.91	-9.72	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):26 Humidity(%):65

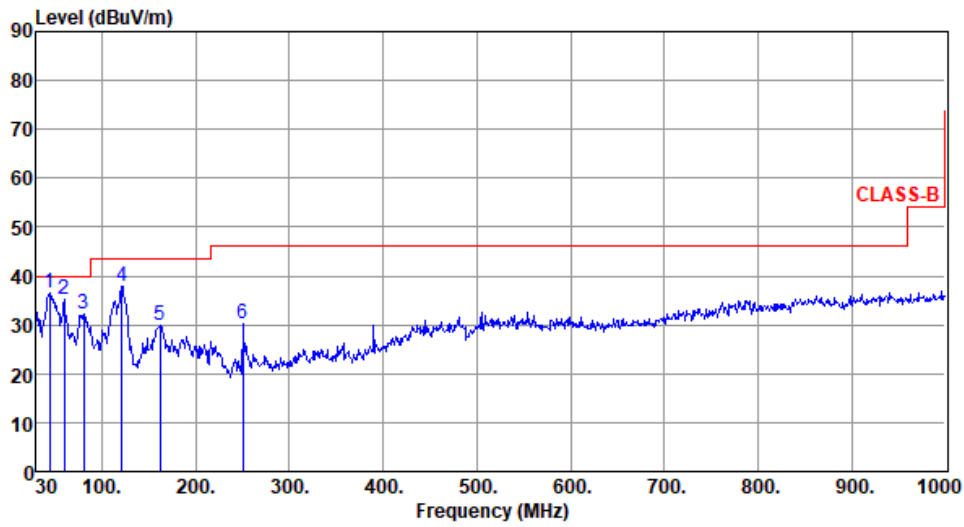

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	44.55	36.40	40.00	-3.60	44.51	-8.11	Peak	---	---
2	60.07	35.04	40.00	-4.96	43.88	-8.84	Peak	---	---
3	80.44	32.33	40.00	-7.67	45.70	-13.37	Peak	---	---
4	121.18	37.92	43.50	-5.58	48.96	-11.04	Peak	---	---
5	161.92	29.85	43.50	-13.65	38.56	-8.71	Peak	---	---
6	250.19	30.24	46.00	-15.76	39.96	-9.72	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.




Adapter mode

Unwanted Emissions (Below 1GHz)

Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):26 Humidity(%):65

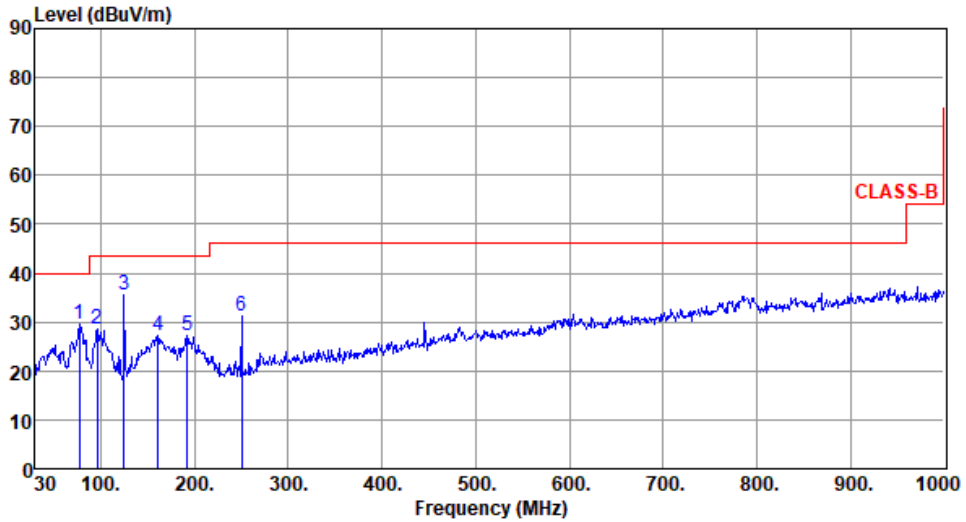

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	77.53	29.48	40.00	-10.52	41.97	-12.49	Peak	---	---
2	95.96	28.64	43.50	-14.86	42.23	-13.59	Peak	---	---
3	125.06	35.46	43.50	-8.04	46.03	-10.57	Peak	---	---
4	160.95	27.29	43.50	-16.21	35.91	-8.62	Peak	---	---
5	191.99	27.33	43.50	-16.17	38.74	-11.41	Peak	---	---
6	250.19	31.11	46.00	-14.89	40.83	-9.72	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):26 Humidity(%):65

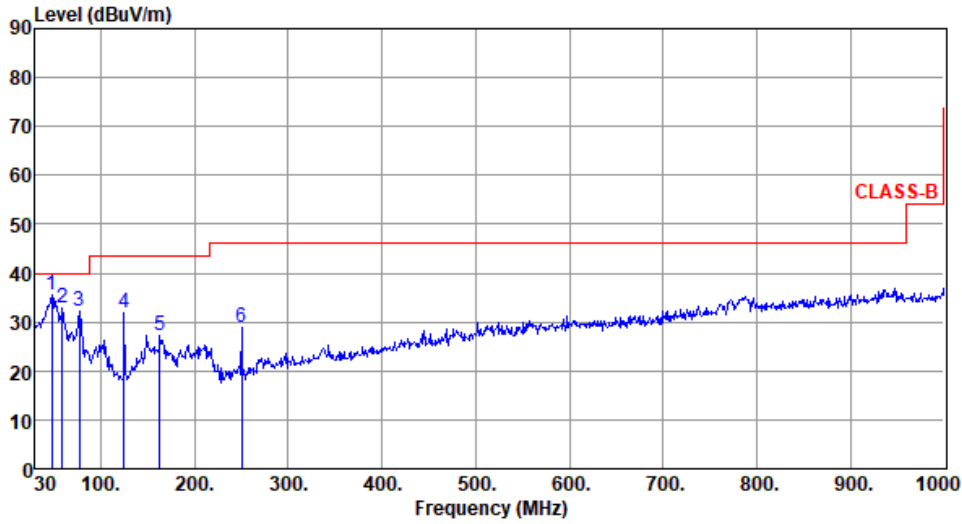

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	47.46	35.43	40.00	-4.57	43.40	-7.97	Peak	---	---
2	59.10	32.79	40.00	-7.21	41.36	-8.57	Peak	---	---
3	77.53	32.27	40.00	-7.73	44.76	-12.49	Peak	---	---
4	125.06	31.98	43.50	-11.52	42.55	-10.57	Peak	---	---
5	162.89	27.14	43.50	-16.36	35.77	-8.63	Peak	---	---
6	250.19	28.90	46.00	-17.10	38.62	-9.72	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):26 Humidity(%):65

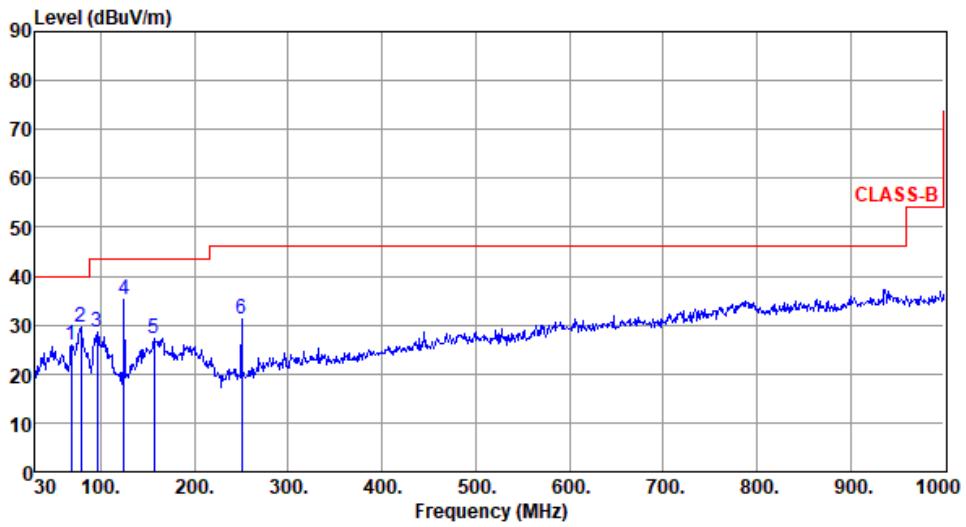

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	68.80	25.99	40.00	-14.01	36.41	-10.42	Peak	---	---
2	78.50	29.48	40.00	-10.52	42.37	-12.89	Peak	---	---
3	95.96	28.68	43.50	-14.82	42.27	-13.59	Peak	---	---
4	125.06	35.07	43.50	-8.43	45.64	-10.57	Peak	---	---
5	157.07	27.26	43.50	-16.24	35.80	-8.54	Peak	---	---
6	250.19	31.17	46.00	-14.83	40.89	-9.72	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):26 Humidity(%):65

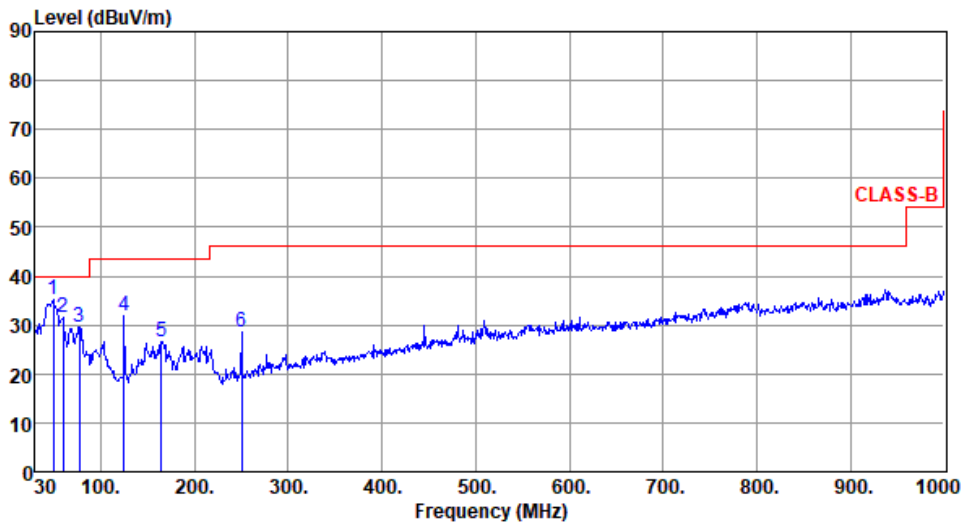

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	49.40	35.36	40.00	-4.64	43.42	-8.06	Peak	---	---
2	60.07	31.64	40.00	-8.36	40.48	-8.84	Peak	---	---
3	77.53	29.46	40.00	-10.54	41.95	-12.49	Peak	---	---
4	125.06	31.85	43.50	-11.65	42.42	-10.57	Peak	---	---
5	164.83	26.60	43.50	-16.90	35.39	-8.79	Peak	---	---
6	250.19	28.58	46.00	-17.42	38.30	-9.72	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



Unwanted Emissions (Above 1GHz) for 11a

Modulation	11a	Test Freq. (MHz)	5180
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):65

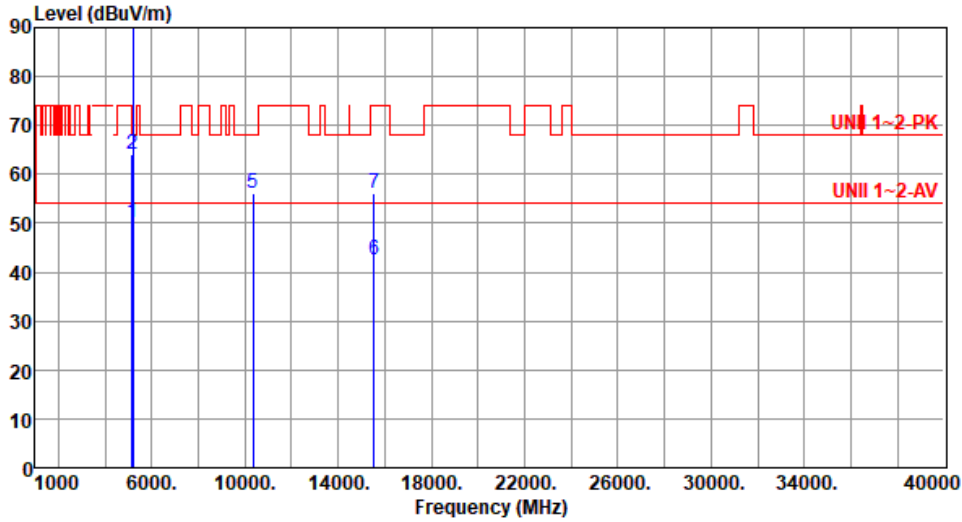

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.19	54.00	-3.81	49.33	0.86	Average	187	353
2	5150.00	64.02	74.00	-9.98	63.16	0.86	Peak	187	353
3 *	5180.00	110.98			110.24	0.74	Average	187	353
4 *	5180.00	121.23			120.49	0.74	Peak	187	353
5	10360.00	56.18	68.20	-12.02	47.66	8.52	Peak	100	149
6	15540.00	42.42	54.00	-11.58	36.37	6.05	Average	100	71
7	15540.00	56.24	74.00	-17.76	50.19	6.05	Peak	100	71

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5180
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):65

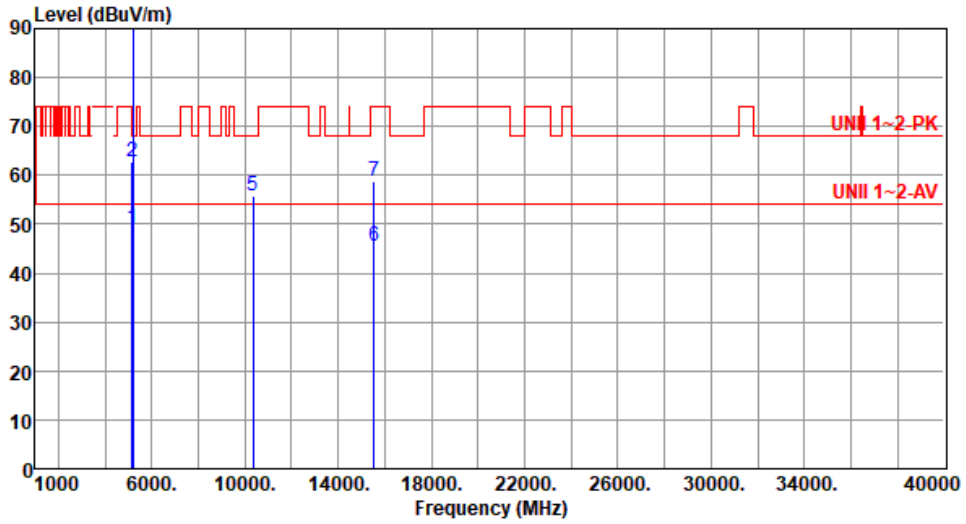

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	49.11	54.00	-4.89	48.25	0.86	Average	143	13
2	5150.00	62.74	74.00	-11.26	61.88	0.86	Peak	143	13
3 *	5180.00	108.67			107.93	0.74	Average	143	13
4 *	5180.00	119.14			118.40	0.74	Peak	143	13
5	10360.00	55.69	68.20	-12.51	47.17	8.52	Peak	100	124
6	15540.00	45.41	54.00	-8.59	39.36	6.05	Average	100	60
7	15540.00	58.63	74.00	-15.37	52.58	6.05	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5200
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):66

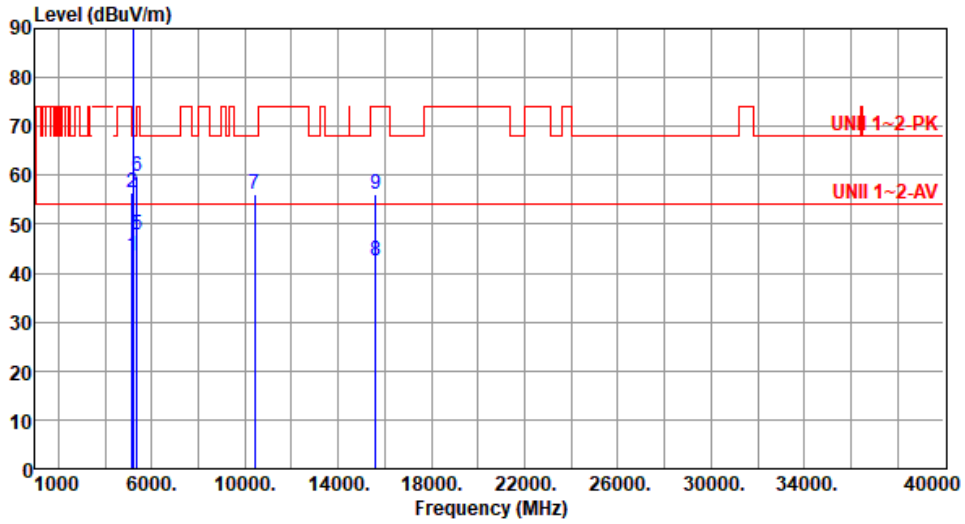

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.41	54.00	-10.59	42.55	0.86	Average	188	2
2	5150.00	56.58	74.00	-17.42	55.72	0.86	Peak	188	2
3 *	5200.00	109.59			108.93	0.66	Average	188	2
4 *	5200.00	120.68			120.02	0.66	Peak	188	2
5	5360.00	47.86	54.00	-6.14	47.64	0.22	Average	188	358
6	5360.00	59.62	74.00	-14.38	59.40	0.22	Peak	188	358
7	10400.00	55.99	68.20	-12.21	47.31	8.68	Peak	123	22
8	15600.00	42.39	54.00	-11.61	36.57	5.82	Average	100	24
9	15600.00	56.04	74.00	-17.96	50.22	5.82	Peak	100	24

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5200
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):66

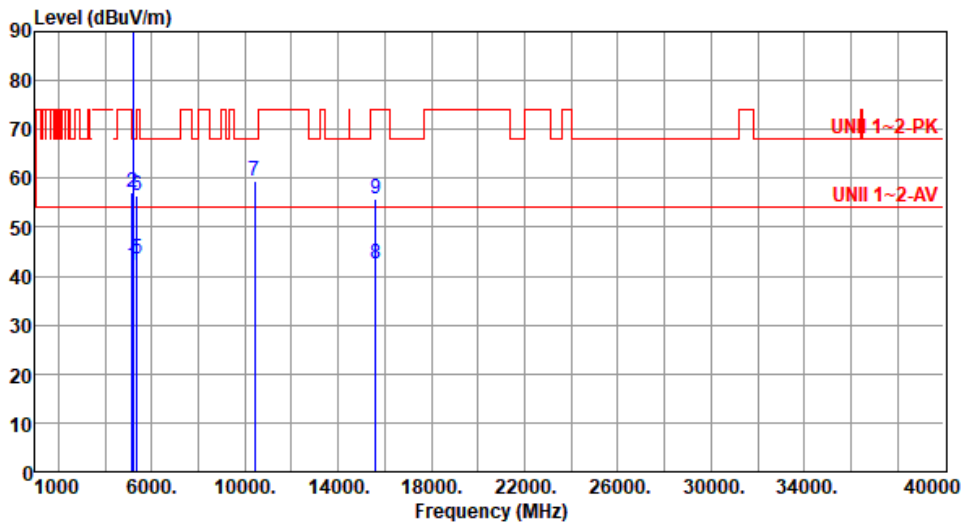

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.26	54.00	-11.74	41.40	0.86	Average	141	10
2	5150.00	57.00	74.00	-17.00	56.14	0.86	Peak	141	10
3 *	5200.00	107.50			106.84	0.66	Average	141	10
4 *	5200.00	117.28			116.62	0.66	Peak	141	10
5	5360.00	43.63	54.00	-10.37	43.41	0.22	Average	141	10
6	5360.00	56.30	74.00	-17.70	56.08	0.22	Peak	141	10
7	10400.00	59.41	68.20	-8.79	50.73	8.68	Peak	106	359
8	15600.00	42.35	54.00	-11.65	36.53	5.82	Average	100	29
9	15600.00	55.63	74.00	-18.37	49.81	5.82	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5240
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):65

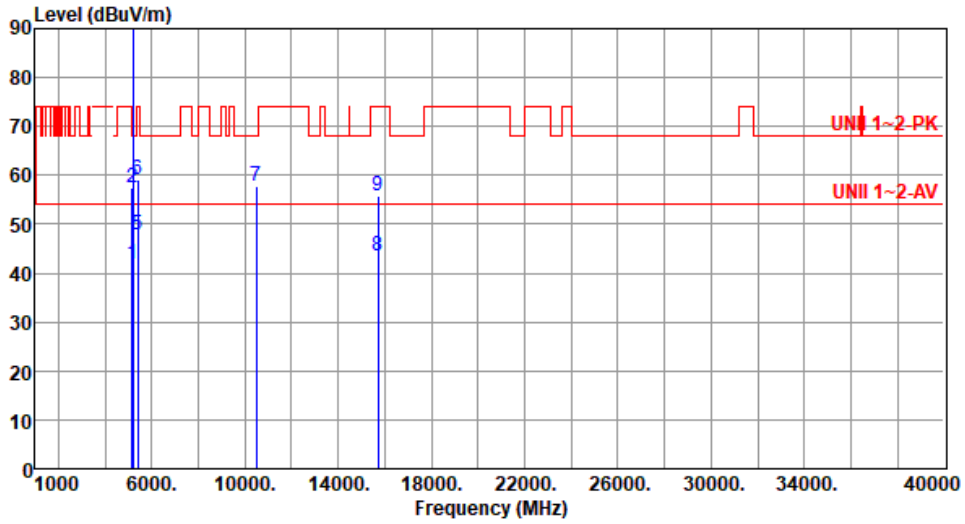

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	41.96	54.00	-12.04	41.10	0.86	Average	188	355
2	5150.00	57.37	74.00	-16.63	56.51	0.86	Peak	188	355
3 *	5240.00	111.25			110.91	0.34	Average	188	355
4 *	5240.00	121.34			121.00	0.34	Peak	188	355
5	5396.00	47.83	54.00	-6.17	47.47	0.36	Average	188	355
6	5396.00	58.99	74.00	-15.01	58.63	0.36	Peak	188	355
7	10480.00	57.85	68.20	-10.35	49.12	8.73	Peak	133	324
8	15720.00	43.57	54.00	-10.43	37.77	5.80	Average	100	26
9	15720.00	55.80	74.00	-18.20	50.00	5.80	Peak	100	26

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5240
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):65

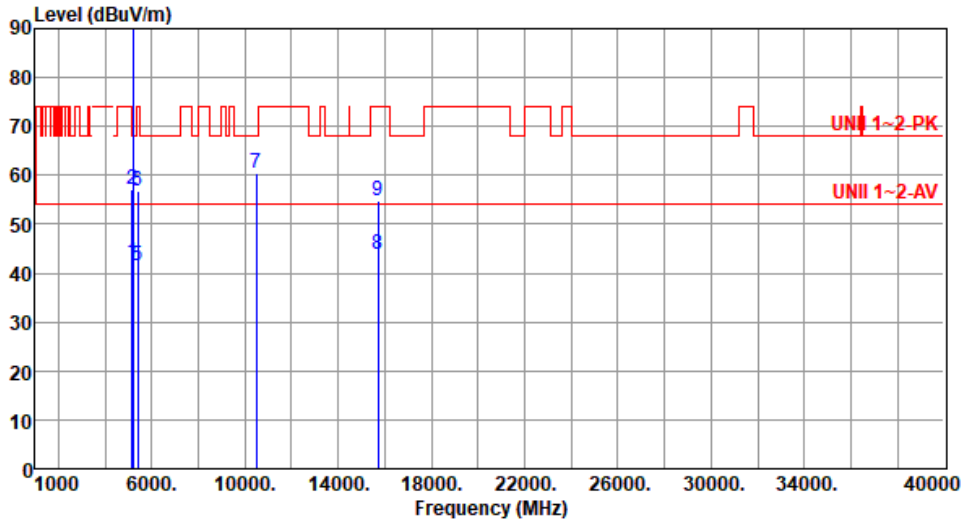

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.20	54.00	-11.80	41.34	0.86	Average	145	11
2	5150.00	57.15	74.00	-16.85	56.29	0.86	Peak	145	11
3 *	5240.00	109.29			108.95	0.34	Average	145	11
4 *	5240.00	119.40			119.06	0.34	Peak	145	11
5	5396.00	41.67	54.00	-12.33	41.31	0.36	Average	145	11
6	5396.00	56.65	74.00	-17.35	56.29	0.36	Peak	145	11
7	10480.00	60.55	68.20	-7.65	51.82	8.73	Peak	100	358
8	15720.00	43.74	54.00	-10.26	37.94	5.80	Average	100	16
9	15720.00	54.75	74.00	-19.25	48.95	5.80	Peak	100	16

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5260
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

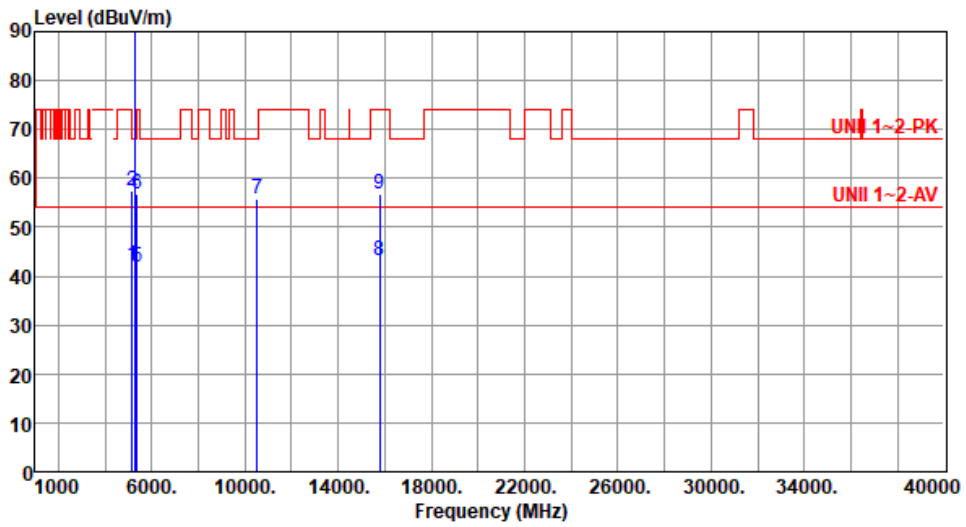

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.18	54.00	-11.82	41.32	0.86	Average	180	356
2	5150.00	57.33	74.00	-16.67	56.47	0.86	Peak	180	356
3 *	5260.00	105.47			105.24	0.23	Average	180	356
4 *	5260.00	115.18			114.95	0.23	Peak	180	356
5	5350.00	41.86	54.00	-12.14	41.69	0.17	Average	180	356
6	5350.00	56.94	74.00	-17.06	56.77	0.17	Peak	180	356
7	10520.00	55.76	68.20	-12.44	47.00	8.76	Peak	125	28
8	15780.00	43.28	54.00	-10.72	37.53	5.75	Average	100	44
9	15780.00	56.72	74.00	-17.28	50.97	5.75	Peak	100	44

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5260
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

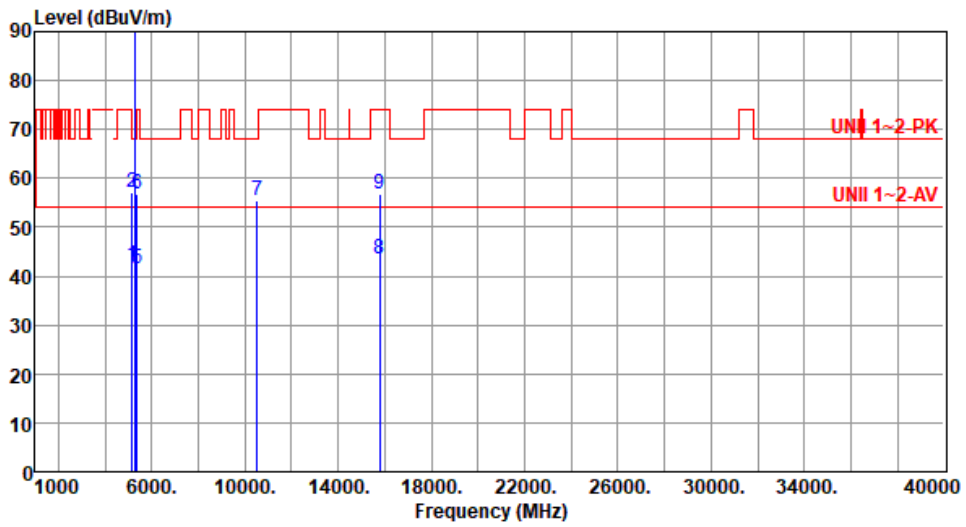

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.24	54.00	-11.76	41.38	0.86	Average	142	10
2	5150.00	57.22	74.00	-16.78	56.36	0.86	Peak	142	10
3 *	5260.00	103.57			103.34	0.23	Average	142	10
4 *	5260.00	113.25			113.02	0.23	Peak	142	10
5	5350.00	41.56	54.00	-12.44	41.39	0.17	Average	142	10
6	5350.00	56.91	74.00	-17.09	56.74	0.17	Peak	142	10
7	10520.00	55.30	68.20	-12.90	46.54	8.76	Peak	125	1
8	15780.00	43.55	54.00	-10.45	37.80	5.75	Average	100	37
9	15780.00	56.91	74.00	-17.09	51.16	5.75	Peak	100	37

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5300
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

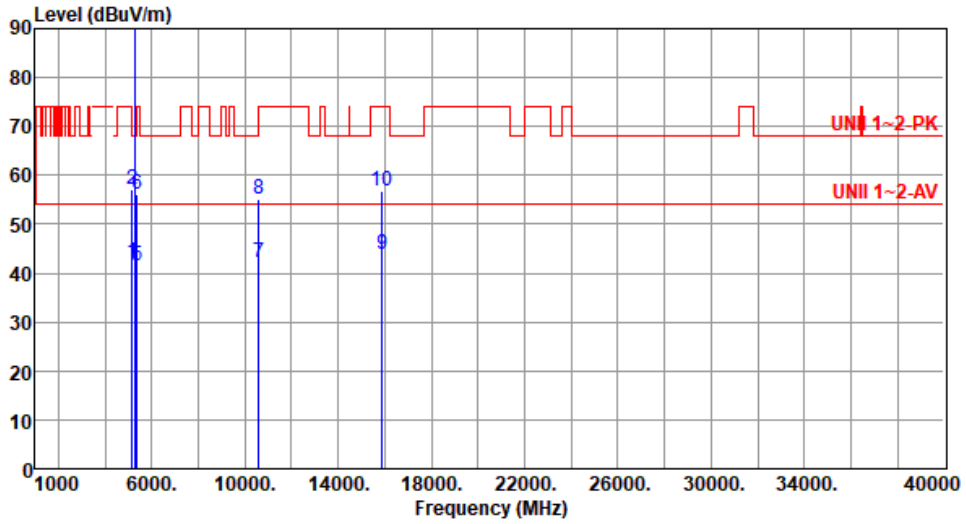

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.19	54.00	-11.81	41.33	0.86	Average	180	359
2	5150.00	56.96	74.00	-17.04	56.10	0.86	Peak	180	359
3 *	5300.00	106.32			106.25	0.07	Average	180	359
4 *	5300.00	116.13			116.06	0.07	Peak	180	359
5	5350.00	41.46	54.00	-12.54	41.29	0.17	Average	180	359
6	5350.00	56.22	74.00	-17.78	56.05	0.17	Peak	180	359
7	10600.00	42.06	54.00	-11.94	33.22	8.84	Average	118	22
8	10600.00	55.29	74.00	-18.71	46.45	8.84	Peak	118	22
9	15900.00	43.90	54.00	-10.10	38.17	5.73	Average	100	64
10	15900.00	56.87	74.00	-17.13	51.14	5.73	Peak	100	64

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5300
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

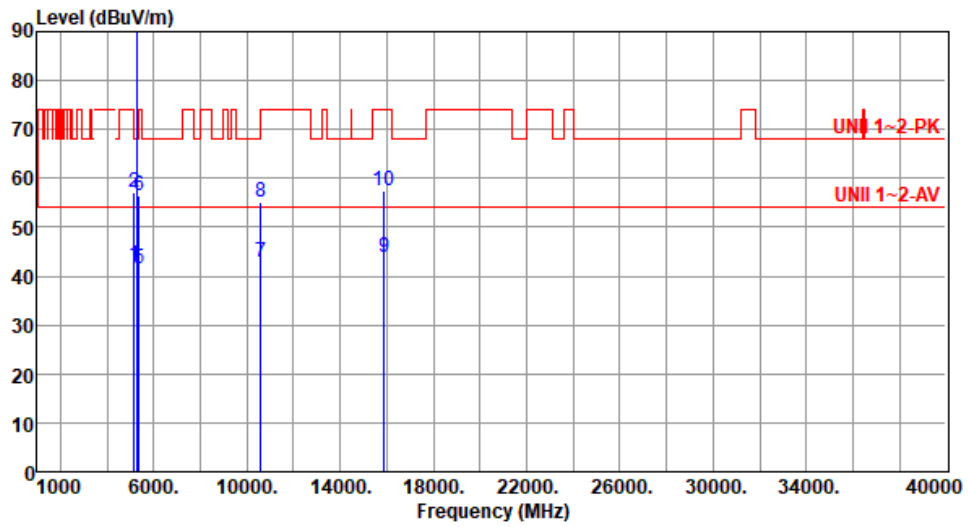

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	42.30	54.00	-11.70	41.44	0.86	Average	145	13
2	5150.00	57.27	74.00	-16.73	56.41	0.86	Peak	145	13
3 *	5300.00	102.59			102.52	0.07	Average	145	13
4 *	5300.00	112.76			112.69	0.07	Peak	145	13
5	5350.00	41.63	54.00	-12.37	41.46	0.17	Average	145	13
6	5350.00	56.35	74.00	-17.65	56.18	0.17	Peak	145	13
7	10600.00	42.83	54.00	-11.17	33.99	8.84	Average	123	354
8	10600.00	55.27	74.00	-18.73	46.43	8.84	Peak	123	354
9	15900.00	43.98	54.00	-10.02	38.25	5.73	Average	100	41
10	15900.00	57.50	74.00	-16.50	51.77	5.73	Peak	100	41

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5320
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

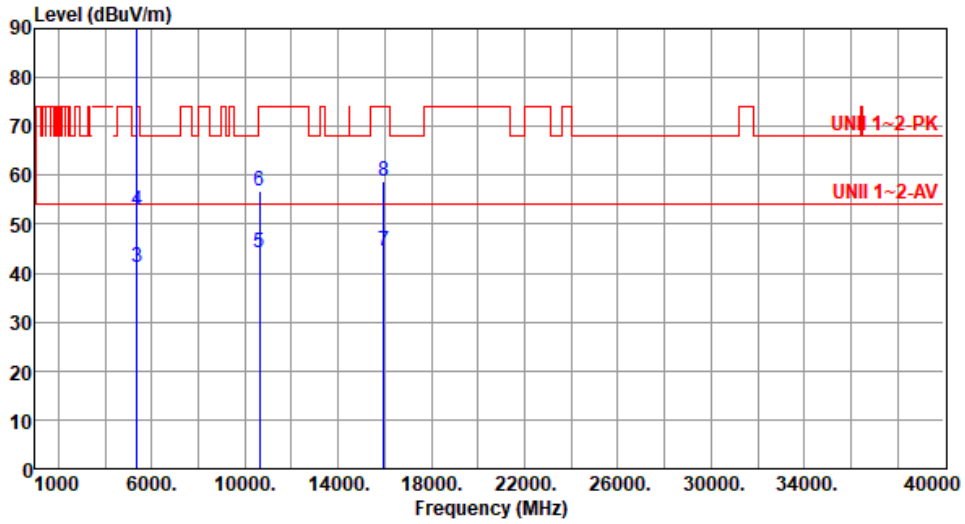

		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table
			dBuV/m			dBuV			cm	deg
1	*	5320.00	105.77			105.66	0.11	Average	182	2
2	*	5320.00	116.86			116.75	0.11	Peak	182	2
3		5350.00	41.12	54.00	-12.88	40.95	0.17	Average	182	2
4		5350.00	52.90	74.00	-21.10	52.73	0.17	Peak	182	2
5		10640.00	44.09	54.00	-9.91	35.25	8.84	Average	100	73
6		10640.00	56.72	74.00	-17.28	47.88	8.84	Peak	100	73
7		15960.00	44.66	54.00	-9.34	38.92	5.74	Average	100	19
8		15960.00	58.93	74.00	-15.07	53.19	5.74	Peak	100	19

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5320
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

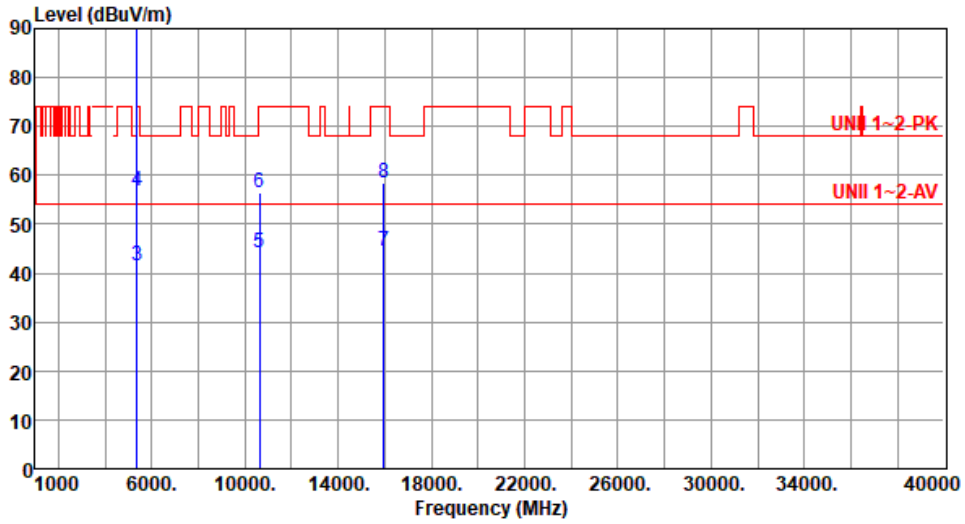

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	5320.00	102.34			102.23	0.11	Average	139	14
2 *	5320.00	112.03			111.92	0.11	Peak	139	14
3	5350.00	41.55	54.00	-12.45	41.38	0.17	Average	139	14
4	5350.00	56.84	74.00	-17.16	56.67	0.17	Peak	139	14
5	10640.00	44.01	54.00	-9.99	35.17	8.84	Average	100	102
6	10640.00	56.55	74.00	-17.45	47.71	8.84	Peak	100	102
7	15960.00	44.36	54.00	-9.64	38.62	5.74	Average	100	58
8	15960.00	58.38	74.00	-15.62	52.64	5.74	Peak	100	58

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5500
Polarization	Horizontal		

Test By : Paul Lin Temperature(°C): 24 Humidity(%): 67

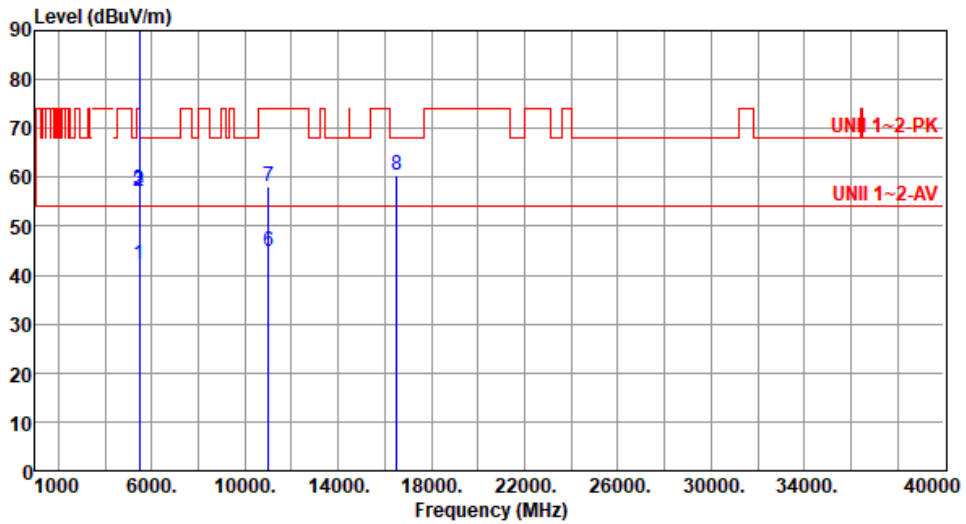

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.14	54.00	-11.86	41.53	0.61	Average	177	5
2	5460.00	57.15	74.00	-16.85	56.54	0.61	Peak	177	5
3	5470.00	57.48	68.20	-10.72	56.86	0.62	Peak	177	5
4 *	5500.00	104.19			103.50	0.69	Average	177	5
5 *	5500.00	113.95			113.26	0.69	Peak	177	5
6	11000.00	44.71	54.00	-9.29	35.46	9.25	Average	100	182
7	11000.00	58.01	74.00	-15.99	48.76	9.25	Peak	100	182
8	16500.00	60.51	68.20	-7.69	53.36	7.15	Peak	100	115

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5500
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

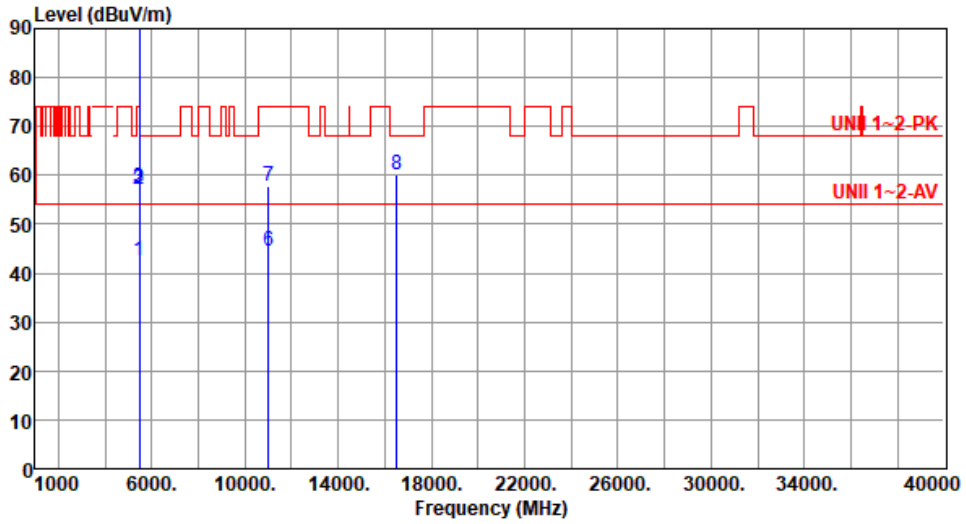

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.38	54.00	-11.62	41.77	0.61	Average	135	13
2	5460.00	57.02	74.00	-16.98	56.41	0.61	Peak	135	13
3	5470.00	57.60	68.20	-10.60	56.98	0.62	Peak	135	13
4 *	5500.00	101.27			100.58	0.69	Average	135	13
5 *	5500.00	110.94			110.25	0.69	Peak	135	13
6	11000.00	44.58	54.00	-9.42	35.33	9.25	Average	100	56
7	11000.00	57.94	74.00	-16.06	48.69	9.25	Peak	100	56
8	16500.00	60.10	68.20	-8.10	52.95	7.15	Peak	100	56

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5580
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

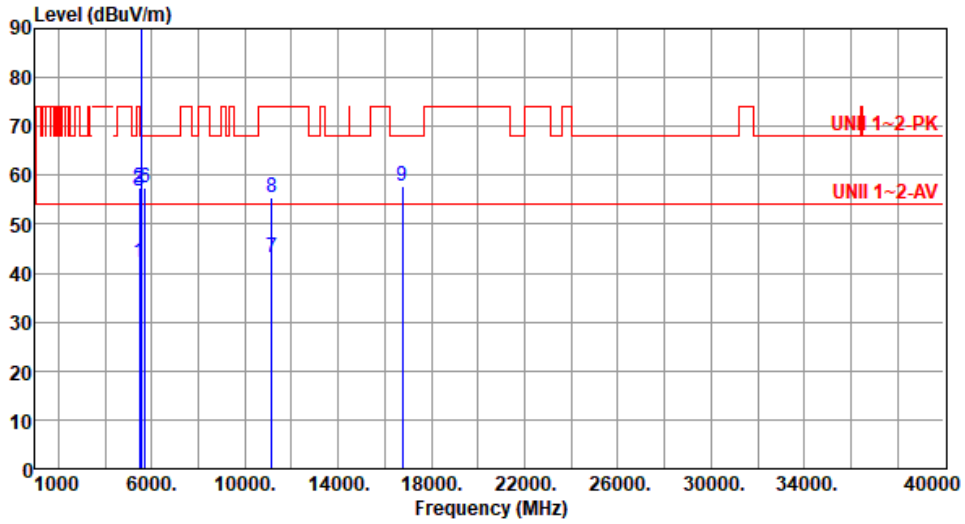

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.28	54.00	-11.72	41.67	0.61	Average	178	337
2	5460.00	57.45	74.00	-16.55	56.84	0.61	Peak	178	337
3	5470.00	56.82	68.20	-11.38	56.20	0.62	Peak	178	337
4 *	5580.00	104.58			103.91	0.67	Average	178	337
5 *	5580.00	114.90			114.23	0.67	Peak	178	337
6	5725.00	57.32	68.20	-10.88	56.37	0.95	Peak	178	337
7	11160.00	43.13	54.00	-10.87	34.35	8.78	Average	114	17
8	11160.00	55.49	74.00	-18.51	46.71	8.78	Peak	114	17
9	16740.00	57.87	68.20	-10.33	50.64	7.23	Peak	100	19

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5580
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

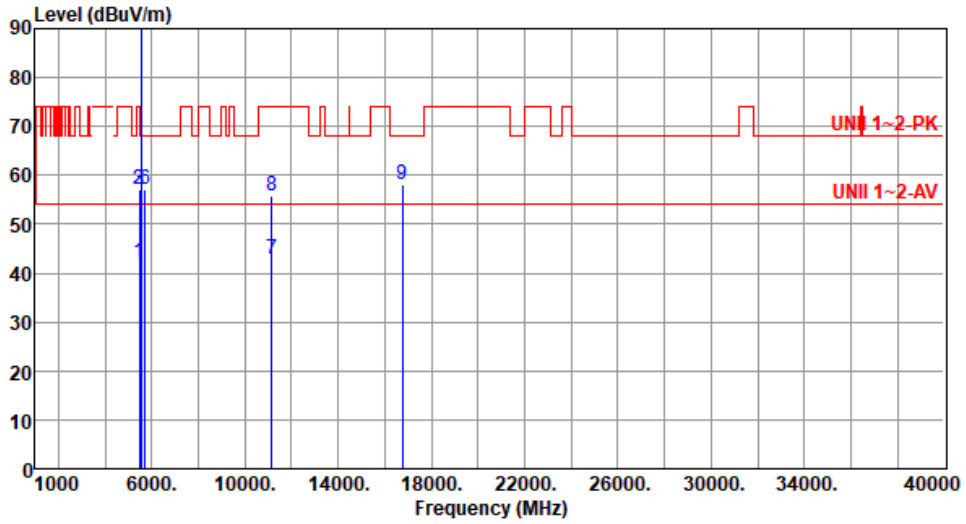

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.24	54.00	-11.76	41.63	0.61	Average	148	15
2	5460.00	56.96	74.00	-17.04	56.35	0.61	Peak	148	15
3	5470.00	57.29	68.20	-10.91	56.67	0.62	Peak	148	15
4 *	5580.00	101.57			100.90	0.67	Average	148	15
5 *	5580.00	111.42			110.75	0.67	Peak	148	15
6	5725.00	57.09	68.20	-11.11	56.14	0.95	Peak	148	15
7	11160.00	42.99	54.00	-11.01	34.21	8.78	Average	122	355
8	11160.00	55.76	74.00	-18.24	46.98	8.78	Peak	122	355
9	16740.00	58.22	68.20	-9.98	50.99	7.23	Peak	100	83

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5700
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

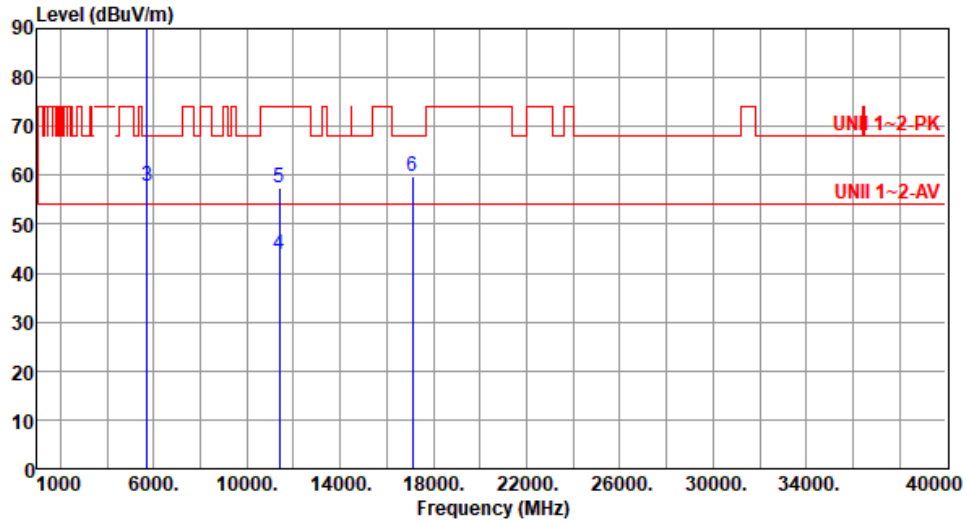

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	5700.00	104.02			103.13	0.89	Average	170	341
2 *	5700.00	114.04			113.15	0.89	Peak	170	341
3	5725.00	57.76	68.20	-10.44	56.81	0.95	Peak	170	341
4	11400.00	43.95	54.00	-10.05	35.34	8.61	Average	100	156
5	11400.00	57.32	74.00	-16.68	48.71	8.61	Peak	100	156
6	17100.00	59.67	68.20	-8.53	53.02	6.65	Peak	100	117

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5700
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

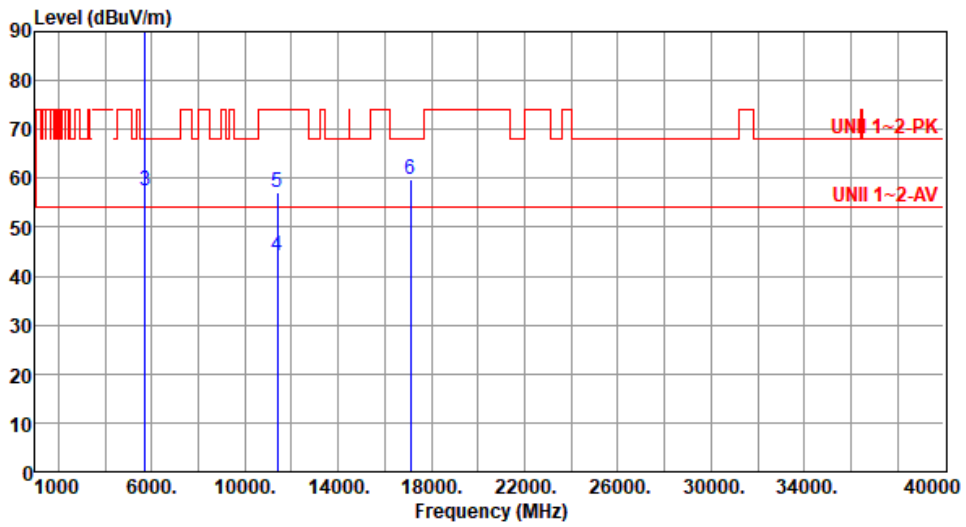


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	5700.00	101.62			100.73	0.89	Average	137	17
2 *	5700.00	111.26			110.37	0.89	Peak	137	17
3	5725.00	57.52	68.20	-10.68	56.57	0.95	Peak	137	17
4	11400.00	44.03	54.00	-9.97	35.42	8.61	Average	100	86
5	11400.00	57.26	74.00	-16.74	48.65	8.61	Peak	100	86
6	17100.00	59.76	68.20	-8.44	53.11	6.65	Peak	100	112

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5720
Polarization	Horizontal		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

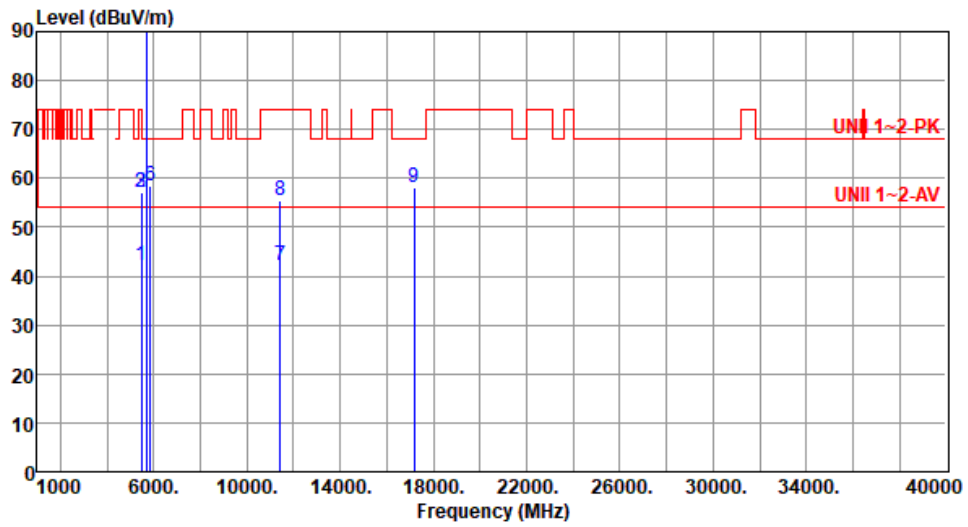

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.09	54.00	-11.91	41.48	0.61	Average	172	345
2	5460.00	56.98	74.00	-17.02	56.37	0.61	Peak	172	345
3	5470.00	57.25	68.20	-10.95	56.63	0.62	Peak	172	345
4 *	5720.00	104.28			103.35	0.93	Average	172	345
5 *	5720.00	114.41			113.48	0.93	Peak	172	345
6	5850.00	58.40	68.20	-9.80	57.13	1.27	Peak	172	345
7	11440.00	42.25	54.00	-11.75	33.57	8.68	Average	117	19
8	11440.00	55.32	74.00	-18.68	46.64	8.68	Peak	117	19
9	17160.00	58.28	68.20	-9.92	51.77	6.51	Peak	100	67

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5720
Polarization	Vertical		

Test By :Paul Lin Temperature(°C):24 Humidity(%):67

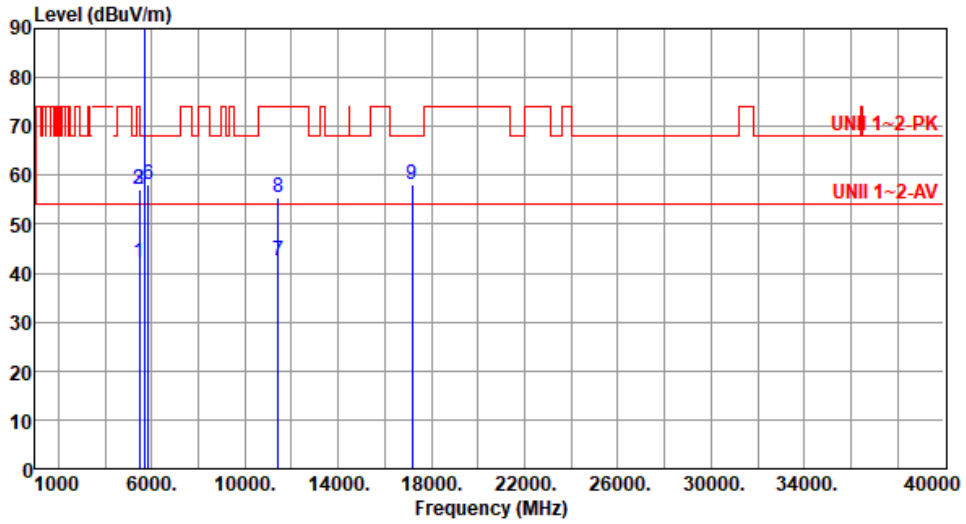

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.08	54.00	-11.92	41.47	0.61	Average	139	15
2	5460.00	56.98	74.00	-17.02	56.37	0.61	Peak	139	15
3	5470.00	57.27	68.20	-10.93	56.65	0.62	Peak	139	15
4 *	5720.00	101.12			100.19	0.93	Average	139	15
5 *	5720.00	111.22			110.29	0.93	Peak	139	15
6	5850.00	58.10	68.20	-10.10	56.83	1.27	Peak	139	15
7	11440.00	42.36	54.00	-11.64	33.68	8.68	Average	109	334
8	11440.00	55.35	74.00	-18.65	46.67	8.68	Peak	109	334
9	17160.00	58.18	68.20	-10.02	51.67	6.51	Peak	100	91

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):66

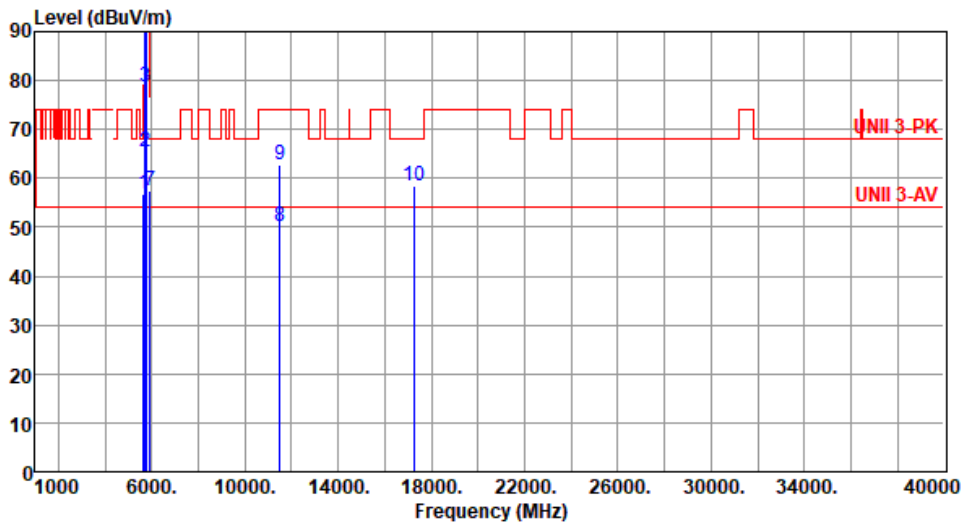

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	56.90	68.20	-11.30	56.34	0.56	Peak	175	343
2	5700.00	65.27	105.20	-39.93	64.38	0.89	Peak	175	343
3	5720.00	78.71	110.80	-32.09	77.78	0.93	Peak	175	343
4	5725.00	91.94	122.20	-30.26	90.99	0.95	Peak	175	343
5 *	5745.00	112.39			111.39	1.00	Average	175	343
6 *	5745.00	122.92			121.92	1.00	Peak	175	343
7	5925.00	57.47	68.20	-10.73	55.96	1.51	Peak	175	343
8	11490.00	50.11	54.00	-3.89	41.34	8.77	Average	100	21
9	11490.00	62.67	74.00	-11.33	53.90	8.77	Peak	100	21
10	17235.00	58.48	68.20	-9.72	52.02	6.46	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5745
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):66

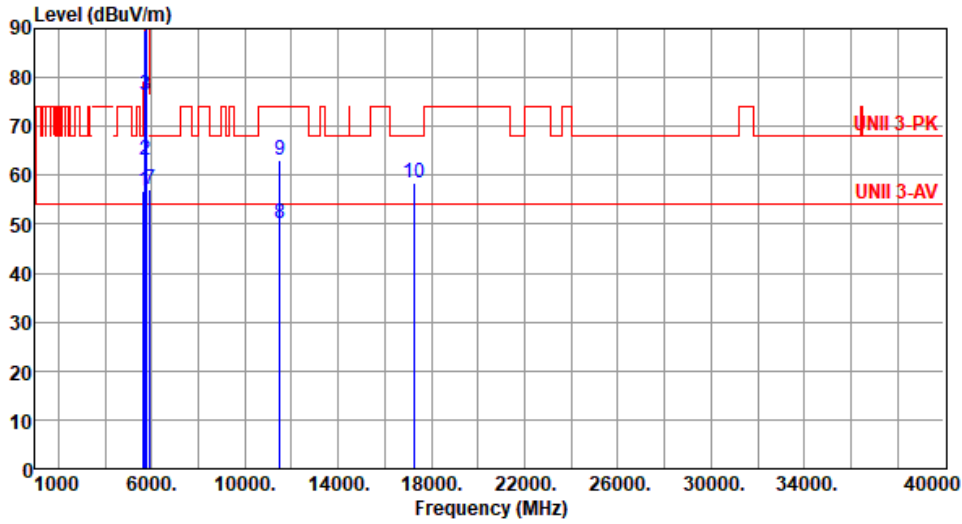

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	56.83	68.20	-11.37	56.27	0.56	Peak	100	342
2	5700.00	63.07	105.20	-42.13	62.18	0.89	Peak	100	342
3	5720.00	76.28	110.80	-34.52	75.35	0.93	Peak	100	342
4	5725.00	89.67	122.20	-32.53	88.72	0.95	Peak	100	342
5 *	5745.00	110.63			109.63	1.00	Average	100	342
6 *	5745.00	121.17			120.17	1.00	Peak	100	342
7	5925.00	57.27	68.20	-10.93	55.76	1.51	Peak	100	342
8	11490.00	50.06	54.00	-3.94	41.29	8.77	Average	183	344
9	11490.00	62.98	74.00	-11.02	54.21	8.77	Peak	183	344
10	17235.00	58.29	68.20	-9.91	51.83	6.46	Peak	100	46

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5785
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):66

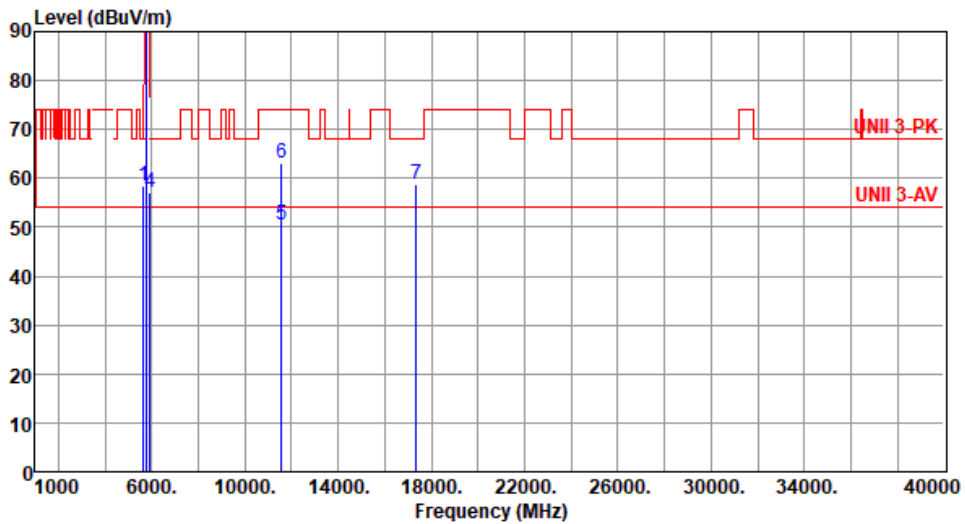

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	58.29	68.20	-9.91	57.73	0.56	Peak	176	340
2 *	5785.00	111.25			110.15	1.10	Average	176	340
3 *	5785.00	121.92			120.82	1.10	Peak	176	340
4	5925.00	57.23	68.20	-10.97	55.72	1.51	Peak	176	340
5	11570.00	50.56	54.00	-3.44	41.91	8.65	Average	100	20
6	11570.00	63.18	74.00	-10.82	54.53	8.65	Peak	100	20
7	17355.00	58.79	68.20	-9.41	52.02	6.77	Peak	100	28

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5785
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):66

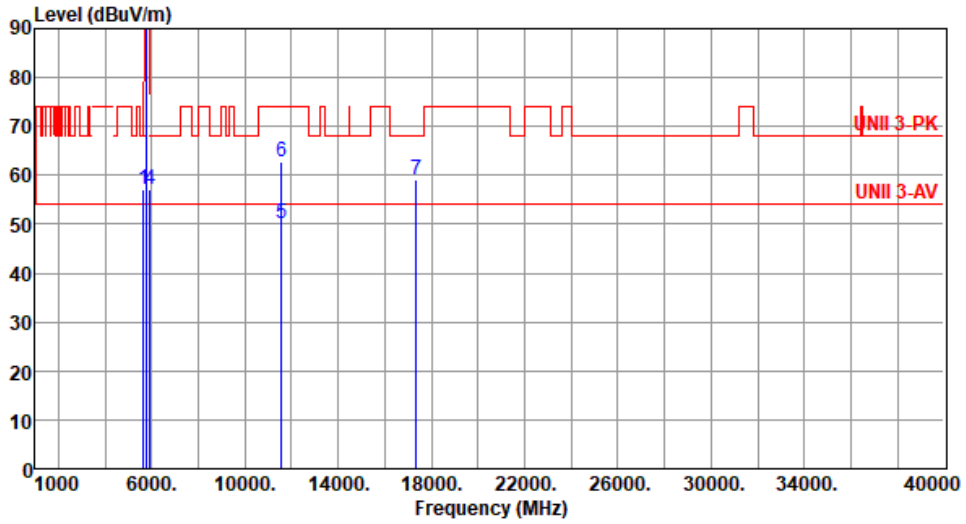

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	57.10	68.20	-11.10	56.54	0.56	Peak	100	338
2 *	5785.00	109.51			108.41	1.10	Average	100	338
3 *	5785.00	119.18			118.08	1.10	Peak	100	338
4	5925.00	57.12	68.20	-11.08	55.61	1.51	Peak	100	338
5	11570.00	50.30	54.00	-3.70	41.65	8.65	Average	177	344
6	11570.00	62.68	74.00	-11.32	54.03	8.65	Peak	177	344
7	17355.00	59.10	68.20	-9.10	52.33	6.77	Peak	100	14

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5825
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):23 Humidity(%):66

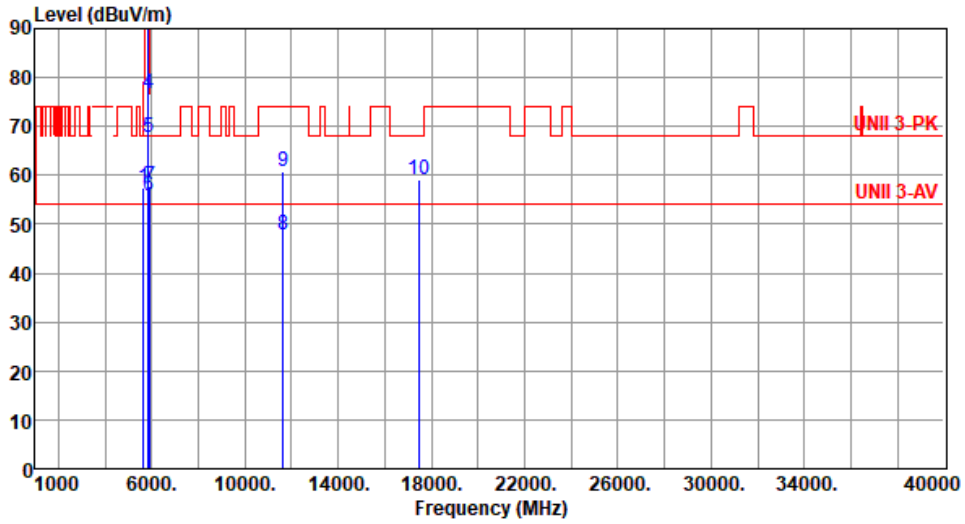

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	57.56	68.20	-10.64	57.00	0.56	Peak	160	338
2 *	5825.00	110.66			109.46	1.20	Average	160	338
3 *	5825.00	120.94			119.74	1.20	Peak	160	338
4	5850.00	76.66	122.20	-45.54	75.39	1.27	Peak	160	338
5	5855.00	67.72	110.80	-43.08	66.43	1.29	Peak	160	338
6	5875.00	55.82	105.20	-49.38	54.43	1.39	Peak	160	338
7	5925.00	57.62	68.20	-10.58	56.11	1.51	Peak	160	338
8	11650.00	47.84	54.00	-6.16	39.55	8.29	Average	100	20
9	11650.00	60.88	74.00	-13.12	52.59	8.29	Peak	100	20
10	17475.00	59.20	68.20	-9.00	51.94	7.26	Peak	100	29

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	11a	Test Freq. (MHz)	5825
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):23 Humidity(%):66

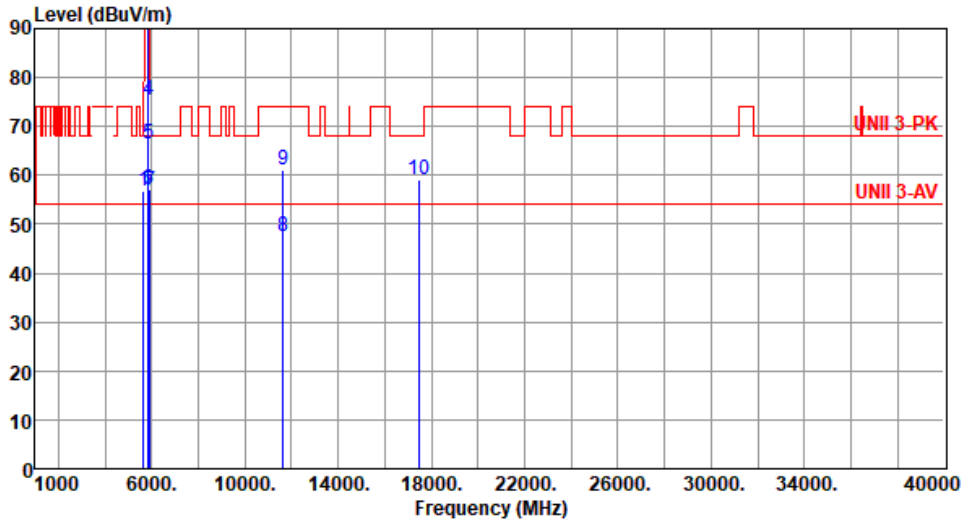

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	56.95	68.20	-11.25	56.39	0.56	Peak	100	337
2 *	5825.00	108.13			106.93	1.20	Average	100	337
3 *	5825.00	118.85			117.65	1.20	Peak	100	337
4	5850.00	75.37	122.20	-46.83	74.10	1.27	Peak	100	337
5	5855.00	66.34	110.80	-44.46	65.05	1.29	Peak	100	337
6	5875.00	57.13	105.20	-48.07	55.74	1.39	Peak	100	337
7	5925.00	56.71	68.20	-11.49	55.20	1.51	Peak	100	337
8	11650.00	47.48	54.00	-6.52	39.19	8.29	Average	181	344
9	11650.00	61.21	74.00	-12.79	52.92	8.29	Peak	181	344
10	17475.00	59.06	68.20	-9.14	51.80	7.26	Peak	100	67

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT20

Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

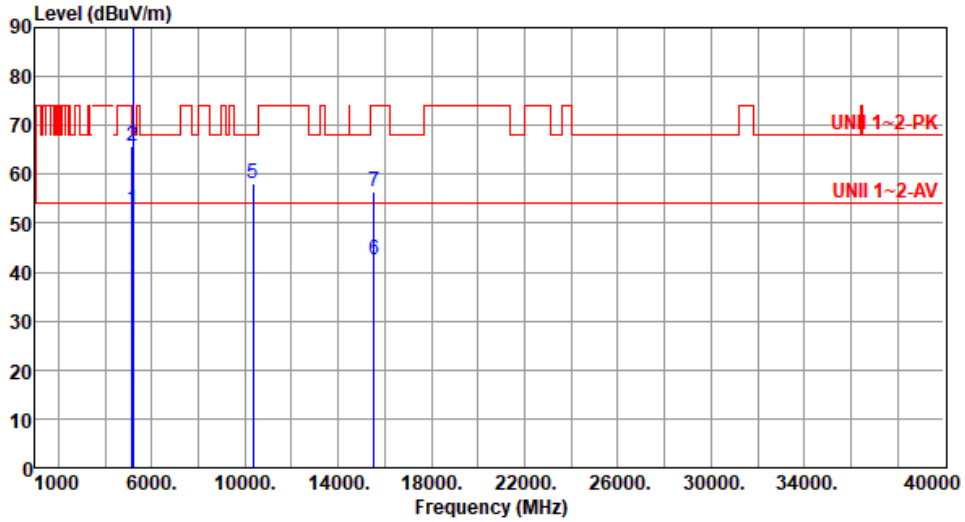

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.68	54.00	-1.32	51.82	0.86	Average	192	352
2	5150.00	65.75	74.00	-8.25	64.89	0.86	Peak	192	352
3 *	5180.00	110.11			109.37	0.74	Average	192	352
4 *	5180.00	123.12			122.38	0.74	Peak	192	352
5	10360.00	58.11	68.20	-10.09	49.59	8.52	Peak	108	7
6	15540.00	42.47	54.00	-11.53	36.42	6.05	Average	100	65
7	15540.00	56.32	74.00	-17.68	50.27	6.05	Peak	100	65

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5180
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

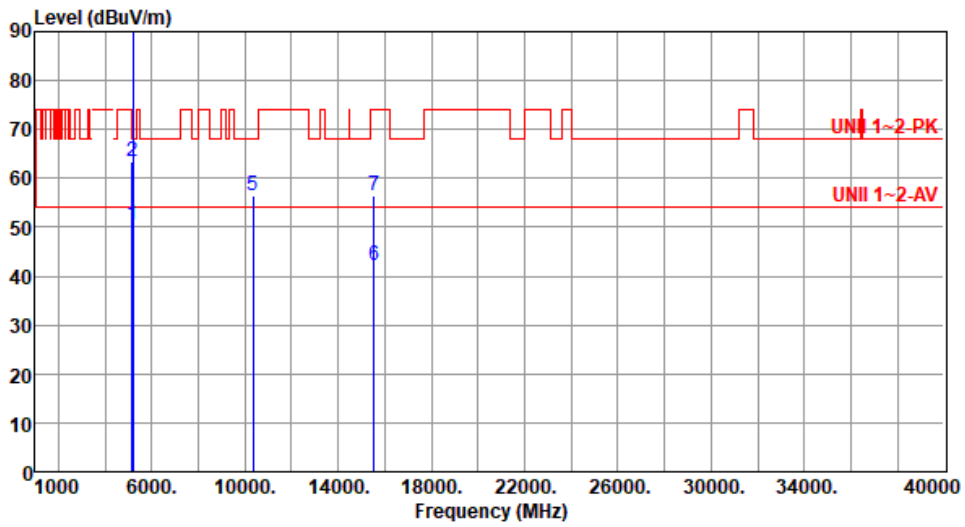

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.47	54.00	-3.53	49.61	0.86	Average	145	17
2	5150.00	63.59	74.00	-10.41	62.73	0.86	Peak	145	17
3 *	5180.00	108.16			107.42	0.74	Average	145	17
4 *	5180.00	121.42			120.68	0.74	Peak	145	17
5	10360.00	56.34	68.20	-11.86	47.82	8.52	Peak	100	27
6	15540.00	42.33	54.00	-11.67	36.28	6.05	Average	100	101
7	15540.00	56.42	74.00	-17.58	50.37	6.05	Peak	100	101

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

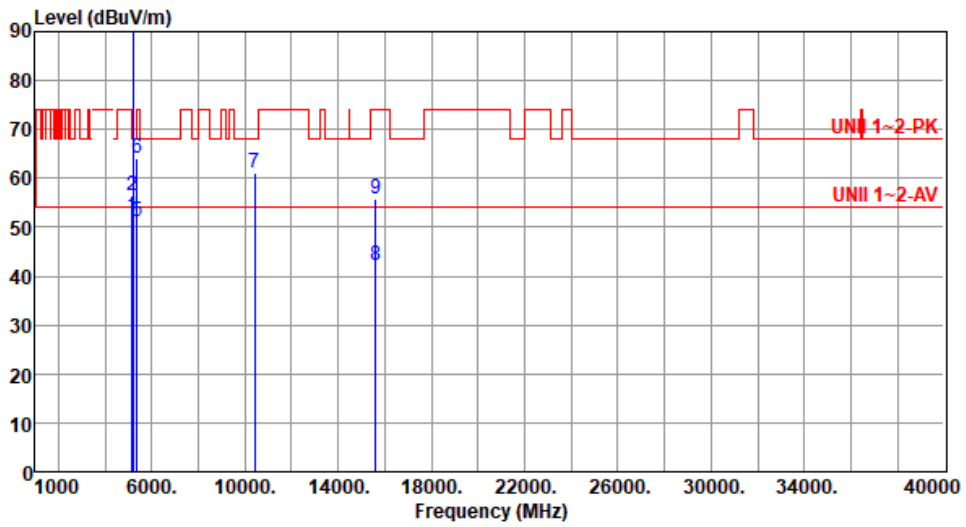

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	52.23	54.00	-1.77	51.37	0.86	Average	182	350
2	5150.00	56.30	74.00	-17.70	55.44	0.86	Peak	182	350
3 *	5200.00	110.95			110.29	0.66	Average	182	350
4 *	5200.00	124.26			123.60	0.66	Peak	182	350
5	5360.00	51.17	54.00	-2.83	50.95	0.22	Average	182	350
6	5360.00	64.21	74.00	-9.79	63.99	0.22	Peak	182	350
7	10400.00	61.05	68.20	-7.15	52.37	8.68	Peak	106	1
8	15600.00	42.30	54.00	-11.70	36.48	5.82	Average	100	35
9	15600.00	55.94	74.00	-18.06	50.12	5.82	Peak	100	35

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5200
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

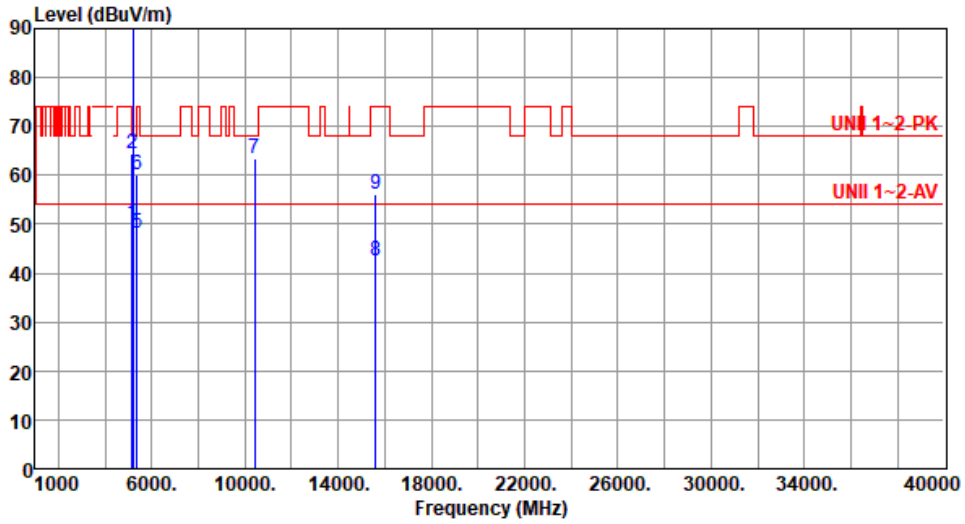

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.22	54.00	-3.78	49.36	0.86	Average	146	13
2	5150.00	64.55	74.00	-9.45	63.69	0.86	Peak	146	13
3 *	5200.00	108.33			107.67	0.66	Average	146	13
4 *	5200.00	120.27			119.61	0.66	Peak	146	13
5	5360.00	48.25	54.00	-5.75	48.03	0.22	Average	146	13
6	5360.00	60.26	74.00	-13.74	60.04	0.22	Peak	146	13
7	10400.00	63.40	68.20	-4.80	54.72	8.68	Peak	102	3
8	15600.00	42.47	54.00	-11.53	36.65	5.82	Average	100	48
9	15600.00	56.15	74.00	-17.85	50.33	5.82	Peak	100	48

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

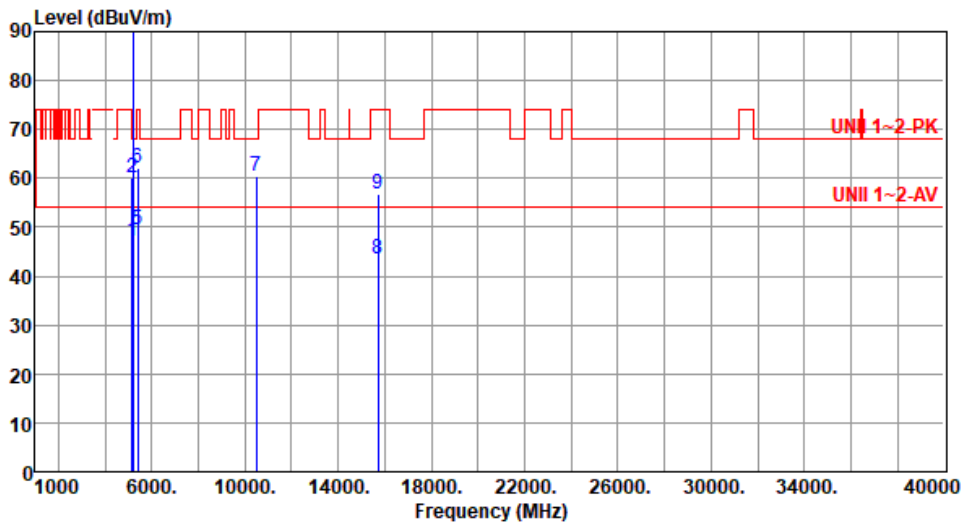

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	47.19	54.00	-6.81	46.33	0.86	Average	191	349
2	5150.00	60.11	74.00	-13.89	59.25	0.86	Peak	191	349
3 *	5240.00	111.28			110.94	0.34	Average	191	349
4 *	5240.00	125.51			125.17	0.34	Peak	191	349
5	5386.00	49.45	54.00	-4.55	49.13	0.32	Average	191	349
6	5386.00	62.09	74.00	-11.91	61.77	0.32	Peak	191	349
7	10480.00	60.39	68.20	-7.81	51.66	8.73	Peak	110	2
8	15720.00	43.41	54.00	-10.59	37.61	5.80	Average	100	33
9	15720.00	56.65	74.00	-17.35	50.85	5.80	Peak	100	33

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5240
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

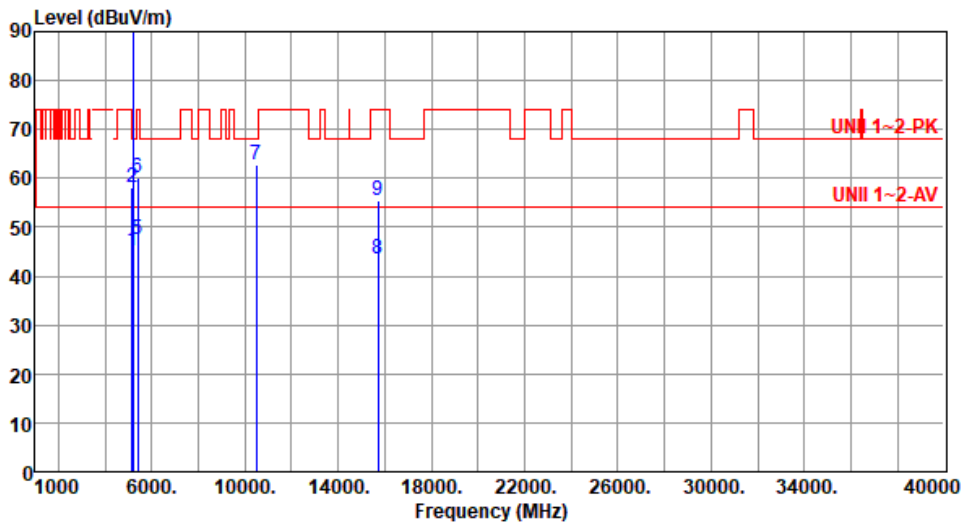

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	45.03	54.00	-8.97	44.17	0.86	Average	148	14
2	5150.00	58.07	74.00	-15.93	57.21	0.86	Peak	148	14
3 *	5240.00	108.86			108.52	0.34	Average	148	14
4 *	5240.00	121.93			121.59	0.34	Peak	148	14
5	5386.00	47.57	54.00	-6.43	47.25	0.32	Average	148	14
6	5386.00	59.96	74.00	-14.04	59.64	0.32	Peak	148	14
7	10480.00	62.78	68.20	-5.42	54.05	8.73	Peak	105	6
8	15720.00	43.63	54.00	-10.37	37.83	5.80	Average	100	23
9	15720.00	55.56	74.00	-18.44	49.76	5.80	Peak	100	23

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

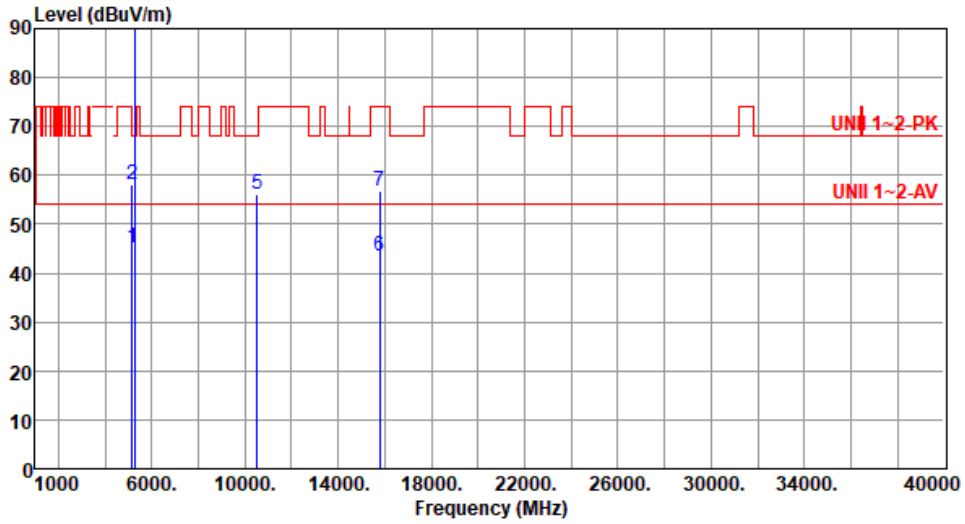

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	45.27	54.00	-8.73	44.41	0.86	Average	189	351
2	5150.00	58.26	74.00	-15.74	57.40	0.86	Peak	189	351
3 *	5260.00	105.39			105.16	0.23	Average	189	351
4 *	5260.00	118.77			118.54	0.23	Peak	189	351
5	10520.00	56.11	68.20	-12.09	47.35	8.76	Peak	100	11
6	15780.00	43.37	54.00	-10.63	37.62	5.75	Average	100	45
7	15780.00	56.77	74.00	-17.23	51.02	5.75	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5260
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

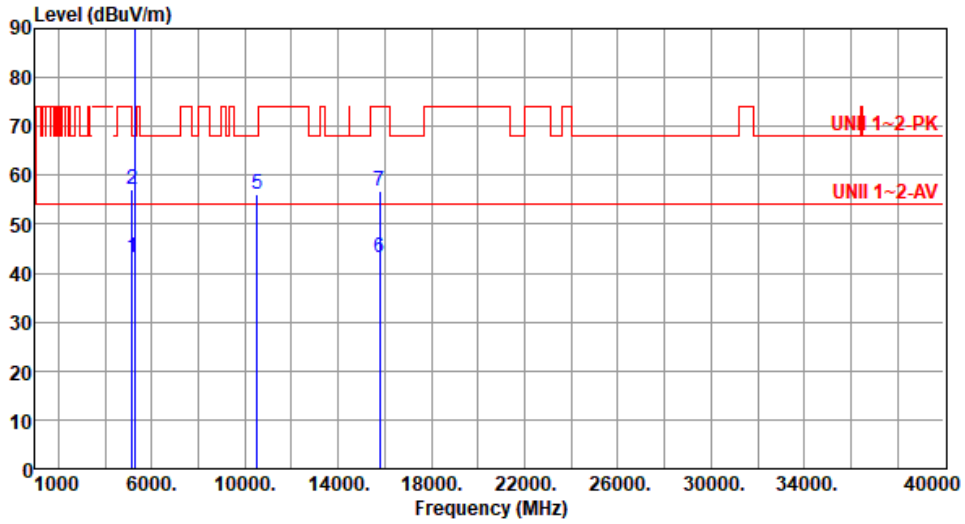

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.13	54.00	-10.87	42.27	0.86	Average	147	12
2	5150.00	57.22	74.00	-16.78	56.36	0.86	Peak	147	12
3 *	5260.00	103.76			103.53	0.23	Average	147	12
4 *	5260.00	117.08			116.85	0.23	Peak	147	12
5	10520.00	56.01	68.20	-12.19	47.25	8.76	Peak	100	59
6	15780.00	43.30	54.00	-10.70	37.55	5.75	Average	100	97
7	15780.00	56.88	74.00	-17.12	51.13	5.75	Peak	100	97

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

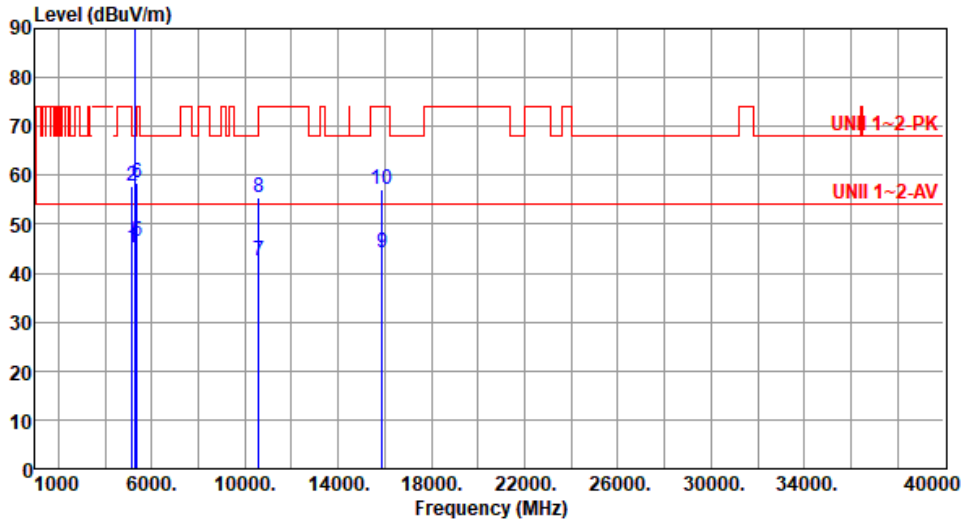

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	45.28	54.00	-8.72	44.42	0.86	Average	178	6
2	5150.00	57.92	74.00	-16.08	57.06	0.86	Peak	178	6
3 *	5300.00	105.82			105.75	0.07	Average	178	6
4 *	5300.00	119.69			119.62	0.07	Peak	178	6
5	5350.00	46.35	54.00	-7.65	46.18	0.17	Average	178	6
6	5350.00	58.31	74.00	-15.69	58.14	0.17	Peak	178	6
7	10600.00	42.47	54.00	-11.53	33.63	8.84	Average	100	31
8	10600.00	55.46	74.00	-18.54	46.62	8.84	Peak	100	31
9	15900.00	44.07	54.00	-9.93	38.34	5.73	Average	100	102
10	15900.00	57.06	74.00	-16.94	51.33	5.73	Peak	100	102

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5300
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

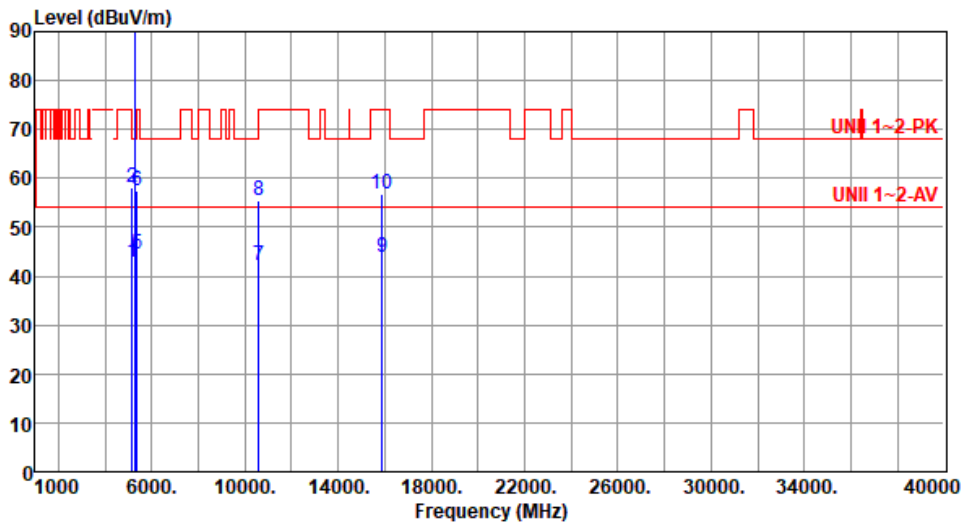

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.00	54.00	-11.00	42.14	0.86	Average	142	11
2	5150.00	58.10	74.00	-15.90	57.24	0.86	Peak	142	11
3 *	5300.00	103.34			103.27	0.07	Average	142	11
4 *	5300.00	117.18			117.11	0.07	Peak	142	11
5	5350.00	44.42	54.00	-9.58	44.25	0.17	Average	142	11
6	5350.00	57.36	74.00	-16.64	57.19	0.17	Peak	142	11
7	10600.00	42.29	54.00	-11.71	33.45	8.84	Average	100	78
8	10600.00	55.35	74.00	-18.65	46.51	8.84	Peak	100	78
9	15900.00	43.91	54.00	-10.09	38.18	5.73	Average	100	118
10	15900.00	56.90	74.00	-17.10	51.17	5.73	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

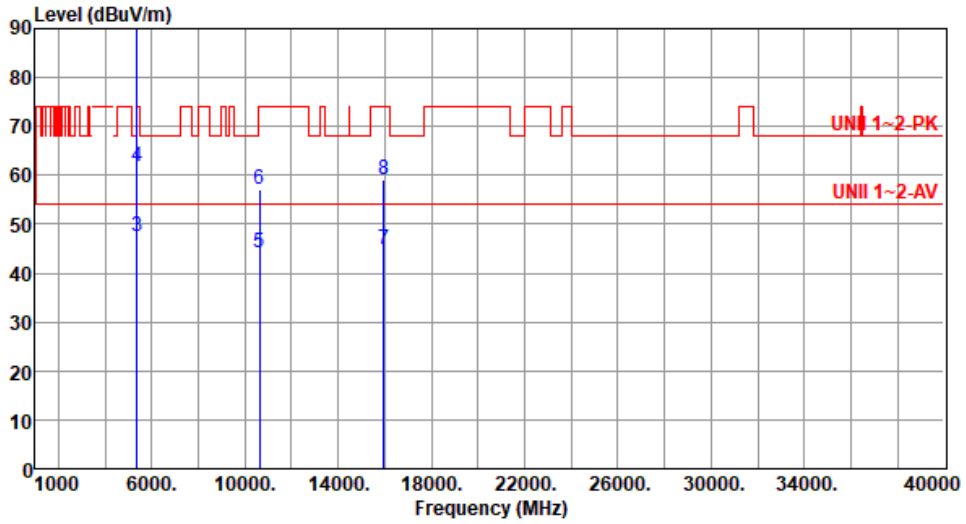

		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
		MHz	level	dBuV/m	dB	reading	dB/m		High	Table
			dBuV/m			dBuV			cm	deg
1	*	5320.00	105.82			105.71	0.11	Average	182	5
2	*	5320.00	119.45			119.34	0.11	Peak	182	5
3		5350.00	47.51	54.00	-6.49	47.34	0.17	Average	182	5
4		5350.00	61.71	74.00	-12.29	61.54	0.17	Peak	182	5
5		10640.00	44.33	54.00	-9.67	35.49	8.84	Average	100	86
6		10640.00	57.07	74.00	-16.93	48.23	8.84	Peak	100	86
7		15960.00	44.89	54.00	-9.11	39.15	5.74	Average	100	22
8		15960.00	59.21	74.00	-14.79	53.47	5.74	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5320
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

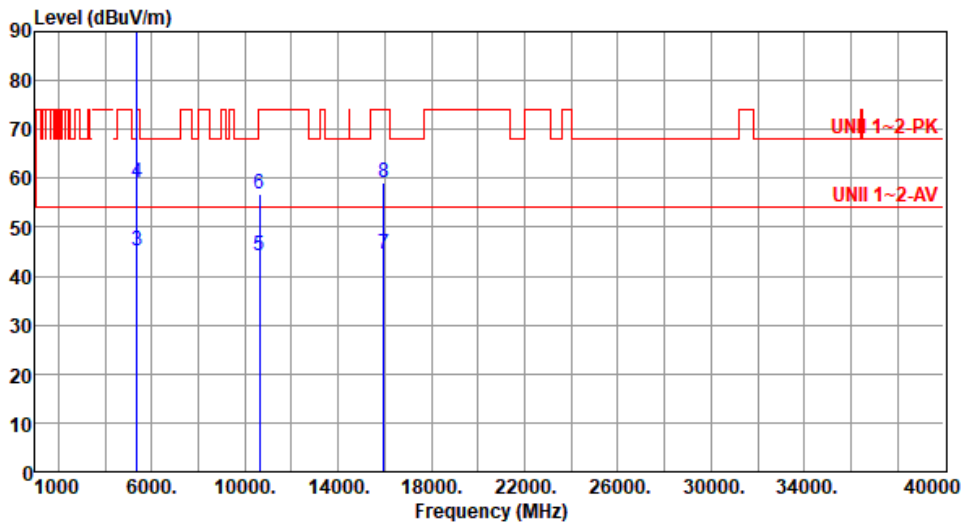

	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1 *	5320.00	103.24			103.13	0.11	Average	143	16
2 *	5320.00	118.91			118.80	0.11	Peak	143	16
3	5350.00	45.06	54.00	-8.94	44.89	0.17	Average	143	16
4	5350.00	59.23	74.00	-14.77	59.06	0.17	Peak	143	16
5	10640.00	44.10	54.00	-9.90	35.26	8.84	Average	100	77
6	10640.00	56.85	74.00	-17.15	48.01	8.84	Peak	100	77
7	15960.00	44.60	54.00	-9.40	38.86	5.74	Average	100	134
8	15960.00	59.03	74.00	-14.97	53.29	5.74	Peak	100	134

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

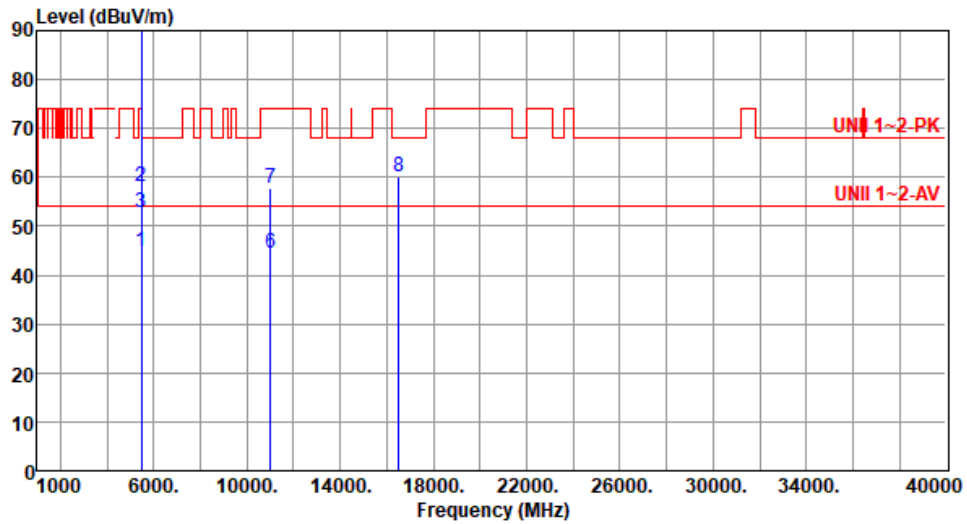

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.82	54.00	-9.18	44.21	0.61	Average	145	18
2	5460.00	58.24	74.00	-15.76	57.63	0.61	Peak	145	18
3	5470.00	52.86	68.20	-15.34	52.24	0.62	Peak	145	18
4 *	5500.00	103.17			102.48	0.69	Average	145	18
5 *	5500.00	117.12			116.43	0.69	Peak	145	18
6	11000.00	44.54	54.00	-9.46	35.29	9.25	Average	100	149
7	11000.00	57.90	74.00	-16.10	48.65	9.25	Peak	100	149
8	16500.00	60.11	68.20	-8.09	52.96	7.15	Peak	100	192

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5500
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

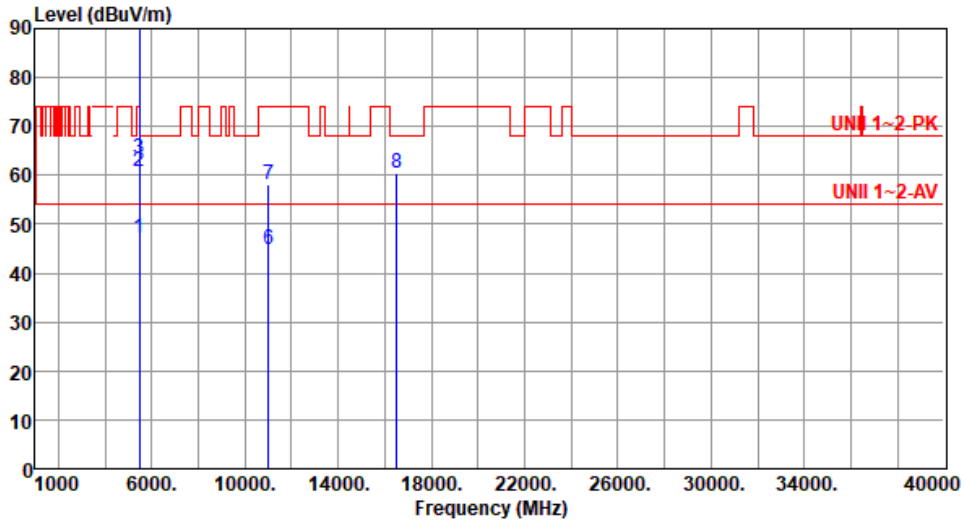

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	47.07	54.00	-6.93	46.46	0.61	Average	171	9
2	5460.00	60.80	74.00	-13.20	60.19	0.61	Peak	171	9
3	5470.00	63.31	68.20	-4.89	62.69	0.62	Peak	171	9
4 *	5500.00	105.69			105.00	0.69	Average	171	9
5 *	5500.00	119.65			118.96	0.69	Peak	171	9
6	11000.00	44.79	54.00	-9.21	35.54	9.25	Average	100	103
7	11000.00	58.12	74.00	-15.88	48.87	9.25	Peak	100	103
8	16500.00	60.43	68.20	-7.77	53.28	7.15	Peak	100	131

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

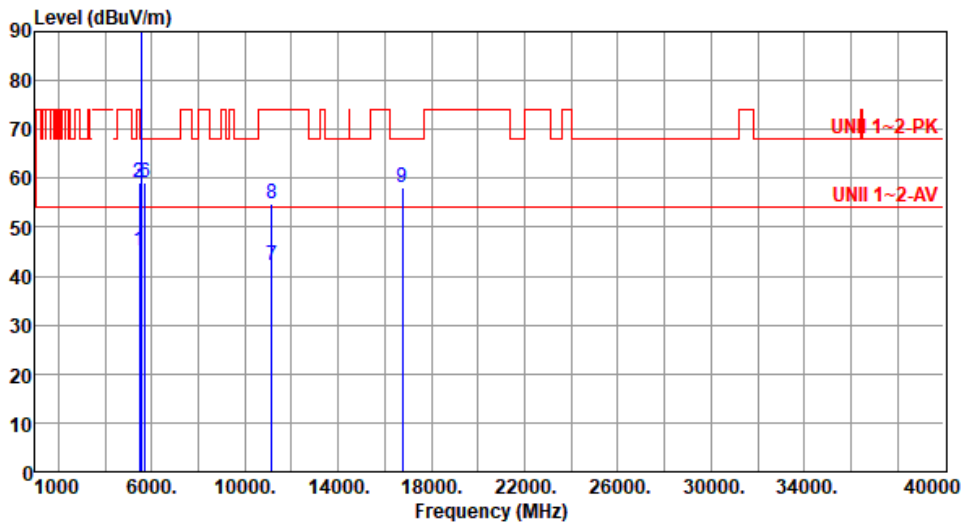

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.31	54.00	-8.69	44.70	0.61	Average	145	19
2	5460.00	59.15	74.00	-14.85	58.54	0.61	Peak	145	19
3	5470.00	59.11	68.20	-9.09	58.49	0.62	Peak	145	19
4 *	5580.00	101.77			101.10	0.67	Average	145	19
5 *	5580.00	116.05			115.38	0.67	Peak	145	19
6	5725.00	59.14	68.20	-9.06	58.19	0.95	Peak	145	19
7	11160.00	42.27	54.00	-11.73	33.49	8.78	Average	100	2
8	11160.00	54.85	74.00	-19.15	46.07	8.78	Peak	100	2
9	16740.00	58.01	68.20	-10.19	50.78	7.23	Peak	100	72

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5580
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

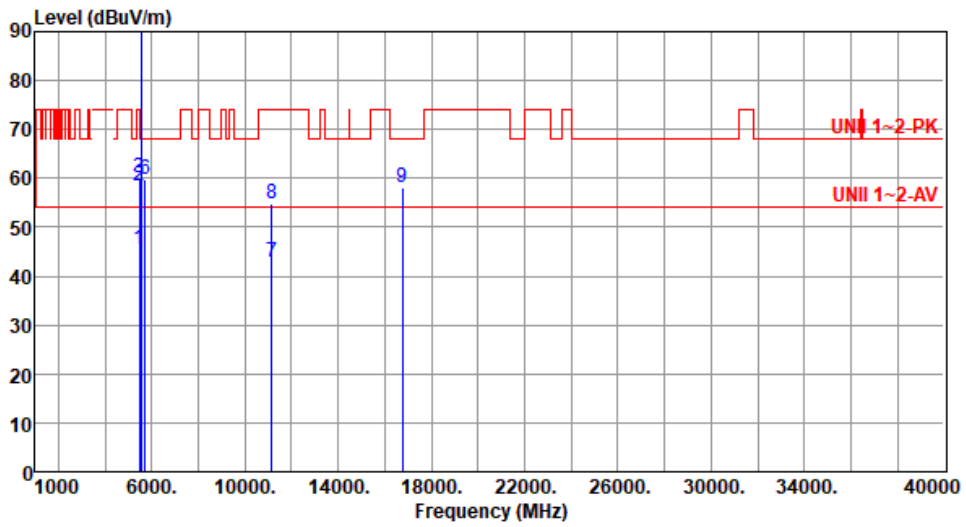

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.65	54.00	-8.35	45.04	0.61	Average	177	13
2	5460.00	58.58	74.00	-15.42	57.97	0.61	Peak	177	13
3	5470.00	60.10	68.20	-8.10	59.48	0.62	Peak	177	13
4 *	5580.00	105.11			104.44	0.67	Average	177	13
5 *	5580.00	118.57			117.90	0.67	Peak	177	13
6	5725.00	59.80	68.20	-8.40	58.85	0.95	Peak	177	13
7	11160.00	42.70	54.00	-11.30	33.92	8.78	Average	100	5
8	11160.00	54.64	74.00	-19.36	45.86	8.78	Peak	100	5
9	16740.00	57.95	68.20	-10.25	50.72	7.23	Peak	100	38

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

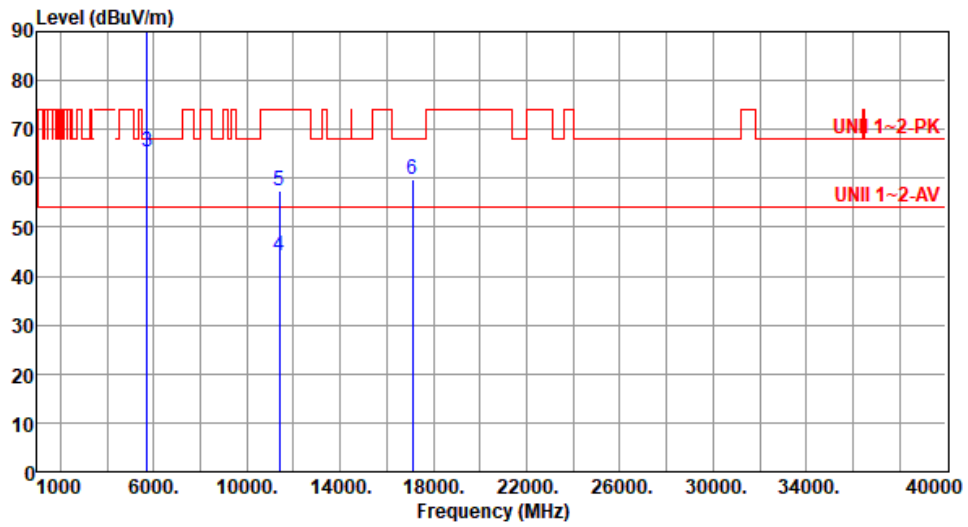

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	5700.00	105.32			104.43	0.89	Average	175	344
2 *	5700.00	118.96			118.07	0.89	Peak	175	344
3	5725.00	65.52	68.20	-2.68	64.57	0.95	Peak	175	344
4	11400.00	44.00	54.00	-10.00	35.39	8.61	Average	100	21
5	11400.00	57.47	74.00	-16.53	48.86	8.61	Peak	100	21
6	17100.00	59.88	68.20	-8.32	53.23	6.65	Peak	100	106

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5700
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

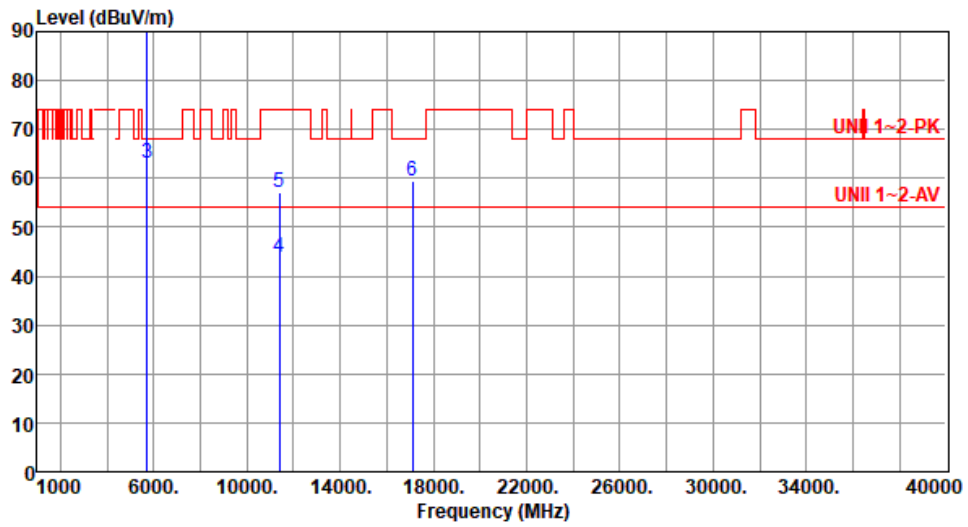


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	5700.00	102.88			101.99	0.89	Average	144	7
2 *	5700.00	116.42			115.53	0.89	Peak	144	7
3	5725.00	63.07	68.20	-5.13	62.12	0.95	Peak	144	7
4	11400.00	43.85	54.00	-10.15	35.24	8.61	Average	100	39
5	11400.00	57.20	74.00	-16.80	48.59	8.61	Peak	100	39
6	17100.00	59.53	68.20	-8.67	52.88	6.65	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

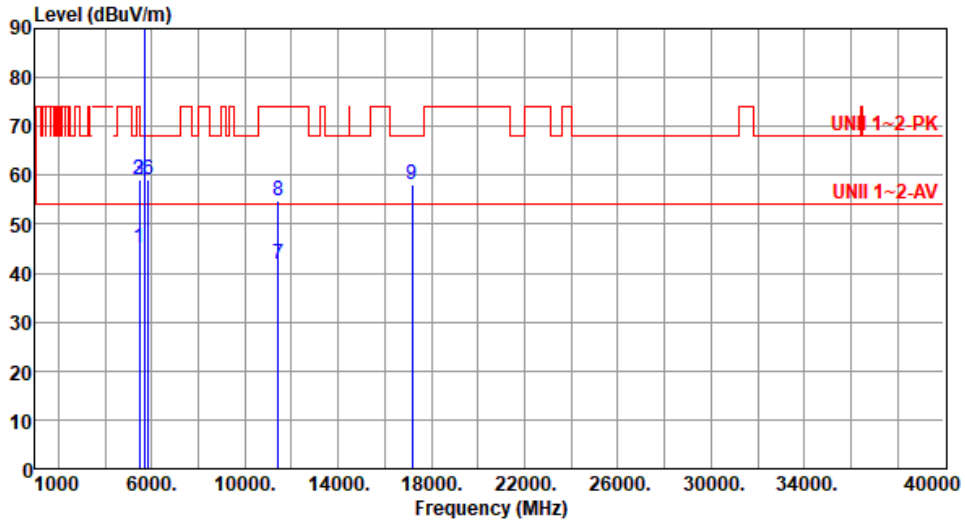

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.26	54.00	-8.74	44.65	0.61	Average	175	15
2	5460.00	59.15	74.00	-14.85	58.54	0.61	Peak	175	15
3	5470.00	59.08	68.20	-9.12	58.46	0.62	Peak	175	15
4 *	5720.00	105.64			104.71	0.93	Average	175	15
5 *	5720.00	119.26			118.33	0.93	Peak	175	15
6	5850.00	59.05	68.20	-9.15	57.78	1.27	Peak	175	15
7	11440.00	41.90	54.00	-12.10	33.22	8.68	Average	100	17
8	11440.00	54.84	74.00	-19.16	46.16	8.68	Peak	100	17
9	17160.00	58.09	68.20	-10.11	51.58	6.51	Peak	100	75

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5720
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

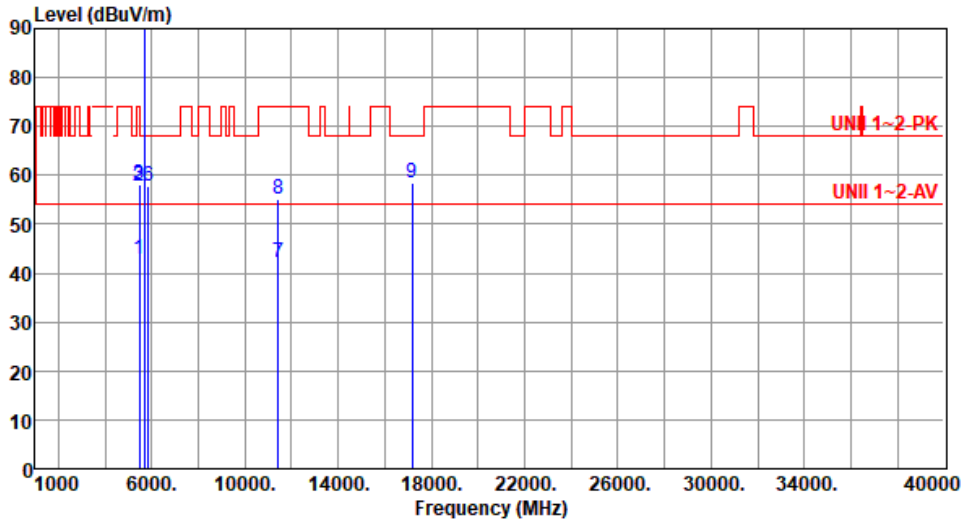

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.97	54.00	-11.03	42.36	0.61	Average	149	12
2	5460.00	57.78	74.00	-16.22	57.17	0.61	Peak	149	12
3	5470.00	57.98	68.20	-10.22	57.36	0.62	Peak	149	12
4 *	5720.00	103.19			102.26	0.93	Average	149	12
5 *	5720.00	116.86			115.93	0.93	Peak	149	12
6	5850.00	57.75	68.20	-10.45	56.48	1.27	Peak	149	12
7	11440.00	42.20	54.00	-11.80	33.52	8.68	Average	100	114
8	11440.00	55.25	74.00	-18.75	46.57	8.68	Peak	100	114
9	17160.00	58.46	68.20	-9.74	51.95	6.51	Peak	100	43

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

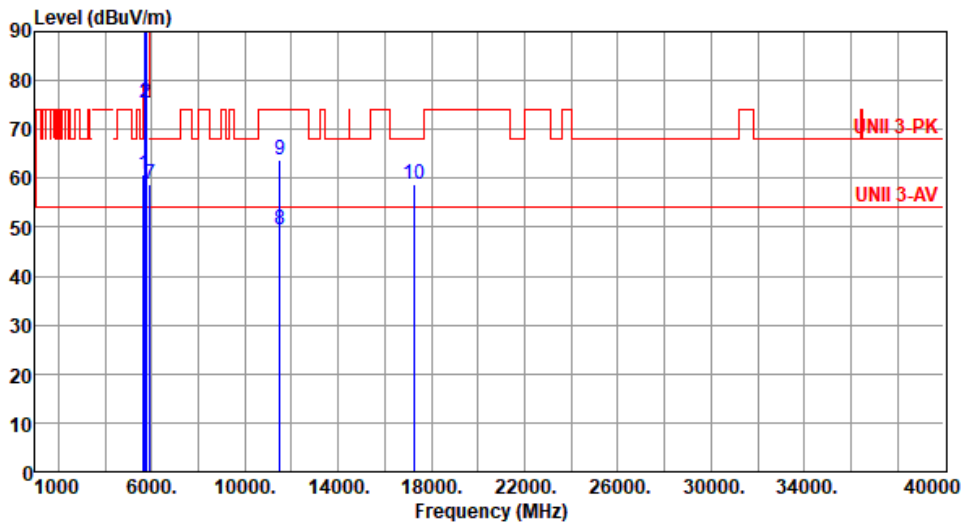

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	60.74	68.20	-7.46	60.18	0.56	Peak	191	343
2	5700.00	75.31	105.20	-29.89	74.42	0.89	Peak	191	343
3	5720.00	94.03	110.80	-16.77	93.10	0.93	Peak	191	343
4	5725.00	98.01	122.20	-24.19	97.06	0.95	Peak	191	343
5 *	5745.00	110.11			109.11	1.00	Average	191	343
6 *	5745.00	123.27			122.27	1.00	Peak	191	343
7	5925.00	58.70	68.20	-9.50	57.19	1.51	Peak	191	343
8	11490.00	49.58	54.00	-4.42	40.81	8.77	Average	107	24
9	11490.00	63.83	74.00	-10.17	55.06	8.77	Peak	107	24
10	17235.00	58.68	68.20	-9.52	52.22	6.46	Peak	100	39

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5745
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

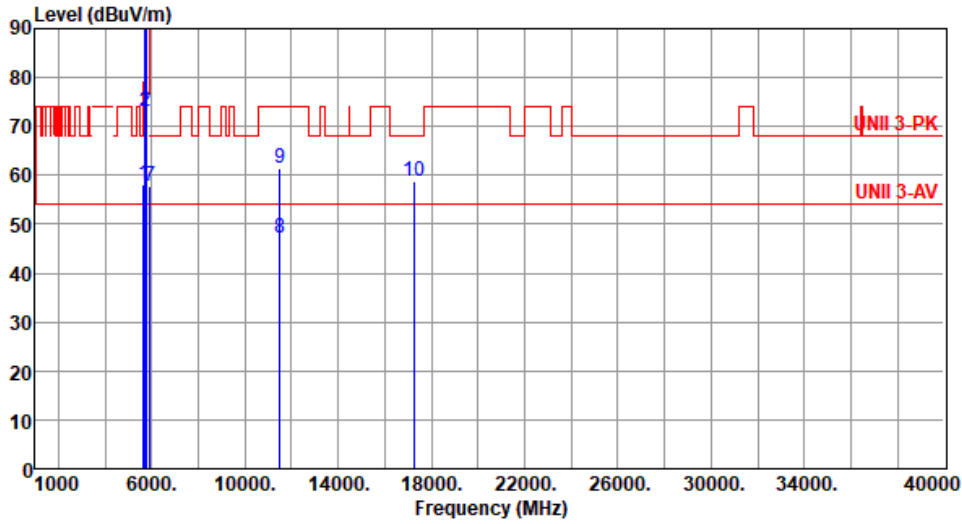

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	58.26	68.20	-9.94	57.70	0.56	Peak	143	15
2	5700.00	72.94	105.20	-32.26	72.05	0.89	Peak	143	15
3	5720.00	91.43	110.80	-19.37	90.50	0.93	Peak	143	15
4	5725.00	95.88	122.20	-26.32	94.93	0.95	Peak	143	15
5 *	5745.00	107.72			106.72	1.00	Average	143	15
6 *	5745.00	120.97			119.97	1.00	Peak	143	15
7	5925.00	57.88	68.20	-10.32	56.37	1.51	Peak	143	15
8	11490.00	47.26	54.00	-6.74	38.49	8.77	Average	100	37
9	11490.00	61.28	74.00	-12.72	52.51	8.77	Peak	100	37
10	17235.00	58.72	68.20	-9.48	52.26	6.46	Peak	100	92

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

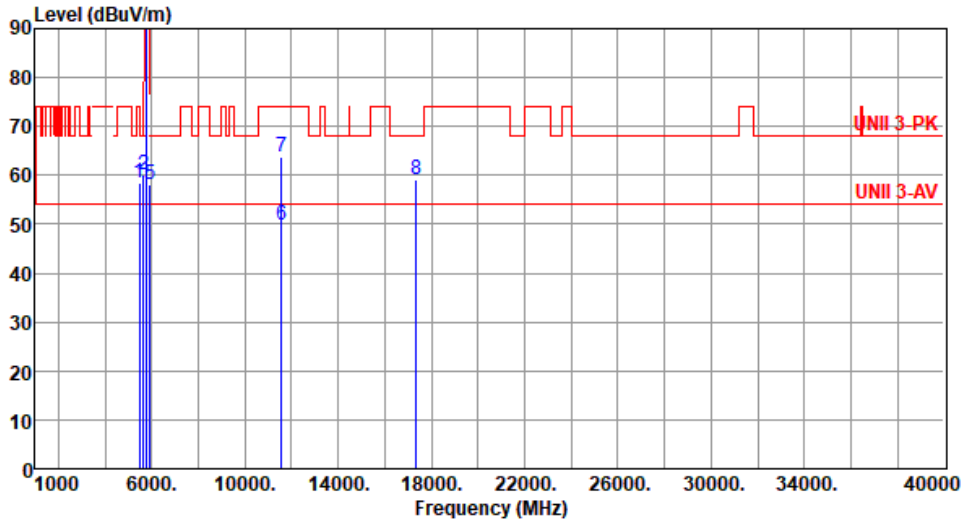

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5480.00	58.44	68.20	-9.76	57.79	0.65	Peak	189	342
2	5650.00	60.01	68.20	-8.19	59.45	0.56	Peak	189	342
3 *	5785.00	109.27			108.17	1.10	Average	189	342
4 *	5785.00	122.85			121.75	1.10	Peak	189	342
5	5925.00	58.13	68.20	-10.07	56.62	1.51	Peak	189	342
6	11570.00	49.65	54.00	-4.35	41.00	8.65	Average	105	27
7	11570.00	63.85	74.00	-10.15	55.20	8.65	Peak	105	27
8	17355.00	59.05	68.20	-9.15	52.28	6.77	Peak	100	39

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5785
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

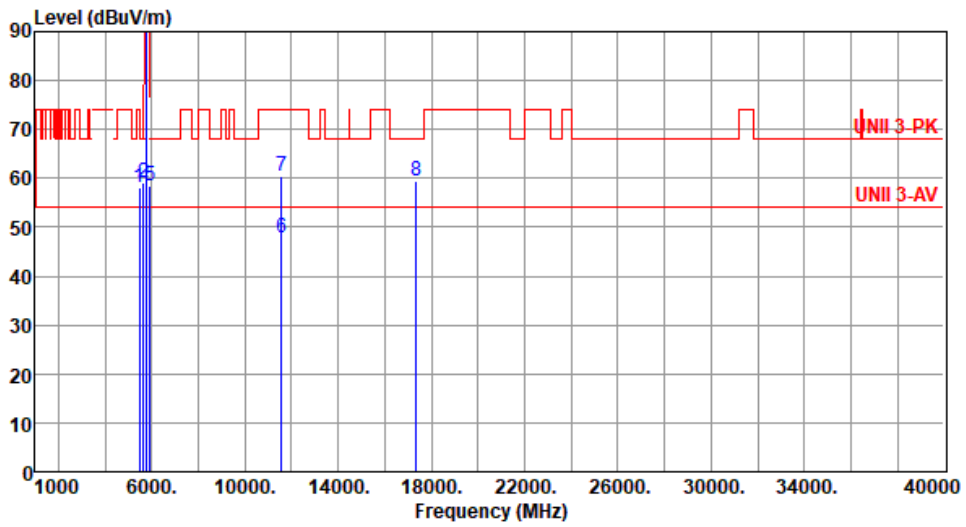

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5480.00	58.25	68.20	-9.95	57.60	0.65	Peak	100	350
2	5650.00	59.03	68.20	-9.17	58.47	0.56	Peak	100	350
3 *	5785.00	107.51			106.41	1.10	Average	100	350
4 *	5785.00	120.80			119.70	1.10	Peak	100	350
5	5925.00	58.43	68.20	-9.77	56.92	1.51	Peak	100	350
6	11570.00	47.71	54.00	-6.29	39.06	8.65	Average	177	343
7	11570.00	60.46	74.00	-13.54	51.81	8.65	Peak	177	343
8	17355.00	59.38	68.20	-8.82	52.61	6.77	Peak	100	22

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Horizontal		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

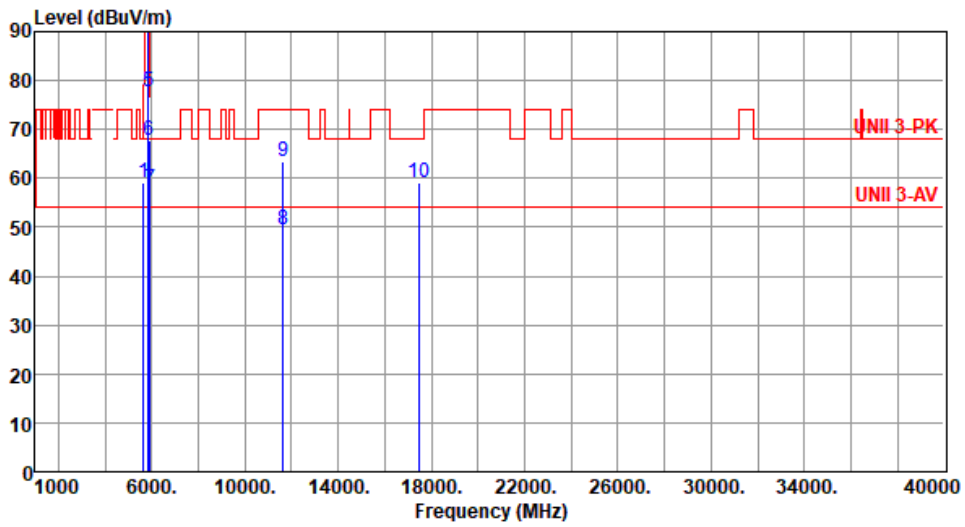

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	59.26	68.20	-8.94	58.70	0.56	Peak	189	348
2 *	5825.00	109.66			108.46	1.20	Average	189	348
3 *	5825.00	122.64			121.44	1.20	Peak	189	348
4	5850.00	93.27	122.20	-28.93	92.00	1.27	Peak	189	348
5	5855.00	77.83	110.80	-32.97	76.54	1.29	Peak	189	348
6	5875.00	67.84	105.20	-37.36	66.45	1.39	Peak	189	348
7	5925.00	57.76	68.20	-10.44	56.25	1.51	Peak	189	348
8	11650.00	49.37	54.00	-4.63	41.08	8.29	Average	108	24
9	11650.00	63.44	74.00	-10.56	55.15	8.29	Peak	108	24
10	17475.00	59.13	68.20	-9.07	51.87	7.26	Peak	100	114

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT20	Test Freq. (MHz)	5825
Polarization	Vertical		

Test By :Brad Wu Temperature(°C):24 Humidity(%):65

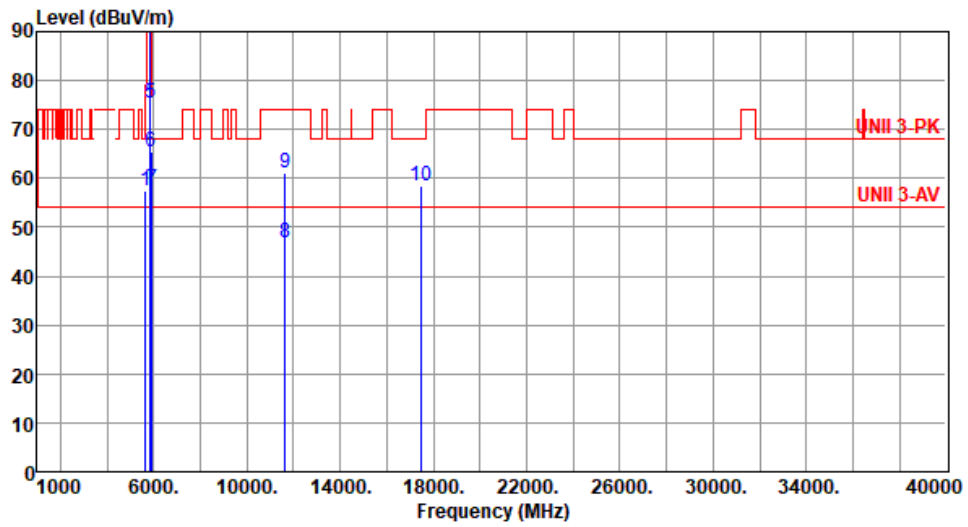

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	57.31	68.20	-10.89	56.75	0.56	Peak	144	18
2 *	5825.00	107.28			106.08	1.20	Average	144	18
3 *	5825.00	120.33			119.13	1.20	Peak	144	18
4	5850.00	91.06	122.20	-31.14	89.79	1.27	Peak	144	18
5	5855.00	75.39	110.80	-35.41	74.10	1.29	Peak	144	18
6	5875.00	65.48	105.20	-39.72	64.09	1.39	Peak	144	18
7	5925.00	57.70	68.20	-10.50	56.19	1.51	Peak	144	18
8	11650.00	46.85	54.00	-7.15	38.56	8.29	Average	100	46
9	11650.00	61.08	74.00	-12.92	52.79	8.29	Peak	100	46
10	17475.00	58.50	68.20	-9.70	51.24	7.26	Peak	100	139


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3:"*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT40

Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

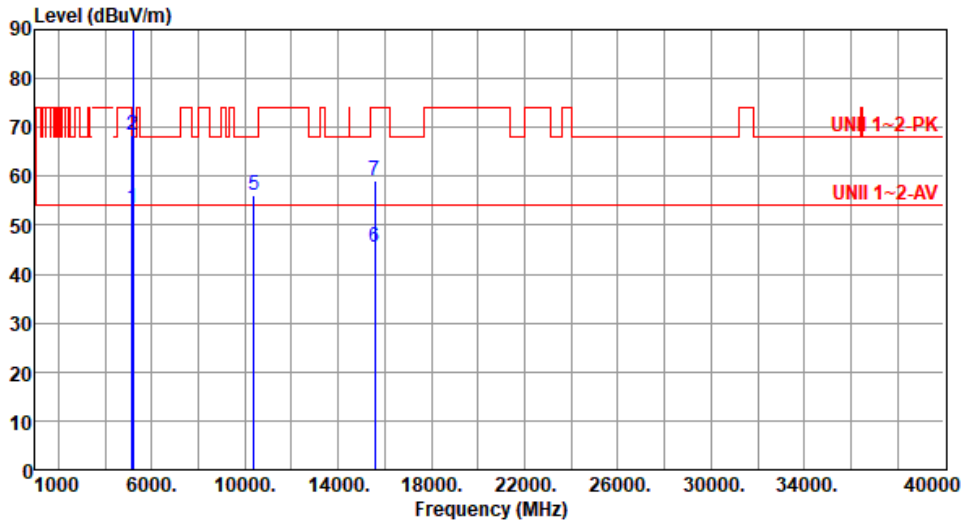

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.57	54.00	-0.43	52.71	0.86	Average	179	352
2	5150.00	68.50	74.00	-5.50	67.64	0.86	Peak	179	352
3 *	5190.00	104.80			104.10	0.70	Average	179	352
4 *	5190.00	119.10			118.40	0.70	Peak	179	352
5	10380.00	56.19	68.20	-12.01	47.58	8.61	Peak	100	83
6	15570.00	45.41	54.00	-8.59	39.48	5.93	Average	100	25
7	15570.00	59.05	74.00	-14.95	53.12	5.93	Peak	100	25

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5190
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

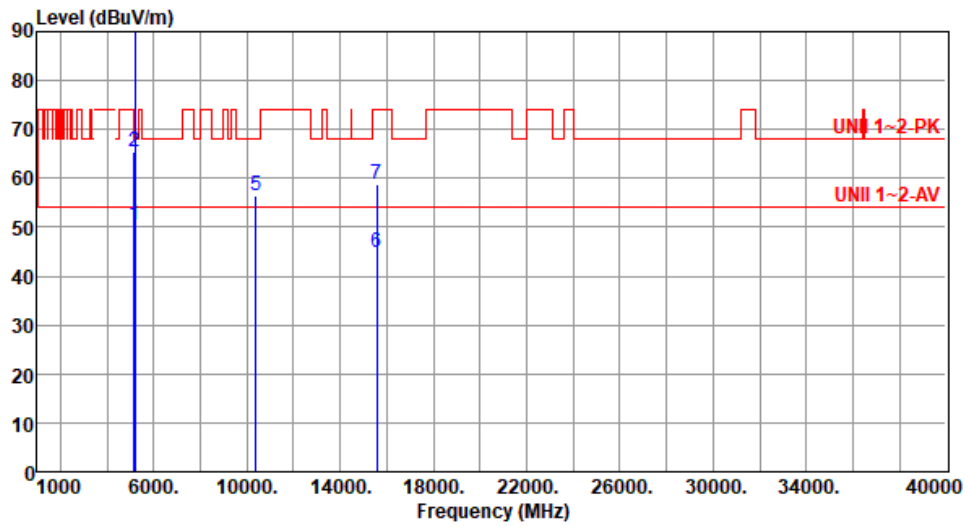

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.52	54.00	-3.48	49.66	0.86	Average	148	16
2	5150.00	65.42	74.00	-8.58	64.56	0.86	Peak	148	16
3 *	5190.00	101.68			100.98	0.70	Average	148	16
4 *	5190.00	116.03			115.33	0.70	Peak	148	16
5	10380.00	56.46	68.20	-11.74	47.85	8.61	Peak	100	115
6	15570.00	44.84	54.00	-9.16	38.91	5.93	Average	100	103
7	15570.00	58.85	74.00	-15.15	52.92	5.93	Peak	100	103

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

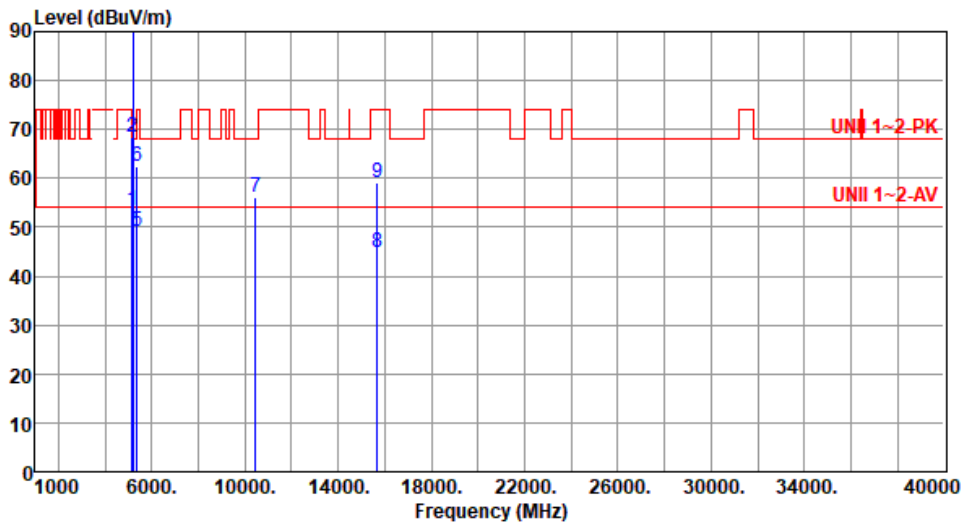

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.38	54.00	-0.62	52.52	0.86	Average	179	352
2	5150.00	68.47	74.00	-5.53	67.61	0.86	Peak	179	352
3 *	5230.00	108.52			108.10	0.42	Average	179	352
4 *	5230.00	121.96			121.54	0.42	Peak	179	352
5	5350.00	49.09	54.00	-4.91	48.92	0.17	Average	179	352
6	5350.00	62.35	74.00	-11.65	62.18	0.17	Peak	179	352
7	10460.00	56.19	68.20	-12.01	47.47	8.72	Peak	100	68
8	15690.00	44.95	54.00	-9.05	39.13	5.82	Average	100	116
9	15690.00	59.07	74.00	-14.93	53.25	5.82	Peak	100	116

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5230
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

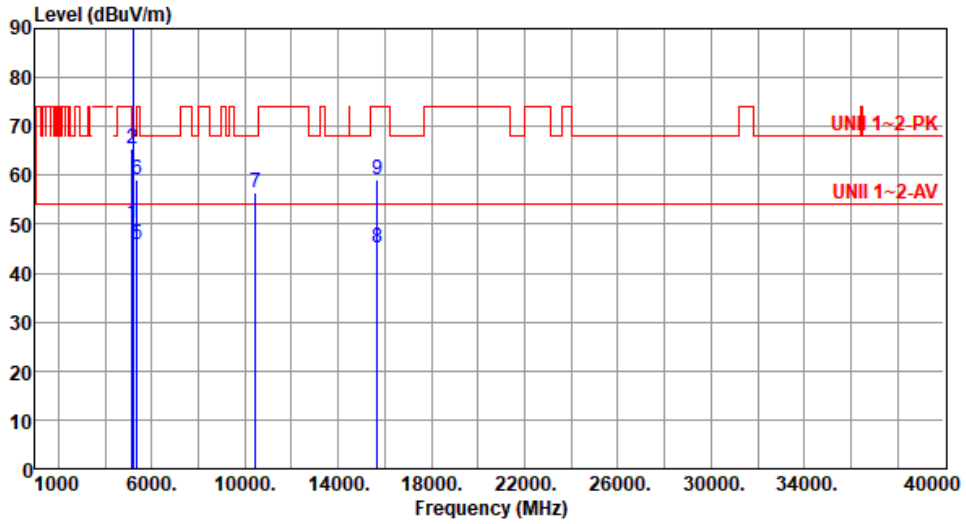

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.29	54.00	-3.71	49.43	0.86	Average	146	11
2	5150.00	65.34	74.00	-8.66	64.48	0.86	Peak	146	11
3 *	5230.00	105.63			105.21	0.42	Average	146	11
4 *	5230.00	118.75			118.33	0.42	Peak	146	11
5	5350.00	45.97	54.00	-8.03	45.80	0.17	Average	146	11
6	5350.00	59.21	74.00	-14.79	59.04	0.17	Peak	146	11
7	10460.00	56.34	68.20	-11.86	47.62	8.72	Peak	100	72
8	15690.00	45.23	54.00	-8.77	39.41	5.82	Average	100	45
9	15690.00	59.01	74.00	-14.99	53.19	5.82	Peak	100	45

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

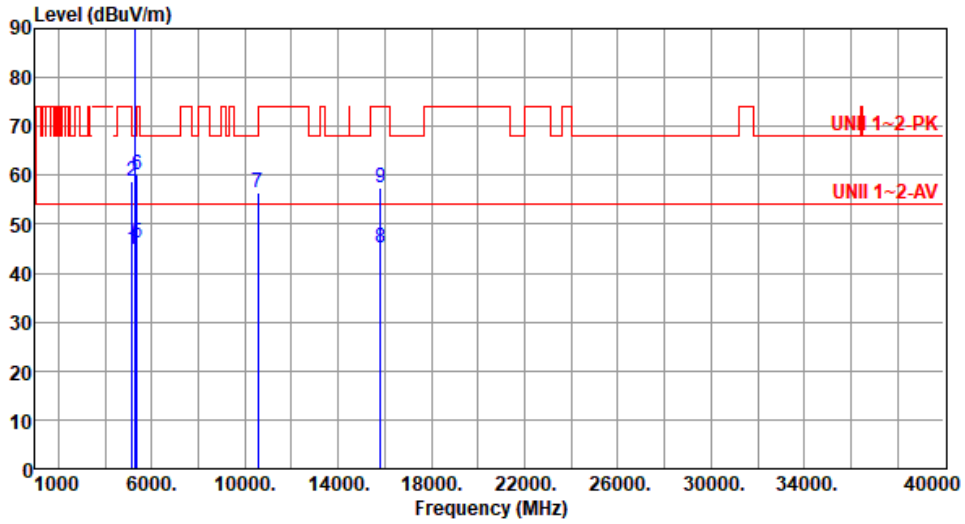

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.82	54.00	-9.18	43.96	0.86	Average	170	1
2	5150.00	58.63	74.00	-15.37	57.77	0.86	Peak	170	1
3 *	5270.00	102.85			102.66	0.19	Average	170	1
4 *	5270.00	116.89			116.70	0.19	Peak	170	1
5	5350.00	46.07	54.00	-7.93	45.90	0.17	Average	170	1
6	5350.00	60.14	74.00	-13.86	59.97	0.17	Peak	170	1
7	10540.00	56.39	68.20	-11.81	47.60	8.79	Peak	100	191
8	15810.00	45.08	54.00	-8.92	39.35	5.73	Average	100	94
9	15810.00	57.51	74.00	-16.49	51.78	5.73	Peak	100	94

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5270
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

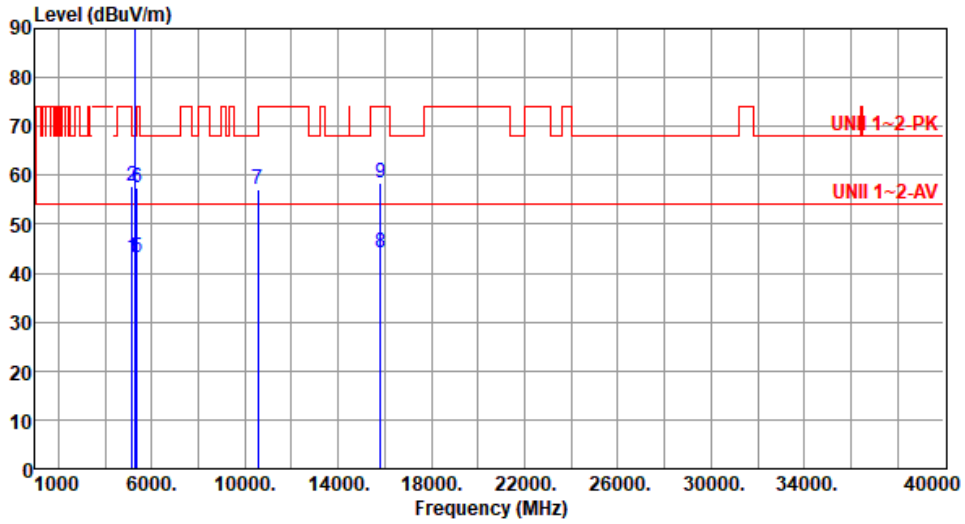

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	43.25	54.00	-10.75	42.39	0.86	Average	147	13
2	5150.00	57.85	74.00	-16.15	56.99	0.86	Peak	147	13
3 *	5270.00	99.97			99.78	0.19	Average	147	13
4 *	5270.00	113.72			113.53	0.19	Peak	147	13
5	5350.00	43.13	54.00	-10.87	42.96	0.17	Average	147	13
6	5350.00	57.29	74.00	-16.71	57.12	0.17	Peak	147	13
7	10540.00	57.23	68.20	-10.97	48.44	8.79	Peak	100	63
8	15810.00	44.25	54.00	-9.75	38.52	5.73	Average	100	149
9	15810.00	58.37	74.00	-15.63	52.64	5.73	Peak	100	149

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

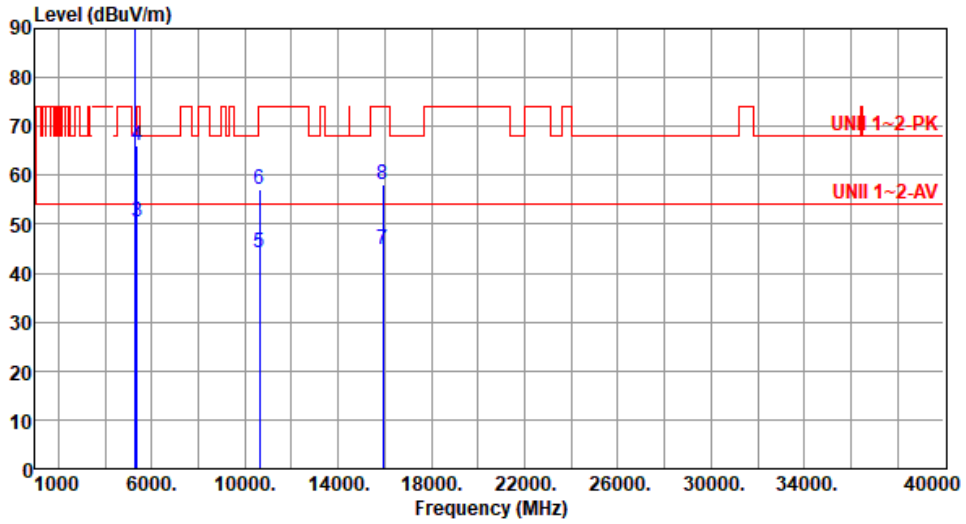

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	5310.00	102.81			102.72	0.09	Average	167	3
2 *	5310.00	117.06			116.97	0.09	Peak	167	3
3	5350.00	50.56	54.00	-3.44	50.39	0.17	Average	167	3
4	5350.00	66.10	74.00	-7.90	65.93	0.17	Peak	167	3
5	10620.00	44.21	54.00	-9.79	35.36	8.85	Average	100	112
6	10620.00	56.97	74.00	-17.03	48.12	8.85	Peak	100	112
7	15930.00	44.89	54.00	-9.11	39.15	5.74	Average	100	49
8	15930.00	58.07	74.00	-15.93	52.33	5.74	Peak	100	49

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5310
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

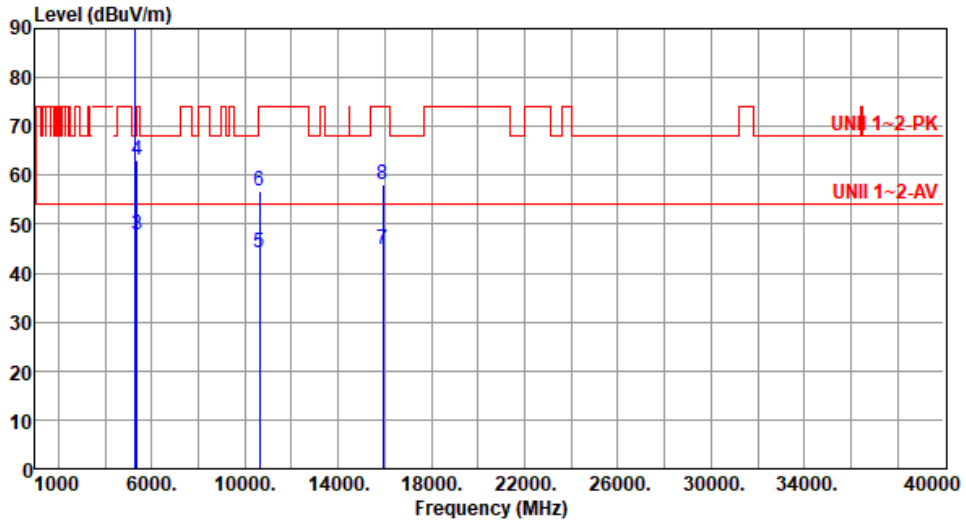

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB/m		High	Table
		dBuV/m			dBuV			cm	deg
1 *	5310.00	98.79			98.70	0.09	Average	142	14
2 *	5310.00	113.95			113.86	0.09	Peak	142	14
3	5350.00	47.68	54.00	-6.32	47.51	0.17	Average	142	14
4	5350.00	63.22	74.00	-10.78	63.05	0.17	Peak	142	14
5	10620.00	44.03	54.00	-9.97	35.18	8.85	Average	100	42
6	10620.00	56.80	74.00	-17.20	47.95	8.85	Peak	100	42
7	15930.00	44.90	54.00	-9.10	39.16	5.74	Average	100	107
8	15930.00	58.01	74.00	-15.99	52.27	5.74	Peak	100	107

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

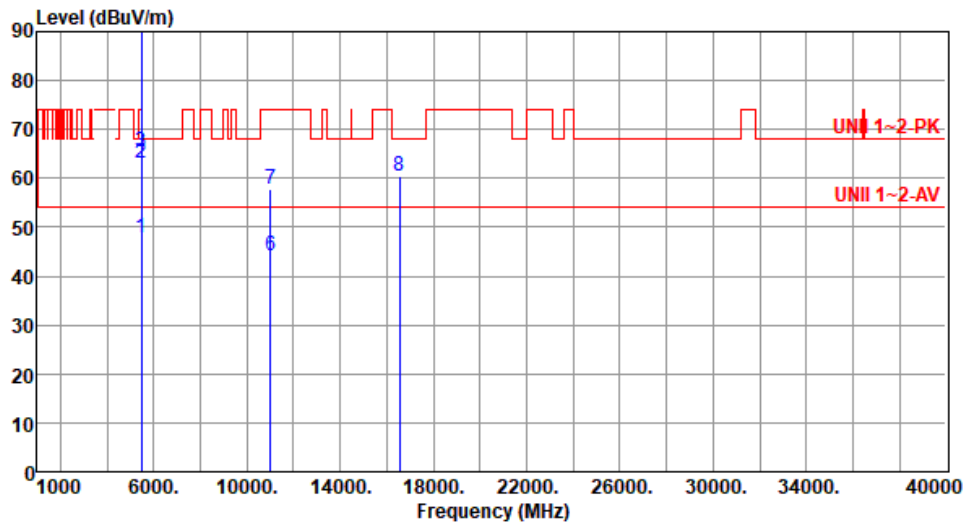

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	47.80	54.00	-6.20	47.19	0.61	Average	182	11
2	5460.00	63.21	74.00	-10.79	62.60	0.61	Peak	182	11
3	5470.00	65.28	68.20	-2.92	64.66	0.62	Peak	182	11
4 *	5510.00	102.02			101.32	0.70	Average	182	11
5 *	5510.00	114.40			113.70	0.70	Peak	182	11
6	11020.00	44.32	54.00	-9.68	35.14	9.18	Average	100	72
7	11020.00	57.74	74.00	-16.26	48.56	9.18	Peak	100	72
8	16530.00	60.31	68.20	-7.89	53.29	7.02	Peak	100	137

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5510
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

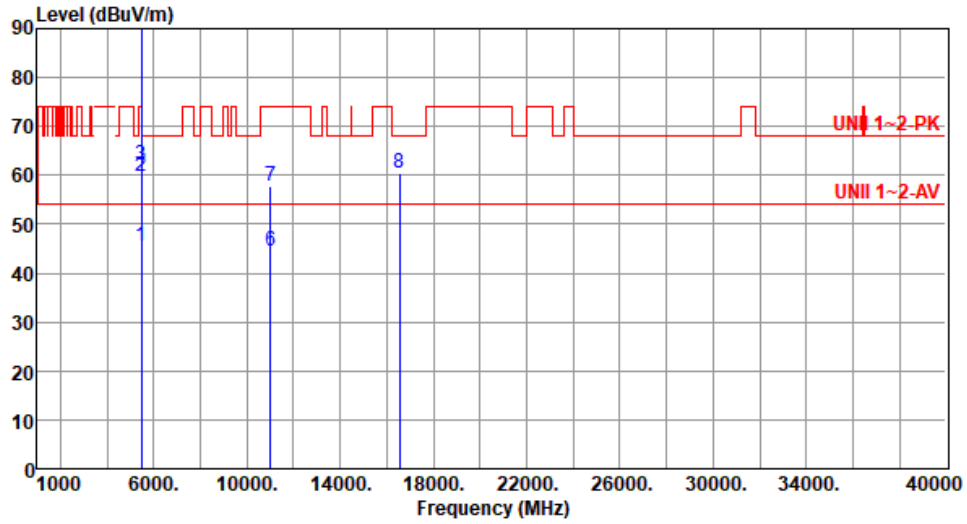

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.54	54.00	-8.46	44.93	0.61	Average	187	16
2	5460.00	59.79	74.00	-14.21	59.18	0.61	Peak	187	16
3	5470.00	62.18	68.20	-6.02	61.56	0.62	Peak	187	16
4 *	5510.00	99.00			98.30	0.70	Average	187	16
5 *	5510.00	111.07			110.37	0.70	Peak	187	16
6	11020.00	44.64	54.00	-9.36	35.46	9.18	Average	100	82
7	11020.00	57.93	74.00	-16.07	48.75	9.18	Peak	100	82
8	16530.00	60.46	68.20	-7.74	53.44	7.02	Peak	100	61

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

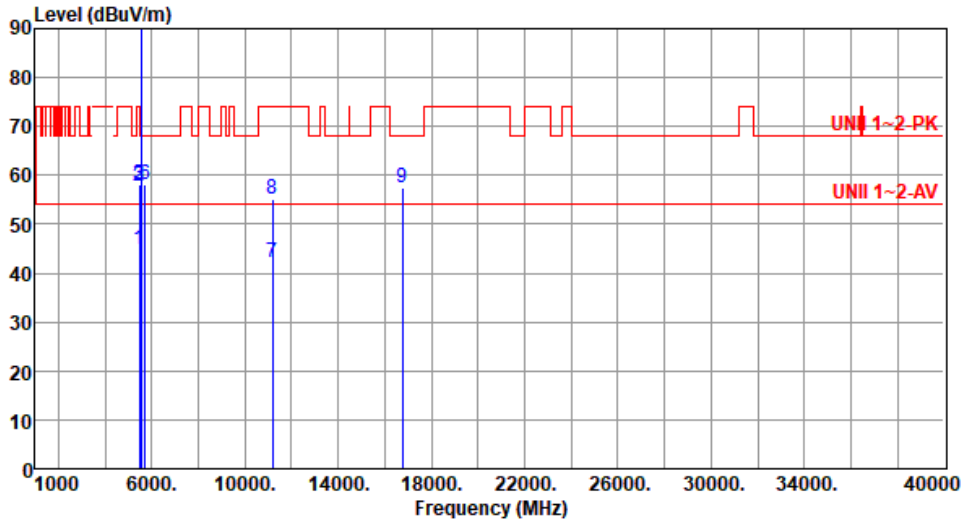

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.83	54.00	-9.17	44.22	0.61	Average	178	8
2	5460.00	57.86	74.00	-16.14	57.25	0.61	Peak	178	8
3	5470.00	57.97	68.20	-10.23	57.35	0.62	Peak	178	8
4 *	5590.00	101.91			101.26	0.65	Average	178	8
5 *	5590.00	114.27			113.62	0.65	Peak	178	8
6	5725.00	58.21	68.20	-9.99	57.26	0.95	Peak	178	8
7	11180.00	42.29	54.00	-11.71	33.56	8.73	Average	100	16
8	11180.00	55.11	74.00	-18.89	46.38	8.73	Peak	100	16
9	16770.00	57.57	68.20	-10.63	50.38	7.19	Peak	100	63

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5590
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

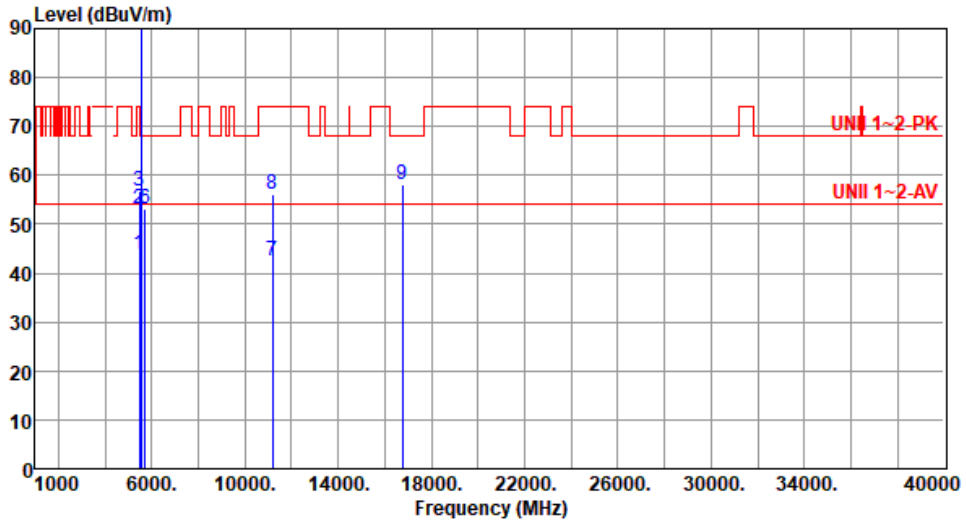

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	43.96	54.00	-10.04	43.35	0.61	Average	148	9
2	5460.00	53.03	74.00	-20.97	52.42	0.61	Peak	148	9
3	5470.00	56.90	68.20	-11.30	56.28	0.62	Peak	148	9
4 *	5590.00	98.84			98.19	0.65	Average	148	9
5 *	5590.00	111.22			110.57	0.65	Peak	148	9
6	5725.00	53.28	68.20	-14.92	52.33	0.95	Peak	148	9
7	11180.00	42.52	54.00	-11.48	33.79	8.73	Average	100	82
8	11180.00	56.19	74.00	-17.81	47.46	8.73	Peak	100	82
9	16770.00	58.10	68.20	-10.10	50.91	7.19	Peak	100	103

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

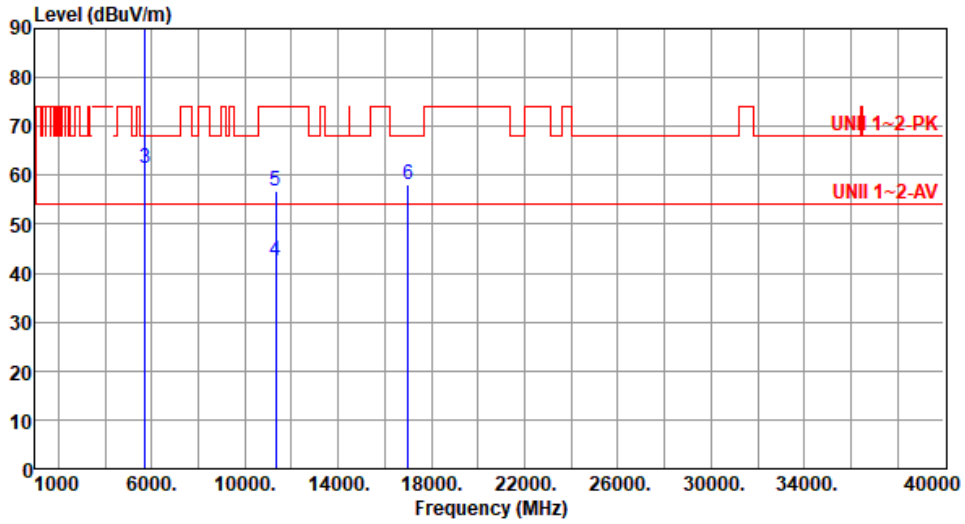

		Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
		MHz	dBuV/m	dBuV/m	dB	dBuV	dB/m		cm	deg
1	*	5670.00	102.04			101.35	0.69	Average	186	343
2	*	5670.00	115.44			114.75	0.69	Peak	186	343
3		5725.00	61.37	68.20	-6.83	60.42	0.95	Peak	186	343
4		11340.00	42.36	54.00	-11.64	33.79	8.57	Average	100	108
5		11340.00	56.92	74.00	-17.08	48.35	8.57	Peak	100	108
6		17010.00	58.22	68.20	-9.98	51.29	6.93	Peak	100	174

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5670
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

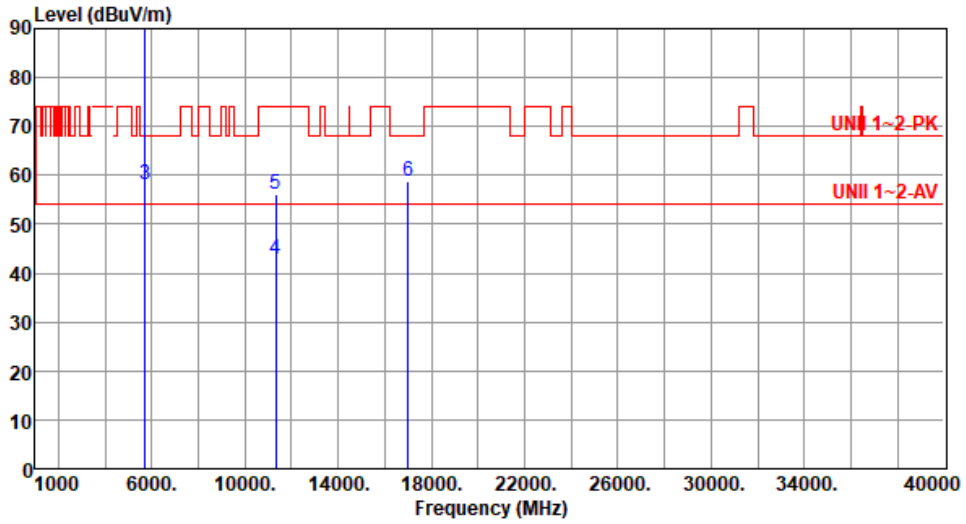

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1 *	5670.00	99.18			98.49	0.69	Average	144	15
2 *	5670.00	112.58			111.89	0.69	Peak	144	15
3	5725.00	58.14	68.20	-10.06	57.19	0.95	Peak	144	15
4	11340.00	42.79	54.00	-11.21	34.22	8.57	Average	100	125
5	11340.00	55.96	74.00	-18.04	47.39	8.57	Peak	100	125
6	17010.00	58.78	68.20	-9.42	51.85	6.93	Peak	100	207

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

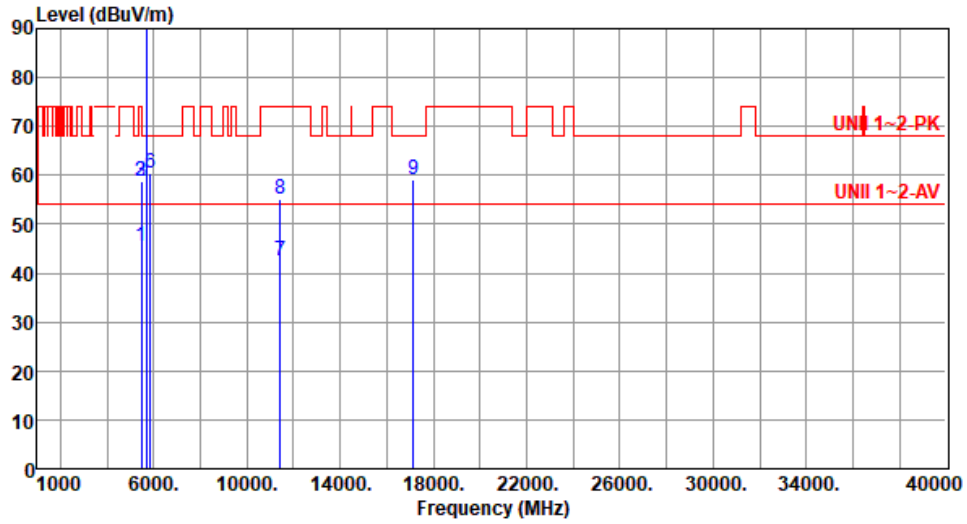

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.65	54.00	-8.35	45.04	0.61	Average	192	346
2	5460.00	58.70	74.00	-15.30	58.09	0.61	Peak	192	346
3	5470.00	58.79	68.20	-9.41	58.17	0.62	Peak	192	346
4 *	5710.00	103.21			102.30	0.91	Average	192	346
5 *	5710.00	116.57			115.66	0.91	Peak	192	346
6	5850.00	60.49	68.20	-7.71	59.22	1.27	Peak	192	346
7	11420.00	42.49	54.00	-11.51	33.84	8.65	Average	100	113
8	11420.00	55.03	74.00	-18.97	46.38	8.65	Peak	100	113
9	17130.00	59.15	68.20	-9.05	52.57	6.58	Peak	100	194

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5710
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

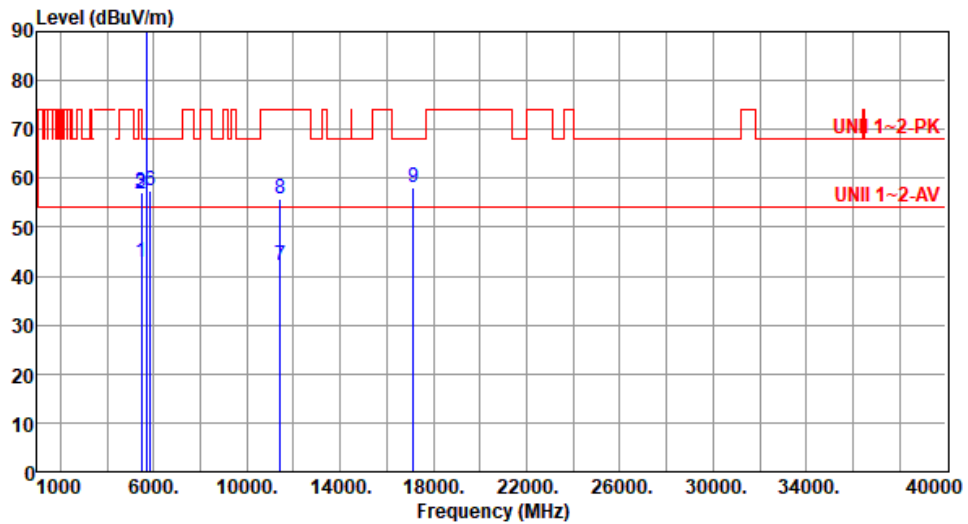

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	42.79	54.00	-11.21	42.18	0.61	Average	147	16
2	5460.00	56.88	74.00	-17.12	56.27	0.61	Peak	147	16
3	5470.00	57.12	68.20	-11.08	56.50	0.62	Peak	147	16
4 *	5710.00	100.29			99.38	0.91	Average	147	16
5 *	5710.00	113.48			112.57	0.91	Peak	147	16
6	5850.00	57.62	68.20	-10.58	56.35	1.27	Peak	147	16
7	11420.00	42.21	54.00	-11.79	33.56	8.65	Average	100	83
8	11420.00	55.80	74.00	-18.20	47.15	8.65	Peak	100	83
9	17130.00	58.21	68.20	-9.99	51.63	6.58	Peak	100	104

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5755
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

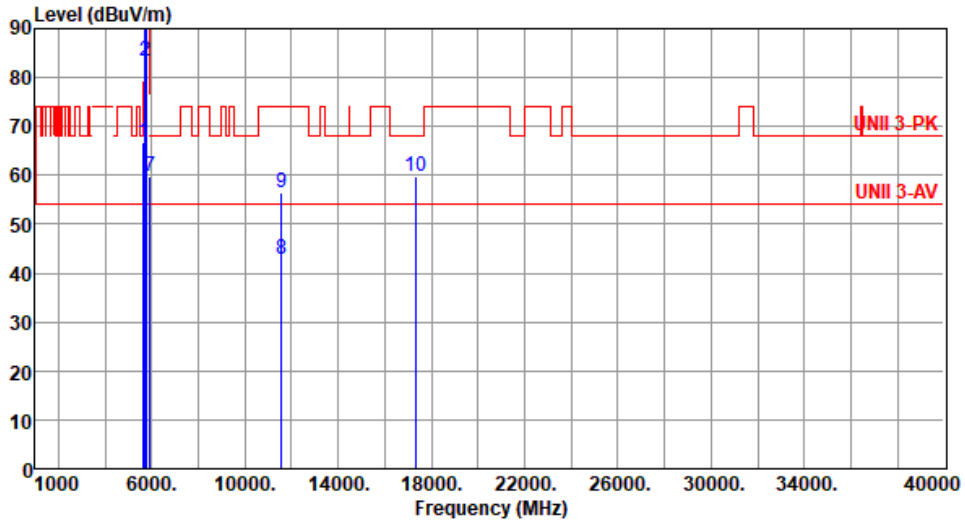

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	66.71	68.20	-1.49	66.15	0.56	Peak	181	339
2	5700.00	83.24	105.20	-21.96	82.35	0.89	Peak	181	339
3	5720.00	96.44	110.80	-14.36	95.51	0.93	Peak	181	339
4	5725.00	97.65	122.20	-24.55	96.70	0.95	Peak	181	339
5 *	5755.00	107.81			106.79	1.02	Average	181	339
6 *	5755.00	120.22			119.20	1.02	Peak	181	339
7	5925.00	59.72	68.20	-8.48	58.21	1.51	Peak	181	339
8	11550.00	42.82	54.00	-11.18	34.13	8.69	Average	100	186
9	11550.00	56.57	74.00	-17.43	47.88	8.69	Peak	100	186
10	17325.00	59.67	68.20	-8.53	53.04	6.63	Peak	100	145

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5755
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

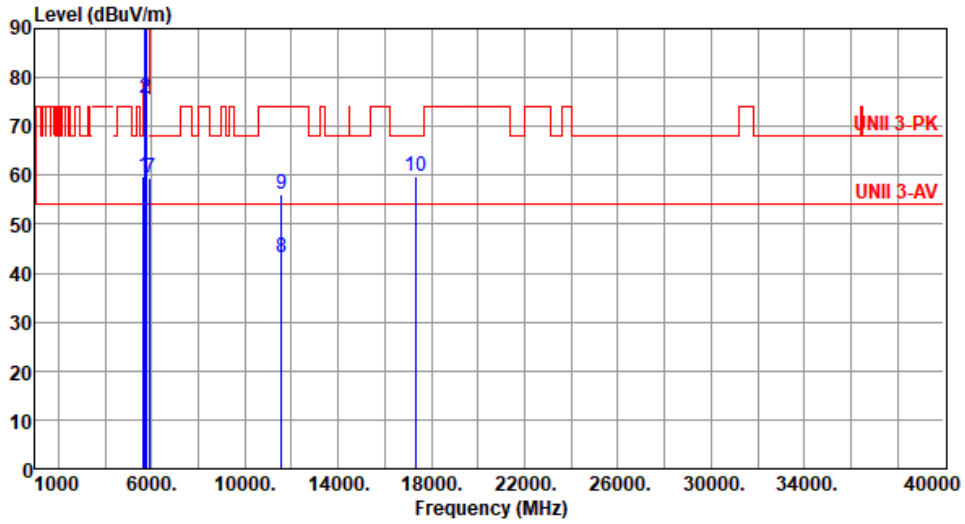

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	59.79	68.20	-8.41	59.23	0.56	Peak	188	34
2	5700.00	75.69	105.20	-29.51	74.80	0.89	Peak	188	34
3	5720.00	88.84	110.80	-21.96	87.91	0.93	Peak	188	34
4	5725.00	91.24	122.20	-30.96	90.29	0.95	Peak	188	34
5 *	5755.00	105.91			104.89	1.02	Average	188	34
6 *	5755.00	118.80			117.78	1.02	Peak	188	34
7	5925.00	59.44	68.20	-8.76	57.93	1.51	Peak	188	34
8	11550.00	43.21	54.00	-10.79	34.52	8.69	Average	100	46
9	11550.00	56.19	74.00	-17.81	47.50	8.69	Peak	100	46
10	17325.00	59.63	68.20	-8.57	53.00	6.63	Peak	100	112

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

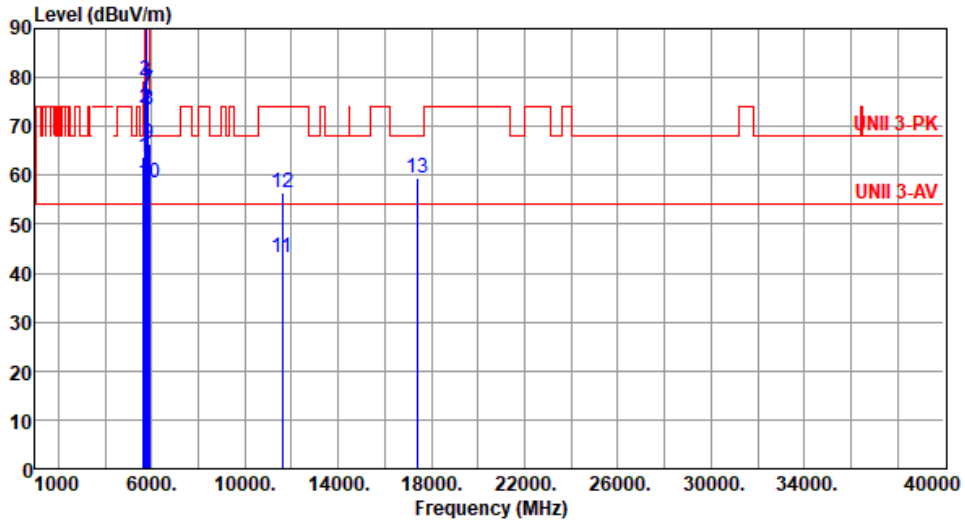

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	63.62	68.20	-4.58	63.06	0.56	Peak	177	347
2	5700.00	73.88	105.20	-31.32	72.99	0.89	Peak	177	347
3	5720.00	79.31	110.80	-31.49	78.38	0.93	Peak	177	347
4	5725.00	78.75	122.20	-43.45	77.80	0.95	Peak	177	347
5 *	5795.00	107.63			106.51	1.12	Average	177	347
6 *	5795.00	120.37			119.25	1.12	Peak	177	347
7	5850.00	77.25	122.20	-44.95	75.98	1.27	Peak	177	347
8	5855.00	73.40	110.80	-37.40	72.11	1.29	Peak	177	347
9	5875.00	66.33	105.20	-38.87	64.94	1.39	Peak	177	347
10	5925.00	58.51	68.20	-9.69	57.00	1.51	Peak	177	347
11	11590.00	43.23	54.00	-10.77	34.63	8.60	Average	100	139
12	11590.00	56.40	74.00	-17.60	47.80	8.60	Peak	100	139
13	17385.00	59.55	68.20	-8.65	52.63	6.92	Peak	100	157

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT40	Test Freq. (MHz)	5795
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

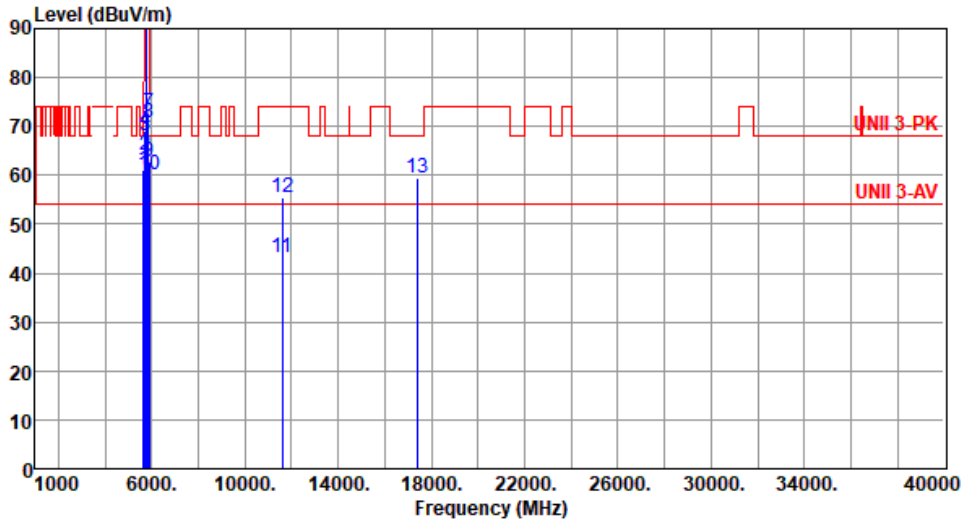

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	61.20	68.20	-7.00	60.64	0.56	Peak	188	33
2	5700.00	63.95	105.20	-41.25	63.06	0.89	Peak	188	33
3	5720.00	68.00	110.80	-42.80	67.07	0.93	Peak	188	33
4	5725.00	69.18	122.20	-53.02	68.23	0.95	Peak	188	33
5 *	5795.00	106.05			104.93	1.12	Average	188	33
6 *	5795.00	119.26			118.14	1.12	Peak	188	33
7	5850.00	72.75	122.20	-49.45	71.48	1.27	Peak	188	33
8	5855.00	70.77	110.80	-40.03	69.48	1.29	Peak	188	33
9	5875.00	62.69	105.20	-42.51	61.30	1.39	Peak	188	33
10	5925.00	59.97	68.20	-8.23	58.46	1.51	Peak	188	33
11	11590.00	43.10	54.00	-10.90	34.50	8.60	Average	100	195
12	11590.00	55.33	74.00	-18.67	46.73	8.60	Peak	100	195
13	17385.00	59.37	68.20	-8.83	52.45	6.92	Peak	100	187

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

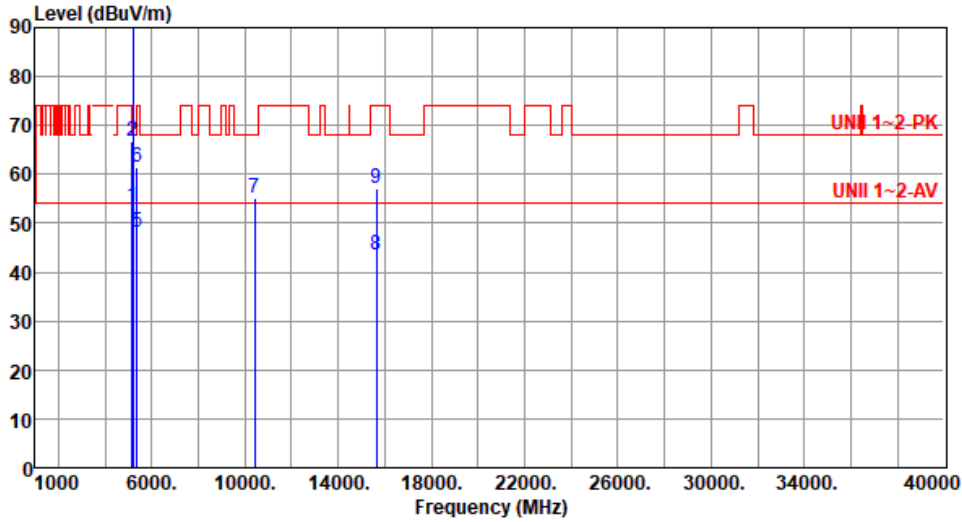

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.51	54.00	-0.49	52.65	0.86	Average	189	349
2	5150.00	66.70	74.00	-7.30	65.84	0.86	Peak	189	349
3 *	5210.00	102.20			101.62	0.58	Average	189	349
4 *	5210.00	115.49			114.91	0.58	Peak	189	349
5	5350.00	48.19	54.00	-5.81	48.02	0.17	Average	189	349
6	5350.00	61.45	74.00	-12.55	61.28	0.17	Peak	189	349
7	10420.00	55.18	68.20	-13.02	46.49	8.69	Peak	100	109
8	15630.00	43.49	54.00	-10.51	37.67	5.82	Average	100	127
9	15630.00	57.16	74.00	-16.84	51.34	5.82	Peak	100	127

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5210
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

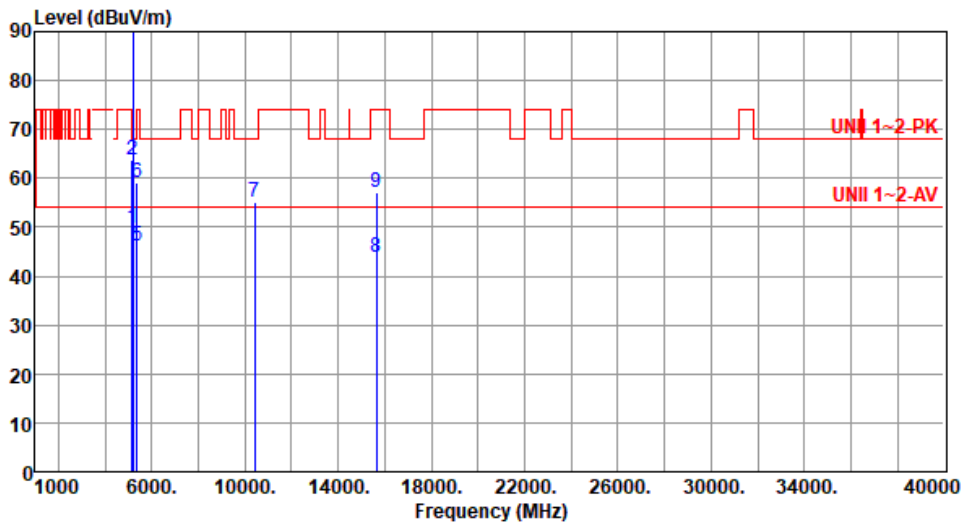

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	49.93	54.00	-4.07	49.07	0.86	Average	158	16
2	5150.00	63.65	74.00	-10.35	62.79	0.86	Peak	158	16
3 *	5210.00	99.29			98.71	0.58	Average	158	16
4 *	5210.00	112.80			112.22	0.58	Peak	158	16
5	5350.00	46.05	54.00	-7.95	45.88	0.17	Average	158	16
6	5350.00	59.05	74.00	-14.95	58.88	0.17	Peak	158	16
7	10420.00	55.25	68.20	-12.95	46.56	8.69	Peak	100	34
8	15630.00	43.85	54.00	-10.15	38.03	5.82	Average	100	76
9	15630.00	57.11	74.00	-16.89	51.29	5.82	Peak	100	76

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

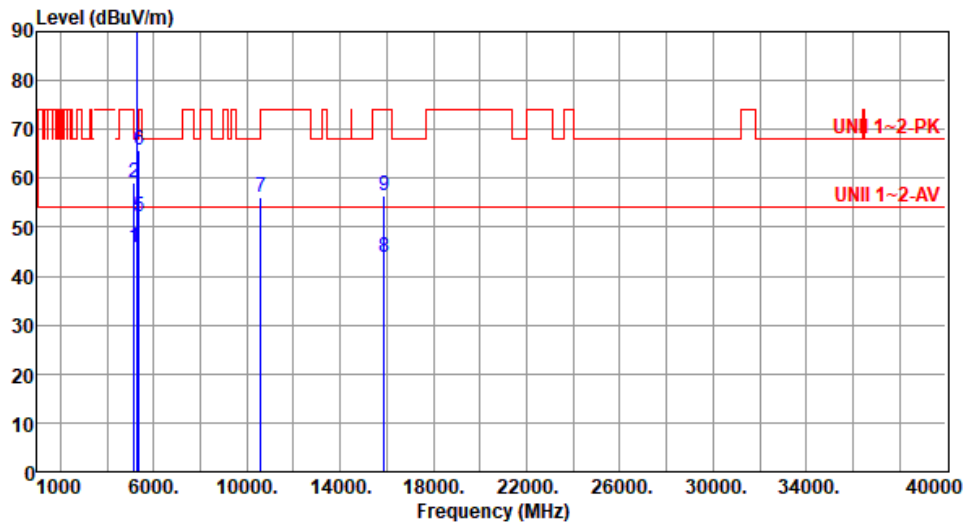

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	45.84	54.00	-8.16	44.98	0.86	Average	175	4
2	5150.00	59.25	74.00	-14.75	58.39	0.86	Peak	175	4
3 *	5290.00	100.83			100.73	0.10	Average	175	4
4 *	5290.00	114.59			114.49	0.10	Peak	175	4
5	5350.00	52.25	54.00	-1.75	52.08	0.17	Average	175	4
6	5350.00	65.65	74.00	-8.35	65.48	0.17	Peak	175	4
7	10580.00	56.19	68.20	-12.01	47.37	8.82	Peak	100	36
8	15870.00	43.72	54.00	-10.28	37.99	5.73	Average	100	138
9	15870.00	56.49	74.00	-17.51	50.76	5.73	Peak	100	138

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5290
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

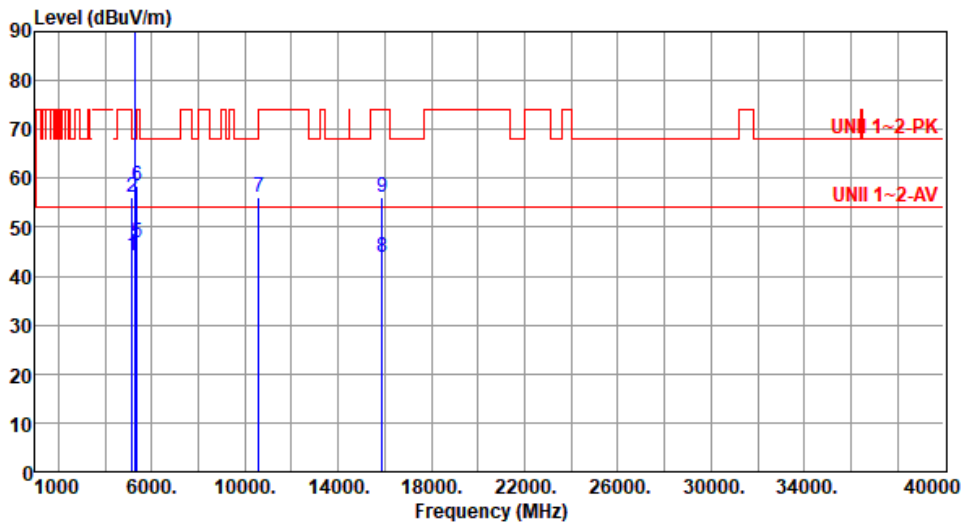

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	44.33	54.00	-9.67	43.47	0.86	Average	154	13
2	5150.00	56.05	74.00	-17.95	55.19	0.86	Peak	154	13
3 *	5290.00	97.41			97.31	0.10	Average	154	13
4 *	5290.00	111.33			111.23	0.10	Peak	154	13
5	5350.00	46.68	54.00	-7.32	46.51	0.17	Average	154	13
6	5350.00	58.36	74.00	-15.64	58.19	0.17	Peak	154	13
7	10580.00	56.10	68.20	-12.10	47.28	8.82	Peak	100	49
8	15870.00	43.98	54.00	-10.02	38.25	5.73	Average	100	144
9	15870.00	56.12	74.00	-17.88	50.39	5.73	Peak	100	144

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

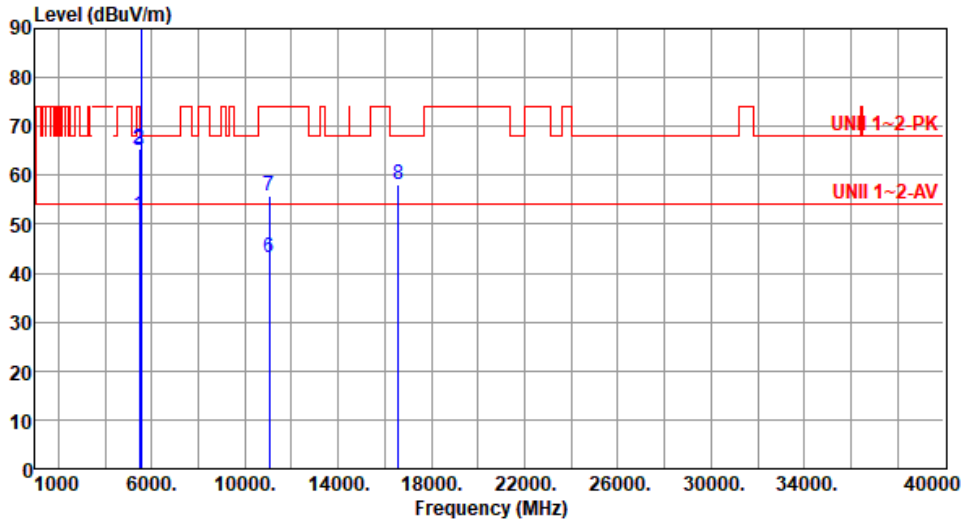

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	51.77	54.00	-2.23	51.16	0.61	Average	168	9
2	5460.00	65.59	74.00	-8.41	64.98	0.61	Peak	168	9
3	5470.00	65.24	68.20	-2.96	64.62	0.62	Peak	168	9
4 *	5530.00	98.99			98.28	0.71	Average	168	9
5 *	5530.00	112.31			111.60	0.71	Peak	168	9
6	11060.00	43.07	54.00	-10.93	34.02	9.05	Average	100	127
7	11060.00	55.84	74.00	-18.16	46.79	9.05	Peak	100	127
8	16590.00	58.08	68.20	-10.12	51.32	6.76	Peak	100	182

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5530
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

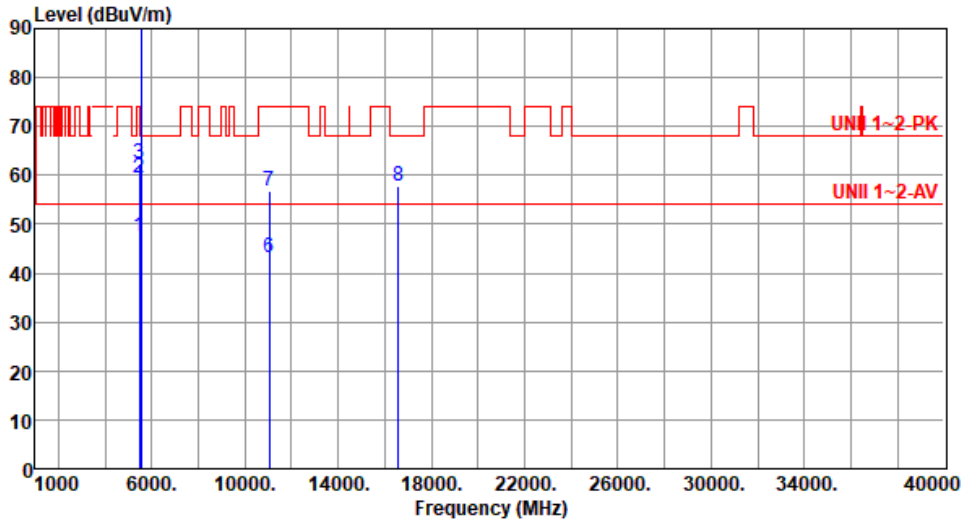

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	47.46	54.00	-6.54	46.85	0.61	Average	156	12
2	5460.00	59.42	74.00	-14.58	58.81	0.61	Peak	156	12
3	5470.00	62.44	68.20	-5.76	61.82	0.62	Peak	156	12
4 *	5530.00	97.03			96.32	0.71	Average	156	12
5 *	5530.00	110.26			109.55	0.71	Peak	156	12
6	11060.00	43.17	54.00	-10.83	34.12	9.05	Average	100	201
7	11060.00	56.80	74.00	-17.20	47.75	9.05	Peak	100	201
8	16590.00	57.82	68.20	-10.38	51.06	6.76	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

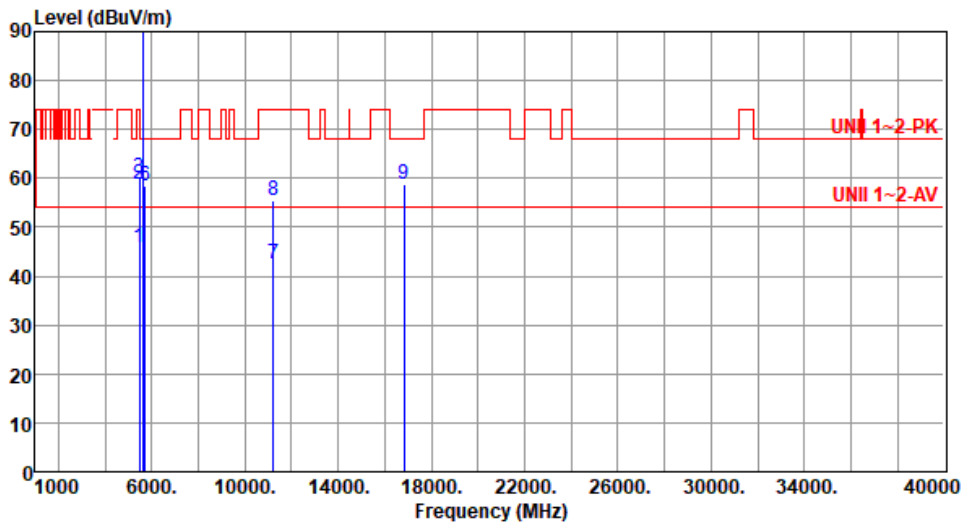

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.87	54.00	-8.13	45.26	0.61	Average	176	8
2	5460.00	58.82	74.00	-15.18	58.21	0.61	Peak	176	8
3	5470.00	60.18	68.20	-8.02	59.56	0.62	Peak	176	8
4 *	5610.00	99.08			98.45	0.63	Average	176	8
5 *	5610.00	112.56			111.93	0.63	Peak	176	8
6	5725.00	58.38	68.20	-9.82	57.43	0.95	Peak	176	8
7	11220.00	42.55	54.00	-11.45	33.89	8.66	Average	100	103
8	11220.00	55.61	74.00	-18.39	46.95	8.66	Peak	100	103
9	16830.00	58.92	68.20	-9.28	51.82	7.10	Peak	100	85

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5610
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

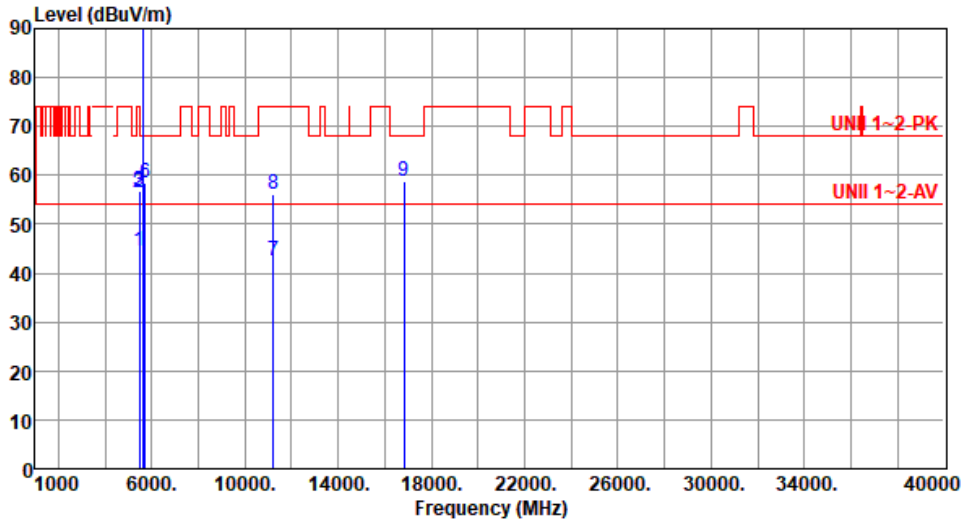

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	44.64	54.00	-9.36	44.03	0.61	Average	157	12
2	5460.00	56.41	74.00	-17.59	55.80	0.61	Peak	157	12
3	5470.00	56.78	68.20	-11.42	56.16	0.62	Peak	157	12
4 *	5610.00	97.79			97.16	0.63	Average	157	12
5 *	5610.00	110.99			110.36	0.63	Peak	157	12
6	5725.00	58.31	68.20	-9.89	57.36	0.95	Peak	157	12
7	11220.00	42.45	54.00	-11.55	33.79	8.66	Average	100	165
8	11220.00	56.15	74.00	-17.85	47.49	8.66	Peak	100	165
9	16830.00	58.75	68.20	-9.45	51.65	7.10	Peak	100	97

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

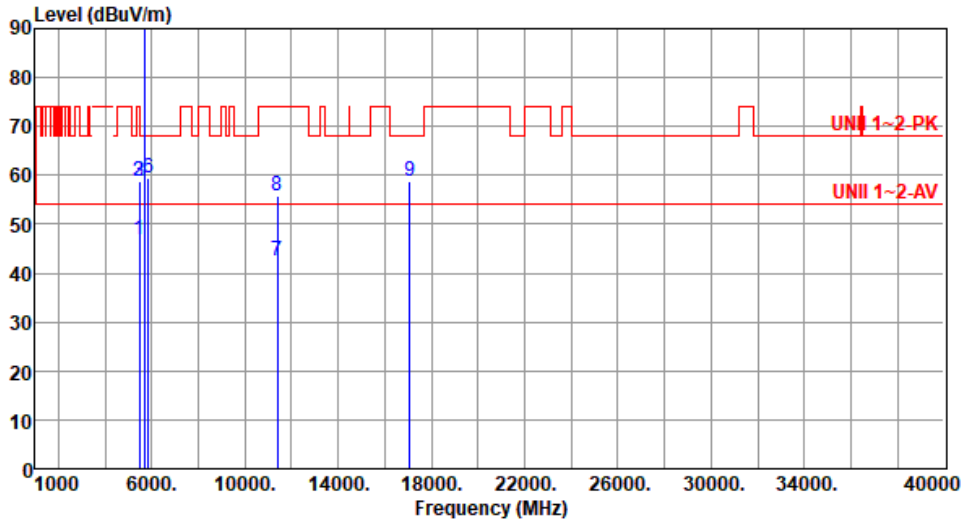

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	46.68	54.00	-7.32	46.07	0.61	Average	174	3
2	5460.00	58.83	74.00	-15.17	58.22	0.61	Peak	174	3
3	5470.00	58.91	68.20	-9.29	58.29	0.62	Peak	174	3
4 *	5690.00	100.15			99.33	0.82	Average	174	3
5 *	5690.00	113.59			112.77	0.82	Peak	174	3
6	5850.00	59.54	68.20	-8.66	58.27	1.27	Peak	174	3
7	11380.00	42.54	54.00	-11.46	33.94	8.60	Average	100	155
8	11380.00	55.91	74.00	-18.09	47.31	8.60	Peak	100	155
9	17070.00	58.81	68.20	-9.39	52.07	6.74	Peak	100	194

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5690
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

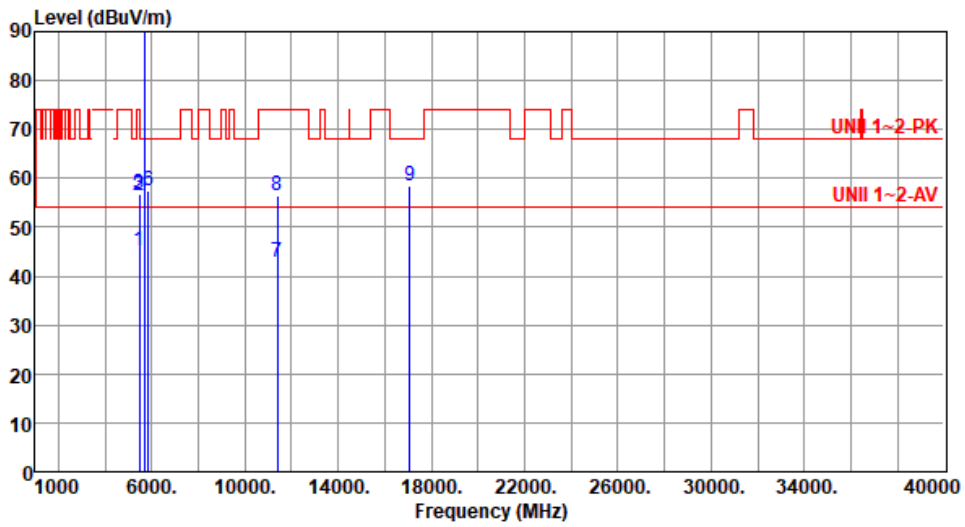

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	45.11	54.00	-8.89	44.50	0.61	Average	152	16
2	5460.00	56.35	74.00	-17.65	55.74	0.61	Peak	152	16
3	5470.00	56.83	68.20	-11.37	56.21	0.62	Peak	152	16
4 *	5690.00	97.91			97.09	0.82	Average	152	16
5 *	5690.00	111.10			110.28	0.82	Peak	152	16
6	5850.00	57.54	68.20	-10.66	56.27	1.27	Peak	152	16
7	11380.00	42.77	54.00	-11.23	34.17	8.60	Average	100	121
8	11380.00	56.59	74.00	-17.41	47.99	8.60	Peak	100	121
9	17070.00	58.47	68.20	-9.73	51.73	6.74	Peak	100	133

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

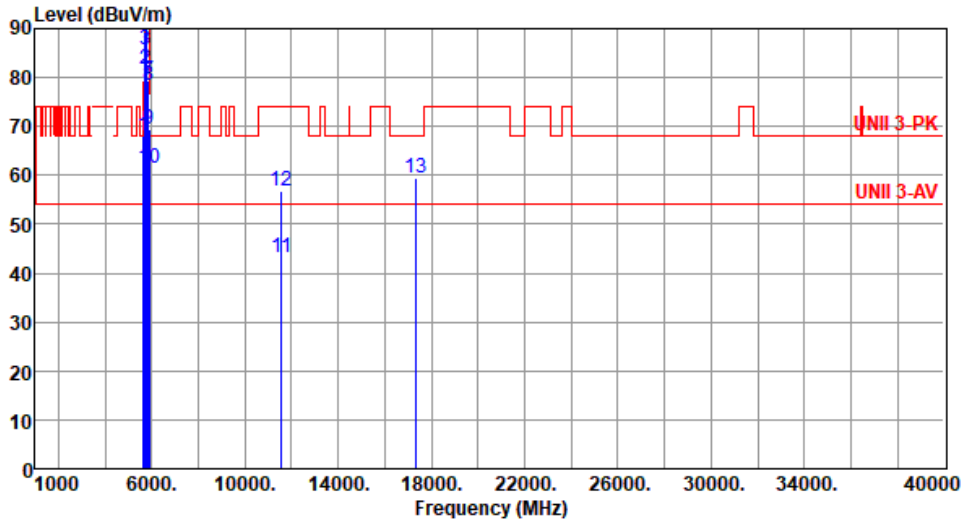

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	68.09	68.20	-0.11	67.53	0.56	Peak	178	343
2	5700.00	81.59	105.20	-23.61	80.70	0.89	Peak	178	343
3	5720.00	85.58	110.80	-25.22	84.65	0.93	Peak	178	343
4	5725.00	89.32	122.20	-32.88	88.37	0.95	Peak	178	343
5 *	5775.00	103.57			102.49	1.08	Average	178	343
6 *	5775.00	116.62			115.54	1.08	Peak	178	343
7	5850.00	79.29	122.20	-42.91	78.02	1.27	Peak	178	343
8	5855.00	78.32	110.80	-32.48	77.03	1.29	Peak	178	343
9	5875.00	69.30	105.20	-35.90	67.91	1.39	Peak	178	343
10	5925.00	61.47	68.20	-6.73	59.96	1.51	Peak	178	343
11	11550.00	43.24	54.00	-10.76	34.55	8.69	Average	100	113
12	11550.00	56.88	74.00	-17.12	48.19	8.69	Peak	100	113
13	17325.00	59.28	68.20	-8.92	52.65	6.63	Peak	100	163

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT80	Test Freq. (MHz)	5775
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

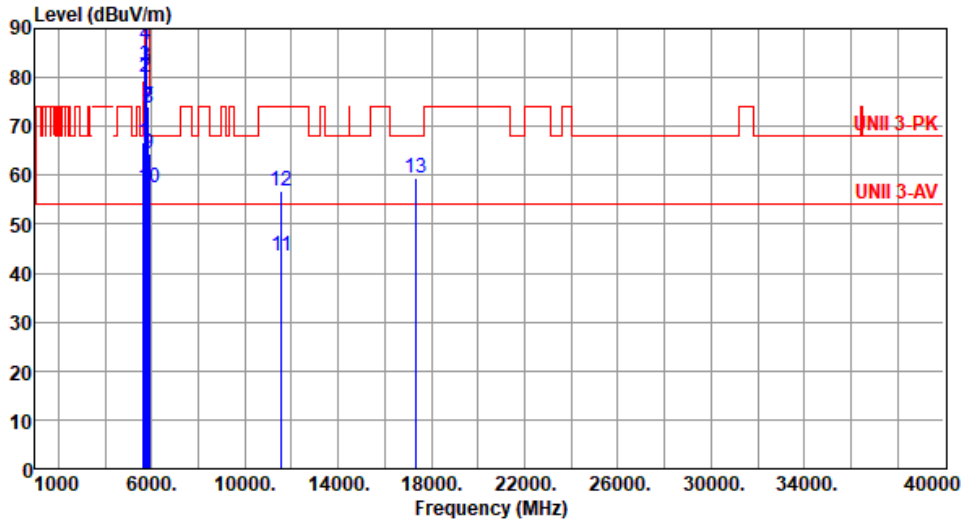

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5650.00	66.69	68.20	-1.51	66.13	0.56	Peak	188	33
2	5700.00	79.90	105.20	-25.30	79.01	0.89	Peak	188	33
3	5720.00	82.41	110.80	-28.39	81.48	0.93	Peak	188	33
4	5725.00	86.79	122.20	-35.41	85.84	0.95	Peak	188	33
5 *	5775.00	103.25			102.17	1.08	Average	188	33
6 *	5775.00	116.89			115.81	1.08	Peak	188	33
7	5850.00	74.08	122.20	-48.12	72.81	1.27	Peak	188	33
8	5855.00	73.89	110.80	-36.91	72.60	1.29	Peak	188	33
9	5875.00	64.59	105.20	-40.61	63.20	1.39	Peak	188	33
10	5925.00	57.32	68.20	-10.88	55.81	1.51	Peak	188	33
11	11550.00	43.60	54.00	-10.40	34.91	8.69	Average	100	235
12	11550.00	56.64	74.00	-17.36	47.95	8.69	Peak	100	235
13	17325.00	59.51	68.20	-8.69	52.88	6.63	Peak	100	91

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT160


Modulation	be EHT160	Test Freq. (MHz)	5250						
Polarization	Horizontal								
<p>Test By :Akun Chung Temperature(°C):23 Humidity(%):65</p>									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	53.58	54.00	-0.42	52.72	0.86	Average	182	2
2	5150.00	68.66	74.00	-5.34	67.80	0.86	Peak	182	2
3 *	5250.00	99.60			99.34	0.26	Average	182	2
4 *	5250.00	112.96			112.70	0.26	Peak	182	2
5	5350.00	52.15	54.00	-1.85	51.98	0.17	Average	182	2
6	5350.00	64.07	74.00	-9.93	63.90	0.17	Peak	182	2
7	10500.00	54.89	68.20	-13.31	46.15	8.74	Peak	100	128
8	15750.00	43.55	54.00	-10.45	37.78	5.77	Average	100	49
9	15750.00	56.60	74.00	-17.40	50.83	5.77	Peak	100	49

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	5250
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

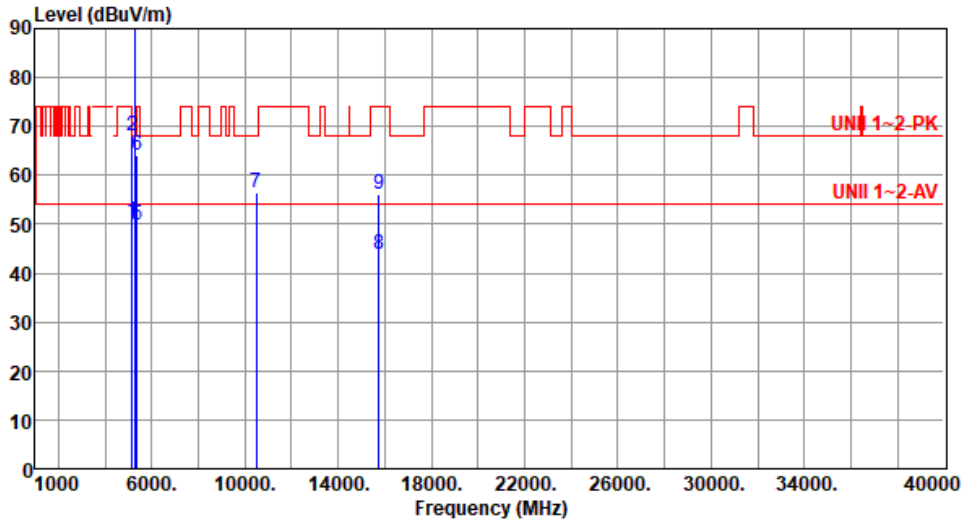


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5150.00	50.50	54.00	-3.50	49.64	0.86	Average	153	26
2	5150.00	68.09	74.00	-5.91	67.23	0.86	Peak	153	26
3 *	5250.00	96.64			96.38	0.26	Average	153	26
4 *	5250.00	109.44			109.18	0.26	Peak	153	26
5	5350.00	49.69	54.00	-4.31	49.52	0.17	Average	153	26
6	5350.00	64.14	74.00	-9.86	63.97	0.17	Peak	153	26
7	10500.00	56.49	68.20	-11.71	47.75	8.74	Peak	100	82
8	15750.00	43.74	54.00	-10.26	37.97	5.77	Average	100	142
9	15750.00	56.10	74.00	-17.90	50.33	5.77	Peak	100	142

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).
 Note 3: "*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Horizontal		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

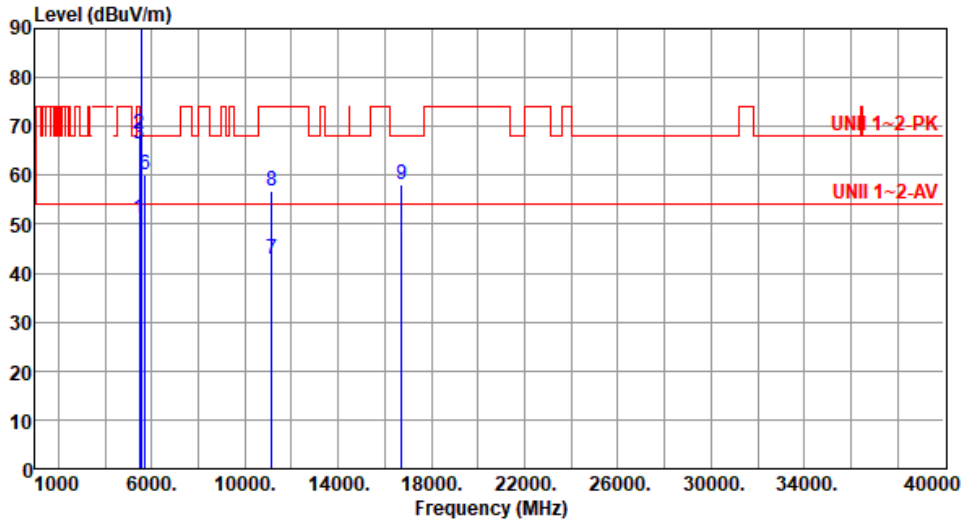

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	51.07	54.00	-2.93	50.46	0.61	Average	189	10
2	5460.00	68.27	74.00	-5.73	67.66	0.61	Peak	189	10
3	5470.00	66.50	68.20	-1.70	65.88	0.62	Peak	189	10
4 *	5570.00	96.77			96.09	0.68	Average	189	10
5 *	5570.00	109.60			108.92	0.68	Peak	189	10
6	5725.00	60.15	68.20	-8.05	59.20	0.95	Peak	189	10
7	11140.00	42.85	54.00	-11.15	34.03	8.82	Average	100	179
8	11140.00	56.77	74.00	-17.23	47.95	8.82	Peak	100	179
9	16710.00	58.21	68.20	-9.99	50.94	7.27	Peak	100	27

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT160	Test Freq. (MHz)	5570
Polarization	Vertical		

Test By :Akun Chung Temperature(°C):23 Humidity(%):65

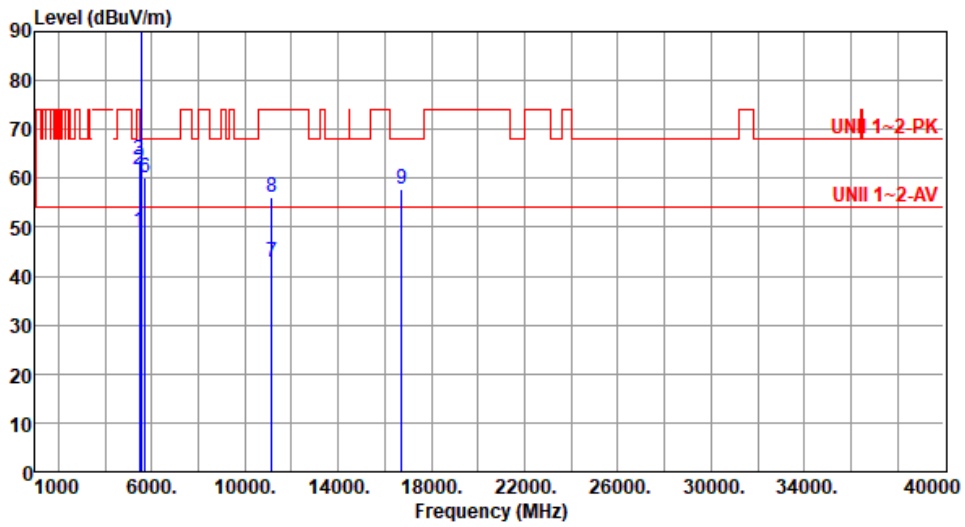

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	49.12	54.00	-4.88	48.51	0.61	Average	175	30
2	5460.00	61.69	74.00	-12.31	61.08	0.61	Peak	175	30
3	5470.00	63.82	68.20	-4.38	63.20	0.62	Peak	175	30
4 *	5570.00	94.25			93.57	0.68	Average	175	30
5 *	5570.00	107.23			106.55	0.68	Peak	175	30
6	5725.00	60.07	68.20	-8.13	59.12	0.95	Peak	175	30
7	11140.00	42.83	54.00	-11.17	34.01	8.82	Average	100	34
8	11140.00	56.14	74.00	-17.86	47.32	8.82	Peak	100	34
9	16710.00	57.94	68.20	-10.26	50.67	7.27	Peak	100	94

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3:"*" is Peak / Average value of fundamental frequency



Unwanted Emissions (Above 1GHz) for be EHT240

Modulation	be EHT240	Test Freq. (MHz)	5610
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):24 Humidity(%):62

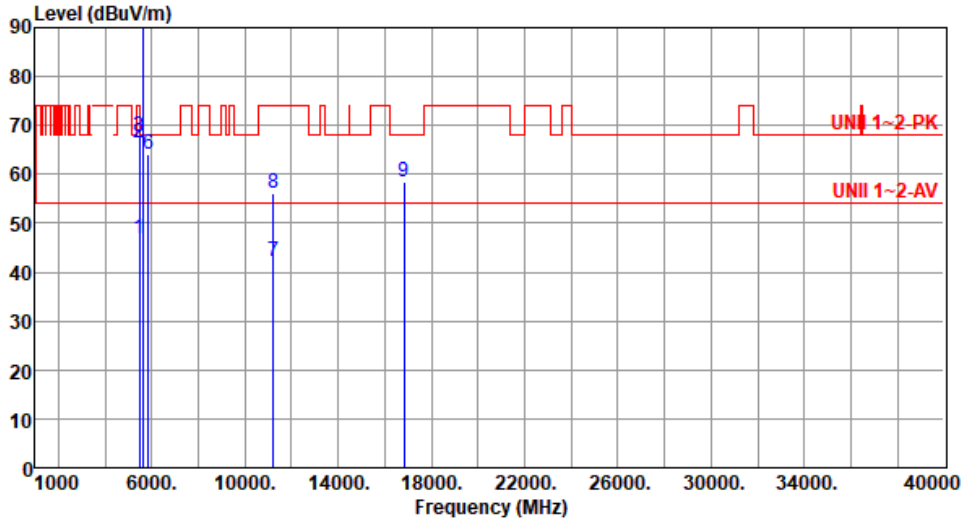

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	46.92	54.00	-7.08	46.31	0.61	Average	184	11
2	5460.00	66.41	74.00	-7.59	65.80	0.61	Peak	184	11
3	5470.00	67.77	68.20	-0.43	67.15	0.62	Peak	184	11
4 *	5610.00	89.87			89.24	0.63	Average	184	11
5 *	5610.00	102.96			102.33	0.63	Peak	184	11
6	5850.00	64.22	68.20	-3.98	62.95	1.27	Peak	184	11
7	11220.00	42.22	54.00	-11.78	33.56	8.66	Average	100	30
8	11220.00	56.22	74.00	-17.78	47.56	8.66	Peak	100	30
9	16830.00	58.55	68.20	-9.65	51.45	7.10	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Modulation	be EHT240	Test Freq. (MHz)	5610
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):62

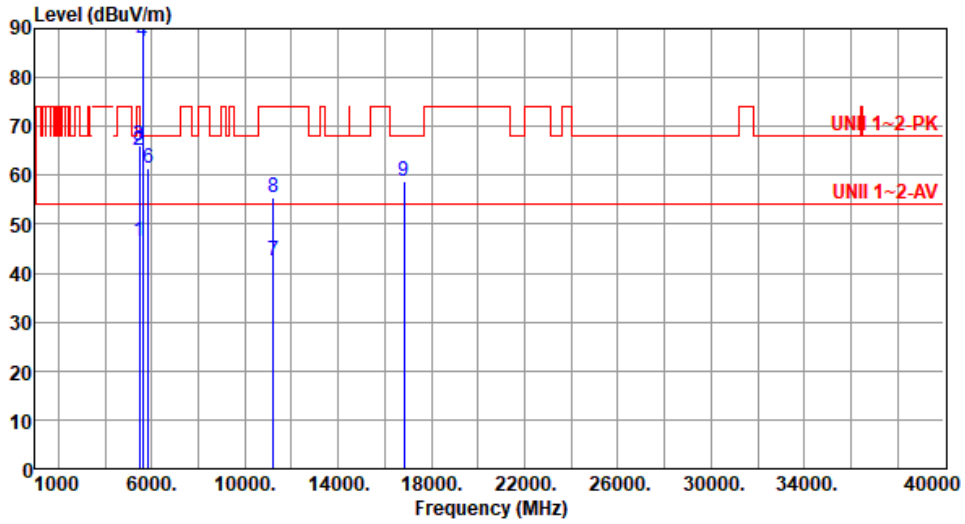

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5460.00	46.34	54.00	-7.66	45.73	0.61	Average	148	19
2	5460.00	65.20	74.00	-8.80	64.59	0.61	Peak	148	19
3	5470.00	66.24	68.20	-1.96	65.62	0.62	Peak	148	19
4 *	5610.00	87.34			86.71	0.63	Average	148	19
5 *	5610.00	98.99			98.36	0.63	Peak	148	19
6	5850.00	61.52	68.20	-6.68	60.25	1.27	Peak	148	19
7	11220.00	42.38	54.00	-11.62	33.72	8.66	Average	100	50
8	11220.00	55.44	74.00	-18.56	46.78	8.66	Peak	100	50
9	16830.00	58.66	68.20	-9.54	51.56	7.10	Peak	100	60

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).

Note 3:"*" is Peak / Average value of fundamental frequency



Frequency: 5300 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.91	1.25	0.88	1.14
T20°CVmin	0.96	1.76	1.54	1.46
T45°CVnom	2.38	2.39	2.64	2.79
T40°CVnom	2.13	2.61	2.07	2.43
T30°CVnom	1.68	1.88	1.97	1.47
T20°CVnom	1.06	1.25	1.64	1.92
T10°CVnom	2.47	2.76	2.47	2.41
T0°CVnom	4.81	5.20	4.87	5.71
T-10°CVnom	6.96	7.09	7.13	7.15
T-20°CVnom	10.19	9.80	9.89	10.35
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 45		Tmin [°C]: -20	


Frequency: 5785 MHz	Frequency Drift (ppm)			
Temperature (°C)	0 minute	2 minutes	5 minutes	10 minutes
T20°CVmax	0.83	1.00	0.58	0.50
T20°CVmin	0.88	0.91	1.30	0.66
T45°CVnom	2.18	2.52	2.74	2.87
T40°CVnom	1.95	1.89	1.81	2.30
T30°CVnom	1.54	1.23	2.36	1.81
T20°CVnom	0.97	1.21	0.86	1.25
T10°CVnom	2.26	1.99	2.36	2.66
T0°CVnom	4.41	5.00	4.12	4.44
T-10°CVnom	6.38	6.35	6.70	6.36
T-20°CVnom	9.01	9.41	9.03	9.45
Vnom [V]: 120	Vmax [V]: 138		Vmin [V]: 102	
Tnom [°C]: 20	Tmax [°C]: 45		Tmin [°C]: -20	



PoE mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5200
Power Phase	Line		

Test by : Joe Liao Temperature: 24°C Humidity: 62%

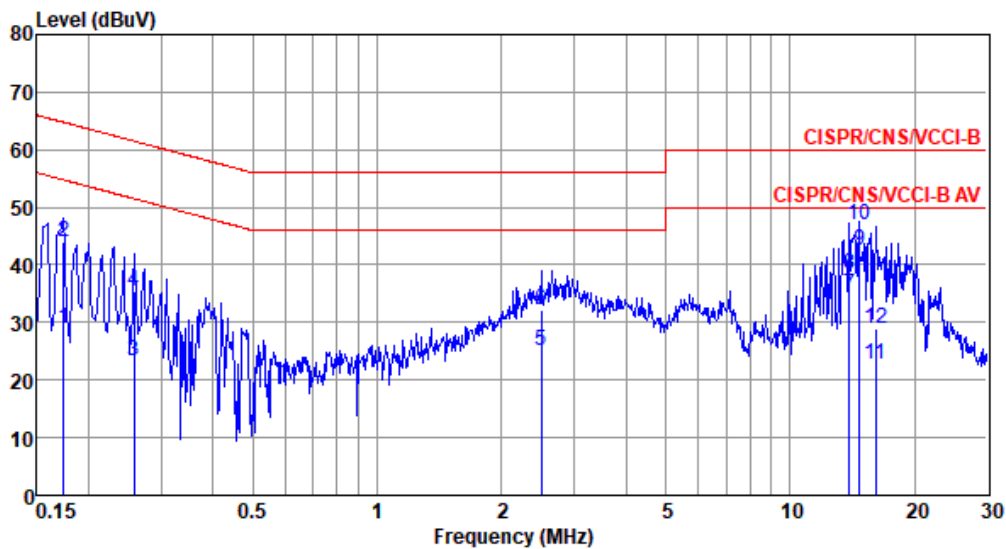

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.174	28.84	54.77	-25.93	19.16	9.62	0.06	0.00	Average
2	0.174	44.01	64.77	-20.76	34.33	9.62	0.06	0.00	QP
3	0.258	23.43	51.51	-28.08	13.75	9.62	0.06	0.00	Average
4	0.258	35.30	61.51	-26.21	25.62	9.62	0.06	0.00	QP
5	2.500	25.18	46.00	-20.82	15.39	9.64	0.15	0.00	Average
6	2.500	32.27	56.00	-23.73	22.48	9.64	0.15	0.00	QP
7	13.915	34.91	50.00	-15.09	24.79	9.69	0.43	0.00	Average
8	13.915	38.45	60.00	-21.55	28.33	9.69	0.43	0.00	QP
9*	14.701	42.62	50.00	-7.38	32.50	9.68	0.44	0.00	Average
10	14.701	46.87	60.00	-13.13	36.75	9.68	0.44	0.00	QP
11	16.140	22.83	50.00	-27.17	12.69	9.68	0.46	0.00	Average
12	16.140	28.89	60.00	-31.11	18.75	9.68	0.46	0.00	QP


Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).

2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5200
Power Phase	Neutral		

Test by : Joe Liao Temperature: 24°C Humidity: 62%

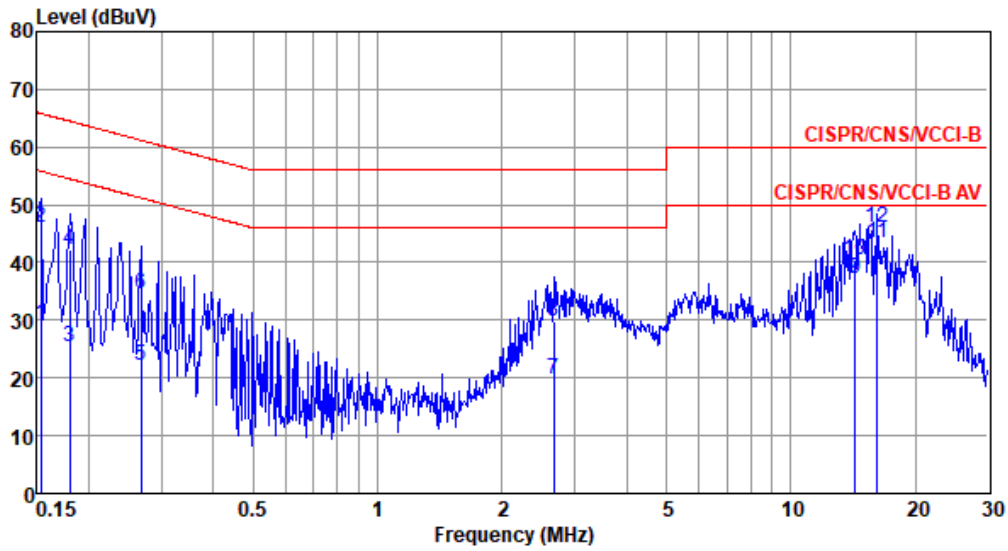


	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	29.34	55.82	-26.48	19.65	9.63	0.06	0.00	Average
2	0.153	46.05	65.82	-19.77	36.36	9.63	0.06	0.00	QP
3	0.180	25.48	54.50	-29.02	15.79	9.63	0.06	0.00	Average
4	0.180	42.31	64.50	-22.19	32.62	9.63	0.06	0.00	QP
5	0.267	22.14	51.20	-29.06	12.45	9.63	0.06	0.00	Average
6	0.267	34.40	61.20	-26.80	24.71	9.63	0.06	0.00	QP
7	2.664	19.75	46.00	-26.25	9.96	9.64	0.15	0.00	Average
8	2.664	29.75	56.00	-26.25	19.96	9.64	0.15	0.00	QP
9	14.288	37.22	50.00	-12.78	27.03	9.76	0.43	0.00	Average
10	14.288	40.50	60.00	-19.50	30.31	9.76	0.43	0.00	QP
11*	16.226	43.39	50.00	-6.61	33.16	9.77	0.46	0.00	Average
12	16.226	46.06	60.00	-13.94	35.83	9.77	0.46	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBUV) - Limit Line (dBUV).



Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Line		

Test by : Joe Liao Temperature: 24°C Humidity: 62%

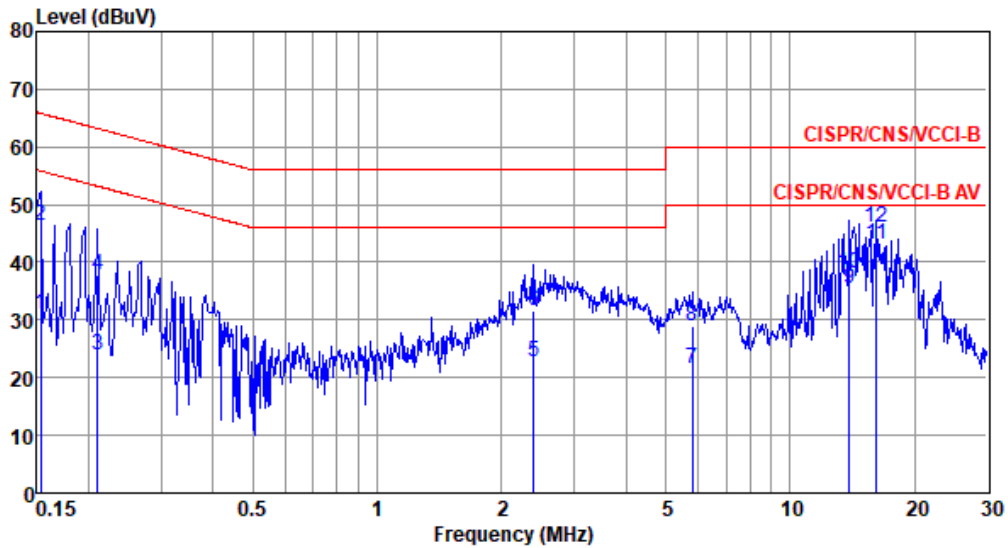


	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	30.85	55.82	-24.97	21.16	9.63	0.06	0.00	Average
2	0.153	46.49	65.82	-19.33	36.80	9.63	0.06	0.00	QP
3	0.211	23.89	53.18	-29.29	14.21	9.62	0.06	0.00	Average
4	0.211	37.89	63.18	-25.29	28.21	9.62	0.06	0.00	QP
5	2.396	22.58	46.00	-23.42	12.80	9.64	0.14	0.00	Average
6	2.396	31.52	56.00	-24.48	21.74	9.64	0.14	0.00	QP
7	5.805	21.50	50.00	-28.50	11.58	9.67	0.25	0.00	Average
8	5.805	28.85	60.00	-31.15	18.93	9.67	0.25	0.00	QP
9	13.915	35.34	50.00	-14.66	25.22	9.69	0.43	0.00	Average
10	13.915	38.16	60.00	-21.84	28.04	9.69	0.43	0.00	QP
11*	16.226	43.23	50.00	-6.77	33.09	9.68	0.46	0.00	Average
12	16.226	46.02	60.00	-13.98	35.88	9.68	0.46	0.00	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).



Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Neutral		

Test by : Joe Liao Temperature: 24°C Humidity: 62%

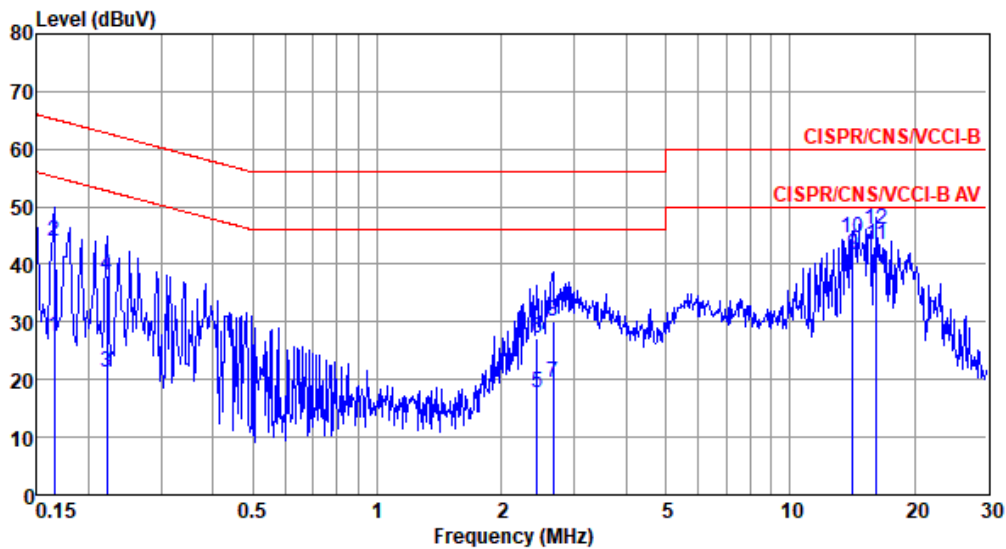

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.165	27.46	55.21	-27.75	17.77	9.63	0.06	0.00	Average
2	0.165	43.89	65.21	-21.32	34.20	9.63	0.06	0.00	QP
3	0.222	21.20	52.74	-31.54	11.51	9.63	0.06	0.00	Average
4	0.222	38.00	62.74	-24.74	28.31	9.63	0.06	0.00	QP
5	2.435	17.80	46.00	-28.20	8.02	9.64	0.14	0.00	Average
6	2.435	27.16	56.00	-28.84	17.38	9.64	0.14	0.00	QP
7	2.664	19.50	46.00	-26.50	9.71	9.64	0.15	0.00	Average
8	2.664	30.21	56.00	-25.79	20.42	9.64	0.15	0.00	QP
9	14.213	41.57	50.00	-8.43	31.38	9.76	0.43	0.00	Average
10	14.213	44.70	60.00	-15.30	34.51	9.76	0.43	0.00	QP
11*	16.226	43.44	50.00	-6.56	33.21	9.77	0.46	0.00	Average
12	16.226	46.03	60.00	-13.97	35.80	9.77	0.46	0.00	QP


Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).



Adapter mode

Modulation Mode	be EHT20	Test Freq. (MHz)	5200
Power Phase	Line		

Test by : Joe Liao Temperature: 24°C Humidity: 62%

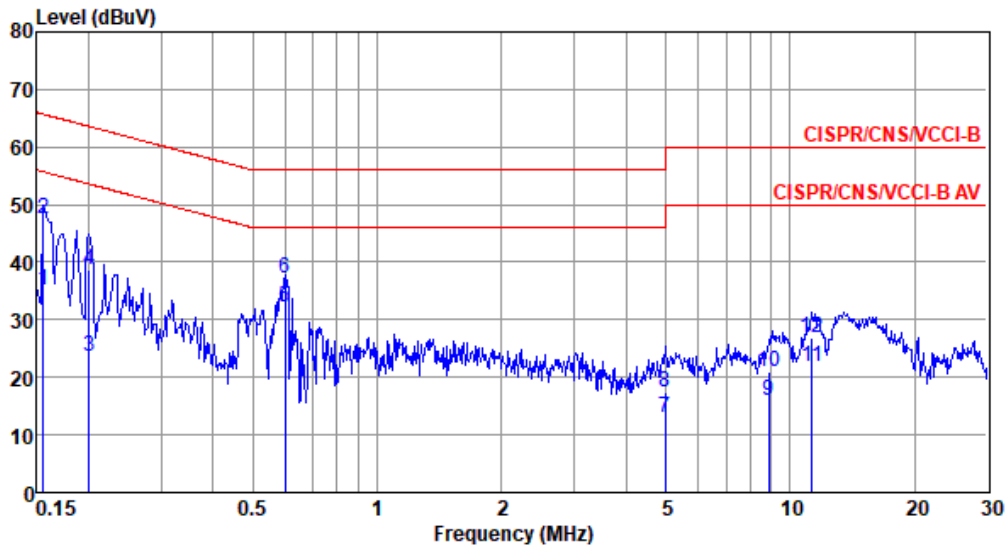


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.156	35.01	55.69	-20.68	25.14	9.63	0.06	0.18	Average
2	0.156	47.40	65.69	-18.29	37.53	9.63	0.06	0.18	QP
3	0.201	23.74	53.58	-29.84	13.87	9.62	0.06	0.19	Average
4	0.201	38.72	63.58	-24.86	28.85	9.62	0.06	0.19	QP
5*	0.598	32.30	46.00	-13.70	22.29	9.62	0.08	0.31	Average
6	0.598	37.33	56.00	-18.67	27.32	9.62	0.08	0.31	QP
7	4.978	12.90	46.00	-33.10	2.60	9.66	0.22	0.42	Average
8	4.978	17.35	56.00	-38.65	7.05	9.66	0.22	0.42	QP
9	8.869	15.90	50.00	-34.10	5.44	9.68	0.34	0.44	Average
10	8.869	21.01	60.00	-38.99	10.55	9.68	0.34	0.44	QP
11	11.317	21.90	50.00	-28.10	11.37	9.69	0.38	0.46	Average
12	11.317	26.76	60.00	-33.24	16.23	9.69	0.38	0.46	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	be EHT20	Test Freq. (MHz)	5200
Power Phase	Neutral		

Test by : Joe Liao Temperature: 24°C Humidity: 62%

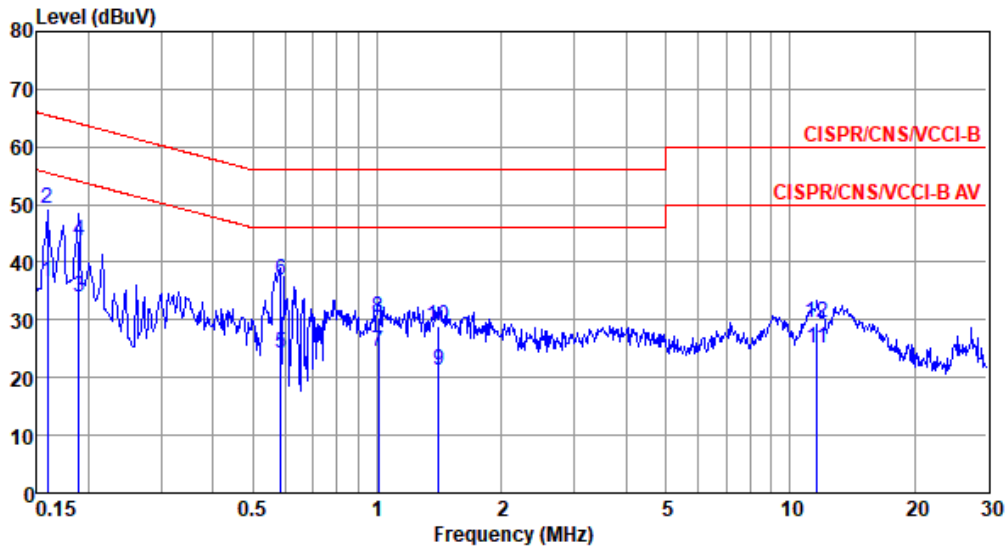


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.159	36.72	55.52	-18.80	26.85	9.63	0.06	0.18	Average
2*	0.159	49.18	65.52	-16.34	39.31	9.63	0.06	0.18	QP
3	0.189	33.83	54.06	-20.23	23.95	9.63	0.06	0.19	Average
4	0.189	43.56	64.06	-20.50	33.68	9.63	0.06	0.19	QP
5	0.585	24.11	46.00	-21.89	14.10	9.62	0.08	0.31	Average
6	0.585	36.93	56.00	-19.07	26.92	9.62	0.08	0.31	QP
7	1.005	24.55	46.00	-21.45	14.48	9.63	0.11	0.33	Average
8	1.005	30.41	56.00	-25.59	20.34	9.63	0.11	0.33	QP
9	1.411	21.16	46.00	-24.84	11.07	9.63	0.12	0.34	Average
10	1.411	28.94	56.00	-27.06	18.85	9.63	0.12	0.34	QP
11	11.621	24.98	50.00	-25.02	14.40	9.73	0.39	0.46	Average
12	11.621	29.45	60.00	-30.55	18.87	9.73	0.39	0.46	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Line		

Test by : Joe Liao Temperature: 24°C Humidity: 62%

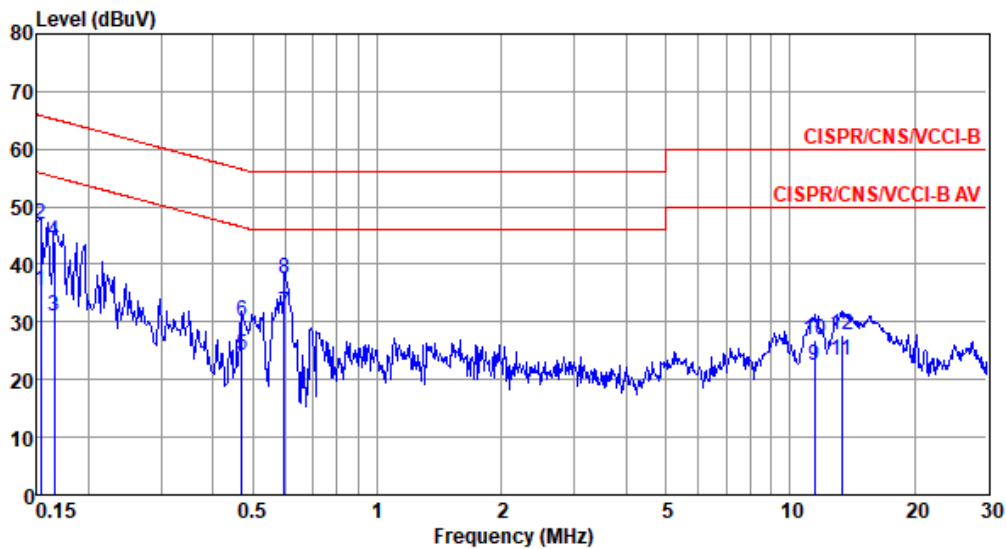


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	35.32	55.82	-20.50	25.45	9.63	0.06	0.18	Average
2	0.153	46.90	65.82	-18.92	37.03	9.63	0.06	0.18	QP
3	0.165	31.01	55.21	-24.20	21.14	9.63	0.06	0.18	Average
4	0.165	43.90	65.21	-21.31	34.03	9.63	0.06	0.18	QP
5	0.471	24.28	46.49	-22.21	14.28	9.62	0.07	0.31	Average
6	0.471	30.01	56.49	-26.48	20.01	9.62	0.07	0.31	QP
7*	0.595	31.55	46.00	-14.45	21.54	9.62	0.08	0.31	Average
8	0.595	37.55	56.00	-18.45	27.54	9.62	0.08	0.31	QP
9	11.438	22.37	50.00	-27.63	11.83	9.69	0.39	0.46	Average
10	11.438	26.92	60.00	-33.08	16.38	9.69	0.39	0.46	QP
11	13.337	23.37	50.00	-26.63	12.78	9.69	0.42	0.48	Average
12	13.337	27.83	60.00	-32.17	17.24	9.69	0.42	0.48	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).



Modulation Mode	be EHT40	Test Freq. (MHz)	5795
Power Phase	Neutral		

Test by : Joe Liao Temperature: 24°C Humidity: 62%

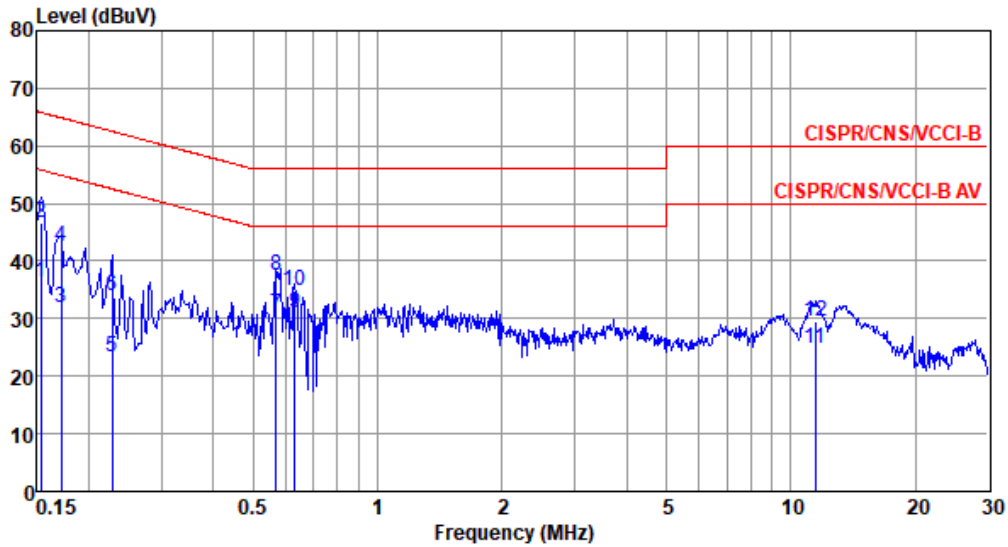

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	Factor dB	Cable loss dB	Aux dB	Remark
1	0.153	36.40	55.82	-19.42	26.53	9.63	0.06	0.18	Average
2	0.153	46.59	65.82	-19.23	36.72	9.63	0.06	0.18	QP
3	0.171	31.98	54.90	-22.92	22.11	9.63	0.06	0.18	Average
4	0.171	42.45	64.90	-22.45	32.58	9.63	0.06	0.18	QP
5	0.228	23.23	52.52	-29.29	13.33	9.63	0.06	0.21	Average
6	0.228	33.83	62.52	-28.69	23.93	9.63	0.06	0.21	QP
7	0.567	30.62	46.00	-15.38	20.61	9.62	0.08	0.31	Average
8	0.567	37.49	56.00	-18.51	27.48	9.62	0.08	0.31	QP
9*	0.630	30.91	46.00	-15.09	20.90	9.62	0.08	0.31	Average
10	0.630	34.79	56.00	-21.21	24.78	9.62	0.08	0.31	QP
11	11.438	24.89	50.00	-25.11	14.31	9.73	0.39	0.46	Average
12	11.438	29.41	60.00	-30.59	18.83	9.73	0.39	0.46	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB) + Aux (dB).
 Note 2: Over Limit (dB) = Level (dBuV) - Limit Line (dBuV).