

Test Laboratory: Compliance Certification Services Inc.

D2450V2 SN-728 Body

DUT: Dipole 2450 MHz; Type: D2450V2; Serial: D2450V2 - SN:728

Communication System: CW2450; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2450$ MHz; $\sigma = 1.99$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg


DASY4 Configuration:


- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 4mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Pin=250mW,d=10mm/Area Scan (6x6x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 12.4 mW/g

Pin=250mW,d=10mm/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 88.2 V/m; Power Drift = -0.049 dB
Peak SAR (extrapolated) = 29.0 W/kg
SAR(1 g) = 14.2 mW/g; SAR(10 g) = 6.58 mW/g
Maximum value of SAR (measured) = 16.3 mW/g

Pin=250mW,d=10mm/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

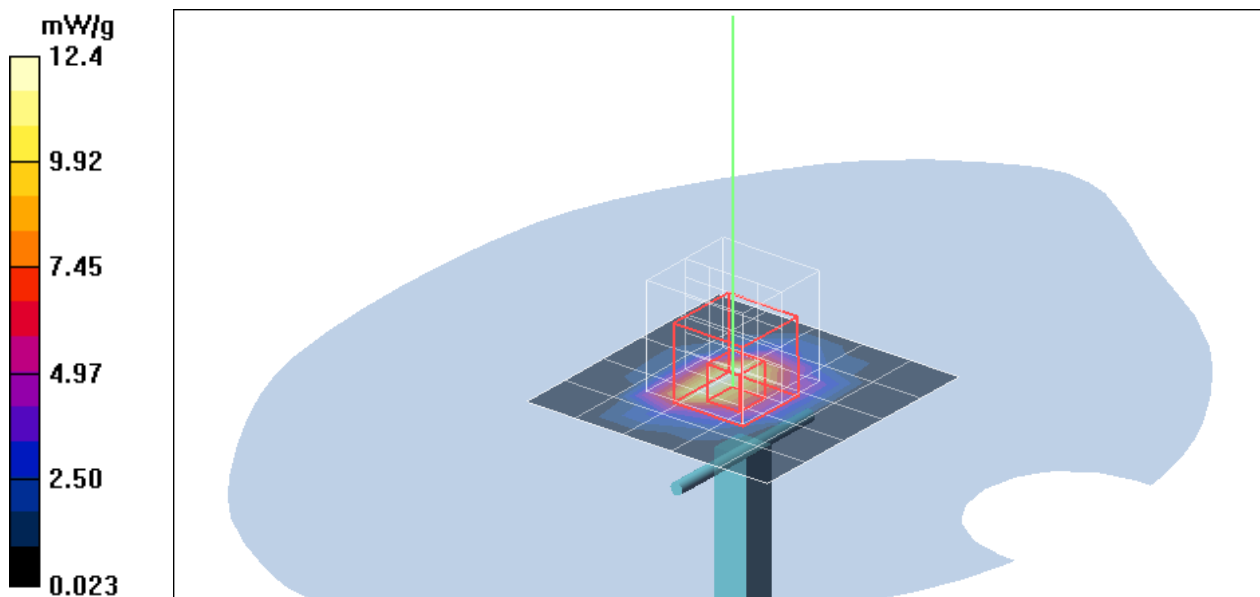

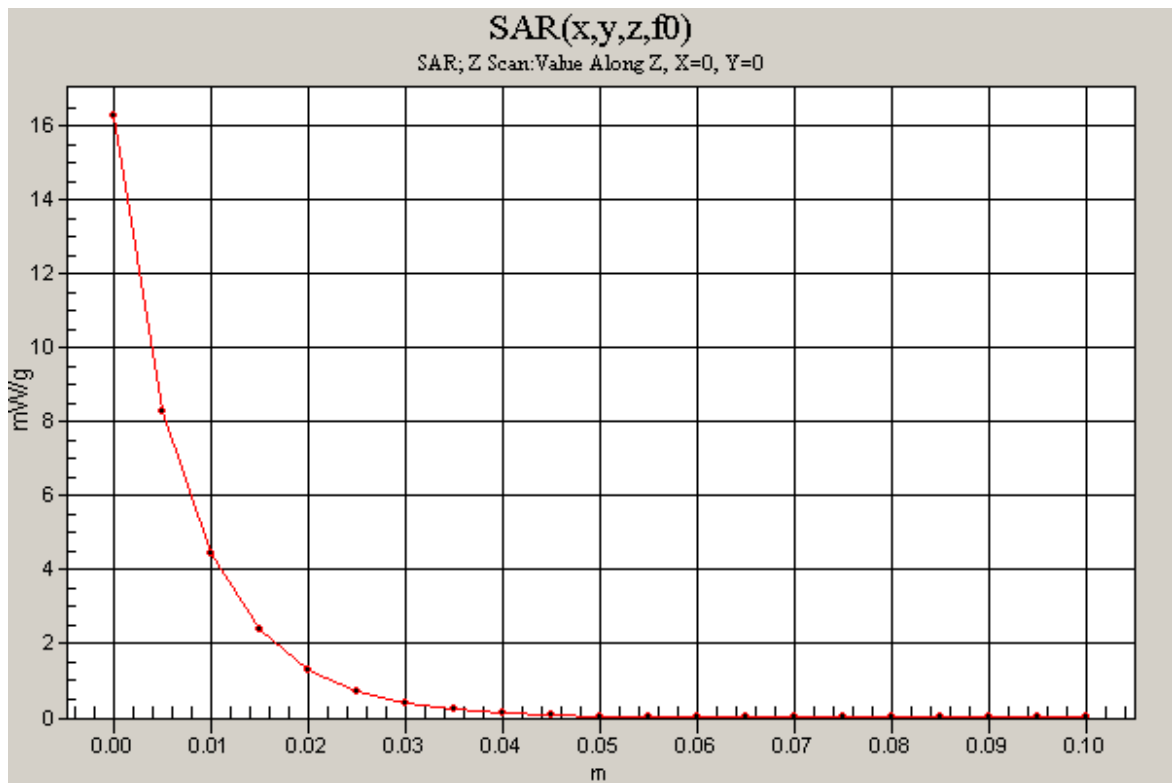

Test Laboratory: Compliance Certification Services Inc.

D5GHz V2 SN 1004

DUT: Dipole 5GHz ; Type: D5GHz V2; Serial: 1004

Communication System: CW5GHz; Frequency: 5200 MHz;Duty Cycle: 1:1

Medium parameters used: $f = 5200$ MHz; $\sigma = 5.36$ mho/m; $\epsilon_r = 48.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature:25.6 deg C;Liquid Temperature:24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Pin=250mW,d=10mm f=5200MHz/Area Scan (8x8x1): Measurement grid: dx=10mm,
dy=10mm

Maximum value of SAR (measured) = 19.0 mW/g

Pin=250mW,d=10mm f=5200MHz/Zoom Scan (8x8x8)/Cube 0: Measurement
grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 80.3 V/m; Power Drift = -0.054 dB



Peak SAR (extrapolated) = 70.3 W/kg

SAR(1 g) = 18 mW/g; SAR(10 g) = 5.1 mW/g

Maximum value of SAR (measured) = 30.1 mW/g

Pin=250mW,d=10mm f=5200MHz/Z Scan (1x1x21): Measurement grid: dx=20mm,
dy=20mm, dz=5mm

Maximum value of SAR (measured) = 62.7 mW/g

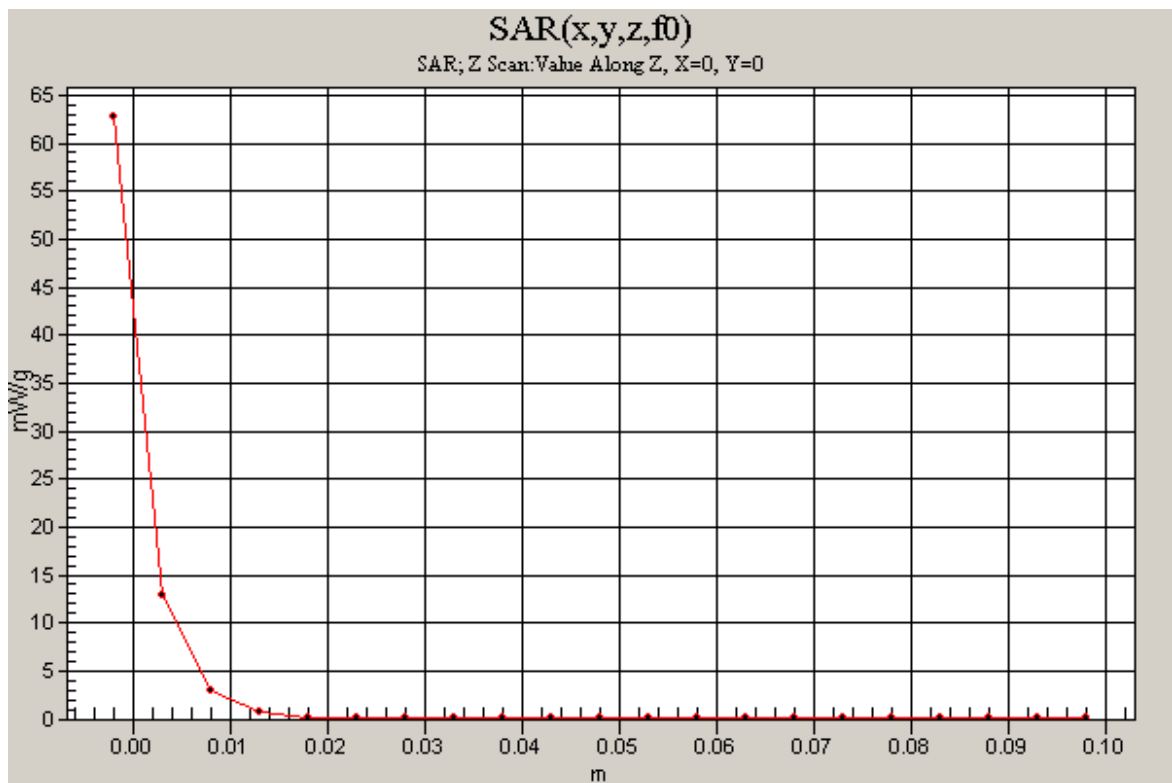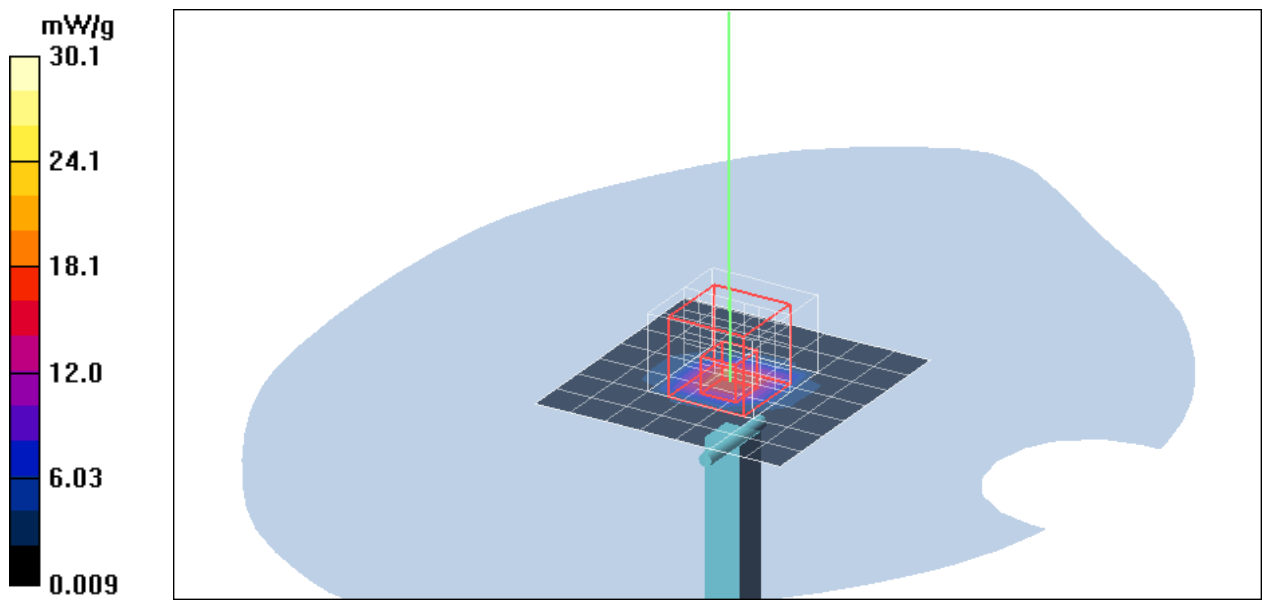

Test Laboratory: Compliance Certification Services Inc.

D5GHz V2 SN 1004

DUT: Dipole 5GHz ; Type: D5GHz V2; Serial: 1004

Communication System: CW5GHz; Frequency: 5800 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5800$ MHz; $\sigma = 6.22$ mho/m; $\epsilon_r = 47.1$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.82, 3.82, 3.82);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Pin=250mW, d=10mm f=5800MHz/Area Scan (8x8x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 17.9 mW/g

Pin=250mW, d=10mm f=5800MHz/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 71.5 V/m; Power Drift = -0.018 dB



Peak SAR (extrapolated) = 79.3 W/kg

SAR(1 g) = 17 mW/g; SAR(10 g) = 4.72 mW/g

Maximum value of SAR (measured) = 27.7 mW/g

Pin=250mW, d=10mm f=5800MHz/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 57.6 mW/g

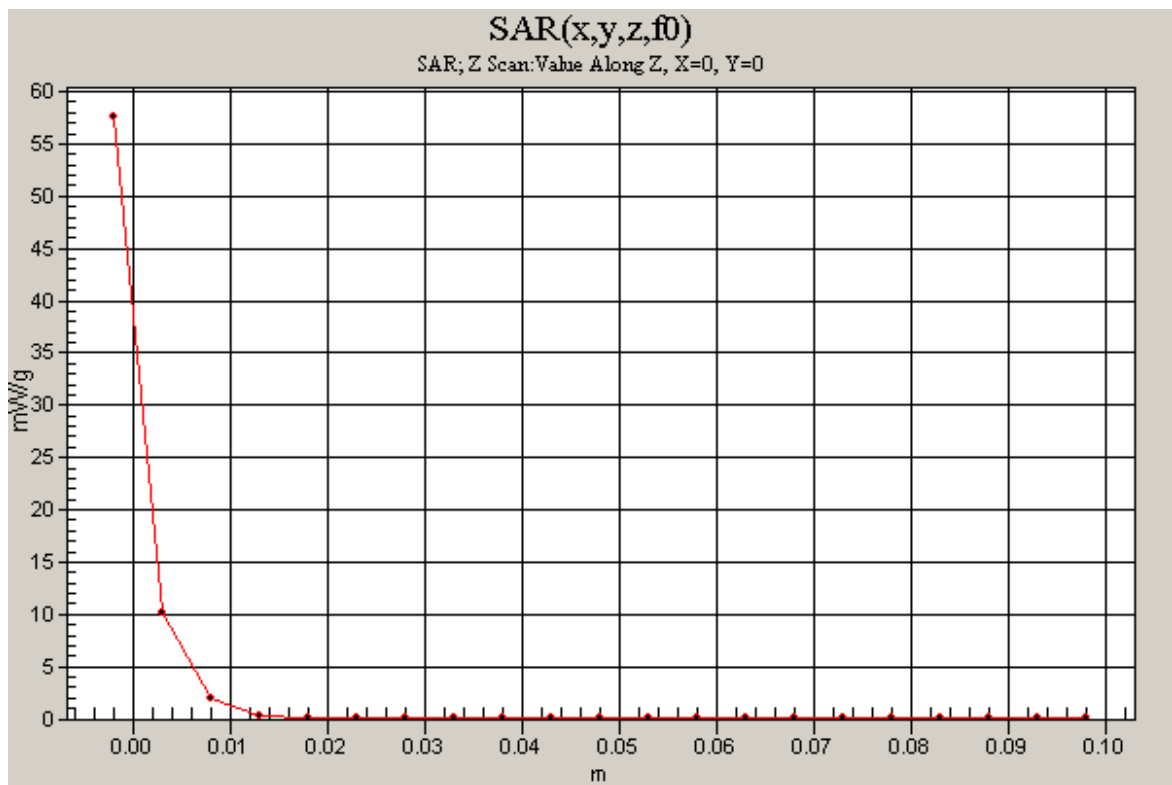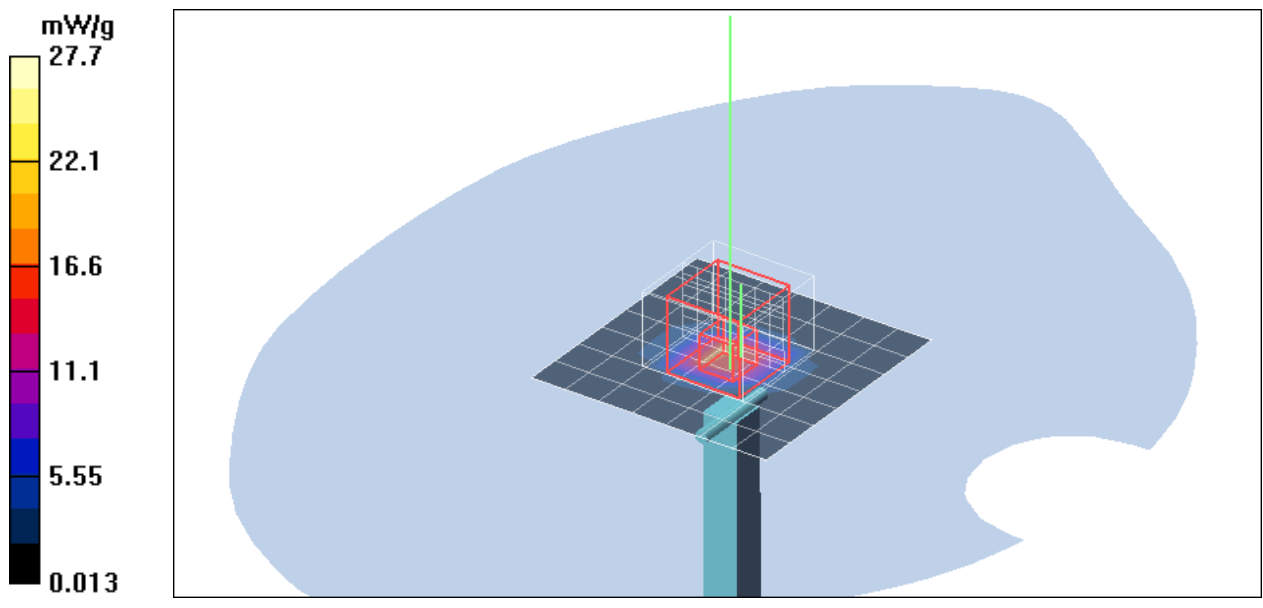

Test Laboratory: Compliance Certification Services Inc.

802.11b Ant-1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C


Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH, Rate=1M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.398 mW/g

Middle CH, Rate=1M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 11.1 V/m; Power Drift = -0.070 dB
Peak SAR (extrapolated) = 0.581 W/kg
SAR(1 g) = 0.317 mW/g; SAR(10 g) = 0.170 mW/g
Maximum value of SAR (measured) = 0.418 mW/g

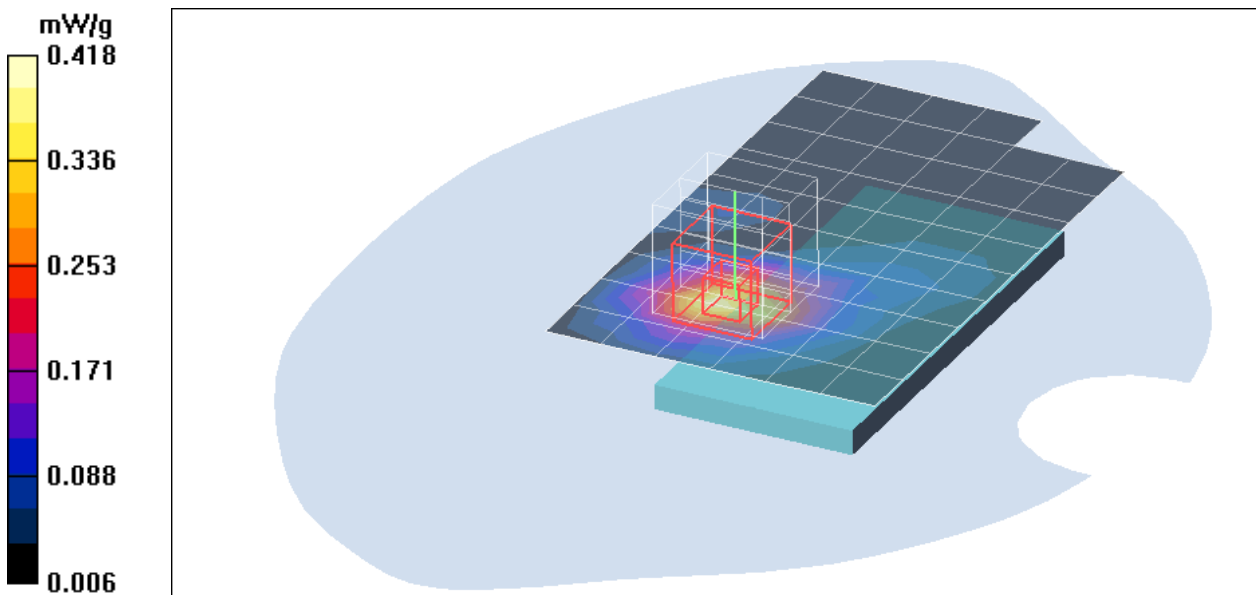

Test Laboratory: Compliance Certification Services Inc.

802.11b Ant-1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH, Rate=11M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.450 mW/g

Middle CH, Rate=11M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.078 dB



Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.379 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.508 mW/g

Middle CH, Rate=11M/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.562 mW/g

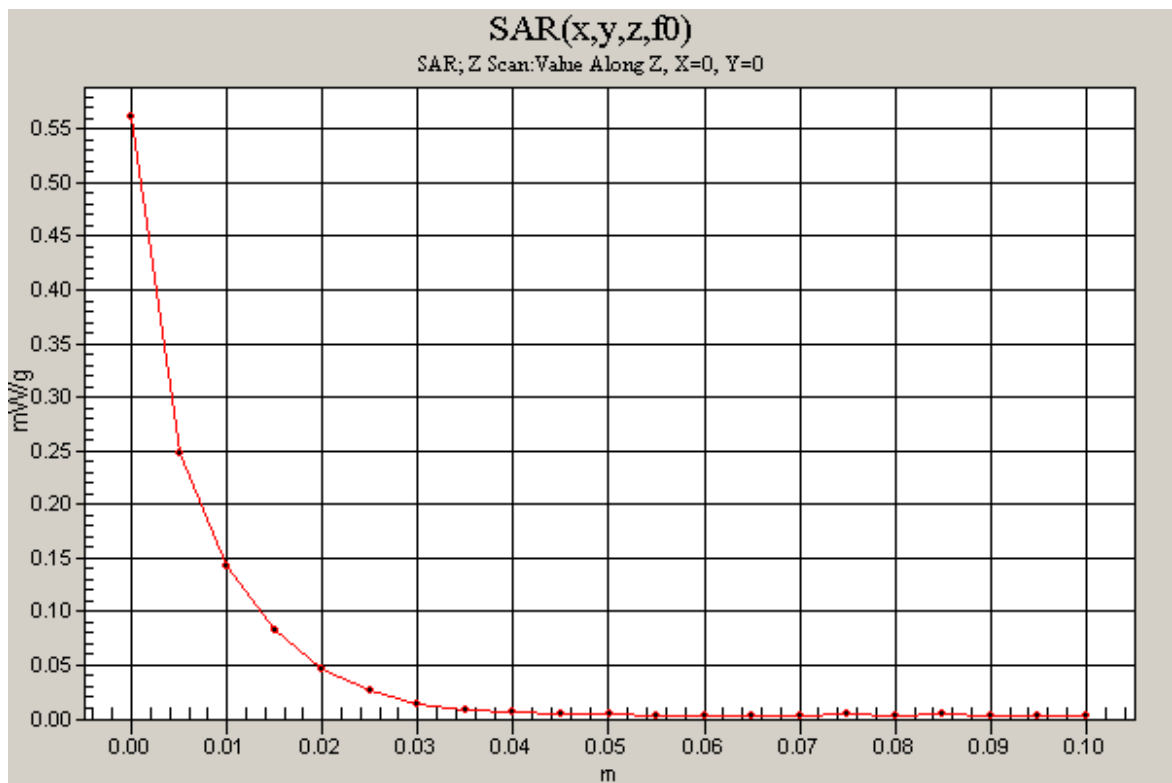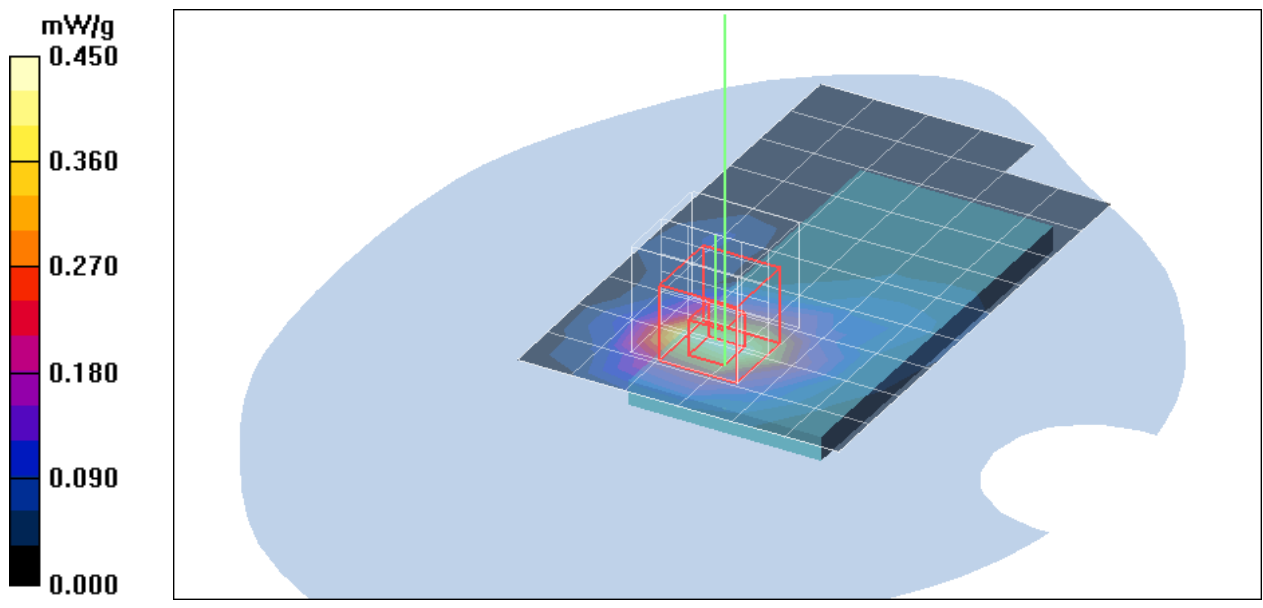

Test Laboratory: Compliance Certification Services Inc.

802.11b Ant-2 Bottom Touch mode

DUT: AG-120; Type: 802.11a/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH, Rate=11M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.440 mW/g


Middle CH, Rate=11M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 13.8 V/m; Power Drift = -0.142 dB

Peak SAR (extrapolated) = 0.665 W/kg

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.475 mW/g

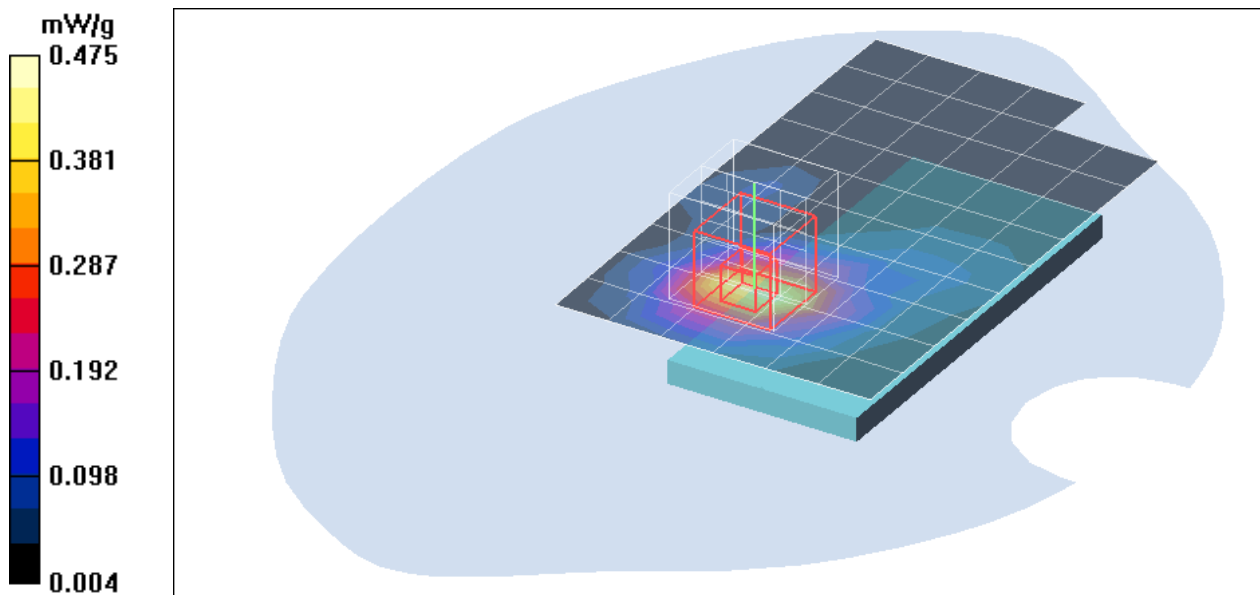

Test Laboratory: Compliance Certification Services Inc.

802.11g Ant-1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH, Rate=6M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.351 mW/g

Middle CH, Rate=6M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 11.1 V/m; Power Drift = -0.107 dB



Peak SAR (extrapolated) = 0.561 W/kg

SAR(1 g) = 0.305 mW/g; SAR(10 g) = 0.165 mW/g

Maximum value of SAR (measured) = 0.400 mW/g

Middle CH, Rate=6M/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.384 mW/g

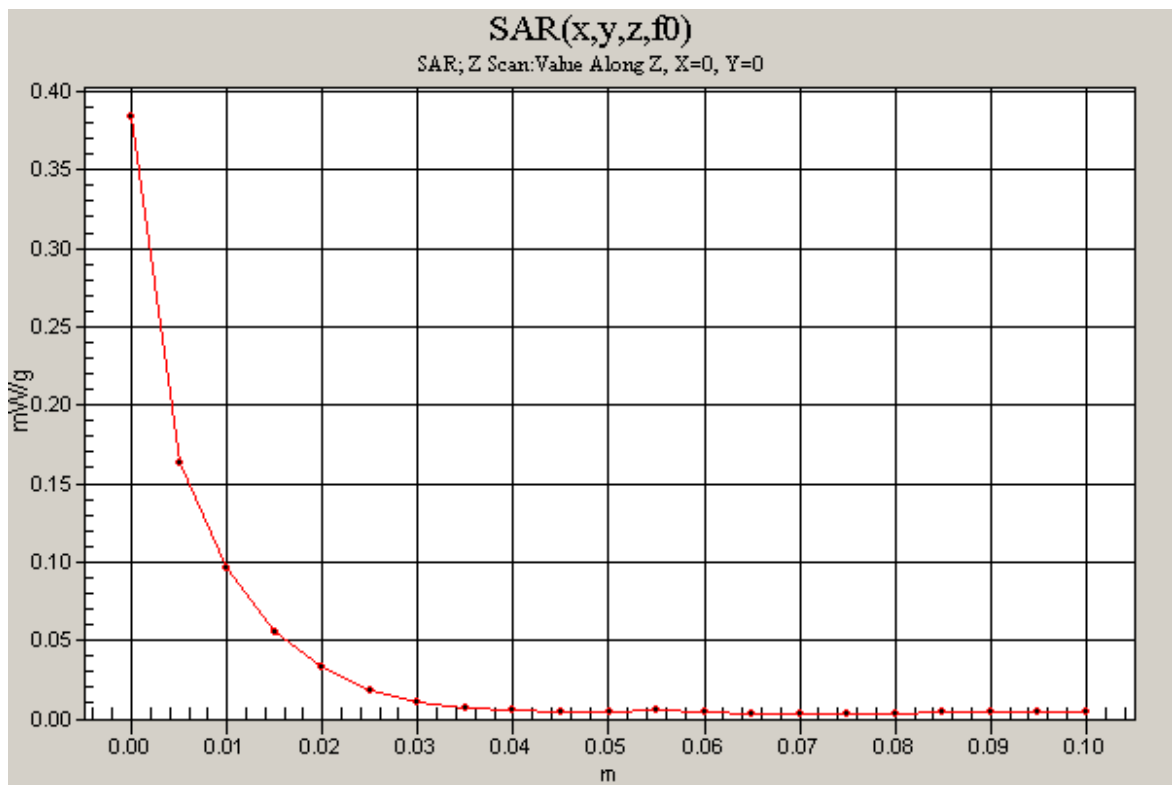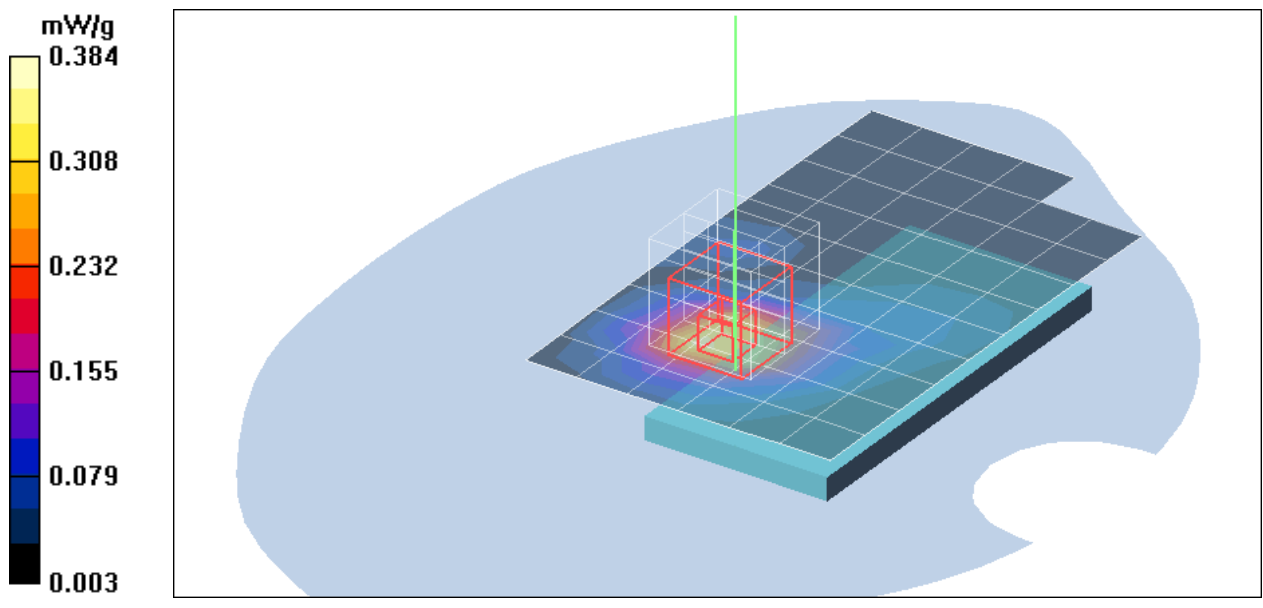

Test Laboratory: Compliance Certification Services Inc.

802.11a UNII Ant 1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

UNII Middle CH Rate=6M bit/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.276 mW/g

UNII Middle CH Rate=6M bit/Zoom Scan (8x8x8)/Cube 0: Measurement grid:

dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 4.38 V/m; Power Drift = -0.102 dB



Peak SAR (extrapolated) = 0.543 W/kg

SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.252 mW/g

UNII Middle CH Rate=6M bit/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Maximum value of SAR (measured) = 0.264 mW/g

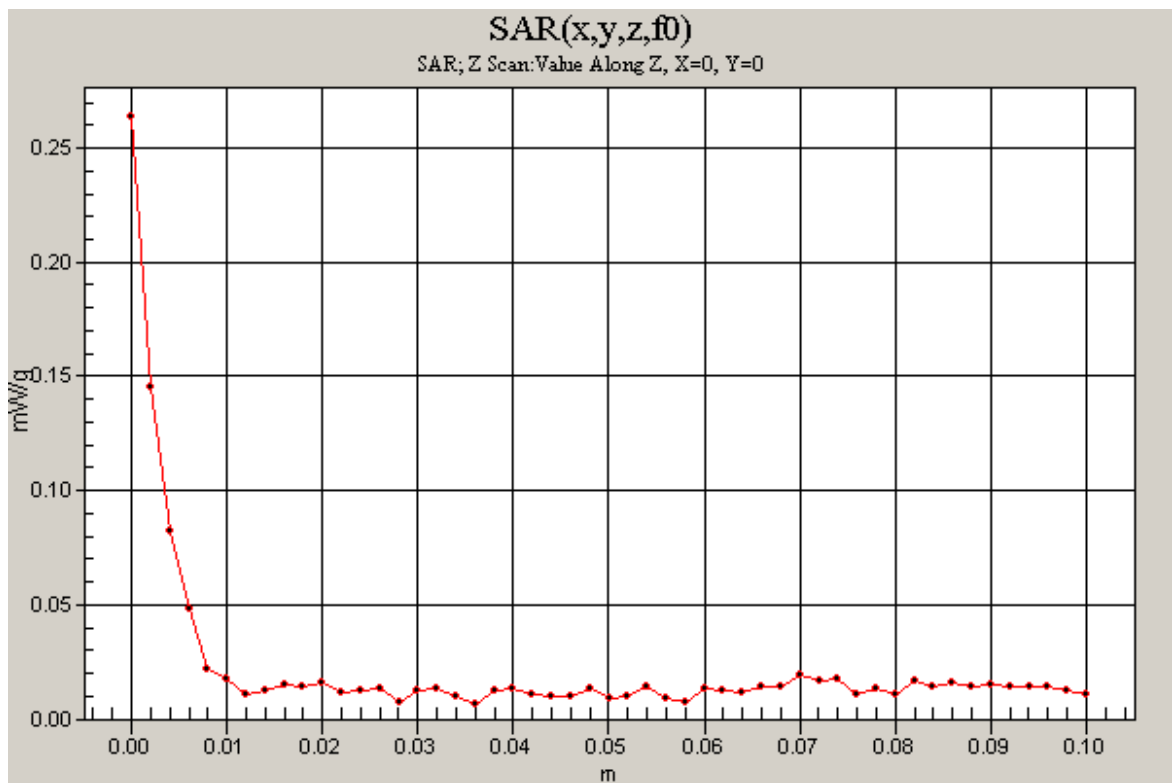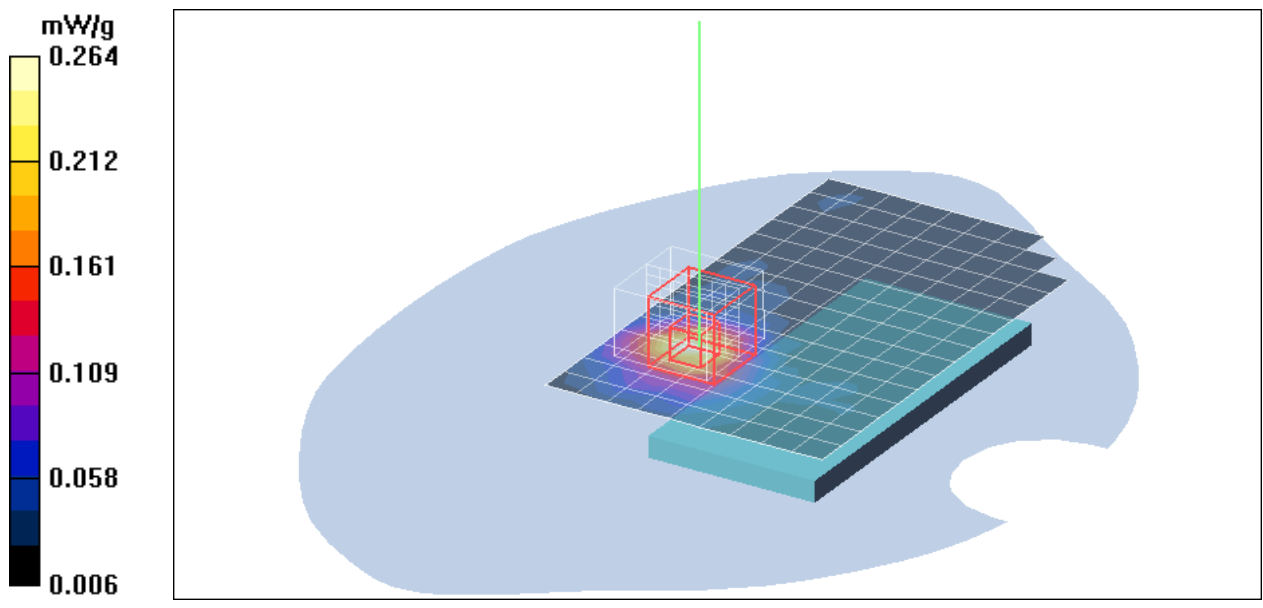

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Ant 1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.21$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.82, 3.82, 3.82);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

DTS Middle CH Rate=6M bit/Area Scan (10x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.246 mW/g

DTS Middle CH Rate=6M bit/Zoom Scan (8x8x8)/Cube 0: Measurement grid:

dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 3.15 V/m; Power Drift = -0.129 dB

Peak SAR (extrapolated) = 0.858 W/kg

SAR(1 g) = 0.159 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.245 mW/g

DTS Middle CH Rate=6M bit/Zoom Scan (8x8x8)/Cube 1: Measurement grid:

dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 3.15 V/m; Power Drift = -0.129 dB



Peak SAR (extrapolated) = 0.409 W/kg

SAR(1 g) = 0.062 mW/g; SAR(10 g) = 0.026 mW/g

Maximum value of SAR (measured) = 0.125 mW/g

DTS Middle CH Rate=6M bit/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Maximum value of SAR (measured) = 0.208 mW/g

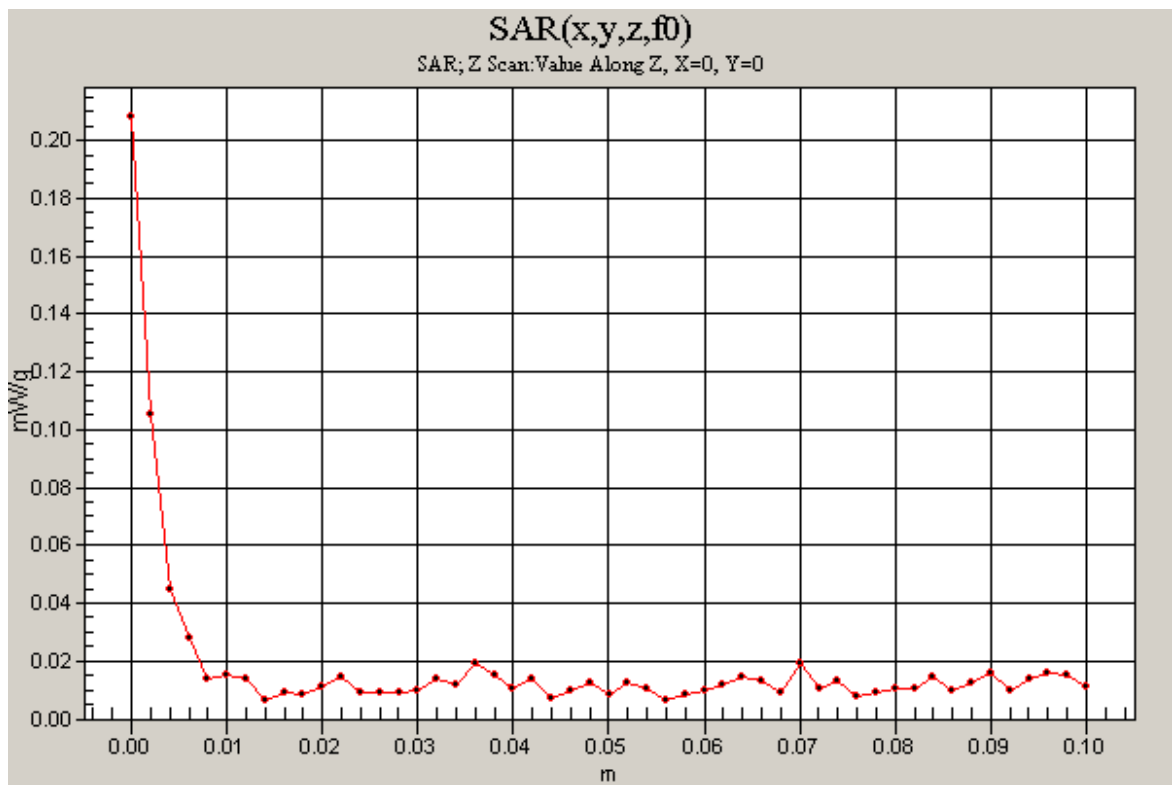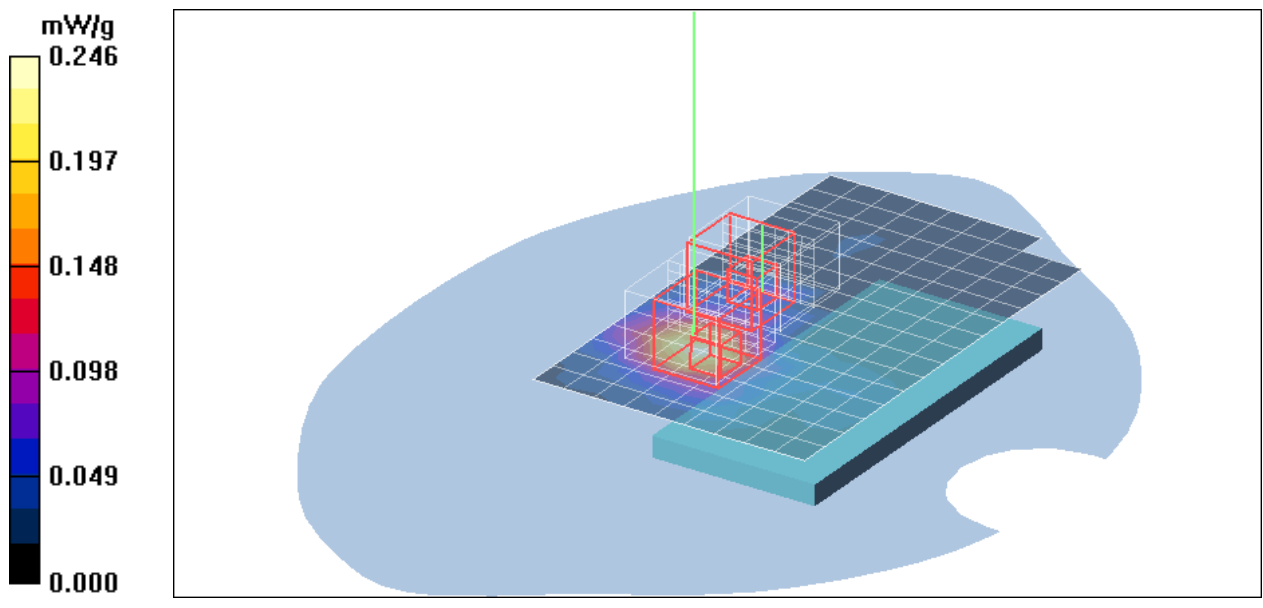

Test Laboratory: Compliance Certification Services Inc.

802.11b Ant-1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C


Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Low CH, Rate=11M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (measured) = 0.960 mW/g

Low CH, Rate=11M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm
Reference Value = 18.7 V/m; Power Drift = -0.052 dB
Peak SAR (extrapolated) = 1.54 W/kg
SAR(1 g) = 0.801 mW/g; SAR(10 g) = 0.411 mW/g
Maximum value of SAR (measured) = 1.09 mW/g

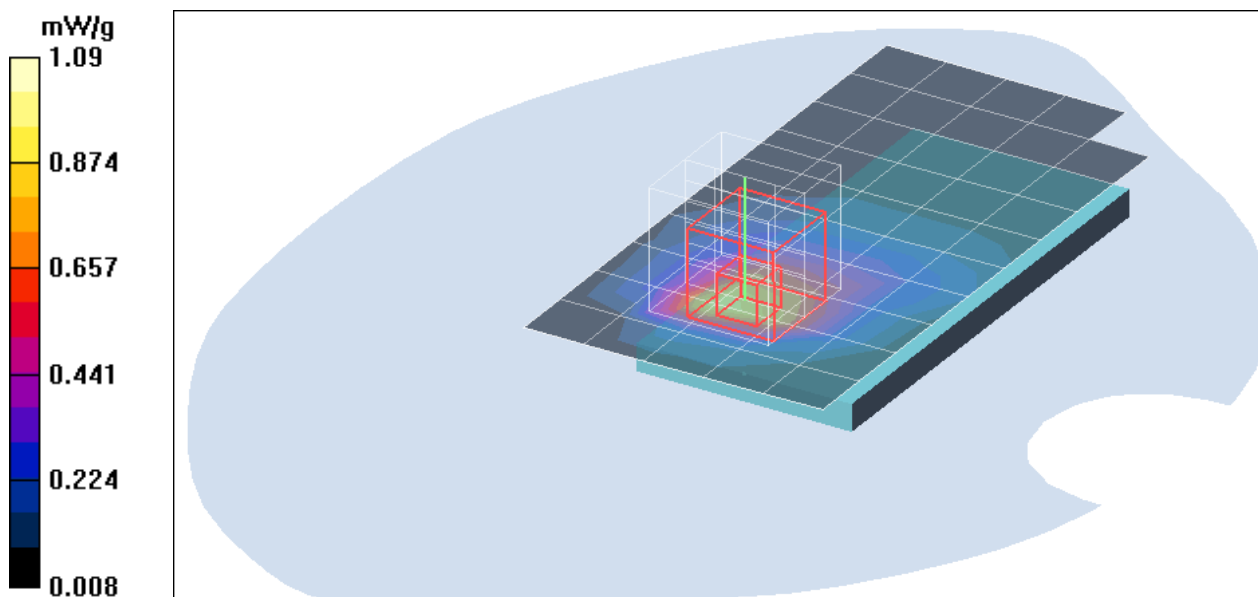

Test Laboratory: Compliance Certification Services Inc.

802.11b Ant-1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH, Rate=11M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.22 mW/g


Middle CH, Rate=11M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.6 V/m; Power Drift = -0.016 dB

Peak SAR (extrapolated) = 2.18 W/kg

SAR(1 g) = 1.120 mW/g; SAR(10 g) = 0.569 mW/g

Maximum value of SAR (measured) = 1.54 mW/g

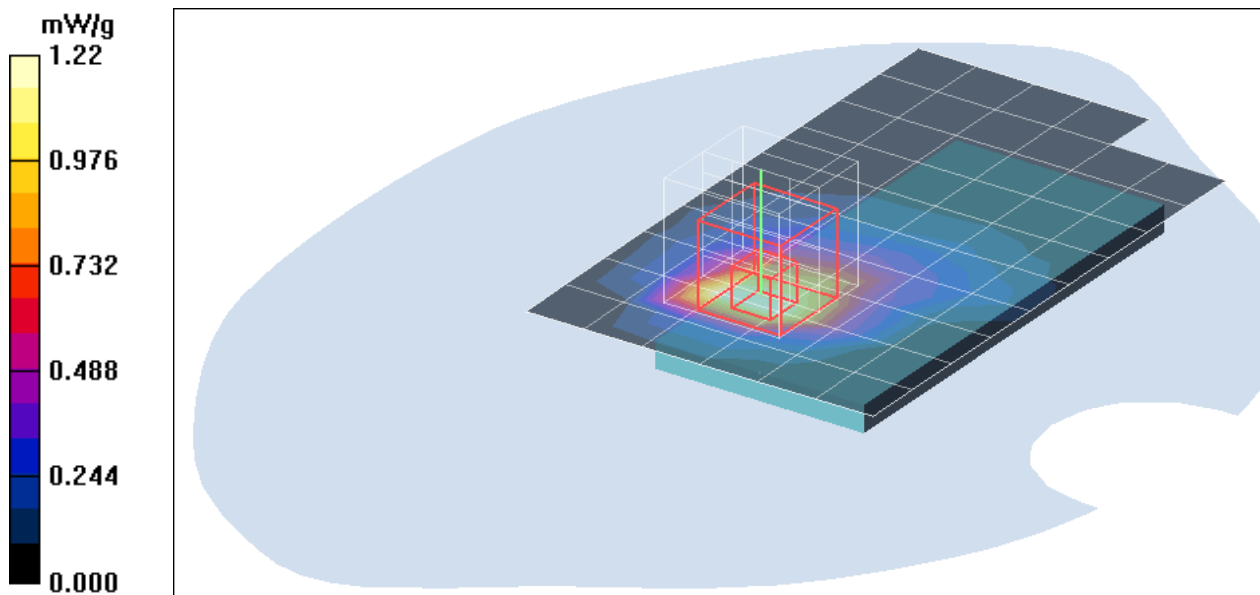

Test Laboratory: Compliance Certification Services Inc.

802.11b Ant-1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

High CH, Rate=11M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.72 mW/g

High CH, Rate=11M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.7 V/m; Power Drift = -0.027 dB



Peak SAR (extrapolated) = 2.96 W/kg

SAR(1 g) = 1.480 mW/g; SAR(10 g) = 0.735 mW/g

Maximum value of SAR (measured) = 2.05 mW/g

High CH, Rate=11M/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.61 mW/g

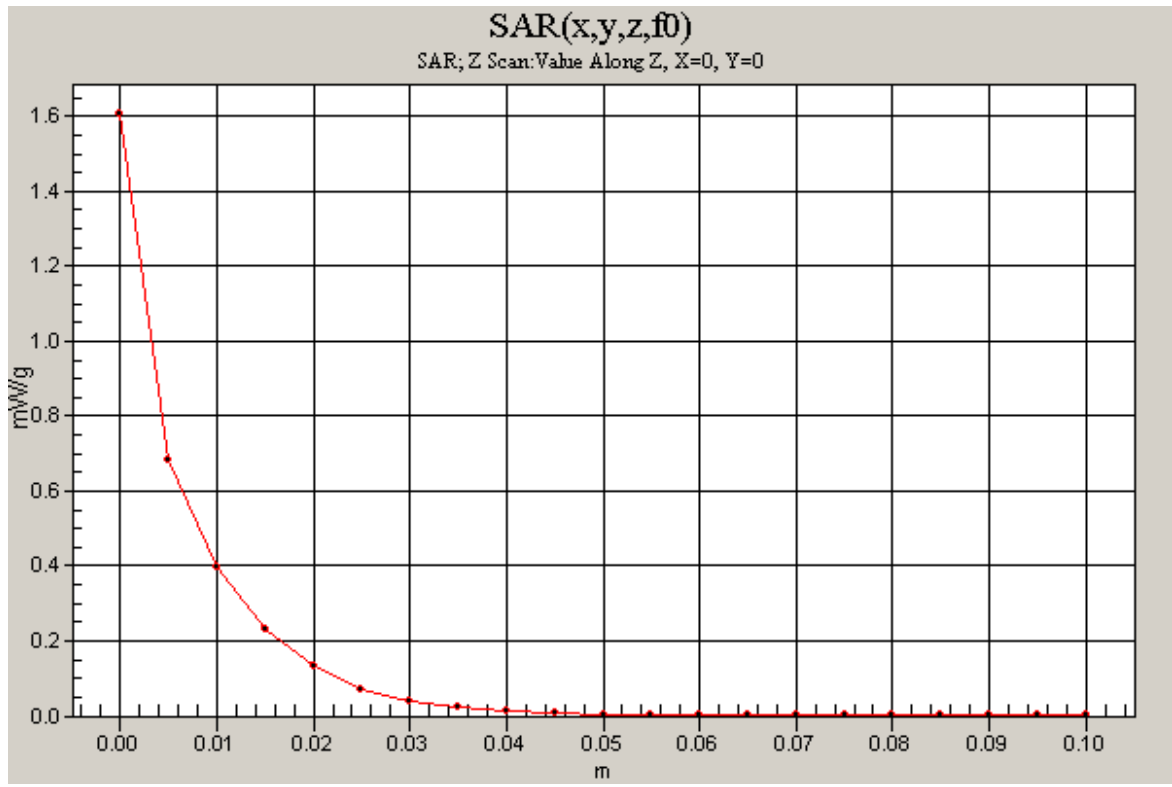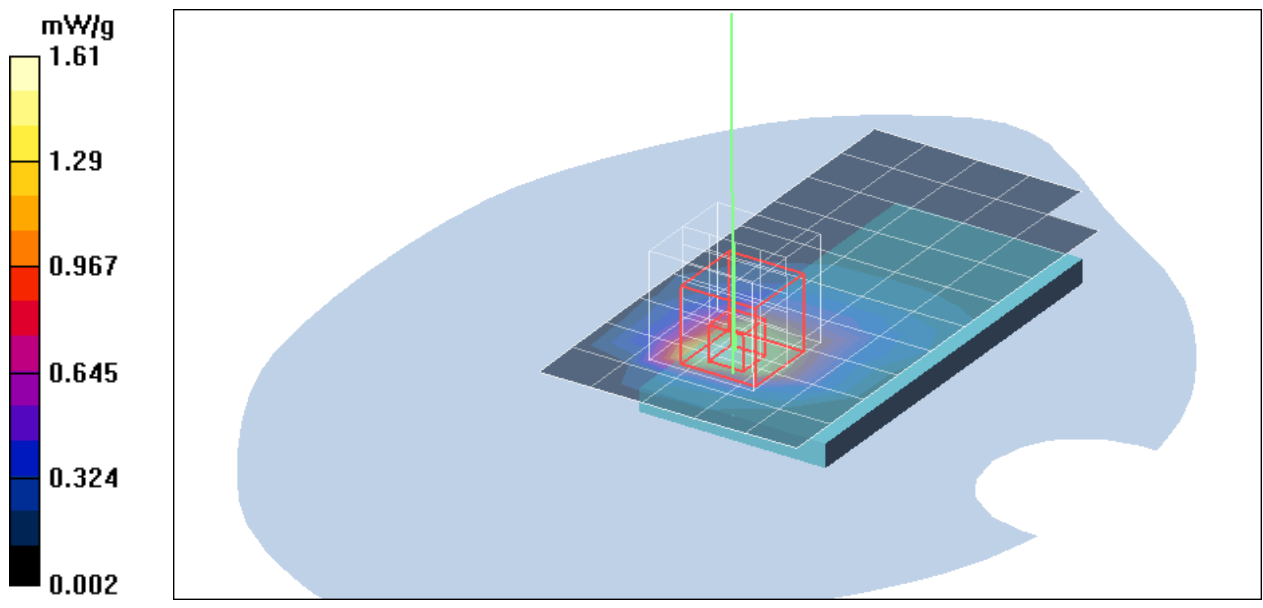

Test Laboratory: Compliance Certification Services Inc.

802.11g Ant-1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2412$ MHz; $\sigma = 1.95$ mho/m; $\epsilon_r = 51.3$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Low CH, Rate=6M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.537 mW/g


Low CH, Rate=6M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 14.3 V/m; Power Drift = -0.034 dB

Peak SAR (extrapolated) = 0.922 W/kg

SAR(1 g) = 0.469 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.642 mW/g

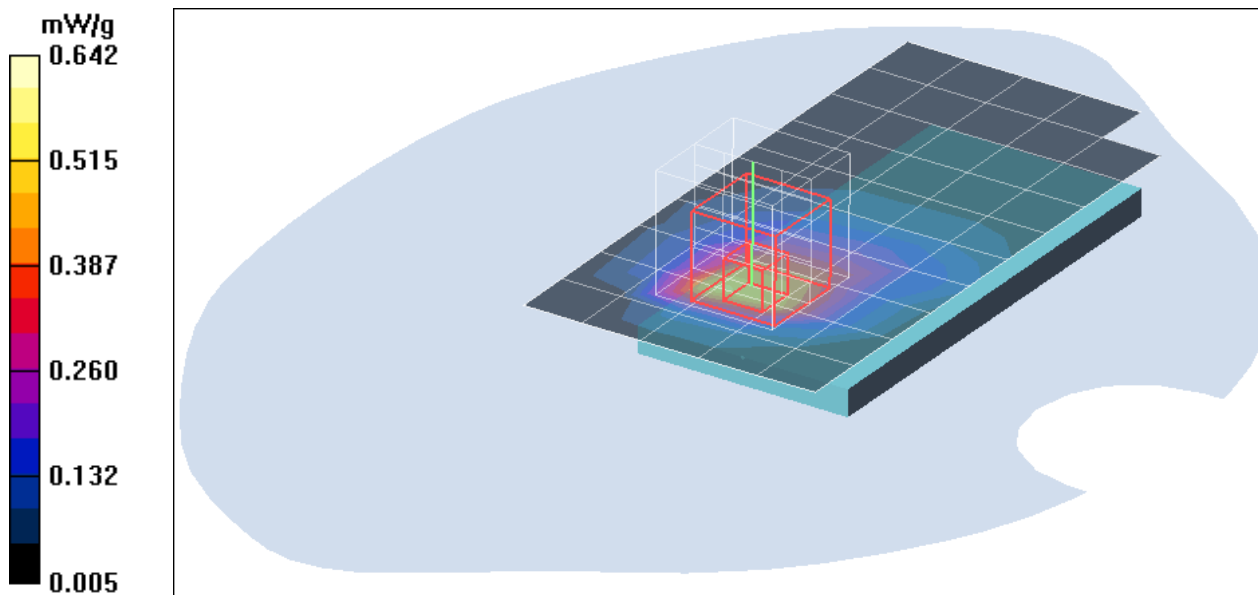

Test Laboratory: Compliance Certification Services Inc.

802.11g Ant-1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH, Rate=6M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.23 mW/g

Middle CH, Rate=6M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 22.5 V/m; Power Drift = -0.037 dB



Peak SAR (extrapolated) = 1.90 W/kg

SAR(1 g) = 0.968 mW/g; SAR(10 g) = 0.487 mW/g

Maximum value of SAR (measured) = 1.31 mW/g

Middle CH, Rate=6M/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 1.54 mW/g

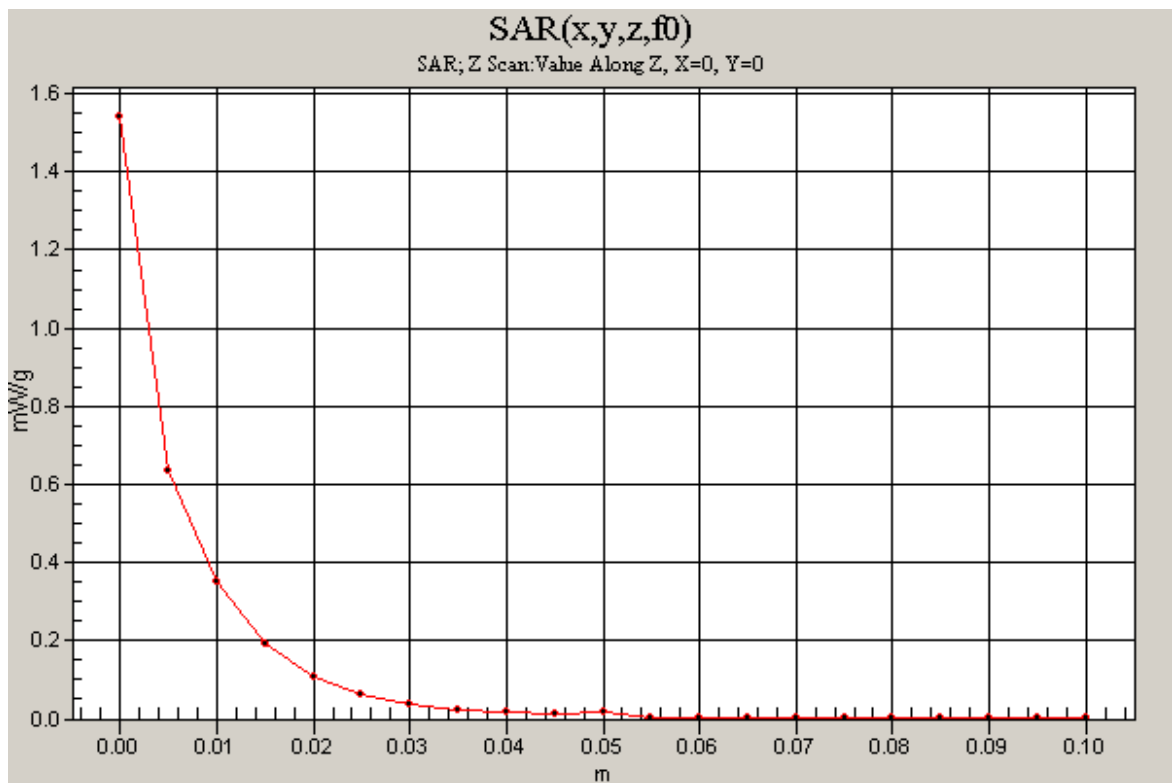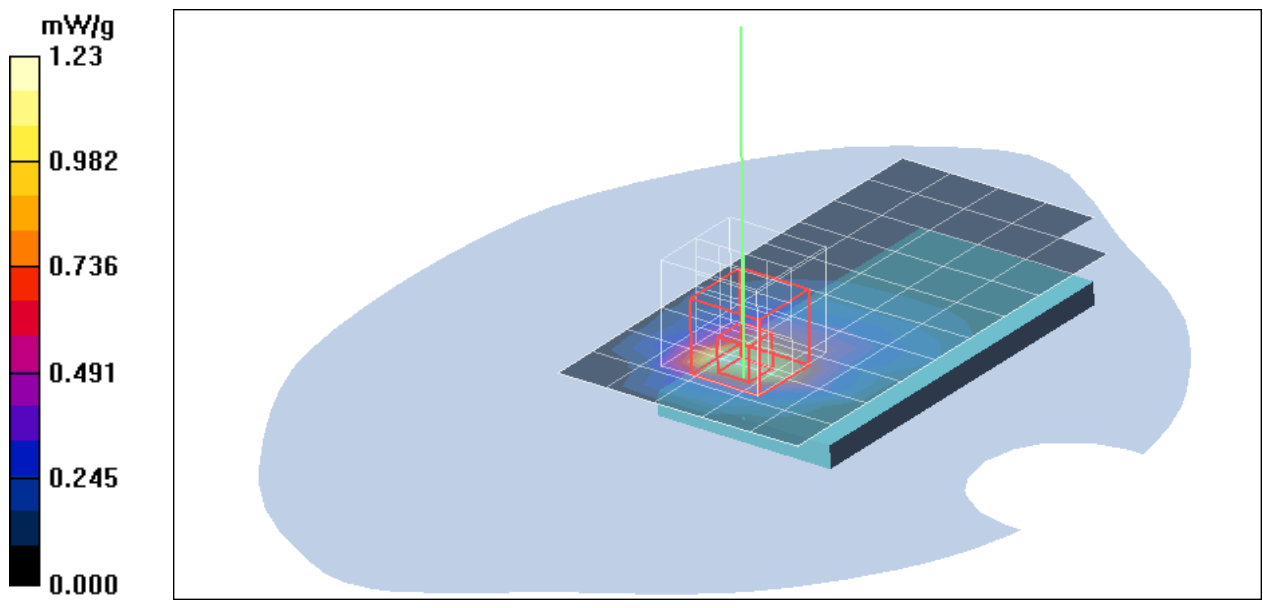

Test Laboratory: Compliance Certification Services Inc.

802.11g Ant-1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 2462$ MHz; $\sigma = 2.01$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

High CH, Rate=6M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 1.07 mW/g


High CH, Rate=6M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 18.9 V/m; Power Drift = -0.112 dB

Peak SAR (extrapolated) = 1.60 W/kg

SAR(1 g) = 0.801 mW/g; SAR(10 g) = 0.396 mW/g

Maximum value of SAR (measured) = 1.11 mW/g

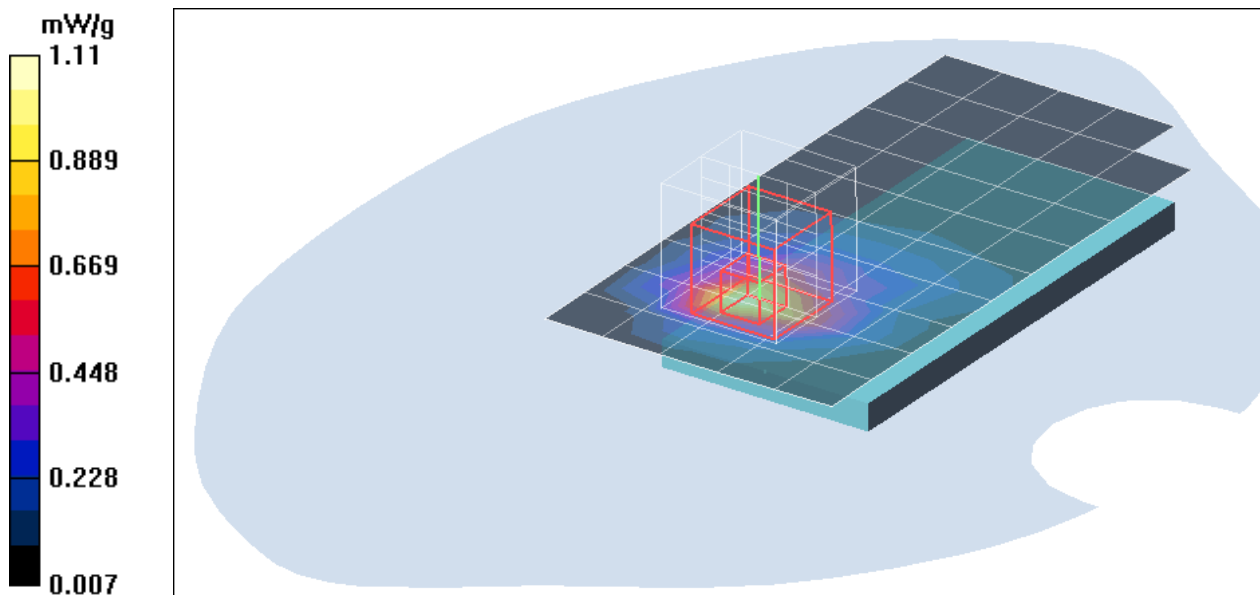

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Ant 1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.3 deg C; Liquid Temperature: 24.3 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

UNII Middle CH Rate=6M bit/Area Scan (8x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.691 mW/g

UNII Middle CH Rate=6M bit/Zoom Scan (8x8x8)/Cube 0: Measurement grid:

dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 6.14 V/m; Power Drift = -0.071 dB



Peak SAR (extrapolated) = 1.59 W/kg

SAR(1 g) = 0.466 mW/g; SAR(10 g) = 0.183 mW/g

Maximum value of SAR (measured) = 0.748 mW/g

UNII Middle CH Rate=6M bit/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Maximum value of SAR (measured) = 0.789 mW/g

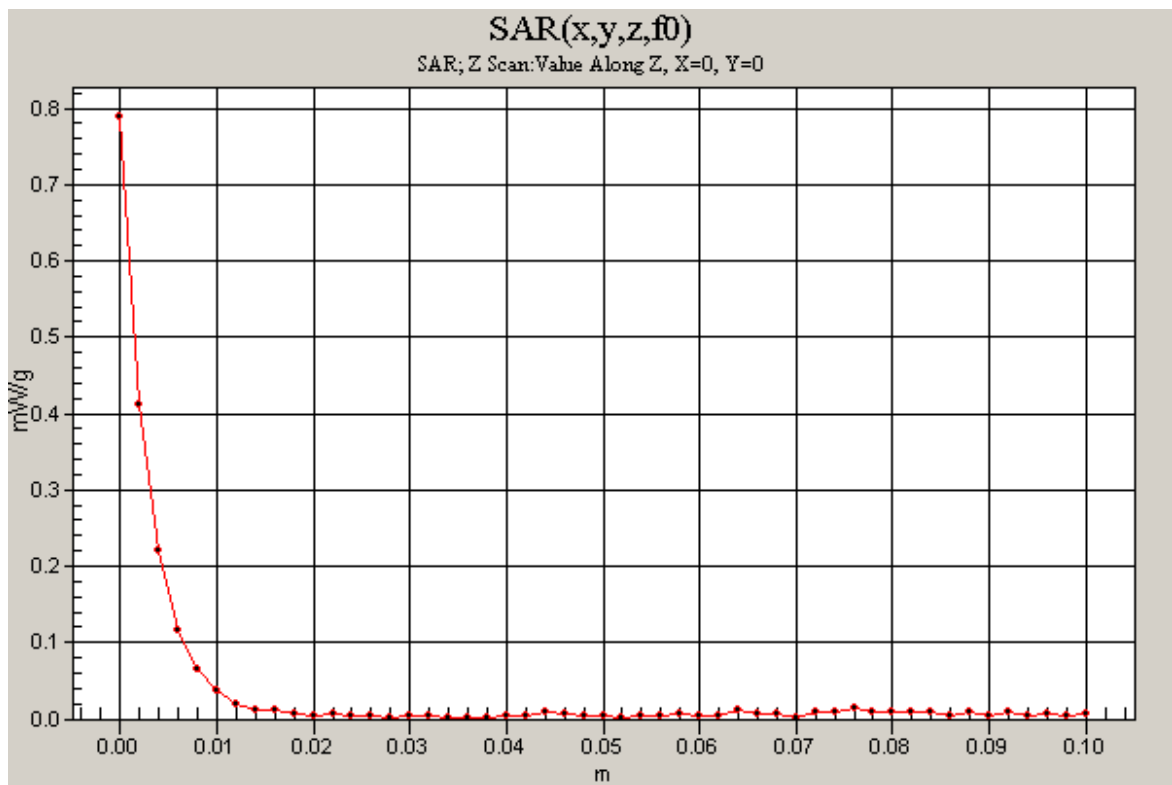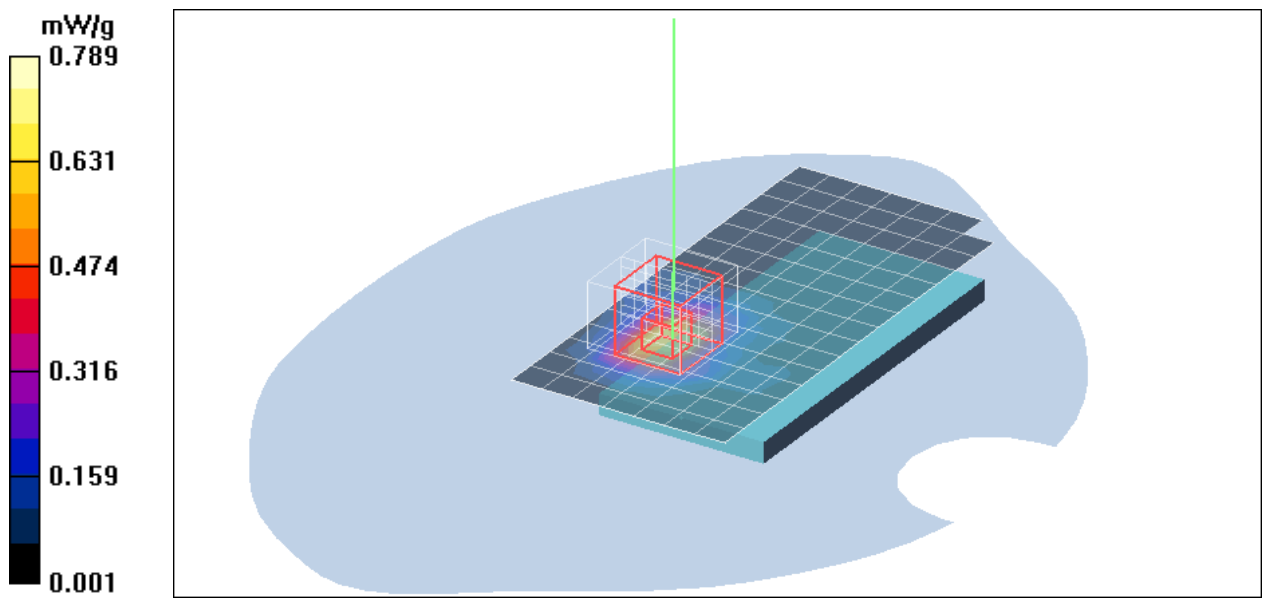

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Ant 1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 5785$ MHz; $\sigma = 6.21$ mho/m; $\epsilon_r = 47.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.61 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.82, 3.82, 3.82);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

DTS Middle CH Rate=6M bit/Area Scan (8x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.508 mW/g

DTS Middle CH Rate=6M bit/Zoom Scan (8x8x8)/Cube 0: Measurement grid:

dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 3.79 V/m; Power Drift = -0.148 dB



Peak SAR (extrapolated) = 1.49 W/kg

SAR(1 g) = 0.346 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.570 mW/g

DTS Middle CH Rate=6M bit/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Maximum value of SAR (measured) = 0.569 mW/g

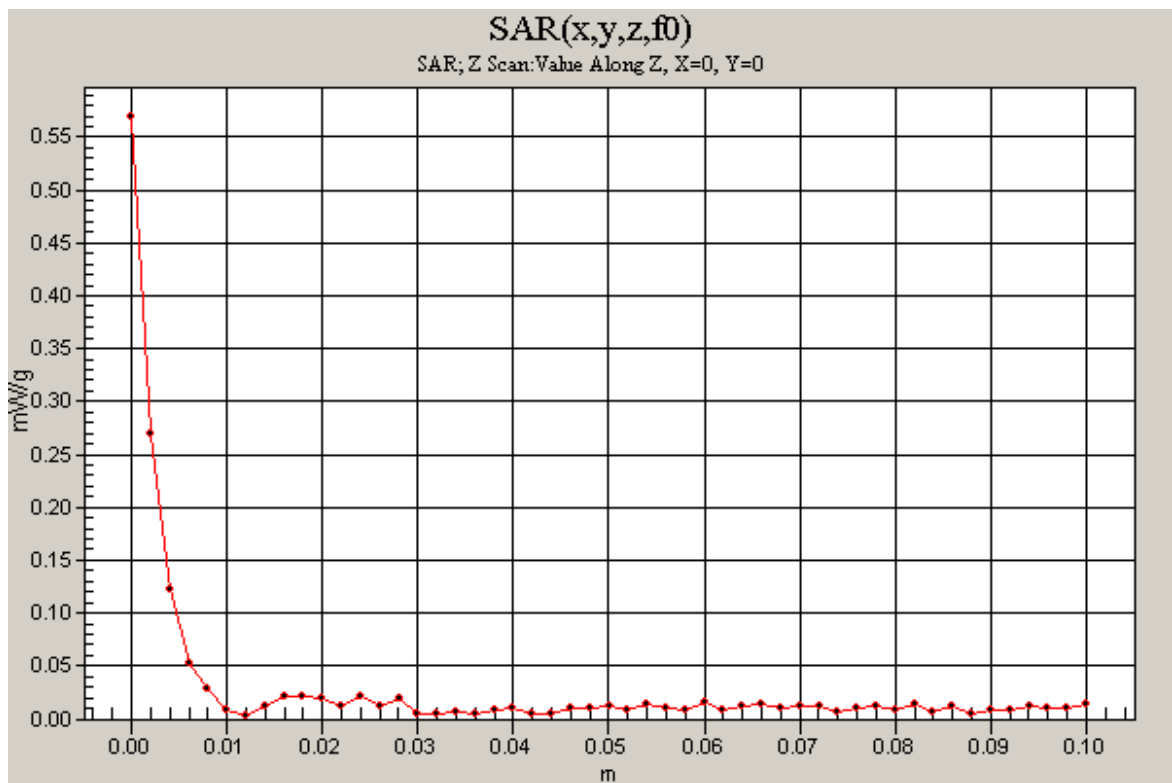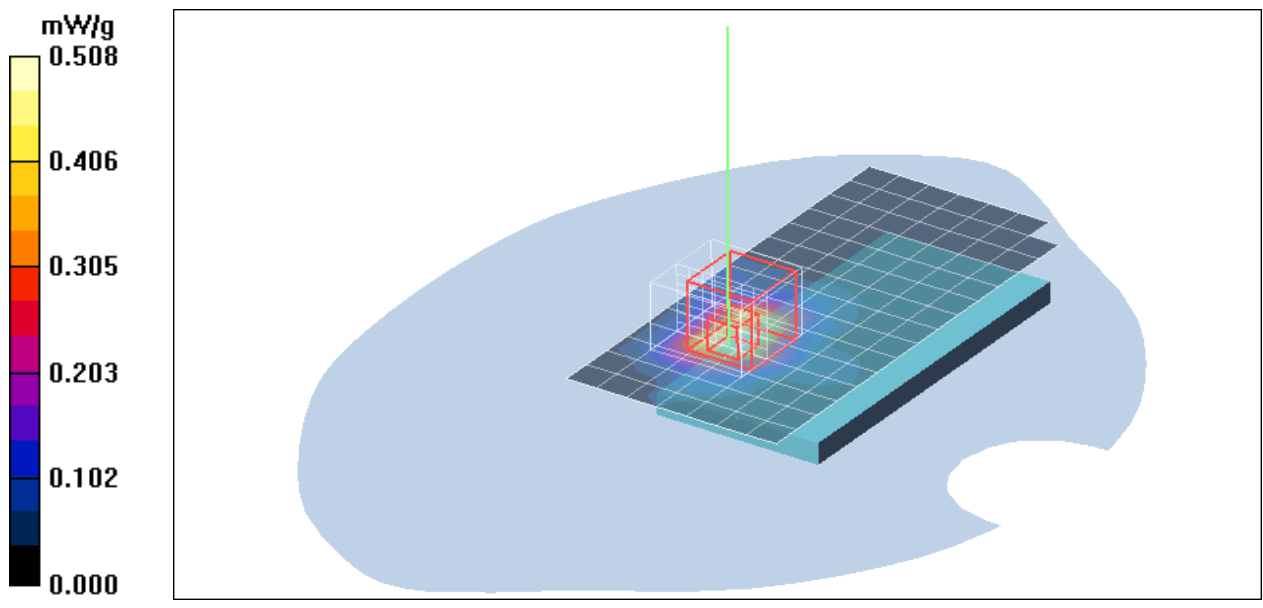

Test Laboratory: Compliance Certification Services Inc.

802.11b Ant-1 Bottom Touch mode Dell

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11b WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH, Rate=11M/Area Scan (7x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.601 mW/g

Middle CH, Rate=11M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 12.0 V/m; Power Drift = -0.157 dB



Peak SAR (extrapolated) = 0.964 W/kg

SAR(1 g) = 0.490 mW/g; SAR(10 g) = 0.246 mW/g

Maximum value of SAR (measured) = 0.670 mW/g

Middle CH, Rate=11M/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.425 mW/g

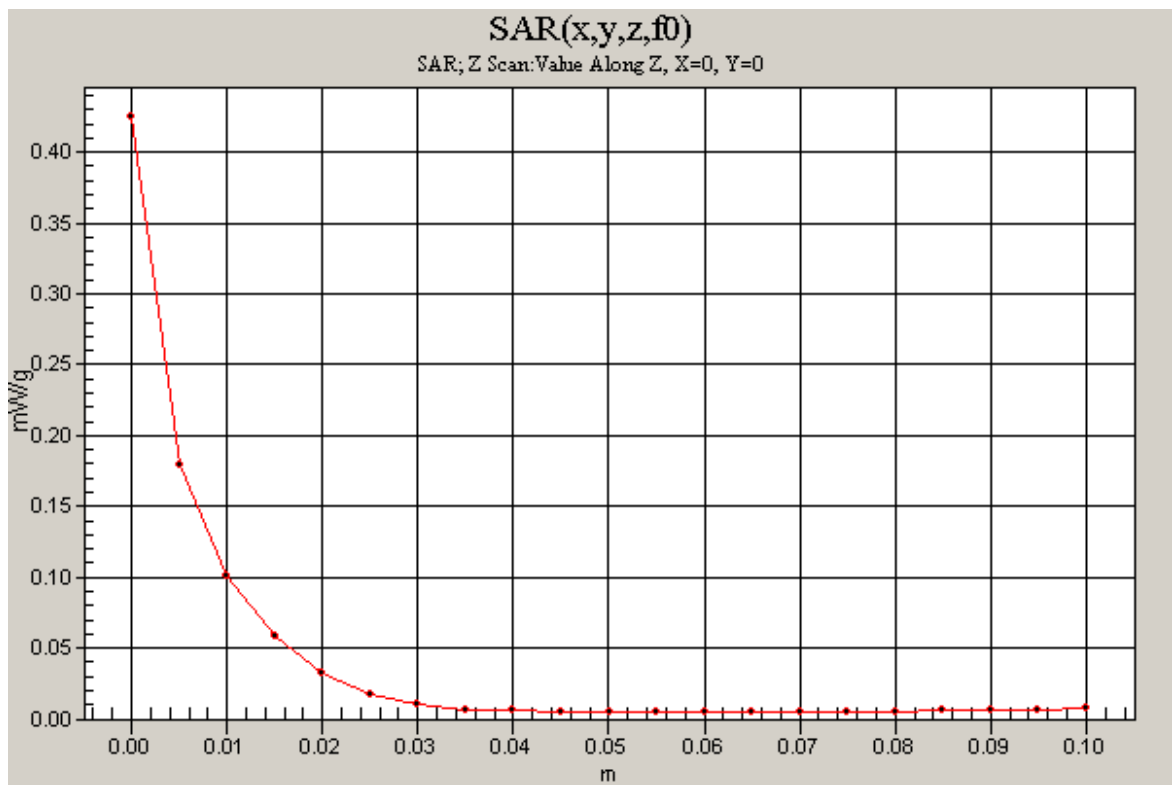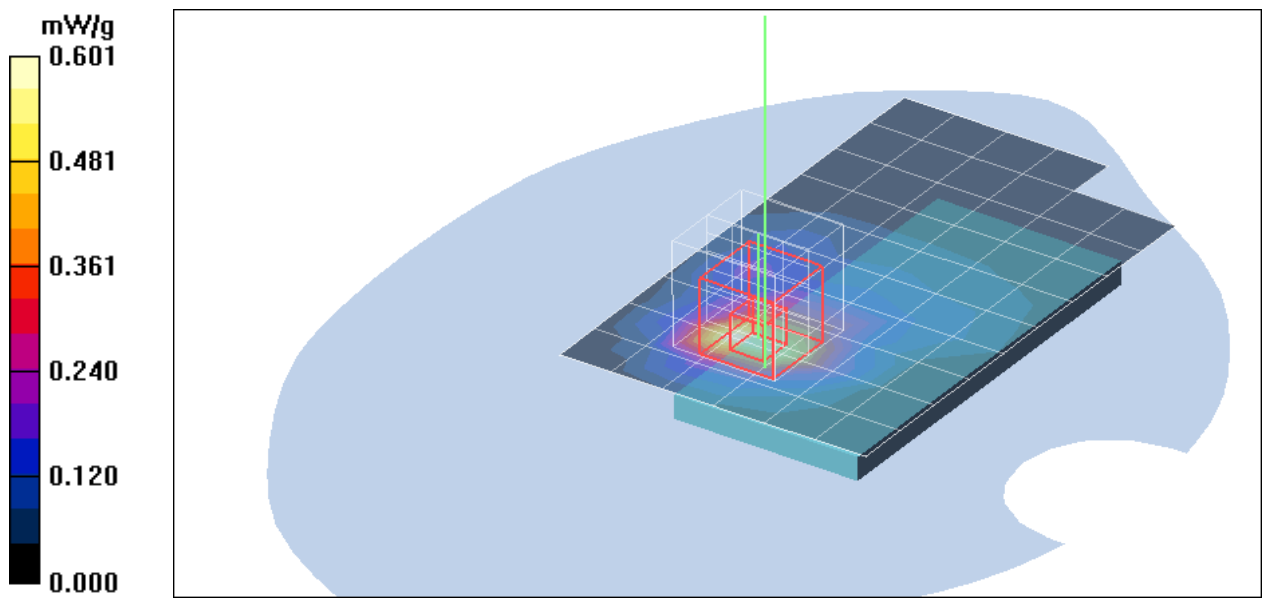

Test Laboratory: Compliance Certification Services Inc.

802.11g Ant-1 Bottom Touch mode Dell

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11g WLAN; Frequency: 2437 MHz; Duty Cycle: 1:1

Medium parameters used (interpolated): $f = 2437$ MHz; $\sigma = 1.98$ mho/m; $\epsilon_r = 51.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(6.12, 6.12, 6.12);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 12; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

Middle CH, Rate=6M/Area Scan (6x11x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (measured) = 0.594 mW/g

Middle CH, Rate=6M/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=7.5mm, dy=7.5mm, dz=5mm

Reference Value = 15.2 V/m; Power Drift = -0.126 dB



Peak SAR (extrapolated) = 0.906 W/kg

SAR(1 g) = 0.453 mW/g; SAR(10 g) = 0.225 mW/g

Maximum value of SAR (measured) = 0.624 mW/g

Middle CH, Rate=6M/Z Scan (1x1x21): Measurement grid: dx=20mm, dy=20mm, dz=5mm

Maximum value of SAR (measured) = 0.685 mW/g

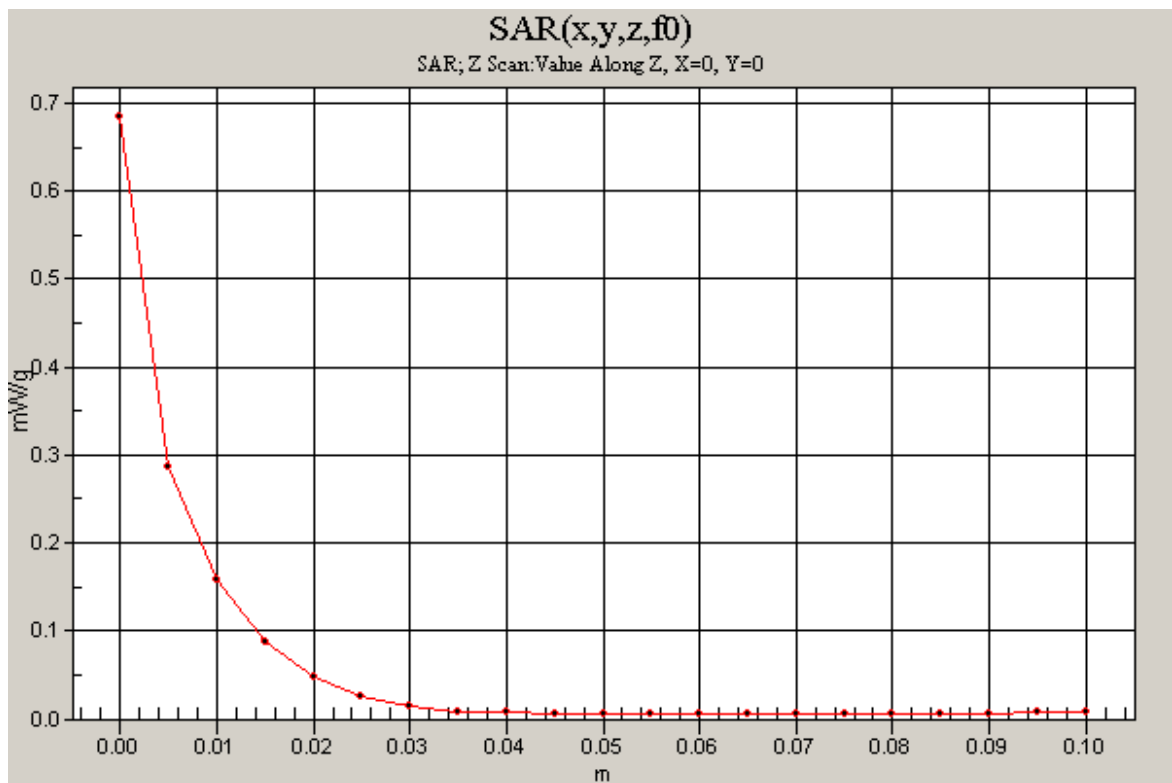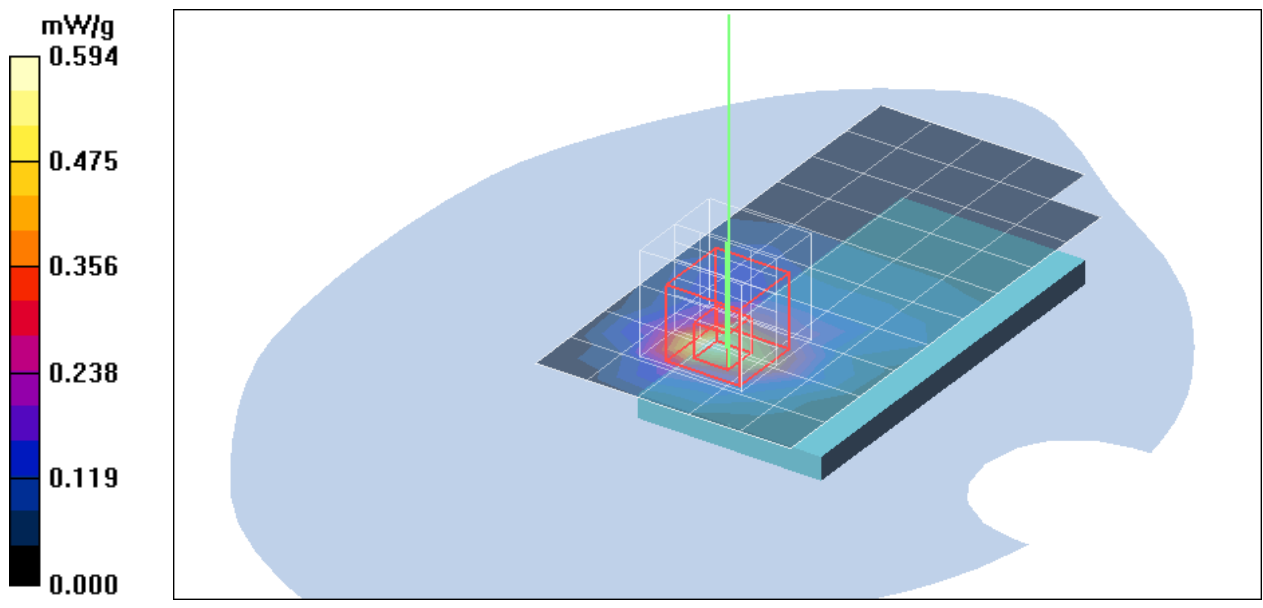

Test Laboratory: Compliance Certification Services Inc.

80211a UNII Ant 1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium parameters used: $f = 5260$ MHz; $\sigma = 5.45$ mho/m; $\epsilon_r = 48.2$; $\rho = 1000$ kg/m³

Phantom section: Flat Section

Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C

Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.99, 3.99, 3.99);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection) Sensor-Surface: 0mm (Fix Surface)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

UNII Middle CH Rate=6M bit/Area Scan (8x16x1): Measurement grid: dx=10mm, dy=10mm

Maximum value of SAR (measured) = 0.587 mW/g

UNII Middle CH Rate=6M bit/Zoom Scan (8x8x8)/Cube 0: Measurement grid:

dx=4.3mm, dy=4.3mm, dz=3mm

Reference Value = 3.37 V/m; Power Drift = -0.174 dB



Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.156 mW/g

Maximum value of SAR (measured) = 0.592 mW/g

UNII Middle CH Rate=6M bit/Z Scan (1x1x51): Measurement grid: dx=20mm, dy=20mm, dz=2mm

Maximum value of SAR (measured) = 0.627 mW/g

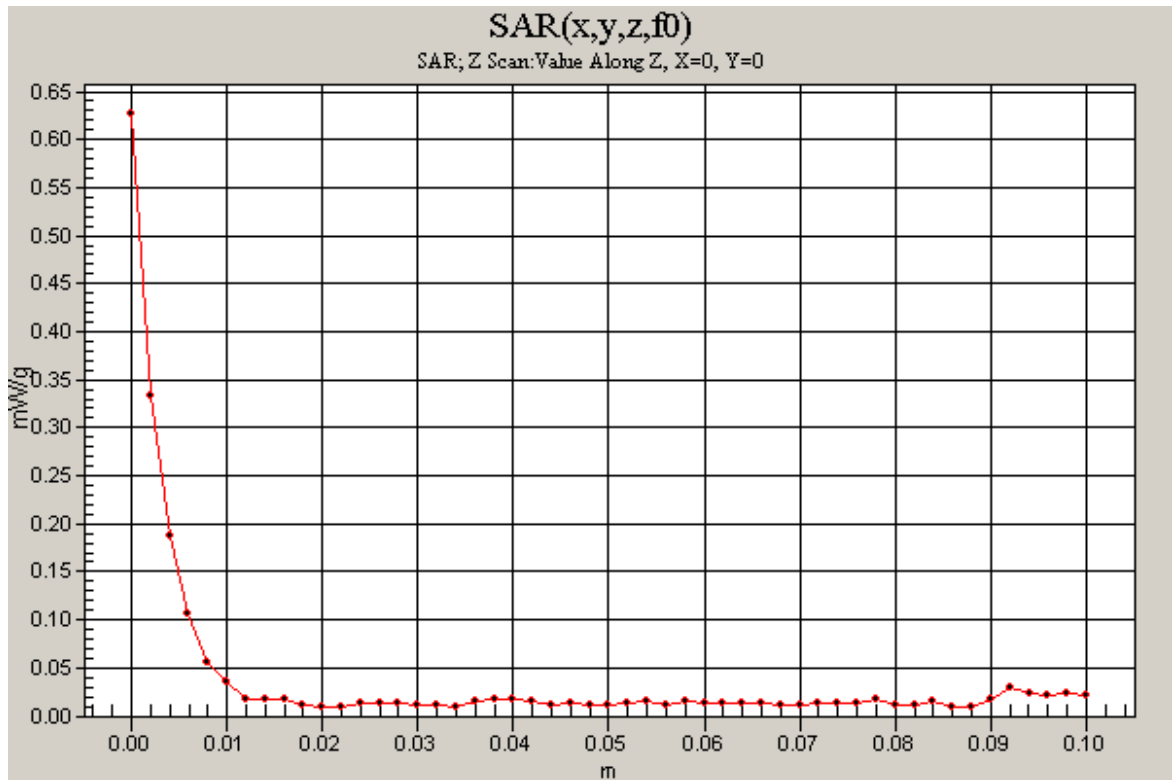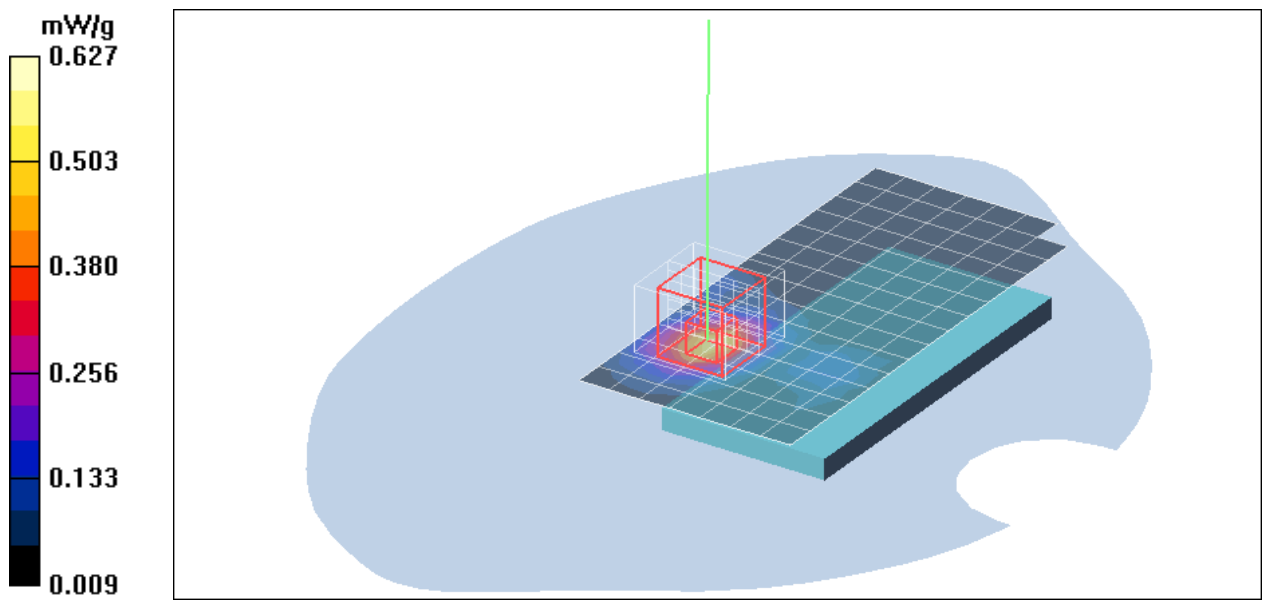

Test Laboratory: Compliance Certification Services Inc.

80211a DTS Ant 1 Bottom Touch mode

DUT: AG-120; Type: 802.11a/b/g wireless PCMCIA card; Serial: N/A

Communication System: IEEE 802.11 A; Frequency: 5785 MHz; Duty Cycle: 1:1
Medium parameters used (interpolated): $f = 5785 \text{ MHz}$; $\sigma = 6.21 \text{ mho/m}$; $\epsilon_r = 47.2$; $\rho = 1000 \text{ kg/m}^3$
Phantom section: Flat Section
Air Temperature: 25.6 deg C; Liquid Temperature: 24.6 deg C
Area Scan Find Secondary Maximum Within 2dB and with a peak SAR value greater than 0.0012W/kg

DASY4 Configuration:

- Probe: EX3DV4 - SN3554; ConvF(3.82, 3.82, 3.82);
- Sensor-Surface: 2.5mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn427; Calibrated: 9/22/2005
- Phantom: SAM 34; Type: SAM V4.0; Serial: TP-1150
- Measurement SW: DASY4, V4.6 Build 23; Postprocessing SW: SEMCAD, V1.8 Build 161

DTS Middle CH Rate=6M bit/Area Scan (8x16x1): Measurement grid: dx=10mm, dy=10mm
Maximum value of SAR (measured) = 0.441 mW/g

DTS Middle CH Rate=6M bit/Zoom Scan (8x8x8)/Cube 0: Measurement grid: dx=4.3mm, dy=4.3mm, dz=3mm
Reference Value = 3.52 V/m; Power Drift = -0.069 dB
Peak SAR (extrapolated) = 1.21 W/kg
SAR(1 g) = 0.300 mW/g; SAR(10 g) = 0.119 mW/g
Maximum value of SAR (measured) = 0.459 mW/g

