

Specific Absorption Rate (SAR) Test Report

for

ZyXEL Communications Corporation

on the

CardBus 11Mbps Wireless LAN Card

Model Number: ZyAIR B-122

Test Report: EME-031071

Date of Report: Sep. 24, 2003

Date of test: Sep. 23, 2003

Total No of Pages Contained in this Report: 70



0597

ILAC MRA

Accredited for testing to FCC Part 15

Tested by: Kevin Chen	
Reviewed by: Elton Chen	

Review Date: Sep. 25, 2003

All services undertaken are subject to the following general policy: Reports are submitted for exclusive use of the client to whom they are addressed. Their significance is subject to the adequacy and representative character of the samples and to the comprehensiveness of the tests, examinations or surveys made. This report shall not be reproduced except in full, without written consent of Intertek Testing Services, Taiwan Ltd.

Table of Contents

1.0 Job Description	4
1.1 Client Information.....	4
1.2 Equipment under test (EUT).....	4
1.3 Test plan reference	5
1.4 System test configuration.....	5
1.4.1 System block diagram & Support equipment	5
1.4.2 Test Position.....	6
1.4.3 Test Condition	6
1.5 Modifications required for compliance.....	7
1.6 Additions, deviations and exclusions from standards.....	7
2.0 SAR Evaluation	8
2.1 SAR Limits	8
2.2 Configuration Photographs	9
2.3 SAR measurement system	13
2.4 SAR measurement system validation	14
2.5 Test Result.....	15
3.0 Test Equipment	17
3.1 Equipment List.....	17
3.2 Body Tissue Simulating Liquid for evaluation test	18
3.3 Head Tissue Simulating Liquid for System performance Check test	18
3.4 E-Field Probe Calibration	18
3.5 Measurement Uncertainty	19
3.6 Measurement Traceability.....	20
4.0 WARNING LABEL INFORMATION - USA	21
REFERENCES	22
DOCUMENT HISTORY	23
APPENDIX A - SAR Evaluation Data.....	24
APPENDIX B – 2450MHz body liquid Calibration Data	45
APPENDIX C - E-Field Probe Certificate and Calibration Data	50

STATEMENT OF COMPLIANCE

The ZyXEL sample device, model # ZyAIR B-122 was evaluated in accordance with the requirements for compliance testing defined in FCC OET Bulletin 65, Supplement C (Edition 01-01). Testing was performed at the Intertek Testing Services facility in Hsinchu, Taiwan.

For the evaluation, the dosimetric assessment system INDEXSAR SARA2 was used. The phantom employed was the box phantom of 2mm thick in one wall. The total uncertainty for the evaluation of the spatial peak SAR values averaged over a cube of 1g tissue mass had been assessed for this system to be $\pm 20.6\%$.

The device was tested at their maximum output power declared by the ZyXEL.

In summary, the maximum spatial peak SAR value for the sample device averaged over 1g was found to be:

Phantom	Position	SAR_{1g}, mW/g
2mm thick box phantom wall	The EUT inserted into the left side of notebook PC, with EUT perpendicular to the phantom, 0 mm separatio	0.180 mW/g.

In conclusion, the tested Sample device was found to be in compliance with the requirements defined in OET Bulletin 65, Supplement C (Edition 01-01) for body configurations.

1.0 Job Description

1.1 Client Information

The ZyAIR B-122 has been tested at the request of:

Company: ZyXEL Communications Corporation
No. 6, Innovation Rd II, Science-Based Industrial Park,
Hsin-Chu, Taiwan

1.2 Equipment under test (EUT)

Product Descriptions:

Equipment	CardBus 11Mbps Wireless LAN Card		
Trade Name	ZyXEL	Model No:	ZyAIR B-122
FCC ID	I88B122	S/N No.	Not Labeled
Category	Portable	RF Exposure	Uncontrolled Environment
Frequency Band	2412 – 2462 MHz	System	DSSS

EUT Antenna Description			
Type	Ceramic	Configuration	Fixed
Dimensions	116 x 54 mm	Gain	2.5 dBi
Location	Embedded		

Use of Product : Wireless Data Communication

Manufacturer: ZyXEL

Production is planned: Yes, No

EUT receive date: Sep. 1/, 2003

EUT received condition: Good operating condition prototype

Test start date: Sep. 23, 2003

Test end date: Sep. 23, 2003

1.3 Test plan reference

FCC Rule: Part 2.1093, FCC's OET Bulletin 65, Supplement C (Edition 01-01)

1.4 System test configuration

1.4.1 System block diagram & Support equipment

Support Equipment			
Item #	Equipment	Model No.	S/N
1	Notebook	PS240T-00UHT	92043590J



1.4.2 Test Position

See the photographs as section 2.2

1.4.3 Test Condition

During tests the worst-case data (max RF coupling) was determined with following conditions:

Usage	Operates with a portable computer	Distance between antenna axis at the joint and the liquid surface:	Laptop is touching the Phantom in bottom side, perpendicular to phantom 15mm separating, perpendicular to phantom 0mm positions	
Simulating human Head/ Body/Hand	Body	EUT Battery	Device is powered from host computer through battery.	
Conducted output Power	Channel	Frequency MHz	Before SAR Test (dBm)	After SAR Test (dBm)
	Low Channel - 1	2412	14.93	14.95
	Mid Channel - 6	2437	15.13	15.22
	High Channel- 11	2462	15.33	15.30

The spatial peak SAR values were assessed for lowest, middle and highest operating channels, defined by the manufacturer.

The conducted output power was measured before and after the test using a diode detector, oscilloscope and signal generator.

Settle the EUT into Notebook, run the test program “ZDconfig”, under windows Os, provided by manufacturer. The EUT was transmitted continuously during all the test.

The EUT was transmitted continuously during the test.

After verifying the maximum output power, we found the maximum output power was occurred at 11Mbps data rate.

All the test data were performed under the above transmission rate.

1.5 Modifications required for compliance

Intertek Testing Services implemented no modifications.

1.6 Additions, deviations and exclusions from standards

The phantom employed was the box phantom of 2mm thick in vertical wall.

2.0 SAR Evaluation

2.1 SAR Limits

The following FCC limits for SAR apply to devices operate in General Population/Uncontrolled Exposure environment:

EXPOSURE (General Population/Uncontrolled Exposure environment)	SAR (W/kg)
Average over the whole body	0.08
Spatial Peak (1g)	1.60
Spatial Peak for hands, wrists, feet and ankles (10g)	4.00

2.2 Configuration Photographs

SAR Measurement Test Setup

Test System



SAR Measurement Test Setup

Bottom side of Laptop facing phantom touching



Bottom side of Laptop facing phantom touching – Zoom In




**SAR Measurement Test Setup
EUT perpendicular to phantom, 0 mm separation**



EUT perpendicular to phantom, 0 mm separation – Zoom In



**SAR Measurement Test Setup
EUT perpendicular to phantom, 15 mm separation**

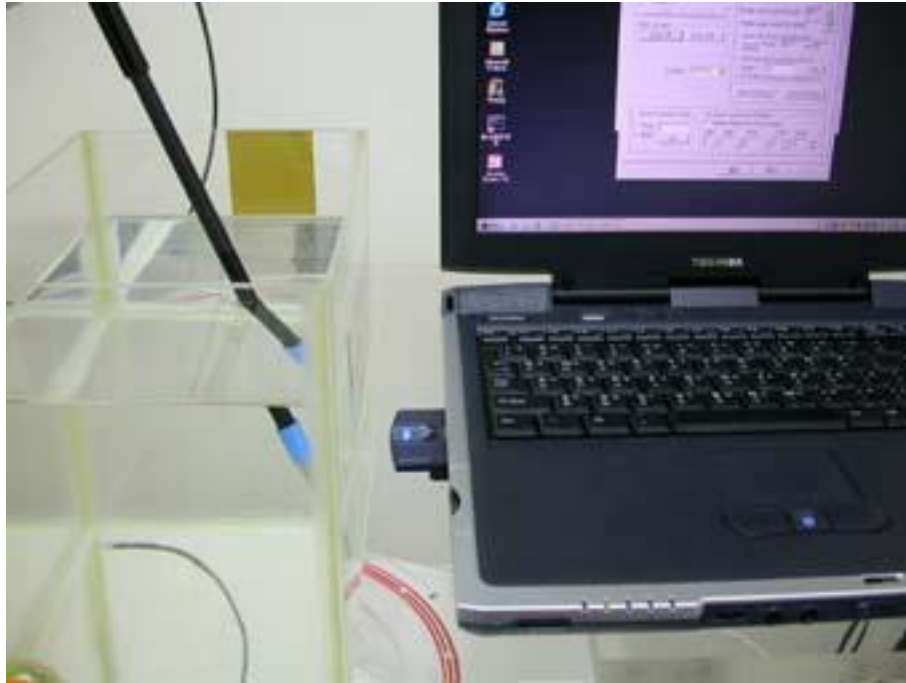

EUT perpendicular to phantom, 15 mm separation- Zoom In



2.3 SAR measurement system

Robot system specification

The SAR measurement system being used is the IndexSAR SARA2 system, which consists of a Mitsubishi RV-E2 6-axis robot arm and controller, IndexSAR probe and amplifier and SAM phantom Head Shape. The robot is used to articulate the probe to programmed positions inside the phantom head to obtain the SAR readings from the DUT.

The system is controlled remotely from a PC, which contains the software to control the robot and data acquisition equipment. The software also displays the data obtained from test scans.

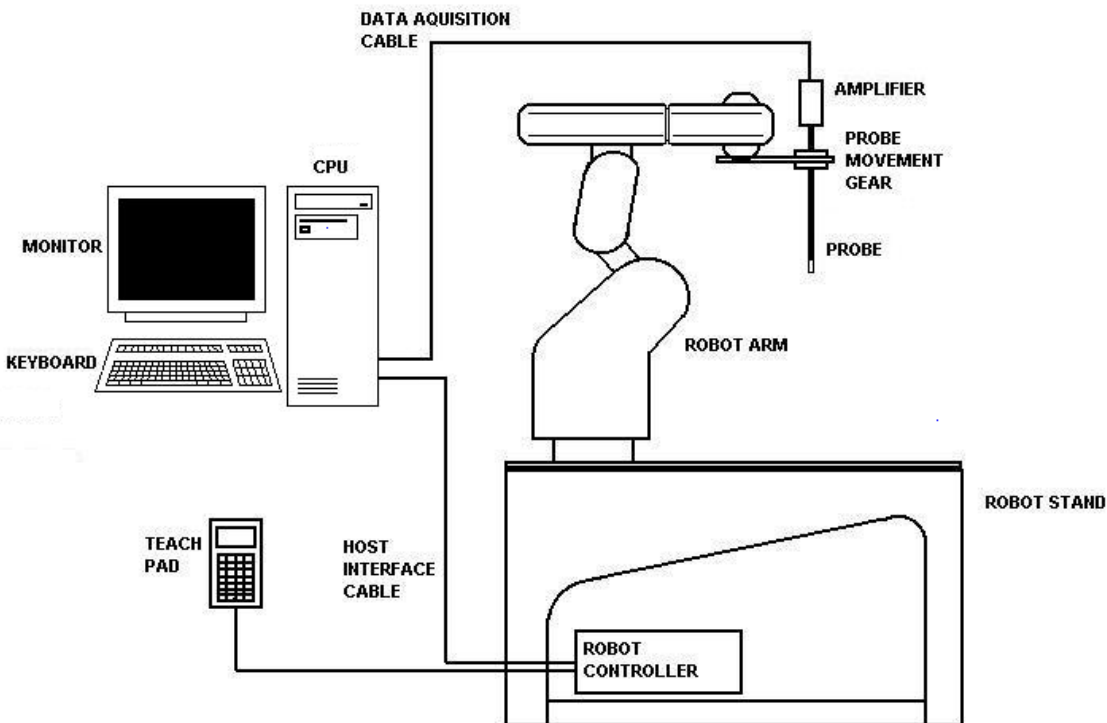


Figure 1: Schematic diagram of the SAR measurement system

The position and digitised shape of the phantom heads are made available to the software for accurate positioning of the probe and reduction of set-up time.

The SAM phantom heads are individually digitised using a Mitutoyo CMM machine to a precision of 0.02mm. The data is then converted into a shape format for the software, providing an accurate description of the phantom shell.

In operation, the system first does an area (2D) scan at a fixed depth within the liquid from the inside wall of the phantom. When the maximum SAR point has been found, the system will then carry out a 3D scan centred at that point to determine volume averaged SAR level.

2.4 SAR measurement system validation

Prior to the assessment, the system was verified to the $\pm 10\%$ of the specifications by using the system validation equipments. The validation was performed at 2450 MHz on the bottom side of box phantom.

Procedures

The SAR evaluation was performed with the following procedures:

- a. The SAR distribution was measured at the exposed side of the bottom of the box phantom and was measured at a distance of 8 mm from the inner surface of the shell. The feed power was 1/4W.
- b. The dimension for this cube is 32 mm x 32 mm x 34 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated with the following procedure:
 - i) The data at the surface were extrapolated, since the center of the dipoles is 2.7 mm away from the tip of the probe and the distance between the surface and the lowest measurement point is 5 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in Z-axis. This polynomial was then used to evaluate the points between the surface and the probe tip.
 - ii) The maximum interpolated value was searched with a straightforward algorithm. Around this maximum, the SAR values averaged over the spatial volumes (1g or 10g) were computed using the 3-D spline interpolation algorithm. The 3-D spline is composed of three one-dimensional splines with the “Not a knot” condition (in x, y and z directions). The volume was integrated with the trapezoidal algorithm. 1000 points (10 x 10 x 10) were interpolated to calculate the average.
 - iii) All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.

System Validation (2450 MHz Head)					
Frequency MHz	Operating Mode	Target SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Deviation ($\pm 10\%$)	Plot Number
2450	CW	52.4	55.79	6.47%	1

System performance check (2450 MHz Head)					
Frequency MHz	Operating Mode	Target SAR _{1g} (mW/g)	Measured SAR _{1g} (mW/g)	Deviation ($\pm 10\%$)	Plot Number
2450	CW	52.4	49.78	-5%	2

2.5 Test Result

The results on the following page(s) were obtained when the device was tested in the condition described in this report. Detailed measurement data and plots, which reveal information about the location of the maximum SAR with respect to the device, are reported in Appendix A.

Measurement Results

Trade Name:	ZyXEL	Model No.:	ZyAIR B-122
Serial No.:	Not Labeled	Test Engineer:	Kevin Chen
TEST CONDITIONS			
Ambient Temperature	23 °C	Relative Humidity	50 %
Test Signal Source	Test Mode	Signal Modulation	DSSS
Output Power Before SAR Test	See page 6	Output Power After SAR Test	See page 6
Test Duration	22 min. each scan	Number of Battery Change	1

EUT Position						
Channel (MHz)	Operating Mode	Crest Factor	Description	Distance (mm)	Measured SAR _{1g} (mW/g)	Plot Number
2437	DSSS	1	Bottom of NoteBook PC	0	0.093	3
2412	DSSS	1	Bottom of NoteBook PC	0	0.095	4
2462	DSSS	1	Bottom of Note Book PC	0	0.111	5
2437	DSSS	1	Perpendicular to phantom	15	0.032	6
2412	DSSS	1	Perpendicular to phantom	15	0.030	7
2462	DSSS	1	Perpendicular to phantom	15	0.040	8
2437	DSSS	1	Perpendicular to phantom	0	0.148	9
2412	DSSS	1	Perpendicular to phantom	0	0.142	10
2462	DSSS	1	Perpendicular to phantom	0	0.180	11

Note: The distance from bottom of EUT to flat phantom is 13 mm.

3.0 Test Equipment

3.1 Equipment List

The Specific Absorption Rate (SAR) tests were performed with the INDEXSAR SARA2 SYSTEM.

The following major equipment/components were used for the SAR evaluations:

SAR Measurement System			
EQUIPMENT	SPECIFICATIONS	S/N #	LAST CAL. DATE
Balanced Validation dipole	2450MHz	0048	N/A
Controller	Mitsubishi CR-E116	F1008007	N/A
Robot	Mitsubishi RV-E2	EA009002	N/A
	Repeatability: ± 0.04mm; Number of Axes: 6		
E-Field Probe	IXP-050	0136	09/10/2003
	Frequency Range: Probe outer diameter: 5.2 mm; Length: 350 mm; Distance between the probe tip and the dipole center: 2.7 mm		
Data Acquisition	SARA2	N/A	N/A
	Processor: Pentium 4; Clock speed: 1.5GHz; OS: Windows XP; I/O: two RS232; Software: SARA2 ver. 0.421N		
Phantom	2mm wall thickness box phantom	N/A	N/A
	Shell Material: clear Perspex; Thickness: 2 ± 0.1 mm; Capacity: 152.5 x 215.5 x 200 (W x L x D) mm ³ ; Dielectric constant: less than 2.85 above 500MHz;		
Device holder	Material: clear Perspex; Dielectric constant: less than 2.85 above 500MHz	N/A	N/A
Simulated Tissue	Mixture	N/A	N/A
	Please see section 3.2 for details		
RF Power Meter	Boonton 4231A with 51011-EMC power sensor	79401-32482	03/21/2003
	Frequency Range: 0.03 to 8 GHz, <24dBm		
RF Power Amplifier	INDEXSAR VTL5400	0302	01/23/2003
	10MHz to 2.5GHz, Gain >30dB		
Directional Coupler	INDEXSAR VDC0830-20	0302	05/19/2003
	0.8 to 3 GHz, Max. Power<500W		
Vector Network Analyzer	HP 8753B HP 85046A	2807J04037 2729A01958	07/04/2003
	300k to 3GHz		
Signal Generator	R&S SMR27	100036	09/19/2003
	10M to 27GHz, <120dBuV		
Crystal Detector	Agilent 8472B	MY42240243	N/A
	10MHz to 18GHz		
Two Channel Digital Storage Oscilloscope	Tektronix TDS1012	C031679	Aug. 16, 2003

3.2 Body Tissue Simulating Liquid for evaluation test

The dielectric parameters were verified prior to assessment using the HP 85046A dielectric probe kit and the HP 8753B network Analyzer. The dielectric parameters were:

Frequency (MHz)	Temp. (°C)	e _r / Relative Permittivity			s / Conductivity (mho/m)			r *(kg/m ³)
		measured	target	Δ(±5%)	measured	target	Δ(±5%)	
2450	22.5	51.15	52.7	-2.9%	1.952	1.95	0.10%	1000

* Worst-case assumption

Test data is included in Appendix B.

3.3 Head Tissue Simulating Liquid for System performance Check test

The dielectric parameters were verified prior to assessment using the HP 85046A dielectric probe kit and the HP 8753B network Analyzer. The dielectric parameters were:

Frequency (MHz)	Temp. (°C)	e _r / Relative Permittivity			s / Conductivity (mho/m)			r *(kg/m ³)
		measured	target	Δ(±5%)	measured	target	Δ(±5%)	
2450	23.5	38.398	39.2	-2.05%	1.779	1.80	-1.17	1000

* Worst-case assumption

3.4 E-Field Probe Calibration

Probe calibration factors are included in Appendix C.

3.5 Measurement Uncertainty

The uncertainty budget has been determined for the INDEXSAR SARA2 measurement system according to IEEE P1528 documents [3] and is given in the following table. The extended uncertainty (95% confidence level) was assessed to be 20.6 %

Uncertainty Component	Sec.	(dB)	Tol.(+/-)	(%)	Prob. Dist.	Divisor (descript)	Divisor (value)	c1	Standard Uncertainty (%)
Measurement System									
Probe Calibration	E 2.1			2.5	N	1 or k	1	1	2.50
Axial Isotropy	E 2.2	0.25	5.93	5.93	R	$\sqrt{3}$	1.73	0	0.00
Hemispherical Isotropy	E 2.2	0.45	10.92	10.92	R	$\sqrt{3}$	1.73	1	6.30
Boundary effects	E 2.3		4	4.00	R	$\sqrt{3}$	1.73	1	2.31
Linearity	E 2.4	0.04	0.93	0.93	R	$\sqrt{3}$	1.73	1	0.53
System Detection Limits	E 2.5		1	1.00	R	$\sqrt{3}$	1.73	1	0.58
Readout Electronics	E 2.6		1	1.00	N	1 or k	1.00	1	1.00
Response time	E 2.7		0	0.00	R	$\sqrt{3}$	1.73	1	0.00
Integration time	E 2.8		1.4	1.40	R	$\sqrt{3}$	1.73	1	0.81
RF Ambient Conditions	E 6.1		3	3.00	R	$\sqrt{3}$	1.73	1	1.73
Probe Positioner Mechanical Tolerance	E 6.2		0.6	0.60	R	$\sqrt{3}$	1.73	1	0.35
Probe Position wrt. Phantom Shell	E 6.3		3	3.00	R	$\sqrt{3}$	1.73	1	1.73
SAR Evaluation Algorithms	E 5		8	8.00	R	$\sqrt{3}$	1.73	1	4.62
Test Sample Related									
Test Sample Positioning	E 4.2		2	2.00	N	1	1.00	1	2.00
Device Holder Uncertainty	E 4.1		2	2.00	N	1	1.00	1	2.00
Output Power Variation	E 6.6.2		5	5.00	R	$\sqrt{3}$	1.73	1	2.89
Phantom and tissue Parameters									
Phantom Uncertainty (shape and thickness)	E 3.1		4	4.00	R	$\sqrt{3}$	1.73	1	2.31
Liquid conductivity (Deviation from target)	E 3.2		5	5.00	R	$\sqrt{3}$	1.73	0.64	1.85
Liquid conductivity (Meas. Uncertainty)	E 3.3		1.1	1.10	N	1	1.00	0.64	0.70
Liquid permittivity (Deviation from target)	E 3.2		5	5.00	R	$\sqrt{3}$	1.73	0.6	1.73
Liquid permittivity (Meas. Uncertainty)	E 3.3		1.1	1.10	N	1	1.00	0.6	0.66
Combined standard uncertainty					RSS				10.5

3.6 Measurement Traceability

All measurements described in this report are traceable to Chinese National Laboratory Accreditation (CNLA) standards or appropriate national standards.



FCC ID. : I88B122

Report No.: EME-031071
Page 21 of 70

4.0 WARNING LABEL INFORMATION - USA

See user manual.

REFERENCES

- [1] ANSI, *ANSI/IEEE C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3kHz to 300 GHz*, The Institute of electrical and Electronics Engineers, Inc., New York, NY 10017, 1999

- [2] Federal Communications Commission, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", OET Bulletin 65, FCC, Washington, D.C. 20554, 1997

- [3] IEEE Standards Coordinating Committee 34, "DRAFT Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Measurement Techniques", IEEE Std 1528-200X, Draft CD 1.2 – April 21, 2003

DOCUMENT HISTORY

Revision/ Job Number	Writer Initials	Date	Change
N/A	J.C.	Sep. 24, 2003	Original document

APPENDIX A - SAR Evaluation Data

Power drift is the measurement of power drift of the device over one complete SAR scan.


To assess the drift of the power of the device under test, a SAR measurement was made in the middle of the zoom scan volume at the start of the scan and a measurement at this point was then also made after the measurement scan. The difference between the two measurements should be less than 5%.

Plot #1

Date: 2003/3/7	Position: Bottom
Filename: 2450val3-7.txt	Phantom: Box1.csv
Device Tested: SARA2 system	Head Rotation: 0
Antenna: 2450dipole	Test Frequency: 2450MHz
Shape File: none.csv	Power Level: 24dBm /CW

Probe: 0114				
Cal File: SN0114_2450_CW_HEAD				
Cal Factors:		X	Y	Z
	Air	532	494	450
	DCP	20	20	20
	Lin	.495	.495	.495
Amp Gain: 2				
Averaging: 1				
Batteries Replaced: N/A				

Liquid: 15.1cm	
Type: 2450MHz Head	
Conductivity: 1.790	
Relative Permittivity: 38.050	
Liquid Temp (deg C): 23	
Ambient Temp (deg C): 22.1	
Ambient RH (%): 63	
Density (kg/m3): 1000	
Software Version: 0.421N	
Crest Factor = 1	

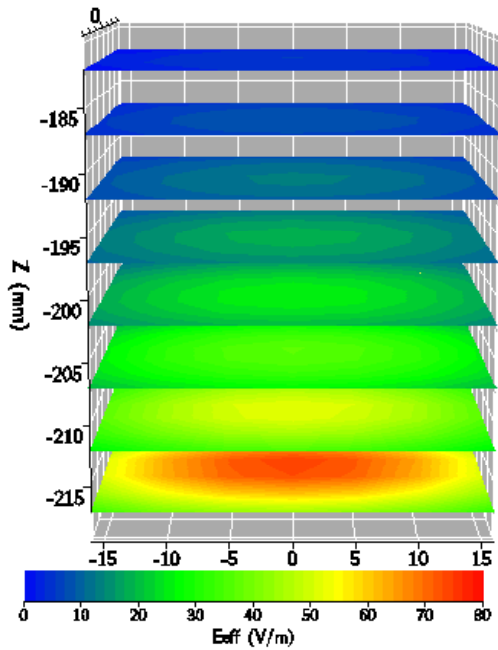

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan	End Scan

Change during Scan (%)

Max E-field (V/m): 76.33

Max SAR (W/kg)	1g	10g
	13.9475	6.54

Location of Max (mm):	X	Y	Z
	2.7	1.4	-223.0


Normalized to an input power of 1W
Averaged over 1 cm³ (1g) of tissue
55.79 W/kg

Plot #2

Date / Time: 17/09/2003	Position: bottom of box
Filename: 2450 performance-2.txt	Phantom: HeadBox1.csv
Device Tested: 2450 performance check	Head Rotation: 0
Antenna: dipole antenna	Test Frequency: 2450MHz
Shape File: none.csv	Power Level: 24dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_HEAD			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.378	.378	.378
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	-			

Liquid:	15.5cm
Type:	2450MHz Head
Conductivity:	1.7788
Relative Permittivity:	38.3985
Liquid Temp (deg C):	23.5
Ambient Temp (deg C):	23
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N
Crest Factor=1	

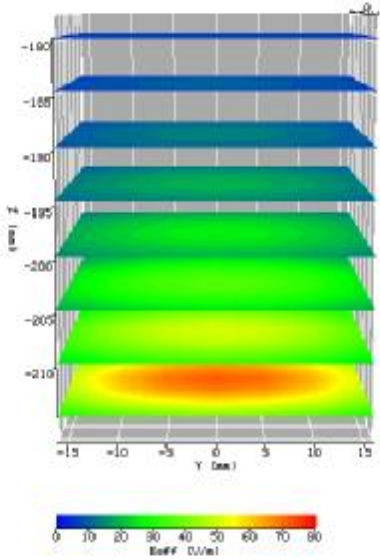

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan	End Scan
Change during Scan (%)		
Max E-field (V/m):	71.99	
Max SAR (W/kg)	1g	10g
	12.445	5.911

Location of Max (mm):	X	Y	Z
	1.3	0.0	-222.5

Normalized to an input power of 1W
Averaged over 1 cm³ (1g) of tissue
49.78 W/kg

Plot #3 (1/2)

Date / Time:	2003/9/23	Position:	bottom 0mm
Filename:	b-122-2437bot0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2437MHz
Shape File:	122bottom.csv	Power Level:	15.13dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm		
Type:	2450MHz Body		
Conductivity:	1.95229		
Relative Permittivity:	51.1547		
Liquid Temp (deg C):	22.8		
Ambient Temp (deg C):	23		
Ambient RH (%):	50		
Density (kg/m3):	1000		
Software Version:	0.421N		
Crest Factor=1			

ZOOM SCAN RESULTS:


Spot SAR (W/kg):	Start Scan	End Scan
	0.030	0.030
Change during Scan (%)	0.00	
Max E-field (V/m):	7.59	
Max SAR (W/kg)	1g	10g
	0.093	0.052
Location of Max (mm):	X	Y
	75.1	-16.0
	Z	-146.0

Plot #3 (2/2)

Date / Time:	2003/9/23	Position:	bottom 0mm
Filename:	b-122-2437bot0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2437MHz
Shape File:	122bottom.csv	Power Level:	15.13dBm

AREA SCAN:

	Min	Max	Steps
Scan Extent:	Y -35.0	35.0	7.0
	Z -170.0	-120.0	5.0

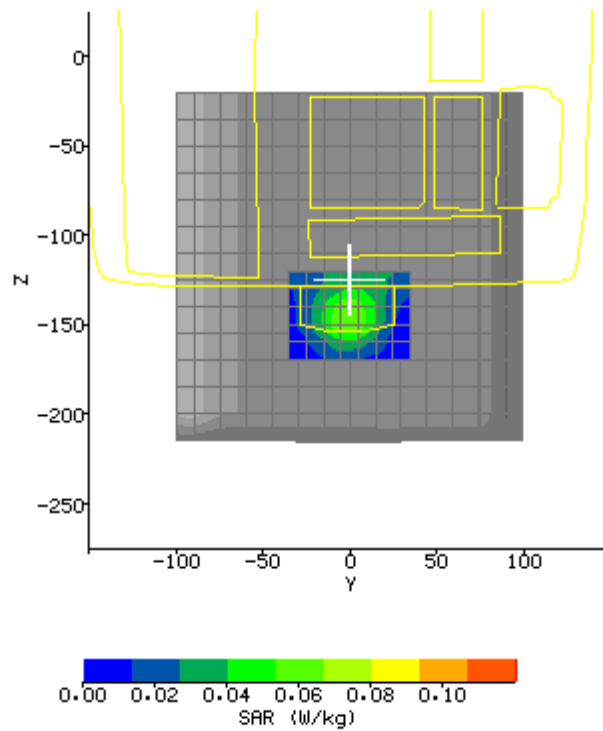

Plot #4 (1/2)

Date / Time:	2003/9/23	Position:	bottom 0mm
Filename:	b-122-2412bot0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2412MHz
Shape File:	122bottom.csv	Power Level:	14.93dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm
Type:	2450MHz Body
Conductivity:	1.95229
Relative Permittivity:	51.1547
Liquid Temp (deg C):	22.8
Ambient Temp (deg C):	23
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N
Crest Factor=1	

0.00 0.02 0.04 0.06 0.08 0.10
SAR (W/kg)

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan	End Scan
	0.025	0.026

Change during Scan (%): 2.56

Max E-field (V/m): 7.73

Max SAR (W/kg)	1g	10g
	0.095	0.052

Location of Max (mm):	X	Y	Z
	75.1	-17.0	-145.0



Plot #4 (2/2)

Date / Time:	2003/9/23	Position:	bottom 0mm
Filename:	b-122-2412bot0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2412MHz
Shape File:	122bottom.csv	Power Level:	14.93dBm

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-35.0	35.0	7.0
Z	-170.0	-120.0	5.0

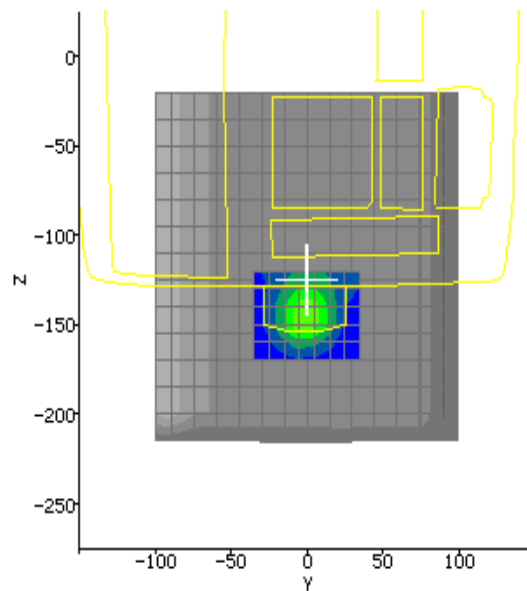

Plot #5 (1/2)

Date / Time:	2003/9/23	Position:	bottom 0mm
Filename:	b-122-2462bot0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2462MHz
Shape File:	122bottom.csv	Power Level:	15.33dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm		
Type:	2450MHz Body		
Conductivity:	1.95229		
Relative Permittivity:	51.1547		
Liquid Temp (deg C):	22.8		
Ambient Temp (deg C):	23		
Ambient RH (%):	50		
Density (kg/m3):	1000		
Software Version:	0.421N		
Crest Factor=1			

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan	End Scan
	0.034	0.034

Change during Scan (%): 0.85

Max E-field (V/m): 8.42

Max SAR (W/kg)	1g	10g
	0.111	0.061



Location of Max (mm):	X	Y	Z
	75.1	-15.0	-146.0

Plot #5 (2/2)

Date / Time:	2003/9/23	Position:	bottom 0mm
Filename:	b-122-2462bot0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2462MHz
Shape File:	122bottom.csv	Power Level:	15.33dBm

AREA SCAN:

	Min	Max	Steps
Scan Extent:			
Y	-35.0	35.0	7.0
Z	-170.0	-120.0	5.0

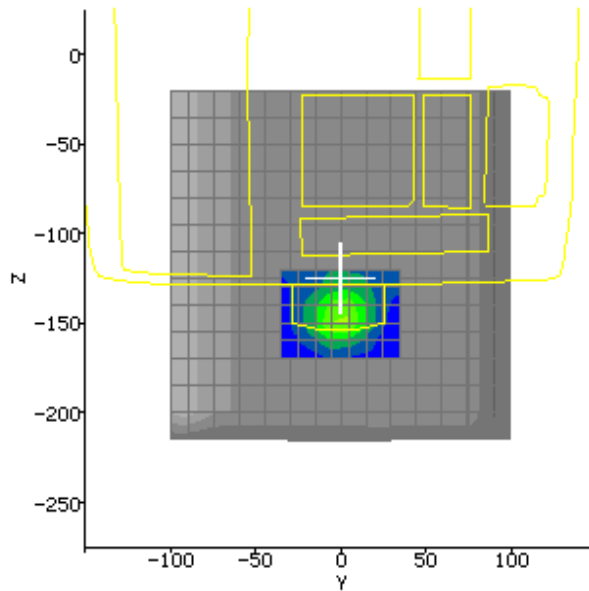

Plot #6 (1/2)

Date / Time:	2003/9/23	Position:	perpendicular 15mm
Filename:	b-122-2437per15.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2437MHz
Shape File:	122left.csv	Power Level:	15.13dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm
Type:	2450MHz Body
Conductivity:	1.95229
Relative Permittivity:	51.1547
Liquid Temp (deg C):	22.8
Ambient Temp (deg C):	23
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N
Crest Factor=1	

SAR (W/kg)

ZOOM SCAN RESULTS:


Spot SAR (W/kg):	Start Scan	End Scan
	0.008	0.008
Change during Scan (%)	0.00	
Max E-field (V/m):	4.52	
Max SAR (W/kg)	1g	10g
	0.032	0.019
Location of Max (mm):	X	Y
	75.0	-13.0
	Z	-150.1

Plot #6 (2/2)

Date / Time:	2003/9/23	Position:	perpendicular 15mm
Filename:	b-122-2437per15.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2437MHz
Shape File:	122left.csv	Power Level:	15.13dBm

AREA SCAN:

	Min	Max	Steps
Scan Extent:			
Y	-30.0	30.0	6.0
Z	-170.0	-130.0	4.0

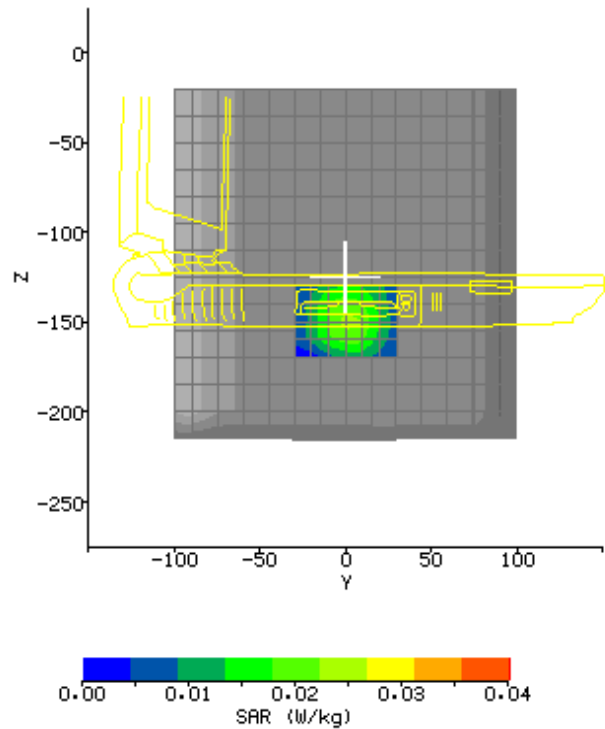

Plot #7 (1/2)

Date / Time:	2003/9/23	Position:	perpendicular 15mm
Filename:	b-122-2412per15.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2412MHz
Shape File:	122left.csv	Power Level:	14.93dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm		
Type:	2450MHz Body		
Conductivity:	1.95229		
Relative Permittivity:	51.1547		
Liquid Temp (deg C):	22.8		
Ambient Temp (deg C):	23		
Ambient RH (%):	50		
Density (kg/m3):	1000		
Software Version:	0.421N		
Crest Factor=1			

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan	End Scan	
	0.010	0.010	
Change during Scan (%)	0.00		
Max E-field (V/m):	4.35		
Max SAR (W/kg)	1g	10g	
	0.030	0.018	
Location of Max (mm):	X	Y	Z
	75.1	-15.0	-150.1


Plot #7 (2/2)

Date / Time:	2003/9/23	Position:	perpendicular 15mm
Filename:	b-122-2412per15.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2412MHz
Shape File:	122left.csv	Power Level:	14.93dBm

AREA SCAN:

Scan Extent:

	Min	Max	Steps
Y	-30.0	30.0	6.0
Z	-170.0	-130.0	4.0

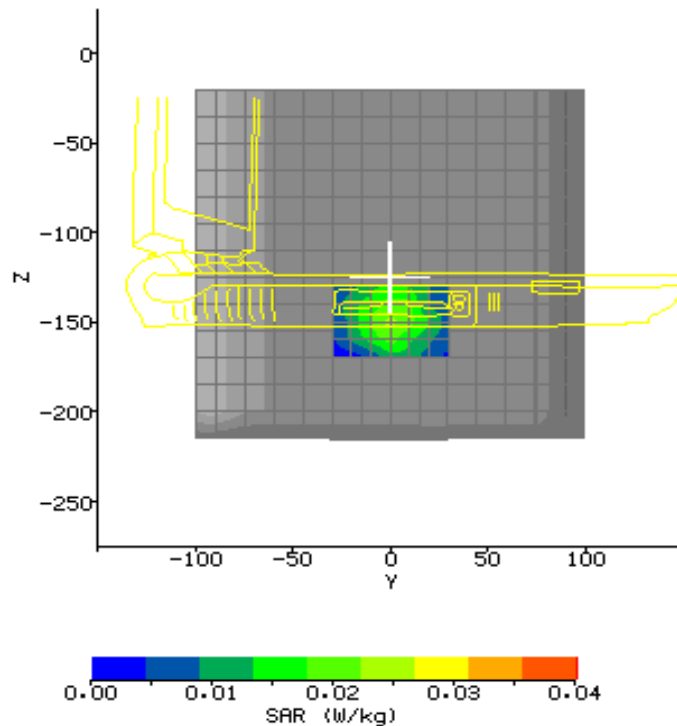

Plot #8 (1/2)

Date / Time:	2003/9/23	Position:	perpendicular 15mm
Filename:	b-122-2462per15.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2462MHz
Shape File:	122left.csv	Power Level:	15.33dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm		
Type:	2450MHz Body		
Conductivity:	1.95229		
Relative Permittivity:	51.1547		
Liquid Temp (deg C):	22.8		
Ambient Temp (deg C):	23		
Ambient RH (%):	50		
Density (kg/m3):	1000		
Software Version:	0.421N		
Crest Factor=1			

ZOOM SCAN RESULTS:


Spot SAR (W/kg):	Start Scan	End Scan	
	0.011	0.011	
Change during Scan (%)	0.00		
Max E-field (V/m):	5.05		
Max SAR (W/kg)	1g	10g	
	0.040	0.023	
Location of Max (mm):	X	Y	Z
	75.0	-14.0	-149.0

Plot #8 (2/2)

Date / Time:	2003/9/23	Position:	perpendicular 15mm
Filename:	b-122-2462per15.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2462MHz
Shape File:	122left.csv	Power Level:	15.33dBm

AREA SCAN:

	Min	Max	Steps
Scan Extent:			
Y	-30.0	30.0	6.0
Z	-170.0	-130.0	4.0

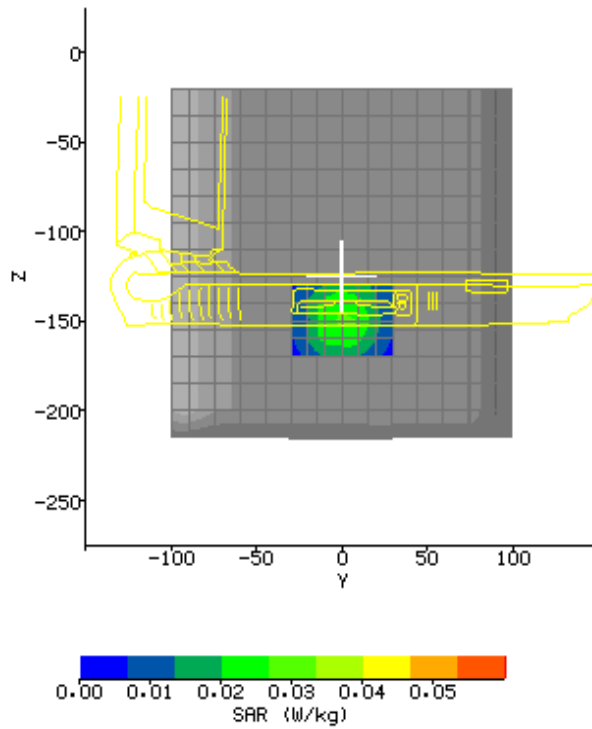

Plot #9 (1/2)

Date / Time:	2003/9/23	Position:	perpendicular 0mm
Filename:	b-122-2437per0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2437MHz
Shape File:	122left.csv	Power Level:	15.13dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm
Type:	2450MHz Body
Conductivity:	1.95229
Relative Permittivity:	51.1547
Liquid Temp (deg C):	22.8
Ambient Temp (deg C):	23
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N

ZOOM SCAN RESULTS:


Spot SAR (W/kg):	Start Scan	End Scan
	0.040	0.040
Change during Scan (%)	0.00	
Max E-field (V/m):	10.11	
Max SAR (W/kg)	1g	10g
	0.148	0.073
Location of Max (mm):	X	Y
	75.0	-14.0
	Z	-149.0

Plot #9 (2/2)

Date / Time:	2003/9/23	Position:	perpendicular 0mm
Filename:	b-122-2437per0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2437MHz
Shape File:	122left.csv	Power Level:	15.13dBm

AREA SCAN:

Scan Extent:	<table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th style="width: 10%;"></th> <th style="width: 20%;">Min</th> <th style="width: 20%;">Max</th> <th style="width: 20%;">Steps</th> </tr> </thead> <tbody> <tr> <td>Y</td> <td>-30.0</td> <td>30.0</td> <td>6.0</td> </tr> <tr> <td>Z</td> <td>-170.0</td> <td>-130.0</td> <td>4.0</td> </tr> </tbody> </table>		Min	Max	Steps	Y	-30.0	30.0	6.0	Z	-170.0	-130.0	4.0
	Min	Max	Steps										
Y	-30.0	30.0	6.0										
Z	-170.0	-130.0	4.0										

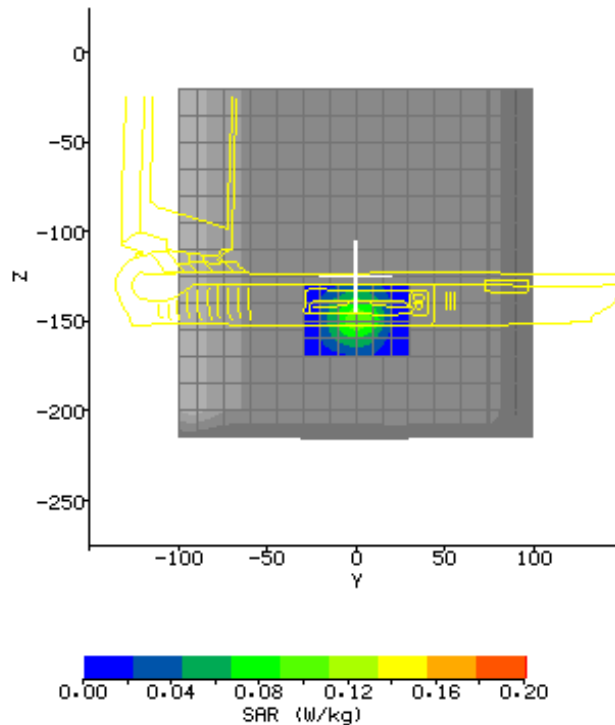

Plot #10 (1/2)

Date / Time:	2003/9/23	Position:	perpendicular 0mm
Filename:	b-122-2412per0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2412MHz
Shape File:	122left.csv	Power Level:	14.93dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm
Type:	2450MHz Body
Conductivity:	1.95229
Relative Permittivity:	51.1547
Liquid Temp (deg C):	22.8
Ambient Temp (deg C):	23
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N
Crest Factor=1	

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan	End Scan
	0.040	0.038

Change during Scan (%): -3.56

Max E-field (V/m): 9.85

Max SAR (W/kg)	1g	10g
	0.142	0.070


Location of Max (mm):	X	Y	Z
	75.0	-14.0	-149.0

Plot #10 (2/2)

Date / Time:	2003/9/23	Position:	perpendicular 0mm
Filename:	b-122-2412per0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2412MHz
Shape File:	122left.csv	Power Level:	14.93dBm

AREA SCAN:

	Min	Max	Steps
Scan Extent:			
Y	-30.0	30.0	6.0
Z	-170.0	-130.0	4.0

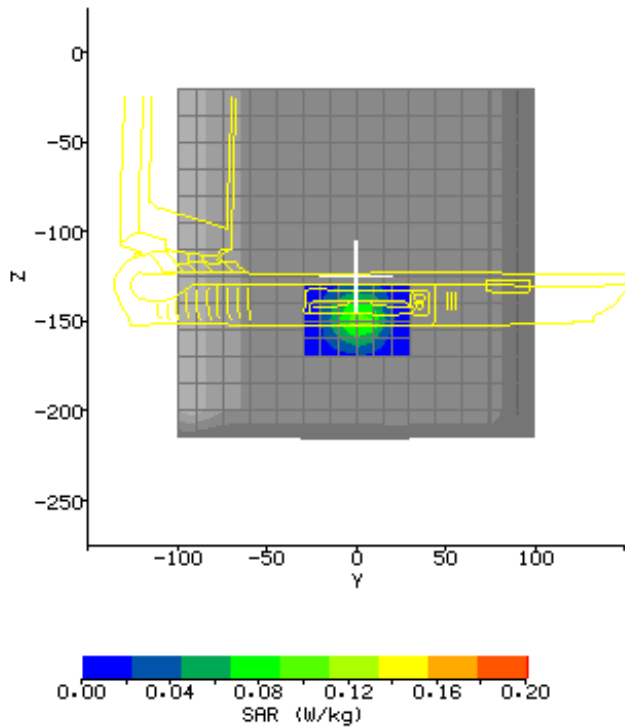

Plot #11 (1/2)

Date / Time:	2003/9/23	Position:	perpendicular 0mm
Filename:	b-122-2462per0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2462MHz
Shape File:	122left.csv	Power Level:	15.33dBm

Probe:	0136			
Cal File:	SN0136_2450_CW_BODY			
Cal Factors:		X	Y	Z
	Air	490	405	405
	DCP	20	20	20
	Lin	.486	.486	.486
Amp Gain:	2			
Averaging:	1			
Batteries Replaced:	1			

Liquid:	15.5cm
Type:	2450MHz Body
Conductivity:	1.95229
Relative Permittivity:	51.1547
Liquid Temp (deg C):	22.8
Ambient Temp (deg C):	23
Ambient RH (%):	50
Density (kg/m3):	1000
Software Version:	0.421N

ZOOM SCAN RESULTS:

Spot SAR (W/kg):	Start Scan	End Scan	
	0.048	0.048	
Change during Scan (%)	-0.01		
Max E-field (V/m):	11.06		
Max SAR (W/kg)	1g	10g	
	0.180	0.088	
Location of Max (mm):	X	Y	Z
	75.1	-15.0	-149.0


Plot #11 (2/2)

Date / Time:	2003/9/23	Position:	perpendicular 0mm
Filename:	b-122-2462per0.txt	Phantom:	HeadBox1.csv
Device Tested:	ZyAIR B-122	Head Rotation:	0
Antenna:	Ceramic	Test Frequency:	2462MHz
Shape File:	122left.csv	Power Level:	15.33dBm

AREA SCAN:


Scan Extent:

	Min	Max	Steps
Y	-30.0	30.0	6.0
Z	-170.0	-130.0	4.0

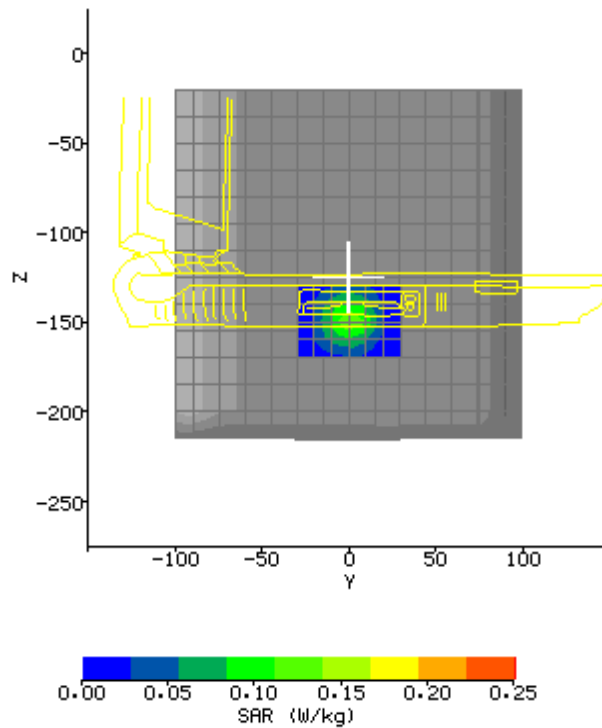


APPENDIX B – 2450MHz body liquid Calibration Data

Date: 23 Sep. 2003	Temperature: 22.5°C	Type: 2450MHz/body (FCC)	Tested by: Kevin
2410, 50.5461637144, -2.0154744203		2450, 51.1546861107, -1.9522934902	
2411, 50.5182646199, -2.0177380403		2451, 51.1603419606, -1.9540475153	
2412, 50.455642907, -2.0130190975		2452, 51.1986427605, -1.9614249412	
2413, 50.523758025, -2.0080668361		2453, 51.2256013652, -1.9595758662	
2414, 50.5009028244, -2.0111139484		2454, 51.2563104777, -1.9608064518	
2415, 50.5016207218, -1.9983672986		2455, 51.3047196667, -1.9624285369	
2416, 50.4707402331, -1.9971879665		2456, 51.2877418897, -1.9696394201	
2417, 50.5030911885, -1.9971326231		2457, 51.3455995022, -1.970326476	
2418, 50.5296835511, -1.9993513784		2458, 51.3198779435, -1.9702798189	
2419, 50.5082616489, -1.9881839715		2459, 51.358923221, -1.9725006217	
2420, 50.5110599479, -1.9906577426		2460, 51.3840932028, -1.9702317657	
2421, 50.5259298428, -1.9838111234		2461, 51.4135855942, -1.9780302297	
2422, 50.5253773418, -1.9864108025		2462, 51.4572035483, -1.9841790126	
2423, 50.5514286533, -1.9806004513		2463, 51.4736652802, -1.986668944	
2424, 50.5620087971, -1.9774308466		2464, 51.4603829208, -1.9924019822	
2425, 50.5567500421, -1.9725405196		2465, 51.5051669823, -1.992990205	
2426, 50.5511601679, -1.9717491366		2466, 51.4852268866, -1.9862598974	
2427, 50.5636458222, -1.9654683305		2467, 51.5699090833, -2.001261124	
2428, 50.6203544608, -1.964925314		2468, 51.572352744, -2.0085375044	
2429, 50.621646019, -1.9639689564		2469, 51.565522828, -2.0073562786	
2430, 50.6774592621, -1.9586479117		2470, 51.5514651739, -2.008567638	
2431, 50.6890338061, -1.9581888833		2471, 51.6109612245, -2.0163871076	
2432, 50.6877404552, -1.9581082096		2472, 51.5805941624, -2.0220455621	
2433, 50.7039560273, -1.9511250653		2473, 51.6317560976, -2.0256682404	
2434, 50.7009804402, -1.9543809047		2474, 51.6026935319, -2.0219768126	
2435, 50.7583242302, -1.9525657078		2475, 51.6693812404, -2.0358685895	
2436, 50.7774191322, -1.9550525613		2476, 51.715334044, -2.035333953	
2437, 50.7931079647, -1.9546745227		2477, 51.7177845957, -2.0378834	
2438, 50.844106081, -1.949233922		2478, 51.708654741, -2.0457699168	
2439, 50.8652541494, -1.9514933214		2479, 51.6978230532, -2.0515309153	
2440, 50.8925937131, -1.9498449766		2480, 51.7212113857, -2.0533418455	
2441, 50.9106256988, -1.9493719349		2481, 51.7305123016, -2.0681996158	
2442, 50.9124813911, -1.9558182996		2482, 51.6848010929, -2.0602313134	
2443, 50.957178675, -1.9518552696		2483, 51.7564620287, -2.068629867	
2444, 50.9789312172, -1.9478314726		2484, 51.8003708703, -2.0771380294	
2445, 51.008191062, -1.9500872835		2485, 51.7799579277, -2.0786870005	
2446, 51.0188668037, -1.9495628072		2486, 51.7749876473, -2.083657993	
2447, 51.077040652, -1.9512422002		2487, 51.7738553283, -2.0910191602	
2448, 51.0826879171, -1.9486645579		2488, 51.7858878174, -2.0872875866	
2449, 51.1352815872, -1.9536023362		2489, 51.778274655, -2.1033458369	
		2490, 51.7973567737, -2.1002439783	


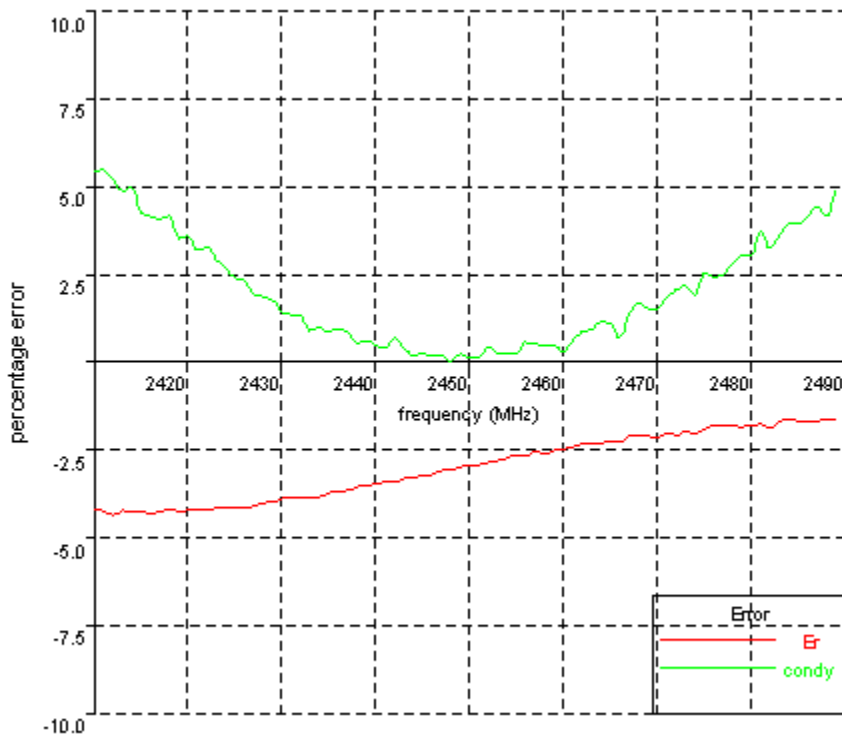


Photographs

External photo

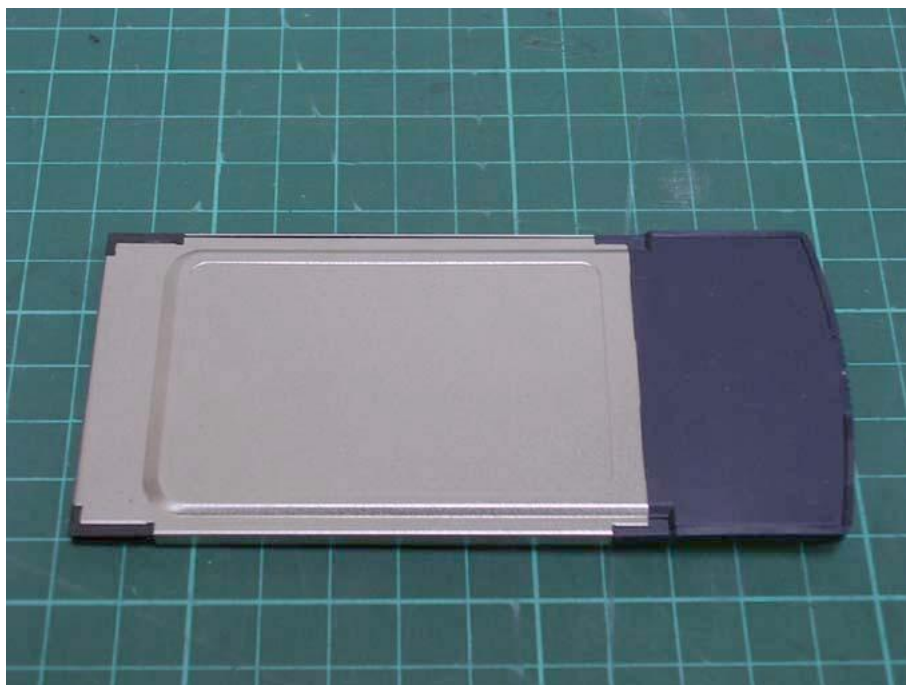

Internal photo

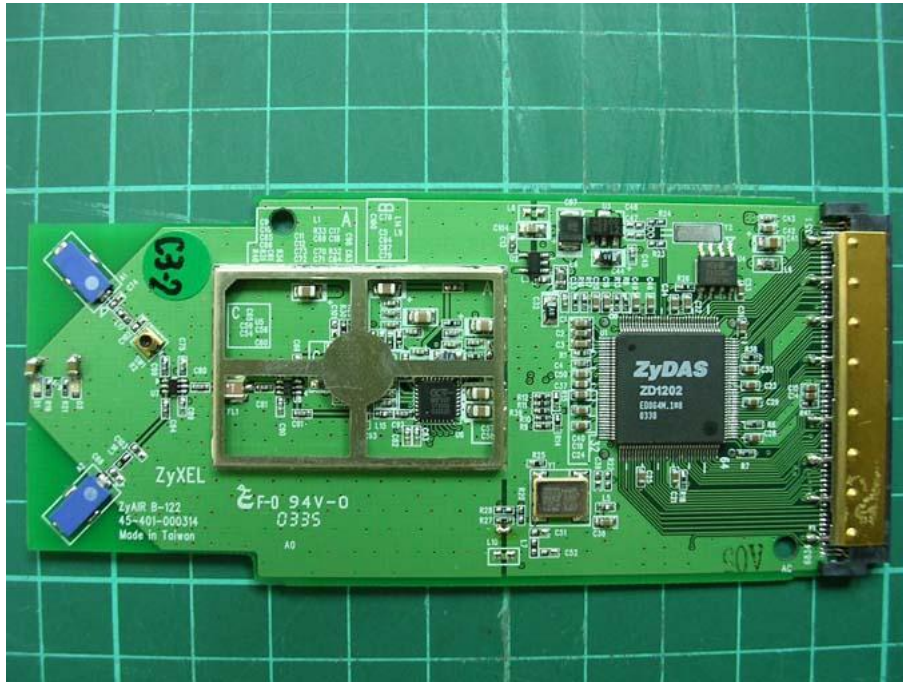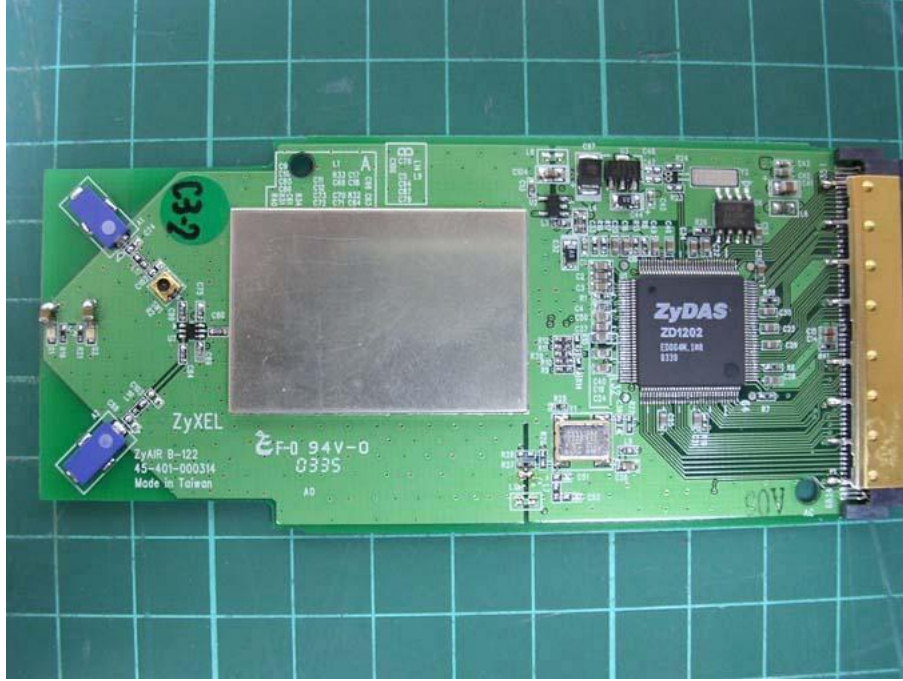



**APPENDIX C - E-Field Probe Certificate and Calibration Data
Validation dipole certificate and performance measurements**



Type:	IXP-050
Manufacturer:	IndexSAR, UK
Serial Number:	0136
Place of Calibration:	IndexSAR, UK


IndexSAR Limited hereby declares that the IXP-050 Probe named above has been calibrated for conformity to the IEEE 1528 and CENELEC En 50361 standards on the date shown below.


Date of Initial Calibration:	10th September 2003
------------------------------	---------------------------------------

The probe named above will require a calibration check on the date shown below.

Next Calibration Date:	September 2004
------------------------	-----------------------

The calibration was carried out using the methods described in the calibration document. Where applicable, the standards used in the calibration process are traceable to the UK's National Physical Laboratory.

Calibrated By: 

Approved By: 

Please keep this certificate with the calibration document. When the probe is sent for a calibration check, please include the calibration document.



IMMERSIBLE SAR PROBE

CALIBRATION REPORT

Part Number: IXP – 050

S/N 0136

10th September 2003



Indexsar Limited
Oakfield House
Cudworth Lane
Newdigate
Surrey RH5 5DR
Tel: +44 (0) 1306 631 233
Fax: +44 (0) 1306 631 834
e-mail: enquiries@indexsar.com

INTRODUCTION

This Report presents measured calibration data for a particular Indexsar SAR probe (S/N 0136) and describes the procedures used for characterisation and calibration.

Indexsar probes are characterised using procedures that, where applicable, follow the recommendations of CENELEC [1] and IEEE [2] standards. The procedures incorporate techniques for probe linearisation, isotropy assessment and determination of liquid factors (conversion factors). Calibrations are determined by comparing probe readings with analytical computations in canonical test geometries (waveguides) using normalised power inputs.

Each step of the calibration procedure and the equipment used is described in the sections below.

CALIBRATION PROCEDURE

1. Equipment Used

For the first part of the characterisation procedure, the probe is placed in an isotropy measurement jig as pictured in Figure 1. In this position the probe can be rotated about its axis by a non-metallic belt driven by a stepper motor.

The probe is attached via its amplifier and an optical cable to a PC. A schematic representation of the test geometry is illustrated in Figure 2.

A balanced dipole (900 MHz) is inserted horizontally into the bracket attached to a second belt (Figure 1). The dipole can also be rotated about its axis. A cable connects the dipole to a signal generator, via a directional coupler and power meter. The signal generator feeds an RF amplifier at constant power, the output of which is monitored using the power meter. The probe is positioned so that its sensors line up with the rotation center of the source dipole. By recording output voltage measurements of each channel as both the probe and the dipole are rotated, data are obtained from which the spherical isotropy of the probe can be optimised and its magnitude determined.

The calibration process requires E-field measurements to be taken in air, in 900 MHz simulated brain liquid and at other frequencies/liquids as appropriate.

2. Linearising probe output

The probe channel output signals are linearised in the manner set out in Refs [1] and [2]. The following equation is utilized for each channel:

$$U_{lin} = U_{op} + U_{op}^2 / DCP \quad (1)$$

where U_{lin} is the linearised signal, U_{op} is the raw output signal in voltage units and DCP is the diode compression potential in similar voltage units.

DCP is determined from fitting equation (1) to measurements of U_{lin} versus source feed power over the full dynamic range of the probe. The DCP is a characteristic of the schottky diodes used as the sensors. For the IXP-050 probes with CW signals the DCP values are typically 0.10V (or 20 in the voltage units used by Indexsar software, which are V*200).

3. Selecting channel sensitivity factors to optimise isotropic response

The basic measurements obtained using the calibration jig (Fig 1) represent the output from each diode sensor as a function of the presentation angle of the source (probe and dipole rotation angles). The directionality of the orthogonally-arranged sensors can be checked by analysing the data using dedicated Indexsar software, which displays the data in 3D format as in Figure 3. The left-hand side of this diagram shows the individual channel outputs after linearisation (see above). The program uses these data to balance the channel outputs and then applies an optimisation process, which makes fine adjustments to the channel factors for optimum isotropic response.

The next stage of the process is to calibrate the Indexsar probe to a W&G EMR300 E-field meter in air. The principal reasons for this are to obtain conversion factors applicable should the probe be used in air and to provide an overall measure of the probe sensitivity.

A multiplier is applied to factors to bring the magnitudes of the average E-field measurements as close as possible to those of the W&G probe.

The following equation is used (where linearised output voltages are in units of V*200):

$$E_{air}^2 \text{ (V/m)} = \begin{matrix} U_{linx} * \text{Air Factor}_x \\ + U_{liny} * \text{Air Factor}_y \\ + U_{linz} * \text{Air Factor}_z \end{matrix} \quad (2)$$

It should be noted that the air factors are not separately used for normal SAR testing. The IXP-050 probes are optimised for use in tissue-simulating liquids and do not behave isotropically in air.

4. 900 MHz Liquid Calibration

Conversion factors for use when the probes are immersed in tissue-simulant liquids at 900 MHz are determined either using a waveguide or by comparison to a reference probe that has been calibrated by NPL. Waveguide procedures are described later. The summary sheet indicates the method used for the probe S/N 0136.

The conversion factor, referred to as the 'liquid factor' is also applied to the measurements of each channel. The following equation is used (where output voltages are in units of V*200):

$$E_{liq}^2 \text{ (V/m)} = \begin{matrix} U_{linx} * \text{Air Factor}_x * \text{Liq Factor}_x \\ + U_{liny} * \text{Air Factor}_y * \text{Liq Factor}_y \\ + U_{linz} * \text{Air Factor}_z * \text{Liq Factor}_z \end{matrix} \quad (3)$$

A 3D representation of the spherical isotropy for probe S/N 0136 using these factors is shown in Figure 3.

The rotational isotropy can also be determined from the calibration jig measurements and is reported as the 900MHz isotropy in the summary table. Note that waveguide measurements can also be used to determine rotational isotropy (Fig. 5).

The design of the cells used for determining probe conversion factors are waveguide cells is shown in Figure 4. The cells consist of a coax to waveguide transition and an open-ended section of waveguide containing a dielectric separator. Each waveguide cell stands in the upright position and is filled with liquid within 10 mm of the open end. The separator provides a liquid seal and is designed for a good

electrical transition from air filled guide to liquid filled guide. The choice of cell depends on the portion of the frequency band to be examined and the choice of liquid used. The depth of liquid ensures there is negligible radiation from the waveguide open top and that the probe calibration is not influenced by reflections from nearby objects. The return loss at the coaxial connector of the filled waveguide cell is measured initially using a network analyser and this information is used subsequently in the calibration procedure. The probe is positioned in the centre of the waveguide and is adjusted vertically or rotated using stepper motor arrangements. The signal generator is connected to the waveguide cell and the power is monitored with a coupler and a power meter. A fuller description of the waveguide method is given below.

The liquid dielectric parameters used for the probe calibrations are listed in the Tables below. The final calibration factors for the probe are listed in the summary chart.

WAVEGUIDE MEASUREMENT PROCEDURE

The calibration method is based on setting up a calculable specific absorption rate (SAR) in a vertically-mounted WG8 (R22) waveguide section [1]. The waveguide has an air-filled, launcher section and a liquid-filled section separated by a matching window that is designed to minimise reflections at the liquid interface. A TE_{01} mode is launched into the waveguide by means of a N-type-to-waveguide adapter. The power delivered to the liquid section is calculated from the forward power and reflection coefficient measured at the input to the waveguide. At the centre of the cross-section of the waveguide, the local spot SAR in the liquid as a function of distance from the window is given by functions set out in IEEE1528 as below:

Because of the low cutoff frequency, the field inside the liquid nearly propagates as a TEM wave. The depth of the medium (greater than three penetration depths) ensures that reflections at the upper surface of the liquid are negligible. The power absorbed in the liquid is determined by measuring the waveguide forward and reflected power. Equation (4) shows the relationship between the SAR at the cross-sectional center of the lossy waveguide and the longitudinal distance (z) from the dielectric separator

$$SAR(z) = \frac{4(P_f - P_b)}{rabd} e^{-2z/d} \quad (4)$$

where the density r is conventionally assumed to be 1000 kg/m^3 , ab is the cross-sectional area of the waveguide, P_f and P_b are the forward and reflected power inside the lossless section of the waveguide, respectively. The penetration depth d , which is the reciprocal of the waveguide-mode attenuation coefficient, is determined from a scan along the z -axis and compared with the theoretical value determined from Equation (5) using the measured dielectric properties of the lossy liquid.

$$d = \left[\text{Re} \left\{ \sqrt{(p/a)^2 + jwm_o(s + jwe_o e_r)} \right\} \right]^{-1} \quad (5)$$

Table A.1 of [1] can be used for designing calibration waveguides with a return loss greater than 30 dB at the most important frequencies used for personal wireless communications. Values for the penetration depth for these specific fixtures and tissue-simulating mixtures are also listed in Table A.1.

According to [1], this calibration technique provides excellent accuracy, with standard uncertainty of less than 3.6% depending on the frequency and medium. The calibration itself is reduced to power measurements traceable to a standard calibration procedure. The practical limitation to the frequency

band of 800 to 2500 MHz because of the waveguide size is not severe in the context of compliance testing.

CALIBRATION FACTORS MEASURED FOR PROBE S/N 0136

The probe was calibrated at 900, 1800, 1900 and 2450MHz MHz in liquid samples representing both brain liquid and body fluid at these frequencies. The calibration was for CW signals only, and the axis of the probe was parallel to the direction of propagation of the incident field i.e. end-on to the incident radiation. The axial isotropy of the probe was measured by rotating the probe about its axis in 10 degree steps through 360 degrees in this orientation.

The reference point for the calibration is in the centre of the probe's cross-section at a distance of 2.7 m from the probe tip in the direction of the probe amplifier. A value of 2.7 mm should be used for the tip to sensor offset distance in the software.

It is important that the diode compression point and air factors used in the software are the same as those quoted in the results tables, as these are used to convert the diode output voltages to a SAR value.

DIELECTRIC PROPERTIES OF LIQUIDS

The dielectric properties of the brain and body tissue-simulant liquids employed for calibration are listed in the tables below. The measurements were performed prior to each waveguide test using an Indexsar DiLine measurement kit, which uses the TEM method as recommended in [2].

AMBIENT CONDITIONS

Measurements were made in the open laboratory at $22 \pm 2.0^{\circ}\text{C}$. The temperature of the liquids in the waveguide used was measured using a mercury thermometer.

RESPONSE TO MODULATED SIGNALS

To measure the response of the probe and amplifier to modulated signals, the probe is held vertically in a liquid-filled waveguide.

An RF amplifier is allowed to warm up and stabilise before use. A spectrum analyser is used to demonstrate that the peak power of the RF amplifier for the CW signals and the pulsed signals are within 0.1dB of each other when the signal generator is switched from CW to modulated output. Subsequently, the power levels recorded are read from a power meter when a CW signal is being transmitted.

The test sequence involves manually stepping the power up in regular (e.g. 2 dB) steps from the lowest power that gives a measurable reading on the SAR probe up to the maximum that the amplifiers can deliver.

At each power level, the individual channel outputs from the SAR probe are recorded at CW and then recorded again with the modulation setting. The results are entered into a spreadsheet. Using the spreadsheets, the modulated power is calculated by applying a factor to the measured CW power (e.g. for GSM, this factor is 9.03dB). This process is repeated 3 times with the response maximised for each channel sensor in turn.

The probe channel output signals are linearised in the manner set out in Section 1 above using equation (1) with the DCPs determined from the linearisation procedure. Calibration factors for the probe are used to determine the E-field values corresponding to the probe readings using equation (3). SAR is determined from the equation

$$\text{SAR (W/kg)} = E_{\text{liq}}^2 \text{ (V/m)} * \sigma \text{ (S/m)} / 1000 \quad (6)$$

Where σ is the conductivity of the simulant liquid employed.


Using the spreadsheet data, the DCP value for linearising each of the individual channels (X, Y and Z) is assessed separately. The corresponding DCP values are listed in the summary page of the calibration factors for each probe.

Figure 7 shows the linearised probe response to GSM signals, Figure 8 the response to GPRS signals (GSM with 2 timeslots) and Figure 9 the response to CDMA IS-95A and W-CDMA signals.

Additional tests have shown that the modulation response is similar at 1800MHz and is not affected by the orientation between the source and the probe.

SUMMARY OF CALIBRATION FACTORS FOR PROBE IXP-050 S/N 0136

Spherical isotropy measured at 900 MHz 0.24 (+/-) dB

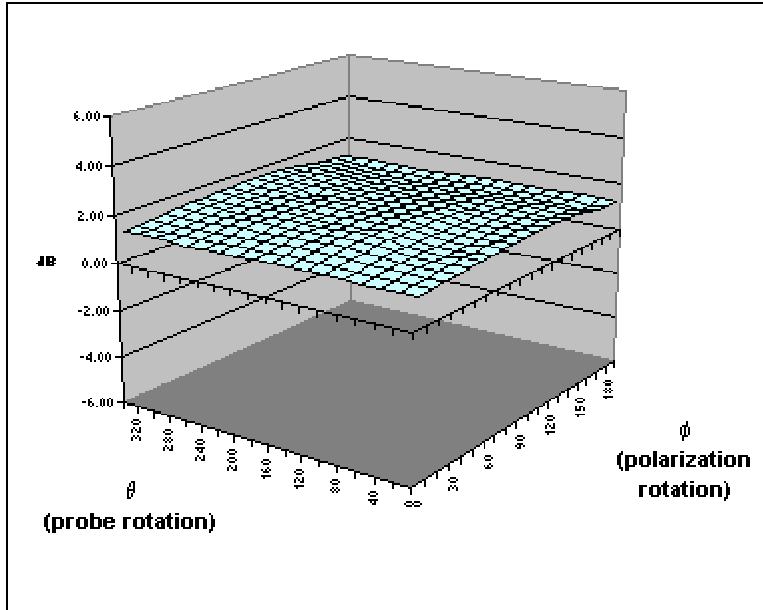

	X	Y	Z	
Air factors	490	405	405	(V*200)
DCPs	20	20	20	(V*200)
DSSS	20	20	20	(V*200)
GSM	8	9.5	11.2	(V*200)
CDMA	20	20	20	(V*200)

f (MHz)	Axial isotropy (+/- dB)		SAR conversion factors (liq/air)		Notes
	BRAIN	BODY	BRAIN	BODY	
450					
835	0.05	0.04	0.257	0.272	1,2,3
900	0.05	0.04	0.261	0.282	1,2,3
1800	0.06	0.06	0.315	0.339	1,2,3
1900	0.06	0.06	0.327	0.351	1,2,3
2450	0.05	0.10	0.453	0.486	1,2,3

Notes

- 1) Calibrations done at 22C +/- 2C
- 2) Waveguide calibration
- 3) Checked using box-phantom validation test

(the graph shows a simple, spreadsheet representation of surface shown in 3D in Figure 3 below)

PROBE SPECIFICATIONS

Indexsar probe 0136, along with its calibration, is compared with CENELEC and IEEE standards recommendations (Refs [1] and [2]) in the Tables below. A listing of relevant specifications is contained in the tables below:

Dimensions	S/N 0136	CENELEC [1]	IEEE [2]
Overall length (mm)	350		
Tip length (mm)	10		
Body diameter (mm)	12		
Tip diameter (mm)	5.2	8	8
Distance from probe tip to dipole centers (mm)	2.7		

Dynamic range	S/N 0136	CENELEC [1]	IEEE [2]
Minimum (W/kg)	0.01	<0.02	0.01
Maximum (W/kg) N.B. only measured to 35 W/kg	>35	>100	100

Linearity of response	S/N 0136	CENELEC [1]	IEEE [2]
Over range 0.01 – 100 W/kg (+/- dB)	0.125	0.50	0.25

Isotropy (measured at 900MHz)	S/N 0136	CENELEC [1]	IEEE [2]
Axial rotation with probe normal to source (+/- dB) at 835, 900, 1800, 1900 and 2450 MHz	Max. 0.10 (see summary table)	0.5	0.25
Spherical isotropy covering all orientations to source (+/- dB)	0.24	1.0	0.50

Construction	Each probe contains three orthogonal dipole sensors arranged on a triangular prism core, protected against static charges by built-in shielding, and covered at the tip by PEEK cylindrical enclosure material. No adhesives are used in the immersed section. Outer case materials are PEEK and heat-shrink sleeving.
Chemical resistance	Tested to be resistant to glycol and alcohol containing simulant liquids but probes should be removed, cleaned and dried when not in use.

REFERENCES

- [1] CENELEC, EN 50361, July 2001. Basic Standard for the measurement of specific absorption rate related to human exposure to electromagnetic fields from mobile phones.
- [2] IEEE 1528, Recommended practice for determining the spatial-peak specific absorption rate (SAR) in the human body due to wireless communications devices: Experimental techniques.
- [3] Calibration report on SAR probe IXP-050 S/N 0071 from National Physical Laboratory. Test Report EF07/2002/03/IndexSAR. Dated 20 February 2002.

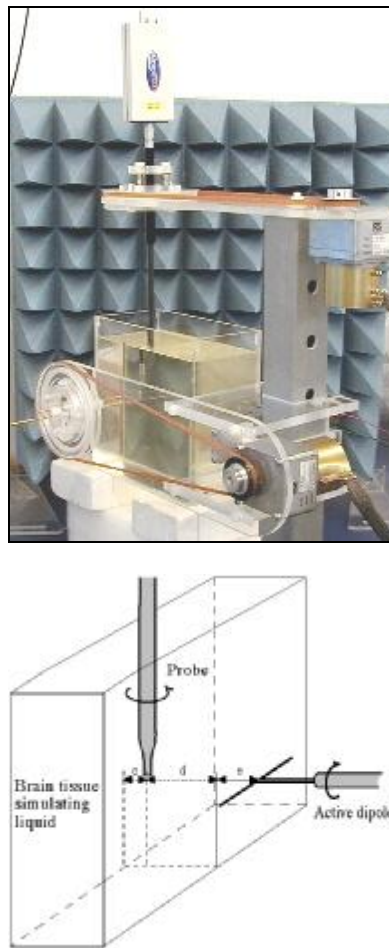


Figure 1. Spherical isotropy jig showing probe, dipole and box filled with simulated brain liquid (see Ref [2], Section A.5.2.1)

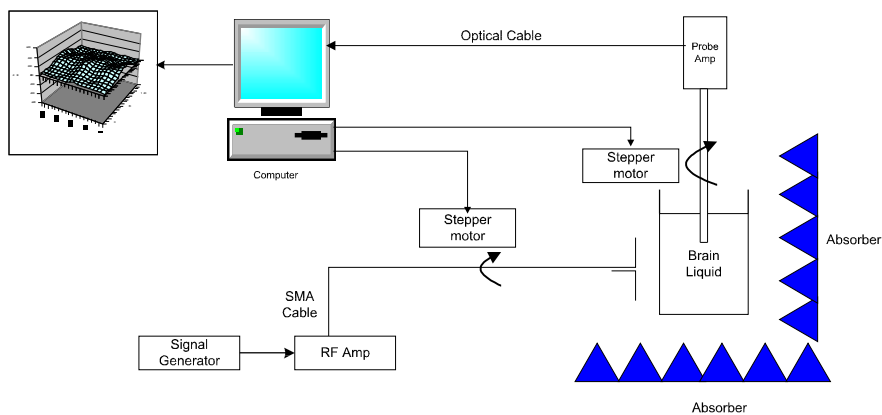


Figure 2. Schematic diagram of the test geometry used for isotropy determination

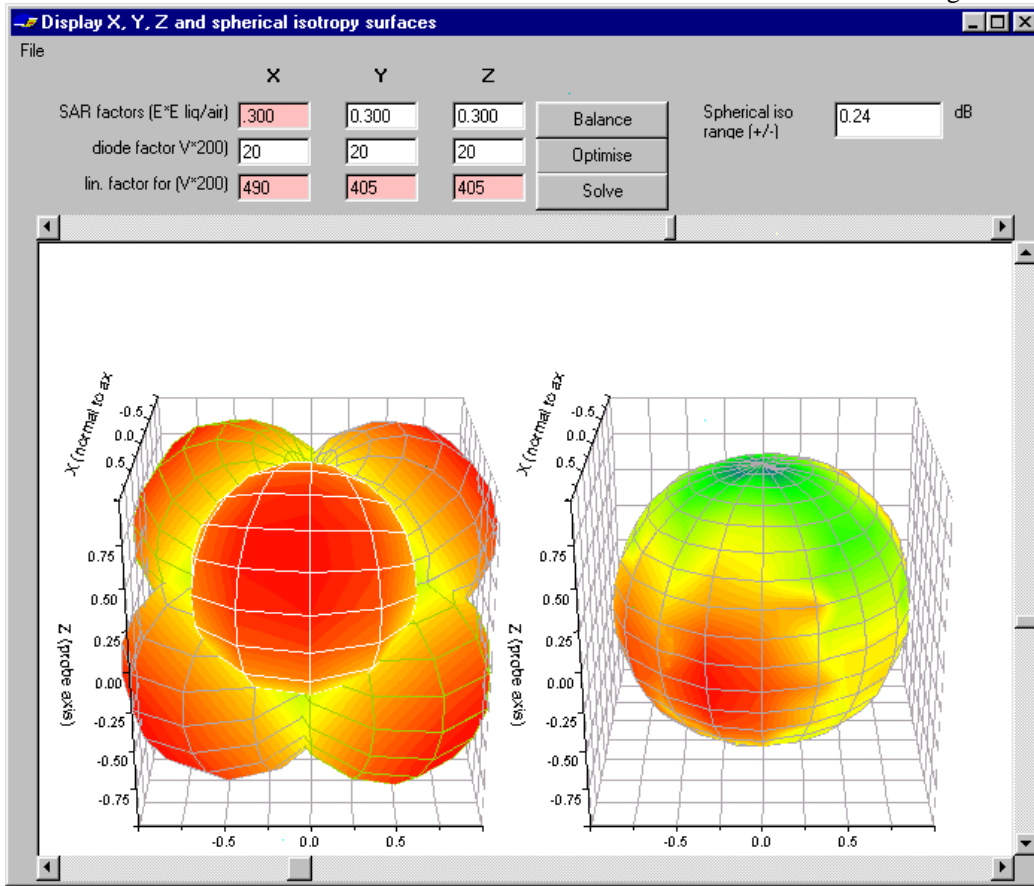


Figure 3. Graphical representation of the probe response to fields applied from each direction. The diagram on the left shows the individual response characteristics of each of the three channels and the diagram on the right shows the resulting probe sensitivity in each direction. The colour range in the figure images the lowest values as blue and the maximum values as red. For the probe S/N 0136, this range is (+/-) 0.24 dB. The probe is more sensitive to fields parallel to the axis and less sensitive to fields normal to the probe axis.

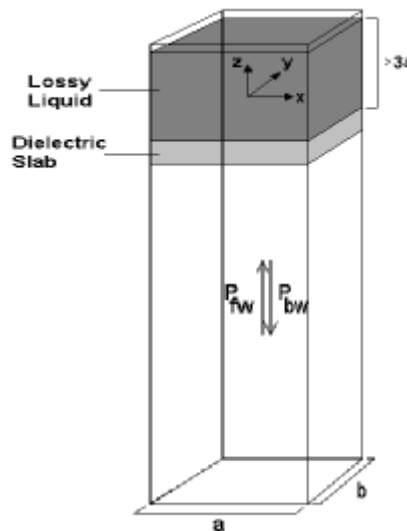


Figure 4. Geometry used for waveguide calibration (after Ref [2]. Section A.3.2.2)

IXP-050 S/N 0136

18-Aug-03

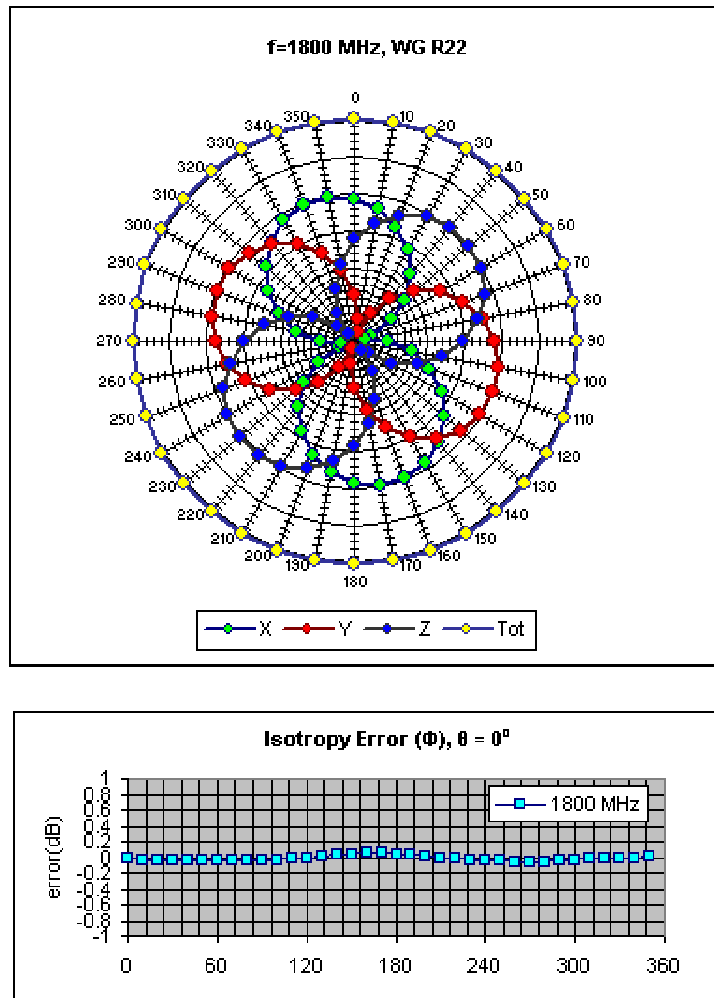


Figure 5. Example of the rotational isotropy of probe S/N 0136 obtained by rotating the probe in a liquid-filled waveguide at 2450 MHz. Similar distributions are obtained at the other test frequencies (1800 and 1900 MHz) both in brain liquids and body fluids (see summary table)

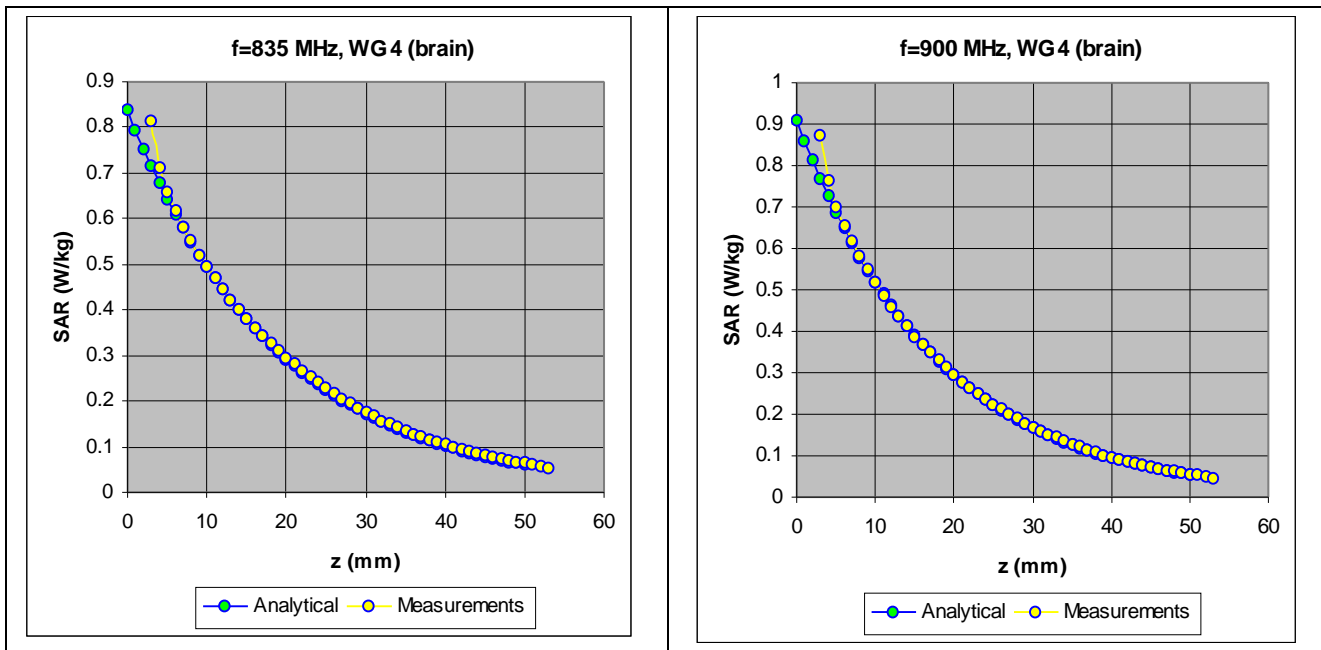


Figure 6. The measured SAR decay function along the centreline of the WG4 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

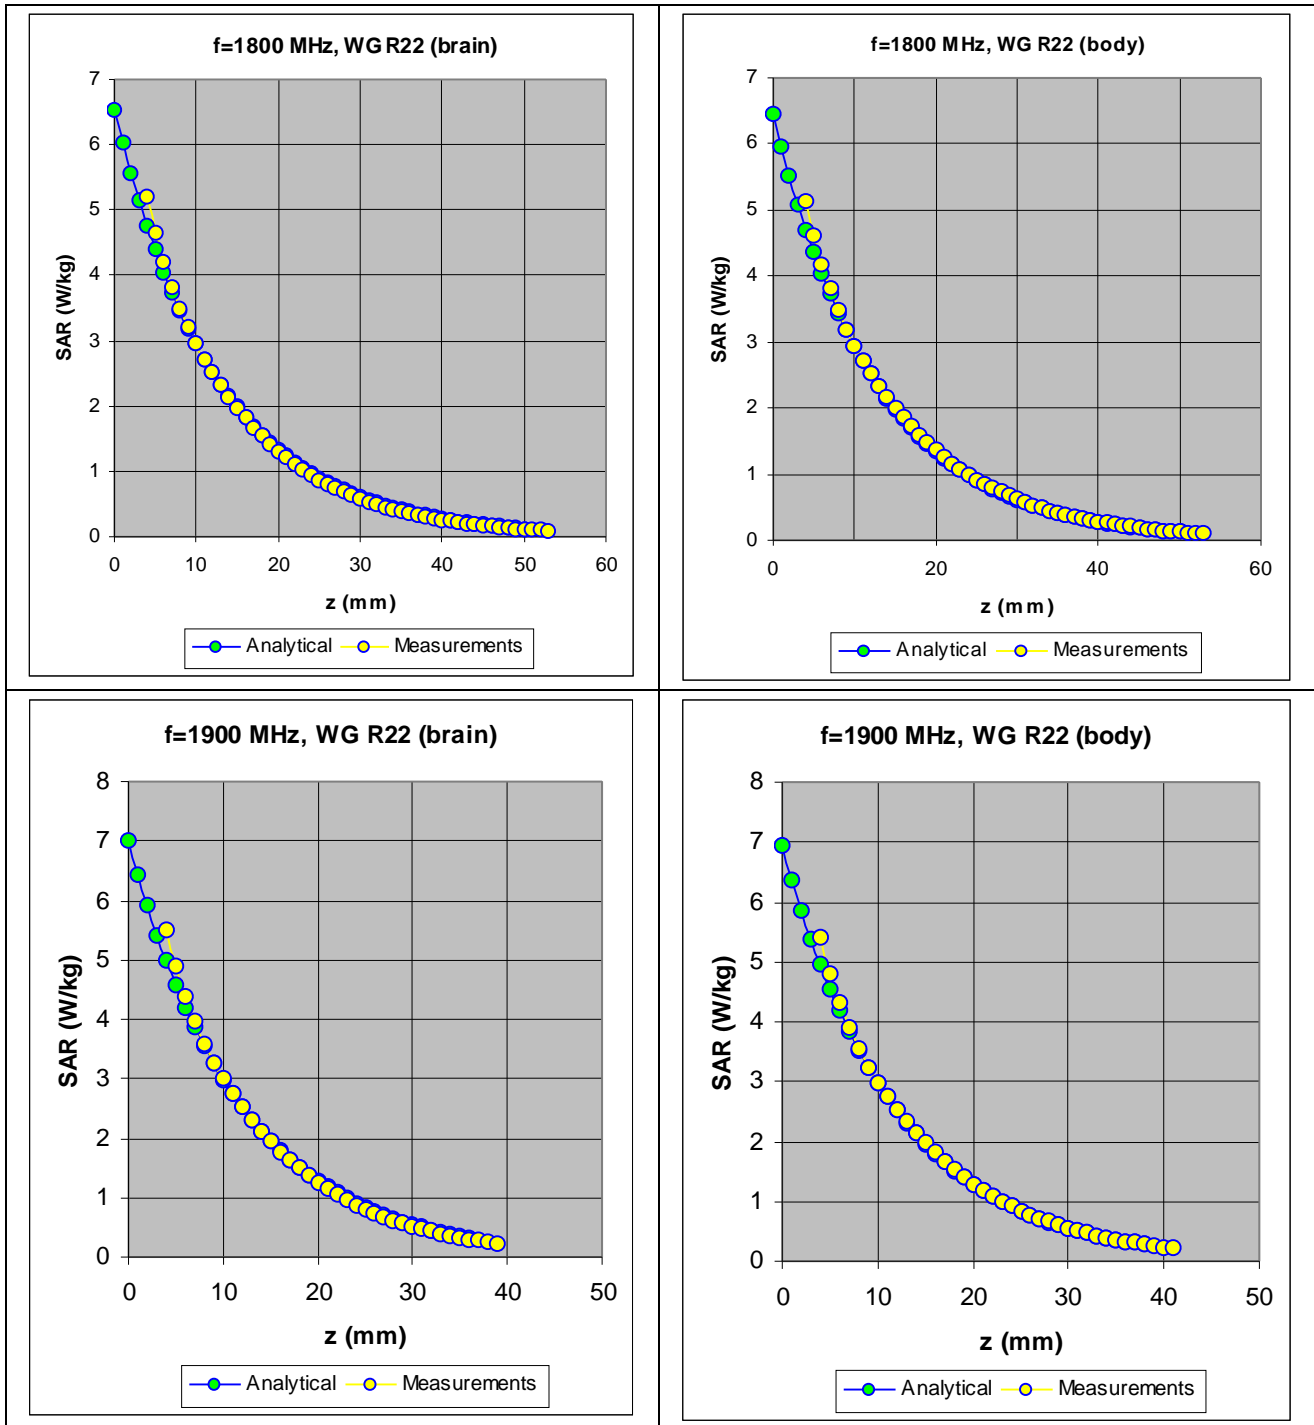


Figure 7. The measured SAR decay function along the centreline of the R22 waveguide with conversion factors adjusted to fit to the theoretical function for the particular dimension, frequency, power and liquid properties employed.

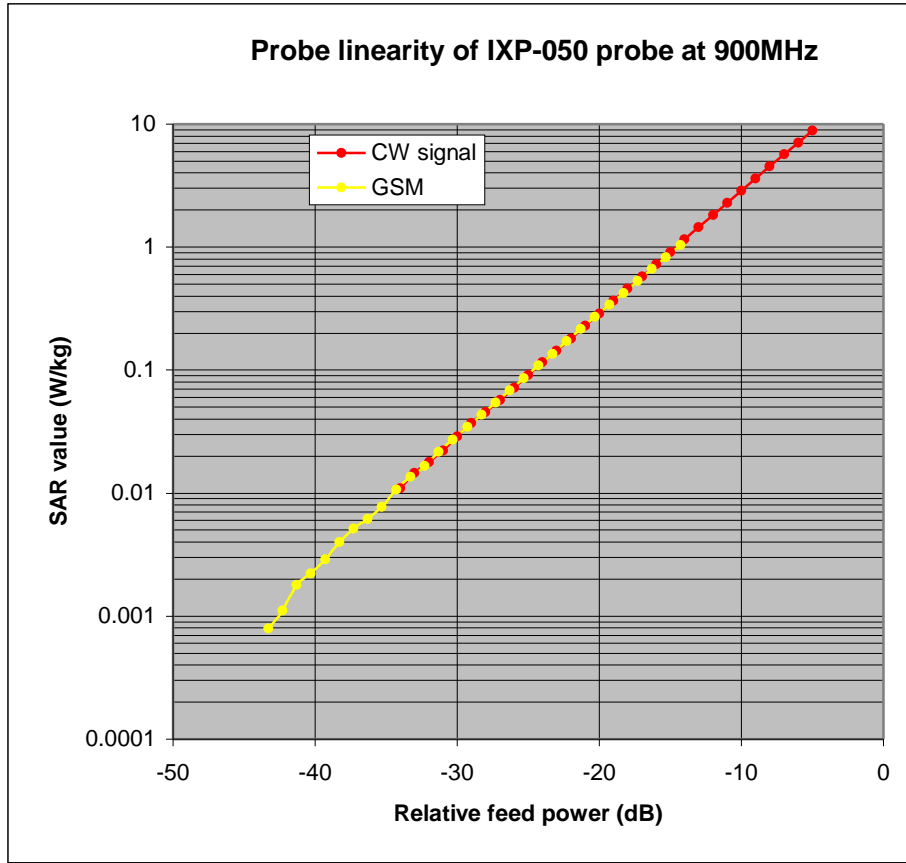


Figure 8. The GSM response of an IXP-050 probe at 900MHz.

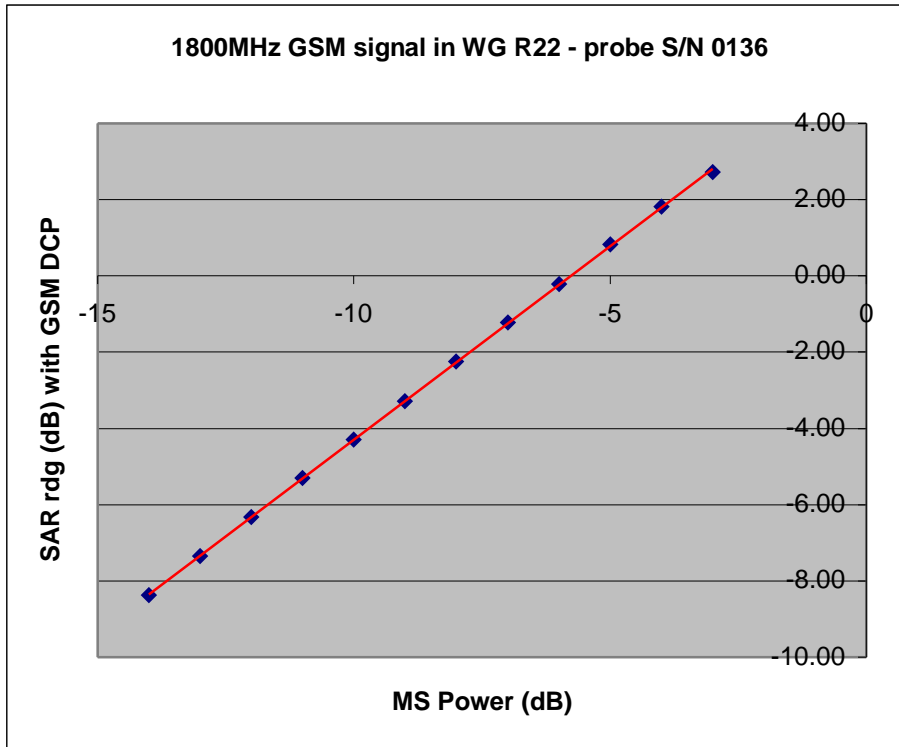


Figure 8a. The actual GSM response of IXP-050 probe S/N 0136 at 1800MHz

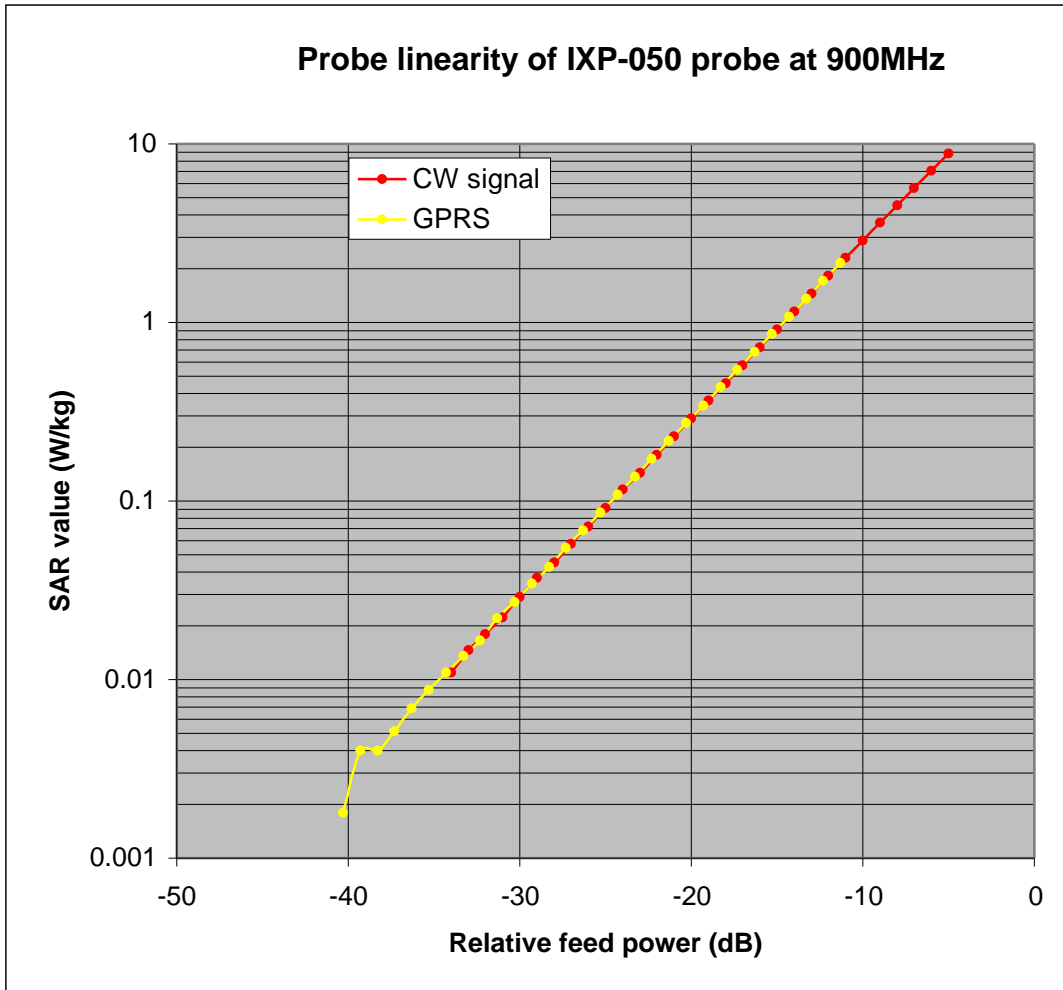
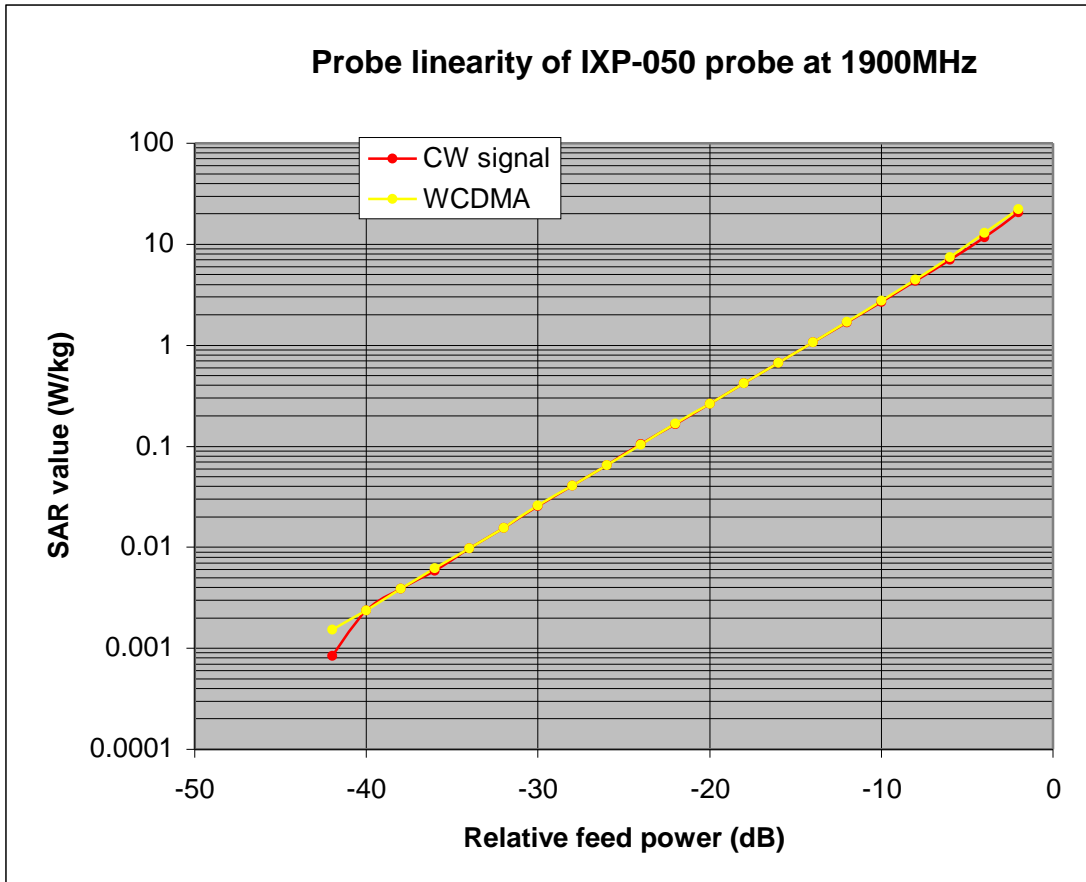


Figure 9. The GPRS response of an IXP-050 probe at 900MHz.



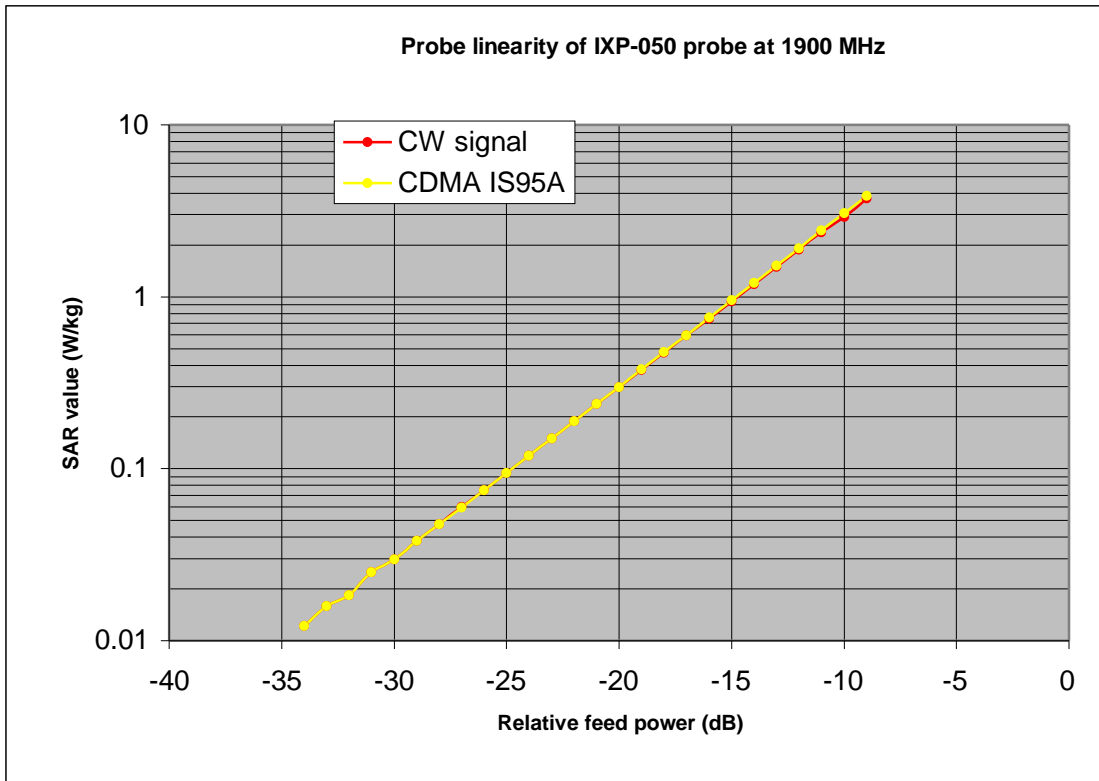


Figure 10. The CDMA response of an IXP-050 probe at 1900MHz.

Table indicating the dielectric parameters of the liquids used for calibrations at each frequency

<i>Liquid used</i>	<i>Relative permittivity (measured)</i>	<i>Conductivity (S/m) (measured)</i>
835 MHz BRAIN	43.18	0.935
835 MHz BODY	59.19	0.992
900 MHz BRAIN	42.47	0.998
900 MHz BODY	58.7	1.056
1800 MHz BRAIN	38.72	1.34
1800 MHz BODY	52.5	1.53
1900 MHz BRAIN	38.31	1.43
1900 MHz BODY	52.06	1.64
2450 MHz BRAIN	38.9	1.87
2450 MHz BODY	52.59	2.08