

FCC Test Report

Report No.: RFBFBE-WTW-P21080189-1

FCC ID: I88C4000LZ

Test Model: C4000BZ

Series Model: C4000LZ

Received Date: 2021/8/4

Test Date: 2021/9/1 ~ 2021/9/2

Issued Date: 2021/10/7

Applicant: Zyxel Communications Corporation

Address: No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu 30075, Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch
Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwa.

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan.

**FCC Registration /
Designation Number:** 723255 / TW2022



This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 Summary of Test Results	5
2.1 Measurement Uncertainty	5
2.2 Modification Record	5
3 General Information	6
3.1 General Description of EUT	6
3.2 Description of Test Modes	11
3.2.1 Test Mode Applicability and Tested Channel Detail	13
3.3 Description of Support Units	14
3.3.1 Configuration of System under Test	15
3.4 General Description of Applied Standard and references	16
4 Test Types and Results	17
4.1 Radiated Emission and Bandedge Measurement	17
4.1.1 Limits of Radiated Emission and Bandedge Measurement	17
4.1.2 Test Instruments	18
4.1.3 Test Procedure	19
4.1.4 Deviation from Test Standard	19
4.1.5 Test Setup	20
4.1.6 EUT Operating Condition	20
4.1.7 Test Results (Mode 1)	21
4.1.8 Test Results (Mode 2)	23
4.1.9 Test Results (Mode 3)	25
4.2 Conducted Emission Measurement	27
4.2.1 Limits of Conducted Emission Measurement	27
4.2.2 Test Instruments	27
4.2.3 Test Procedure	28
4.2.4 Deviation from Test Standard	28
4.2.5 Test Setup	28
4.2.6 EUT Operating Condition	28
4.2.7 Test Results (Mode 1)	29
4.2.8 Test Results (Mode 2)	31
4.2.9 Test Results (Mode 3)	33
5 Pictures of Test Arrangements	35
Appendix – Information of the Testing Laboratories	36

Release Control Record

Issue No.	Description	Date Issued
RFBFBE-WTW-P21080189-1	Original release.	2021/10/7

1 Certificate of Conformity

Product: Dual-Band Wireless AX VDSL2 Gigabit Gateway,
Dual-Band Wireless AX VDSL2 Gigabit Bonding Gateway

Brand: CenturyLink, ZYXEL

Test Model: C4000BZ

Series Model: C4000LZ

Sample Status: ENGINEERING SAMPLE

Applicant: Zyxel Communications Corporation

Test Date: 2021/9/1 ~ 2021/9/2

Standard: 47 CFR FCC Part 15, Subpart E (Section 15.407)
ANSI C63.10: 2013

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by :  , **Date:** 2021/10/7
Claire Kuan / Specialist

Approved by :  , **Date:** 2021/10/7
Clark Lin / Technical Manager

2 Summary of Test Results

47 CFR FCC Part 15, Subpart E (Section 15.407)			
FCC Clause	Test Item	Result	Remarks
15.407(b)(6)	AC Power Conducted Emissions	Pass	Meet the requirement of limit. Minimum passing margin is -8.64dB at 0.16562MHz.
15.407(b)(1/2/3/4(i/ii)/6)	Radiated Emissions & Band Edge Measurement*	Pass	Meet the requirement of limit. Minimum passing margin is -3.1dB at 666.66MHz.
15.407(a)(1/2/3)	Max Average Transmit Power	N/A	Refer to Note 1 below
---	Occupied Bandwidth Measurement	N/A	Refer to Note 1 below
15.407(a)(1/2/3)	Peak Power Spectral Density	N/A	Refer to Note 1 below
15.407(e)	6dB bandwidth	N/A	Refer to Note 1 below
15.407(g)	Frequency Stability	N/A	Refer to Note 1 below
15.203	Antenna Requirement	Pass	Antenna connector is i-pex(MHF) not a standard connector.

Note:

- AC Power Conducted Emission test and Radiated Emissions (below 1GHz) were performed for this addendum. Other test items data refer to original test report.
- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

2.1 Measurement Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

Measurement	Frequency	Expanded Uncertainty (k=2) (\pm)
Conducted Emissions at mains ports	150kHz ~ 30MHz	1.9 dB
Radiated Emissions up to 1 GHz	9kHz ~ 30MHz	3.1 dB
	30MHz ~ 1GHz	5.5 dB

2.2 Modification Record

There were no modifications required for compliance.

3 General Information

3.1 General Description of EUT

Product	Dual-Band Wireless AX VDSL2 Gigabit Gateway, Dual-Band Wireless AX VDSL2 Gigabit Bonding Gateway
Brand	CenturyLink, ZYXEL
Test Model	C4000BZ
Series Model	C4000LZ
CPU Model No.	GRX350
RF Chip Model No.	WAV654
Status of EUT	ENGINEERING SAMPLE
Power Supply Rating	12Vdc from adapter
Modulation Type	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM 256QAM for OFDM in 11ac mode and VHT20/40 in 2.4GHz 1024QAM for OFDMA in 11ax HE mode
Modulation Technology	DSSS, OFDM, OFDMA
Transfer Rate	802.11b: up to 11 Mbps 802.11a/g: up to 54 Mbps 802.11n: up to 300 Mbps 802.11ac: up to 1733.3 Mbps 802.11ax: up to 2401.9 Mbps
Operating Frequency	2.4GHz: 2.412GHz ~ 2.462GHz 5GHz: 5.18 ~ 5.24GHz, 5.26GHz ~ 5.32GHz, 5.5 ~ 5.72GHz 5.745 ~ 5.825GHz
Number of Channel	2.4GHz: 802.11b, 802.11g, 802.11n (HT20), VHT20, 80211ax (HE20): 11 802.11n (HT40), VHT40, 80211ax (HE40): 7 5GHz: 802.11a, 802.11n (HT20), 802.11ac (VHT20), 80211ax (HE20): 25 802.11n (HT40), 802.11ac (VHT40), 80211ax (HE40): 12 802.11ac (VHT80), 80211ax (HE80): 6 802.11ac (VHT160), 802.11ax (HE160): 2
Output Power	Non-Beamforming Mode: 2.412 ~ 2.462 GHz: 832.061 mW 5.18 ~ 5.24 GHz: 827.149 mW 5.26 ~ 5.32 GHz: 221.25 mW 5.5 ~ 5.72 GHz: 221.692 mW 5.745 ~ 5.825 GHz: 945.395 mW Beamforming Mode: 2.412 ~ 2.462 GHz: 759.637 mW 5.18 ~ 5.24 GHz: 827.149 mW 5.26 ~ 5.32 GHz: 221.25 mW 5.5 ~ 5.72 GHz: 221.692 mW 5.745 ~ 5.825 GHz: 835.929 mW
Antenna Type	Refer to Note
Antenna Connector	Refer to Note
Accessory Device	- AC Adaptor, Brand:UMEC, Model:UP0251M-12PA - AC Adaptor, Brand:DVE, Model:DSA-24PFS-12 FUS 120200 - AC Adaptor, Brand:MNC, Model:MAUS-120200 - Ethernet Cable , Non-shielded, 1.8m x1 - DSL cable , Non-shielded, 3.66m x1

Note:

1. This is a supplementary report of Report No.: RF200320E01-1 & RF200320E01A. The differences between them are as below information:

- ◆ Add model name :C4000BZ
- ◆ HW change :
 - 1.) DSL (from single change to bonding)
 - 2.) Add heat sink at CPU
 - 3.) Add LED control IC

2. According to above condition, only AC power conducted emission test and radiated emissions (below 1GHz) test items need to be performed. And all data was verified to meet the requirements.

3. The EUT has below brand names, which are identical to each other in all aspects except for the following table:

Original			
Brand	Model	Model	Difference
Dual-Band Wireless AX VDSL2 Gigabit Gateway	CenturyLink	C4000LZ	Different brand names are for marketing purpose.
	ZYXEL		
Newly			
Brand	Model	Model	Difference
Dual-Band Wireless AX VDSL2 Gigabit Bonding Gateway	CenturyLink	C4000BZ	HW change : 1.) DSL (from single change to bonding) 2.) Add heat sink at CPU 3.) Add LED control IC
	ZYXEL		

4. The EUT has two radios as following table:

Radio 1	Radio 2
WLAN 2.4GHz	WLAN 5GHz

5. Simultaneously transmission condition.

Condition	Technology	
1	WLAN 2.4GHz	WLAN 5GHz


Note: The emission of the simultaneous operation has been evaluated and no non-compliance was found.

6. The EUT must be supplied one power adapter and following different models could be chosen as following table:

No.	Brand	Model No.	Spec.
1	UMEC	UP0251M-12PA	Input: 100-240Vac, 0.6A, 50/60Hz Output: 12V, 2A DC Output cable: Unshielded, 1.8m
2	DVE	DSA-24PFS-12 FUS 120200	Input: 100-240Vac, 0.8A, 50/60Hz Output: 12V, 2A DC Output cable: Unshielded, 1.8m
3	MNC	MAUS-120200	Input: 100-240Vac, 0.7A, 50/60Hz Output: 12V, 2A DC Output cable: Unshielded, 1.8m

7. The antennas provided to the EUT, please refer to the following table:

Antenna NO.	Chain NO.	Brand	Antenna Net Gain(dBi)	Frequency range	Antenna Type	Connector Type	Cable Length(mm)
2G_ANT1	Chain 0	M.gear	2.48	2.4~2.4835GHz	Dipole	i-pex(MHF)	108.8
5G_ANT1	Chain 0	M.gear	3.36	5.15~5.25GHz	Dipole	i-pex(MHF)	113.5
			3.45	5.25~5.35GHz			
			3.44	5.47~5.725GHz			
			3.36	5.725~5.85GHz			
2G_ANT2	Chain 1	M.gear	2.77	2.4~2.4835GHz	Dipole	i-pex(MHF)	148.5
5G_ANT2	Chain 1	M.gear	3.41	5.15~5.25GHz	Dipole	i-pex(MHF)	78.5
			3.18	5.25~5.35GHz			
			3.47	5.47~5.725GHz			
			3.47	5.725~5.85GHz			

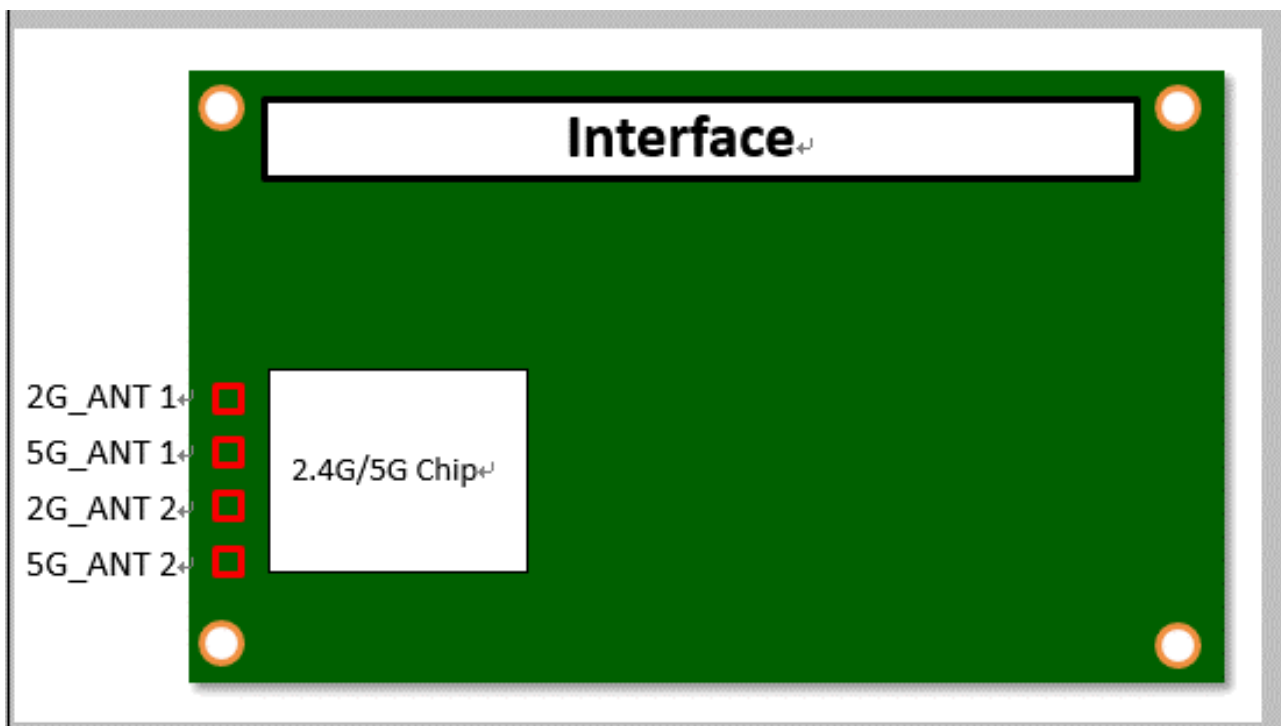

* Antenna port location

8. The EUT incorporates a MIMO function:

2.4GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11b	1Tx Fixed Chain 0	2RX
802.11g	2TX	2RX
802.11n (HT20)	2TX	2RX
802.11n (HT40)	2TX	2RX
VHT20	2TX	2RX
VHT40	2TX	2RX
802.11ax (HE20)	2TX	2RX
802.11ax (HE40)	2TX	2RX
5GHz Band		
MODULATION MODE	TX & RX CONFIGURATION	
802.11a	2TX	2TX
802.11n (HT20)	2TX	2TX
802.11n (HT40)	2TX	2TX
802.11ac (VHT20)	2TX	2TX
802.11ac (VHT40)	2TX	2TX
802.11ac (VHT80)	2TX	2TX
802.11ax (HE20)	2TX	2TX
802.11ax (HE40)	2TX	2TX
802.11ax (HE80)	2TX	2TX

Note:

1. All of modulation mode support beamforming function except 802.11a/b/g modulation mode.
2. The EUT support Beamforming and non-beamforming mode, therefore both mode were investigated and the worst case scenario was identified. The worst case data were presented in test report.
3. The modulation and bandwidth are similar for 802.11n mode for 20MHz (40MHz) and 802.11ac mode for 20MHz (40MHz), the manufacturer will control the power for 802.11n mode is the same as the 802.11ac or more lower than it and investigated worst case to representative mode in test report. (Final test mode refer to section 3.2.1)

9. The power setting are list as below:

Non-Beamforming Mode													
802.11a		802.11ac (VHT20)		802.11ac (VHT40)		802.11ac (VHT80)		802.11ax (HE20)		802.11ax (HE40)		802.11ax (HE80)	
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
5180	25	5180	25	5190	19.5	5210	18	5180	25	5190	19.5	5210	18
5200	28	5200	28	5230	27	5775	23	5200	28	5230	27	5775	23
5240	27	5240	27	5755	27			5240	27	5755	27		
5745	27	5745	27	5795	26.5			5745	27	5795	26.5		
5785	27	5785	27					5785	27				
5825	27	5825	27					5825	27				
Beamforming Mode													
802.11ac (VHT20)		802.11ac (VHT40)		802.11ac (VHT80)		802.11ax (HE20)		802.11ax (HE40)		802.11ax (HE80)			
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
5180	25	5190	19.5	5210	18	5180	25	5190	19.5	5210	18		
5200	28	5230	27	5775	23	5200	28	5230	27	5775	23		
5240	27	5755	27			5240	27	5755	26.5				
5745	26.5	5795	26.5			5745	26.5	5795	26.5				
5785	26.5					5785	26.5						
5825	26.5					5825	26.5						

Non-Beamforming Mode									
802.11a		802.11ac (VHT20)		802.11ac (VHT40)		802.11ac (VHT80)		802.11ac (VHT160)	
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
52	22.5	52	22	54	22	58	19.5	50	21
60	22.5	60	22	62	20.5	106	21.5	114	20.5
64	22.5	64	22.5	102	22	122	21.5		
100	22	100	22.5	110	19.5	138	22		
116	19.5	116	19	134	22.5				
140	22	140	22.5	142	22.5				
144	20	144	20						
802.11ax (HE20)		802.11ax (HE40)		802.11ax (HE80)		802.11ax (HE160)			
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
52	22	54	22	58	19.5	50	21		
60	22	62	20.5	106	21.5	114	20.5		
64	22.5	102	22	122	21.5				
100	22.5	110	19.5	138	22				
116	19	134	22.5						
140	22.5	142	22.5						
144	20								
Beamforming Mode									
802.11ac (VHT20)		802.11ac (VHT40)		802.11ac (VHT80)		802.11ac (VHT160)			
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
52	22	54	22	58	19.5	50	21		
60	22	62	20.5	106	21.5	114	20.5		
64	22.5	102	22	122	21.5				
100	22.5	110	19.5	138	22				
116	19	134	22.5						
140	22.5	142	22.5						
144	20								
802.11ax (HE20)		802.11ax (HE40)		802.11ax (HE80)		802.11ax (HE160)			
Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting	Freq. (MHz)	Power Setting
52	22	54	22	58	19.5	50	21		
60	22	62	20.5	106	21.5	114	20.5		
64	22.5	102	22	122	21.5				
100	22.5	110	19.5	138	22				
116	19	134	22.5						
140	22.5	142	22.5						
144	20								

10. The above EUT information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

11. The above Antenna information is declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

3.2 Description of Test Modes

FOR 5180 ~ 5240MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
36	5180 MHz	44	5220 MHz
40	5200 MHz	48	5240 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
38	5190 MHz	46	5230 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
42	5210 MHz

FOR 5260 ~ 5320MHz

4 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
52	5260 MHz	60	5300 MHz
56	5280 MHz	64	5320 MHz

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
54	5270 MHz	62	5310 MHz

1 channel is provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency
58	5290 MHz

1 straddle channel is provided for 802.11ac (VHT160), 802.11ax (HE160):

Channel	Frequency
50	5250 MHz

FOR 5500 ~ 5720MHz

12 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20), 802.11ax (HE20):

Channel	Frequency	Channel	Frequency
100	5500 MHz	124	5620 MHz
104	5520 MHz	128	5640 MHz
108	5540 MHz	132	5660 MHz
112	5560 MHz	136	5680 MHz
116	5580 MHz	140	5700 MHz
120	5600 MHz	144	5720 MHz

6 channels are provided for 802.11n (HT40), 802.11ac (VHT40), 802.11ax (HE40):

Channel	Frequency	Channel	Frequency
102	5510 MHz	126	5630 MHz
110	5550 MHz	134	5670 MHz
118	5590 MHz	142	5710 MHz

3 channels are provided for 802.11ac (VHT80), 802.11ax (HE80):

Channel	Frequency	Channel	Frequency
106	5530 MHz	138	5690 MHz
122	5610 MHz		

1 straddle channel is provided for 802.11ac (VHT160), 802.11ax (HE160):

Channel	Frequency
114	5570 MHz

FOR 5745 ~ 5825MHz:

5 channels are provided for 802.11a, 802.11n (HT20), 802.11ac (VHT20):

Channel	Frequency	Channel	Frequency
149	5745 MHz	161	5805 MHz
153	5765 MHz	165	5825 MHz
157	5785 MHz		

2 channels are provided for 802.11n (HT40), 802.11ac (VHT40):

Channel	Frequency	Channel	Frequency
151	5755 MHz	159	5795 MHz

1 channel is provided for 802.11ac (VHT80):

Channel	Frequency
155	5775 MHz

3.2.1 Test Mode Applicability and Tested Channel Detail

EUT Configure Mode	Applicable To		Description
	RE<1G	PLC	
1	√	√	Adapter 1
2	√	√	Adapter 2
3	√	√	Adapter 3

Where **RE<1G**: Radiated Emission below 1GHz **PLC**: Power Line Conducted Emission

Radiated Emission Test (Below 1GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE40)	5180-5240 5745-5825	38 to 46 151 to 159	151	OFDMA	BPSK	MCS0

Power Line Conducted Emission Test:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

Non-Beamforming Mode						
Mode	FREQ. Band (MHz)	Available Channel	Tested Channel	Modulation Technology	Modulation Type	Data Rate Parameter
802.11ax (HE40)	5180-5240 5745-5825	38 to 46 151 to 159	151	OFDMA	BPSK	MCS0

Test Condition:

Applicable To	Environmental Conditions	Input Power	Tested By
RE<1G	26deg. C, 66%RH	120Vac, 60Hz	Sampson Chen
PLC	26deg. C, 68%RH	120Vac, 60Hz	Sampson Chen

3.3 Description of Support Units

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.


ID	Product	Brand	Model No.	Serial No.	FCC ID	Remarks
A.	Laptop	Lenovo	20U5S01X00 L14	PF-28LKK7	NA	Provided by Lab
B.	Laptop	Lenovo	20U5S01X00 L14	PF-1ANPYA	NA	Provided by Lab
C.	Switch	D-Link	DGS-1005D	DR8WC92000523	NA	Provided by Lab
D.	Telephone	WONDER	WD-303	7C17KA04011	NA	Provided by Lab
E.	iPod	Apple	MC749TA/A	CC4DN25WDFDM	NA	Provided by Lab

Note:

- All power cords of the above support units are non-shielded (1.8m).

ID	Descriptions	Qty.	Length (m)	Shielding (Yes/No)	Cores (Qty.)	Remarks
1.	DC Cable	1	1.8	No	0	Supplied by client
2.	RJ-45 Cable	1	10	No	0	Provided by Lab
3.	RJ-45 Cable	1	1.8	No	0	Supplied by client
4.	RJ-45 Cable	1	10	No	0	Provided by Lab
5.	RJ-45 Cable	1	10	No	0	Provided by Lab
6.	RJ-11 Cable	1	3.66	No	0	Supplied by client
7.	RJ-11 Cable	1	10	No	0	Provided by Lab
8.	USB Cable	1	0.1	Yes	0	Provided by Lab

3.3.1 Configuration of System under Test

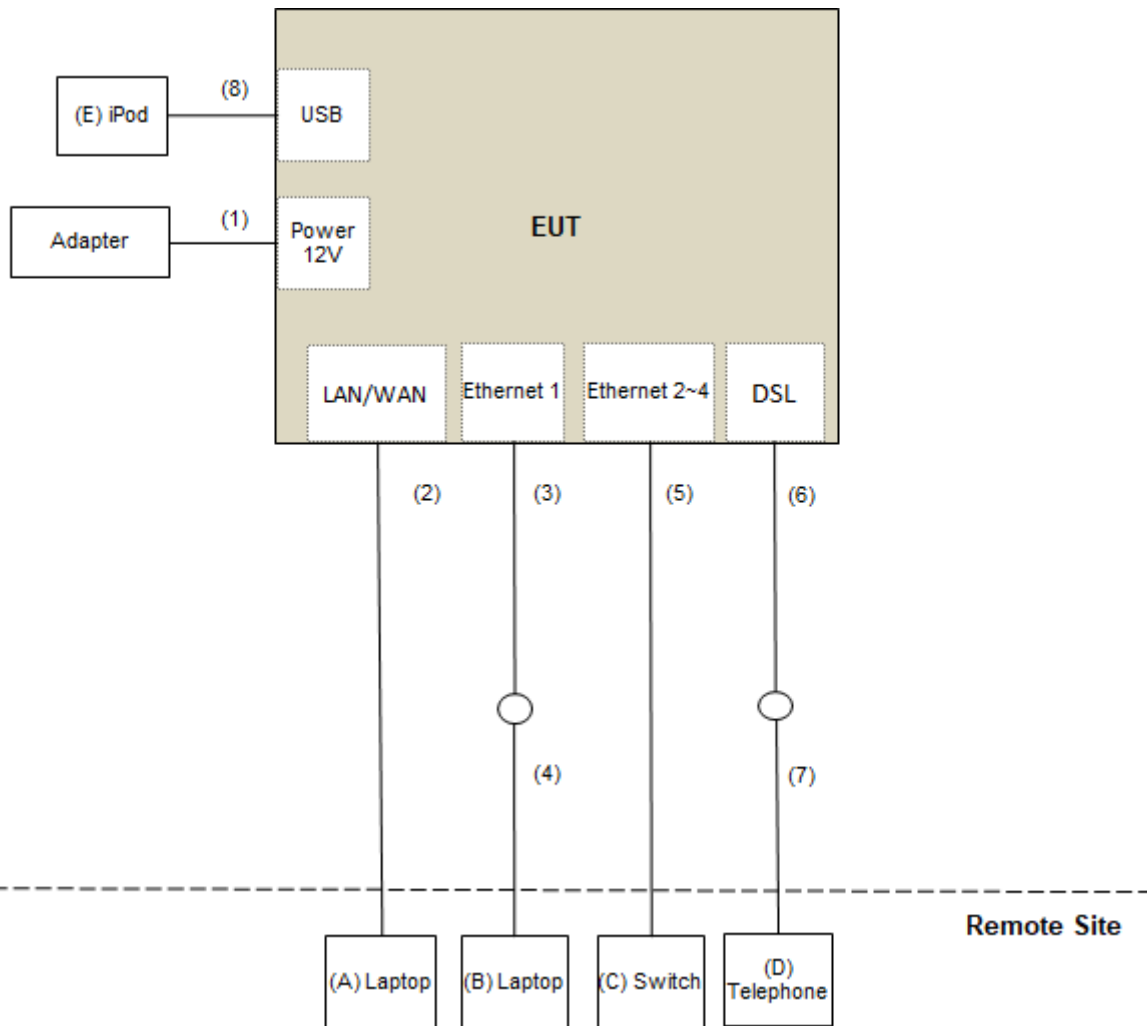

3.4 General Description of Applied Standard and references

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards and references:

Test Standard:

FCC Part 15, Subpart E (15.407)
ANSI C63.10-2013

All test items have been performed and recorded as per the above standards.

References Test Guidance:

KDB 789033 D02 General UNII Test Procedure New Rules v02r01
KDB 662911 D01 Multiple Transmitter Output v02r01

All test items have been performed as a reference to the above KDB test guidance.

4 Test Types and Results

4.1 Radiated Emission and Bandedge Measurement

4.1.1 Limits of Radiated Emission and Bandedge Measurement

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table.

Frequencies (MHz)	Field Strength (microvolts/meter)	Measurement Distance (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dBuV/m) = 20 log Emission level (uV/m).
3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.

Limits of unwanted emission out of the restricted bands

Applicable To		Limit	
789033 D02 General UNII Test Procedure New Rules v02r01		Field Strength at 3m	
		PK:74 (dBuV/m)	AV:54 (dBuV/m)
Frequency Band	Applicable To	EIRP Limit	Equivalent Field Strength at 3m
5150~5250 MHz	15.407(b)(1)	PK:-27 (dBm/MHz)	PK:68.2(dBuV/m)
5250~5350 MHz	15.407(b)(2)		
5470~5725 MHz	15.407(b)(3)		
5725~5850 MHz	15.407(b)(4)(i)	PK:-27 (dBm/MHz) ^{*1} PK:10 (dBm/MHz) ^{*2} PK:15.6 (dBm/MHz) ^{*3} PK:27 (dBm/MHz) ^{*4}	PK: 68.2(dBuV/m) ^{*1} PK:105.2 (dBuV/m) ^{*2} PK: 110.8(dBuV/m) ^{*3} PK:122.2 (dBuV/m) ^{*4}
^{*1} beyond 75 MHz or more above of the band edge.		^{*2} below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above.	
^{*3} below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above.		^{*4} from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.	

Note:

The following formula is used to convert the equipment isotropic radiated power (eirp) to field strength:

$$E = \frac{1000000\sqrt{30P}}{3} \mu\text{V/m, where P is the eirp (Watts).}$$

4.1.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver Agilent	N9038A	MY51210202	2020/12/1	2021/11/30
Software	ADT_Radiated_V8.7.08	NA	NA	NA
Boresight Antenna Tower & Turn Table Max-Full	MF-7802BS	MF780208530	NA	NA
Pre_Amplifier EMCI	EMC001340	980142	2021/5/24	2022/5/23
LOOP ANTENNA Electro-Metrics	EM-6879	264	2021/3/5	2022/3/4
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-001	2021/1/7	2022/1/6
RF Coaxial Cable JYEBO	5D-FB	LOOPCAB-002	2021/1/7	2022/1/6
Pre_Amplifier EMCI	EMC330N	980701	2021/3/10	2022/3/9
Trilog Broadband Antenna Schwarzbeck	VULB 9168	9168-406	2020/11/6	2021/11/5
RF Coaxial Cable COMMATE/PEWC	8D	966-4-1	2021/3/17	2022/3/16
RF Coaxial Cable COMMATE/PEWC	8D	966-4-2	2021/3/17	2022/3/16
RF Coaxial Cable COMMATE/PEWC	8D	966-4-3	2021/3/17	2022/3/16
Fixed attenuator Mini-Circuits	UNAT-5+	PAD-ATT5-03	2021/1/11	2022/1/10

Note:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in 966 Chamber No. 4.
3. Loop antenna was used for all emissions below 30 MHz.
4. Tested Date: 2021/9/2

4.1.3 Test Procedure

For Radiated emission below 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter chamber room. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. Parallel, perpendicular, and ground-parallel orientations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Quasi-Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.

Note:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 9kHz at frequency below 30MHz.

For Radiated emission above 30MHz

- a. The EUT was placed on the top of a rotating table 0.8 meters (for 30MHz ~ 1GHz) / 1.5 meters (for above 1GHz) above the ground at 3 meter chamber room for test. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The height of antenna is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to quasi-peak detect function and specified bandwidth with maximum hold mode when the test frequency is below 1 GHz.

Note:


1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection (QP) at frequency below 1GHz.
2. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 Deviation from Test Standard


No deviation.

4.1.5 Test Setup

For Radiated emission below 30MHz

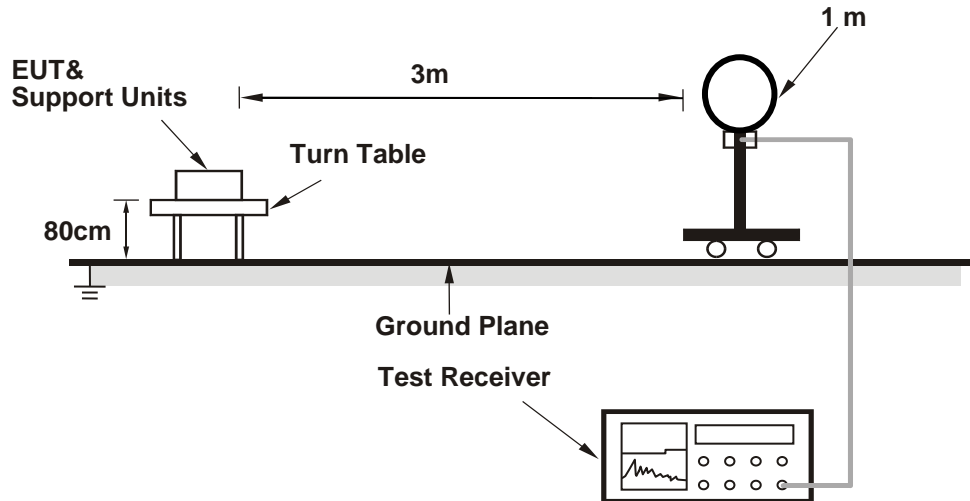

For Radiated emission 30MHz to 1GHz

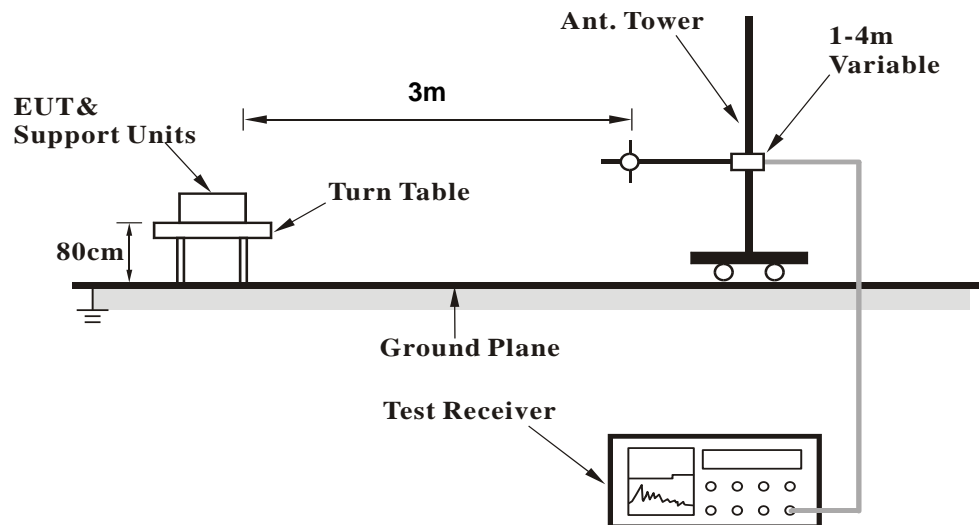

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT Operating Condition

- Connected the EUT with the Laptop Computer which is placed on remote site.
- Controlling software (DUT_setup.610.26) has been activated to set the EUT under transmission condition continuously at specific channel frequency.

4.1.7 Test Results (Mode 1)

Below 1GHz Data:


802.11ax (HE40)

RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	31.48	27.9 QP	40.0	-12.1	1.50 H	127	41.6	-13.7
2	106.68	29.1 QP	43.5	-14.4	2.00 H	103	44.5	-15.4
3	250.00	31.5 QP	46.0	-14.5	1.00 H	99	44.2	-12.7
4	509.98	31.9 QP	46.0	-14.1	1.50 H	116	36.5	-4.6
5	666.64	42.4 QP	46.0	-3.6	1.00 H	205	43.6	-1.2
6	764.99	36.0 QP	46.0	-10.0	1.00 H	152	34.8	1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

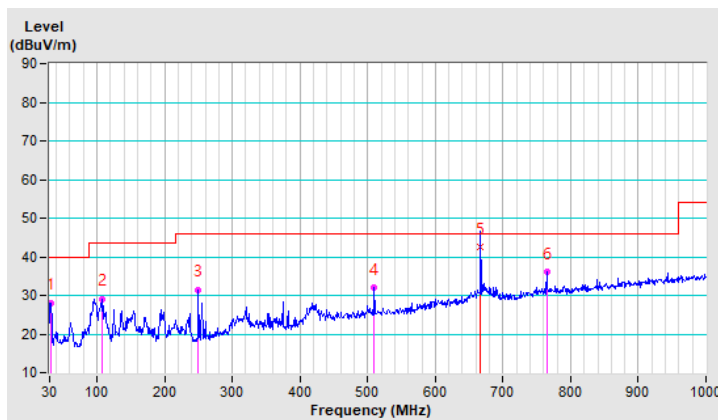


RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	51.85	35.9 QP	40.0	-4.1	1.00 V	333	48.5	-12.6
2	70.84	35.3 QP	40.0	-4.7	1.50 V	237	50.3	-15.0
3	98.41	28.8 QP	43.5	-14.7	1.00 V	218	45.8	-17.0
4	422.61	29.4 QP	46.0	-16.6	1.00 V	264	36.5	-7.1
5	666.66	42.5 QP	46.0	-3.5	1.50 V	273	43.7	-1.2
6	765.02	34.6 QP	46.0	-11.4	1.00 V	160	33.4	1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

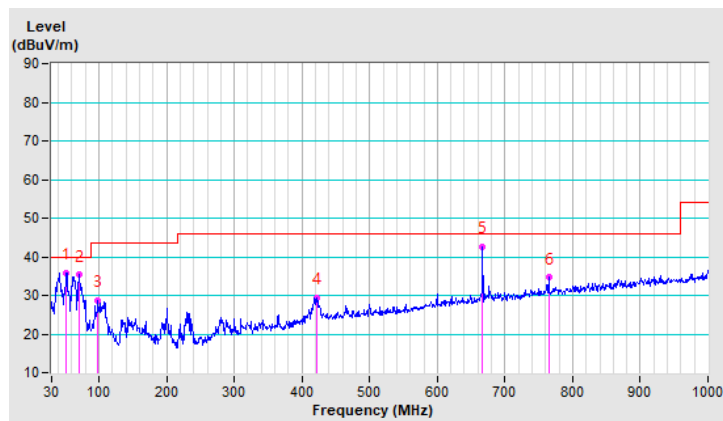

4.1.8 Test Results (Mode 2)

Below 1GHz Data:


802.11ax (HE40)

RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.70	26.5 QP	40.0	-13.5	1.50 H	72	40.1	-13.6
2	132.87	28.0 QP	43.5	-15.5	2.00 H	265	40.9	-12.9
3	273.08	26.0 QP	46.0	-20.0	1.00 H	216	37.6	-11.6
4	421.30	28.1 QP	46.0	-17.9	2.00 H	360	35.2	-7.1
5	666.66	42.9 QP	46.0	-3.1	1.00 H	181	44.1	-1.2
6	764.99	36.6 QP	46.0	-9.4	1.00 H	143	35.4	1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

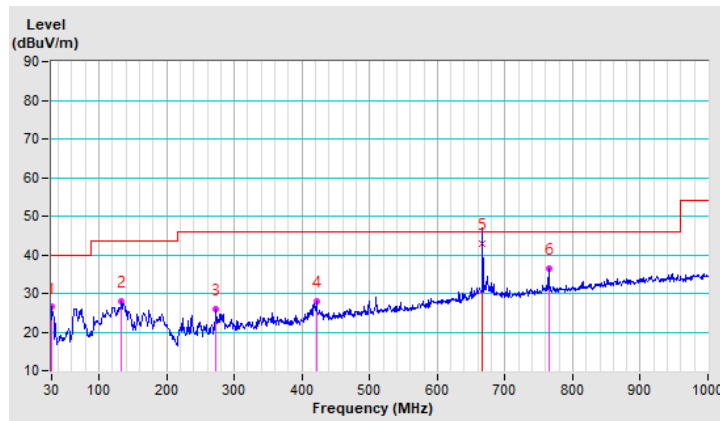


RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	41.49	35.5 QP	40.0	-4.5	1.00 V	2	48.2	-12.7
2	64.82	34.2 QP	40.0	-5.8	2.00 V	253	48.2	-14.0
3	273.13	27.7 QP	46.0	-18.3	2.00 V	184	39.3	-11.6
4	421.32	30.3 QP	46.0	-15.7	1.00 V	266	37.4	-7.1
5	666.67	42.8 QP	46.0	-3.2	1.50 V	240	44.0	-1.2
6	764.99	34.2 QP	46.0	-11.8	1.50 V	247	33.0	1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

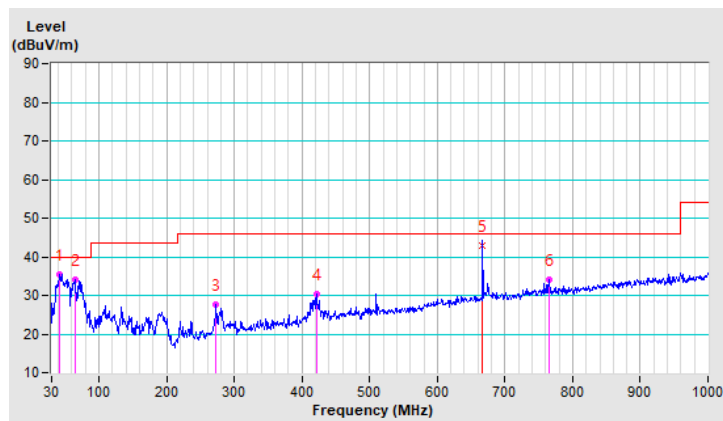

4.1.9 Test Results (Mode 3)

Below 1GHz Data:


802.11ax (HE40)

RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	30.53	25.8 QP	40.0	-14.2	1.00 H	347	39.4	-13.6
2	111.94	30.1 QP	43.5	-13.4	1.50 H	266	45.0	-14.9
3	136.75	30.1 QP	43.5	-13.4	2.00 H	114	42.8	-12.7
4	419.19	27.4 QP	46.0	-18.6	1.50 H	360	34.6	-7.2
5	666.65	42.4 QP	46.0	-3.6	1.00 H	181	43.6	-1.2
6	764.99	35.4 QP	46.0	-10.6	1.00 H	85	34.2	1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

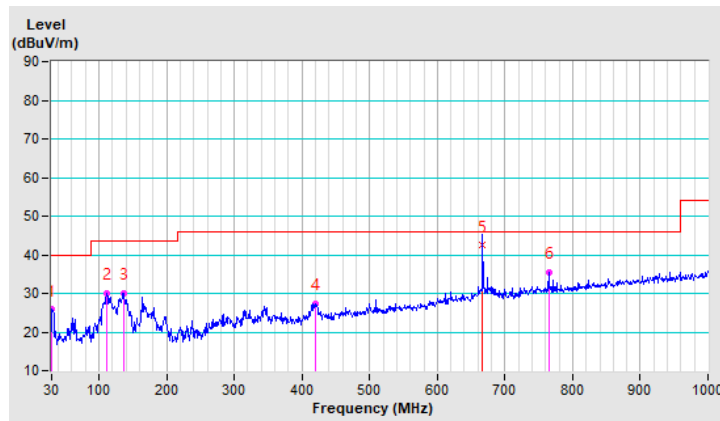


RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	9kHz ~ 1GHz	Detector Function	Quasi-Peak (QP)

Antenna Polarity & Test Distance : Vertical at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	43.82	35.0 QP	40.0	-5.0	1.50 V	242	47.6	-12.6
2	58.72	35.1 QP	40.0	-4.9	1.50 V	137	48.2	-13.1
3	106.73	28.9 QP	43.5	-14.6	1.00 V	272	44.3	-15.4
4	415.45	31.3 QP	46.0	-14.7	1.50 V	281	38.7	-7.4
5	666.67	42.0 QP	46.0	-4.0	1.50 V	273	43.2	-1.2
6	764.99	35.3 QP	46.0	-10.7	1.50 V	190	34.1	1.2

Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit of frequency range 30MHz~1000MHz.
5. The emission levels were very low against the limit of frequency range 9kHz~30MHz: the amplitude of spurious emissions attenuated more than 20 dB below the permissible value to be report.

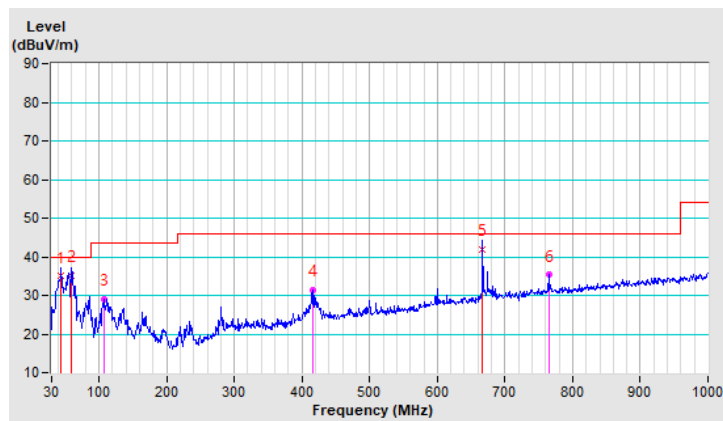

4.2 Conducted Emission Measurement

4.2.1 Limits of Conducted Emission Measurement

Frequency (MHz)	Conducted Limit (dBuV)	
	Quasi-peak	Average
0.15 - 0.5	66 - 56	56 - 46
0.50 - 5.0	56	46
5.0 - 30.0	60	50

Note: 1. The lower limit shall apply at the transition frequencies.

2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50MHz.

4.2.2 Test Instruments

Description & Manufacturer	Model No.	Serial No.	Calibrated Date	Calibrated Until
Test Receiver R&S	ESCS 30	847124/029	2020/10/20	2021/10/19
LISN R&S	ESH3-Z5	848773/004	2020/10/27	2021/10/26
LISN R & S	ESH3-Z5	835239/001	2021/3/26	2022/3/25
50 ohms Terminator	50	3	2020/10/26	2021/10/25
RF Coaxial Cable JYEBO	5D-FB	COCCAB-001	2020/9/26	2021/9/25
Fixed attenuator STI	STI02-2200-10	005	2021/8/27	2022/8/26
Software BVADT	BVADT_Cond_ V7.3.7.4	NA	NA	NA

Note:

1. The calibration interval of the above test instruments are 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. The test was performed in Conduction 1.
3. Tested Date: 2021/9/1

4.2.3 Test Procedure


- The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 Deviation from Test Standard

No deviation.

4.2.5 Test Setup

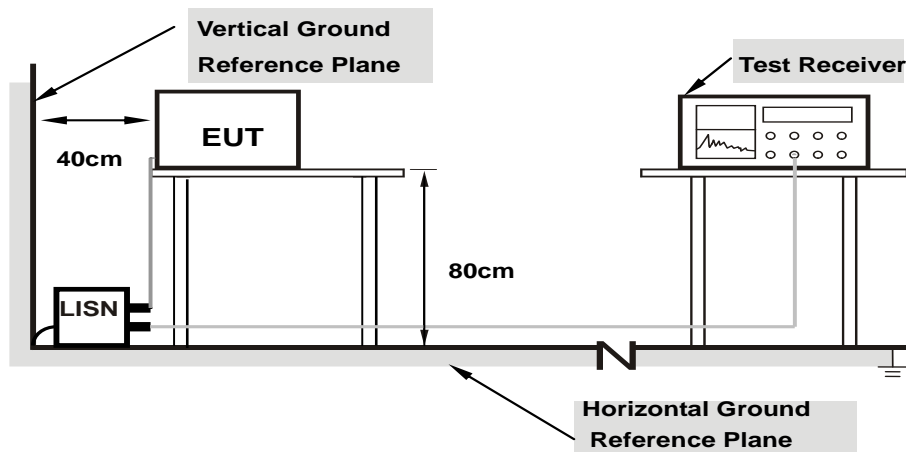

Note: 1.Support units were connected to second LISN.

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT Operating Condition

Same as 4.1.6.


4.2.7 Test Results (Mode 1)

RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.97	35.51	21.46	45.48	31.43	65.79	55.79	-20.31	-24.36
2	0.19687	10.00	34.47	21.75	44.47	31.75	63.74	53.74	-19.27	-21.99
3	0.31797	10.02	30.76	24.77	40.78	34.79	59.76	49.76	-18.98	-14.97
4	0.39609	10.03	29.55	21.12	39.58	31.15	57.93	47.93	-18.35	-16.78
5	2.57422	10.16	25.46	12.61	35.62	22.77	56.00	46.00	-20.38	-23.23
6	21.25391	11.51	28.60	21.89	40.11	33.40	60.00	50.00	-19.89	-16.60

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

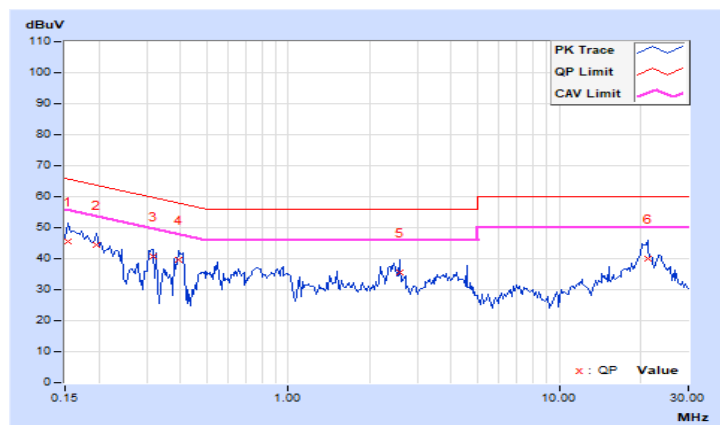


RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	9.95	33.03	19.35	42.98	29.30	65.79	55.79	-22.81	-26.49
2	0.18516	9.99	28.48	16.76	38.47	26.75	64.25	54.25	-25.78	-27.50
3	0.36094	10.02	26.96	19.24	36.98	29.26	58.71	48.71	-21.73	-19.45
4	2.07813	10.13	23.74	14.87	33.87	25.00	56.00	46.00	-22.13	-21.00
5	2.44141	10.15	30.38	18.94	40.53	29.09	56.00	46.00	-15.47	-16.91
6	20.76953	11.19	29.21	22.06	40.40	33.25	60.00	50.00	-19.60	-16.75

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

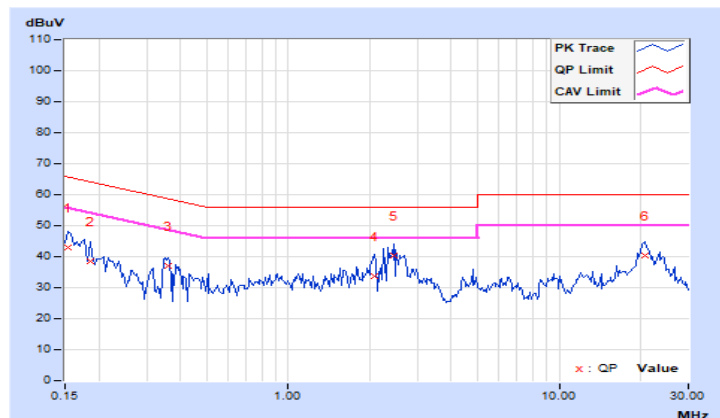


4.2.8 Test Results (Mode 2)

RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16172	9.98	42.84	20.19	52.82	30.17	65.38	55.38	-12.56	-25.21
2	0.17734	9.99	40.47	20.71	50.46	30.70	64.61	54.61	-14.15	-23.91
3	0.25156	10.01	33.92	18.55	43.93	28.56	61.71	51.71	-17.78	-23.15
4	2.96094	10.19	25.40	12.42	35.59	22.61	56.00	46.00	-20.41	-23.39
5	7.32813	10.50	29.13	18.71	39.63	29.21	60.00	50.00	-20.37	-20.79
6	13.01563	10.94	28.97	19.62	39.91	30.56	60.00	50.00	-20.09	-19.44

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

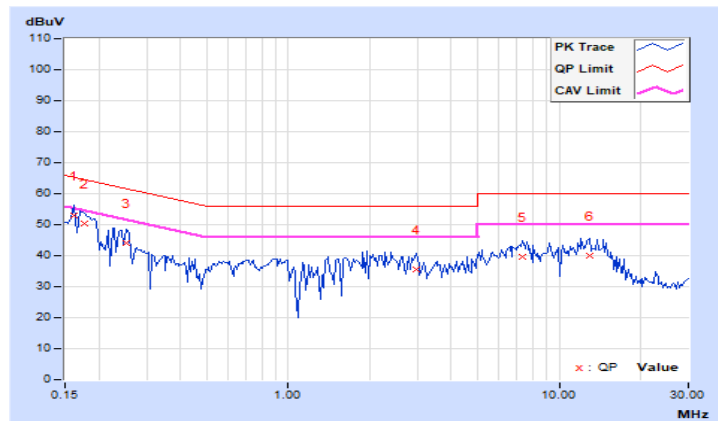


RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.16562	9.97	41.50	22.24	51.47	32.21	65.18	55.18	-13.71	-22.97
2	0.23203	10.00	32.60	12.54	42.60	22.54	62.38	52.38	-19.78	-29.84
3	0.85703	10.05	25.43	10.71	35.48	20.76	56.00	46.00	-20.52	-25.24
4	3.78125	10.23	28.11	17.09	38.34	27.32	56.00	46.00	-17.66	-18.68
5	7.42188	10.45	32.07	21.91	42.52	32.36	60.00	50.00	-17.48	-17.64
6	11.60547	10.69	28.72	19.83	39.41	30.52	60.00	50.00	-20.59	-19.48

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

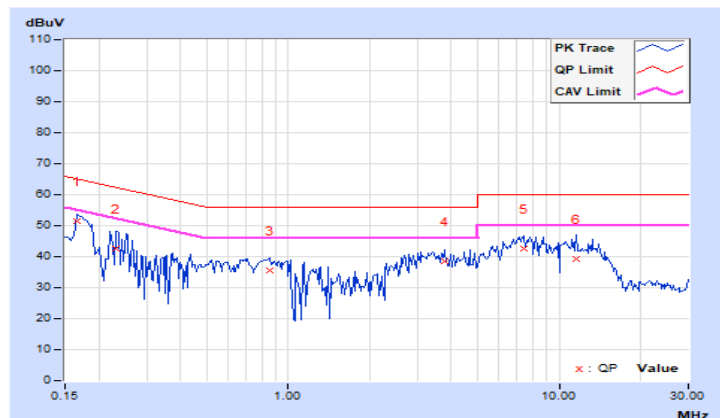


4.2.9 Test Results (Mode 3)

RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Line (L)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.97	43.51	28.16	53.48	38.13	66.00	56.00	-12.52	-17.87
2	0.18516	9.99	38.27	23.13	48.26	33.12	64.25	54.25	-15.99	-21.13
3	0.23594	10.01	33.04	18.60	43.05	28.61	62.24	52.24	-19.19	-23.63
4	0.31797	10.02	24.50	11.18	34.52	21.20	59.76	49.76	-25.24	-28.56
5	2.55859	10.16	17.55	9.48	27.71	19.64	56.00	46.00	-28.29	-26.36
6	10.37500	10.73	23.04	17.55	33.77	28.28	60.00	50.00	-26.23	-21.72

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

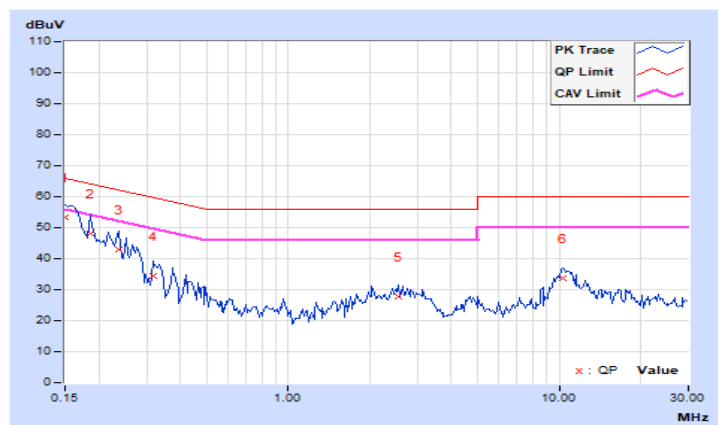


RF Mode	TX 802.11ax (HE40)	Channel	CH 151 : 5755 MHz
Frequency Range	150kHz ~ 30MHz	Detector Function & Resolution Bandwidth	Quasi-Peak (QP) / Average (AV), 9kHz

Phase Of Power : Neutral (N)										
No	Frequency (MHz)	Correction Factor (dB)	Reading Value (dBuV)		Emission Level (dBuV)		Limit (dBuV)		Margin (dB)	
			Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15000	9.95	47.15	32.30	57.10	42.25	66.00	56.00	-8.90	-13.75
2	0.16562	9.97	46.57	29.93	56.54	39.90	65.18	55.18	-8.64	-15.28
3	0.18906	9.99	41.77	27.02	51.76	37.01	64.08	54.08	-12.32	-17.07
4	0.22031	10.00	37.34	22.82	47.34	32.82	62.81	52.81	-15.47	-19.99
5	0.27500	10.01	33.74	22.76	43.75	32.77	60.97	50.97	-17.22	-18.20
6	10.31250	10.62	20.66	14.96	31.28	25.58	60.00	50.00	-28.72	-24.42

Remarks:

1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
2. The emission levels of other frequencies were very low against the limit.
3. Margin value = Emission level – Limit value
4. Correction factor = Insertion loss + Cable loss
5. Emission Level = Correction Factor + Reading Value

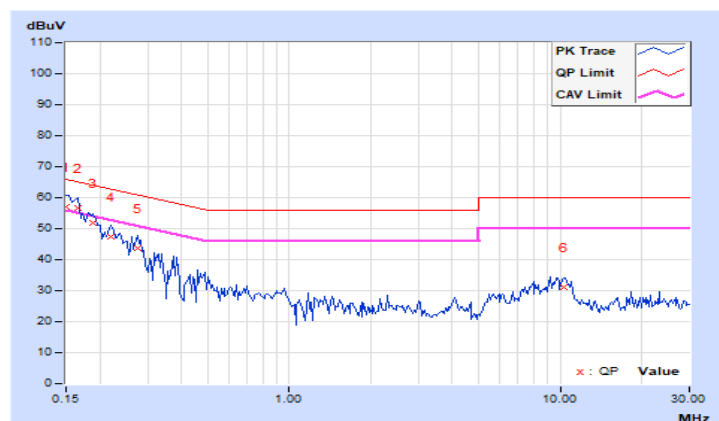

5 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo).

Appendix – Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Lin Kou EMC/RF Lab

Tel: 886-2-26052180

Fax: 886-2-26051924

Hsin Chu EMC/RF/Telecom Lab

Tel: 886-3-6668565

Fax: 886-3-6668323

Hwa Ya EMC/RF/Safety Lab

Tel: 886-3-3183232

Fax: 886-3-3270892

Email: service.adt@tw.bureauveritas.com

Web Site: www.bureauveritas-adt.com

The address and road map of all our labs can be found in our web site also.

--- END ---