

RF Exposure Report

Report No.: MFBFBE-WTW-P22031258

FCC ID: I88DX4510-B1

Test Model: DX4510-B1

Received Date: 2022/4/14

Test Date: 2022/6/5

Issued Date: 2022/7/29

Applicant: Zyxel Communications Corporation

Address: No.2 Industry East RD. IX, Hsinchu Science Park, Hsinchu 30075,
Taiwan

Issued By: Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan
Branch Hsin Chu Laboratory

Lab Address: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

Test Location: E-2, No.1, Li Hsin 1st Road, Hsinchu Science Park, Hsinchu City 300,
Taiwan

**FCC Registration /
Designation Number:** 723255 / TW2022

This report is governed by, and incorporates by reference, the Conditions of Testing as posted at the date of issuance of this report at <http://www.bureauveritas.com/home/about-us/our-business/cps/about-us/terms-conditions/> and is intended for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. Measurement uncertainty is only provided upon request for accredited tests. Statements of conformity are based on simple acceptance criteria without taking measurement uncertainty into account, unless otherwise requested in writing. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence or if you require measurement uncertainty; provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents.

Table of Contents

Release Control Record	3
1 Certificate of Conformity	4
2 RF Exposure	5
2.1 Limits for Maximum Permissible Exposure (MPE)	5
2.2 MPE Calculation Formula	5
2.3 Classification	5
2.4 Antenna Gain	6
2.5 Calculation Result	9

Release Control Record

Issue No.	Description	Date Issued
MFBFBE-WTW-P22031258	Original release.	2022/7/29

1 Certificate of Conformity

Product: AX6000 WiFi6 VDSL2 Bonding Gateway

Brand: ZYXEL

Test Model: DX4510-B1

Sample Status: Engineering sample

Applicant: Zyxel Communications Corporation

Test Date: 2022/6/5

FCC Rule Part: FCC Part 2 (Section 2.1091)

Standards: KDB 447498 D01 General RF Exposure Guidance v06

The above equipment has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Prepared by : Cherry Chuo , **Date:** 2022/7/29
Cherry Chuo / Specialist

Approved by : May Chen , **Date:** 2022/7/29
May Chen / Manager

2 RF Exposure

2.1 Limits for Maximum Permissible Exposure (MPE)

Frequency Range (MHz)	Electric Field Strength (V/m)	Magnetic Field Strength (A/m)	Power Density (mW/cm ²)	Average Time (minutes)
Limits For General Population / Uncontrolled Exposure				
0.3-1.34	614	1.63	(100)*	30
1.34-30	824/f	2.19/f	(180/f ²)*	30
30-300	27.5	0.073	0.2	30
300-1500	f/1500	30
1500-100,000	1.0	30

f = Frequency in MHz ; *Plane-wave equivalent power density

2.2 MPE Calculation Formula

$$Pd = (Pout * G) / (4 * \pi * r^2)$$

where

Pd = power density in mW/cm²

Pout = output power to antenna in mW

G = gain of antenna in linear scale

Pi = 3.1416

R = distance between observation point and center of the radiator in cm

2.3 Classification

The antenna of this product, under normal use condition, is at least 24cm away from the body of the user.



So, this device is classified as **Mobile Device**.

2.4 Antenna Gain

Antenna No.	RF Chain No.	Brand	Model	Antenna Net Gain(dBi)	Frequency range (GHz)	Antenna Type	Connector Type	*Cable Length (mm)
ANT1	2.4G_Chain 3	WHAYU	56-001-000047Z	2.7	2.4~2.4835	Dipole	ipex(MHF)	313
ANT2	2.4G_Chain 2	WHAYU	56-001-000048Z	2.31	2.4~2.4835	Dipole	ipex(MHF)	258
ANT3	2.4G_Chain 1	WHAYU	56-001-000049Z	2.57	2.4~2.4835	Dipole	ipex(MHF)	263
ANT4	2.4G_Chain 0	WHAYU	56-001-000050Z	2.53	2.4~2.4835	Dipole	ipex(MHF)	145
ANT5	5G_Chain 3	WHAYU	56-001-000051Z	2.6 2.92 3.31 3.16	5.15~5.25 5.25~5.35 5.47~5.725 5.725~5.85	Dipole	ipex(MHF)	59
ANT6	5G_Chain 2	WHAYU	56-001-000052Z	2.99 3.22 3.13 2.18	5.15~5.25 5.25~5.35 5.47~5.725 5.725~5.85	Dipole	ipex(MHF)	40
ANT7	5G_Chain 1	WHAYU	56-001-000053Z	3.48 3.09 3.79 2.46	5.15~5.25 5.25~5.35 5.47~5.725 5.725~5.85	Dipole	ipex(MHF)	45
ANT8	5G_Chain 0	WHAYU	56-001-000054Z	0.63 2.62 2.61 3.73	5.15~5.25 5.25~5.35 5.47~5.725 5.725~5.85	Dipole	ipex(MHF)	80

*Detail antenna specification please refer to antenna datasheet and/or antenna measurement report.

* Antenna port location

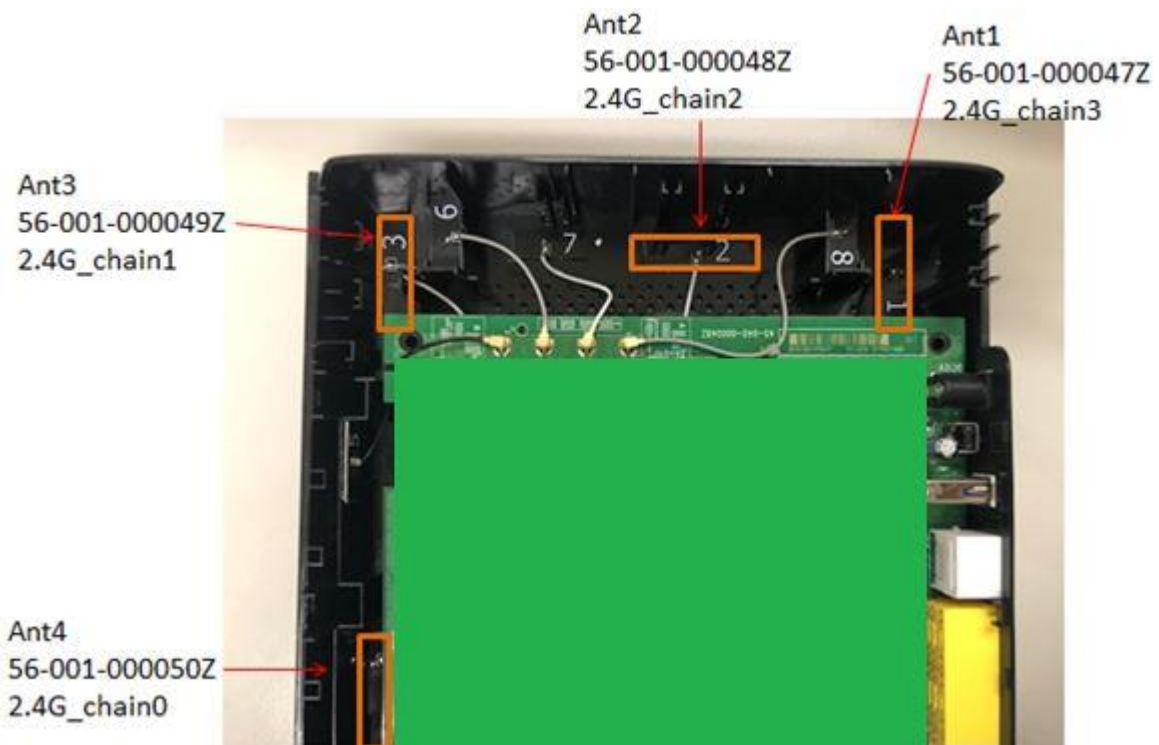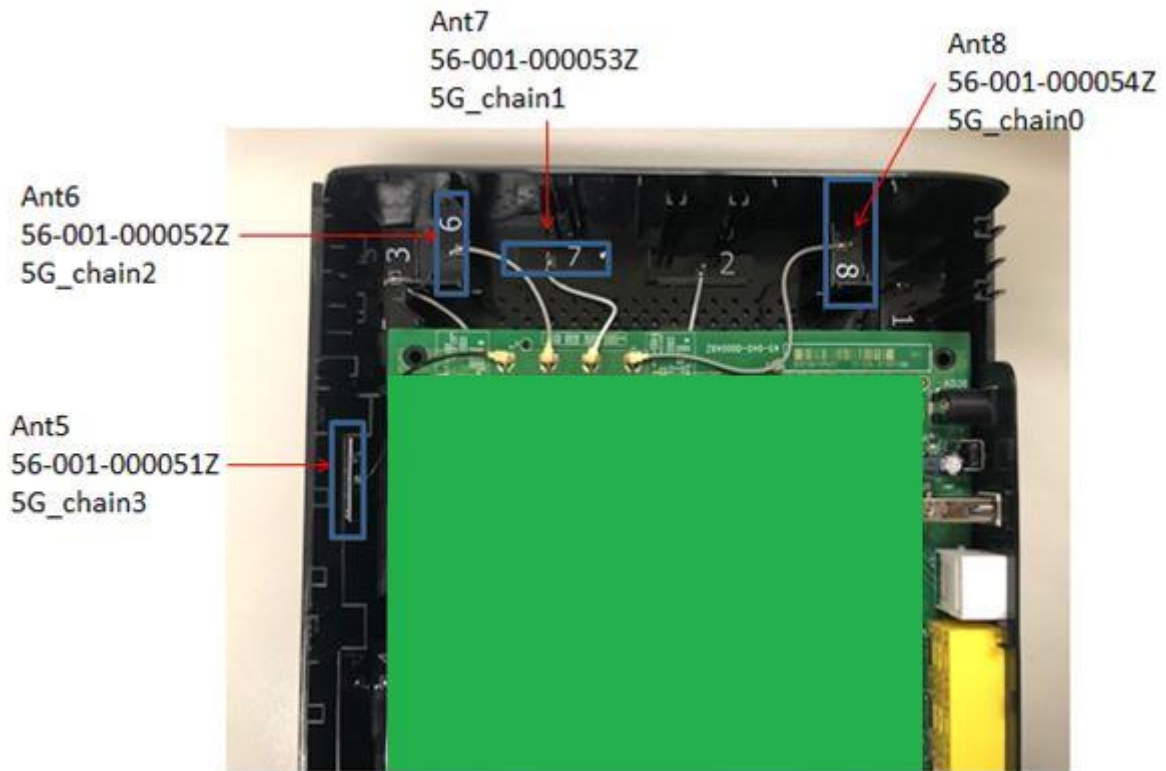

The directional antenna gain, please refer to the following table:

Frequency Range (GHz)	Directional Antenna Gain (dBi)	Antenna Type	Antenna Connector
2.4~2.4835	4.84	Dipole	ipex(MHF)
5.15~5.25	7.09		
5.25~5.35	7.39		
5.47~5.725	6.21		
5.725~5.85	6.42		

Note: Directional gain is the measured value according to KDB 662911 D03 Method of MIMO Antenna Gain Measurement. More detailed information, please refer to antenna specification.

2.5 Calculation Result

CDD Mode

Operation Mode	Evaluation Frequency (MHz)	Max. Average Power (mW)	Antenna Gain (dBi)	Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)	Result
WLAN (2.4GHz)	2412~2462	946.837	2.70	24	0.24358	1	Pass
WiFi 5GHz (U-NII-1)	5180-5240	769.183	3.48	24	0.23681	1	Pass
WiFi 5GHz (U-NII-2A)	5240-5320	248.382	3.22	24	0.07203	1	Pass
WiFi 5GHz (U-NII-2C)	5500-5720	237.878	3.79	24	0.07865	1	Pass
WiFi 5GHz (U-NII-3)	5745-5825	993.039	3.73	24	0.32384	1	Pass

Beamforming Mode

Operation Mode	Evaluation Frequency (MHz)	Max. Average Power (mW)	Antenna Gain (dBi)	Distance (cm)	Power Density (mW/cm ²)	Limit (mW/cm ²)	Result
WLAN (2.4GHz)	2412~2462	807.068	4.84	24	0.33984	1	Pass
WiFi 5GHz (U-NII-1)	5180-5240	708.866	7.09	24	0.50111	1	Pass
WiFi 5GHz (U-NII-2A)	5240-5320	181.289	7.39	24	0.13718	1	Pass
WiFi 5GHz (U-NII-2C)	5500-5720	237.878	6.21	24	0.13732	1	Pass
WiFi 5GHz (U-NII-3)	5745-5825	902.535	6.42	24	0.54680	1	Pass

Note:

- Determining compliance based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.

Conclusion:

The formula of calculated the MPE is:

$$CPD1 / LPD1 + CPD2 / LPD2 + \dots \text{etc.} < 1$$

CPD = Calculation power density

LPD = Limit of power density

CDD Mode

$$\text{WLAN (2.4GHz) + WLAN (5GHz)} = 0.24358 / 1 + 0.32384 / 1 = 0.56742$$

Beamforming Mode

$$\text{WLAN (2.4GHz) + WLAN (5GHz)} = 0.33984 / 1 + 0.54680 / 1 = 0.88664$$

Therefore the maximum calculations of above situations are less than the "1" limit.

--- END ---