




Modulation	be EHT40	Test Freq. (MHz)	6405
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):24 Humidity(%):63

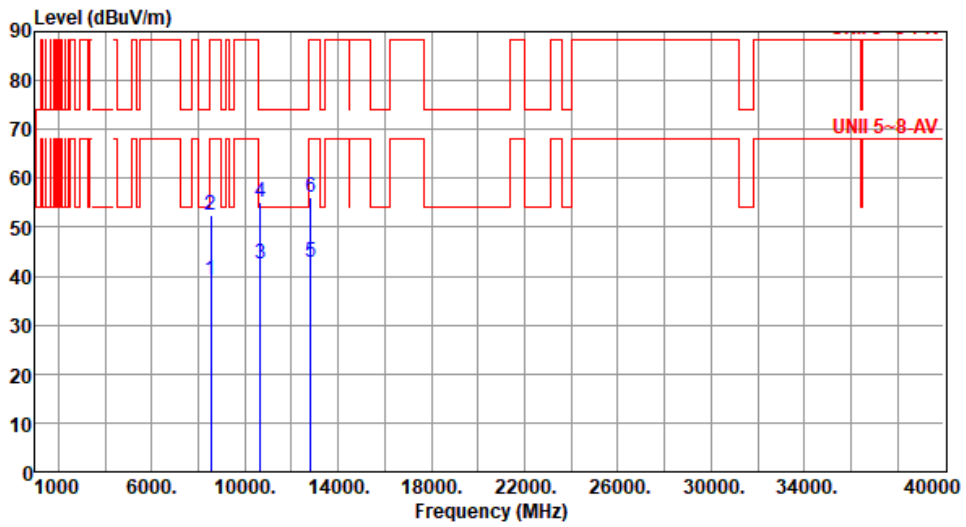

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8540.00	39.13	68.20	-29.07	33.62	5.51	Average	100	239
2	8540.00	52.31	88.20	-35.89	46.80	5.51	Peak	100	239
3	10675.00	42.57	54.00	-11.43	35.07	7.50	Average	100	115
4	10675.00	55.16	74.00	-18.84	47.66	7.50	Peak	100	115
5	12810.00	42.71	68.20	-25.49	36.59	6.12	Average	100	60
6	12810.00	56.23	88.20	-31.97	50.11	6.12	Peak	100	60

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6445
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 63

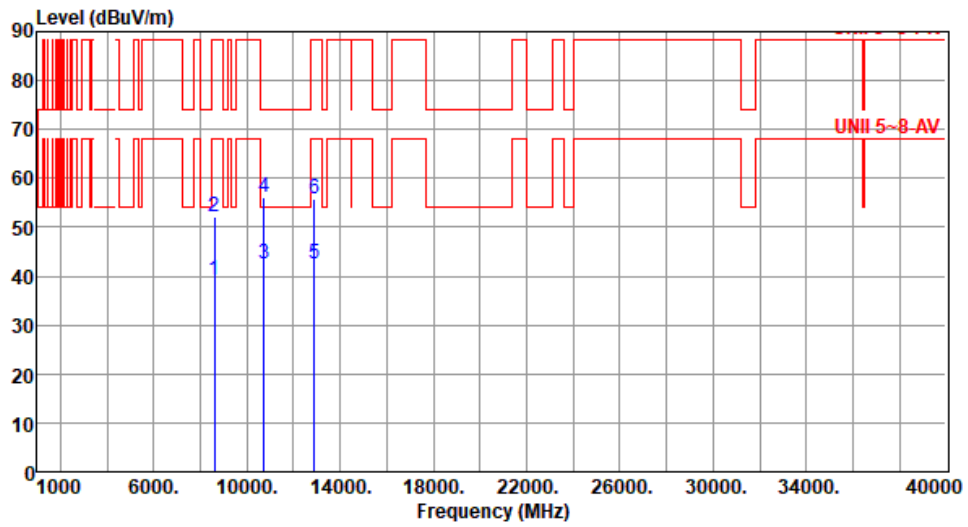

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8593.30	39.14	68.20	-29.06	33.45	5.69	Average	100	122
2	8593.30	52.27	88.20	-35.93	46.58	5.69	Peak	100	122
3	10741.60	42.46	54.00	-11.54	35.08	7.38	Average	100	274
4	10741.60	55.96	74.00	-18.04	48.58	7.38	Peak	100	274
5	12890.00	42.48	68.20	-25.72	36.50	5.98	Average	100	64
6	12890.00	55.82	88.20	-32.38	49.84	5.98	Peak	100	64

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6445
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 63

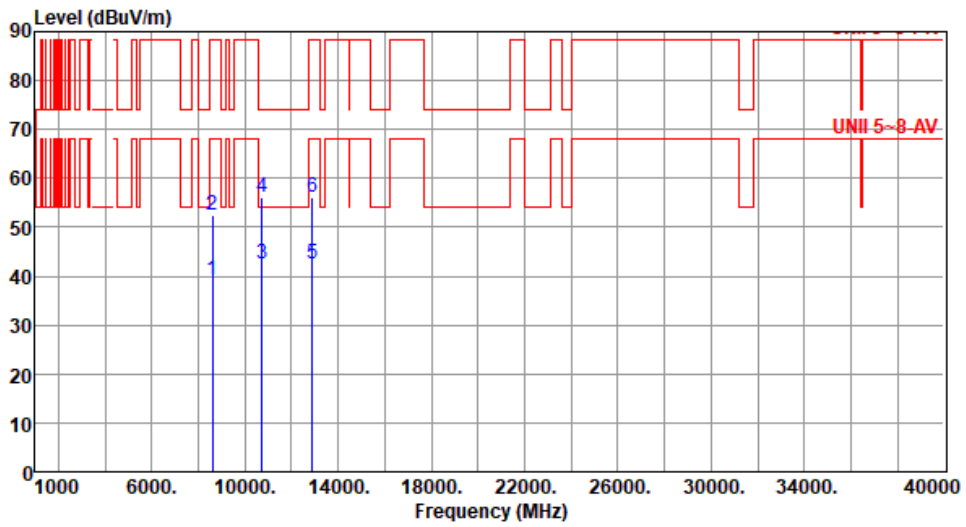

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8593.30	39.19	68.20	-29.01	33.50	5.69	Average	100	239
2	8593.30	52.42	88.20	-35.78	46.73	5.69	Peak	100	239
3	10741.60	42.48	54.00	-11.52	35.10	7.38	Average	100	128
4	10741.60	56.13	74.00	-17.87	48.75	7.38	Peak	100	128
5	12890.00	42.50	68.20	-25.70	36.52	5.98	Average	100	90
6	12890.00	56.04	88.20	-32.16	50.06	5.98	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6485
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 63

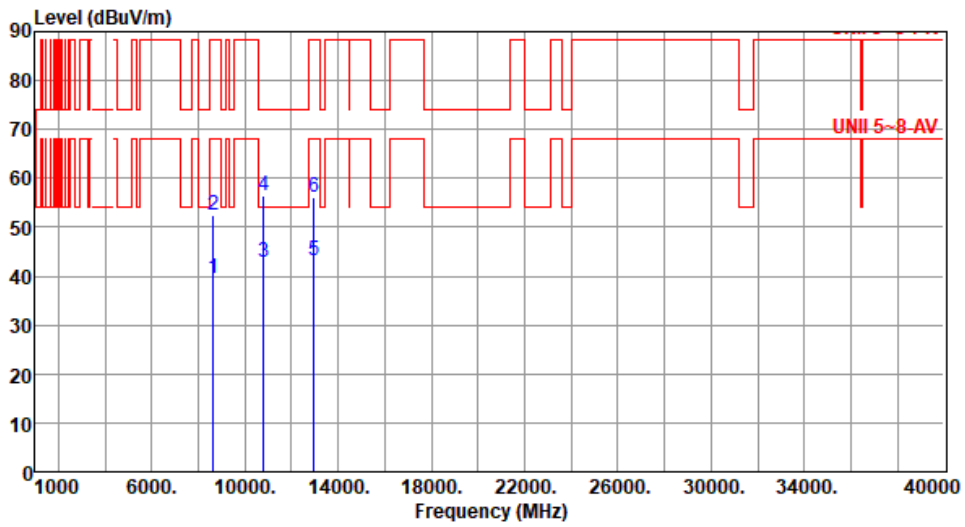

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8646.60	39.47	68.20	-28.73	33.59	5.88	Average	100	118
2	8646.60	52.49	88.20	-35.71	46.61	5.88	Peak	100	118
3	10808.30	42.81	54.00	-11.19	35.35	7.46	Average	100	240
4	10808.30	56.56	74.00	-17.44	49.10	7.46	Peak	100	240
5	12970.00	43.13	68.20	-25.07	37.01	6.12	Average	100	309
6	12970.00	56.16	88.20	-32.04	50.04	6.12	Peak	100	309

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6485
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 63

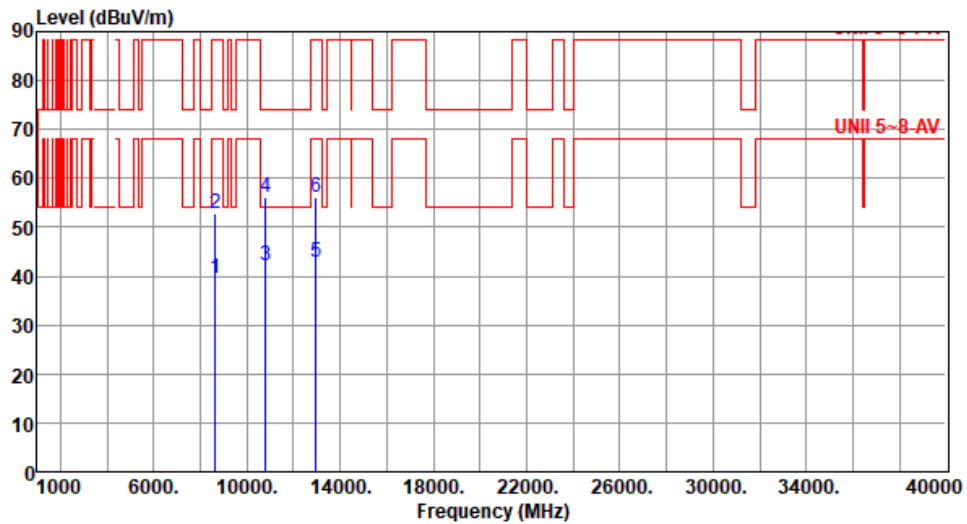

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8646.60	39.43	68.20	-28.77	33.55	5.88	Average	100	263
2	8646.60	52.67	88.20	-35.53	46.79	5.88	Peak	100	263
3	10808.30	42.06	54.00	-11.94	34.60	7.46	Average	100	156
4	10808.30	55.99	74.00	-18.01	48.53	7.46	Peak	100	156
5	12970.00	42.80	68.20	-25.40	36.68	6.12	Average	100	80
6	12970.00	56.10	88.20	-32.10	49.98	6.12	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6525
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 63

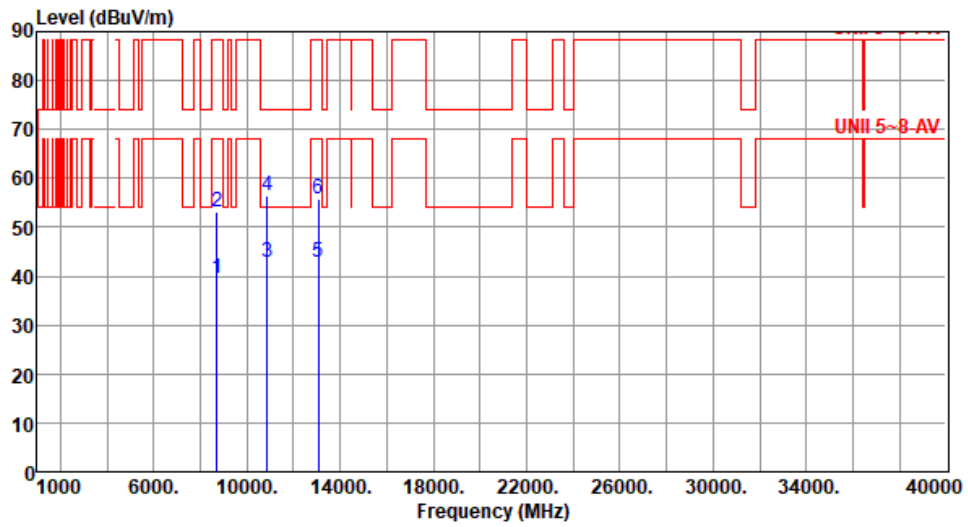

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8700.00	39.66	68.20	-28.54	33.60	6.06	Average	100	127
2	8700.00	53.21	88.20	-34.99	47.15	6.06	Peak	100	127
3	10875.00	42.68	54.00	-11.32	35.12	7.56	Average	100	254
4	10875.00	56.42	74.00	-17.58	48.86	7.56	Peak	100	254
5	13050.00	42.96	68.20	-25.24	37.06	5.90	Average	100	55
6	13050.00	55.96	88.20	-32.24	50.06	5.90	Peak	100	55

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6525
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):24 Humidity(%):63

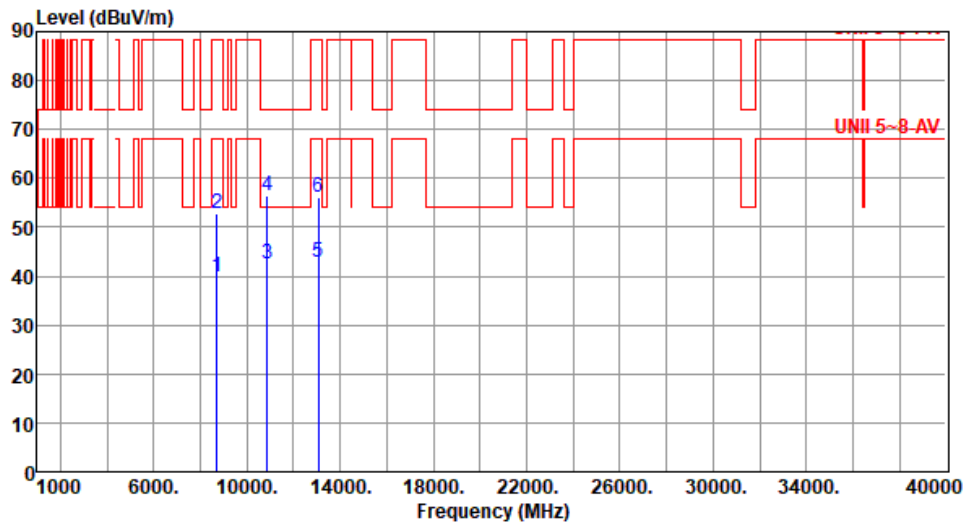

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8700.00	39.71	68.20	-28.49	33.65	6.06	Average	100	245
2	8700.00	52.75	88.20	-35.45	46.69	6.06	Peak	100	245
3	10875.00	42.64	54.00	-11.36	35.08	7.56	Average	100	112
4	10875.00	56.49	74.00	-17.51	48.93	7.56	Peak	100	112
5	13050.00	42.96	68.20	-25.24	37.06	5.90	Average	100	84
6	13050.00	56.01	88.20	-32.19	50.11	5.90	Peak	100	84

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6565
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 63

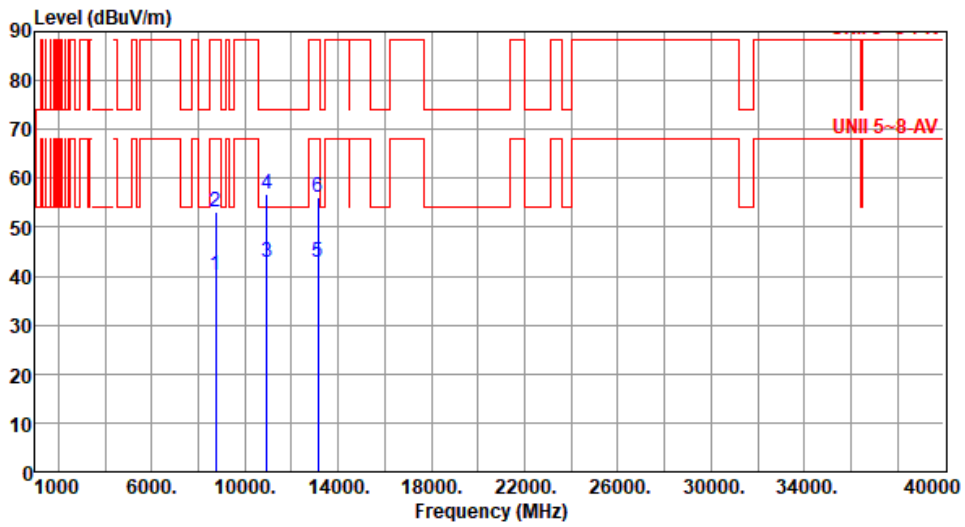

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8753.30	40.07	68.20	-28.13	33.73	6.34	Average	100	124
2	8753.30	53.03	88.20	-35.17	46.69	6.34	Peak	100	124
3	10941.60	42.92	54.00	-11.08	35.26	7.66	Average	100	242
4	10941.60	56.69	74.00	-17.31	49.03	7.66	Peak	100	242
5	13130.00	42.91	68.20	-25.29	37.13	5.78	Average	100	312
6	13130.00	55.98	88.20	-32.22	50.20	5.78	Peak	100	312

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6565
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):24 Humidity(%):63

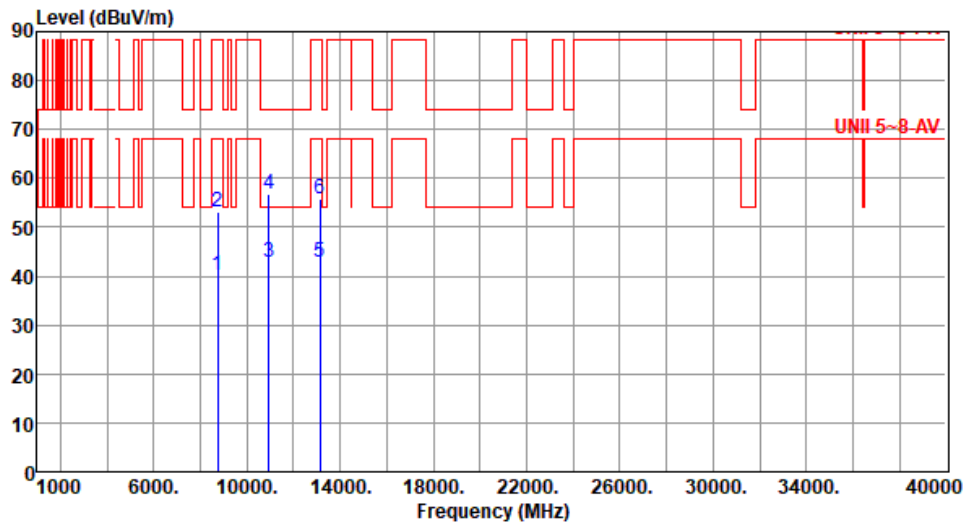

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8753.30	40.04	68.20	-28.16	33.70	6.34	Average	100	226
2	8753.30	53.07	88.20	-35.13	46.73	6.34	Peak	100	226
3	10941.60	42.90	54.00	-11.10	35.24	7.66	Average	100	109
4	10941.60	56.65	74.00	-17.35	48.99	7.66	Peak	100	109
5	13130.00	42.91	68.20	-25.29	37.13	5.78	Average	100	13
6	13130.00	55.84	88.20	-32.36	50.06	5.78	Peak	100	13

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6725
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):24 Humidity(%):63

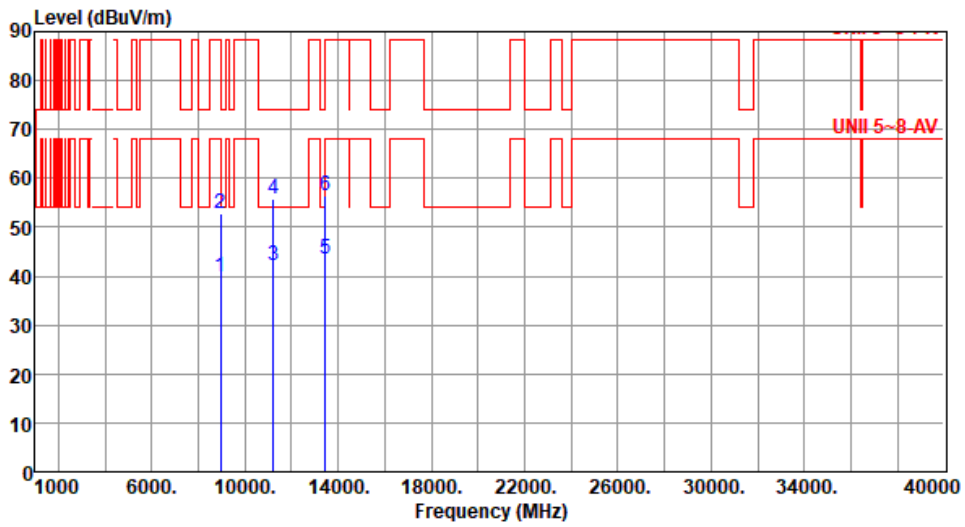

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8966.60	39.82	68.20	-28.38	33.85	5.97	Average	100	137
2	8966.60	52.77	88.20	-35.43	46.80	5.97	Peak	100	137
3	11208.30	42.16	54.00	-11.84	35.49	6.67	Average	100	220
4	11208.30	55.87	74.00	-18.13	49.20	6.67	Peak	100	220
5	13450.00	43.41	68.20	-24.79	37.40	6.01	Average	100	92
6	13450.00	56.58	88.20	-31.62	50.57	6.01	Peak	100	92

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6725
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):24 Humidity(%):63

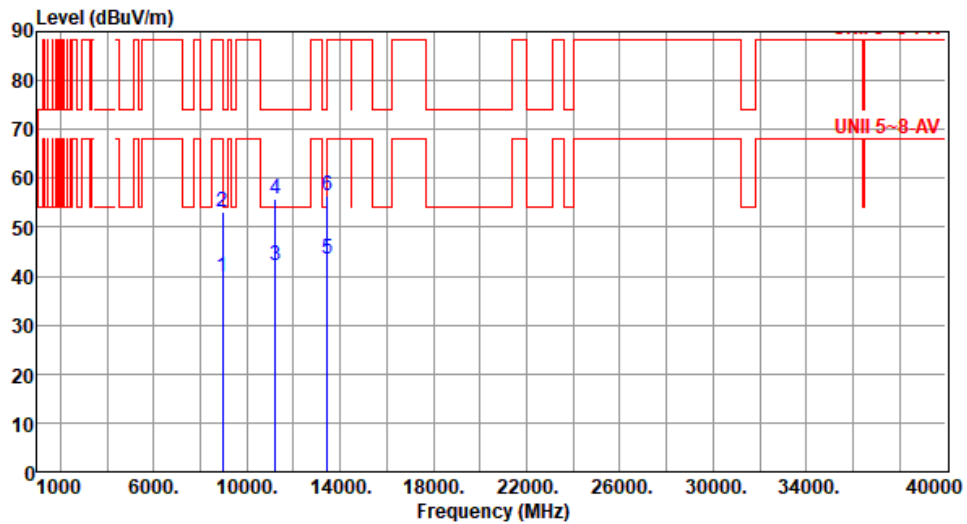

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8966.60	39.83	68.20	-28.37	33.86	5.97	Average	100	248
2	8966.60	53.17	88.20	-35.03	47.20	5.97	Peak	100	248
3	11208.30	42.20	54.00	-11.80	35.53	6.67	Average	100	123
4	11208.30	55.83	74.00	-18.17	49.16	6.67	Peak	100	123
5	13450.00	43.41	68.20	-24.79	37.40	6.01	Average	100	66
6	13450.00	56.50	88.20	-31.70	50.49	6.01	Peak	100	66

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6845
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):24 Humidity(%):63

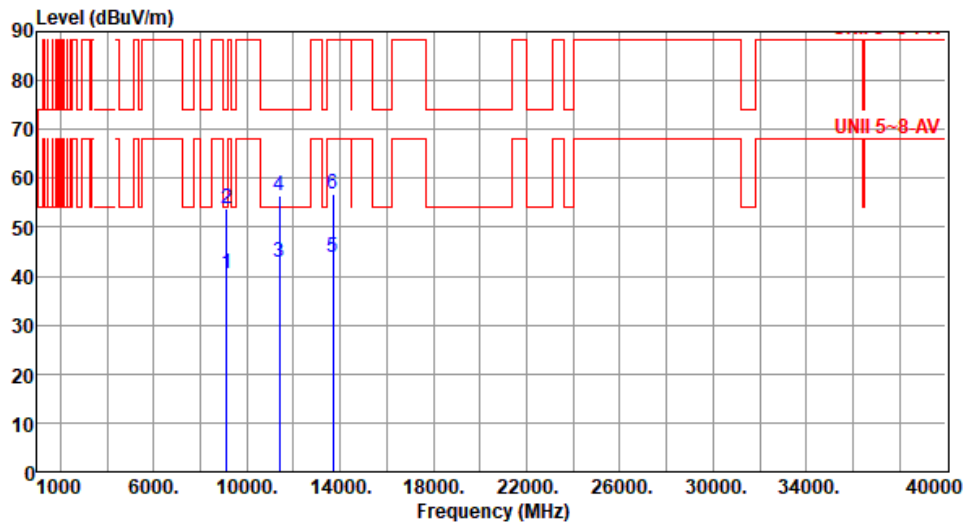

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9126.60	40.65	54.00	-13.35	34.09	6.56	Average	100	126
2	9126.60	53.90	74.00	-20.10	47.34	6.56	Peak	100	126
3	11408.30	42.80	54.00	-11.20	35.61	7.19	Average	100	262
4	11408.30	56.42	74.00	-17.58	49.23	7.19	Peak	100	262
5	13690.00	43.71	68.20	-24.49	37.71	6.00	Average	100	320
6	13690.00	56.77	88.20	-31.43	50.77	6.00	Peak	100	320

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6845
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 24 Humidity(%): 63

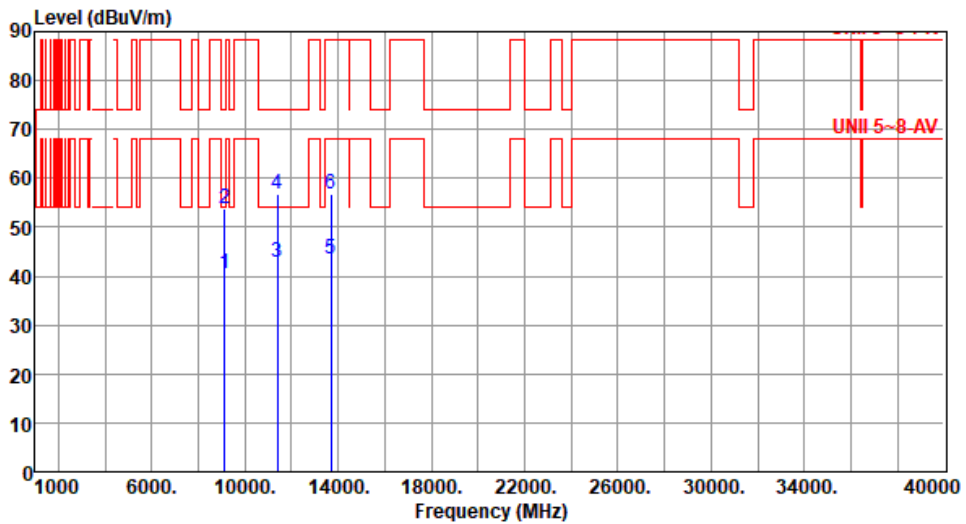

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9126.60	40.65	54.00	-13.35	34.09	6.56	Average	100	221
2	9126.60	53.94	74.00	-20.06	47.38	6.56	Peak	100	221
3	11408.30	42.86	54.00	-11.14	35.67	7.19	Average	100	135
4	11408.30	56.83	74.00	-17.17	49.64	7.19	Peak	100	135
5	13690.00	43.67	68.20	-24.53	37.67	6.00	Average	100	74
6	13690.00	56.86	88.20	-31.34	50.86	6.00	Peak	100	74

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6885
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 25 Humidity(%): 61

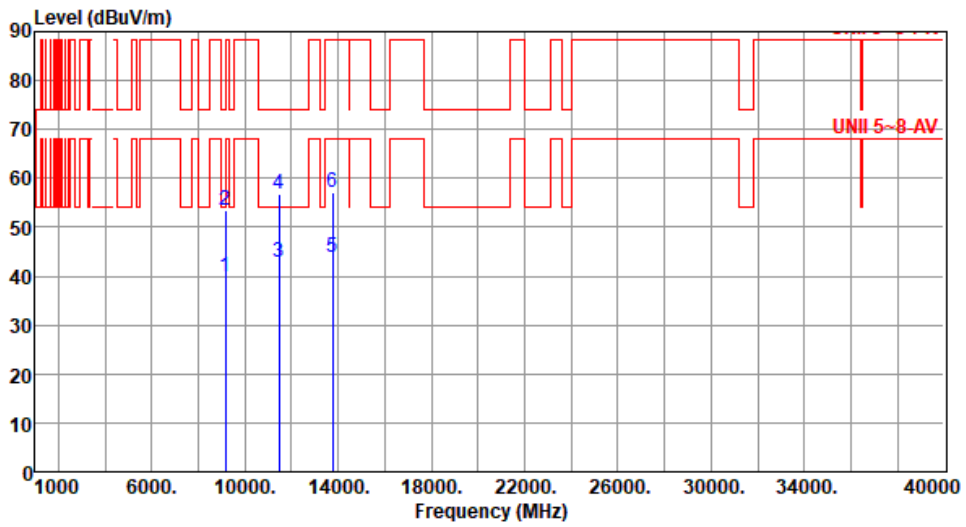

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9180.00	40.00	54.00	-14.00	33.26	6.74	Average	100	133
2	9180.00	53.55	74.00	-20.45	46.81	6.74	Peak	100	133
3	11475.00	42.94	54.00	-11.06	35.68	7.26	Average	100	231
4	11475.00	56.63	74.00	-17.37	49.37	7.26	Peak	100	231
5	13770.00	43.94	68.20	-24.26	37.82	6.12	Average	100	319
6	13770.00	57.00	88.20	-31.20	50.88	6.12	Peak	100	319

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6885
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

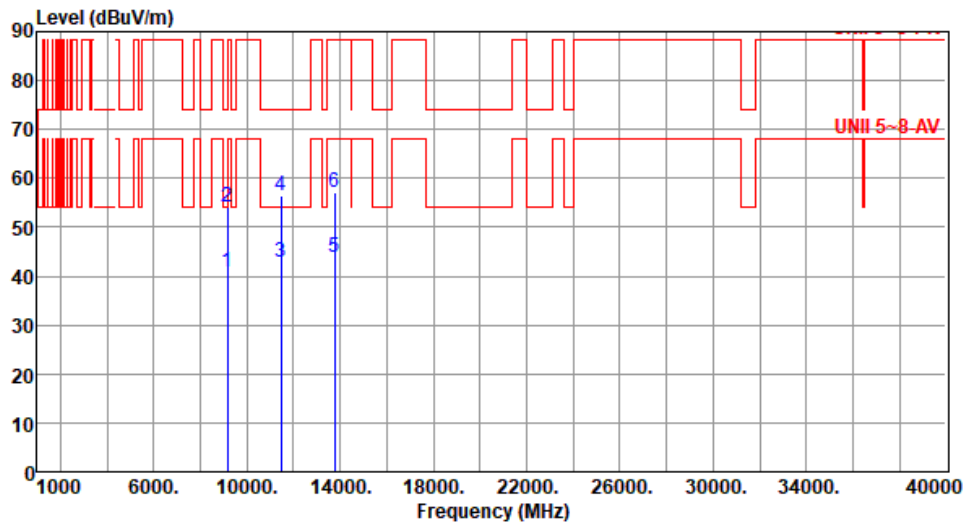

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9180.00	40.80	54.00	-13.20	34.06	6.74	Average	100	254
2	9180.00	54.23	74.00	-19.77	47.49	6.74	Peak	100	254
3	11475.00	42.92	54.00	-11.08	35.66	7.26	Average	100	134
4	11475.00	56.52	74.00	-17.48	49.26	7.26	Peak	100	134
5	13770.00	43.85	68.20	-24.35	37.73	6.12	Average	100	66
6	13770.00	57.04	88.20	-31.16	50.92	6.12	Peak	100	66

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6925
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

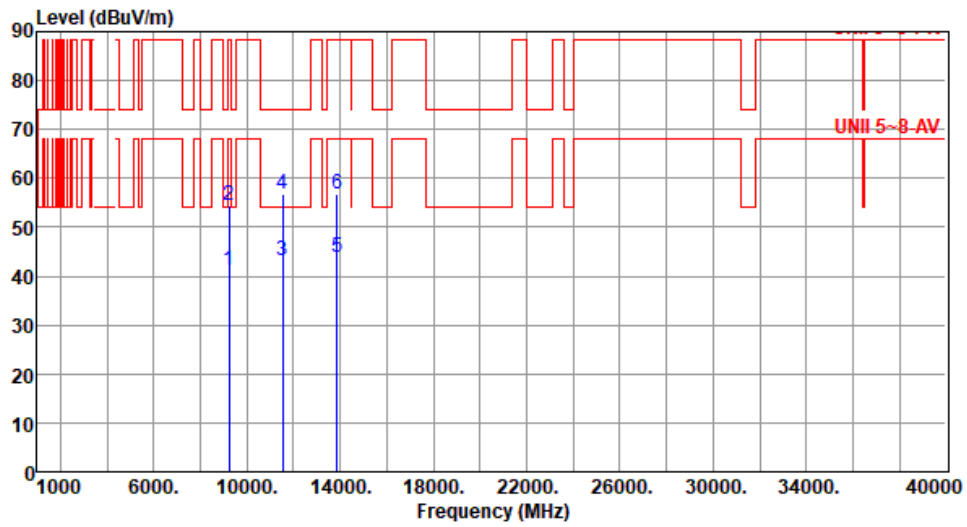

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9233.30	41.25	68.20	-26.95	34.33	6.92	Average	100	137
2	9233.30	54.32	88.20	-33.88	47.40	6.92	Peak	100	137
3	11541.60	43.01	54.00	-10.99	35.67	7.34	Average	100	247
4	11541.60	56.79	74.00	-17.21	49.45	7.34	Peak	100	247
5	13850.00	43.91	68.20	-24.29	37.86	6.05	Average	100	322
6	13850.00	56.94	88.20	-31.26	50.89	6.05	Peak	100	322

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	6925
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

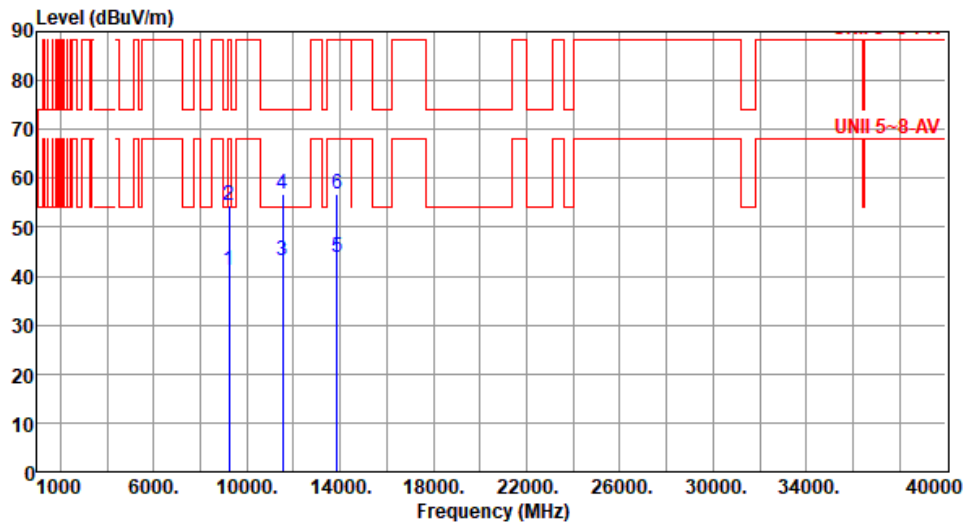

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9233.30	41.18	68.20	-27.02	34.26	6.92	Average	100	235
2	9233.30	54.41	88.20	-33.79	47.49	6.92	Peak	100	235
3	11541.60	43.18	54.00	-10.82	35.84	7.34	Average	100	123
4	11541.60	56.75	74.00	-17.25	49.41	7.34	Peak	100	123
5	13850.00	43.89	68.20	-24.31	37.84	6.05	Average	100	83
6	13850.00	56.95	88.20	-31.25	50.90	6.05	Peak	100	83

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	7005
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

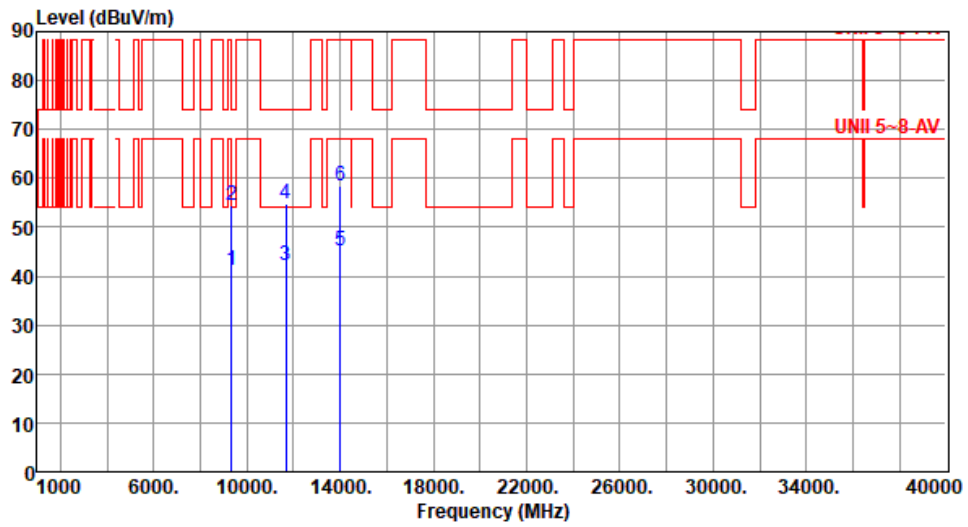

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9340.00	41.16	54.00	-12.84	34.10	7.06	Average	100	137
2	9340.00	54.46	74.00	-19.54	47.40	7.06	Peak	100	137
3	11675.00	42.23	54.00	-11.77	35.71	6.52	Average	100	248
4	11675.00	54.87	74.00	-19.13	48.35	6.52	Peak	100	248
5	14010.00	45.07	68.20	-23.13	38.32	6.75	Average	100	70
6	14010.00	58.34	88.20	-29.86	51.59	6.75	Peak	100	70

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	7005
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

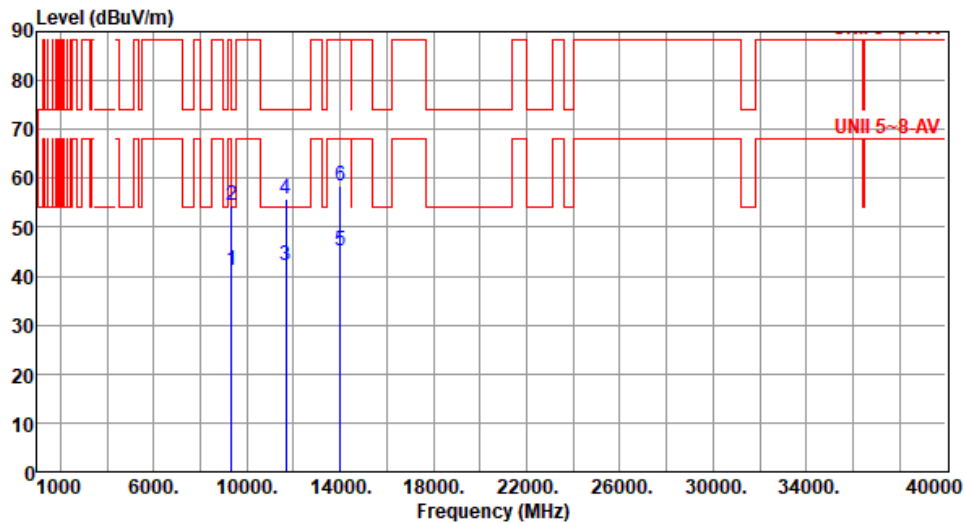

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9340.00	41.26	54.00	-12.74	34.20	7.06	Average	100	237
2	9340.00	54.62	74.00	-19.38	47.56	7.06	Peak	100	237
3	11675.00	42.12	54.00	-11.88	35.60	6.52	Average	100	134
4	11675.00	55.86	74.00	-18.14	49.34	6.52	Peak	100	134
5	14010.00	45.09	68.20	-23.11	38.34	6.75	Average	100	85
6	14010.00	58.37	88.20	-29.83	51.62	6.75	Peak	100	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	7085
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

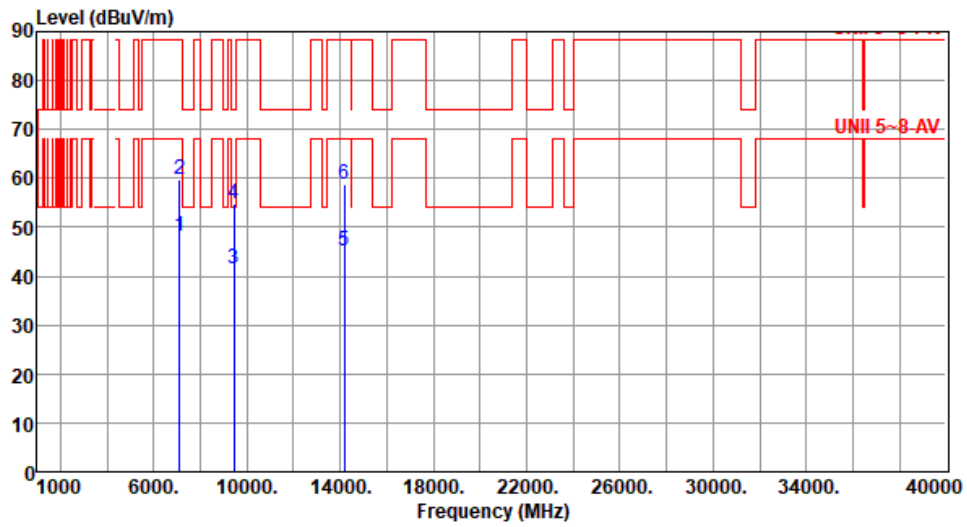

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	48.24	68.20	-19.96	43.38	4.86	Average	190	267
2	7125.00	59.72	88.20	-28.48	54.86	4.86	Peak	190	267
3	9446.60	41.58	54.00	-12.42	34.41	7.17	Average	100	149
4	9446.60	54.84	74.00	-19.16	47.67	7.17	Peak	100	149
5	14170.00	45.03	68.20	-23.17	38.24	6.79	Average	100	326
6	14170.00	58.74	88.20	-29.46	51.95	6.79	Peak	100	326

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT40	Test Freq. (MHz)	7085
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

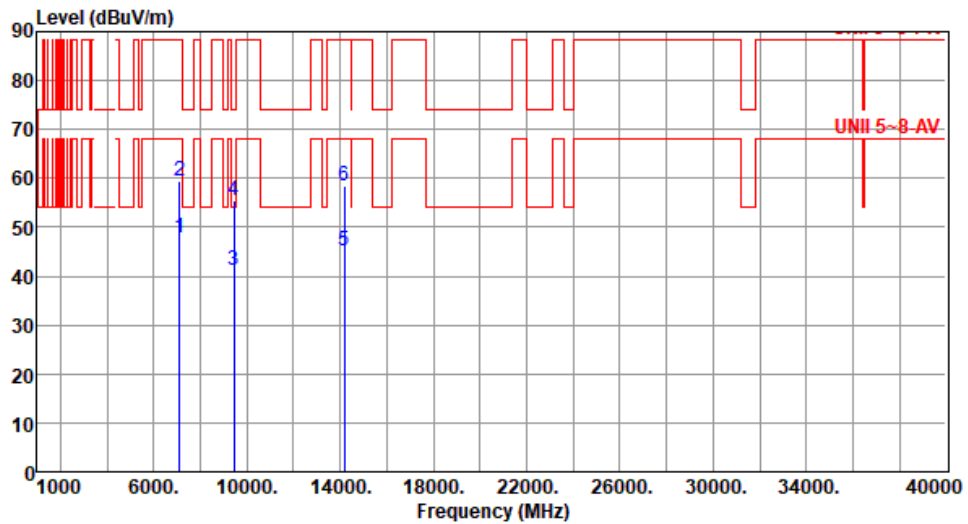

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	47.87	68.20	-20.33	43.01	4.86	Average	173	226
2	7125.00	59.37	88.20	-28.83	54.51	4.86	Peak	173	226
3	9446.60	41.26	54.00	-12.74	34.09	7.17	Average	100	240
4	9446.60	55.60	74.00	-18.40	48.43	7.17	Peak	100	240
5	14170.00	45.00	68.20	-23.20	38.21	6.79	Average	100	76
6	14170.00	58.31	88.20	-29.89	51.52	6.79	Peak	100	76

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT80

Modulation	be EHT80	Test Freq. (MHz)	5985
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

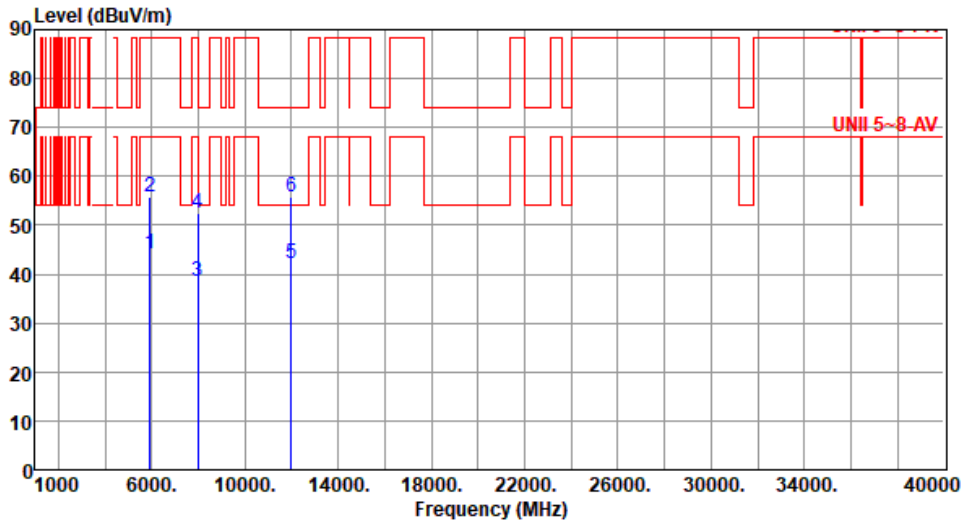

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	44.15	68.20	-24.05	43.02	1.13	Average	162	243
2	5925.00	55.72	88.20	-32.48	54.59	1.13	Peak	162	243
3	7980.00	38.46	68.20	-29.74	32.90	5.56	Average	100	137
4	7980.00	52.39	88.20	-35.81	46.83	5.56	Peak	100	137
5	11970.00	42.26	54.00	-11.74	36.09	6.17	Average	100	334
6	11970.00	55.72	74.00	-18.28	49.55	6.17	Peak	100	334

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	5985
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

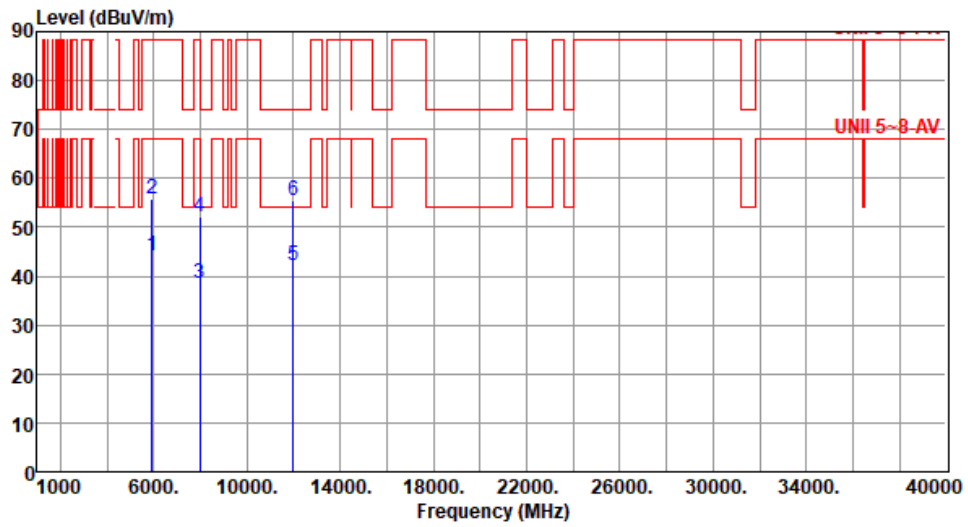

	Freq. MHz	Emission level dBUV/m	Limit dBUV/m	Margin dB	SA reading dBUV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	44.24	68.20	-23.96	43.11	1.13	Average	100	245
2	5925.00	55.82	88.20	-32.38	54.69	1.13	Peak	100	245
3	7980.00	38.45	68.20	-29.75	32.89	5.56	Average	100	228
4	7980.00	52.09	88.20	-36.11	46.53	5.56	Peak	100	228
5	11970.00	42.32	54.00	-11.68	36.15	6.17	Average	100	88
6	11970.00	55.51	74.00	-18.49	49.34	6.17	Peak	100	88

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT80	Test Freq. (MHz)	6145
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

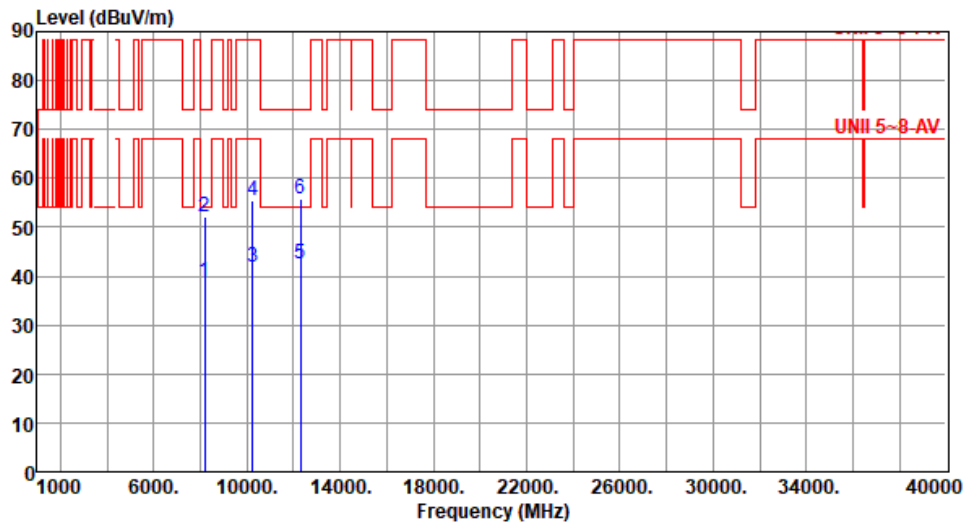

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8193.30	38.72	54.00	-15.28	33.13	5.59	Average	100	121
2	8193.30	52.21	74.00	-21.79	46.62	5.59	Peak	100	121
3	10241.60	41.79	68.20	-26.41	34.69	7.10	Average	100	211
4	10241.60	55.36	88.20	-32.84	48.26	7.10	Peak	100	211
5	12290.00	42.40	54.00	-11.60	36.21	6.19	Average	100	341
6	12290.00	55.86	74.00	-18.14	49.67	6.19	Peak	100	341

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6145
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

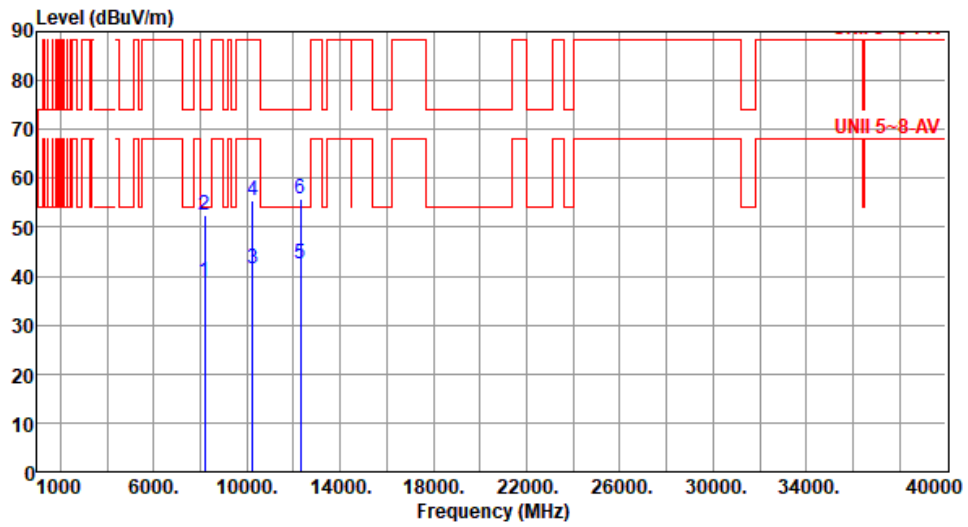

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8193.30	38.88	54.00	-15.12	33.29	5.59	Average	100	196
2	8193.30	52.42	74.00	-21.58	46.83	5.59	Peak	100	196
3	10241.60	41.67	68.20	-26.53	34.57	7.10	Average	100	248
4	10241.60	55.34	88.20	-32.86	48.24	7.10	Peak	100	248
5	12290.00	42.49	54.00	-11.51	36.30	6.19	Average	100	84
6	12290.00	55.83	74.00	-18.17	49.64	6.19	Peak	100	84

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6385
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

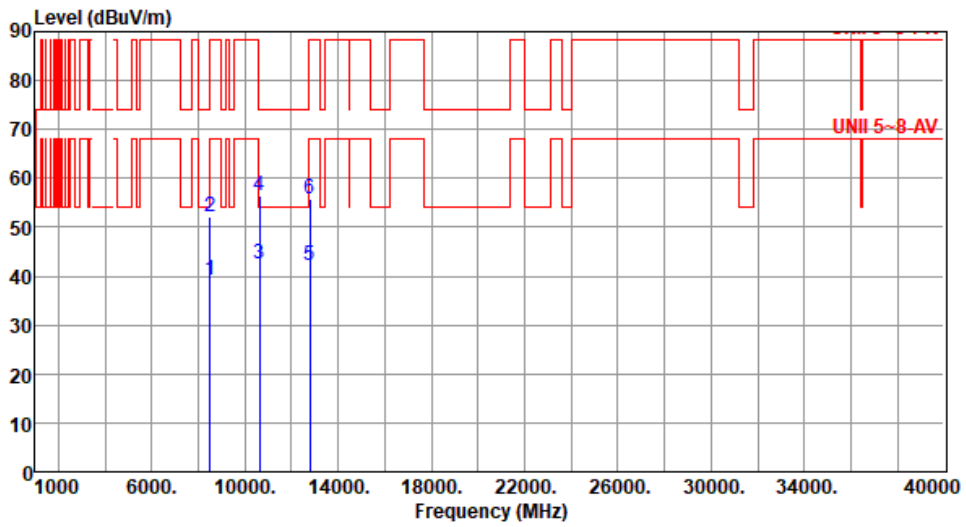

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8513.30	39.03	68.20	-29.17	33.65	5.38	Average	100	124
2	8513.30	52.09	88.20	-36.11	46.71	5.38	Peak	100	124
3	10641.60	42.50	54.00	-11.50	34.90	7.60	Average	100	216
4	10641.60	56.37	74.00	-17.63	48.77	7.60	Peak	100	216
5	12770.00	42.32	68.20	-25.88	36.43	5.89	Average	100	326
6	12770.00	55.75	88.20	-32.45	49.86	5.89	Peak	100	326

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6385
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 25 Humidity(%): 61

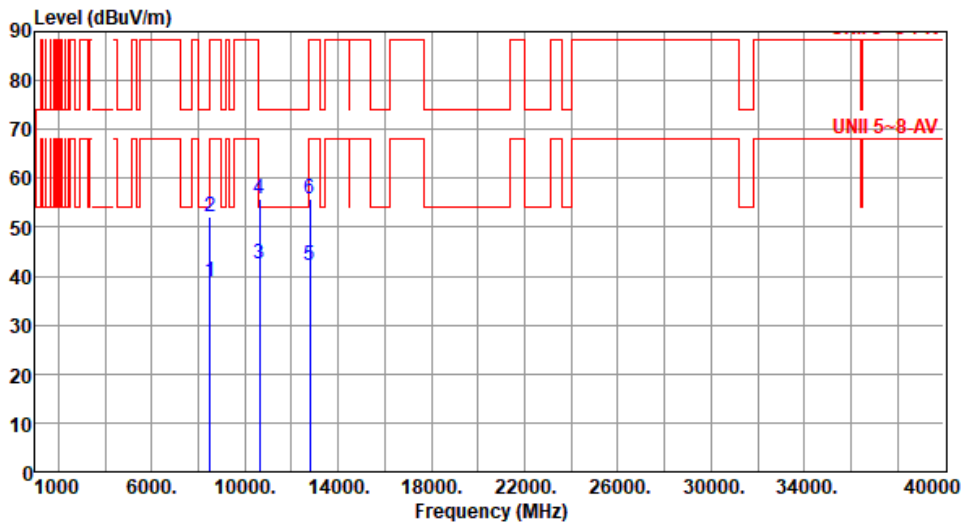

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8513.30	38.80	68.20	-29.40	33.42	5.38	Average	100	233
2	8513.30	52.14	88.20	-36.06	46.76	5.38	Peak	100	233
3	10641.60	42.49	54.00	-11.51	34.89	7.60	Average	100	137
4	10641.60	55.94	74.00	-18.06	48.34	7.60	Peak	100	137
5	12770.00	42.33	68.20	-25.87	36.44	5.89	Average	100	344
6	12770.00	55.77	88.20	-32.43	49.88	5.89	Peak	100	344

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6465
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

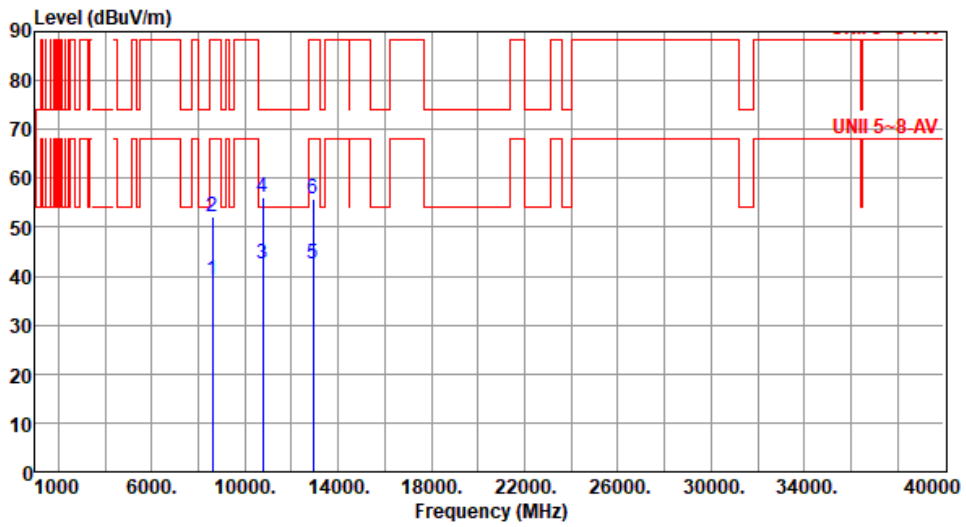

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8620.00	39.34	68.20	-28.86	33.56	5.78	Average	100	133
2	8620.00	52.25	88.20	-35.95	46.47	5.78	Peak	100	133
3	10775.00	42.49	54.00	-11.51	35.08	7.41	Average	100	235
4	10775.00	56.16	74.00	-17.84	48.75	7.41	Peak	100	235
5	12930.00	42.60	68.20	-25.60	36.56	6.04	Average	100	335
6	12930.00	55.89	88.20	-32.31	49.85	6.04	Peak	100	335

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6465
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

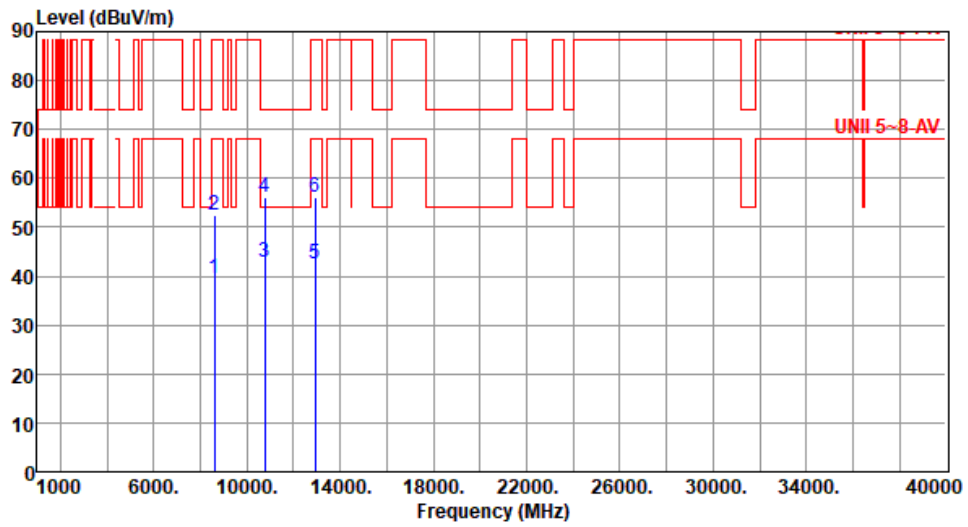

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8620.00	39.38	68.20	-28.82	33.60	5.78	Average	100	233
2	8620.00	52.53	88.20	-35.67	46.75	5.78	Peak	100	233
3	10775.00	42.69	54.00	-11.31	35.28	7.41	Average	100	218
4	10775.00	55.97	74.00	-18.03	48.56	7.41	Peak	100	218
5	12930.00	42.59	68.20	-25.61	36.55	6.04	Average	100	76
6	12930.00	56.09	88.20	-32.11	50.05	6.04	Peak	100	76

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6545
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

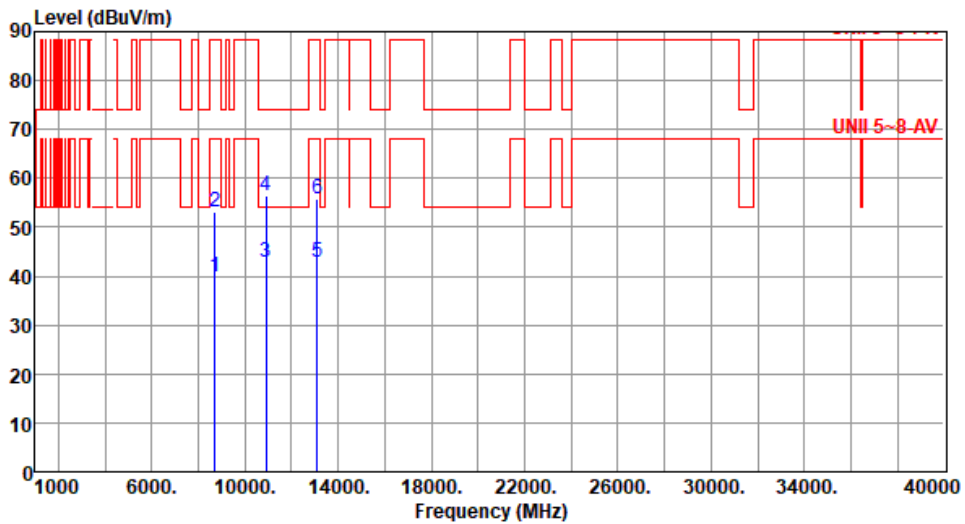

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8726.60	39.97	68.20	-28.23	33.76	6.21	Average	100	136
2	8726.60	53.00	88.20	-35.20	46.79	6.21	Peak	100	136
3	10908.30	42.83	54.00	-11.17	35.21	7.62	Average	100	263
4	10908.30	56.47	74.00	-17.53	48.85	7.62	Peak	100	263
5	13090.00	42.78	68.20	-25.42	37.09	5.69	Average	100	346
6	13090.00	55.73	88.20	-32.47	50.04	5.69	Peak	100	346

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6545
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

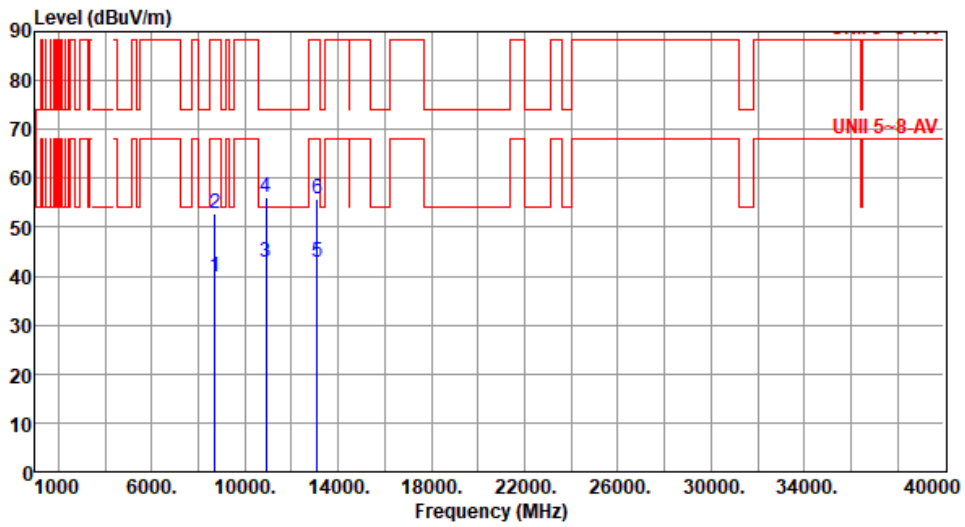

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8726.60	39.92	68.20	-28.28	33.71	6.21	Average	100	237
2	8726.60	52.90	88.20	-35.30	46.69	6.21	Peak	100	237
3	10908.30	42.84	54.00	-11.16	35.22	7.62	Average	100	135
4	10908.30	56.14	74.00	-17.86	48.52	7.62	Peak	100	135
5	13090.00	42.74	68.20	-25.46	37.05	5.69	Average	100	80
6	13090.00	55.72	88.20	-32.48	50.03	5.69	Peak	100	80

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6625
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

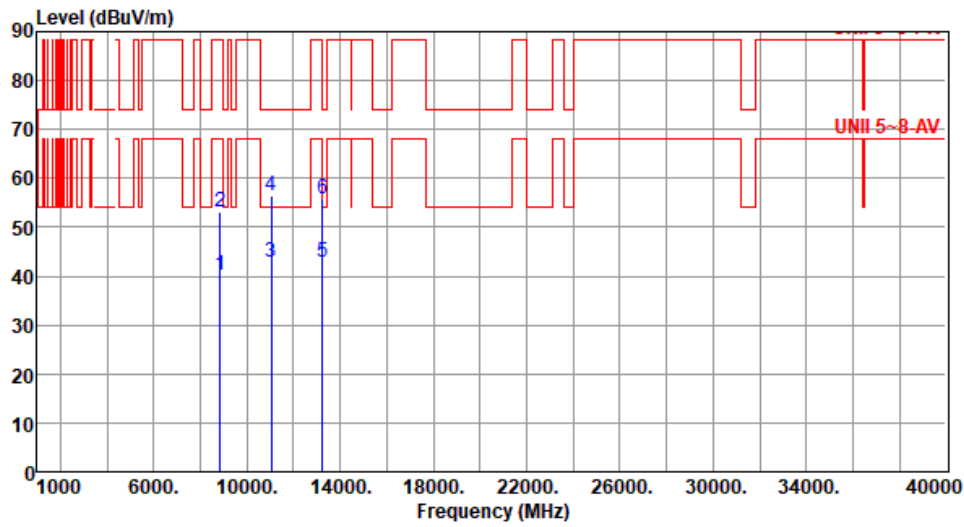

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8833.30	40.04	68.20	-28.16	33.81	6.23	Average	100	131
2	8833.30	53.05	88.20	-35.15	46.82	6.23	Peak	100	131
3	11041.60	42.94	54.00	-11.06	35.41	7.53	Average	100	241
4	11041.60	56.58	74.00	-17.42	49.05	7.53	Peak	100	241
5	13250.00	42.91	54.00	-11.09	37.26	5.65	Average	100	323
6	13250.00	55.94	74.00	-18.06	50.29	5.65	Peak	100	323

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6625
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

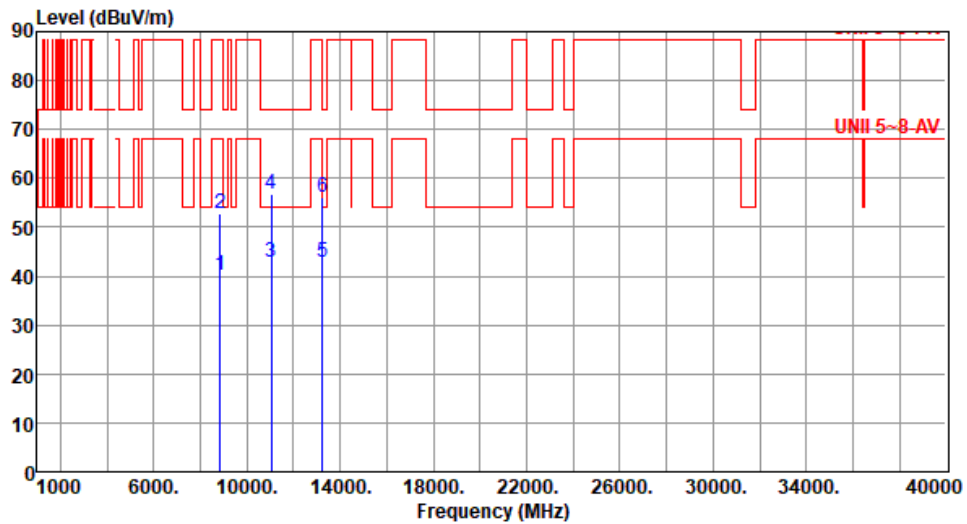

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8833.30	40.02	68.20	-28.18	33.79	6.23	Average	100	279
2	8833.30	52.89	88.20	-35.31	46.66	6.23	Peak	100	279
3	11041.60	42.96	54.00	-11.04	35.43	7.53	Average	100	134
4	11041.60	56.66	74.00	-17.34	49.13	7.53	Peak	100	134
5	13250.00	42.95	54.00	-11.05	37.30	5.65	Average	100	83
6	13250.00	55.99	74.00	-18.01	50.34	5.65	Peak	100	83

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6705
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

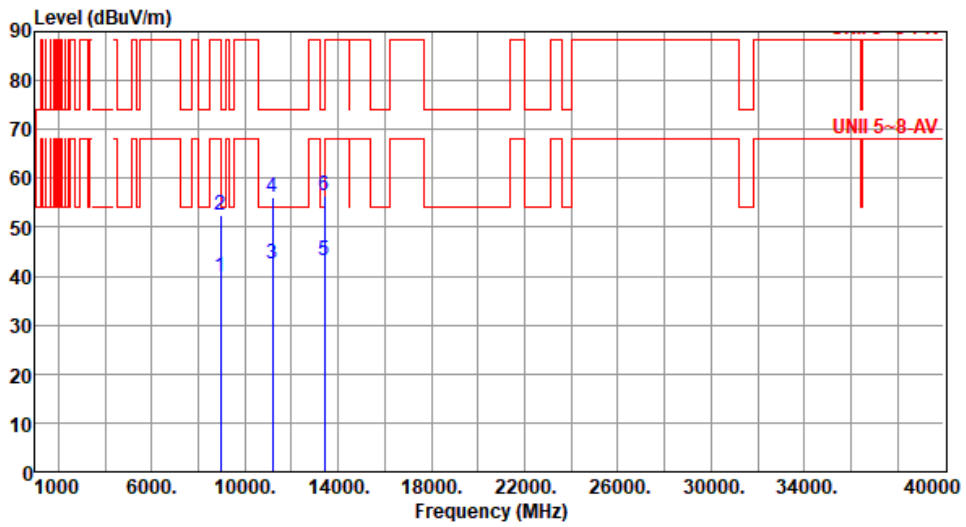

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8940.00	40.00	68.20	-28.20	34.03	5.97	Average	100	124
2	8940.00	52.57	88.20	-35.63	46.60	5.97	Peak	100	124
3	11175.00	42.46	54.00	-11.54	35.63	6.83	Average	100	235
4	11175.00	56.06	74.00	-17.94	49.23	6.83	Peak	100	235
5	13410.00	43.30	68.20	-24.90	37.40	5.90	Average	100	334
6	13410.00	56.36	88.20	-31.84	50.46	5.90	Peak	100	334

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6705
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

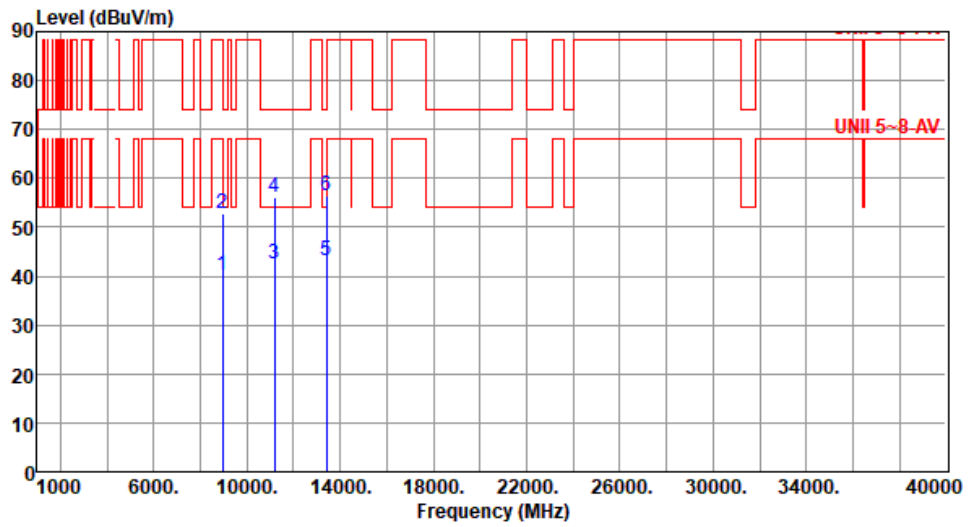

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8940.00	40.03	68.20	-28.17	34.06	5.97	Average	100	234
2	8940.00	52.81	88.20	-35.39	46.84	5.97	Peak	100	234
3	11175.00	42.36	54.00	-11.64	35.53	6.83	Average	100	124
4	11175.00	56.13	74.00	-17.87	49.30	6.83	Peak	100	124
5	13410.00	43.29	68.20	-24.91	37.39	5.90	Average	100	90
6	13410.00	56.33	88.20	-31.87	50.43	5.90	Peak	100	90

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6785
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

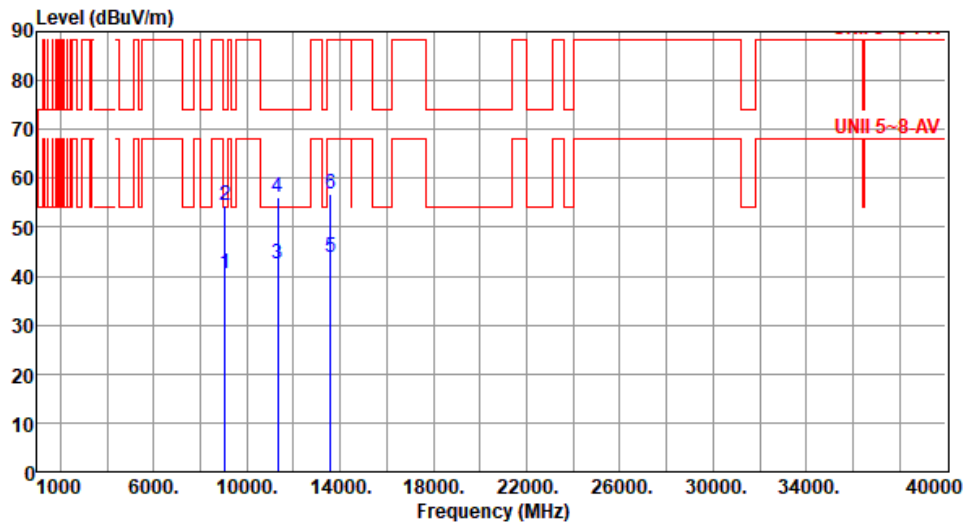

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9046.60	40.50	54.00	-13.50	34.23	6.27	Average	100	134
2	9046.60	54.34	74.00	-19.66	48.07	6.27	Peak	100	134
3	11308.30	42.57	54.00	-11.43	35.69	6.88	Average	100	249
4	11308.30	56.09	74.00	-17.91	49.21	6.88	Peak	100	249
5	13570.00	43.92	68.20	-24.28	37.63	6.29	Average	100	337
6	13570.00	56.93	88.20	-31.27	50.64	6.29	Peak	100	337

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6785
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

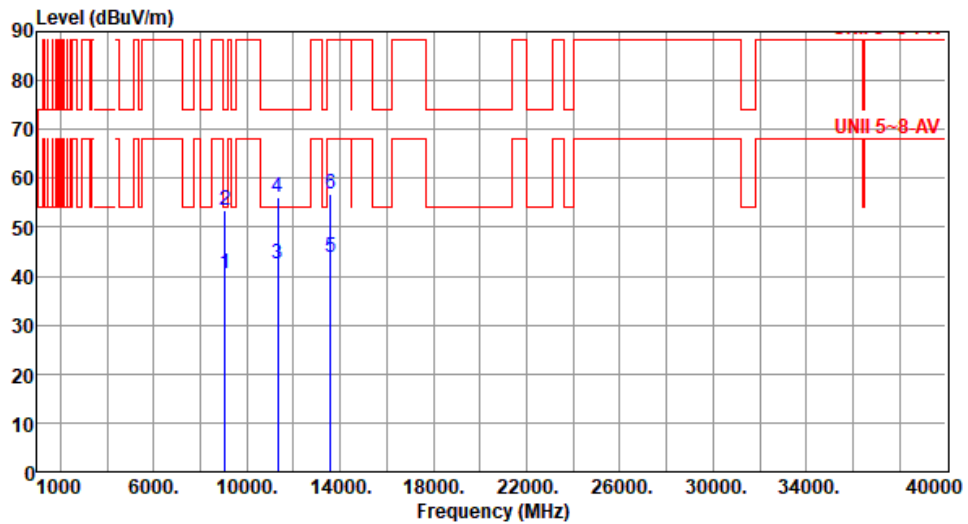

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9046.60	40.50	54.00	-13.50	34.23	6.27	Average	100	223
2	9046.60	53.61	74.00	-20.39	47.34	6.27	Peak	100	223
3	11308.30	42.36	54.00	-11.64	35.48	6.88	Average	100	149
4	11308.30	56.03	74.00	-17.97	49.15	6.88	Peak	100	149
5	13570.00	43.84	68.20	-24.36	37.55	6.29	Average	100	68
6	13570.00	56.82	88.20	-31.38	50.53	6.29	Peak	100	68

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6865
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

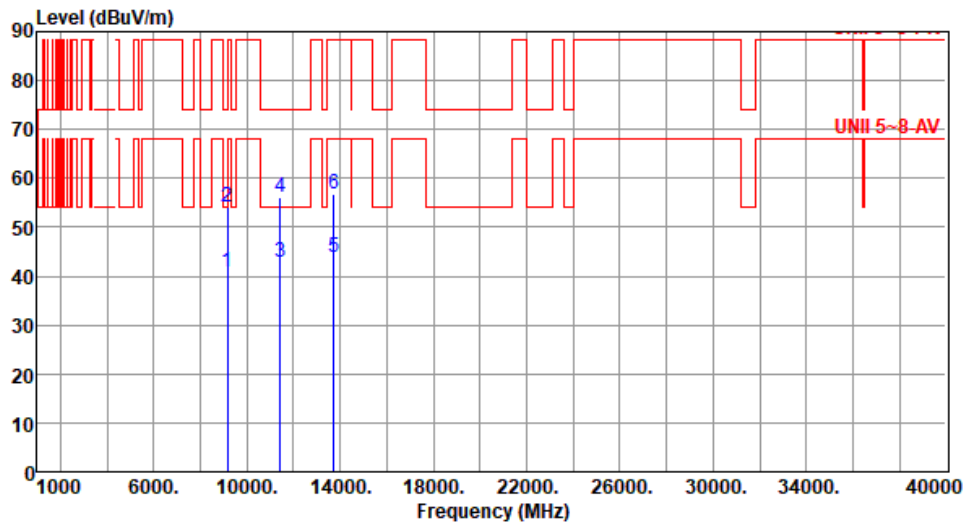

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9153.30	40.94	54.00	-13.06	34.30	6.64	Average	100	130
2	9153.30	54.11	74.00	-19.89	47.47	6.64	Peak	100	130
3	11441.60	42.68	54.00	-11.32	35.51	7.17	Average	100	251
4	11441.60	56.21	74.00	-17.79	49.04	7.17	Peak	100	251
5	13730.00	43.77	68.20	-24.43	37.76	6.01	Average	100	321
6	13730.00	56.88	88.20	-31.32	50.87	6.01	Peak	100	321

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6865
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

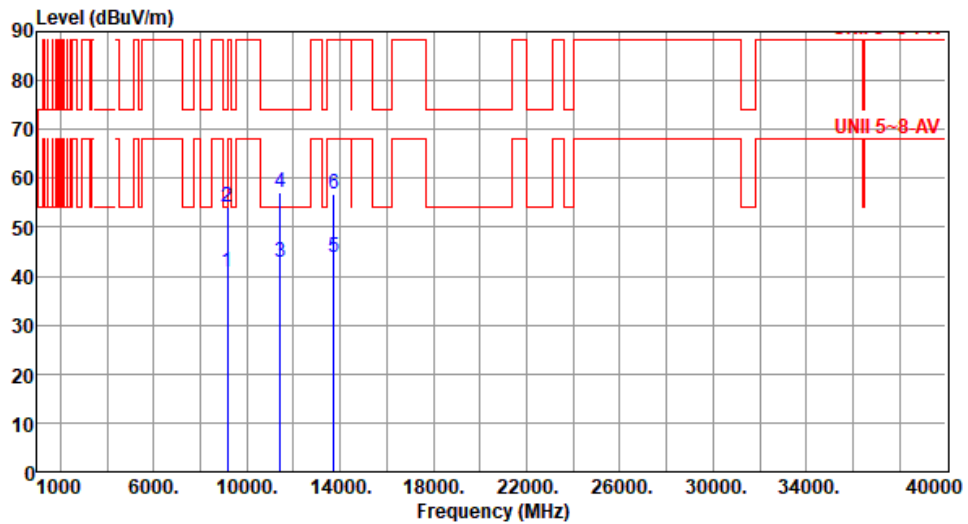

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9153.30	40.91	54.00	-13.09	34.27	6.64	Average	100	226
2	9153.30	54.14	74.00	-19.86	47.50	6.64	Peak	100	226
3	11441.60	42.86	54.00	-11.14	35.69	7.17	Average	100	149
4	11441.60	57.06	74.00	-16.94	49.89	7.17	Peak	100	149
5	13730.00	43.72	68.20	-24.48	37.71	6.01	Average	100	89
6	13730.00	56.74	88.20	-31.46	50.73	6.01	Peak	100	89

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6945
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 25 Humidity(%): 61

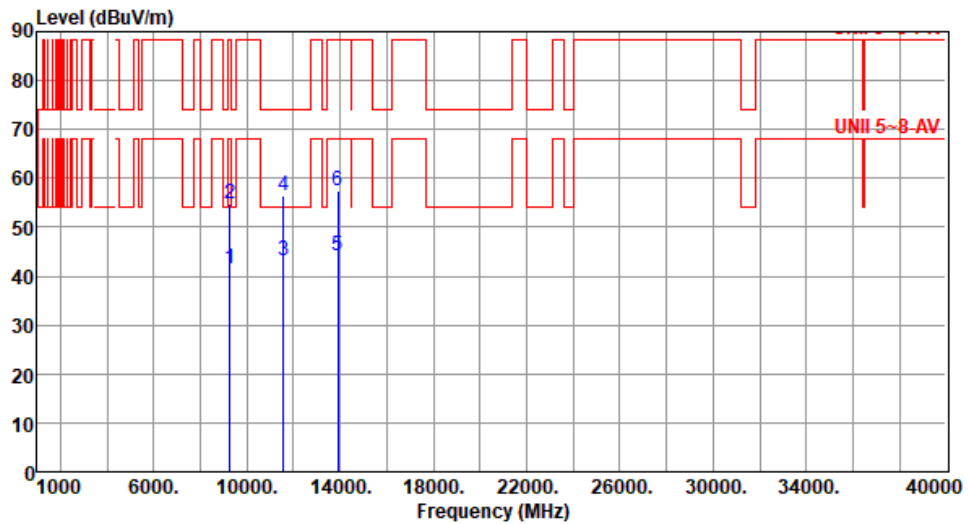

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9260.00	41.51	68.20	-26.69	34.49	7.02	Average	100	143
2	9260.00	54.71	88.20	-33.49	47.69	7.02	Peak	100	143
3	11575.00	43.05	54.00	-10.95	35.86	7.19	Average	100	283
4	11575.00	56.58	74.00	-17.42	49.39	7.19	Peak	100	283
5	13890.00	44.30	68.20	-23.90	37.96	6.34	Average	100	328
6	13890.00	57.30	88.20	-30.90	50.96	6.34	Peak	100	328

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	6945
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 25 Humidity(%): 61

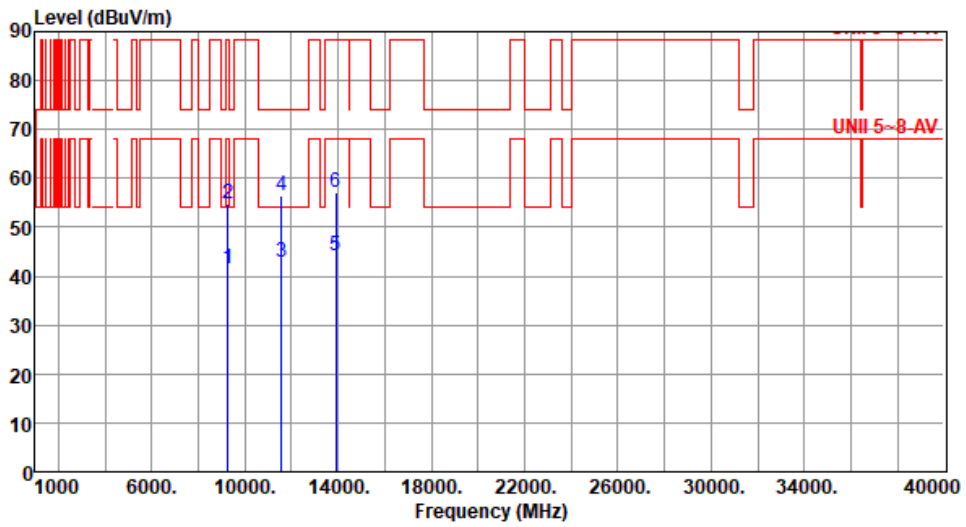

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9260.00	41.42	68.20	-26.78	34.40	7.02	Average	100	234
2	9260.00	54.65	88.20	-33.55	47.63	7.02	Peak	100	234
3	11575.00	42.69	54.00	-11.31	35.50	7.19	Average	100	150
4	11575.00	56.45	74.00	-17.55	49.26	7.19	Peak	100	150
5	13890.00	44.20	68.20	-24.00	37.86	6.34	Average	100	85
6	13890.00	57.16	88.20	-31.04	50.82	6.34	Peak	100	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	7025
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

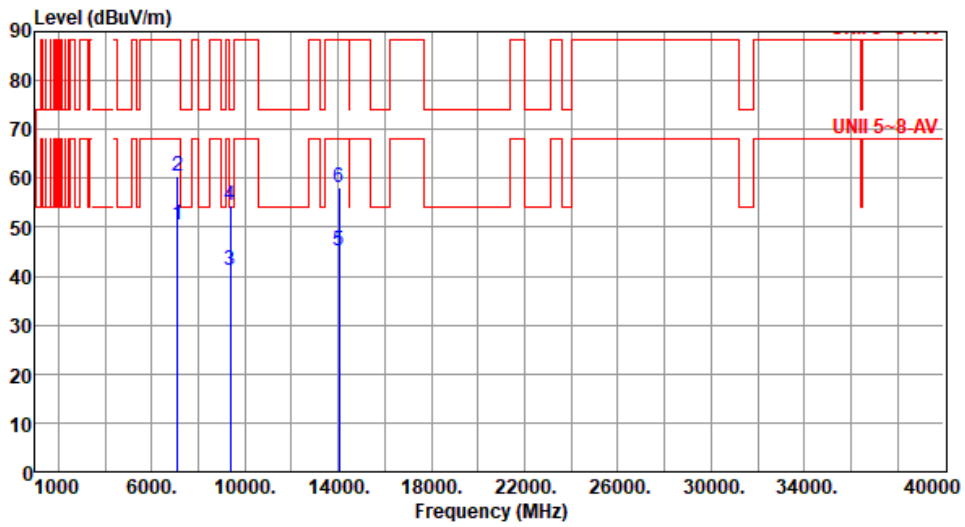

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	50.56	68.20	-17.64	45.70	4.86	Average	169	267
2	7125.00	60.38	88.20	-27.82	55.52	4.86	Peak	169	267
3	9366.60	41.21	54.00	-12.79	34.15	7.06	Average	100	134
4	9366.60	54.42	74.00	-19.58	47.36	7.06	Peak	100	134
5	14050.00	45.05	68.20	-23.15	38.31	6.74	Average	100	332
6	14050.00	58.22	88.20	-29.98	51.48	6.74	Peak	100	332

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT80	Test Freq. (MHz)	7025
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

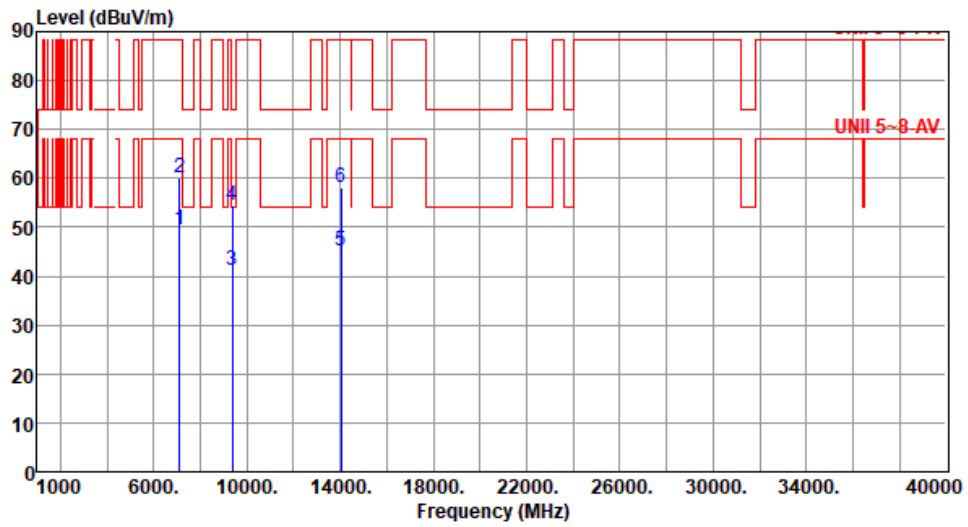

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	49.51	68.20	-18.69	44.65	4.86	Average	172	236
2	7125.00	60.15	88.20	-28.05	55.29	4.86	Peak	172	236
3	9366.60	41.24	54.00	-12.76	34.18	7.06	Average	100	246
4	9366.60	54.37	74.00	-19.63	47.31	7.06	Peak	100	246
5	14050.00	45.03	68.20	-23.17	38.29	6.74	Average	100	96
6	14050.00	58.15	88.20	-30.05	51.41	6.74	Peak	100	96

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT160

Modulation	be EHT160	Test Freq. (MHz)	6025
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

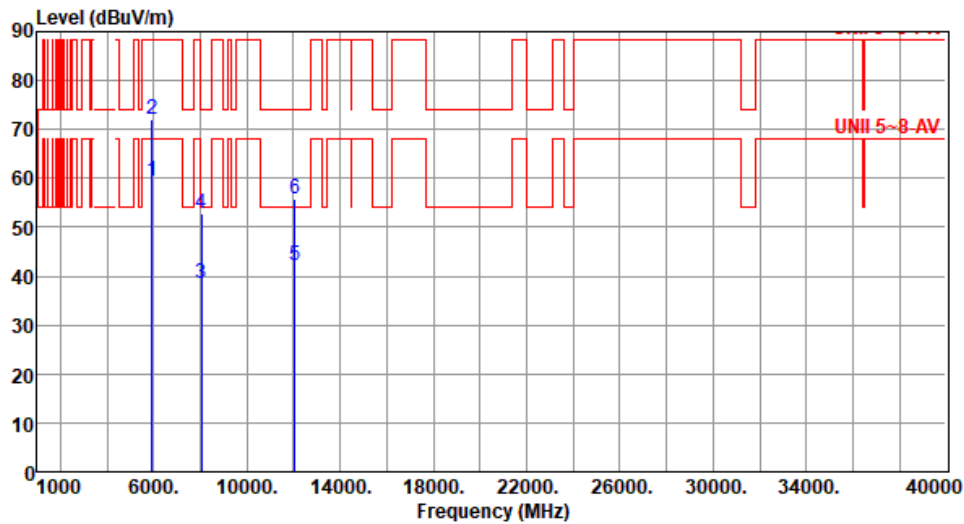


	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	59.57	68.20	-8.63	58.44	1.13	Average	191	243
2	5925.00	71.97	88.20	-16.23	70.84	1.13	Peak	191	243
3	8033.30	38.63	54.00	-15.37	33.01	5.62	Average	100	117
4	8033.30	52.79	74.00	-21.21	47.17	5.62	Peak	100	117
5	12050.00	42.27	54.00	-11.73	36.02	6.25	Average	100	236
6	12050.00	55.84	74.00	-18.16	49.59	6.25	Peak	100	236

Note 1: Emission Level (dBUV/m) = SA Reading (dBUV) + Factor* (dB/m)
 *Factor includes antenna factor , cable loss and amplifier gain
 Note 2: Margin (dB) = Emission level (dBUV/m) – Limit (dBUV/m).



Modulation	be EHT160	Test Freq. (MHz)	6025
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

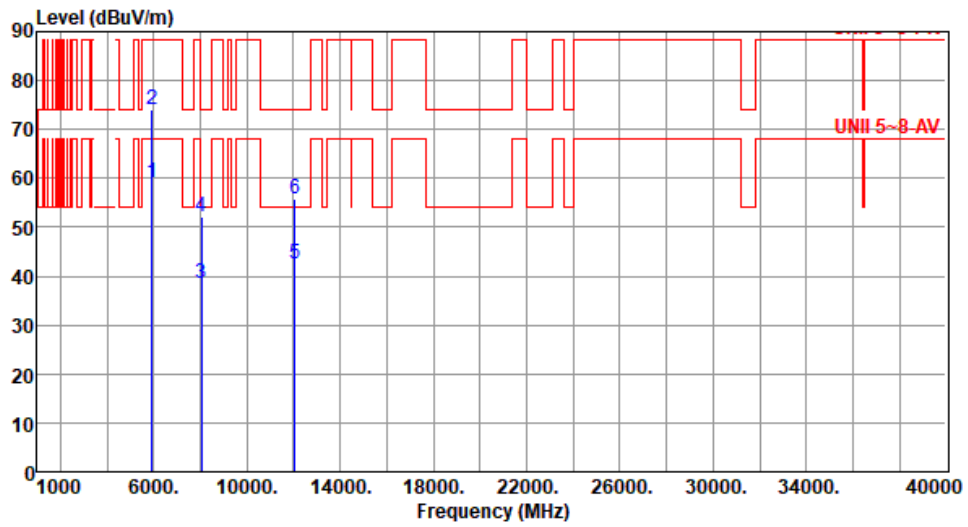

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	59.26	68.20	-8.94	58.13	1.13	Average	134	241
2	5925.00	73.91	88.20	-14.29	72.78	1.13	Peak	134	241
3	8033.30	38.63	54.00	-15.37	33.01	5.62	Average	100	233
4	8033.30	52.15	74.00	-21.85	46.53	5.62	Peak	100	233
5	12050.00	42.39	54.00	-11.61	36.14	6.25	Average	100	85
6	12050.00	55.92	74.00	-18.08	49.67	6.25	Peak	100	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6185
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

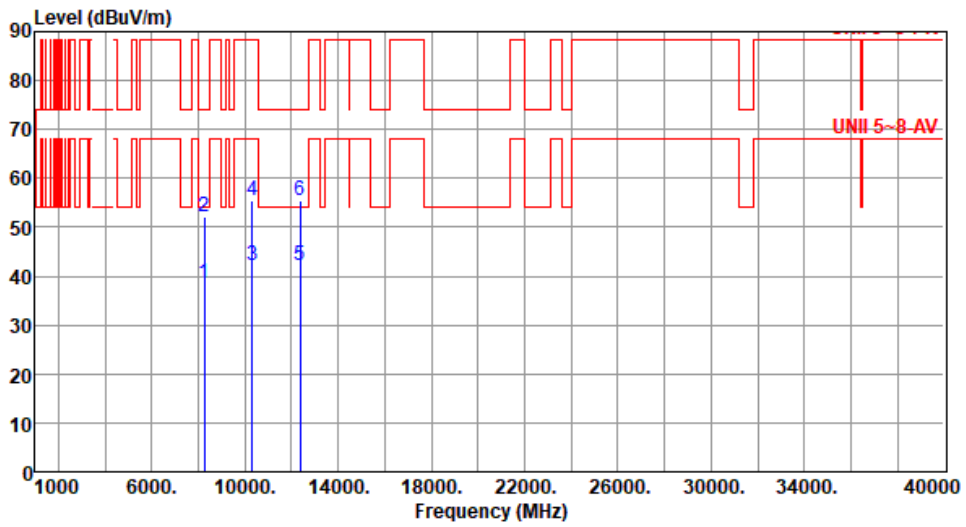

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8246.60	38.67	54.00	-15.33	33.27	5.40	Average	100	127
2	8246.60	51.99	74.00	-22.01	46.59	5.40	Peak	100	127
3	10308.30	42.04	68.20	-26.16	34.82	7.22	Average	100	234
4	10308.30	55.58	88.20	-32.62	48.36	7.22	Peak	100	234
5	12370.00	42.04	54.00	-11.96	36.34	5.70	Average	100	319
6	12370.00	55.56	74.00	-18.44	49.86	5.70	Peak	100	319

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6185
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

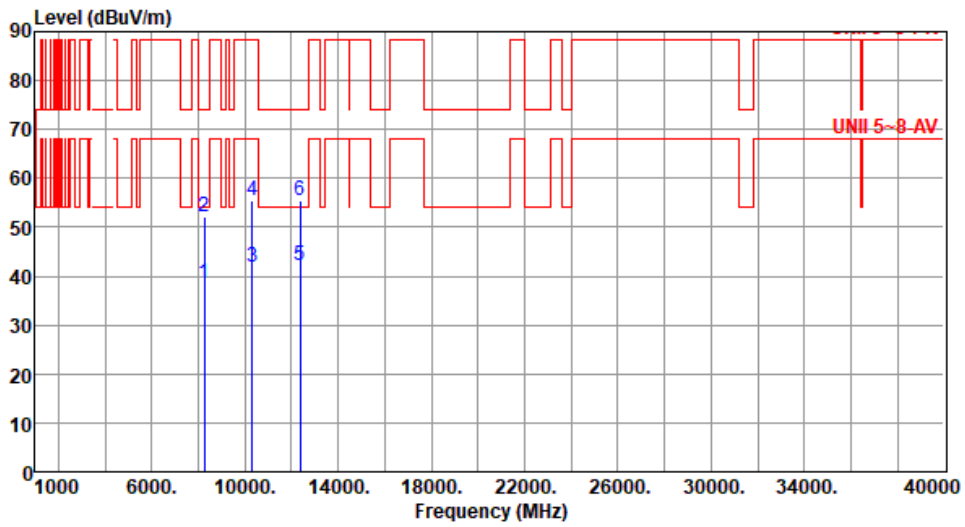

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8246.60	38.59	54.00	-15.41	33.19	5.40	Average	100	218
2	8246.60	52.06	74.00	-21.94	46.66	5.40	Peak	100	218
3	10308.30	41.80	68.20	-26.40	34.58	7.22	Average	100	158
4	10308.30	55.56	88.20	-32.64	48.34	7.22	Peak	100	158
5	12370.00	42.03	54.00	-11.97	36.33	5.70	Average	100	85
6	12370.00	55.39	74.00	-18.61	49.69	5.70	Peak	100	85

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6345
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

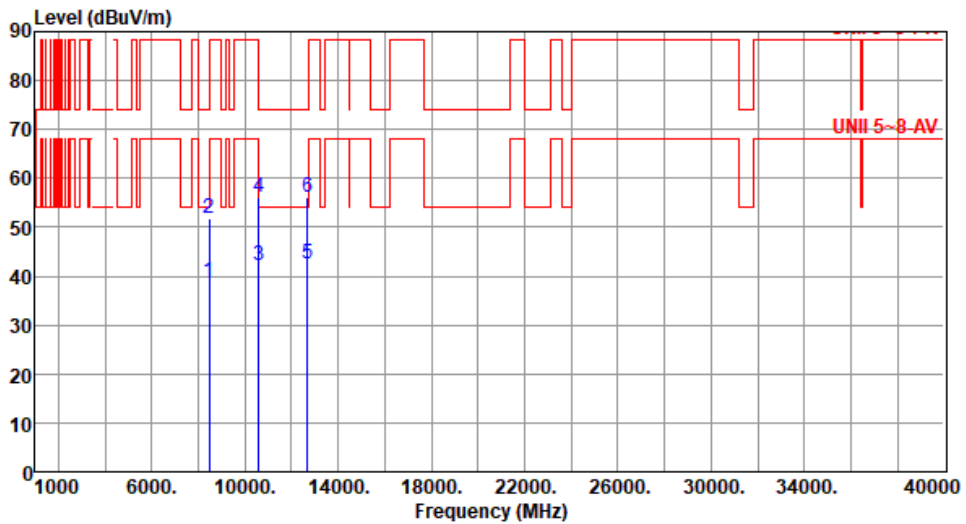

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8460.00	38.78	54.00	-15.22	33.60	5.18	Average	100	131
2	8460.00	51.94	74.00	-22.06	46.76	5.18	Peak	100	131
3	10575.00	42.16	68.20	-26.04	34.85	7.31	Average	100	246
4	10575.00	56.02	88.20	-32.18	48.71	7.31	Peak	100	246
5	12690.00	42.57	54.00	-11.43	36.78	5.79	Average	100	340
6	12690.00	56.06	74.00	-17.94	50.27	5.79	Peak	100	340

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6345
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

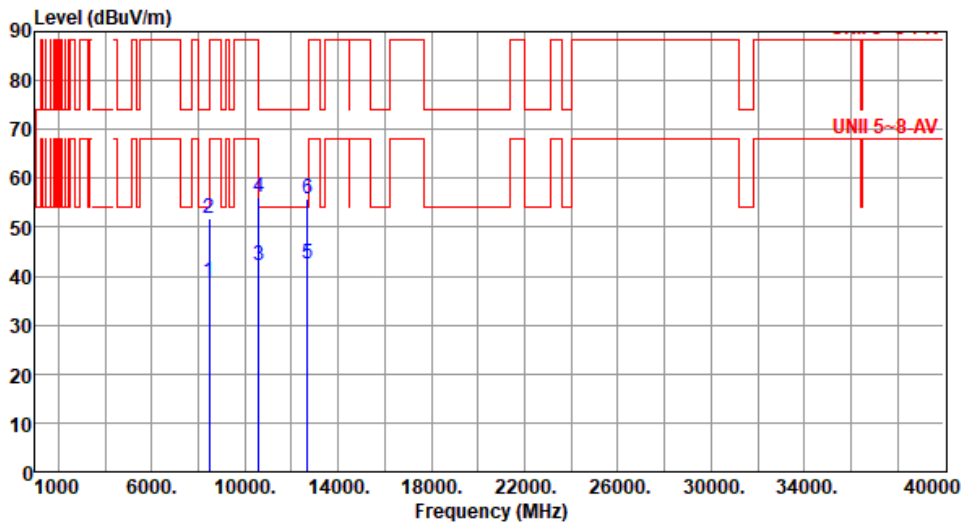

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8460.00	38.94	54.00	-15.06	33.76	5.18	Average	100	239
2	8460.00	51.85	74.00	-22.15	46.67	5.18	Peak	100	239
3	10575.00	42.19	68.20	-26.01	34.88	7.31	Average	100	130
4	10575.00	55.99	88.20	-32.21	48.68	7.31	Peak	100	130
5	12690.00	42.40	54.00	-11.60	36.61	5.79	Average	100	87
6	12690.00	55.95	74.00	-18.05	50.16	5.79	Peak	100	87

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6505
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

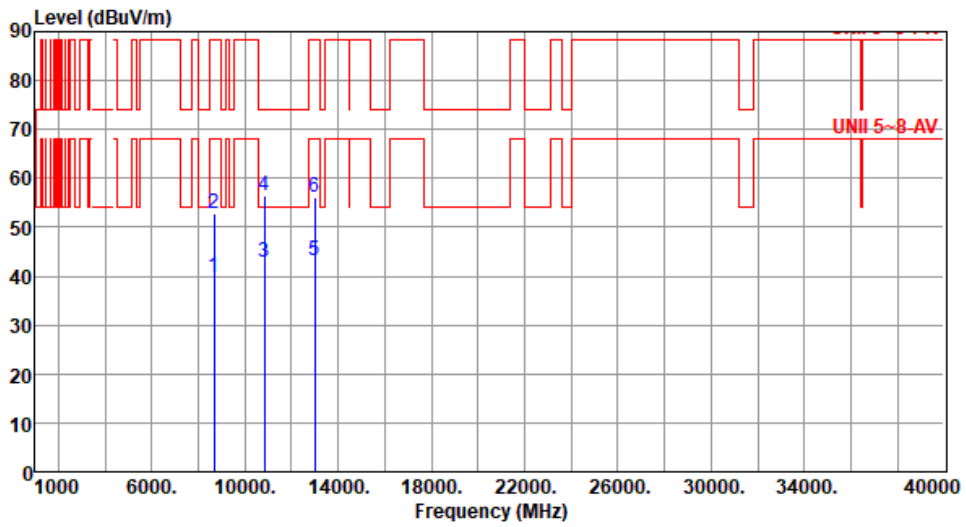

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8673.30	39.98	68.20	-28.22	34.01	5.97	Average	100	135
2	8673.30	52.75	88.20	-35.45	46.78	5.97	Peak	100	135
3	10841.60	42.72	54.00	-11.28	35.22	7.50	Average	100	221
4	10841.60	56.47	74.00	-17.53	48.97	7.50	Peak	100	221
5	13010.00	43.16	68.20	-25.04	37.05	6.11	Average	100	334
6	13010.00	56.27	88.20	-31.93	50.16	6.11	Peak	100	334

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6505
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

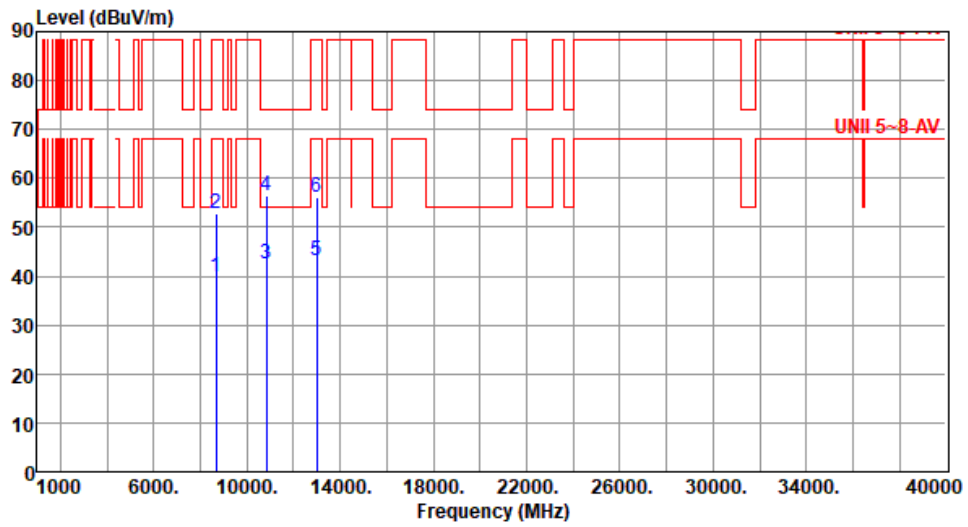

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8673.30	39.95	68.20	-28.25	33.98	5.97	Average	100	249
2	8673.30	52.77	88.20	-35.43	46.80	5.97	Peak	100	249
3	10841.60	42.61	54.00	-11.39	35.11	7.50	Average	100	110
4	10841.60	56.45	74.00	-17.55	48.95	7.50	Peak	100	110
5	13010.00	43.06	68.20	-25.14	36.95	6.11	Average	100	65
6	13010.00	56.24	88.20	-31.96	50.13	6.11	Peak	100	65

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6665
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 25 Humidity(%): 61

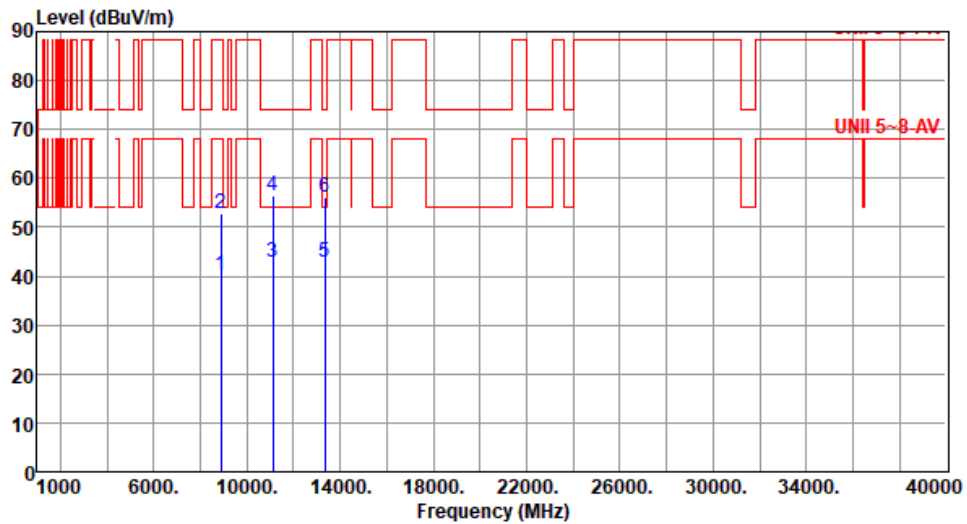

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8886.60	40.31	68.20	-27.89	34.21	6.10	Average	100	127
2	8886.60	52.92	88.20	-35.28	46.82	6.10	Peak	100	127
3	11108.30	42.72	54.00	-11.28	35.46	7.26	Average	100	246
4	11108.30	56.47	74.00	-17.53	49.21	7.26	Peak	100	246
5	13330.00	43.00	54.00	-11.00	37.36	5.64	Average	100	324
6	13330.00	56.00	74.00	-18.00	50.36	5.64	Peak	100	324

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6665
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 25 Humidity(%): 61

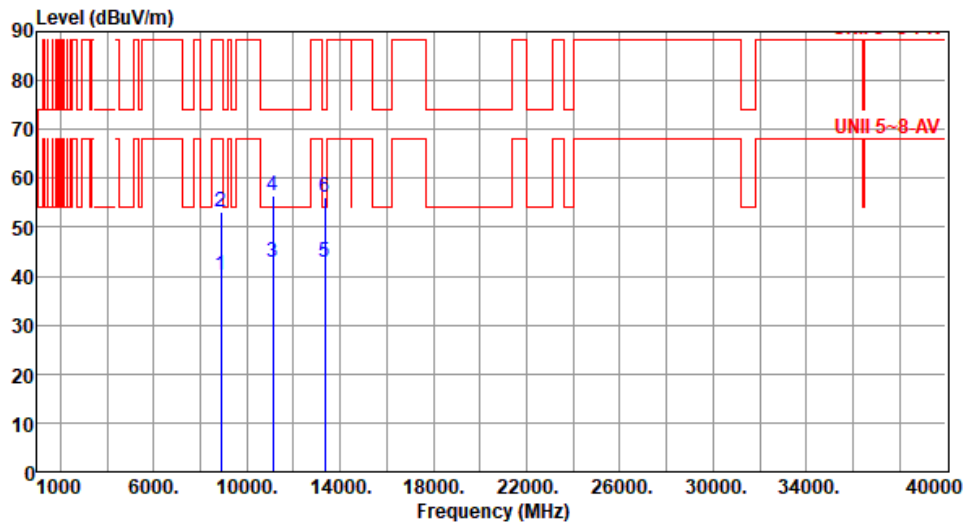

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8886.60	40.29	68.20	-27.91	34.19	6.10	Average	100	219
2	8886.60	52.99	88.20	-35.21	46.89	6.10	Peak	100	219
3	11108.30	42.88	54.00	-11.12	35.62	7.26	Average	100	126
4	11108.30	56.62	74.00	-17.38	49.36	7.26	Peak	100	126
5	13330.00	42.98	54.00	-11.02	37.34	5.64	Average	100	84
6	13330.00	56.00	74.00	-18.00	50.36	5.64	Peak	100	84

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6825
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

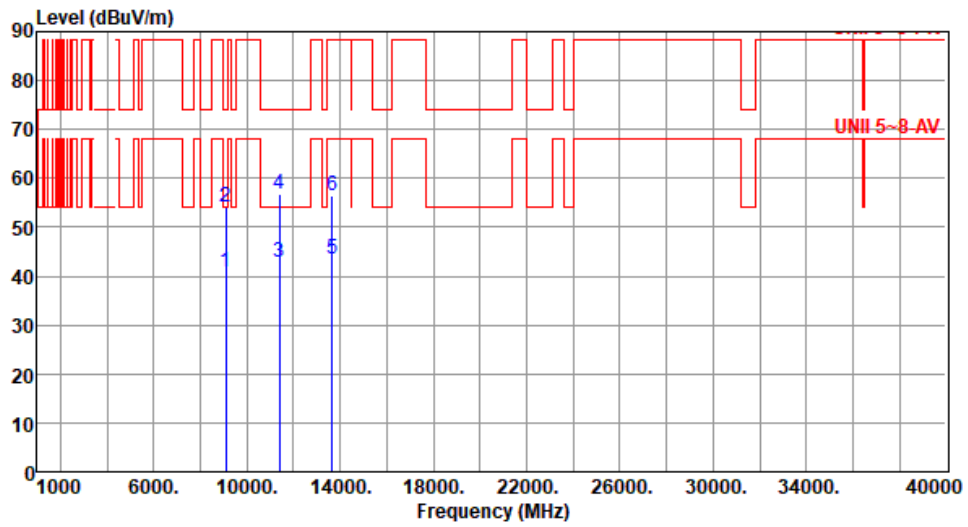

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9100.00	40.76	54.00	-13.24	34.29	6.47	Average	100	130
2	9100.00	54.05	74.00	-19.95	47.58	6.47	Peak	100	130
3	11375.00	42.74	54.00	-11.26	35.59	7.15	Average	100	259
4	11375.00	56.66	74.00	-17.34	49.51	7.15	Peak	100	259
5	13650.00	43.55	68.20	-24.65	37.69	5.86	Average	100	316
6	13650.00	56.59	88.20	-31.61	50.73	5.86	Peak	100	316

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6825
Polarization	Vertical		

Test By : Roger Lu Temperature(°C):25 Humidity(%):61

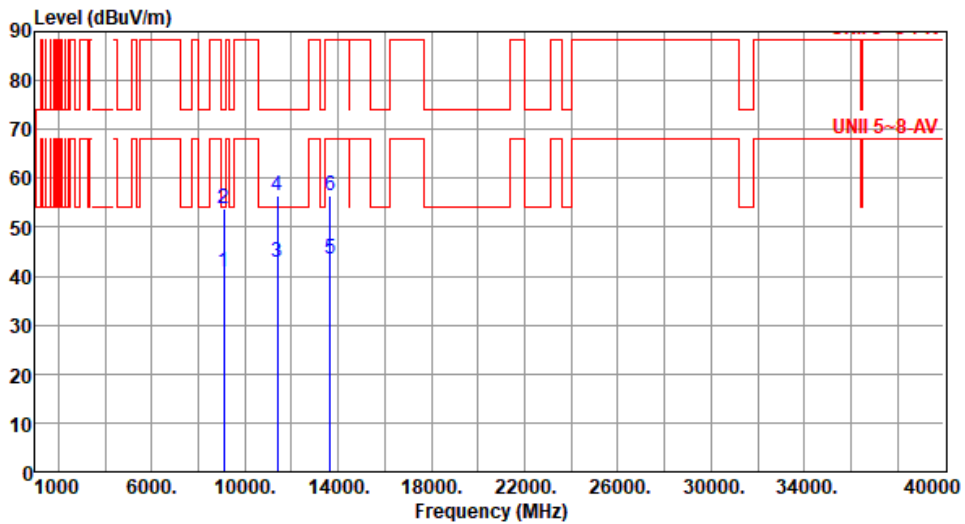

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	9100.00	40.71	54.00	-13.29	34.24	6.47	Average	100	225
2	9100.00	53.67	74.00	-20.33	47.20	6.47	Peak	100	225
3	11375.00	42.84	54.00	-11.16	35.69	7.15	Average	100	131
4	11375.00	56.54	74.00	-17.46	49.39	7.15	Peak	100	131
5	13650.00	43.49	68.20	-24.71	37.63	5.86	Average	100	92
6	13650.00	56.47	88.20	-31.73	50.61	5.86	Peak	100	92

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6985
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

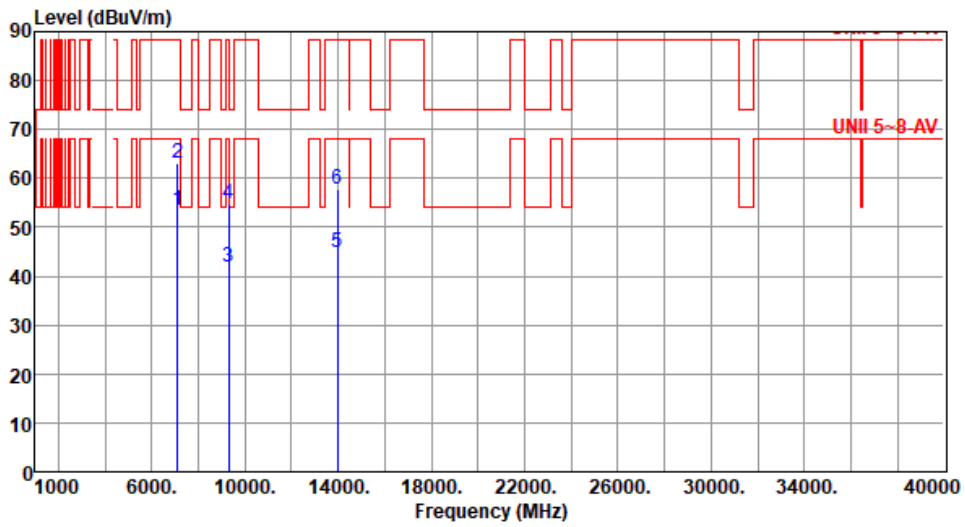

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	53.39	68.20	-14.81	48.53	4.86	Average	203	268
2	7125.00	63.26	88.20	-24.94	58.40	4.86	Peak	203	268
3	9313.30	41.72	54.00	-12.28	34.60	7.12	Average	100	139
4	9313.30	54.82	74.00	-19.18	47.70	7.12	Peak	100	139
5	13970.00	44.69	68.20	-23.51	38.03	6.66	Average	100	305
6	13970.00	57.65	88.20	-30.55	50.99	6.66	Peak	100	305

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT160	Test Freq. (MHz)	6985
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

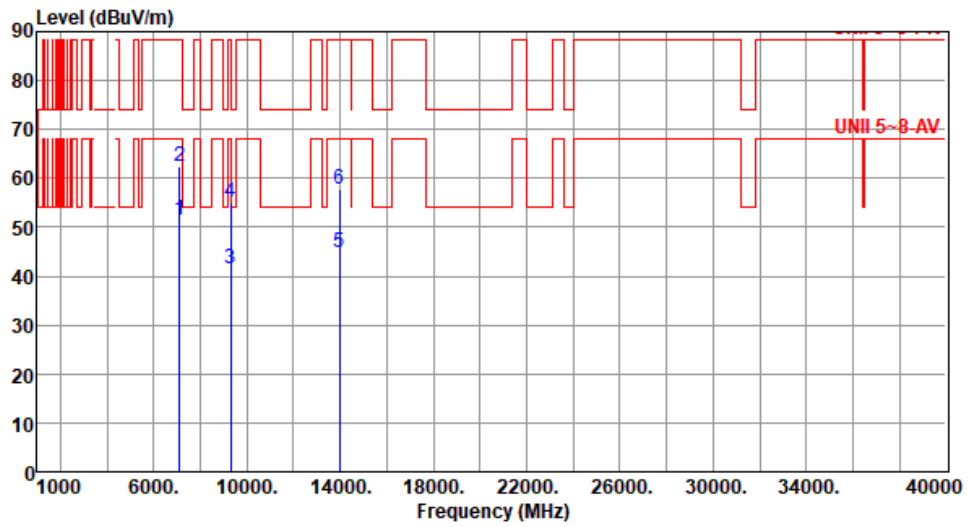

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	51.55	68.20	-16.65	46.69	4.86	Average	160	235
2	7125.00	62.55	88.20	-25.65	57.69	4.86	Peak	160	235
3	9313.30	41.58	54.00	-12.42	34.46	7.12	Average	100	240
4	9313.30	54.99	74.00	-19.01	47.87	7.12	Peak	100	240
5	13970.00	44.76	68.20	-23.44	38.10	6.66	Average	100	86
6	13970.00	57.79	88.20	-30.41	51.13	6.66	Peak	100	86

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Unwanted Emissions (Above 1GHz) for be EHT320

Modulation	be EHT320	Test Freq. (MHz)	6105
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

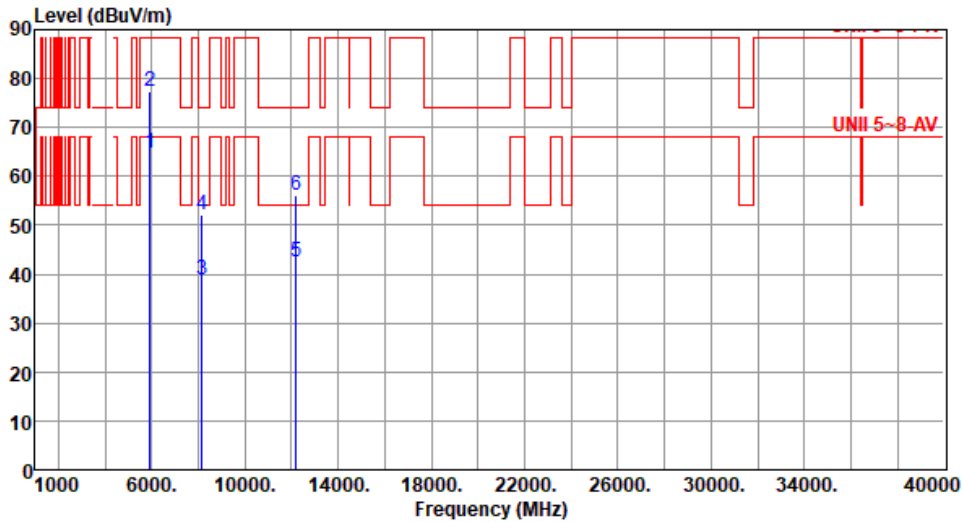

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	64.70	68.20	-3.50	63.57	1.13	Average	188	244
2	5925.00	77.39	88.20	-10.81	76.26	1.13	Peak	188	244
3	8140.00	38.72	54.00	-15.28	33.15	5.57	Average	100	105
4	8140.00	52.16	74.00	-21.84	46.59	5.57	Peak	100	105
5	12210.00	42.64	54.00	-11.36	36.22	6.42	Average	100	187
6	12210.00	56.27	74.00	-17.73	49.85	6.42	Peak	100	187

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6105
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

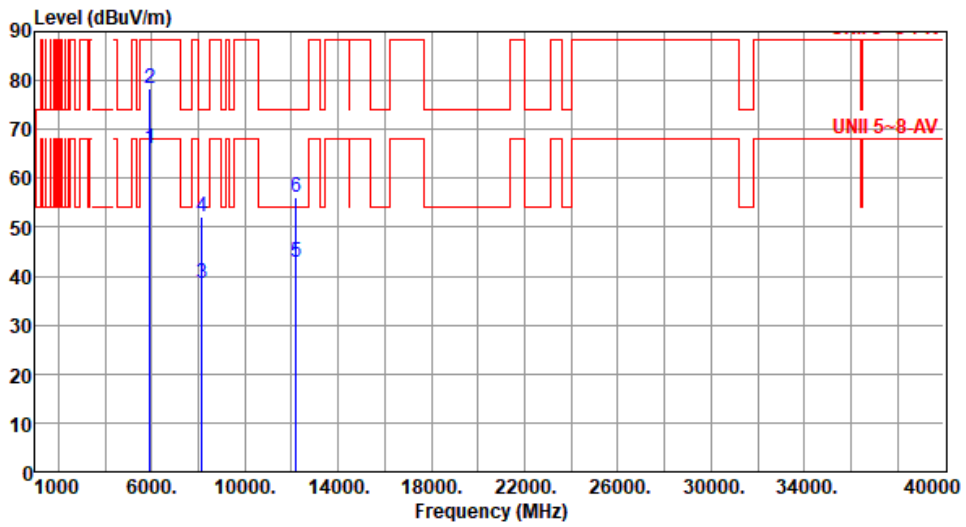

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	5925.00	66.15	68.20	-2.05	65.02	1.13	Average	115	231
2	5925.00	78.49	88.20	-9.71	77.36	1.13	Peak	115	231
3	8140.00	38.63	54.00	-15.37	33.06	5.57	Average	100	224
4	8140.00	52.20	74.00	-21.80	46.63	5.57	Peak	100	224
5	12210.00	42.69	54.00	-11.31	36.27	6.42	Average	100	176
6	12210.00	56.17	74.00	-17.83	49.75	6.42	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6265
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

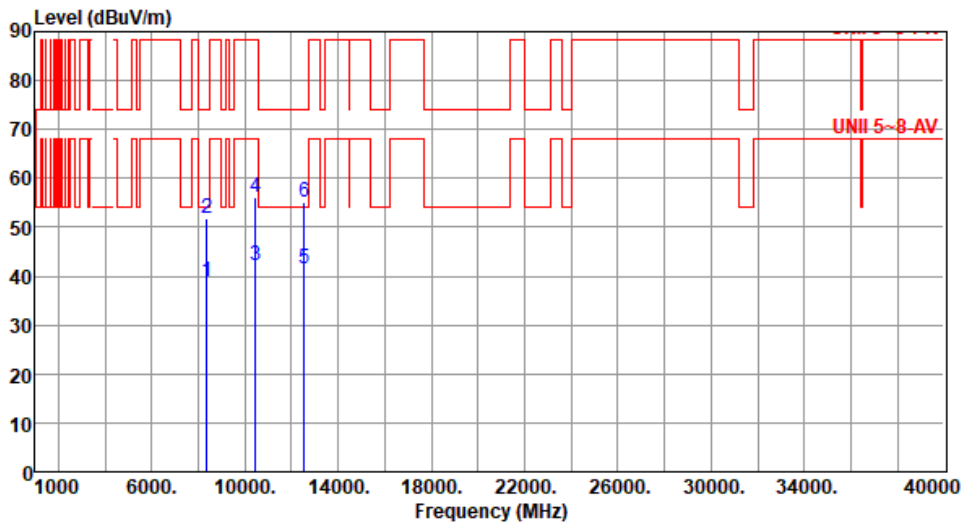

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8353.30	38.77	54.00	-15.23	33.59	5.18	Average	100	123
2	8353.30	51.77	74.00	-22.23	46.59	5.18	Peak	100	123
3	10441.60	42.21	68.20	-25.99	34.89	7.32	Average	100	243
4	10441.60	56.08	88.20	-32.12	48.76	7.32	Peak	100	243
5	12530.00	41.37	54.00	-12.63	35.66	5.71	Average	100	178
6	12530.00	55.19	74.00	-18.81	49.48	5.71	Peak	100	178

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6265
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 25 Humidity(%): 61

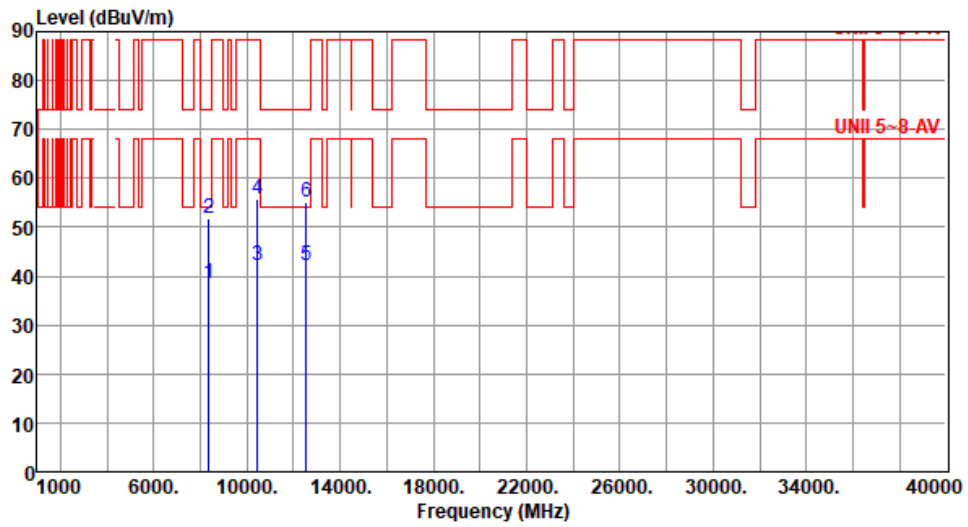

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8353.30	38.48	54.00	-15.52	33.30	5.18	Average	100	249
2	8353.30	51.80	74.00	-22.20	46.62	5.18	Peak	100	249
3	10441.60	42.09	68.20	-26.11	34.77	7.32	Average	100	132
4	10441.60	55.91	88.20	-32.29	48.59	7.32	Peak	100	132
5	12530.00	42.15	54.00	-11.85	36.44	5.71	Average	100	176
6	12530.00	55.19	74.00	-18.81	49.48	5.71	Peak	100	176

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Horizontal		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

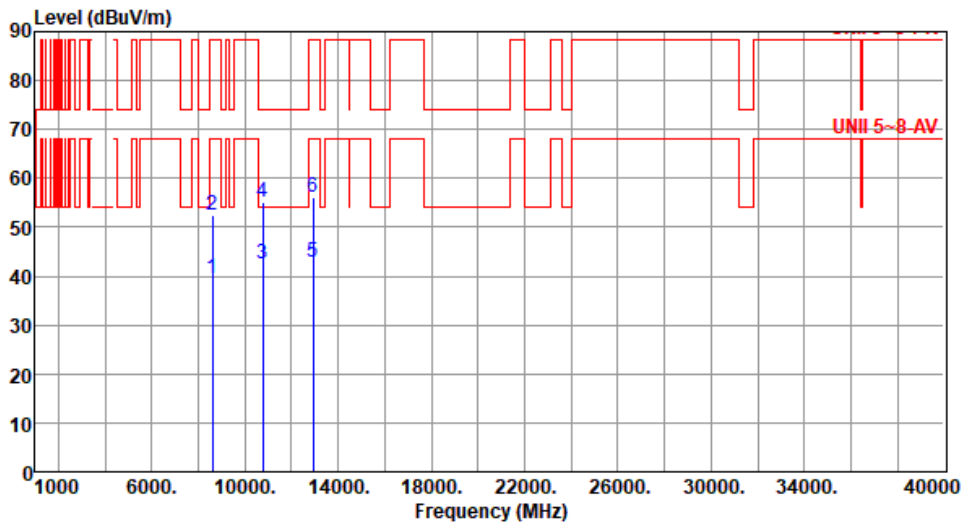

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8620.00	39.54	68.20	-28.66	33.76	5.78	Average	100	144
2	8620.00	52.46	88.20	-35.74	46.68	5.78	Peak	100	144
3	10775.00	42.36	54.00	-11.64	34.95	7.41	Average	100	259
4	10775.00	55.24	74.00	-18.76	47.83	7.41	Peak	100	259
5	12930.00	42.88	68.20	-25.32	36.84	6.04	Average	100	342
6	12930.00	56.09	88.20	-32.11	50.05	6.04	Peak	100	342

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6425
Polarization	Vertical		

Test By :Roger Lu Temperature(°C):25 Humidity(%):61

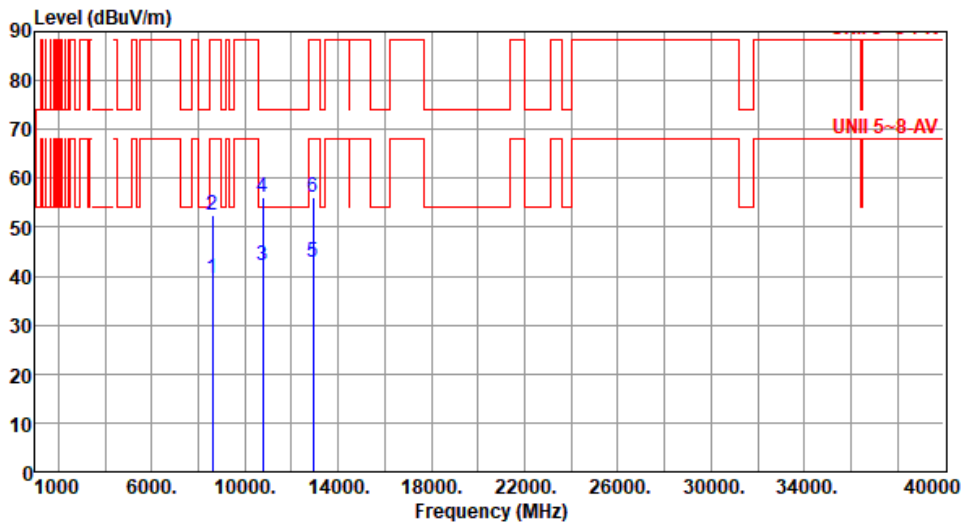

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8620.00	39.58	68.20	-28.62	33.80	5.78	Average	100	218
2	8620.00	52.55	88.20	-35.65	46.77	5.78	Peak	100	218
3	10775.00	42.31	54.00	-11.69	34.90	7.41	Average	100	234
4	10775.00	56.16	74.00	-17.84	48.75	7.41	Peak	100	234
5	12930.00	42.75	68.20	-25.45	36.71	6.04	Average	100	82
6	12930.00	56.07	88.20	-32.13	50.03	6.04	Peak	100	82

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6585
Polarization	Horizontal		

Test By : Roger Lu Temperature(°C): 25 Humidity(%): 61

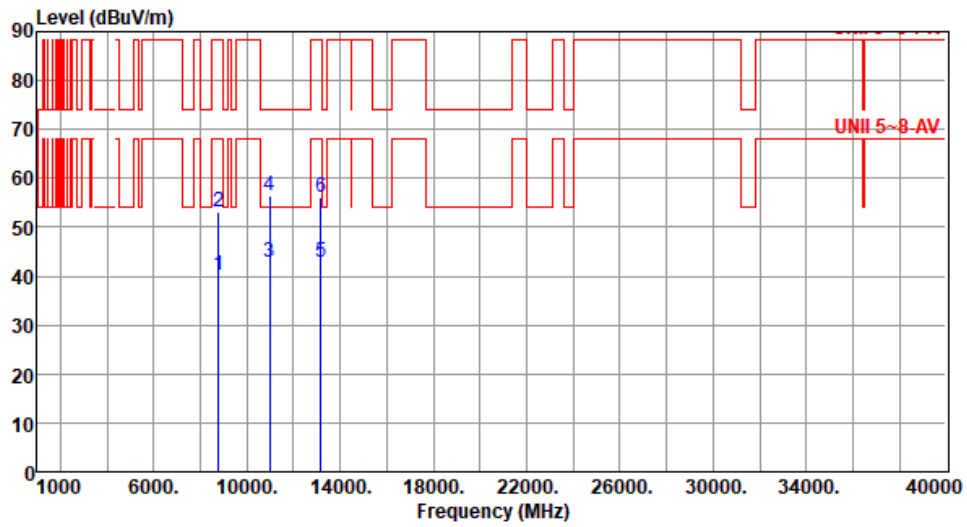

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8780.00	40.33	68.20	-27.87	34.00	6.33	Average	100	136
2	8780.00	53.22	88.20	-34.98	46.89	6.33	Peak	100	136
3	10975.00	42.90	54.00	-11.10	35.29	7.61	Average	100	229
4	10975.00	56.57	74.00	-17.43	48.96	7.61	Peak	100	229
5	13170.00	43.00	68.20	-25.20	37.19	5.81	Average	100	337
6	13170.00	56.02	88.20	-32.18	50.21	5.81	Peak	100	337

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6585
Polarization	Vertical		

Test By : Roger Lu Temperature(°C): 25 Humidity(%): 61

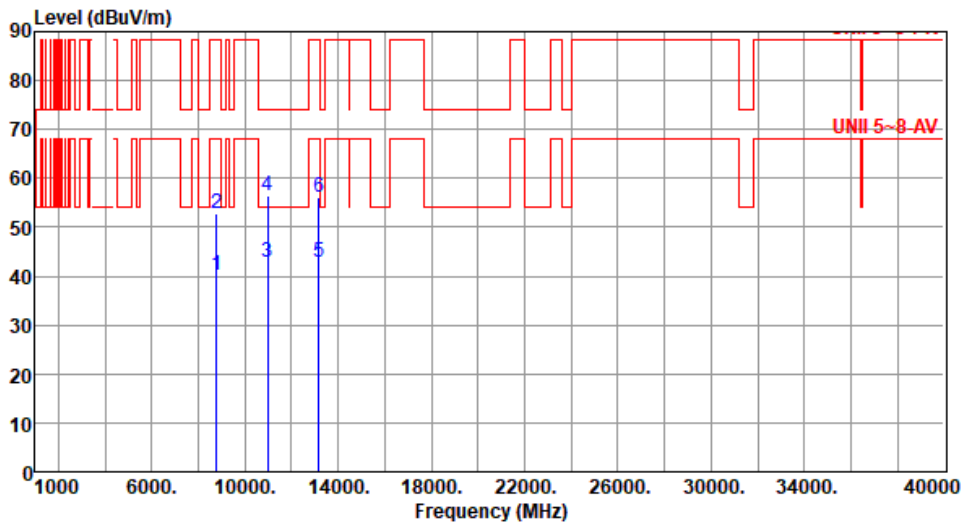

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	8780.00	40.28	68.20	-27.92	33.95	6.33	Average	100	223
2	8780.00	52.92	88.20	-35.28	46.59	6.33	Peak	100	223
3	10975.00	42.86	54.00	-11.14	35.25	7.61	Average	100	137
4	10975.00	56.47	74.00	-17.53	48.86	7.61	Peak	100	137
5	13170.00	42.94	68.20	-25.26	37.13	5.81	Average	100	79
6	13170.00	55.99	88.20	-32.21	50.18	5.81	Peak	100	79

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6745
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 63

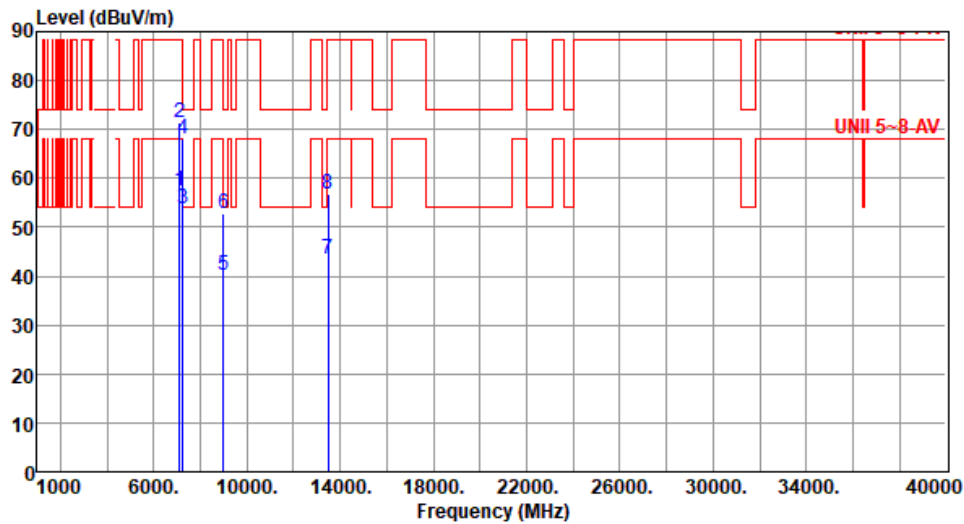

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	57.40	68.20	-10.80	52.54	4.86	Average	177	251
2	7125.00	71.33	88.20	-16.87	66.47	4.86	Peak	177	251
3	7250.00	53.65	54.00	-0.35	48.44	5.21	Average	177	251
4	7250.00	68.07	74.00	-5.93	62.86	5.21	Peak	177	251
5	8993.30	40.19	68.20	-28.01	34.17	6.02	Average	100	118
6	8993.30	52.97	88.20	-35.23	46.95	6.02	Peak	100	118
7	13490.00	43.63	68.20	-24.57	37.59	6.04	Average	100	356
8	13490.00	56.90	88.20	-31.30	50.86	6.04	Peak	100	356

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6745
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 63

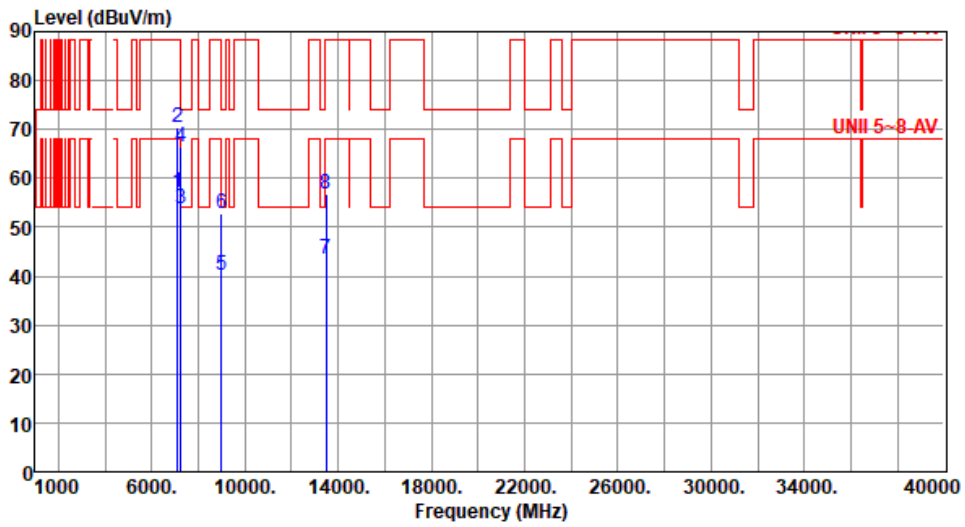

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	57.11	68.20	-11.09	52.25	4.86	Average	172	223
2	7125.00	70.49	88.20	-17.71	65.63	4.86	Peak	172	223
3	7250.00	53.78	54.00	-0.22	48.57	5.21	Average	164	241
4	7250.00	66.54	74.00	-7.46	61.33	5.21	Peak	164	241
5	8993.30	40.11	68.20	-28.09	34.09	6.02	Average	100	226
6	8993.30	52.73	88.20	-35.47	46.71	6.02	Peak	100	226
7	13490.00	43.50	68.20	-24.70	37.46	6.04	Average	100	81
8	13490.00	56.80	88.20	-31.40	50.76	6.04	Peak	100	81

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6905
Polarization	Horizontal		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 63

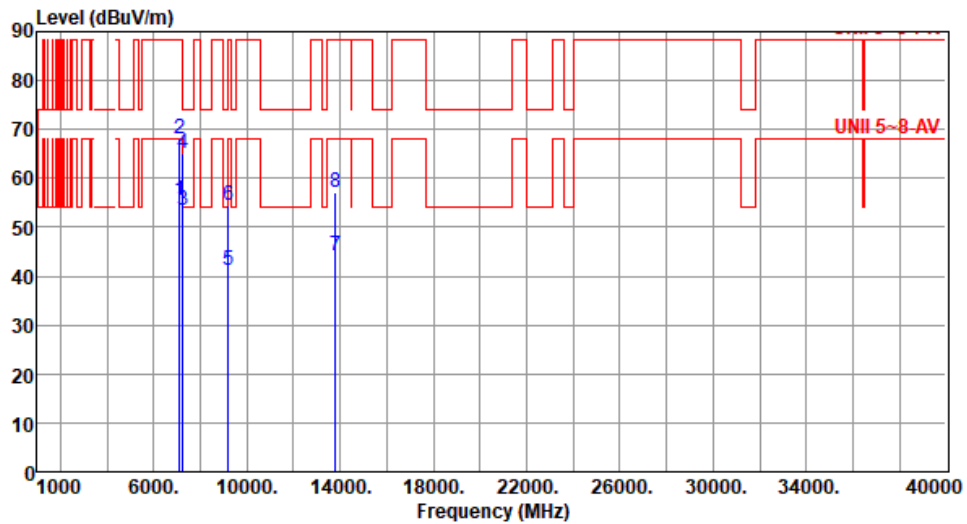

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	55.52	68.20	-12.68	50.66	4.86	Average	185	271
2	7125.00	68.23	88.20	-19.97	63.37	4.86	Peak	185	271
3	7250.00	53.58	54.00	-0.42	48.37	5.21	Average	185	271
4	7250.00	65.07	74.00	-8.93	59.86	5.21	Peak	185	271
5	9206.60	41.26	68.20	-26.94	34.43	6.83	Average	100	126
6	9206.60	54.32	88.20	-33.88	47.49	6.83	Peak	100	126
7	13810.00	44.17	68.20	-24.03	37.94	6.23	Average	100	325
8	13810.00	57.19	88.20	-31.01	50.96	6.23	Peak	100	325

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)


*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Modulation	be EHT320	Test Freq. (MHz)	6905
Polarization	Vertical		

Test By : Sean Yu Temperature(°C): 24 Humidity(%): 63

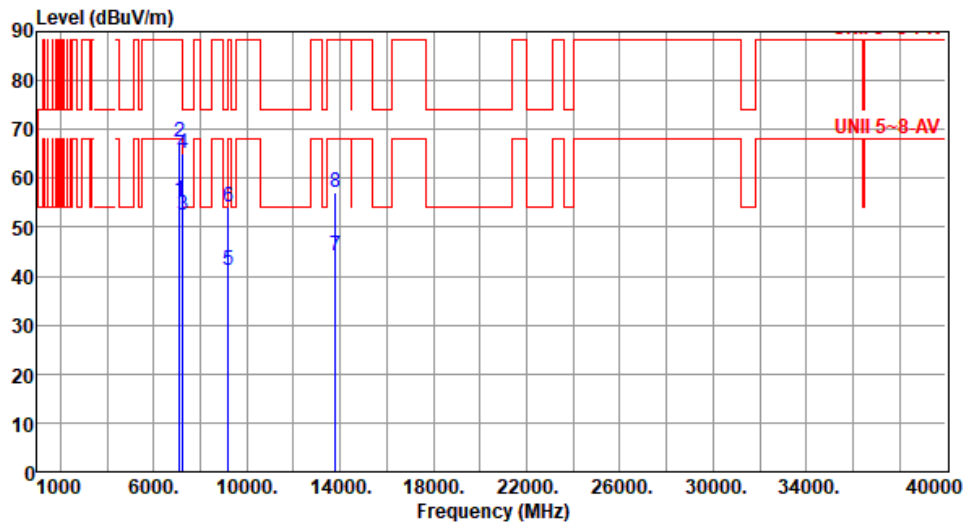

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB/m	Remark	ANT High cm	Turn Table deg
1	7125.00	55.57	68.20	-12.63	50.71	4.86	Average	189	227
2	7125.00	67.34	88.20	-20.86	62.48	4.86	Peak	189	227
3	7250.00	52.60	54.00	-1.40	47.39	5.21	Average	189	227
4	7250.00	64.97	74.00	-9.03	59.76	5.21	Peak	189	227
5	9206.60	41.21	68.20	-26.99	34.38	6.83	Average	100	206
6	9206.60	54.21	88.20	-33.99	47.38	6.83	Peak	100	206
7	13810.00	44.07	68.20	-24.13	37.84	6.23	Average	100	84
8	13810.00	57.09	88.20	-31.11	50.86	6.23	Peak	100	84

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV) + Factor* (dB/m)

*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).



Summary

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
5.925-6.425GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.18059G	-8.81	6.1935G	-40.69	-33.85	-6.84	1
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	5.97859G	-7.02	5.9974G	-37.11	-30.58	-6.53	1
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	5.99939G	-4.09	6.0286G	-31.25	-24.16	-7.09	4
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.10092G	-0.08	6.2698G	-47.28	-39.97	-7.31	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.1498G	2.80	6.5978G	-41.96	-36.98	-4.98	3
6.425-6.525GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.4726G	-8.97	6.4595G	-38.26	-30.75	-7.51	3
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.4818G	-6.98	6.452G	-38.36	-31.51	-6.85	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.55579G	-2.61	6.3846G	-49.19	-42.61	-6.58	1
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.44186G	-0.24	6.2594G	-48.15	-39.94	-8.21	4
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.5514G	3.30	7.1354G	-39.71	-36.70	-3.01	3
6.525-6.875GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.84881G	-10.40	6.8376G	-40.95	-34.26	-6.69	4
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	6.7216G	-6.60	6.687G	-39.92	-33.25	-6.67	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	6.77381G	-4.54	6.6246G	-50.34	-44.54	-5.80	1
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.63943G	-0.72	6.4186G	-49.40	-40.39	-9.01	1
6.875-7.125GHz	-	-	-	-	-	-	-	-
802.11be EHT20_Nss1,(MCS0)_4TX	Pass	6.88871G	-9.79	6.8779G	-40.33	-33.69	-6.64	1
802.11be EHT40_Nss1,(MCS0)_4TX	Pass	7.07881G	-8.45	7.0512G	-38.76	-32.77	-5.99	4
802.11be EHT80_Nss1,(MCS0)_4TX	Pass	7.01261G	-4.74	6.8646G	-49.18	-44.74	-4.44	1
802.11be EHT160_Nss1,(MCS0)_4TX	Pass	6.90908G	-0.49	6.741G	-46.97	-40.15	-6.82	1
802.11be EHT320_Nss1,(MCS0)_4TX	Pass	6.7098G	3.01	7.2394G	-39.98	-36.89	-3.09	3



Result

Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
802.11be EHT20_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5955MHz	Pass	5.9599G	-8.90	5.9734G	-39.77	-31.99	-7.78	1
5955MHz	Pass	5.96009G	-9.22	5.972G	-39.36	-30.18	-9.18	2
5955MHz	Pass	5.9599G	-8.94	5.9709G	-38.23	-29.16	-9.07	3
5955MHz	Pass	5.9599G	-9.89	6.0038G	-59.53	-49.89	-9.64	4
6175MHz	Pass	6.18059G	-8.81	6.1935G	-40.69	-33.85	-6.84	1
6175MHz	Pass	6.1786G	-8.77	6.158G	-39.29	-31.26	-8.03	2
6175MHz	Pass	6.1774G	-8.82	6.1603G	-37.85	-29.26	-8.59	3
6175MHz	Pass	6.1712G	-9.13	6.1591G	-39.07	-29.28	-9.79	4
6415MHz	Pass	6.4137G	-9.05	6.3971G	-40.18	-32.50	-7.68	1
6415MHz	Pass	6.4199G	-8.52	6.3991G	-38.39	-29.81	-8.58	2
6415MHz	Pass	6.4172G	-9.23	6.3997G	-38.62	-29.26	-9.36	3
6415MHz	Pass	6.40991G	-9.55	6.4001G	-38.67	-29.90	-8.77	4
6435MHz	Pass	6.42861G	-8.81	6.4203G	-37.73	-29.03	-8.70	1
6435MHz	Pass	6.4399G	-8.81	6.4201G	-38.16	-29.58	-8.58	2
6435MHz	Pass	6.42991G	-9.33	6.419G	-38.87	-29.65	-9.22	3
6435MHz	Pass	6.42871G	-9.56	6.4202G	-38.31	-30.28	-8.03	4
6475MHz	Pass	6.4786G	-8.74	6.4584G	-38.73	-30.29	-8.44	1
6475MHz	Pass	6.4774G	-8.72	6.4577G	-39.45	-31.42	-8.03	2
6475MHz	Pass	6.4726G	-8.97	6.4595G	-38.26	-30.75	-7.51	3
6475MHz	Pass	6.47G	-9.48	6.4599G	-38.56	-30.07	-8.49	4
6515MHz	Pass	6.5198G	-8.40	6.5301G	-37.69	-29.28	-8.41	1
6515MHz	Pass	6.5173G	-8.73	6.4712G	-58.53	-48.61	-9.92	2
6515MHz	Pass	6.5124G	-8.85	6.5001G	-38.07	-29.02	-9.05	3
6515MHz	Pass	6.5173G	-9.29	6.5304G	-38.70	-29.46	-9.24	4
6535MHz	Pass	6.5374G	-8.47	6.5207G	-37.25	-28.54	-8.71	1
6535MHz	Pass	6.5374G	-8.73	6.5183G	-39.18	-30.12	-9.06	2
6535MHz	Pass	6.5374G	-8.92	6.5179G	-39.57	-30.72	-8.85	3
6535MHz	Pass	6.5325G	-9.45	6.4905G	-58.79	-49.45	-9.34	4
6715MHz	Pass	6.7162G	-8.48	6.7002G	-37.30	-29.30	-8.00	1
6715MHz	Pass	6.70981G	-8.52	6.6988G	-38.37	-29.29	-9.08	2
6715MHz	Pass	6.7112G	-8.60	6.6997G	-37.84	-29.69	-8.15	3
6715MHz	Pass	6.7111G	-9.28	6.6968G	-40.17	-32.14	-8.03	4
6855MHz	Pass	6.8599G	-10.16	6.8937G	-57.97	-50.06	-7.91	1
6855MHz	Pass	6.8512G	-10.25	6.8364G	-41.78	-34.57	-7.21	2
6855MHz	Pass	6.8586G	-9.92	6.8397G	-38.88	-31.73	-7.15	3
6855MHz	Pass	6.84881G	-10.40	6.8376G	-40.95	-34.26	-6.69	4
6875MHz Straddle 6.875-7.125GHz	Pass	6.86761G	-9.57	6.9182G	-58.15	-49.57	-8.58	1
6875MHz Straddle 6.875-7.125GHz	Pass	6.8727G	-9.71	6.8586G	-39.84	-32.48	-7.36	2
6875MHz Straddle 6.875-7.125GHz	Pass	6.86921G	-9.17	6.9195G	-58.23	-49.17	-9.06	3
6875MHz Straddle 6.875-7.125GHz	Pass	6.86861G	-9.94	6.922G	-58.29	-49.94	-8.35	4
6895MHz	Pass	6.88871G	-9.79	6.8779G	-40.33	-33.69	-6.64	1



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6895MHz	Pass	6.88991G	-9.88	6.9367G	-57.92	-49.88	-8.04	2
6895MHz	Pass	6.8988G	-9.56	6.9361G	-57.94	-49.56	-8.38	3
6895MHz	Pass	6.88981G	-10.04	6.9436G	-58.12	-50.04	-8.08	4
7015MHz	Pass	7.0186G	-10.30	6.9694G	-57.86	-50.30	-7.56	1
7015MHz	Pass	7.00991G	-9.52	6.9736G	-57.67	-49.52	-8.15	2
7015MHz	Pass	7.00871G	-10.23	6.9715G	-57.78	-50.23	-7.55	3
7015MHz	Pass	7.0124G	-10.79	6.975G	-57.75	-50.79	-6.96	4
7095MHz	Pass	7.0937G	-10.27	7.1431G	-58.58	-50.27	-8.31	1
7095MHz	Pass	7.0999G	-10.12	7.1406G	-58.57	-50.12	-8.45	2
7095MHz	Pass	7.08871G	-10.49	7.1366G	-58.25	-50.49	-7.76	3
7095MHz	Pass	7.08991G	-11.27	7.1407G	-58.56	-51.27	-7.29	4
802.11be EHT40_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5965MHz	Pass	5.97859G	-7.02	5.9974G	-37.11	-30.58	-6.53	1
5965MHz	Pass	5.97239G	-7.36	6.0024G	-39.00	-32.21	-6.79	2
5965MHz	Pass	5.9698G	-7.04	6.0024G	-38.85	-31.41	-7.44	3
5965MHz	Pass	5.97759G	-7.20	5.9942G	-36.15	-28.90	-7.25	4
6165MHz	Pass	6.17119G	-6.92	6.1962G	-37.78	-30.49	-7.29	1
6165MHz	Pass	6.1688G	-6.58	6.1972G	-38.30	-30.32	-7.98	2
6165MHz	Pass	6.17019G	-6.27	6.1324G	-37.79	-30.24	-7.55	3
6165MHz	Pass	6.1698G	-7.01	6.1966G	-38.05	-30.41	-7.64	4
6405MHz	Pass	6.4086G	-6.62	6.3734G	-37.37	-30.35	-7.02	1
6405MHz	Pass	6.41G	-6.77	6.4398G	-39.27	-31.73	-7.54	2
6405MHz	Pass	6.41219G	-6.83	6.3766G	-36.76	-27.60	-9.16	3
6405MHz	Pass	6.41139G	-7.36	6.3684G	-40.10	-32.76	-7.34	4
6445MHz	Pass	6.43861G	-6.42	6.4118G	-37.94	-29.78	-8.16	1
6445MHz	Pass	6.43841G	-5.86	6.412G	-37.34	-30.03	-7.31	2
6445MHz	Pass	6.4422G	-6.31	6.411G	-38.41	-31.03	-7.38	3
6445MHz	Pass	6.43821G	-6.89	6.4104G	-39.06	-31.89	-7.17	4
6485MHz	Pass	6.47881G	-6.78	6.4482G	-39.73	-32.57	-7.16	1
6485MHz	Pass	6.48G	-6.26	6.4504G	-38.44	-31.18	-7.26	2
6485MHz	Pass	6.48G	-6.57	6.4514G	-38.38	-30.97	-7.41	3
6485MHz	Pass	6.4818G	-6.98	6.452G	-38.36	-31.51	-6.85	4
6525MHz Straddle 6.425-6.525GHz	Pass	6.53239G	-6.53	6.4926G	-37.67	-30.46	-7.21	1
6525MHz Straddle 6.425-6.525GHz	Pass	6.529G	-6.11	6.492G	-37.49	-30.40	-7.09	2
6525MHz Straddle 6.425-6.525GHz	Pass	6.5278G	-6.35	6.5626G	-39.71	-32.14	-7.57	3
6525MHz Straddle 6.425-6.525GHz	Pass	6.53039G	-6.49	6.5588G	-38.46	-31.15	-7.31	4
6565MHz	Pass	6.5604G	-6.64	6.5306G	-38.73	-31.40	-7.33	1
6565MHz	Pass	6.55981G	-6.43	6.5286G	-39.36	-31.97	-7.39	2
6565MHz	Pass	6.56G	-6.32	6.5312G	-38.44	-30.88	-7.56	3
6565MHz	Pass	6.5698G	-6.83	6.527G	-40.28	-33.00	-7.28	4
6725MHz	Pass	6.73099G	-6.99	6.6874G	-40.20	-33.05	-7.15	1
6725MHz	Pass	6.71981G	-5.95	6.6914G	-37.86	-30.51	-7.35	2




Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6725MHz	Pass	6.73099G	-6.43	6.6912G	-38.22	-30.56	-7.66	3
6725MHz	Pass	6.7216G	-6.60	6.687G	-39.92	-33.25	-6.67	4
6845MHz	Pass	6.83741G	-7.13	6.8124G	-38.12	-31.14	-6.98	1
6845MHz	Pass	6.85G	-6.62	6.8062G	-40.20	-33.40	-6.80	2
6845MHz	Pass	6.83941G	-6.48	6.8074G	-39.73	-32.64	-7.09	3
6845MHz	Pass	6.841G	-7.03	6.812G	-38.07	-31.20	-6.87	4
6885MHz Straddle 6.875-7.125GHz	Pass	6.87781G	-7.23	6.8462G	-40.63	-33.36	-7.27	1
6885MHz Straddle 6.875-7.125GHz	Pass	6.87981G	-6.54	6.8522G	-37.95	-29.50	-8.45	2
6885MHz Straddle 6.875-7.125GHz	Pass	6.87861G	-6.73	6.8504G	-38.42	-31.73	-6.69	3
6885MHz Straddle 6.875-7.125GHz	Pass	6.8812G	-6.99	6.8512G	-38.47	-31.62	-6.85	4
6925MHz	Pass	6.91601G	-7.01	6.9988G	-54.94	-47.01	-7.93	1
6925MHz	Pass	6.92G	-6.60	6.8888G	-38.97	-32.11	-6.86	2
6925MHz	Pass	6.91901G	-6.51	6.894G	-36.93	-29.01	-7.92	3
6925MHz	Pass	6.91881G	-6.75	6.8884G	-39.09	-31.58	-7.51	4
7005MHz	Pass	6.99981G	-7.60	6.9664G	-40.88	-34.20	-6.68	1
7005MHz	Pass	6.99961G	-6.84	6.9678G	-39.60	-32.70	-6.90	2
7005MHz	Pass	6.99981G	-7.29	6.9738G	-37.72	-30.86	-6.86	3
7005MHz	Pass	7.0002G	-7.33	6.9702G	-39.05	-32.29	-6.76	4
7085MHz	Pass	7.081G	-8.67	7.0074G	-55.59	-48.67	-6.92	1
7085MHz	Pass	7.07881G	-7.83	7.0544G	-37.05	-29.68	-7.37	2
7085MHz	Pass	7.07981G	-8.34	7.0478G	-39.88	-33.64	-6.24	3
7085MHz	Pass	7.07881G	-8.45	7.0512G	-38.76	-32.77	-5.99	4
802.11be EHT80_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
5985MHz	Pass	5.99499G	-4.20	6.0286G	-31.45	-24.27	-7.18	1
5985MHz	Pass	5.99739G	-4.39	6.0294G	-31.97	-24.43	-7.54	2
5985MHz	Pass	5.99739G	-4.19	6.0298G	-32.00	-24.21	-7.79	3
5985MHz	Pass	5.99939G	-4.09	6.0286G	-31.25	-24.16	-7.09	4
6145MHz	Pass	6.15819G	-3.34	6.305G	-51.12	-43.34	-7.78	1
6145MHz	Pass	6.15659G	-3.44	6.1014G	-32.12	-23.51	-8.61	2
6145MHz	Pass	6.15699G	-3.40	6.1018G	-31.70	-23.42	-8.28	3
6145MHz	Pass	6.15659G	-3.63	6.1882G	-31.96	-23.70	-8.26	4
6385MHz	Pass	6.37301G	-3.85	6.2246G	-51.55	-43.85	-7.70	1
6385MHz	Pass	6.37141G	-4.12	6.3418G	-31.93	-24.16	-7.77	2
6385MHz	Pass	6.39699G	-4.16	6.2074G	-52.44	-44.16	-8.28	3
6385MHz	Pass	6.37341G	-4.19	6.3426G	-31.50	-24.21	-7.29	4
6465MHz	Pass	6.45261G	-2.87	6.305G	-50.14	-42.87	-7.27	1
6465MHz	Pass	6.45301G	-2.76	6.285G	-51.68	-42.76	-8.92	2
6465MHz	Pass	6.45141G	-3.09	6.4226G	-30.32	-23.11	-7.21	3
6465MHz	Pass	6.45101G	-2.85	6.4222G	-30.34	-22.87	-7.47	4
6545MHz Straddle 6.425-6.525GHz	Pass	6.55579G	-2.61	6.3846G	-49.19	-42.61	-6.58	1
6545MHz Straddle 6.425-6.525GHz	Pass	6.55819G	-2.68	6.5018G	-30.66	-22.68	-7.98	2
6545MHz Straddle 6.425-6.525GHz	Pass	6.55739G	-2.58	6.4922G	-33.43	-23.98	-9.45	3



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6545MHz Straddle 6.425-6.525GHz	Pass	6.55699G	-2.51	6.5026G	-29.64	-22.51	-7.13	4
6625MHz	Pass	6.61021G	-3.09	6.4646G	-49.55	-43.09	-6.46	1
6625MHz	Pass	6.61261G	-3.72	6.5818G	-31.64	-23.79	-7.85	2
6625MHz	Pass	6.63619G	-3.66	6.459G	-52.03	-43.66	-8.37	3
6625MHz	Pass	6.63619G	-3.71	6.459G	-51.97	-43.71	-8.26	4
6705MHz	Pass	6.69581G	-3.69	6.5446G	-50.76	-43.69	-7.07	1
6705MHz	Pass	6.69141G	-3.76	6.6618G	-31.94	-23.83	-8.11	2
6705MHz	Pass	6.69141G	-3.64	6.6626G	-31.13	-23.66	-7.47	3
6705MHz	Pass	6.69381G	-3.61	6.6622G	-31.06	-23.68	-7.38	4
6785MHz	Pass	6.77381G	-4.54	6.6246G	-50.34	-44.54	-5.80	1
6785MHz	Pass	6.77181G	-4.37	6.9138G	-52.29	-44.37	-7.92	2
6785MHz	Pass	6.77381G	-3.98	6.9546G	-52.08	-43.98	-8.10	3
6785MHz	Pass	6.77381G	-4.37	6.955G	-52.14	-44.37	-7.77	4
6865MHz Straddle 6.875-7.125GHz	Pass	6.85221G	-4.05	6.7046G	-49.71	-44.05	-5.66	1
6865MHz Straddle 6.875-7.125GHz	Pass	6.85261G	-4.12	6.9962G	-51.91	-44.12	-7.79	2
6865MHz Straddle 6.875-7.125GHz	Pass	6.85341G	-3.61	6.8218G	-31.51	-23.61	-7.90	3
6865MHz Straddle 6.875-7.125GHz	Pass	6.85301G	-4.06	6.993G	-51.76	-44.06	-7.70	4
6945MHz	Pass	6.93261G	-3.73	6.7846G	-48.30	-43.73	-4.57	1
6945MHz	Pass	6.93221G	-3.81	6.9026G	-30.42	-23.83	-6.59	2
6945MHz	Pass	6.93341G	-3.73	6.9014G	-31.52	-23.80	-7.72	3
6945MHz	Pass	6.93101G	-3.79	6.9014G	-31.44	-23.89	-7.55	4
7025MHz	Pass	7.01261G	-4.74	6.8646G	-49.18	-44.74	-4.44	1
7025MHz	Pass	7.01381G	-4.21	6.9814G	-31.99	-24.25	-7.74	2
7025MHz	Pass	7.01381G	-4.50	6.9818G	-31.87	-24.52	-7.35	3
7025MHz	Pass	7.01221G	-4.70	6.9818G	-32.02	-24.74	-7.28	4
802.11be EHT160_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6025MHz	Pass	6.10092G	-0.23	6.2698G	-48.32	-39.89	-8.43	1
6025MHz	Pass	6.04978G	-0.28	6.269G	-48.97	-40.17	-8.80	2
6025MHz	Pass	6.04658G	-0.41	6.269G	-48.65	-40.19	-8.46	3
6025MHz	Pass	6.10092G	-0.08	6.2698G	-47.28	-39.97	-7.31	4
6185MHz	Pass	6.26092G	-0.17	6.4282G	-49.45	-39.60	-9.85	1
6185MHz	Pass	6.16182G	0.16	6.429G	-49.13	-39.50	-9.63	2
6185MHz	Pass	6.24574G	-0.12	6.4282G	-49.50	-39.55	-9.95	3
6185MHz	Pass	6.24814G	0.12	6.4282G	-49.11	-39.31	-9.80	4
6345MHz	Pass	6.32102G	-1.10	6.5882G	-51.48	-40.53	-10.95	1
6345MHz	Pass	6.32102G	-1.07	6.5882G	-51.05	-40.73	-10.32	2
6345MHz	Pass	6.32102G	-0.80	6.589G	-51.09	-40.35	-10.74	3
6345MHz	Pass	6.31863G	-0.53	6.5898G	-51.16	-40.31	-10.85	4
6505MHz Straddle 6.425-6.525GHz	Pass	6.44266G	-0.75	6.2618G	-49.31	-40.15	-9.16	1
6505MHz Straddle 6.425-6.525GHz	Pass	6.44266G	-0.76	6.2618G	-49.79	-40.26	-9.53	2
6505MHz Straddle 6.425-6.525GHz	Pass	6.52898G	-0.43	6.261G	-49.45	-40.00	-9.45	3
6505MHz Straddle 6.425-6.525GHz	Pass	6.44186G	-0.24	6.2594G	-48.15	-39.94	-8.21	4



Mode	Result	Ref (Hz)	Ref (dBm)	Freq (Hz)	Level (dBm)	Limit (dBm)	Margin (dB)	Port
6665MHz	Pass	6.63943G	-0.72	6.4186G	-49.40	-40.39	-9.01	1
6665MHz	Pass	6.69137G	-0.85	6.4202G	-50.31	-40.63	-9.68	2
6665MHz	Pass	6.64102G	-1.07	6.4218G	-49.81	-40.50	-9.31	3
6665MHz	Pass	6.68898G	-0.55	6.4218G	-49.20	-39.98	-9.22	4
6825MHz Straddle 6.875-7.125GHz	Pass	6.80182G	-1.17	6.5802G	-50.93	-40.91	-10.02	1
6825MHz Straddle 6.875-7.125GHz	Pass	6.76266G	-0.59	6.5818G	-49.88	-40.04	-9.84	2
6825MHz Straddle 6.875-7.125GHz	Pass	6.79783G	-1.03	6.5818G	-50.81	-40.38	-10.43	3
6825MHz Straddle 6.875-7.125GHz	Pass	6.79943G	-1.06	6.581G	-50.54	-40.63	-9.91	4
6985MHz	Pass	6.90908G	-0.49	6.741G	-46.97	-40.15	-6.82	1
6985MHz	Pass	6.90908G	-0.50	6.7402G	-47.33	-40.16	-7.17	2
6985MHz	Pass	6.90908G	-0.74	6.7402G	-48.36	-40.40	-7.96	3
6985MHz	Pass	6.90988G	-0.49	6.741G	-47.82	-40.15	-7.67	4
802.11be EHT320_Nss1,(MCS0)_4TX	-	-	-	-	-	-	-	-
6105MHz	Pass	6.2073G	3.25	6.601G	-41.91	-36.75	-5.16	1
6105MHz	Pass	6.1386G	2.84	6.5994G	-42.67	-37.16	-5.51	2
6105MHz	Pass	6.1498G	2.80	6.5978G	-41.96	-36.98	-4.98	3
6105MHz	Pass	6.2105G	3.13	6.6042G	-42.93	-36.87	-6.06	4
6265MHz	Pass	6.2986G	2.97	6.761G	-42.87	-37.03	-5.84	1
6265MHz	Pass	6.2986G	3.24	6.7658G	-41.79	-36.76	-5.03	2
6265MHz	Pass	6.2986G	3.16	6.7642G	-41.87	-36.84	-5.03	3
6265MHz	Pass	6.3002G	3.34	6.761G	-41.95	-36.66	-5.29	4
6425MHz Straddle 5.925-6.425GHz	Pass	6.3914G	3.20	6.9258G	-41.87	-36.80	-5.07	1
6425MHz Straddle 5.925-6.425GHz	Pass	6.4586G	3.25	6.9546G	-42.49	-36.75	-5.74	2
6425MHz Straddle 5.925-6.425GHz	Pass	6.3914G	3.16	6.961G	-42.44	-36.77	-5.67	3
6425MHz Straddle 5.925-6.425GHz	Pass	6.3914G	3.16	6.9626G	-43.41	-36.84	-6.57	4
6585MHz Straddle 6.425-6.525GHz	Pass	6.5498G	2.99	7.1258G	-40.89	-37.01	-3.88	1
6585MHz Straddle 6.425-6.525GHz	Pass	6.5514G	3.39	7.1082G	-40.10	-36.61	-3.49	2
6585MHz Straddle 6.425-6.525GHz	Pass	6.5514G	3.30	7.1354G	-39.71	-36.70	-3.01	3
6585MHz Straddle 6.425-6.525GHz	Pass	6.5514G	3.37	7.137G	-39.94	-36.63	-3.31	4
6745MHz Straddle 6.875-7.125GHz	Pass	6.7146G	2.87	7.241G	-41.05	-37.13	-3.92	1
6745MHz Straddle 6.875-7.125GHz	Pass	6.7098G	2.53	7.2442G	-42.64	-37.47	-5.17	2
6745MHz Straddle 6.875-7.125GHz	Pass	6.7098G	3.01	7.2394G	-39.98	-36.89	-3.09	3
6745MHz Straddle 6.875-7.125GHz	Pass	6.7114G	2.96	7.2426G	-40.72	-37.04	-3.68	4
6905MHz Straddle 6.875-7.125GHz	Pass	6.8011G	0.67	7.4042G	-46.86	-39.33	-7.53	1
6905MHz Straddle 6.875-7.125GHz	Pass	6.7995G	0.96	7.4026G	-46.61	-39.04	-7.57	2
6905MHz Straddle 6.875-7.125GHz	Pass	6.8043G	0.63	7.401G	-47.05	-39.37	-7.68	3
6905MHz Straddle 6.875-7.125GHz	Pass	6.8027G	0.89	7.401G	-47.01	-39.11	-7.90	4

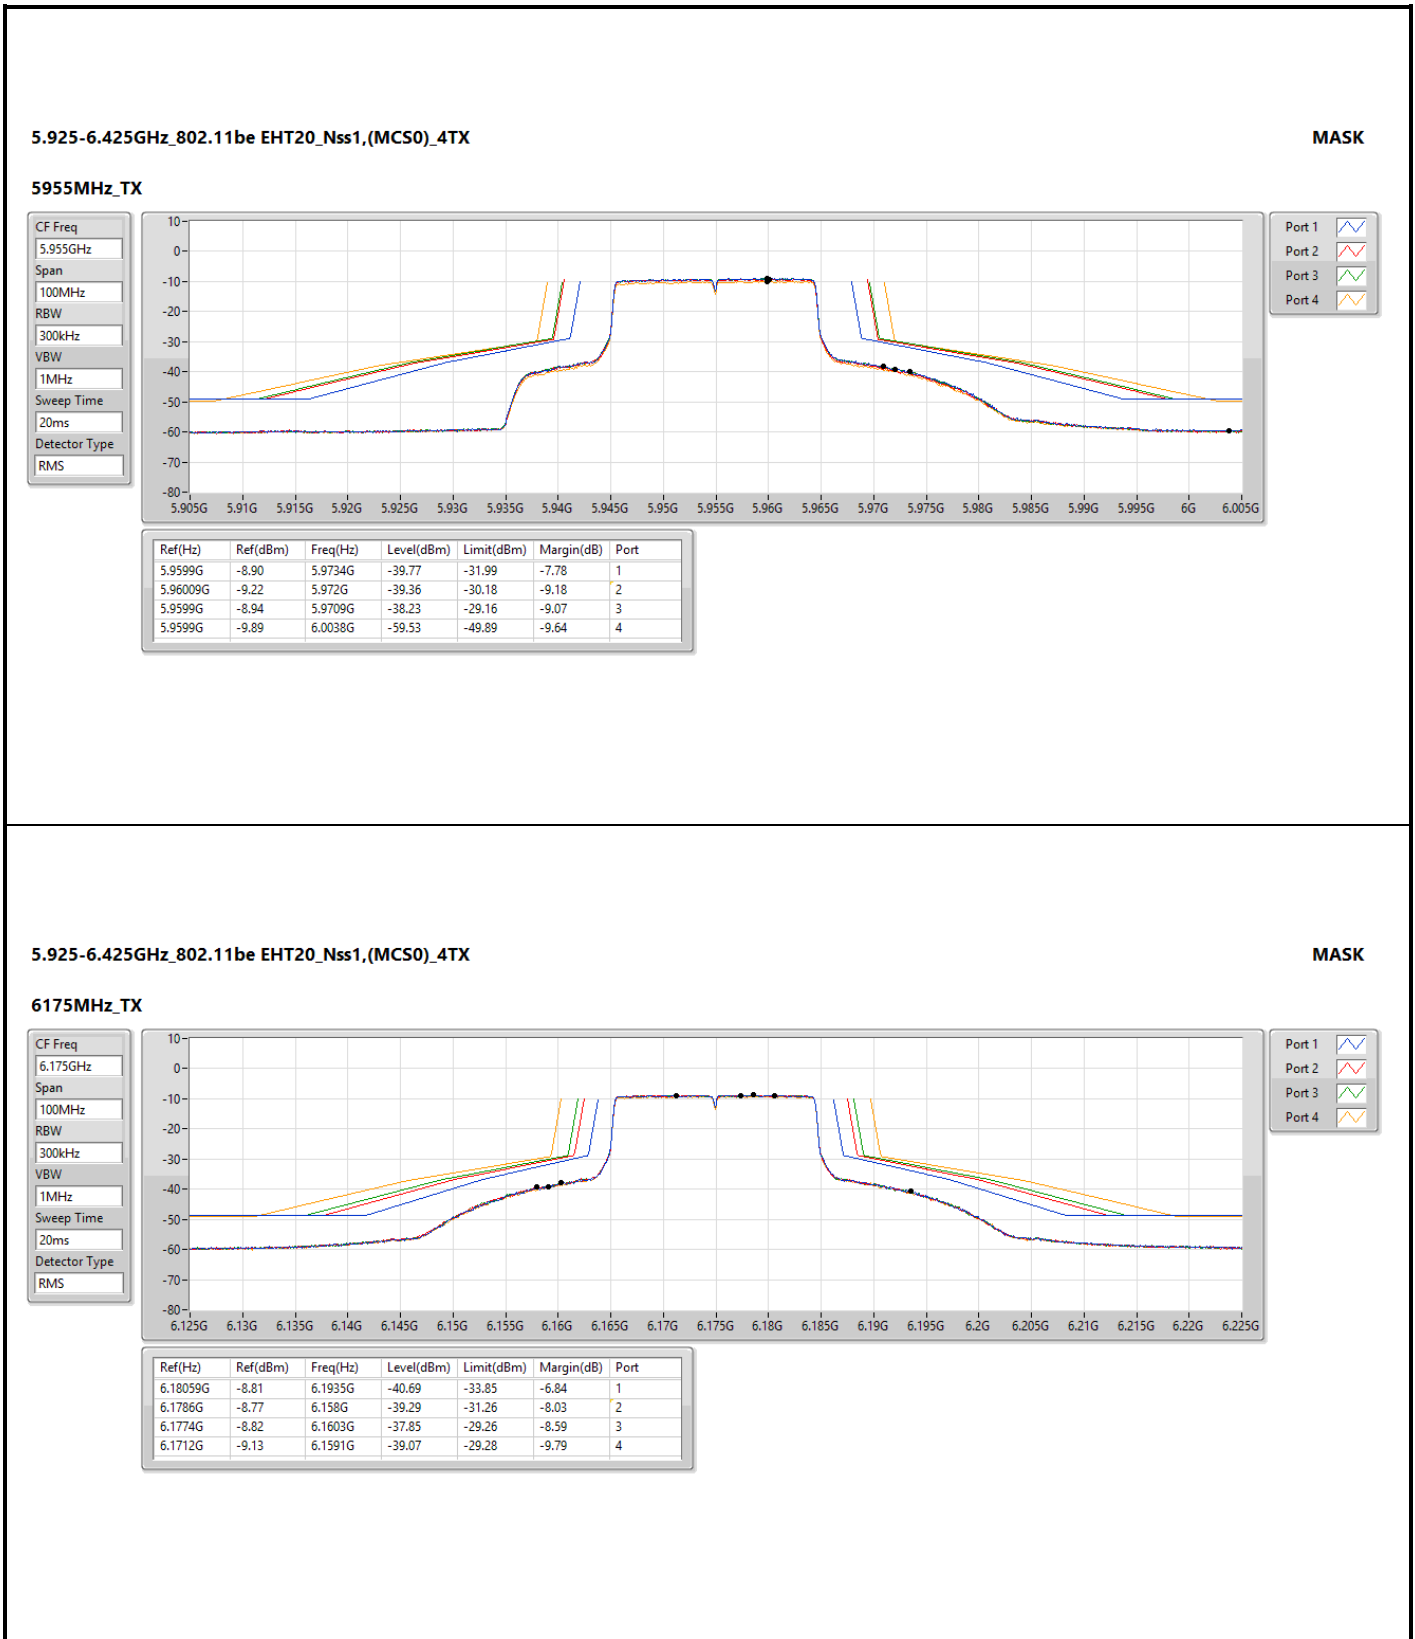



5.925-6.425GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6415MHz_TX

CF Freq
6.415GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

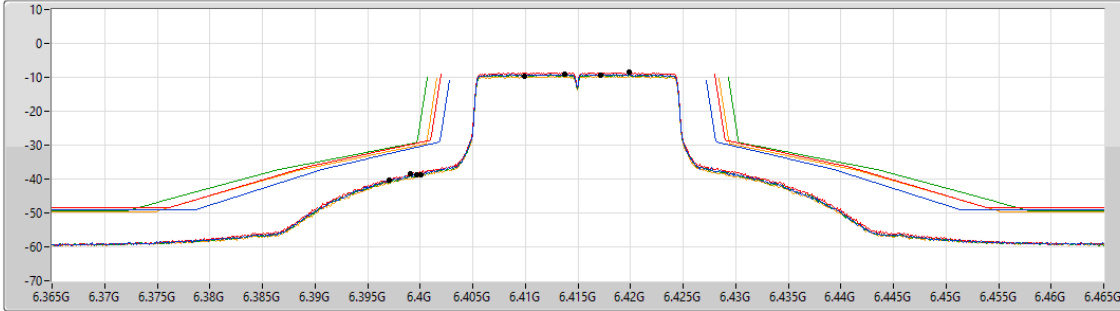

Port 1

Port 2

Port 3

Port 4

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.4137G	-9.05	6.3971G	-40.18	-32.50	-7.68	1
6.4199G	-8.52	6.3991G	-38.39	-29.81	-8.58	2
6.4172G	-9.23	6.3997G	-38.62	-29.26	-9.36	3
6.40991G	-9.55	6.4001G	-38.67	-29.90	-8.77	4

6.425-6.525GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6435MHz_TX

CF Freq
6.435GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

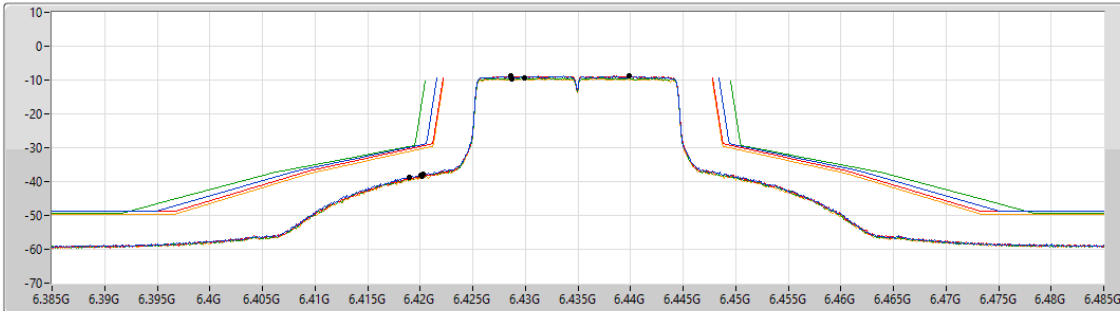



Port 1



Port 2


Port 3

Port 4

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.42861G	-8.81	6.4203G	-37.73	-29.03	-8.70	1
6.4399G	-8.81	6.4201G	-38.16	-29.58	-8.58	2
6.42991G	-9.33	6.419G	-38.87	-29.65	-9.22	3
6.42871G	-9.56	6.4202G	-38.31	-30.28	-8.03	4

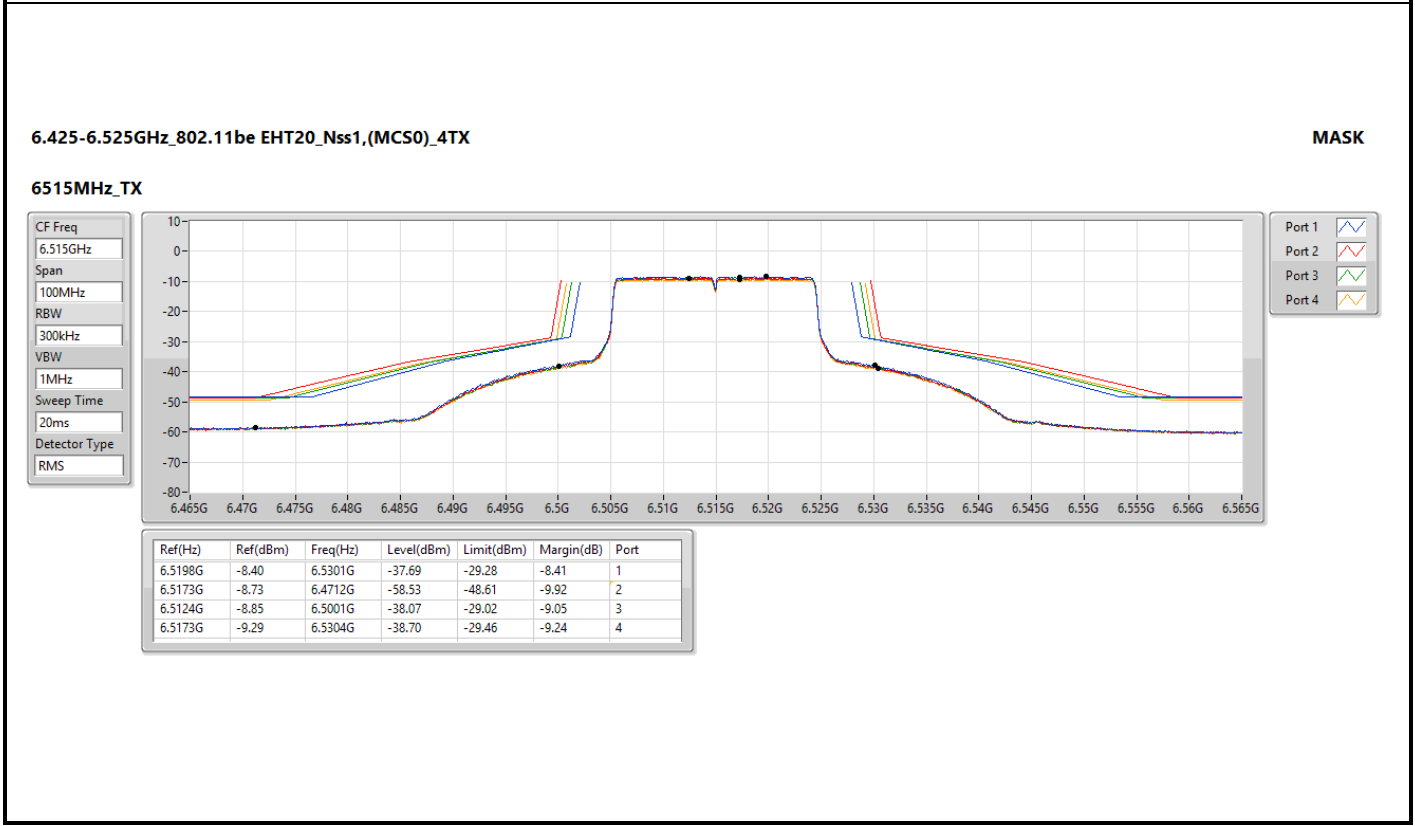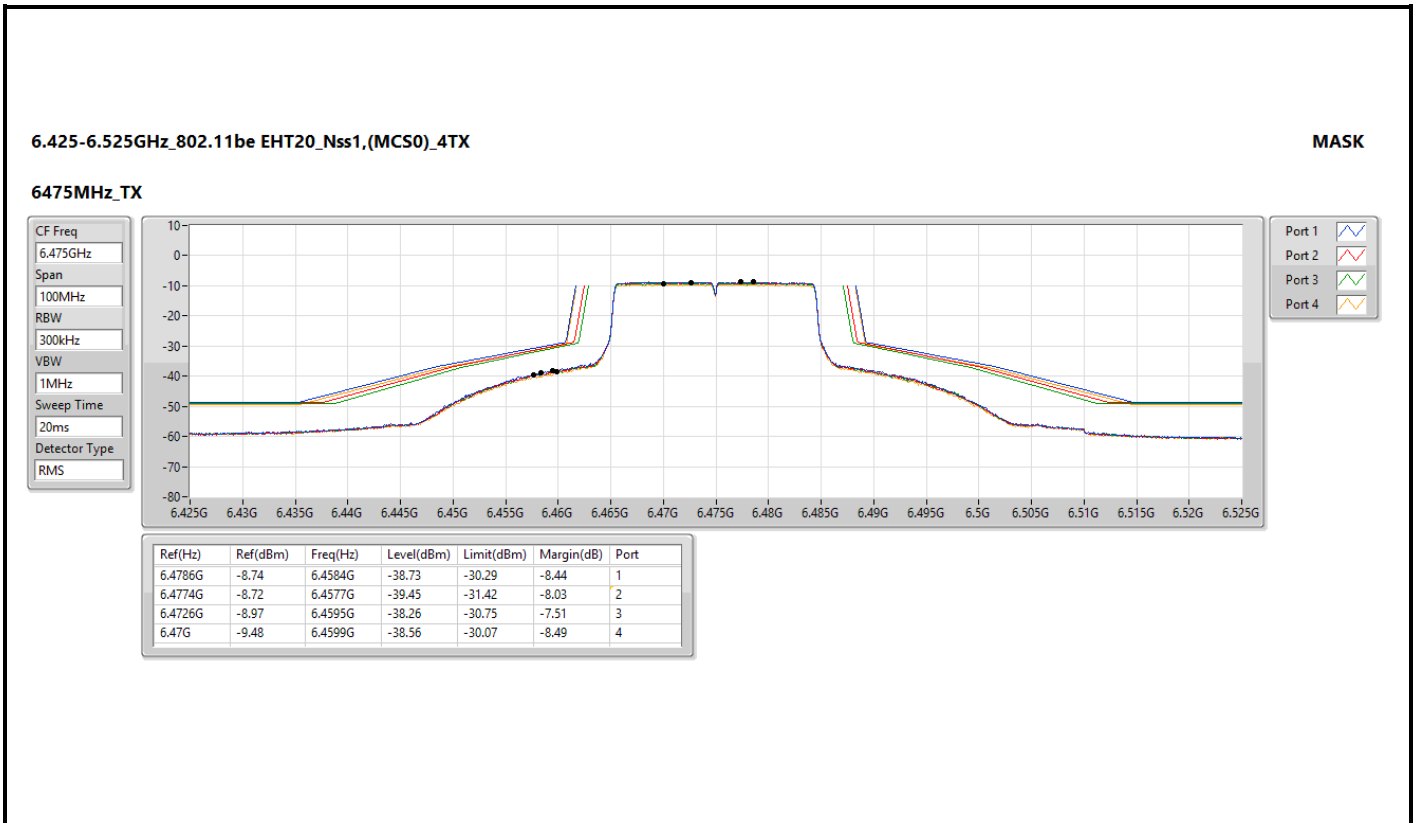

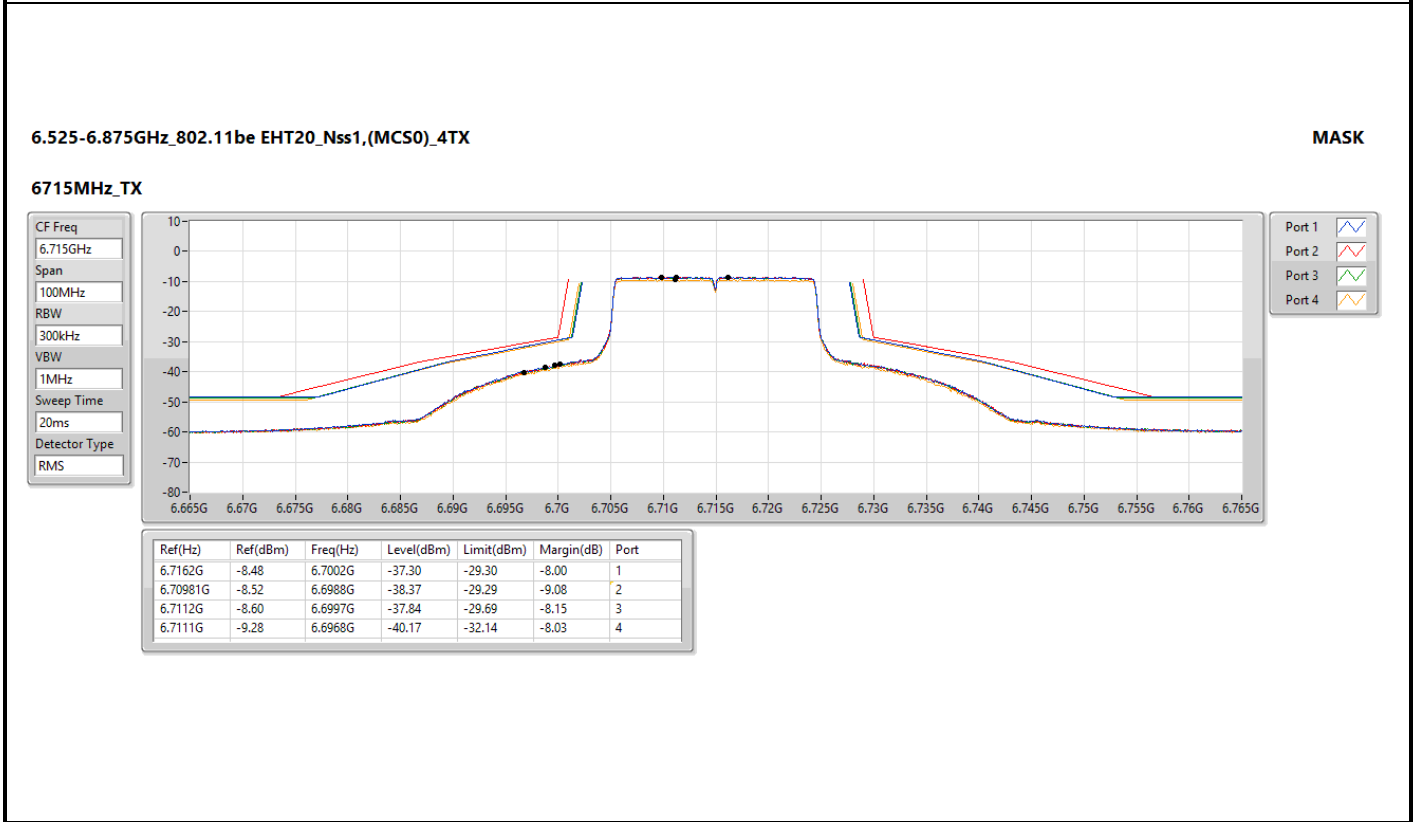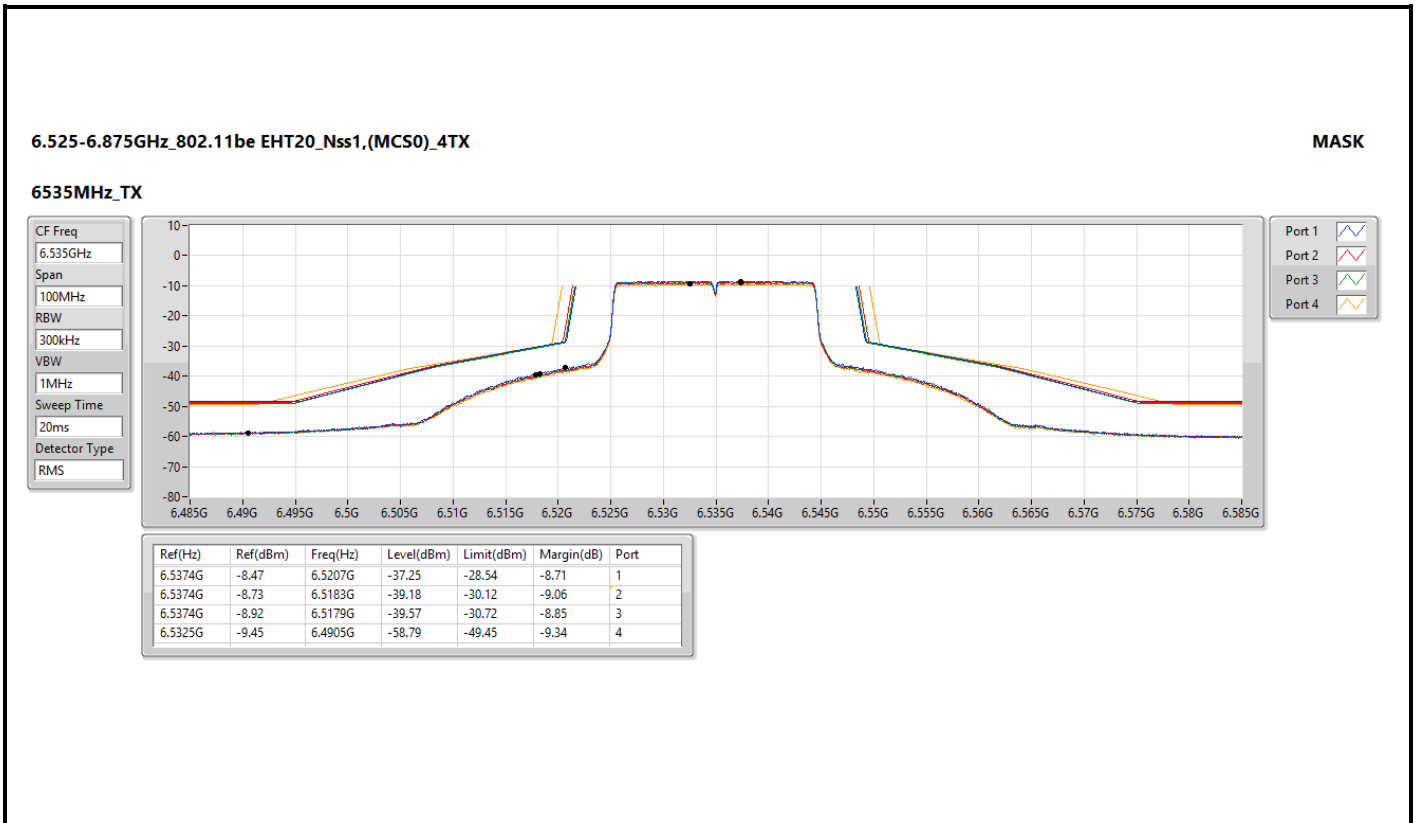

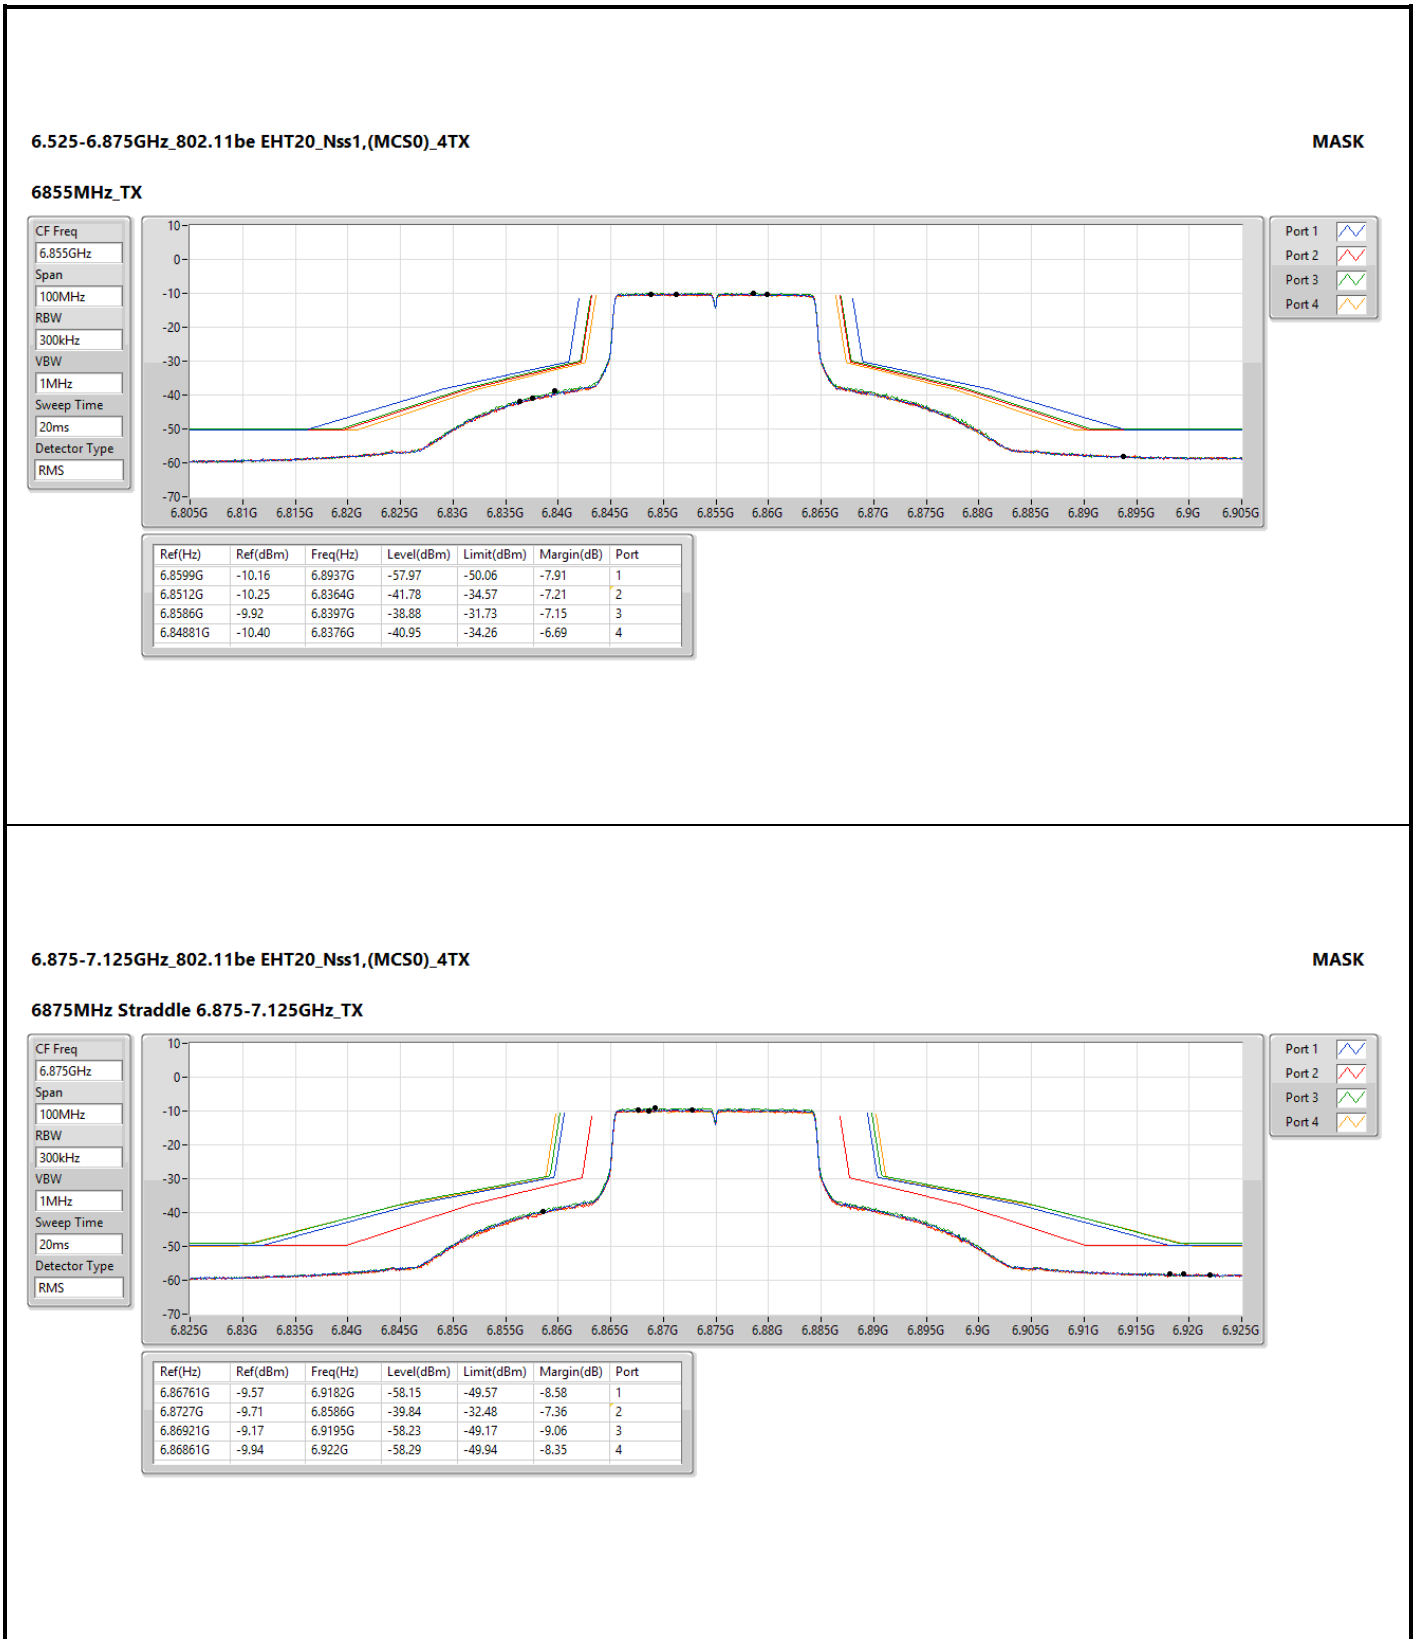

Port 1

Port 2

Port 3

Port 4

CF Freq
6.875GHz

Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

Port 1

Port 2

Port 3

Port 4



6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

6895MHz_TX

CF Freq
6.895GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

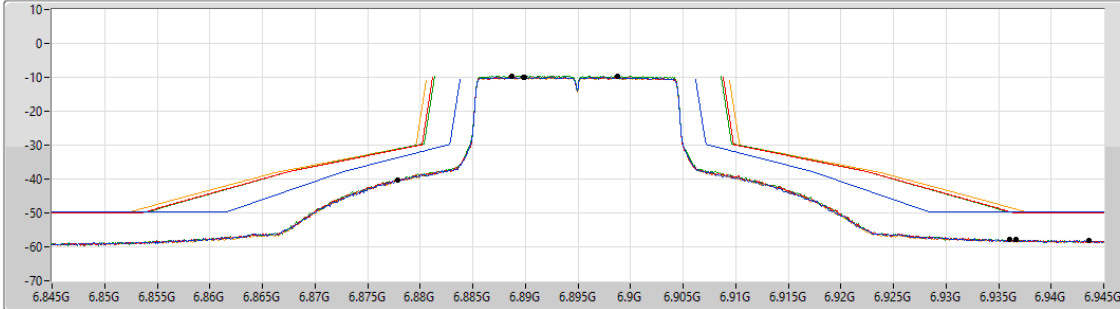

Port 1

Port 2

Port 3

Port 4

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.88871G	-9.79	6.8779G	-40.33	-33.69	-6.64	1
6.88991G	-9.88	6.9367G	-57.92	-49.88	-8.04	2
6.8988G	-9.56	6.9361G	-57.94	-49.56	-8.38	3
6.8981G	-10.04	6.9436G	-58.12	-50.04	-8.08	4

6.875-7.125GHz_802.11be EHT20_Nss1,(MCS0)_4TX

MASK

7015MHz_TX

CF Freq
7.015GHz


Span
100MHz

RBW
300kHz

VBW
1MHz

Sweep Time
20ms

Detector Type
RMS

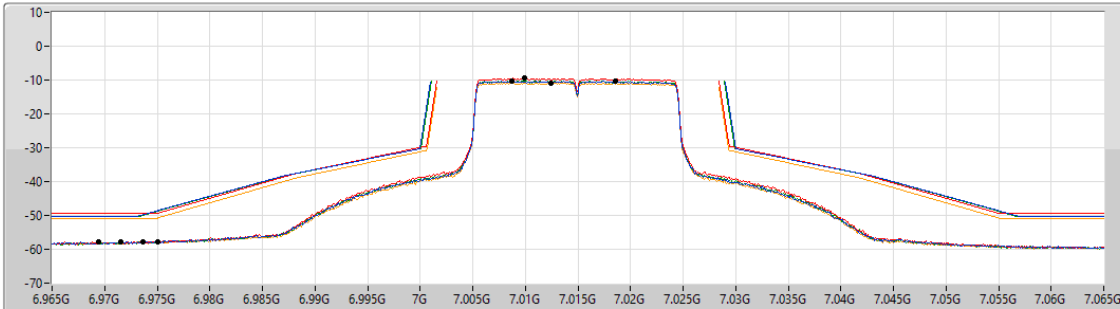

Port 1



Port 2


Port 3

Port 4

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
7.0186G	-10.30	6.9694G	-57.86	-50.30	-7.56	1
7.00991G	-9.52	6.9736G	-57.67	-49.52	-8.15	2
7.00871G	-10.23	6.9715G	-57.78	-50.23	-7.55	3
7.0124G	-10.79	6.975G	-57.75	-50.79	-6.96	4



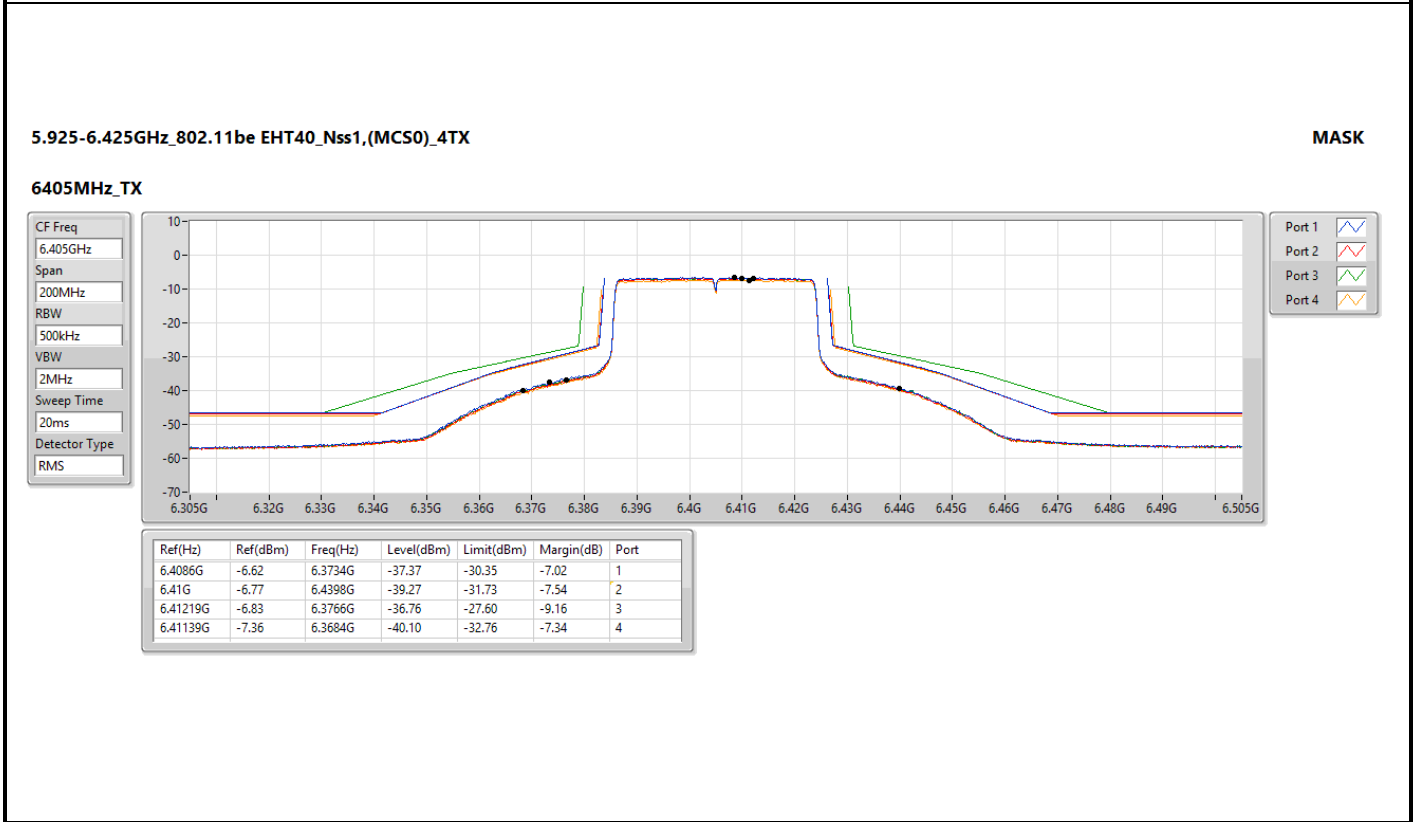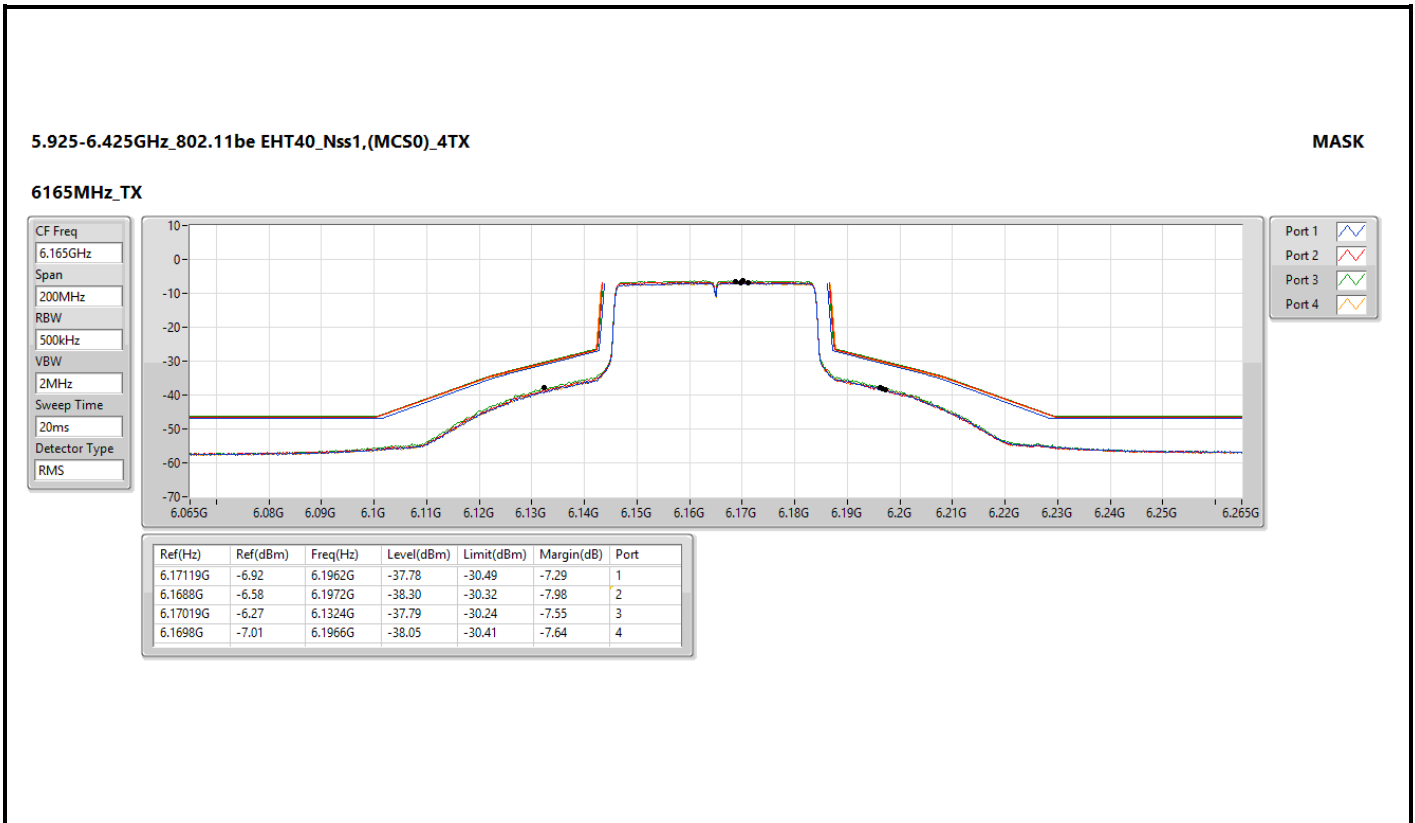

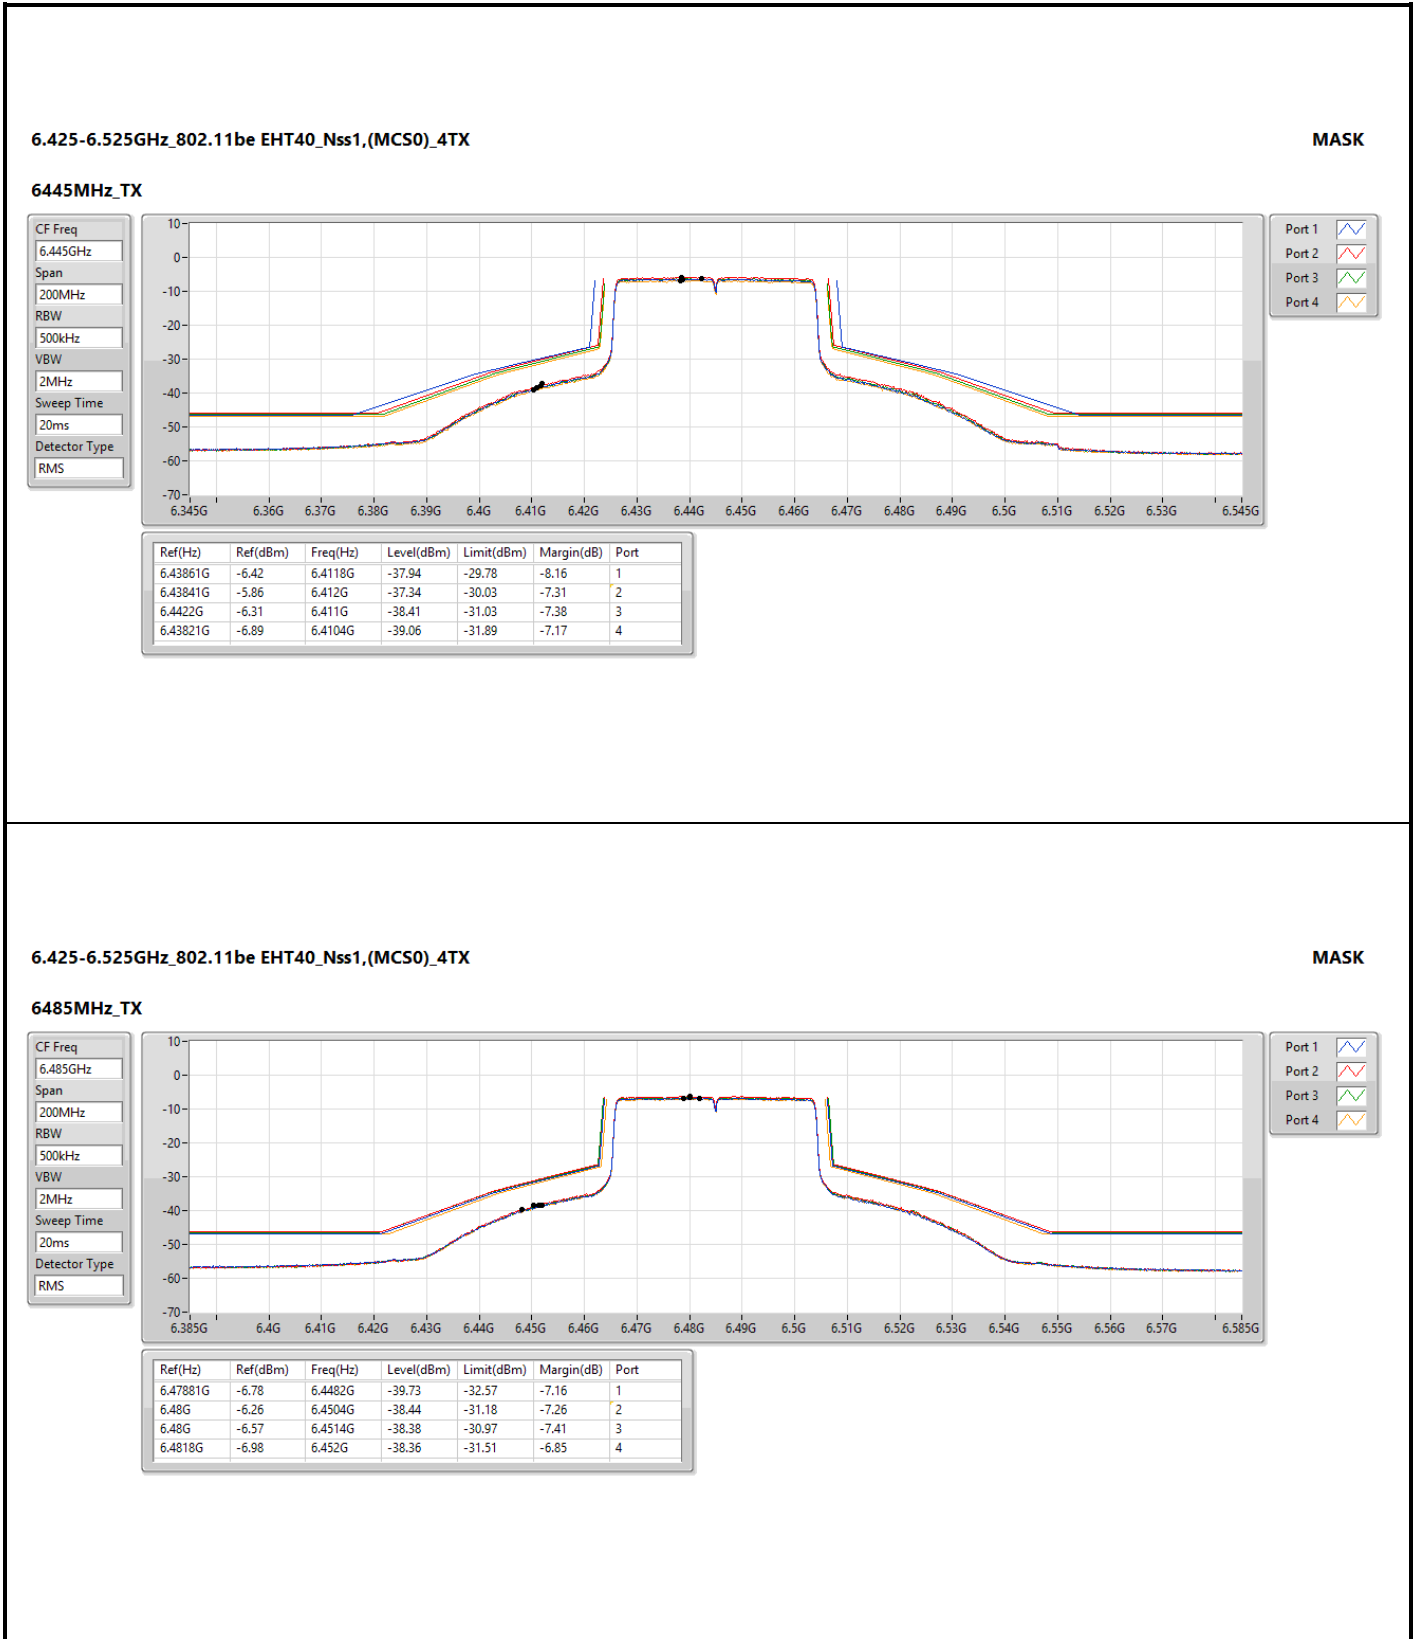



6.425-6.525GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK

6525MHz Straddle 6.425-6.525GHz_TX

CF Freq
6.525GHz


Span
200MHz

RBW
500kHz

VBW
2MHz

Sweep Time
20ms

Detector Type
RMS

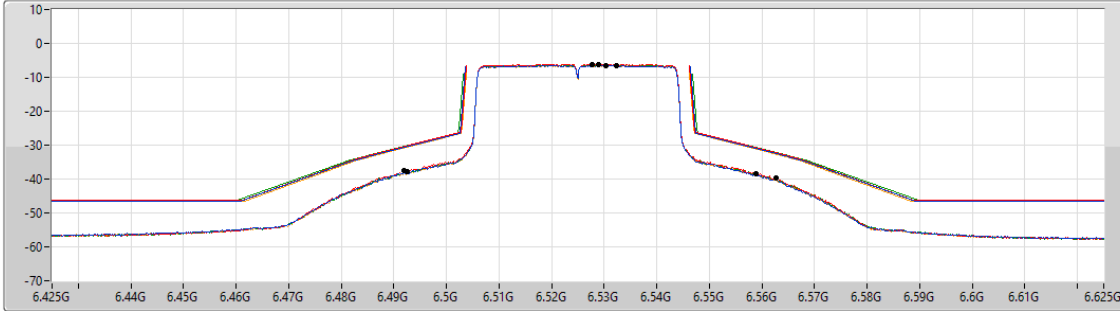

Port 1

Port 2

Port 3

Port 4

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.53239G	-6.53	6.4926G	-37.67	-30.46	-7.21	1
6.529G	-6.11	6.492G	-37.49	-30.40	-7.09	2
6.5278G	-6.35	6.5626G	-39.71	-32.14	-7.57	3
6.53039G	-6.49	6.5588G	-38.46	-31.15	-7.31	4

6.525-6.875GHz_802.11be EHT40_Nss1,(MCS0)_4TX

MASK

6565MHz_TX

CF Freq
6.565GHz


Span
200MHz

RBW
500kHz

VBW
2MHz

Sweep Time
20ms

Detector Type
RMS

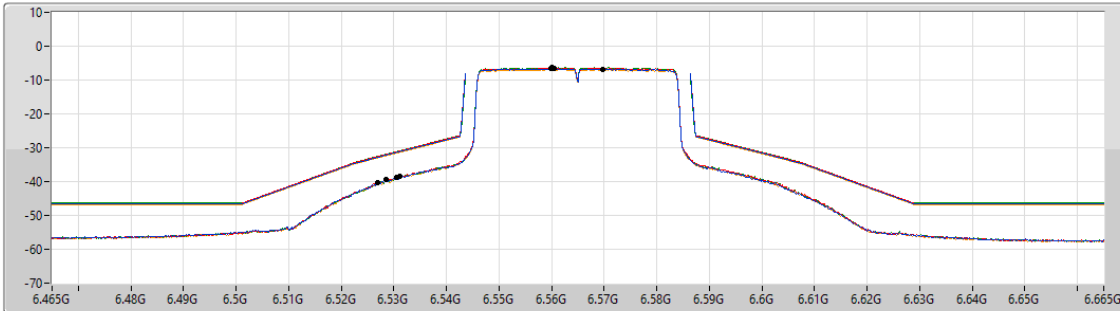


Port 1


Port 2



Port 3

Port 4

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.5604G	-6.64	6.5306G	-38.73	-31.40	-7.33	1
6.55981G	-6.43	6.5286G	-39.36	-31.97	-7.39	2
6.56G	-6.32	6.5312G	-38.44	-30.88	-7.56	3
6.5698G	-6.83	6.527G	-40.28	-33.00	-7.28	4

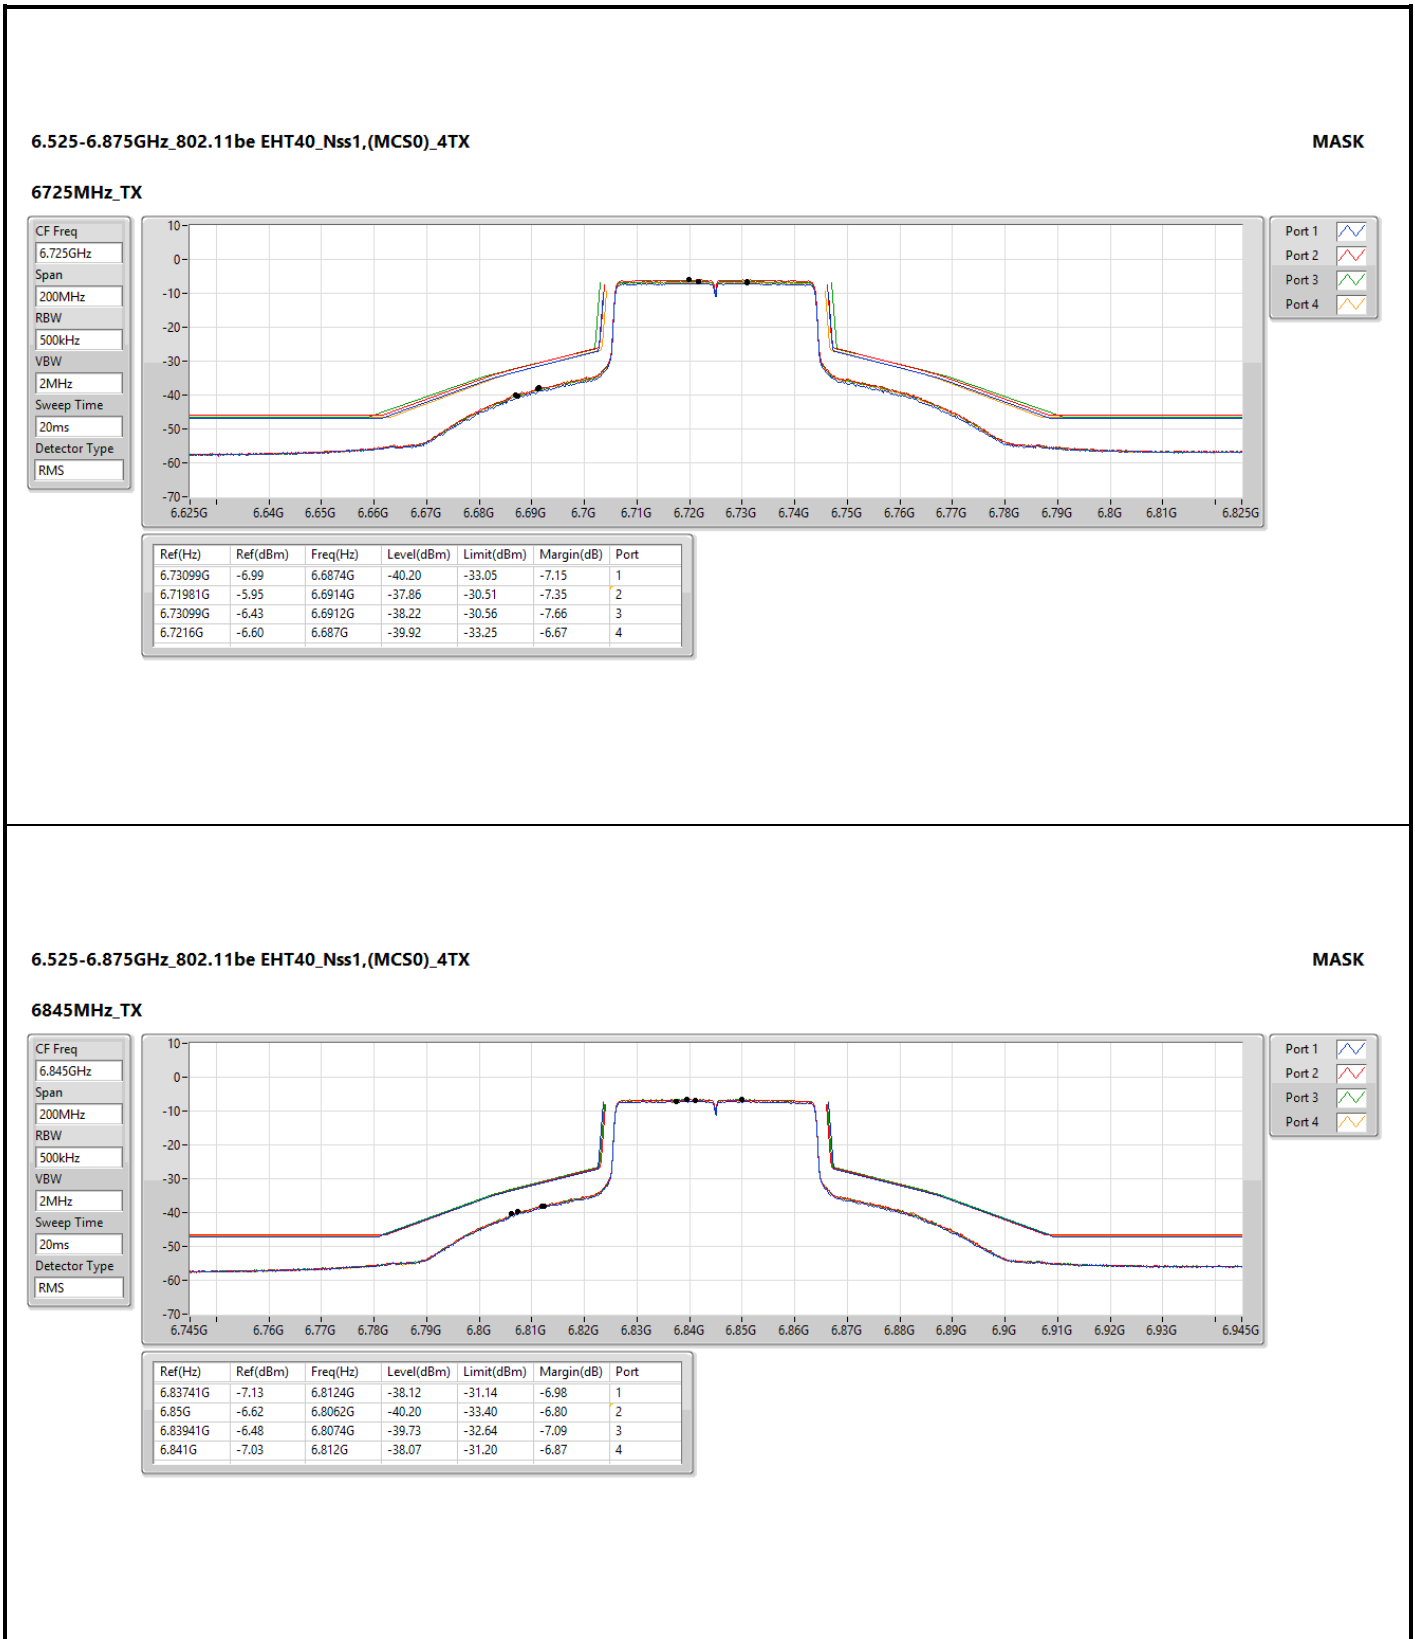

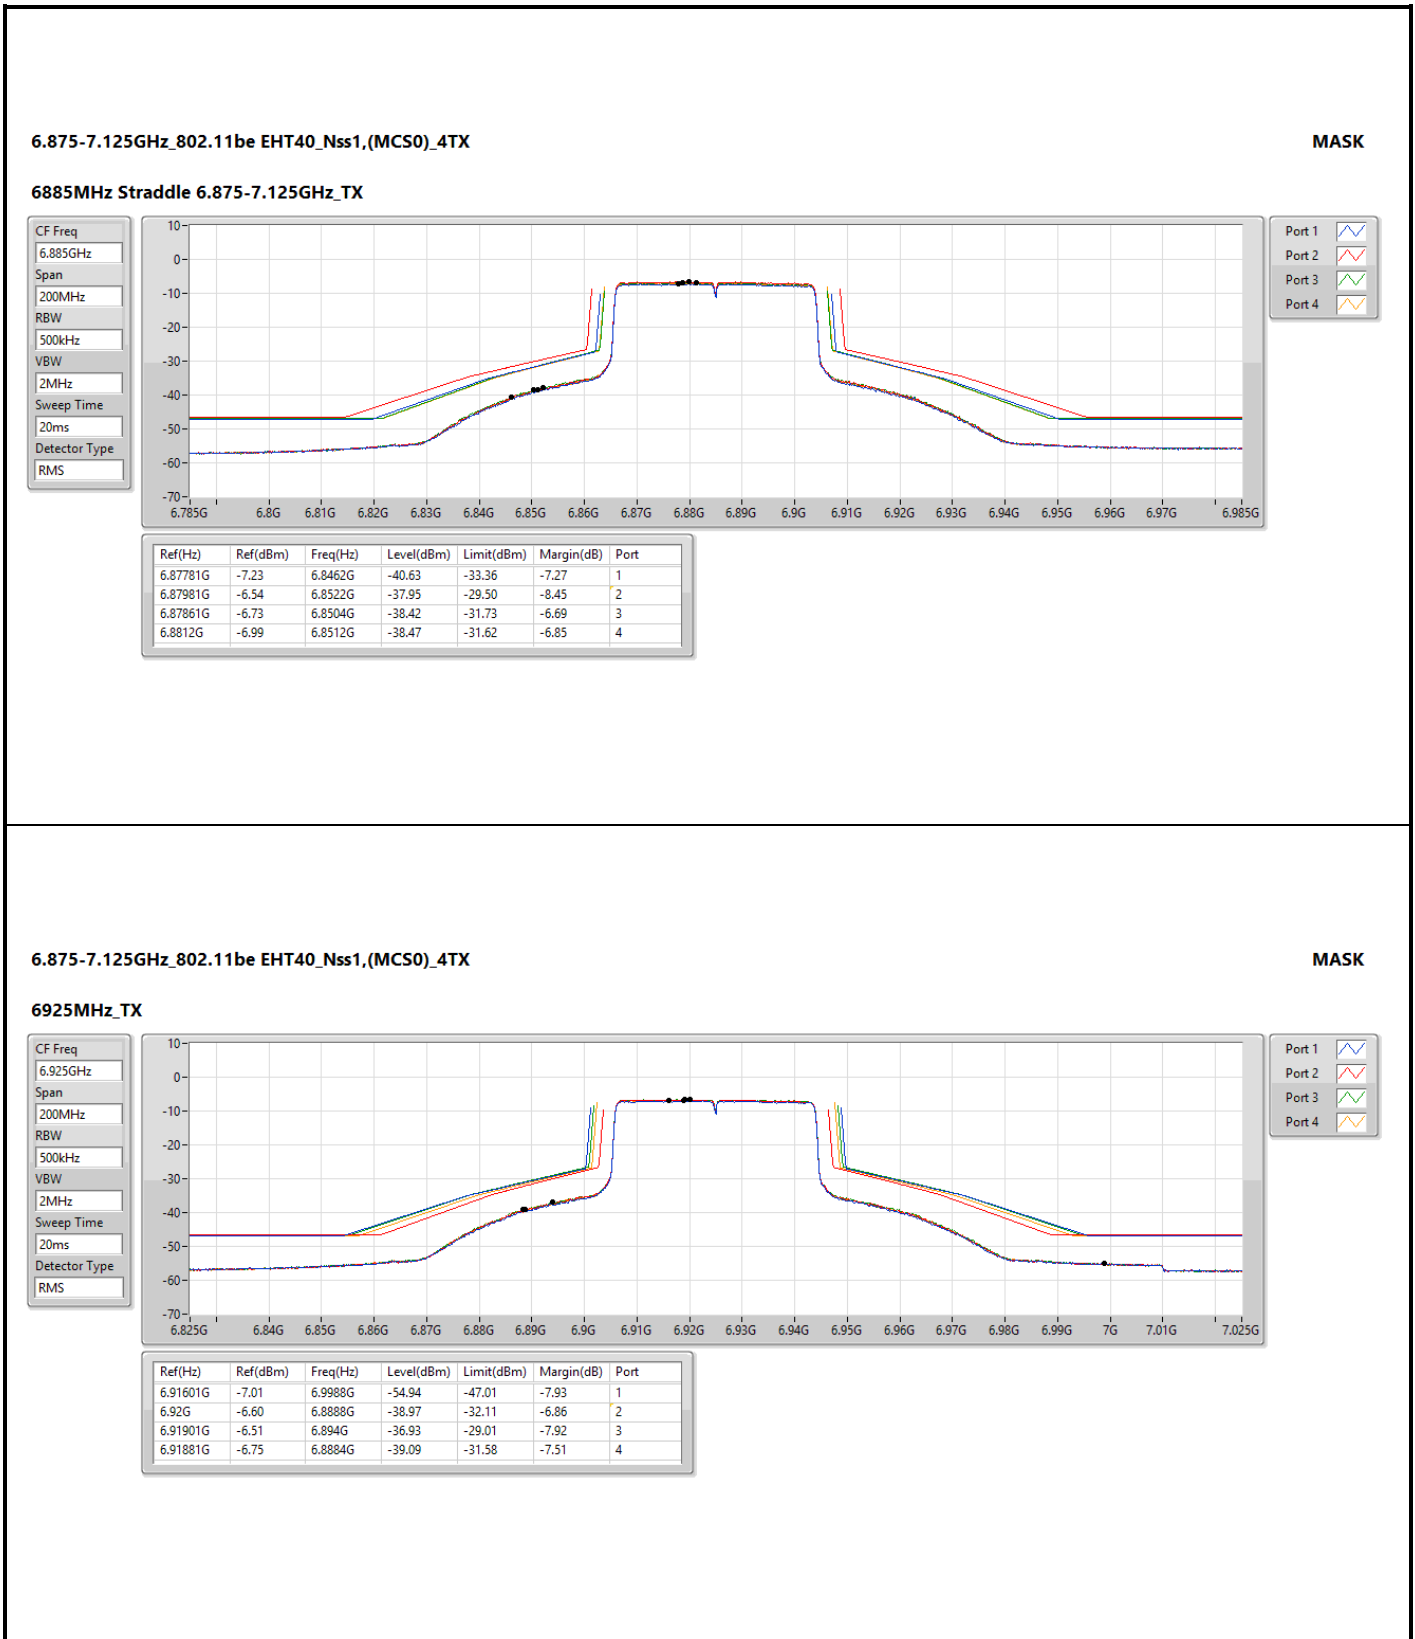

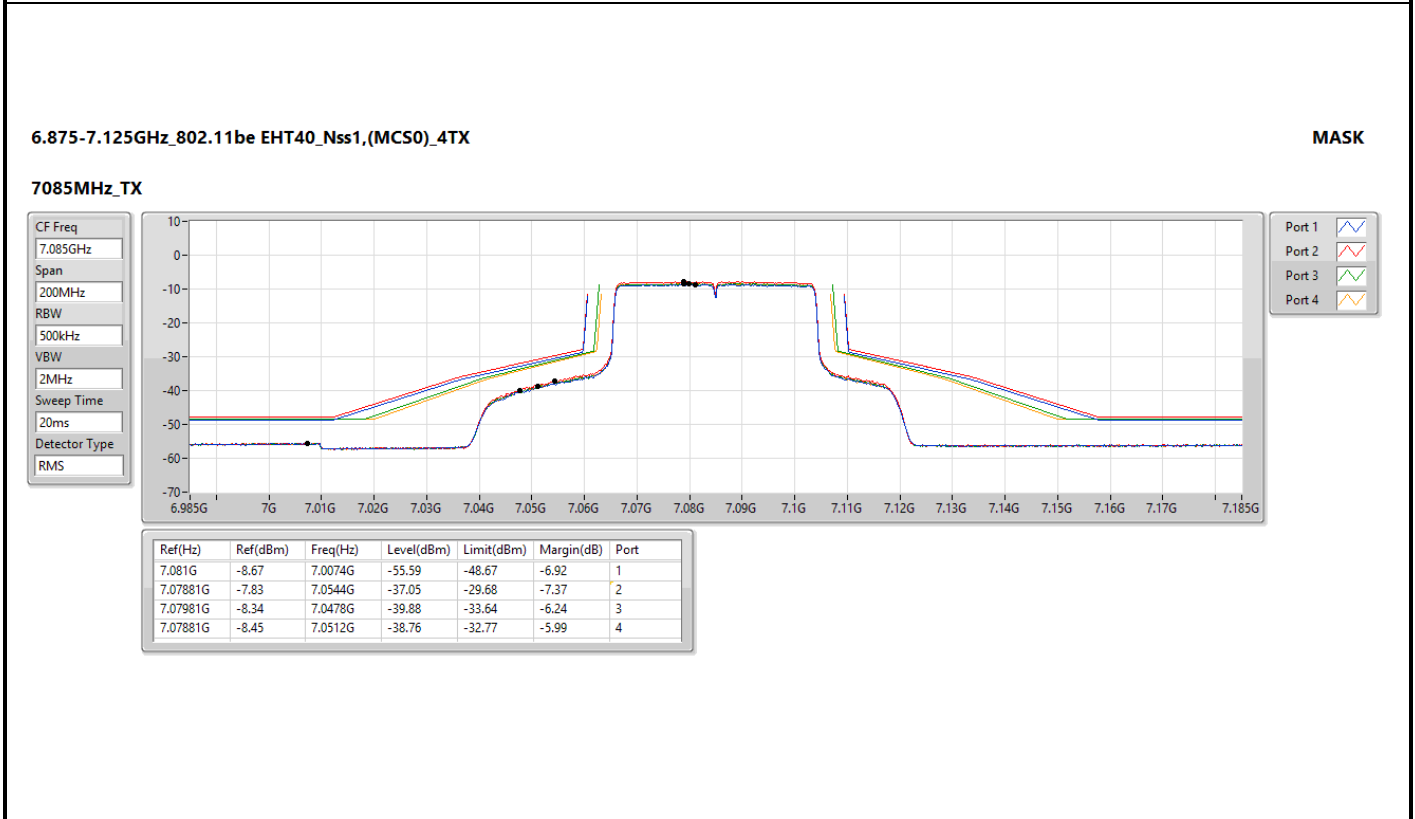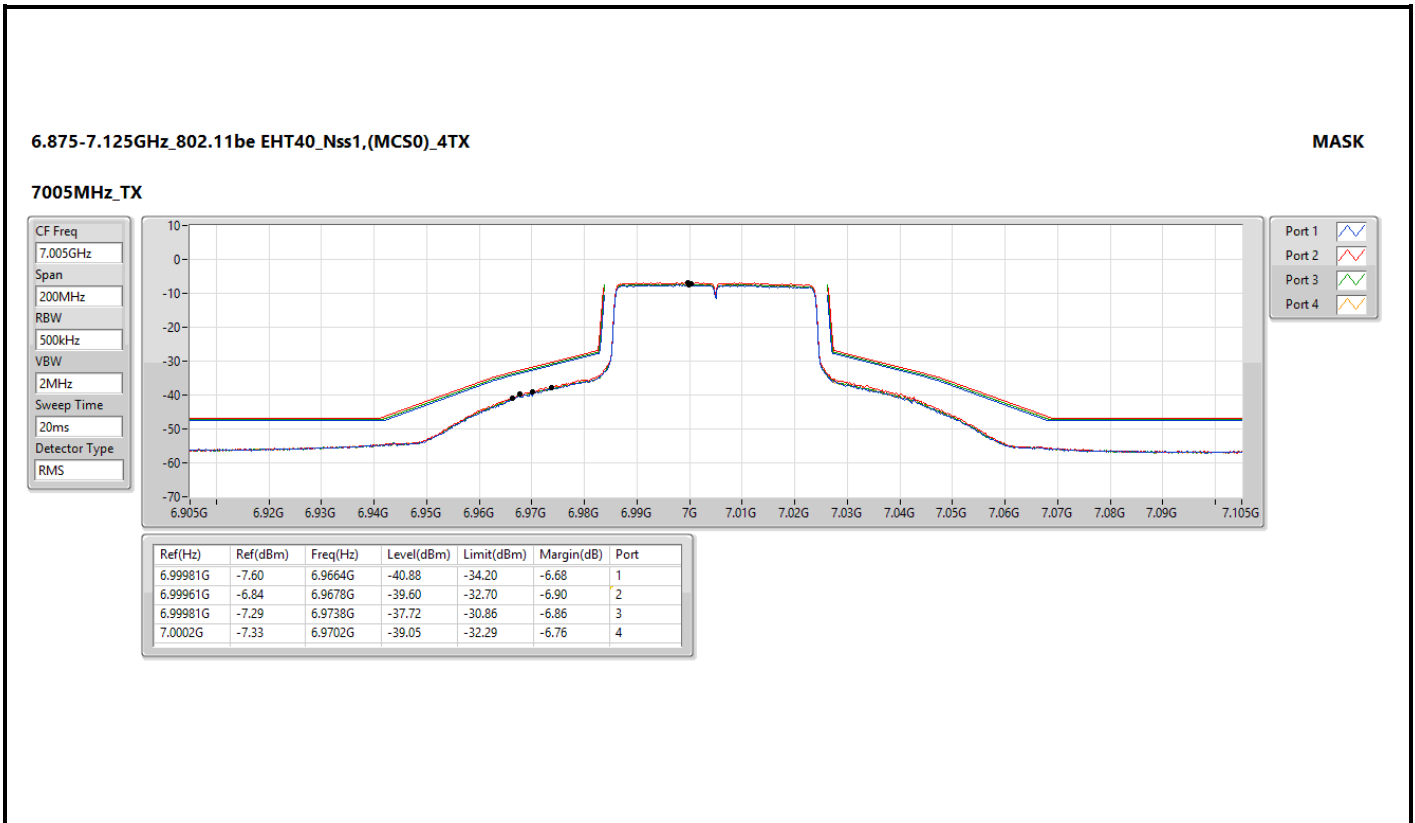





5.925-6.425GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK

6385MHz_TX

CF Freq
6.385GHz


Span
400MHz

RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

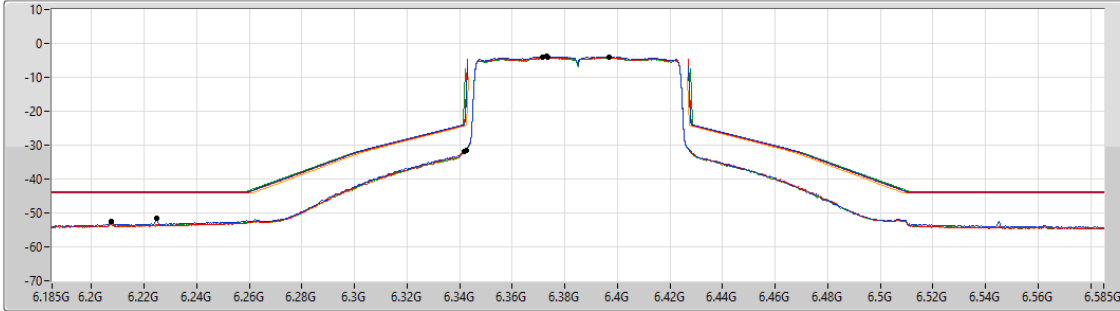

Port 1

Port 2

Port 3

Port 4

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.37301G	-3.85	6.2246G	-51.55	-43.85	-7.70	1
6.37141G	-4.12	6.3418G	-31.93	-24.16	-7.77	2
6.39699G	-4.16	6.2074G	-52.44	-44.16	-8.28	3
6.37341G	-4.19	6.3426G	-31.50	-24.21	-7.29	4

6.425-6.525GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK

6465MHz_TX

CF Freq
6.465GHz


Span
400MHz

RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS

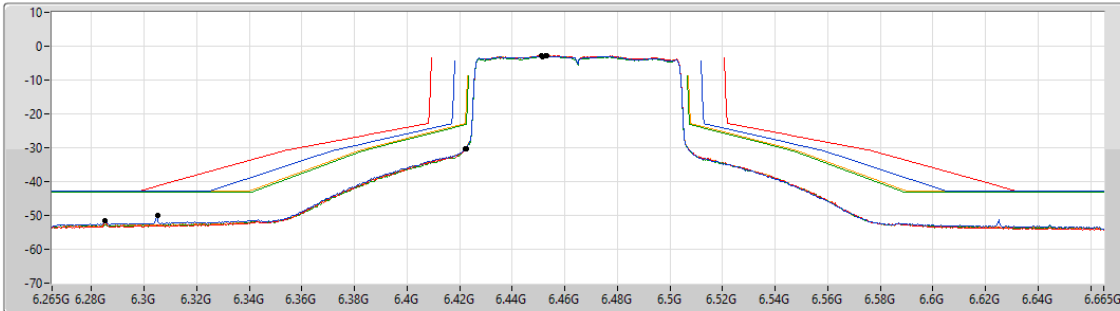



Port 1



Port 2


Port 3

Port 4

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.45261G	-2.87	6.305G	-50.14	-42.87	-7.27	1
6.45301G	-2.76	6.285G	-51.68	-42.76	-8.92	2
6.45141G	-3.09	6.4226G	-30.32	-23.11	-7.21	3
6.45101G	-2.85	6.4222G	-30.34	-22.87	-7.47	4

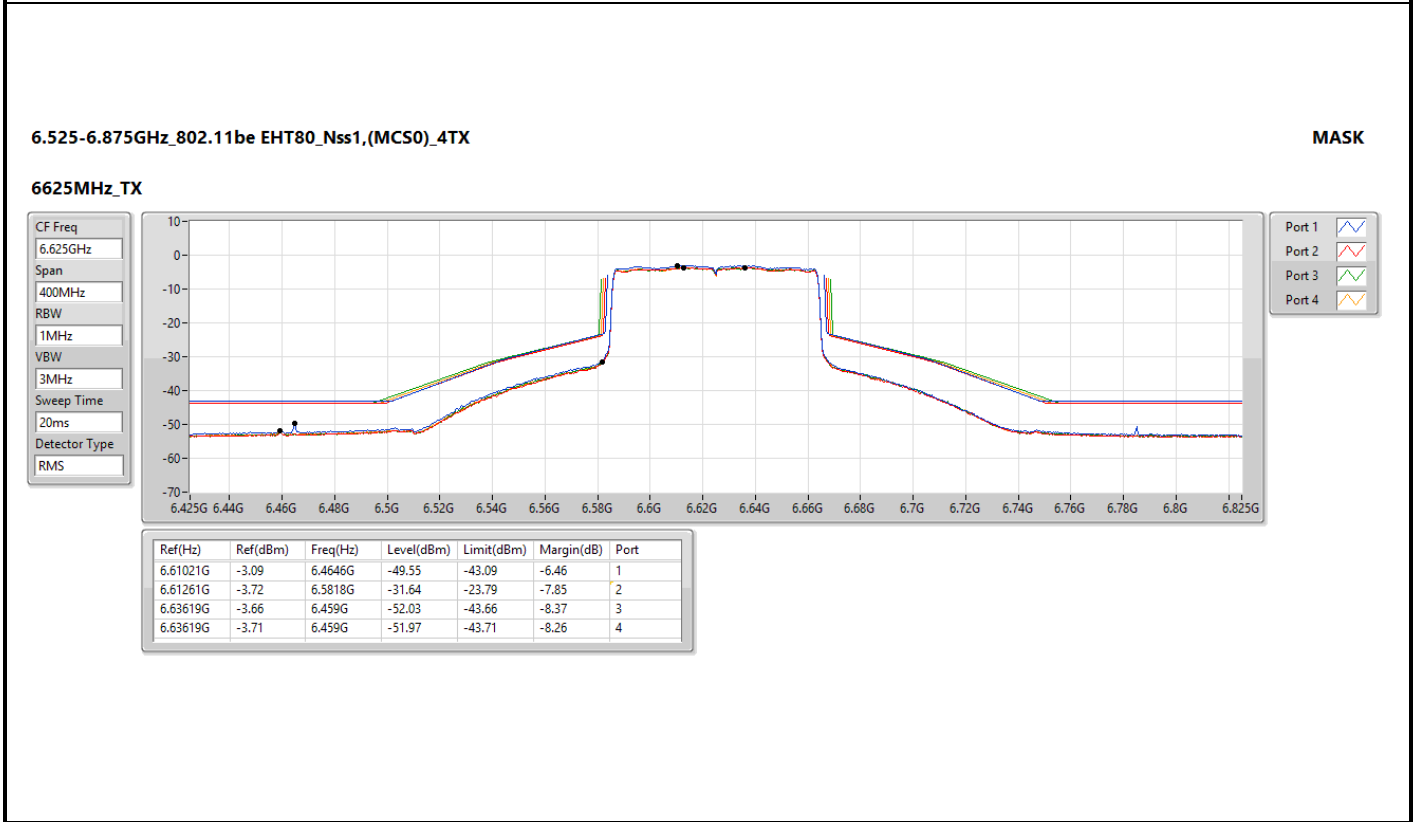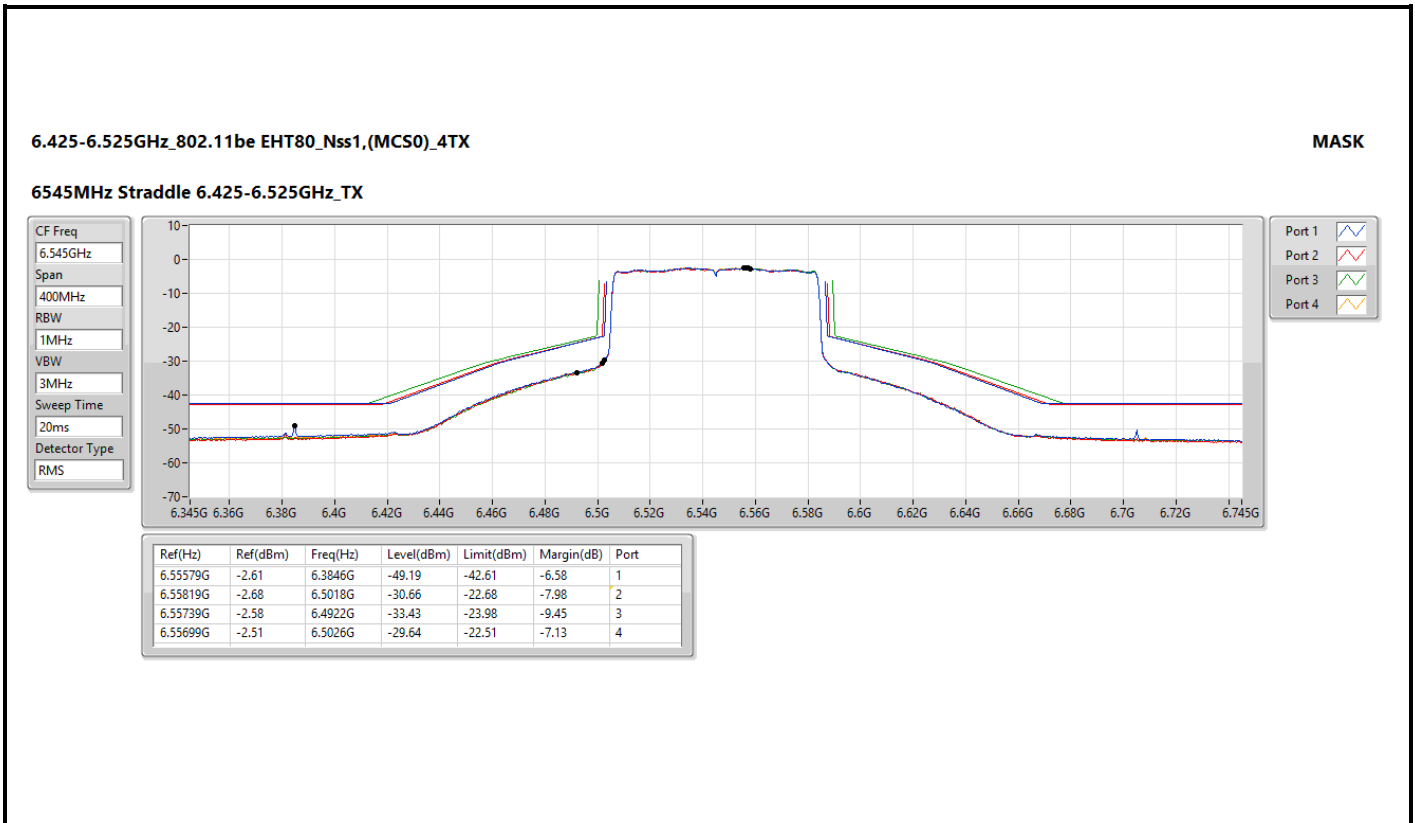

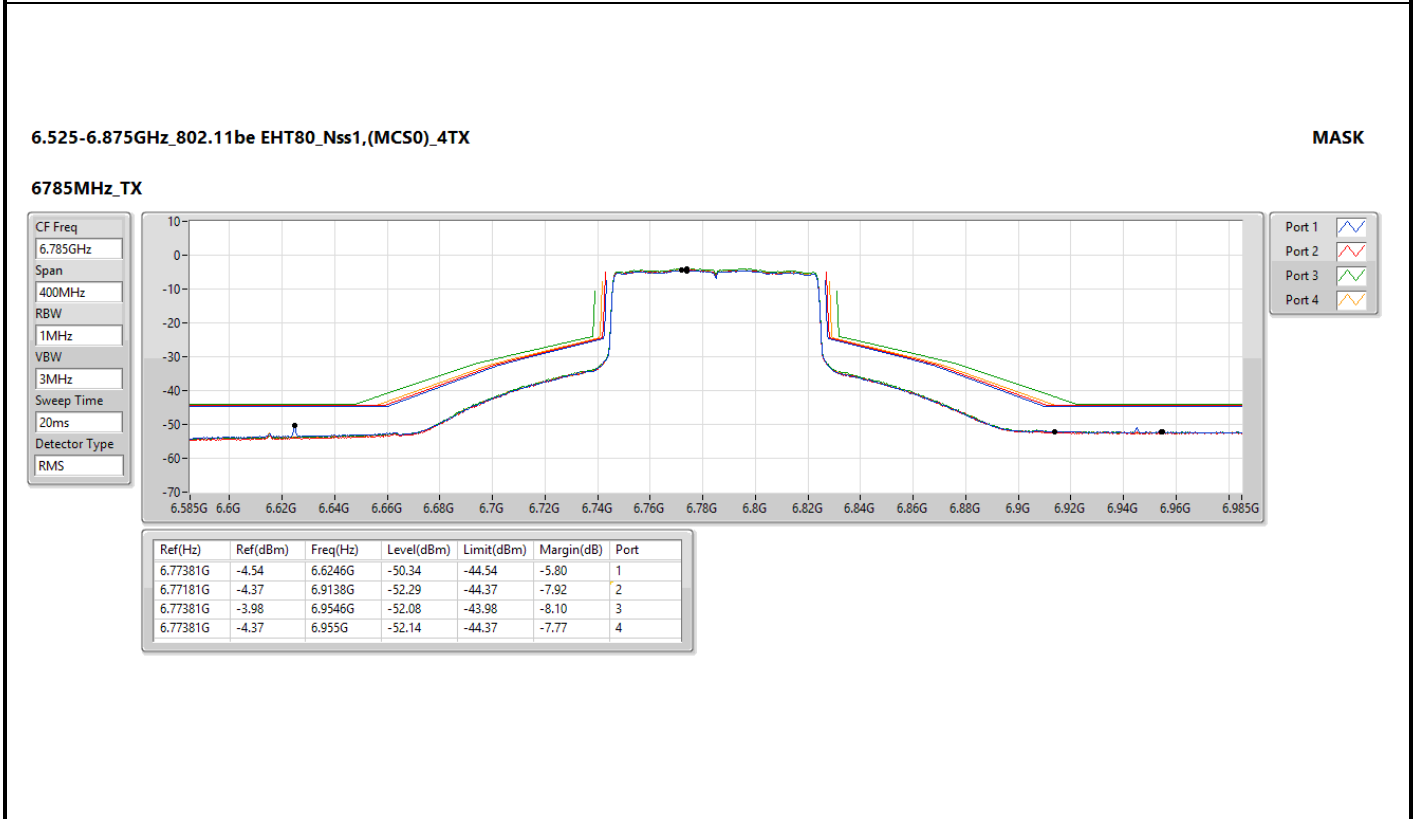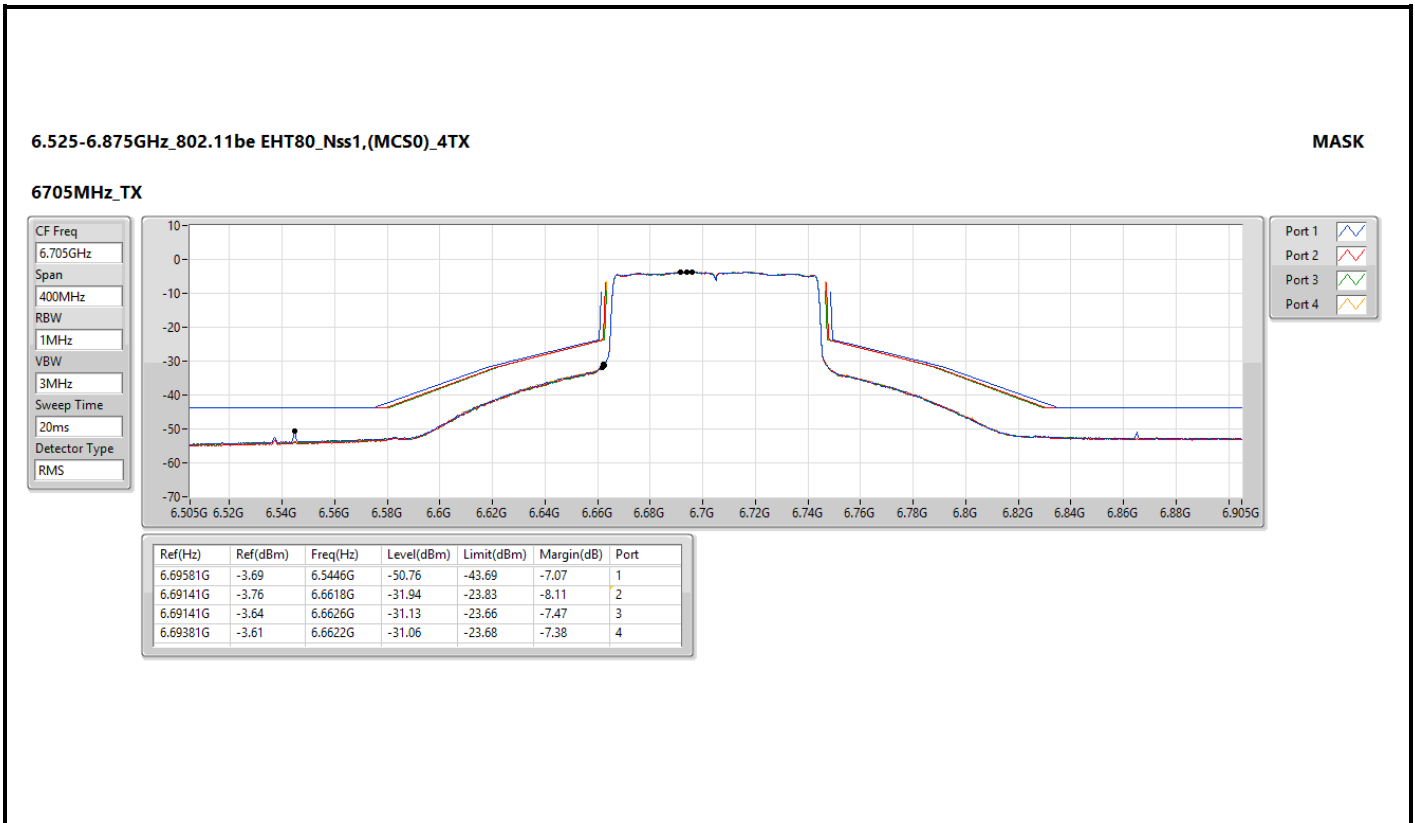

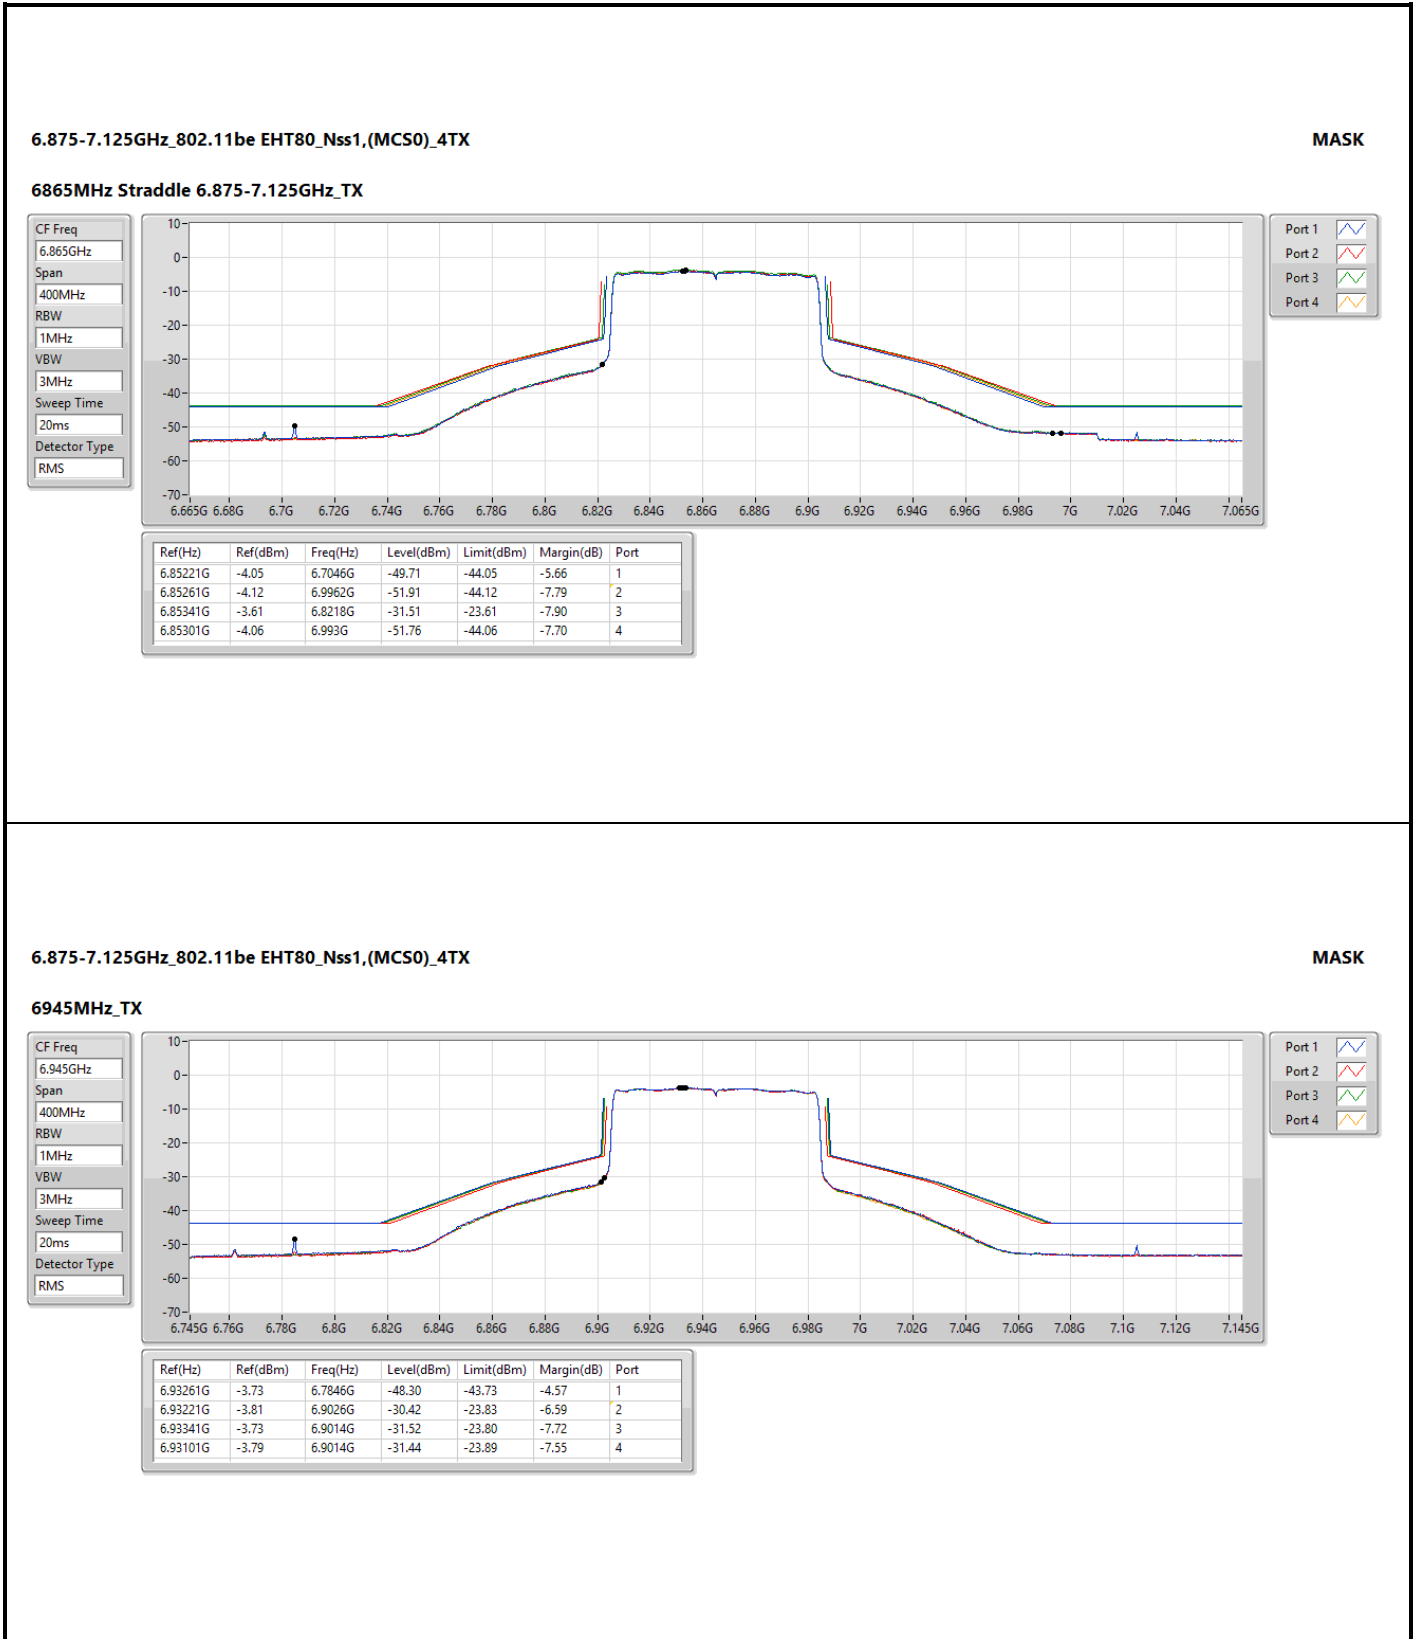

6.875-7.125GHz_802.11be EHT80_Nss1,(MCS0)_4TX

MASK

6945MHz_TX

CF Freq
6.945GHz

Span
400MHz

RBW
1MHz

VBW
3MHz

Sweep Time
20ms

Detector Type
RMS



Port 1 

Port 2 

Port 3 

Port 4 

Ref(Hz)	Ref(dBm)	Freq(Hz)	Level(dBm)	Limit(dBm)	Margin(dB)	Port
6.93261G	-3.73	6.7846G	-48.30	-43.73	-4.57	1
6.93221G	-3.81	6.9026G	-30.42	-23.83	-6.59	2
6.93341G	-3.73	6.9014G	-31.52	-23.80	-7.72	3
6.93101G	-3.79	6.9014G	-31.44	-23.89	-7.55	4



5.925-6.425GHz_802.11be EHT160_Nss1,(MCS0)_4TX

MASK

6025MHz_TX

CF Freq
6.025GHz

Span
800MHz

RBW
2MHz

VBW
10MHz

Sweep Time
20ms

Detector Type
RMS

Port 1

Port 2

Port 3

Port 4

