


Site: SIP-SR2	Time: 2022/05/07 - 14:08
Limit: FCC_Part15.207_CE_AC Power	Engineer: Augleo Wang
Probe: SIP-SR2-ENV216_101684_E	Polarity: Neutral
EUT: Dual-Band Wireless AX1800 Gigabit Ethernet Gateway	Power: AC 120V/60Hz
Test Mode: Transmit by 802.11n-HT20 at channel 2437MHz	

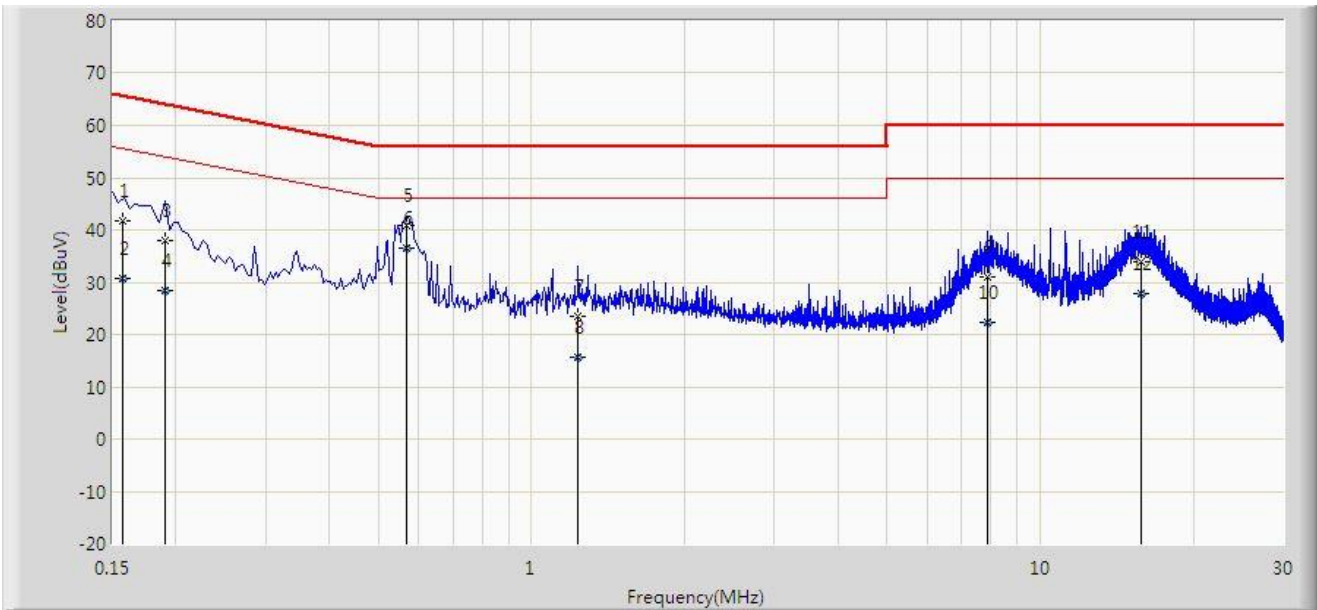

No	Flag	Mark	Frequency (MHz)	Measure Level (dB μ V)	Reading Level (dB μ V)	Margin (dB)	Limit (dB μ V)	Factor (dB)	Type
1			0.157	41.738	32.000	-23.883	65.621	9.738	QP
2			0.157	30.838	21.100	-24.783	55.621	9.738	AV
3			0.190	37.925	28.180	-26.111	64.037	9.746	QP
4			0.190	28.340	18.594	-25.697	54.037	9.746	AV
5			0.566	40.858	31.034	-15.142	56.000	9.823	QP
6		*	0.566	36.469	26.646	-9.531	46.000	9.823	AV
7			1.234	23.573	13.699	-32.427	56.000	9.874	QP
8			1.234	15.718	5.845	-30.282	46.000	9.874	AV
9			7.898	31.010	20.471	-28.990	60.000	10.539	QP
10			7.898	22.223	11.684	-27.777	50.000	10.539	AV
11			15.750	33.910	21.797	-26.090	60.000	12.112	QP
12			15.750	27.955	15.843	-22.045	50.000	12.112	AV

Note 1: " *", means this data is the worst emission level.

Note 2: Measure Level (dB μ V) = Reading Level (dB μ V) + Factor (dB)

Note 3: Factor (dB) = Cable Loss (dB) + LISN Factor (dB)

Appendix B – Test Setup Photograph

Refer to “2203RSU090-UT” file.

Appendix C – EUT Photograph

Refer to “2203RSU090-UE” file.

_____ The End _____