


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		


Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.2 PK			1.53 V	93	97.8	9.4
2	*6985.00	97.5 AV			1.53 V	93	88.1	9.4
3	#7130.57	57.2 PK	88.2	-31.0	1.53 V	93	47.2	10.0
4	#7130.57	47.4 AV	68.2	-20.8	1.53 V	93	37.4	10.0
5	#13970.00	47.7 PK	88.2	-40.5	2.32 V	147	30.3	17.4
6	#13970.00	35.2 AV	68.2	-33.0	2.32 V	147	17.8	17.4
7	20955.00	58.1 PK	74.0	-15.9	1.54 V	199	62.4	-4.3
8	20955.00	46.5 AV	54.0	-7.5	1.54 V	199	50.8	-4.3

**Remarks:**



1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

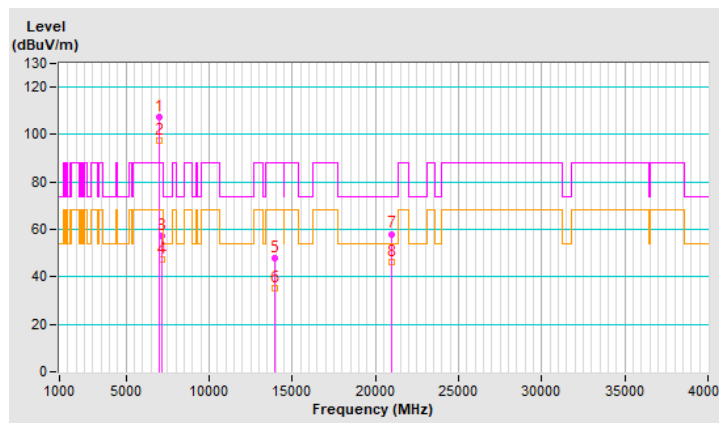



Plot of Band Edge\_CDD Mode

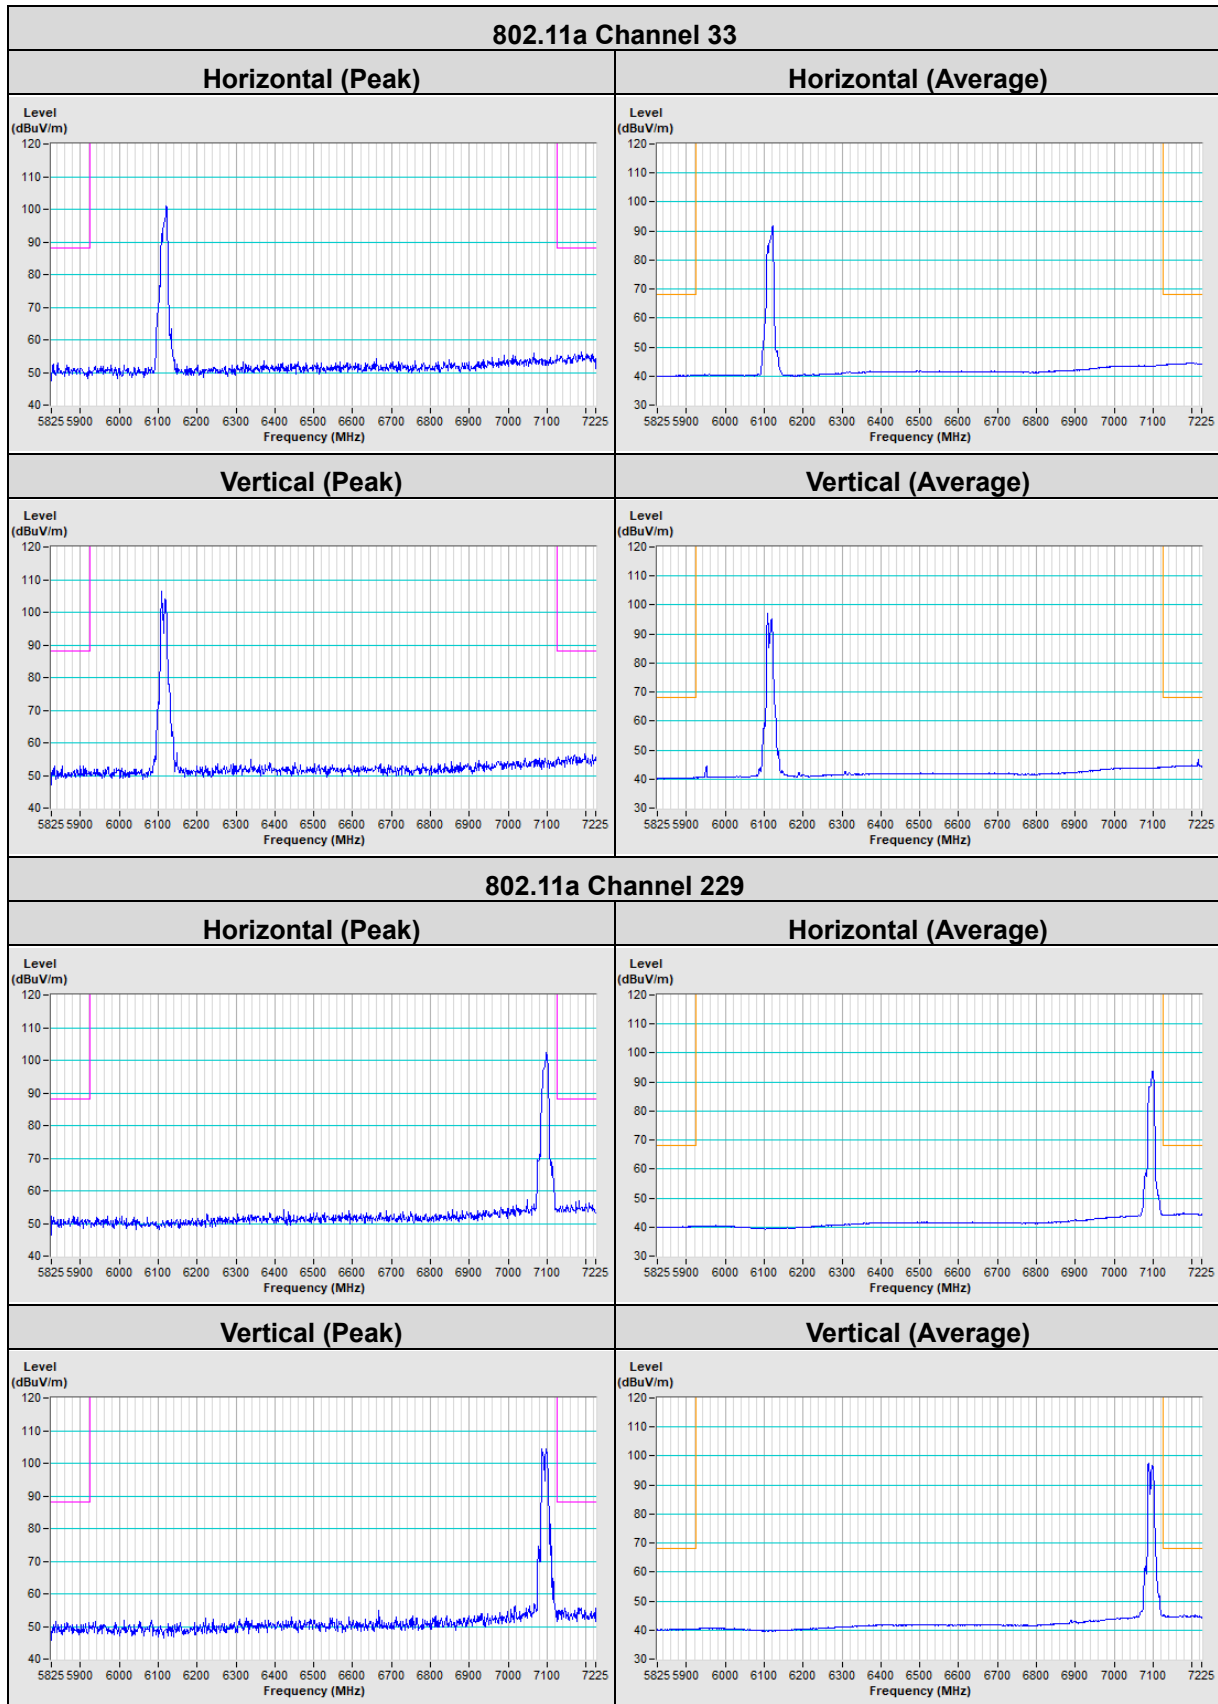


### 802.11ax (HE20) Channel 33

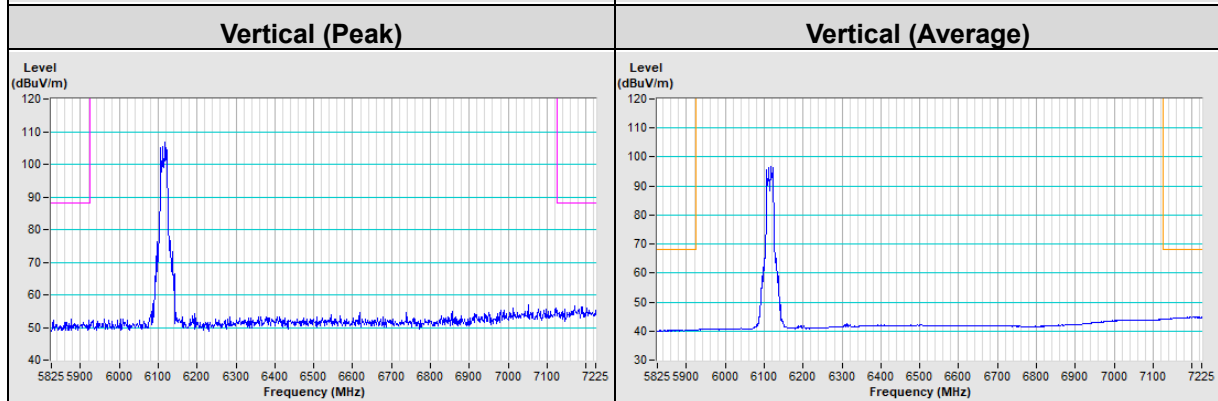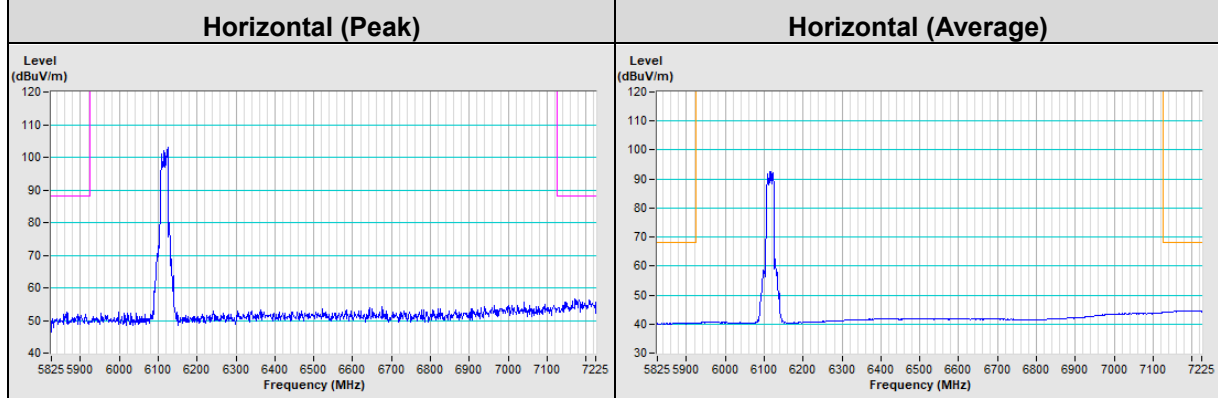


### 802.11ax (HE20) Channel 229

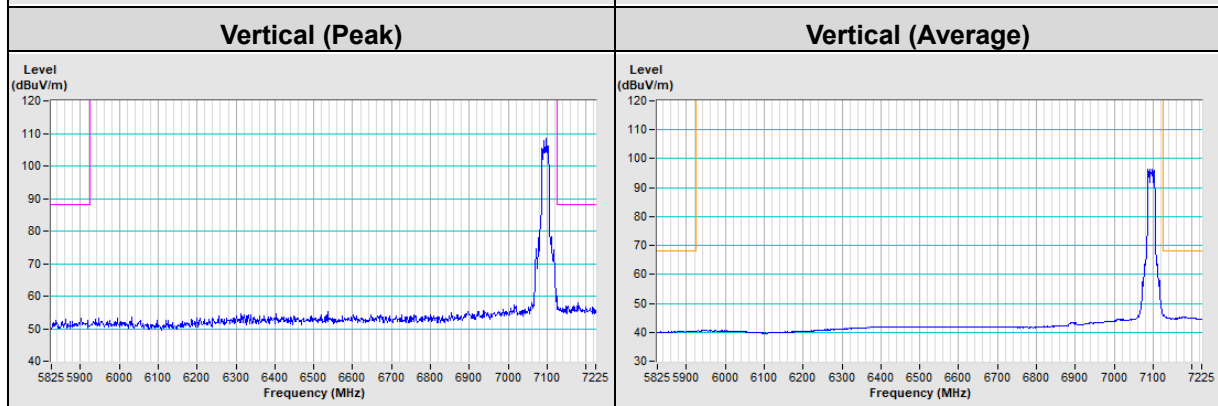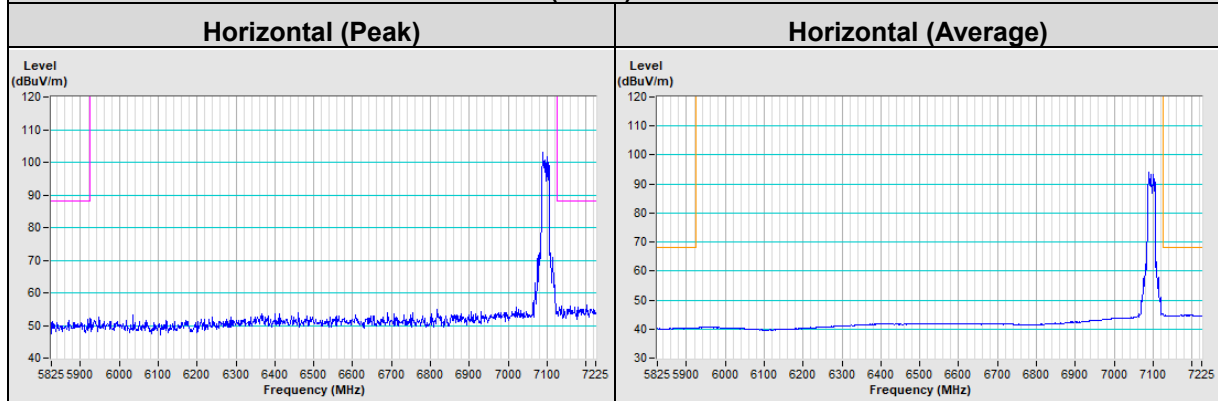


### 802.11ax (HE40) Channel 35

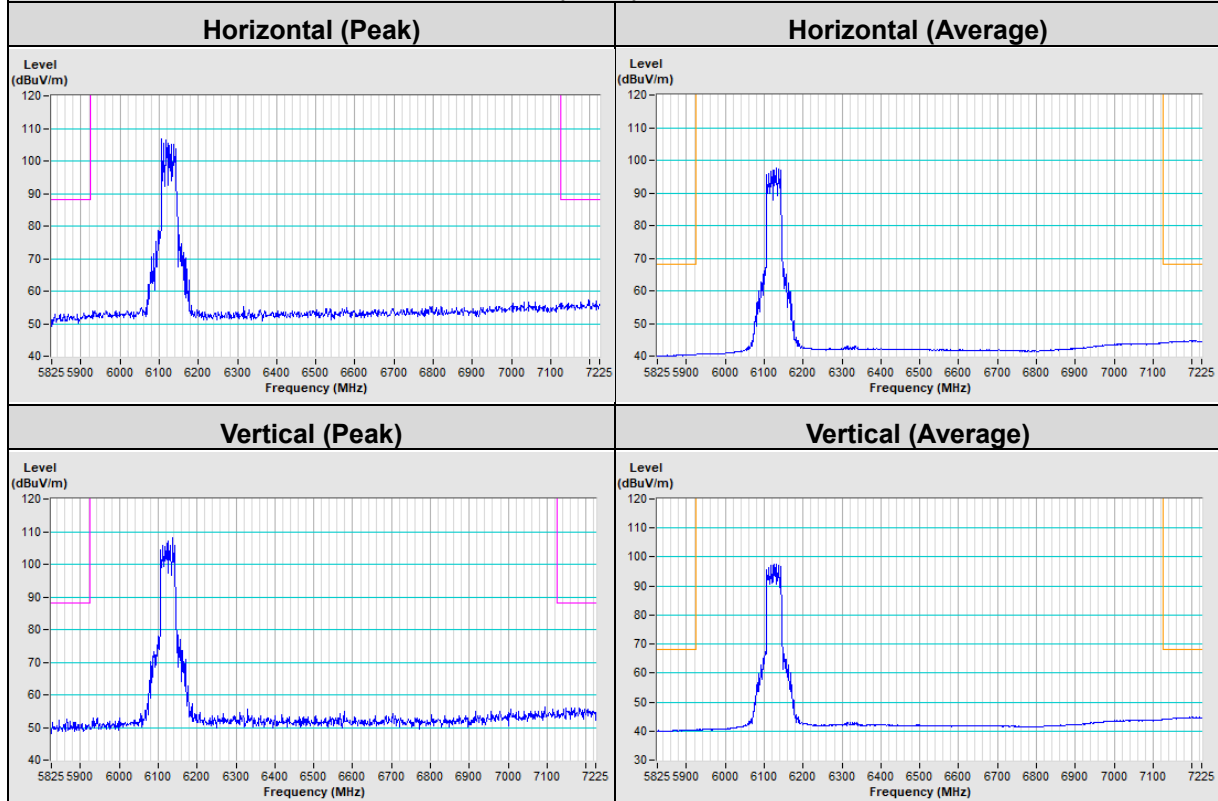


### 802.11ax (HE40) Channel 227

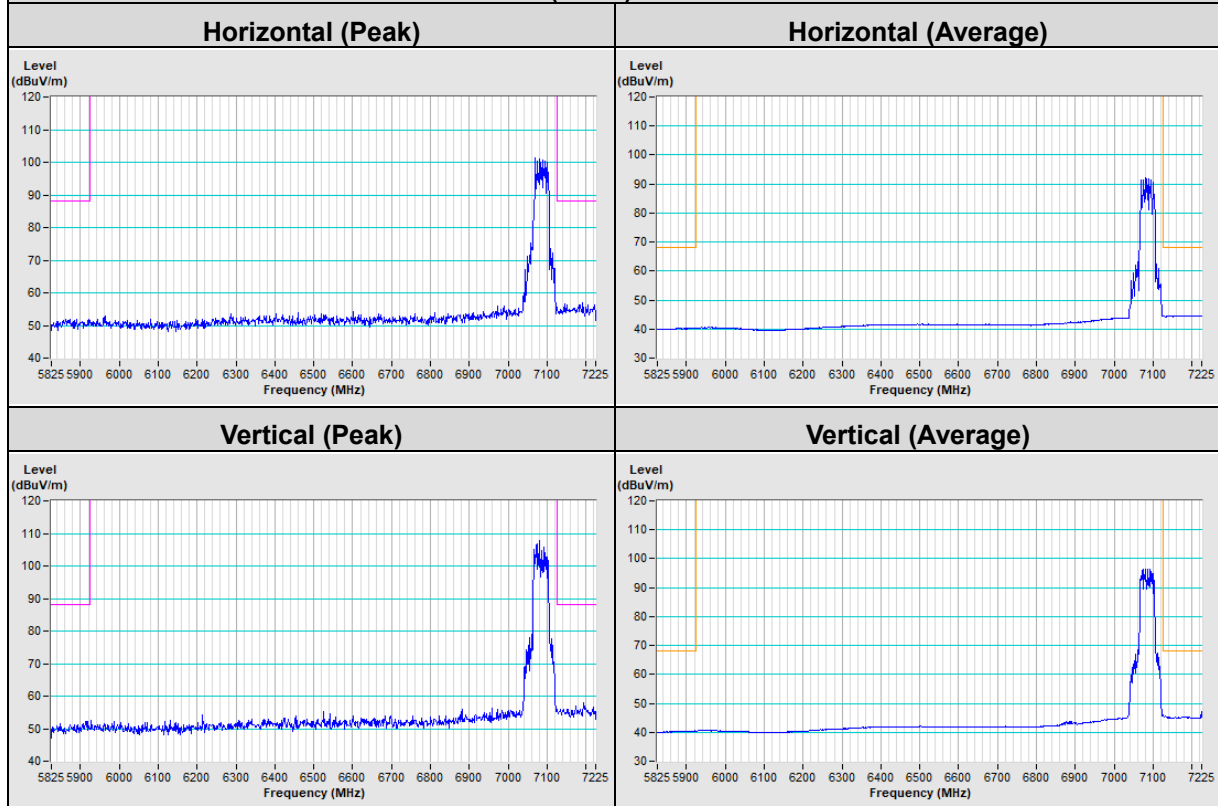


### 802.11ax (HE80) Channel 39

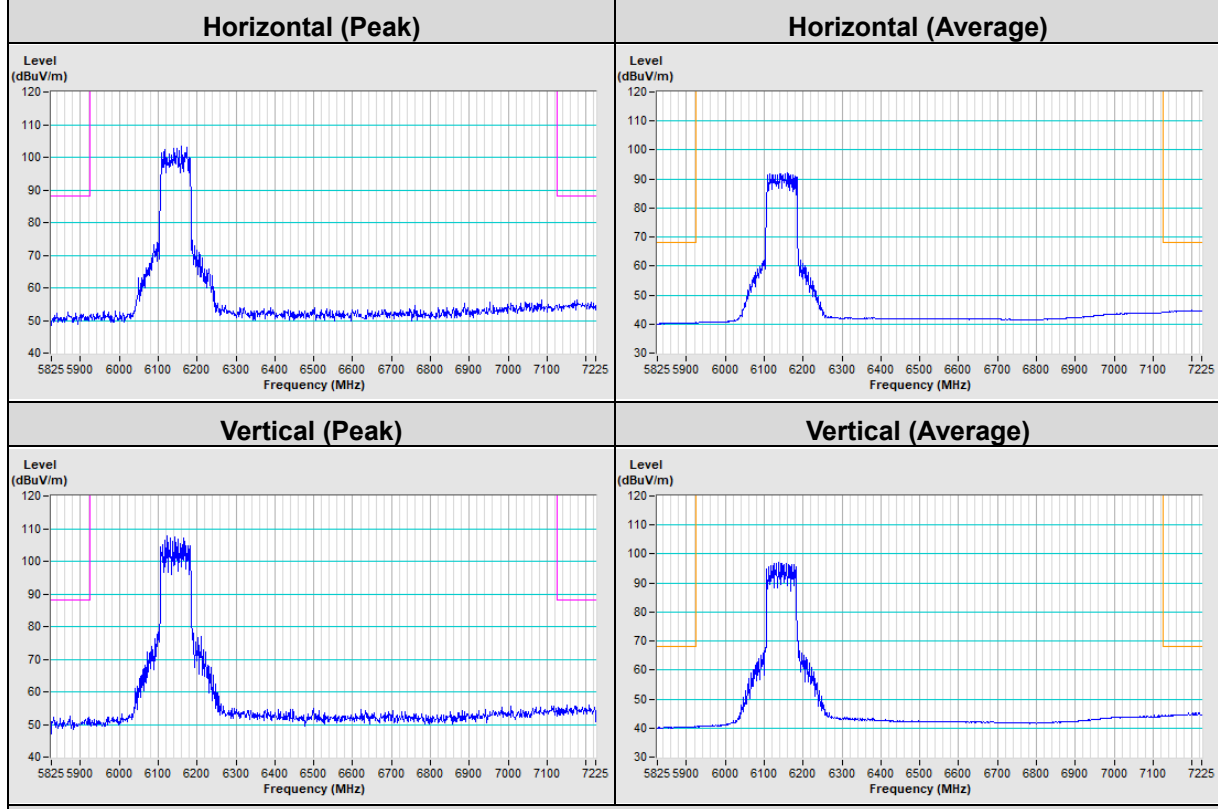


### 802.11ax (HE80) Channel 215

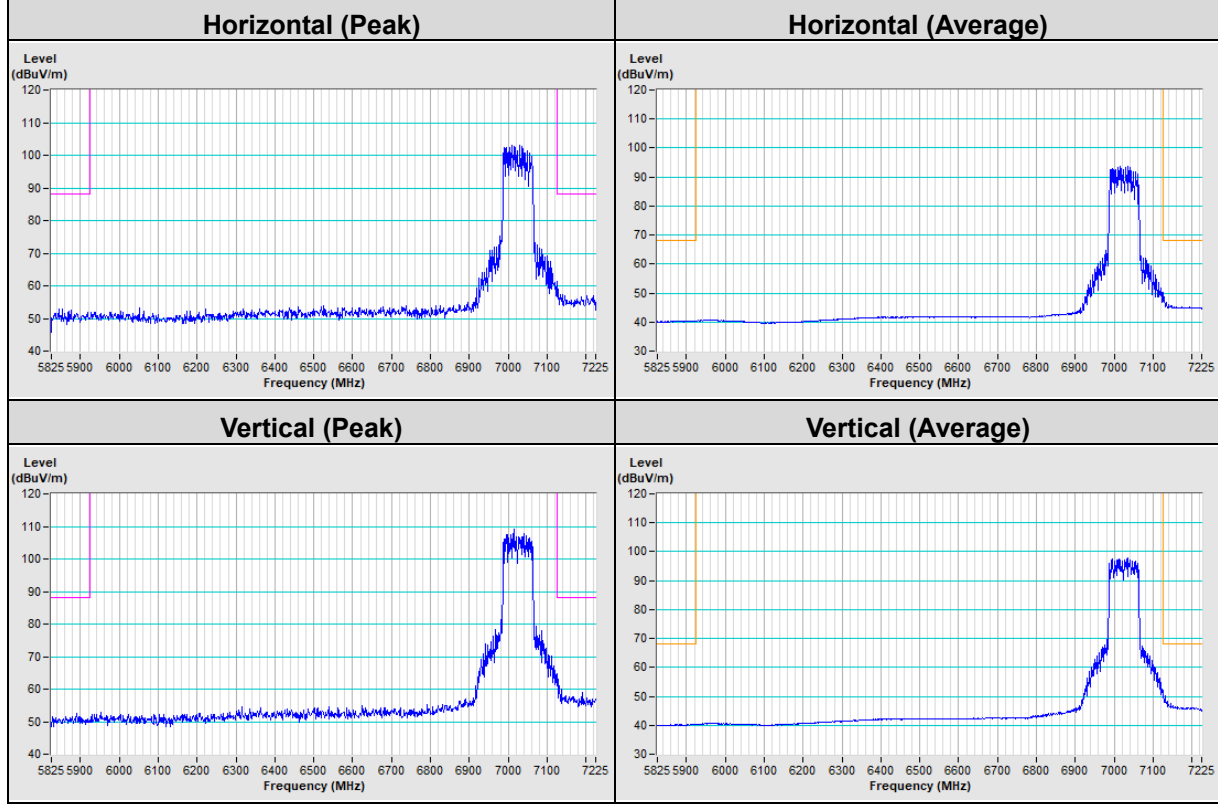

### 802.11ax (HE160) Channel 47

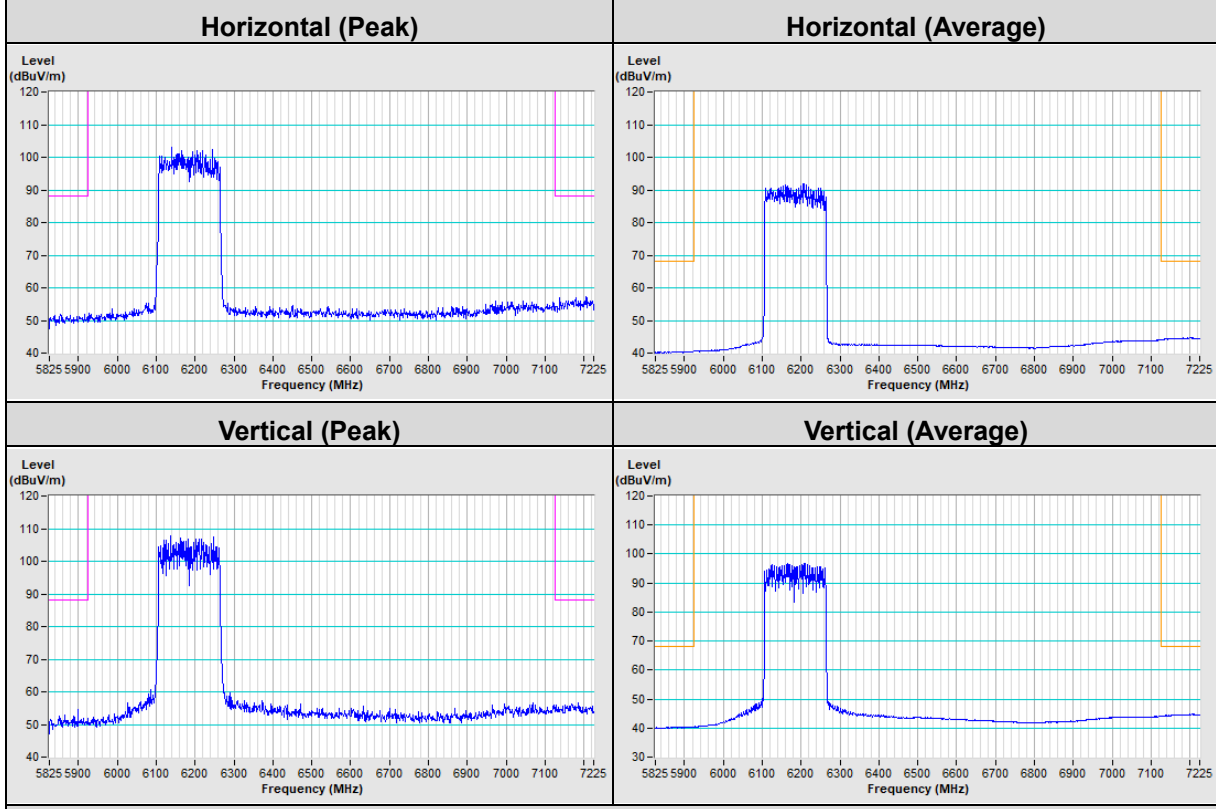

### 802.11ax (HE160) Channel 207

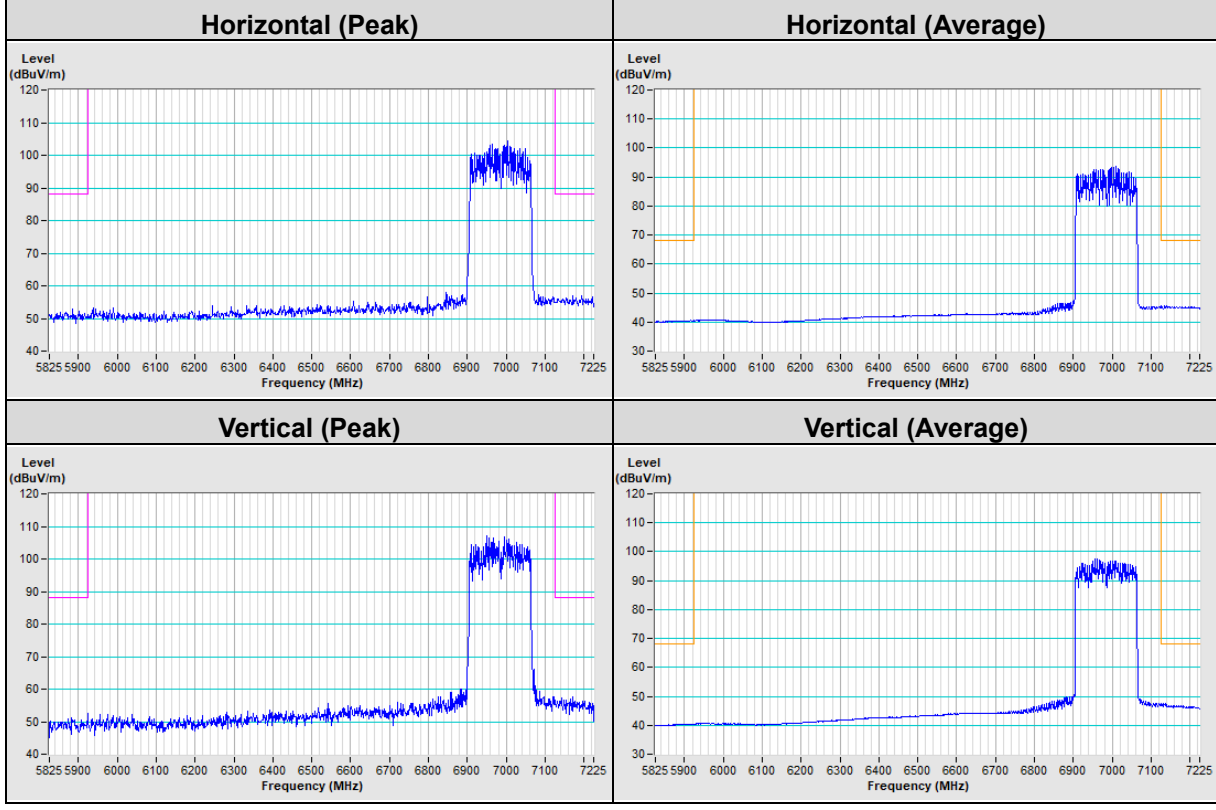

### Beamforming Mode


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 33 : 6115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

#### Antenna Polarity & Test Distance : Horizontal at 3 m

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5923.45	52.1 PK	88.2	-36.1	2.24 H	138	46.6	5.5
2	#5923.45	40.3 AV	68.2	-27.9	2.24 H	138	34.8	5.5
3	*6115.00	101.9 PK			2.24 H	138	96.1	5.8
4	*6115.00	91.9 AV			2.24 H	138	86.1	5.8
5	12230.00	48.2 PK	74.0	-25.8	1.71 H	163	33.6	14.6
6	12230.00	36.1 AV	54.0	-17.9	1.71 H	163	21.5	14.6
7	18345.00	59.3 PK	74.0	-14.7	2.53 H	147	65.9	-6.6
8	18345.00	47.1 AV	54.0	-6.9	2.53 H	147	53.7	-6.6

#### Remarks:

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

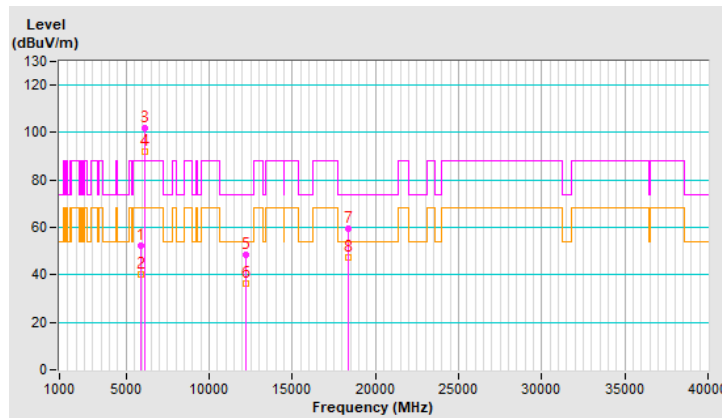


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 33 : 6115 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5915.00	52.2 PK	88.2	-36.0	2.03 V	96	46.7	5.5
2	#5915.00	40.3 AV	68.2	-27.9	2.03 V	96	34.8	5.5
3	*6115.00	107.6 PK			2.03 V	96	101.8	5.8
4	*6115.00	96.9 AV			2.03 V	96	91.1	5.8
5	12230.00	48.2 PK	74.0	-25.8	2.42 V	156	33.6	14.6
6	12230.00	35.6 AV	54.0	-18.4	2.42 V	156	21.0	14.6
7	18345.00	59.0 PK	74.0	-15.0	1.58 V	227	65.6	-6.6
8	18345.00	47.1 AV	54.0	-6.9	1.58 V	227	53.7	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

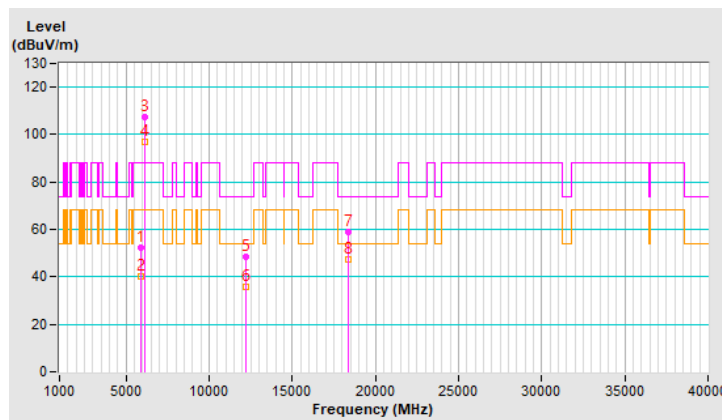




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 61 : 6255 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	102.2 PK			2.19 H	154	95.9	6.3
2	*6255.00	92.2 AV			2.19 H	154	85.9	6.3
3	12510.00	47.9 PK	74.0	-26.1	1.67 H	182	34.2	13.7
4	12510.00	36.2 AV	54.0	-17.8	1.67 H	182	22.5	13.7
5	18765.00	58.7 PK	74.0	-15.3	2.59 H	138	65.4	-6.7
6	18765.00	46.7 AV	54.0	-7.3	2.59 H	138	53.4	-6.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

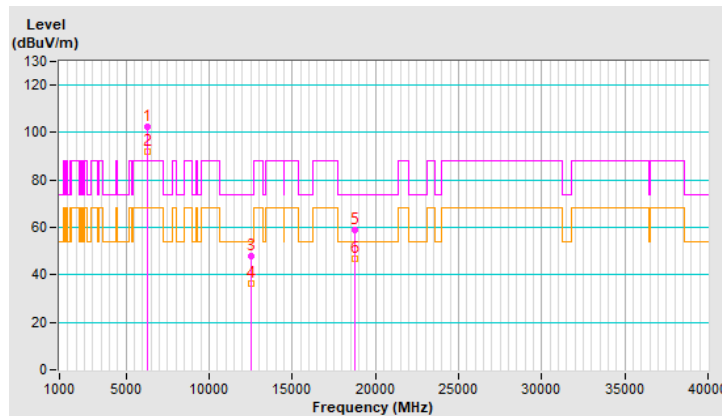


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 61 : 6255 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6255.00	108.2 PK			1.67 V	91	101.9	6.3
2	*6255.00	96.6 AV			1.67 V	91	90.3	6.3
3	12510.00	47.7 PK	74.0	-26.3	2.36 V	174	34.0	13.7
4	12510.00	35.4 AV	54.0	-18.6	2.36 V	174	21.7	13.7
5	18765.00	58.7 PK	74.0	-15.3	1.56 V	224	65.4	-6.7
6	18765.00	46.8 AV	54.0	-7.2	1.56 V	224	53.5	-6.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

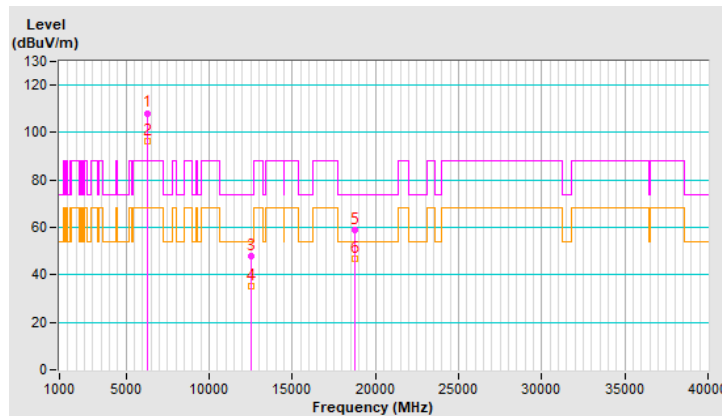


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	102.4 PK			2.22 H	145	95.4	7.0
2	*6415.00	92.3 AV			2.22 H	145	85.3	7.0
3	#12830.00	48.3 PK	88.2	-39.9	1.66 H	174	33.4	14.9
4	#12830.00	36.5 AV	68.2	-31.7	1.66 H	174	21.6	14.9
5	19245.00	58.2 PK	74.0	-15.8	2.53 H	136	64.6	-6.4
6	19245.00	46.4 AV	54.0	-7.6	2.53 H	136	52.8	-6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

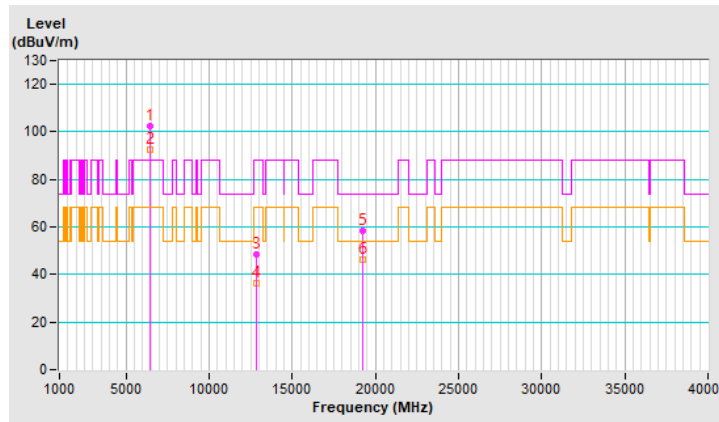


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 93 : 6415 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6415.00	107.0 PK			2.00 V	91	100.0	7.0
2	*6415.00	97.5 AV			2.00 V	91	90.5	7.0
3	#12830.00	47.6 PK	88.2	-40.6	2.39 V	156	32.7	14.9
4	#12830.00	35.3 AV	68.2	-32.9	2.39 V	156	20.4	14.9
5	19245.00	58.7 PK	74.0	-15.3	1.52 V	209	65.1	-6.4
6	19245.00	46.9 AV	54.0	-7.1	1.52 V	209	53.3	-6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

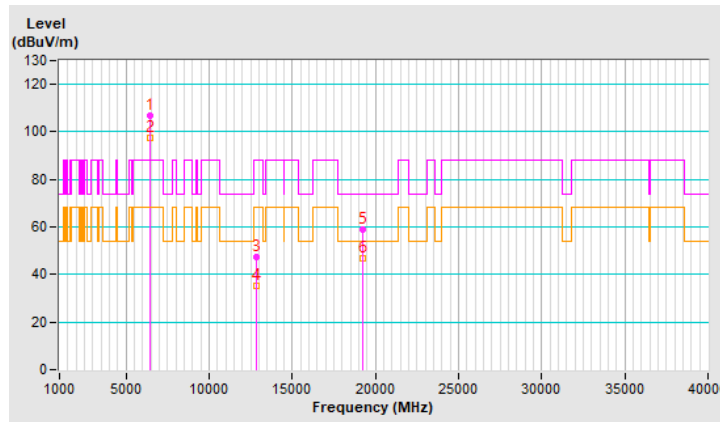


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	102.2 PK			2.20 H	138	95.0	7.2
2	*6435.00	92.2 AV			2.20 H	138	85.0	7.2
3	#12870.00	48.4 PK	88.2	-39.8	1.76 H	191	33.4	15.0
4	#12870.00	36.5 AV	68.2	-31.7	1.76 H	191	21.5	15.0
5	19305.00	59.2 PK	74.0	-14.8	2.52 H	146	65.8	-6.6
6	19305.00	47.0 AV	54.0	-7.0	2.52 H	146	53.6	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

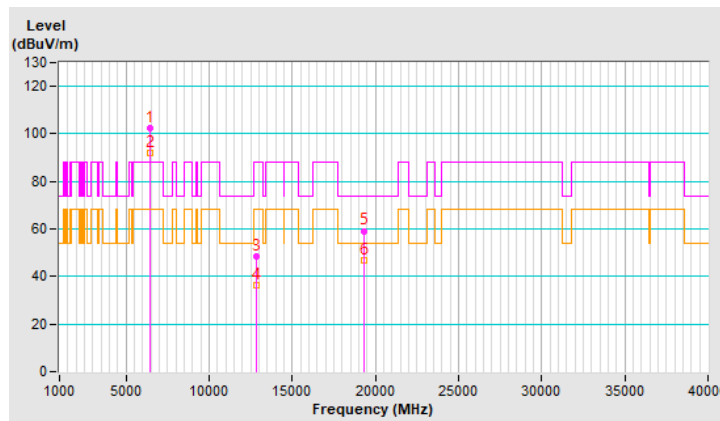


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 97 : 6435 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6435.00	108.1 PK			2.00 V	87	100.9	7.2
2	*6435.00	96.8 AV			2.00 V	87	89.6	7.2
3	#12870.00	47.5 PK	88.2	-40.7	2.33 V	150	32.5	15.0
4	#12870.00	35.3 AV	68.2	-32.9	2.33 V	150	20.3	15.0
5	19305.00	58.6 PK	74.0	-15.4	1.51 V	233	65.2	-6.6
6	19305.00	47.1 AV	54.0	-6.9	1.51 V	233	53.7	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

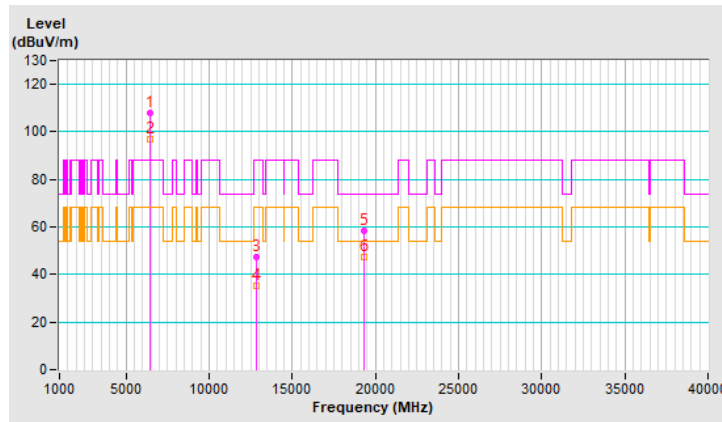


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	101.6 PK			2.21 H	149	94.1	7.5
2	*6475.00	91.6 AV			2.21 H	149	84.1	7.5
3	#12950.00	48.2 PK	88.2	-40.0	1.71 H	181	33.2	15.0
4	#12950.00	36.5 AV	68.2	-31.7	1.71 H	181	21.5	15.0
5	19425.00	58.1 PK	74.0	-15.9	2.53 H	142	64.5	-6.4
6	19425.00	46.2 AV	54.0	-7.8	2.53 H	142	52.6	-6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

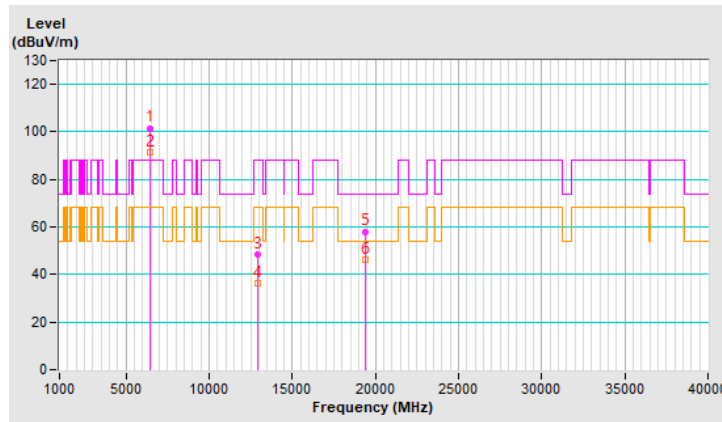


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 105 : 6475 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6475.00	105.6 PK			1.60 V	99	98.1	7.5
2	*6475.00	96.5 AV			1.60 V	99	89.0	7.5
3	#12950.00	47.3 PK	88.2	-40.9	2.38 V	148	32.3	15.0
4	#12950.00	35.1 AV	68.2	-33.1	2.38 V	148	20.1	15.0
5	19425.00	58.8 PK	74.0	-15.2	1.51 V	214	65.2	-6.4
6	19425.00	46.9 AV	54.0	-7.1	1.51 V	214	53.3	-6.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

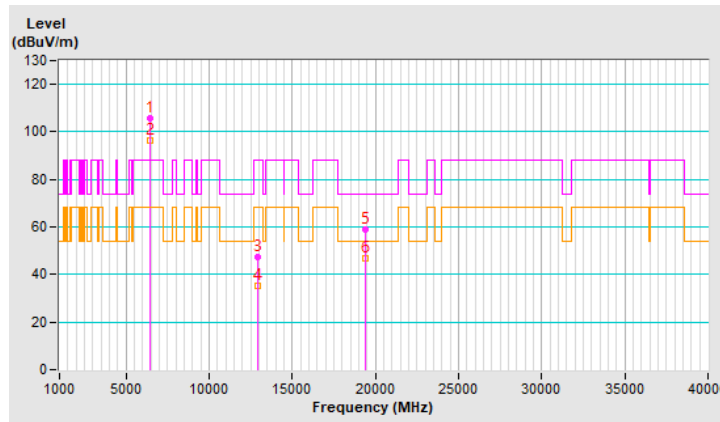




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	102.0 PK			2.20 H	123	94.2	7.8
2	*6515.00	91.8 AV			2.20 H	123	84.0	7.8
3	#13030.00	47.6 PK	88.2	-40.6	1.69 H	168	32.5	15.1
4	#13030.00	35.9 AV	68.2	-32.3	1.69 H	168	20.8	15.1
5	19545.00	58.0 PK	74.0	-16.0	2.49 H	152	64.2	-6.2
6	19545.00	46.1 AV	54.0	-7.9	2.49 H	152	52.3	-6.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

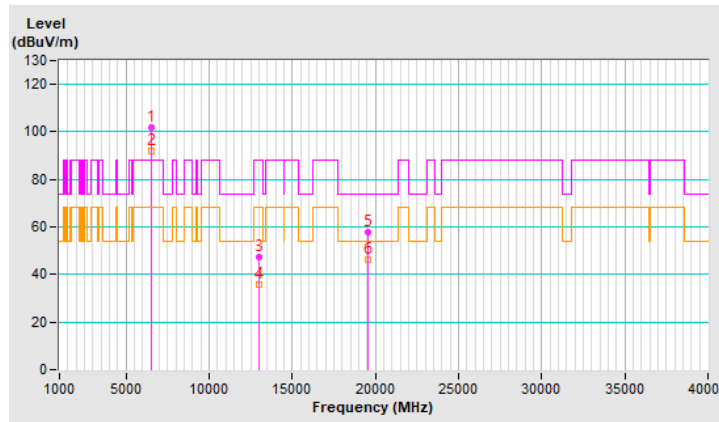


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 113 : 6515 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6515.00	107.0 PK			1.63 V	197	99.2	7.8
2	*6515.00	96.3 AV			1.63 V	197	88.5	7.8
3	#13030.00	48.1 PK	88.2	-40.1	2.42 V	161	33.0	15.1
4	#13030.00	35.7 AV	68.2	-32.5	2.42 V	161	20.6	15.1
5	19545.00	58.2 PK	74.0	-15.8	1.49 V	221	64.4	-6.2
6	19545.00	46.8 AV	54.0	-7.2	1.49 V	221	53.0	-6.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

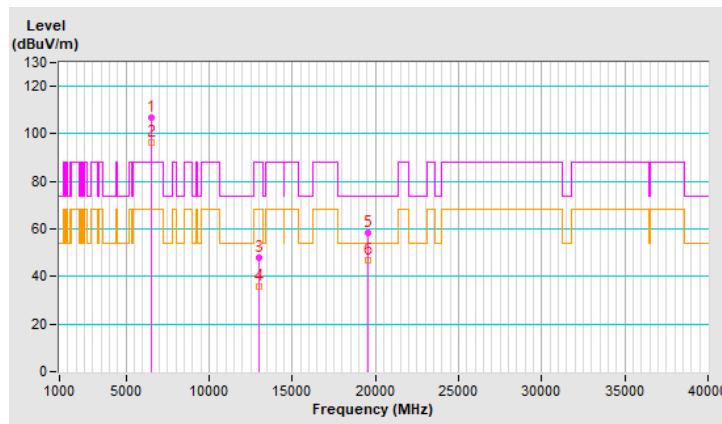


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	102.1 PK			2.23 H	134	94.2	7.9
2	*6535.00	92.2 AV			2.23 H	134	84.3	7.9
3	#13070.00	48.9 PK	88.2	-39.3	1.71 H	167	33.8	15.1
4	#13070.00	36.8 AV	68.2	-31.4	1.71 H	167	21.7	15.1
5	19605.00	58.5 PK	74.0	-15.5	2.50 H	133	64.5	-6.0
6	19605.00	46.6 AV	54.0	-7.4	2.50 H	133	52.6	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

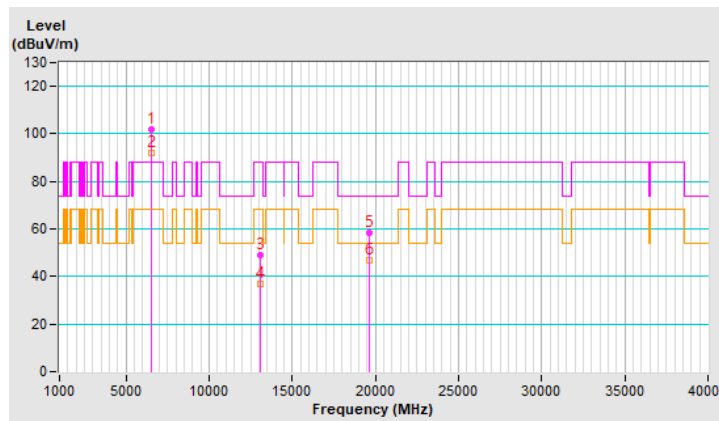


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 117 : 6535 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6535.00	106.3 PK			1.63 V	94	98.4	7.9
2	*6535.00	96.0 AV			1.63 V	94	88.1	7.9
3	#13070.00	47.3 PK	88.2	-40.9	2.41 V	151	32.2	15.1
4	#13070.00	34.9 AV	68.2	-33.3	2.41 V	151	19.8	15.1
5	19605.00	58.2 PK	74.0	-15.8	1.49 V	222	64.2	-6.0
6	19605.00	46.9 AV	54.0	-7.1	1.49 V	222	52.9	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

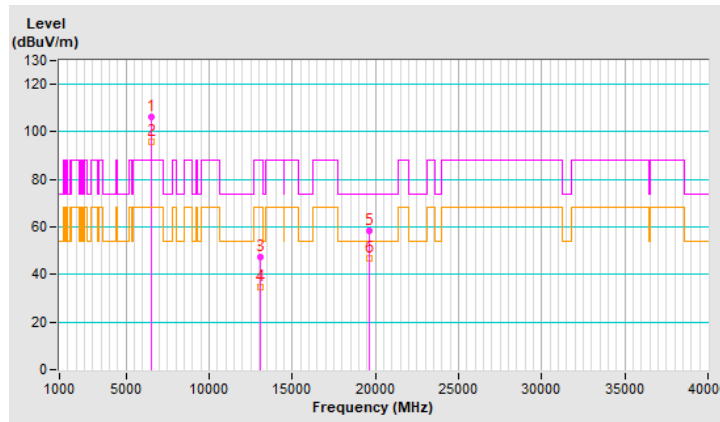


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 153 : 6715 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6715.00	102.0 PK			2.25 H	130	94.1	7.9
2	*6715.00	91.8 AV			2.25 H	130	83.9	7.9
3	#13430.00	49.1 PK	88.2	-39.1	1.67 H	189	32.9	16.2
4	#13430.00	36.9 AV	68.2	-31.3	1.67 H	189	20.7	16.2
5	20145.00	58.6 PK	74.0	-15.4	2.59 H	137	64.0	-5.4
6	20145.00	46.5 AV	54.0	-7.5	2.59 H	137	51.9	-5.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

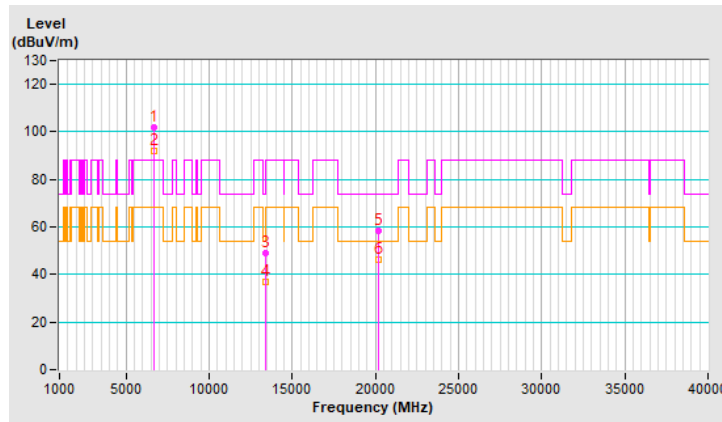


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 153 : 6715 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6715.00	106.3 PK			1.52 V	93	98.4	7.9
2	*6715.00	97.1 AV			1.52 V	93	89.2	7.9
3	#13430.00	48.1 PK	88.2	-40.1	2.43 V	161	31.9	16.2
4	#13430.00	35.6 AV	68.2	-32.6	2.43 V	161	19.4	16.2
5	20145.00	58.1 PK	74.0	-15.9	1.54 V	221	63.5	-5.4
6	20145.00	46.5 AV	54.0	-7.5	1.54 V	221	51.9	-5.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

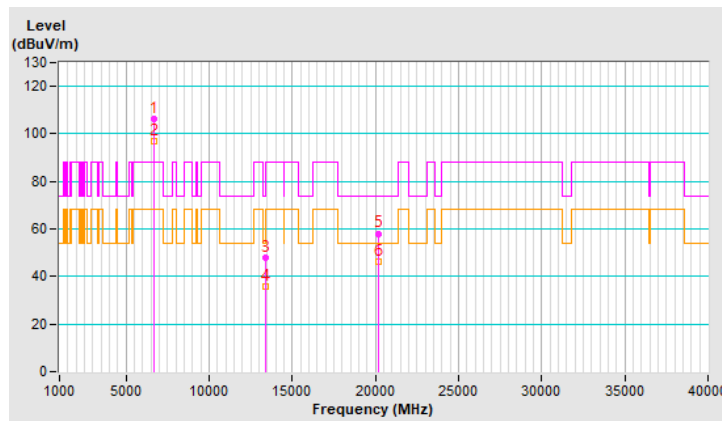


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	101.9 PK			2.22 H	141	93.6	8.3
2	*6855.00	91.8 AV			2.22 H	141	83.5	8.3
3	#13710.00	48.1 PK	88.2	-40.1	1.76 H	175	31.7	16.4
4	#13710.00	36.1 AV	68.2	-32.1	1.76 H	175	19.7	16.4
5	20565.00	58.3 PK	74.0	-15.7	2.48 H	156	63.1	-4.8
6	20565.00	46.5 AV	54.0	-7.5	2.48 H	156	51.3	-4.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

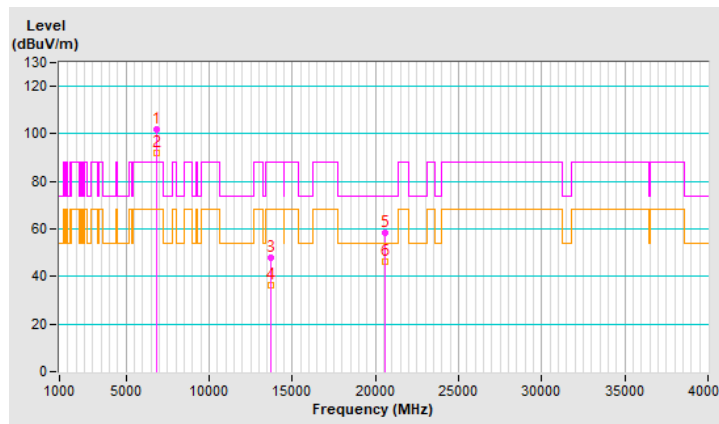


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 181 : 6855 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6855.00	105.8 PK			1.51 V	85	97.5	8.3
2	*6855.00	96.6 AV			1.51 V	85	88.3	8.3
3	#13710.00	47.4 PK	88.2	-40.8	2.36 V	166	31.0	16.4
4	#13710.00	34.8 AV	68.2	-33.4	2.36 V	166	18.4	16.4
5	20565.00	58.7 PK	74.0	-15.3	1.55 V	227	63.5	-4.8
6	20565.00	47.2 AV	54.0	-6.8	1.55 V	227	52.0	-4.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

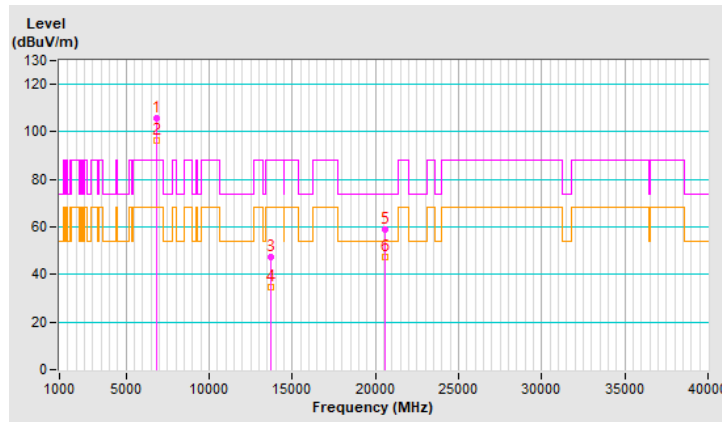




<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	102.2 PK			2.20 H	137	93.7	8.5
2	*6875.00	92.1 AV			2.20 H	137	83.6	8.5
3	#13750.00	48.4 PK	88.2	-39.8	1.74 H	161	31.7	16.7
4	#13750.00	36.8 AV	68.2	-31.4	1.74 H	161	20.1	16.7
5	20625.00	58.1 PK	74.0	-15.9	2.49 H	143	62.8	-4.7
6	20625.00	46.2 AV	54.0	-7.8	2.49 H	143	50.9	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

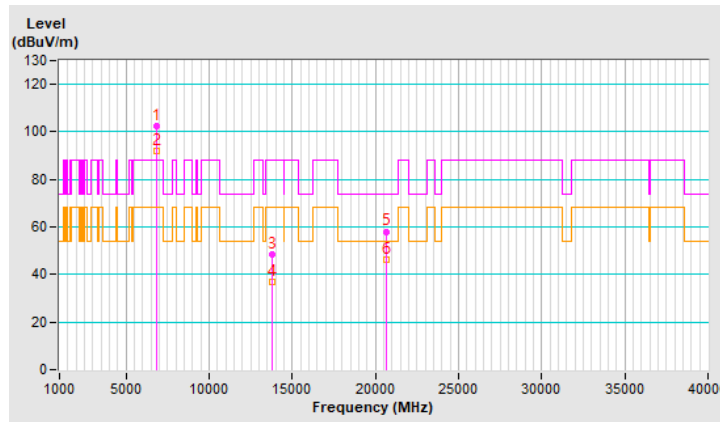


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 185 : 6875 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6875.00	106.8 PK			1.50 V	248	98.3	8.5
2	*6875.00	96.0 AV			1.50 V	248	87.5	8.5
3	#13750.00	48.1 PK	88.2	-40.1	2.38 V	167	31.4	16.7
4	#13750.00	35.5 AV	68.2	-32.7	2.38 V	167	18.8	16.7
5	20625.00	58.6 PK	74.0	-15.4	1.51 V	230	63.3	-4.7
6	20625.00	46.8 AV	54.0	-7.2	1.51 V	230	51.5	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

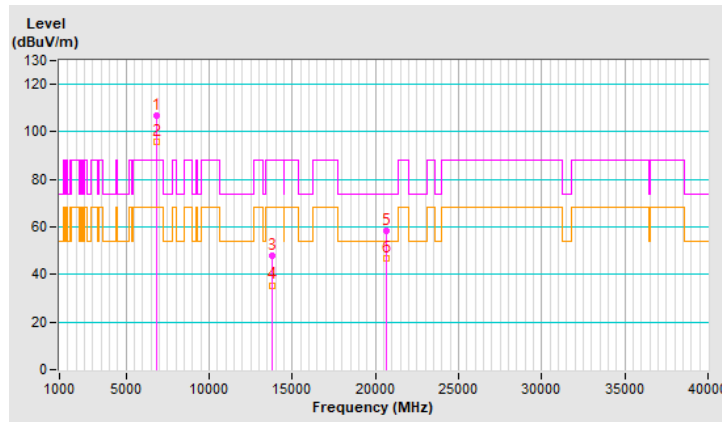


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 213 : 7015 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7015.00	101.6 PK			2.26 H	145	92.1	9.5
2	*7015.00	91.5 AV			2.26 H	145	82.0	9.5
3	#14030.00	48.0 PK	88.2	-40.2	1.73 H	177	30.3	17.7
4	#14030.00	36.2 AV	68.2	-32.0	1.73 H	177	18.5	17.7
5	21045.00	59.2 PK	74.0	-14.8	2.58 H	138	63.4	-4.2
6	21045.00	46.9 AV	54.0	-7.1	2.58 H	138	51.1	-4.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

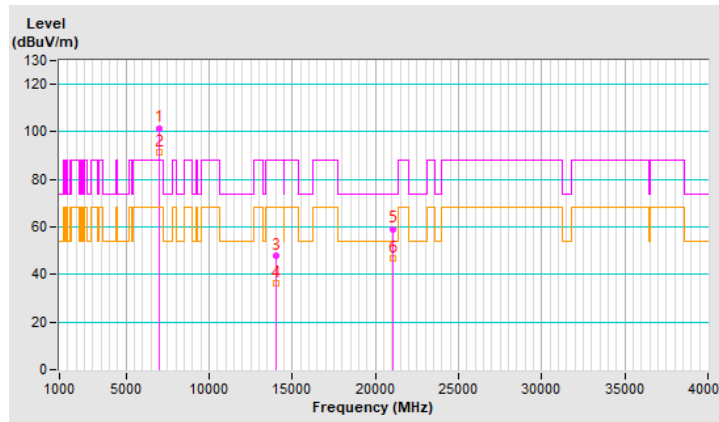


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 213 : 7015 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7015.00	108.8 PK			1.45 V	95	99.3	9.5
2	*7015.00	97.1 AV			1.45 V	95	87.6	9.5
3	#14030.00	47.9 PK	88.2	-40.3	2.37 V	159	30.2	17.7
4	#14030.00	35.2 AV	68.2	-33.0	2.37 V	159	17.5	17.7
5	21045.00	58.4 PK	74.0	-15.6	1.53 V	231	62.6	-4.2
6	21045.00	46.7 AV	54.0	-7.3	1.53 V	231	50.9	-4.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

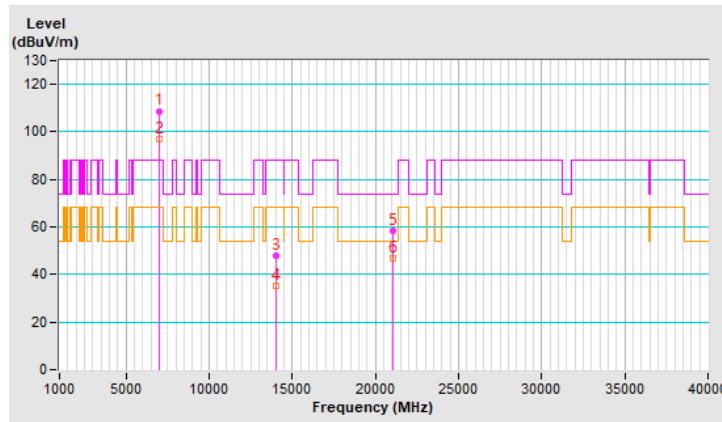


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 229 : 7095 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	103.8 PK			1.50 H	154	94.2	9.6
2	*7095.00	93.8 AV			1.50 H	154	84.2	9.6
3	#7167.00	56.7 PK	88.2	-31.5	1.50 H	154	46.6	10.1
4	#7167.00	44.4 AV	68.2	-23.8	1.50 H	154	34.3	10.1
5	#14190.00	48.9 PK	88.2	-39.3	1.74 H	174	30.9	18.0
6	#14190.00	36.8 AV	68.2	-31.4	1.74 H	174	18.8	18.0
7	21285.00	58.5 PK	74.0	-15.5	2.48 H	145	62.6	-4.1
8	21285.00	46.5 AV	54.0	-7.5	2.48 H	145	50.6	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

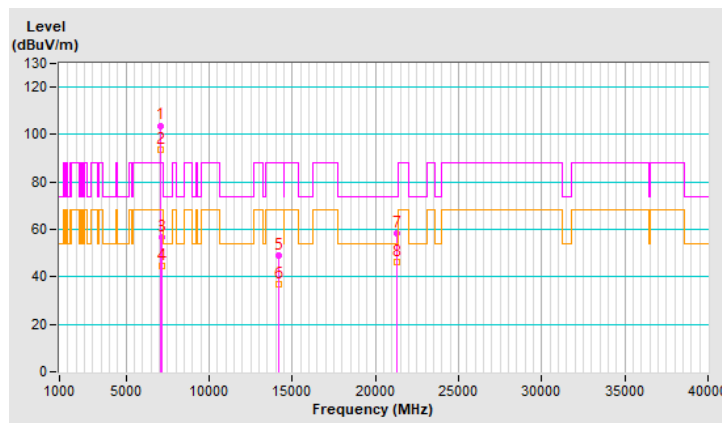


<b>RF Mode</b>	802.11ax (HE20)	<b>Channel</b>	CH 229 : 7095 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7095.00	108.0 PK			1.55 V	94	98.4	9.6
2	*7095.00	97.5 AV			1.55 V	94	87.9	9.6
3	#7125.00	54.9 PK	88.2	-33.3	1.55 V	94	45.0	9.9
4	#7125.00	45.7 AV	68.2	-22.5	1.55 V	94	35.8	9.9
5	#14190.00	48.2 PK	88.2	-40.0	2.37 V	170	30.2	18.0
6	#14190.00	35.8 AV	68.2	-32.4	2.37 V	170	17.8	18.0
7	21285.00	58.7 PK	74.0	-15.3	1.59 V	216	62.8	-4.1
8	21285.00	47.3 AV	54.0	-6.7	1.59 V	216	51.4	-4.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

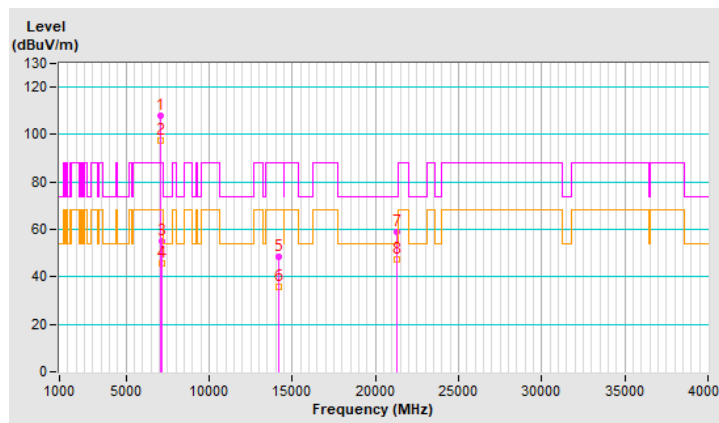


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 35 : 6125 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5917.00	51.5 PK	88.2	-36.7	2.89 H	116	46.0	5.5
2	#5917.00	40.4 AV	68.2	-27.8	2.89 H	116	34.9	5.5
3	*6125.00	103.5 PK			2.89 H	116	97.6	5.9
4	*6125.00	94.6 AV			2.89 H	116	88.7	5.9
5	12250.00	48.4 PK	74.0	-25.6	1.77 H	171	33.8	14.6
6	12250.00	36.6 AV	54.0	-17.4	1.77 H	171	22.0	14.6
7	18375.00	59.3 PK	74.0	-14.7	2.58 H	154	66.1	-6.8
8	18375.00	47.1 AV	54.0	-6.9	2.58 H	154	53.9	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

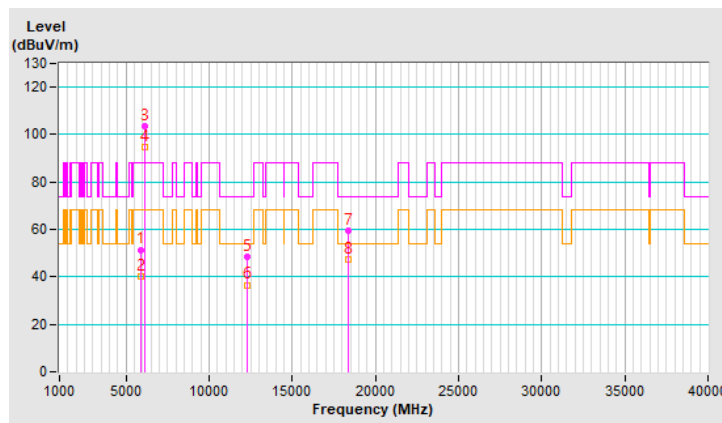


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 35 : 6125 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5917.00	53.0 PK	88.2	-35.2	2.04 V	96	47.5	5.5
2	#5917.00	40.3 AV	68.2	-27.9	2.04 V	96	34.8	5.5
3	*6125.00	108.5 PK			2.04 V	96	102.6	5.9
4	*6125.00	96.3 AV			2.04 V	96	90.4	5.9
5	12250.00	48.2 PK	74.0	-25.8	2.41 V	173	33.6	14.6
6	12250.00	35.7 AV	54.0	-18.3	2.41 V	173	21.1	14.6
7	18375.00	58.4 PK	74.0	-15.6	1.51 V	232	65.2	-6.8
8	18375.00	46.9 AV	54.0	-7.1	1.51 V	232	53.7	-6.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

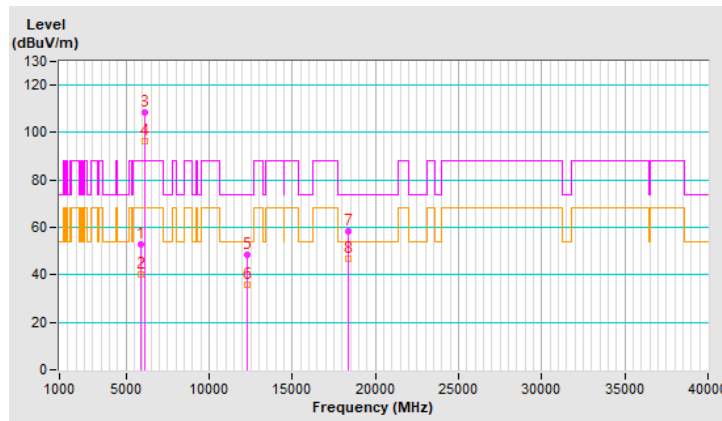




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 59 : 6245 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	103.7 PK			2.84 H	100	97.5	6.2
2	*6245.00	95.1 AV			2.84 H	100	88.9	6.2
3	12490.00	48.1 PK	74.0	-25.9	1.76 H	178	34.4	13.7
4	12490.00	36.3 AV	54.0	-17.7	1.76 H	178	22.6	13.7
5	18735.00	59.3 PK	74.0	-14.7	2.48 H	143	65.9	-6.6
6	18735.00	47.0 AV	54.0	-7.0	2.48 H	143	53.6	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

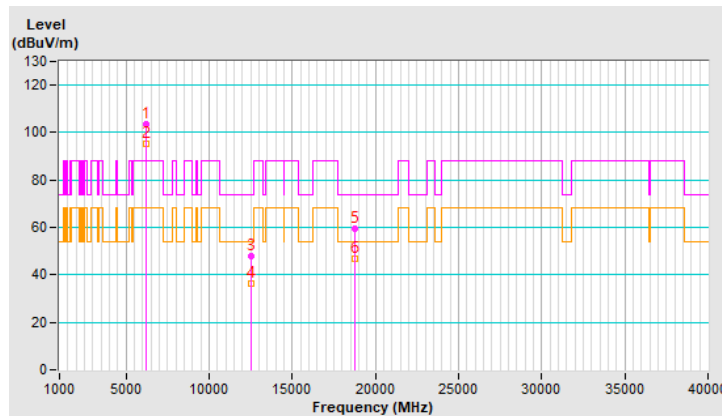


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 59 : 6245 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6245.00	108.8 PK			1.97 V	95	102.6	6.2
2	*6245.00	96.8 AV			1.97 V	95	90.6	6.2
3	12490.00	48.3 PK	74.0	-25.7	2.36 V	149	34.6	13.7
4	12490.00	35.6 AV	54.0	-18.4	2.36 V	149	21.9	13.7
5	18735.00	58.8 PK	74.0	-15.2	1.55 V	222	65.4	-6.6
6	18735.00	47.0 AV	54.0	-7.0	1.55 V	222	53.6	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

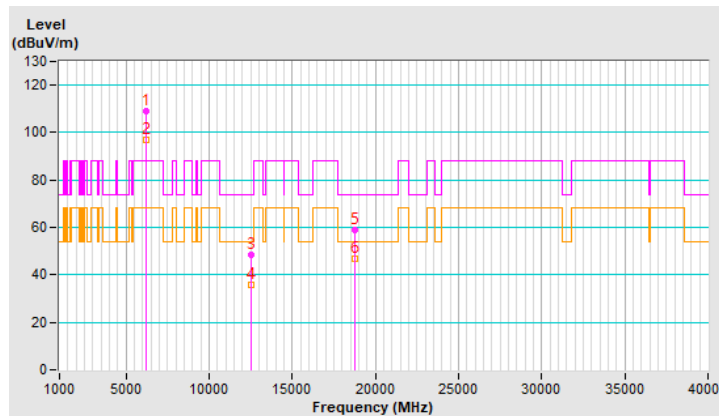


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	103.6 PK			2.90 H	114	96.7	6.9
2	*6405.00	94.5 AV			2.90 H	114	87.6	6.9
3	#12810.00	48.2 PK	88.2	-40.0	1.72 H	185	33.3	14.9
4	#12810.00	36.1 AV	68.2	-32.1	1.72 H	185	21.2	14.9
5	19215.00	58.0 PK	74.0	-16.0	2.57 H	130	64.3	-6.3
6	19215.00	46.1 AV	54.0	-7.9	2.57 H	130	52.4	-6.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

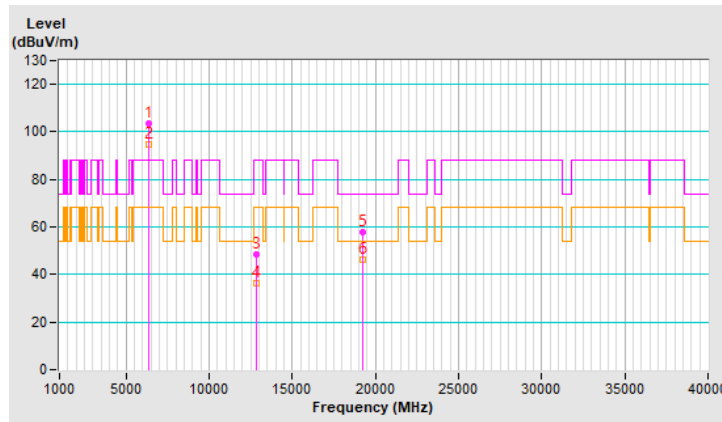


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 91 : 6405 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6405.00	107.5 PK			1.65 V	97	100.6	6.9
2	*6405.00	96.1 AV			1.65 V	97	89.2	6.9
3	#12810.00	47.8 PK	88.2	-40.4	2.37 V	165	32.9	14.9
4	#12810.00	35.3 AV	68.2	-32.9	2.37 V	165	20.4	14.9
5	19215.00	58.2 PK	74.0	-15.8	1.57 V	240	64.5	-6.3
6	19215.00	46.6 AV	54.0	-7.4	1.57 V	240	52.9	-6.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

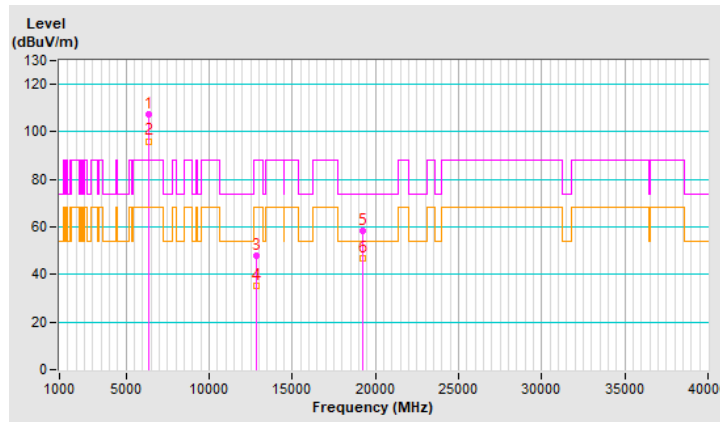


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	103.1 PK			2.84 H	107	95.8	7.3
2	*6445.00	94.5 AV			2.84 H	107	87.2	7.3
3	#12890.00	47.8 PK	88.2	-40.4	1.78 H	184	32.7	15.1
4	#12890.00	36.0 AV	68.2	-32.2	1.78 H	184	20.9	15.1
5	19335.00	58.5 PK	74.0	-15.5	2.55 H	131	65.1	-6.6
6	19335.00	46.3 AV	54.0	-7.7	2.55 H	131	52.9	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

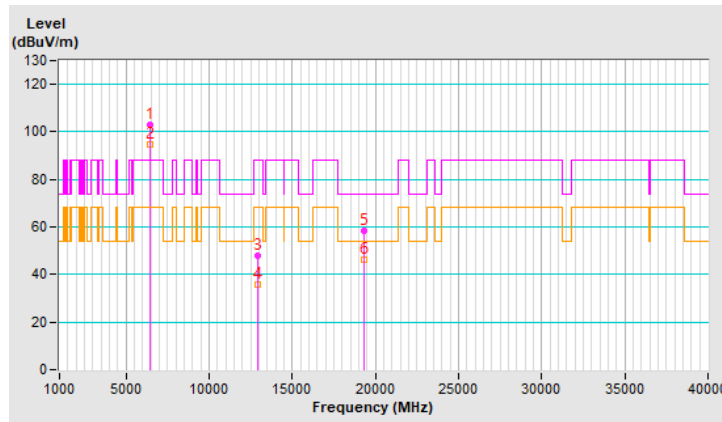


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 99 : 6445 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6445.00	107.7 PK			2.02 V	96	100.4	7.3
2	*6445.00	96.8 AV			2.02 V	96	89.5	7.3
3	#12890.00	47.2 PK	88.2	-41.0	2.40 V	164	32.1	15.1
4	#12890.00	34.8 AV	68.2	-33.4	2.40 V	164	19.7	15.1
5	19335.00	58.3 PK	74.0	-15.7	1.58 V	229	64.9	-6.6
6	19335.00	47.0 AV	54.0	-7.0	1.58 V	229	53.6	-6.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

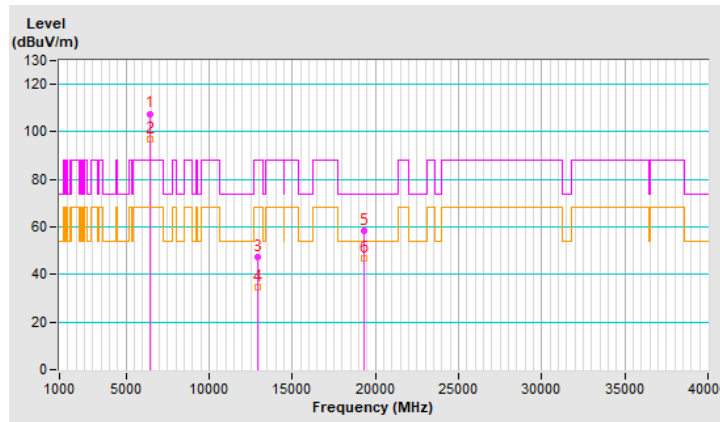


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	103.6 PK			2.83 H	115	96.0	7.6
2	*6485.00	94.9 AV			2.83 H	115	87.3	7.6
3	#12970.00	49.0 PK	88.2	-39.2	1.73 H	188	34.0	15.0
4	#12970.00	36.8 AV	68.2	-31.4	1.73 H	188	21.8	15.0
5	19455.00	59.1 PK	74.0	-14.9	2.47 H	132	65.4	-6.3
6	19455.00	46.8 AV	54.0	-7.2	2.47 H	132	53.1	-6.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

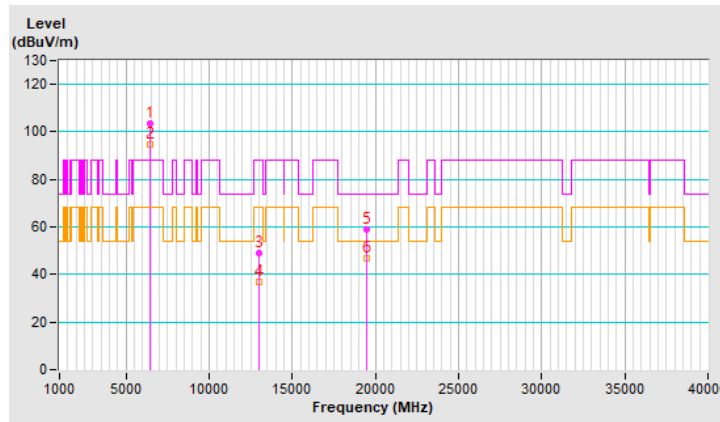


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 107 : 6485 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6485.00	110.0 PK			2.02 V	116	102.4	7.6
2	*6485.00	98.3 AV			2.02 V	116	90.7	7.6
3	#12970.00	47.3 PK	88.2	-40.9	2.38 V	165	32.3	15.0
4	#12970.00	35.0 AV	68.2	-33.2	2.38 V	165	20.0	15.0
5	19455.00	58.5 PK	74.0	-15.5	1.56 V	238	64.8	-6.3
6	19455.00	46.6 AV	54.0	-7.4	1.56 V	238	52.9	-6.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

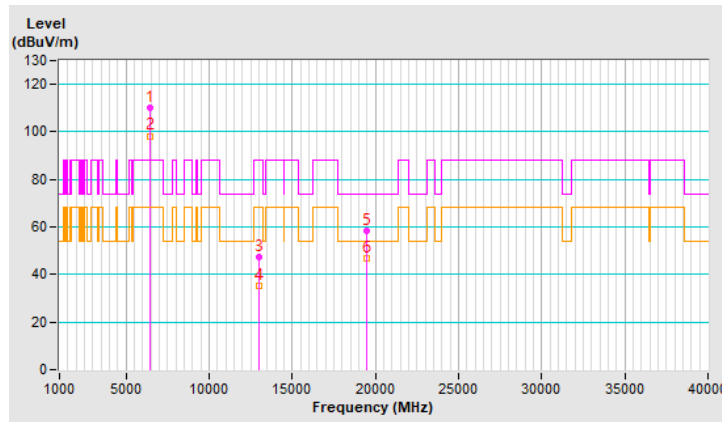




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	103.2 PK			2.83 H	129	95.4	7.8
2	*6525.00	94.5 AV			2.83 H	129	86.7	7.8
3	#13050.00	48.2 PK	88.2	-40.0	1.69 H	163	33.1	15.1
4	#13050.00	36.3 AV	68.2	-31.9	1.69 H	163	21.2	15.1
5	19575.00	59.0 PK	74.0	-15.0	2.56 H	130	65.1	-6.1
6	19575.00	47.1 AV	54.0	-6.9	2.56 H	130	53.2	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

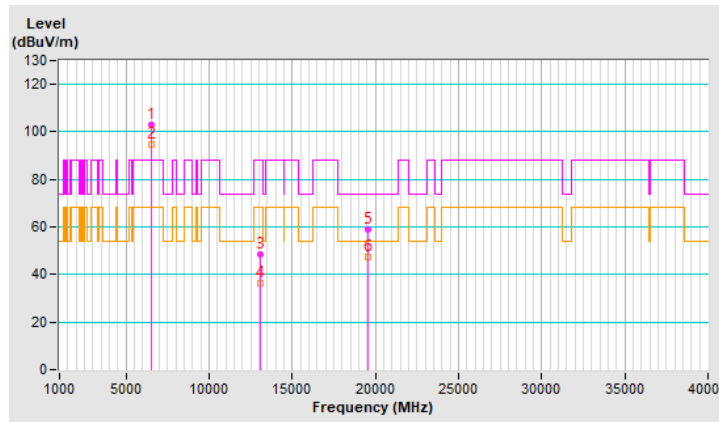


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 115 : 6525 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6525.00	106.4 PK			1.68 V	95	98.6	7.8
2	*6525.00	96.5 AV			1.68 V	95	88.7	7.8
3	#13050.00	48.4 PK	88.2	-39.8	2.42 V	175	33.3	15.1
4	#13050.00	35.6 AV	68.2	-32.6	2.42 V	175	20.5	15.1
5	19575.00	58.6 PK	74.0	-15.4	1.50 V	225	64.7	-6.1
6	19575.00	47.2 AV	54.0	-6.8	1.50 V	225	53.3	-6.1

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

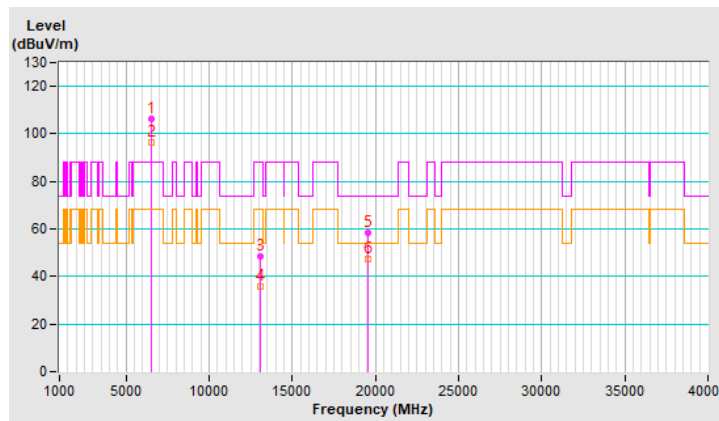


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	103.4 PK			2.91 H	128	95.3	8.1
2	*6565.00	94.2 AV			2.91 H	128	86.1	8.1
3	#13130.00	48.8 PK	88.2	-39.4	1.69 H	168	33.5	15.3
4	#13130.00	36.9 AV	68.2	-31.3	1.69 H	168	21.6	15.3
5	19695.00	57.9 PK	74.0	-16.1	2.47 H	157	63.9	-6.0
6	19695.00	46.2 AV	54.0	-7.8	2.47 H	157	52.2	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

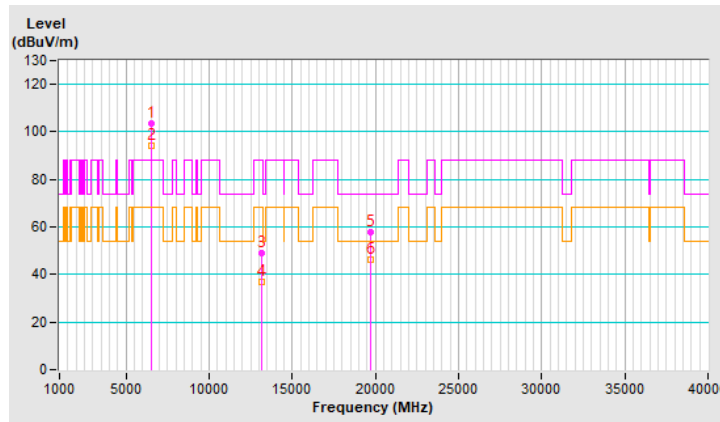


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 123 : 6565 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6565.00	106.9 PK			1.67 V	93	98.8	8.1
2	*6565.00	97.0 AV			1.67 V	93	88.9	8.1
3	#13130.00	47.8 PK	88.2	-40.4	2.33 V	162	32.5	15.3
4	#13130.00	35.5 AV	68.2	-32.7	2.33 V	162	20.2	15.3
5	19695.00	58.6 PK	74.0	-15.4	1.50 V	227	64.6	-6.0
6	19695.00	47.3 AV	54.0	-6.7	1.50 V	227	53.3	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

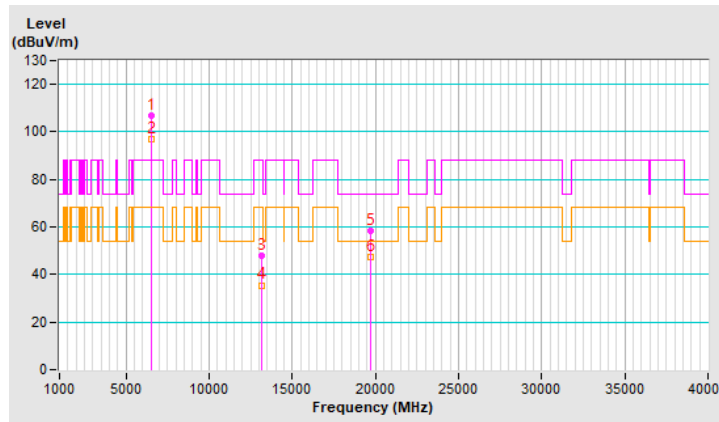


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 155 : 6725 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	103.4 PK			2.90 H	111	95.5	7.9
2	*6725.00	94.7 AV			2.90 H	111	86.8	7.9
3	#13450.00	48.3 PK	88.2	-39.9	1.72 H	174	32.1	16.2
4	#13450.00	36.7 AV	68.2	-31.5	1.72 H	174	20.5	16.2
5	20175.00	58.2 PK	74.0	-15.8	2.48 H	146	63.7	-5.5
6	20175.00	46.4 AV	54.0	-7.6	2.48 H	146	51.9	-5.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

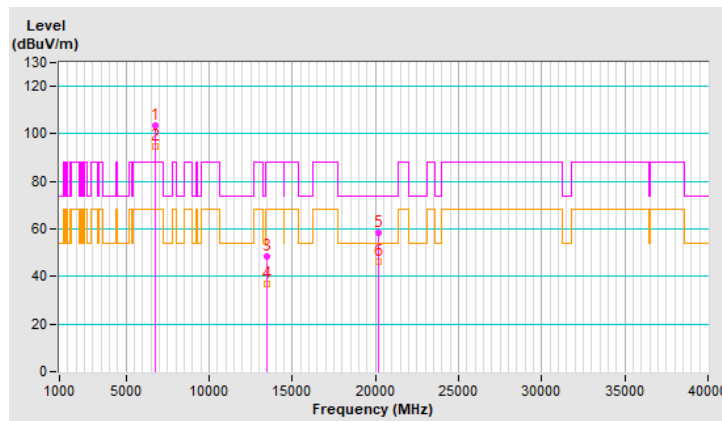


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 155 : 6725 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6725.00	109.2 PK			1.58 V	103	101.3	7.9
2	*6725.00	97.9 AV			1.58 V	103	90.0	7.9
3	#13450.00	47.8 PK	88.2	-40.4	2.34 V	146	31.6	16.2
4	#13450.00	35.4 AV	68.2	-32.8	2.34 V	146	19.2	16.2
5	20175.00	58.8 PK	74.0	-15.2	1.58 V	217	64.3	-5.5
6	20175.00	47.4 AV	54.0	-6.6	1.58 V	217	52.9	-5.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

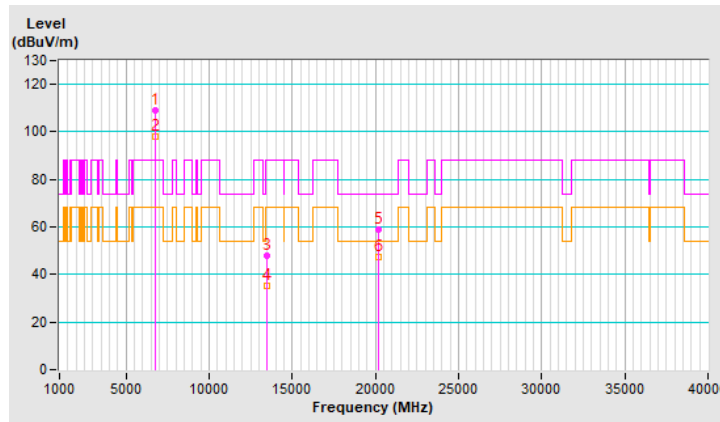


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	103.4 PK			2.93 H	121	95.1	8.3
2	*6845.00	94.8 AV			2.93 H	121	86.5	8.3
3	#13690.00	48.5 PK	88.2	-39.7	1.71 H	164	32.1	16.4
4	#13690.00	36.8 AV	68.2	-31.4	1.71 H	164	20.4	16.4
5	20535.00	58.7 PK	74.0	-15.3	2.59 H	138	63.5	-4.8
6	20535.00	46.4 AV	54.0	-7.6	2.59 H	138	51.2	-4.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

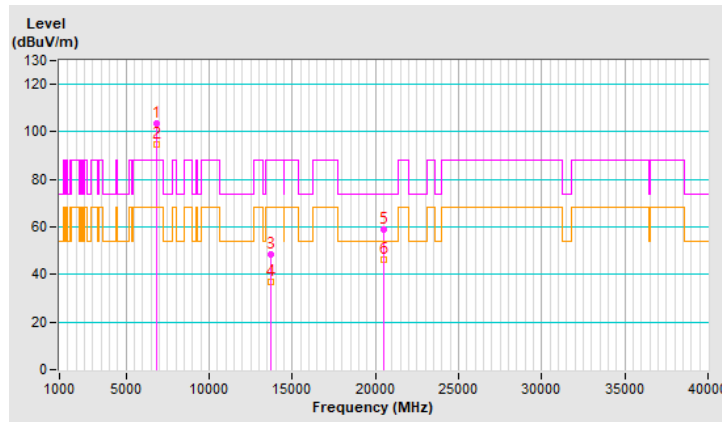


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 179 : 6845 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6845.00	107.7 PK			1.55 V	93	99.4	8.3
2	*6845.00	96.8 AV			1.55 V	93	88.5	8.3
3	#13690.00	47.7 PK	88.2	-40.5	2.39 V	163	31.3	16.4
4	#13690.00	35.5 AV	68.2	-32.7	2.39 V	163	19.1	16.4
5	20535.00	57.9 PK	74.0	-16.1	1.49 V	228	62.7	-4.8
6	20535.00	46.5 AV	54.0	-7.5	1.49 V	228	51.3	-4.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

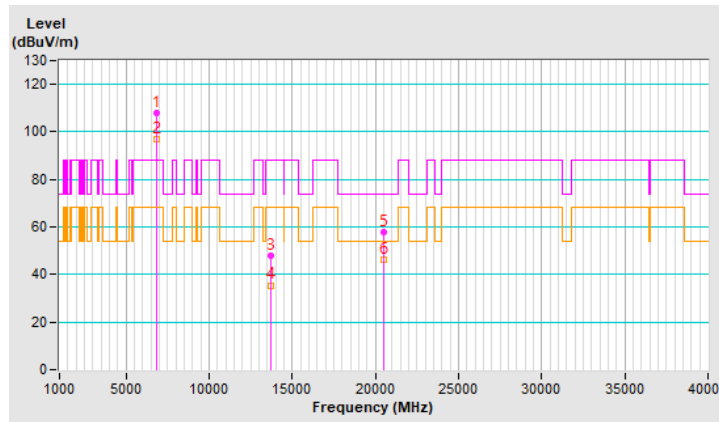




<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	103.3 PK			2.85 H	115	94.8	8.5
2	*6885.00	94.2 AV			2.85 H	115	85.7	8.5
3	#13770.00	48.1 PK	88.2	-40.1	1.74 H	177	31.2	16.9
4	#13770.00	36.4 AV	68.2	-31.8	1.74 H	177	19.5	16.9
5	20655.00	58.2 PK	74.0	-15.8	2.54 H	155	62.9	-4.7
6	20655.00	46.3 AV	54.0	-7.7	2.54 H	155	51.0	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

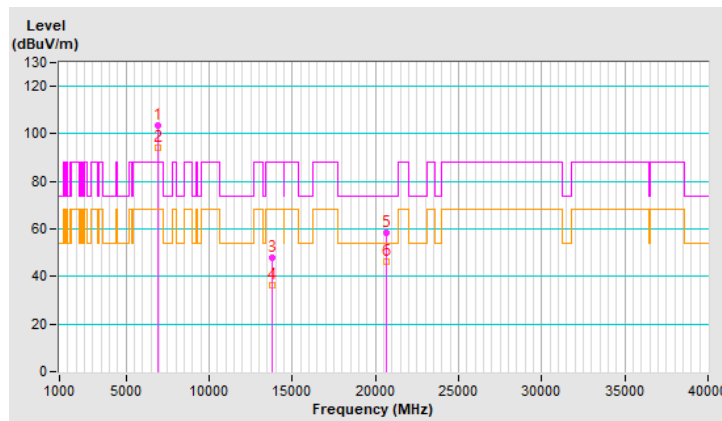


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 187 : 6885 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6885.00	106.9 PK			2.33 V	247	98.4	8.5
2	*6885.00	96.2 AV			2.33 V	247	87.7	8.5
3	#13770.00	47.4 PK	88.2	-40.8	2.42 V	170	30.5	16.9
4	#13770.00	35.0 AV	68.2	-33.2	2.42 V	170	18.1	16.9
5	20655.00	59.0 PK	74.0	-15.0	1.53 V	235	63.7	-4.7
6	20655.00	47.2 AV	54.0	-6.8	1.53 V	235	51.9	-4.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

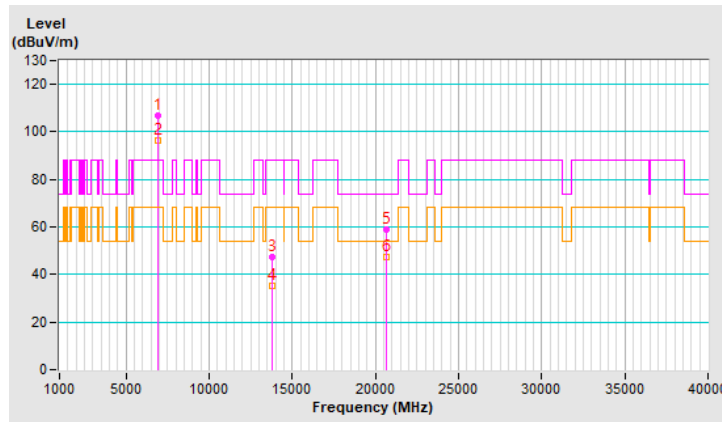


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 211 : 7005 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	103.6 PK			2.94 H	121	94.1	9.5
2	*7005.00	94.9 AV			2.94 H	121	85.4	9.5
3	#14010.00	48.4 PK	88.2	-39.8	1.68 H	177	30.8	17.6
4	#14010.00	36.7 AV	68.2	-31.5	1.68 H	177	19.1	17.6
5	21015.00	58.2 PK	74.0	-15.8	2.56 H	155	62.4	-4.2
6	21015.00	46.3 AV	54.0	-7.7	2.56 H	155	50.5	-4.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

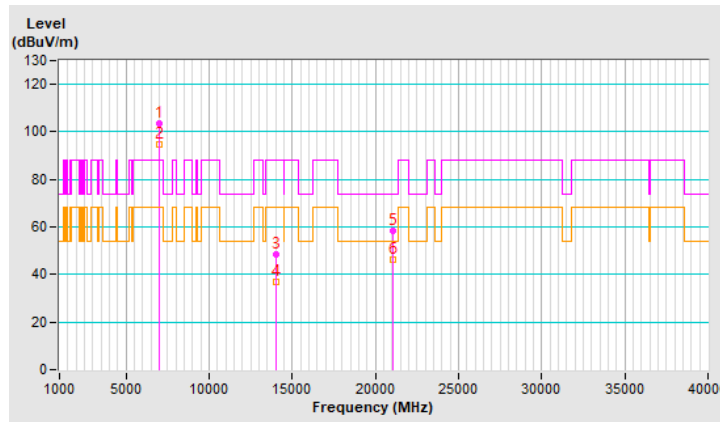


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 211 : 7005 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7005.00	108.9 PK			1.44 V	82	99.4	9.5
2	*7005.00	96.3 AV			1.44 V	82	86.8	9.5
3	#14010.00	48.3 PK	88.2	-39.9	2.38 V	147	30.7	17.6
4	#14010.00	35.7 AV	68.2	-32.5	2.38 V	147	18.1	17.6
5	21015.00	58.3 PK	74.0	-15.7	1.51 V	210	62.5	-4.2
6	21015.00	46.5 AV	54.0	-7.5	1.51 V	210	50.7	-4.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

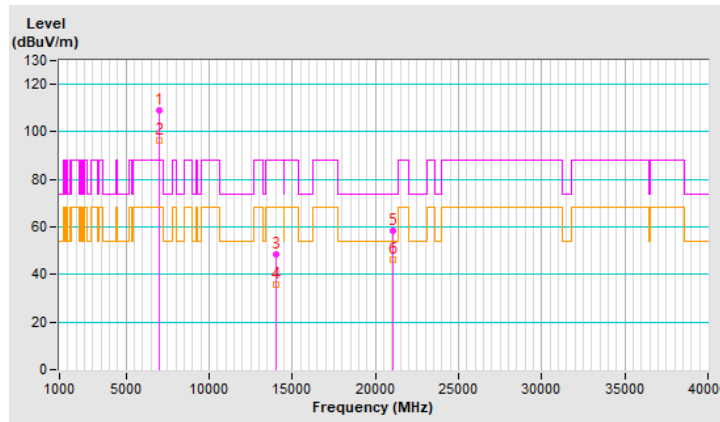


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	103.8 PK			2.00 H	86	94.2	9.6
2	*7085.00	93.6 AV			2.00 H	86	84.0	9.6
3	#7145.52	57.7 PK	88.2	-30.5	2.00 H	86	47.5	10.2
4	#7145.52	45.1 AV	68.2	-23.1	2.00 H	86	34.9	10.2
5	#14170.00	47.9 PK	88.2	-40.3	1.71 H	161	29.9	18.0
6	#14170.00	36.0 AV	68.2	-32.2	1.71 H	161	18.0	18.0
7	21255.00	58.1 PK	74.0	-15.9	2.56 H	154	62.4	-4.3
8	21255.00	46.2 AV	54.0	-7.8	2.56 H	154	50.5	-4.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

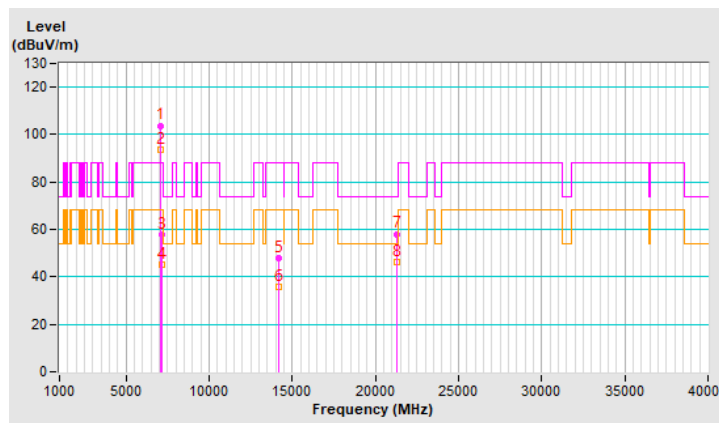


<b>RF Mode</b>	802.11ax (HE40)	<b>Channel</b>	CH 227 : 7085 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7085.00	108.1 PK			1.53 V	105	98.5	9.6
2	*7085.00	96.8 AV			1.53 V	105	87.2	9.6
3	#7150.00	57.9 PK	88.2	-30.3	1.53 V	105	47.7	10.2
4	#7150.00	47.6 AV	68.2	-20.6	1.53 V	105	37.4	10.2
5	#14170.00	48.0 PK	88.2	-40.2	2.35 V	161	30.0	18.0
6	#14170.00	35.5 AV	68.2	-32.7	2.35 V	161	17.5	18.0
7	21255.00	58.8 PK	74.0	-15.2	1.51 V	210	63.1	-4.3
8	21255.00	47.2 AV	54.0	-6.8	1.51 V	210	51.5	-4.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

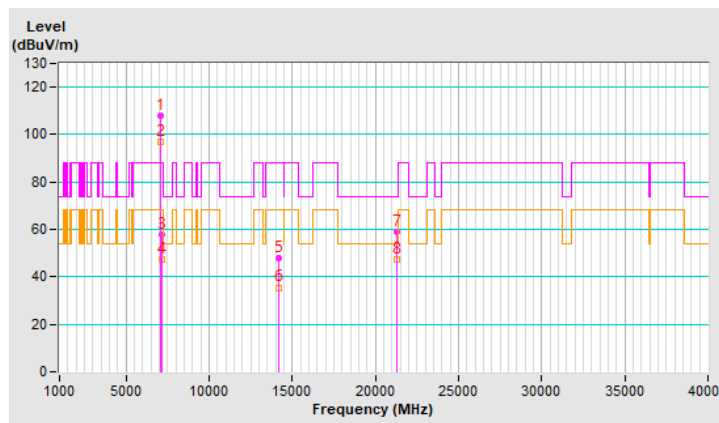


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 39 : 6145 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	52.2 PK	88.2	-36.0	2.56 H	131	46.7	5.5
2	#5925.00	40.3 AV	68.2	-27.9	2.56 H	131	34.8	5.5
3	*6145.00	104.9 PK			2.56 H	131	99.0	5.9
4	*6145.00	94.9 AV			2.56 H	131	89.0	5.9
5	12290.00	48.5 PK	74.0	-25.5	1.76 H	181	34.1	14.4
6	12290.00	36.8 AV	54.0	-17.2	1.76 H	181	22.4	14.4
7	18435.00	59.0 PK	74.0	-15.0	2.54 H	150	65.7	-6.7
8	18435.00	47.0 AV	54.0	-7.0	2.54 H	150	53.7	-6.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

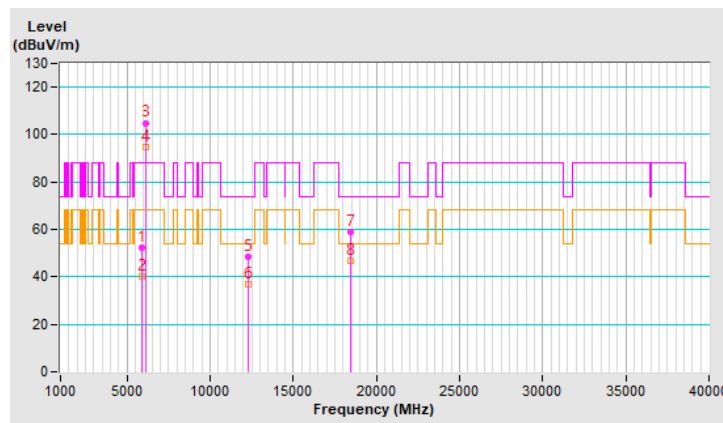


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 39 : 6145 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5925.00	51.5 PK	88.2	-36.7	2.08 V	99	46.0	5.5
2	#5925.00	40.4 AV	68.2	-27.8	2.08 V	99	34.9	5.5
3	*6145.00	110.5 PK			2.08 V	99	104.6	5.9
4	*6145.00	96.3 AV			2.08 V	99	90.4	5.9
5	12290.00	48.0 PK	74.0	-26.0	2.41 V	155	33.6	14.4
6	12290.00	35.7 AV	54.0	-18.3	2.41 V	155	21.3	14.4
7	18435.00	58.3 PK	74.0	-15.7	1.50 V	236	65.0	-6.7
8	18435.00	46.8 AV	54.0	-7.2	1.50 V	236	53.5	-6.7

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

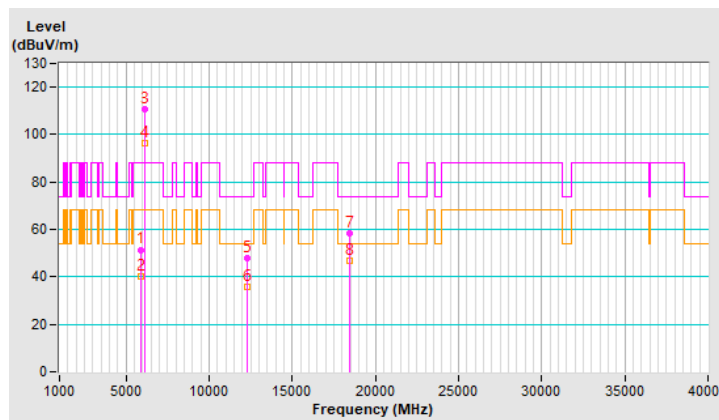




<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 55 : 6225 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	105.0 PK			2.50 H	147	98.8	6.2
2	*6225.00	95.1 AV			2.50 H	147	88.9	6.2
3	12450.00	48.7 PK	74.0	-25.3	1.66 H	183	35.0	13.7
4	12450.00	36.7 AV	54.0	-17.3	1.66 H	183	23.0	13.7
5	18675.00	58.4 PK	74.0	-15.6	2.52 H	155	64.9	-6.5
6	18675.00	46.2 AV	54.0	-7.8	2.52 H	155	52.7	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

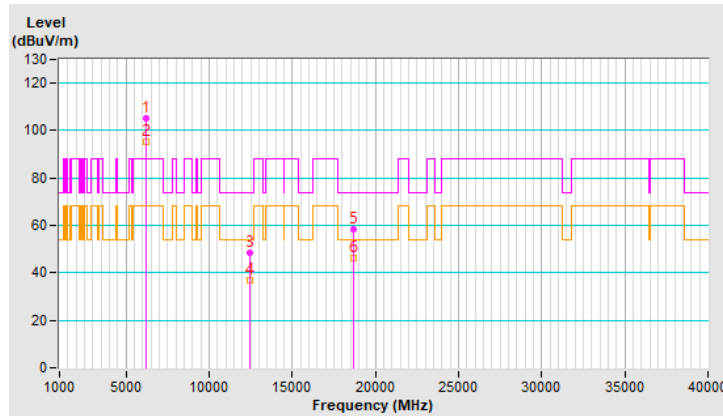


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 55 : 6225 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6225.00	110.2 PK			1.98 V	100	104.0	6.2
2	*6225.00	97.5 AV			1.98 V	100	91.3	6.2
3	12450.00	47.5 PK	74.0	-26.5	2.40 V	159	33.8	13.7
4	12450.00	35.1 AV	54.0	-18.9	2.40 V	159	21.4	13.7
5	18675.00	58.8 PK	74.0	-15.2	1.52 V	209	65.3	-6.5
6	18675.00	47.0 AV	54.0	-7.0	1.52 V	209	53.5	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

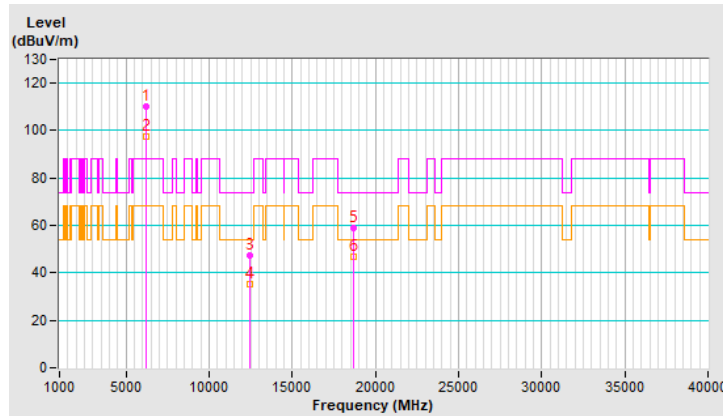


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	104.6 PK			2.51 H	145	97.8	6.8
2	*6385.00	94.8 AV			2.51 H	145	88.0	6.8
3	#12770.00	48.4 PK	88.2	-39.8	1.70 H	178	33.7	14.7
4	#12770.00	36.7 AV	68.2	-31.5	1.70 H	178	22.0	14.7
5	19155.00	59.1 PK	74.0	-14.9	2.50 H	131	65.4	-6.3
6	19155.00	46.9 AV	54.0	-7.1	2.50 H	131	53.2	-6.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

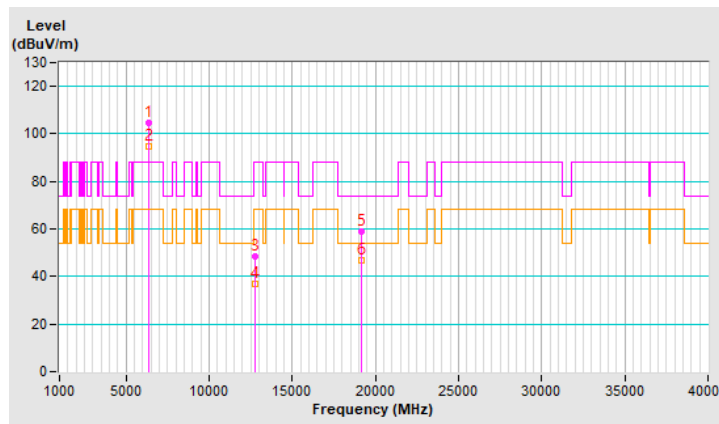


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 87 : 6385 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6385.00	108.5 PK			2.00 V	106	101.7	6.8
2	*6385.00	96.8 AV			2.00 V	106	90.0	6.8
3	#12770.00	47.9 PK	88.2	-40.3	2.34 V	170	33.2	14.7
4	#12770.00	35.6 AV	68.2	-32.6	2.34 V	170	20.9	14.7
5	19155.00	58.4 PK	74.0	-15.6	1.49 V	228	64.7	-6.3
6	19155.00	46.8 AV	54.0	-7.2	1.49 V	228	53.1	-6.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

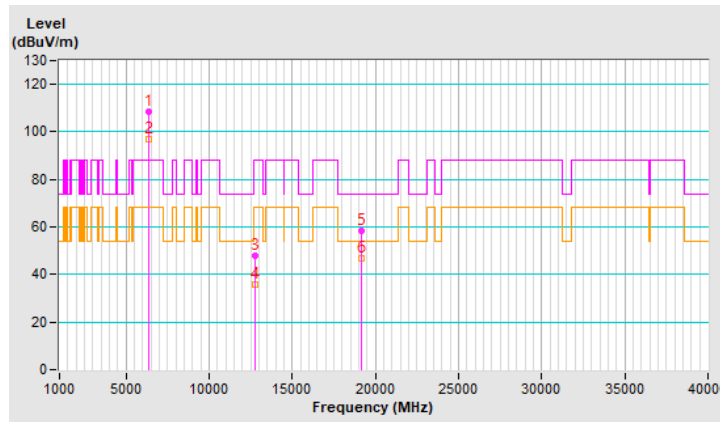


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	105.0 PK			2.59 H	117	97.5	7.5
2	*6465.00	95.2 AV			2.59 H	117	87.7	7.5
3	#12930.00	48.1 PK	88.2	-40.1	1.73 H	187	33.0	15.1
4	#12930.00	36.1 AV	68.2	-32.1	1.73 H	187	21.0	15.1
5	19395.00	59.1 PK	74.0	-14.9	2.59 H	151	65.6	-6.5
6	19395.00	46.8 AV	54.0	-7.2	2.59 H	151	53.3	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

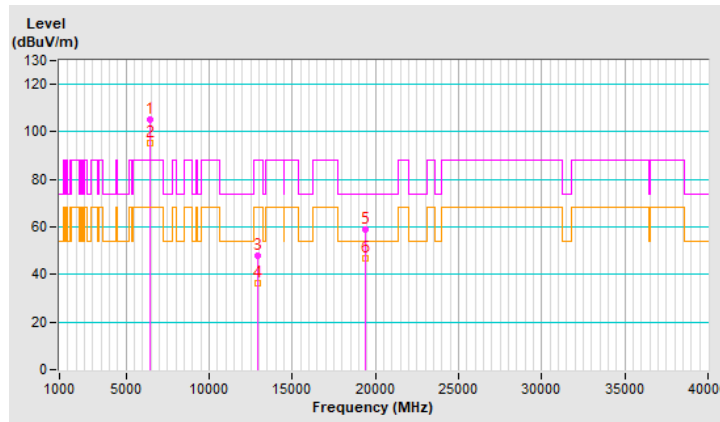


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 103 : 6465 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6465.00	109.6 PK			1.83 V	95	102.1	7.5
2	*6465.00	97.6 AV			1.83 V	95	90.1	7.5
3	#12930.00	48.0 PK	88.2	-40.2	2.36 V	158	32.9	15.1
4	#12930.00	35.4 AV	68.2	-32.8	2.36 V	158	20.3	15.1
5	19395.00	58.3 PK	74.0	-15.7	1.50 V	215	64.8	-6.5
6	19395.00	46.7 AV	54.0	-7.3	1.50 V	215	53.2	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

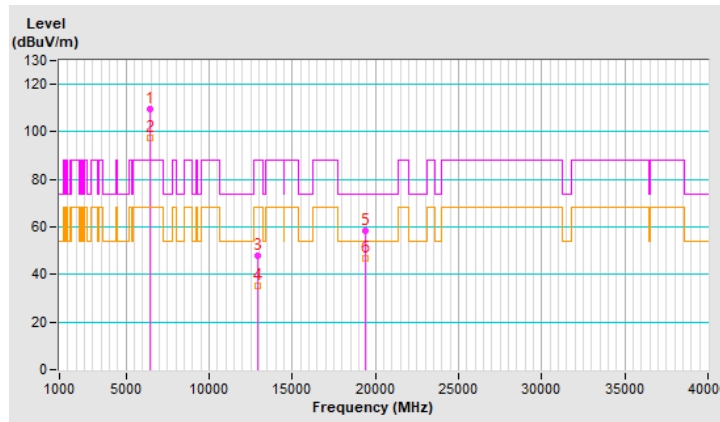


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	104.9 PK			2.60 H	132	96.9	8.0
2	*6545.00	95.0 AV			2.60 H	132	87.0	8.0
3	#13090.00	47.6 PK	88.2	-40.6	1.74 H	179	32.5	15.1
4	#13090.00	36.0 AV	68.2	-32.2	1.74 H	179	20.9	15.1
5	19635.00	58.6 PK	74.0	-15.4	2.48 H	145	64.6	-6.0
6	19635.00	46.5 AV	54.0	-7.5	2.48 H	145	52.5	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

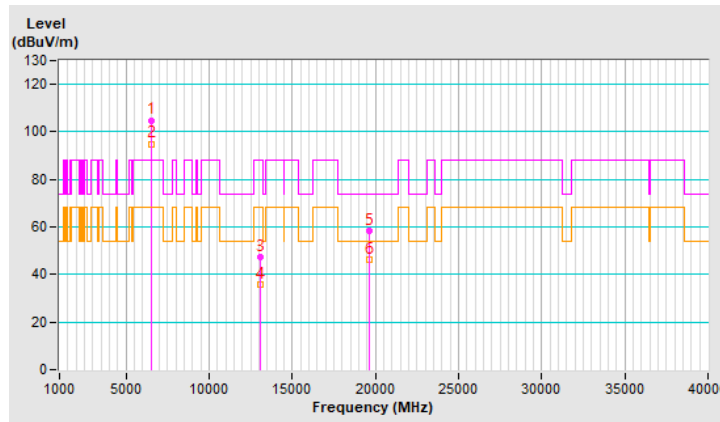


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 119 : 6545 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6545.00	108.3 PK			1.50 V	102	100.3	8.0
2	*6545.00	97.1 AV			1.50 V	102	89.1	8.0
3	#13090.00	47.9 PK	88.2	-40.3	2.35 V	145	32.8	15.1
4	#13090.00	35.3 AV	68.2	-32.9	2.35 V	145	20.2	15.1
5	19635.00	57.8 PK	74.0	-16.2	1.58 V	224	63.8	-6.0
6	19635.00	46.5 AV	54.0	-7.5	1.58 V	224	52.5	-6.0

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

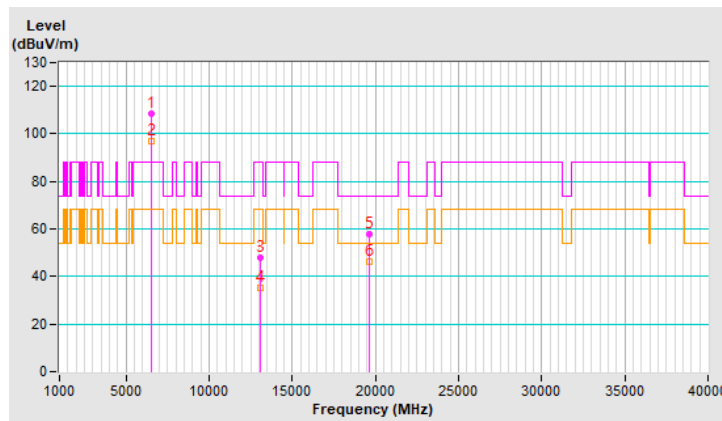




<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 135 : 6625 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	105.1 PK			2.58 H	117	97.1	8.0
2	*6625.00	95.1 AV			2.58 H	117	87.1	8.0
3	13250.00	47.8 PK	74.0	-26.2	1.73 H	173	32.2	15.6
4	13250.00	36.0 AV	54.0	-18.0	1.73 H	173	20.4	15.6
5	19875.00	58.5 PK	74.0	-15.5	2.51 H	152	64.4	-5.9
6	19875.00	46.3 AV	54.0	-7.7	2.51 H	152	52.2	-5.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

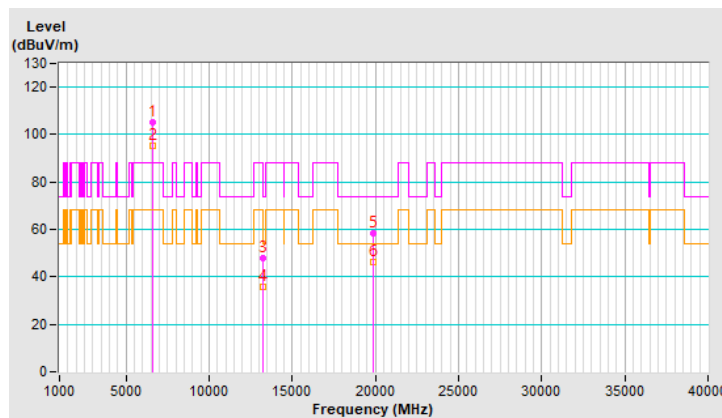


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 135 : 6625 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6625.00	109.9 PK			1.65 V	96	101.9	8.0
2	*6625.00	97.1 AV			1.65 V	96	89.1	8.0
3	13250.00	47.7 PK	74.0	-26.3	2.44 V	162	32.1	15.6
4	13250.00	35.3 AV	54.0	-18.7	2.44 V	162	19.7	15.6
5	19875.00	58.7 PK	74.0	-15.3	1.60 V	240	64.6	-5.9
6	19875.00	47.2 AV	54.0	-6.8	1.60 V	240	53.1	-5.9

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

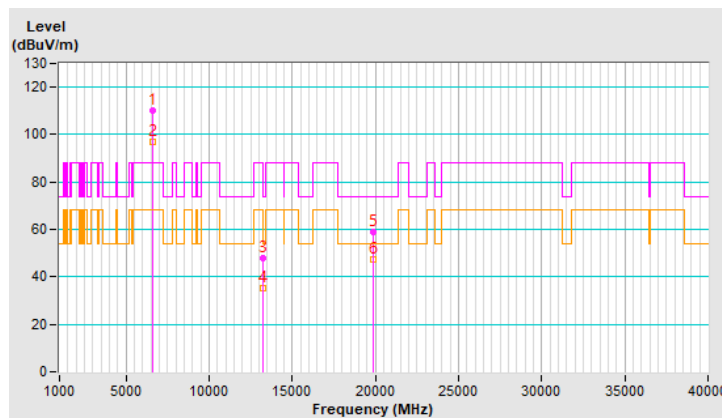


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	105.1 PK			2.50 H	129	97.2	7.9
2	*6705.00	95.1 AV			2.50 H	129	87.2	7.9
3	#13410.00	47.7 PK	88.2	-40.5	1.71 H	189	31.6	16.1
4	#13410.00	36.0 AV	68.2	-32.2	1.71 H	189	19.9	16.1
5	20115.00	58.2 PK	74.0	-15.8	2.50 H	131	63.6	-5.4
6	20115.00	46.5 AV	54.0	-7.5	2.50 H	131	51.9	-5.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

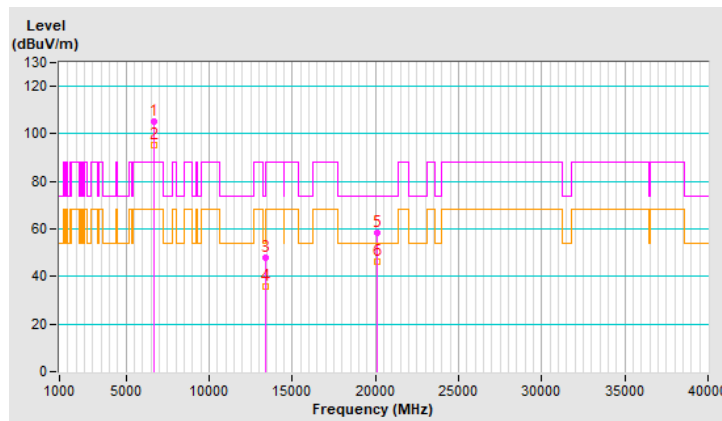


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 151 : 6705 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6705.00	110.4 PK			1.89 V	113	102.5	7.9
2	*6705.00	97.5 AV			1.89 V	113	89.6	7.9
3	#13410.00	48.4 PK	88.2	-39.8	2.41 V	173	32.3	16.1
4	#13410.00	35.6 AV	68.2	-32.6	2.41 V	173	19.5	16.1
5	20115.00	58.0 PK	74.0	-16.0	1.53 V	210	63.4	-5.4
6	20115.00	46.7 AV	54.0	-7.3	1.53 V	210	52.1	-5.4

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

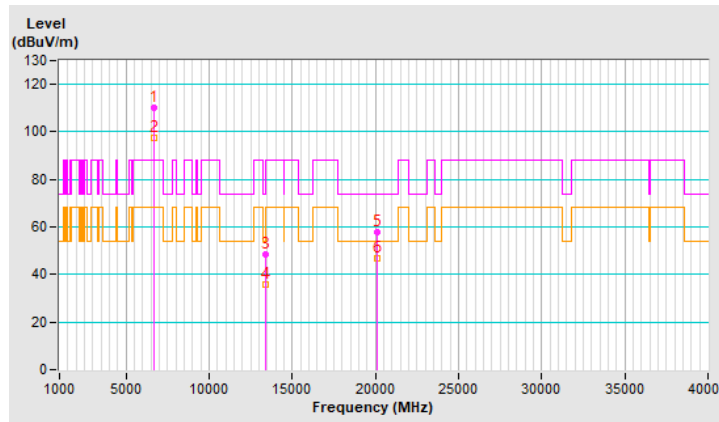


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 167 : 6785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	104.5 PK			2.56 H	141	96.5	8.0
2	*6785.00	94.6 AV			2.56 H	141	86.6	8.0
3	#13570.00	48.1 PK	88.2	-40.1	1.77 H	170	31.6	16.5
4	#13570.00	36.0 AV	68.2	-32.2	1.77 H	170	19.5	16.5
5	20355.00	58.6 PK	74.0	-15.4	2.52 H	136	63.9	-5.3
6	20355.00	46.7 AV	54.0	-7.3	2.52 H	136	52.0	-5.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

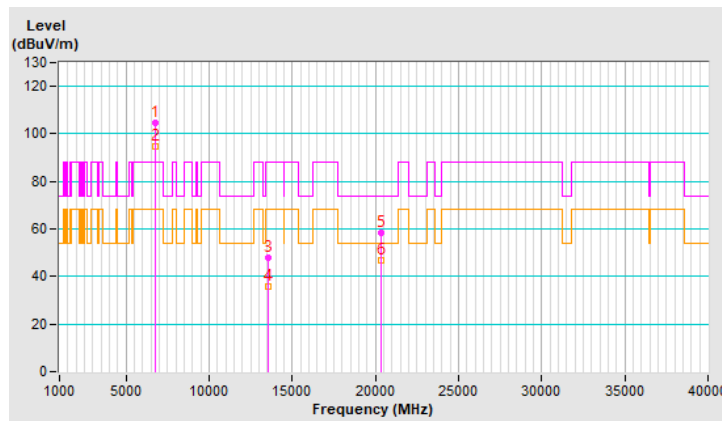


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 167 : 6785 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6785.00	109.2 PK			1.89 V	189	101.2	8.0
2	*6785.00	96.8 AV			1.89 V	189	88.8	8.0
3	#13570.00	47.5 PK	88.2	-40.7	2.43 V	168	31.0	16.5
4	#13570.00	34.8 AV	68.2	-33.4	2.43 V	168	18.3	16.5
5	20355.00	58.4 PK	74.0	-15.6	1.57 V	224	63.7	-5.3
6	20355.00	46.7 AV	54.0	-7.3	1.57 V	224	52.0	-5.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

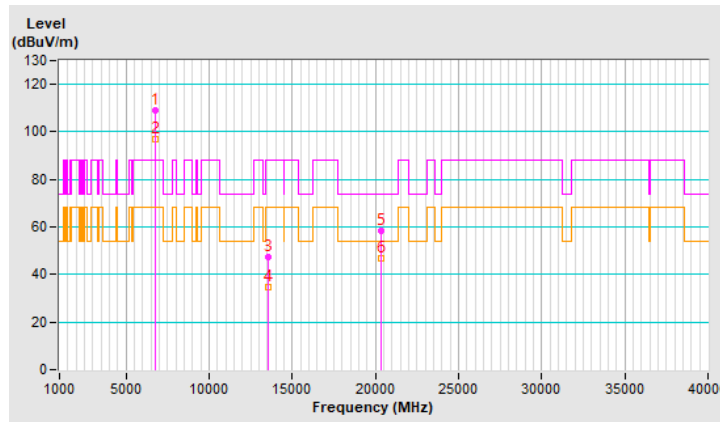


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	104.7 PK			2.60 H	135	96.3	8.4
2	*6865.00	94.6 AV			2.60 H	135	86.2	8.4
3	#13730.00	48.1 PK	88.2	-40.1	1.71 H	164	31.5	16.6
4	#13730.00	36.4 AV	68.2	-31.8	1.71 H	164	19.8	16.6
5	20595.00	58.4 PK	74.0	-15.6	2.51 H	141	63.2	-4.8
6	20595.00	46.4 AV	54.0	-7.6	2.51 H	141	51.2	-4.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

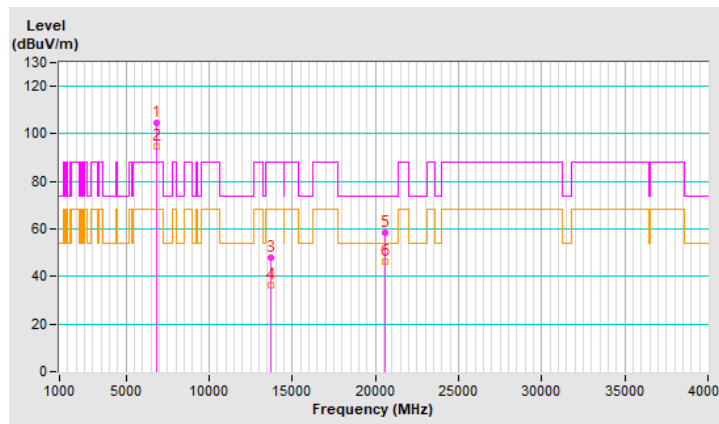


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 183 : 6865 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6865.00	109.4 PK			1.92 V	104	101.0	8.4
2	*6865.00	97.2 AV			1.92 V	104	88.8	8.4
3	#13730.00	47.7 PK	88.2	-40.5	2.41 V	174	31.1	16.6
4	#13730.00	35.3 AV	68.2	-32.9	2.41 V	174	18.7	16.6
5	20595.00	58.8 PK	74.0	-15.2	1.49 V	223	63.6	-4.8
6	20595.00	47.3 AV	54.0	-6.7	1.49 V	223	52.1	-4.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

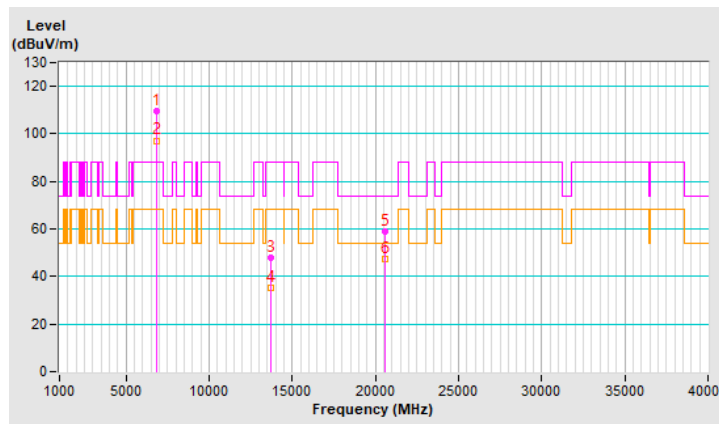




<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	104.9 PK			2.50 H	138	95.9	9.0
2	*6945.00	94.9 AV			2.50 H	138	85.9	9.0
3	#13890.00	48.0 PK	88.2	-40.2	1.69 H	178	30.9	17.1
4	#13890.00	35.9 AV	68.2	-32.3	1.69 H	178	18.8	17.1
5	20835.00	59.0 PK	74.0	-15.0	2.51 H	128	63.6	-4.6
6	20835.00	46.8 AV	54.0	-7.2	2.51 H	128	51.4	-4.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

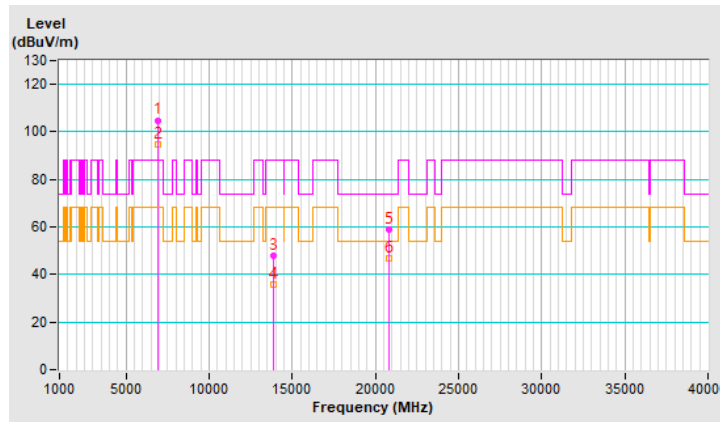


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 199 : 6945 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6945.00	110.6 PK			1.98 V	82	101.6	9.0
2	*6945.00	96.9 AV			1.98 V	82	87.9	9.0
3	#13890.00	48.1 PK	88.2	-40.1	2.32 V	146	31.0	17.1
4	#13890.00	35.7 AV	68.2	-32.5	2.32 V	146	18.6	17.1
5	20835.00	59.2 PK	74.0	-14.8	1.51 V	231	63.8	-4.6
6	<b>20835.00</b>	<b>47.4 AV</b>	<b>54.0</b>	<b>-6.6</b>	<b>1.51 V</b>	<b>231</b>	<b>52.0</b>	<b>-4.6</b>

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

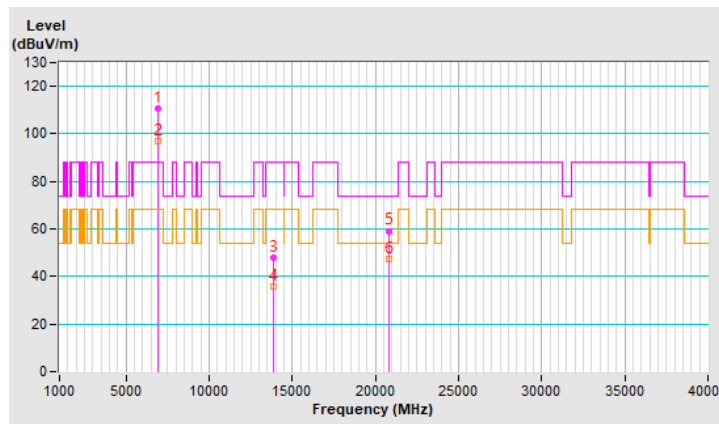


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	106.5 PK			1.66 H	122	97.0	9.5
2	*7025.00	95.7 AV			1.66 H	122	86.2	9.5
3	#7126.69	60.4 PK	88.2	-27.8	1.66 H	122	50.4	10.0
4	#7126.69	46.5 AV	68.2	-21.7	1.66 H	122	36.5	10.0
5	#14050.00	48.7 PK	88.2	-39.5	1.73 H	160	31.0	17.7
6	#14050.00	36.9 AV	68.2	-31.3	1.73 H	160	19.2	17.7
7	21075.00	58.9 PK	74.0	-15.1	2.50 H	135	63.1	-4.2
8	21075.00	46.6 AV	54.0	-7.4	2.50 H	135	50.8	-4.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

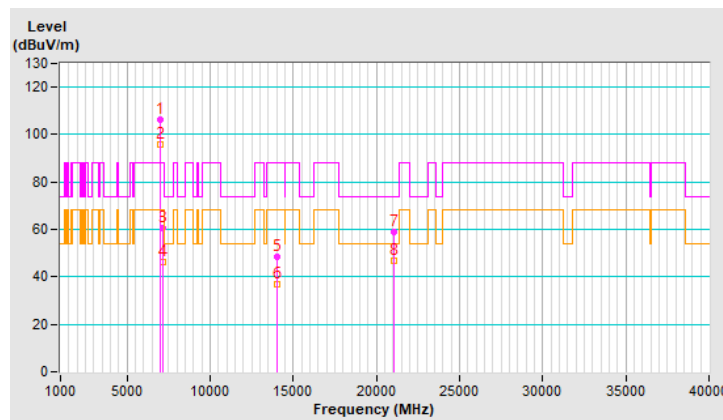


<b>RF Mode</b>	802.11ax (HE80)	<b>Channel</b>	CH 215 : 7025 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*7025.00	109.0 PK			2.01 V	94	99.5	9.5
2	*7025.00	97.6 AV			2.01 V	94	88.1	9.5
3	#7132.74	60.3 PK	88.2	-27.9	2.01 V	94	50.3	10.0
4	#7132.74	49.5 AV	68.2	-18.7	2.01 V	94	39.5	10.0
5	#14050.00	48.4 PK	88.2	-39.8	2.41 V	163	30.7	17.7
6	#14050.00	35.7 AV	68.2	-32.5	2.41 V	163	18.0	17.7
7	21075.00	58.4 PK	74.0	-15.6	1.56 V	240	62.6	-4.2
8	21075.00	47.0 AV	54.0	-7.0	1.56 V	240	51.2	-4.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

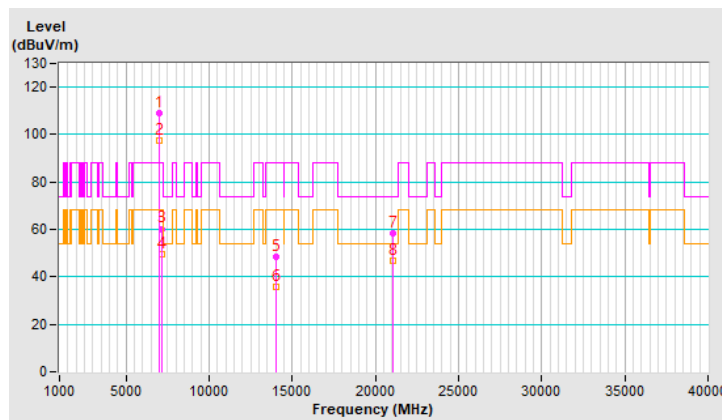


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5920.00	52.5 PK	88.2	-35.7	1.88 H	35	47.0	5.5
2	#5920.00	40.3 AV	68.2	-27.9	1.88 H	35	34.8	5.5
3	*6185.00	105.4 PK			1.88 H	35	99.4	6.0
4	*6185.00	94.8 AV			1.88 H	35	88.8	6.0
5	12370.00	48.3 PK	74.0	-25.7	1.67 H	186	34.3	14.0
6	12370.00	36.5 AV	54.0	-17.5	1.67 H	186	22.5	14.0
7	18555.00	58.3 PK	74.0	-15.7	2.58 H	152	64.8	-6.5
8	18555.00	46.2 AV	54.0	-7.8	2.58 H	152	52.7	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

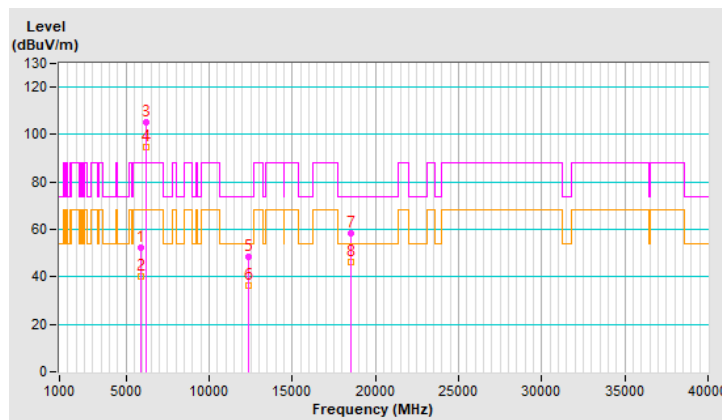


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 47 : 6185 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	#5920.00	52.8 PK	88.2	-35.4	2.00 V	96	47.3	5.5
2	#5920.00	40.2 AV	68.2	-28.0	2.00 V	96	34.7	5.5
3	*6185.00	109.5 PK			2.00 V	96	103.5	6.0
4	*6185.00	96.7 AV			2.00 V	96	90.7	6.0
5	12370.00	48.2 PK	74.0	-25.8	2.32 V	149	34.2	14.0
6	12370.00	35.4 AV	54.0	-18.6	2.32 V	149	21.4	14.0
7	18555.00	58.2 PK	74.0	-15.8	1.51 V	220	64.7	-6.5
8	18555.00	46.8 AV	54.0	-7.2	1.51 V	220	53.3	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

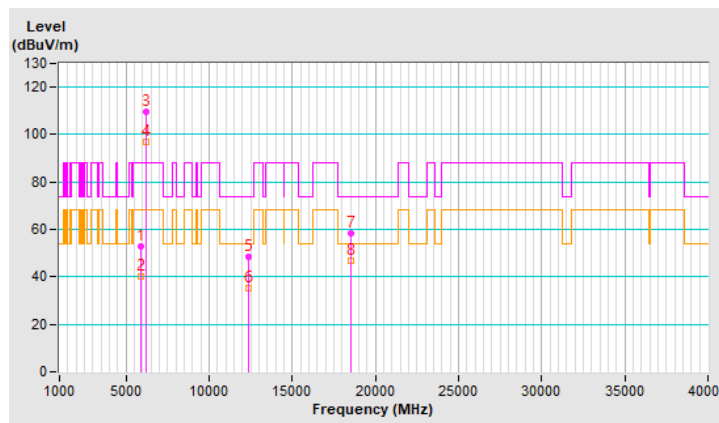


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	105.9 PK			1.89 H	27	99.2	6.7
2	*6345.00	95.1 AV			1.89 H	27	88.4	6.7
3	12690.00	48.6 PK	74.0	-25.4	1.67 H	177	34.3	14.3
4	12690.00	36.5 AV	54.0	-17.5	1.67 H	177	22.2	14.3
5	19035.00	58.8 PK	74.0	-15.2	2.57 H	134	65.3	-6.5
6	19035.00	46.6 AV	54.0	-7.4	2.57 H	134	53.1	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

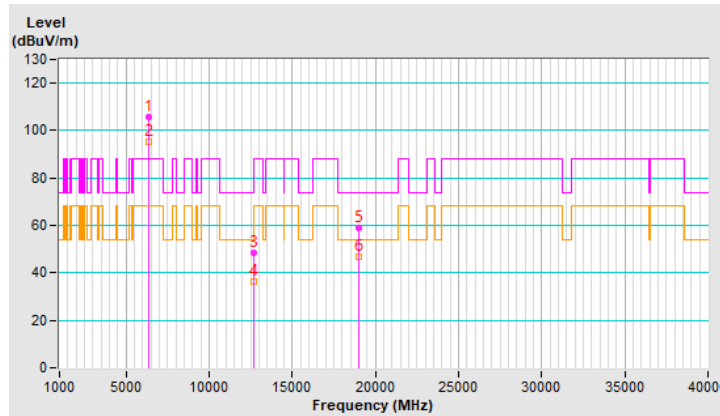


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 79 : 6345 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6345.00	109.4 PK			1.97 V	102	102.7	6.7
2	*6345.00	97.0 AV			1.97 V	102	90.3	6.7
3	12690.00	47.9 PK	74.0	-26.1	2.43 V	149	33.6	14.3
4	12690.00	35.7 AV	54.0	-18.3	2.43 V	149	21.4	14.3
5	19035.00	58.8 PK	74.0	-15.2	1.49 V	238	65.3	-6.5
6	19035.00	47.3 AV	54.0	-6.7	1.49 V	238	53.8	-6.5

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

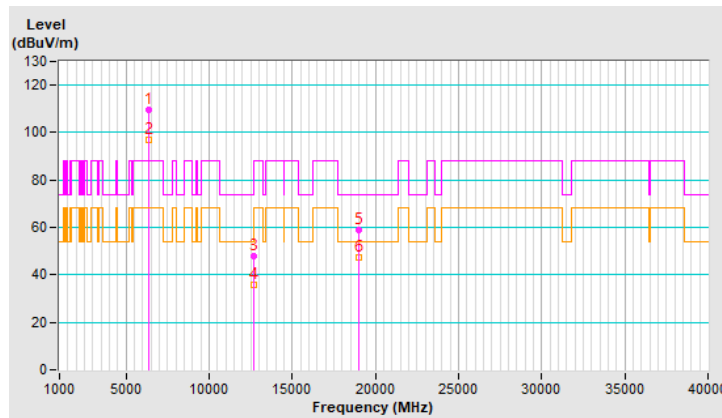




<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	105.2 PK			1.87 H	28	97.5	7.7
2	*6505.00	94.6 AV			1.87 H	28	86.9	7.7
3	#13010.00	47.9 PK	88.2	-40.3	1.67 H	183	32.9	15.0
4	#13010.00	36.1 AV	68.2	-32.1	1.67 H	183	21.1	15.0
5	19515.00	58.2 PK	74.0	-15.8	2.47 H	159	64.4	-6.2
6	19515.00	46.3 AV	54.0	-7.7	2.47 H	159	52.5	-6.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

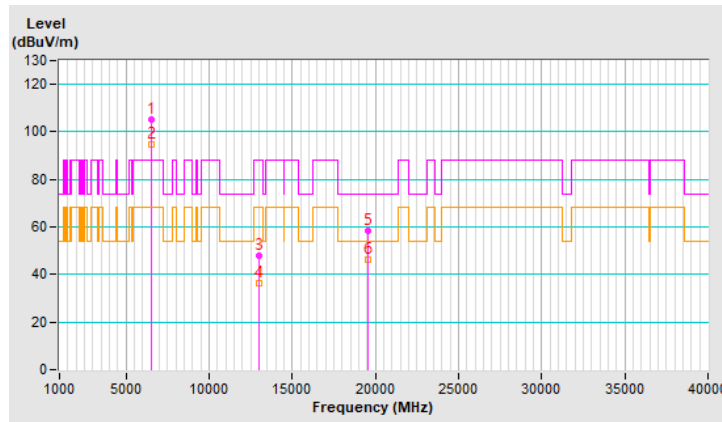


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 111 : 6505 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6505.00	109.7 PK			1.86 V	98	102.0	7.7
2	*6505.00	97.1 AV			1.86 V	98	89.4	7.7
3	#13010.00	47.6 PK	88.2	-40.6	2.41 V	164	32.6	15.0
4	#13010.00	35.0 AV	68.2	-33.2	2.41 V	164	20.0	15.0
5	19515.00	58.4 PK	74.0	-15.6	1.56 V	228	64.6	-6.2
6	19515.00	46.6 AV	54.0	-7.4	1.56 V	228	52.8	-6.2

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

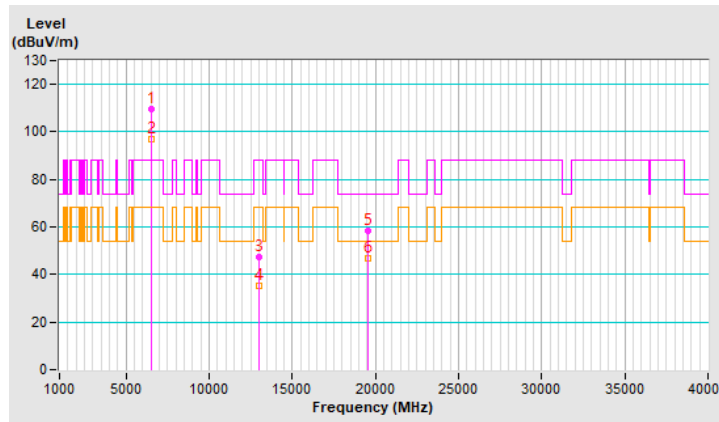


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	105.8 PK			1.87 H	30	97.8	8.0
2	*6665.00	95.2 AV			1.87 H	30	87.2	8.0
3	13330.00	48.1 PK	74.0	-25.9	1.78 H	186	32.2	15.9
4	13330.00	36.4 AV	54.0	-17.6	1.78 H	186	20.5	15.9
5	19995.00	58.4 PK	74.0	-15.6	2.58 H	146	64.0	-5.6
6	19995.00	46.1 AV	54.0	-7.9	2.58 H	146	51.7	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.

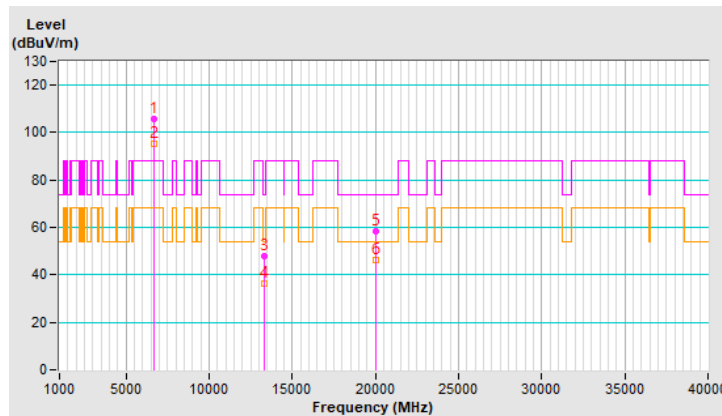


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 143 : 6665 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6665.00	112.0 PK			1.76 V	114	104.0	8.0
2	*6665.00	96.3 AV			1.76 V	114	88.3	8.0
3	13330.00	47.2 PK	74.0	-26.8	2.40 V	175	31.3	15.9
4	13330.00	34.9 AV	54.0	-19.1	2.40 V	175	19.0	15.9
5	19995.00	58.4 PK	74.0	-15.6	1.55 V	221	64.0	-5.6
6	19995.00	46.7 AV	54.0	-7.3	1.55 V	221	52.3	-5.6

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.

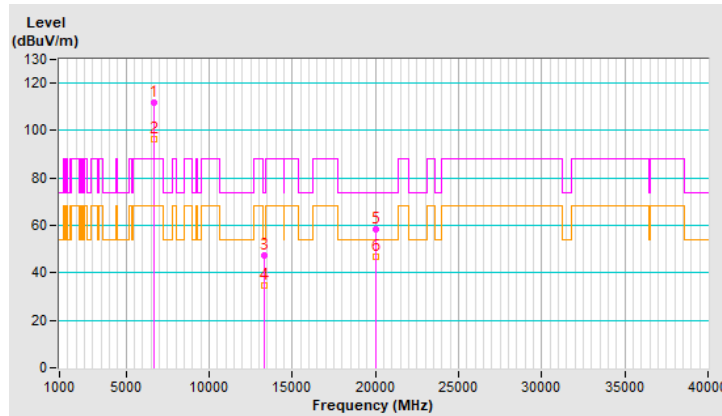


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

**Antenna Polarity & Test Distance : Horizontal at 3 m**

No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	105.0 PK			1.92 H	43	96.8	8.2
2	*6825.00	94.3 AV			1.92 H	43	86.1	8.2
3	#13650.00	48.4 PK	88.2	-39.8	1.71 H	174	32.0	16.4
4	#13650.00	36.4 AV	68.2	-31.8	1.71 H	174	20.0	16.4
5	20475.00	58.6 PK	74.0	-15.4	2.58 H	141	63.4	-4.8
6	20475.00	46.4 AV	54.0	-7.6	2.58 H	141	51.2	-4.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

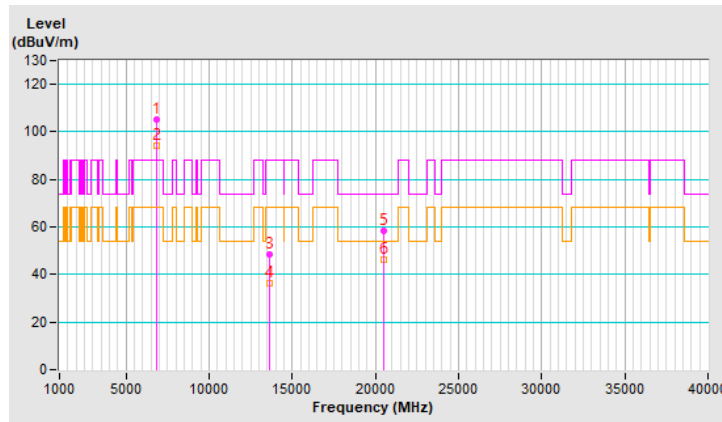




<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 175 : 6825 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6825.00	111.5 PK			1.76 V	82	103.3	8.2
2	*6825.00	96.8 AV			1.76 V	82	88.6	8.2
3	#13650.00	48.0 PK	88.2	-40.2	2.36 V	152	31.6	16.4
4	#13650.00	35.4 AV	68.2	-32.8	2.36 V	152	19.0	16.4
5	20475.00	58.4 PK	74.0	-15.6	1.55 V	229	63.2	-4.8
6	20475.00	46.9 AV	54.0	-7.1	1.55 V	229	51.7	-4.8

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* " : Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # " : The radiated frequency is out of the restricted band.

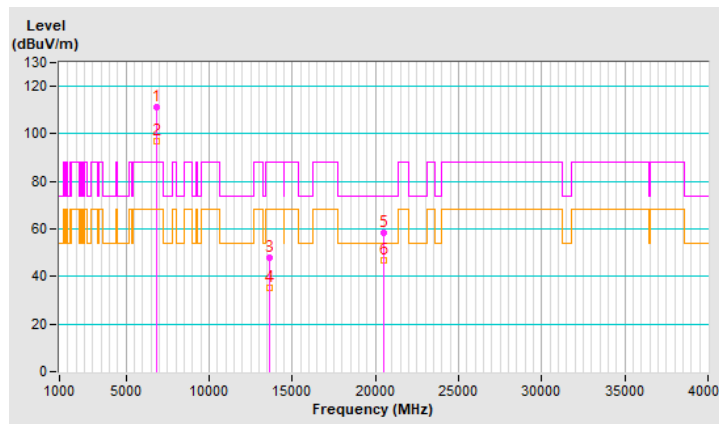


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Horizontal at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	107.7 PK			2.75 H	96	98.3	9.4
2	*6985.00	95.6 AV			2.75 H	96	86.2	9.4
3	#7148.14	58.7 PK	88.2	-29.5	2.75 H	96	48.5	10.2
4	#7148.14	48.2 AV	68.2	-20.0	2.75 H	96	38.0	10.2
5	#13970.00	48.7 PK	88.2	-39.5	1.76 H	167	31.3	17.4
6	#13970.00	36.5 AV	68.2	-31.7	1.76 H	167	19.1	17.4
7	20955.00	59.2 PK	74.0	-14.8	2.48 H	143	63.5	-4.3
8	20955.00	47.1 AV	54.0	-6.9	2.48 H	143	51.4	-4.3

**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

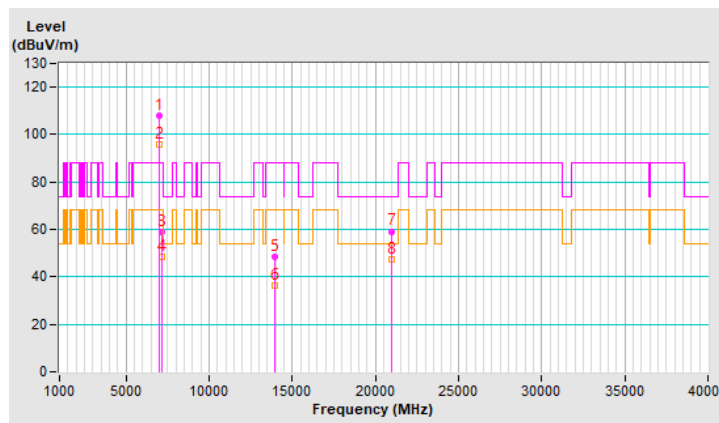


<b>RF Mode</b>	802.11ax (HE160)	<b>Channel</b>	CH 207 : 6985 MHz
<b>Frequency Range</b>	1 GHz ~ 40 GHz	<b>Detector Function &amp; Bandwidth</b>	(PK) RB = 1 MHz, VB = 3 MHz (AV) RB = 1 MHz, VB = 10 Hz
<b>Input Power</b>	120 Vac, 60 Hz	<b>Environmental Conditions</b>	23°C, 72% RH
<b>Tested By</b>	Sampson Chen		

Antenna Polarity & Test Distance : Vertical at 3 m								
No	Frequency (MHz)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Antenna Height (m)	Table Angle (Degree)	Raw Value (dBuV)	Correction Factor (dB/m)
1	*6985.00	110.0 PK			1.91 V	80	100.6	9.4
2	*6985.00	97.1 AV			1.91 V	80	87.7	9.4
3	#7138.44	57.3 PK	88.2	-30.9	1.91 V	80	47.2	10.1
4	#7138.44	53.9 AV	68.2	-14.3	1.91 V	80	43.8	10.1
5	#13970.00	48.4 PK	88.2	-39.8	2.38 V	161	31.0	17.4
6	#13970.00	35.7 AV	68.2	-32.5	2.38 V	161	18.3	17.4
7	20955.00	58.2 PK	74.0	-15.8	1.54 V	225	62.5	-4.3
8	20955.00	46.4 AV	54.0	-7.6	1.54 V	225	50.7	-4.3


**Remarks:**

1. Emission Level(dBuV/m) = Raw Value(dBuV) + Correction Factor(dB/m)
2. Correction Factor(dB/m) = Antenna Factor(dB/m) + Cable Factor(dB) – Pre-Amplifier Factor(dB)
3. Margin value = Emission Level – Limit value
4. The other emission levels were very low against the limit.
5. " \* ": Fundamental frequency, the limit was restricted at the RF Output Power.
6. " # ": The radiated frequency is out of the restricted band.

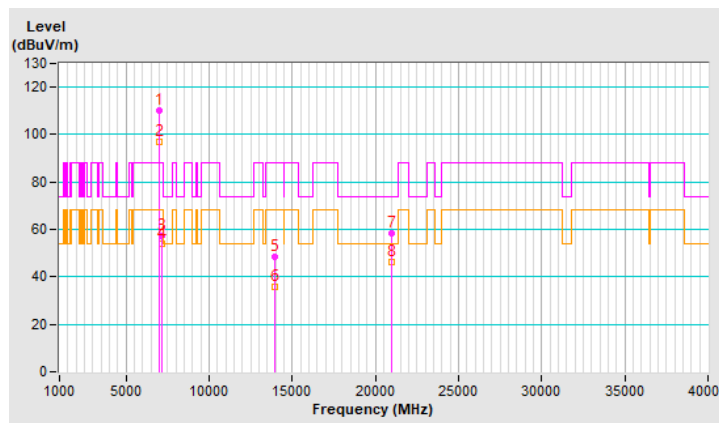





Plot of Band Edge\_Beamforming Mode

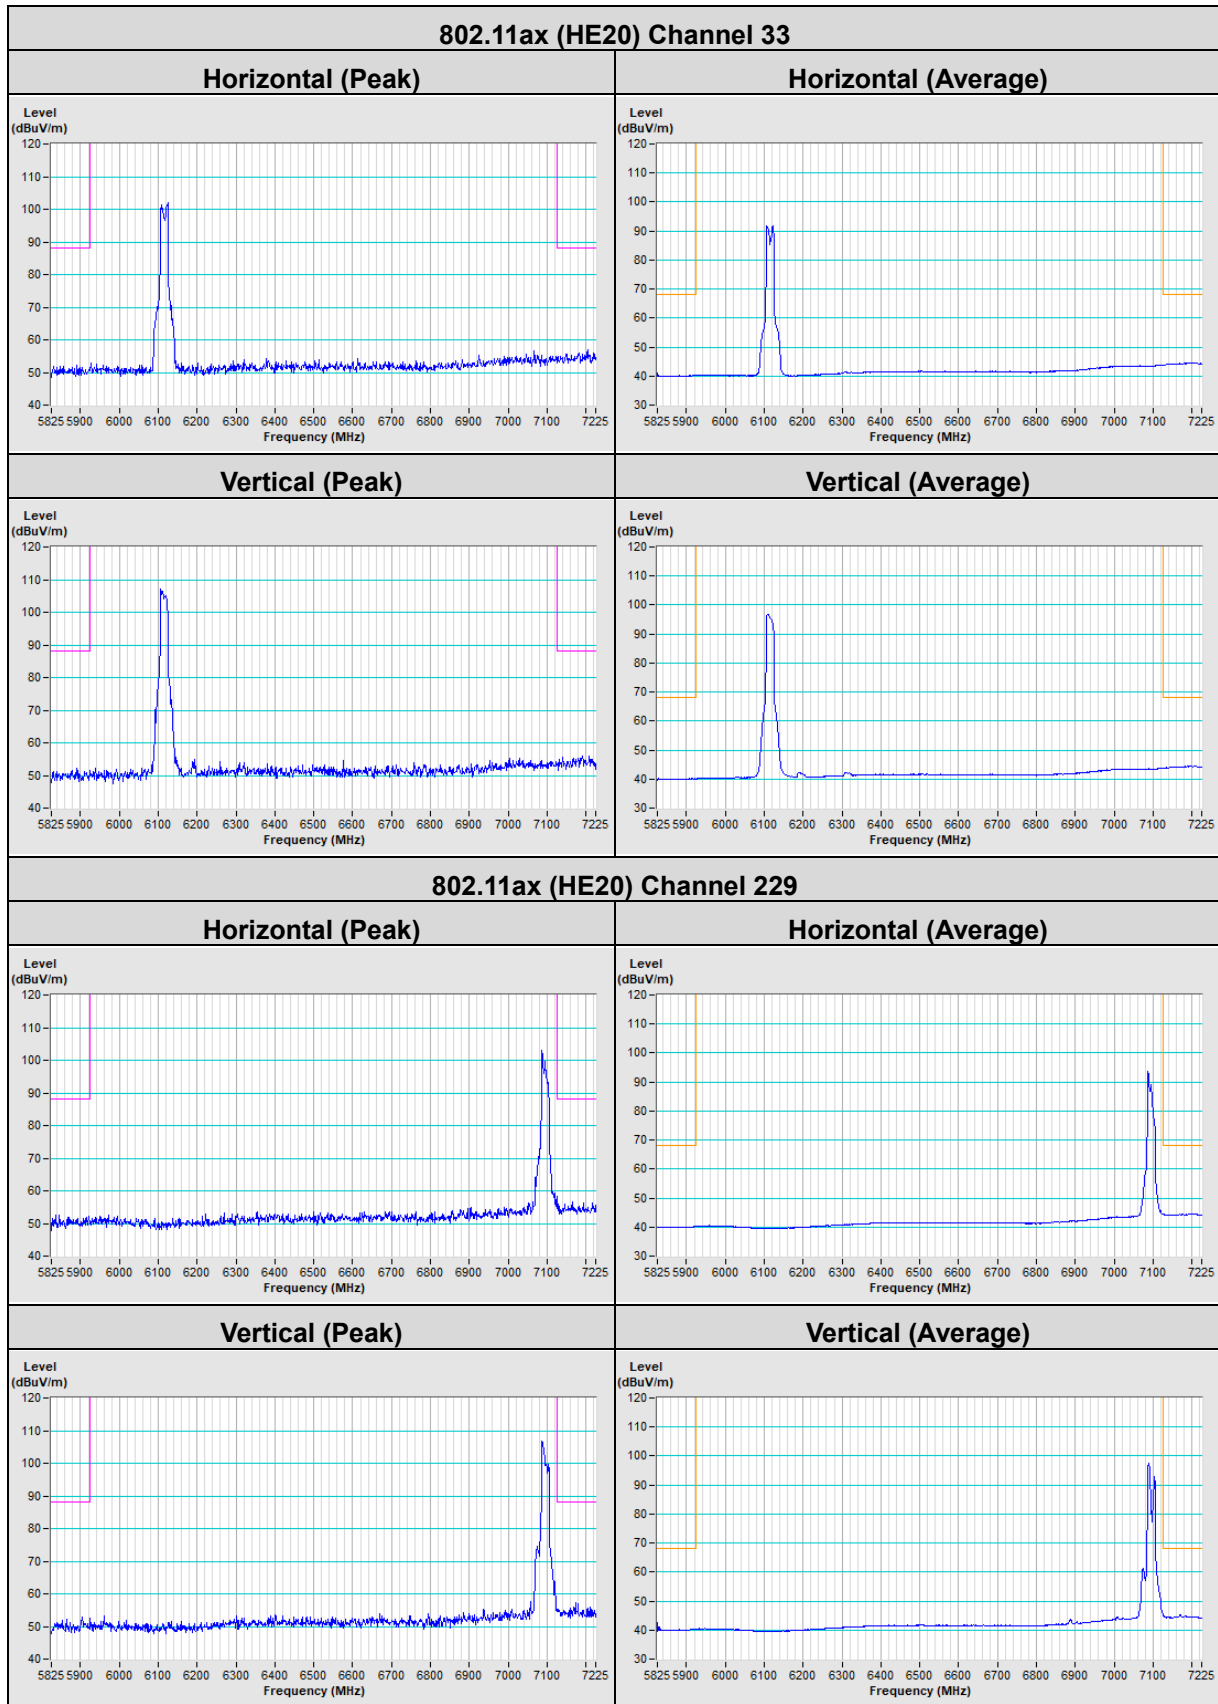


### 802.11ax (HE40) Channel 35

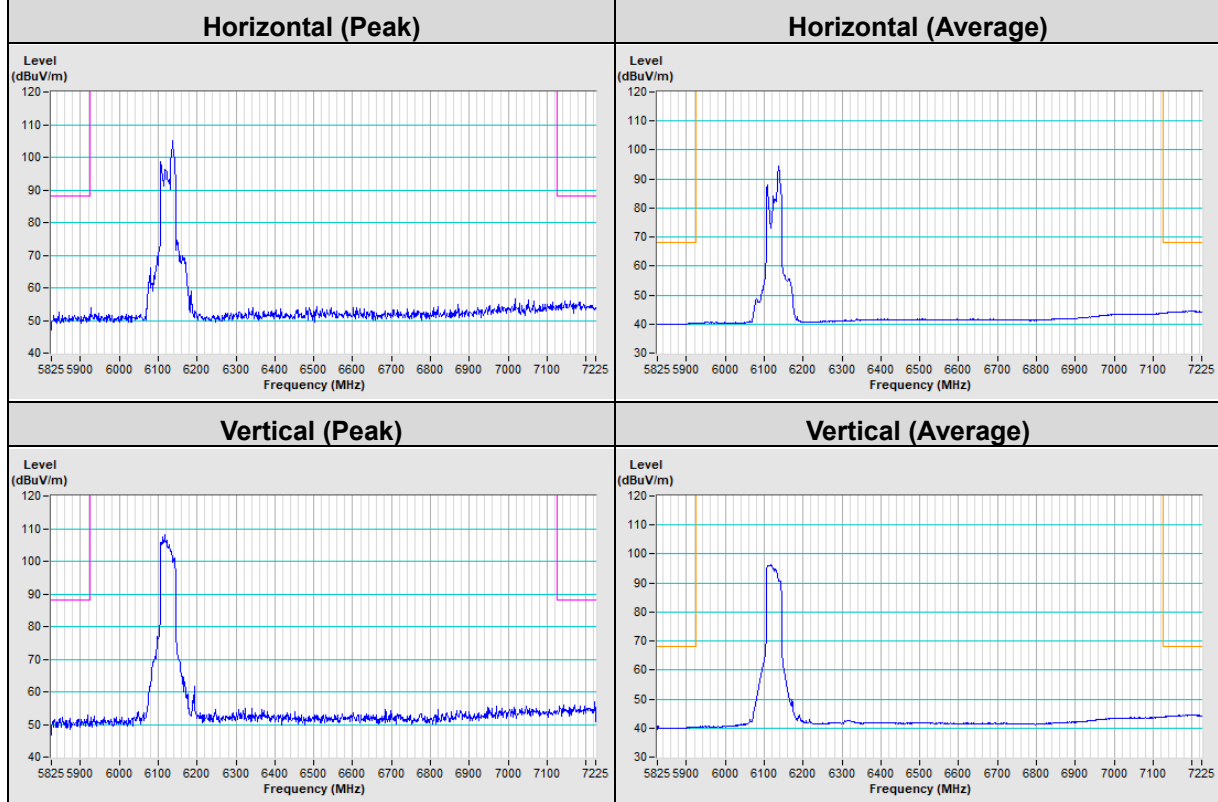


### 802.11ax (HE40) Channel 227

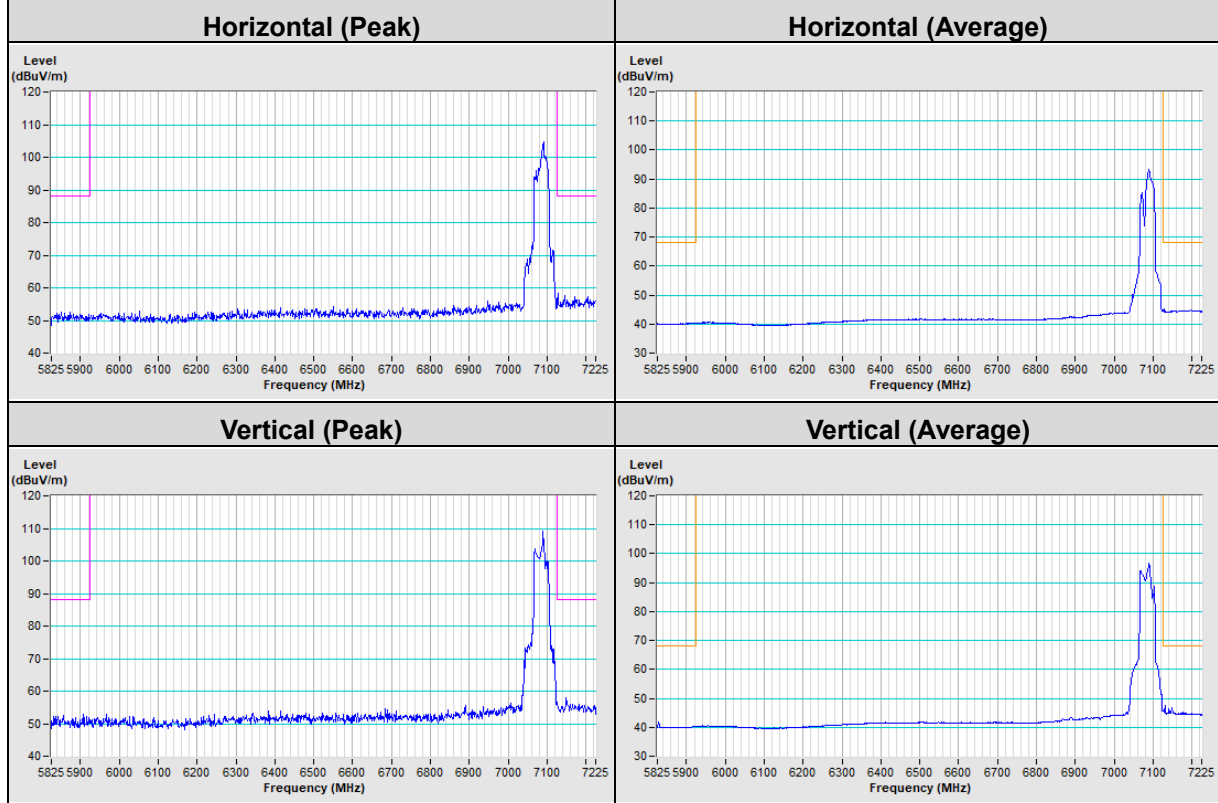


### 802.11ax (HE80) Channel 39

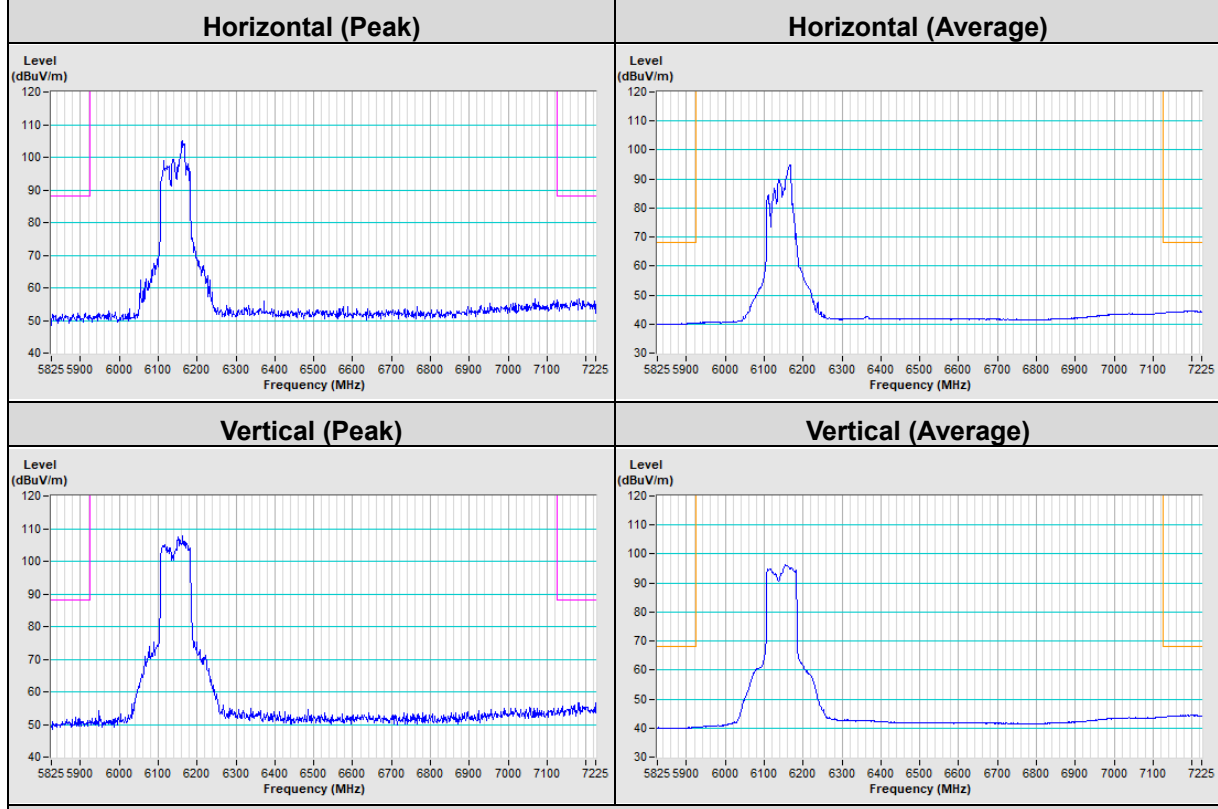


### 802.11ax (HE80) Channel 215

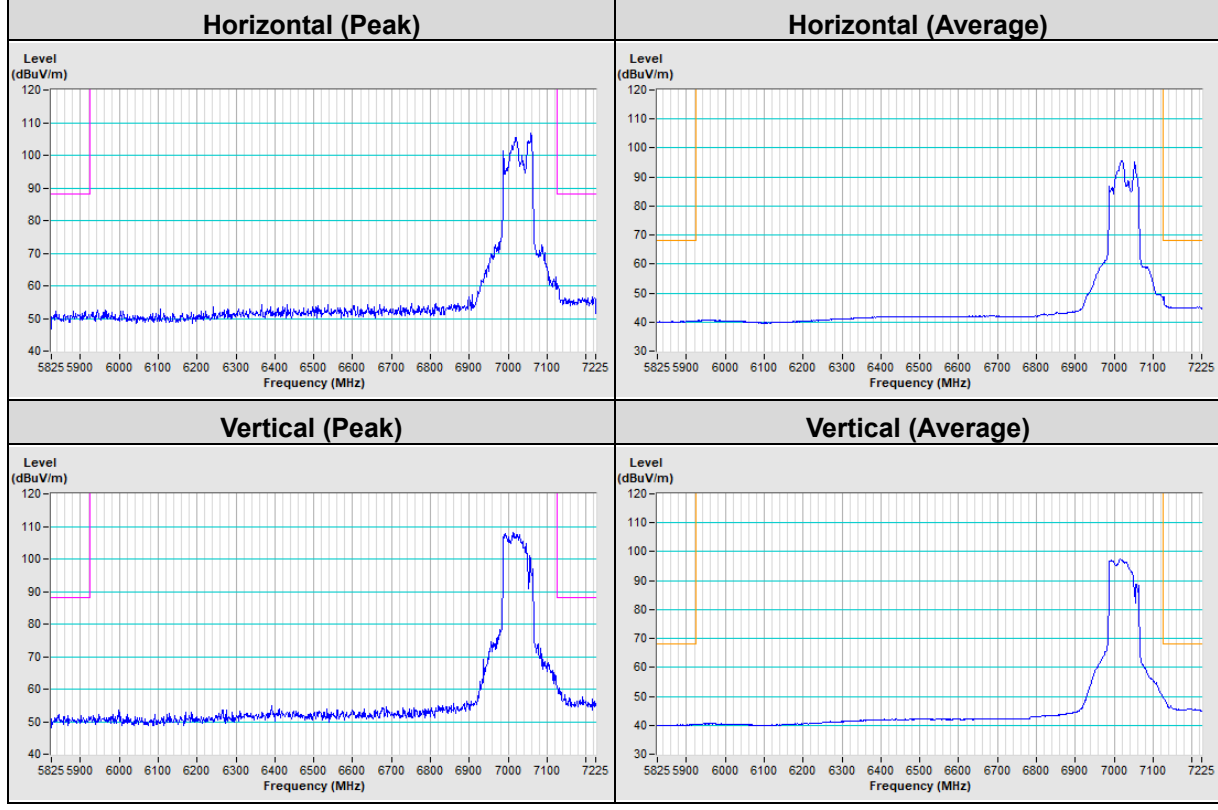

### 802.11ax (HE160) Channel 47

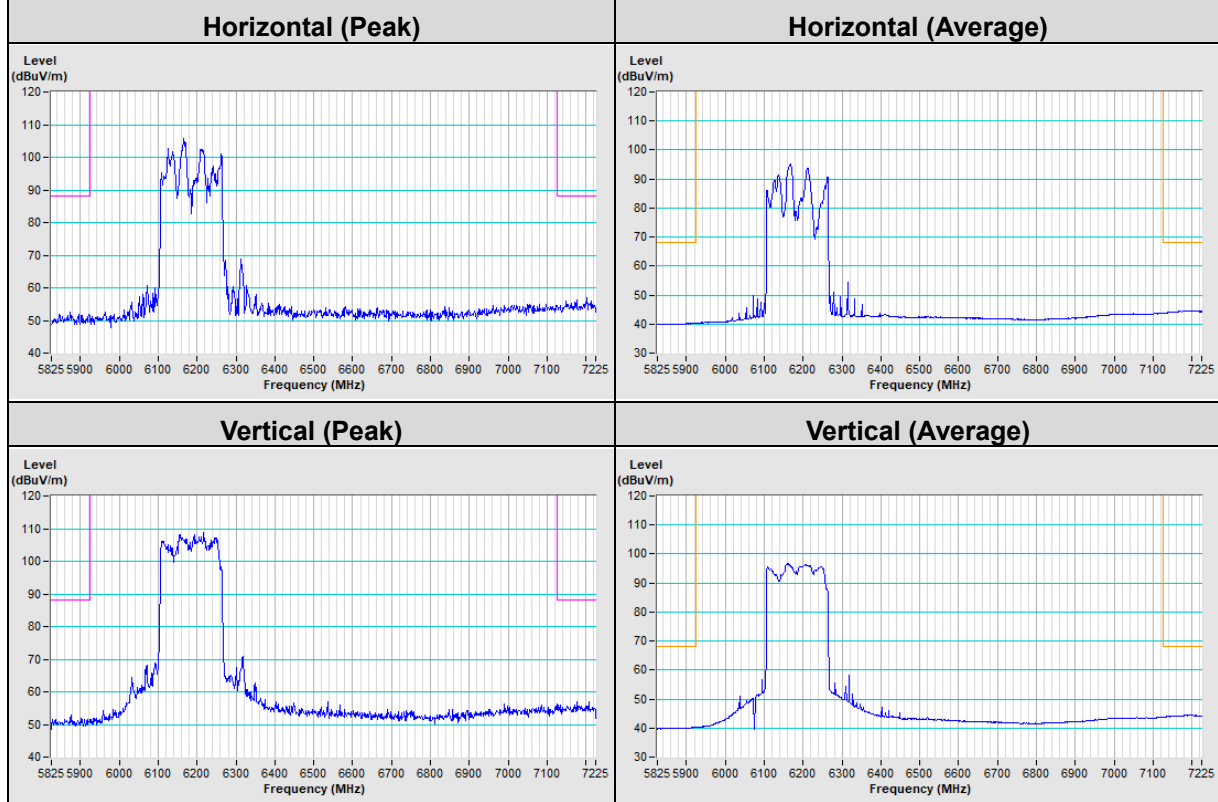

### 802.11ax (HE160) Channel 207

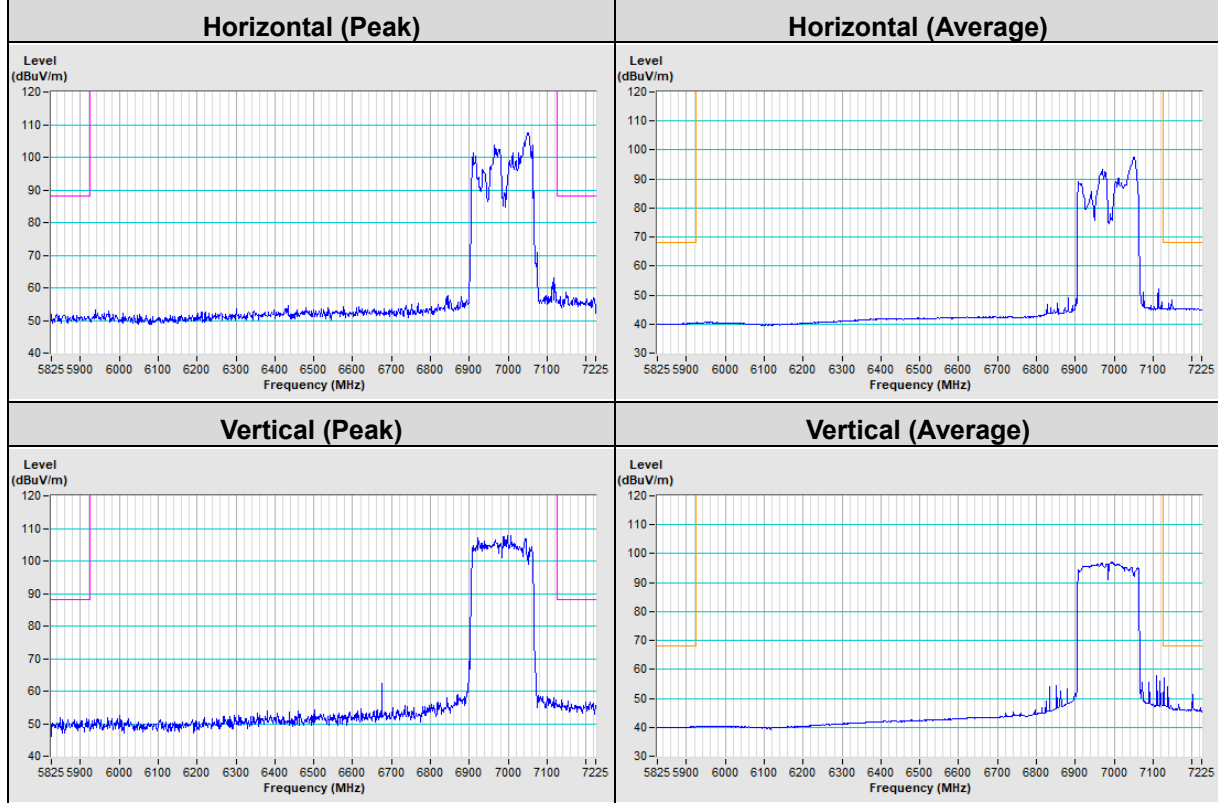

## 8 Operational Restrictions for 6 GHz U-NII Devices

- (1) Operation of indoor access points in the 5.925-7.125 GHz band is prohibited on oil platforms, cars, trains, boats, and aircraft, except that indoor access points are permitted to operate in the 5.925-6.425 GHz bands in large aircraft while flying above 10,000 feet.
- (2) Operation of transmitters in the 5.925-7.125 GHz band is prohibited for control of or communications with unmanned aircraft systems.
- (3) Transmitters operating under indoor access points are limited to indoor locations.
- (4) In the 5.925-7.125 GHz band, indoor access points must bear the following statement in a conspicuous location on the device and in the user's manual: FCC regulations restrict operation of this device to indoor use only. The operation of this device is prohibited on oil platforms, cars, trains, boats, and aircraft, except that operation of this device is permitted in large aircraft while flying above 10,000 feet.
- (5) In the 5.925-7.125 GHz band, Access points may connect to other access points or subordinate devices.
- (6) Indoor access points, operating in the 5.925-7.125 GHz band must employ a contention-based protocol.

Device is a Indoor AP all restrictions are meet the §15.407 (d) requirements. Please refer to the Attestation letter exhibit supplied within this application.

## 9 Pictures of Test Arrangements

Please refer to the attached file (Test Setup Photo)

## 10 Information of the Testing Laboratories

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are FCC recognized accredited test firms and accredited according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

**Lin Kou EMC/RF Lab**

Tel: 886-2-26052180

Fax: 886-2-26051924

**Hsin Chu EMC/RF/Telecom Lab**

Tel: 886-3-6668565

Fax: 886-3-6668323

**Hwa Ya EMC/RF/Safety Lab**

Tel: 886-3-3183232

Fax: 886-3-3270892

**Email:** [service.adt@bureauveritas.com](mailto:service.adt@bureauveritas.com)

**Web Site:** <http://ee.bureauveritas.com.tw>

The address and road map of all our labs can be found in our web site also.

--- END ---