

# EMC TEST REPORT

**Report No. : TS11070054-EME**

**Model No. : FSG1100HN**

**Issued Date : Aug. 01, 2011**

**Applicant: ZyXEL Communications Corporation**  
**No. 6, Innovation Rd II, Science-Based Industrial Park,**  
**Hsin-Chu, Taiwan**

**Test Method/ Standard: CFR 47 FCC Part 15.247 & ANSI C63.4 2003**

**Test By: Intertek Testing Services Taiwan Ltd.**  
**No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,**  
**Shiang-Shan District, Hsinchu City, Taiwan**

It may be duplicated completely for legal use with the allowance of the applicant.  
It shall not be reproduced except in full, without the written approval of Intertek  
Laboratory. The test result(s) in this report only applies to the tested sample(s).

**The test report was prepared by:** Sign on File  
Jill Chen / Assistant

**These measurements were taken by:** Sign on File  
Terry Hsu / Engineer

**The test report was reviewed by:**

**Name** Jimmy Yang  
**Title** Engineer

Table of Contents

1. Summary of Test Data..... 3

2. General Information ..... 4

3. Maximum 6 dB Bandwidth ..... 7

4. 99 % Occupied Bandwidth ..... 15

5. Maximum Output Power..... 23

6. Power Spectral Density ..... 25

7. RF Antenna conducted Spurious..... 33

8. Radiated Spurious Emission ..... 39

9. Emission on Band Edge..... 39

Appendix A: Test Equipment List..... 39

## 1. Summary of Test Data

Test/Requirement Description	Applicable Rule	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Output Power	15.247(b)	Pass
Power Spectral Density	15.247(e)	Pass
RF Antenna Conducted Spurious	15.247(d)	Pass
Radiated Spurious Emission	15.247(d), 15.205, 15.209	Pass
Emission on the Band Edge	15.247(d)	Pass
AC Power Line Conducted Emission	15.207	Pass

## 2. General Information

### Identification of the EUT

Product:	Wireless Active Fiber Router
Model No.:	FSG1100HN
FCC ID.:	I88FSG1100HN
Frequency Range:	1. 2412 MHz ~ 2462 MHz for 802.11b, 802.11g, 802.11n HT20 2. 2422 MHz ~ 2452 MHz for 802.11n HT40
Channel Number:	1. 11 channels for 2412 MHz ~ 2462 MHz 2. 7 channels for 2422 MHz ~ 2452 MHz
Rated Power:	DC 12 V from Adapter
Power Cord:	N/A
Data Cable:	1. RJ-45 UTP Cat.5 10 meter × 4 2. Fiber 5 meter × 1
Sample Received:	Jul. 07, 2011
Test Date(s):	Jul. 11, 2011 ~ Jul. 27, 2011
Note 1:	This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
Note 2:	When determining the test conclusion, the Measurement Uncertainty of test has been considered.

## Description of EUT

The EUT is the Wireless Active Fiber Router, and was defined as information technology equipment.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

## Antenna description

### Antenna

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 2 dBi  
Antenna Type : Dipole antenna  
Connector Type : SMA reverse

## Adapter information

The EUT will be supplied with a power supply from below list:

No.	Brand	Model no.	Specification
Adapter	OEM	ADS0128-W 120100	I/P: 100-240 Vac, 50-60 Hz, 0.5 A O/P: 12 Vdc, 1.0 A

## Peripherals equipment

Peripherals	Brand	Model No.	Serial No.
Notebook PC	DELL	Latitude D610	2YWZK1S
ZyWALL	ZyXEL	1050	N/A
Muti-mode converter	VOLKTEK	NXF-742	N/A

## Operation mode

The EUT was supplied with 12 Vdc from adapter (Test voltage: 120Vac, 60Hz) and it was run in TX mode that was controlled by “MP N Test” program.

The EUT was transmitted continuously during the test.

With individual verifying, the maximum output power was found out 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT 20 mode and 13 Mbps data rate for 802.11n HT 40 mode. The final tests were executed under these conditions recorded in this report individually. Please refer the details below:

Chain 0: 802.11b channel 6	
Data rate (Mbps)	PK(dBm)
1	18.43
2	18.35
5.5	18.24
11	18.11

Chain 0: 802.11n HT20 channel 6	
Data rate (Mbps)	PK(dBm)
6.5	22.35
13	22.27
19.5	22.21
26	22.18
39	21.29
52	21.21
58.5	22.01
65	21.97

Chain 0: 802.11g channel 6	
Data rate (Mbps)	PK(dBm)
6	22.64
9	22.55
12	22.41
18	22.33
24	22.21
36	22.14
48	21.97
54	21.91

Chain 0: 802.11n HT40 channel 6	
Data rate (Mbps)	PK(dBm)
13	21.95
26	21.88
39	21.79
52	21.71
78	21.64
104	21.56
117	21.49
130	21.40

### 3. Maximum 6 dB Bandwidth


<b>Name of Test</b>	Maximum 6 dB Bandwidth
<b>Base Standard</b>	FCC 15.247 (a)(2)

**Test Result:** Complies  
**Measurement Data:** See Table & plots below

#### Method of Measurement:

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

#### Test Diagram:

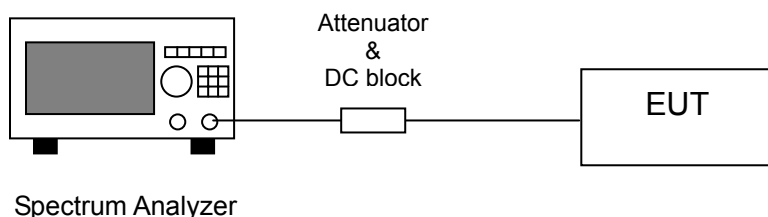


**Note:** The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT20 mode and 13 Mbps data rate for 802.11n HT40 mode. The EUT was tuned to a low, middle and high channel.

Table 1 Maximum 6 dB Bandwidth


Mode	Channel	Frequency (MHz)	Bandwidth (MHz)	Min. Limit (MHz)	Pass/Fail
802.11b	1	2412	8.430	0.5	Pass
	6	2437	8.340	0.5	Pass
	11	2462	8.430	0.5	Pass
802.11g	1	2412	16.605	0.5	Pass
	6	2437	16.605	0.5	Pass
	11	2462	16.605	0.5	Pass
802.11n HT20	1	2412	17.895	0.5	Pass
	6	2437	17.895	0.5	Pass
	11	2462	17.895	0.5	Pass
802.11n HT40	3	2422	36.570	0.5	Pass
	6	2437	36.570	0.5	Pass
	9	2452	36.570	0.5	Pass




## 6 dB Bandwidth @ 802.11b mode channel 1

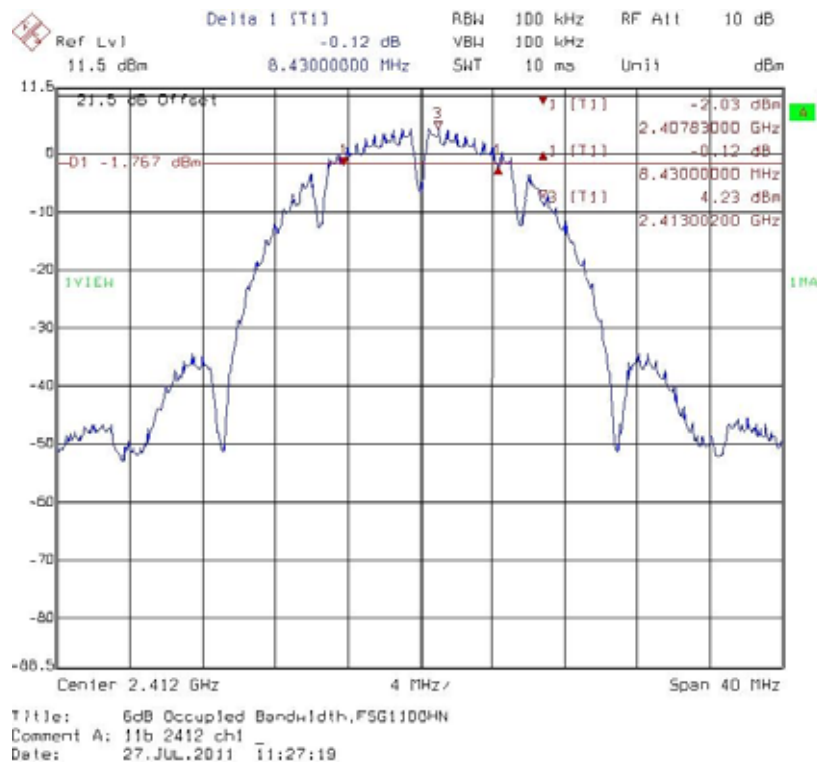


## 6 dB Bandwidth @ 802.11b mode channel 6

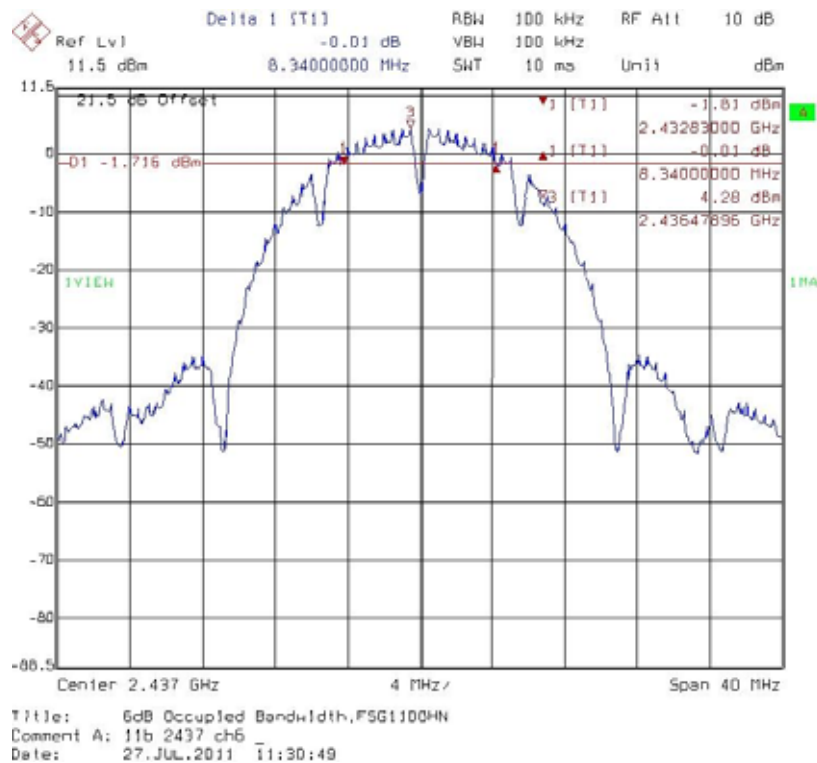


### 6 dB Bandwidth @ 802.11b mode channel 11

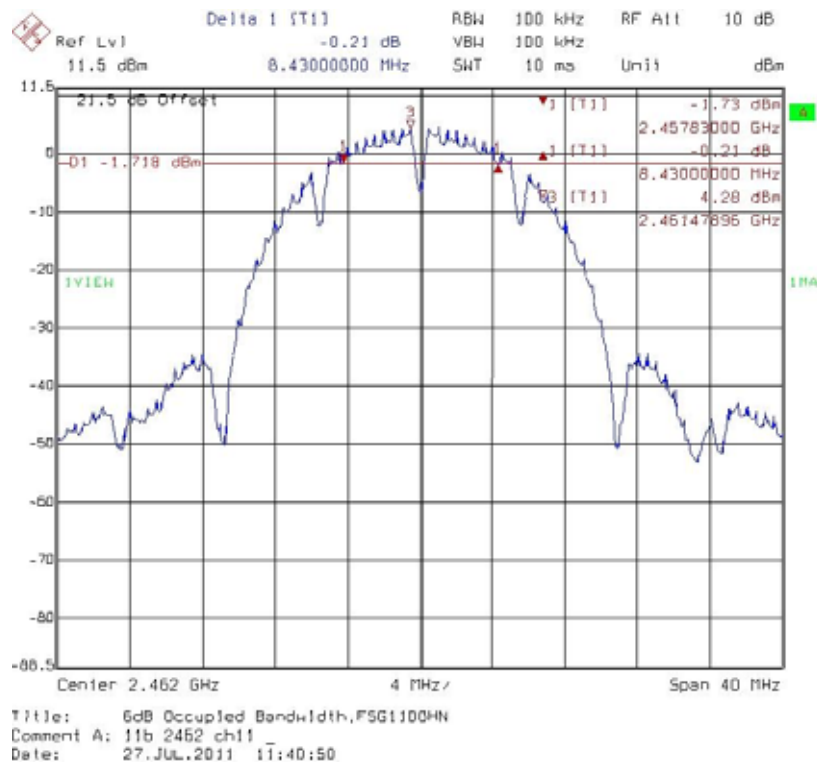


### 6 dB Bandwidth @ 802.11g mode channel 1

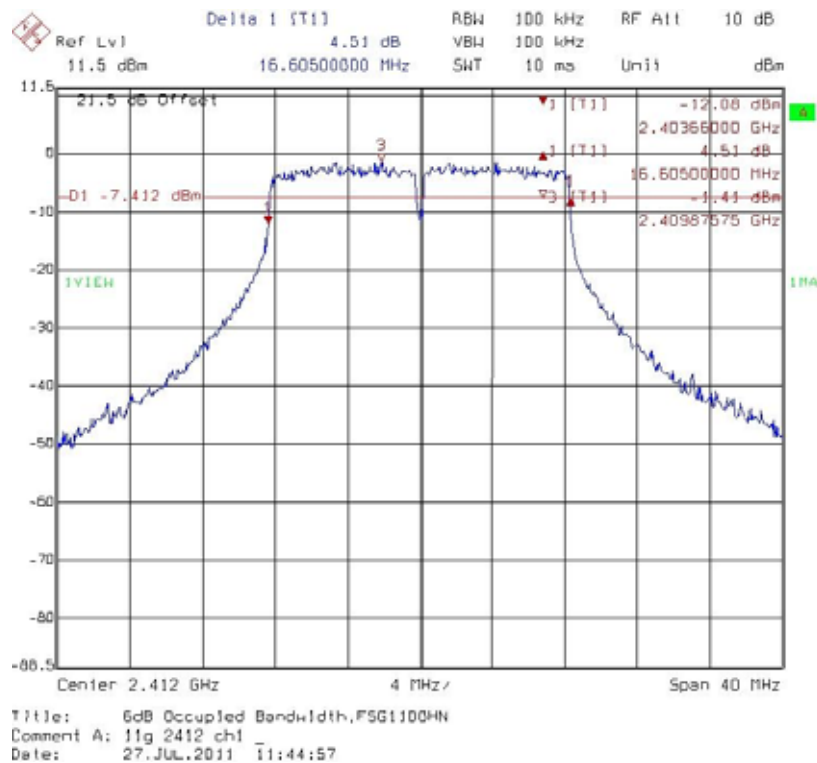


### 6 dB Bandwidth @ 802.11g mode channel 6

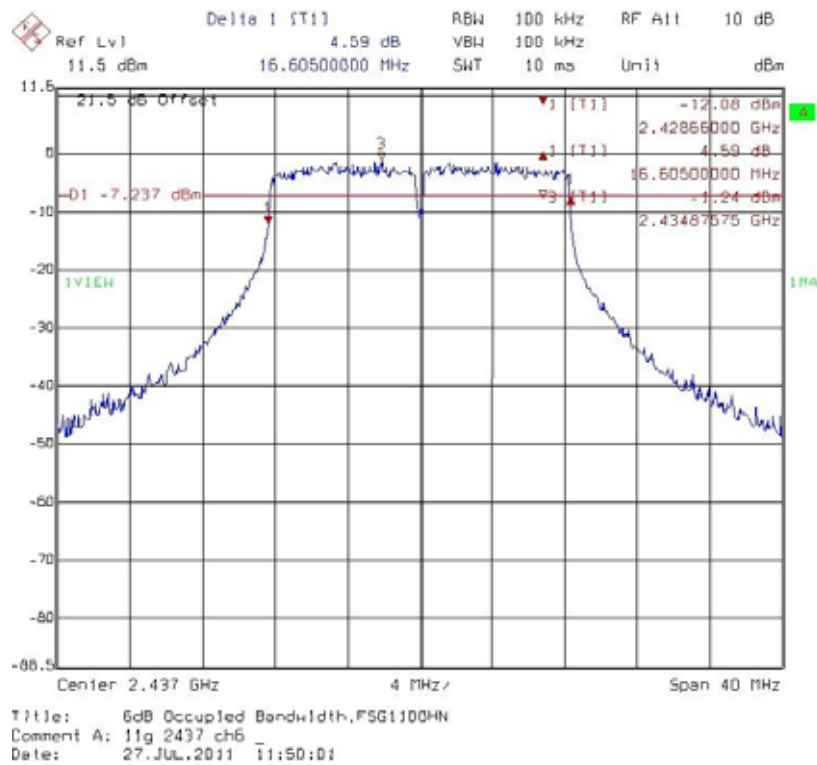


### 6 dB Bandwidth @ 802.11g mode channel 11

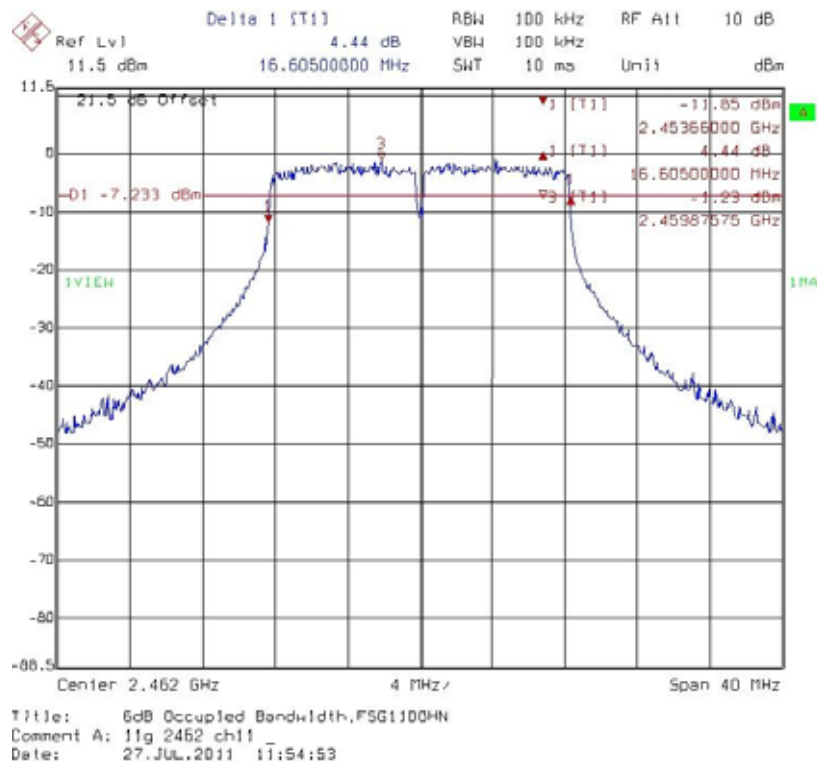


### 6 dB Bandwidth @ 802.11n HT20 mode channel 1

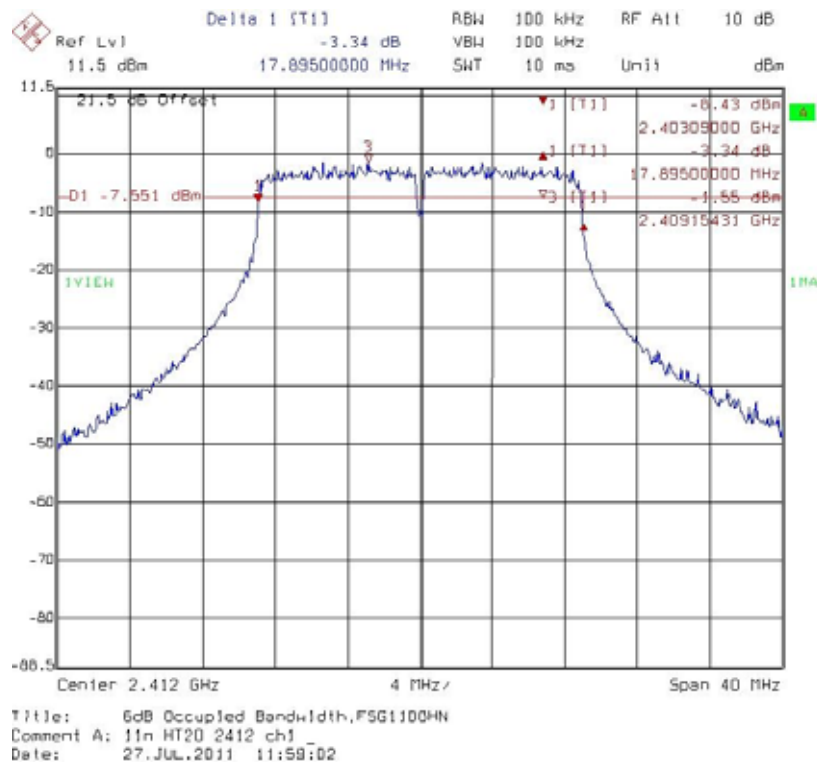


### 6 dB Bandwidth @ 802.11n HT20 mode channel 6

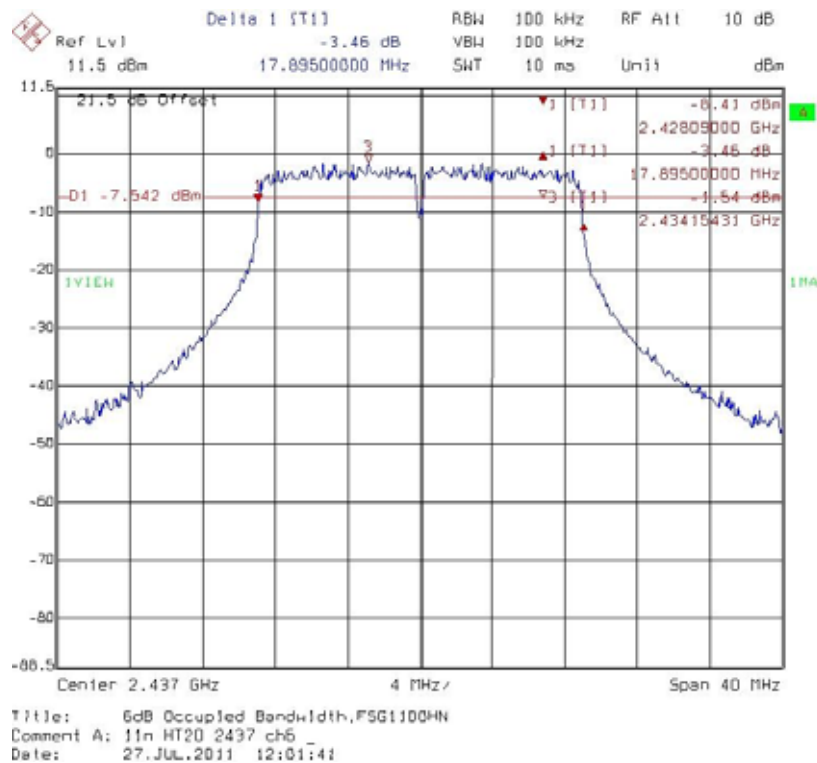


### 6 dB Bandwidth @ 802.11n HT20 mode channel 11

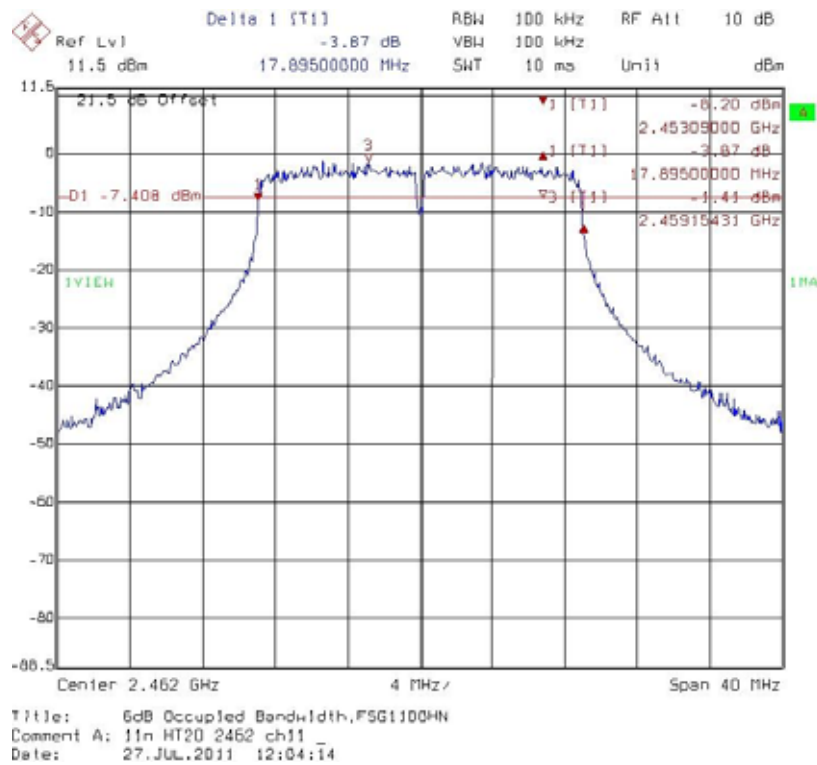


### 6 dB Bandwidth @ 802.11n HT40 mode channel 3

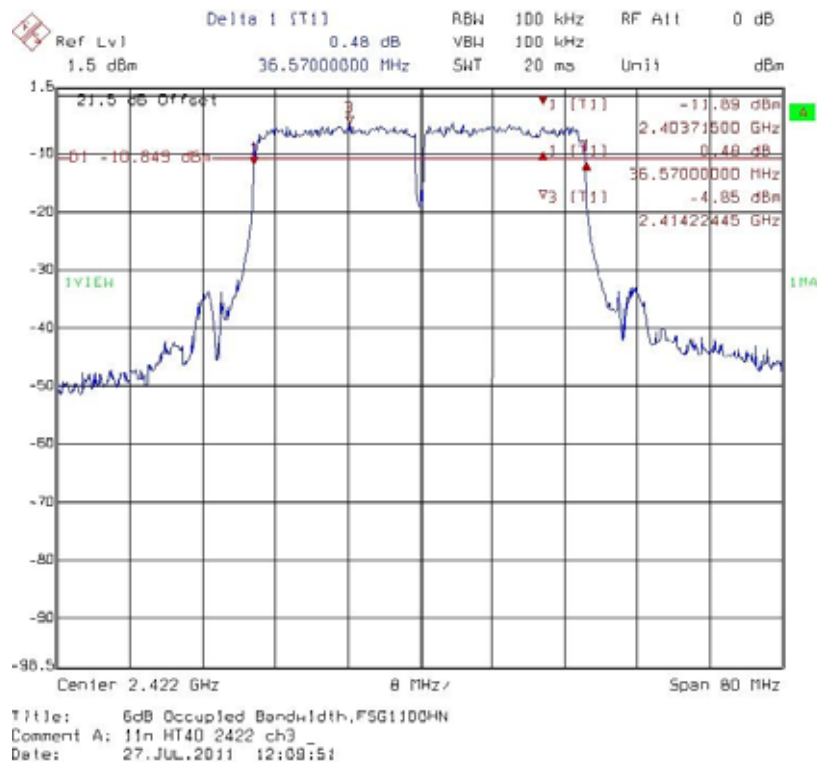

### 6 dB Bandwidth @ 802.11n HT40 mode channel 6

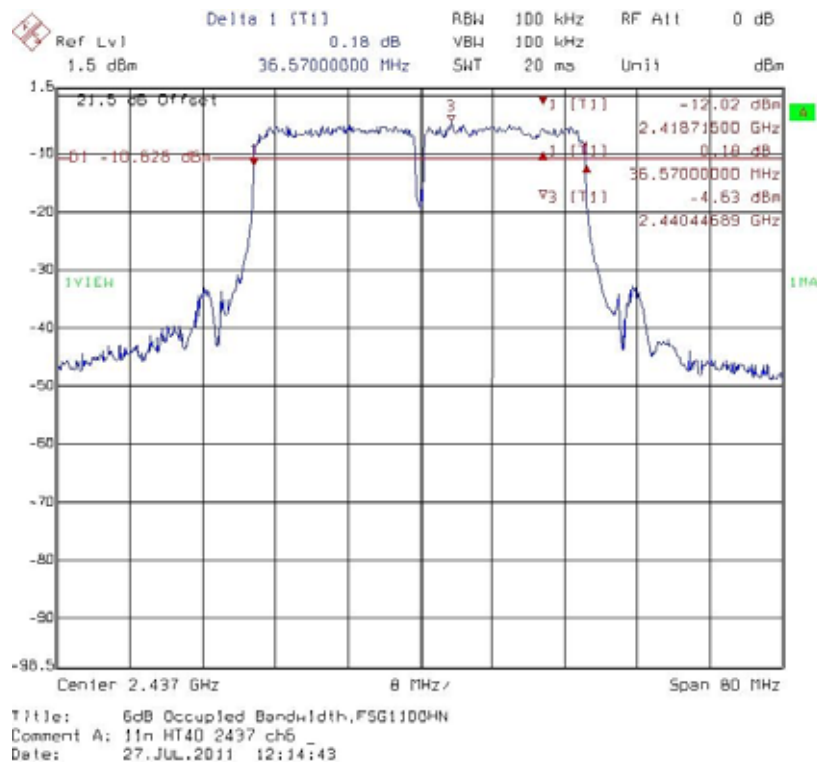

### 6 dB Bandwidth @ 802.11n HT40 mode channel 9

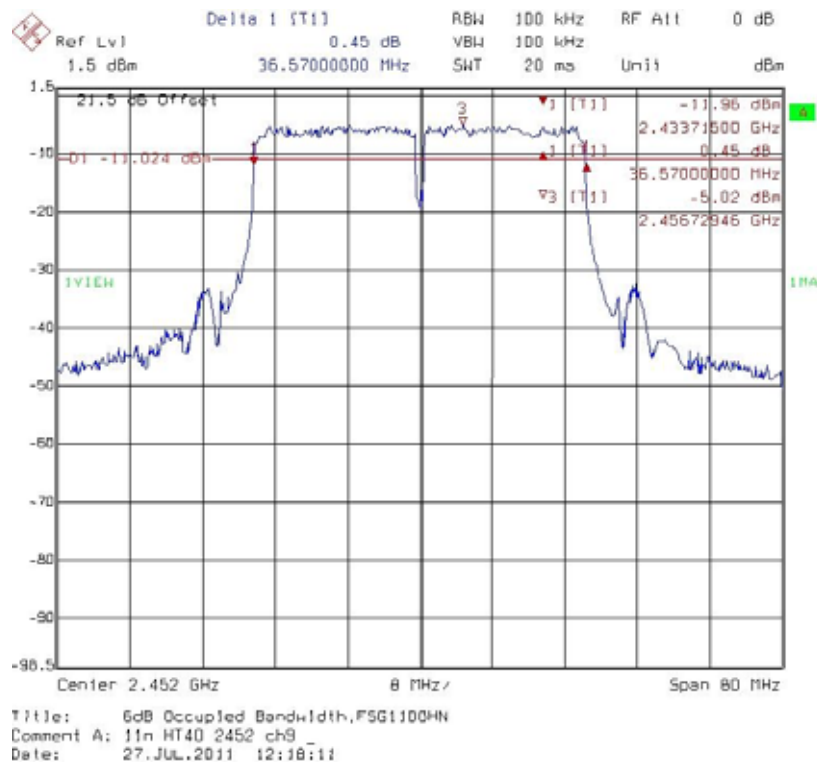

#### 4. 99 % Occupied Bandwidth

<b>Name of Test</b>	99 % Occupied Bandwidth
<b>Base Standard</b>	None; for reporting purposes only


**Test Result:** Complies  
**Measurement Data:** See Table & plots below

#### Method of Measurement:

#### Reference FCC document: KDB558074

A portion of the transmitted signal is coupled to a Spectrum Analyzer with a resolution bandwidth of at least 1 % of the bandwidth of the transmitted signal. The resolution bandwidth is chosen so as not to reduce the peak level of the measured waveform. The appropriate bandwidth mask is applied to the output waveform to verify compliance.

#### Test Diagram:

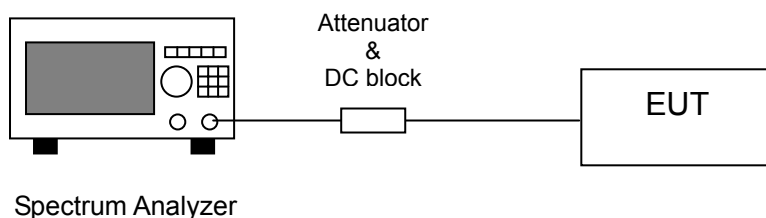


**Note:** The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT20 mode and 13 Mbps data rate for 802.11n HT40 mode. The EUT was tuned to a low, middle and high channel.

Table 2 99 % Occupied Bandwidth


Mode	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
802.11b	1	2412	14.830
	6	2437	14.830
	11	2462	14.830
802.11g	1	2412	17.134
	6	2437	17.234
	11	2462	17.234
802.11n HT20	1	2412	18.236
	6	2437	18.236
	11	2462	18.337
802.11n HT40	3	2422	36.473
	6	2437	36.473
	9	2452	36.673




### 99 % Occupied Bandwidth @ 802.11b mode channel 1

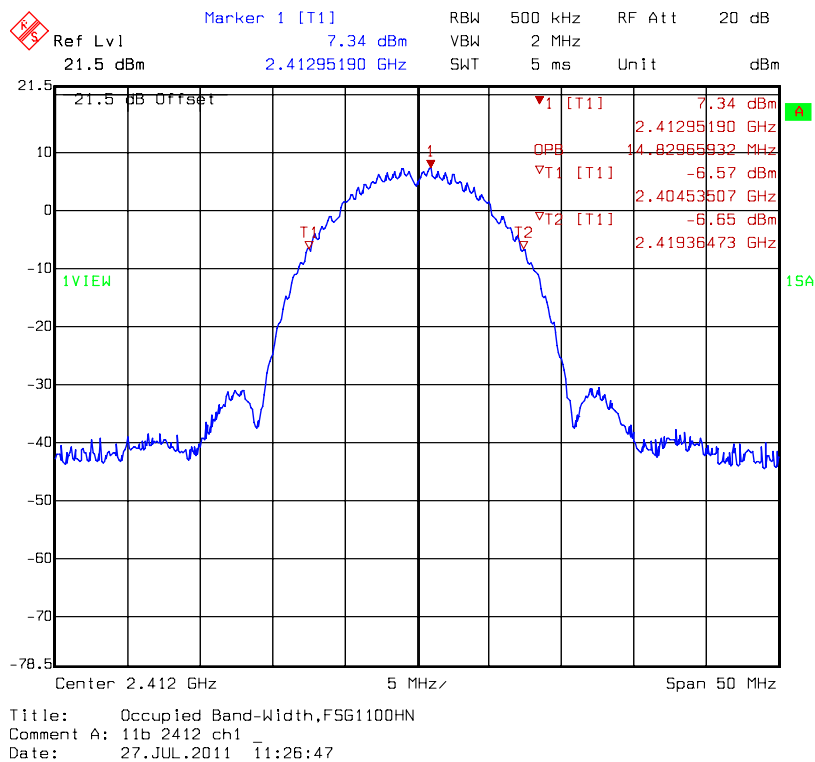


### 99 % Occupied Bandwidth @ 802.11b mode channel 6

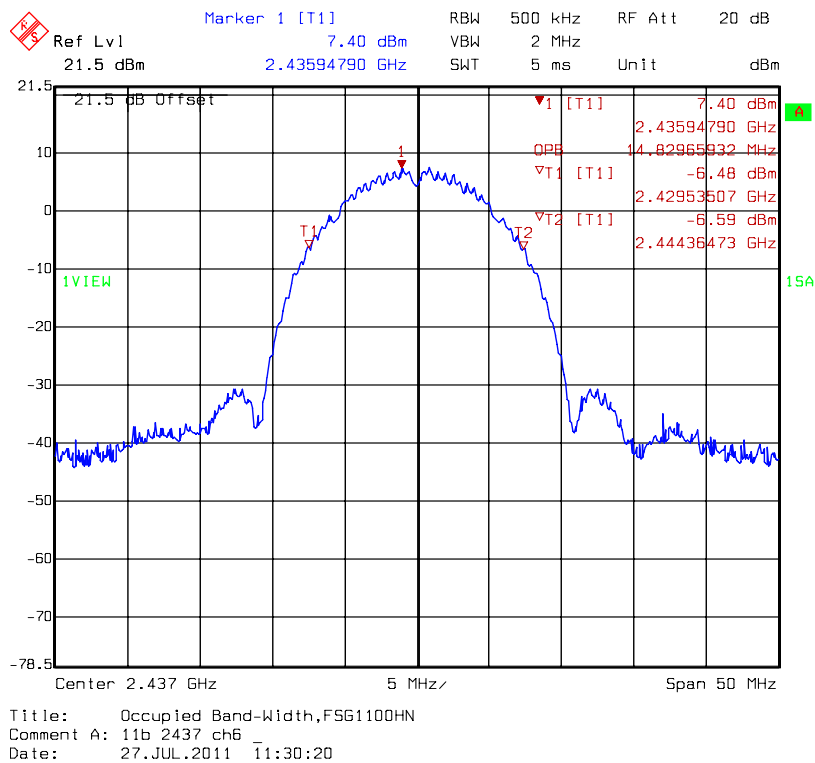


### 99 % Occupied Bandwidth @ 802.11b mode channel 11

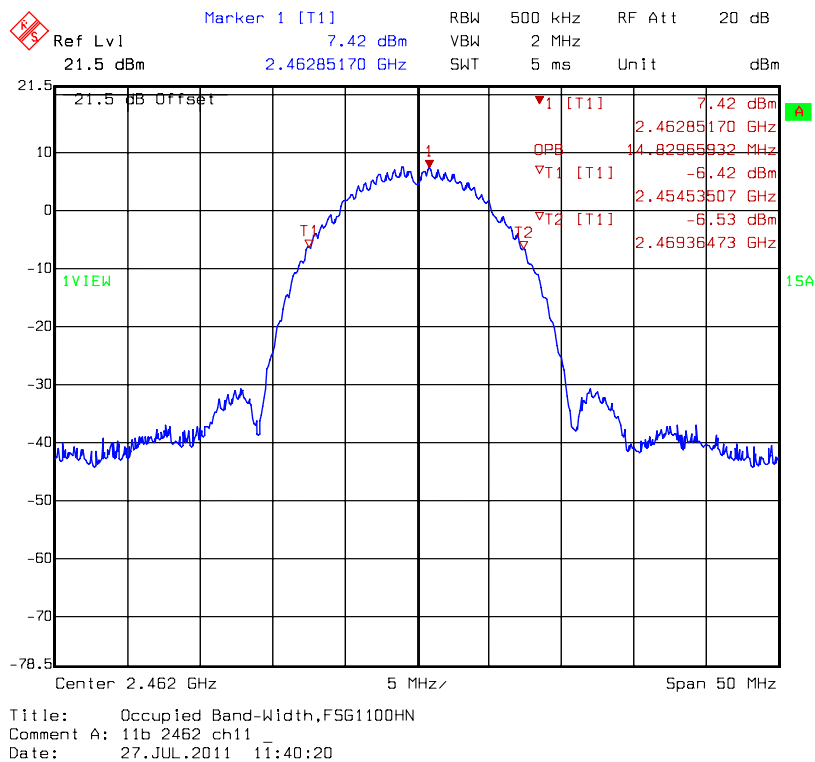


### 99 % Occupied Bandwidth @ 802.11g mode channel 1

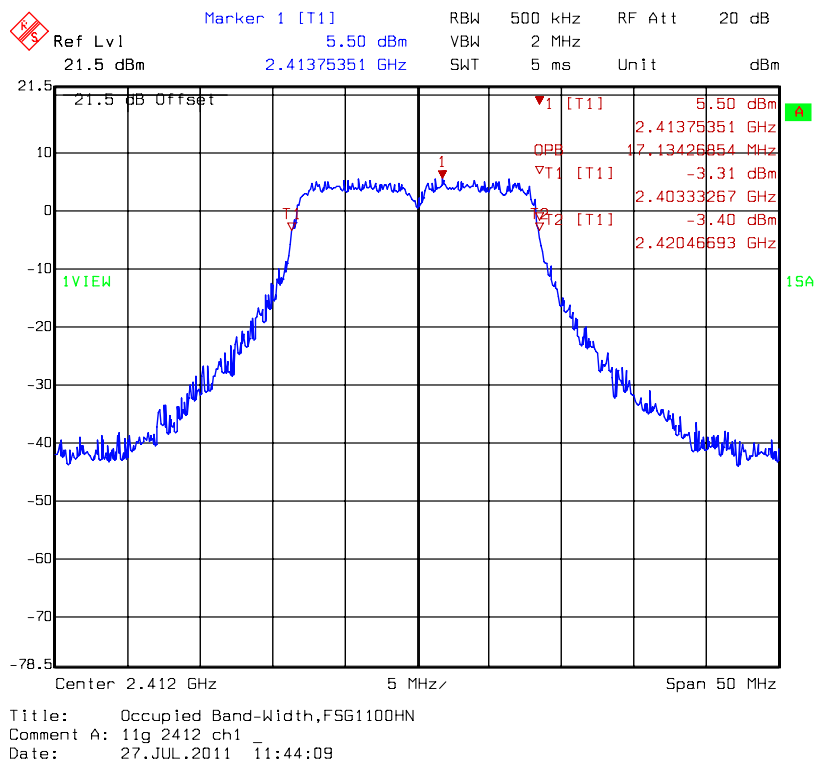


### 99 % Occupied Bandwidth @ 802.11g mode channel 6

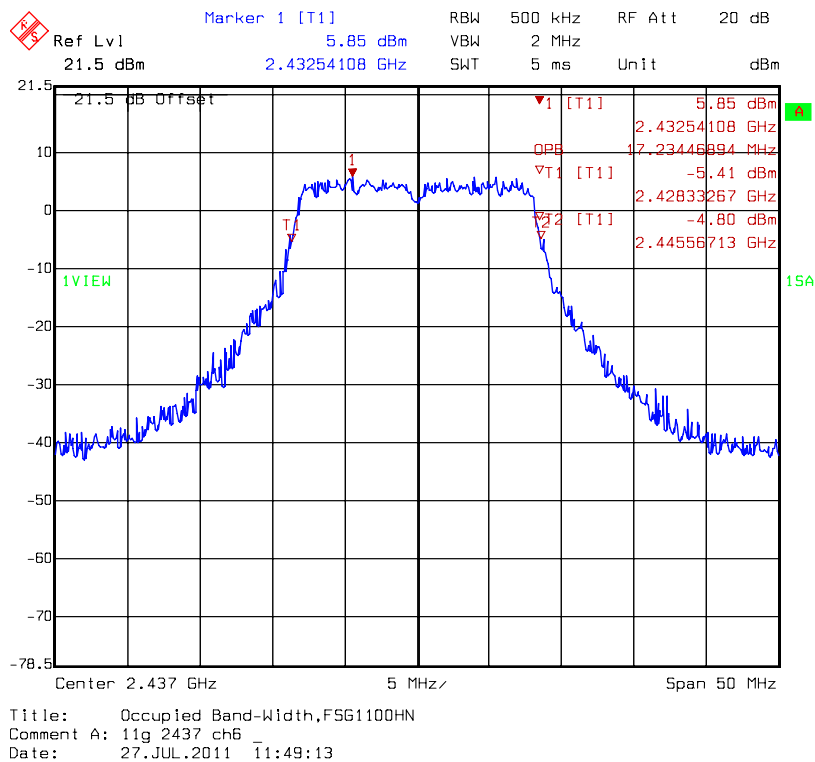


### 99 % Occupied Bandwidth @ 802.11g mode channel 11

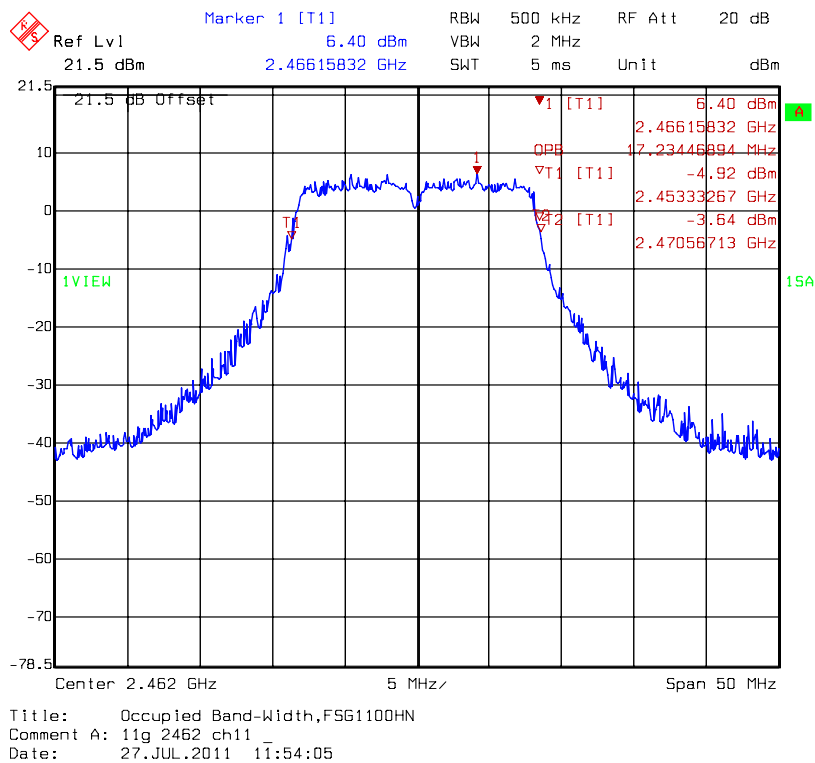


### 99 % Occupied Bandwidth @ 802.11n HT20 mode channel 1

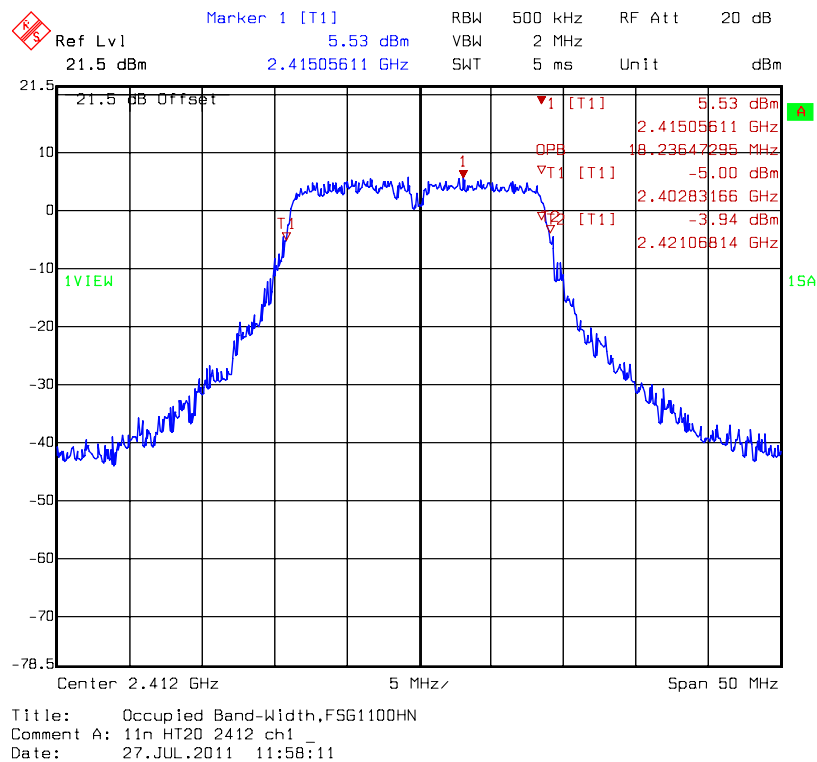


### 99 % Occupied Bandwidth @ 802.11n HT20 mode channel 6

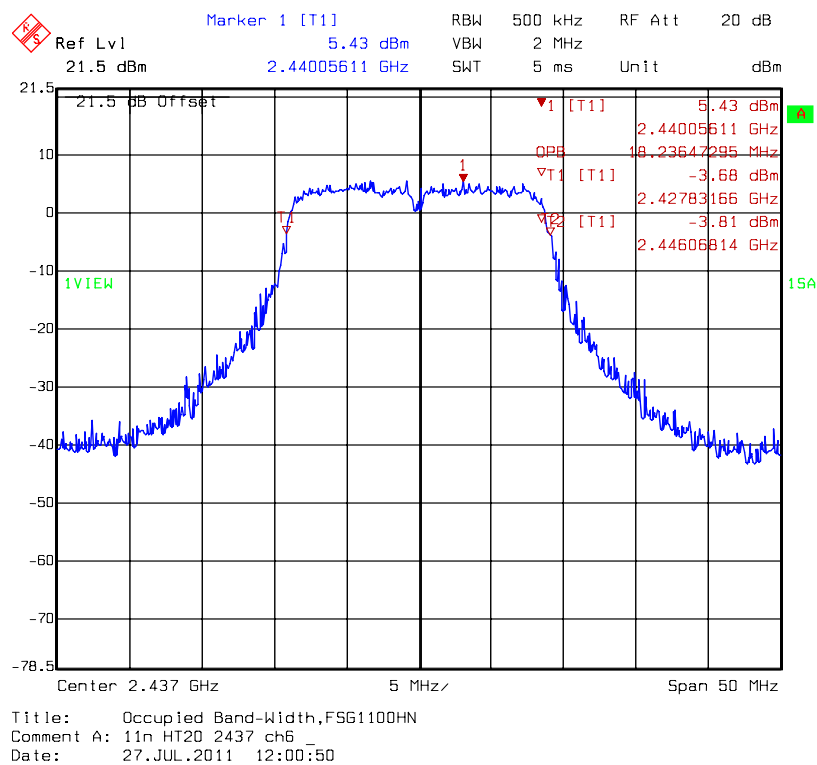


### 99 % Occupied Bandwidth @ 802.11n HT20 mode channel 11

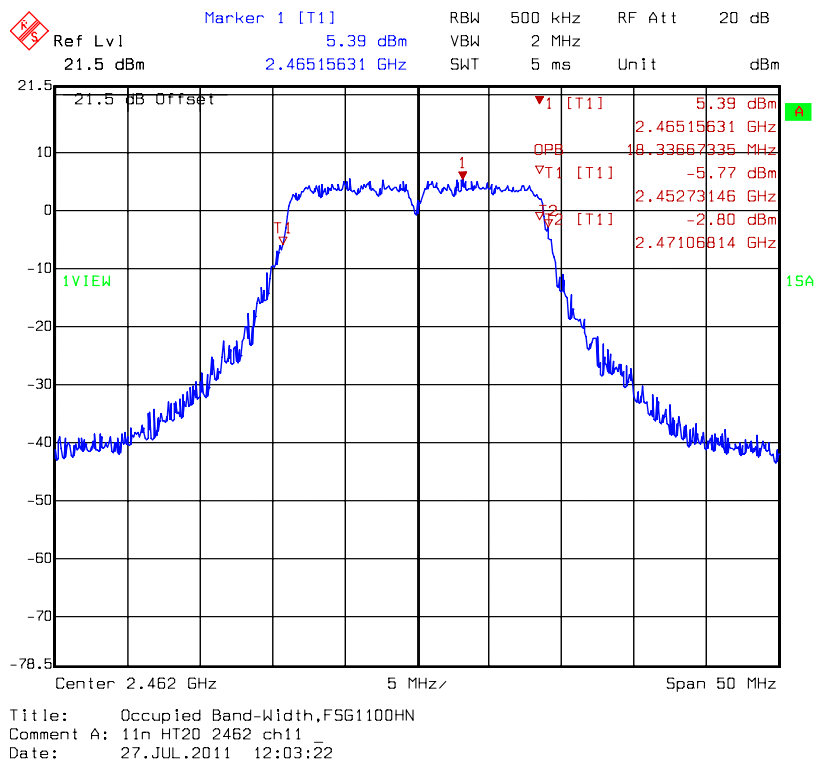


### 99 % Occupied Bandwidth @ 802.11n HT40 mode channel 3

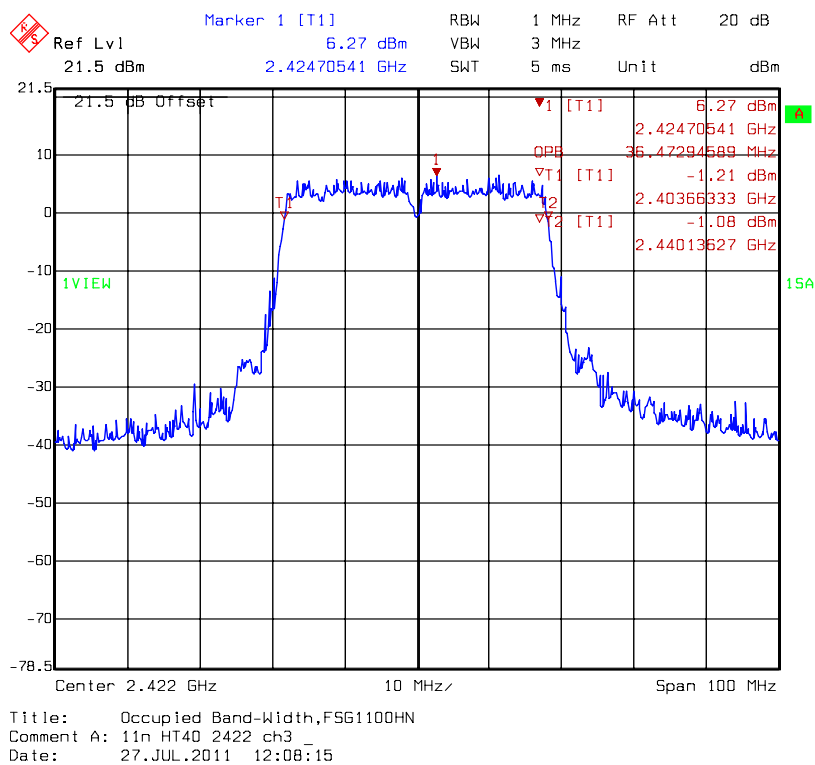

### 99 % Occupied Bandwidth @ 802.11n HT40 mode channel 6

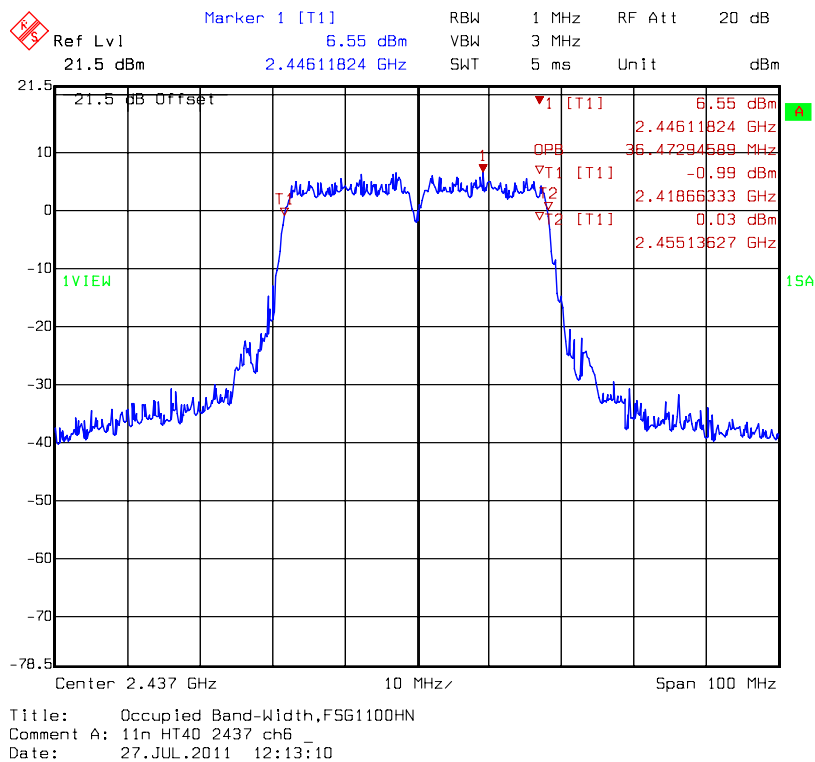

### 99 % Occupied Bandwidth @ 802.11n HT40 mode channel 9

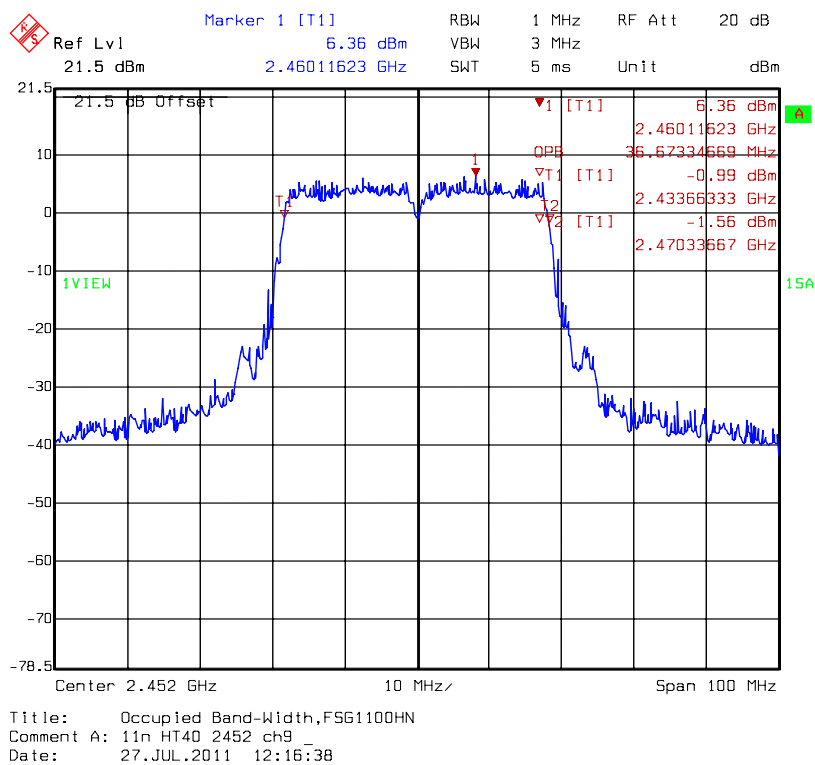

## 5. Maximum Output Power

<b>Name of Test</b>	Maximum output power
<b>Base Standard</b>	FCC 15.247(b)


**Measurement Uncertainty:**  $\pm 0.392$  dB (k=2)  
**Test Result:** Complies  
**Measurement Data:** See Table below

### Method of Measurement:

#### Reference FCC document: KDB558074

The power output was measured on the EUT using a 50 ohm SMA Cable connected to peak power meter via power sensor. Connect 20 dB attenuator and DC block at the input port of the power sensor. Measure conducted transmit power of at each antenna port ,besides another ports were terminated by 50 ohm and sum these power in linear power units,Power output was measured with the maximum rated input level.

### Test Diagram:

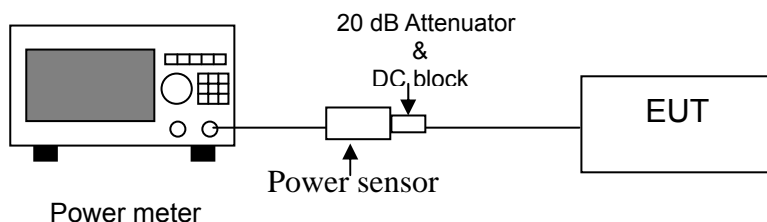

**Note 1:** §15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Table 3. Maximum output power

Mode	Channel	Frequency (MHz)	Output Power (dBm)	Total Power (mW)	Limit (dBm)	Margin (dB)
			PK			
			DAC0	PK		
802.11b	1	2412	18.38	68.87	30	-11.62
	6	2437	18.43	69.66	30	-11.57
	11	2462	18.62	72.78	30	-11.38
802.11g	1	2412	22.12	162.93	30	-7.88
	6	2437	22.64	183.65	30	-7.36
	11	2462	22.86	193.20	30	-7.14
802.11n HT20	1	2412	22.19	165.58	30	-7.81
	6	2437	22.35	171.79	30	-7.65
	11	2462	22.54	179.47	30	-7.46
802.11n HT40	3	2422	22.05	160.32	30	-7.95
	6	2437	21.95	156.68	30	-8.05
	9	2452	22.09	161.81	30	-7.91



## 6. Power Spectral Density

<b>Name of Test</b>	Power Spectral Density
<b>Base Standard</b>	FCC 15.247(e)

**Test Result:** Complies  
**Measurement Data:** See Table & plots below

### Method of Measurement:

#### Reference FCC document: KDB558074

The power spectrum density was measured from the antenna port of the EUT using a 50 ohm spectrum analyzer. Locate and zoom in on emission peak(s) within the passband. Set RBW = 3 kHz, VBW >RBW, sweep= 500s. The peak level measured must be no greater than + 8 dBm. Power spectrum density was read directly and cable loss (1 dB)/external attenuator (20 dB) correction was added to the reading to obtain power at the EUT antenna terminals.

### Test Diagram:


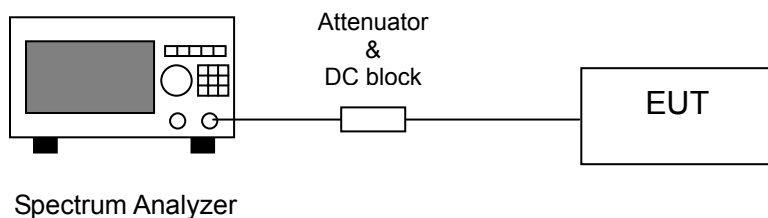



Table 4. Power Spectral Density

Mode	Channel	Frequency (MHz)	PSD (dBm)	Total PSD (mW)	Limit (dBm)	Margin (dB)
802.11b	1	2412	-14.38	0.04	8	-22.38
	6	2437	-14.21	0.04	8	-22.21
	11	2462	-14.00	0.04	8	-22.00
802.11g	1	2412	-16.04	0.02	8	-24.04
	6	2437	-15.95	0.03	8	-23.95
	11	2462	-15.71	0.03	8	-23.71
802.11n HT20	1	2412	-16.38	0.02	8	-24.38
	6	2437	-14.86	0.03	8	-22.86
	11	2462	-5.61	0.28	8	-13.61
802.11n HT40	3	2422	-18.54	0.01	8	-26.54
	6	2437	-16.75	0.02	8	-24.75
	9	2452	-16.60	0.02	8	-24.60


### Power Spectral Density @ 802.11b mode channel 1

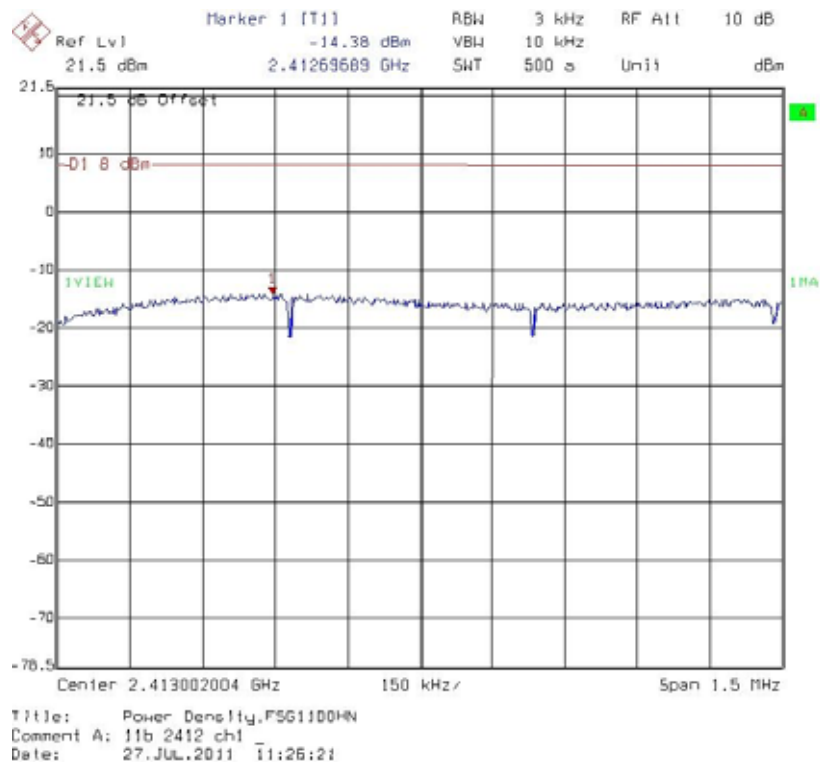


### Power Spectral Density @ 802.11b mode channel 6

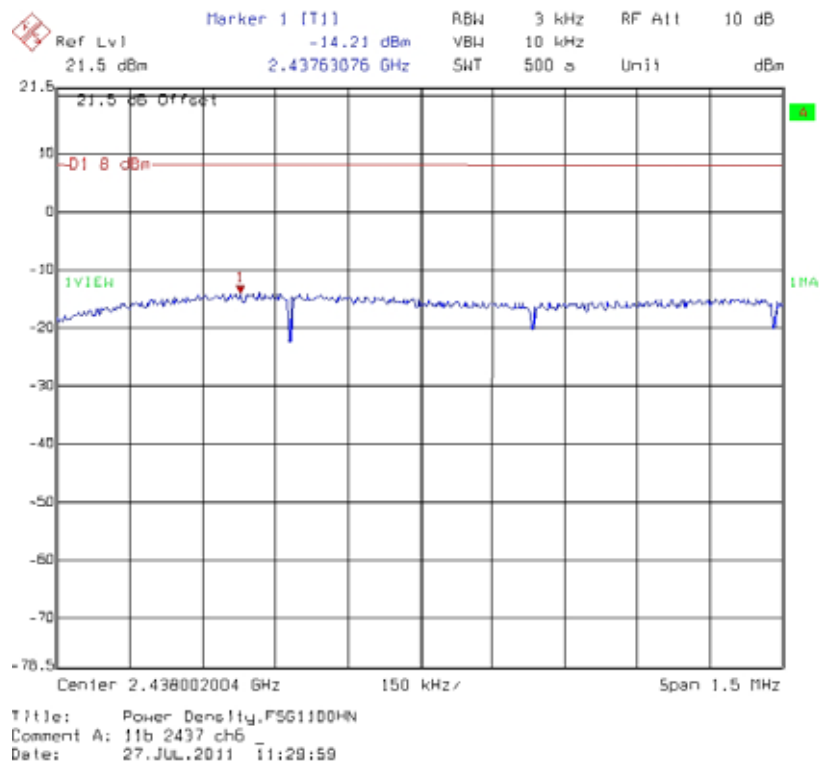


## Power Spectral Density @ 802.11b mode channel 11

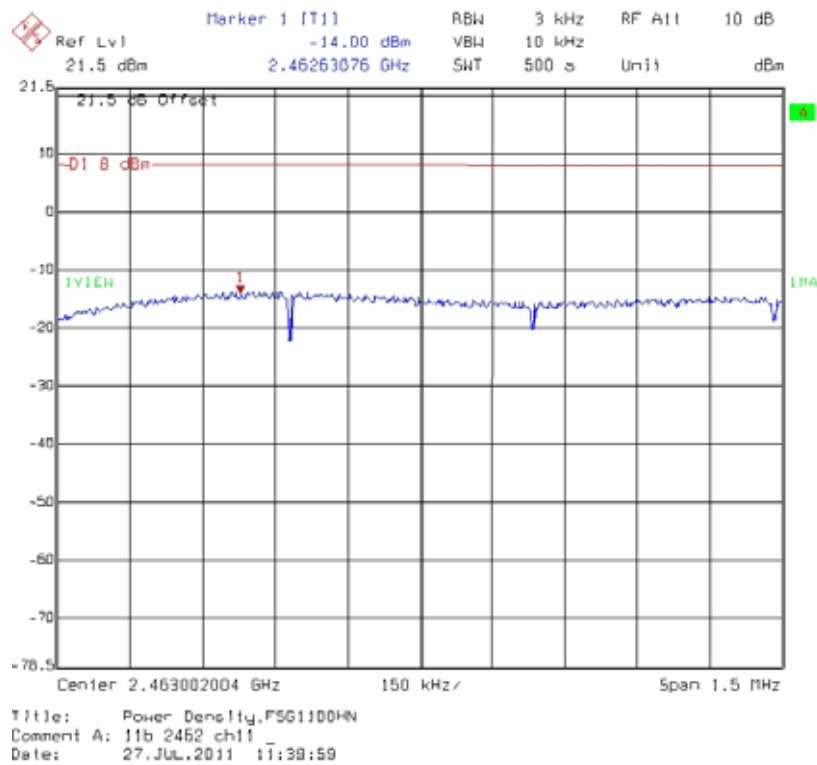


## Power Spectral Density @ 802.11g mode channel 1

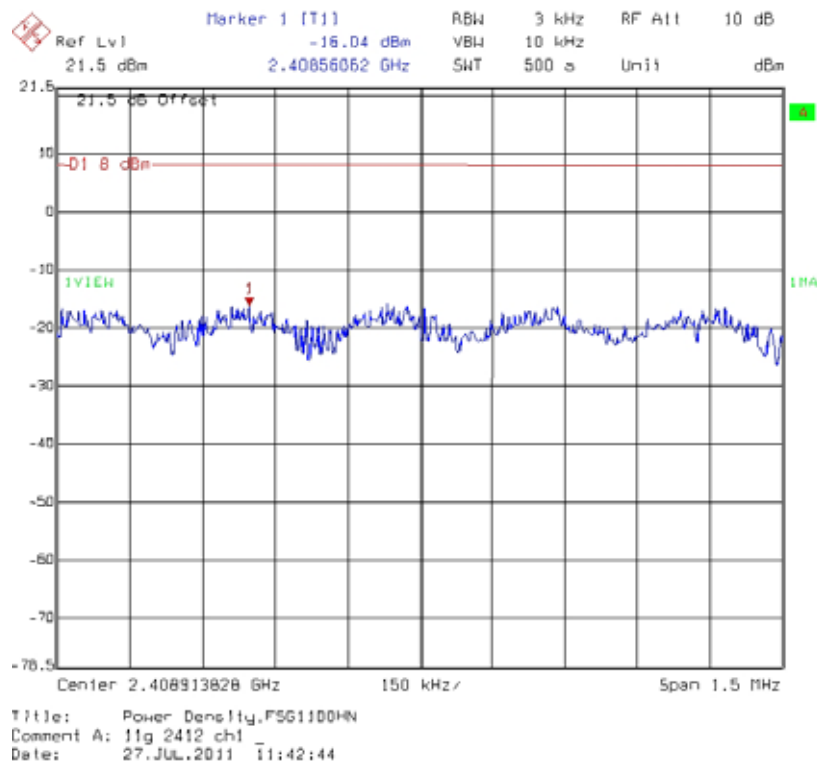


### Power Spectral Density @ 802.11g mode channel 6

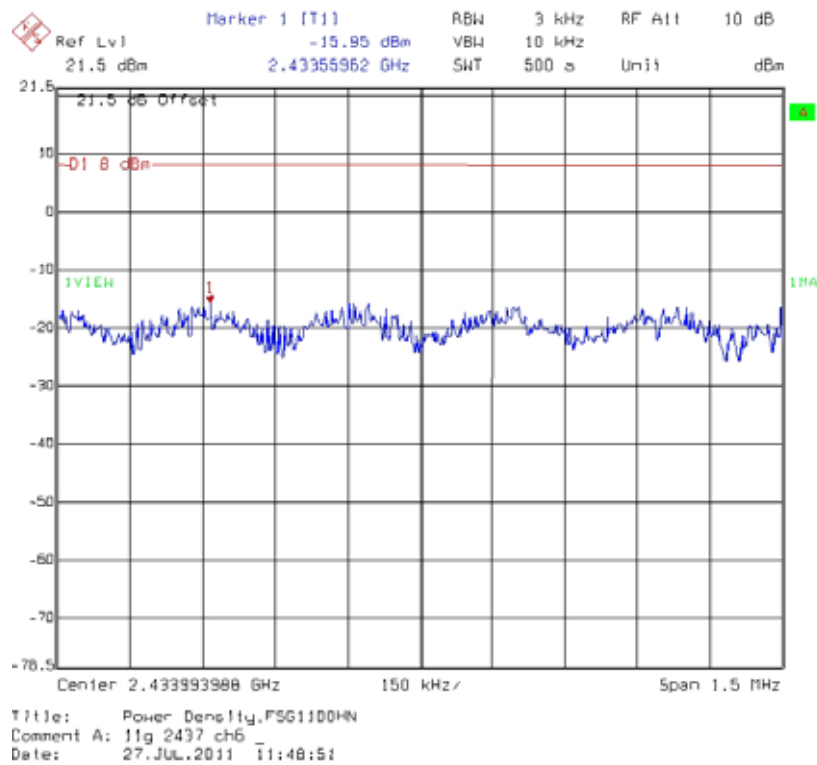


### Power Spectral Density @ 802.11g mode channel 11

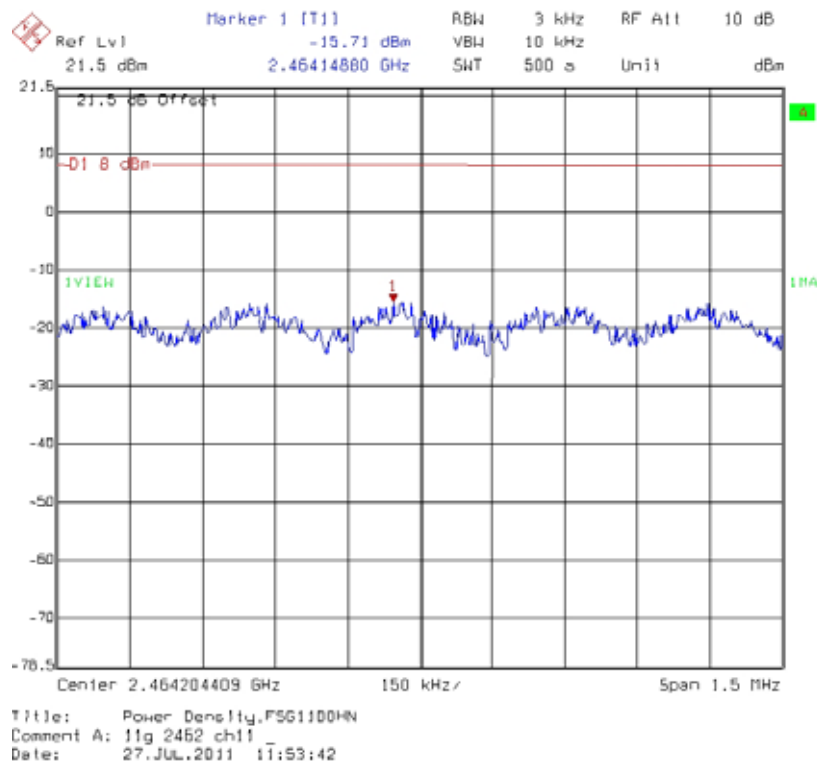


### Power Spectral Density @ 802.11n HT20 mode channel 1

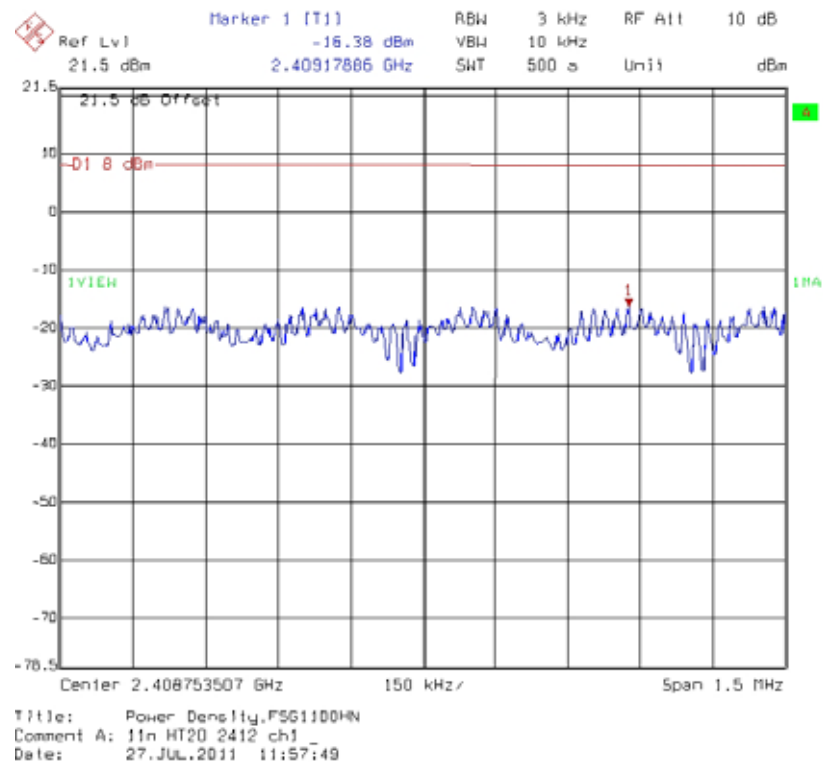


### Power Spectral Density @ 802.11n HT20 mode channel 6

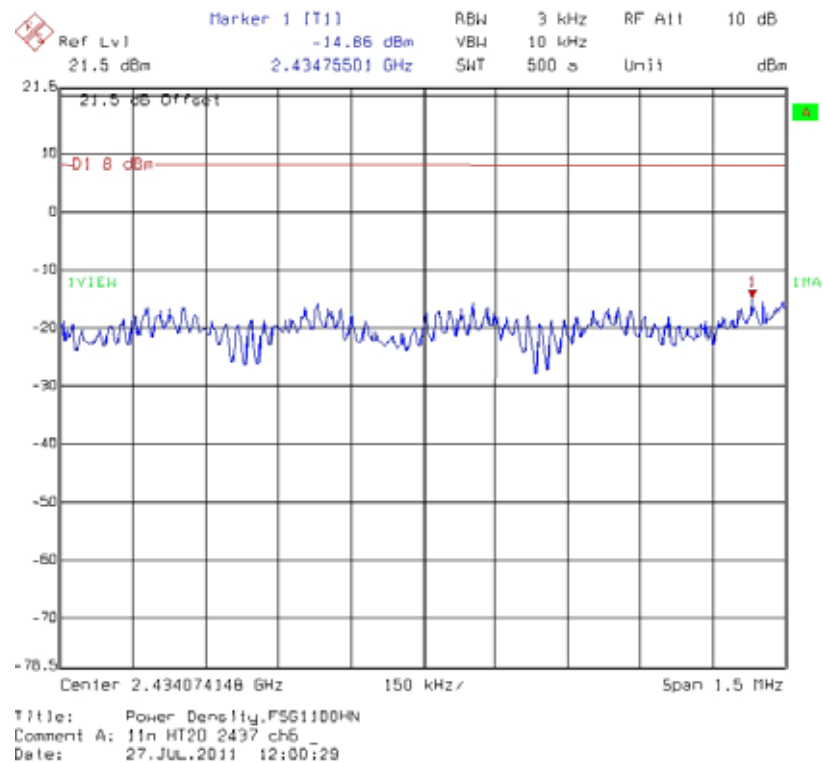


### Power Spectral Density @ 802.11n HT20 mode channel 11

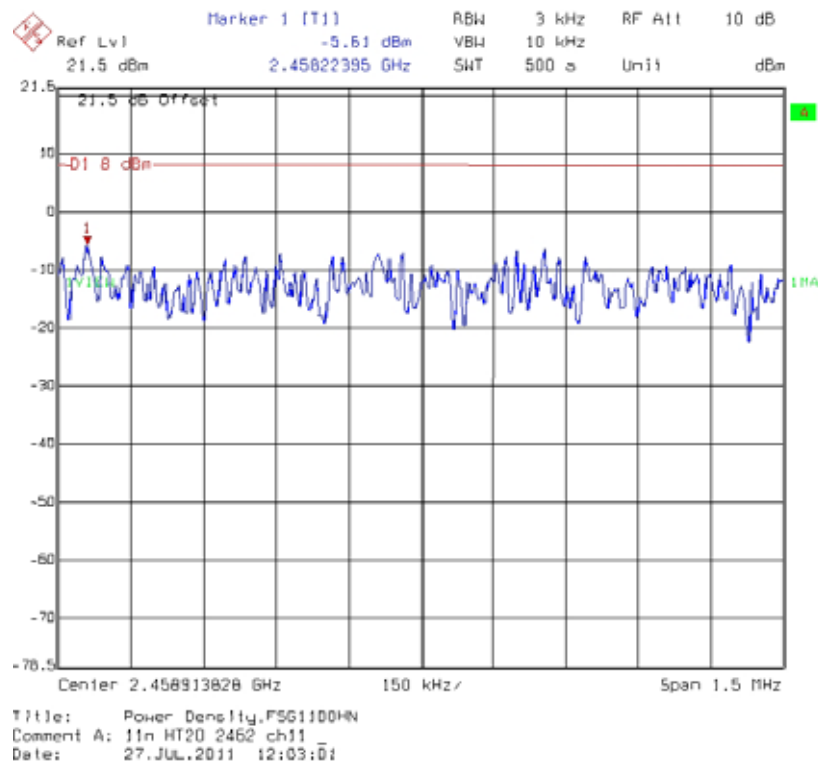


### Power Spectral Density @ 802.11n HT40 mode channel 3

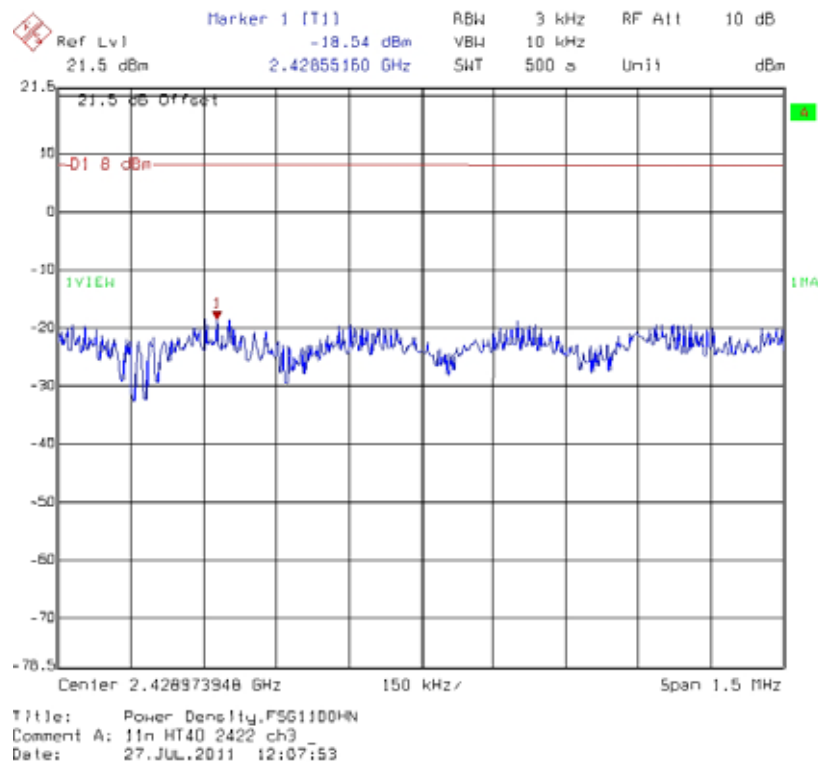

### Power Spectral Density @ 802.11n HT40 mode channel 6

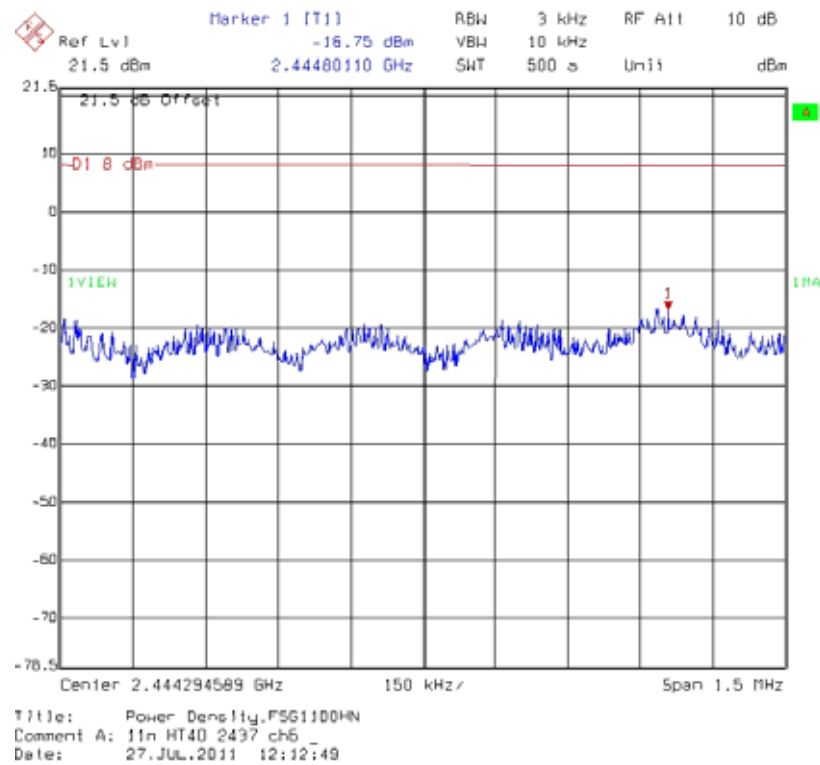

### Power Spectral Density @ 802.11n HT40 mode channel 9

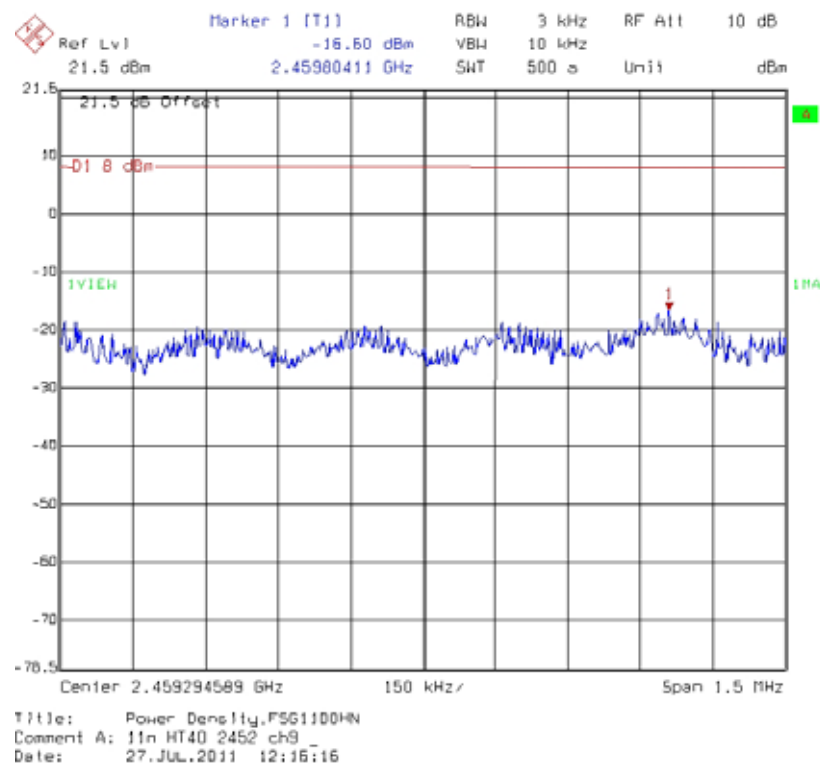



## 7. RF Antenna conducted Spurious

<b>Name of Test</b>	RF Antenna Conducted Spurious
<b>Base Standard</b>	FCC 15.247(d)


**Test Result:** Complies  
**Measurement Data:** See plots below

### Method of Measurement:


#### Reference FCC document: KDB558074

The measurements were performed from 30 MHz to 25 GHz RF antenna conducted per FCC 15.247 (d) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 100 kHz. Harmonics and spurious noise must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The table below is the results from the highest emission for each channel within the authorized band. This table was used to determine the spurious limits for each channel.


### Test Diagram:

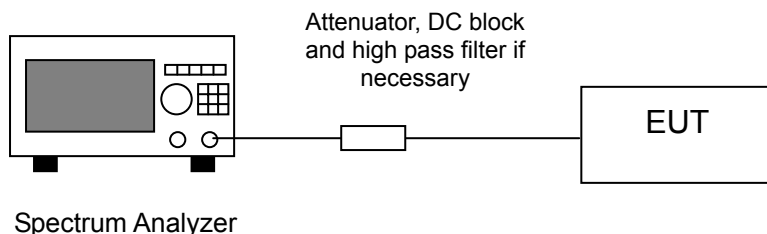


### Conducted spurious @ 802.11b mode channel 1

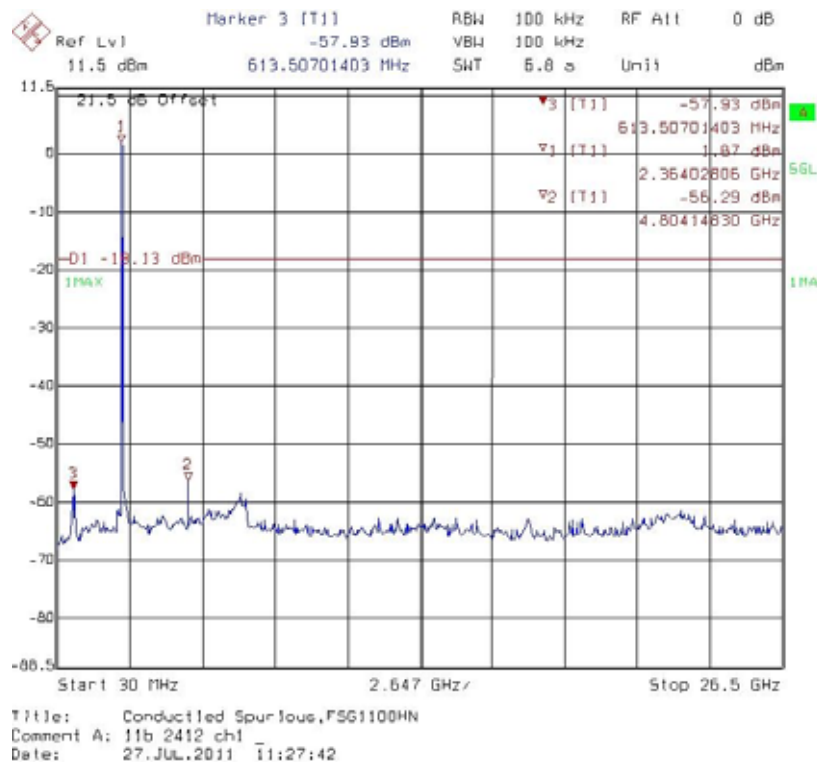


### Conducted spurious @ 802.11b mode channel 6

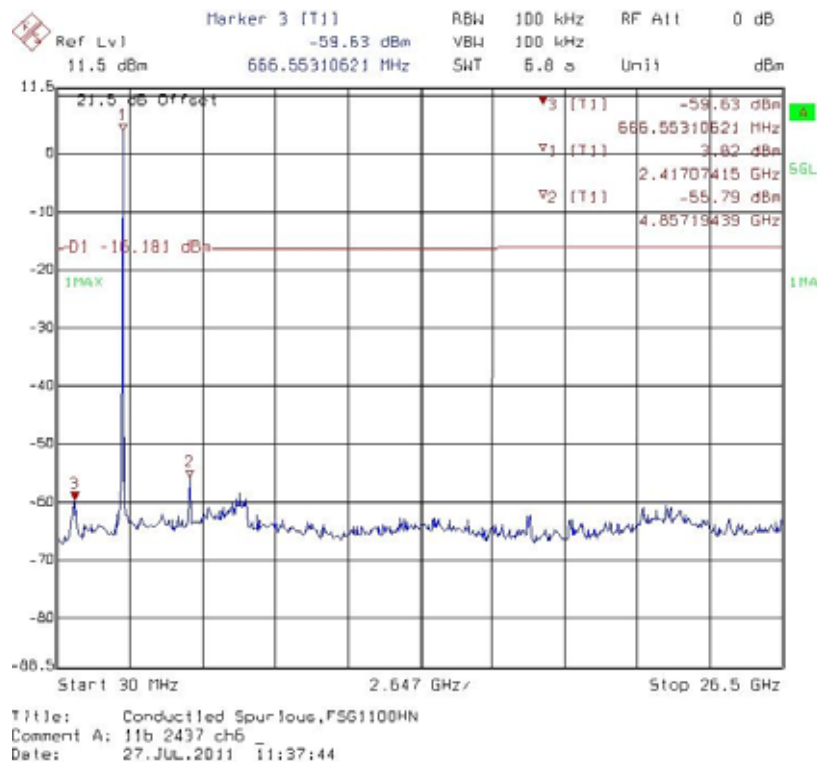


### Conducted spurious @ 802.11b mode channel 11

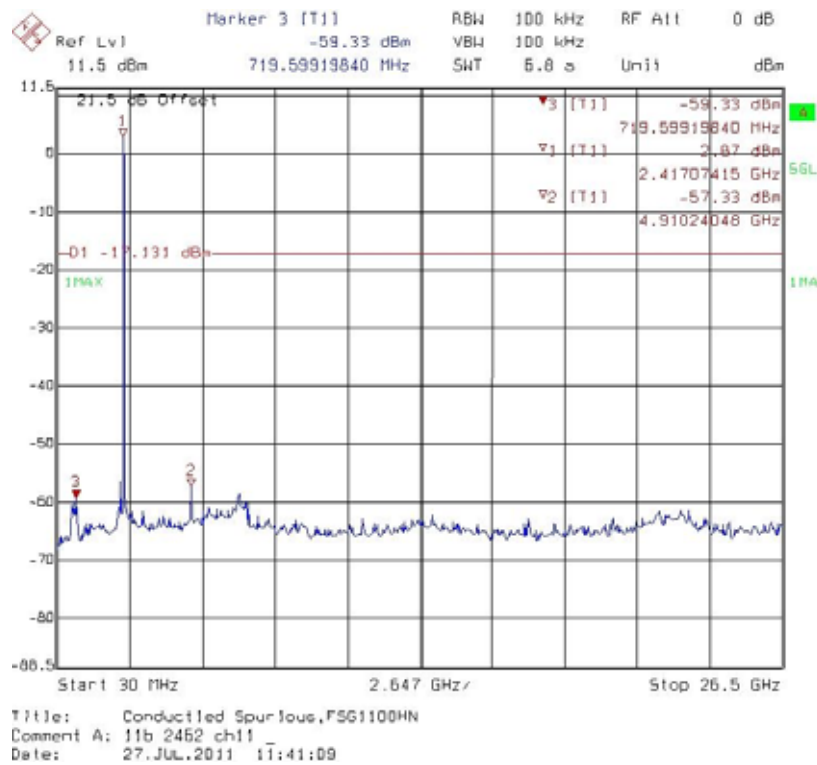


### Conducted spurious @ 802.11g mode channel 1

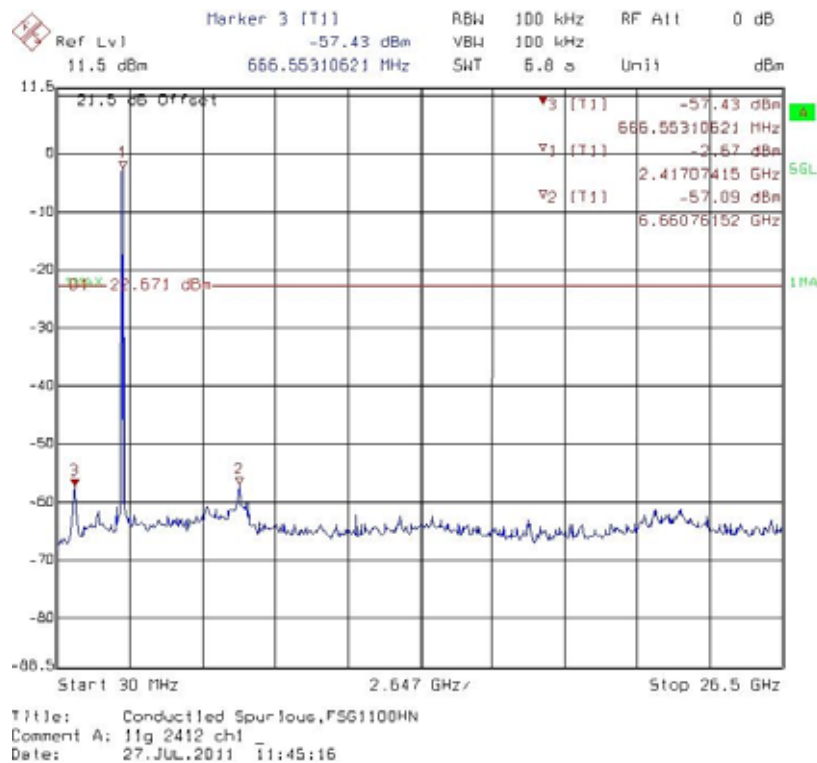


### Conducted spurious @ 802.11g mode channel 6

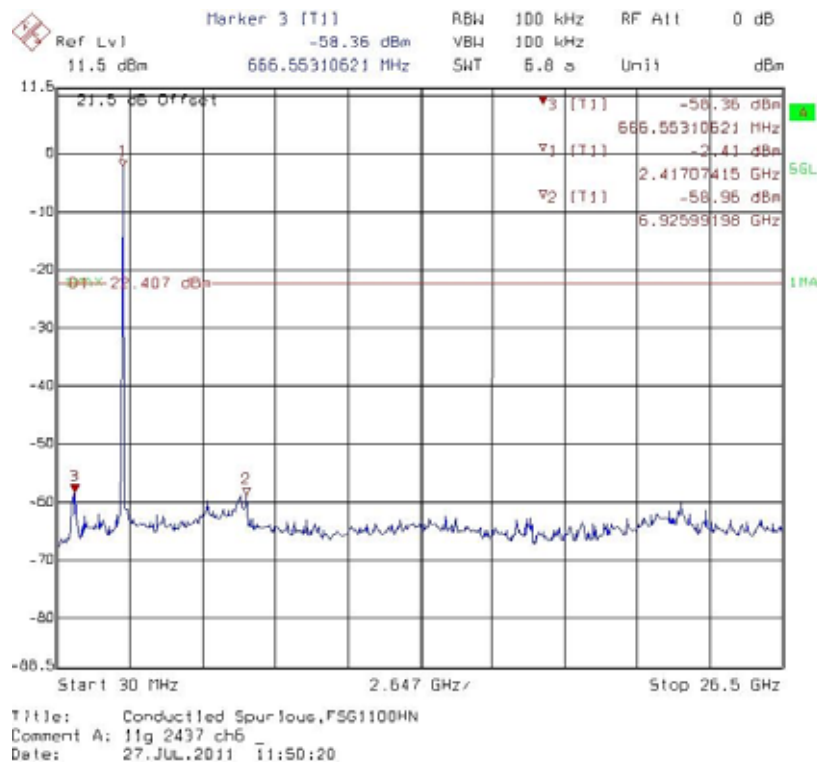


### Conducted spurious @ 802.11g mode channel 11

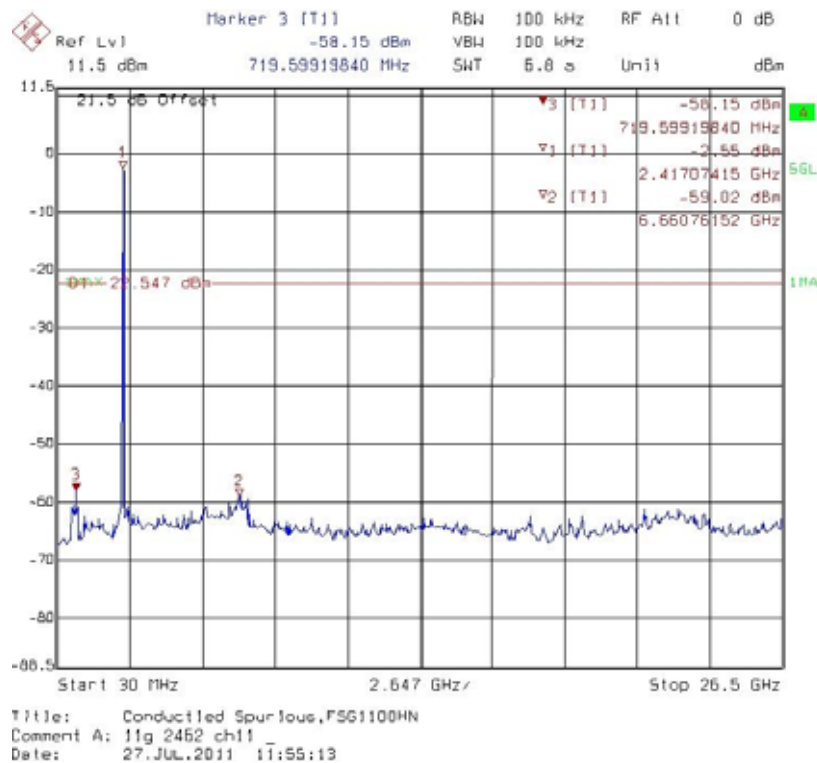


### Conducted spurious @ 802.11n HT20 mode channel 1

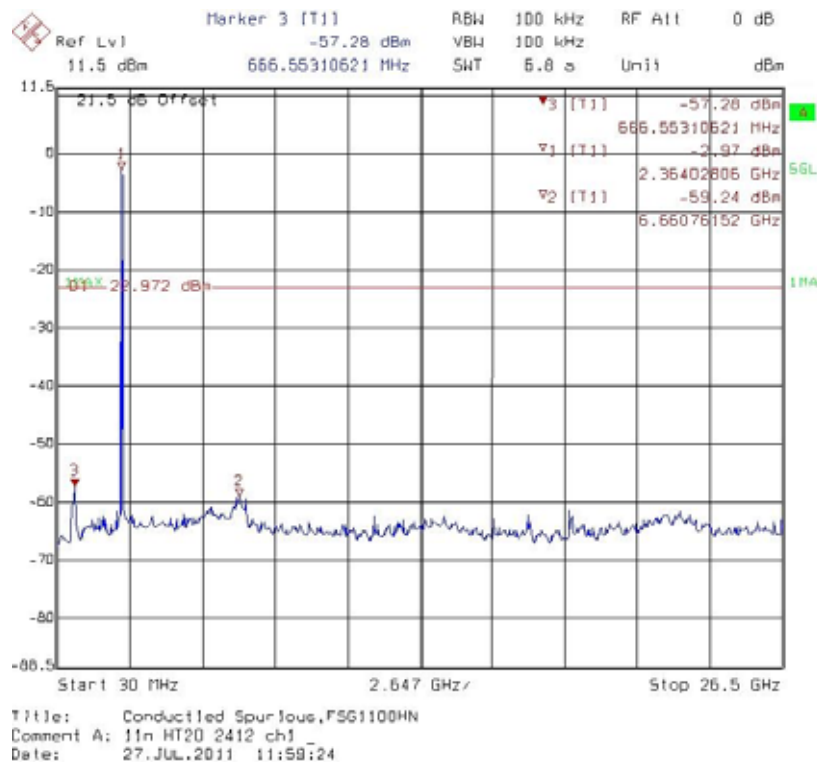


### Conducted spurious @ 802.11n HT20 mode channel 6

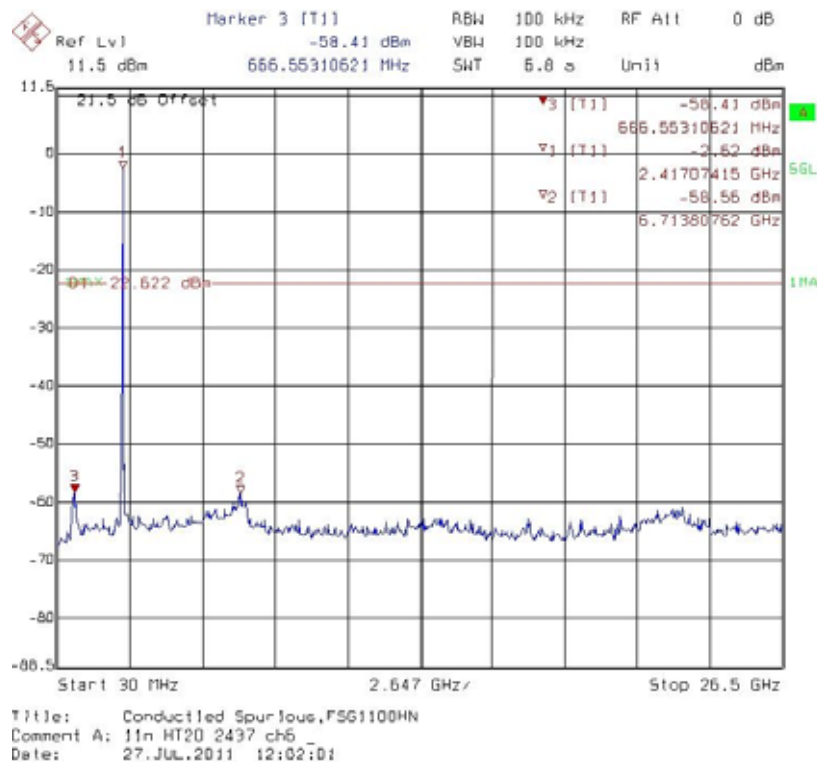


### Conducted spurious @ 802.11n HT20 mode channel 11

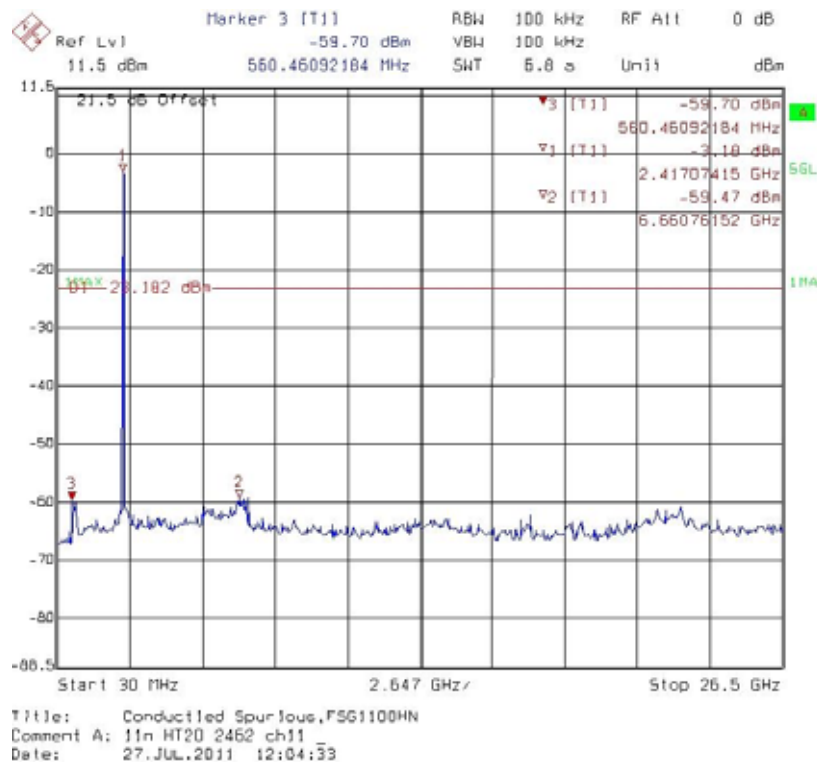


### Conducted spurious @ 802.11n HT40 mode channel 3

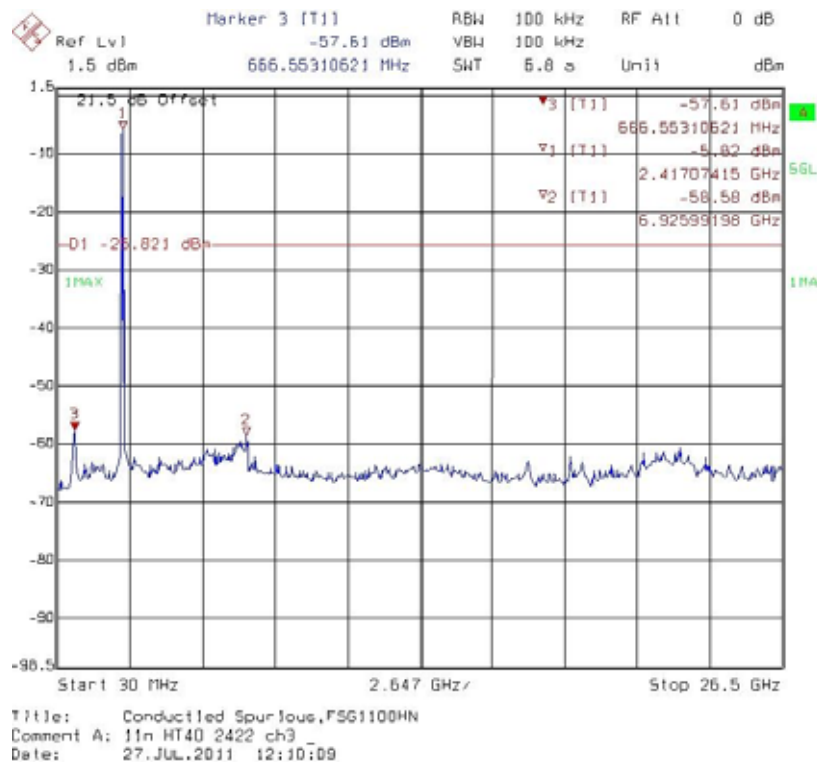

### Conducted spurious @ 802.11n HT40 mode channel 6

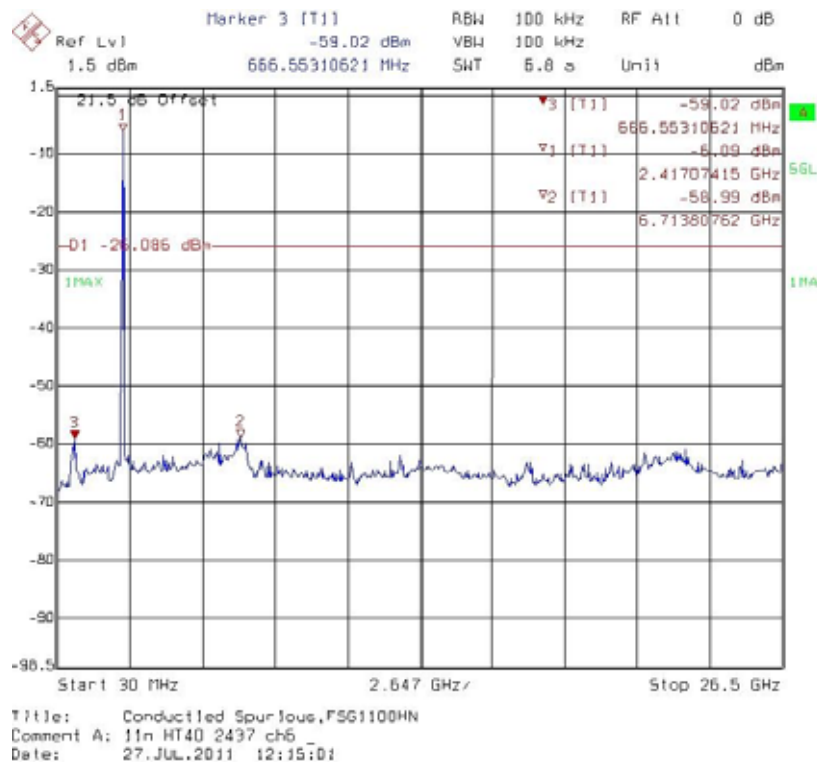

### Conducted spurious @ 802.11n HT40 mode channel 9

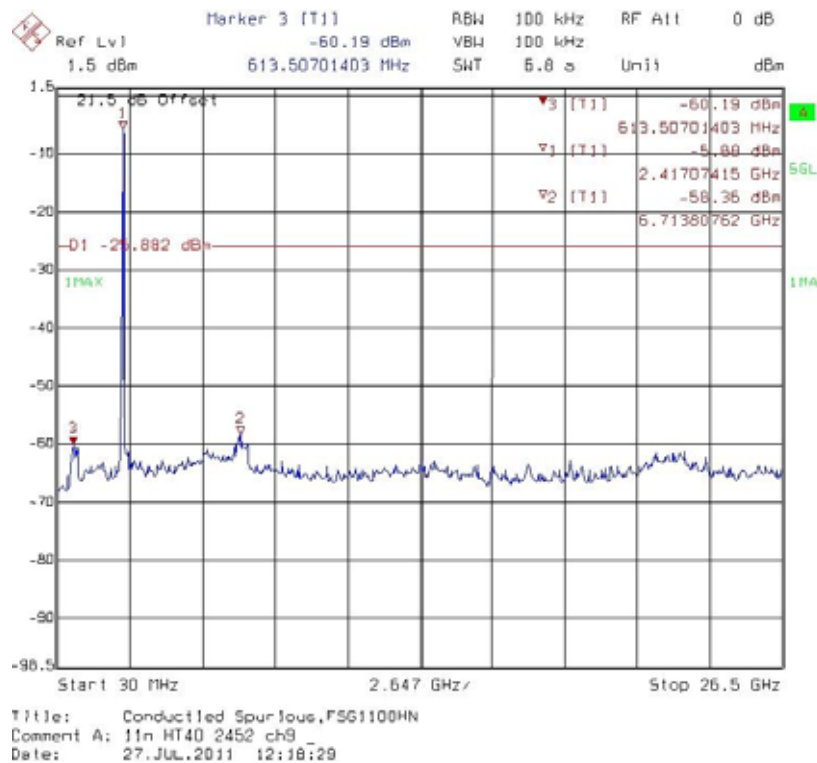

## 8. Radiated Spurious Emission

<b>Name of Test</b>	Radiated Spurious Emission
<b>Base Standard</b>	FCC 15.247(d), 15.209, 15.205

**Test Result:** Complies  
**Measurement Data:** See Tables below

### Method of Measurement:

#### Reference FCC document: KDB558074, ANSI C63.4


The frequency range from 30 MHz to 1000 MHz using Bilog Antenna.  
The frequency range over 1 GHz using Horn Antenna.

Radiated emissions were investigated cover the frequency range from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz and 10 Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/VBW) recorded also on the report. The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter. The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent 3 meters reading using inverse scaling with distance.

The EUT configuration please refer to the "Spurious set-up photo.pdf".



**Test Diagram:**

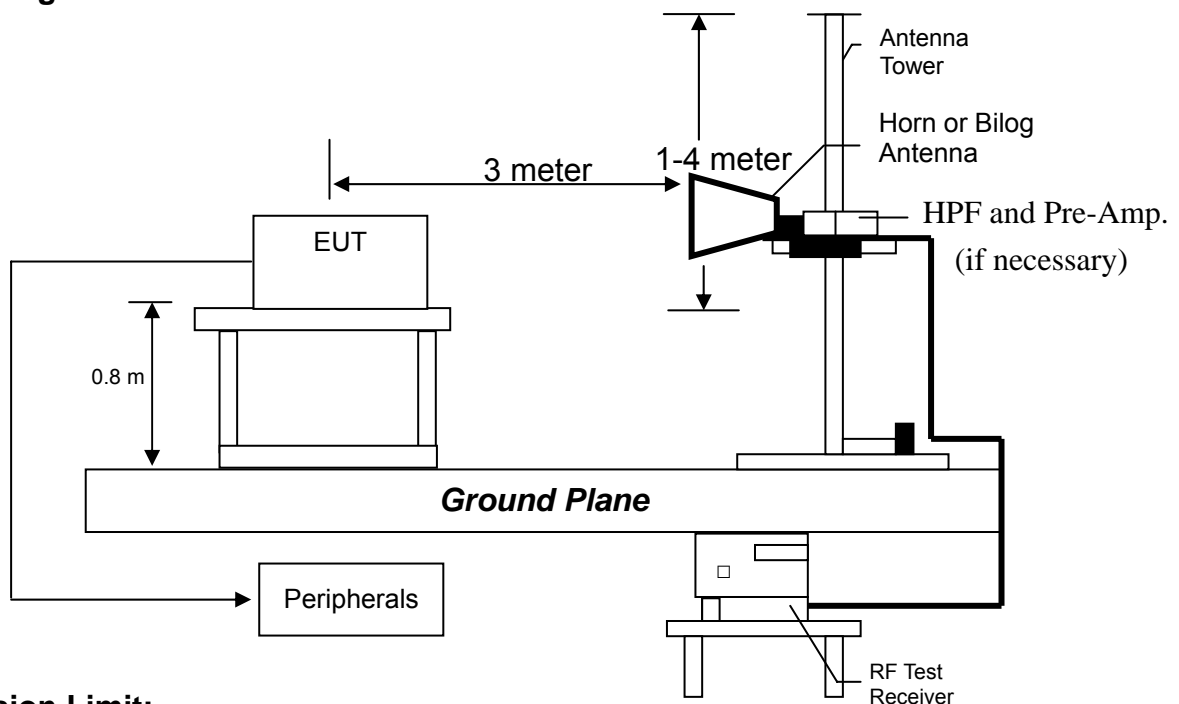

**Emission Limit:**

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Limits (dBµV/m@ 3 meter)
30-88	40
88-216	43.5
216-960	46
Above 960	54

**Remark:**

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

- Note:**
- (1) The EUT was tested while in a continuous transmit mode and the worst case data rates are Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT20 mode and 13 Mbps data rate for 802.11n HT40 mode. The EUT was tuned to a low, middle and high channel.
  - (2) The EUT operating at 2.4 GHz ISM band. Frequency Range scanned from 30 MHz to 25 GHz.

### Measurement results: frequencies equal to or less than 1 GHz

The test was performed on EUT under 802.11b, 802.11g, 802.11n HT20 and 802.11n HT40 continuously transmitting mode. The worst case occurred at 802.11b Tx channel 1.

EUT : FSG1100HN  
Worst Case : 802.11b Tx at channel 1

Antenna Polariz. (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
V	30.64	QP	12.60	25.98	38.57	40.00	-1.43
V	58.66	QP	12.90	21.20	34.09	40.00	-5.91
V	107.60	QP	7.64	29.66	37.30	43.50	-6.20
V	138.64	QP	11.39	23.42	34.81	43.50	-8.69
V	296.75	QP	13.95	27.84	41.79	46.00	-4.21
V	499.48	QP	18.43	18.36	36.78	46.00	-9.22
V	593.57	QP	20.71	17.64	38.35	46.00	-7.65
V	741.98	QP	22.74	12.95	35.69	46.00	-10.31
V	890.39	QP	24.35	14.39	38.73	46.00	-7.27
H	296.75	QP	14.17	20.14	34.30	46.00	-11.70
H	374.35	QP	15.48	20.07	35.54	46.00	-10.46
H	389.87	QP	16.74	19.93	36.67	46.00	-9.33
H	424.79	QP	16.81	22.35	39.16	46.00	-6.84
H	445.16	QP	18.12	23.21	41.33	46.00	-4.67
H	474.26	QP	18.16	20.25	38.41	46.00	-7.59
H	524.70	QP	18.77	18.56	37.33	46.00	-8.67
H	593.57	QP	20.84	19.31	40.14	46.00	-5.86
H	890.39	QP	24.62	15.05	39.66	46.00	-6.34
H	936.95	QP	25.33	12.22	37.55	46.00	-8.45

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

### Measurement results: frequency above 1GHz

EUT : FSG1100HN  
Test Condition : 802.11b Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4824	PK	V	35.1	38.54	42.35	45.79	54	-8.21
7236	PK	V	33.0	44.60	38.18	49.78	54	-4.22
4824	PK	H	35.1	38.54	42.40	45.84	54	-8.16
7236	PK	H	33.0	44.60	36.93	48.53	54	-5.47

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11b Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4874	PK	V	35.1	38.54	43.48	46.92	54	-7.08
7311	PK	V	33.0	44.60	37.88	49.48	54	-4.52
4874	PK	H	35.1	38.54	41.96	45.40	54	-8.60
7311	PK	H	33.0	44.60	37.09	48.69	54	-5.31

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11b Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4924	PK	V	35.1	38.54	43.11	46.55	54	-7.45
7386	PK	V	33.0	44.60	36.38	47.98	54	-6.02
4924	PK	H	35.1	38.54	39.53	42.97	54	-11.03
7386	PK	H	33.0	44.60	34.50	46.10	54	-7.90

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11g Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4824	PK	V	35.1	38.54	41.30	44.74	54	-9.26
7236	PK	V	33.0	44.60	36.31	47.91	54	-6.09
4824	PK	H	35.1	38.54	38.53	41.97	54	-12.03
7236	PK	H	33.0	44.60	36.68	48.28	54	-5.72

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11g Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4874	PK	V	35.1	38.54	41.98	45.42	54	-8.58
7311	PK	V	33.0	44.60	37.46	49.06	54	-4.94
4874	PK	V	35.1	38.54	38.74	42.18	54	-11.82
7311	PK	H	33.0	44.60	34.23	45.83	54	-8.17

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11g Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4924	PK	V	35.1	38.54	41.63	45.07	54	-8.93
7386	PK	V	33.0	44.60	35.92	47.52	54	-6.48
4924	PK	H	35.1	38.54	38.86	42.30	54	-11.70
7386	PK	H	33.0	44.60	33.50	45.10	54	-8.90

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11n HT20 Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4824	PK	V	35.1	38.54	42.24	45.68	54	-8.32
7236	PK	V	33.0	44.60	35.41	47.01	54	-6.99
4824	PK	H	35.1	38.54	38.31	41.75	54	-12.25
7236	PK	H	33.0	44.60	34.77	46.37	54	-7.63

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11n HT20 Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4874	PK	V	35.1	38.54	41.71	45.15	54	-8.85
7311	PK	V	33.0	44.60	38.79	50.39	54	-3.61
4874	PK	H	35.1	38.54	40.47	43.91	54	-10.09
7311	PK	H	33.0	44.60	34.96	46.56	54	-7.44

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11n HT20 Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4924	PK	V	35.1	38.54	40.38	43.82	54	-10.18
7386	PK	V	33.0	44.60	36.17	47.77	54	-6.23
4924	PK	H	35.1	38.54	37.83	41.27	54	-12.73
7386	PK	H	33.0	44.60	34.20	45.80	54	-8.20

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11n HT40 Tx at channel 3

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4844	PK	V	35.1	38.54	42.10	45.54	54	-8.46
7266	PK	V	33.0	44.60	33.87	45.47	54	-8.53
4844	PK	H	35.1	38.54	39.00	42.44	54	-11.56
7266	PK	H	33.0	44.60	33.78	45.38	54	-8.62

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11n HT40 Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4874	PK	V	35.1	38.54	42.18	45.62	54	-8.38
7311	PK	V	33.0	44.60	35.11	46.71	54	-7.29
4874	PK	H	35.1	38.54	39.26	42.70	54	-11.30
7311	PK	H	33.0	44.60	34.45	46.05	54	-7.95

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : FSG1100HN  
Test Condition : 802.11n HT40 Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4904	PK	V	35.1	38.54	41.46	44.90	54	-9.10
7356	PK	V	33.0	44.60	35.00	46.60	54	-7.40
4904	PK	H	35.1	38.54	38.64	42.08	54	-11.92
7356	PK	H	33.0	44.60	33.56	45.16	54	-8.84

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.



## 9. Emission on Band Edge

<b>Name of Test</b>	Emission Band Edge
<b>Base Standard</b>	FCC 15.247(d)

**Test Result:** Complies  
**Measurement Data:** See Tables & plots below

### Method of Measurement:

#### Reference FCC document: KDB558074, ANSI C63.4

The frequency range from 30 MHz to 1000 MHz using Bilog Antenna.  
The frequency range over 1 GHz using Horn Antenna.

Radiated emissions were investigated cover the frequency range from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz and 10 Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/VBW) recorded also on the report.

**Test Mode: 802.11b mode**

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	57.57	74	-16.43
		AV	46.73	54	-7.27
11 (highest)	2483.5-2500	PK	59.19	74	-14.81
		AV	48.52	54	-5.48

**Test Mode: 802.11g mode**

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	60.06	74	-13.94
		AV	47.38	54	-6.62
11 (highest)	2483.5-2500	PK	65.59	74	-8.41
		AV	49.79	54	-4.21


**Test Mode: 802.11n HT20 mode**

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	59.34	74	-14.66
		AV	47.24	54	-6.76
11 (highest)	2483.5-2500	PK	64.90	74	-9.10
		AV	49.83	54	-4.17


**Test Mode: 802.11n HT40 mode**

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3 (lowest)	2310-2390	PK	65.48	74	-8.52
		AV	50.23	54	-3.77
9 (highest)	2483.5-2500	PK	68.88	74	-5.12
		AV	52.39	54	-1.61


Band edge @ 802.11b mode channel 1 (PK)

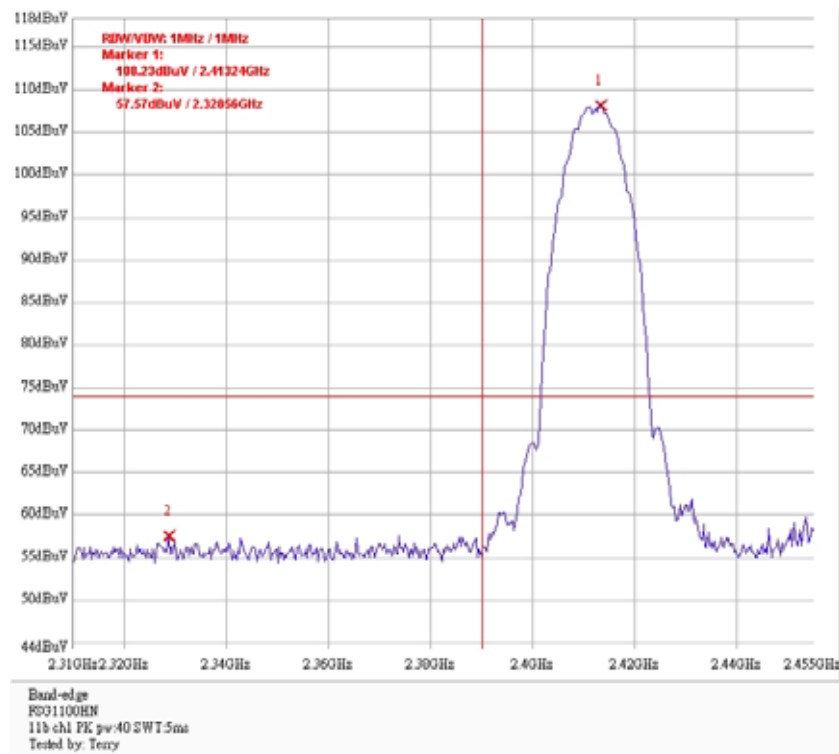


Band edge @ 802.11b mode channel 1 (AV)

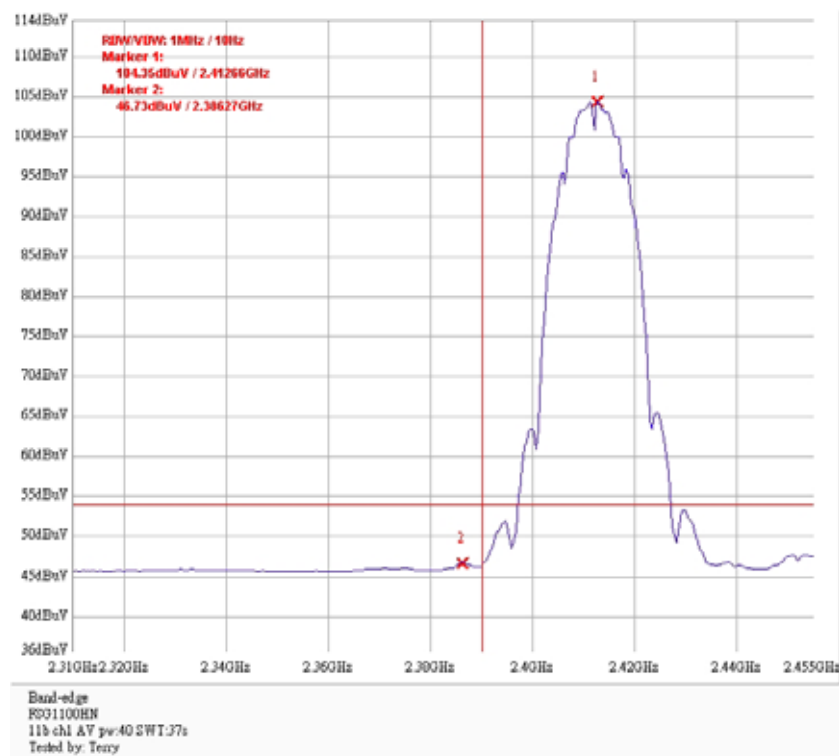


Band edge @ 802.11b mode channel 11 (PK)

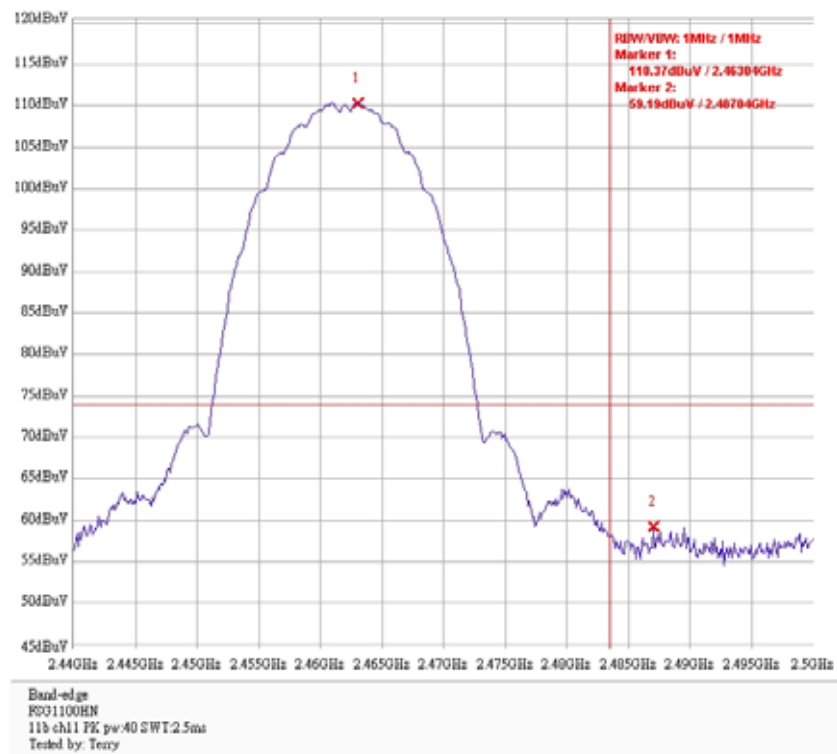


Band edge @ 802.11b mode channel 11 (AV)

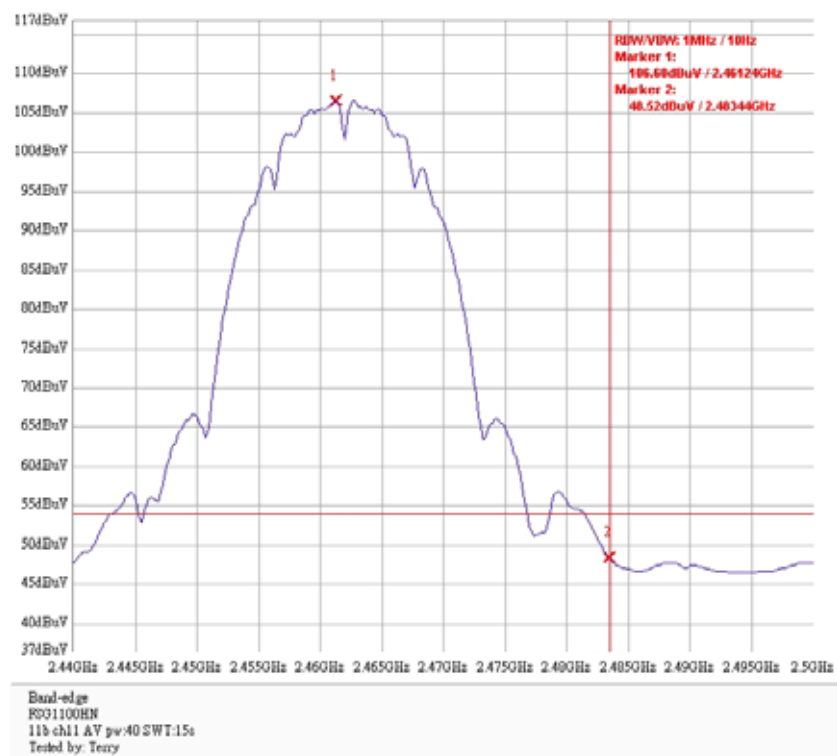


Band edge @ 802.11g mode channel 1 (PK)

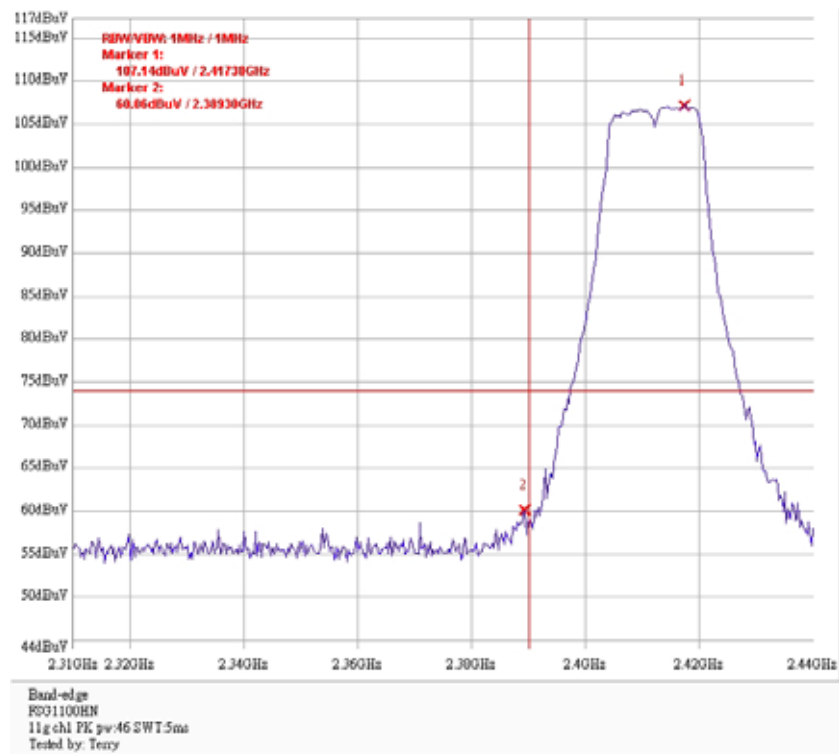


Band edge @ 802.11g mode channel 1 (AV)

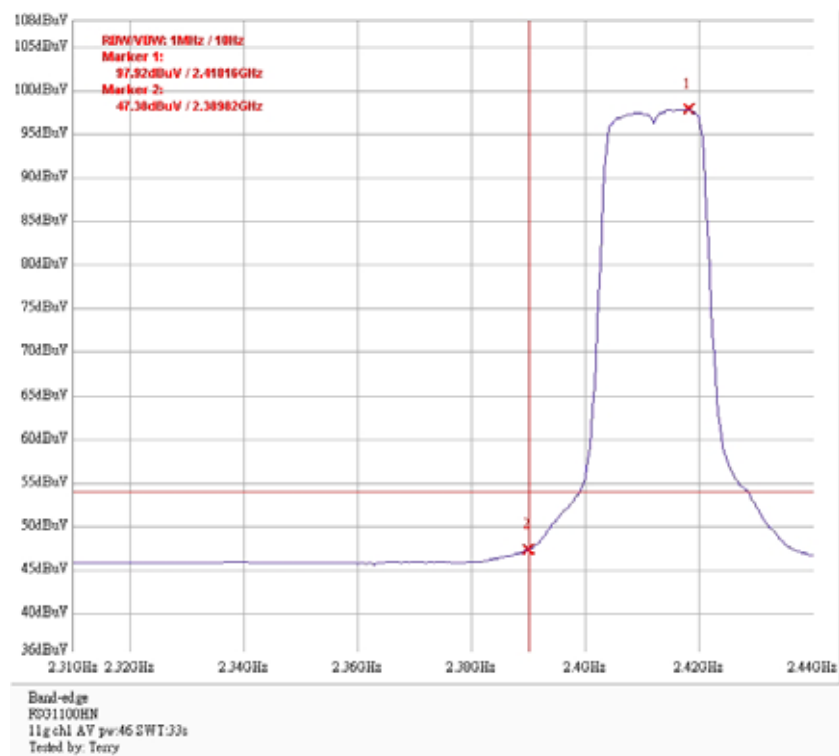


Band edge @ 802.11g mode channel 11 (PK)

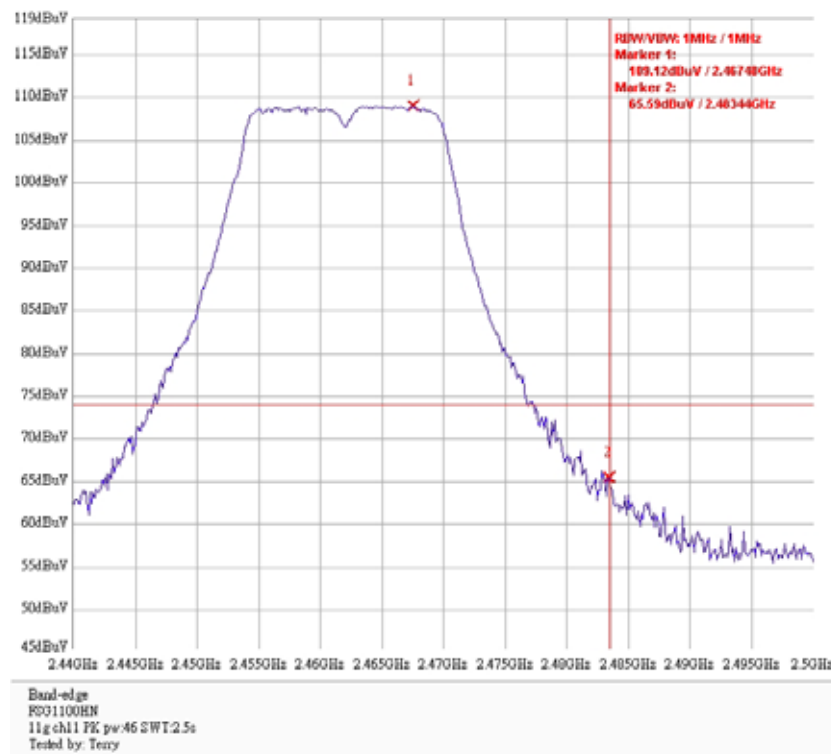


Band edge @ 802.11g mode channel 11 (AV)

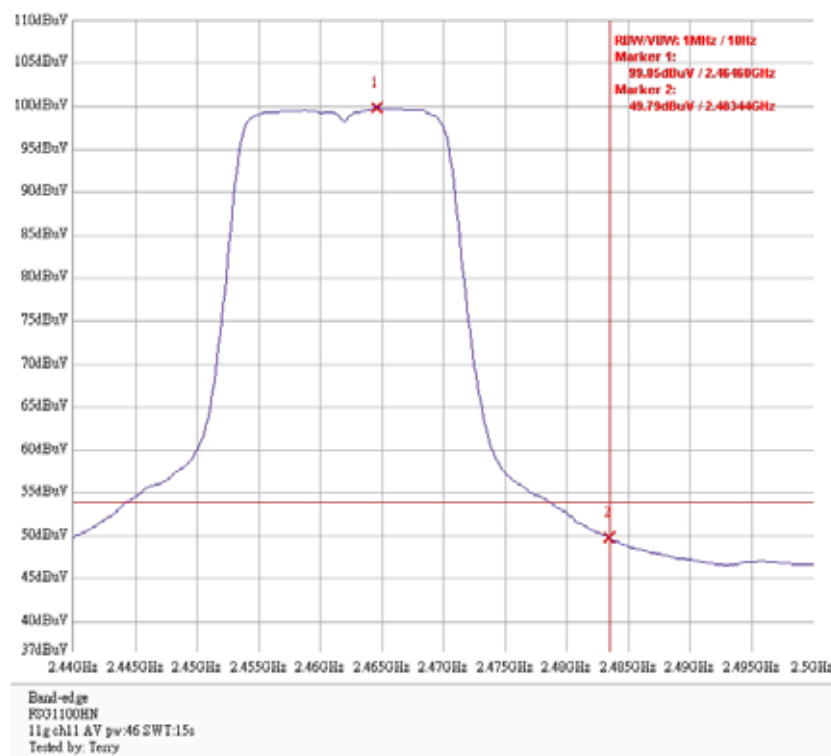

Band edge @ 802.11n HT20 mode channel 1 (PK)

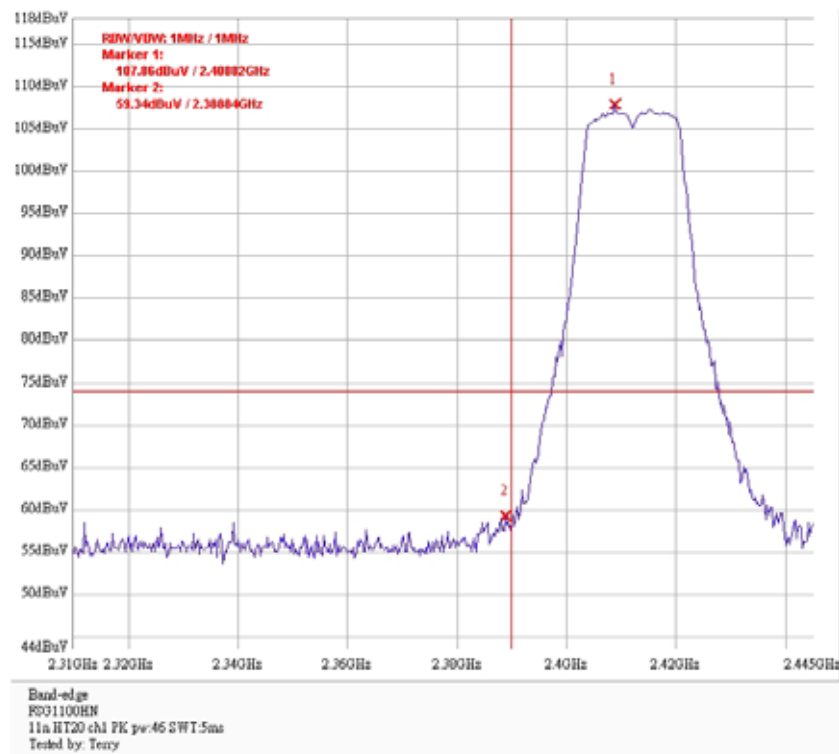


Band edge @ 802.11n HT20 mode channel 1 (AV)

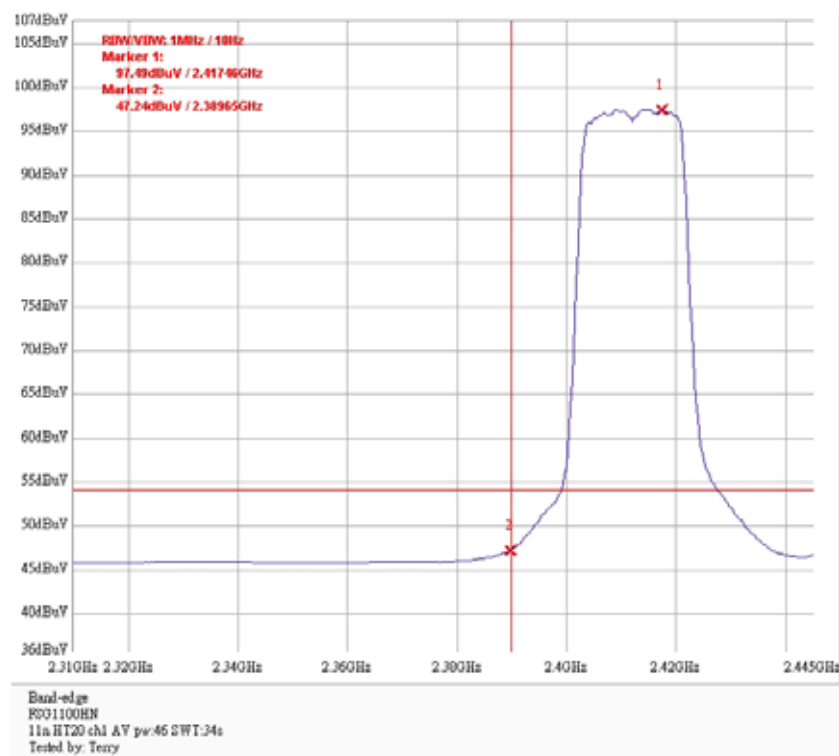





Band edge @ 802.11n HT20 mode channel 11 (PK)

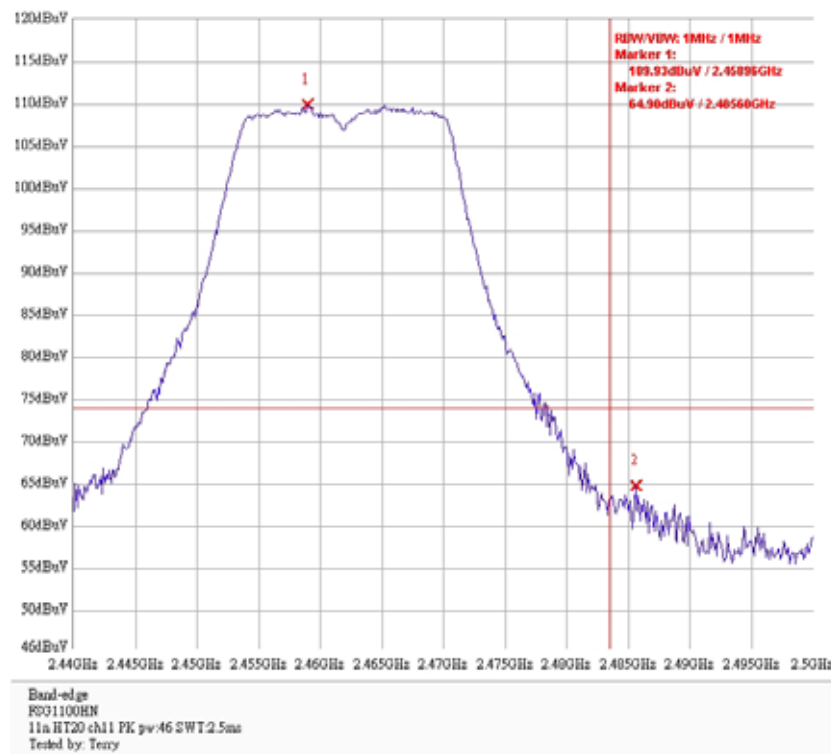


Band edge @ 802.11n HT20 mode channel 11 (AV)

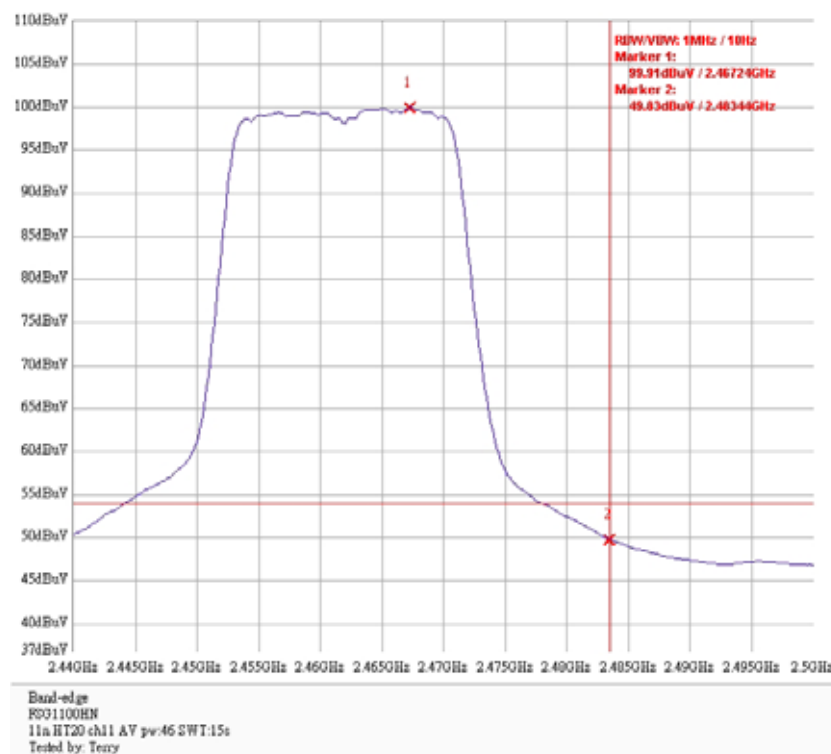


Band edge @ 802.11n HT40 mode channel 3 (PK)

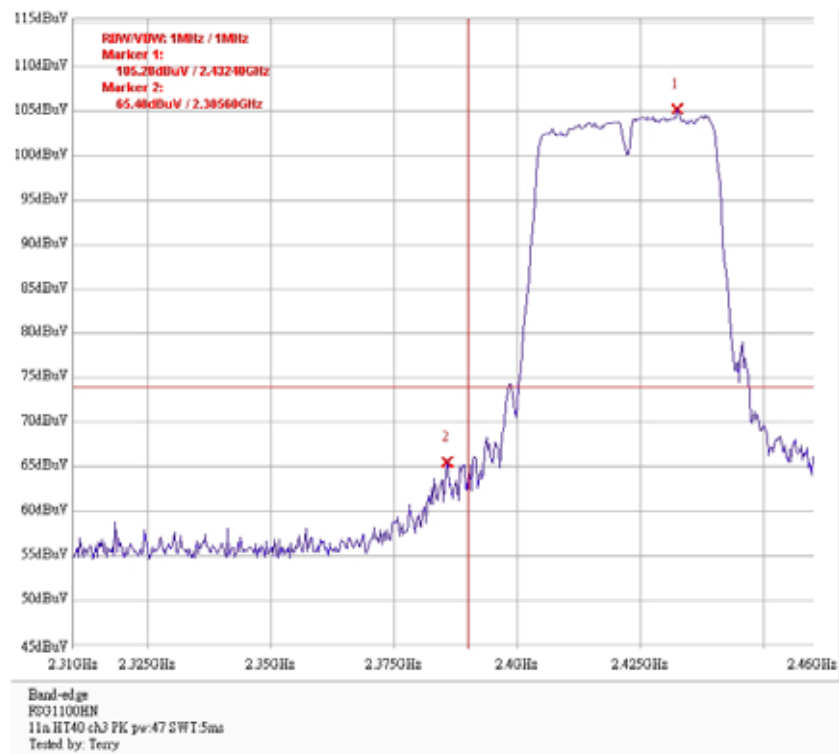


Band edge @ 802.11n HT40 mode channel 3 (AV)

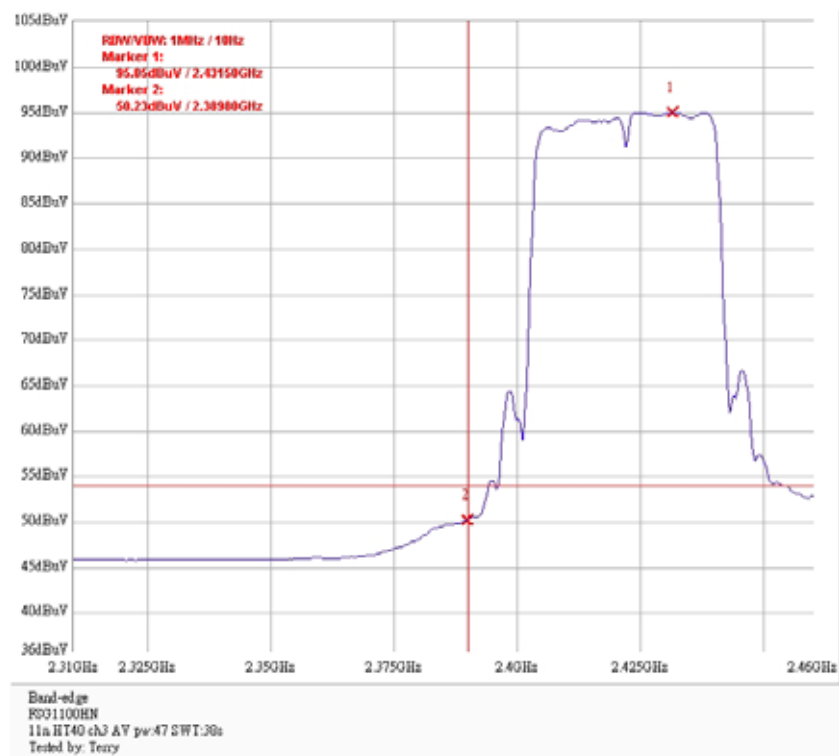

Band edge @ 802.11n HT40 mode channel 9 (PK)

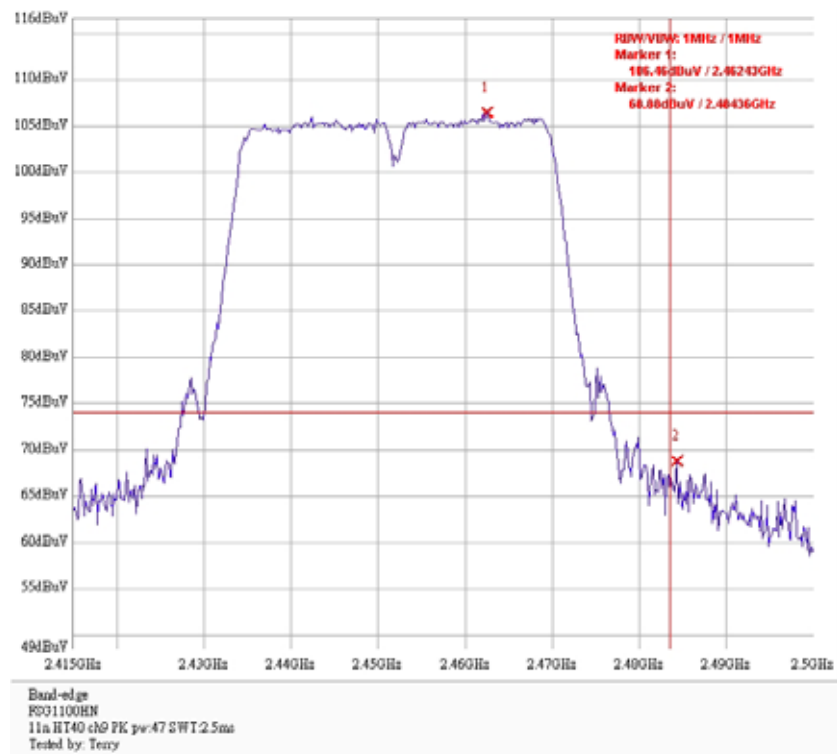

Band edge @ 802.11n HT40 mode channel 9 (AV)

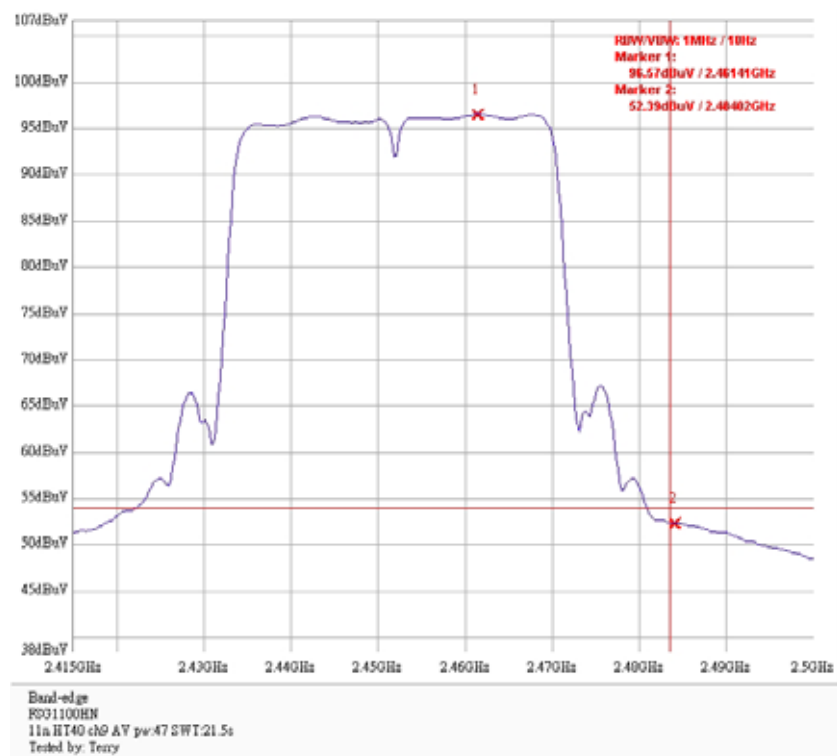

## 10. AC power line conducted emission

<b>Name of Test</b>	AC power line conducted emission
<b>Base Standard</b>	FCC 15.207

**Test Result:** Complies  
**Measurement Data:** See Tables & plots below

### Method of Measurement:

#### Reference FCC document: KDB558074, ANSI C63.4


The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50 uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm/ 50 uH coupling impedance with 50 ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/2003 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9 kHz.

The EUT configuration please refer to the "Conducted set-up photo.pdf".

### Test Diagram:

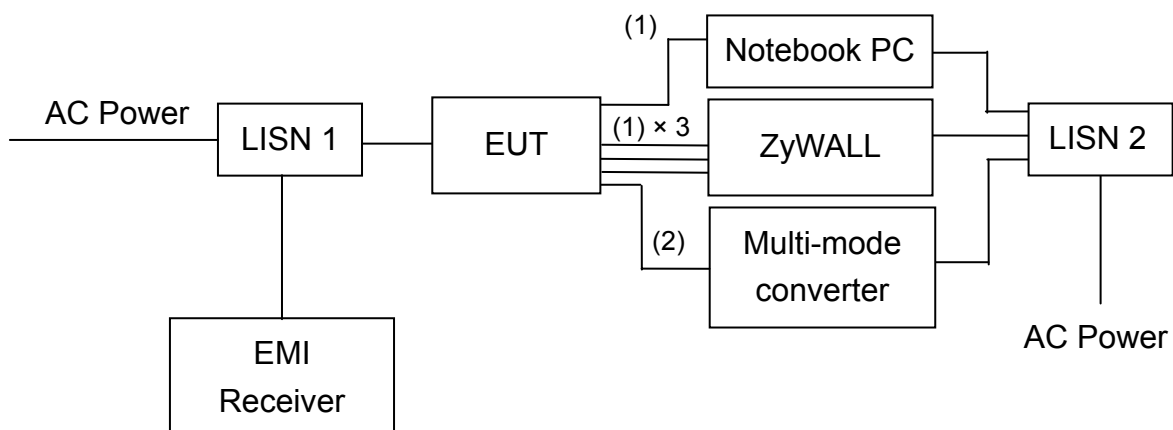

(1) RJ-45 UTP Cat.5 10 meter

(2) Fiber 5 meter

**Emission Limit:**

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50

\*Decreases with the logarithm of the frequency.


**Note:** The EUT was tested while in normal communication mode.

Phase : Line  
EUT : FSG1100HN  
Test Condition : Continuously mode  
Remark : N/A

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
0.153	0.80	43.14	65.82	28.04	55.82	-22.68	-27.78
3.399	0.24	30.44	56.00	22.95	46.00	-25.56	-23.05
6.024	0.39	34.47	60.00	27.74	50.00	-25.53	-22.26
7.606	0.44	39.51	60.00	32.17	50.00	-20.49	-17.83
10.905	0.57	37.61	60.00	30.52	50.00	-22.39	-19.48
13.408	0.72	36.46	60.00	29.48	50.00	-23.54	-20.52

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

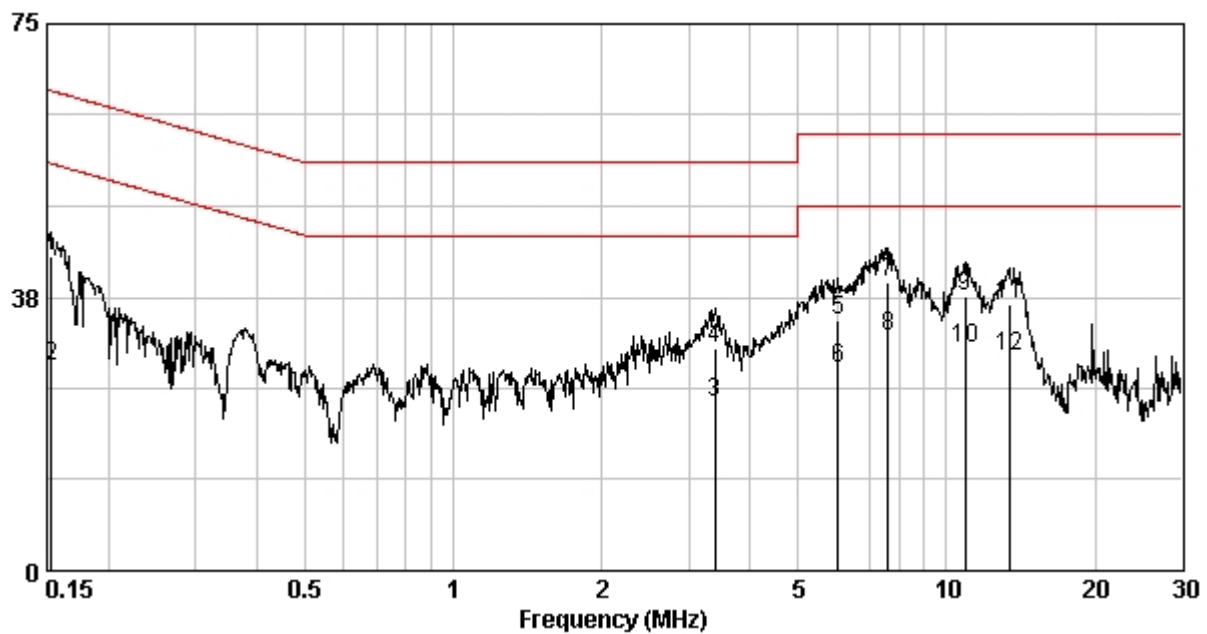


Phase : Neutral  
EUT : FSG1100HN  
Test Condition : Continuously mode  
Remark : N/A

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
0.154	0.10	42.14	65.78	27.75	55.78	-23.64	-28.03
3.364	0.23	30.95	56.00	23.29	46.00	-25.05	-22.71
5.713	0.34	35.60	60.00	28.58	50.00	-24.40	-21.42
7.526	0.37	40.80	60.00	33.91	50.00	-19.20	-16.09
10.847	0.42	39.24	60.00	32.48	50.00	-20.76	-17.52
13.841	0.48	36.90	60.00	30.33	50.00	-23.10	-19.67

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

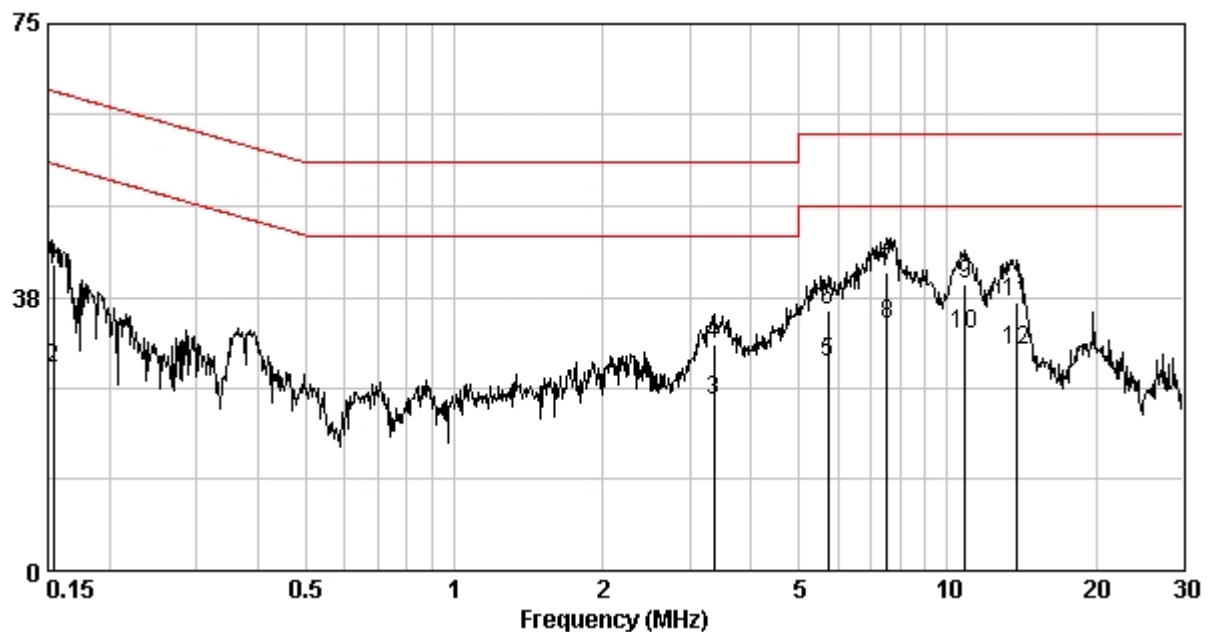

## Appendix A: Test Equipment List

Equipment	Brand	Frequency range	Model No.	Last Cal.	Cal. interval
EMI Test Receiver	Rohde & Schwarz	9kHz~2.75GHz	ESCS30	2011/6/29	1 year
EMI Test Receiver	Rohde & Schwarz	9kHz~3GHz	ESCI	2010/12/3	1 year
Spectrum Analyzer	Rohde & Schwarz	9kHz~30GHz	FSP30	2011/6/29	1 year
Spectrum Analyzer	Rohde & Schwarz	20Hz~40GHz	FSEK30	2011/1/18	1 year
Horn Antenna	SCHWARZBECK	1GHz~18GHz	BBHA9120D	2010/8/31	2 years
Bilog Antenna	SCHWARZBECK	25MHz~1.7GHz	VULB 9168	2009/9/22	2 years
Turn Table	HDGmbH	N/A	DS 420S	N/A	N/A
Antenna Tower	HDGmbH	N/A	MA 240	N/A	N/A
Pre-Amplifier	MITER	100MHz~26.5GHz	AFS42-00102 650	2009/10/27	2 years
LISN	Rohde & Schwarz	9KHz~30MHz	ESH3-Z5	2010/10/15	1 year
Power Meter	Anritsu	100kHz ~ 65GHz (video bandwidth:65MHz)	ML2495A	2010/10/20	1 year
Power Sensor	Anritsu	300MHz ~ 40GHz (video bandwidth:50MHz)	MA2411B	2010/10/20	1 year

Note: The above equipments are within the valid calibration period.

### Measurement Uncertainty:

Measurement uncertainty was calculated in accordance with TR 100 028-1.

Parameter	Uncertainty
Radiated Emission	±5.056 dB
Conducted Emission	±2.786 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.