



FCC TEST REPORT (PART 27)

REPORT NO.: RF990415E05

MODEL NO.: MAX-207HW2R,
IX280P-5-1420JMDL-A,
MAX-207HW2R1, MAX-207HW2R2,
MAX-207HW2R3, MAX-207HW2R4

RECEIVED: Apr. 16, 2010

TESTED: Apr. 23 to 30, 2010

ISSUED: May 10, 2010

APPLICANT: ZyXEL Communications Corporation

ADDRESS: No. 6, Innovation Road II, Science-Park, Hsin-Chu,
300, Taiwan

ISSUED BY : Bureau Veritas Consumer Products Services (H.K.)
Ltd., Taoyuan Branch

LAB LOCATION : No. 81-1, Lu Liao Keng, 9th Ling,Wu Lung Tsuen,
Chiung Lin Hsiang, Hsin Chu Hsien 307, Taiwan

This test report consists of 68 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by any government agencies. The test results in the report only apply to the tested sample.



A D T

TABLE OF CONTENTS

1	CERTIFICATION	4
2	SUMMARY OF TEST RESULTS	5
2.1	MEASUREMENT UNCERTAINTY	6
3	GENERAL INFORMATION.....	7
3.1	GENERAL DESCRIPTION OF EUT.....	7
3.2	DESCRIPTION OF TEST MODES.....	9
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	10
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS.....	13
3.4	DESCRIPTION OF SUPPORT UNITS	14
3.4.1	CONFIGURATION OF SYSTEM UNDER TEST	15
4	TEST TYPES AND RESULTS	16
4.1	OUTPUT POWER MEASUREMENT	16
4.1.1	LIMITS OF OUTPUT POWER MEASUREMENT	16
4.1.2	TEST INSTRUMENTS	16
4.1.3	TEST PROCEDURES.....	16
4.1.4	TEST SETUP.....	16
4.1.5	EUT OPERATING CONDITIONS.....	17
4.1.6	TEST RESULTS.....	18
4.2	FREQUENCY STABILITY MEASUREMENT.....	19
4.2.1	LIMITS OF FREQUENCY STABILITY MEASUREMENT	19
4.2.2	TEST INSTRUMENTS	19
4.2.3	TEST PROCEDURE	20
4.2.4	TEST SETUP.....	20
4.2.5	TEST RESULTS.....	21
4.3	EMISSION BANDWIDTH MEASUREMENT.....	22
4.3.1	LIMITS OF EMISSION BANDWIDTH MEASUREMENT	22
4.3.2	TEST INSTRUMENTS	22
4.3.3	TEST SETUP.....	22
4.3.4	TEST PROCEDURES.....	23
4.3.5	TEST RESULTS.....	24
4.4	CHANNEL EDGE MEASUREMENT	28
4.4.1	LIMITS OF CHANNEL EDGE MEASUREMENT	28
4.4.2	TEST INSTRUMENTS	28
4.4.3	TEST SETUP	28
4.4.4	TEST PROCEDURES.....	29
4.4.5	EUT OPERATING CONDITION	29
4.4.6	TEST RESULTS.....	30
4.5	CONDUCTED SPURIOUS EMISSIONS	36
4.5.1	LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT	36



A D T

4.5.2	TEST INSTRUMENTS	36
4.5.3	TEST PROCEDURE	37
4.5.4	TEST SETUP	37
4.5.5	EUT OPERATING CONDITIONS	37
4.5.6	TEST RESULTS.....	38
4.6	RADIATED EMISSION MEASUREMENT (BELOW 1GHz)	50
4.6.1	LIMITS OF RADIATED EMISSION MEASUREMENT	50
4.6.2	TEST INSTRUMENTS	50
4.6.3	TEST PROCEDURES.....	51
4.6.4	DEVIATION FROM TEST STANDARD	51
4.6.5	TEST SETUP	52
4.6.6	EUT OPERATING CONDITIONS	52
4.6.7	TEST RESULTS.....	53
4.7	RADIATED EMISSION MEASUREMENT (ABOVE 1GHz).....	56
4.7.1	LIMITS OF RADIATED EMISSION MEASUREMENT	56
4.7.2	TEST INSTRUMENTS	56
4.7.3	TEST PROCEDURES.....	57
4.7.4	DEVIATION FROM TEST STANDARD	57
4.7.5	TEST SETUP	58
4.7.6	EUT OPERATING CONDITIONS	58
4.7.7	TEST RESULTS.....	59
5	PHOTOGRAPHS OF THE TEST CONFIGURATION	66
6	INFORMATION ON THE TESTING LABORATORIES	67
7	APPENDIX - A DL/UL RATION FOR TEST	68



1 CERTIFICATION

PRODUCT: WiMAX MIMO 2.5GHz Indoor Simple CPE
BRAND NAME: ZyXEL, ZTE
MODEL NO.: MAX-207HW2R, IX280P-5-1420JMDL-A,
MAX-207HW2R1, MAX-207HW2R2, MAX-207HW2R3,
MAX-207HW2R4
APPLICANT: ZyXEL Communications Corporation
TESTED: Apr. 23 to 30, 2010
TEST SAMPLE: MASS-PRODUCTION
TEST STANDARDS: FCC 47 CFR Part 2
FCC 47 CFR Part 27, Subpart C & M
ANSI/TIA/EIA-603-C-2004

The above equipment (Model No.: MAX-207HW2R) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Claire Kaun , **DATE:** May 10, 2010
(Claire Kaun, Specialist)

TECHNICAL ACCEPTANCE : Hank Chung , **DATE:** May 10, 2010
(Hank Chung, Deputy Manager)

APPROVED BY : May Chen , **DATE:** May 10, 2010
(May Chen, Deputy Manager)

2 SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 27 & Part 2			
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK
2.1046 27.50(h)(2)	Maximum Peak Output Power Limit: max. 2 watts conducted peak power	PASS	Meet the requirement of limit.
2.1055 27.54	Frequency Stability Stay with the authorized bands of operation	PASS	Meet the requirement of limit.
2.1049 27.53(m)(6)	Emission Bandwidth	PASS	Meet the requirement of limit.
2.1051 27.53(m)(2)(6)	Band Edge Measurements	PASS	Meet the requirement of limit.
2.1051 27.53(m)(2)(6)	Conducted Spurious Emissions	PASS	Meet the requirement of limit.
2.1053 27.53(m)(2)(6)	Radiated Spurious Emissions	PASS	Meet the requirement of limit.



A D T

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$.

Measurement	Value
Radiated emissions (30MHz-1GHz)	3.94 dB
Radiated emissions (1GHz -18GHz)	2.49 dB
Radiated emissions (18GHz -40GHz)	2.70 dB

3 GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	WiMAX MIMO 2.5GHz Indoor Simple CPE
MODEL NO.	MAX-207HW2R, IX280P-5-1420JMDL-A, MAX-207HW2R1, MAX-207HW2R2, MAX-207HW2R3, MAX-207HW2R4
POWER SUPPLY	DC 12V from adapter
MODULATION TECHNOLOGY	OFDMA
MODULATION	BPSK-1/2, QPSK-1/2, -3/4, 16QAM-1/2, 3/4, 64QAM-1/2, -2/3, -3/4 (64QAM for Rx only)
OPERATING FREQUENCY	2505MHz ~ 2685MHz
CHANNEL BANDWIDTH	5MHz & 10MHz
MAX. CONDUCTED POWER	5MHz: 26.9dBm 10MHz: 26.7dBm
ANTENNA TYPE	Please see note 2
DATA CABLE	NA
I/O PORTS	VOIP port x 2 LAN port x 4
ASSOCIATED DEVICES	Adapter x 1

NOTE:

- The EUT has two brand names and six model names, which are identical to each other in all aspects except for the following:

Brand	Model No.	Description
ZyXEL	MAX-207HW2R	HW is the same. They are only different in their model names and color of housings.
	MAX-207HW2R1	
	MAX-207HW2R2	
	MAX-207HW2R3	
	MAX-207HW2R4	
ZTE	IX280P-5-1420JMDL-A	

From the above models, model: **MAX-207HW2R** was selected as representative model for the test and its data was recorded in this report.



A D T

2. There are two antennas provided to this EUT, please refer to the following table:

Antenna	Antenna Type	Antenna Connector	Gain (dBi)	Cable loss (dB)	Net Gain (dBi)	Cable Length (cm)	Frequency range (MHz)	Diversity Function
1	Dipole	I-PEX	6.7	0.5	6.2	29	2500~2700	YES
2	Dipole	I-PEX	6.7	0.5	6.2	29	2500~2700	YES

3. The EUT must be supplied with the a power adapter as below table:

Brand:	DVE
Model No.:	DSA-30WN-12 US 120240
Input power :	100-240V, 50/60Hz, 0.8A
Output power :	12V, 2A DC output cable (unshielded, 1.8m with one core)

4. For the EUT Modulation type and coding rate. After pre-testing items of output power and spurious emissions, QPSK-1/2 was found to be 5MHz / 10MHz worst case, and was selected for the final test configuration.

Up Link		Down Link	
Modulation	Coding rate	Modulation	Coding rate
BPSK	1/2	BPSK	1/2
QPSK	1/2	QPSK	1/2
	3/4		3/4
16QAM	1/2	16QAM	1/2
	3/4		3/4
		64QAM	1/2
			2/3
			3/4

5. There is one Wi-Fi module provided to this EUT, please refer to the following table:

Brand	Model
ZyXEL	WM5204Z

6. The EUT embedded a firmware for testing that needs to control from Notebook computer to let EUT with different DL/UL ration.

7. The device has different DL/UL ration in normal operation. It was tested with (DL:UL= 29:18) duty cycle mode for 5MHz and 10MHz, which is the worse mode, and controlled by software. (The detail duty cycle refer to appendix A).

8. The above EUT information was declared by manufacturer and for more detailed feature descriptions, please refers to the manufacturer's specifications or User's Manual.



A D T

3.2 DESCRIPTION OF TEST MODES

Three channels have been tested and presented.

CHANNEL BANDWIDTH:

Low channel (L): 2505MHz.

Middle channel (M): 2590MHz.

High channel (H): 2685MHz.



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO							DESCRIPTION
	OP	FS	EB	CE	CSE	RE<1G	RE ³ 1G	
MODE 1	√	√	√	√	√	√	√	Channel Bandwidth: 5MHz
MODE 2	√	√	√	√	√	√	√	Channel Bandwidth: 10MHz
MODE 3	-	-	-	-	-	√	√	Co-location mode

Where **OP**: Output power **FS**: Frequency stability
EB: Emission bandwidth **CE**: Channel edge
CSE: Conducted spurious emissions **RE<1G**: Radiated emission below 1GHz
RE³1G: Radiated emission above 1GHz

OUTPUT POWER MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L, M, H	OFDMA	QPSK-1/2
MODE 2	L, M, H	OFDMA	QPSK-1/2

FREQUENCY STABILITY MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
M	OFDMA	Unmodulation

EMISSION BANDWIDTH MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L, M, H	OFDMA	QPSK-1/2
MODE 2	L, M, H	OFDMA	QPSK-1/2

CHANNEL EDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L, M, H	OFDMA	QPSK-1/2
MODE 2	L, M, H	OFDMA	QPSK-1/2

CONDUCTED SPURIOUS EMISSIONS MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L, M, H	OFDMA	QPSK-1/2
MODE 2	L, M, H	OFDMA	QPSK-1/2

RADIATED EMISSION MEASUREMENT (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L	OFDMA	QPSK-1/2
MODE 2	M	OFDMA	QPSK-1/2
MODE 3	WiMAX: L + Wi-Fi: 11g CH 6	WiMAX: OFDMA + Wi-Fi: OFDM	WiMAX: QPSK-1/2 + Wi-Fi: BPSK

RADIATED EMISSION MEASUREMENT (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

TESTED MODE	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE
MODE 1	L, M, H	OFDMA	QPSK-1/2
MODE 2	L, M, H	OFDMA	QPSK-1/2
MODE 3	WiMAX: L + Wi-Fi: 11g CH 6	WiMAX: OFDMA + Wi-Fi: OFDM	WiMAX: QPSK-1/2 + Wi-Fi: BPSK

3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC 47 CFR Part 2

FCC 47 CFR Part 27, Subpart C & M

ANSI/TIA/EIA-603-C-2004

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.



A D T

3.4 DESCRIPTION OF SUPPORT UNITS


The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK COMPUTER	ASUS	M2400N	00043-499-425-357	NA
2	HUB	ZyXEL	ES-116P	S060H02000215	FCC DoC
3	ESG Vector signal generator	Agilent	E4438C	MY47271330 506602 UNJ	NA
4	TELEPHONE	WONDER	WD-303	6C17BA02173	NA
5	TELEPHONE	WONDER	WD-303	6C17BA03983	NA

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	UTP cable (10m)
2	UTP cable (10m)
3	NA
4	TEL line (3m)
5	TEL line (3m)

NOTE: All power cords of the above support units are non shielded (1.8m).

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

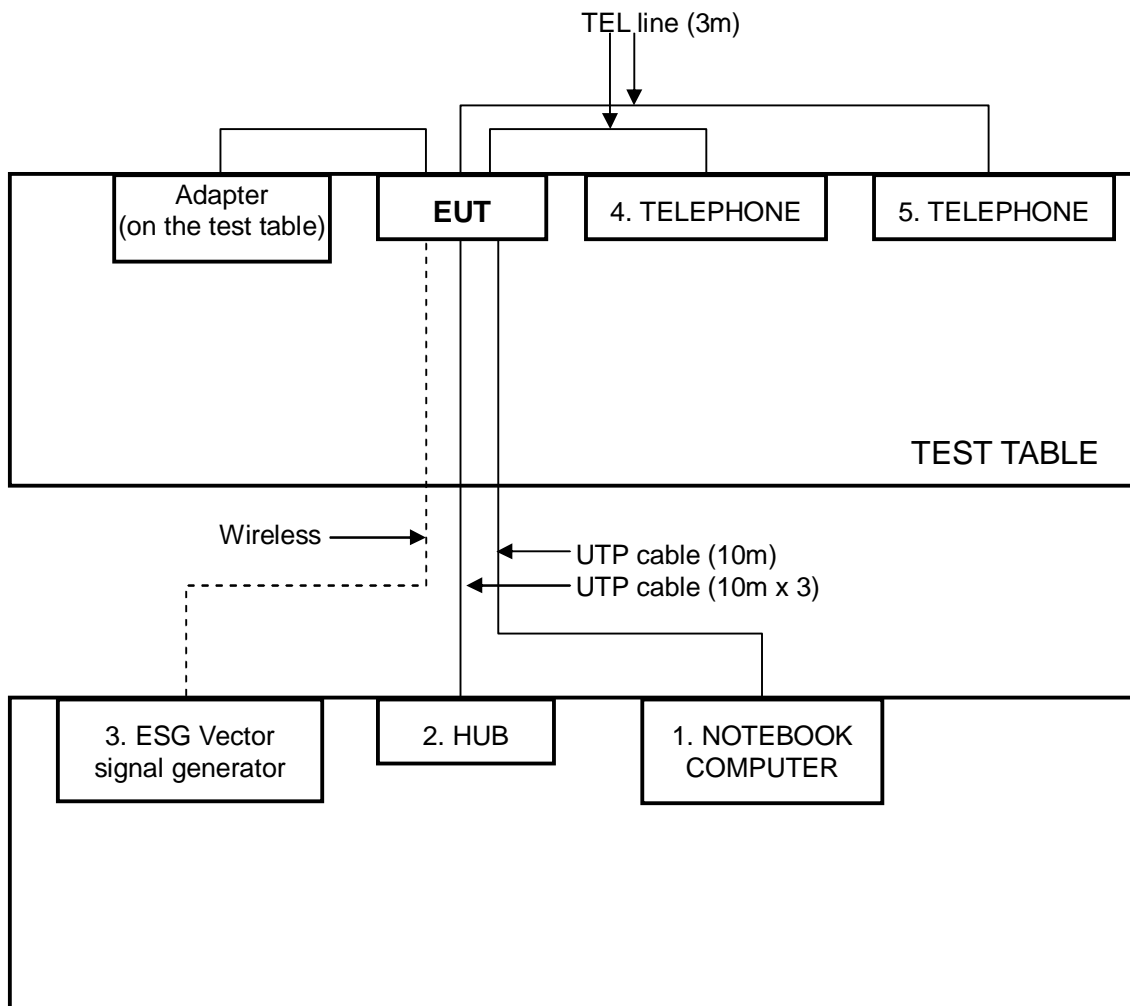

4 TEST TYPES AND RESULTS

4.1 OUTPUT POWER MEASUREMENT

4.1.1 LIMITS OF OUTPUT POWER MEASUREMENT

The radiated peak output power shall be according to the specific rule Part 27.50(h)(2) that “Other User stations are limited to 2 watts and 27.50(i) specific that “Peak transmit power must be measure over any interval of continuous transmission using instrumentation calibration in terms of rms-equivalent voltage.”

4.1.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
Anritsu Power meter	ML2495A	0824006	April 24, 2011
JFW 10dB attenuation	50HF-010-SMA	N/A	NA


NOTE:

The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.1.3 TEST PROCEDURES

The transmitter output was connected to power meter through an attenuator. The test result was measured and recorded.

4.1.4 TEST SETUP

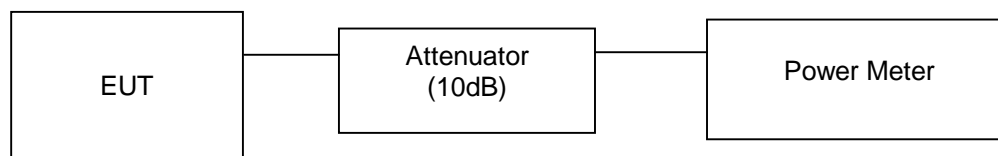

4.1.5 EUT OPERATING CONDITIONS

1. Prepared other computer system support unit 1 (Notebook Computer) to act as communication partners and placed them outside of testing area.
2. The communication partners run test program “Beceem Diagnostic Control Pannel 3.3.0” to enable EUT under transmission/receiving condition continuously at specific channel frequency.
3. The support unit 1 (Notebook computer) acts as a server system to communicate with support unit 3 (ESG Vector signal generator) which is placed at outside of testing areas.
4. The support units 5~6 (Telephone) link EUT via RJ11 cables.



A D T

4.1.6 TEST RESULTS

CHANNEL BANDWIDTH: 5MHz

INPUT POWER	120Vac, 60Hz		
ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa	TESTED BY	Wen Yu

CONDUCTED POWER			
CHANNEL	FREQUENCY (MHz)	POWER OUTPUT(mW)	POWER OUTPUT(dBm)
Low	2505	489.8	26.9
Middle	2590	457.1	26.6
High	2685	436.5	26.4

CHANNEL BANDWIDTH: 10MHz

INPUT POWER	120Vac, 60Hz		
ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa	TESTED BY	Wen Yu

CONDUCTED POWER			
CHANNEL	FREQUENCY (MHz)	POWER OUTPUT(mW)	POWER OUTPUT(dBm)
Low	2505	426.6	26.3
Middle	2590	407.4	26.1
High	2685	467.7	26.7



4.2 FREQUENCY STABILITY MEASUREMENT

4.2.1 LIMITS OF FREQUENCY STABILITY MEASUREMENT

According to the FCC part 2.1055 shall be tested the frequency stability. The rule is defined that” The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.” The test extreme voltage is according to the 2.1055(d)(1) Vary primary supply voltage from 85 to 115 percent of the nominal value for other than hand carried battery equipment and the extreme temperature rule is comply with specification of EUT -30°C ~ 50°C .

4.2.2 TEST INSTRUMENTS


DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100037	Aug. 03, 2009	Aug. 02, 2010
OVEN	MHU-225AU	911033	Dec. 17, 2009	Dec. 16, 2010
HUBER+SUHNER	SUCOFLEX104	222684/4	Aug. 15, 2009	Aug. 14, 2010
AC POWER SOURCE	6205	1140503	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months. And the calibrations are traceable to NML/ROC and NIST/USA.

4.2.3 TEST PROCEDURE

- a. Power must be removed when changing from one temperature to another or one voltage to another voltage. Power warm up is at least 15 min and power applied should perform before recording frequency error.
- b. EUT is connected the external power supply to control the AC input power. The various Volts from the minimum 102 Volts to 138 Volts. Each step shall be record the frequency error rate.
- c. The temperature range step is 10 degrees in this test items. All temperature levels shall be hold the $\pm 0.5^{\circ}\text{C}$ during the measurement testing.
- d. The each temperature step shall be at least 0.5 hours, consider the EUT could be test under the stability condition.

4.2.4 TEST SETUP

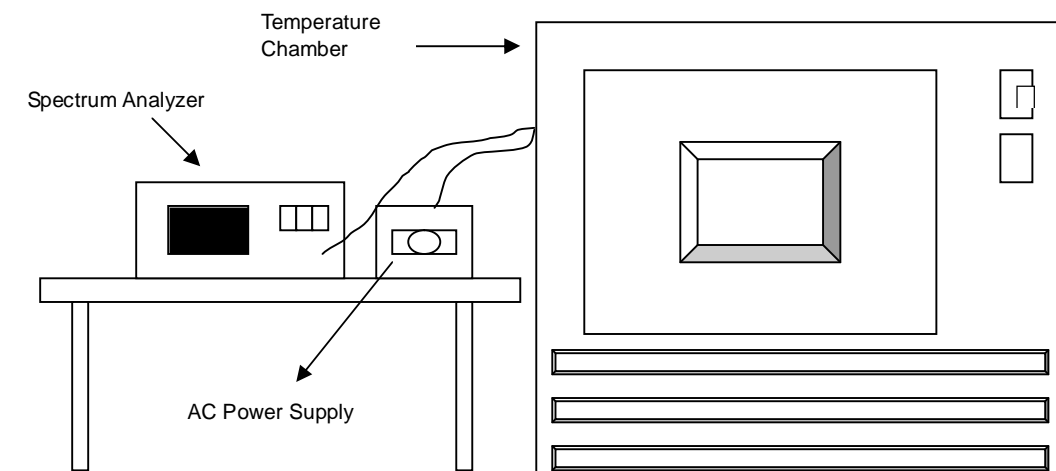



4.2.5 TEST RESULTS

MODE	Low channel (2505MHz)	INPUT POWER	120Vac, 60Hz
ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa	TESTED BY	Rex Huang

AFC FREQUENCY ERROR VS. VOLTAGE						
VOLTAGE (Volts)	2Minutes		5Minutes		10Minutes	
	FREQUENCY (MHz)	PPM (%)	FREQUENCY (MHz)	PPM (%)	FREQUENCY (MHz)	PPM (%)
138	2505.0011	0.000044	2505.0014	0.000056	2505.0015	0.000060
120	2505.0012	0.000048	2505.0017	0.000068	2505.0016	0.000064
102	2505.0012	0.000048	2505.0013	0.000052	2505.0011	0.000044

AFC FREQUENCY ERROR VS. TEMP						
TEMP (°C)	2Minutes		5Minutes		10Minutes	
	FREQUENCY (MHz)	PPM (%)	FREQUENCY (MHz)	PPM (%)	FREQUENCY (MHz)	PPM (%)
50	2505.0005	0.000020	2505.0003	0.000012	2505.0004	0.000016
40	2505.0008	0.000032	2505.0009	0.000036	2505.0005	0.000020
30	2505.0009	0.000036	2505.0005	0.000020	2505.0010	0.000040
20	2505.0012	0.000048	2505.0017	0.000068	2505.0016	0.000064
10	2505.001	0.000040	2505.0002	0.000008	2505.0004	0.000016
0	2505.0008	0.000032	2505.0007	0.000028	2505.0004	0.000016
-10	2505.0002	0.000008	2505.0004	0.000016	2505.0006	0.000024
-20	2504.9998	0.000008	2504.9997	0.000012	2504.9995	0.000020
-30	2505.0003	0.000012	2505.0050	0.000200	2505.0001	0.000004



A D T

4.3 EMISSION BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF EMISSION BANDWIDTH MEASUREMENT


According to FCC 27.53(m)(6) specified that emission bandwidth is defined as the width of the signal between two points, one below the carrier center frequency and one above the carrier center frequency, outside of which all emissions are attenuated at least 26dB below the transmitter power.

4.3.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY46180622	Apr. 23 , 2010	Apr. 22 , 2011
HUBER+SUHNER	SUCOFLEX104	222684/4	Aug. 15, 2009	Aug. 14, 2010
JFW 10dB attenuation	50HF-010-SMA	N/A	N/A	N/A

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.3.3 TEST SETUP

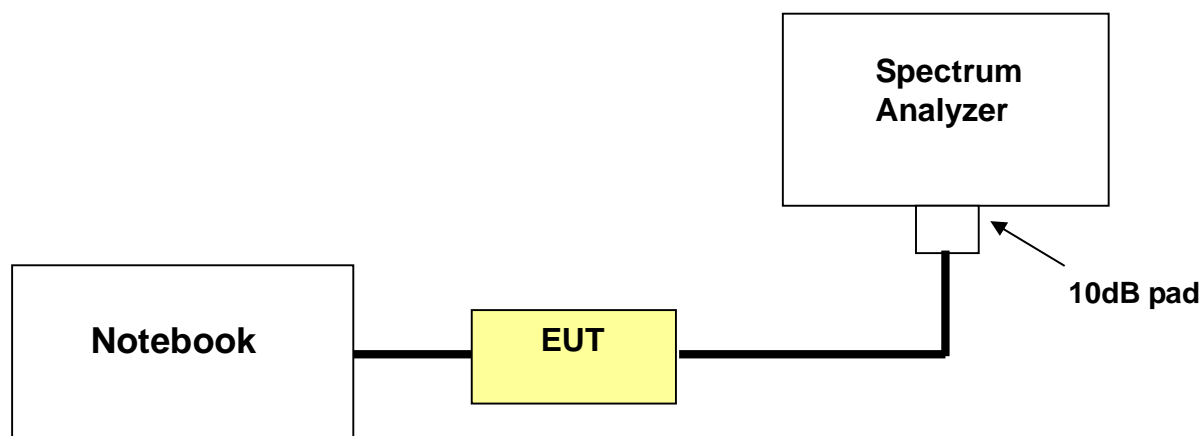

4.3.4 TEST PROCEDURES

- a. The Notebook controlled EUT to export rated output power under transmission mode and specific channel frequency. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 300kHz VBW. The 26dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 26dB.




A D T

4.3.5 TEST RESULTS

CHANNEL BANDWIDTH: 5MHz

FREQUENCY (MHz)	-26 dBc BANDWIDTH (MHz)
2505	5.07
2600	5.06
2685	5.07


LOW CHANNEL

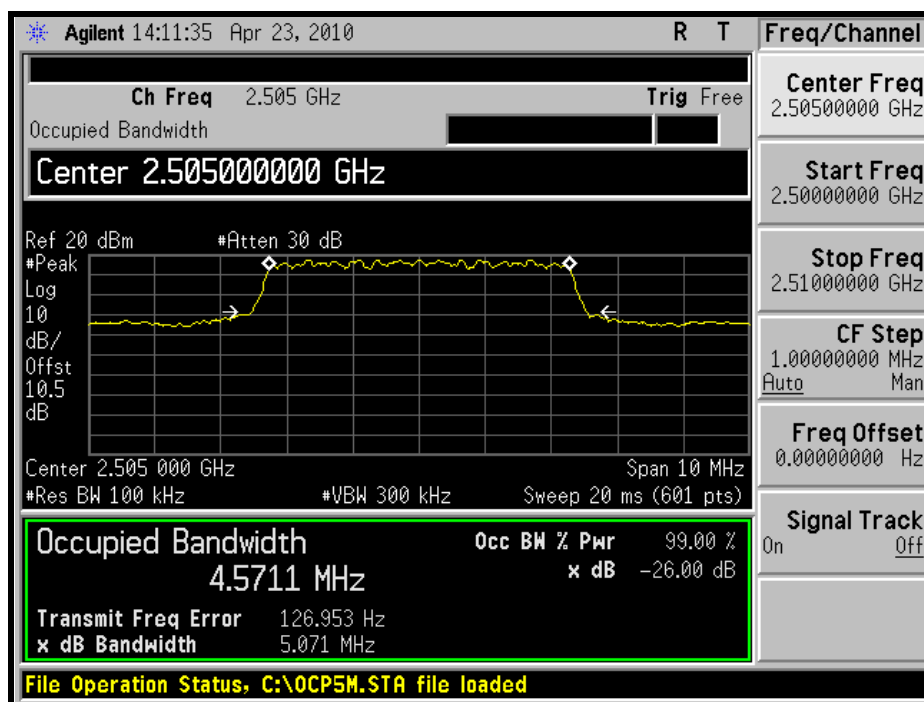




A D T

MIDDLE CHANNEL

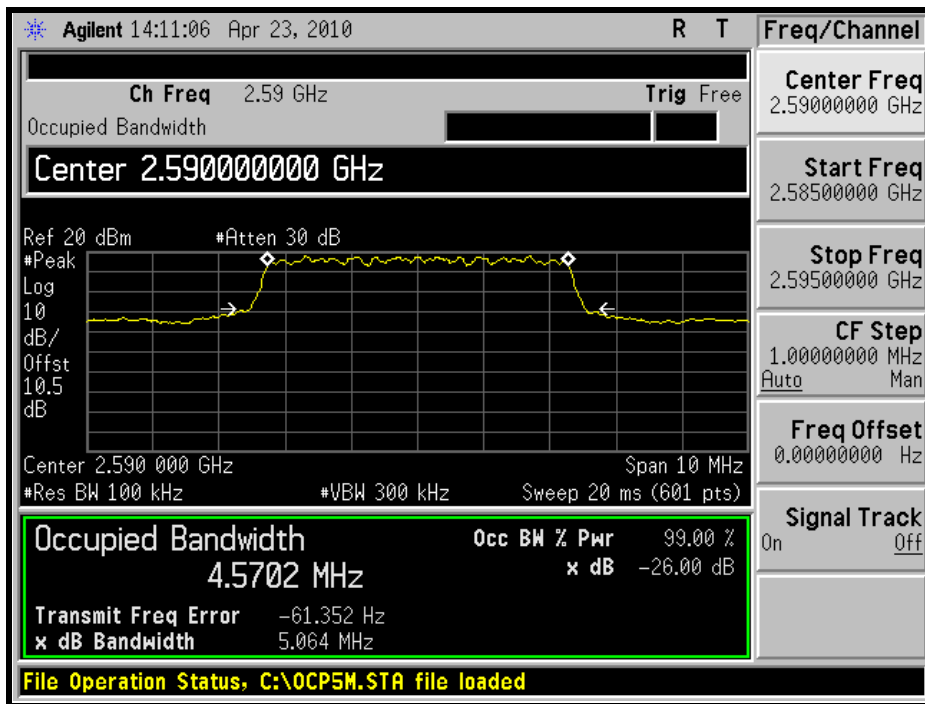

HIGH CHANNEL

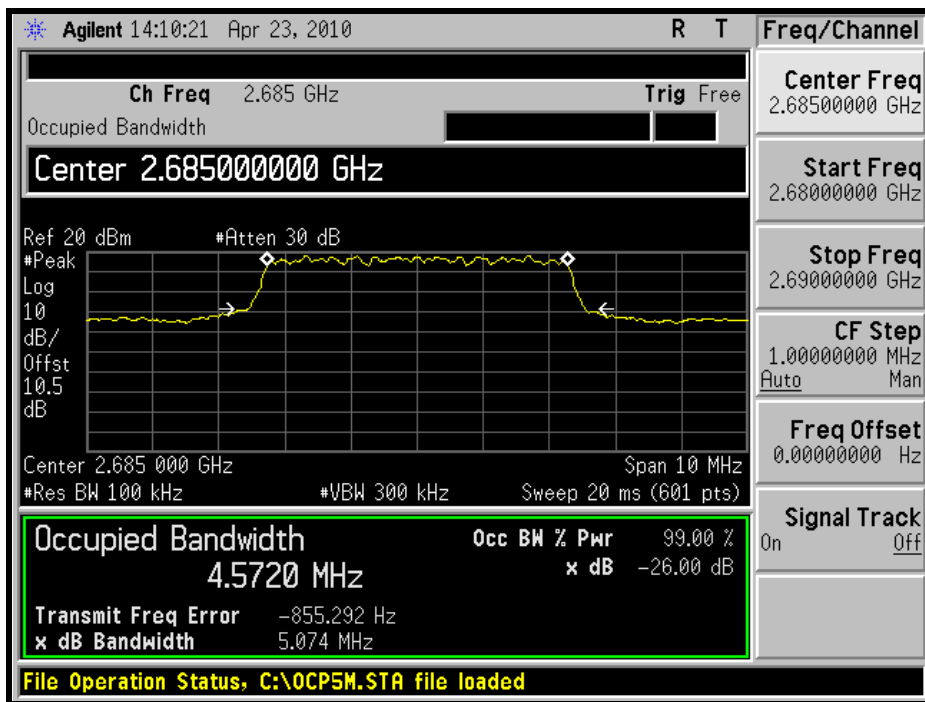




A D T

CHANNEL BANDWIDTH: 10MHz

FREQUENCY (MHz)	-26 dBc BANDWIDTH (MHz)
2505	10.03
2600	10.01
2685	10.02


LOW CHANNEL

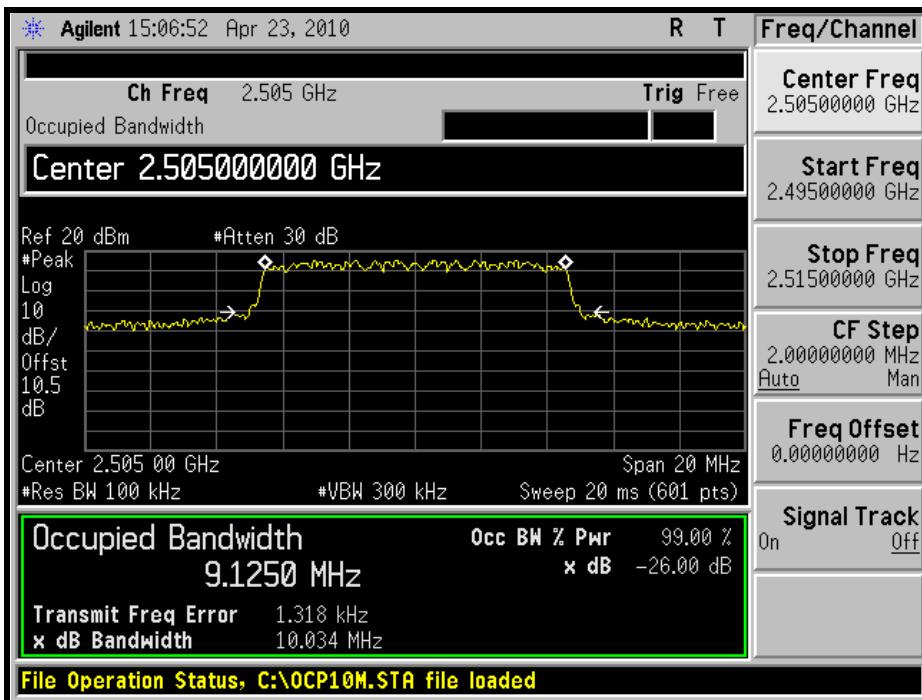




A D T

MIDDLE CHANNEL

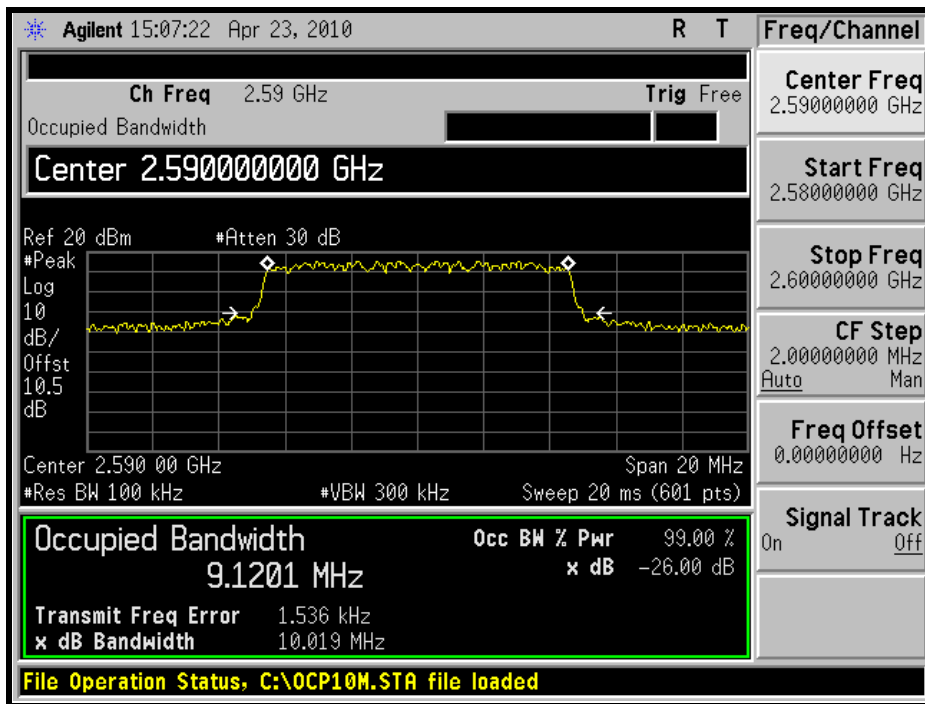

HIGH CHANNEL

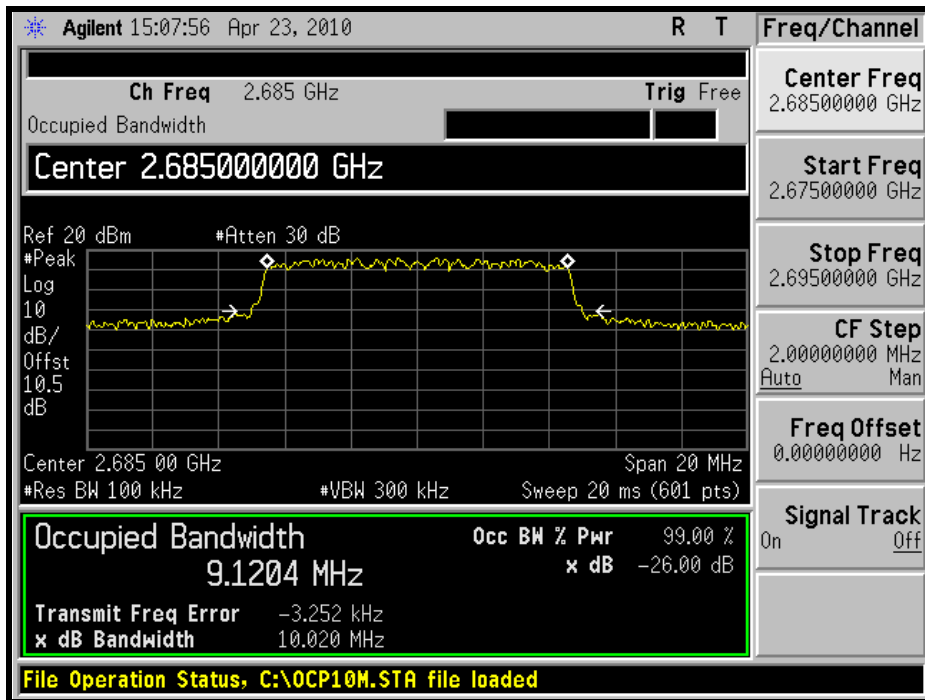



4.4 CHANNEL EDGE MEASUREMENT

4.4.1 LIMITS OF CHANNEL EDGE MEASUREMENT

According to FCC 27.53(m)(2) specified that power of any emission outside of the channel edge must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. In the 1MHz bands immediately outside and adjacent to the frequency block a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

4.4.2 TEST INSTRUMENTS

Description & Manufacturer	Model No.	Serial No.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY46180622	Apr. 24 , 2009	Apr. 23 , 2010
HUBER+SUHNER	SUCOFLEX104	222684/4	Aug. 15, 2009	Aug. 14, 2010
JFW 10dB attenuation	50HF-010-SMA	NA	NA	NA

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.4.3 TEST SETUP

Same as Item 4.3.3

4.4.4 TEST PROCEDURES

- a. The EUT was set up for the rated peak power. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. For Channel bandwidth: 5 MHz:
The center frequency of spectrum is the band edge frequency and span is 20MHz. RBW of the spectrum is 51kHz and VB W of the spectrum is 160kHz.
- c. For Channel bandwidth: 10 MHz:
The center frequency of spectrum is the band edge frequency and span is 30MHz. RB W of the spectrum is 110kHz and VB W of the spectrum is 330kHz.
- d. Record the max trace plot into the test report.

4.4.5 EUT OPERATING CONDITION

Same as item 4.1.5





A D T

4.4.6 TEST RESULTS

CHANNEL BANDWIDTH: 5MHz



LOW CHANNEL

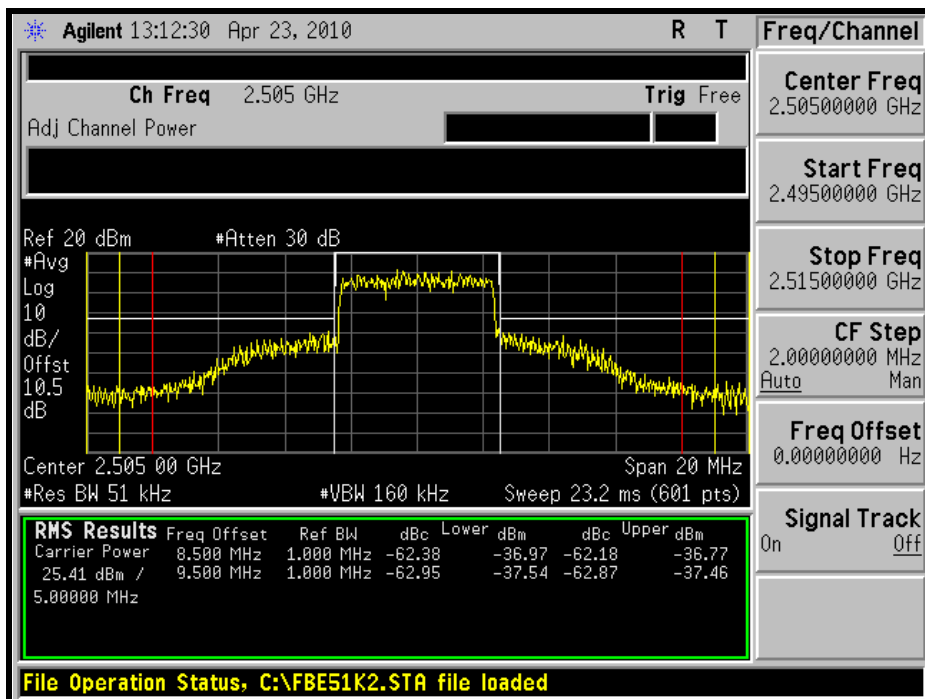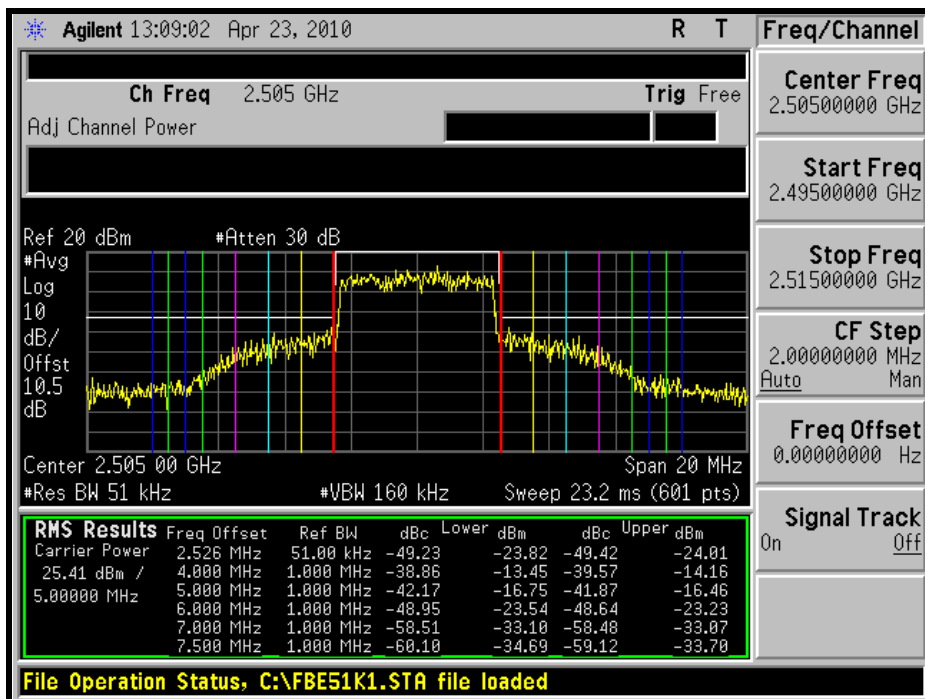



A D T



MIDDLE CHANNEL

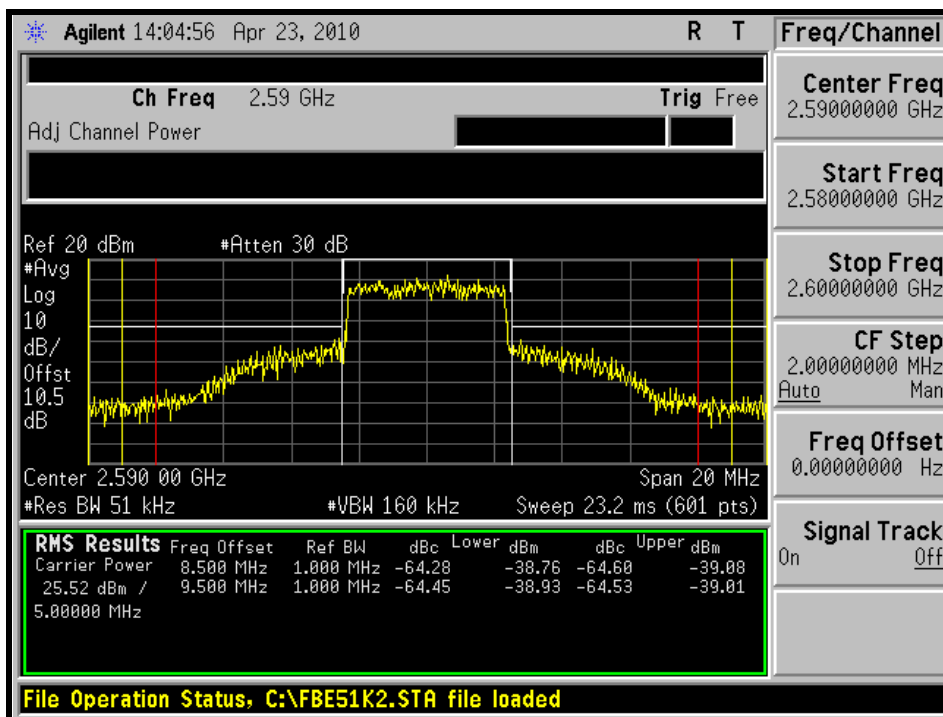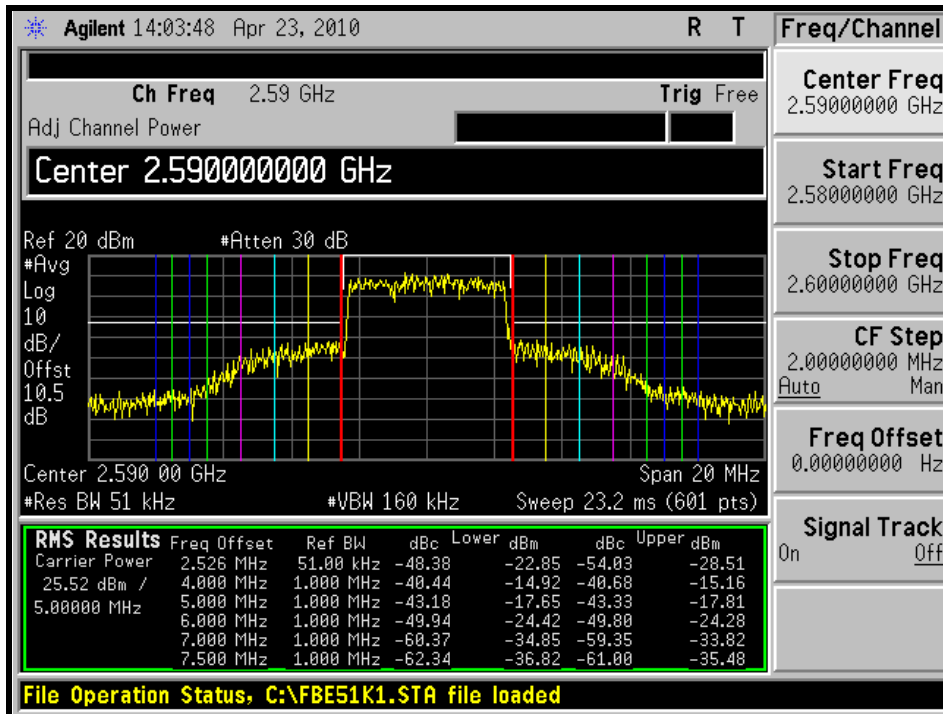



A D T

HIGH CHANNEL

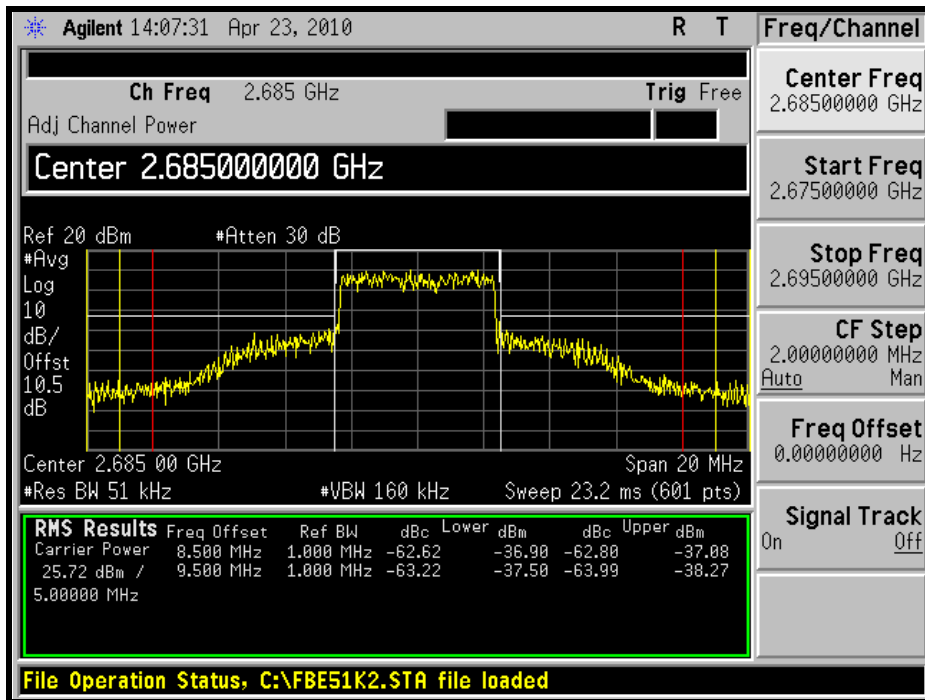
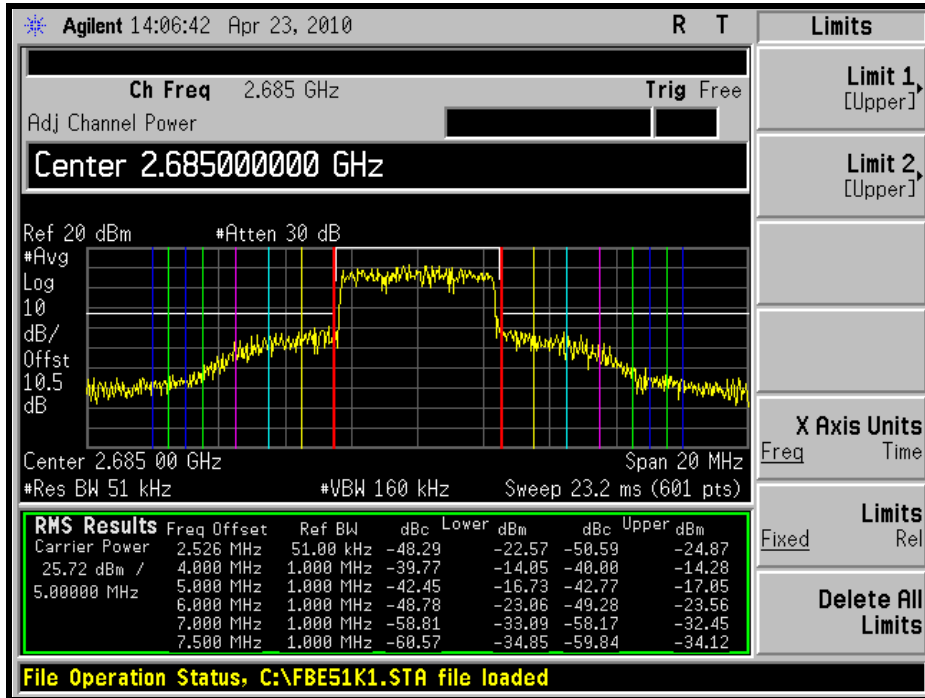




A D T

CHANNEL BANDWIDTH: 10MHz



LOW CHANNEL

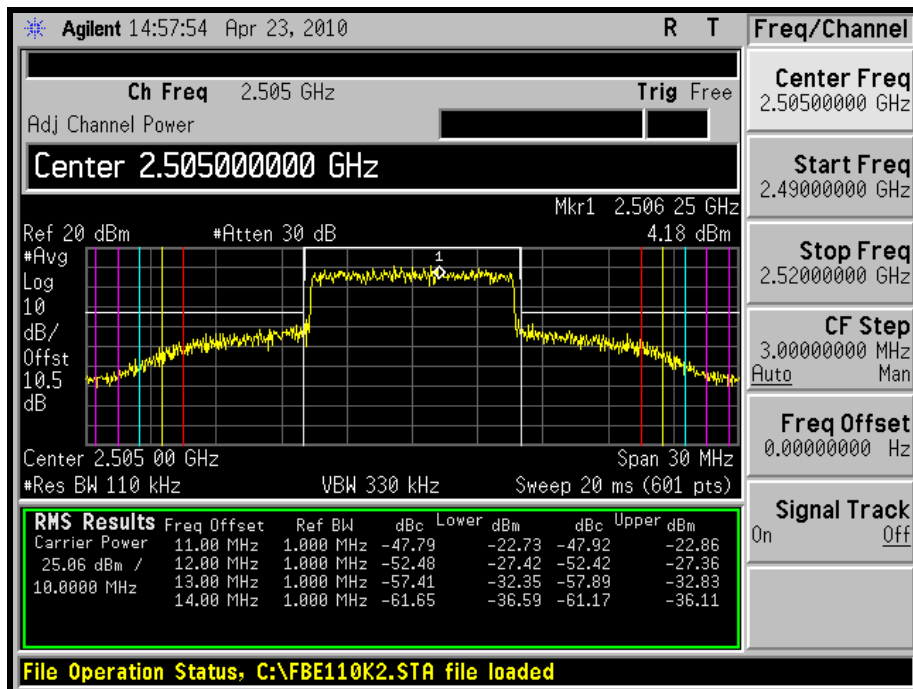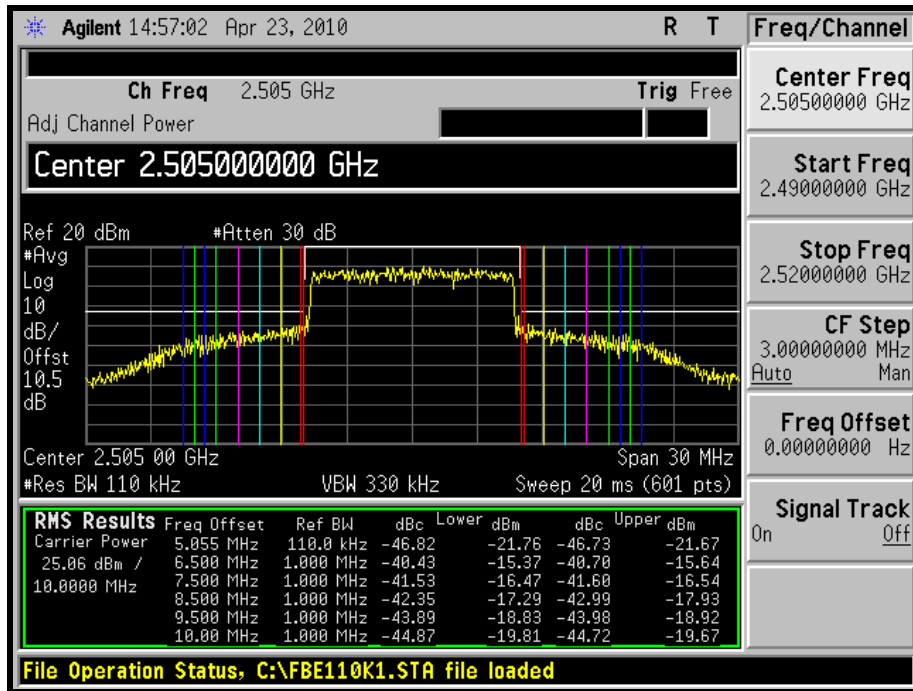



A D T



MIDDLE CHANNEL

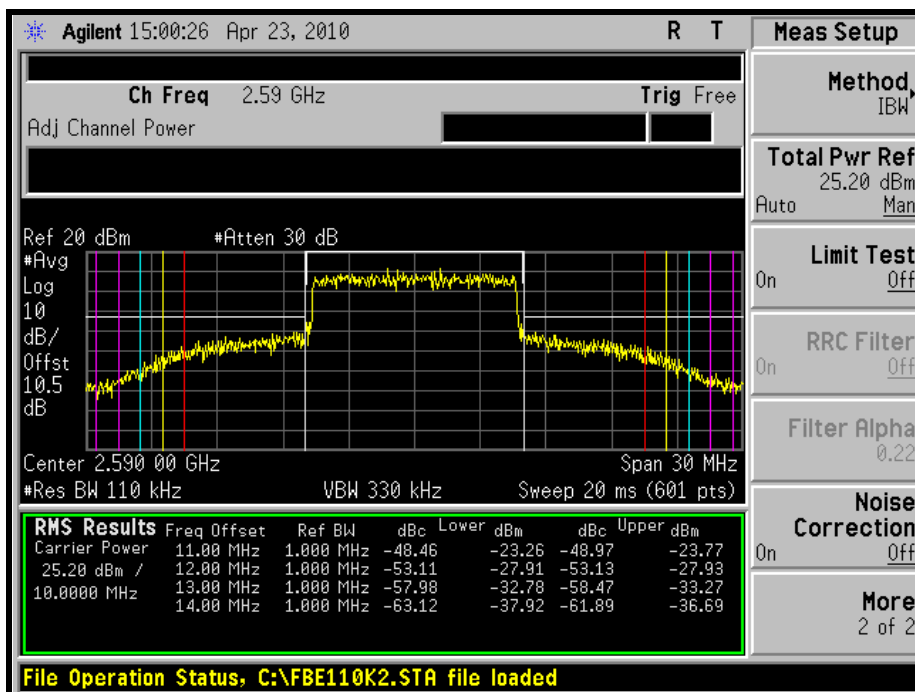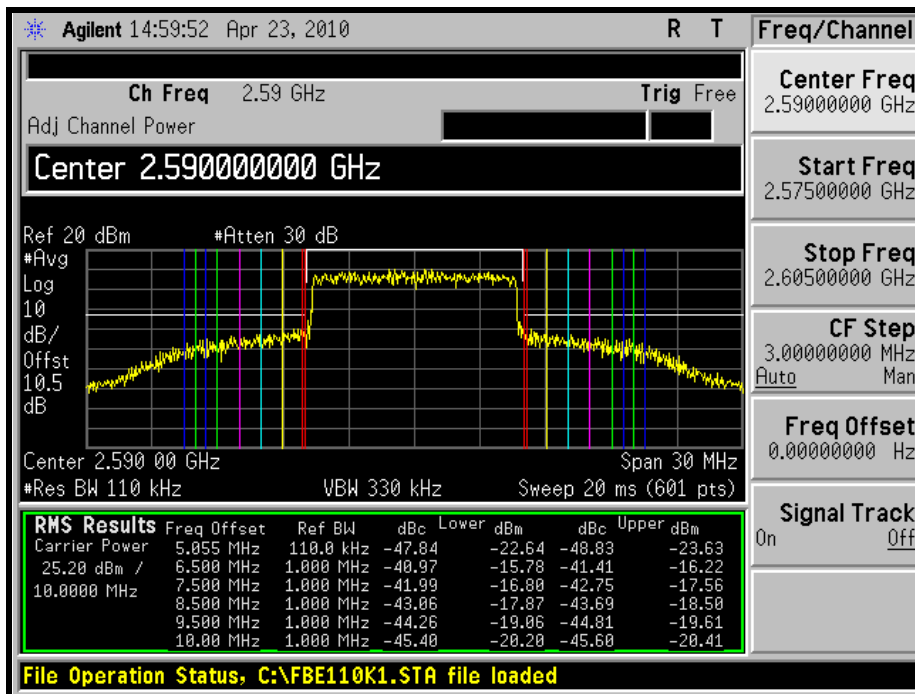



A D T

HIGH CHANNEL

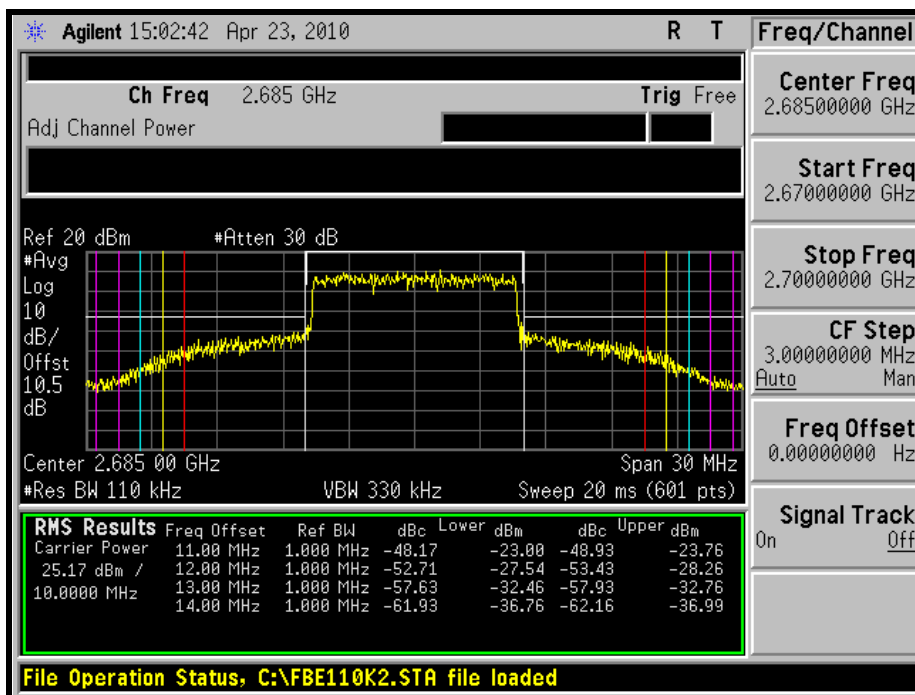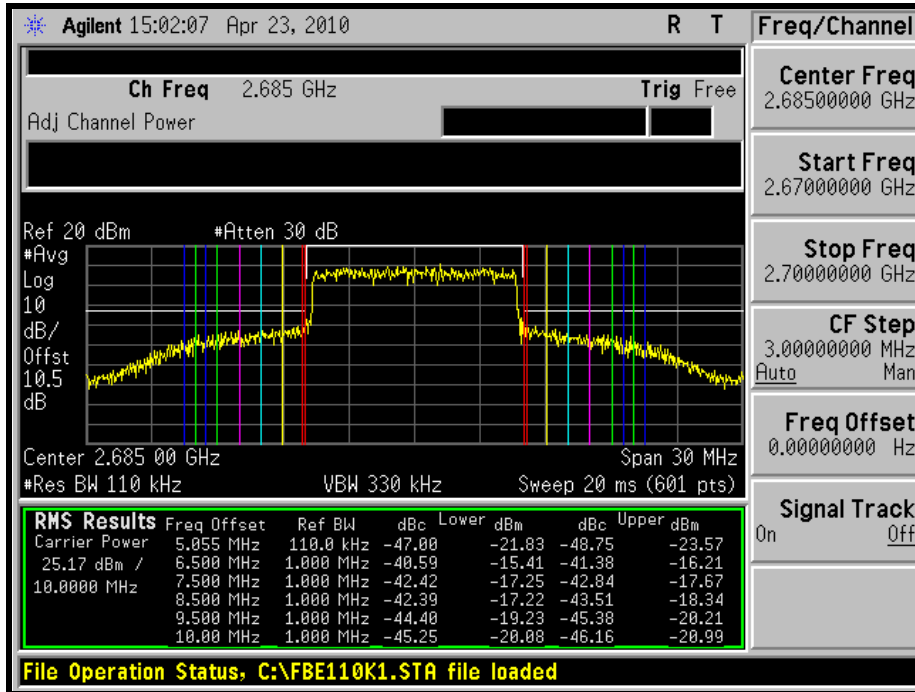



4.5 CONDUCTED SPURIOUS EMISSIONS

4.5.1 LIMITS OF CONDUCTED SPURIOUS EMISSIONS MEASUREMENT

In the FCC 27.53(m)(2), On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB from the channel edges.

4.5.2 TEST INSTRUMENTS


Description & Manufacturer	Model No.	Serial No.	CALIBRATED DATE	CALIBRATED UNTIL
Agilent Spectrum Analyzer	E4446A	MY46180622	Apr. 23, 2010	Apr. 22, 2011
HUBER+SUHNER	SUCOFLEX104	22238114	July 31, 2009	July 30, 2010
JFW 10dB attenuation	50HF-010-SMA	N/A	N/A	N/A
Wainwright Instruments High Pass Filter	WHK3.1/18G-10 SS	ZZ-010091	N/A	N/A

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

- a. The EUT was set up for the rated peak power. The power was measured with Spectrum Analyzer. All measurements were done at 3 channels: low, middle and high operational frequency range.
- b. When the spectrum scanned from 30MHz to 26.5GHz, it shall be connected to the 10dB pad attenuated the carried frequency. The spectrum set $RB = 1\text{MHz}$, $VB = 3\text{MHz}$.

4.5.4 TEST SETUP

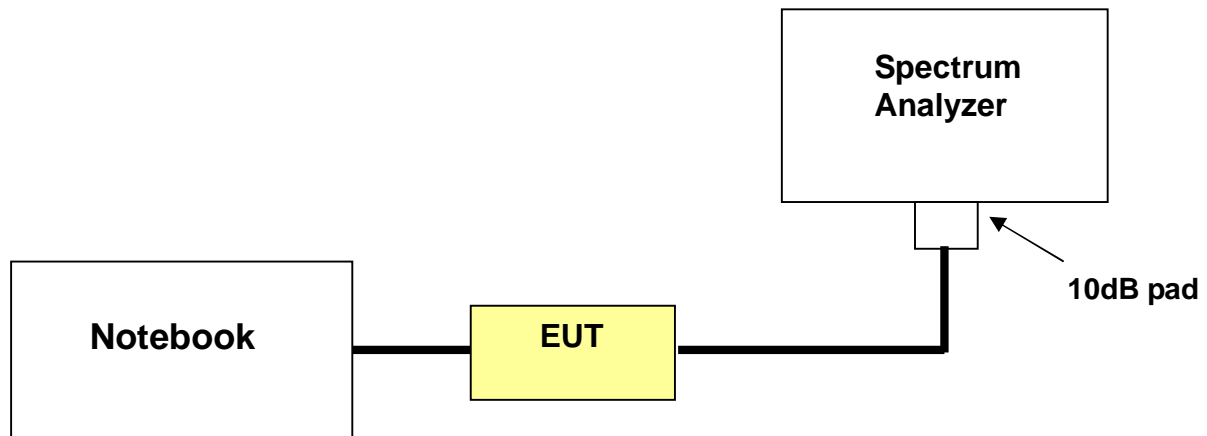

4.5.5 EUT OPERATING CONDITIONS

Same as item 4.1.5




A D T


4.5.6 TEST RESULTS

CHANNEL BANDWIDTH: 5MHz

LOW CHANNEL: 30MHz ~ 1GHz:

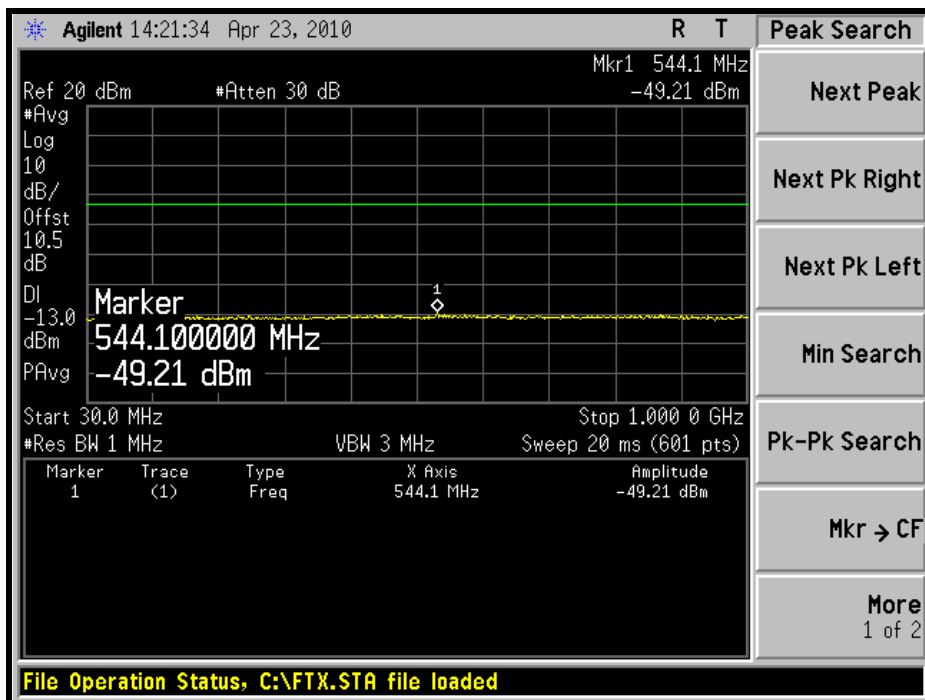


1GHz ~ 5GHz:

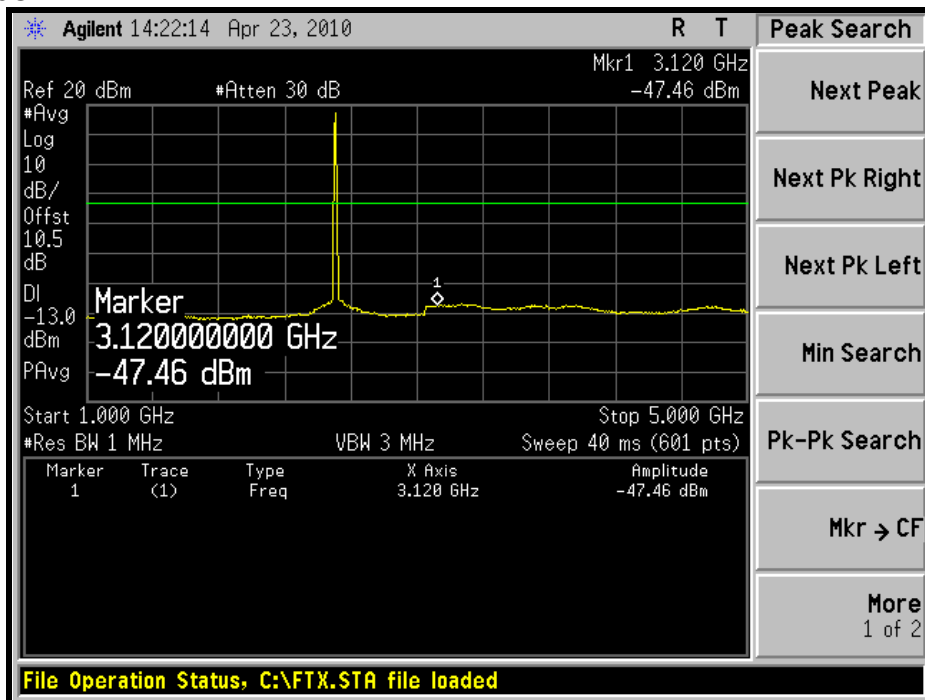




A D T

5GHz ~ 10GHz:

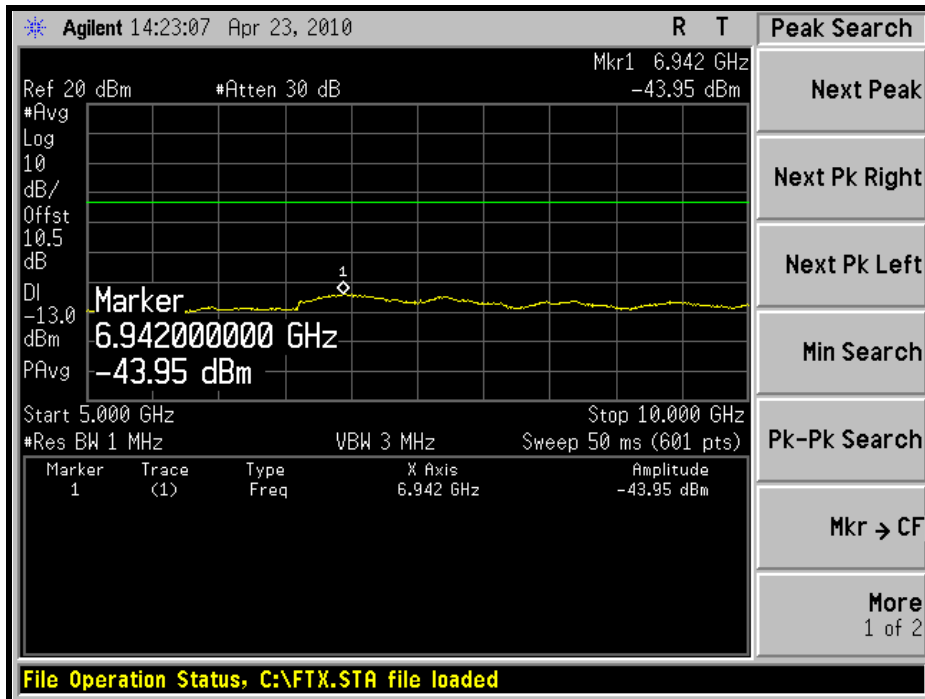


10GHz ~ 27GHz:

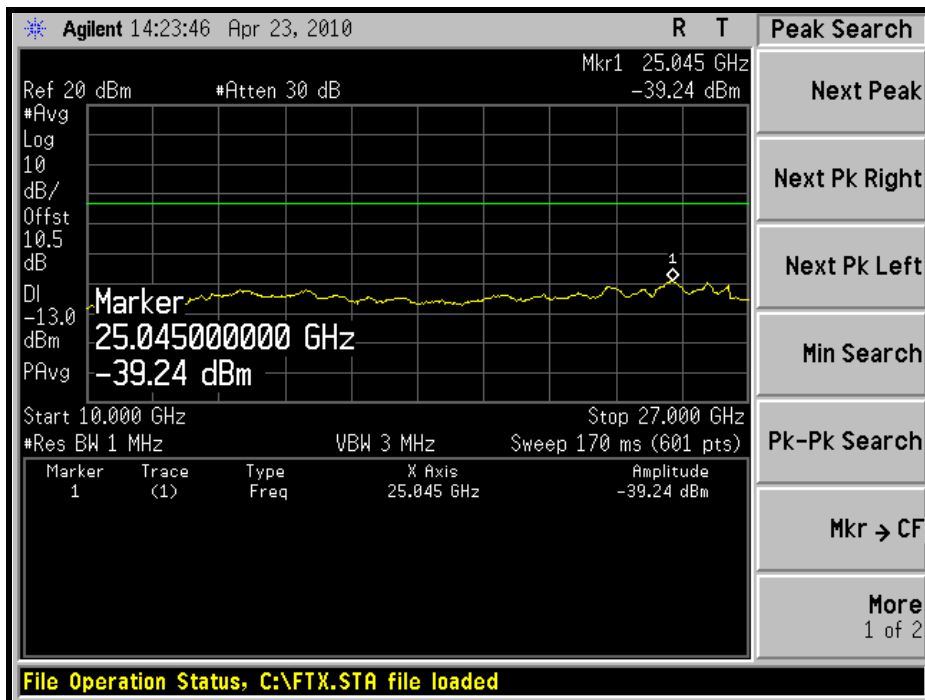




A D T

MIDDLE CHANNEL: 30MHz ~ 1GHz:

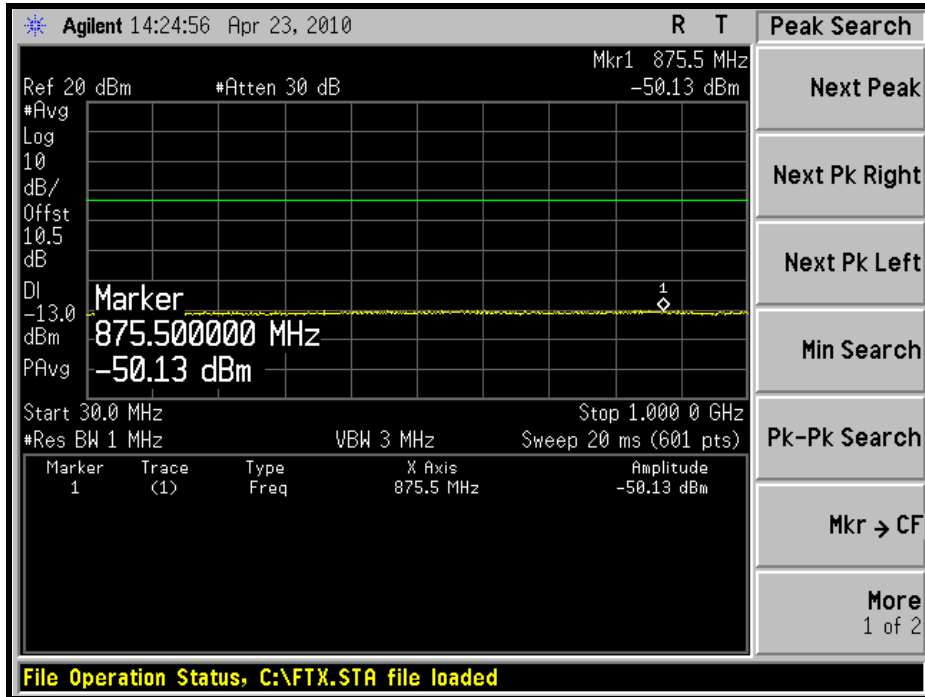


1GHz ~ 5GHz:

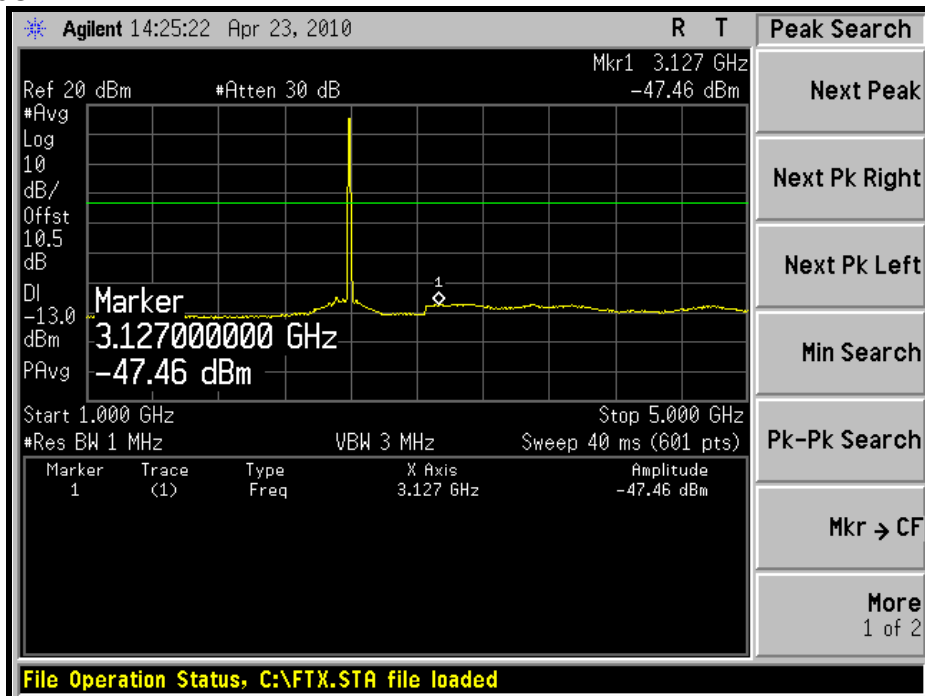




A D T

5GHz ~ 10GHz:

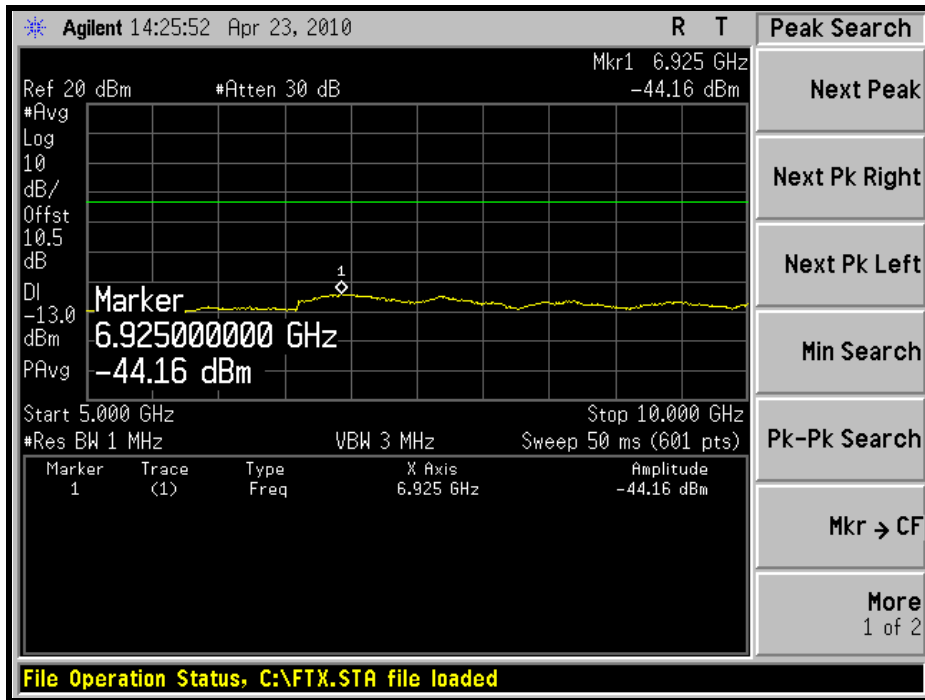


10GHz ~ 27GHz:

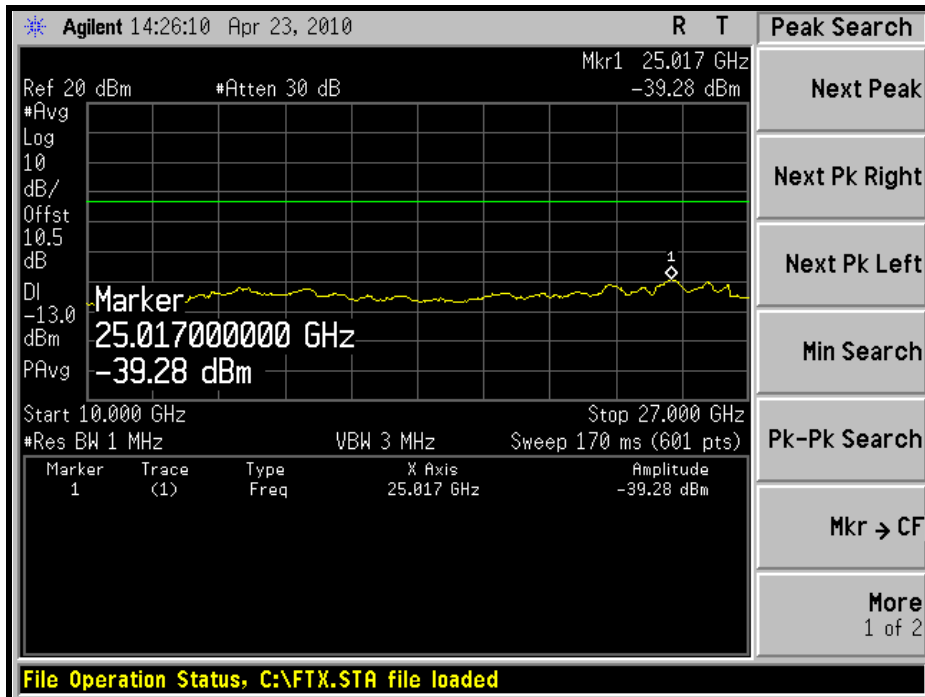




A D T

HIGH CHANNEL: 30MHz ~ 1GHz:

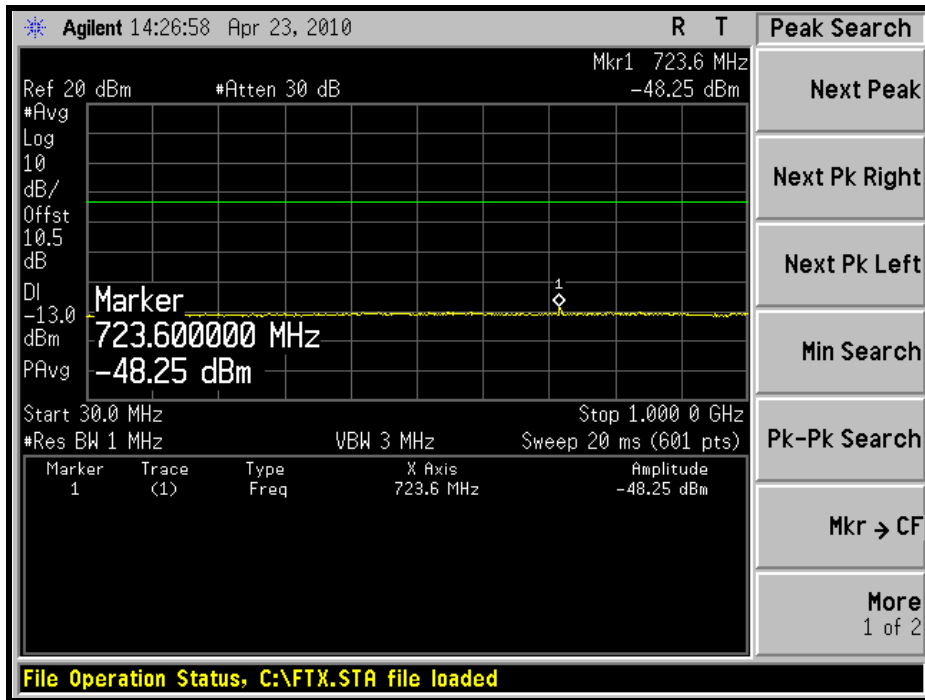


1GHz ~ 5GHz:

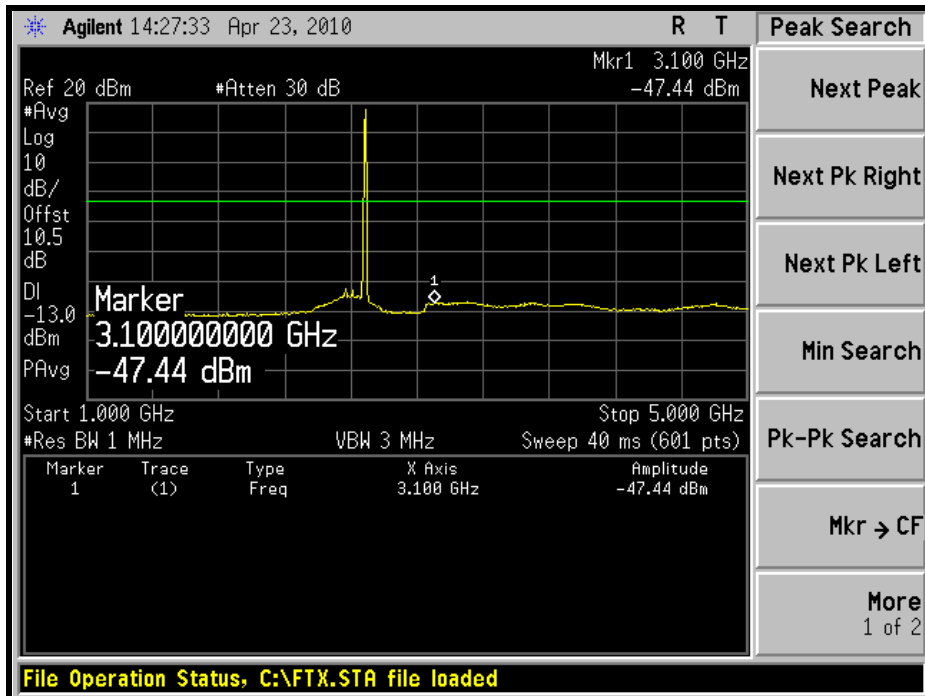




A D T

5GHz ~ 10GHz:

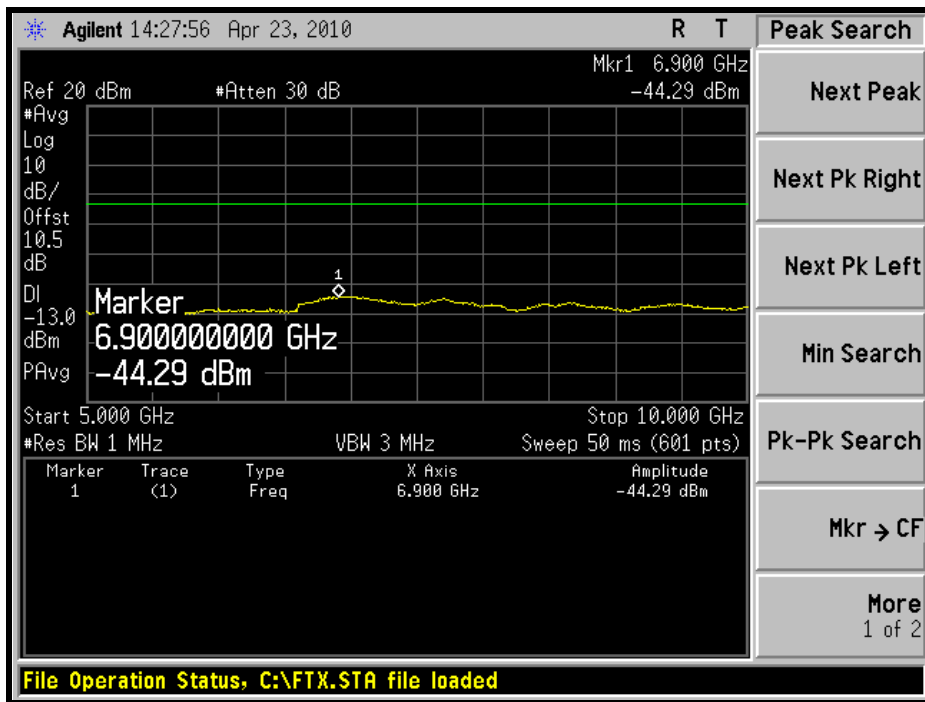

10GHz ~ 27GHz:

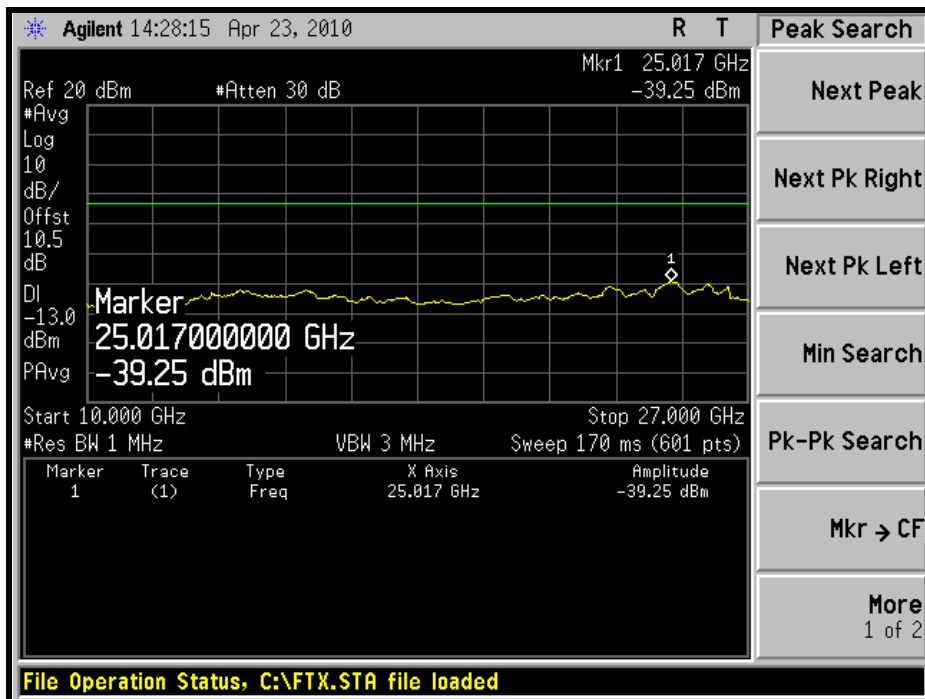





A D T

CHANNEL BANDWIDTH: 10MHz

LOW CHANNEL: 30MHz ~ 1GHz:

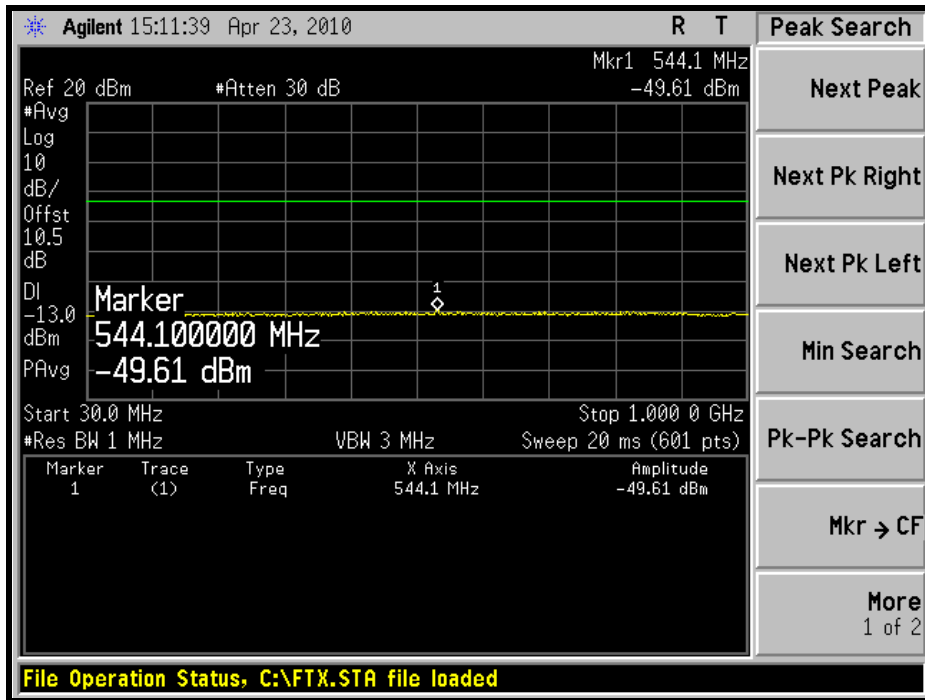


1GHz ~ 5GHz:

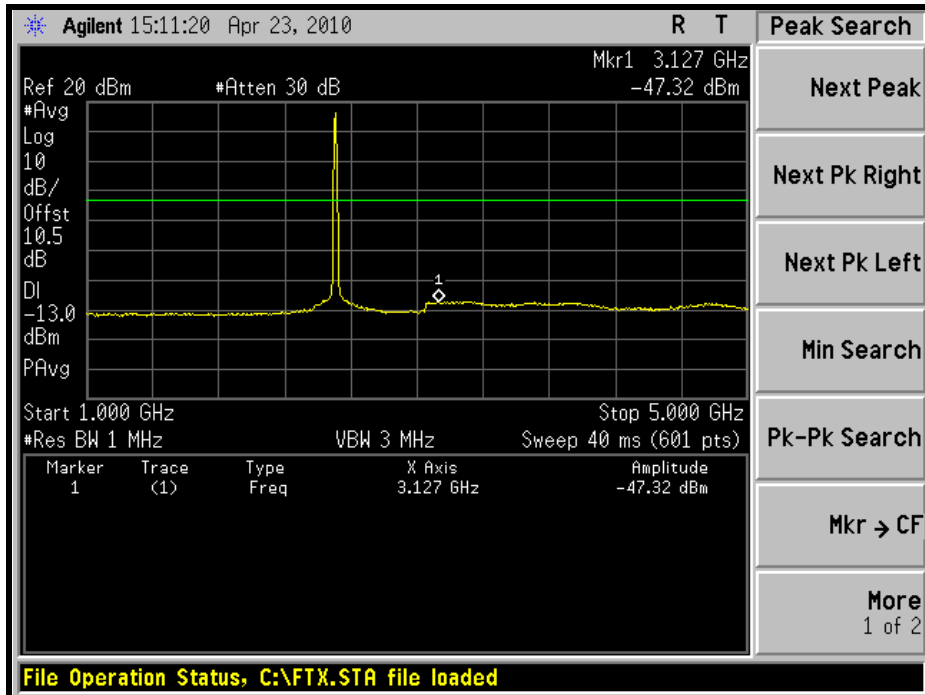




A D T

5GHz ~ 10GHz:

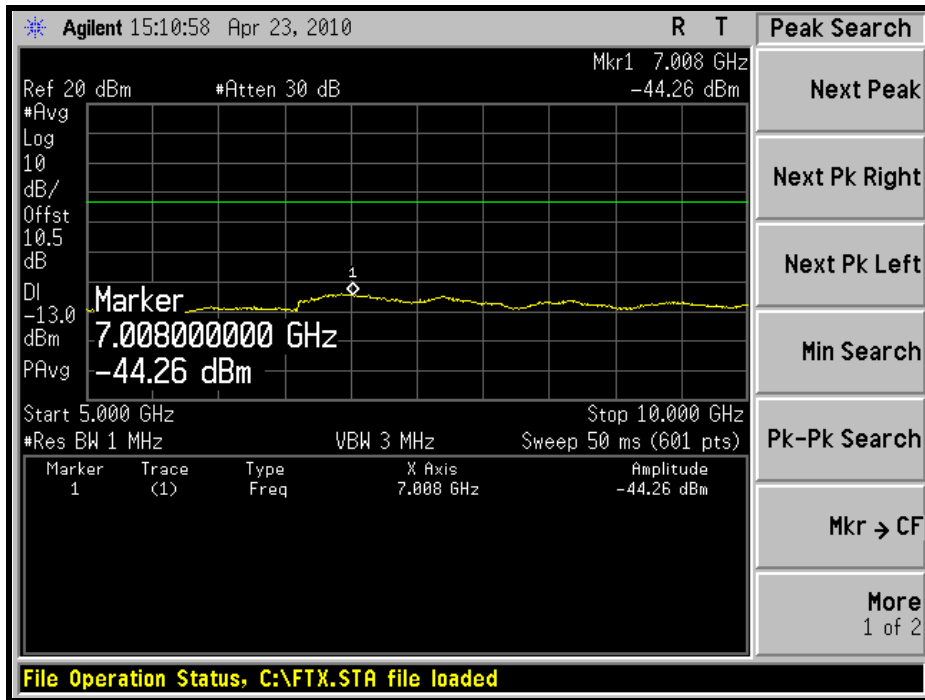


10GHz ~ 27GHz:

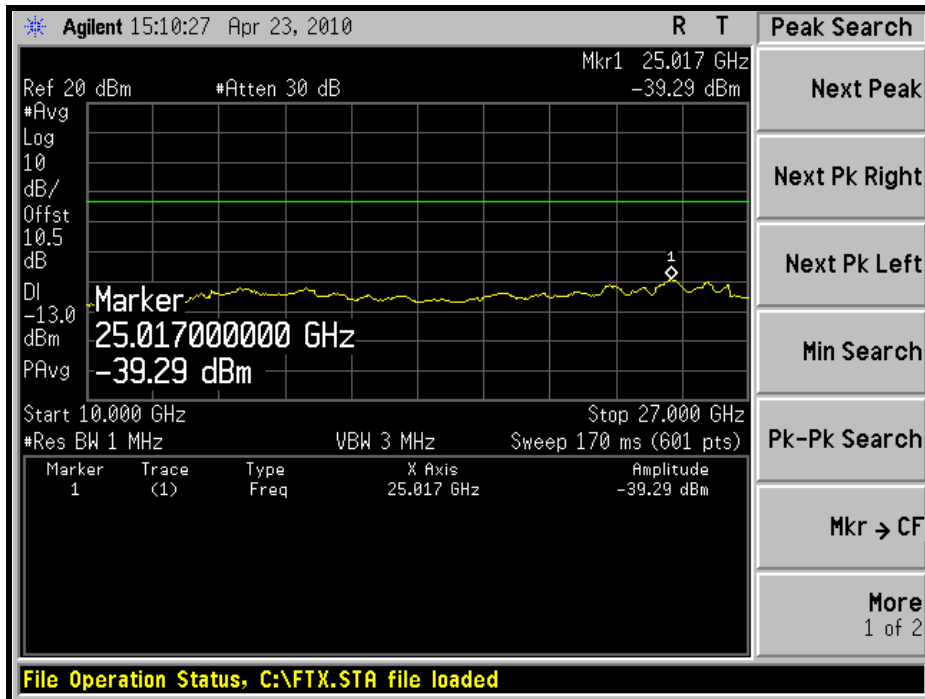




A D T

MIDDLE CHANNEL: 30MHz ~ 1GHz:

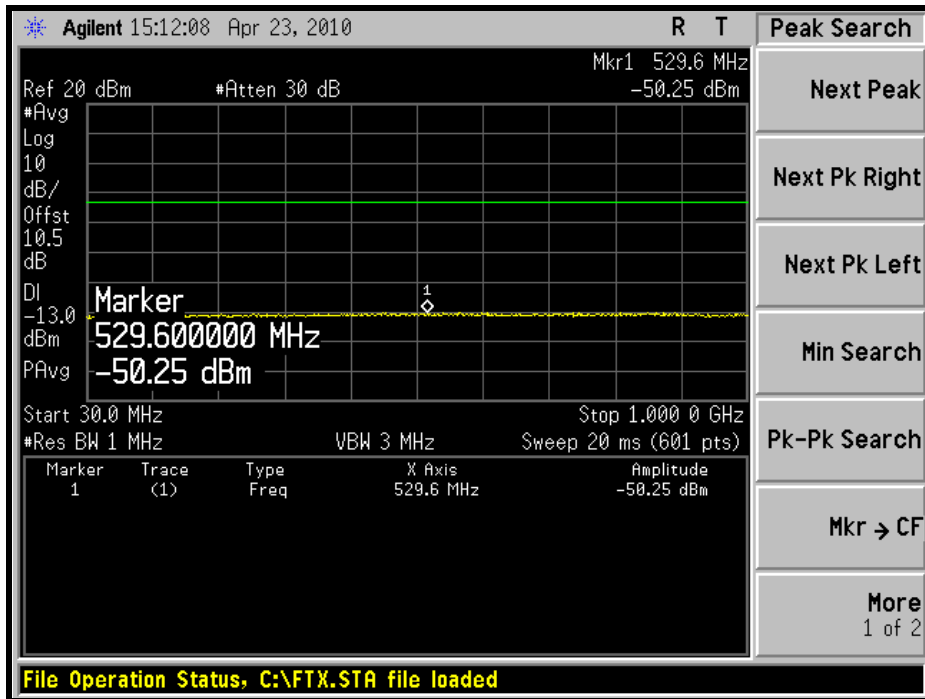


1GHz ~ 5GHz:

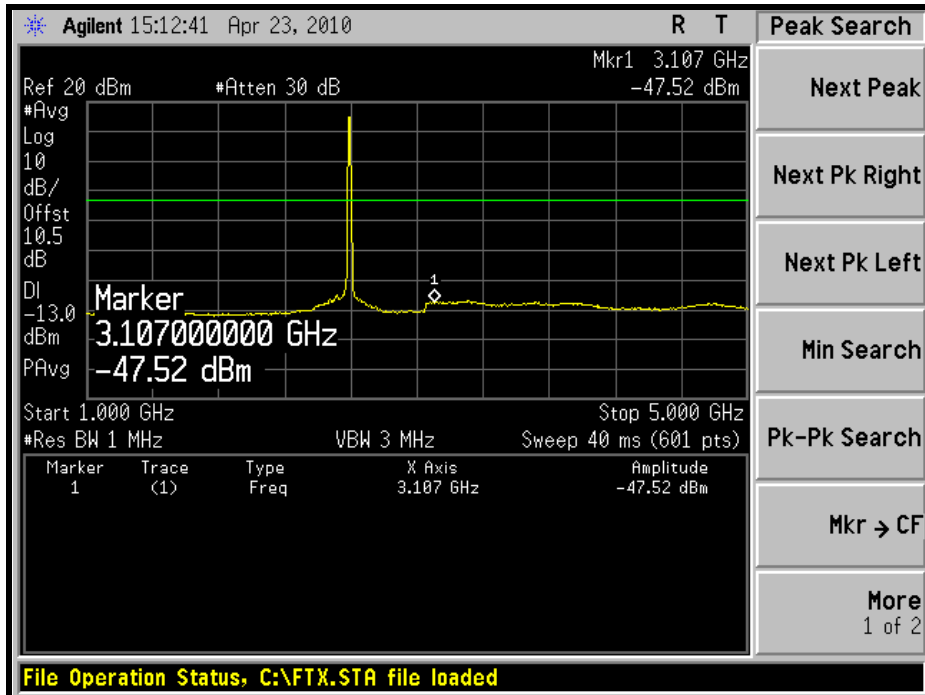




A D T

5GHz ~ 10GHz:

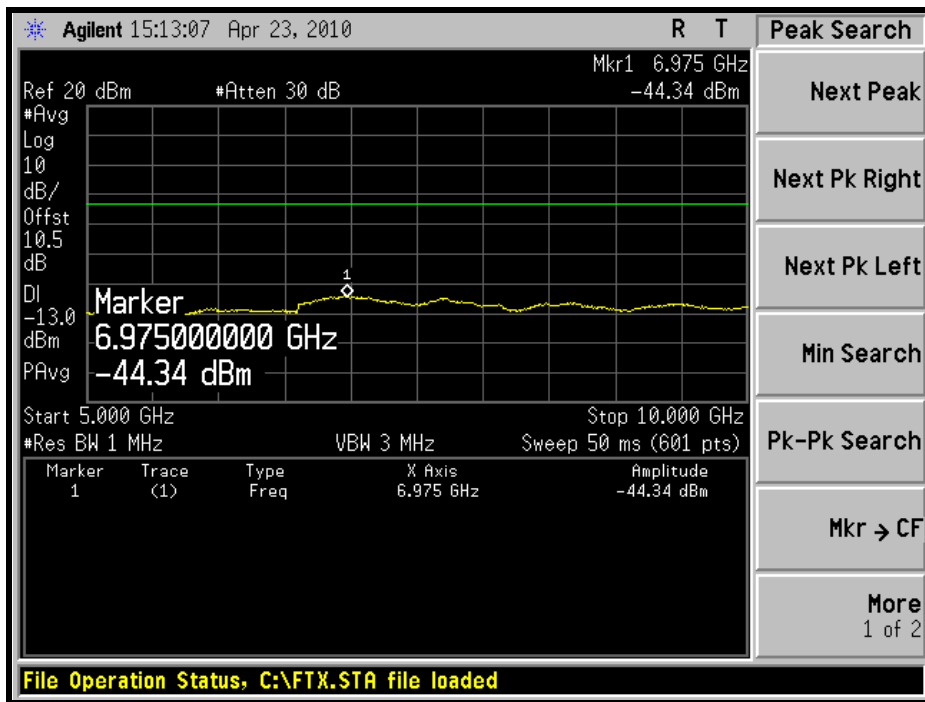


10GHz ~ 27GHz:

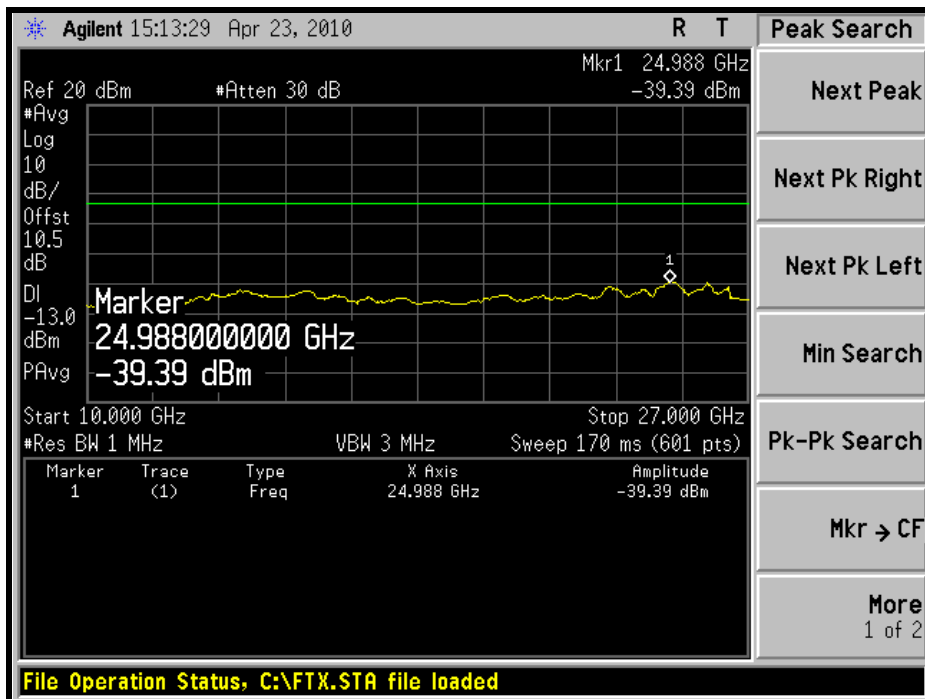




A D T

HIGH CHANNEL: 30MHz ~ 1GHz:

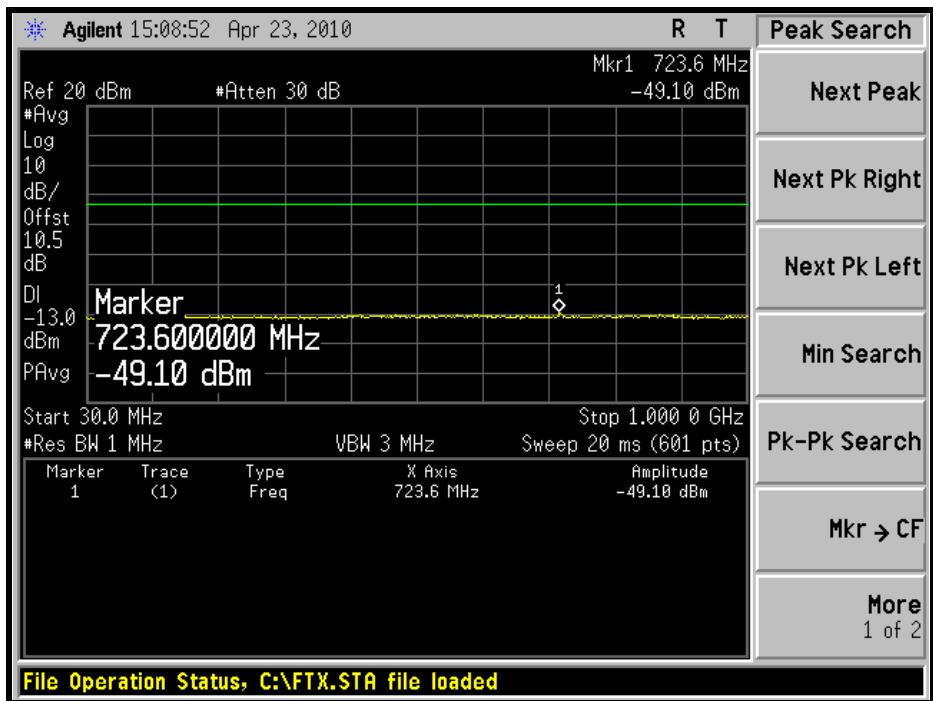


1GHz ~ 5GHz:

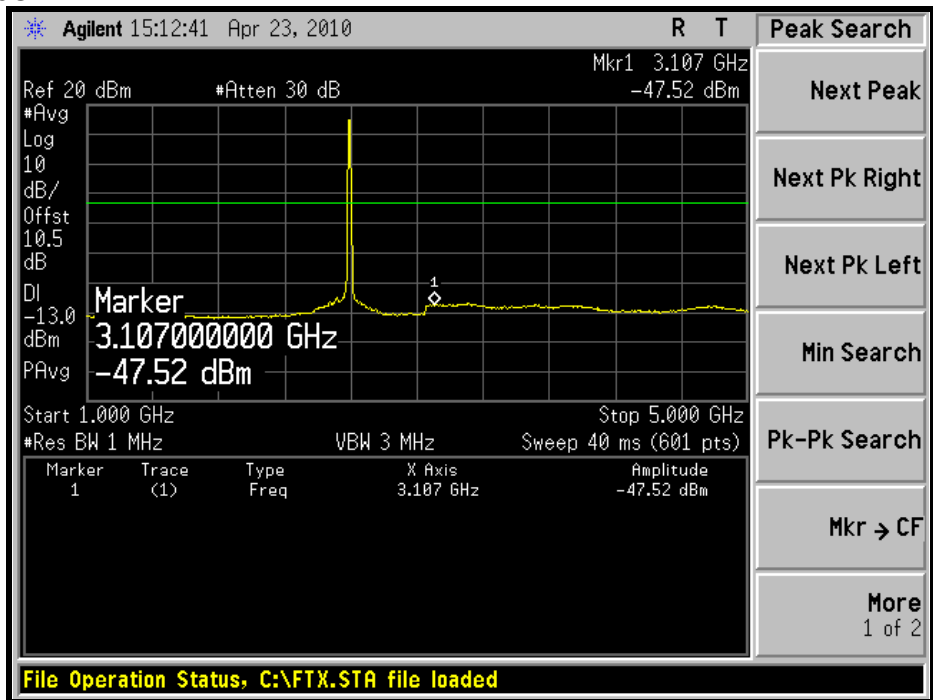




A D T

5GHz ~ 10GHz:

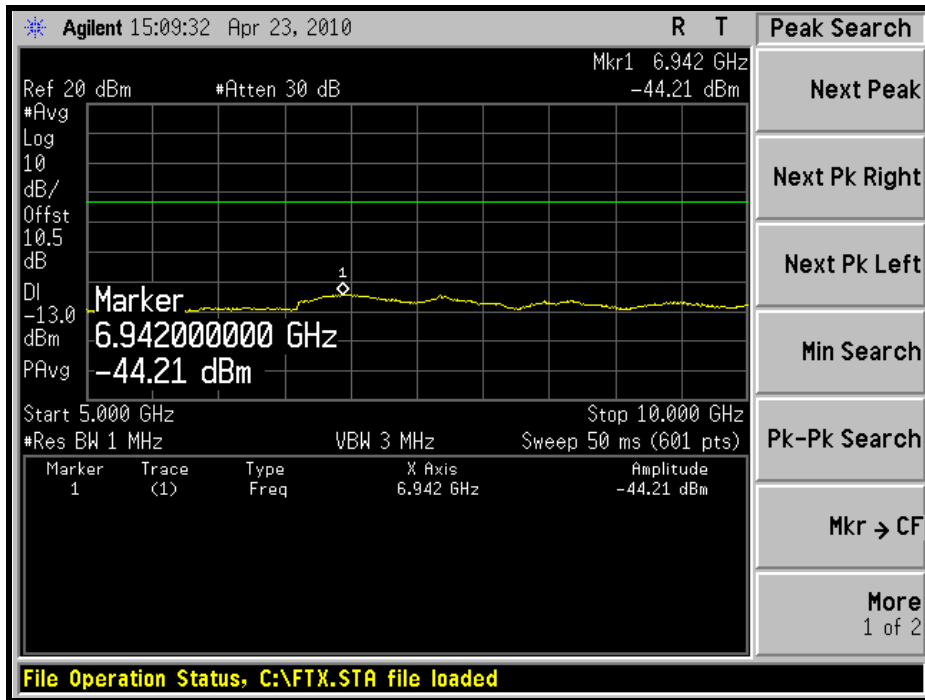

10GHz ~ 27GHz:

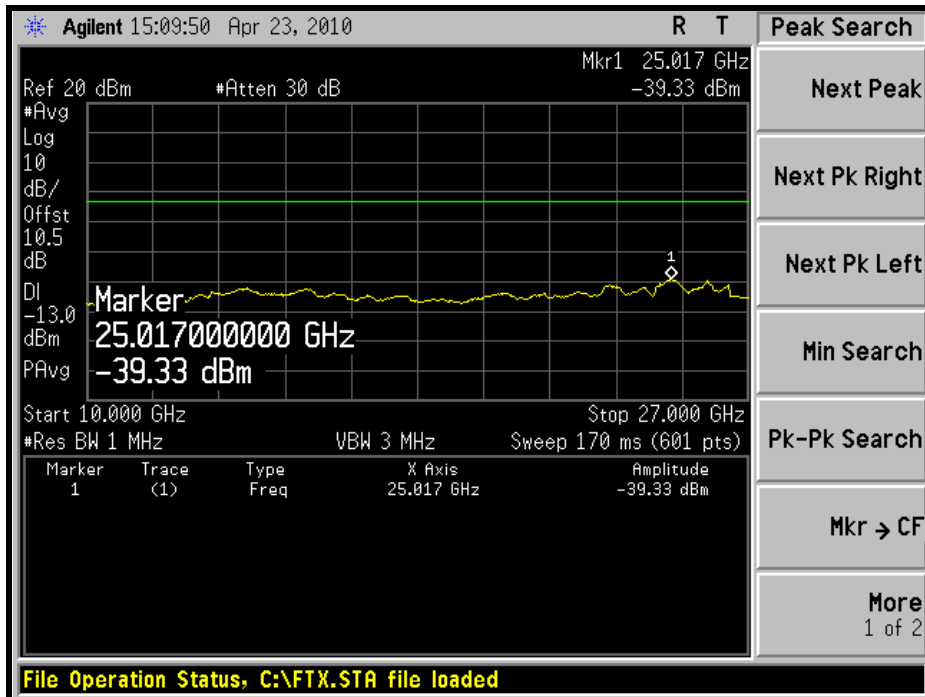

4.6 RADIATED EMISSION MEASUREMENT (BELOW 1GHz)

4.6.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 27.53(m) (2), On any frequency outside a licensee's frequency block the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB from the channel edges.

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	Apr. 23, 2010	Apr. 22, 2011
HP Pre_Amplifier	8449B	300801923	Nov. 02, 2009	Nov. 01, 2010
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Aug. 28, 2009	Aug. 27, 2010
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 28, 2010	Apr. 27, 2011
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 18, 2009	Dec. 17, 2010
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2010	Jan. 21, 2011
R&S Loop Antenna	HFH2-Z2	100070	Feb. 3, 2010	Feb. 2, 2012
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 14, 2009	Aug. 13, 2010
RF Cable	8DFB	STCCAB-30M-1GHz	NA	NA
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.6.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. The EUT is replaced by a horn antenna connected to a signal generator tuned to the frequency of emission.
- e. The signal generator level has to be adjusted to have the same emission nature.
- f. The radiated power can be calculated via the factor and antenna gain.
- g. Repeat step a ~ f for horizontal polarization.

NOTE: The resolution bandwidth of spectrum analyzer is 1MHz and the video bandwidth is 3MHz.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation

4.6.5 TEST SETUP

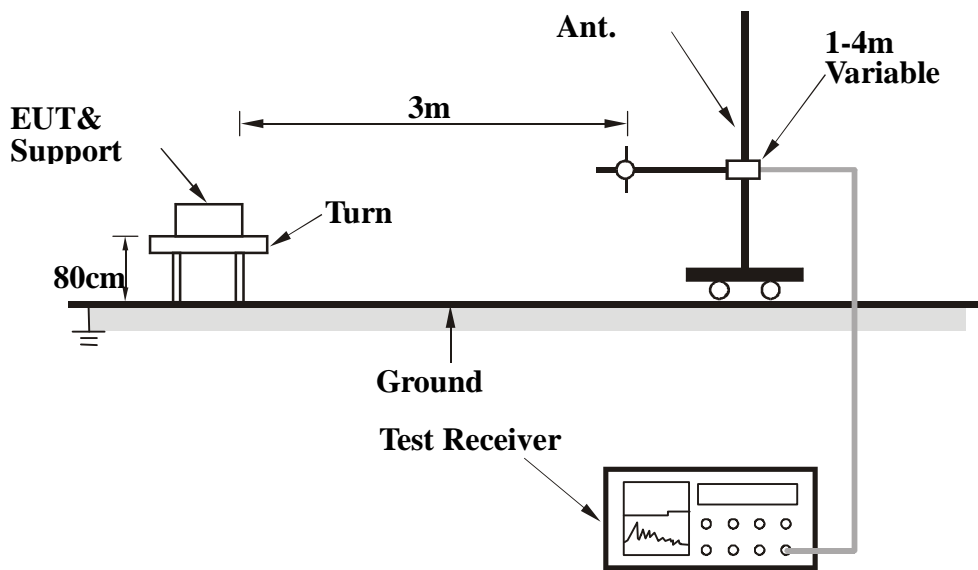

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.6.6 EUT OPERATING CONDITIONS

Same as item 4.1.5



A D T

4.6.7 TEST RESULTS

CHANNEL BANDWIDTH: 5MHz

MODE	Low channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa
TESTED BY	Nick Tsai		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	60	20.75	-13	-61.37	-7.58	-68.95
2	125	24.66	-13	-66.02	-1.21	-67.24
3	200	30.39	-13	-65.10	4.34	-60.76
4	250	37.59	-13	-57.37	3.89	-53.48
5	300	42.34	-13	-53.44	3.71	-49.73
6	375	42.9	-13	-54.74	3.60	-51.14
7	500	36.55	-13	-58.97	2.89	-56.08
8	750	40.11	-13	-56.27	0.82	-55.45
9	850	37.04	-13	-57.61	1.03	-56.58
10	900	38	-13	-60.73	0.49	-60.24

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	60	32.17	-13	-49.95	-7.58	-57.53
2	200	31.94	-13	-63.55	4.34	-59.21
3	250	35.81	-13	-59.15	3.89	-55.26
4	300	35.38	-13	-60.40	3.71	-56.69
5	325	37.71	-13	-60.17	3.73	-56.44
6	375	38.65	-13	-58.99	3.60	-55.39
7	550	39.6	-13	-55.33	2.52	-52.81
8	600	36.8	-13	-57.82	1.79	-56.03
9	750	38.5	-13	-57.88	0.82	-57.06
10	1000	42.31	-13	-54.16	0.59	-53.57

REMARKS: 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

CHANNEL BANDWIDTH: 10MHz

MODE	High channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa
TESTED BY	Nick Tsai		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	60	21.05	-13	-61.07	-7.58	-68.65
2	125	24.68	-13	-66.00	-1.21	-67.22
3	200	30.24	-13	-65.25	4.34	-60.91
4	250	37.84	-13	-57.12	3.89	-53.23
5	300	42.67	-13	-53.11	3.71	-49.40
6	375	42.97	-13	-54.67	3.60	-51.07
7	500	36.8	-13	-58.72	2.89	-55.83
8	750	40.24	-13	-56.14	0.82	-55.32
9	850	37.66	-13	-56.99	1.03	-55.96
10	900	38.12	-13	-60.61	0.49	-60.12

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	60	32.24	-13	-49.88	-7.58	-57.46
2	200	32.67	-13	-62.82	4.34	-58.48
3	250	35.74	-13	-59.22	3.89	-55.33
4	300	35.12	-13	-60.66	3.71	-56.95
5	325	37.88	-13	-60.00	3.73	-56.27
6	375	38.45	-13	-59.19	3.60	-55.59
7	550	39.64	-13	-55.29	2.52	-52.77
8	600	36.37	-13	-58.25	1.79	-56.46
9	750	38.75	-13	-57.63	0.82	-56.81
10	1000	42.18	-13	-54.29	0.59	-53.70

REMARKS: 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

CO-LOCATION MODE

MODE	High channel	FREQUENCY RANGE	Below 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa
TESTED BY	Nick Tsai		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	60	22.34	-13	-59.78	-7.58	-67.36
2	125	24.98	-13	-65.70	-1.21	-66.92
3	200	30.73	-13	-64.76	4.34	-60.42
4	250	38.14	-13	-56.82	3.89	-52.93
5	300	42.69	-13	-53.09	3.71	-49.38
6	375	42.81	-13	-54.83	3.60	-51.23
7	500	36.5	-13	-59.02	2.89	-56.13
8	750	40.15	-13	-56.23	0.82	-55.41
9	850	37.54	-13	-57.11	1.03	-56.08
10	900	37.94	-13	-60.79	0.49	-60.30

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M						
No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	60	33.17	-13	-48.95	-7.58	-56.53
2	200	32.86	-13	-62.63	4.34	-58.29
3	250	35.78	-13	-59.18	3.89	-55.29
4	300	35.14	-13	-60.64	3.71	-56.93
5	325	37.9	-13	-59.98	3.73	-56.25
6	375	38.43	-13	-59.21	3.60	-55.61
7	550	39.55	-13	-55.38	2.52	-52.86
8	600	36.28	-13	-58.34	1.79	-56.55
9	750	38.73	-13	-57.65	0.82	-56.83
10	1000	42.16	-13	-54.31	0.59	-53.72

REMARKS: 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

4.7 RADIATED EMISSION MEASUREMENT (ABOVE 1GHz)

4.7.1 LIMITS OF RADIATED EMISSION MEASUREMENT

In the FCC 27.53(m) (2), On any frequency outside a licensee's frequency block, the power of any emission shall be attenuated below the transmitter power (P) by at least $43 + 10 \log (P)$ dB from the channel edges.

4.7.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	CALIBRATED DATE	CALIBRATED UNTIL
ROHDE & SCHWARZ Spectrum Analyzer	FSP40	100036	Dec. 18, 2009	Dec. 17, 2010
Agilent PSA Spectrum Analyzer	E4446A	MY46180622	Apr. 23 , 2010	Apr. 22 , 2011
HP Pre_Amplifier	8449B	300801923	Nov. 02, 2009	Nov. 01, 2010
ROHDE & SCHWARZ Test Receiver	ESCS30	847124/029	Aug. 28, 2009	Aug. 27, 2010
SCHWARZBECK TRILOG Broadband Antenna	VULB 9168	138	Apr. 28, 2010	Apr. 27, 2011
Schwarzbeck Horn_Antenna	BBHA9120	D124	Dec. 18, 2009	Dec. 17, 2010
Schwarzbeck Horn_Antenna	BBHA 9170	BBHA9170153	Jan. 22, 2010	Jan. 21, 2011
R&S Loop Antenna	HFH2-Z2	100070	Feb. 3, 2010	Feb. 2, 2012
RF Switches	EMH-011	1001	NA	NA
RF CABLE (Chaintek)	Sucoflex 106	28077	Aug. 14, 2009	Aug. 13, 2010
RF Cable	8DFB	STCCAB-30M-1GHz	NA	NA
Software	ADT_Radiated_V7.6.15.9.2	NA	NA	NA
CT Antenna Tower & Turn Table	NA	NA	NA	NA

Note: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

2. The horn antenna, preamplifier (model: 8449B) and Spectrum Analyzer (model: FSP40) are used only for the measurement of emission frequency above 1GHz if tested.

3. The test was performed in Open Site No. C.

4. The FCC Site Registration No. is 656396.

5. The VCCI Site Registration No. is R-1626.

6. The CANADA Site Registration No. is IC 7450G-3.

4.7.3 TEST PROCEDURES


- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the receiving antenna, which was mounted on antenna tower and its position at 0.8 m above the ground.
- c. For each suspected emission, the EUT was arranged to its worst case and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading and recorded the value.
- d. The EUT is replaced by a horn antenna connected to a signal generator tuned to the frequency of emission.
- e. The signal generator level has to be adjusted to have the same emission nature.
- f. The radiated power can be calculated via the factor and antenna gain.
- g. Repeat step a ~ f for horizontal polarization.

NOTE: The resolution bandwidth of spectrum analyzer is 1MHz and the video bandwidth is 3MHz.

4.7.4 DEVIATION FROM TEST STANDARD

No deviation

4.7.5 TEST SETUP

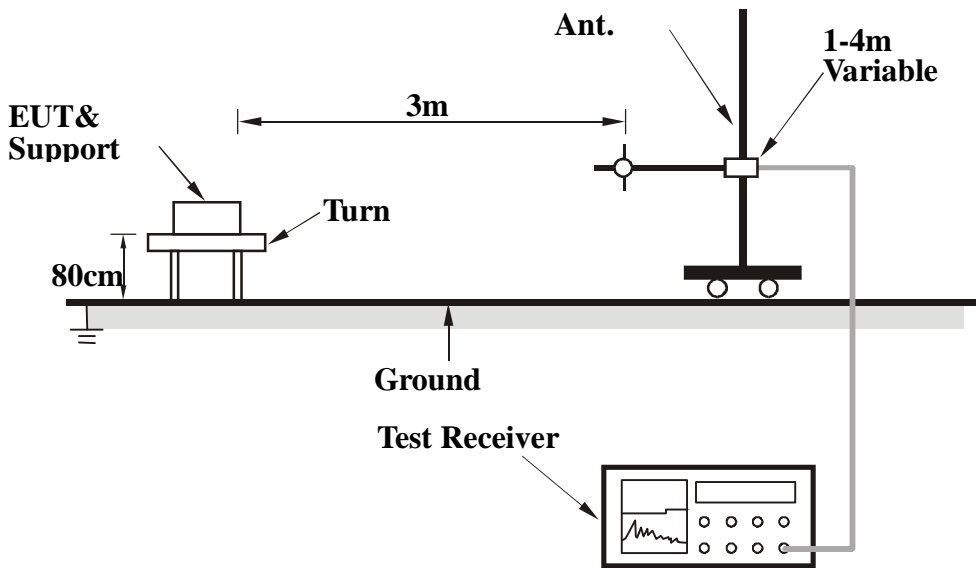

For the actual test configuration, please refer to the related item – Photographs of the Test Configuration.

4.7.6 EUT OPERATING CONDITIONS

Same as item 4.1.5



A D T

4.7.7 TEST RESULTS

CHANNEL BANDWIDTH: 5MHz

MODE	Low channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	3340	39.2	-13	-63.80	7.62	-56.19
2	5010	50.99	-13	-53.26	7.01	-46.24
3	7515	62.3	-13	-40.32	4.53	-35.79
4	10020	49.9	-13	-51.68	4.02	-47.66

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	3340	40.54	-13	-62.46	7.62	-54.85
2	5010	46.76	-13	-57.49	7.01	-50.47
3	7515	58.89	-13	-43.73	4.53	-39.20
4	10020	49.8	-13	-51.78	4.02	-47.76

REMARKS: 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

MODE	Middle channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	3453	39.7	-13	-63.44	7.78	-55.66
2	5180	48.32	-13	-56.18	7.05	-49.13
3	7770	57.7	-13	-44.92	4.31	-40.61
4	10360	48.7	-13	-53.26	3.70	-49.56

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	3453	39.4	-13	-63.74	7.78	-55.96
2	5180	45.4	-13	-59.10	7.05	-52.05
3	7770	56.43	-13	-46.19	4.31	-41.88
4	10360	49.9	-13	-52.06	3.70	-48.36

REMARKS: 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

MODE	High channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	3580	39.9	-13	-63.59	7.80	-55.80
2	5370	46.3	-13	-58.49	7.09	-51.39
3	8055	56.2	-13	-46.42	4.13	-42.29
4	10740	48.3	-13	-53.55	3.34	-50.21

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	3580	39.6	-13	-63.89	7.80	-56.10
2	5370	44.3	-13	-60.49	7.09	-53.39
3	8055	55.2	-13	-47.42	4.13	-43.29
4	10740	49.2	-13	-52.65	3.34	-49.31

REMARKS: 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

CHANNEL BANDWIDTH: 10MHz

MODE	Low channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5010	52.76	-13	-51.49	7.01	-44.47
2	7515	65.36	-13	-37.26	4.53	-32.73
3	10020	61.32	-13	-40.26	4.02	-36.24

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5010	51.35	-13	-52.90	7.01	-45.88
2	7515	65.58	-13	-37.04	4.53	-32.51
3	10020	62.63	-13	-38.95	4.02	-34.93

REMARKS: 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

MODE	Middle channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5180	58.57	-13	-45.93	7.05	-38.88
2	7770	65	-13	-37.62	4.31	-33.31
3	10360	61	-13	-40.96	3.70	-37.26

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5180	53.57	-13	-50.93	7.05	-43.88
2	7770	64.52	-13	-38.10	4.31	-33.79
3	10360	62.3	-13	-39.66	3.70	-35.96

REMARKS: 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

MODE	High channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5370	60.95	-13	-43.84	7.09	-36.74
2	8055	65.76	-13	-36.86	4.13	-32.73
3	10740	61.53	-13	-40.32	3.34	-36.98

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5370	52.98	-13	-51.81	7.09	-44.71
2	8055	62.05	-13	-40.57	4.13	-36.44
3	10740	62.14	-13	-39.71	3.34	-36.37

REMARKS: 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

CO-LOCATION MODE

MODE	High channel	FREQUENCY RANGE	Above 1000MHz
INPUT POWER	120Vac, 60Hz	ENVIRONMENTAL CONDITIONS	20deg°C, 60%RH 1011hPa
TESTED BY	Frank Liu		

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5370	61.22	-13	-43.57	7.09	-36.47
2	8055	65.83	-13	-36.79	4.13	-32.66
3	10740	62.75	-13	-39.10	3.34	-35.76

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M

No.	Freq. (MHz)	Emission Level (dBuV/m)	Limit (dBm)	S.G level (dBm)	C.F. (dB)	Power level (dBm)
1	5370	53.17	-13	-51.62	7.09	-44.52
2	8055	62.74	-13	-39.88	4.13	-35.75
3	10740	63.81	-13	-38.04	3.34	-34.70

REMARKS: 1. Power Value(dBm)=S.G Power Value (dBm) + Correction Factor(dB)



A D T

5 PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).





6 INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025:

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml.
If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180

Fax: 886-2-26052943

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343

Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety/Telecom Lab:

Tel: 886-3-3183232

Fax: 886-3-3185050

Email: service@adt.com.tw

Web Site: www.adt.com.tw


The address and road map of all our labs can be found in our web site also.



A D T

7 APPENDIX - A DL/UL RATION FOR TEST


For reference (5MHz)

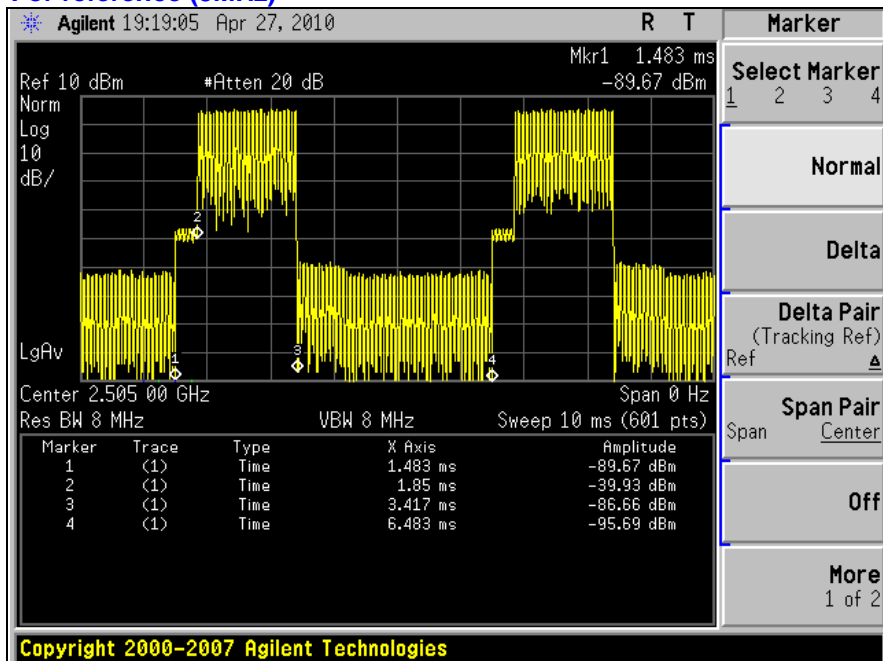

Copyright 2000-2007 Agilent Technologies

$$\text{Ratio} = (1.567 / 5) \% = 31.34\%$$

For reference (10MHz)

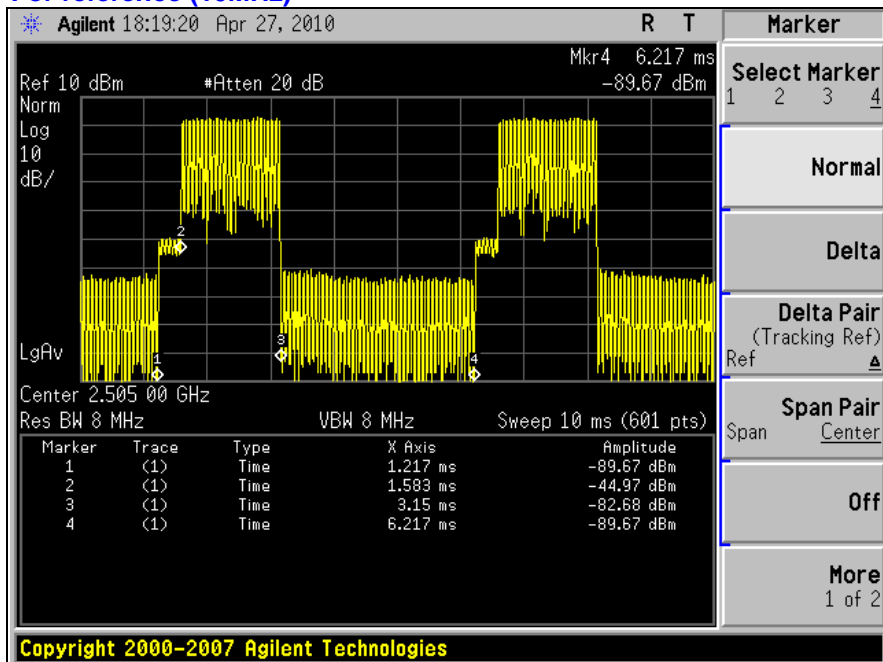

Copyright 2000-2007 Agilent Technologies

$$\text{Ratio} = (1.567 / 5) \% = 31.34\%$$

--- END ---