

EMC TEST REPORT

Report No. : TS11040102-EME
Model No. : NBG4104, NBG-417N v2,
HGW-500HNR-R, HGW-500HN-R
Issued Date : Aug. 23, 2011

Applicant: ZyXEL Communications Corporation
No. 6, Innovation Rd II, Science-Based Industrial Park,
Hsin-Chu, Taiwan

**Test Method/
Standard:** CFR 47 FCC Part 15.247 & ANSI C63.4 2003

Test By: Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan

It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

The test report was prepared by: Sign on File
Jill Chen / Assistant

These measurements were taken by: Sign on File
Terry Hsu / Engineer

The test report was reviewed by:

Name Jimmy Yang
Title Engineer

Table of Contents

1. Summary of Test Data.....	3
2. General Information	4
3. Maximum 6 dB Bandwidth	7
4. 99 % Occupied Bandwidth	15
5. Maximum Output Power.....	21
6. Power Spectral Density	21
7. RF Antenna conducted Spurious.....	21
8. Radiated Spurious Emission	21
9. Emission on Band Edge.....	21
10. AC power line conducted emission	21
Appendix A: Test Equipment List.....	21

1. Summary of Test Data

Test/Requirement Description	Applicable Rule	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Output Power	15.247(b)	Pass
Power Spectral Density	15.247(e)	Pass
RF Antenna Conducted Spurious	15.247(d)	Pass
Radiated Spurious Emission	15.247(d), 15.205, 15.209	Pass
Emission on the Band Edge	15.247(d)	Pass
AC Power Line Conducted Emission	15.207	Pass

2. General Information

Identification of the EUT

Product:	Wireless N-lite Managed Router
Model No.:	NBG4104
FCC ID.:	I88NBG4104
Frequency Range:	1. 2412 MHz ~ 2462 MHz for 802.11b, 802.11g, 802.11n HT20 2. 2422 MHz ~ 2452 MHz for 802.11n HT40
Channel Number:	1. 11 channels for 2412 MHz ~ 2462 MHz 2. 7 channels for 2422 MHz ~ 2452 MHz
Rated Power:	DC 12 V from Adapter
Power Cord:	N/A
Data Cable:	1. RJ-45 UTP Cat.5 10 meter × 4 2. RJ-45 STP Cat.5 10 meter × 1
Sample Received:	May 16, 2011
Test Date(s):	May 17, 2011 ~ Aug. 16, 2011
Note 1:	This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
Note 2:	When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Description of EUT

The EUT is Wireless N-lite Managed Router, and was defined as information technology equipment.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

The customer confirmed NBG-417N v2, HGW-500HNR-R and HGW-500HN-R are series model to NBG4104 (EUT), the different model numbers are served as marketing strategy.

Antenna description

Antenna

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 2 dBi
Antenna Type : Dipole antenna
Connector Type : SMA reverse

Adapter information

The EUT will be supplied with a power supply from below list:

No.	Brand	Model no.	Specification
Adapter 1	LEI	MU05-N120050-A1	I/P: 100-240Vac, 50/60Hz, 0.5A O/P: 12Vdc, 0.5A
Adapter 2	DVE	DSA-12G-12 FUS 120120	I/P: 100-240Vac, 50/60Hz, 0.3A O/P: 12Vdc, 0.5A

Peripherals equipment

Peripherals	Brand	Model No.	Serial No.
Notebook PC	DELL	Latitude D610	2YWZK1S
ZyWALL	ZyXEL	1050	N/A
Muti-mode converter	VOLKTEK	NXF-742	N/A

Operation mode

The EUT was supplied with 12 Vdc from adapter (Test voltage: 120Vac, 60Hz) and it was run in TX mode that was controlled by “QA” program.

The EUT was transmitted continuously during the test.

With individual verifying, the maximum output power was found out 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT 20 mode and 13 Mbps data rate for 802.11n HT 40 mode. The final tests were executed under these conditions recorded in this report individually. Please refer the details below:

Chain 0: 802.11b channel 6	
Data rate (Mbps)	PK(dBm)
1	18.41
2	18.27
5.5	18.14
11	18.04

Chain 0: 802.11n HT20 channel 6	
Data rate (Mbps)	PK(dBm)
6.5	21.87
13	21.67
19.5	21.55
26	21.49
39	21.29
52	21.21
58.5	21.17
65	21.09

Chain 0: 802.11g channel 6	
Data rate (Mbps)	PK(dBm)
6	22.88
9	22.67
12	22.43
18	22.31
24	22.17
36	22.01
48	21.89
54	21.71

Chain 0: 802.11n HT40 channel 6	
Data rate (Mbps)	PK(dBm)
13	21.85
26	21.67
39	21.46
52	21.31
78	21.14
104	21.03
117	20.91
130	20.87

3. Maximum 6 dB Bandwidth


Name of Test	Maximum 6 dB Bandwidth
Base Standard	FCC 15.247 (a)(2)

Test Result: Complies
Measurement Data: See Table & plots below

Method of Measurement:

Make the measurement with the spectrum analyzer's resolution bandwidth (RBW) = 100 kHz. In order to make an accurate measurement, set the span greater than RBW. The 6 dB bandwidth must be greater than 500 kHz.

Test Diagram:

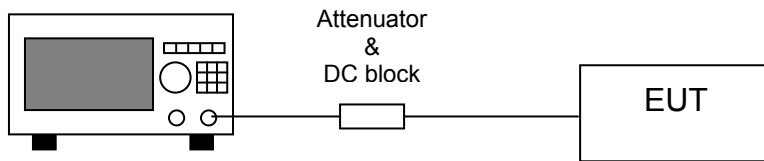


Spectrum Analyzer

Note: The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT20 mode and 13 Mbps data rate for 802.11n HT40 mode. The EUT was tuned to a low, middle and high channel.


Table 1 Maximum 6 dB Bandwidth

Mode	Channel	Frequency (MHz)	Bandwidth (MHz)	Min. Limit (MHz)	Pass/Fail
802.11b	1	2412	10.290	0.5	Pass
	6	2437	10.290	0.5	Pass
	11	2462	10.290	0.5	Pass
802.11g	1	2412	16.530	0.5	Pass
	6	2437	16.530	0.5	Pass
	11	2462	16.605	0.5	Pass
802.11n HT20	1	2412	17.730	0.5	Pass
	6	2437	17.730	0.5	Pass
	11	2462	17.730	0.5	Pass
802.11n HT40	3	2422	36.570	0.5	Pass
	6	2437	36.570	0.5	Pass
	9	2452	36.570	0.5	Pass


6 dB Bandwidth @ 802.11b mode channel 1

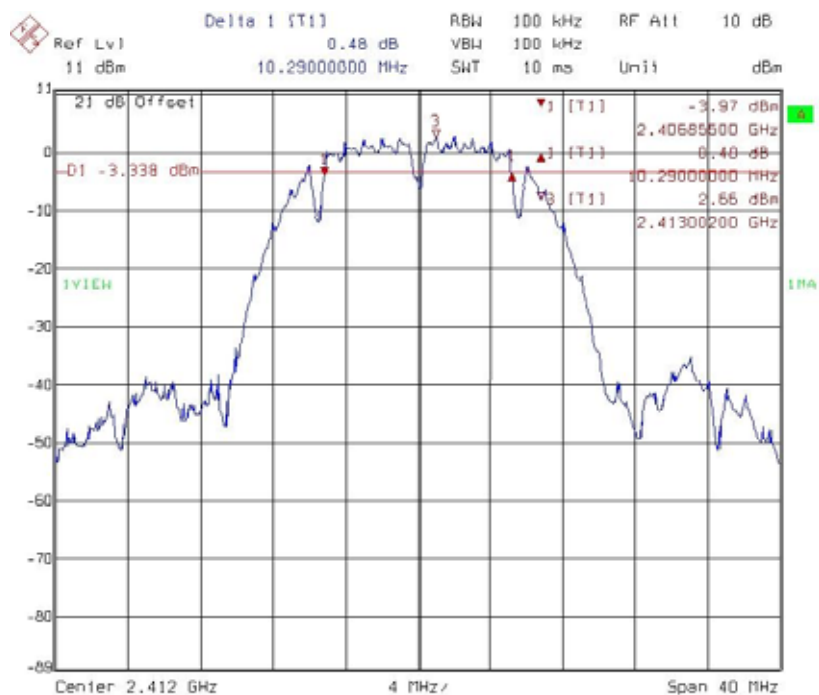


6 dB Bandwidth @ 802.11b mode channel 6

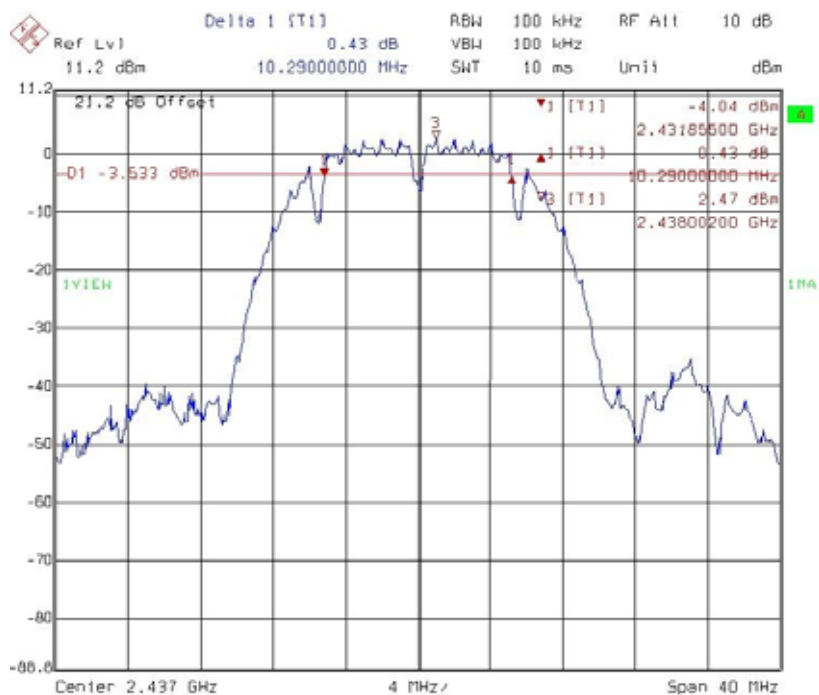


6 dB Bandwidth @ 802.11b mode channel 11

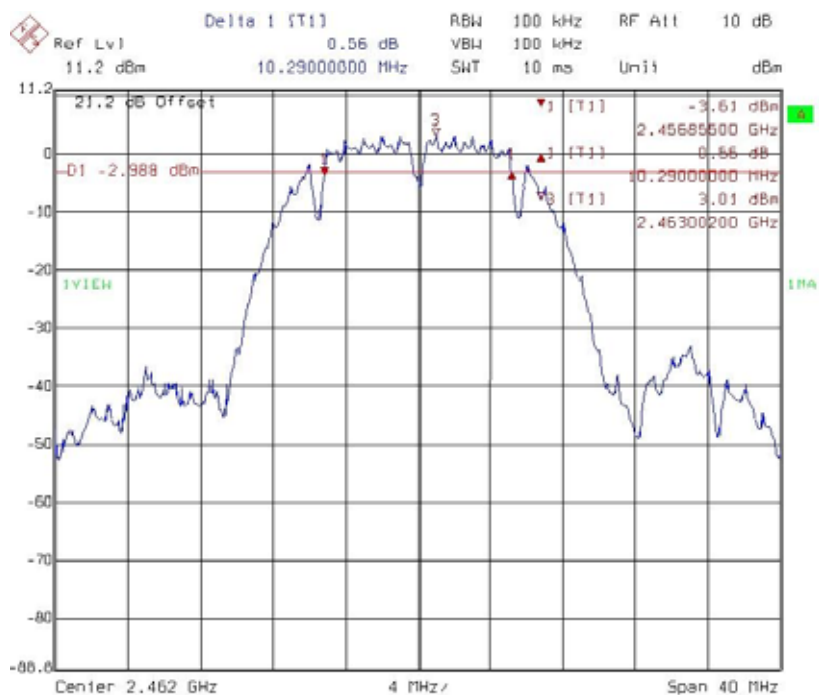


6 dB Bandwidth @ 802.11g mode channel 1

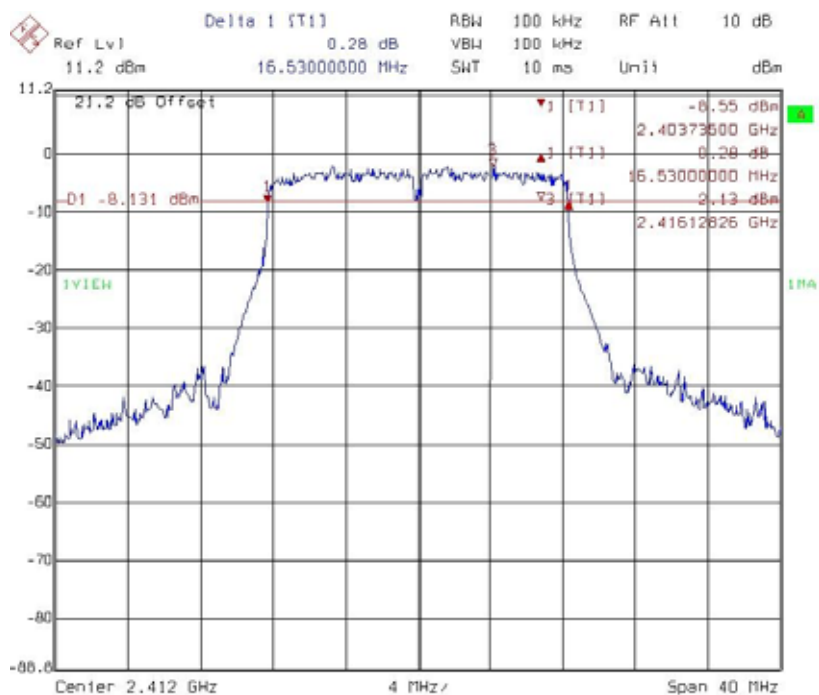


6 dB Bandwidth @ 802.11g mode channel 6

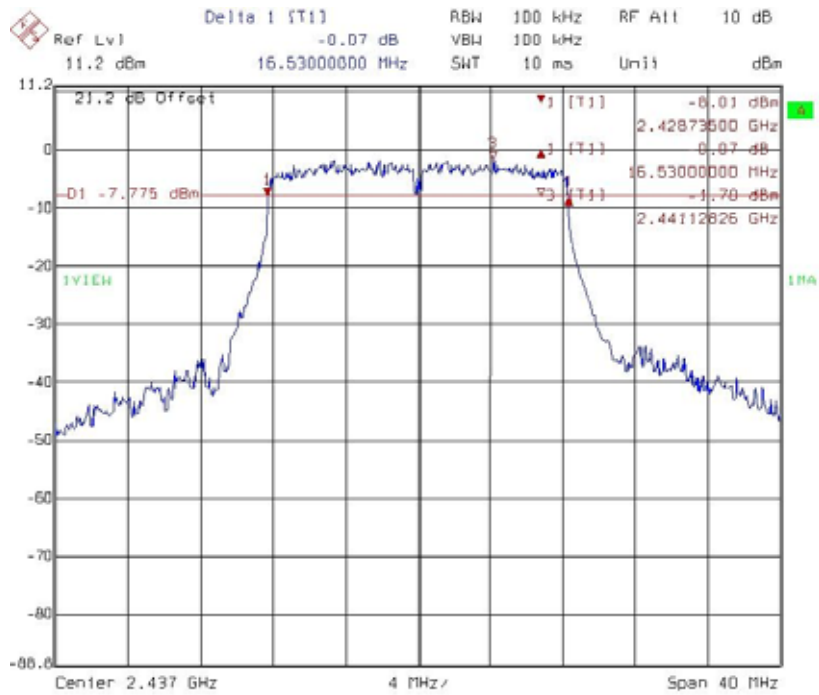


6 dB Bandwidth @ 802.11g mode channel 11

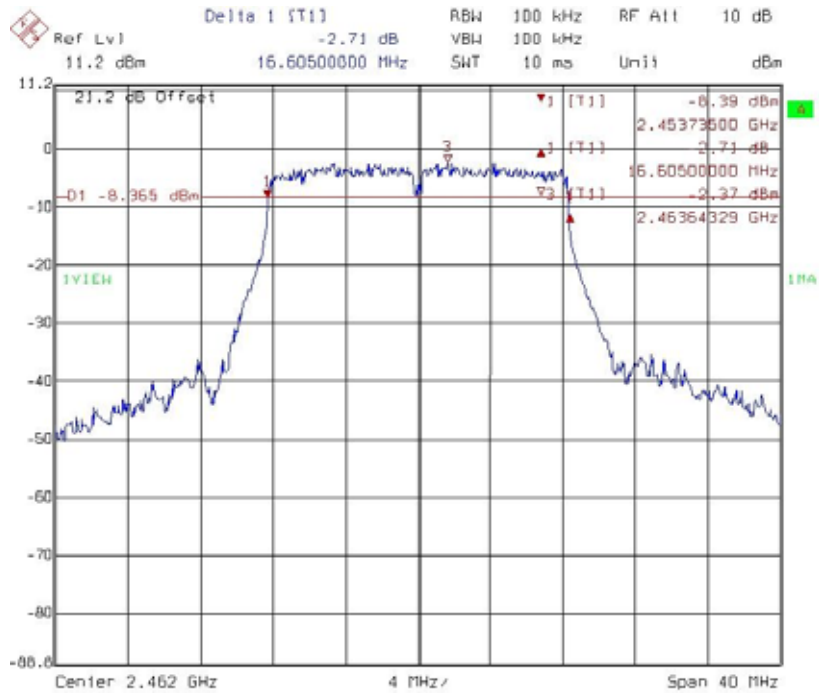


6 dB Bandwidth @ 802.11n HT20 mode channel 1

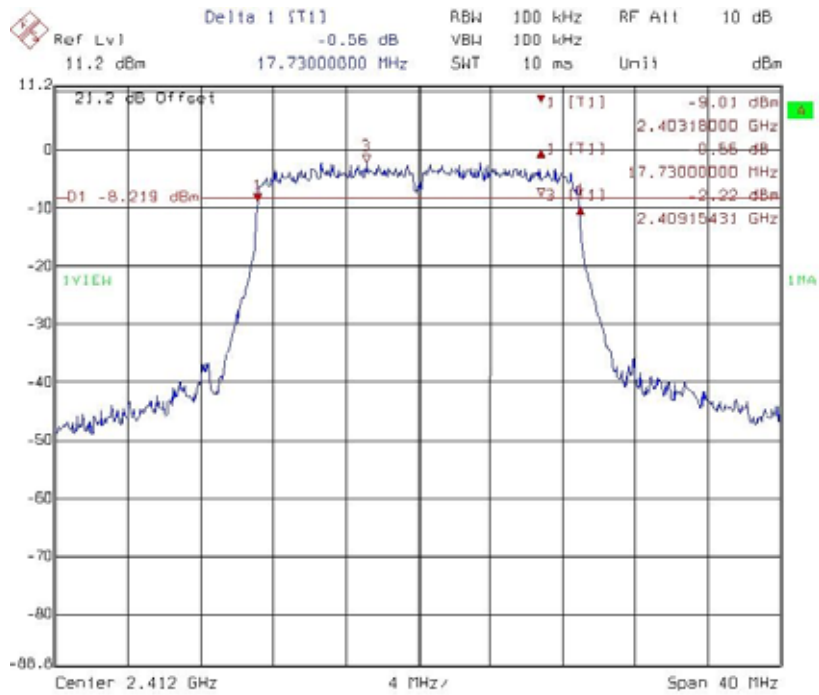


6 dB Bandwidth @ 802.11n HT20 mode channel 6

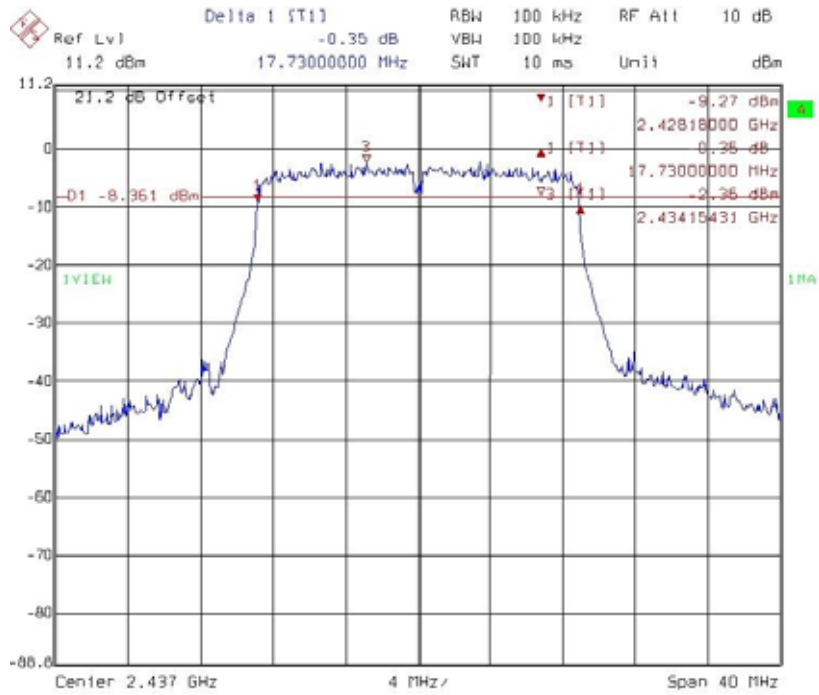


6 dB Bandwidth @ 802.11n HT20 mode channel 11

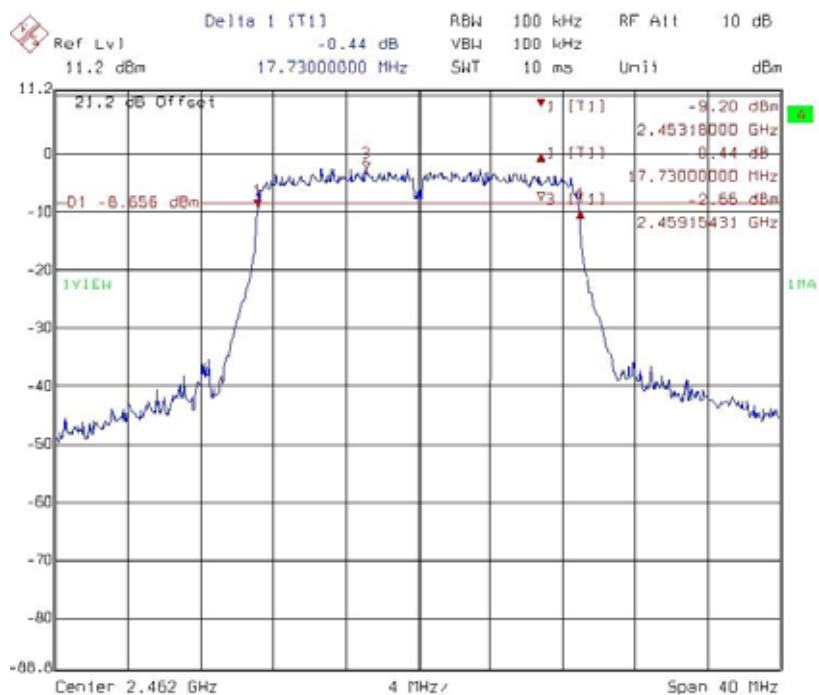


6 dB Bandwidth @ 802.11n HT40 mode channel 3

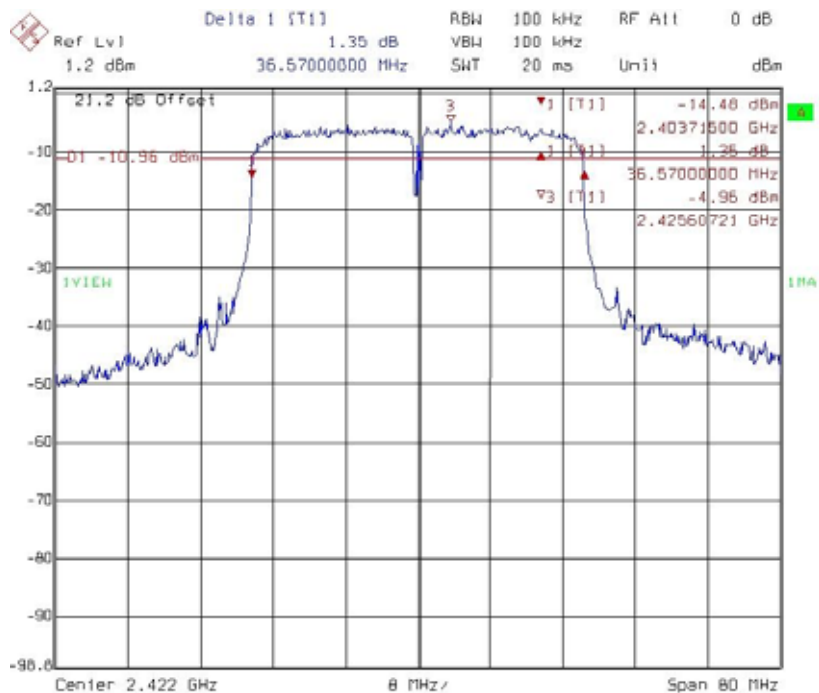

6 dB Bandwidth @ 802.11n HT40 mode channel 6

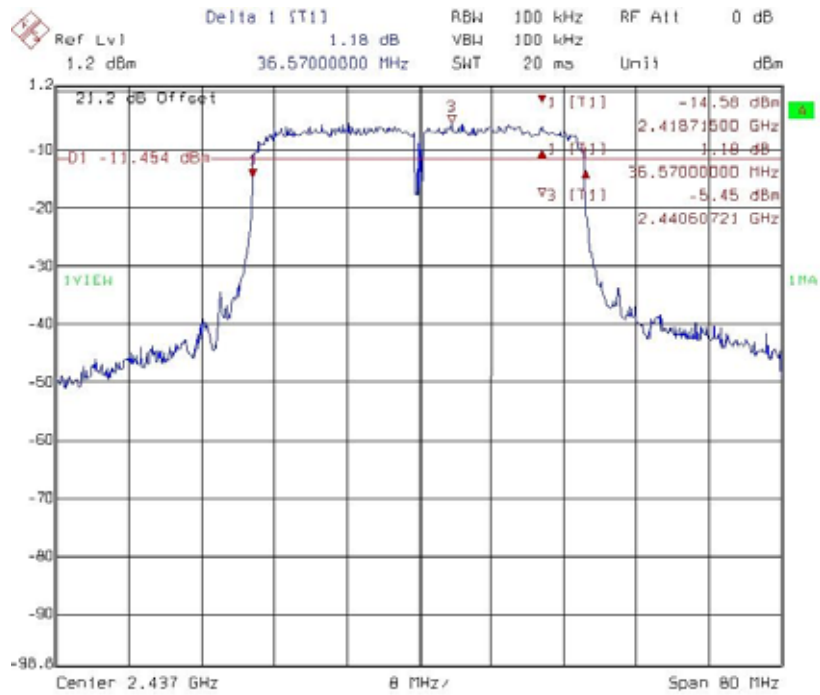

6 dB Bandwidth @ 802.11n HT40 mode channel 9

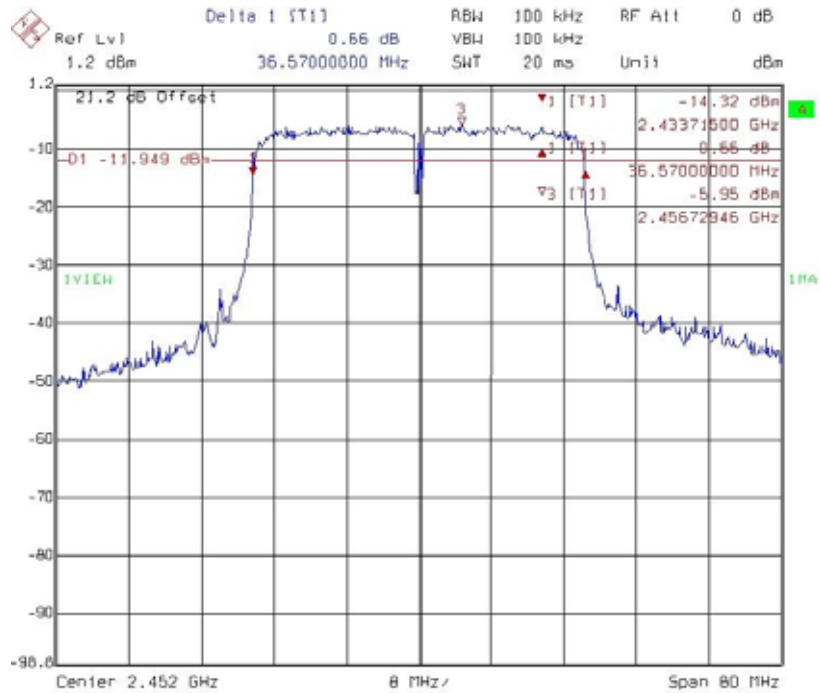

4. 99 % Occupied Bandwidth

Name of Test	99 % Occupied Bandwidth
Base Standard	None; for reporting purposes only


Test Result: Complies
Measurement Data: See Table & plots below

Method of Measurement:

Reference FCC document: KDB558074

A portion of the transmitted signal is coupled to a Spectrum Analyzer with a resolution bandwidth of at least 1 % of the bandwidth of the transmitted signal. The resolution bandwidth is chosen so as not to reduce the peak level of the measured waveform. The appropriate bandwidth mask is applied to the output waveform to verify compliance.

Test Diagram:

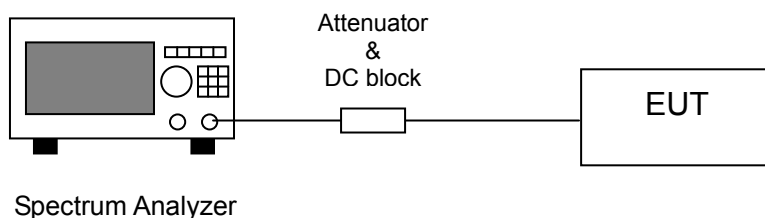


Note: The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT20 mode and 13 Mbps data rate for 802.11n HT40 mode. The EUT was tuned to a low, middle and high channel.


Table 2 99 % Occupied Bandwidth

Mode	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
802.11b	1	2412	14.830
	6	2437	14.830
	11	2462	14.830
802.11g	1	2412	16.934
	6	2437	16.934
	11	2462	17.034
802.11n HT20	1	2412	17.735
	6	2437	17.836
	11	2462	17.735
802.11n HT40	3	2422	36.273
	6	2437	36.273
	9	2452	36.273


99 % Occupied Bandwidth @ 802.11b mode channel 1

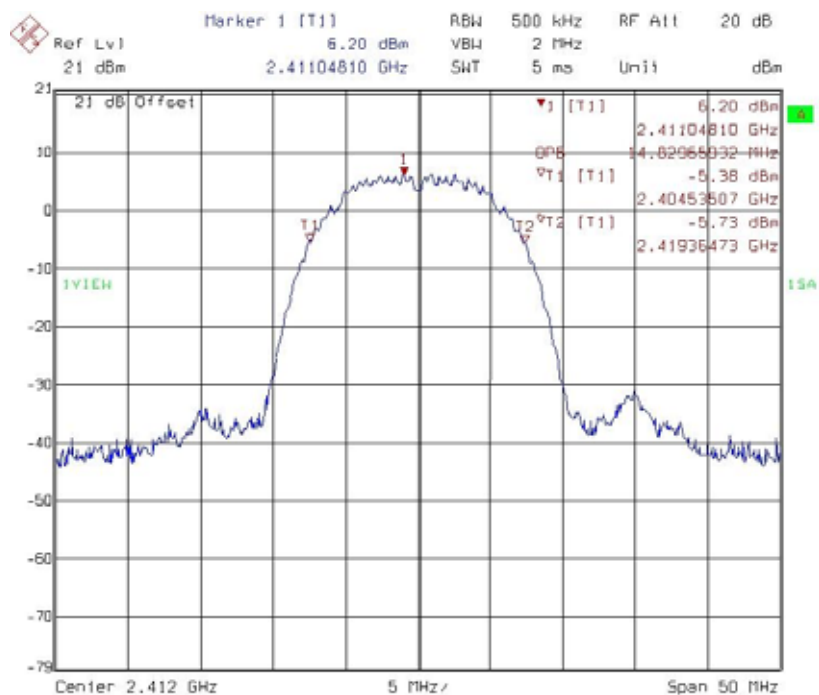


99 % Occupied Bandwidth @ 802.11b mode channel 6

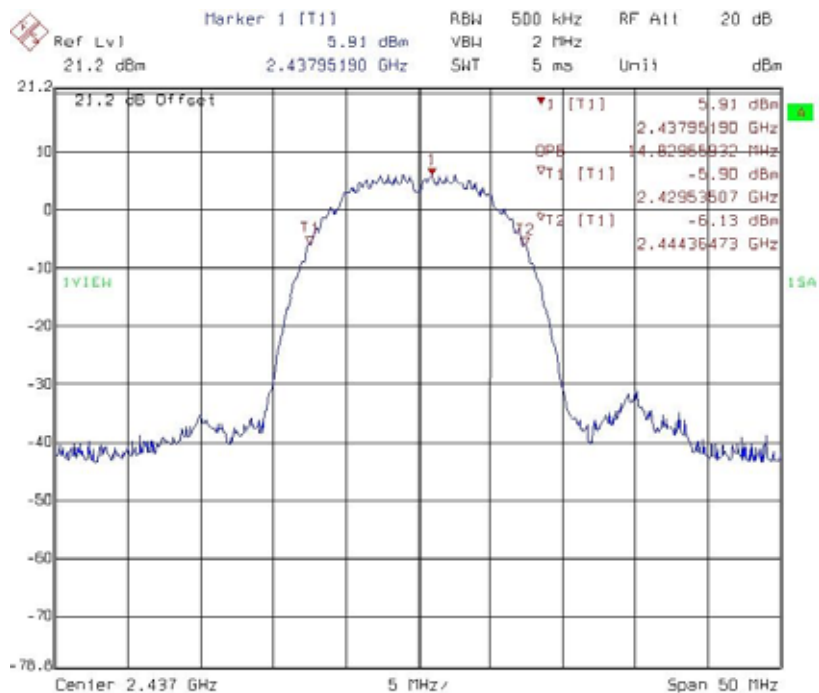


99 % Occupied Bandwidth @ 802.11b mode channel 11

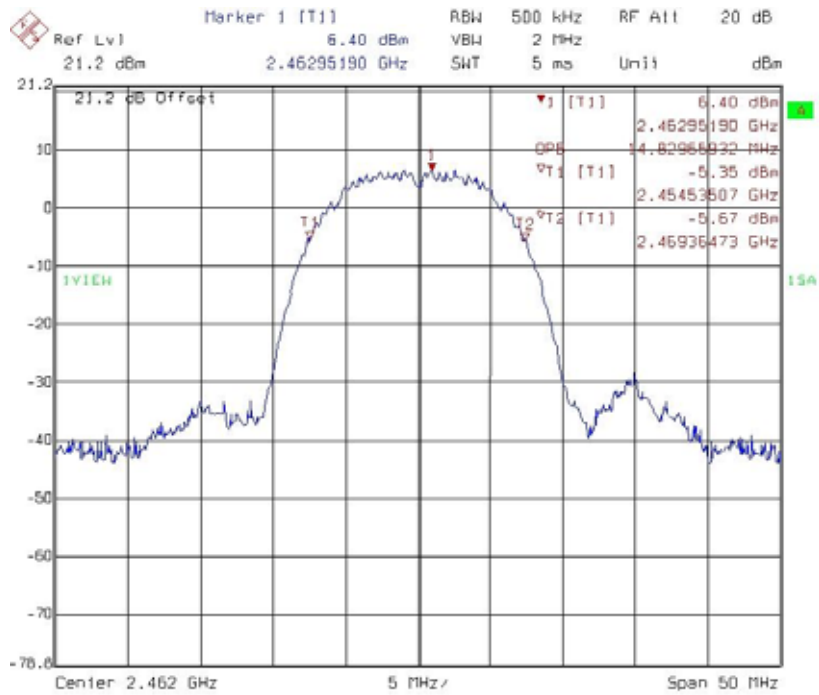


99 % Occupied Bandwidth @ 802.11g mode channel 1

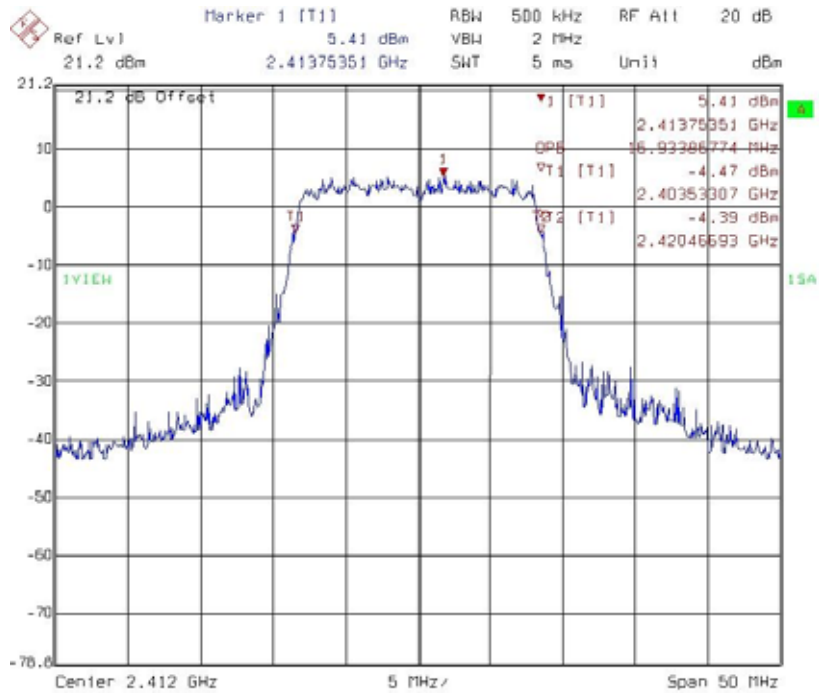


99 % Occupied Bandwidth @ 802.11g mode channel 6

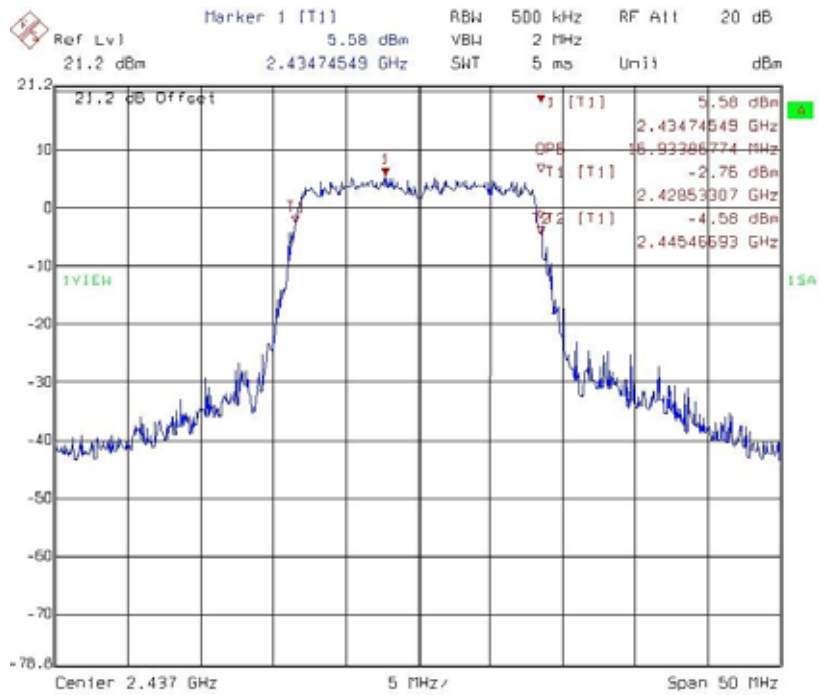


99 % Occupied Bandwidth @ 802.11g mode channel 11

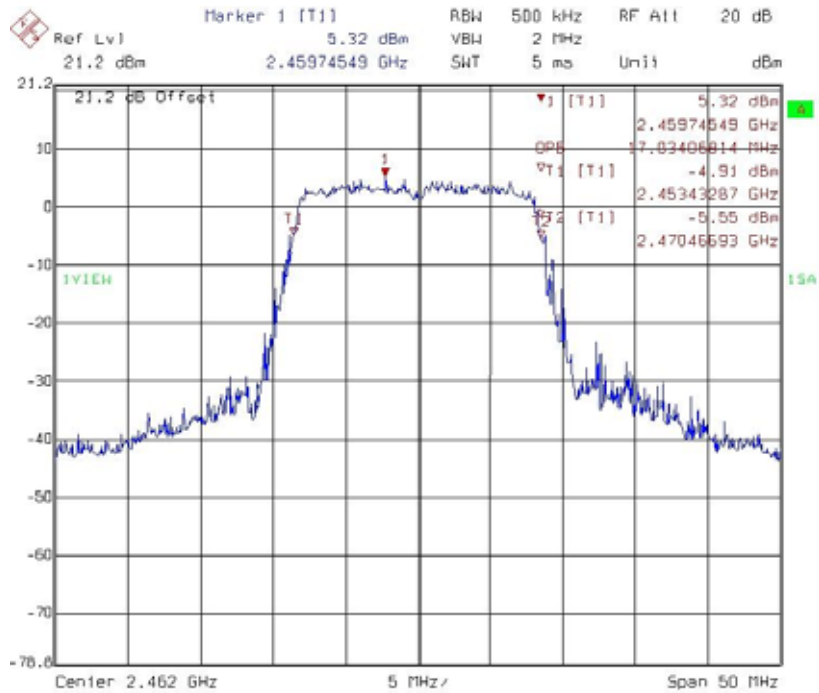


99 % Occupied Bandwidth @ 802.11n HT20 mode channel 1

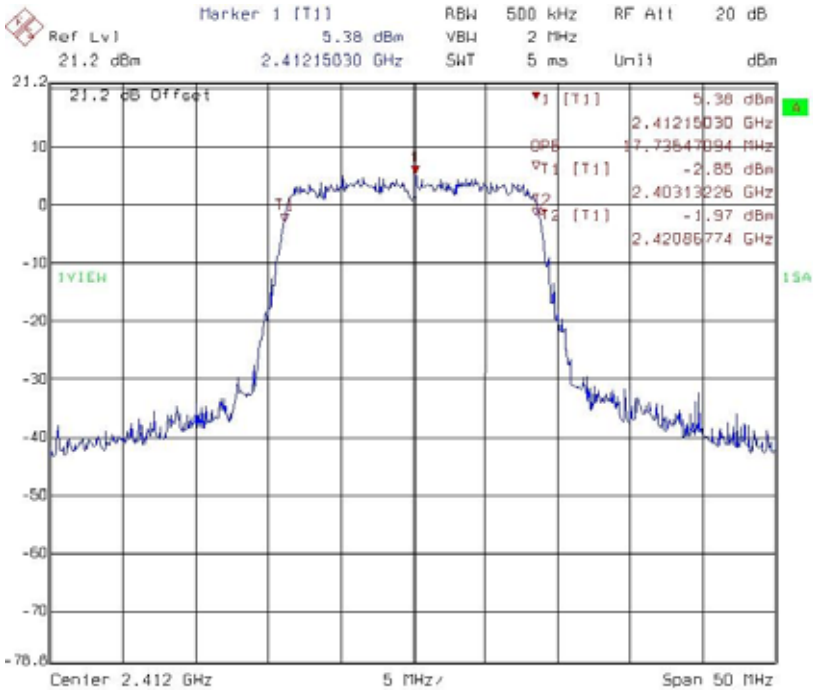


99 % Occupied Bandwidth @ 802.11n HT20 mode channel 6

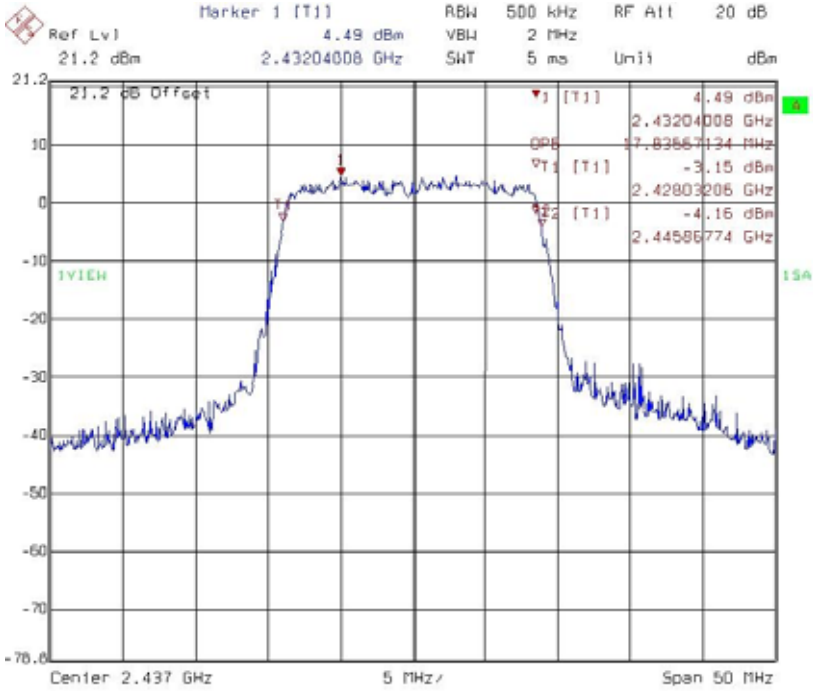


99 % Occupied Bandwidth @ 802.11n HT20 mode channel 11

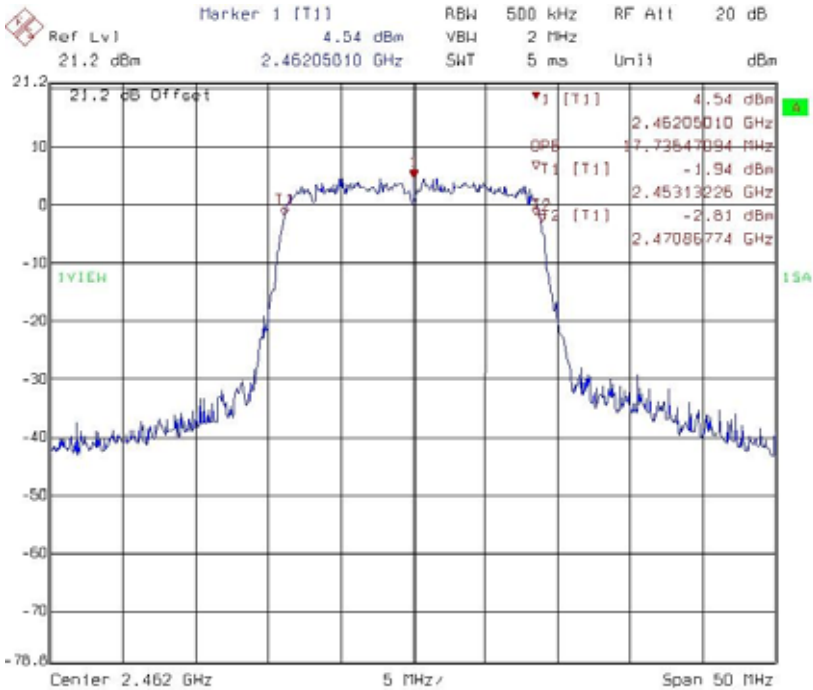


99 % Occupied Bandwidth @ 802.11n HT40 mode channel 3

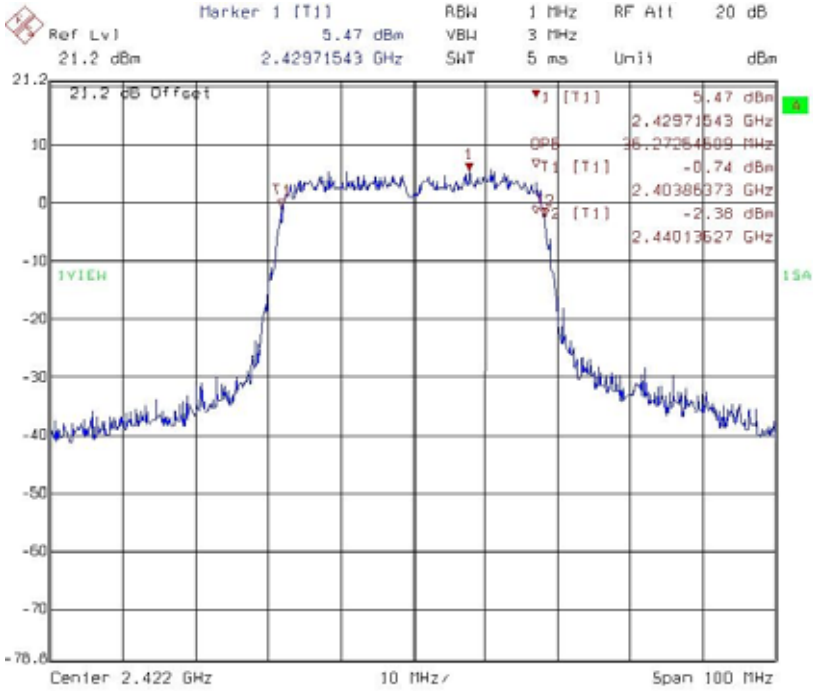

99 % Occupied Bandwidth @ 802.11n HT40 mode channel 6

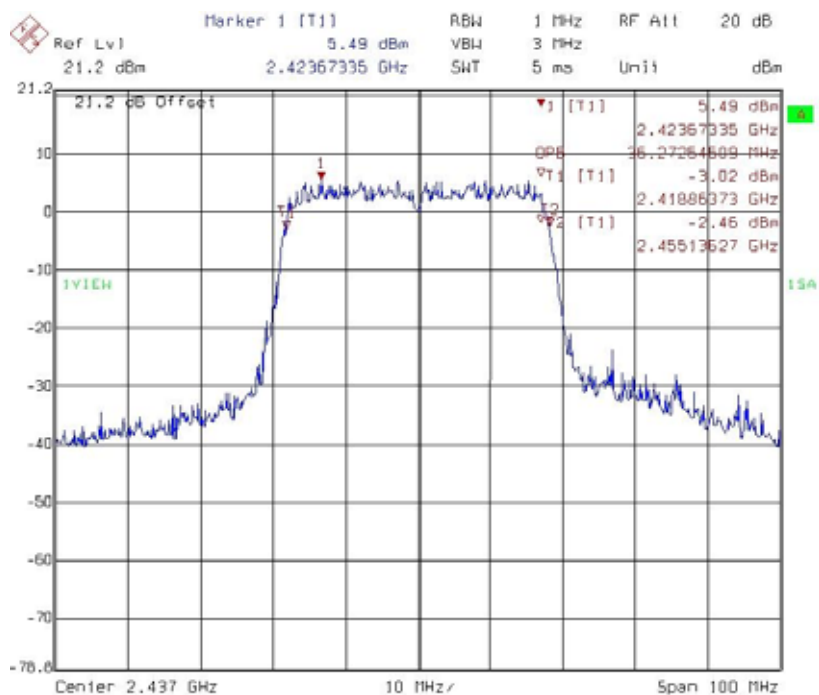

99 % Occupied Bandwidth @ 802.11n HT40 mode channel 9

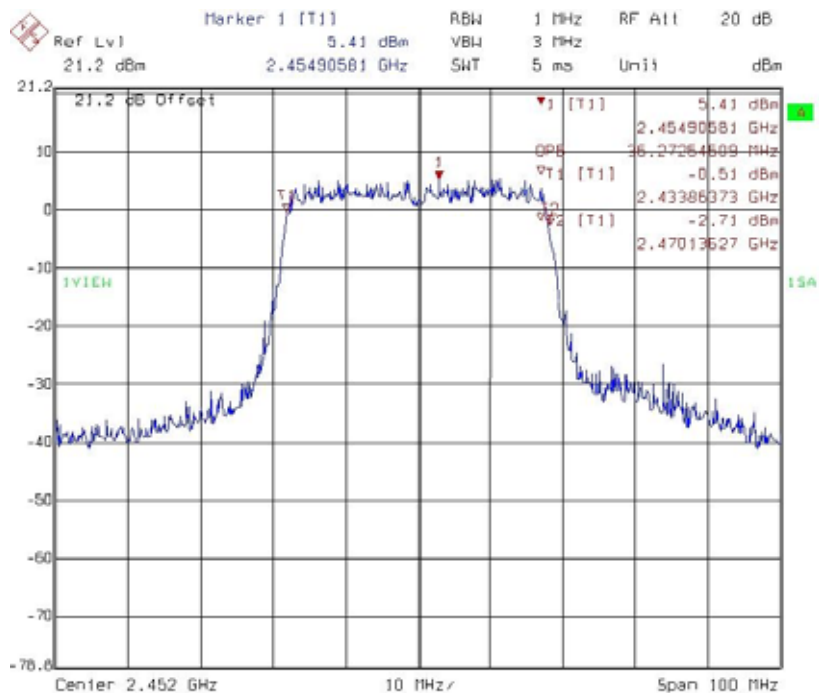

5. Maximum Output Power

Name of Test	Maximum output power
Base Standard	FCC 15.247(b)

Measurement Uncertainty: ±0.392 dB (k=2)

Test Result: Complies


Measurement Data: See Table below

Method of Measurement:

Reference FCC document: KDB558074

The power output was measured on the EUT using a 50 ohm SMA Cable connected to peak power meter via power sensor. Connect 20 dB attenuator and DC block at the input port of the power sensor. Measure conducted transmit power of at each antenna port ,besides another ports were terminated by 50 ohm and sum these power in linear power units,Power output was measured with the maximum rated input level.

Test Diagram:

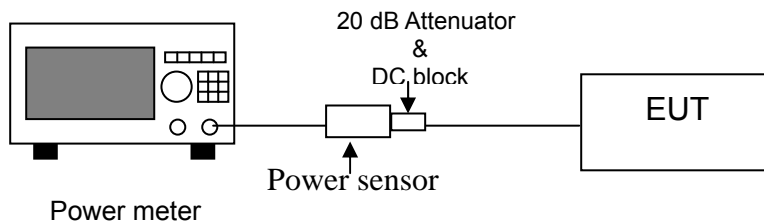

Note 1: §15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Table 3. Maximum output power

Mode	Channel	Frequency (MHz)	Output Power (dBm)	Total Power (mw)	Limit (dBm)	Margin (dB)
			PK	PK		
802.11b	1	2412	18.56	71.78	30	-11.44
	6	2437	18.41	69.34	30	-11.59
	11	2462	18.72	74.47	30	-11.28
802.11g	1	2412	23.07	202.77	30	-6.93
	6	2437	22.88	194.09	30	-7.12
	11	2462	22.79	190.11	30	-7.21
802.11n HT20	1	2412	22.05	160.32	30	-7.95
	6	2437	21.87	153.82	30	-8.13
	11	2462	21.45	139.64	30	-8.55
802.11n HT40	3	2422	22.23	167.11	30	-7.77
	6	2437	21.85	153.11	30	-8.15
	9	2452	21.65	146.22	30	-8.35

6. Power Spectral Density

Name of Test	Power Spectral Density
Base Standard	FCC 15.247(e)

Test Result: Complies
Measurement Data: See Table & plots below

Method of Measurement:

Reference FCC document: KDB558074

The power spectrum density was measured from the antenna port of the EUT using a 50 ohm spectrum analyzer. Locate and zoom in on emission peak(s) within the passband. Set RBW = 3 kHz, VBW >RBW, sweep= 500s. The peak level measured must be no greater than + 8 dBm. Power spectrum density was read directly and cable loss (1 dB)/external attenuator (20 dB) correction was added to the reading to obtain power at the EUT antenna terminals.

Test Diagram:


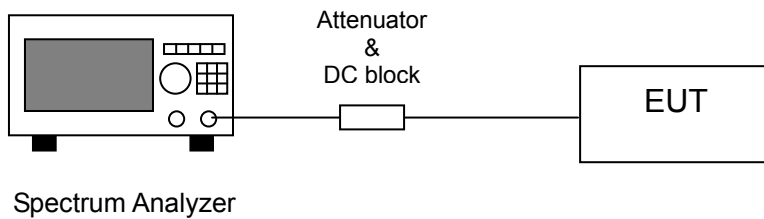



Table 4. Power Spectral Density

Mode	Channel	Frequency (MHz)	PSD (dBm)	Total PSD (mW)	Limit (dBm)	Margin (dB)
802.11b	1	2412	-14.78	0.03	8	-22.78
	6	2437	-15.03	0.03	8	-23.03
	11	2462	-14.46	0.04	8	-22.46
802.11g	1	2412	-16.66	0.02	8	-24.66
	6	2437	-16.40	0.02	8	-24.40
	11	2462	-16.67	0.02	8	-24.67
802.11n HT20	1	2412	-16.05	0.02	8	-24.05
	6	2437	-16.44	0.02	8	-24.44
	11	2462	-15.76	0.03	8	-23.76
802.11n HT40	3	2422	-16.96	0.02	8	-24.96
	6	2437	-16.37	0.02	8	-24.37
	9	2452	-16.51	0.02	8	-24.51


Power Spectral Density @ 802.11b mode channel 1

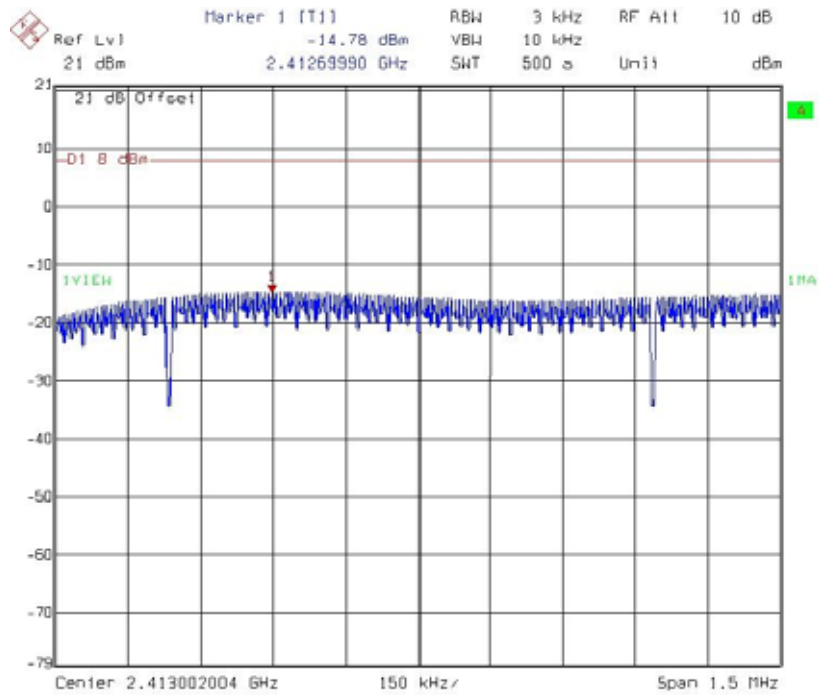


Power Spectral Density @ 802.11b mode channel 6

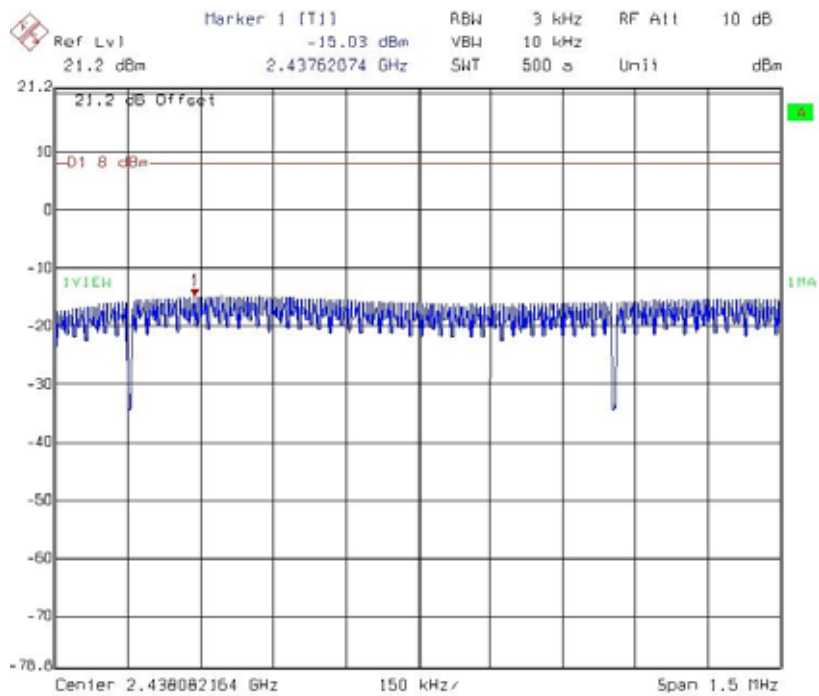


Power Spectral Density @ 802.11b mode channel 11

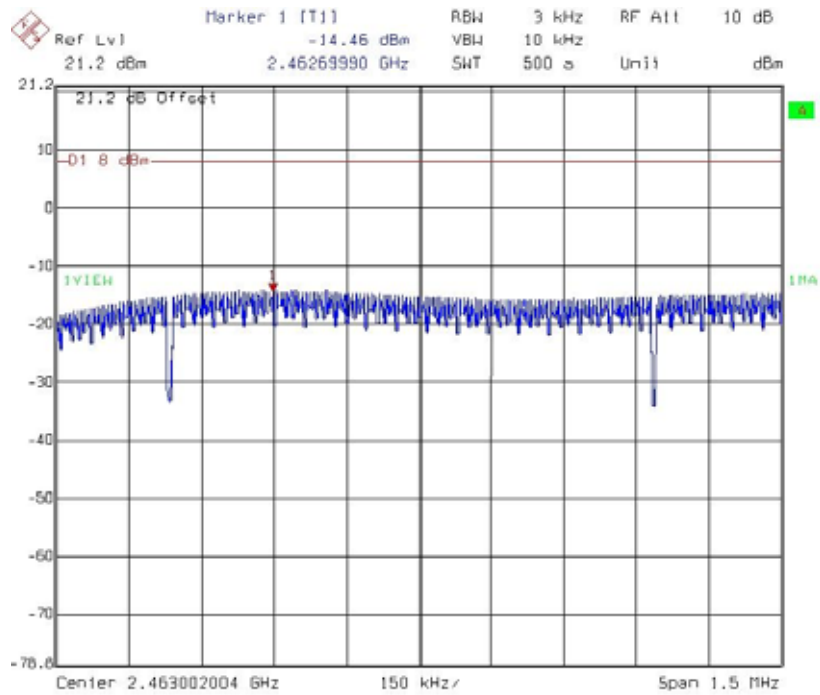


Power Spectral Density @ 802.11g mode channel 1

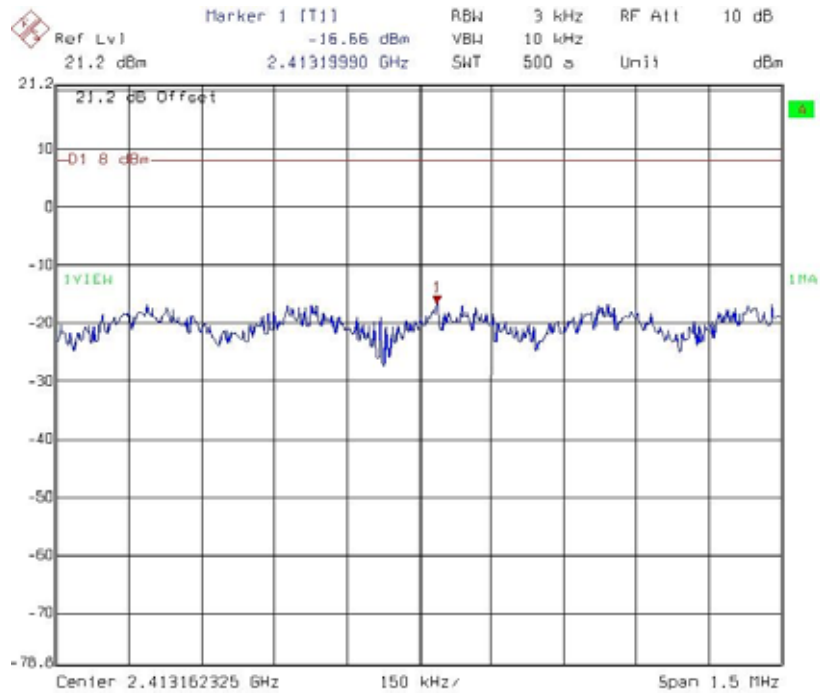


Power Spectral Density @ 802.11g mode channel 6

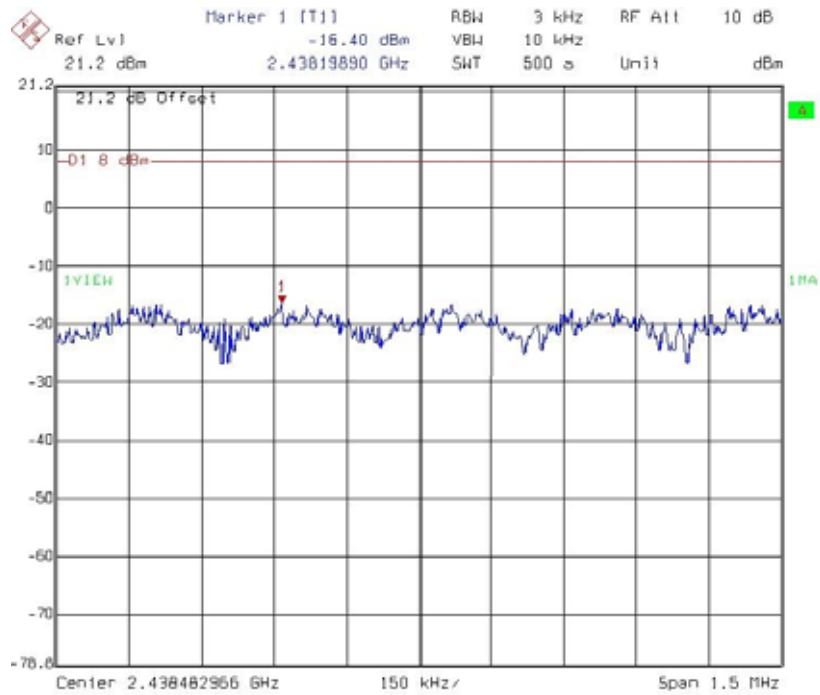


Power Spectral Density @ 802.11g mode channel 11

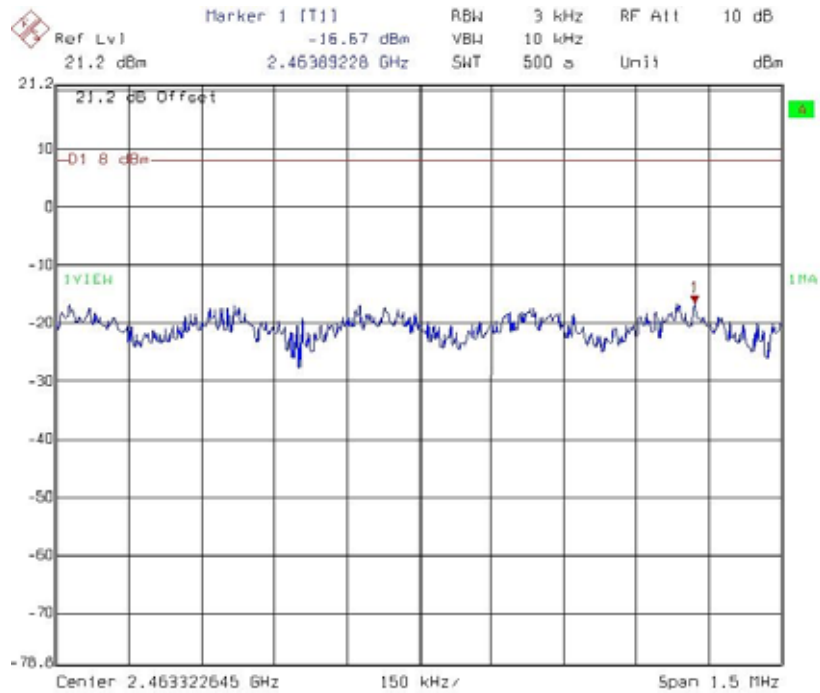


Power Spectral Density @ 802.11n HT20 mode channel 1

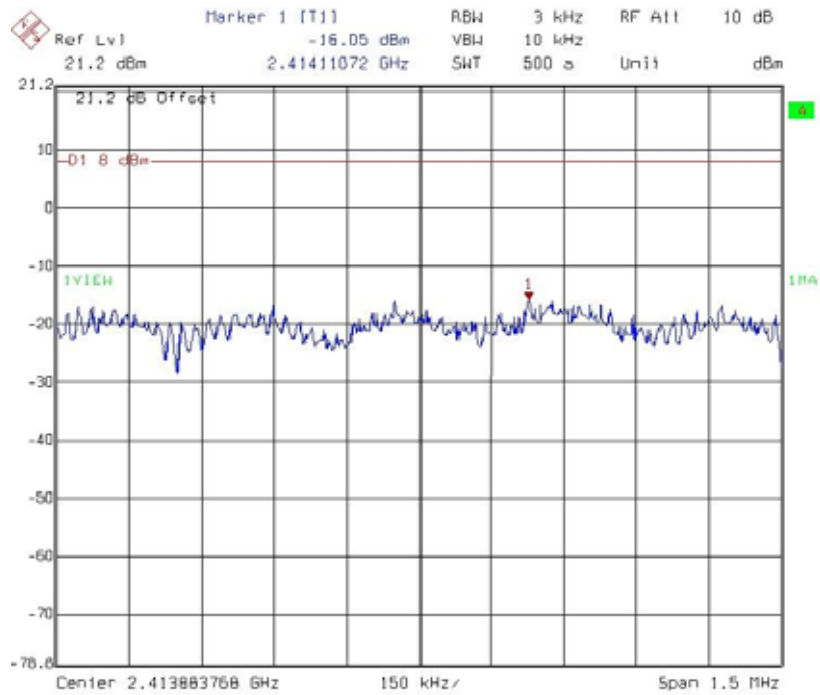


Power Spectral Density @ 802.11n HT20 mode channel 6

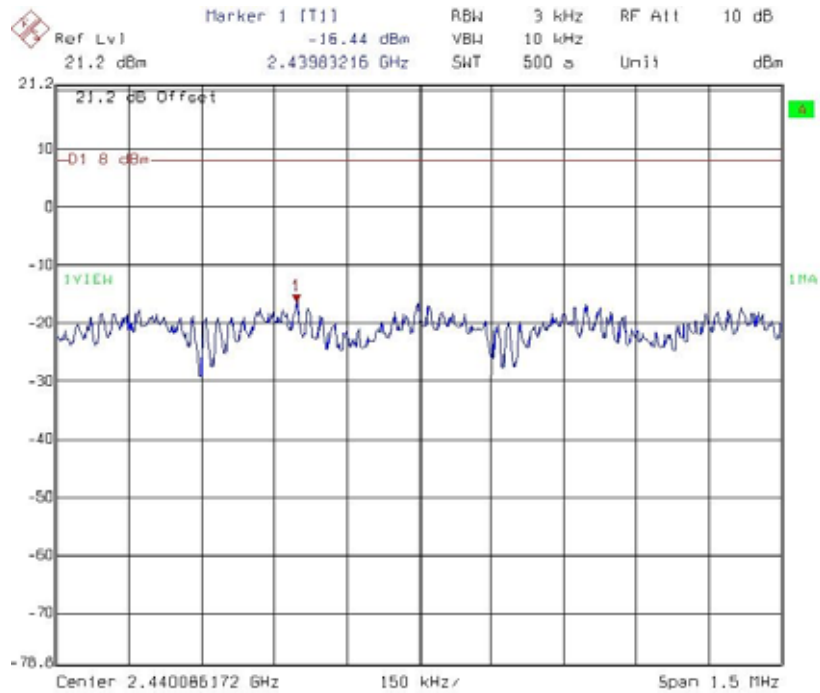


Power Spectral Density @ 802.11n HT20 mode channel 11

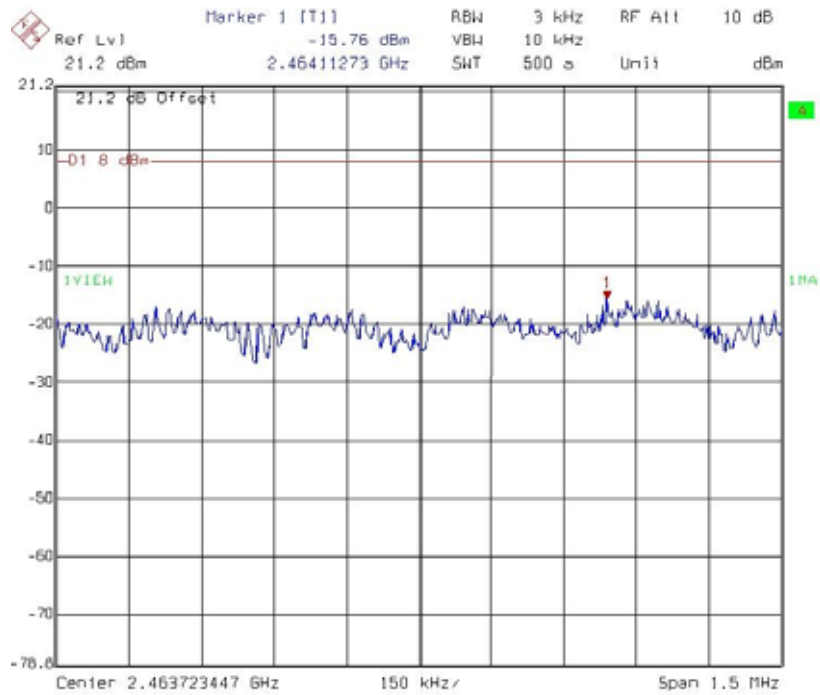


Power Spectral Density @ 802.11n HT40 mode channel 3

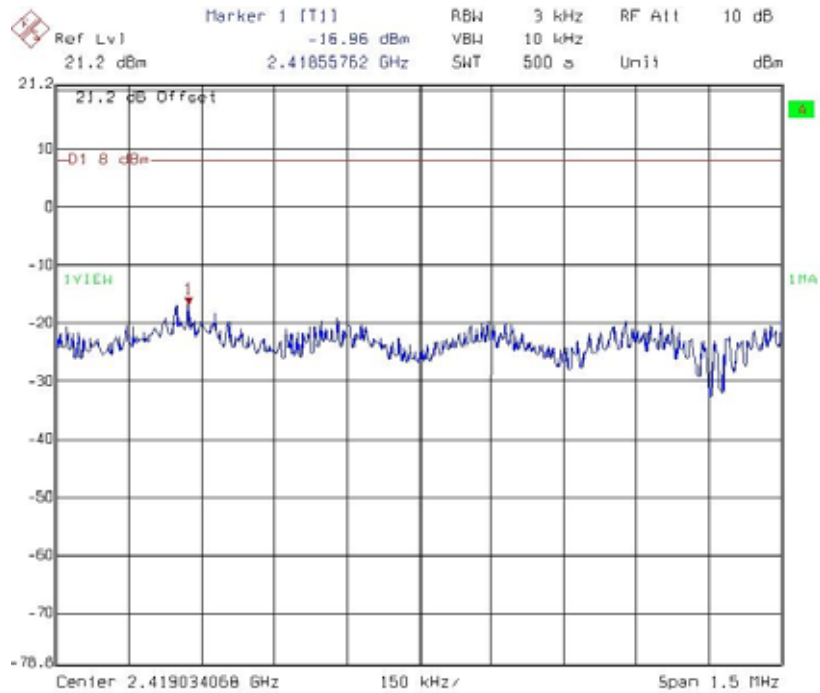

Power Spectral Density @ 802.11n HT40 mode channel 6

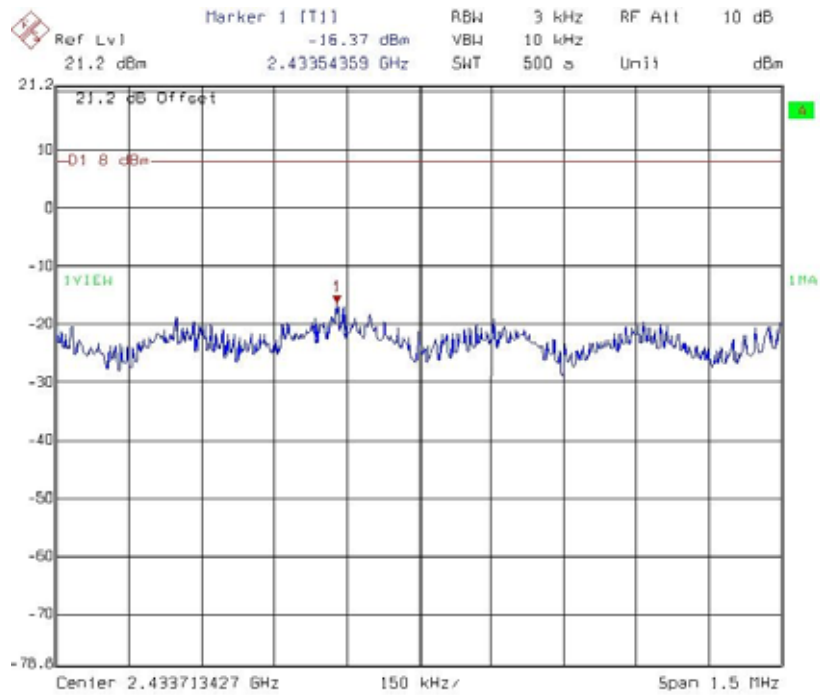

Power Spectral Density @ 802.11n HT40 mode channel 9

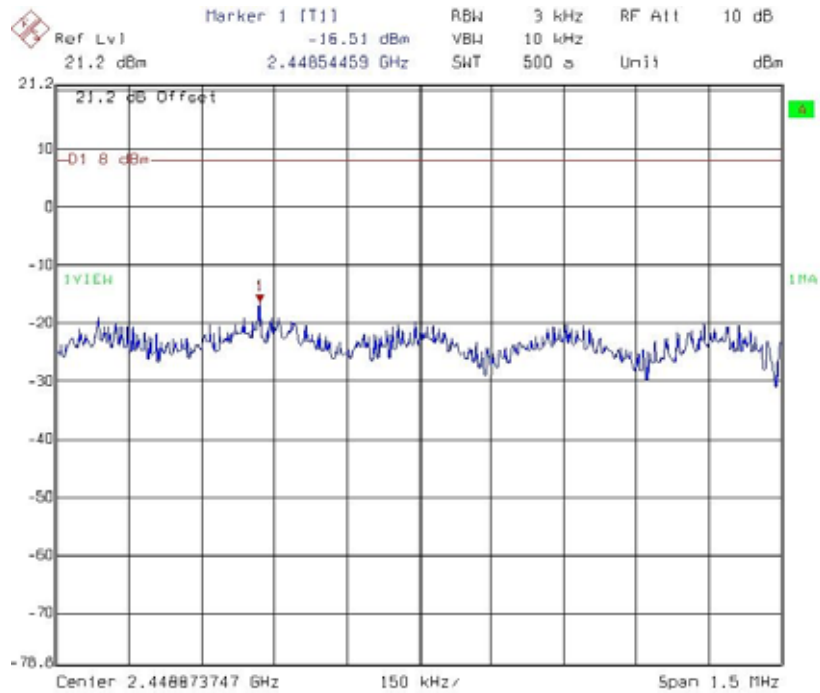

7. RF Antenna conducted Spurious

Name of Test	RF Antenna Conducted Spurious
Base Standard	FCC 15.247(d)


Test Result: Complies
Measurement Data: See plots below

Method of Measurement:


Reference FCC document: KDB558074

The measurements were performed from 30 MHz to 25 GHz RF antenna conducted per FCC 15.247 (d) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 100 kHz. Harmonics and spurious noise must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The table below is the results from the highest emission for each channel within the authorized band. This table was used to determine the spurious limits for each channel.


Test Diagram:

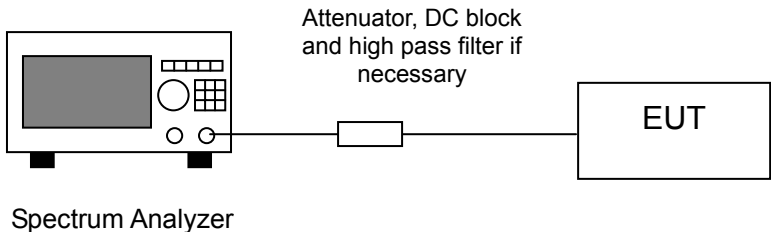


Conducted spurious @ 802.11b mode channel 1 (30 MHz ~ 2400 MHz)

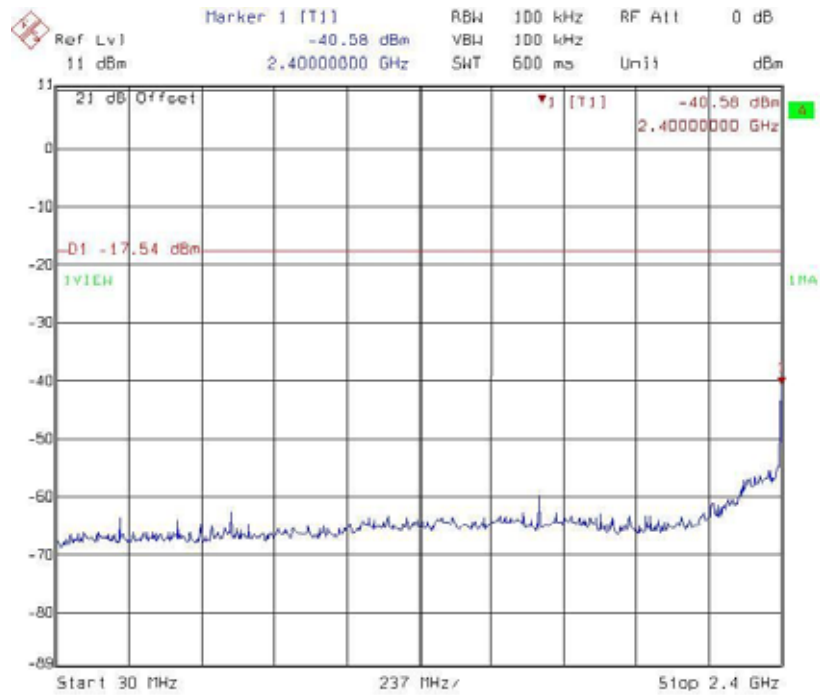


Conducted spurious @ 802.11b mode channel 1 (2400 MHz ~ 2483.5 MHz)

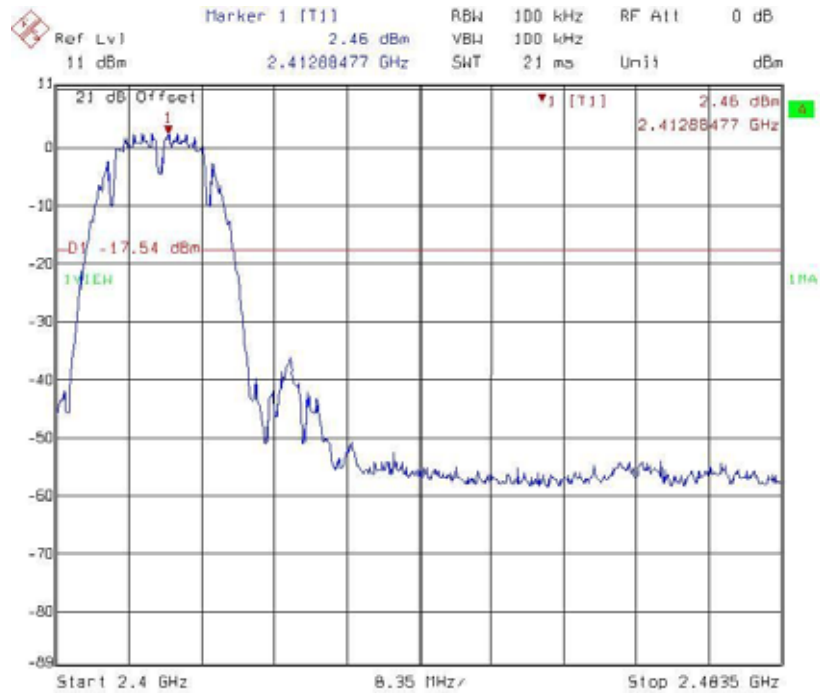


Conducted spurious @ 802.11b mode channel 1 (2483.5 MHz ~ 25 GHz)

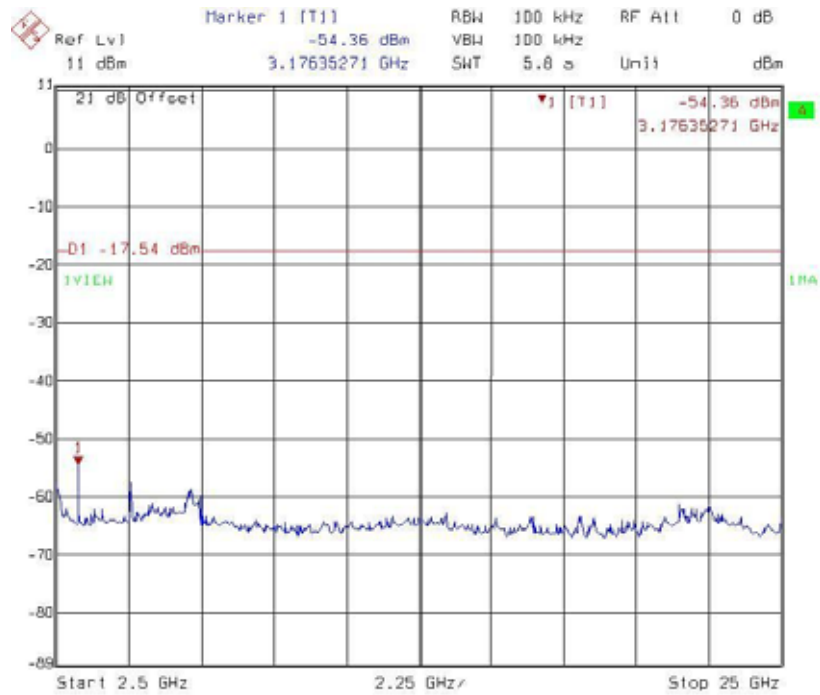


Conducted spurious @ 802.11b mode channel 6 (30 MHz ~ 2400 MHz)

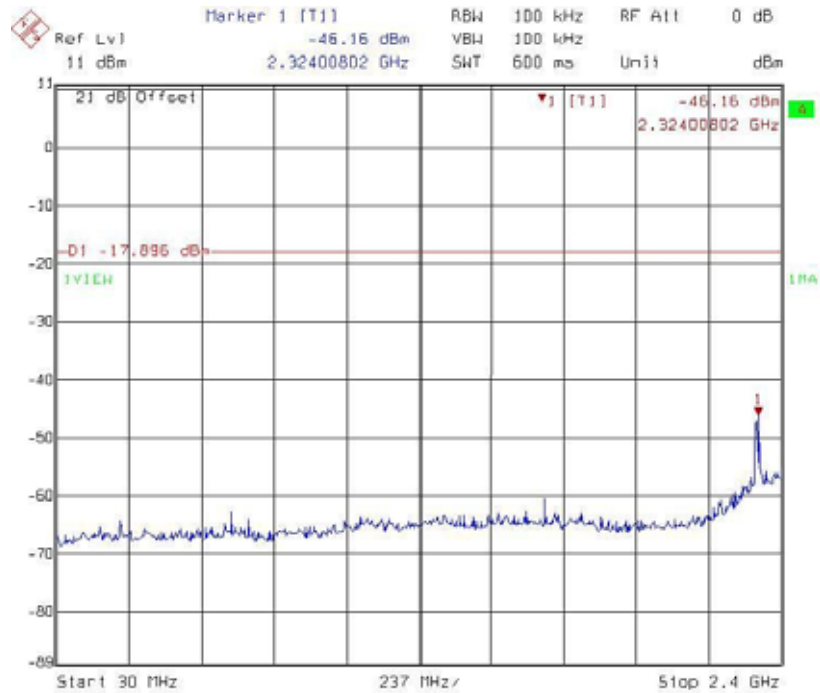


Conducted spurious @ 802.11b mode channel 6 (2400 MHz ~ 2483.5 MHz)

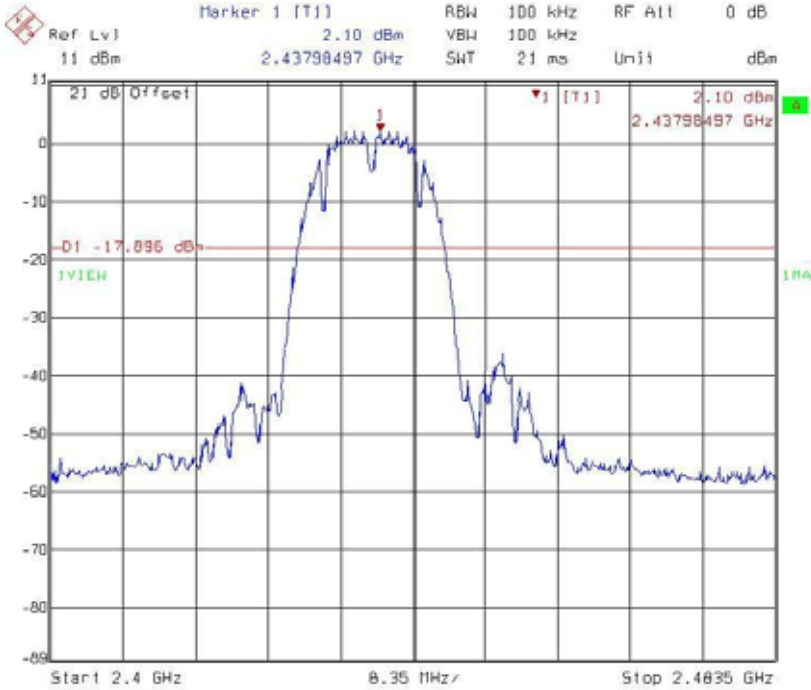


Conducted spurious @ 802.11b mode channel 6 (2483.5 MHz ~ 25 GHz)

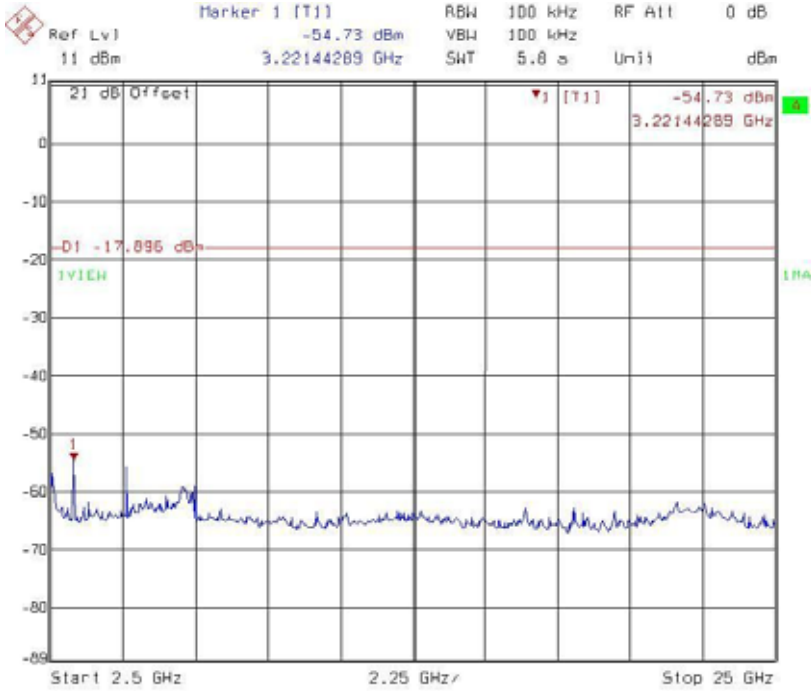


Conducted spurious @ 802.11b mode channel 11 (30 MHz ~ 2400 MHz)

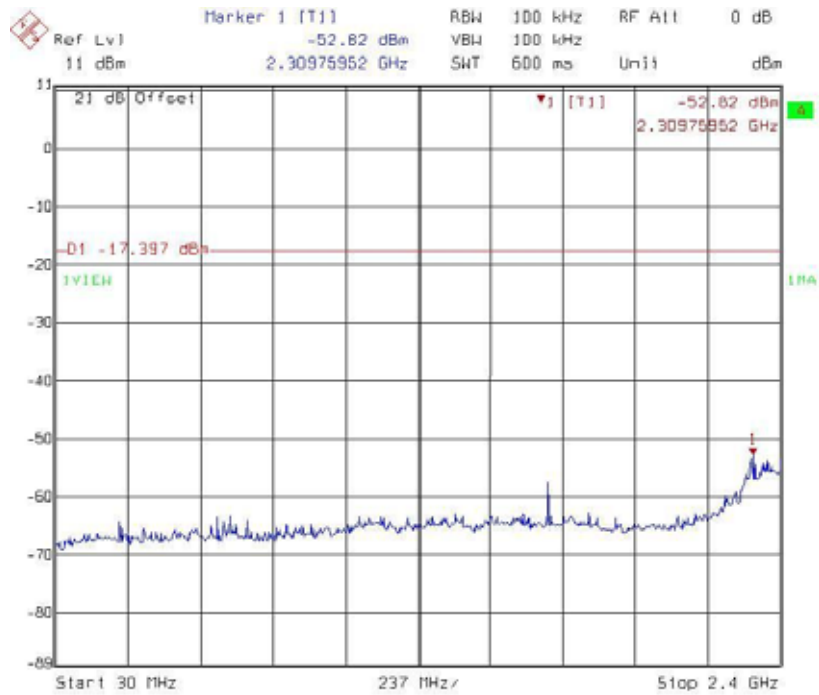


Conducted spurious @ 802.11b mode channel 11 (2400 MHz ~ 2483.5 MHz)

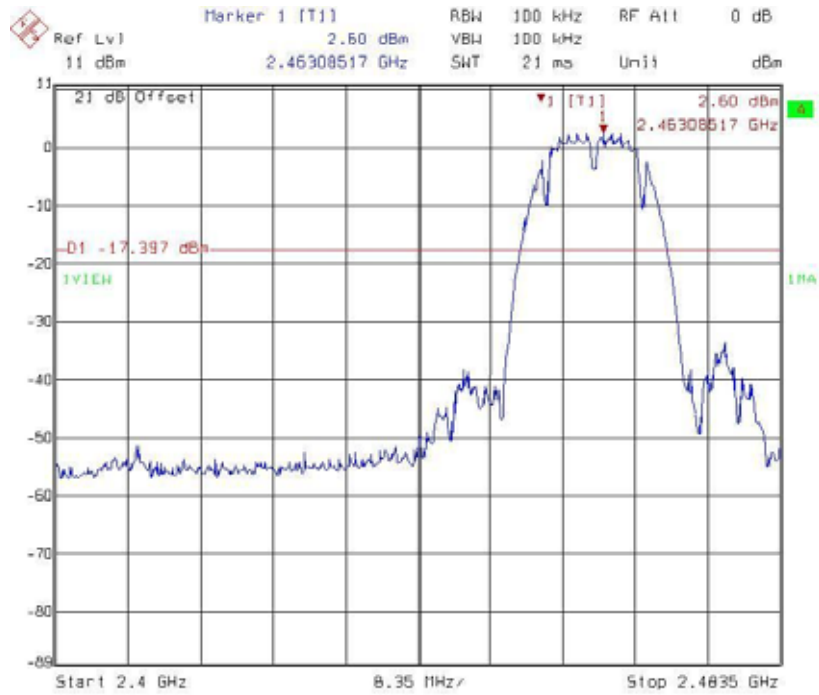


Conducted spurious @ 802.11b mode channel 11 (2483.5 MHz ~ 25 GHz)

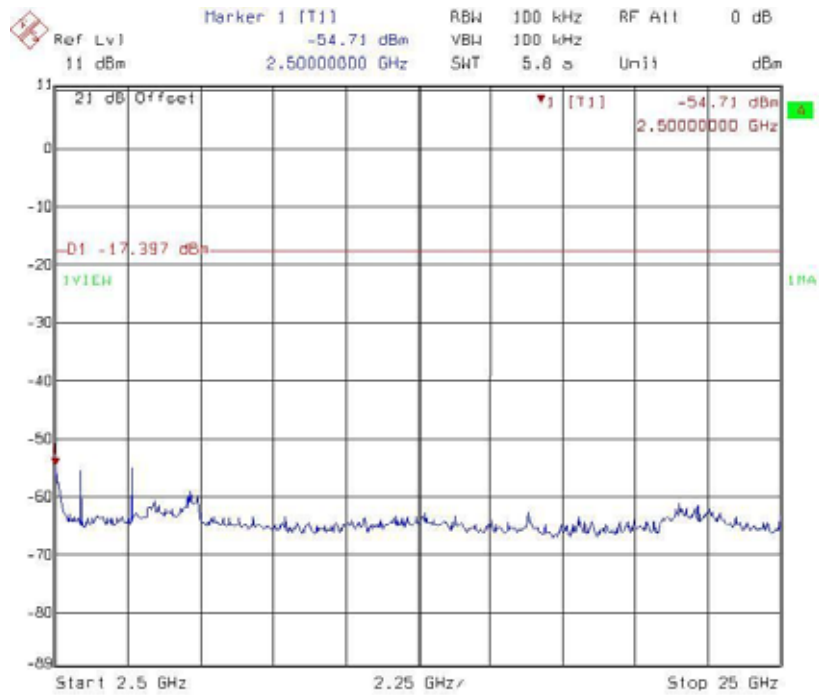


Conducted spurious @ 802.11g mode channel 1 (30 MHz ~ 2400 MHz)

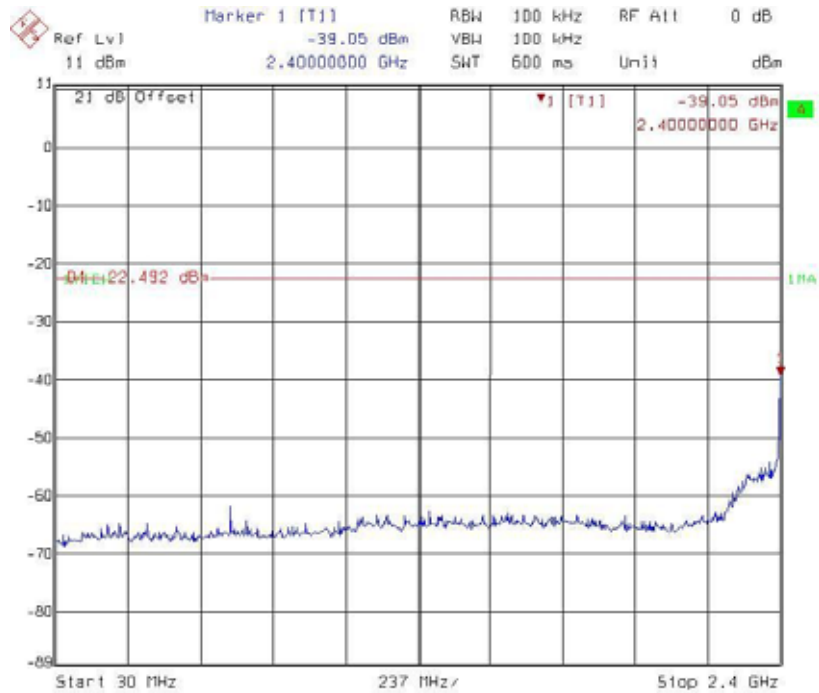


Conducted spurious @ 802.11g mode channel 1 (2400 MHz ~ 2483.5 MHz)

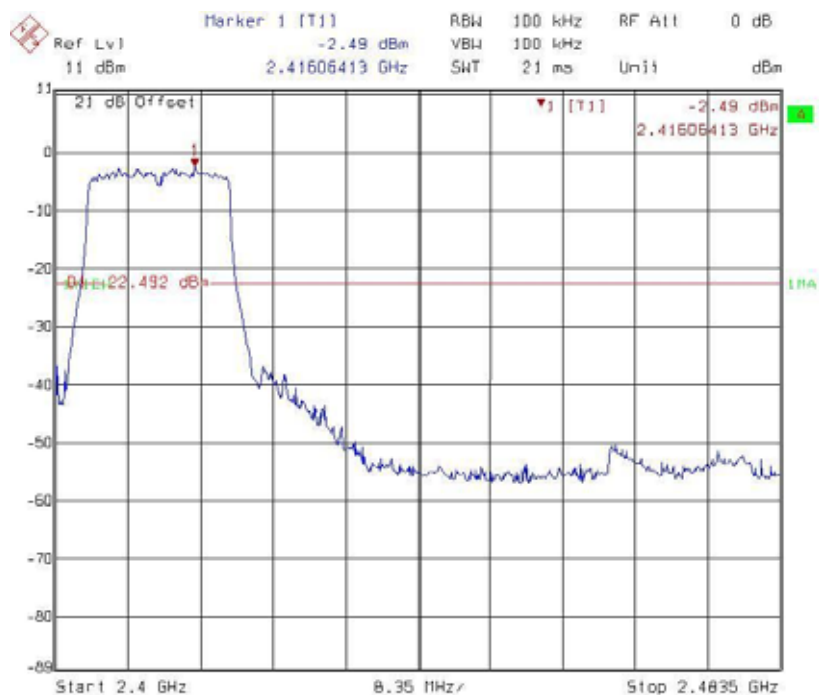


Conducted spurious @ 802.11g mode channel 1 (2483.5 MHz ~ 25 GHz)

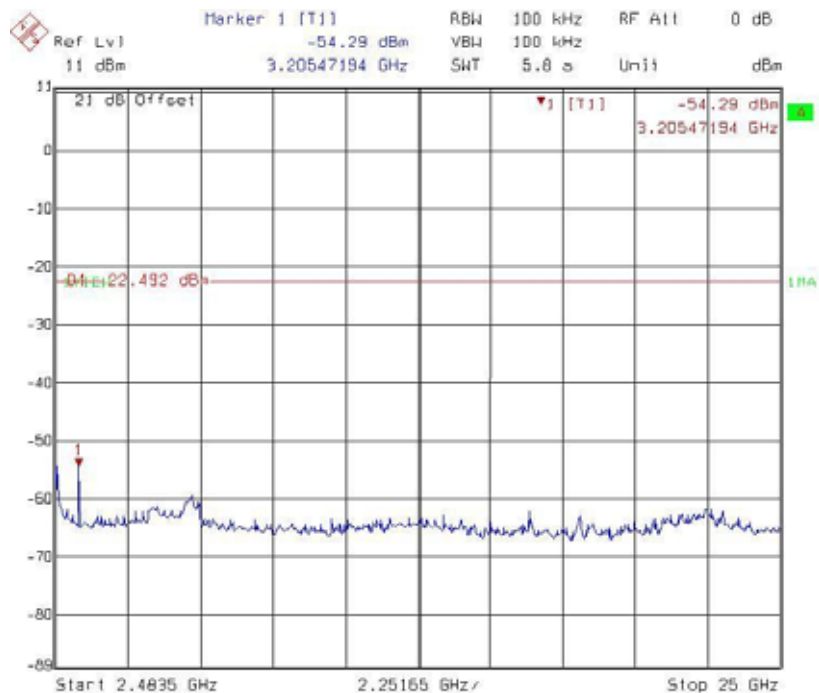


Conducted spurious @ 802.11g mode channel 6 (30 MHz ~ 2400 MHz)

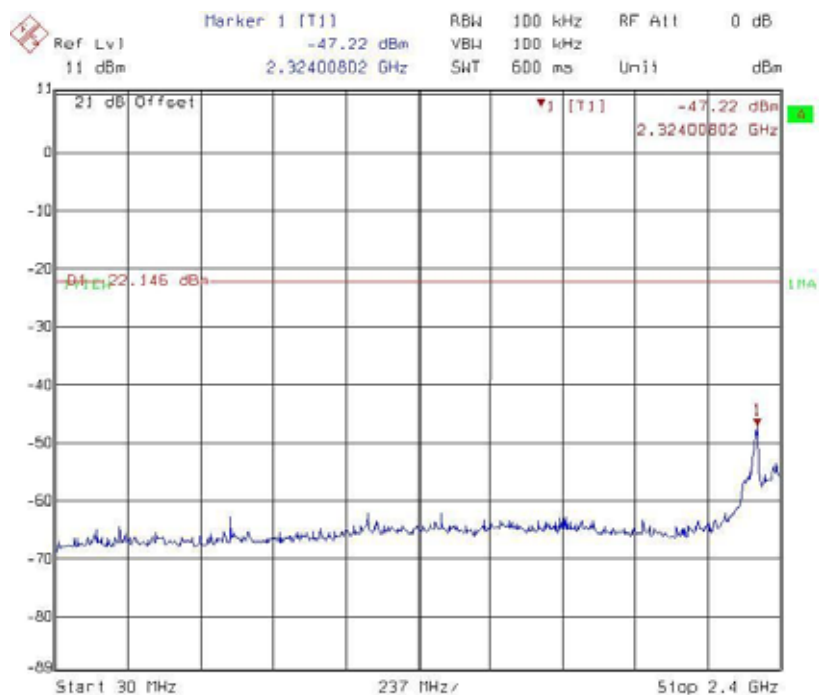


Conducted spurious @ 802.11g mode channel 6 (2400 MHz ~ 2483.5 MHz)

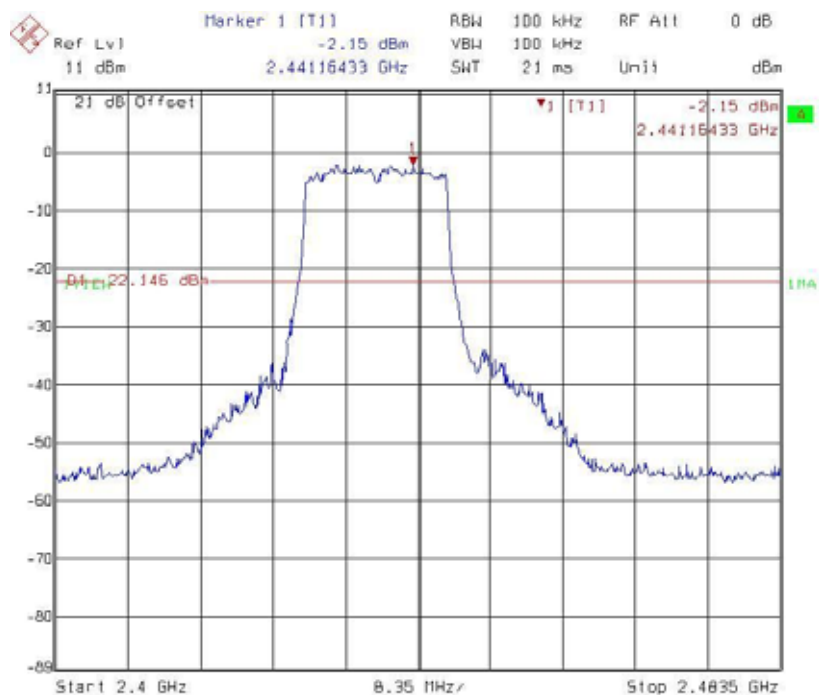


Conducted spurious @ 802.11g mode channel 6 (2483.5 MHz ~ 25 GHz)

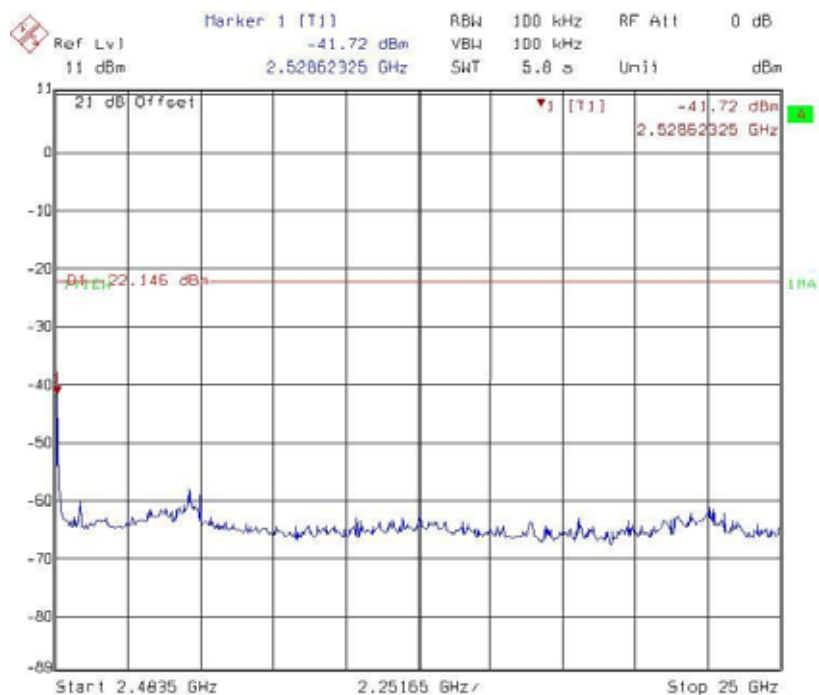


Conducted spurious @ 802.11g mode channel 11 (30 MHz ~ 2400 MHz)

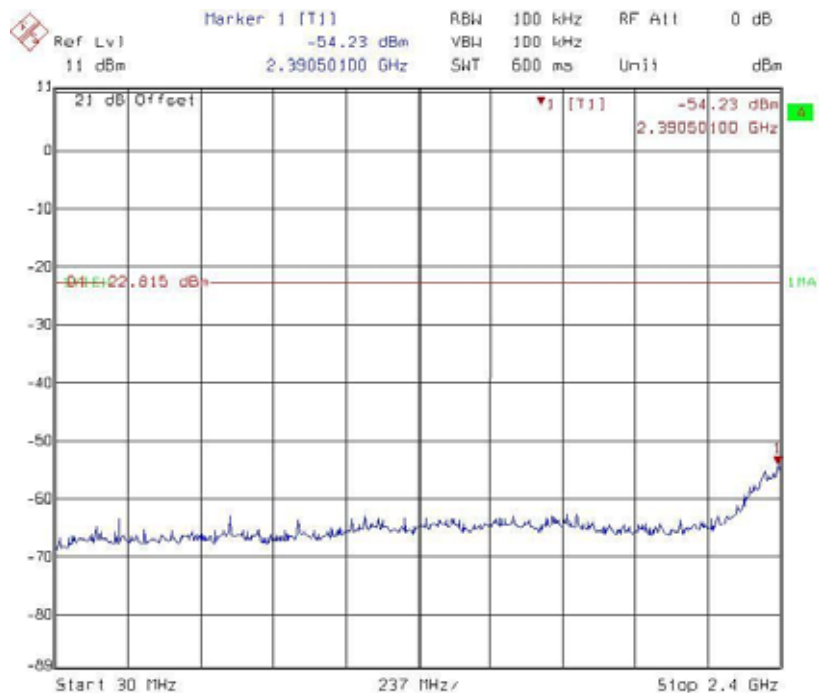


Conducted spurious @ 802.11g mode channel 11 (2400 MHz ~ 2483.5 MHz)

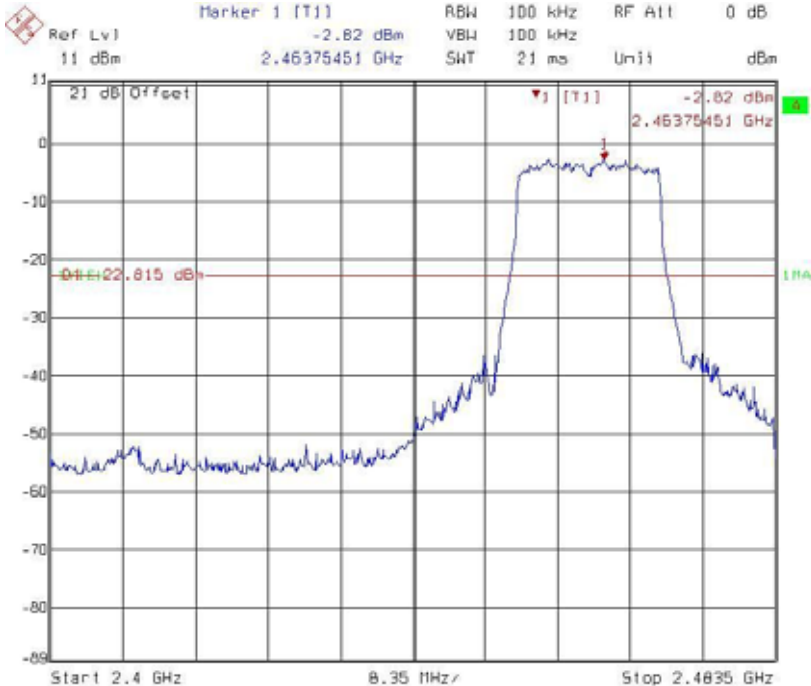


Conducted spurious @ 802.11g mode channel 11 (2483.5 MHz ~ 25 GHz)

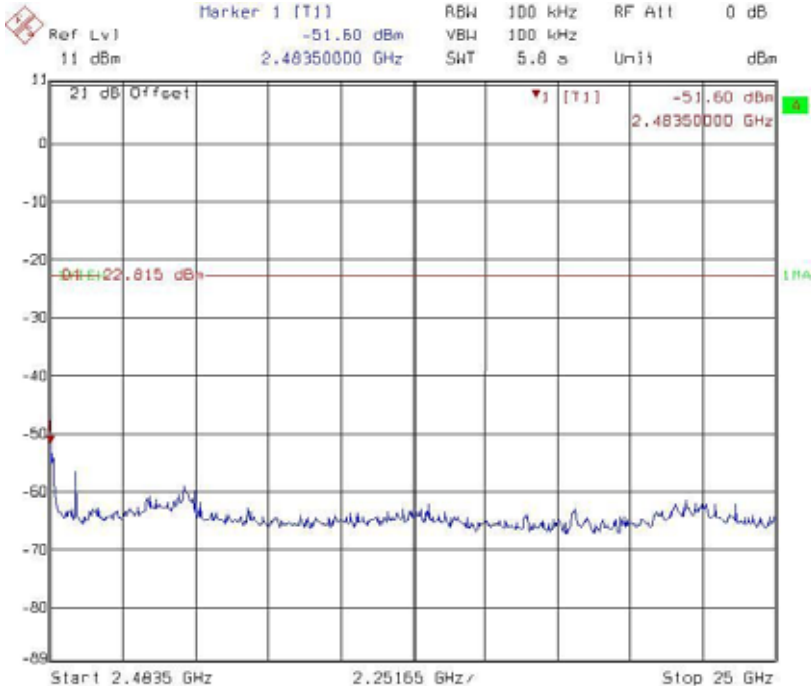


Conducted spurious @ 802.11n HT20 mode channel 1 (30 MHz ~ 2400 MHz)

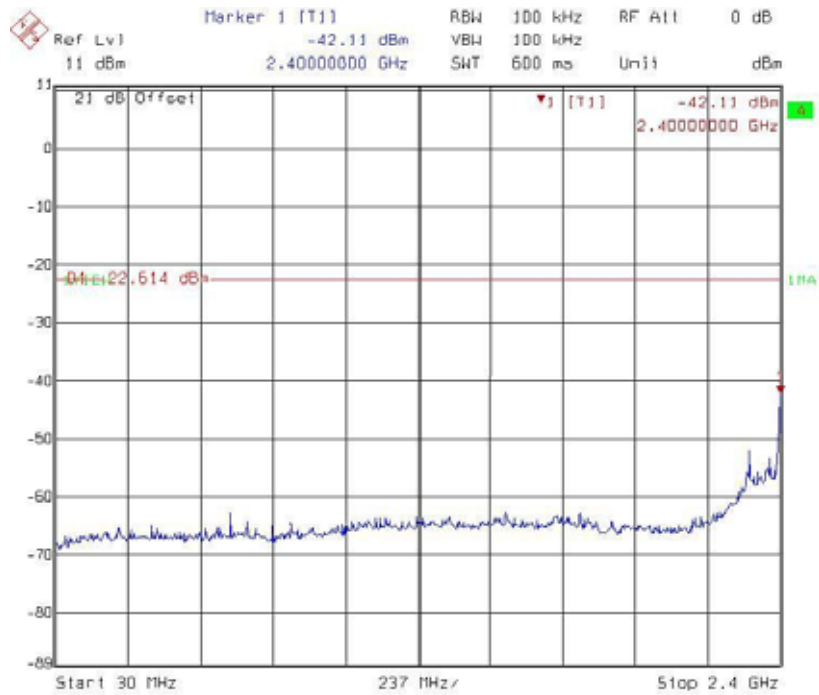


Conducted spurious @ 802.11n HT20 mode channel 1 (2400 MHz ~ 2483.5 MHz)

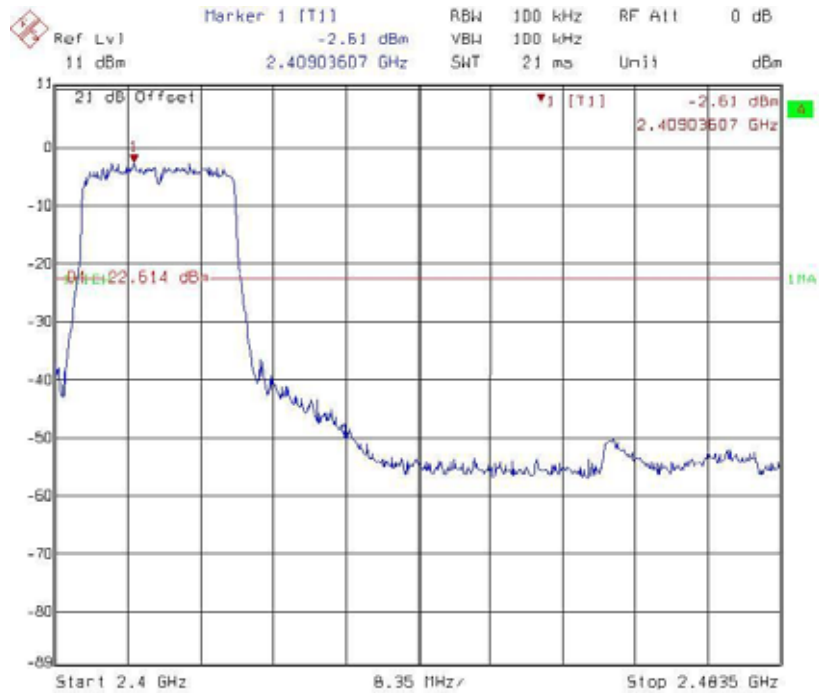


Conducted spurious @ 802.11n HT20 mode channel 1 (2483.5 MHz ~ 25 GHz)

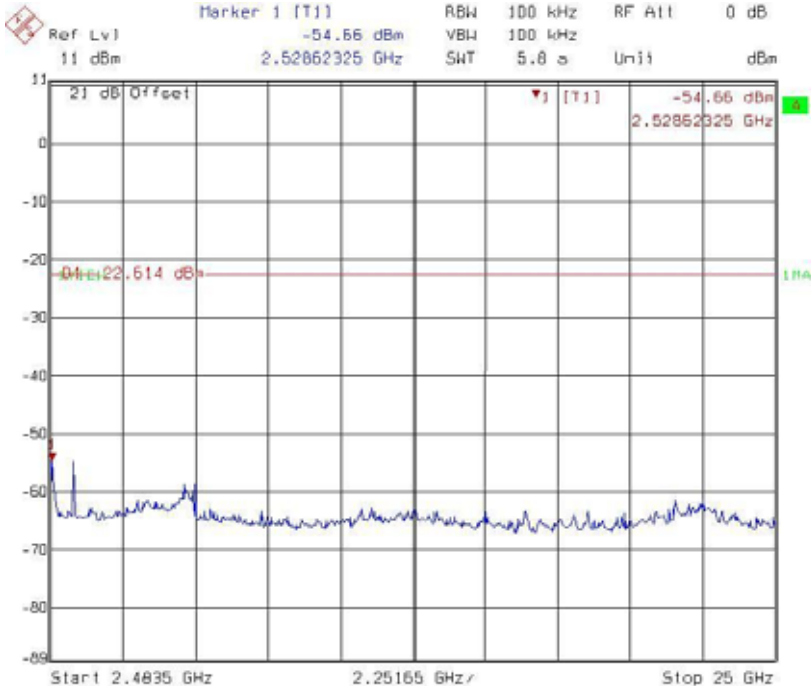


Conducted spurious @ 802.11n HT20 mode channel 6 (30 MHz ~ 2400 MHz)

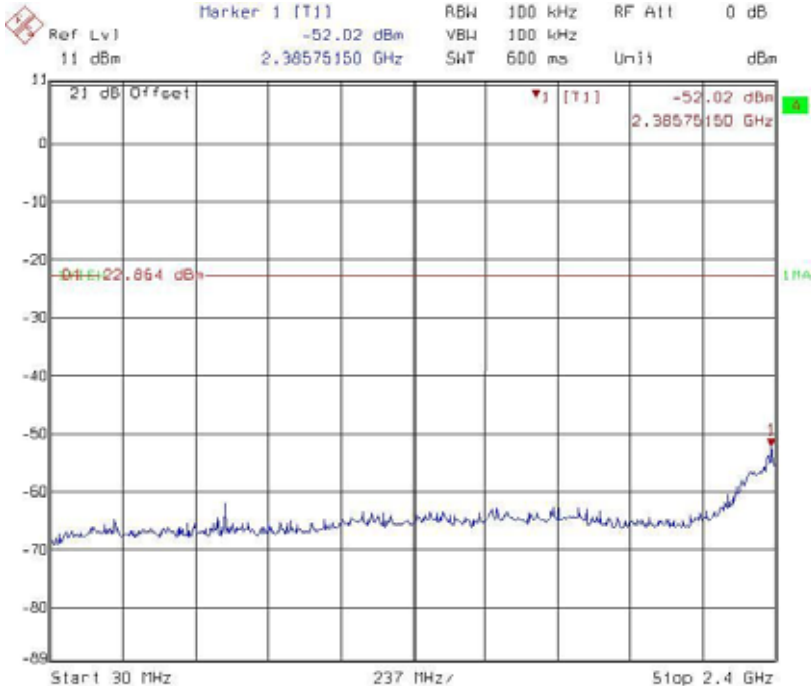


Conducted spurious @ 802.11n HT20 mode channel 6 (2400 MHz ~ 2483.5 MHz)

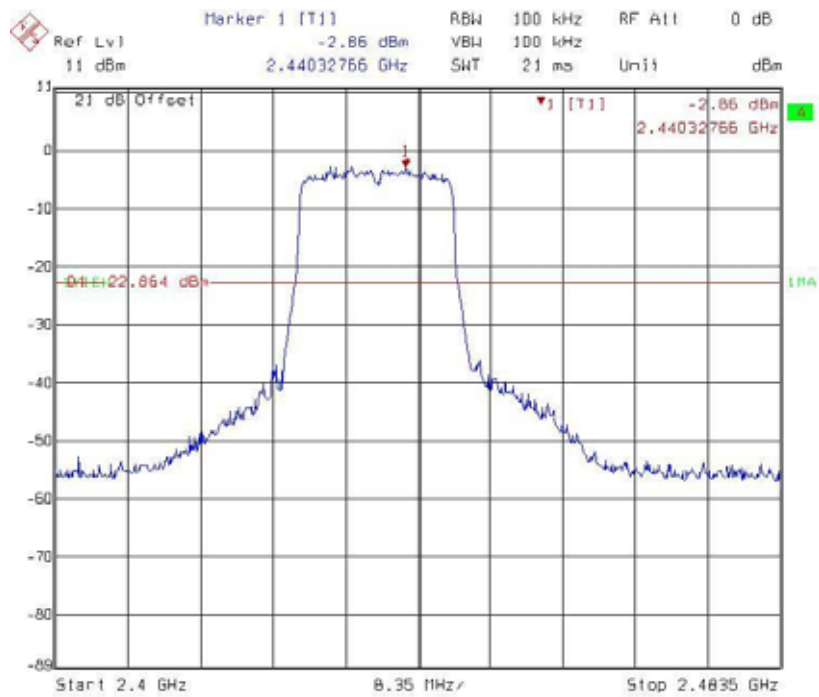


Conducted spurious @ 802.11n HT20 mode channel 6 (2483.5 MHz ~ 25 GHz)

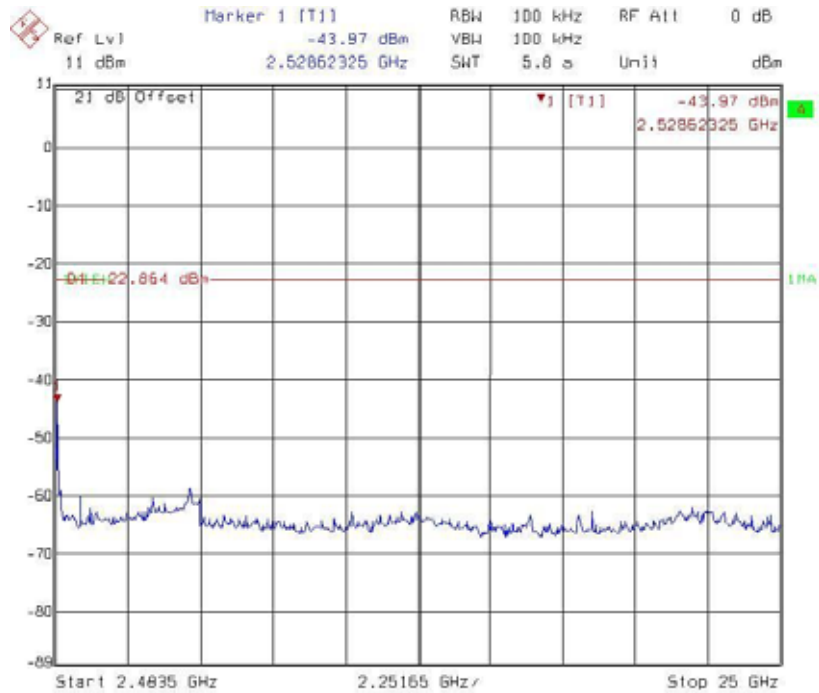


Conducted spurious @ 802.11n HT20 mode channel 11 (30 MHz ~ 2400 MHz)

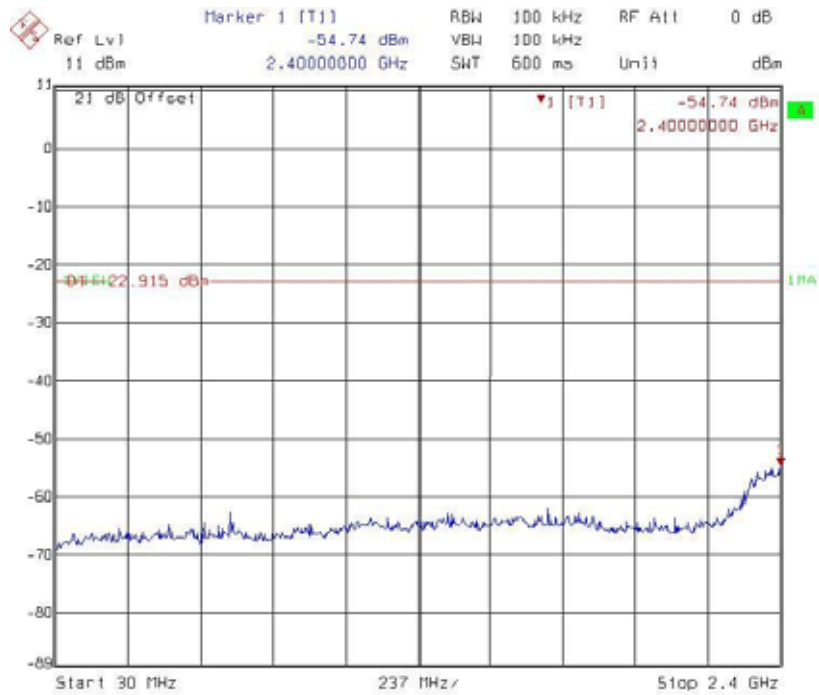


Conducted spurious @ 802.11n HT20 mode channel 11 (2400 MHz ~ 2483.5 MHz)

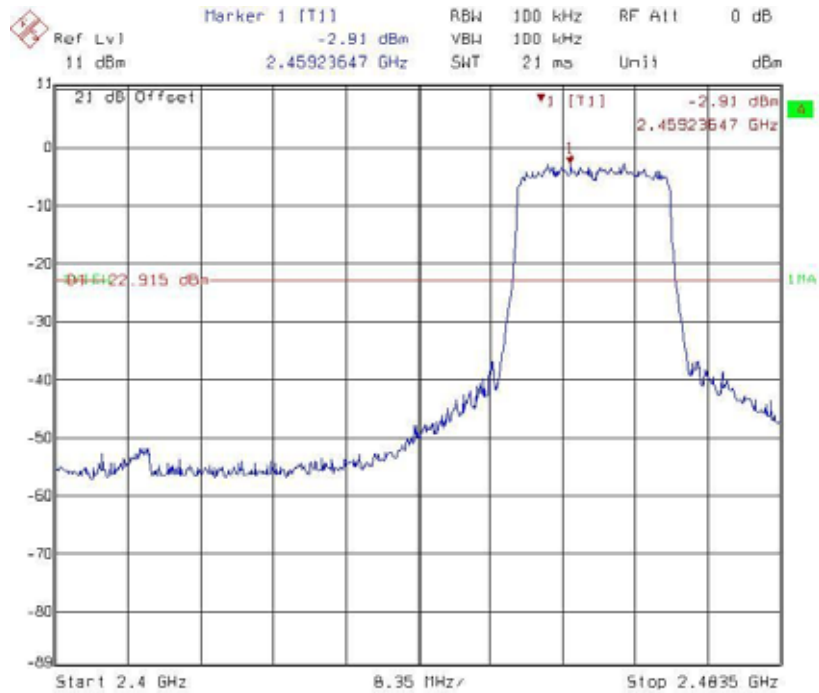


Conducted spurious @ 802.11n HT20 mode channel 11 (2483.5 MHz ~ 25 GHz)

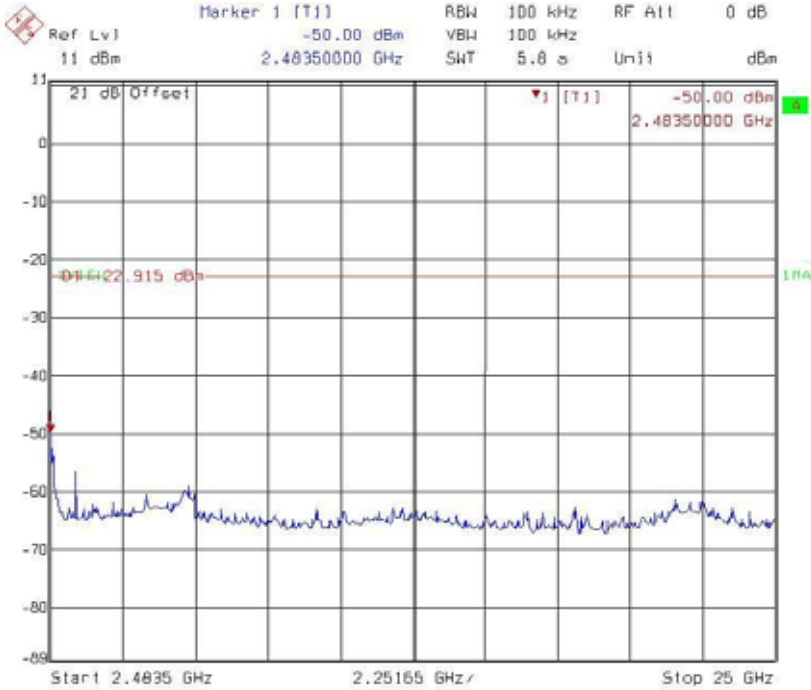


Conducted spurious @ 802.11n HT40 mode channel 3 (30 MHz ~ 2400 MHz)

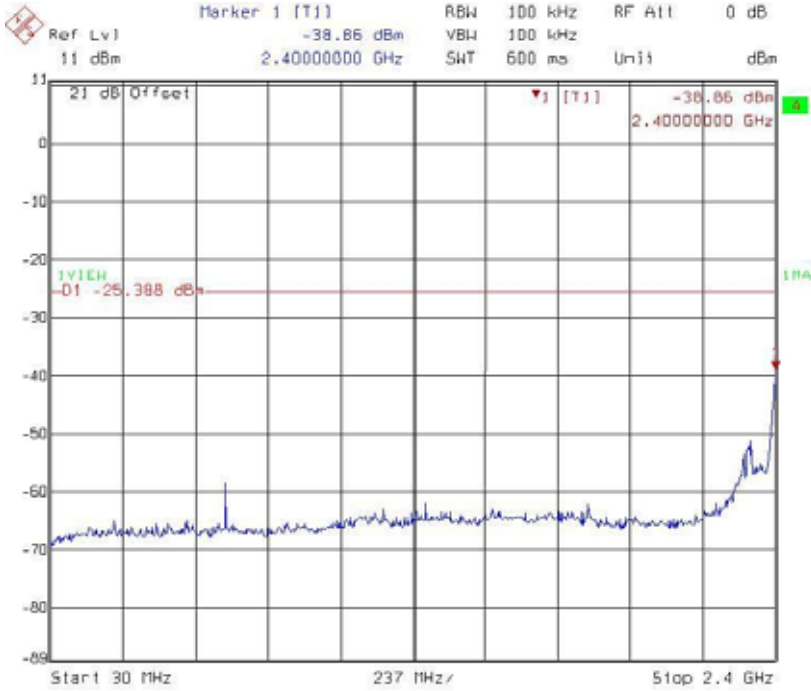


Conducted spurious @ 802.11n HT40 mode channel 3 (2400 MHz ~ 2483.5 MHz)

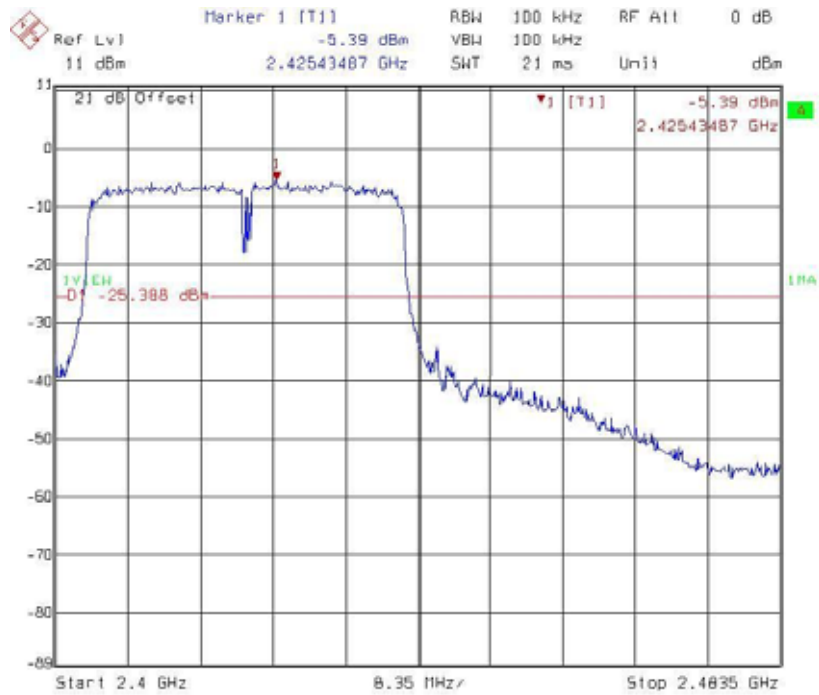


Conducted spurious @ 802.11n HT40 mode channel 3 (2483.5 MHz ~ 25 GHz)

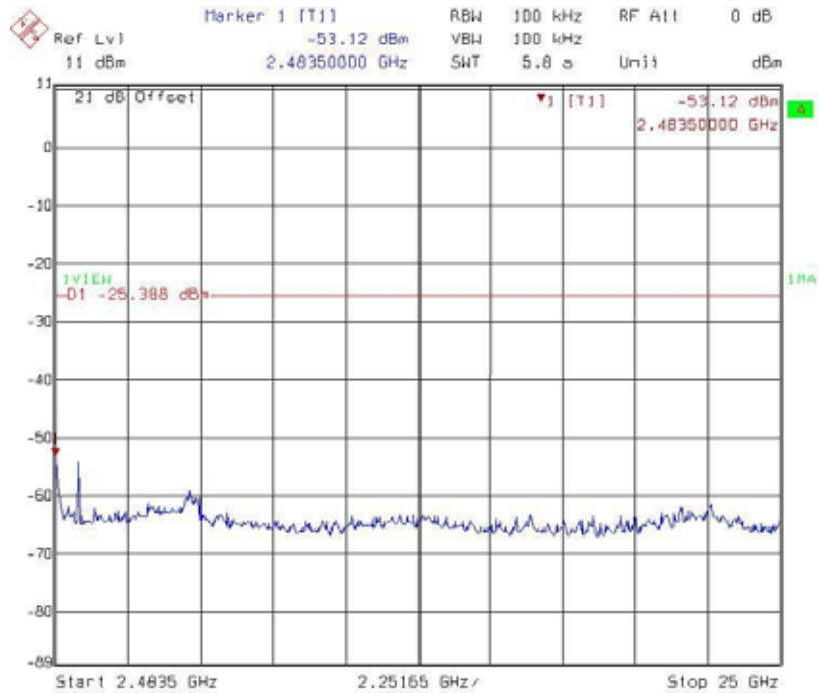


Conducted spurious @ 802.11n HT40 mode channel 6 (30 MHz ~ 2400 MHz)

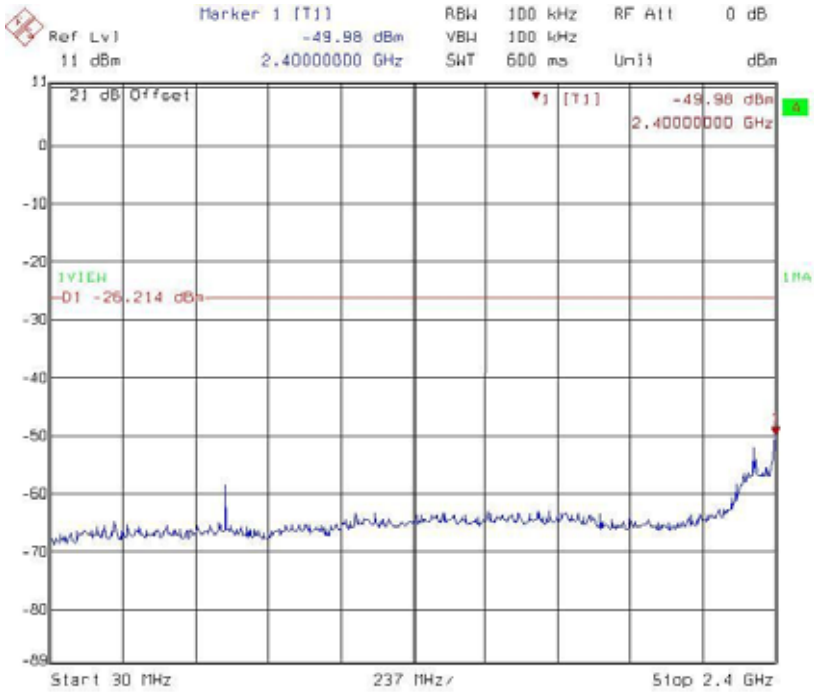


Conducted spurious @ 802.11n HT40 mode channel 6 (2400 MHz ~ 2483.5 MHz)

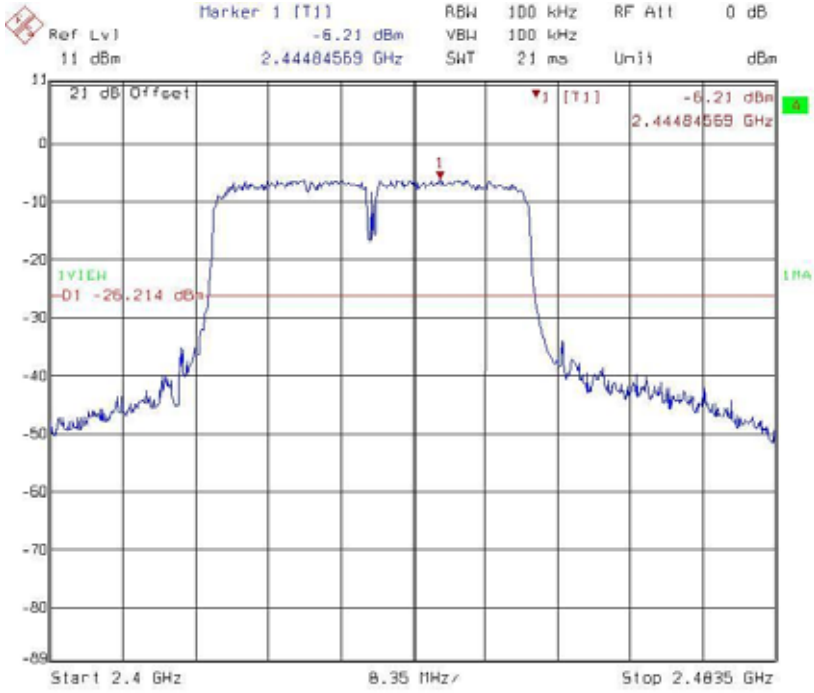


Conducted spurious @ 802.11n HT40 mode channel 6 (2483.5 MHz ~ 25 GHz)

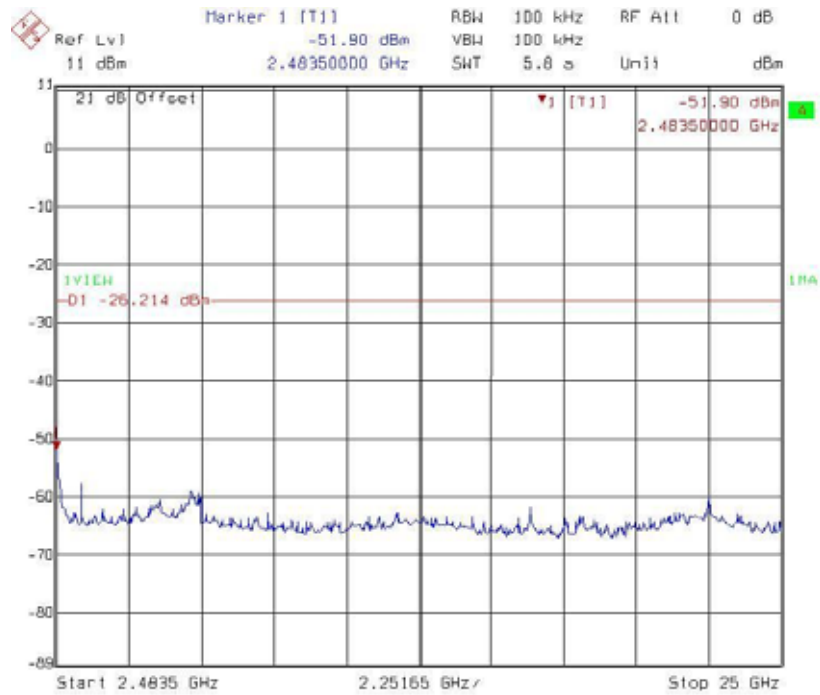


Conducted spurious @ 802.11n HT40 mode channel 9 (30 MHz ~ 2400 MHz)

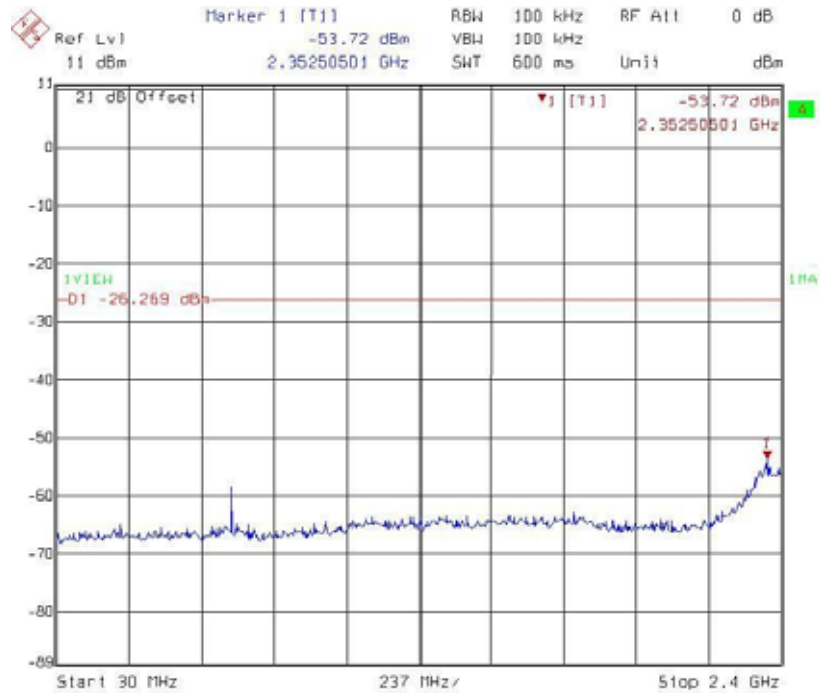

Conducted spurious @ 802.11n HT40 mode channel 9 (2400 MHz ~ 2483.5 MHz)

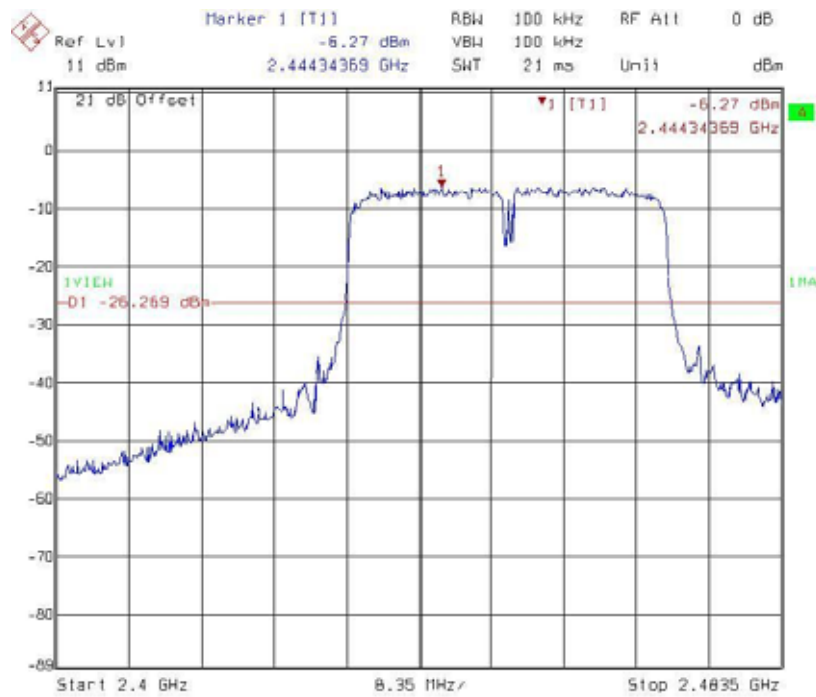

Conducted spurious @ 802.11n HT40 mode channel 9 (2483.5 MHz ~ 25 GHz)

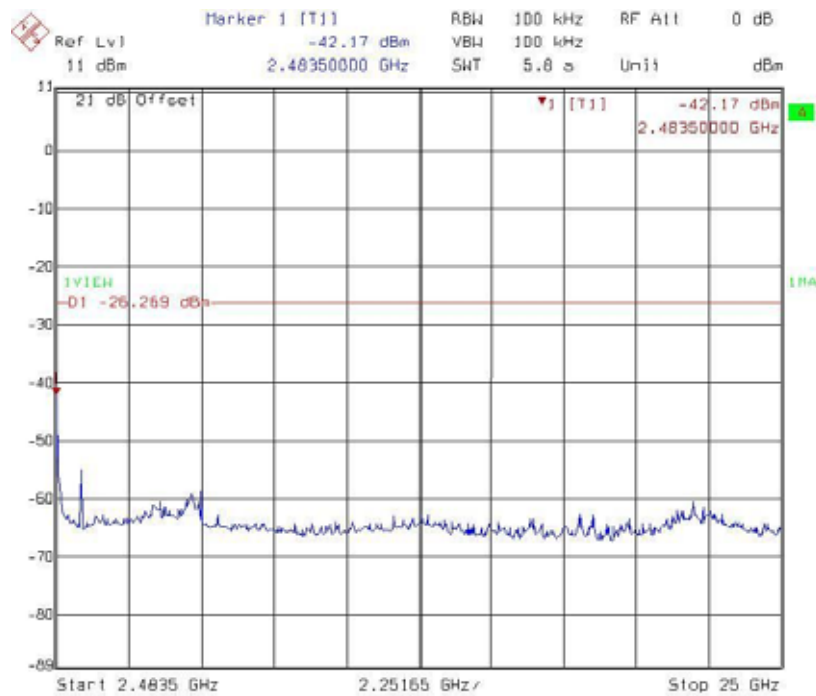

8. Radiated Spurious Emission

Name of Test	Radiated Spurious Emission
Base Standard	FCC 15.247(d), 15.209, 15.205

Test Result: Complies
Measurement Data: See Tables below

Method of Measurement:


Reference FCC document: KDB558074, ANSI C63.4

The frequency range from 30 MHz to 1000 MHz using Bilog Antenna.
The frequency range over 1 GHz using Horn Antenna.

Radiated emissions were investigated cover the frequency range from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz and 10 Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/VBW) recorded also on the report. The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter. The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent 3 meters reading using inverse scaling with distance.

The EUT configuration please refer to the "Spurious set-up photo.pdf".

Test Diagram:

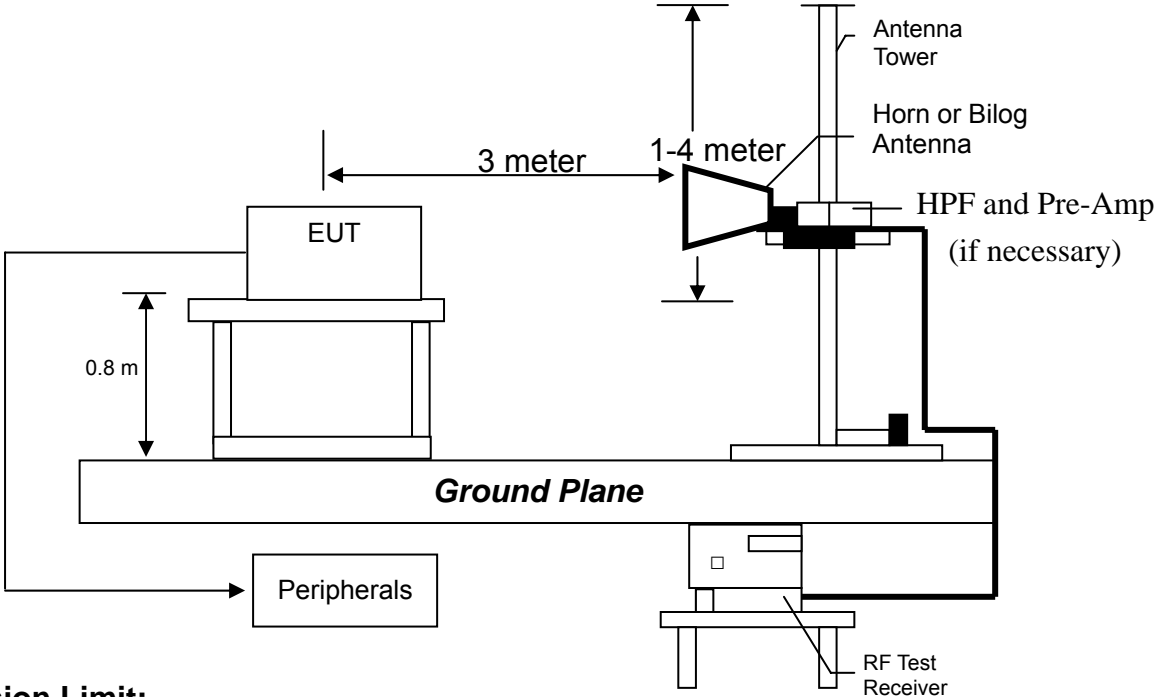

Emission Limit:

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Limits (dBµV/m@ 3 meter)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

- Note:**
- (1) The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps data rate for 802.11b mode, 6 Mbps data rate for 802.11g mode, 6.5 Mbps data rate for 802.11n HT20 mode and 13 Mbps data rate for 802.11n HT40 mode. The EUT was tuned to a low, middle and high channel.
 - (2) The EUT operating at 2.4 GHz ISM band. Frequency Range scanned from 30 MHz to 25 GHz.

Measurement results: frequencies equal to or less than 1 GHz

The test was performed on EUT under 802.11b, 802.11g, 802.11n HT20 and 802.11n HT40 continuously transmitting mode. The worst case occurred at 802.11b Tx channel 1.

EUT : NBG4104
 Worst Case : 802.11b Tx at channel 1

Antenna Polariz. (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
V	31.94	QP	12.60	23.82	36.41	40.00	-3.59
V	90.14	QP	7.38	29.43	36.80	43.50	-6.70
V	174.53	QP	14.96	25.06	40.01	43.50	-3.49
V	175.50	QP	14.96	25.00	39.95	43.50	-3.55
V	359.80	QP	15.06	25.14	40.20	46.00	-5.80
V	839.95	QP	23.62	16.68	40.30	46.00	-5.70
H	168.71	QP	13.84	18.44	32.27	43.50	-11.23
H	359.80	QP	15.48	28.83	44.30	46.00	-1.70
H	499.48	QP	18.64	21.64	40.28	46.00	-5.72
H	599.39	QP	20.84	18.72	39.55	46.00	-6.45
H	839.95	QP	24.04	19.86	43.89	46.00	-2.11
H	959.26	QP	25.54	14.66	40.20	46.00	-5.80

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

Measurement results: frequency above 1GHz

EUT : NBG4104
Test Condition : 802.11b Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3210	PK	V	33.8	36.24	42.67	45.11	54	-8.89
4824	PK	V	35.1	38.54	41.30	44.74	54	-9.26
4824	PK	H	35.1	38.54	40.20	43.64	54	-10.36

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11b Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3240	PK	V	33.8	36.24	41.79	44.23	54	-9.77
4874	PK	V	35.1	38.54	39.19	42.63	54	-11.37
3240	PK	H	33.8	36.24	36.75	39.19	54	-14.81
4874	PK	H	35.1	38.54	37.58	41.02	54	-12.98

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11b Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3270	PK	V	33.8	36.24	42.17	44.61	54	-9.39
4924	PK	V	35.1	38.54	37.68	41.12	54	-12.88
3270	PK	H	33.8	36.24	37.70	40.14	54	-13.86
4924	PK	H	35.1	38.54	37.00	40.44	54	-13.56

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1GHz to 25GHz.The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11g Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3210	PK	V	33.8	36.24	42.04	44.48	54	-9.52
4824	PK	V	35.1	38.54	38.45	41.89	54	-12.11
4824	PK	H	35.1	38.54	37.01	40.45	54	-13.55

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11g Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3240	PK	V	33.8	36.24	40.71	43.15	54	-10.85
4874	PK	V	35.1	38.54	37.48	40.92	54	-13.08
3240	PK	H	33.8	36.24	36.85	39.29	54	-14.71
4874	PK	H	35.1	38.54	36.33	39.77	54	-14.23

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11g Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3270	PK	V	33.8	36.24	41.25	43.69	54	-10.31
4924	PK	V	35.1	38.54	37.44	40.88	54	-13.12
4924	PK	H	35.1	38.54	36.52	39.96	54	-14.04

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11n HT20 Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3210	PK	V	33.8	36.24	40.96	43.40	54	-10.60
4824	PK	V	35.1	38.54	36.64	40.08	54	-13.92
4824	PK	H	35.1	38.54	37.04	40.48	54	-13.52

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11n HT20 Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3240	PK	V	33.8	36.24	40.78	43.22	54	-10.78
4874	PK	V	35.1	38.54	37.27	40.71	54	-13.29
3240	PK	H	33.8	36.24	36.97	39.41	54	-14.59
4874	PK	H	35.1	38.54	37.24	40.68	54	-13.32

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11n HT20 Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3270	PK	V	33.8	36.24	41.42	43.86	54	-10.14
4924	PK	V	35.1	38.54	37.50	40.94	54	-13.06
3270	PK	H	33.8	36.24	38.53	40.97	54	-13.03
4924	PK	H	35.1	38.54	36.99	40.43	54	-13.57

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11n HT40 Tx at channel 3

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3210	PK	V	33.8	36.24	40.87	43.31	54	-10.69
4824	PK	V	35.1	38.54	36.97	40.41	54	-13.59
4844	PK	H	35.1	38.54	36.35	39.79	54	-14.21

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11n HT40 Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3240	PK	V	33.8	36.24	40.62	43.06	54	-10.94
4860	PK	V	35.1	38.54	36.99	40.43	54	-13.57
3240	PK	H	33.8	36.24	36.79	39.23	54	-14.77
4860	PK	H	35.1	38.54	36.53	39.97	54	-14.03

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

EUT : NBG4104
Test Condition : 802.11n HT40 Tx at channel 9

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3270	PK	V	33.8	36.24	41.31	43.75	54	-10.25
4904	PK	V	35.1	38.54	37.75	41.19	54	-12.81
3270	PK	H	33.8	36.24	36.42	38.86	54	-15.14
4904	PK	H	35.1	38.54	36.86	40.30	54	-13.70

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz. The data value listed above which is higher than the system noise floor.

9. Emission on Band Edge

Name of Test	Emission Band Edge
Base Standard	FCC 15.247(d)

Test Result: Complies
Measurement Data: See Tables & plots below

Method of Measurement:

Reference FCC document: KDB558074, ANSI C63.4

The frequency range from 30 MHz to 1000 MHz using Bilog Antenna.
The frequency range over 1 GHz using Horn Antenna.

Radiated emissions were investigated cover the frequency range from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz and 10 Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/VBW) recorded also on the report.

Test Mode: 802.11b mode

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	59.18	74	-14.82
		AV	47.78	54	-6.22
11 (highest)	2483.5-2500	PK	59.82	74	-14.18
		AV	48.99	54	-5.01

Test Mode: 802.11g mode

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	59.64	74	-14.36
		AV	47.70	54	-6.30
11 (highest)	2483.5-2500	PK	62.67	74	-11.33
		AV	48.89	54	-5.11


Test Mode: 802.11n HT20 mode

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	59.57	74	-14.43
		AV	47.70	54	-6.30
11 (highest)	2483.5-2500	PK	63.31	74	-10.69
		AV	48.88	54	-5.12


Test Mode: 802.11n HT40 mode

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
3 (lowest)	2310-2390	PK	63.09	74	-10.91
		AV	50.15	54	-3.85
9 (highest)	2483.5-2500	PK	67.67	74	-6.33
		AV	52.02	54	-1.98


Band edge @ 802.11b mode channel 1 (PK)

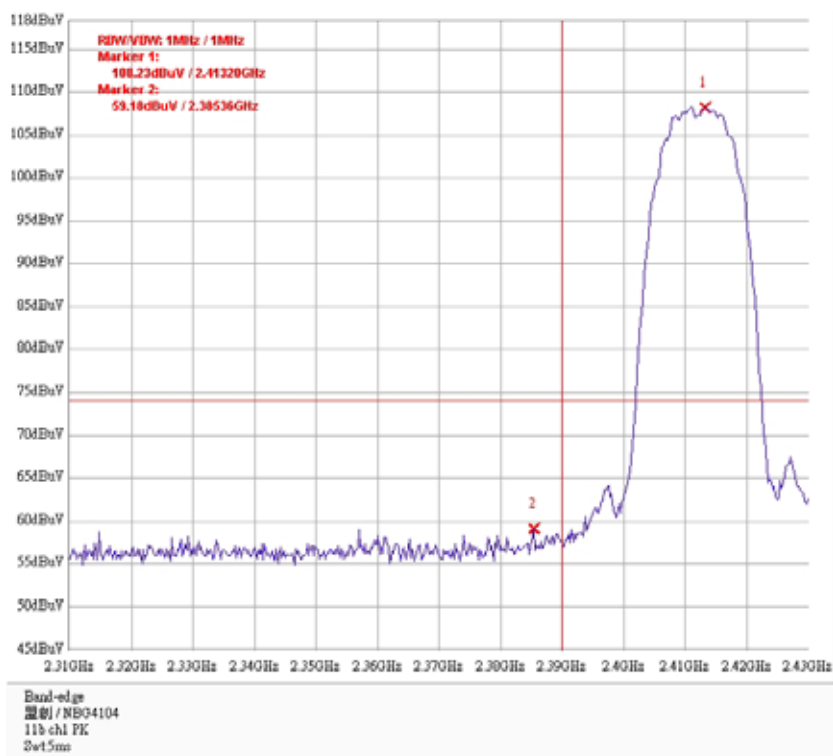


Band edge @ 802.11b mode channel 1 (AV)

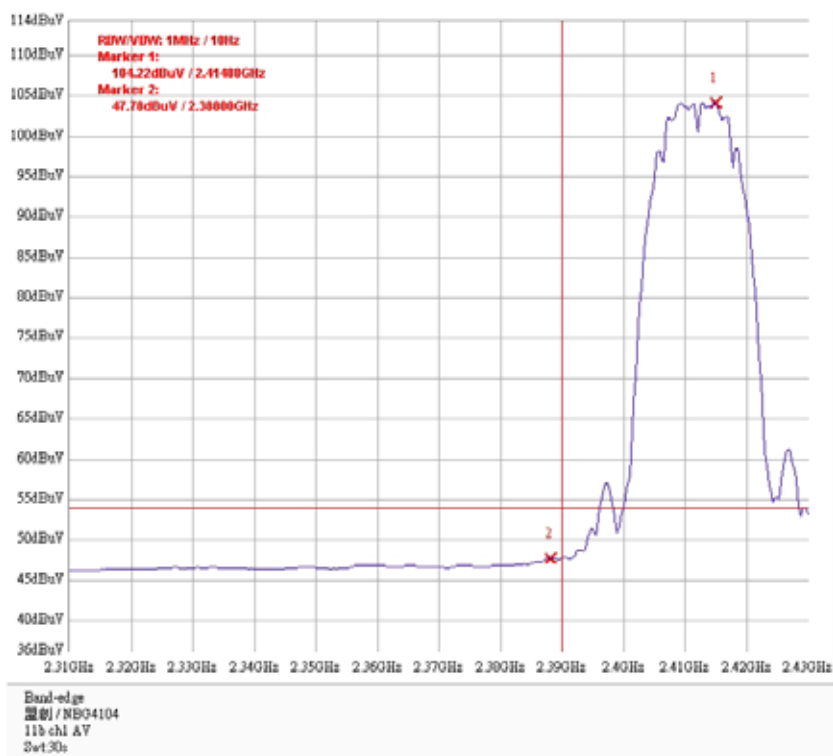


Band edge @ 802.11b mode channel 11 (PK)

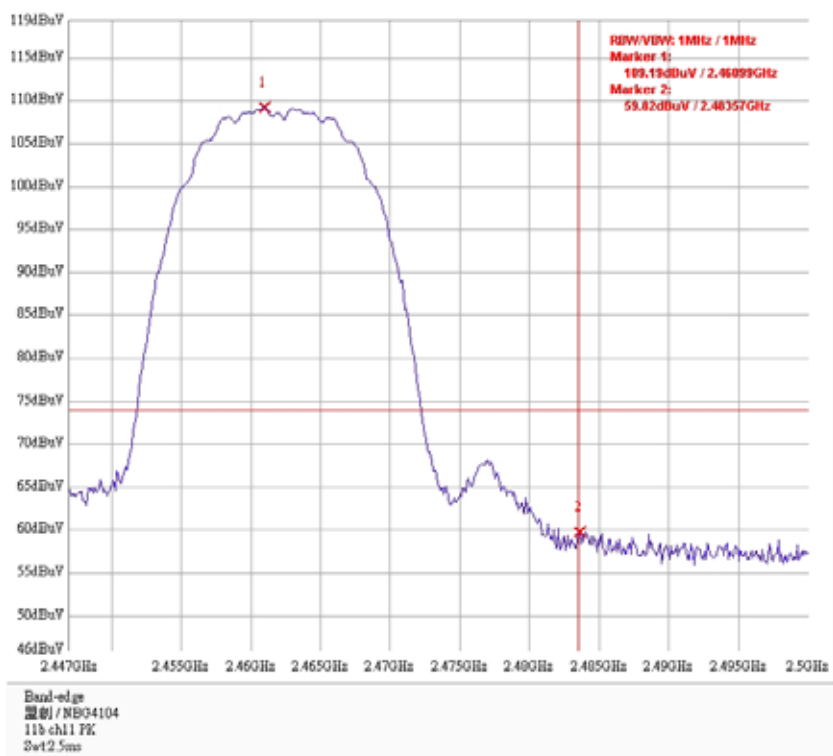


Band edge @ 802.11b mode channel 11 (AV)

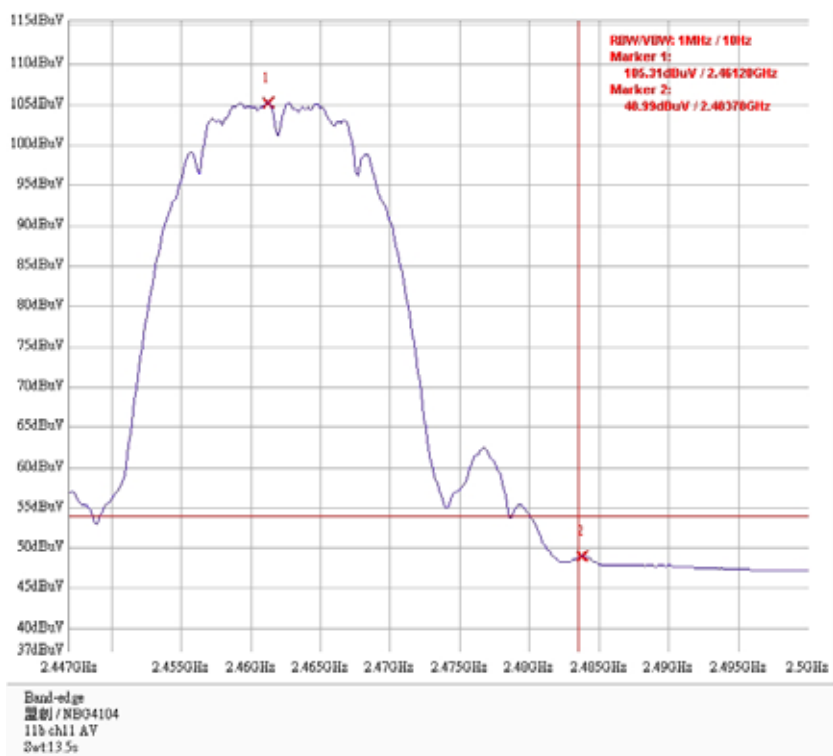


Band edge @ 802.11g mode channel 1 (PK)

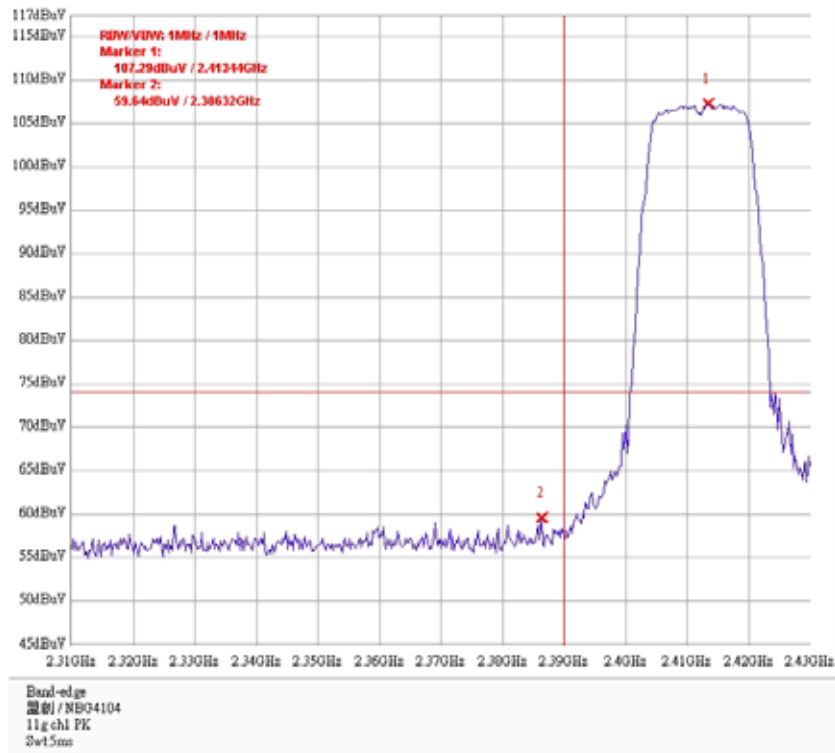


Band edge @ 802.11g mode channel 1 (AV)

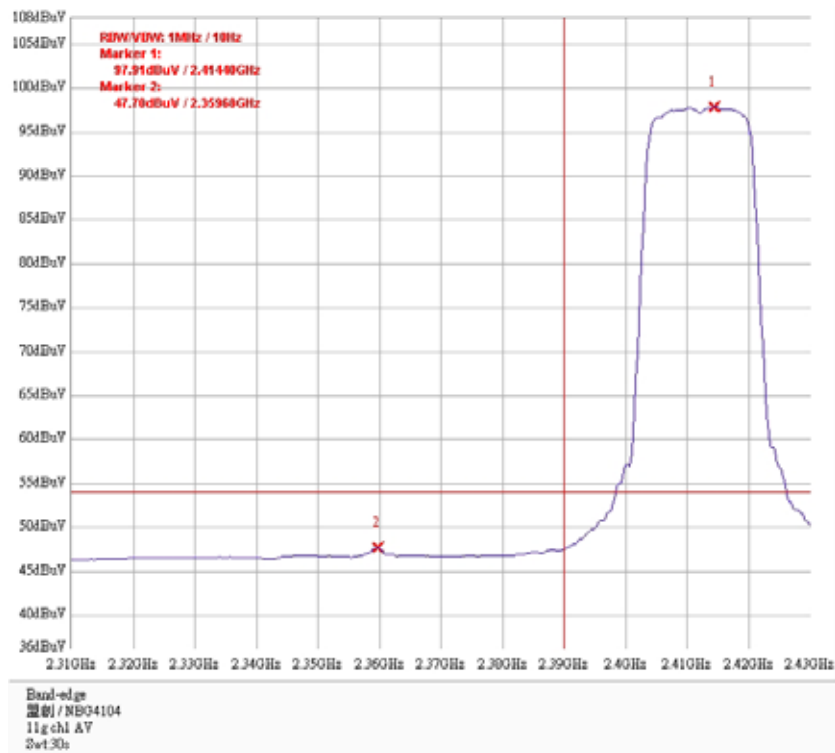


Band edge @ 802.11g mode channel 11 (PK)

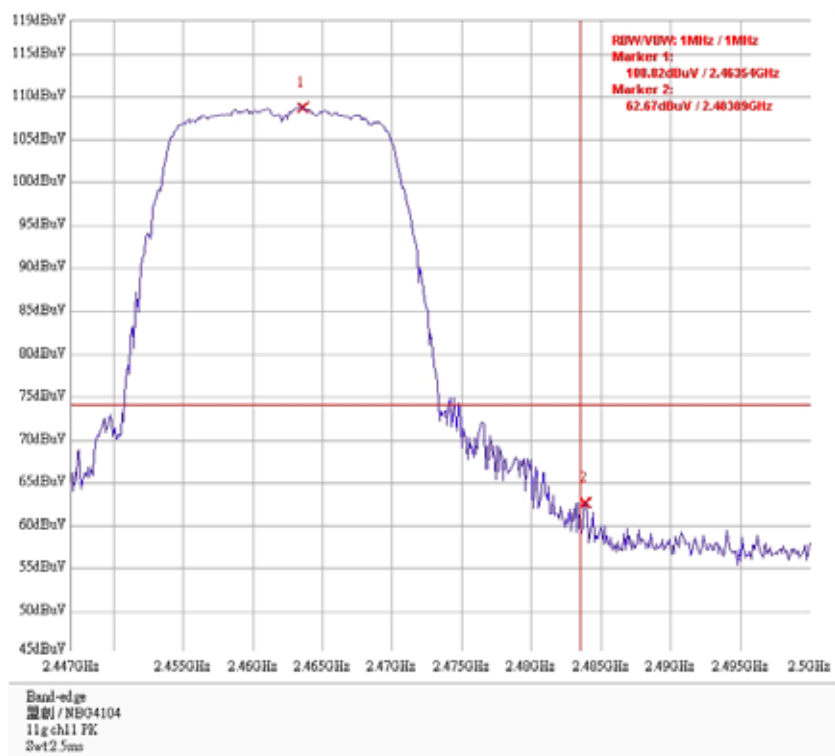


Band edge @ 802.11g mode channel 11 (AV)

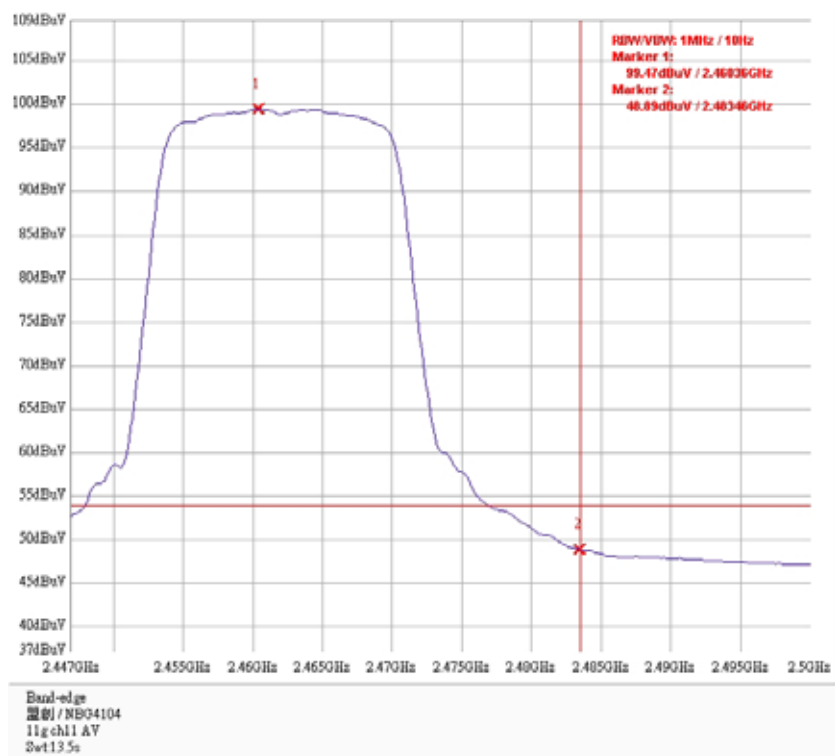


Band edge @ 802.11n HT20 mode channel 1 (PK)

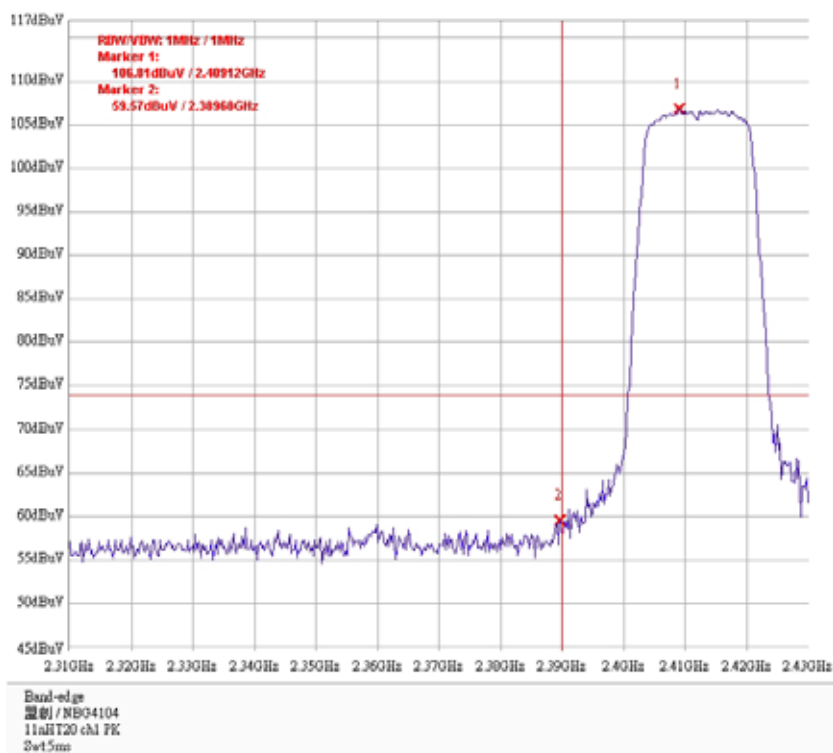


Band edge @ 802.11n HT20 mode channel 1 (AV)

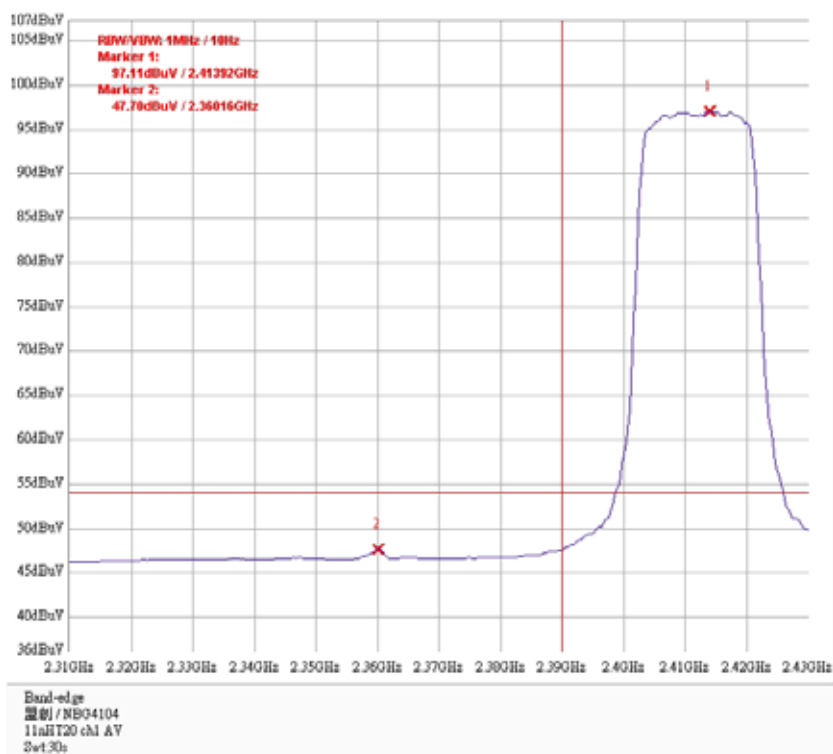


Band edge @ 802.11n HT20 mode channel 11 (PK)

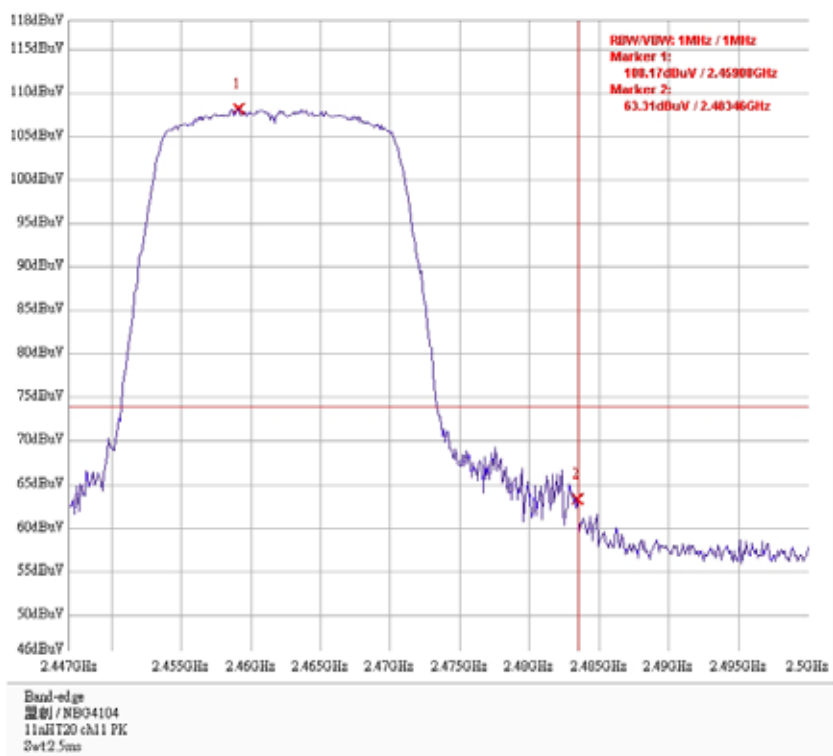


Band edge @ 802.11n HT20 mode channel 11 (AV)

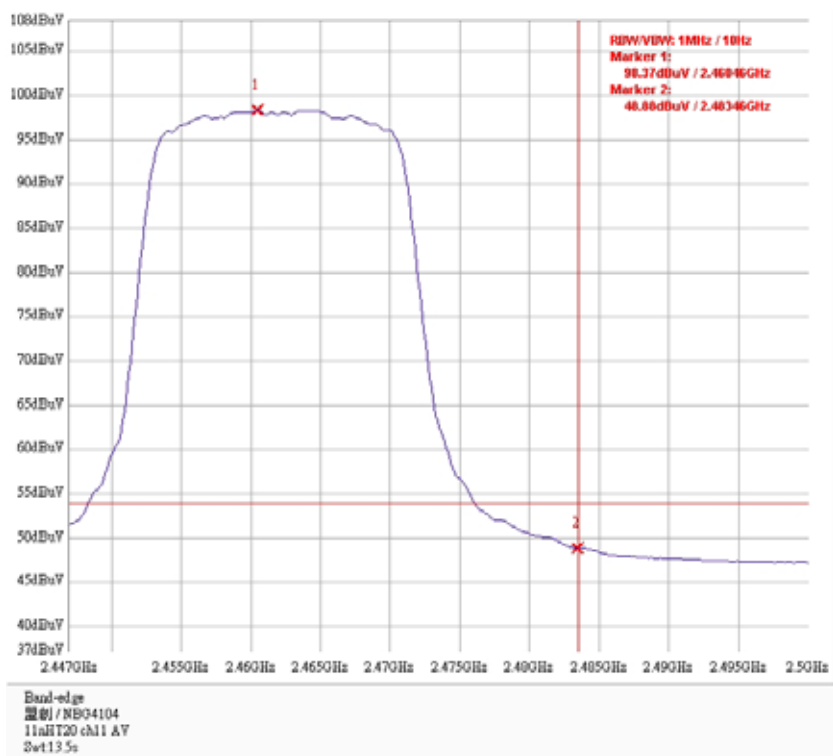


Band edge @ 802.11n HT40 mode channel 3 (PK)

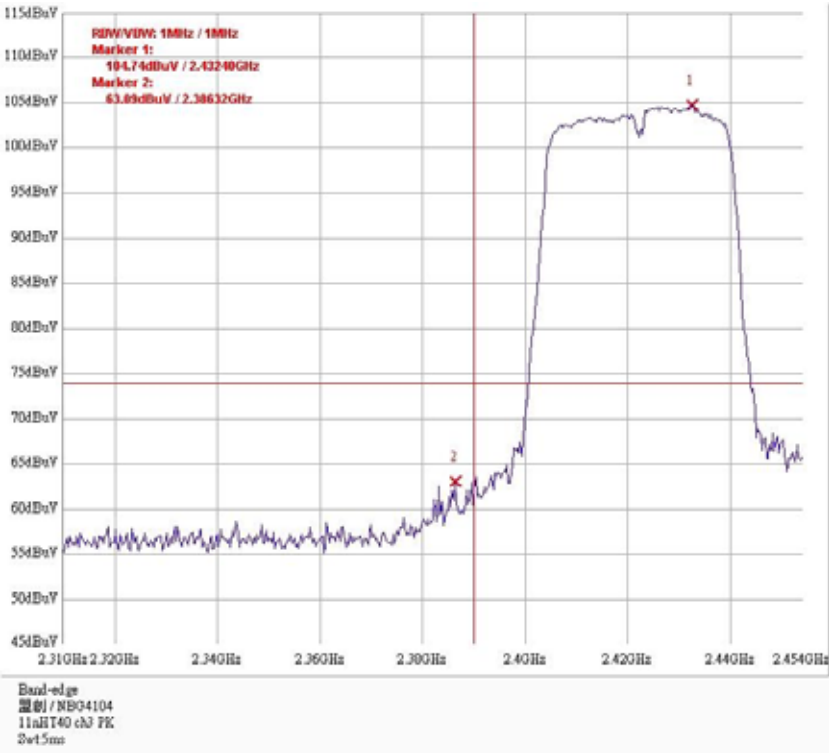


Band edge @ 802.11n HT40 mode channel 3 (AV)

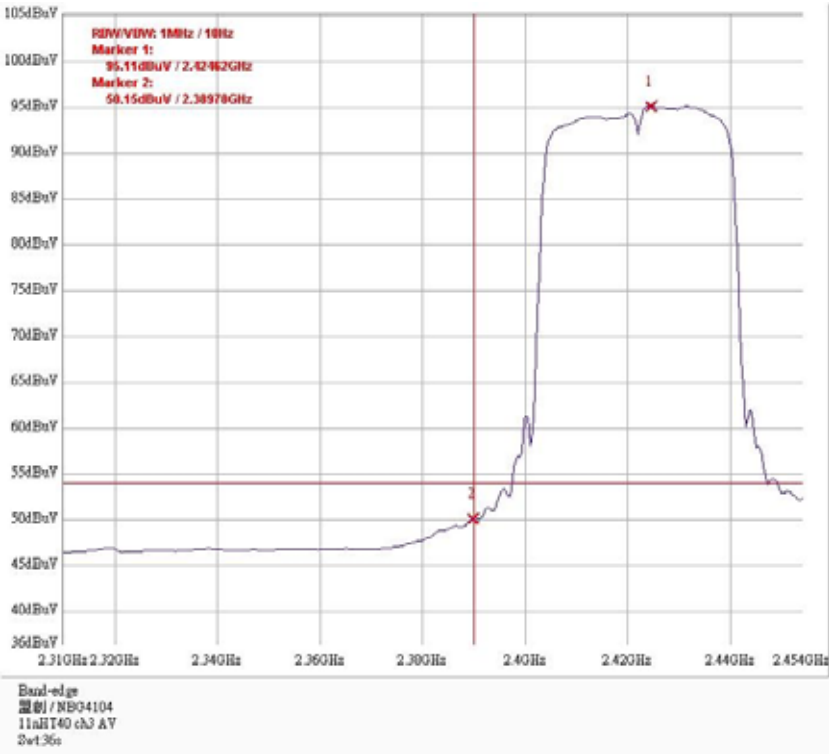

Band edge @ 802.11n HT40 mode channel 9 (PK)

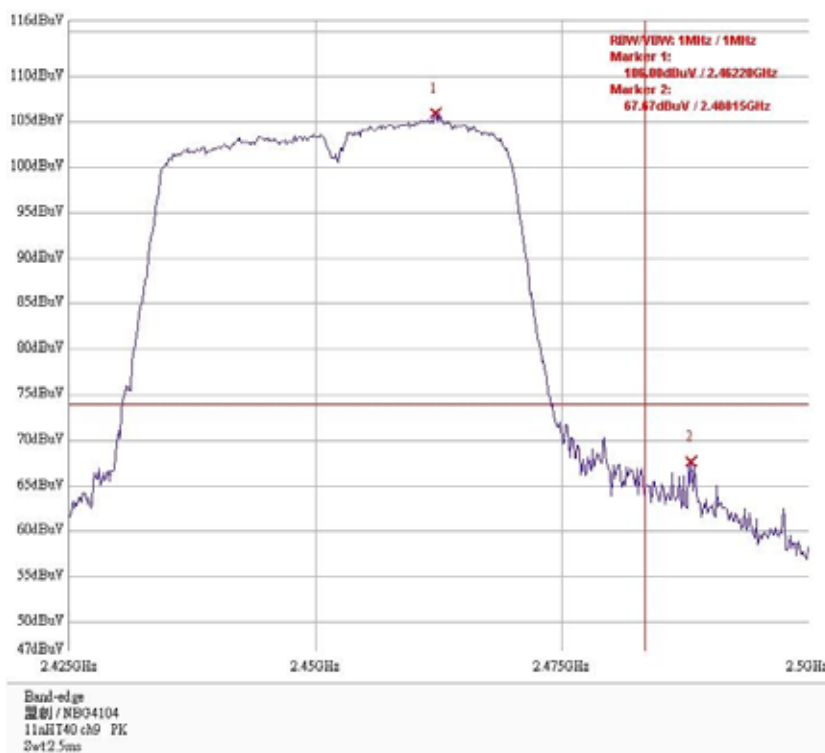

Band edge @ 802.11n HT40 mode channel 9 (AV)

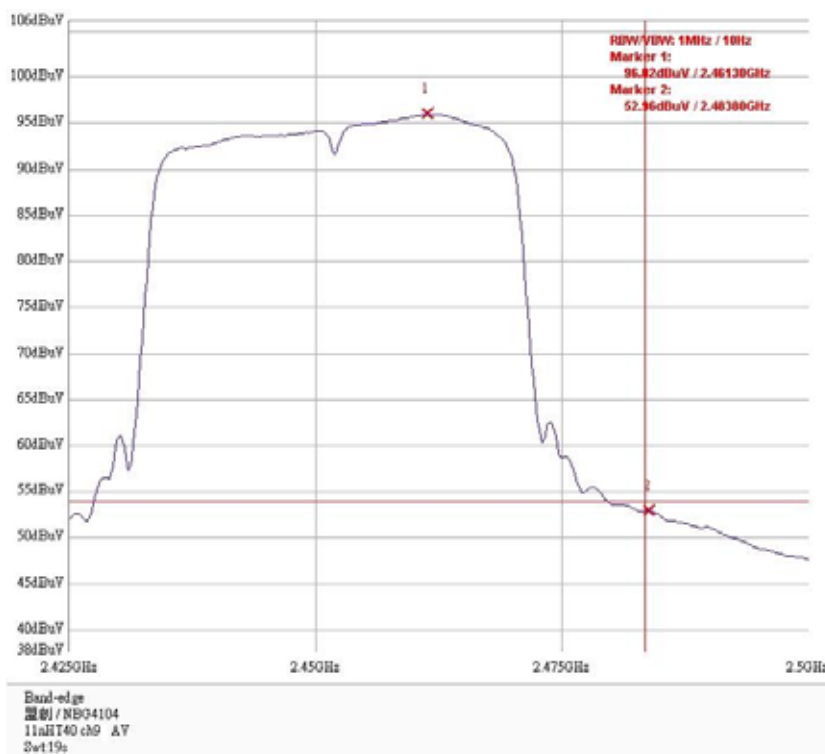

10. AC power line conducted emission

Name of Test	AC power line conducted emission
Base Standard	FCC 15.207

Test Result: Complies
Measurement Data: See Tables & plots below

Method of Measurement:

Reference FCC document: KDB558074, ANSI C63.4


The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50 uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm/ 50 uH coupling impedance with 50 ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/2003 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9 kHz.

The EUT configuration please refer to the “Conducted set-up photo.pdf”.

Test Diagram:

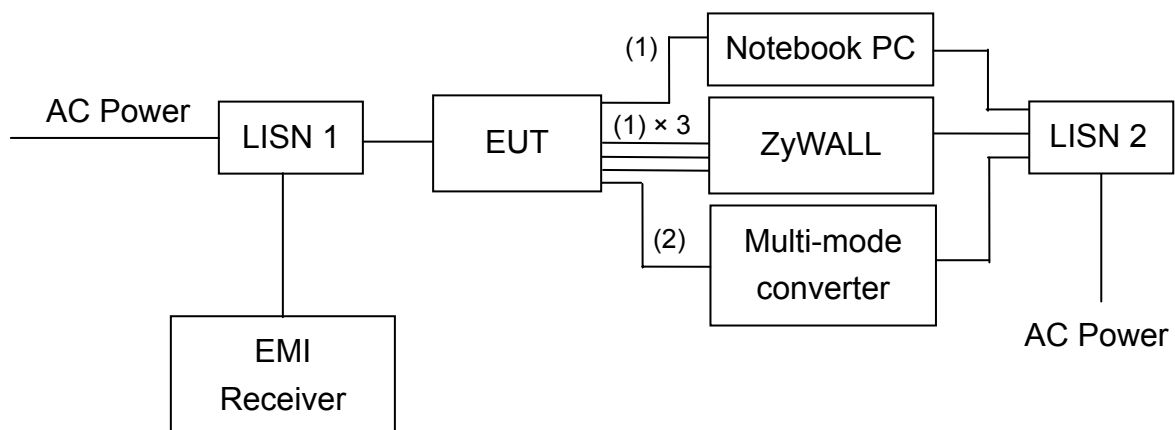

(1) RJ-45 UTP Cat.5 10 meter × 4

(2) RJ-45 STP Cat.5 10 meter × 1

Emission Limit:

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50

*Decreases with the logarithm of the frequency.


Note: The EUT was tested while in normal communication mode.

Phase : Line
 EUT : NBG4104
 Test Condition : Continuously mode
 Remark : Adapter 1

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
0.152	0.11	49.53	65.87	37.44	55.87	-16.34	-18.43
0.184	0.11	46.76	64.28	36.72	54.28	-17.52	-17.56
0.329	0.13	41.07	59.49	34.32	49.49	-18.42	-15.17
0.564	0.14	41.67	56.00	36.89	46.00	-14.33	-9.11
0.658	0.15	41.49	56.00	34.33	46.00	-14.51	-11.67
19.711	1.09	40.68	60.00	33.73	50.00	-19.32	-16.27

Remark:

1. Correction Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

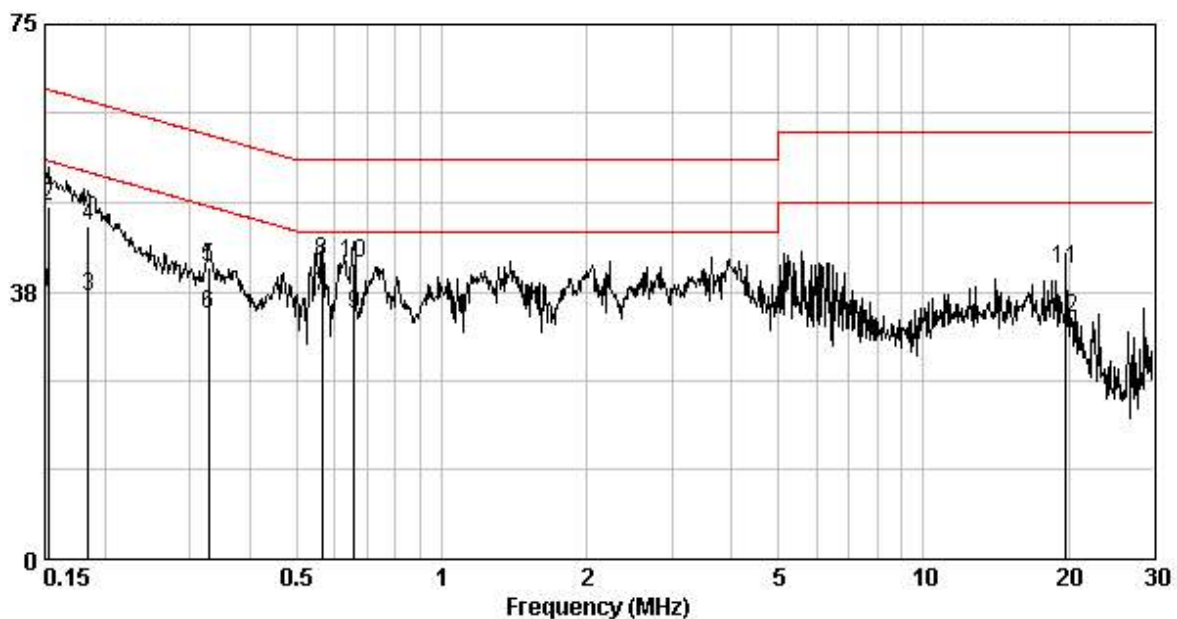


Phase : Neutral
EUT : NBG4104
Test Condition : Continuously mode
Remark : Adapter 1

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
0.152	0.15	48.82	65.87	36.16	55.87	-17.05	-19.71
0.184	0.15	45.77	64.28	33.32	54.28	-18.51	-20.96
0.564	0.18	40.98	56.00	29.12	46.00	-15.02	-16.88
0.658	0.19	35.76	56.00	25.69	46.00	-20.24	-20.31
17.755	0.78	41.33	60.00	35.56	50.00	-18.67	-14.44
19.709	0.84	38.62	60.00	30.53	50.00	-21.38	-19.47

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

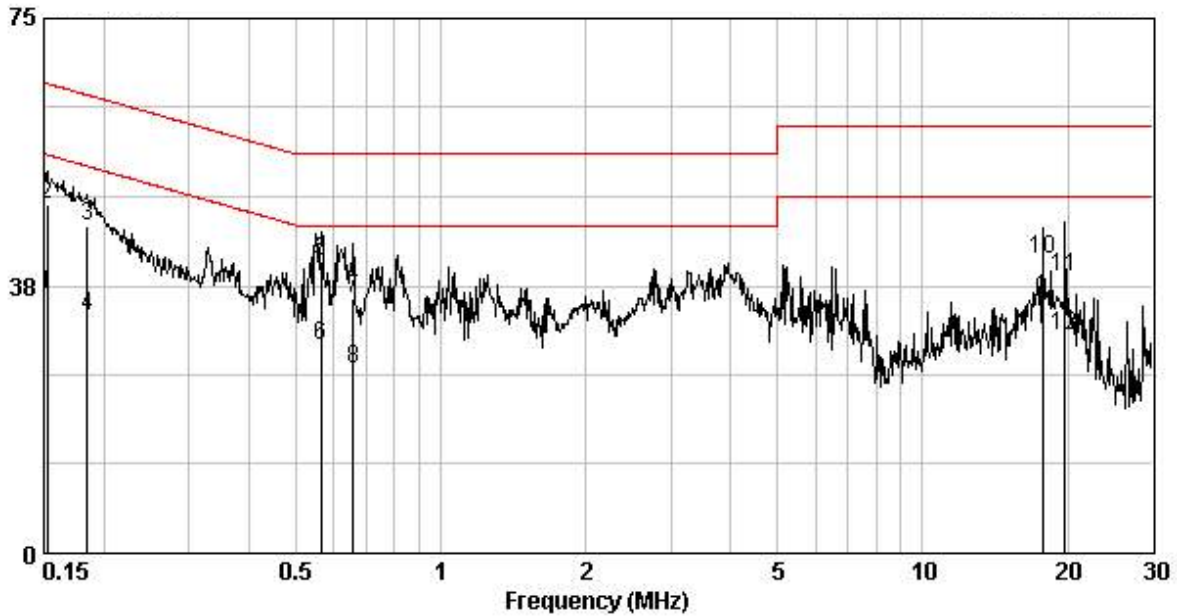


Phase : Line
 EUT : NBG4104
 Test Condition : Continuously mode
 Remark : Adapter 2

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
4.027	0.28	39.11	56.00	30.53	46.00	-16.89	-15.47
10.243	0.53	46.94	60.00	42.35	50.00	-13.06	-7.65
14.151	0.79	45.22	60.00	39.43	50.00	-14.78	-10.57
17.694	0.99	51.01	60.00	47.96	50.00	-8.99	-2.04
19.707	1.09	49.50	60.00	46.11	50.00	-10.50	-3.89
22.579	1.17	48.78	60.00	45.40	50.00	-11.22	-4.60

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

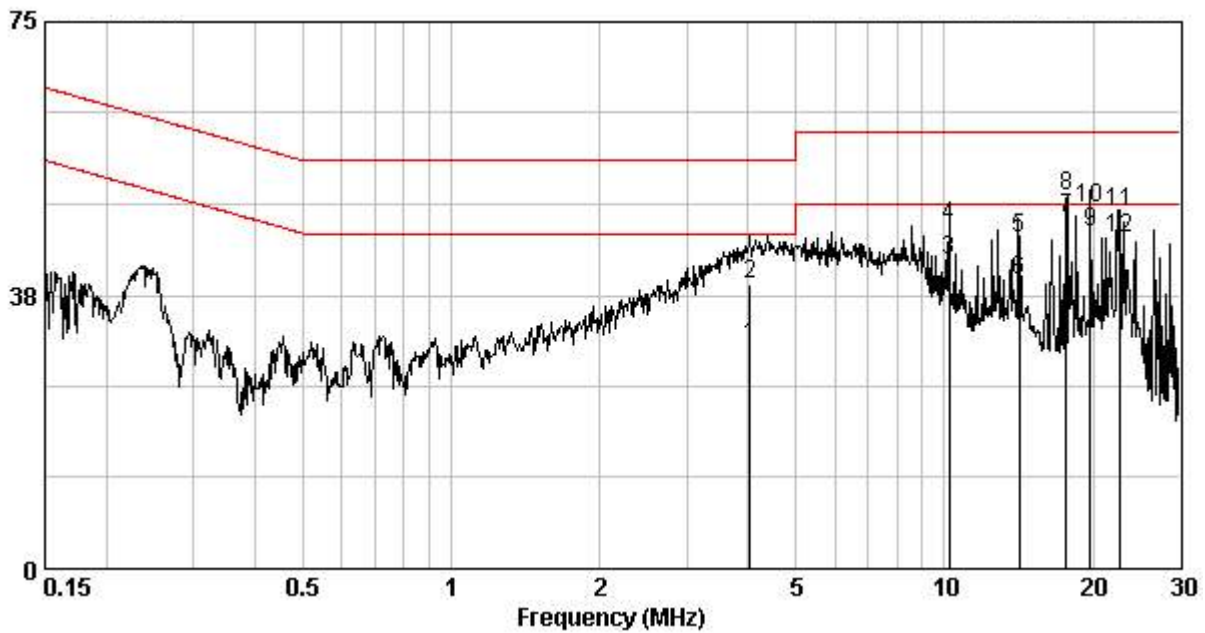


Phase : Neutral
EUT : NBG4104
Test Condition : Continuously mode
Remark : Adapter 2

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
4.006	0.30	35.89	56.00	25.87	46.00	-20.11	-20.13
10.241	0.46	41.73	60.00	37.99	50.00	-18.27	-12.01
17.693	0.78	47.84	60.00	45.05	50.00	-12.16	-4.95
19.707	0.84	48.33	60.00	45.58	50.00	-11.67	-4.42
22.578	0.90	46.24	60.00	43.02	50.00	-13.76	-6.98
23.127	0.92	49.31	60.00	46.47	50.00	-10.69	-3.53

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

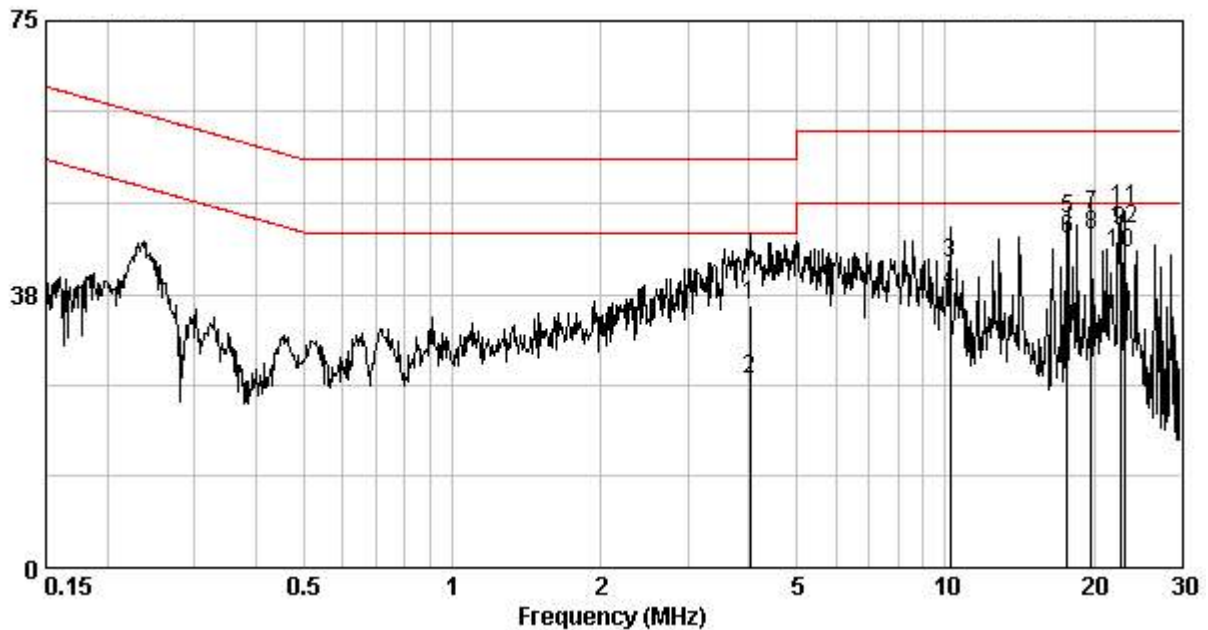

Appendix A: Test Equipment List

Equipment	Brand	Frequency range	Model No.	Last Cal.	Cal. interval
EMI Test Receiver	Rohde & Schwarz	9kHz~2.75GHz	ESCS30	2011/6/29	1 year
EMI Test Receiver	Rohde & Schwarz	9kHz~3GHz	ESCI	2010/12/3	1 year
Spectrum Analyzer	Rohde & Schwarz	9kHz~30GHz	FSP30	2011/6/29	1 year
Spectrum Analyzer	Rohde & Schwarz	20Hz~40GHz	FSEK30	2011/1/18	1 year
Horn Antenna	SCHWARZBECK	1GHz~18GHz	BBHA9120D	2010/8/31	2 years
Bilog Antenna	SCHWARZBECK	25MHz~1.7GHz	VULB 9168	2009/9/22	2 years
Turn Table	HDGmbH	N/A	DS 420S	N/A	N/A
Antenna Tower	HDGmbH	N/A	MA 240	N/A	N/A
Pre-Amplifier	MITER	100MHz~26.5GHz	AFS42-00102 650	2009/10/27	2 years
LISN	Rohde & Schwarz	9KHz~30MHz	ESH3-Z5	2010/10/15	1 year
Power Meter	Anritsu	100kHz ~ 65GHz (video bandwidth:65MHz)	ML2495A	2010/10/20	1 year
Power Sensor	Anritsu	300MHz ~ 40GHz (video bandwidth:50MHz)	MA2411B	2010/10/20	1 year

Note: The above equipments are within the valid calibration period.

Measurement Uncertainty:

Measurement uncertainty was calculated in accordance with TR 100 028-1.

Parameter	Uncertainty
Radiated Emission	±5.056 dB
Conducted Emission	±2.786 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of k=2.