



FCC TEST REPORT

REPORT NO.: RF971218L04A

MODEL NO.: NBG-417N

RECEIVED: Dec. 18, 2008

TESTED: Dec. 22, 2008 ~ Mar. 20, 2009

ISSUED: Mar. 25, 2009

APPLICANT: ZyXEL Communications Corporation

ADDRESS: No. 6, Innovation Road II, Science-Park,
Hsin-Chu, 300, Taiwan

ISSUED BY: Bureau Veritas Consumer Products Services
(H.K.) Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Tsuen, Lin Kou
Hsiang, Taipei Hsien 244, Taiwan, R.O.C.

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei
Shan Hsiang, Taoyuan Hsien 333, Taiwan,
R.O.C.

This test report consists of 81 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by TAF or any government agencies. The test results in the report only apply to the tested sample.





A D T

TABLE OF CONTENTS

1.	CERTIFICATION	4
2.	SUMMARY OF TEST RESULTS.....	5
2.1	MEASUREMENT UNCERTAINTY	5
3.	GENERAL INFORMATION	6
3.1	GENERAL DESCRIPTION OF EUT.....	6
3.2	DESCRIPTION OF TEST MODES.....	8
3.2.1	CONFIGURATION OF SYSTEM UNDER TEST	8
3.2.2	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL.....	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS.....	11
4.	TEST TYPES AND RESULTS	12
4.1	RADIATED EMISSION MEASUREMENT	12
4.1.1	LIMITS OF RADIATED EMISSION MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	14
4.1.5	TEST SETUP	15
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS	16
4.2	CONDUCTED EMISSION MEASUREMENT	30
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	30
4.2.2	TEST INSTRUMENTS	30
4.2.3	TEST PROCEDURES	31
4.2.4	DEVIATION FROM TEST STANDARD	31
4.2.5	TEST SETUP	32
4.2.6	EUT OPERATING CONDITIONS	32
4.2.7	TEST RESULTS	33
4.3	6dB BANDWIDTH MEASUREMENT	37
4.3.1	LIMITS OF 6dB BANDWIDTH MEASUREMENT	37
4.3.2	TEST INSTRUMENTS	37
4.3.3	TEST PROCEDURE	37
4.3.4	DEVIATION FROM TEST STANDARD	37
4.3.5	TEST SETUP	38
4.3.6	EUT OPERATING CONDITIONS	38
4.3.7	TEST RESULTS	39
4.4	MAXIMUM PEAK OUTPUT POWER	47
4.4.1	LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT	47
4.4.2	INSTRUMENTS	47
4.4.3	TEST PROCEDURES	47
4.4.4	DEVIATION FROM TEST STANDARD	47
4.4.5	TEST SETUP	48
4.4.6	EUT OPERATING CONDITIONS	48
4.4.7	TEST RESULTS	49
4.5	POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.1	LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT	51
4.5.2	TEST INSTRUMENTS	51
4.5.3	TEST PROCEDURE	51
4.5.4	DEVIATION FROM TEST STANDARD	51



A D T

4.5.5 TEST SETUP	52
4.5.6 EUT OPERATING CONDITION	52
4.5.7 TEST RESULTS	53
4.6 BAND EDGES MEASUREMENT	61
4.6.1 LIMITS OF BAND EDGES MEASUREMENT	61
4.6.2 TEST INSTRUMENTS	61
4.6.3 TEST PROCEDURE	61
4.6.4 DEVIATION FROM TEST STANDARD	61
4.6.5 EUT OPERATING CONDITION	61
4.6.6 TEST RESULTS	62
4.7 ANTENNA REQUIREMENT	78
4.7.1 STANDARD APPLICABLE	78
4.7.2 ANTENNA CONNECTED CONSTRUCTION	78
5. PHOTOGRAPHS OF THE TEST CONFIGURATION	79
6. INFORMATION ON THE TESTING LABORATORIES	80
7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB	81



A D T

1. CERTIFICATION

PRODUCT: Wireless N-lite Home Router

MODEL: NBG-417N

BRAND: ZyXEL

APPLICANT: ZyXEL Communications Corporation

TESTED: Dec. 22, 2008 ~ Mar. 20, 2009

TEST SAMPLE: R&D SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.4-2003

The above equipment (model: NBG-417N) has been tested by **Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch**, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

PREPARED BY : Ivy Lin , DATE: Mar. 25, 2009
Ivy Lin / Specialist

**TECHNICAL
ACCEPTANCE** : Long Chen , DATE: Mar. 25, 2009
Responsible for RF Long Chen / Senior Engineer

APPROVED BY : Gary Chang , DATE: Mar. 25, 2009
Gary Chang / Assistant Manager



A D T

2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C			
Standard Section	Test Type and Limit	Result	Remark
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit. Minimum passing margin is -13.67dB at 0.193MHz.
15.247(a)(2)	Spectrum Bandwidth of a Direct Sequence Spread Spectrum System Limit: min. 500kHz	PASS	Meet the requirement of limit.
15.247(b)	Maximum Peak Output Power Limit: max. 30dBm	PASS	Meet the requirement of limit.
15.247(d)	Radiated Emissions Limit: Table 15.209	PASS	Meet the requirement of limit. Minimum passing margin is -1.05dB at 2490.00MHz.
15.247(e)	Power Spectral Density Limit: max. 8dBm	PASS	Meet the requirement of limit.
15.247(d)	Band Edge Measurement Limit: 20dB less than the peak value of fundamental frequency	PASS	Meet the requirement of limit.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
Radiated emissions (HwaYa Chamber 4)	30MHz ~ 200MHz	3.34 dB
	200MHz ~1000MHz	3.35 dB
Radiated emissions (HwaYa Chamber 3)	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



A D T

3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

PRODUCT	Wireless N-lite Home Router
MODEL NO.	NBG-417N
FCC ID	I88NBG417N
POWER SUPPLY	12Vdc from AC adapter
MODULATION TYPE	CCK, DQPSK, DBPSK for DSSS 64QAM, 16QAM, QPSK, BPSK for OFDM
MODULATION TECHNOLOGY	DSSS, OFDM
TRANSFER RATE	802.11b: 11.0/ 5.5/ 2.0/ 1.0Mbps 802.11g: 54.0/ 48.0/ 36.0/ 24.0/ 18.0/ 12.0/ 9.0/ 6.0Mbps Draft 802.11n: up to 150Mbps
FREQUENCY RANGE	2412.0MHz ~ 2462.0MHz
NUMBER OF CHANNEL	11 for 802.11b, 802.11g, draft 802.11n (20MHz) 7 for draft 802.11n (40MHz)
MAXIMUM OUTPUT POWER	320.627mW
ANTENNA TYPE	Dipole antenna with 2dBi gain
DATA CABLE	NA
I/O PORTS	RJ45
ACCESSORY DEVICES	AC adapter

NOTE:

1. The EUT incorporates an 802.11n function. Physically, the EUT provides one completed transmitter and one receiver.
2. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



A D T

3. The EUT was powered by the following adapter.

ADAPTER 1	
BRAND:	AMIGO
MODEL:	AMS6-1201000SU
INPUT:	120Vac, 60Hz, 0.5A
OUTPUT:	12Vdc, 1.0A
POWER LINE:	1.8m non-shielded cable without core

ADAPTER 2	
BRAND:	DVE
MODEL:	DSA-12G-12 FUS 120120
INPUT:	100-240Vac, 50/60Hz, 0.3A
OUTPUT:	12Vdc, 1.0A
POWER LINE:	1.8m non-shielded cable without core

4. The above EUT information was declared by manufacturer and for more detailed features description, please refer to the manufacturer's specifications or user's manual.

3.2 DESCRIPTION OF TEST MODES


Eleven channels are provided for 802.11b, 802.11g and draft 802.11n (20MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2412MHz	7	2442MHz
2	2417MHz	8	2447MHz
3	2422MHz	9	2452MHz
4	2427MHz	10	2457MHz
5	2432MHz	11	2462MHz
6	2437MHz		

Seven channels are provided for draft 802.11n (40MHz):

CHANNEL	FREQUENCY	CHANNEL	FREQUENCY
1	2422MHz	5	2442MHz
2	2427MHz	6	2447MHz
3	2432MHz	7	2452MHz
4	2437MHz		

3.2.1 CONFIGURATION OF SYSTEM UNDER TEST

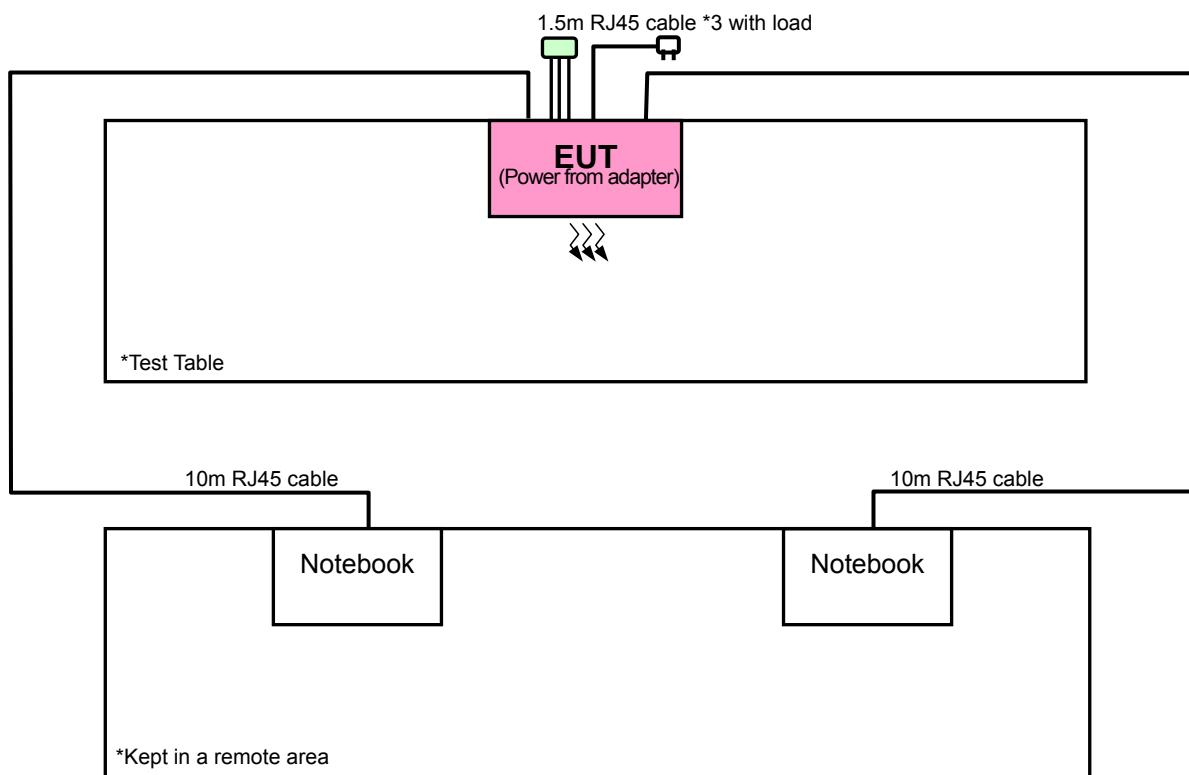



A D T

3.2.2 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

EUT CONFIGURE MODE	APPLICABLE TO				DESCRIPTION
	RE≥1G	RE<1G	PLC	APCM	
A	√	√	√	√	Power form adapter 1
B	-	√	√	-	Power form adapter 2

Where

PLC: Power Line Conducted Emission

RE≥1G: Radiated Emission above 1GHz

Note: “-“ means no effect.

RE<1G: Radiated Emission below 1GHz

APCM: Antenna Port Conducted Measurement

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1	Z
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6	Z
A	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5	Z
A	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5	Z

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, XYZ axis and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)	AXIS
A, B	802.11g	1 to 11	6	OFDM	BPSK	6	Z

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A, B	802.11g	1 to 11	6	OFDM	BPSK	6



A D T

BANDEDGE MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 11	OFDM	BPSK	6
A	Draft 802.11n (20MHz)	1 to 11	1, 11	OFDM	BPSK	6.5
A	Draft 802.11n (40MHz)	1 to 7	1, 7	OFDM	BPSK	13.5

ANTENNA PORT CONDUCTED MEASUREMENT:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, and antenna ports (if EUT with antenna diversity architecture).
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TECHNOLOGY	MODULATION TYPE	DATA RATE (Mbps)
A	802.11b	1 to 11	1, 6, 11	DSSS	DBPSK	1
A	802.11g	1 to 11	1, 6, 11	OFDM	BPSK	6
A	Draft 802.11n (20MHz)	1 to 11	1, 6, 11	OFDM	BPSK	6.5
A	Draft 802.11n (40MHz)	1 to 7	1, 4, 7	OFDM	BPSK	13.5



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:

FCC Part 15, Subpart C (15.247)

ANSI C63.4-2003

All test items have been performed and recorded as per the above standards.

NOTE: The EUT is also considered as a kind of computer peripheral, because the connection to computer is necessary for typical use. It has been verified to comply with the requirements of FCC Part 15, Subpart B, Class B (DoC). The test report has been issued separately.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

NO.	PRODUCT	BRAND	MODEL NO.	SERIAL NO.	FCC ID
1	NOTEBOOK	DELL	PP05L	12130898320	E2K24CLNS
2	NOTEBOOK	DELL	D600	CN-0G5152-4864 3-485-5636	FCC DoC Approved

NO.	SIGNAL CABLE DESCRIPTION OF THE ABOVE SUPPORT UNITS
1	10m UTP RJ45 cable
2	10m UTP RJ45 cable

NOTE: 1. All power cords of the above support units are non shielded (1.8m).
2. Item 1-2 acted as a communication partner to transfer data.



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION MEASUREMENT

Emissions radiated outside of the specified bands, shall be according to the general radiated limits in 15.209 as following:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400 / F(kHz)	300
0.490 ~ 1.705	24000 / F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

NOTE:

1. The lower limit shall apply at the transition frequencies.
2. Emission level (dB_uV/m) = 20 log Emission level (uV/m).
3. As shown in 15.35(b), for frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



A D T

4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUe DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESI7	100033	Jun. 30, 2008	Jun. 29, 2009
Spectrum Analyzer ROHDE & SCHWARZ	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009
BILOG Antenna SCHWARZBECK	VULB9168	9168-160	May 02, 2008	May 01, 2009
HORN Antenna SCHWARZBECK	9120D	9120D-209	Jun. 24, 2008	Jun. 23, 2009
HORN Antenna SCHWARZBECK	BBHA 9170	BBHA9170243	Dec. 25, 2008	Dec. 24, 2009
Preamplifier Agilent	8447D	2944A10633	Nov. 03, 2008	Nov. 02, 2009
Preamplifier Agilent	8449B	3008A01964	Oct. 23, 2008	Oct. 22, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	238141/4	May 20, 2008	May 19, 2009
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	12738/6	May 20, 2008	May 19, 2009
Software ADT.	ADT_Radiated_ V7.6.15.9.2	NA	NA	NA
Antenna Tower inn-co GmbH	MA 4000	013303	NA	NA
Antenna Tower Controller inn-co GmbH	CO2000	017303	NA	NA
Turn Table ADT.	TT100.	TT93021703	NA	NA
Turn Table Controller ADT.	SC100.	SC93021703	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Chamber 3.
 3. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 4. The FCC Site Registration No. is 988962.
 5. The IC Site Registration No. is IC 7450F-3.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meters semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.


NOTE:

1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Peak detection (PK) and Quasi-peak detection (QP) at frequency below 1GHz.
2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
3. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz for Average detection (AV) at frequency above 1GHz.
4. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.

4.1.5 TEST SETUP

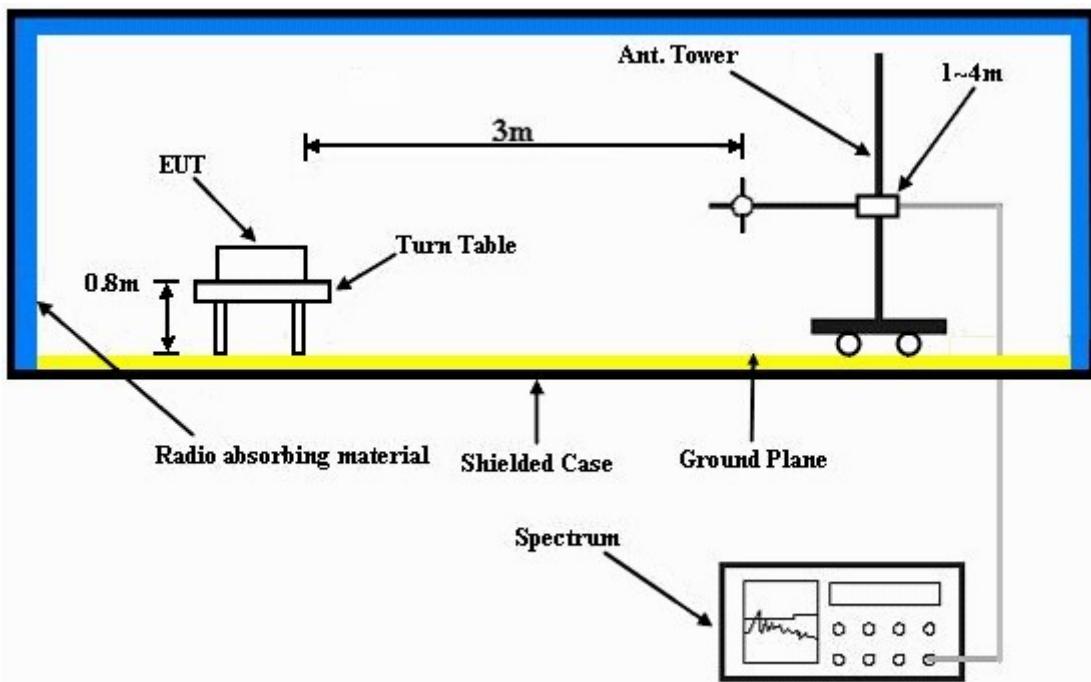

For the actual test configuration, please refer to the attached file (Test Setup Photo)

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on the testing table.
- b. Prepared notebook systems to act as a communication partner and placed them outside of testing area.
- c. The communication partners connected with EUT via a RJ45 cable and run a test program (provided by manufacturer) to enable EUT under transmission condition continuously at specific channel frequency.
- d. The necessary accessories enable the EUT in full functions.



A D T

4.1.7 TEST RESULTS

802.11b DSSS MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		FREQUENCY RANGE		1 ~ 25GHz
INPUT POWER (SYSTEM)		DETECTOR FUNCTION		Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		TESTED BY		Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	57.83 PK	74.00	-16.17	1.00 H	8	25.40	32.43
2	2386.00	46.71 AV	54.00	-7.29	1.00 H	8	14.28	32.43
3	*2412.00	99.81 PK			1.00 H	8	67.29	32.52
4	*2412.00	95.30 AV			1.00 H	8	62.78	32.52
5	4824.00	56.72 PK	74.00	-17.28	1.01 H	13	18.42	38.30
6	4824.00	52.44 AV	54.00	-1.56	1.01 H	13	14.14	38.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2386.00	63.79 PK	74.00	-10.21	1.00 V	70	31.36	32.43
2	2386.00	52.65 AV	54.00	-1.35	1.00 V	70	20.22	32.43
3	*2412.00	108.84 PK			1.00 V	66	76.32	32.52
4	*2412.00	104.16 AV			1.00 V	66	71.64	32.52
5	4824.00	55.37 PK	74.00	-18.63	1.00 V	359	17.07	38.30
6	4824.00	51.44 AV	54.00	-2.56	1.00 V	359	13.14	38.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	99.82 PK			1.01 H	6	67.22	32.60
2	*2437.00	95.20 AV			1.01 H	6	62.60	32.60
3	4874.00	55.51 PK	74.00	-18.49	1.33 H	28	17.01	38.50
4	4874.00	51.19 AV	54.00	-2.81	1.33 H	28	12.69	38.50
5	7311.00	60.38 PK	74.00	-13.62	1.56 H	321	15.90	44.48
6	7311.00	52.38 AV	54.00	-1.62	1.56 H	321	7.90	44.48
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	108.33 PK			1.01 V	69	75.73	32.60
2	*2437.00	103.65 AV			1.01 V	69	71.05	32.60
3	4874.00	55.37 PK	74.00	-18.63	1.02 V	27	16.87	38.50
4	4874.00	51.16 AV	54.00	-2.84	1.02 V	27	12.66	38.50
5	7311.00	58.26 PK	74.00	-15.74	1.13 V	219	13.78	44.48
6	7311.00	50.21 AV	54.00	-3.79	1.13 V	219	5.73	44.48

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	99.21 PK			1.00 H	225	66.53	32.68
2	*2462.00	94.61 AV			1.00 H	225	61.93	32.68
3	2483.50	57.87 PK	74.00	-16.13	1.00 H	225	25.11	32.76
4	2483.50	46.57 AV	54.00	-7.43	1.00 H	225	13.81	32.76
5	4924.00	54.54 PK	74.00	-19.46	1.02 H	41	15.90	38.64
6	4924.00	48.68 AV	54.00	-5.32	1.02 H	41	10.04	38.64
7	7386.00	61.04 PK	74.00	-12.96	1.33 H	285	16.41	44.63
8	7386.00	52.92 AV	54.00	-1.08	1.33 H	285	8.29	44.63

ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	107.84 PK			1.16 V	80	75.16	32.68
2	*2462.00	103.12 AV			1.16 V	80	70.44	32.68
3	2483.50	59.52 PK	74.00	-14.48	1.16 V	80	26.76	32.76
4	2483.50	49.72 AV	54.00	-4.28	1.16 V	80	16.96	32.76
5	4924.00	53.50 PK	74.00	-20.50	1.15 V	3	14.86	38.64
6	4924.00	48.64 AV	54.00	-5.36	1.15 V	3	10.00	38.64
7	7386.00	58.78 PK	74.00	-15.22	1.86 V	0	14.15	44.63
8	7386.00	49.88 AV	54.00	-4.12	1.86 V	0	5.25	44.63

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.48 PK	74.00	-16.52	1.00 H	151	25.04	32.44
2	2390.00	45.93 AV	54.00	-8.07	1.00 H	151	13.49	32.44
3	*2412.00	98.69 PK			1.00 H	151	66.17	32.52
4	*2412.00	88.63 AV			1.00 H	151	56.11	32.52
5	4824.00	50.39 PK	74.00	-23.61	1.08 H	232	12.09	38.30
6	4824.00	38.94 AV	54.00	-15.06	1.08 H	232	0.64	38.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.58 PK	74.00	-7.42	1.00 V	70	34.14	32.44
2	2390.00	52.03 AV	54.00	-1.97	1.00 V	70	19.59	32.44
3	*2412.00	108.76 PK			1.00 V	66	76.24	32.52
4	*2412.00	98.50 AV			1.00 V	66	65.98	32.52
5	4824.00	50.15 PK	74.00	-23.85	1.07 V	256	11.85	38.30
6	4824.00	38.84 AV	54.00	-15.16	1.07 V	256	0.54	38.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.81 PK			1.01 H	153	69.21	32.60
2	*2437.00	91.75 AV			1.01 H	153	59.15	32.60
3	4874.00	56.03 PK	74.00	-17.97	1.14 H	238	17.53	38.50
4	4874.00	43.19 AV	54.00	-10.81	1.14 H	238	4.69	38.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2385.00	65.80 PK	74.00	-8.20	1.00 V	43	33.38	32.42
2	2385.00	52.88 AV	54.00	-1.12	1.00 V	43	20.46	32.42
3	*2437.00	112.12 PK			1.00 V	71	79.52	32.60
4	*2437.00	101.02 AV			1.00 V	71	68.42	32.60
5	2489.00	64.59 PK	74.00	-9.41	1.00 V	43	31.82	32.77
6	2489.00	52.67 AV	54.00	-1.33	1.00 V	43	19.90	32.77
7	4874.00	56.36 PK	74.00	-17.64	1.10 V	25	17.86	38.50
8	4874.00	43.58 AV	54.00	-10.42	1.10 V	25	5.08	38.50

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.83 PK			1.01 H	152	66.15	32.68
2	*2462.00	88.81 AV			1.01 H	152	56.13	32.68
3	2483.50	58.92 PK	74.00	-15.08	1.01 H	152	26.16	32.76
4	2483.50	47.24 AV	54.00	-6.76	1.01 H	152	14.48	32.76
5	4924.00	50.86 PK	74.00	-23.14	1.17 H	231	12.22	38.64
6	4924.00	39.21 AV	54.00	-14.79	1.17 H	231	0.57	38.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.93 PK			1.00 V	26	76.25	32.68
2	*2462.00	98.06 AV			1.00 V	26	65.38	32.68
3	2483.50	71.39 PK	74.00	-2.61	1.00 V	28	38.63	32.76
4	2483.50	52.90 AV	54.00	-1.10	1.00 V	28	20.14	32.76
5	4924.00	50.23 PK	74.00	-23.77	1.01 V	236	11.59	38.64
6	4924.00	38.94 AV	54.00	-15.06	1.01 V	236	0.30	38.64

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	57.69 PK	74.00	-16.31	1.01 H	156	25.25	32.44
2	2390.00	46.11 AV	54.00	-7.89	1.01 H	156	13.67	32.44
3	*2412.00	97.53 PK			1.01 H	156	65.01	32.52
4	*2412.00	87.50 AV			1.01 H	156	54.98	32.52
5	4824.00	50.48 PK	74.00	-23.52	1.06 H	238	12.18	38.30
6	4824.00	39.15 AV	54.00	-14.85	1.06 H	238	0.85	38.30
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	69.12 PK	74.00	-4.88	1.00 V	42	36.68	32.44
2	2390.00	52.56 AV	54.00	-1.44	1.00 V	42	20.12	32.44
3	*2412.00	107.92 PK			1.00 V	66	75.40	32.52
4	*2412.00	97.56 AV			1.00 V	66	65.04	32.52
5	4824.00	49.95 PK	74.00	-24.05	1.04 V	213	11.65	38.30
6	4824.00	38.68 AV	54.00	-15.32	1.04 V	213	0.38	38.30

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	101.65 PK			1.03 H	162	69.05	32.60
2	*2437.00	91.62 AV			1.03 H	162	59.02	32.60
3	4874.00	50.86 PK	74.00	-23.14	1.13 H	239	12.36	38.50
4	4874.00	39.62 AV	54.00	-14.38	1.13 H	239	1.12	38.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.08 PK	74.00	-6.92	1.00 V	69	34.64	32.44
2	2390.00	52.94 AV	54.00	-1.06	1.00 V	69	20.50	32.44
3	*2437.00	112.32 PK			1.00 V	70	79.72	32.60
4	*2437.00	101.96 AV			1.00 V	70	69.36	32.60
5	2490.00	65.88 PK	74.00	-8.12	1.00 V	24	33.10	32.78
6	2490.00	52.95 AV	54.00	-1.05	1.00 V	24	20.17	32.78
7	4874.00	56.19 PK	74.00	-17.81	1.09 V	10	17.69	38.50
8	4874.00	43.21 AV	54.00	-10.79	1.09 V	10	4.71	38.50

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 11		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	98.24 PK			1.03 H	161	65.56	32.68
2	*2462.00	88.21 AV			1.03 H	161	55.53	32.68
3	2483.50	58.95 PK	74.00	-15.05	1.03 H	161	26.19	32.76
4	2483.50	47.43 AV	54.00	-6.57	1.03 H	161	14.67	32.76
5	4924.00	50.95 PK	74.00	-23.05	1.12 H	63	12.31	38.64
6	4924.00	39.83 AV	54.00	-14.17	1.12 H	63	1.19	38.64
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2462.00	108.60 PK			1.00 V	26	75.92	32.68
2	*2462.00	97.98 AV			1.00 V	26	65.30	32.68
3	2483.50	68.78 PK	74.00	-5.22	1.01 V	28	36.02	32.76
4	2483.50	52.81 AV	54.00	-1.19	1.01 V	28	20.05	32.76
5	4924.00	50.13 PK	74.00	-23.87	1.05 V	222	11.49	38.64
6	4924.00	38.82 AV	54.00	-15.18	1.05 V	222	0.18	38.64

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 1		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	62.51 PK	74.00	-11.49	1.01 H	10	30.07	32.44
2	2390.00	48.32 AV	54.00	-5.68	1.01 H	10	15.88	32.44
3	*2422.00	93.38 PK			1.01 H	10	60.83	32.55
4	*2422.00	83.04 AV			1.01 H	10	50.49	32.55
5	4844.00	49.65 PK	74.00	-24.35	1.16 H	13	11.27	38.38
6	4844.00	40.28 AV	54.00	-13.72	1.16 H	13	1.90	38.38
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	66.78 PK	74.00	-7.22	1.27 V	9	34.34	32.44
2	2390.00	52.52 AV	54.00	-1.48	1.27 V	9	20.08	32.44
3	*2422.00	102.40 PK			1.22 V	69	69.85	32.55
4	*2422.00	91.85 AV			1.22 V	69	59.30	32.55
5	4844.00	49.68 PK	74.00	-24.32	1.05 V	22	11.30	38.38
6	4844.00	38.56 AV	54.00	-15.44	1.05 V	22	0.18	38.38

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 4		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2437.00	98.33 PK			1.00 H	9	65.73	32.60
2	*2437.00	87.96 AV			1.00 H	9	55.36	32.60
3	4874.00	49.41 PK	74.00	-24.59	1.18 H	1	10.91	38.50
4	4874.00	40.16 AV	54.00	-13.84	1.18 H	1	1.66	38.50
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	2390.00	67.17 PK	74.00	-6.83	1.00 V	70	34.73	32.44
2	2390.00	52.67 AV	54.00	-1.33	1.00 V	70	20.23	32.44
3	*2437.00	106.09 PK			1.20 V	67	73.49	32.60
4	*2437.00	95.83 AV			1.20 V	67	63.23	32.60
5	2483.50	66.59 PK	74.00	-7.41	1.16 V	67	33.83	32.76
6	2483.50	52.17 AV	54.00	-1.83	1.16 V	67	19.41	32.76
7	4874.00	49.84 PK	74.00	-24.16	1.04 V	329	11.34	38.50
8	4874.00	38.92 AV	54.00	-15.08	1.04 V	329	0.42	38.50

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “*”: Fundamental frequency.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 7		FREQUENCY RANGE 1 ~ 25GHz
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION Peak (PK) Average (AV)
ENVIRONMENTAL CONDITIONS		24deg. C, 64%RH 1024hPa		TESTED BY Brad Wu

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	93.86 PK			1.02 H	12	61.21	32.65
2	*2452.00	83.59 AV			1.02 H	12	50.94	32.65
3	2483.50	50.45 PK	74.00	-23.55	1.02 H	12	17.69	32.76
4	2483.50	48.05 AV	54.00	-5.95	1.02 H	12	15.29	32.76
5	4904.00	49.86 PK	74.00	-24.14	1.10 H	135	11.25	38.61
6	4904.00	40.44 AV	54.00	-13.56	1.10 H	135	1.83	38.61
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	*2452.00	101.82 PK			1.00 V	24	69.17	32.65
2	*2452.00	91.29 AV			1.00 V	24	58.64	32.65
3	2483.50	66.31 PK	74.00	-7.69	1.23 V	0	33.55	32.76
4	2483.50	52.85 AV	54.00	-1.15	1.23 V	0	20.09	32.76
5	4904.00	49.52 PK	74.00	-24.48	1.09 V	34	10.91	38.61
6	4904.00	38.48 AV	54.00	-15.52	1.09 V	34	-0.13	38.61

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.
 5. “ * ”: Fundamental frequency.



A D T

BELOW 1GHz WORST-CASE DATA : 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL			
CHANNEL		Channel 6		FREQUENCY RANGE	
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION	
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1017hPa		TESTED BY	
TEST MODE		A			

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.60	38.23 QP	46.00	-7.77	1.50 H	271	24.55	13.68
2	319.60	39.83 QP	46.00	-6.17	1.00 H	115	24.55	15.28
3	426.53	34.17 QP	46.00	-11.83	1.00 H	61	15.97	18.20
4	533.47	39.40 QP	46.00	-6.60	1.50 H	313	17.98	21.42
5	640.41	42.92 QP	46.00	-3.08	1.25 H	187	18.95	23.97
6	854.28	41.18 QP	46.00	-4.82	1.00 H	154	13.81	27.37
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	36.73 QP	40.00	-3.27	1.25 V	82	24.21	12.52
2	61.01	38.86 QP	40.00	-1.14	1.00 V	328	25.30	13.56
3	319.60	38.23 QP	46.00	-7.77	1.50 V	205	22.96	15.28
4	533.47	36.85 QP	46.00	-9.15	1.00 V	103	15.43	21.42
5	640.41	38.92 QP	46.00	-7.08	1.50 V	31	14.95	23.97
6	854.28	38.92 QP	46.00	-7.08	1.00 V	4	11.55	27.37

- REMARKS:**
1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).
 2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level – Limit value.



A D T

EUT TEST CONDITION		MEASUREMENT DETAIL		
CHANNEL		Channel 6		FREQUENCY RANGE
INPUT POWER (SYSTEM)		120Vac, 60 Hz		DETECTOR FUNCTION
ENVIRONMENTAL CONDITIONS		25deg. C, 65%RH 1017hPa		TESTED BY
TEST MODE		B		Mark Liao

ANTENNA POLARITY & TEST DISTANCE: HORIZONTAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	249.60	34.38 QP	46.00	-11.62	1.25 H	100	20.71	13.68
2	319.60	39.97 QP	46.00	-6.03	1.00 H	109	24.69	15.28
3	426.53	33.85 QP	46.00	-12.15	1.00 H	61	15.65	18.20
4	533.47	38.27 QP	46.00	-7.73	1.50 H	310	16.84	21.42
5	640.41	42.95 QP	46.00	-3.05	1.25 H	142	18.98	23.97
6	854.28	40.37 QP	46.00	-5.63	1.00 H	157	13.00	27.37
ANTENNA POLARITY & TEST DISTANCE: VERTICAL AT 3 M								
NO.	FREQ. (MHz)	EMISSION LEVEL (dBuV/m)	LIMIT (dBuV/m)	MARGIN (dB)	ANTENNA HEIGHT (m)	TABLE ANGLE (Degree)	RAW VALUE (dBuV)	CORRECTION FACTOR (dB/m)
1	37.68	37.33 QP	40.00	-2.67	1.25 V	55	24.81	12.52
2	319.60	39.01 QP	46.00	-6.99	1.50 V	7	23.74	15.28
3	533.47	38.06 QP	46.00	-7.94	1.00 V	244	16.64	21.42
4	640.41	37.49 QP	46.00	-8.51	2.00 V	223	13.52	23.97
5	854.28	38.52 QP	46.00	-7.48	1.00 V	4	11.15	27.37

REMARKS: 1. Emission level (dBuV/m) = Raw Value (dBuV) + Correction Factor (dB/m).

2. Correction Factor (dB/m) = Antenna Factor (dB/m) + Cable Factor (dB).

3. The other emission levels were very low against the limit.

4. Margin value = Emission level – Limit value.



A D T

4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dB μ V)	
	Quasi-peak	Average
0.15-0.5	66 to 56	56 to 46
0.5-5	56	46
5-30	60	50

- NOTE:**
1. The lower limit shall apply at the transition frequencies.
 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 19, 2008	Nov. 18, 2009
RF signal cable Woken	5D-FB	Cable-HYC01-01	Jan. 04, 2008	Jan. 03, 2009
LISN ROHDE & SCHWARZ	ESH3-Z5	100312	Jun. 13, 2008	Jun. 12, 2009
LISN ROHDE & SCHWARZ	ESH2-Z5	100104	Dec. 04, 2008	Dec. 03, 2009
Software ADT	ADT_Cond_V7.3.6	NA	NA	NA

- NOTE:**
1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 2. The test was performed in HwaYa Shielded Room 1.
 3. The VCCI Site Registration No. is C-2040.



A D T

4.2.3 TEST PROCEDURES


- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit - 20dB) was not recorded.

NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.

4.2.5 TEST SETUP

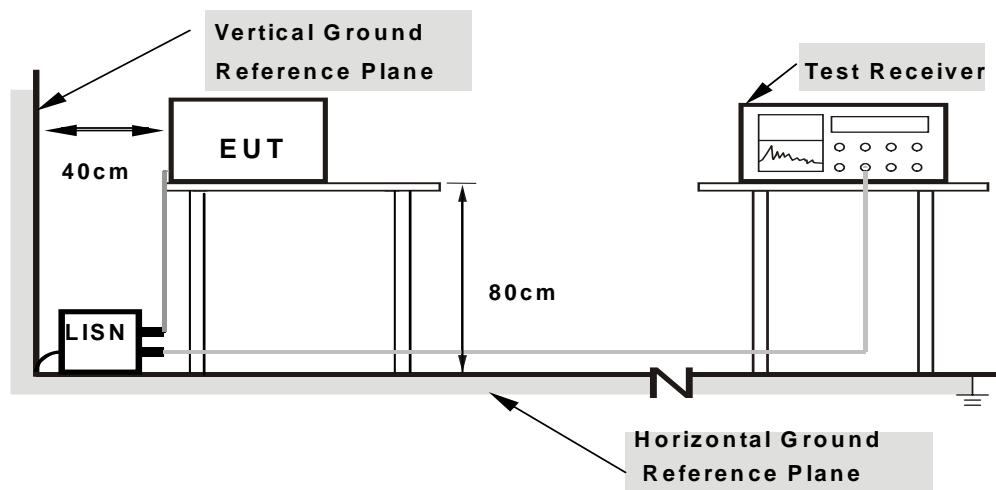

Note:

1. Support units were connected to second LISN.
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.

4.2.7 TEST RESULTS


CONDUCTED WORST-CASE DATA: 802.11g OFDM MODULATION

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1027hPa	TESTED BY	Antony Lee
TEST MODE	A		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	
1	0.189	0.13	47.63	-	47.76	-	64.08	54.08	-16.32	-
2	0.252	0.13	42.00	-	42.13	-	61.71	51.71	-19.57	-
3	0.314	0.14	41.82	-	41.96	-	59.86	49.86	-17.91	-
4	0.447	0.14	38.84	-	38.98	-	56.93	46.93	-17.95	-
5	0.572	0.15	37.36	-	37.51	-	56.00	46.00	-18.49	-
6	0.845	0.17	33.07	-	33.24	-	56.00	46.00	-22.76	-
7	5.764	0.46	43.08	-	43.54	-	60.00	50.00	-16.46	-
8	6.475	0.49	40.34	-	40.83	-	60.00	50.00	-19.17	-

REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.


2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
3. The emission levels of other frequencies were very low against the limit.
4. Margin value = Emission level - Limit value
5. Correction factor = Insertion loss + Cable loss
6. Emission Level = Correction Factor + Reading Value.

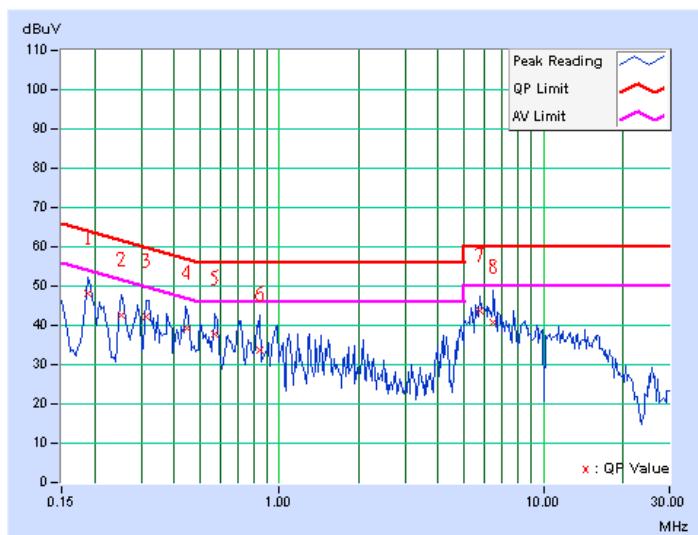

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1027hPa	TESTED BY	Antony Lee
TEST MODE	A		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	[dB (uV)]	(dB)	
			[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.189	0.15	0.15	47.67	-	47.82	-	64.08	54.08	-16.26
2	0.321	0.16	0.16	40.68	-	40.84	-	59.69	49.69	-18.86
3	0.447	0.16	0.16	40.35	-	40.51	-	56.93	46.93	-16.42
4	0.713	0.18	0.18	39.04	-	39.22	-	56.00	46.00	-16.78
5	0.841	0.19	0.19	38.05	-	38.24	-	56.00	46.00	-17.76
6	5.809	0.48	0.48	33.75	-	34.23	-	60.00	50.00	-25.77


REMARKS: 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

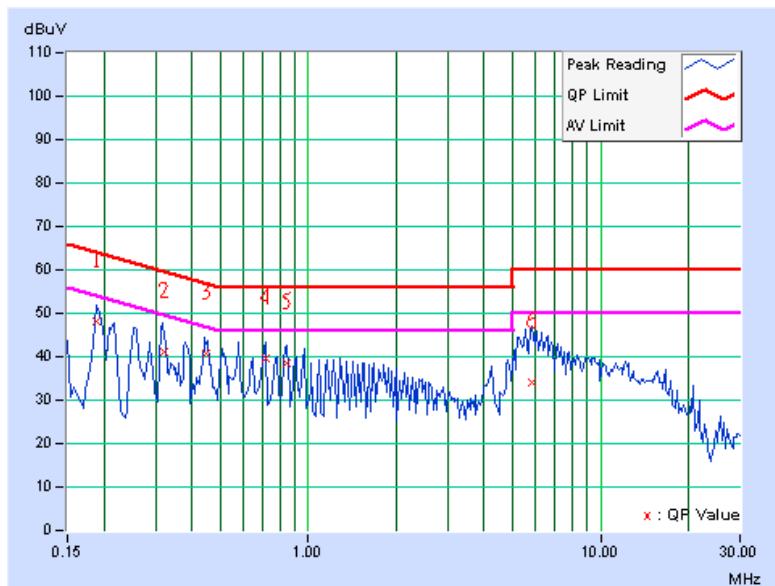

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 1
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1027hPa	TESTED BY	Antony Lee
TEST MODE	B		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]		[dB (uV)]		[dB (uV)]		(dB)
				[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	
1	0.193	0.13	49.83	-	49.96	-	63.91	53.91	-13.95	-
2	0.349	0.14	41.28	-	41.42	-	58.98	48.98	-17.56	-
3	0.470	0.14	40.35	-	40.49	-	56.51	46.51	-16.01	-
4	0.650	0.16	41.58	-	41.74	-	56.00	46.00	-14.26	-
5	0.744	0.16	39.22	-	39.38	-	56.00	46.00	-16.62	-
6	3.992	0.40	38.48	-	38.88	-	56.00	46.00	-17.12	-
7	4.273	0.41	40.70	-	41.11	-	56.00	46.00	-14.89	-


- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

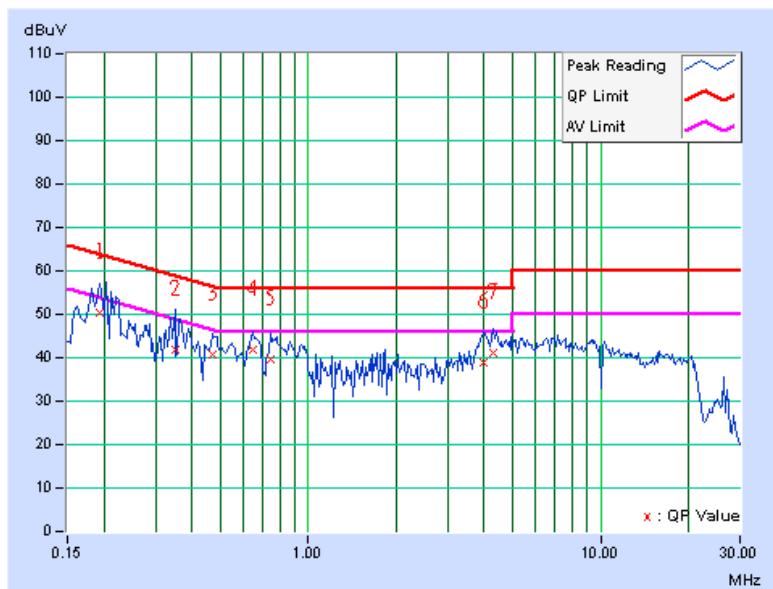

EUT TEST CONDITION		MEASUREMENT DETAIL	
CHANNEL	Channel 6	PHASE	Line 2
MODULATION TYPE	BPSK	INPUT POWER (SYSTEM)	120Vac, 60Hz
TRANSFER RATE	6.0Mbps	6dB BANDWIDTH	9kHz
ENVIRONMENTAL CONDITIONS	22deg. C, 65%RH, 1027hPa	TESTED BY	Antony Lee
TEST MODE	B		

No	Freq.	Corr.	Reading Value		Emission Level		Limit		Margin	
			Factor	[dB (uV)]	[dB (uV)]	[dB (uV)]	Q.P.	AV.	Q.P.	AV.
		[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.
1	0.193	0.15	50.09	-	50.24	-	63.91	53.91	-13.67	-
2	0.224	0.15	47.25	-	47.40	-	62.66	52.66	-15.26	-
3	0.334	0.16	41.16	-	41.32	-	59.36	49.36	-18.04	-
4	0.365	0.16	39.83	-	39.99	-	58.62	48.62	-18.63	-
5	0.533	0.17	33.50	-	33.67	-	56.00	46.00	-22.33	-
6	4.148	0.42	36.08	-	36.50	-	56.00	46.00	-19.50	-

- REMARKS:**
1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 2. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 3. The emission levels of other frequencies were very low against the limit.
 4. Margin value = Emission level - Limit value
 5. Correction factor = Insertion loss + Cable loss
 6. Emission Level = Correction Factor + Reading Value.

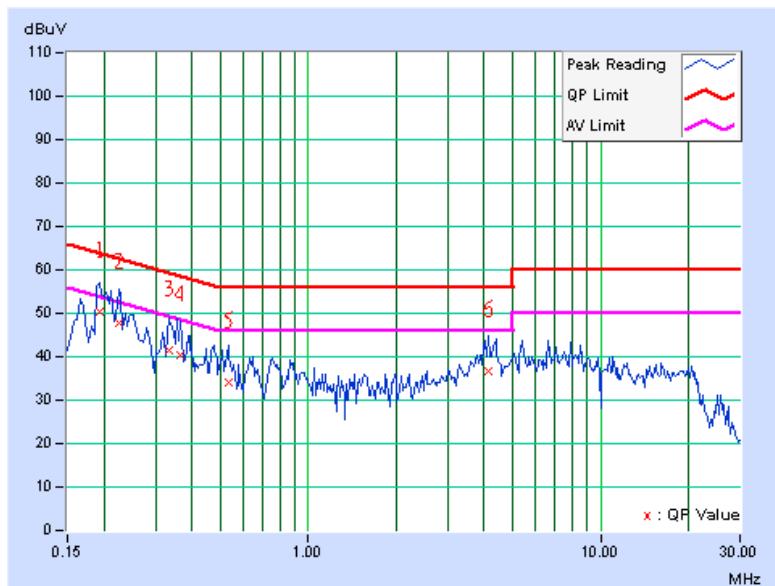



4.3 6dB BANDWIDTH MEASUREMENT

4.3.1 LIMITS OF 6dB BANDWIDTH MEASUREMENT

The minimum of 6dB Bandwidth Measurement is 0.5 MHz.

4.3.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.


4.3.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator. The bandwidth of the fundamental frequency was measured by spectrum analyzer with 100kHz RBW and 100kHz VBW. The 6dB bandwidth is defined as the total spectrum the power of which is higher than peak power minus 6dB.

4.3.4 DEVIATION FROM TEST STANDARD

No deviation.

4.3.5 TEST SETUP

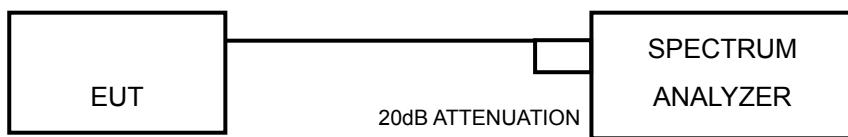

4.3.6 EUT OPERATING CONDITIONS

The software provided by client to enable the EUT under transmission condition continuously at lowest, middle and highest channel frequencies individually.



A D T


4.3.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	12.16	0.5	PASS
6	2437	12.16	0.5	PASS
11	2462	12.15	0.5	PASS


CH 1

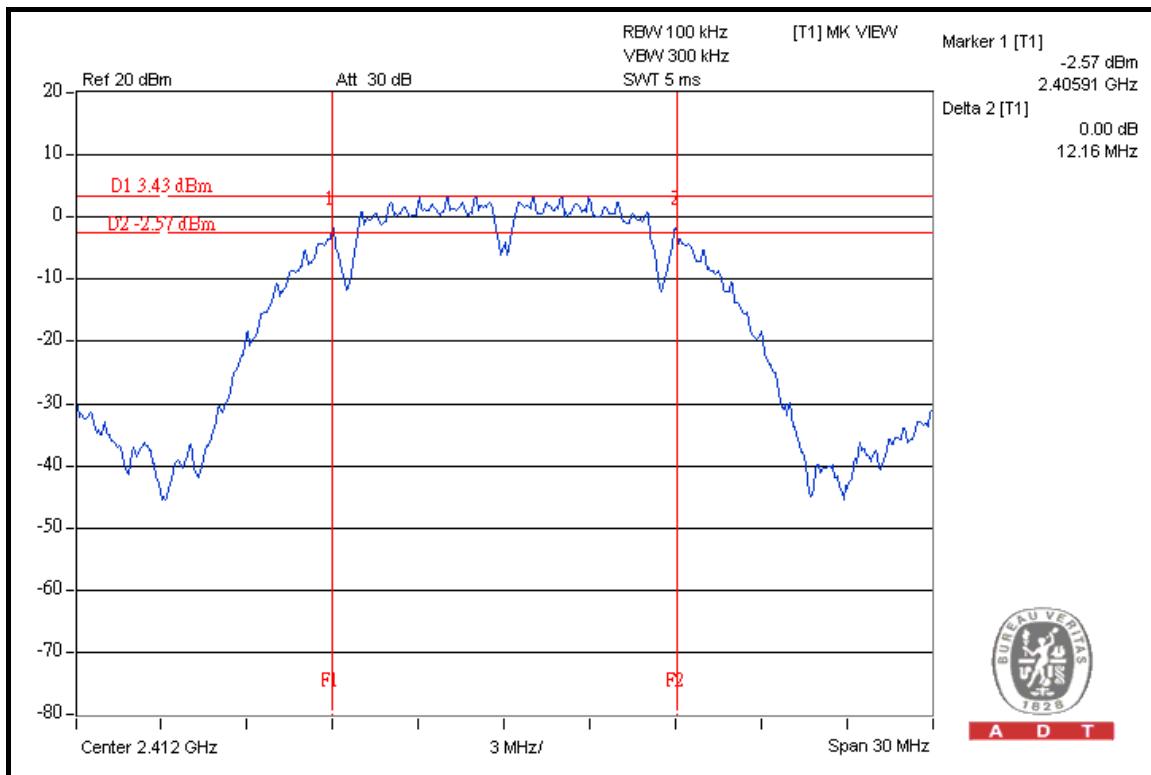




A D T

CH 6

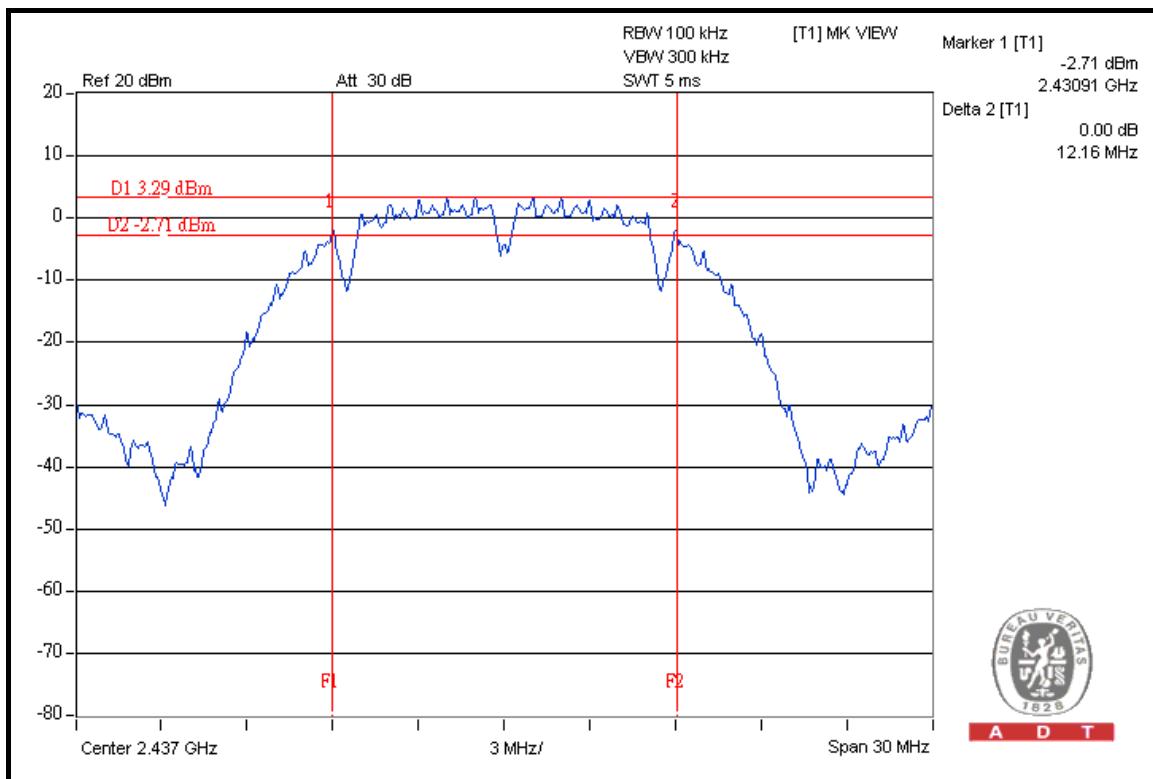

CH 11

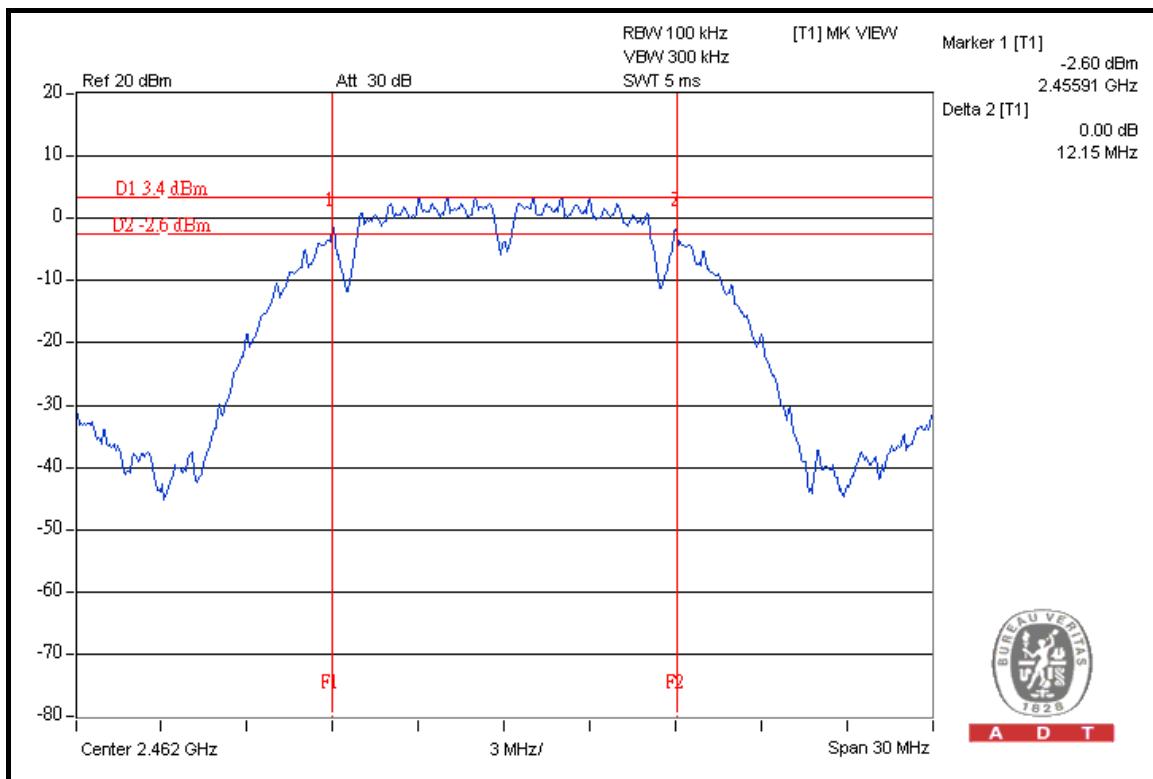




A D T

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	16.61	0.5	PASS
6	2437	16.47	0.5	PASS
11	2462	16.47	0.5	PASS

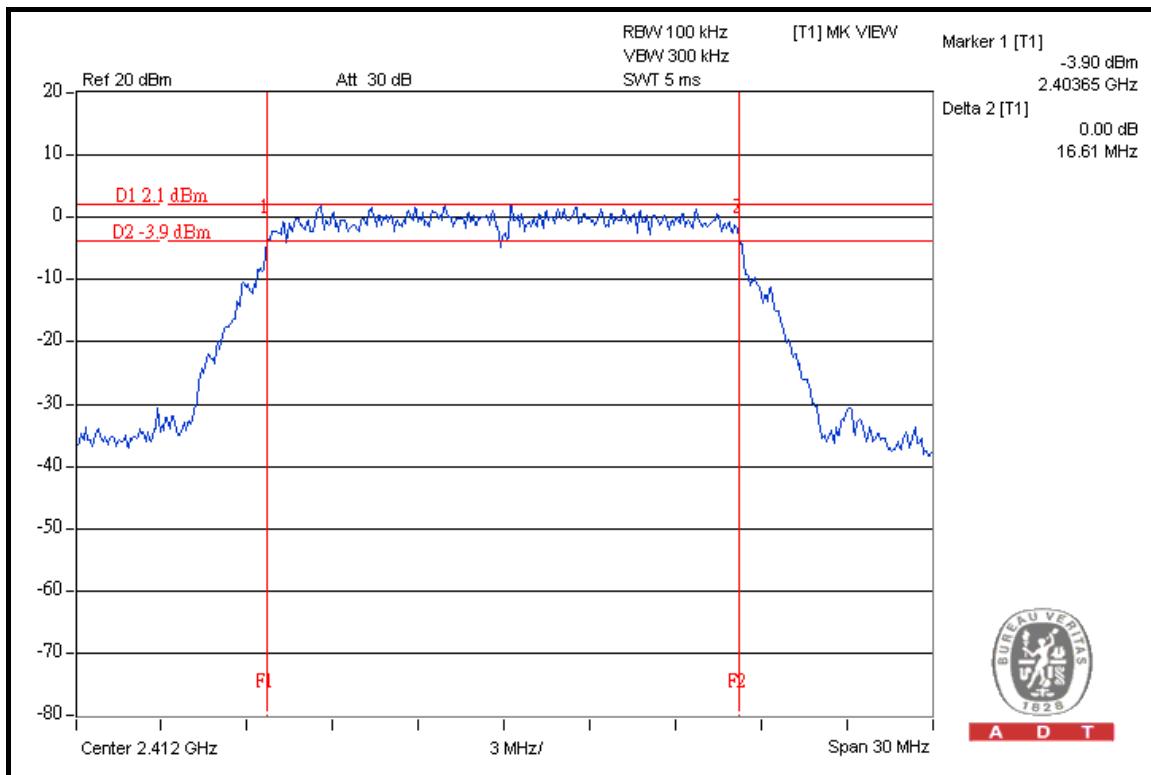CH 1




A D T

CH 6

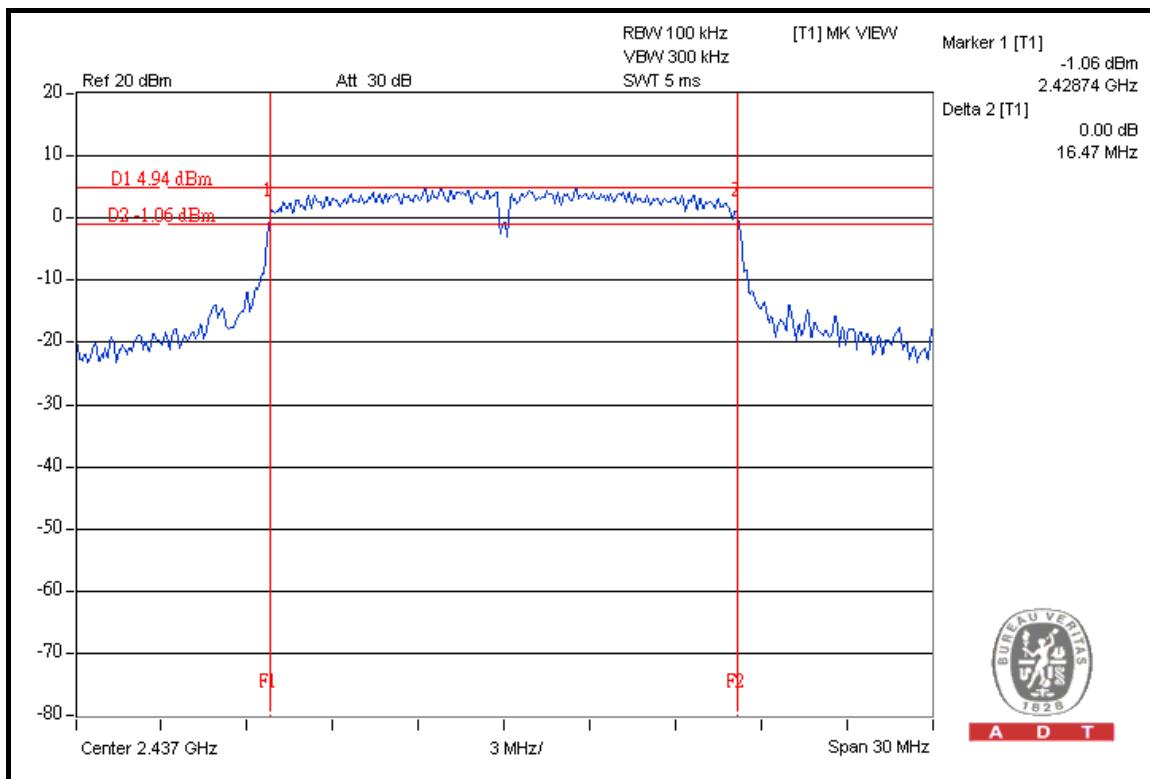

CH 11

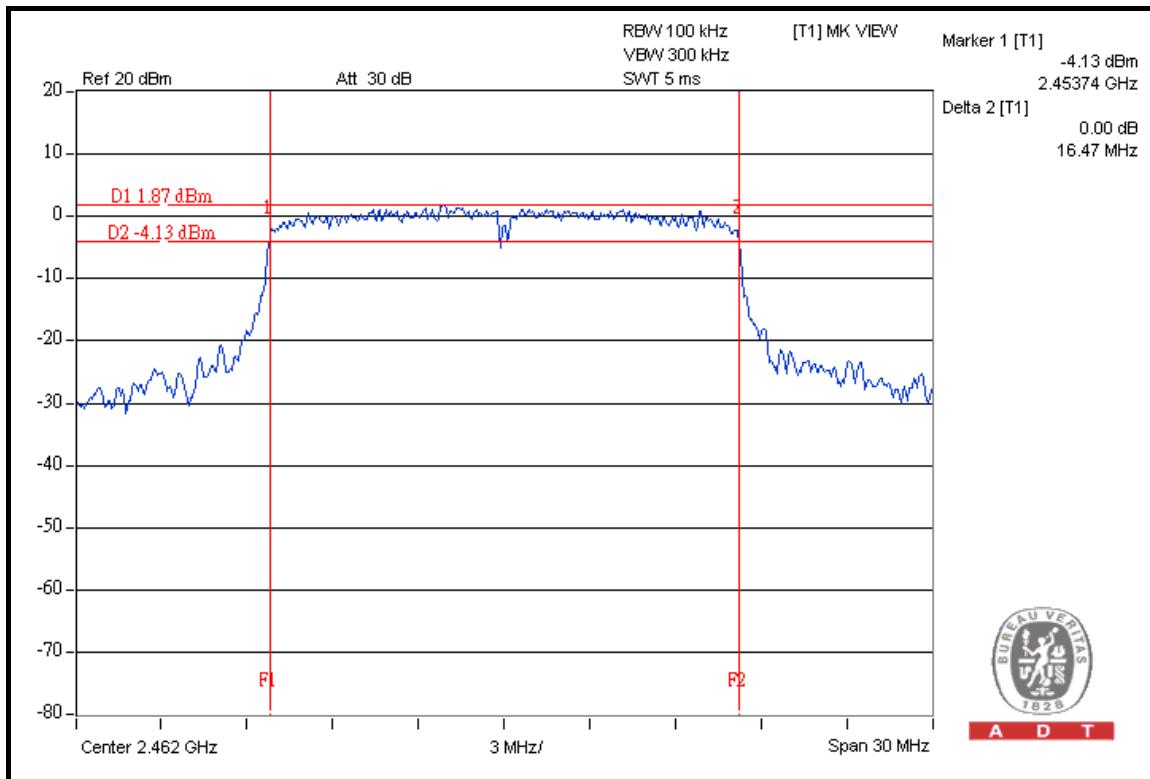




A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		


CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2412	17.43	0.5	PASS
6	2437	17.42	0.5	PASS
11	2462	17.34	0.5	PASS

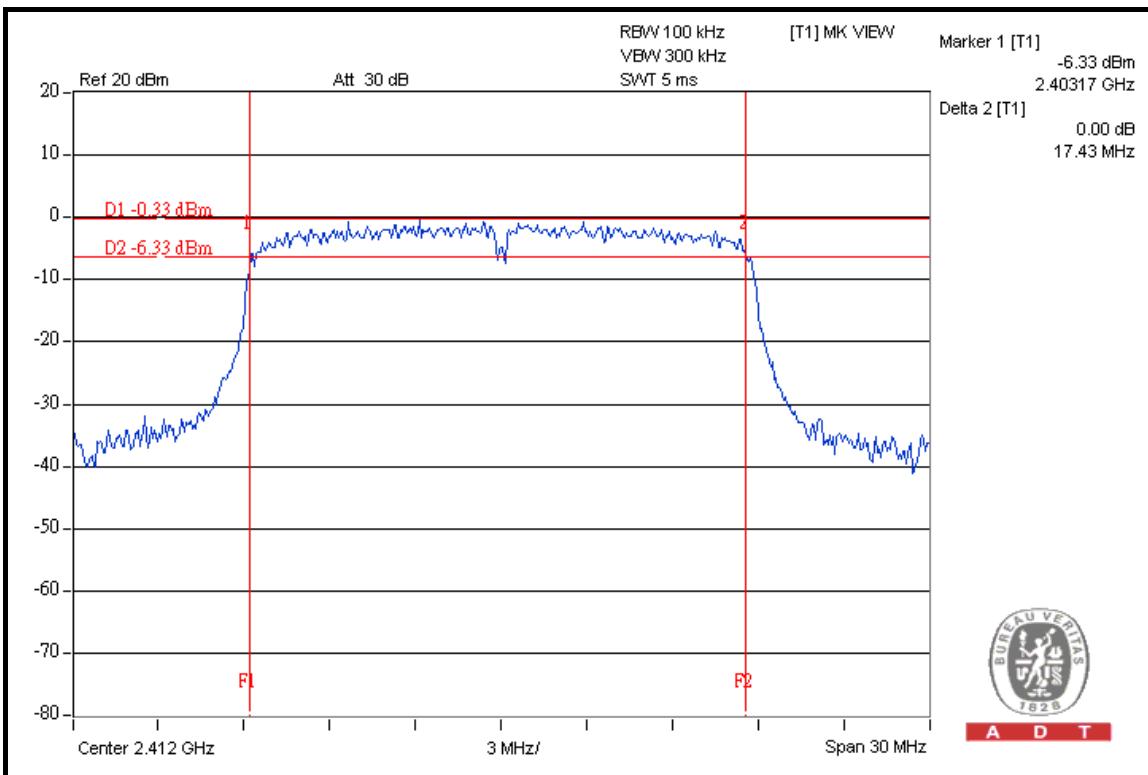CH 1




A D T

CH 6

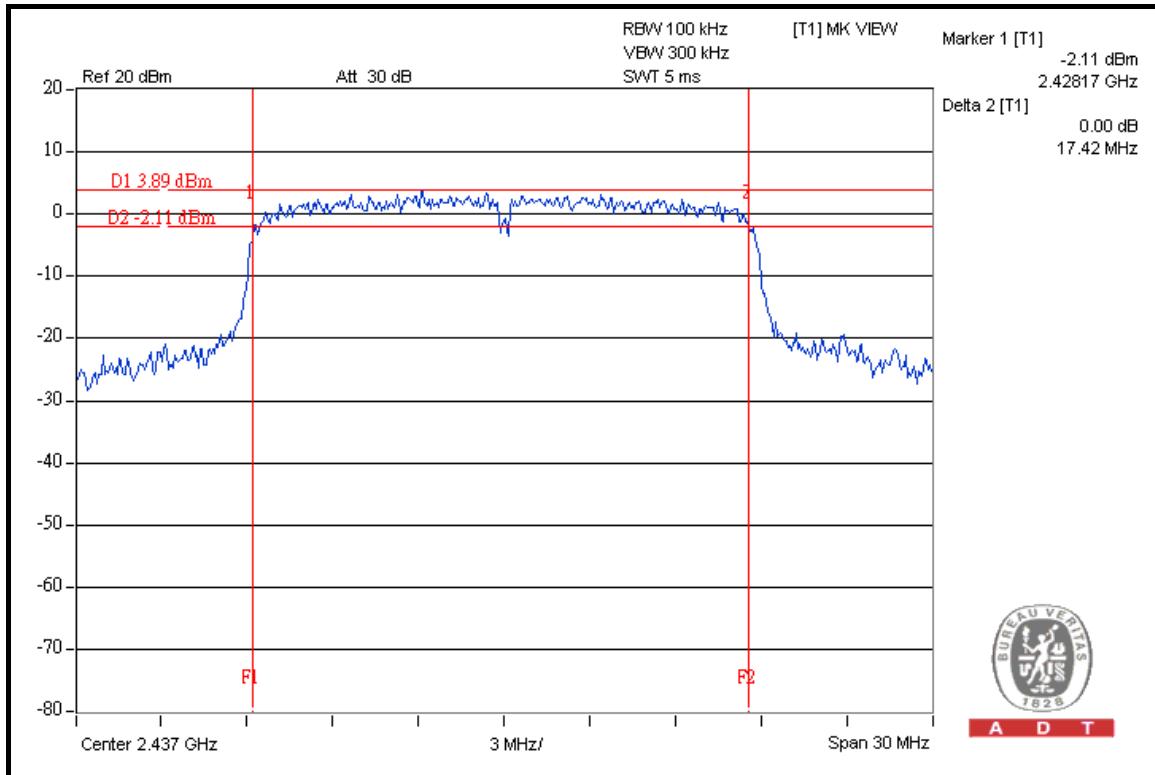

A D T

CH 11

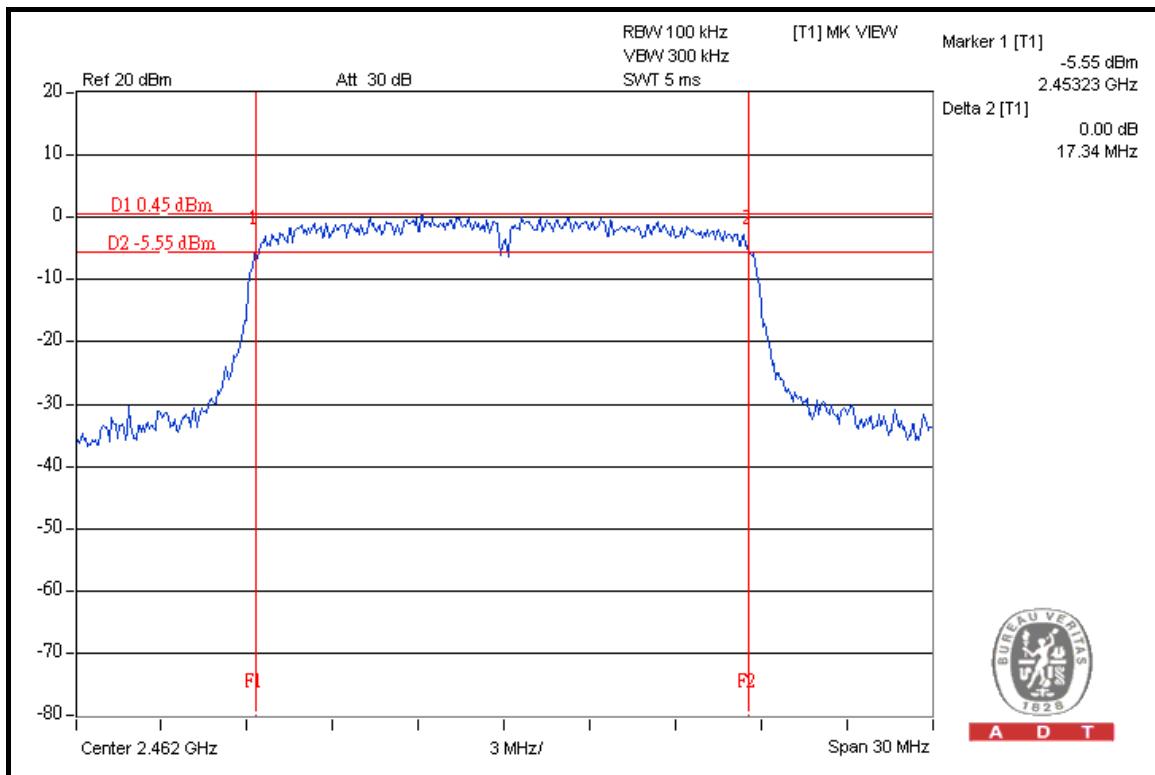

A D T




A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	6dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
1	2422	36.14	0.5	PASS
4	2437	36.15	0.5	PASS
7	2452	36.43	0.5	PASS


CH 1

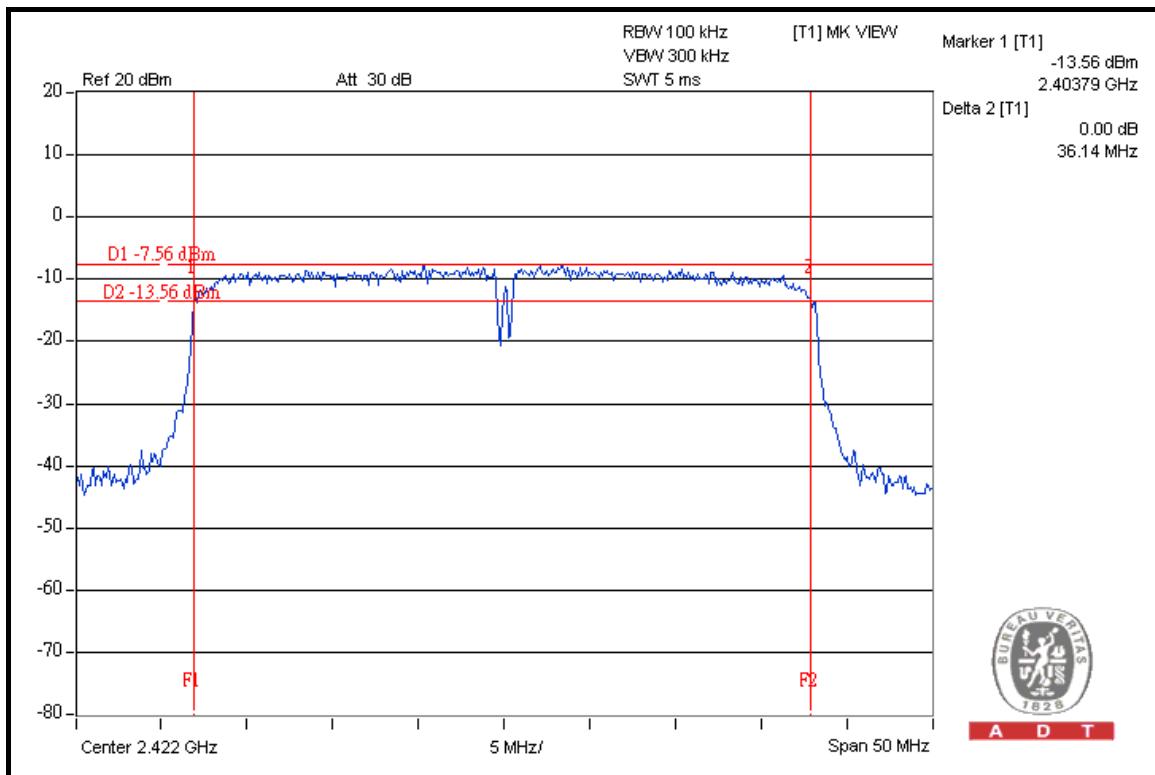




A D T

CH 4

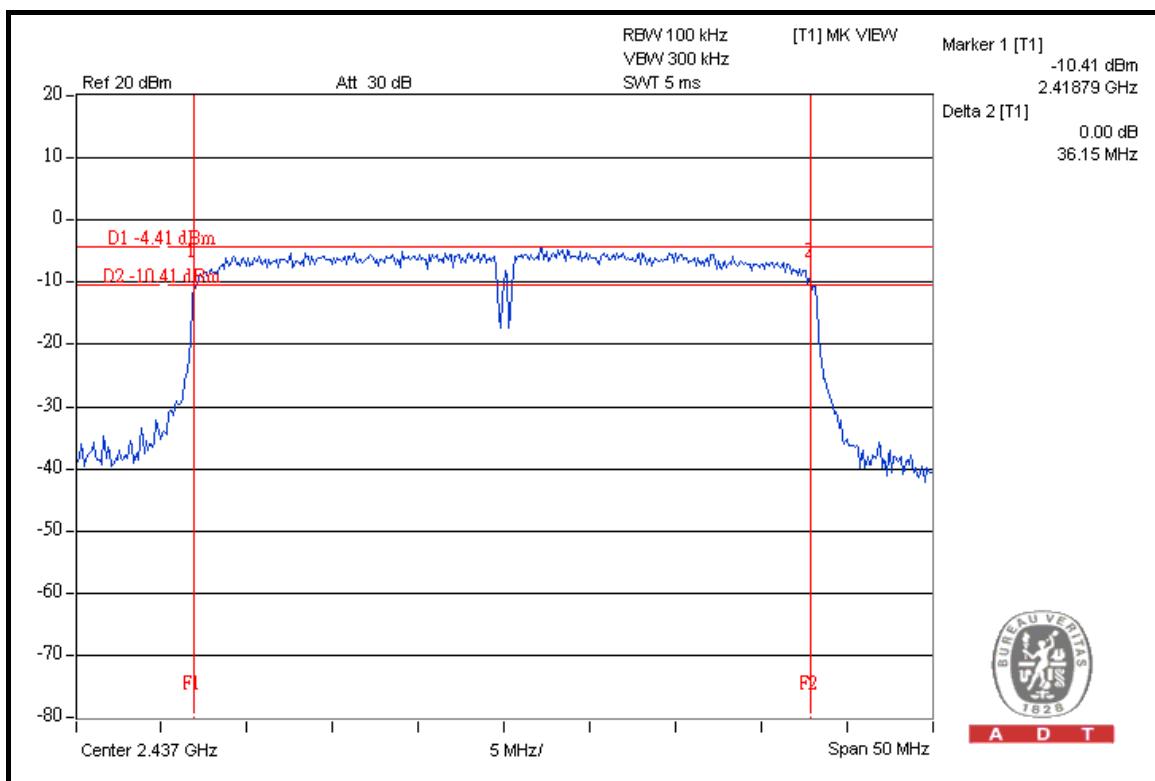

CH 7

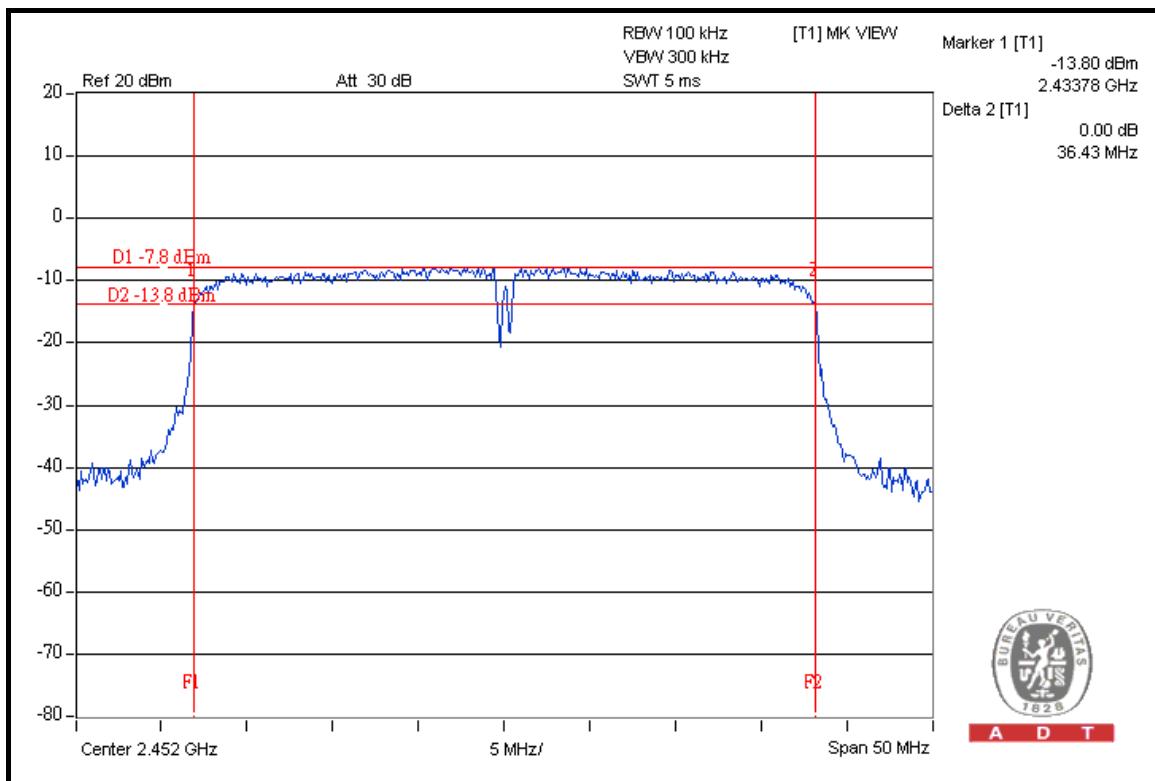



4.4 MAXIMUM PEAK OUTPUT POWER

4.4.1 LIMITS OF MAXIMUM PEAK OUTPUT POWER MEASUREMENT

The Maximum Peak Output Power Measurement is 30dBm.

4.4.2 INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
High Speed Peak Power Meter	ML2495A	0824012	Aug. 04, 2008	Aug. 03, 2009
Power Sensor	MA2444B	0738138	Aug. 04, 2008	Aug. 03, 2009

NOTE:

1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
2. Measurement Bandwidth of ML2495A is 65MHz greater than 6dB bandwidth of emission.


4.4.3 TEST PROCEDURES

A power sensor was used on the output port of the EUT. A power meter was used to read the response of the power sensor. Record the power level.

4.4.4 DEVIATION FROM TEST STANDARD

No deviation.

4.4.5 TEST SETUP

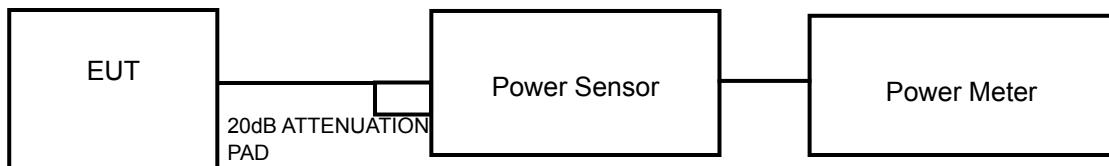

4.4.6 EUT OPERATING CONDITIONS

Same as Item 4.3.6.



A D T

4.4.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	50.466	17.03	30	PASS
6	2437	50.582	17.04	30	PASS
11	2462	50.816	17.06	30	PASS

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	159.221	22.02	30	PASS
6	2437	320.627	25.06	30	PASS
11	2462	160.325	22.05	30	PASS



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2412	126.765	21.03	30	PASS
6	2437	319.890	25.05	30	PASS
11	2462	161.436	22.08	30	PASS

DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHAN	CHANNEL FREQUENCY (MHz)	PEAK POWER OUTPUT (mW)	PEAK POWER OUTPUT (dBm)	PEAK POWER LIMIT (dBm)	PASS/FAIL
1	2422	63.533	18.03	30	PASS
4	2437	127.350	21.05	30	PASS
7	2452	63.973	18.06	30	PASS



4.5 POWER SPECTRAL DENSITY MEASUREMENT

4.5.1 LIMITS OF POWER SPECTRAL DENSITY MEASUREMENT

The Maximum of Power Spectral Density Measurement is 8dBm.

4.5.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.5.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer through an attenuator, the bandwidth of the fundamental frequency was measured with the spectrum analyzer using 3kHz RBW and 30kHz VBW, set sweep time = span/3kHz. The power spectral density was measured and recorded.

The sweep time is allowed to be longer than span/3kHz for a full response of the mixer in the spectrum analyzer.

4.5.4 DEVIATION FROM TEST STANDARD

No deviation.



A D T

4.5.5 TEST SETUP



4.5.6 EUT OPERATING CONDITION

Same as Item 4.3.6.



A D T


4.5.7 TEST RESULTS

802.11b DSSS MODULATION

MODULATION TYPE	DBPSK	TRANSFER RATE	1.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-11.19	8	PASS
6	2437	-11.33	8	PASS
11	2462	-11.34	8	PASS


CH 1

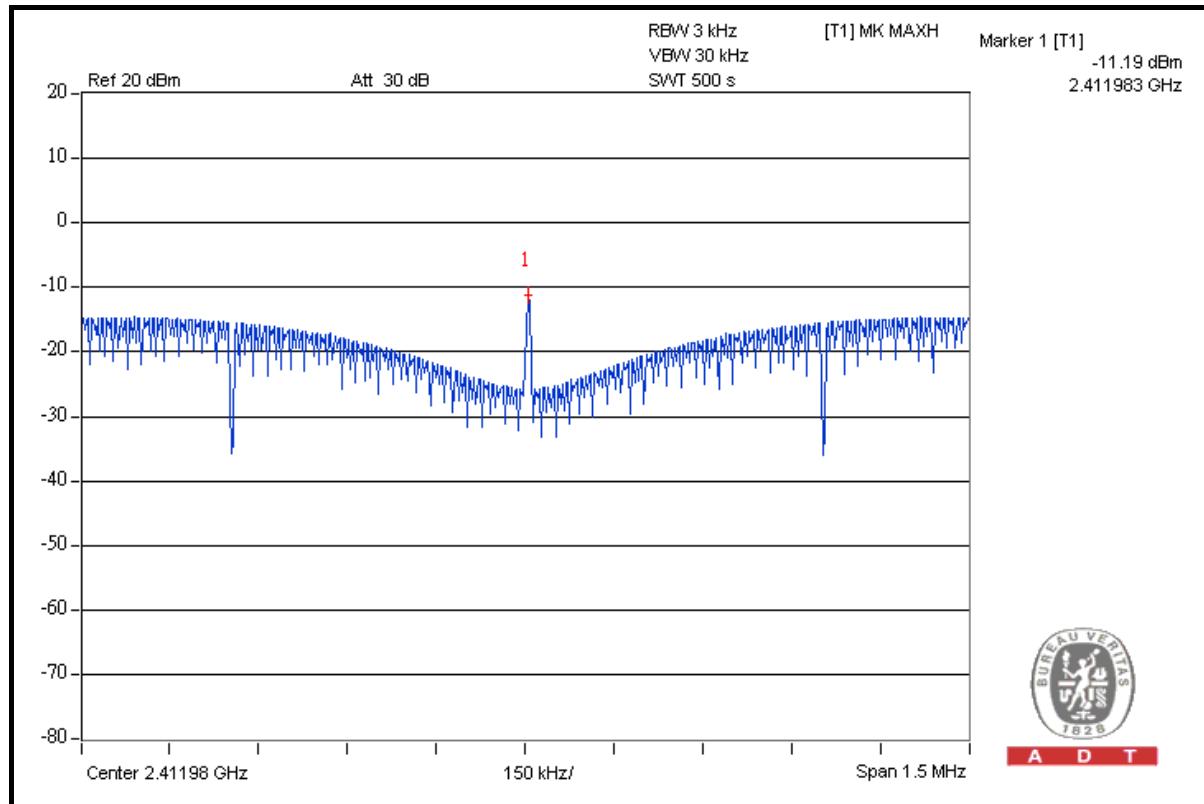




A D T

CH 6

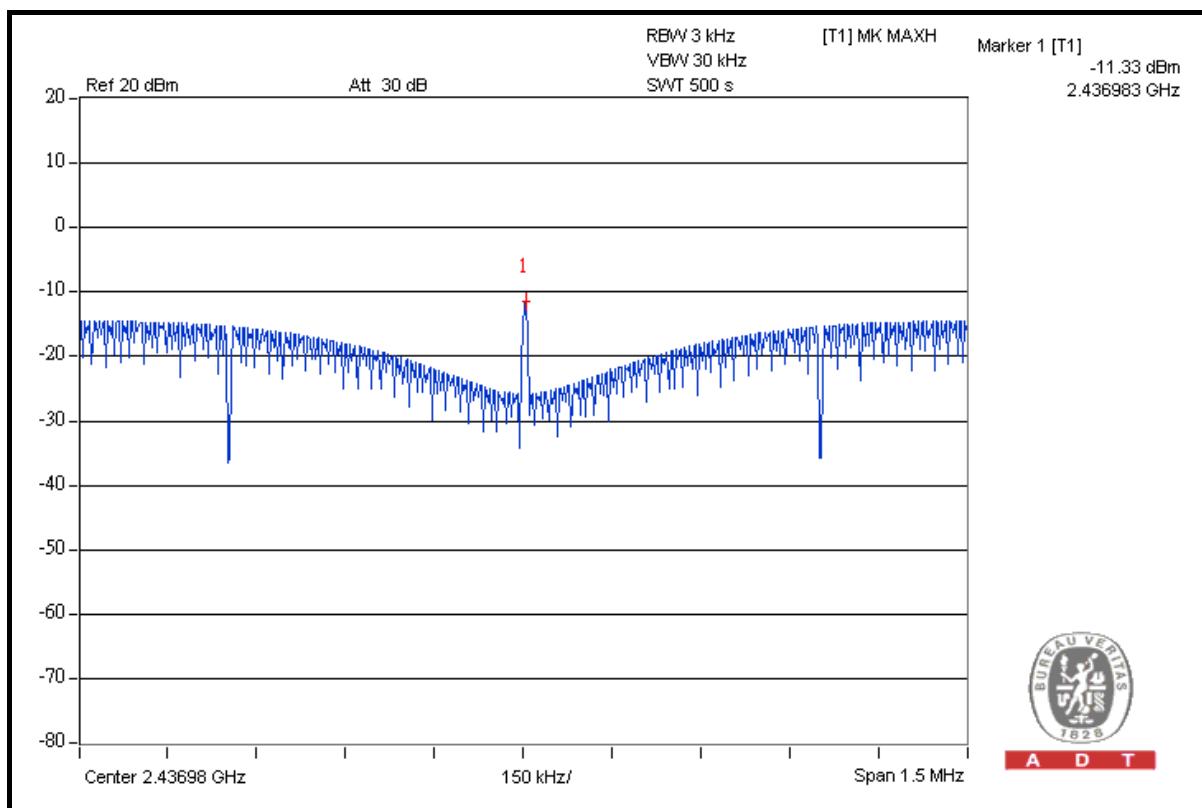

CH 11

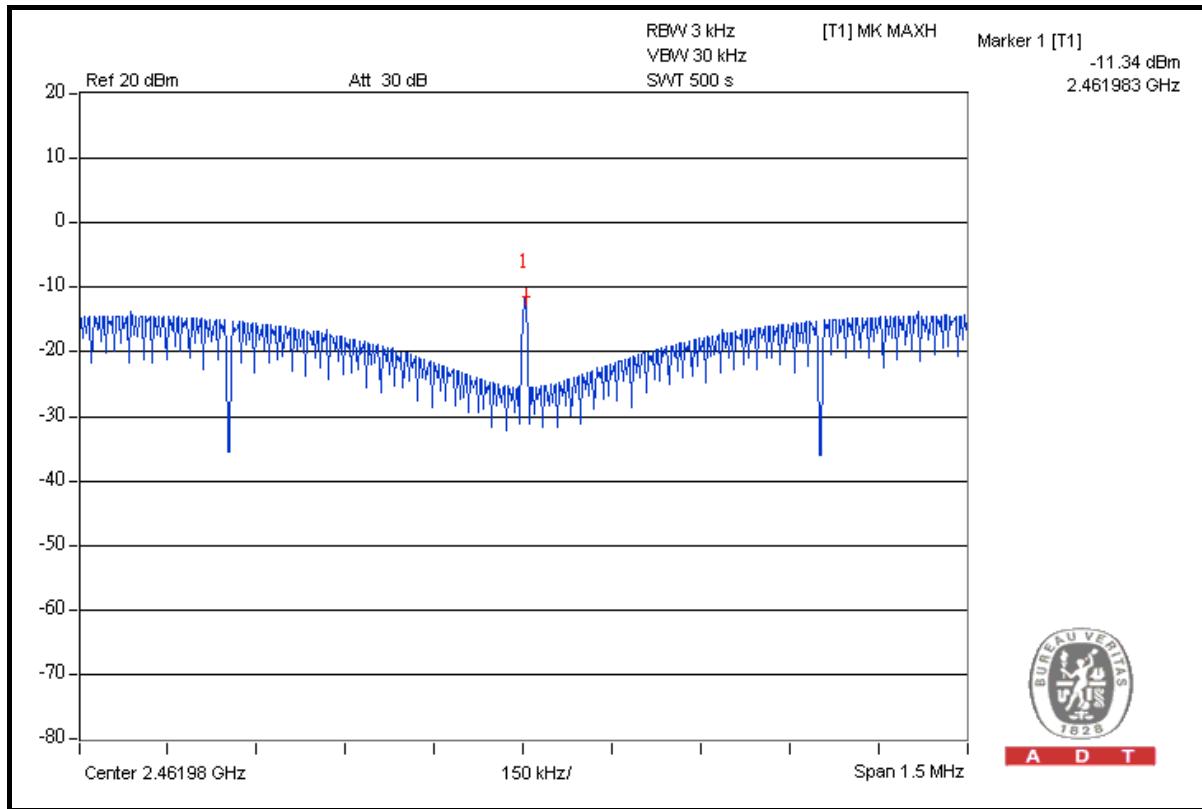




A D T

802.11g OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.0Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.19	8	PASS
6	2437	-5.42	8	PASS
11	2462	-8.07	8	PASS


CH 1

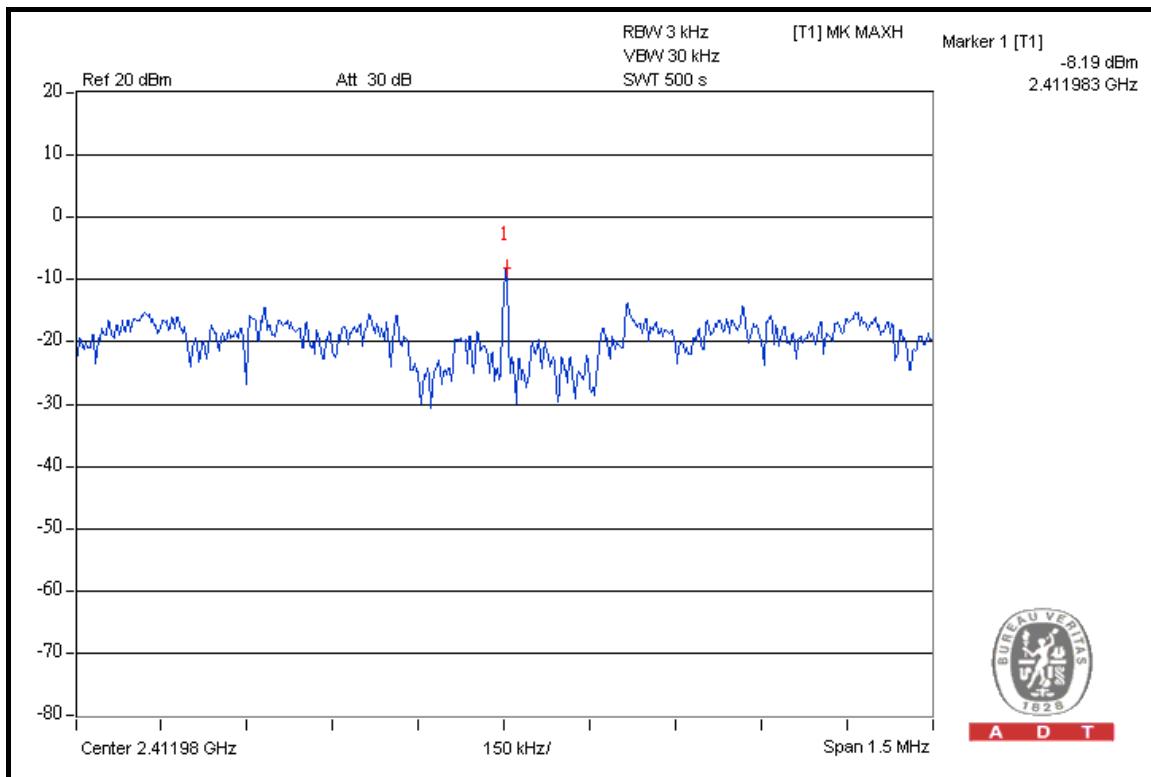




A D T

CH 6

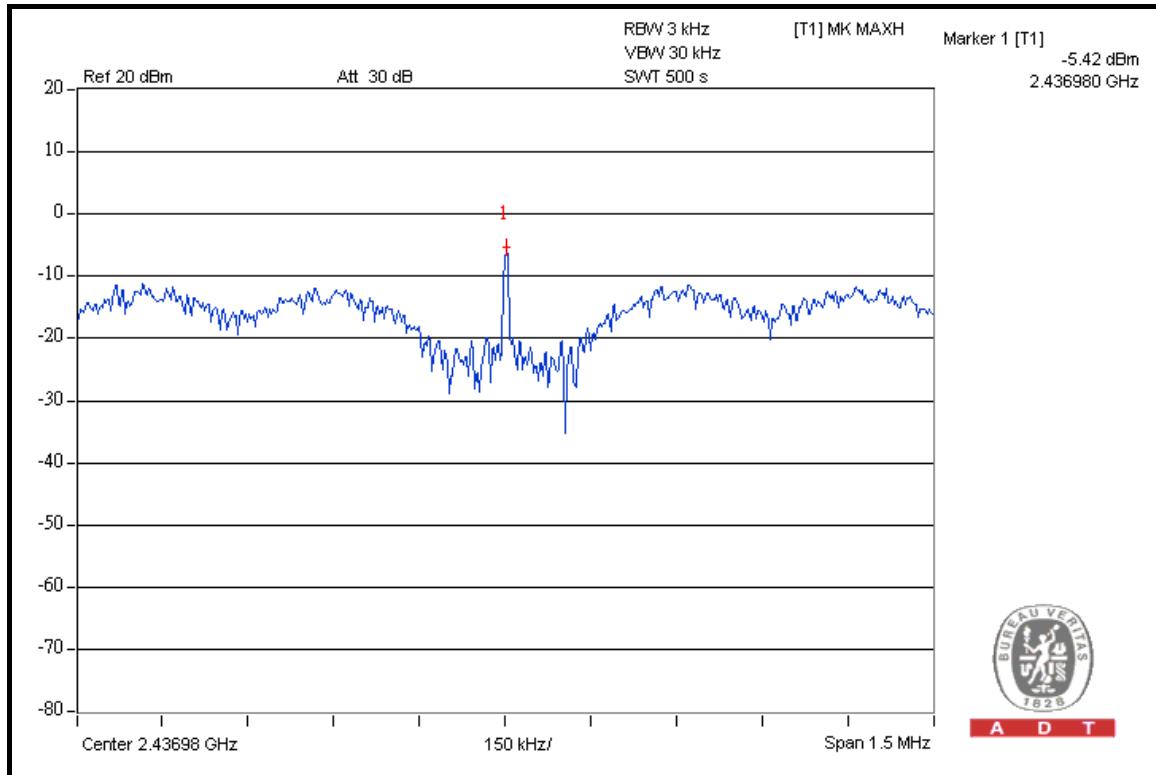

A D T

CH 11

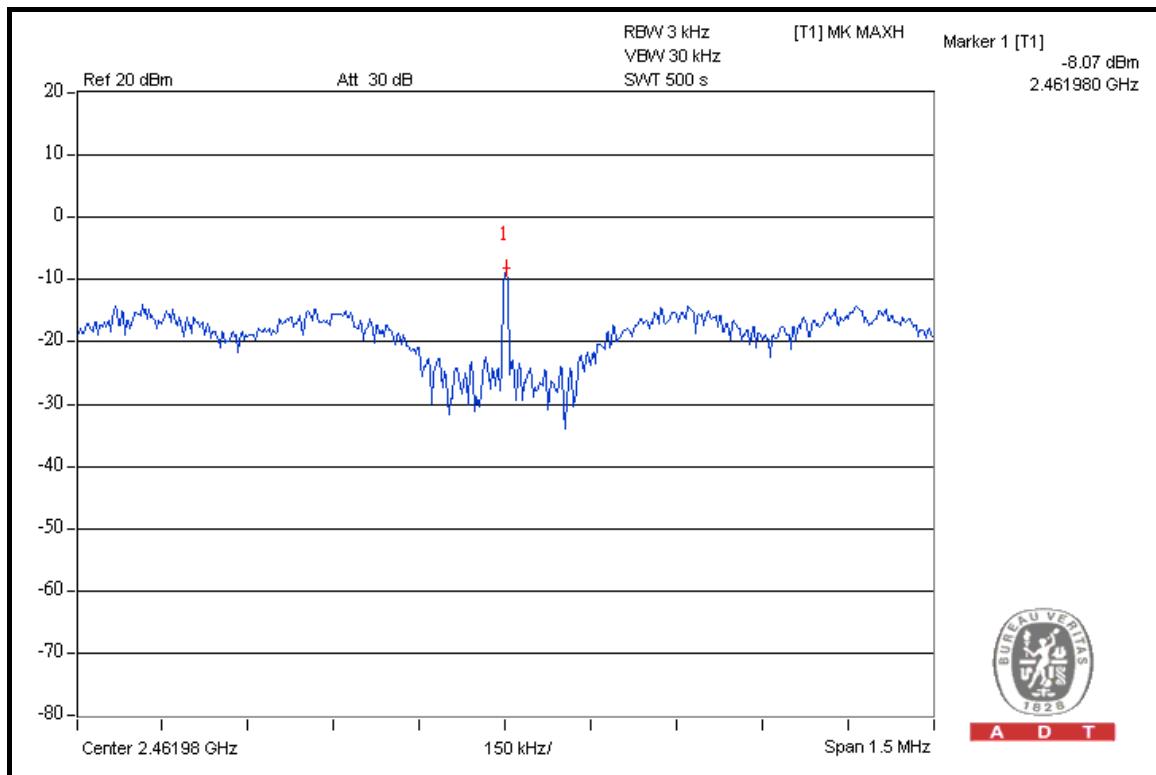

A D T




A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	6.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		


CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2412	-8.68	8	PASS
6	2437	-4.90	8	PASS
11	2462	-7.81	8	PASS

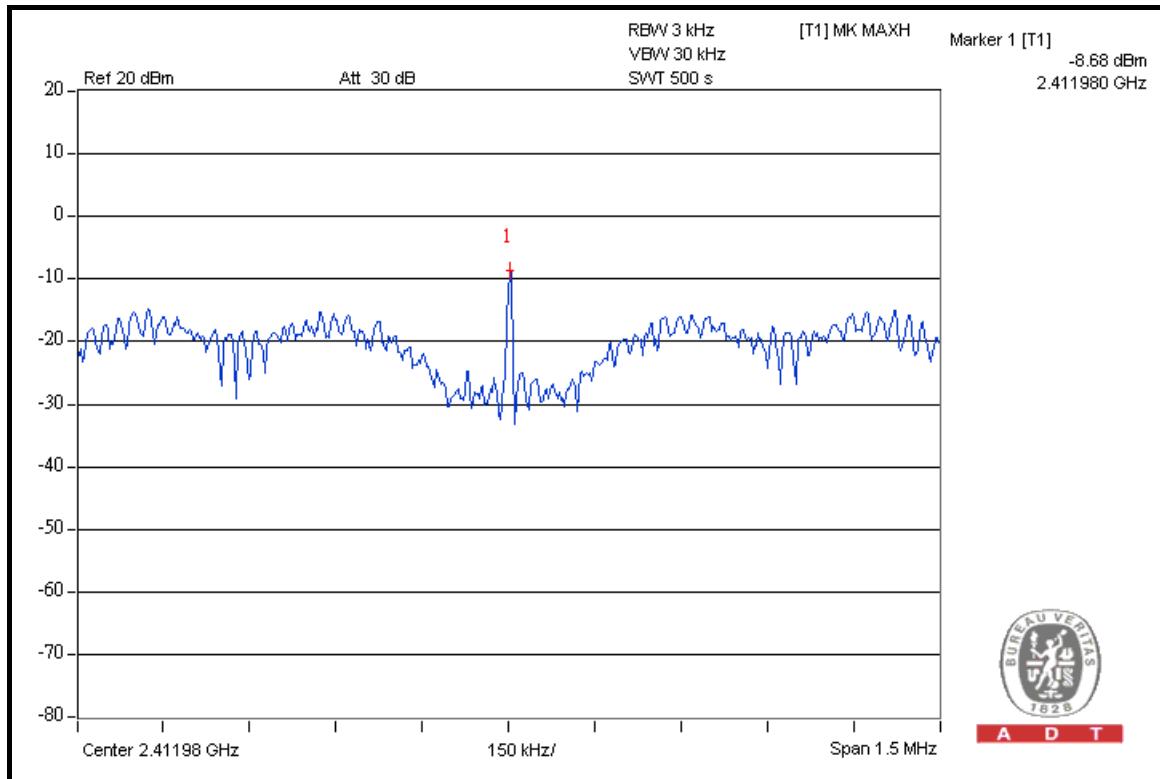CH 1




A D T

CH 6

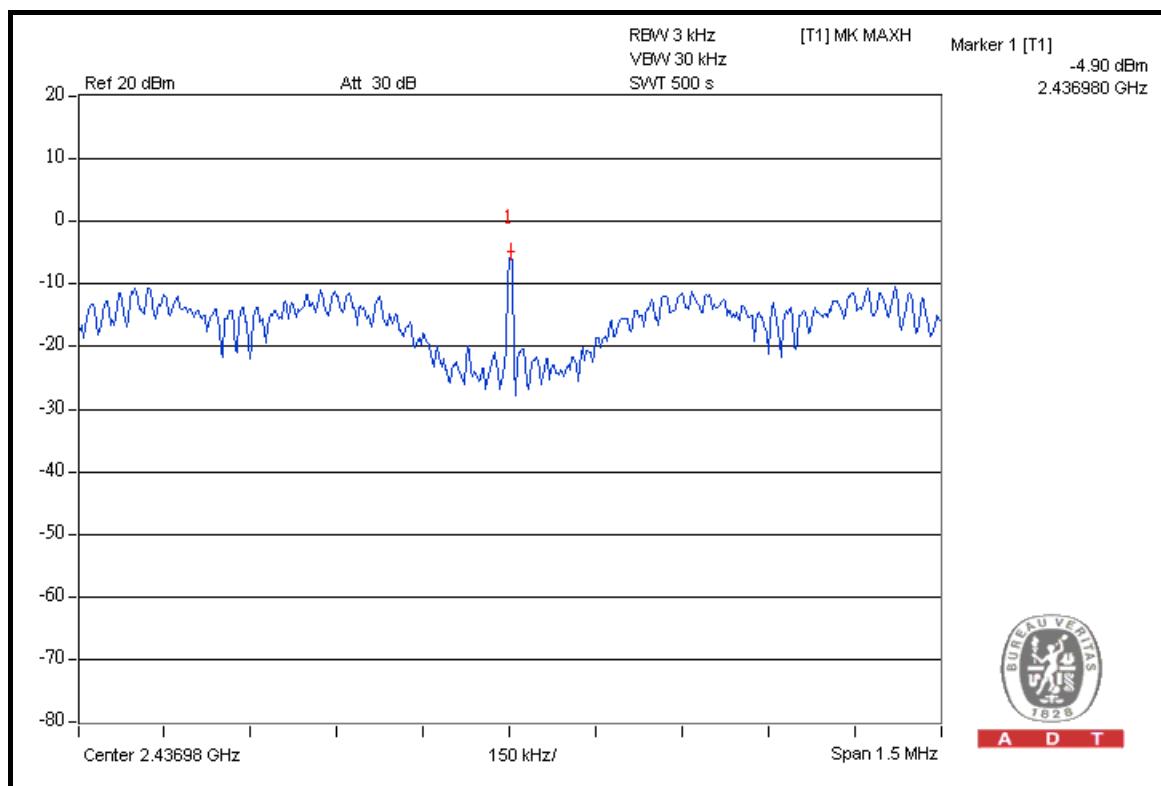

A D T

CH 11

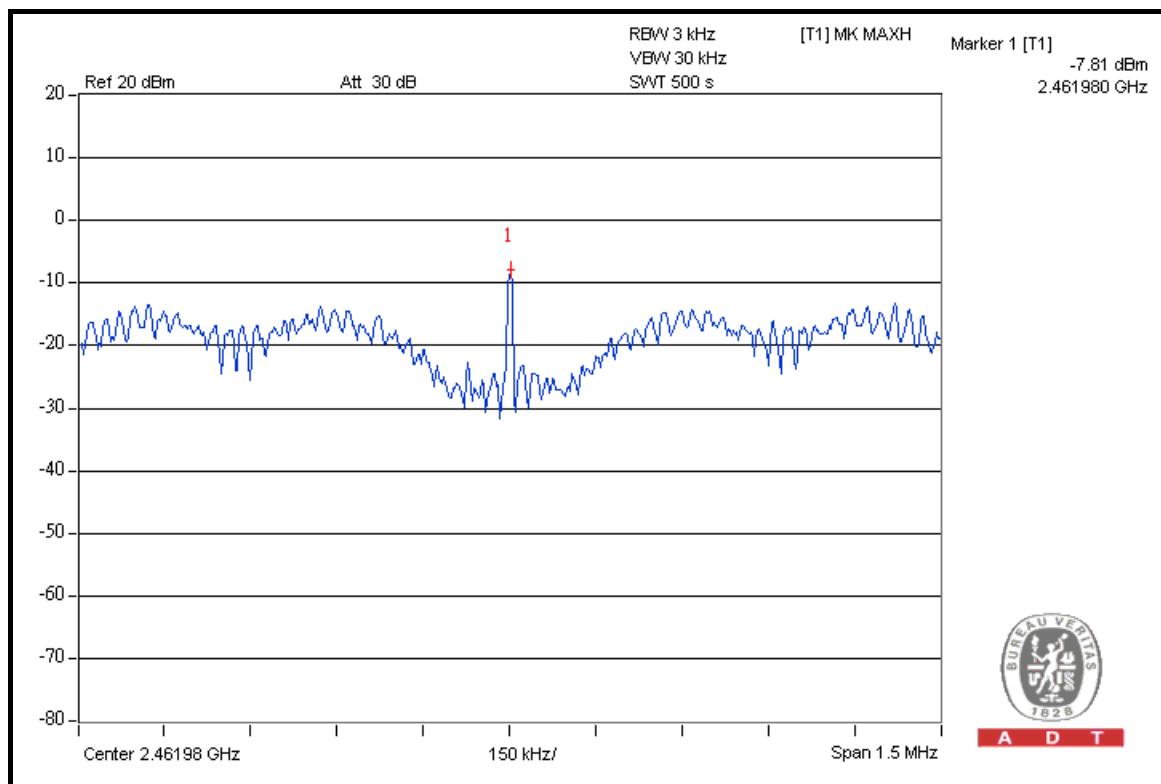

A D T




A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

MODULATION TYPE	BPSK	TRANSFER RATE	13.5Mbps
INPUT POWER (SYSTEM)	120Vac, 60 Hz	ENVIRONMENTAL CONDITIONS	23deg.C, 66%RH, 991hPa
TESTED BY	Brad Wu		

CHANNEL	CHANNEL FREQUENCY (MHz)	RF POWER LEVEL IN 3 kHz BW (dBm)	MAXIMUM LIMIT (dBm)	PASS/FAIL
1	2422	-13.23	8	PASS
4	2437	-10.06	8	PASS
7	2452	-13.30	8	PASS


CH 1

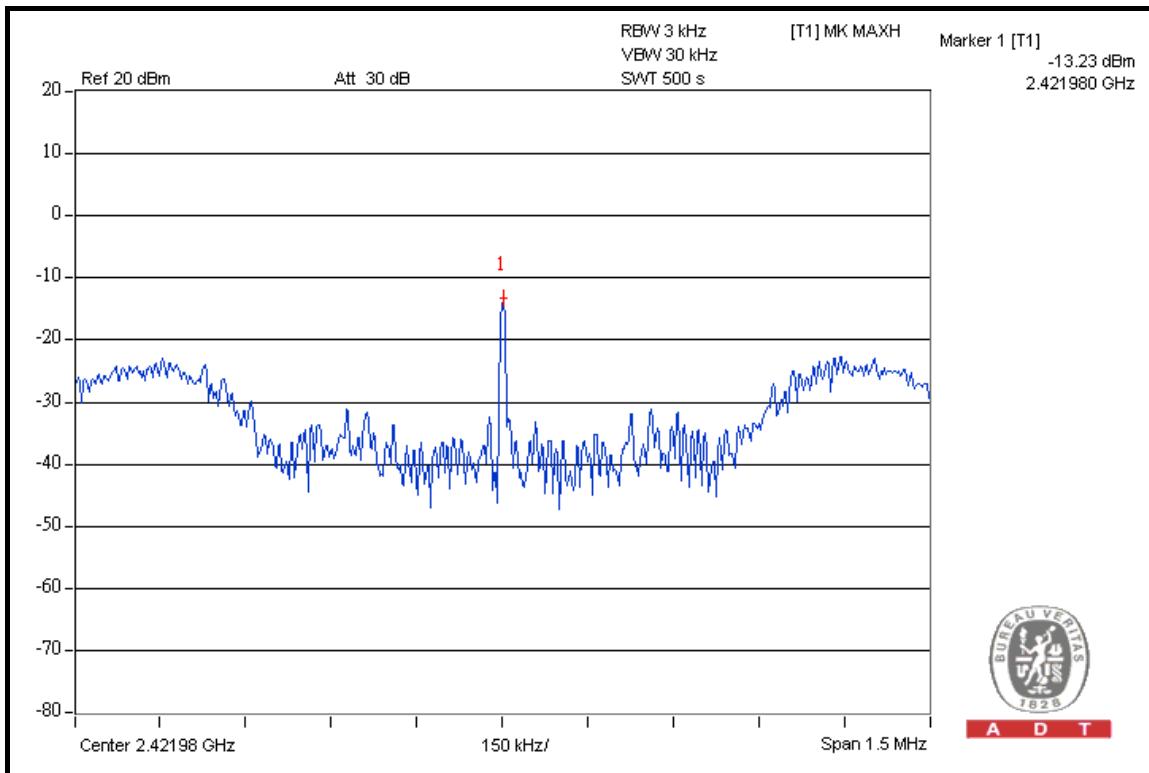




A D T

CH 4

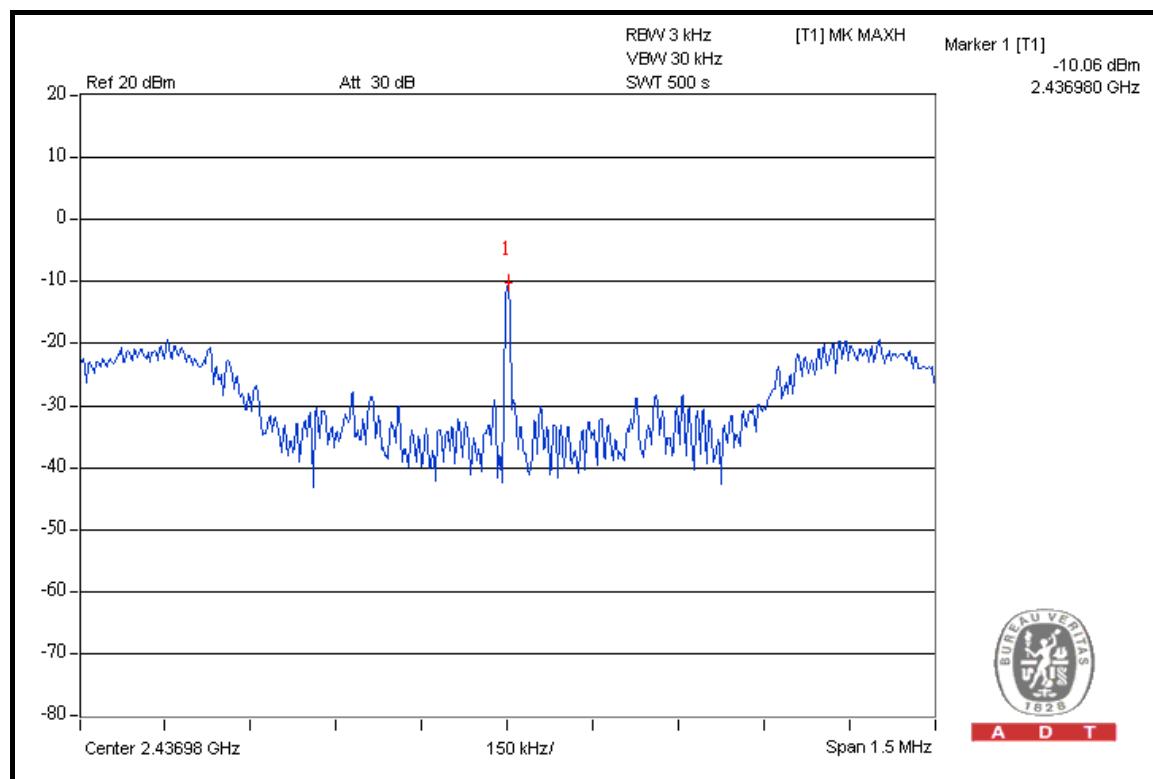

CH 7

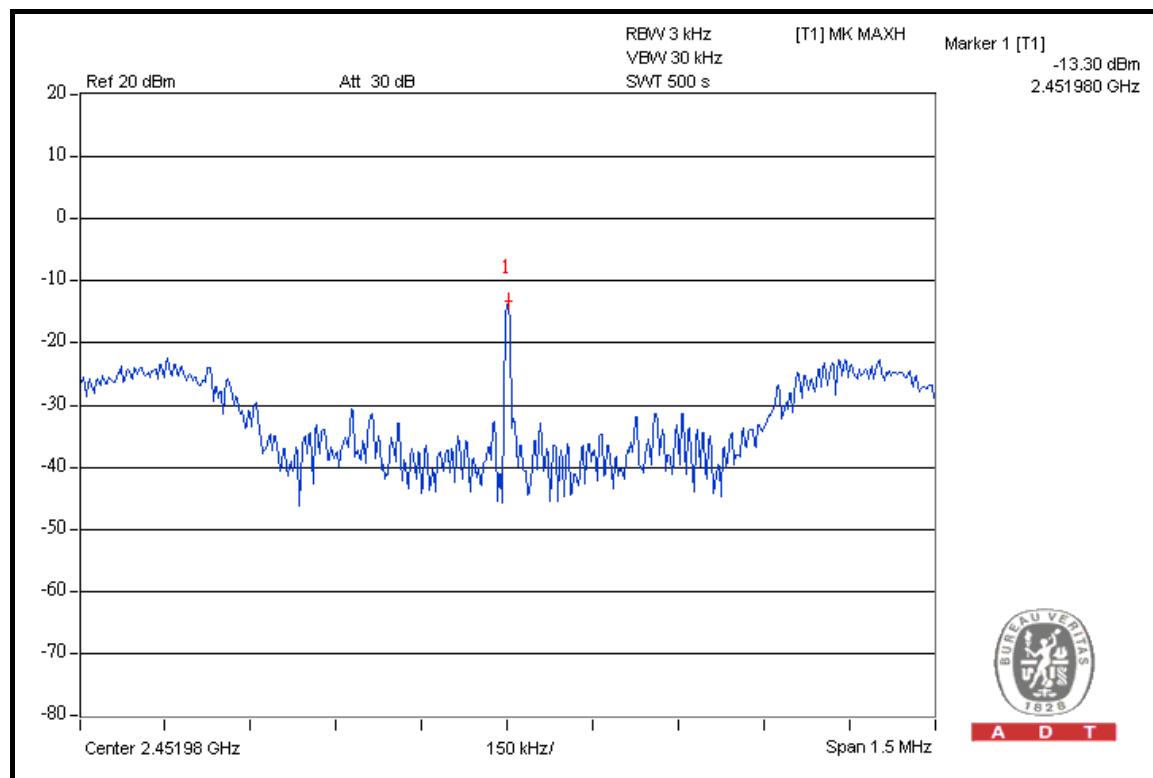



4.6 BAND EDGES MEASUREMENT

4.6.1 LIMITS OF BAND EDGES MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100kHz Resolution Bandwidth).

4.6.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	CALIBRATED UNTIL
R&S SPECTRUM ANALYZER	FSP40	100041	Apr. 22, 2008	Apr. 21, 2009

NOTE: The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

4.6.3 TEST PROCEDURE

The transmitter output was connected to the spectrum analyzer via a low loss cable. Set both RBW and VBW of spectrum analyzer to 100kHz and 300kHz with suitable frequency span including 100MHz bandwidth from band edge. The band edges was measured and recorded.

The spectrum plots (Peak RBW = 100kHz, VBW = 300kHz; Average RBW = 1MHz, VBW = 10Hz) are attached on the following pages.

4.6.4 DEVIATION FROM TEST STANDARD

No deviation.

4.6.5 EUT OPERATING CONDITION

Same as Item 4.3.6.



4.6.6 TEST RESULTS

The spectrum plots are attached on the following 24 images. D1 line indicates the highest level, and D2 line indicates the 20dB offset below D1. It shows compliance with the requirement in part 15.247(d).

802.11b DSSS MODULATION

NOTE 1: The band edge emission plot on the next page shows 49.67dBc between carrier maximum power and local maximum emission in restrict band (2.38740GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 108.84dBuV/m (Peak), so the maximum field strength in restrict band is $108.84 - 49.67 = 59.17$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 52.99dBc between carrier maximum power and local maximum emission in restrict band (2.38680GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 104.16dBuV/m (Average), so the maximum field strength in restrict band is $104.16 - 52.99 = 51.17$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 50.09dBc between carrier maximum power and local maximum emission in restrict band (2.48780GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 107.84dBuV/m (Peak), so the maximum field strength in restrict band is $107.84 - 50.09 = 57.75$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 54.16dBc between carrier maximum power and local maximum emission in restrict band (2.48760GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 103.12dBuV/m (Average), so the maximum field strength in restrict band is $103.12 - 54.16 = 48.96$ dBuV/m which is under 54dBuV/m limit.





A D T

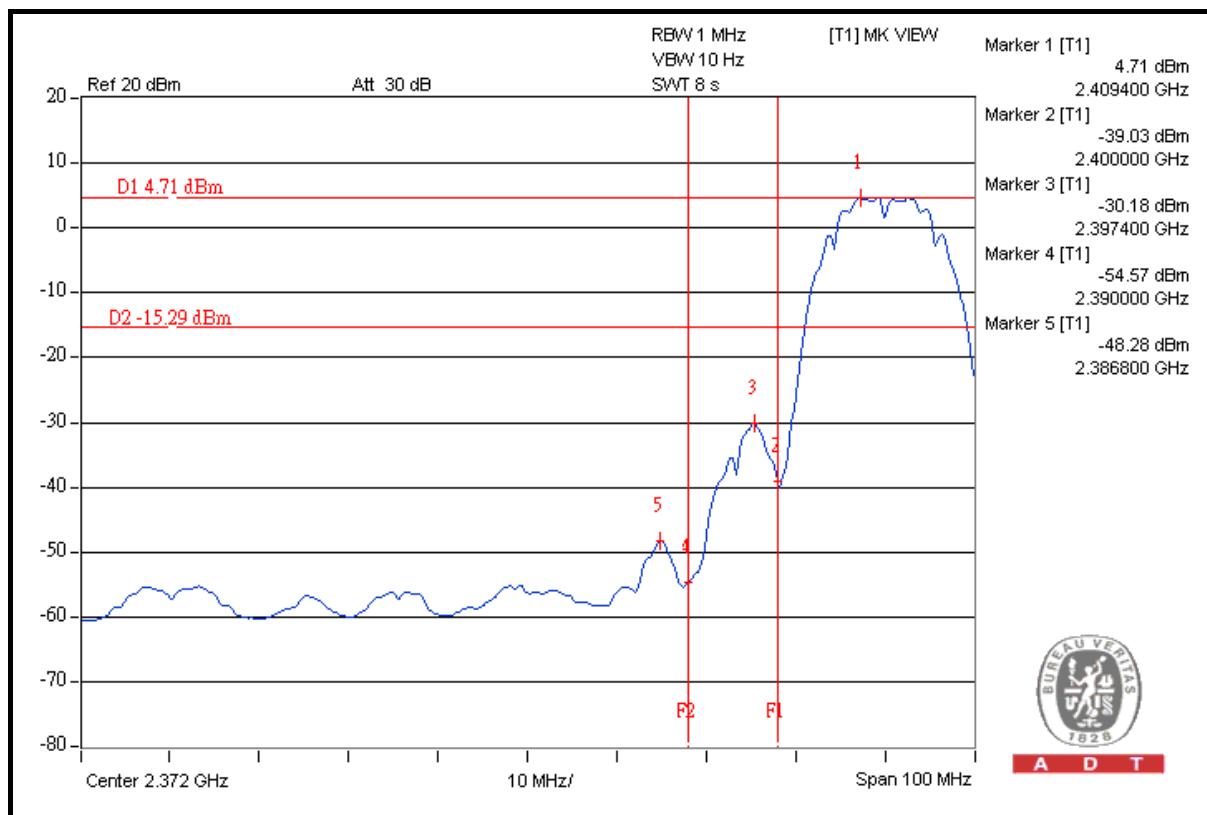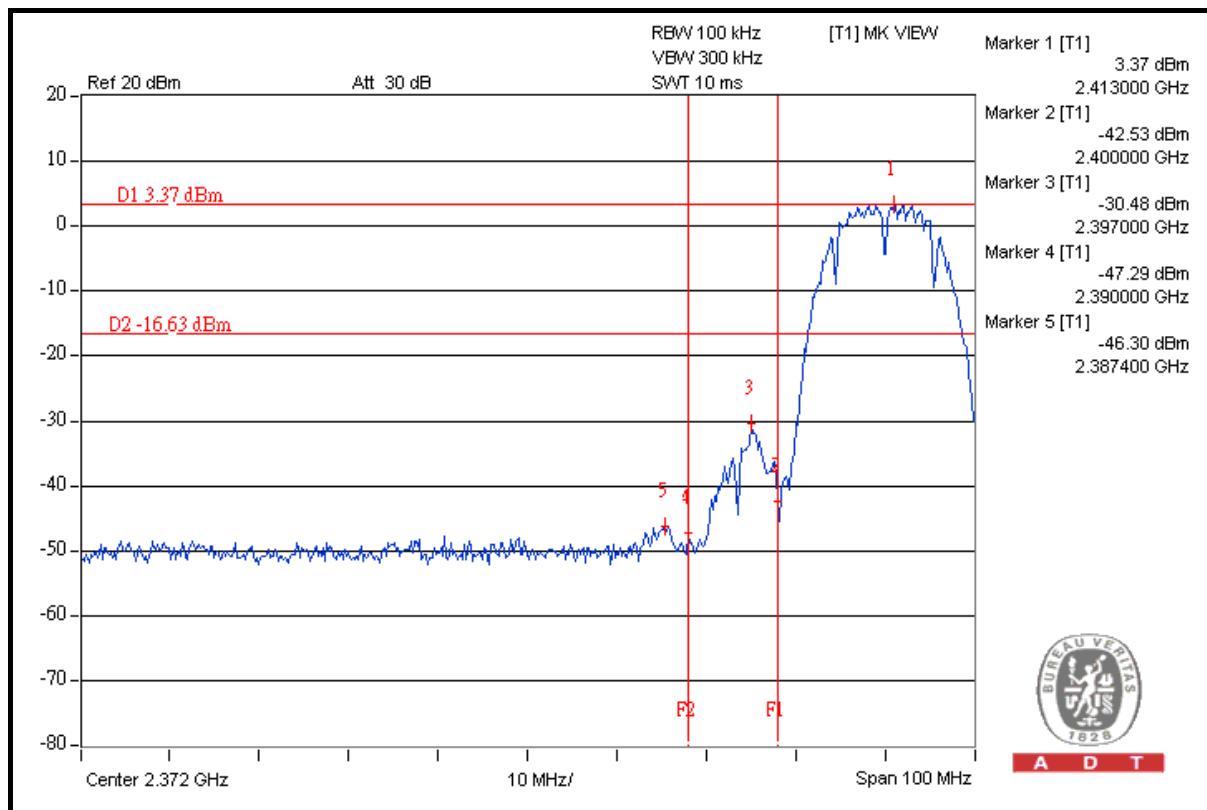





A D T

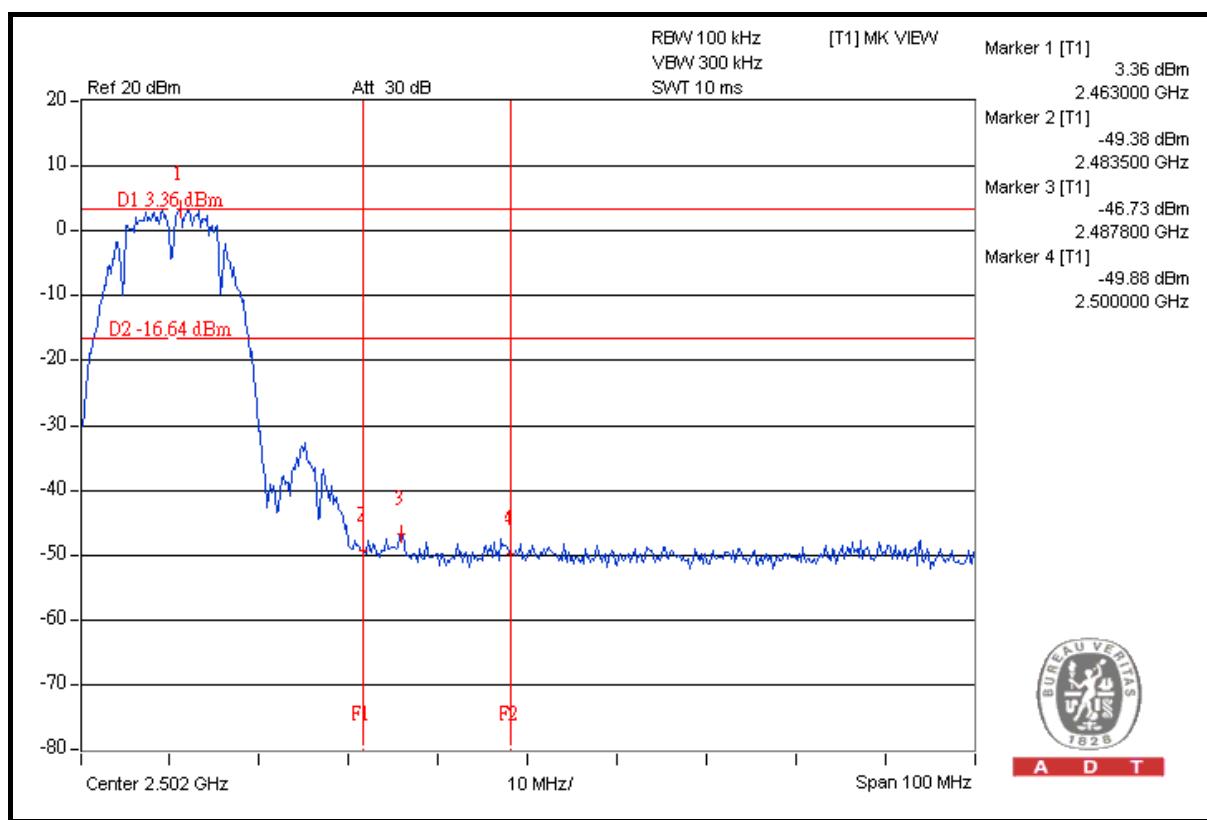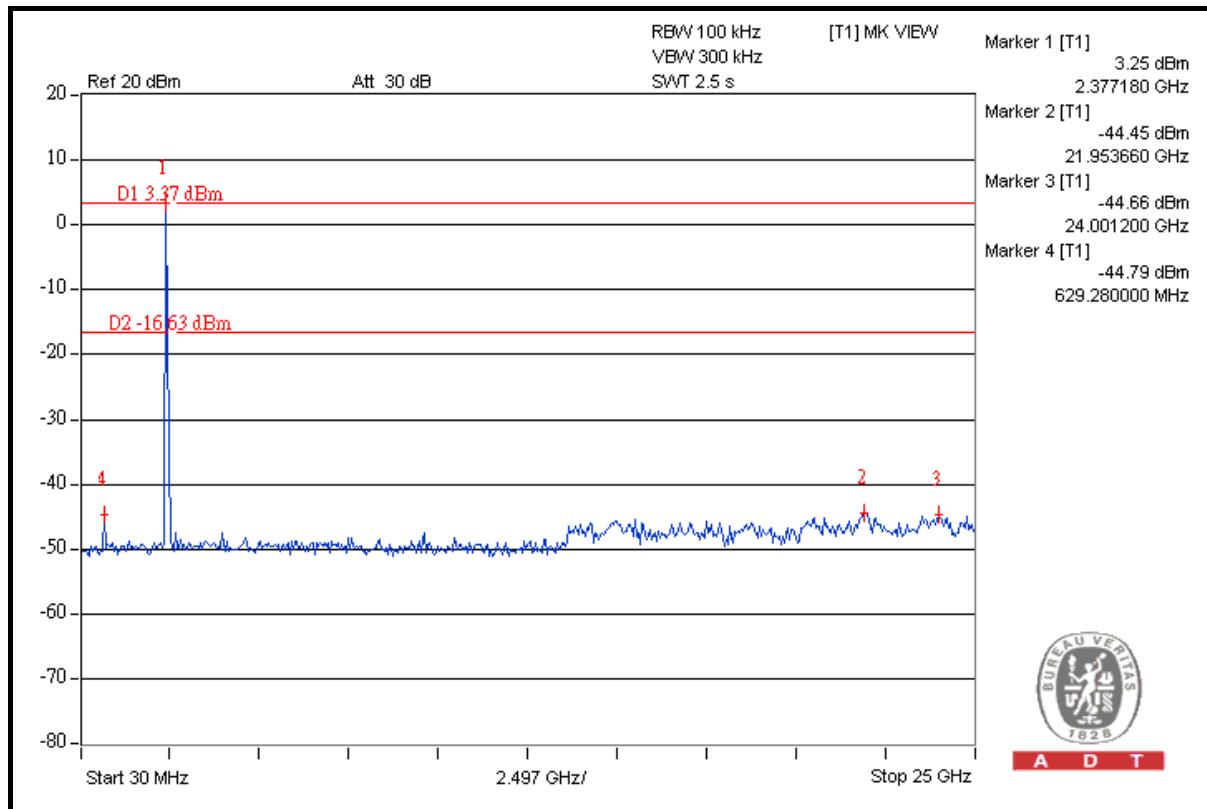



A D T

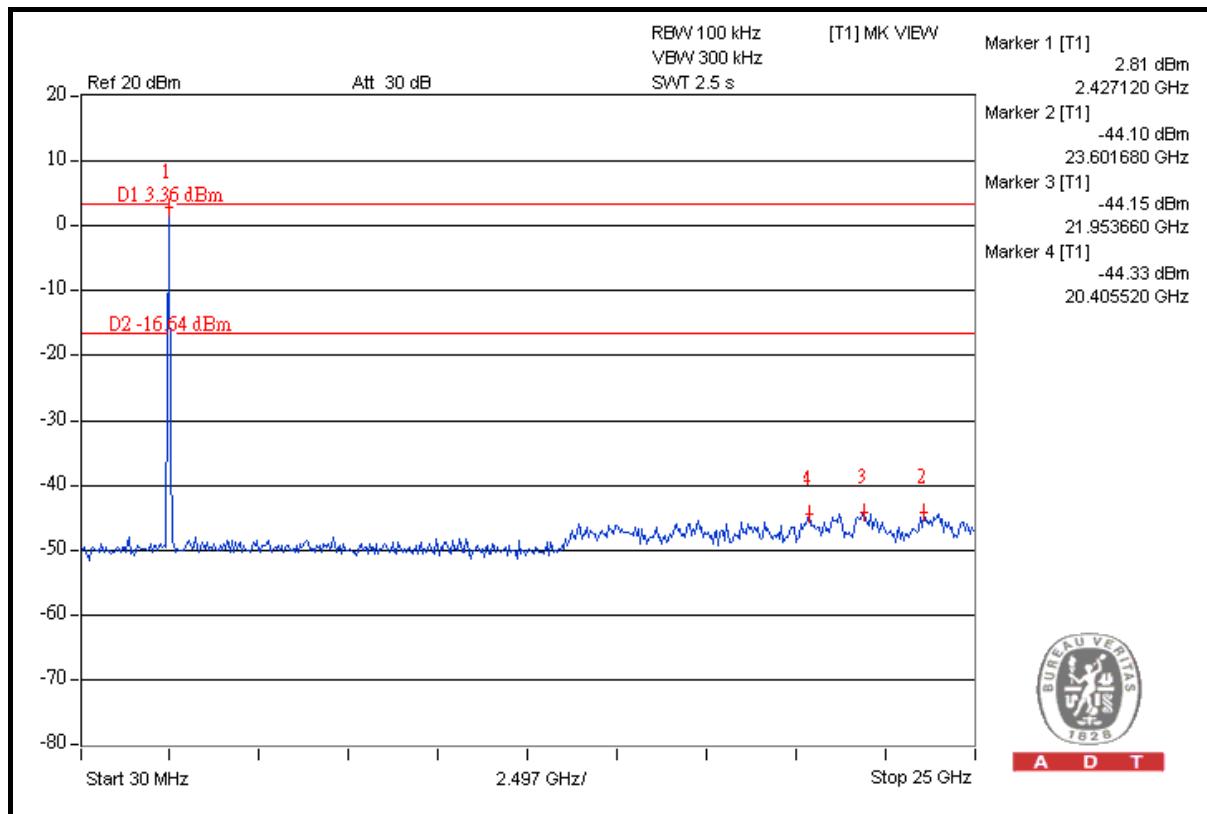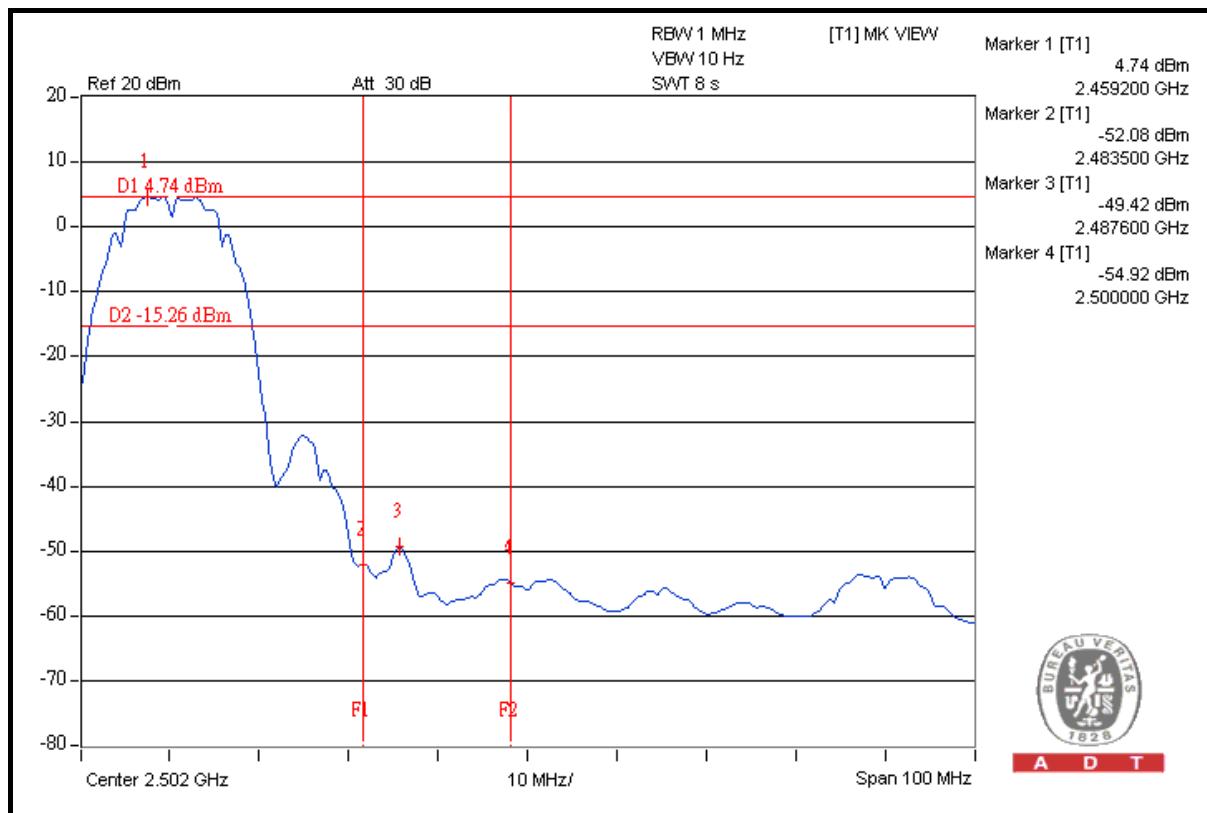



A D T

802.11g OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 45.33dBc between carrier maximum power and local maximum emission in restrict band (2.38960GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 108.76dBuV/m (Peak), so the maximum field strength in restrict band is $108.76 - 45.33 = 63.43$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 47.88dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 98.50dBuV/m (Average), so the maximum field strength in restrict band is $98.50 - 47.88 = 50.62$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 39.33dBc between carrier maximum power and local maximum emission in restrict band (2.48360GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 108.93dBuV/m (Peak), so the maximum field strength in restrict band is $108.93 - 39.33 = 69.60$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 46.80dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 98.06dBuV/m (Average), so the maximum field strength in restrict band is $98.06 - 46.80 = 51.26$ dBuV/m which is under 54dBuV/m limit.





A D T

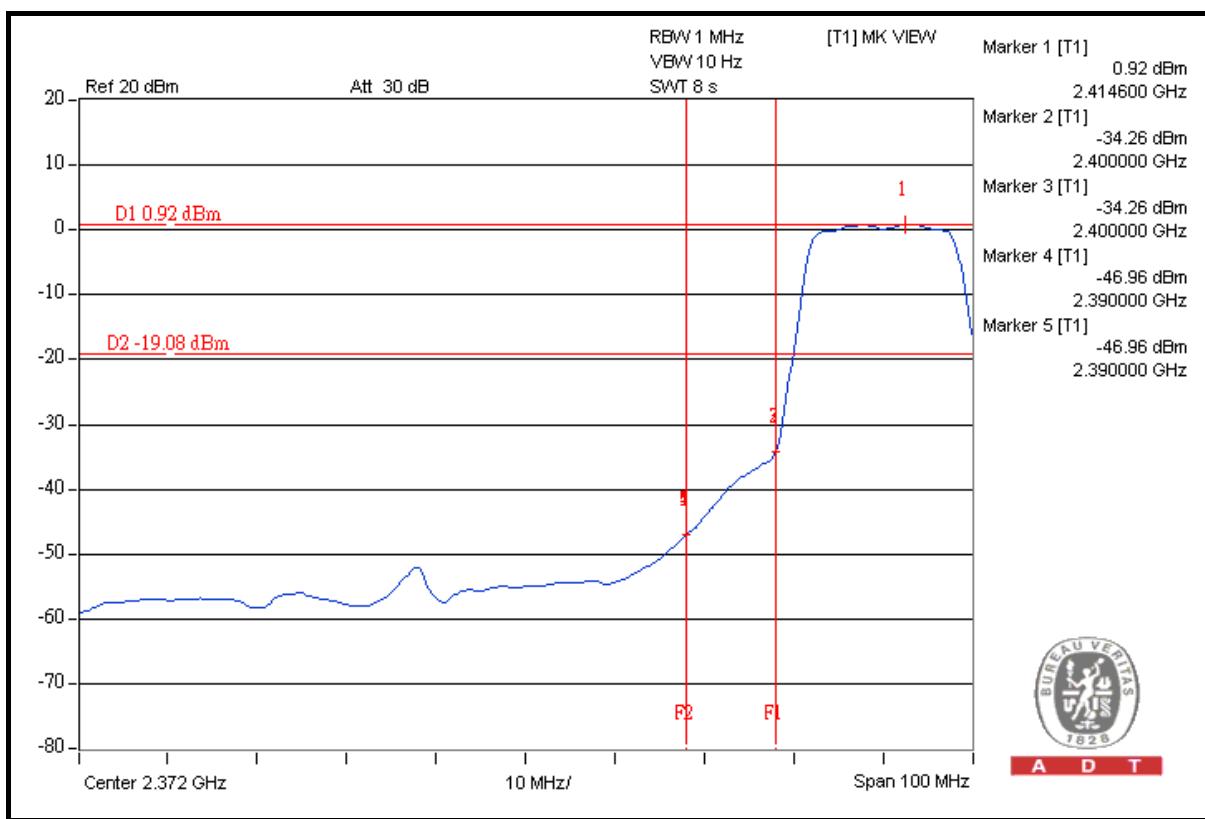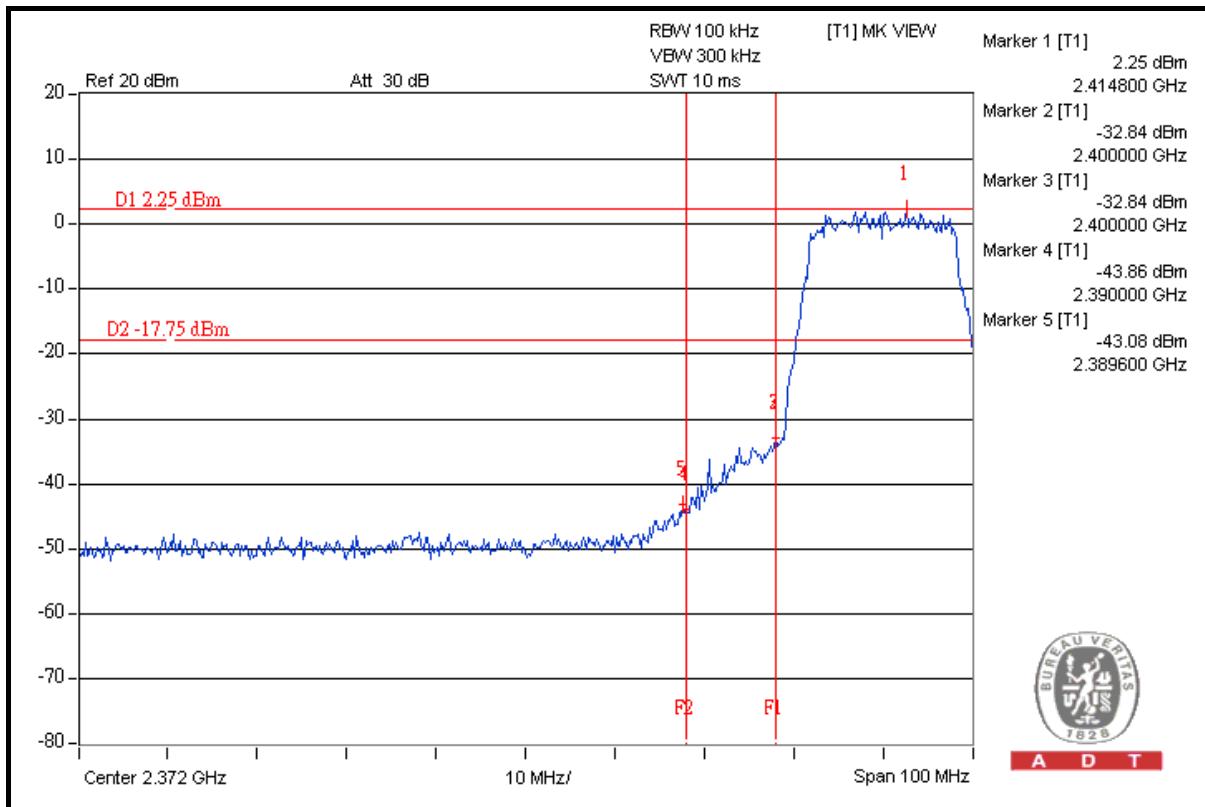





A D T

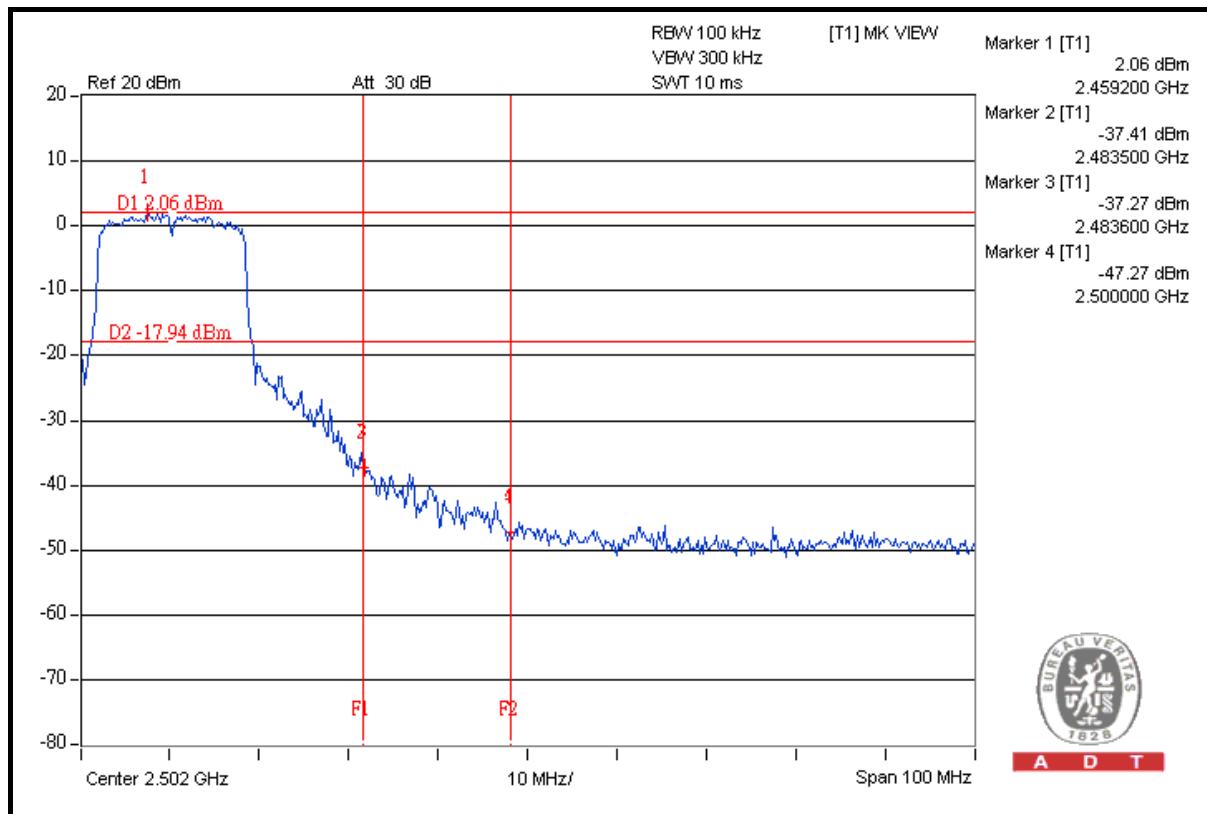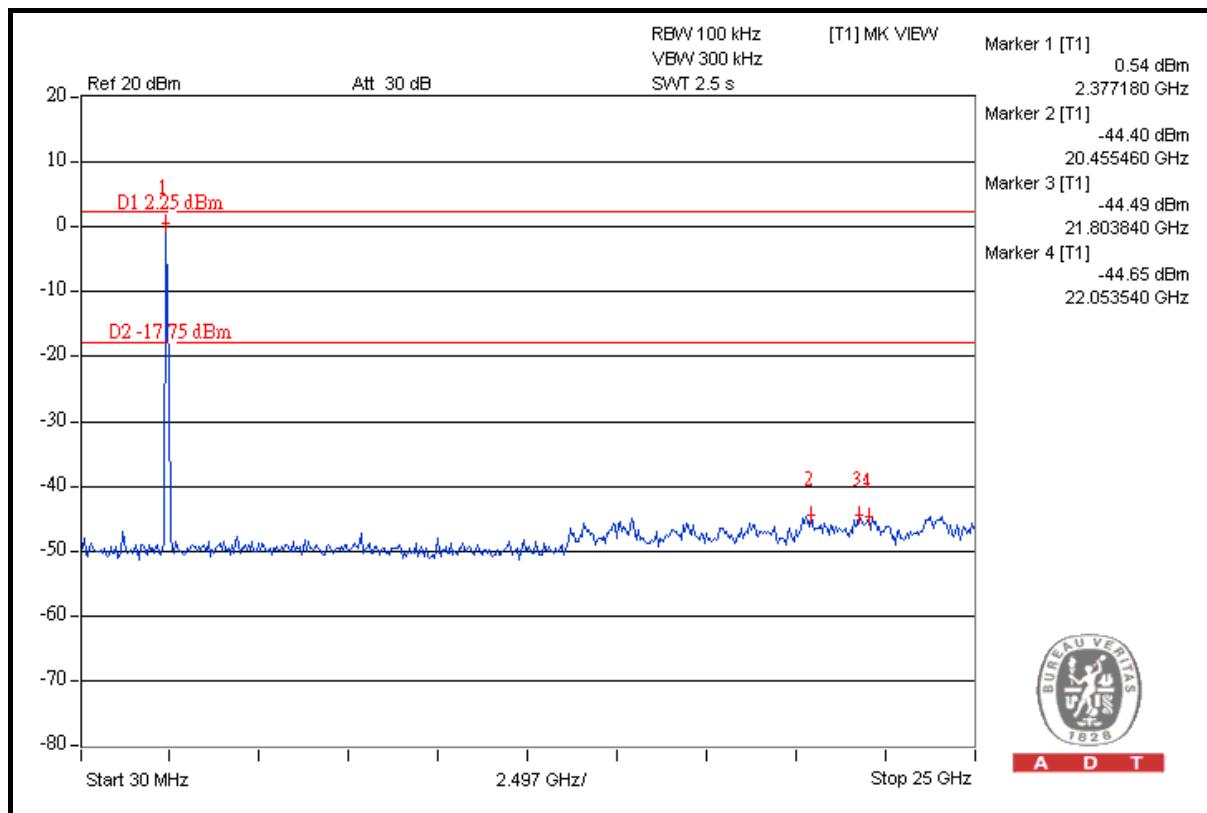



A D T

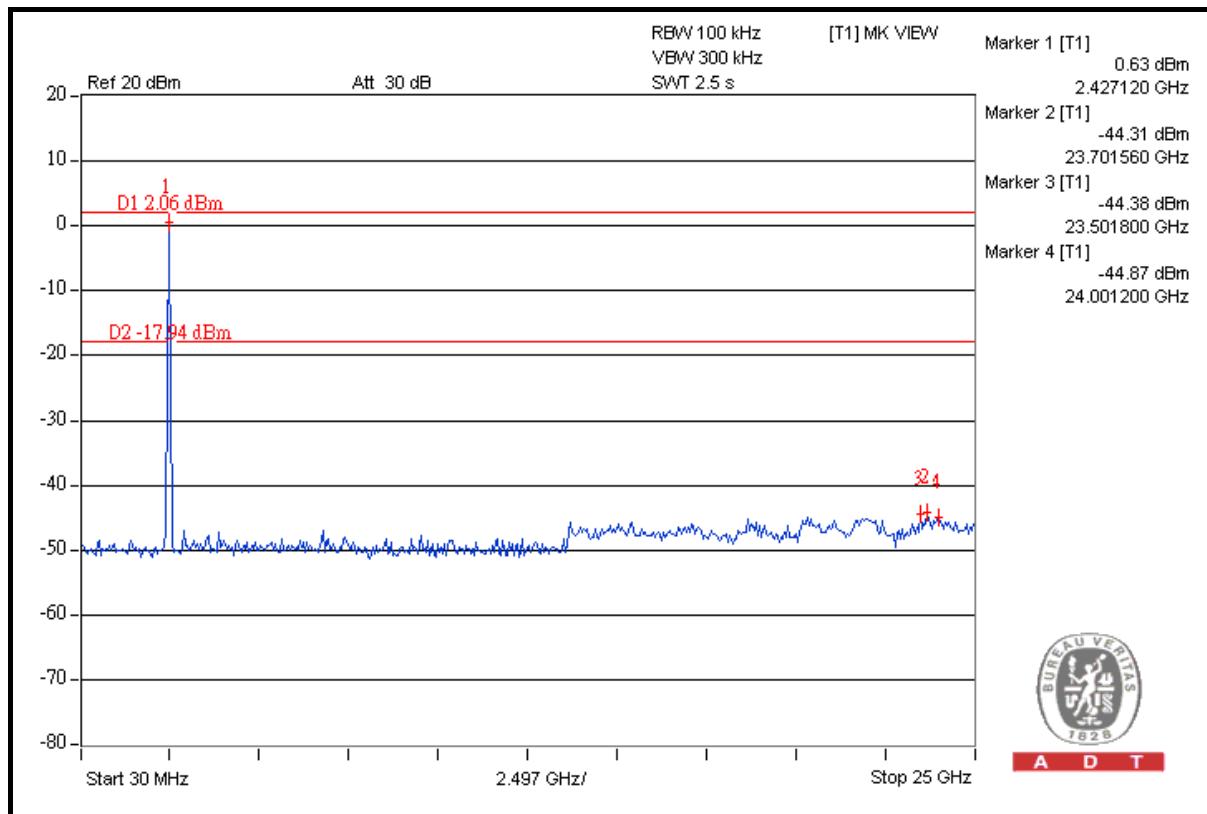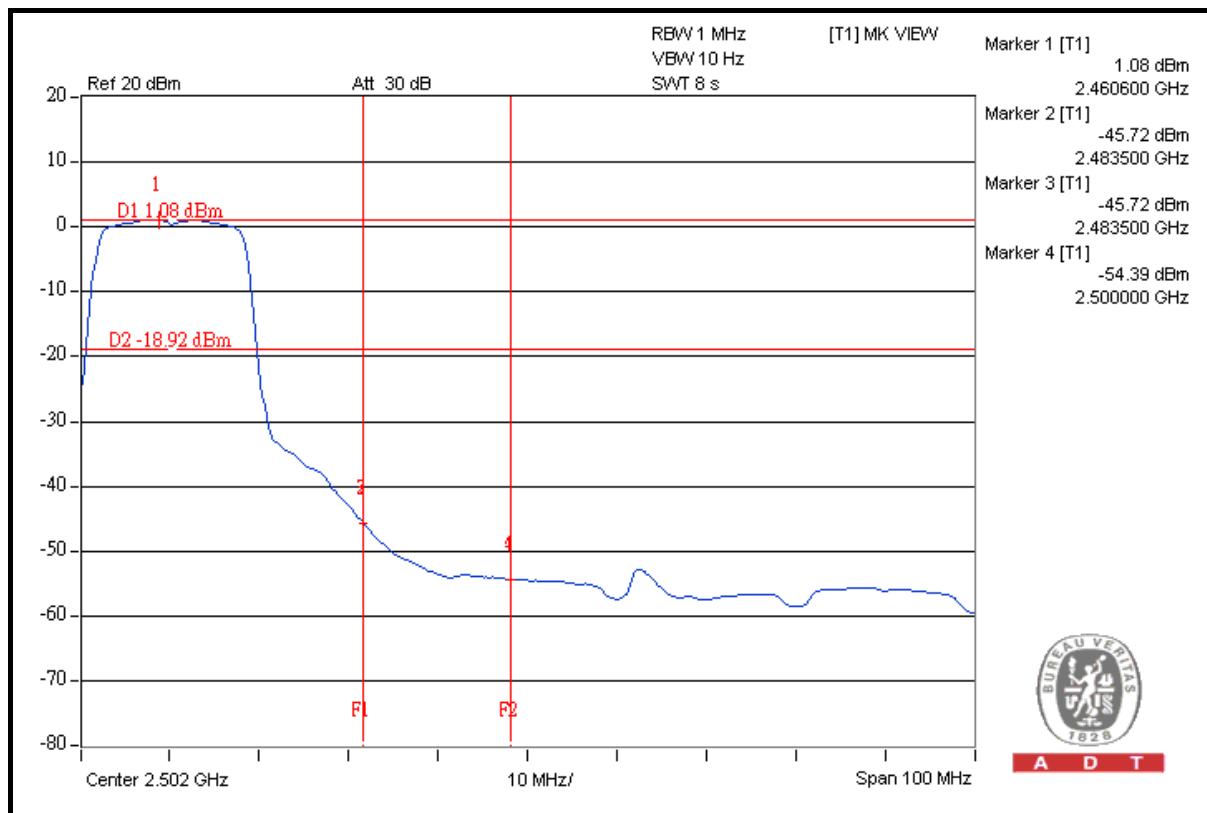



A D T

DRAFT 802.11n (20MHz) OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 43.70dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 107.92dBuV/m (Peak), so the maximum field strength in restrict band is $107.92 - 43.70 = 64.22$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 47.02dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 97.56dBuV/m (Average), so the maximum field strength in restrict band is $97.56 - 47.02 = 50.54$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 40.24dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 108.60dBuV/m (Peak), so the maximum field strength in restrict band is $108.60 - 40.24 = 68.36$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 45.72dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 11 at the item 4.1.7 is 97.98dBuV/m (Average), so the maximum field strength in restrict band is $97.98 - 45.72 = 52.26$ dBuV/m which is under 54dBuV/m limit.





A D T

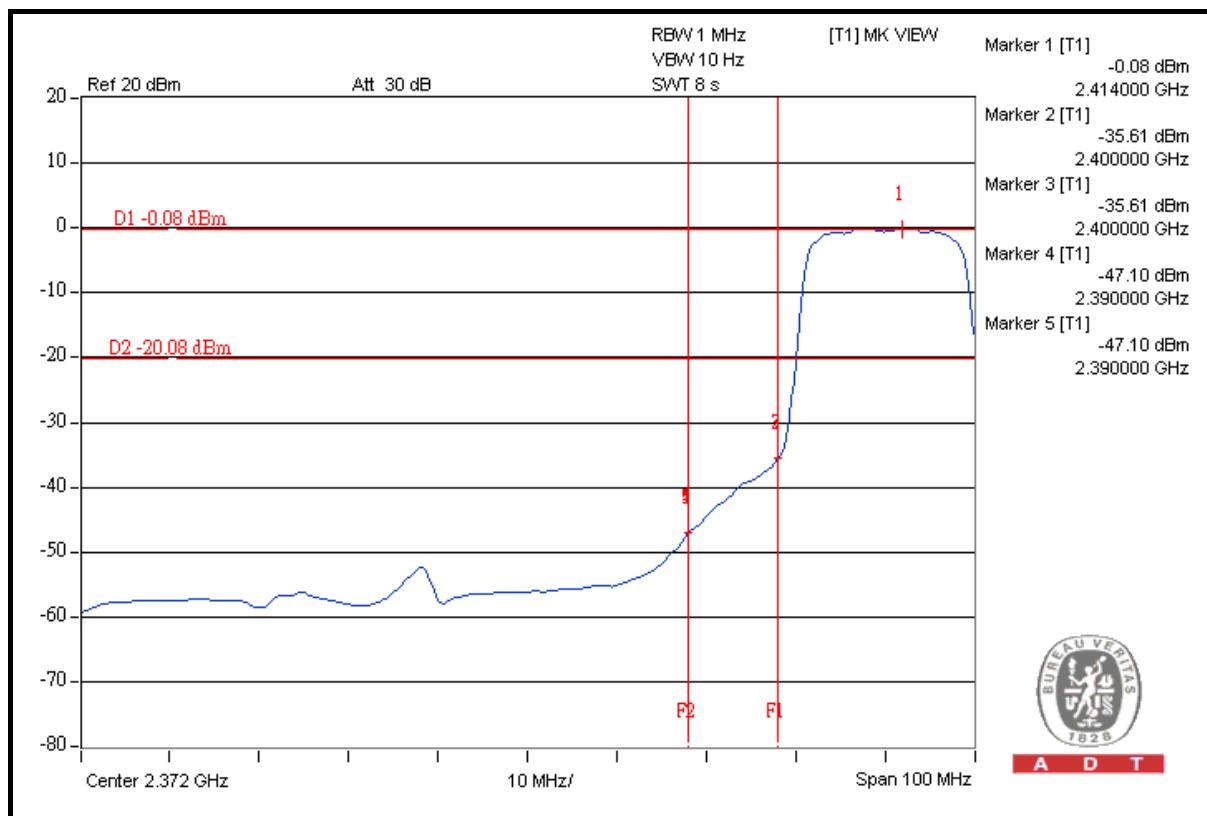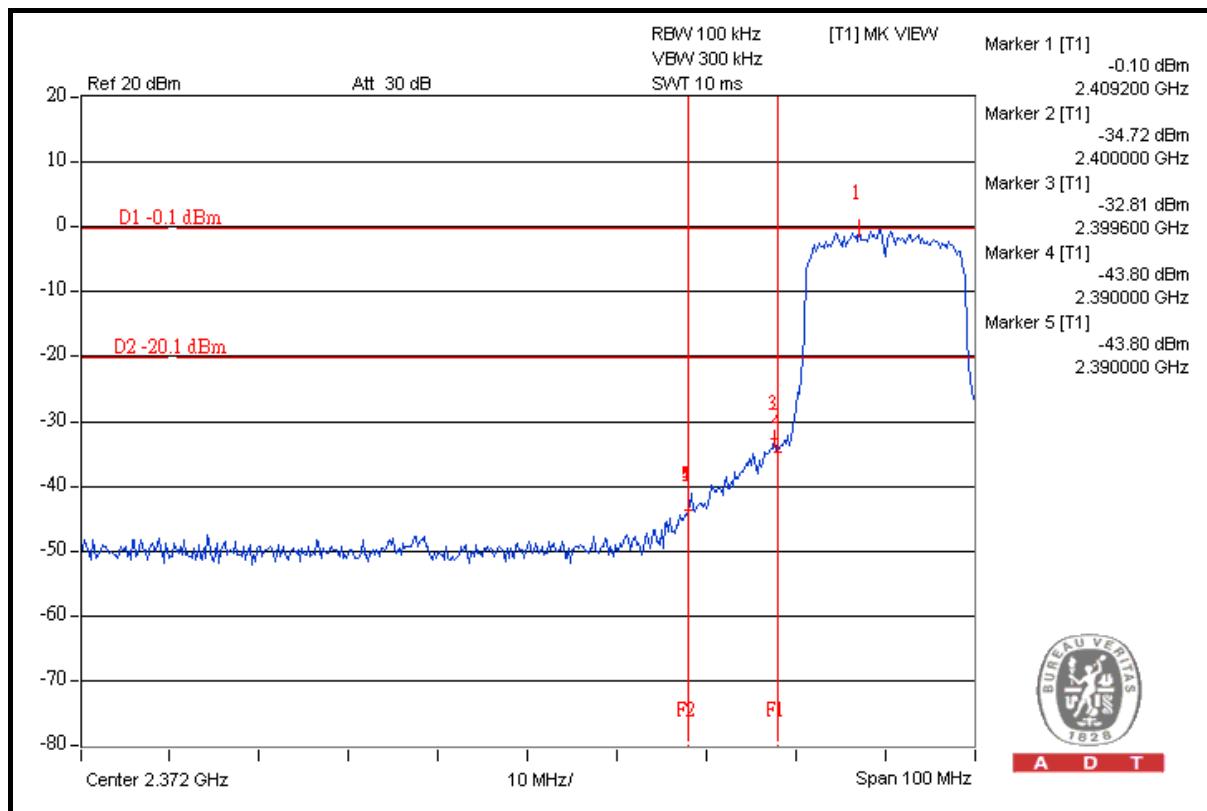





A D T

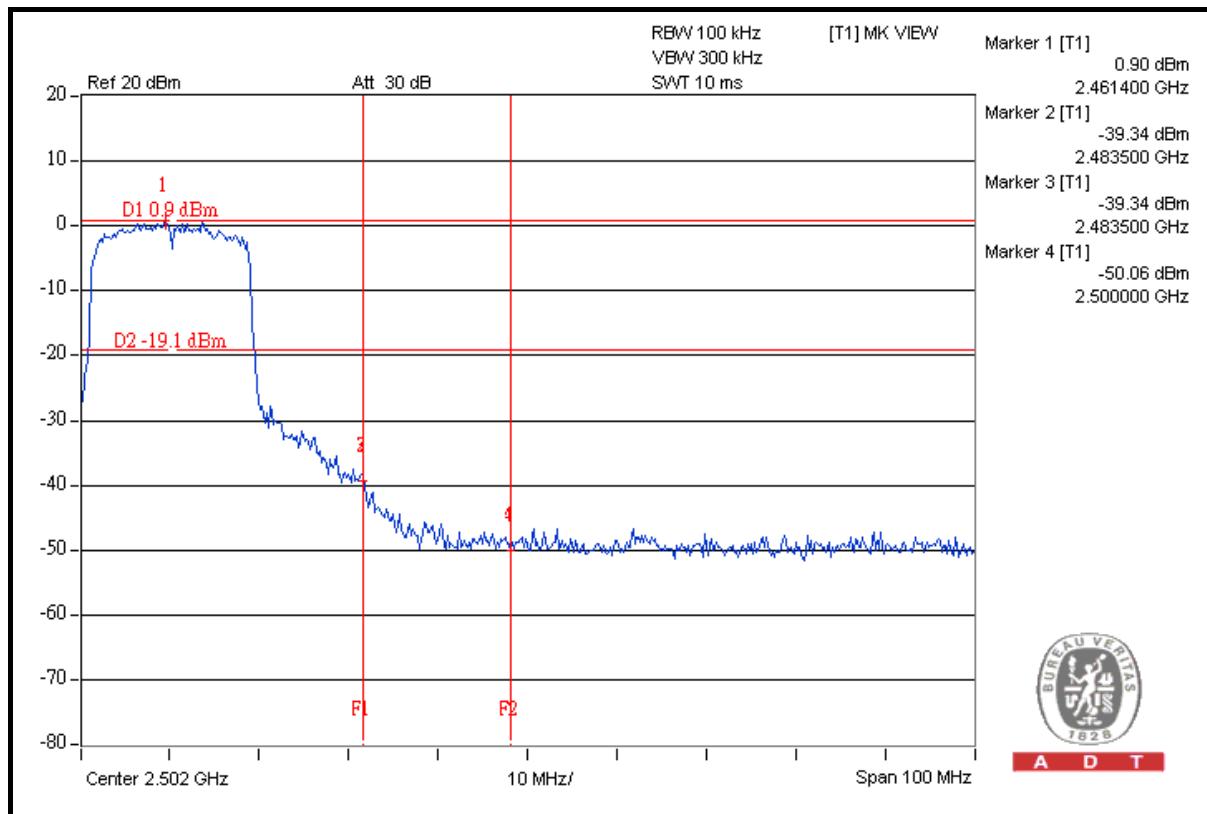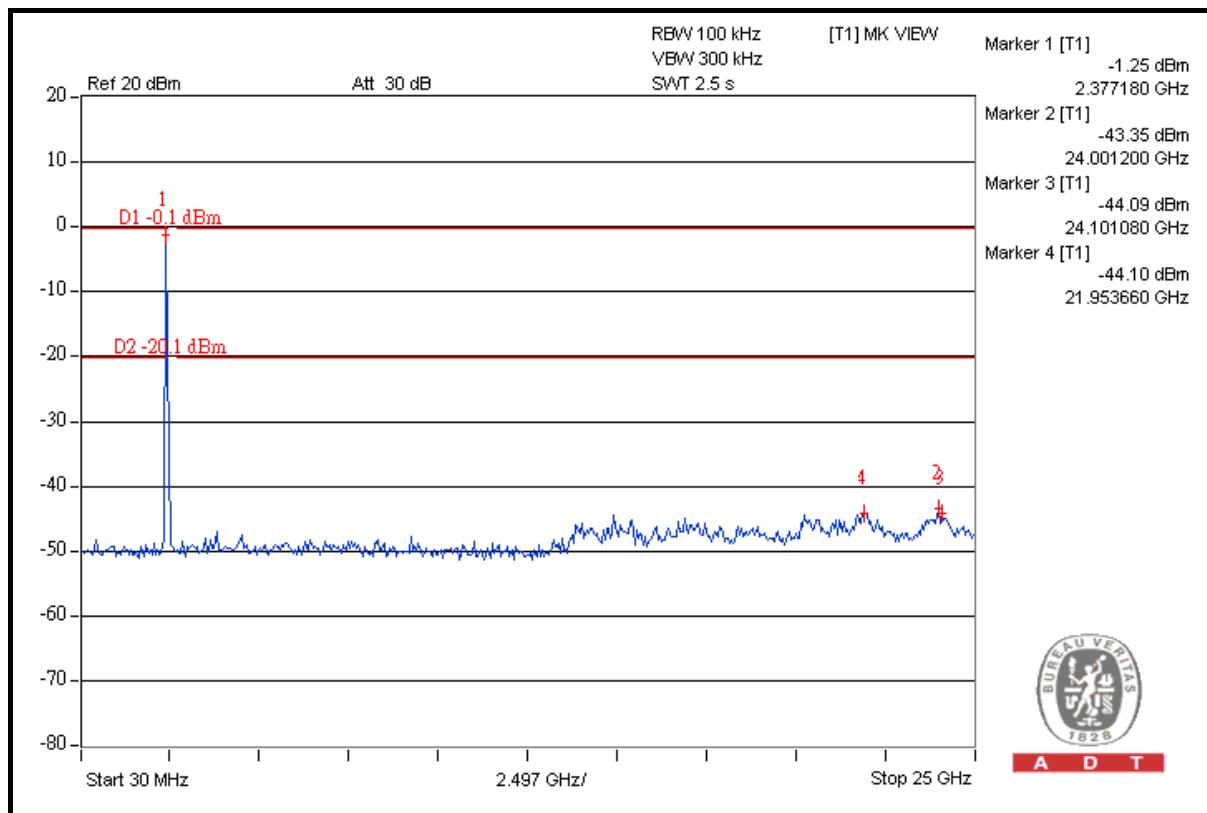



A D T

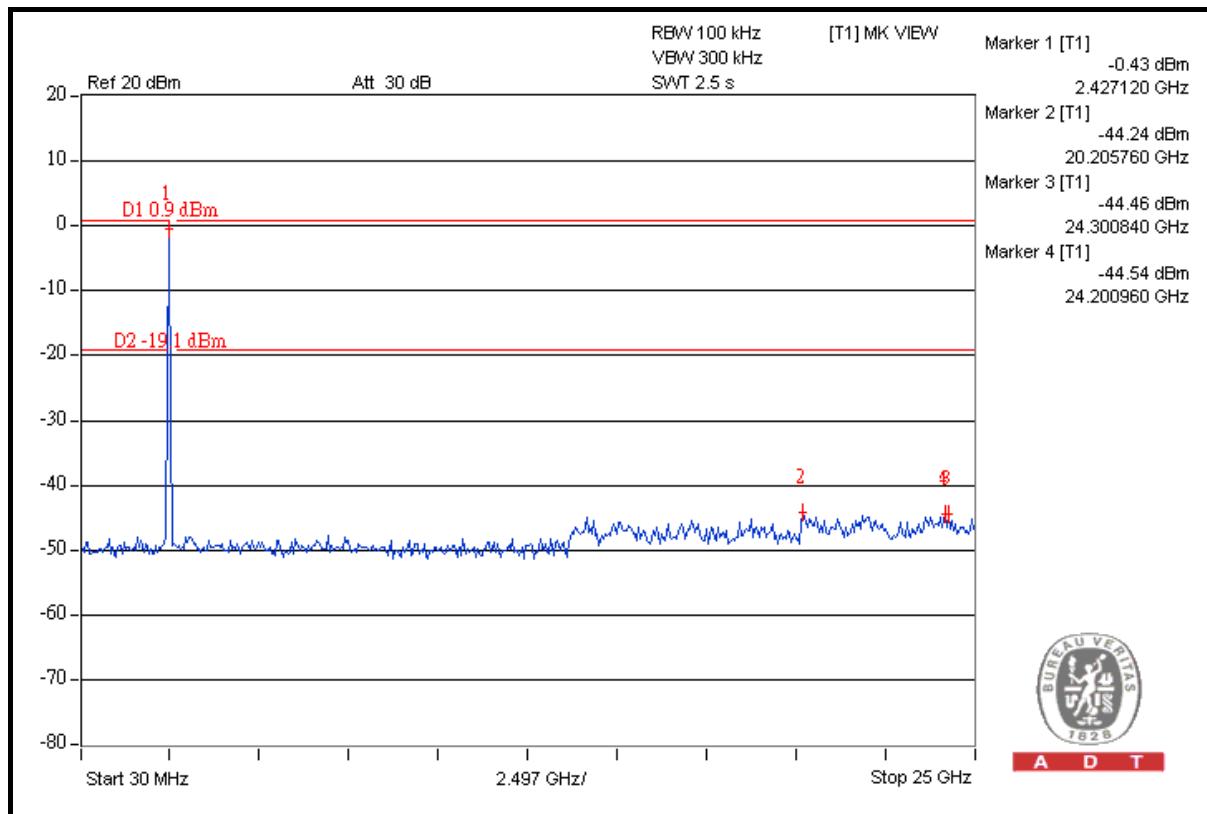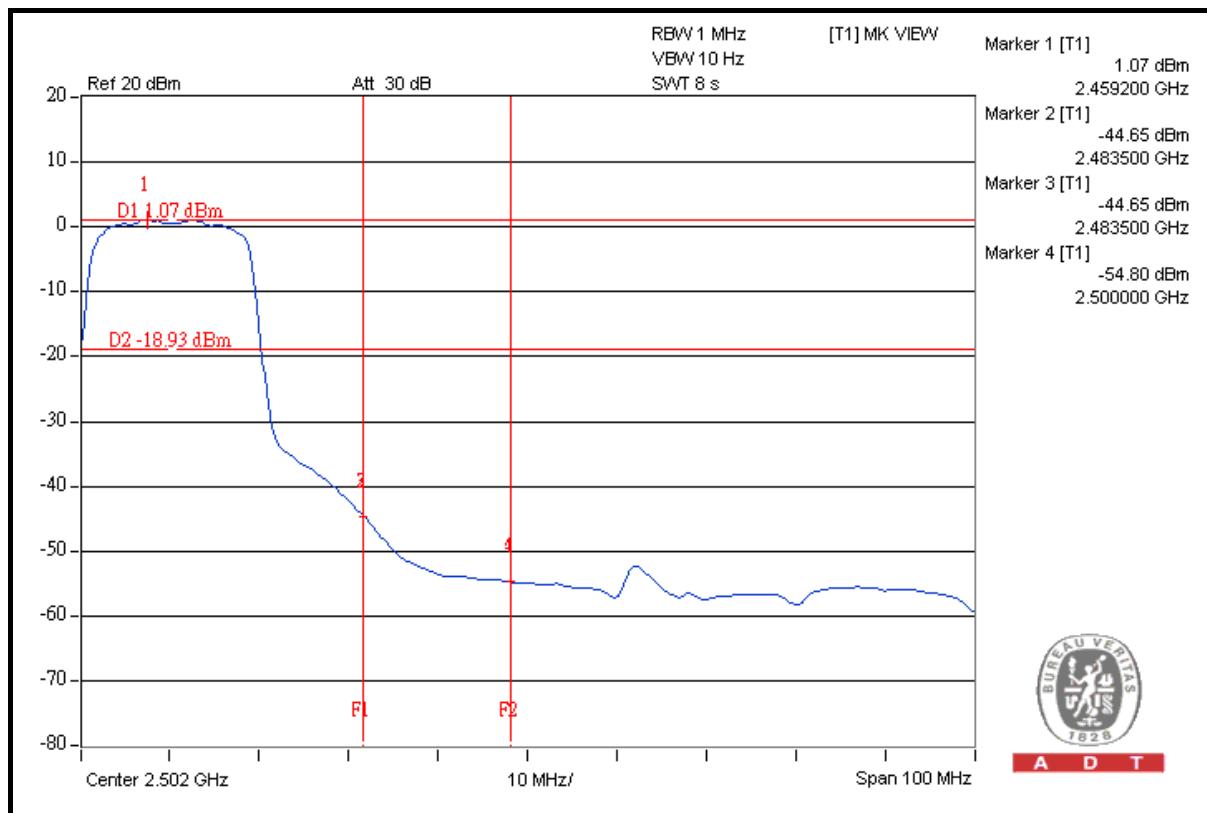



A D T

DRAFT 802.11n (40MHz) OFDM MODULATION

NOTE 1: The band edge emission plot on the next page shows 36.78dBc between carrier maximum power and local maximum emission in restrict band (2.38880GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 102.40dBuV/m (Peak), so the maximum field strength in restrict band is $102.40 - 36.78 = 65.62$ dBuV/m which is under 74dBuV/m limit.



The band edge emission plot on the next page shows 40.01dBc between carrier maximum power and local maximum emission in restrict band (2.39000GHz). The emission of carrier strength list in the test result of channel 1 at the item 4.1.7 is 91.85dBuV/m (Average), so the maximum field strength in restrict band is $91.85 - 40.01 = 51.84$ dBuV/m which is under 54dBuV/m limit.

NOTE 2: The band edge emission plot on the next second page shows 36.28dBc between carrier maximum power and local maximum emission in restrict band (2.48480GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 101.82dBuV/m (Peak), so the maximum field strength in restrict band is $101.82 - 36.28 = 65.54$ dBuV/m which is under 74dBuV/m limit.

The band edge emission plot on the next third page shows 40.45dBc between carrier maximum power and local maximum emission in restrict band (2.48350GHz). The emission of carrier strength list in the test result of channel 7 at the item 4.1.7 is 91.29dBuV/m (Average), so the maximum field strength in restrict band is $91.29 - 40.45 = 50.84$ dBuV/m which is under 54dBuV/m limit.





A D T

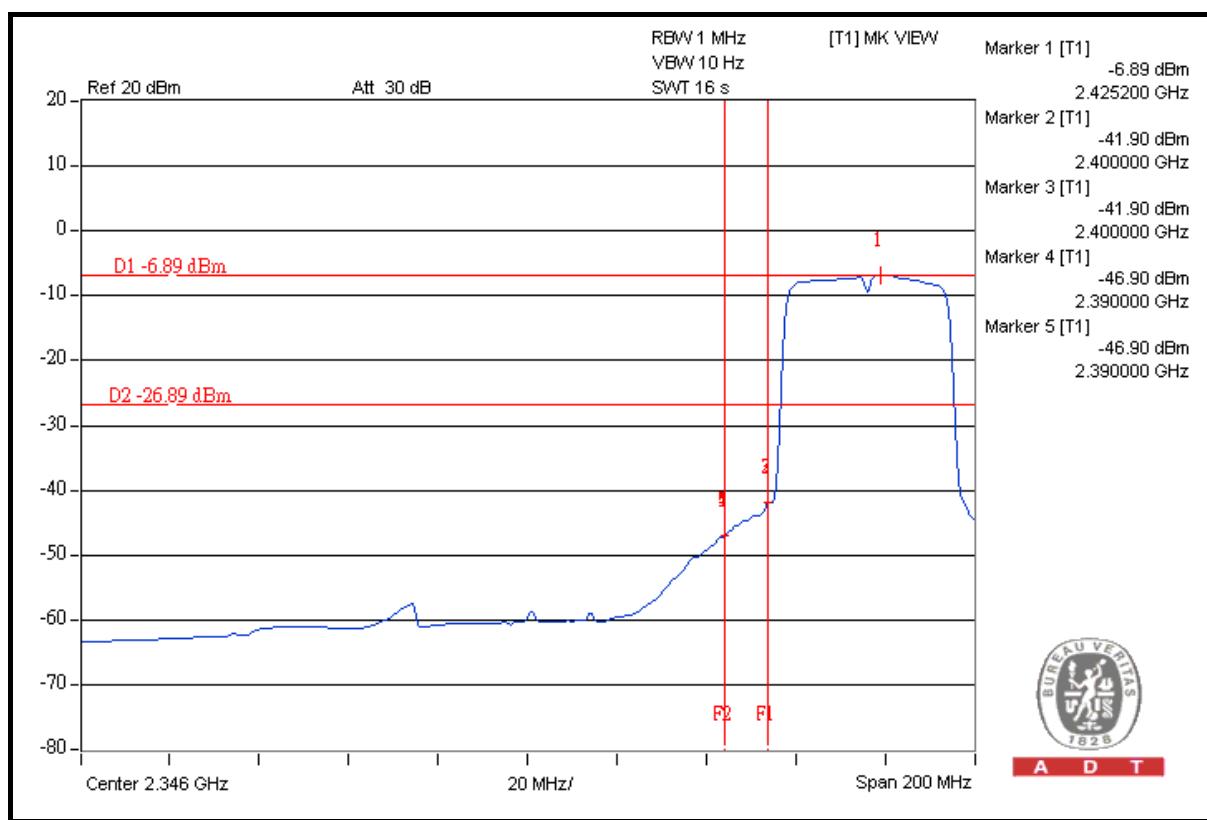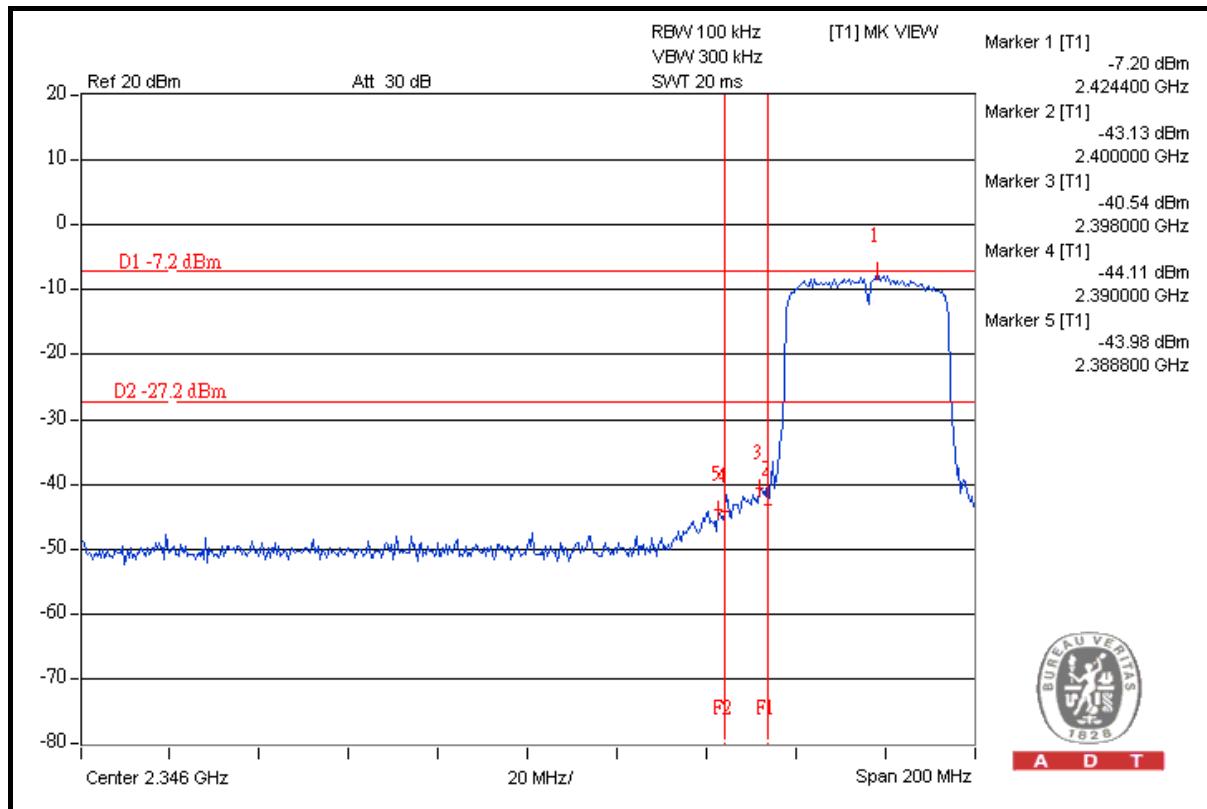





A D T

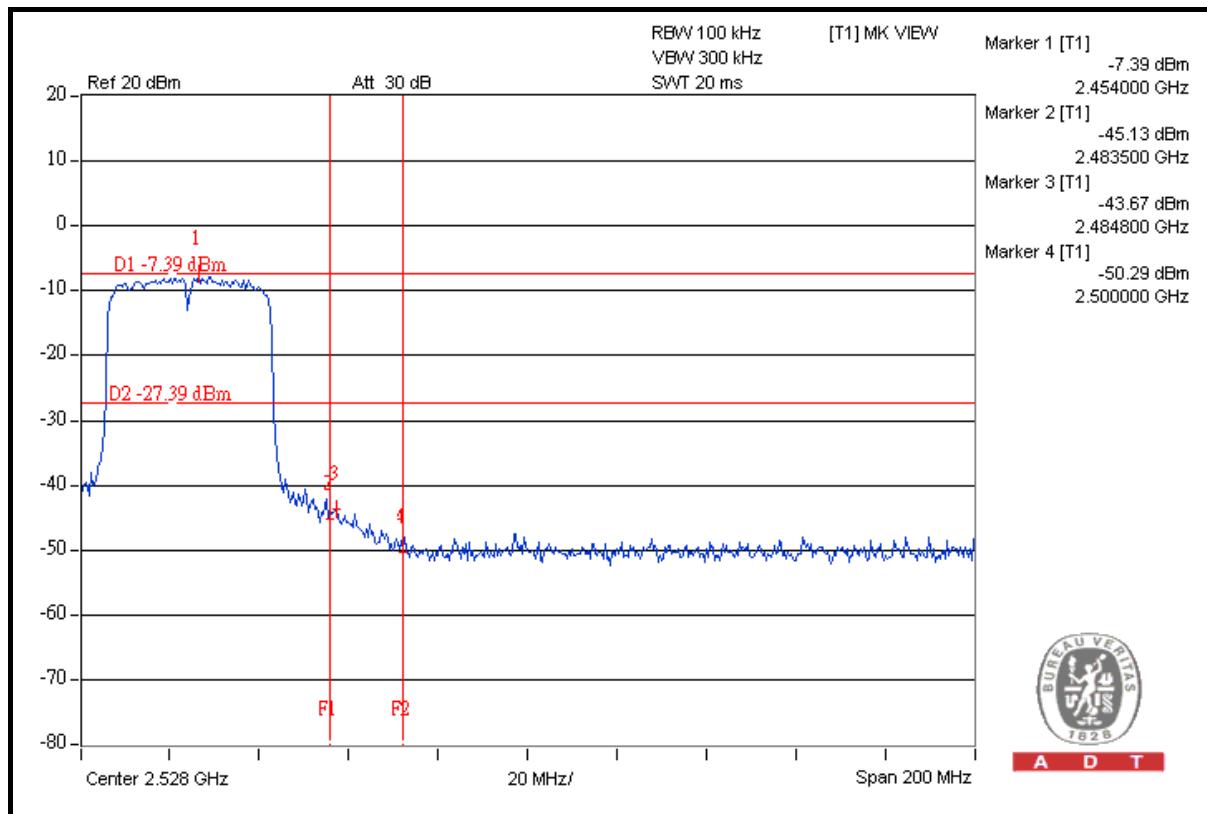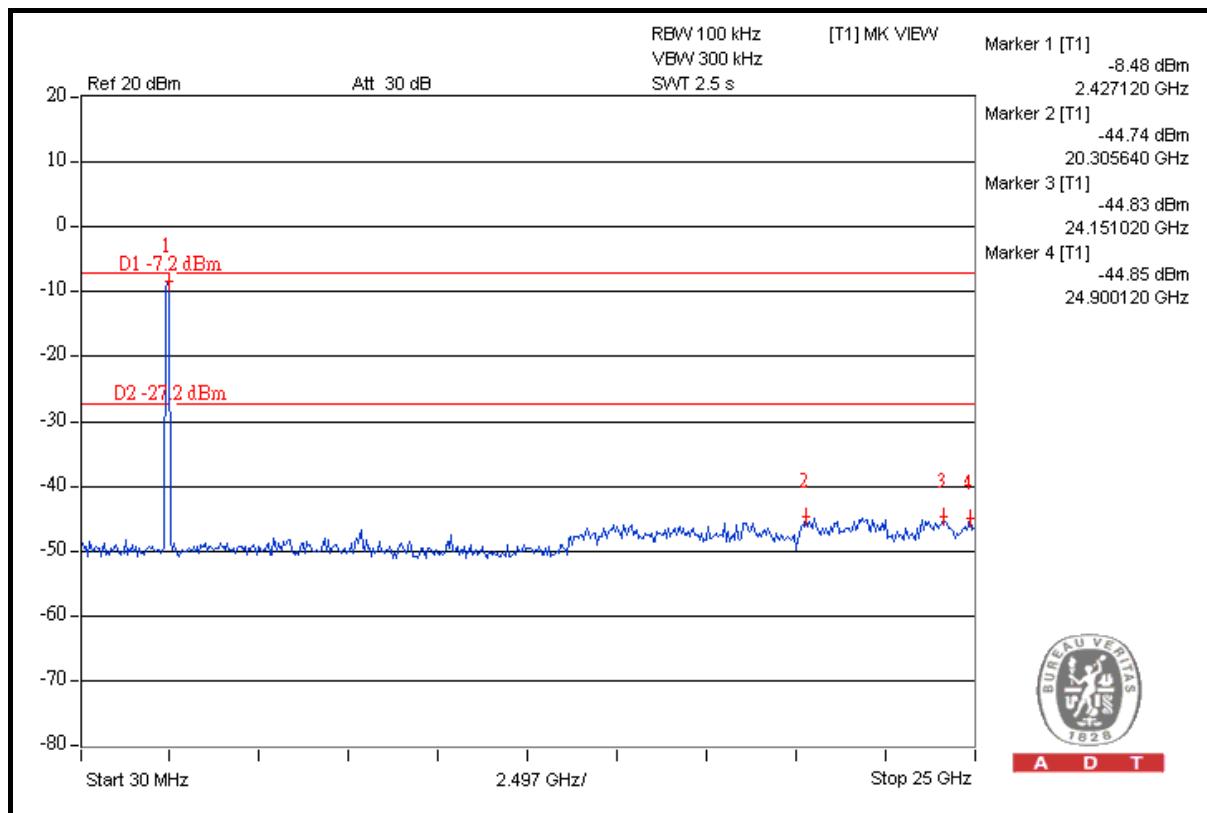



A D T

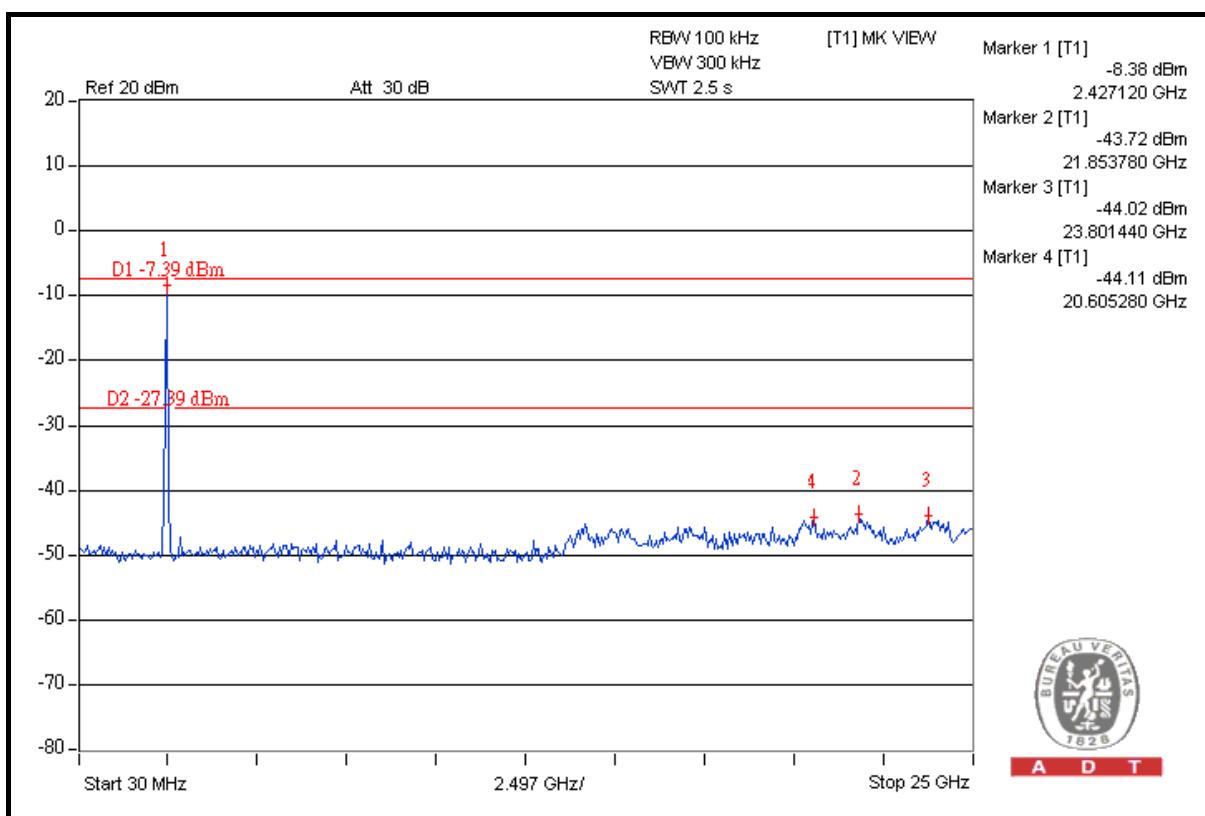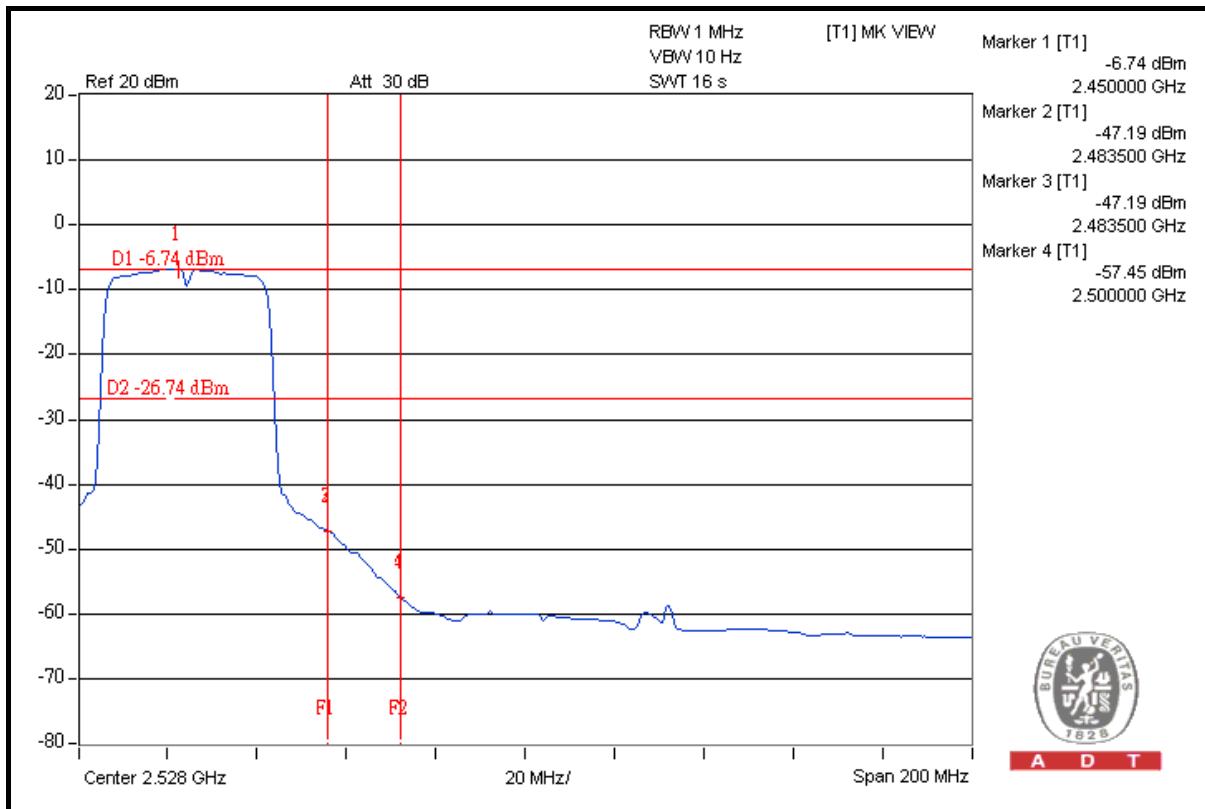



A D T

4.7 ANTENNA REQUIREMENT

4.7.1 STANDARD APPLICABLE

For intentional device, according to FCC 47 CFR Section 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. And according to FCC 47 CFR Section 15.247 (b), if transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6dBi.

4.7.2 ANTENNA CONNECTED CONSTRUCTION

The antenna used in this product is Dipole antenna with R-SMA antenna connector. The maximum Gain of the antenna is 2dBi.



A D T

5. PHOTOGRAPHS OF THE TEST CONFIGURATION

Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved by the following approval agencies according to ISO/IEC 17025.

USA	FCC, NVLAP
Germany	TUV Rheinland
Japan	VCCI
Norway	NEMKO
Canada	INDUSTRY CANADA , CSA
R.O.C.	TAF, BSMI, NCC
Netherlands	Telefication
Singapore	GOST-ASIA(MOU)
Russia	CERTIS(MOU)

Copies of accreditation certificates of our laboratories obtained from approval agencies can be downloaded from our web site: www.adt.com.tw/index.5/phtml. If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:

Tel: 886-2-26052180
Fax: 886-2-26051924

Hsin Chu EMC/RF Lab:

Tel: 886-3-5935343
Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232
Fax: 886-3-3185050

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



A D T

7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No any modifications are made to the EUT by the lab during the test.

--- END ---