

## FCC RADIO TEST REPORT

Applicant's company	<b>ZyXEL Communications Corporation</b>
Applicant Address	No. 2, Gongye E. 9th Road, Hsinchu Science Park, Hsinchu Taiwan 300
FCC ID	<b>I88NWD6505</b>
Manufacturer's company	<b>ZyXEL Communications Corporation</b>
Manufacturer Address	No. 2, Gongye E. 9th Road, Hsinchu Science Park, Hsinchu Taiwan 300

Product Name	Dual-Band Wireless AC600 USB Adapter
Brand Name	ZyXEL
Model No.	NWD6505
Test Rule Part(s)	47 CFR FCC Part 15 Subpart E § 15.407
Test Freq. Range	5150 ~ 5250MHz
Received Date	Jan. 28, 2013
Final Test Date	May 24, 2013
Submission Type	Original Equipment
Operating Mode	Client (without radar detection function)



### Statement

**Test result included is for the IEEE 802.11n and IEEE 802.11a/ac (5150 ~ 5250MHz) of the product.**

The test result in this report refers exclusively to the presented test model / sample.

Without written approval of SPORTON International Inc., the test report shall not be reproduced except in full.

The measurements and test results shown in this test report were made in accordance with the procedures and found in compliance with the limit given in **ANSI C63.10-2009**,

**47 CFR FCC Part 15 Subpart E, KDB 789033 D01 v01r03** and **KDB 662911 D01 v02**.

The test equipment used to perform the test is calibrated and traceable to NML/ROC.



## Table of Contents

<b>1. CERTIFICATE OF COMPLIANCE</b> .....	<b>1</b>
<b>2. SUMMARY OF THE TEST RESULT</b> .....	<b>2</b>
<b>3. GENERAL INFORMATION</b> .....	<b>3</b>
3.1. Product Details .....	3
3.2. Accessories .....	5
3.3. Table for Filed Antenna .....	6
3.4. Table for Carrier Frequencies .....	7
3.5. Table for Test Modes .....	8
3.6. Table for Testing Locations.....	9
3.7. Table for Supporting Units .....	9
3.8. Table for Parameters of Test Software Setting .....	10
3.9. EUT Operation during Test.....	10
3.10. Duty Cycle.....	11
3.11. Test Configurations.....	13
<b>4. TEST RESULT</b> .....	<b>16</b>
4.1. AC Power Line Conducted Emissions Measurement .....	16
4.2. 26dB Bandwidth & 99% Occupied Bandwidth Measurement.....	20
4.3. Maximum Conducted Output Power Measurement.....	29
4.4. Power Spectral Density Measurement.....	32
4.5. Peak Excursion Measurement .....	38
4.6. Radiated Emissions Measurement.....	51
4.7. Band Edge Emissions Measurement.....	66
4.8. Frequency Stability Measurement.....	72
4.9. Antenna Requirements .....	74
<b>5. LIST OF MEASURING EQUIPMENTS</b> .....	<b>75</b>
<b>6. TEST LOCATION</b> .....	<b>77</b>
<b>7. MEASUREMENT UNCERTAINTY</b> .....	<b>78</b>
<b>APPENDIX A. TEST PHOTOS</b> .....	<b>A1 ~ A5</b>



## History of This Test Report

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FR331408-02AB	Rev. 01	Initial issue of report	Jul. 02, 2013



## 1. CERTIFICATE OF COMPLIANCE

**Product Name** : Dual-Band Wireless AC600 USB Adapter  
**Brand Name** : ZyXEL  
**Model No.** : NWD6505  
**Applicant** : ZyXEL Communications Corporation  
**Test Rule Part(s)** : 47 CFR FCC Part 15 Subpart E § 15.407

Sporton International as requested by the applicant to evaluate the EMC performance of the product sample received on Jan. 28, 2013 would like to declare that the tested sample has been evaluated and found to be in compliance with the tested rule parts. The data recorded as well as the test configuration specified is true and accurate for showing the sample's EMC nature.

A handwritten signature in black ink that reads 'Sam Chen'.

**Sam Chen**

**SPORTON INTERNATIONAL INC.**

## 2. SUMMARY OF THE TEST RESULT

Applied Standard: 47 CFR FCC Part 15 Subpart E				
Part	Rule Section	Description of Test	Result	Under Limit
4.1	15.207	AC Power Line Conducted Emissions	Complies	10.61 dB
4.2	15.407(a)	26dB Spectrum Bandwidth & 99% Occupied Bandwidth	Complies	-
4.3	15.407(a)	Maximum Conducted Output Power	Complies	3.79 dB
4.4	15.407(a)	Power Spectral Density	Complies	3.89 dB
4.5	15.407(a)	Peak Excursion	Complies	3.06 dB
4.6	15.407(b)	Radiated Emissions	Complies	0.23 dB
4.7	15.407(b)	Band Edge Emissions	Complies	0.11 dB
4.8	15.407(g)	Frequency Stability	Complies	-
4.9	15.203	Antenna Requirements	Complies	-

### 3. GENERAL INFORMATION

#### 3.1. Product Details

##### IEEE 802.11ac

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	see the below table for IEEE 802.11n/ac
Data Modulation	For 802.11n: OFDM (BPSK / QPSK / 16QAM / 64QAM) For 802.11ac: OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	see the below table for IEEE 802.11n/ac
Frequency Range	5150 ~ 5250MHz
Channel Number	4 for 20MHz bandwidth ; 2 for 40MHz bandwidth 1 for 80MHz bandwidth
Channel Band Width (99%)	802.11ac MCS0/Nss1 (20MHz): 17.76 MHz ; 802.11ac MCS0/Nss1 (40MHz): 36.16 MHz ; 802.11ac MCS0/Nss1 (80MHz): 76.16 MHz
Maximum Conducted Output Power	802.11ac MCS0/Nss1 (20MHz): 13.21 dBm ; 802.11ac MCS0/Nss1 (40MHz): 13.21 dBm ; 802.11ac MCS0/Nss1 (80MHz): 12.60 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**IEEE 802.11a**

Items	Description
Product Type	WLAN (1TX, 1RX)
Radio Type	Intentional Transceiver
Power Type	From Host System
Modulation	OFDM for IEEE 802.11a
Data Modulation	OFDM (BPSK / QPSK / 16QAM / 64QAM)
Data Rate (Mbps)	OFDM (6/9/12/18/24/36/48/54)
Frequency Range	5150 ~ 5250MHz
Channel Number	11a: 4
Channel Band Width (99%)	11a: 16.96 MHz
Maximum Conducted Output Power	11a: 12.97 dBm
Carrier Frequencies	Please refer to section 3.4
Antenna	Please refer to section 3.3

**Antenna & Band width**

Antenna	Single (TX)		
	20 MHz	40 MHz	80MHz
Band width Mode			
IEEE 802.11a	V	X	X
IEEE 802.11n	V	V	X
IEEE 802.11ac	V	V	V

**IEEE 11n/ac Spec.**

Protocol	Number of Transmit Chains (NTX)	Data Rate / MCS
802.11ac (VHT20)	1	MCS 0-9/Nss1
802.11ac (VHT40)	1	MCS 0-9/Nss1
802.11ac (VHT80)	1	MCS 0-9/Nss1
Note 1: IEEE Std. 802.11n modulation consists of HT20 and HT40 (HT: High Throughput). Then EUT support HT20 and HT40. Note 2: IEEE Std. 802.11ac modulation consists of VHT20, VHT40, VHT80 and VHT160 (VHT: Very High Throughput). Then EUT support VHT20, VHT40 and VHT80. Note 3: Modulation modes consist of below configuration: 11a: IEEE 802.11a, HT20/HT40: IEEE 802.11n, VHT20/VHT40/VHT80: IEEE 802.11ac		

**3.2. Accessories**

N/A




### 3.3. Table for Filed Antenna

Ant.	Brand	Model Name	Antenna Type	Connector	Gain (dBi)	
					2.4GHz	5GHz
1	MediaTek	MT7610U D3815	Printed Antenna	Murata	2.4	5.3

Note: The EUT has a antenna.

Ant. 1 can be used as transmitting/receiving antenna.

Ant. 1 can transmit/receive signal simultaneously.

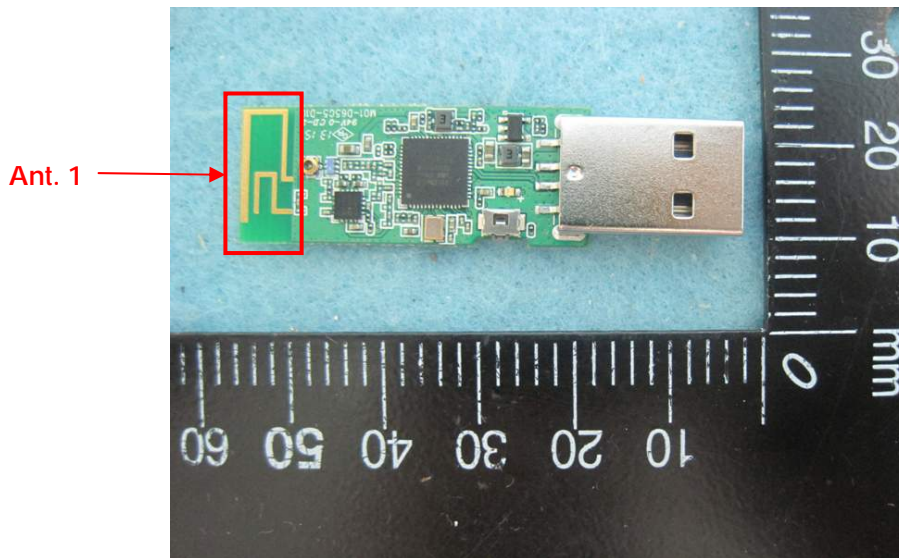

### 3.4. Table for Carrier Frequencies

The EUT has three bandwidth system.

For 20MHz bandwidth systems, use Channel 36, 40, 44, 48.

For 40MHz bandwidth systems, use Channel 38, 46.

For 80MHz bandwidth systems, use Channel 42.

Frequency Band	Channel No.	Frequency	Channel No.	Frequency
5150~5250 MHz Band 1	36	5180 MHz	44	5220 MHz
	38	5190 MHz	46	5230 MHz
	40	5200 MHz	48	5240 MHz
	42	5210 MHz	-	-

### 3.5. Table for Test Modes

Preliminary tests were performed in different data rate to find the worst radiated emission. The data rate shown in the table below is the worst-case rate with respect to the specific test item. Investigation has been done on all the possible configurations for searching the worst cases. The following table is a list of the test modes shown in this test report.

Test Items	Mode		Data Rate	Channel	Antenna
AC Power Conducted Emission	Normal link		-	-	-
Max. Conducted Output Power	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1
	11ac 80MHz	Band 1	MCS0/Nss1	42	1
	11a	Band 1	6Mbps	36/40/48	1
Power Spectral Density	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1
	11ac 80MHz	Band 1	MCS0/Nss1	42	1
	11a	Band 1	6Mbps	36/40/48	1
26dB Spectrum Bandwidth 99% Occupied Bandwidth Measurement	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1
	11ac 80MHz	Band 1	MCS0/Nss1	42	1
	11a	Band 1	6Mbps	36/40/48	1
Peak Excursion	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1
	11ac 80MHz	Band 1	MCS0/Nss1	42	1
	11a	Band 1	6Mbps	36/40/48	1
Radiated Emission Below 1GHz	Normal link		-	-	-
Radiated Emission Above 1GHz	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1
	11ac 80MHz	Band 1	MCS0/Nss1	42	1
	11a	Band 1	6Mbps	36/40/48	1
Band Edge Emission	11ac 20MHz	Band 1	MCS0/Nss1	36/40/48	1
	11ac 40MHz	Band 1	MCS0/Nss1	38/46	1
	11ac 80MHz	Band 1	MCS0/Nss1	42	1
	11a	Band 1	6Mbps	36/40/48	1
Frequency Stability	Un-modulation		-	40	N/A

The following test modes were performed for all tests:

**For Conducted Emission test:**

Mode 1. Normal Link-Ping 2.4G

Mode 2. Normal Link-Ping 5G

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test below 1GHz:**

Mode 1. Normal Link-Ping 2.4G

Mode 2. Normal Link-Ping 5G

Mode 1 is the worst case, so it was selected to record in this test report.

**For Radiated Emission test above 1GHz:**

Mode 1. X-axis

Mode 2. Y-axis

Mode 3. Z-axis

Mode 3 is the worst case, so it was selected to record in this test report.

### 3.6. Table for Testing Locations

Test Site No.	Site Category	Location	FCC Reg. No.	IC File No.
03CH01-CB	SAC	Hsin Chu	262045	IC 4086D
CO01-CB	Conduction	Hsin Chu	262045	IC 4086D
TH01-CB	OVEN Room	Hsin Chu	-	-

Open Area Test Site (OATS); Semi Anechoic Chamber (SAC)).

Please refer section 6 for Test Site Address.

### 3.7. Table for Supporting Units

**For Test Site No : 03CH01-CB ; CO01-CB**

Support Unit	Brand	Model	FCC ID
Wireless AP	Planex	GW-AP54SGX	N/A
Notebook	DELL	E6220	N/A
Mouse	Logitech	M-U0026	DoC
Earphone	SHYARO CHI	MIC-04	N/A

**For Test Site No : TH01-CB**

Support Unit	Brand	Model	FCC ID
Notebook	DELL	M1330	E2KWM3945ABG

### 3.8. Table for Parameters of Test Software Setting

During testing, Channel & Power Controlling Software provided by the customer was used to control the operating channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the customer and is going to be fixed on the firmware of the final end product.

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 20MHz

Test Software Version	MT76xxU QA V2.0.2.12		
Frequency	5180 MHz	5200 MHz	5240 MHz
VHT20 MCS0-NSS1	8	8	8

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 40MHz

Test Software Version	MT76xxU QA V2.0.2.12	
Frequency	5190 MHz	5230 MHz
VHT40 MCS0-NSS1	8	8

#### Power Parameters of IEEE 802.11ac MCS0/Nss1 80MHz

Test Software Version	MT76xxU QA V2.0.2.12
Frequency	5210 MHz
VHT80 MCS0-NSS1	7

#### Power Parameters of IEEE 802.11a


Test Software Version	MT76xxU QA V2.0.2.12		
Frequency	5180 MHz	5200 MHz	5240 MHz
11a OFDM	6	6	7

### 3.9. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.


### 3.10. Duty Cycle

#### IEEE 802.11ac MCS0/Nss1 20MHz

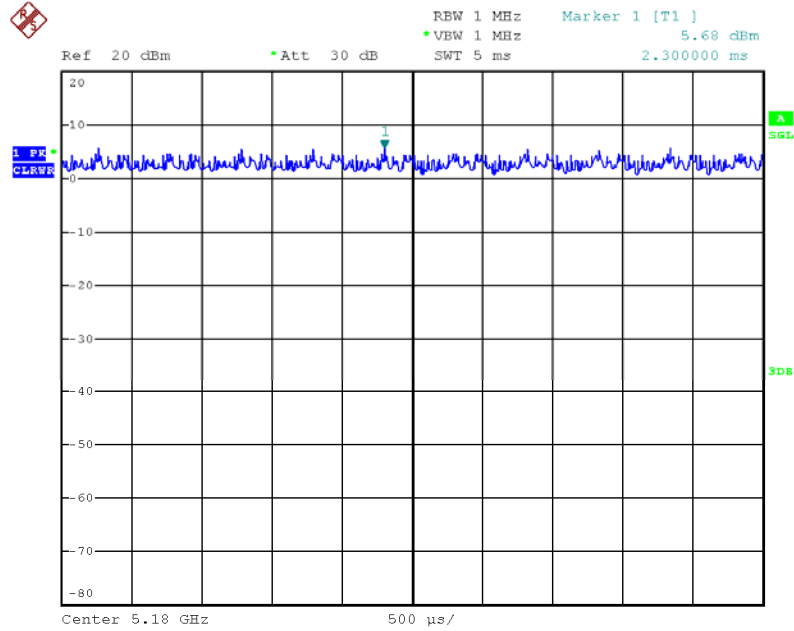


Date: 24.APR.2013 15:18:16

#### IEEE 802.11ac MCS0/Nss1 40MHz

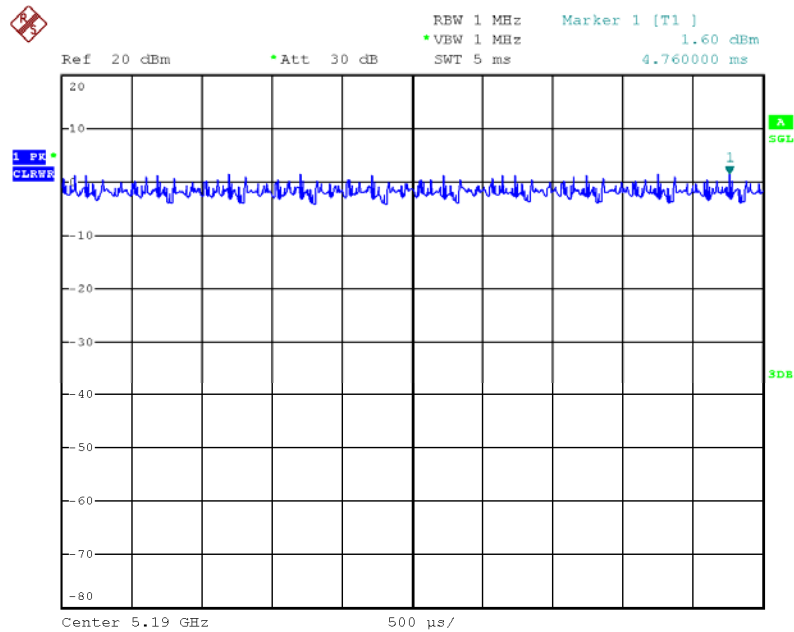


Date: 24.APR.2013 15:20:14

### IEEE 802.11ac MCS0/Nss1 80MHz

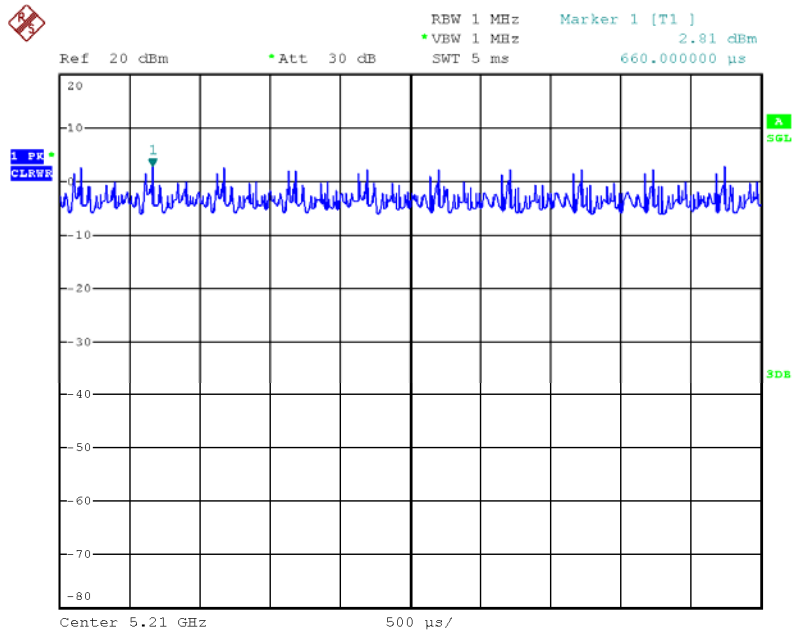

Date: 24.APR.2013 15:20:50


### IEEE 802.11a

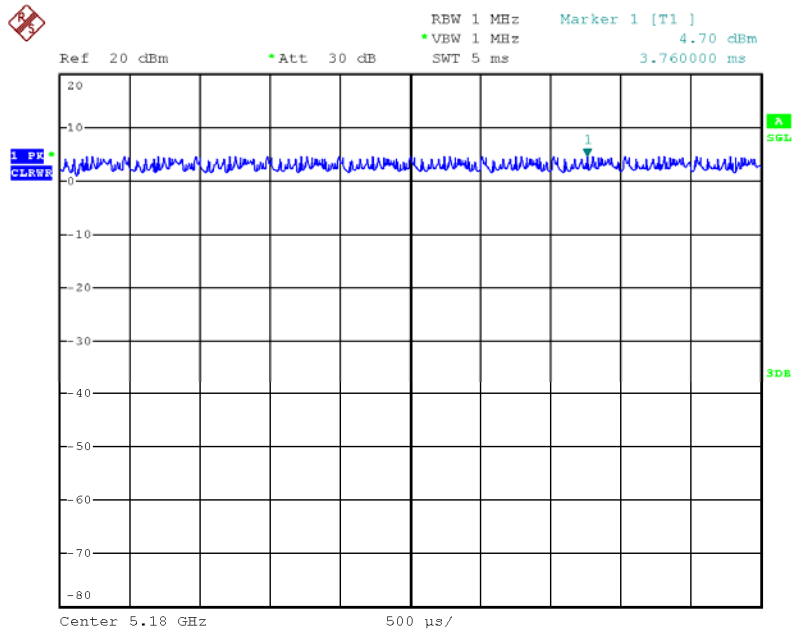

Date: 24.APR.2013 15:17:21

### 3.11. Test Configurations

#### 3.11.1. AC Power Line Conduction Emissions Test Configuration

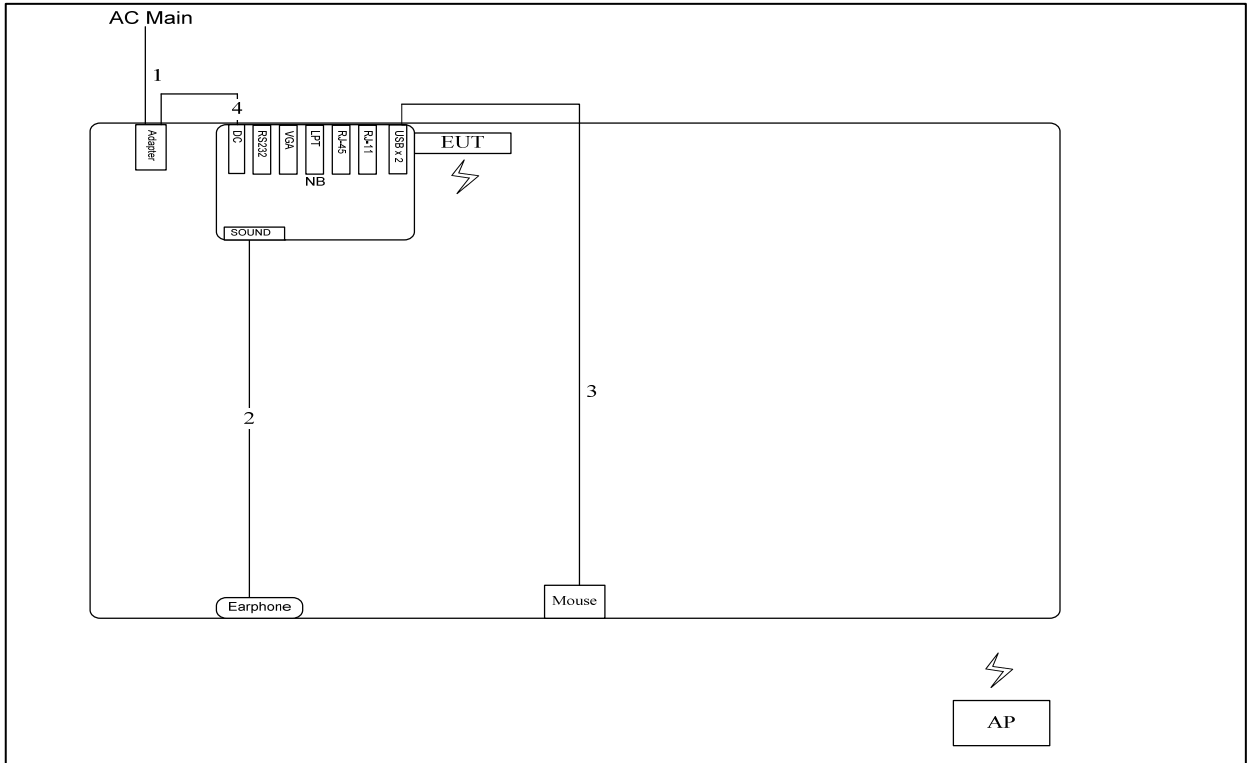


Item	Connection	Shield	Length(m)
1	AC Power cable	No	1.8m
2	Audio cable	No	1.1m
3	USB cable	No	1.8m
4	DC Power cable	No	0.8m




### 3.11.2. Radiation Emissions Test Configuration

Test Configuration: 30MHz~1GHz

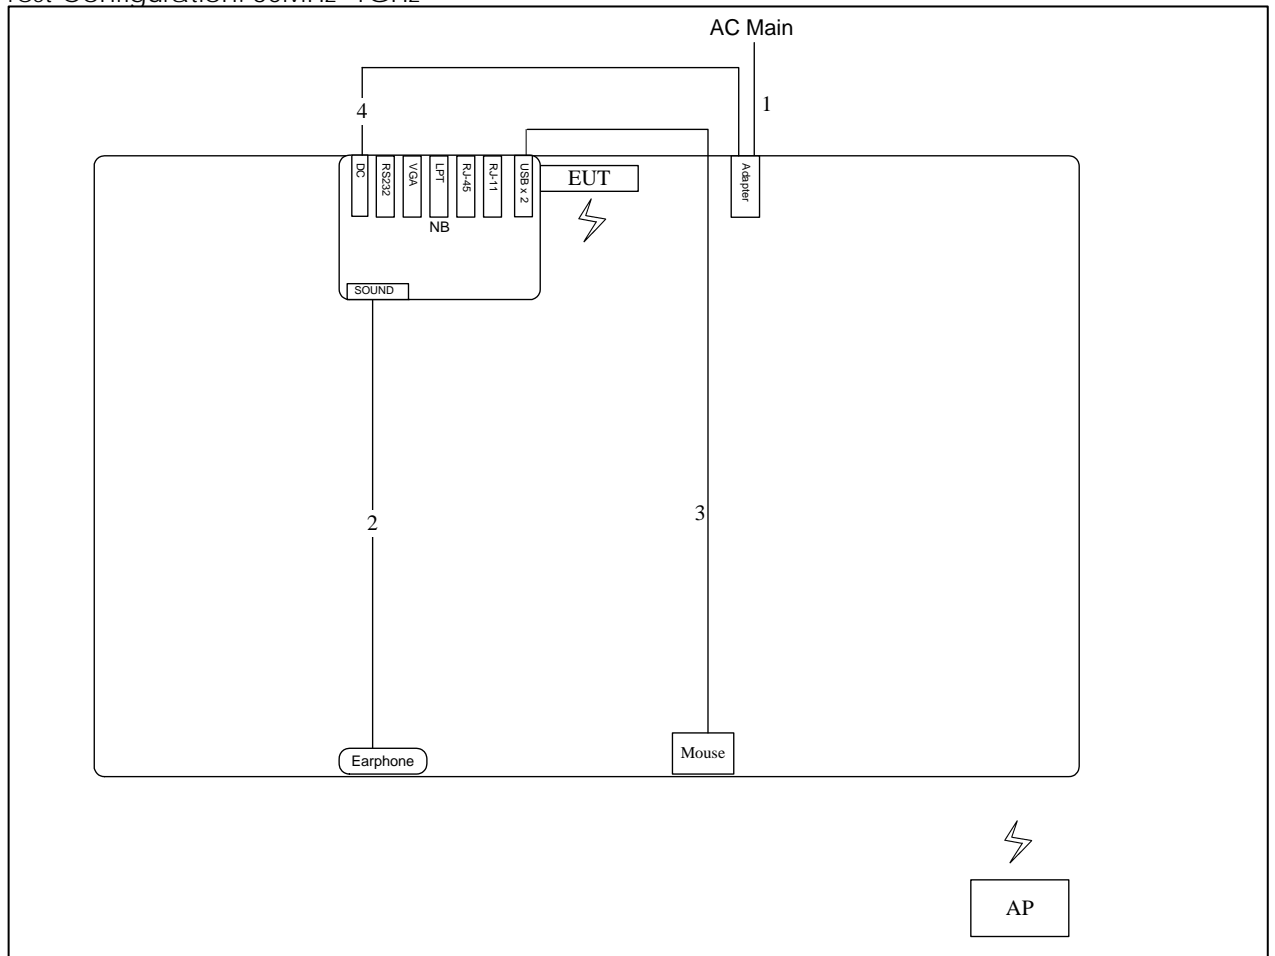

Item	Connection	Shield	Length
1	AC Power cable	No	1.8m
2	Audio cable	No	1.1m
3	USB cable	No	1.8m
4	DC Power Cable	No	0.8m

Test Configuration: above 1GHz

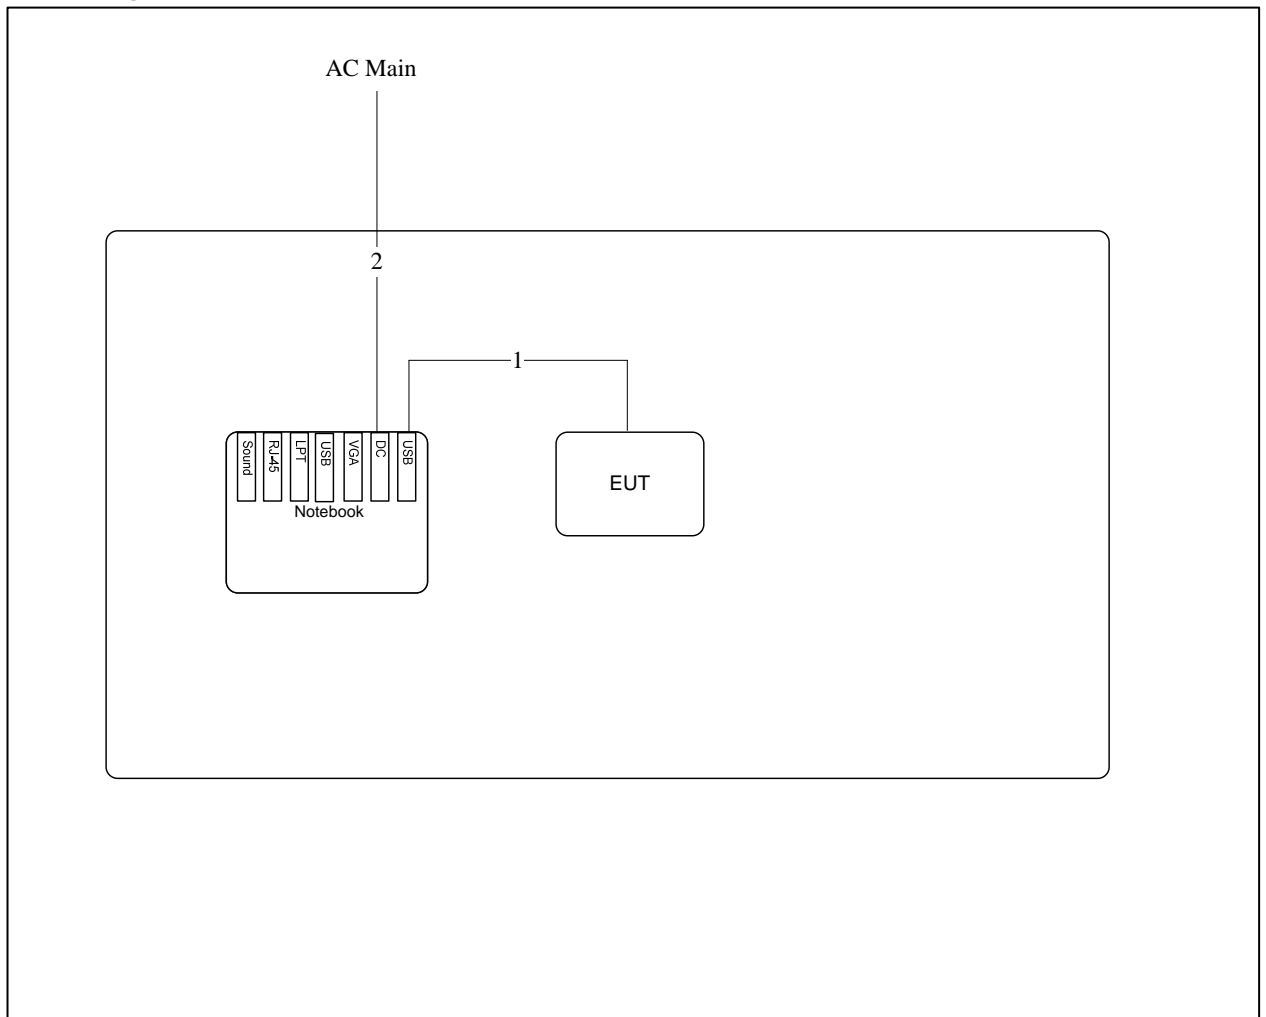

Item	Connection	Shield	Length
1	USB Cable	Yes	1.6m
2	Power Cable	No	1.8m

## 4. TEST RESULT

### 4.1. AC Power Line Conducted Emissions Measurement

#### 4.1.1. Limit

For this product that is designed to connect to the AC power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed below limits table.

Frequency (MHz)	QP Limit (dBuV)	AV Limit (dBuV)
0.15~0.5	66~56	56~46
0.5~5	56	46
5~30	60	50

#### 4.1.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the receiver.

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 KHz

#### 4.1.3. Test Procedures

1. Configure the EUT according to ANSI C63.10. The EUT or host of EUT has to be placed 0.4 meter far from the conducting wall of the shielding room and at least 80 centimeters from any other grounded conducting surface.
2. Connect EUT or host of EUT to the power mains through a line impedance stabilization network (LISN).
3. All the support units are connected to the other LISNs. The LISN should provide 50uH/50ohms coupling impedance.
4. The frequency range from 150 KHz to 30 MHz was searched.
5. Set the test-receiver system to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
6. The measurement has to be done between each power line and ground at the power terminal.

#### 4.1.4. Test Setup Layout

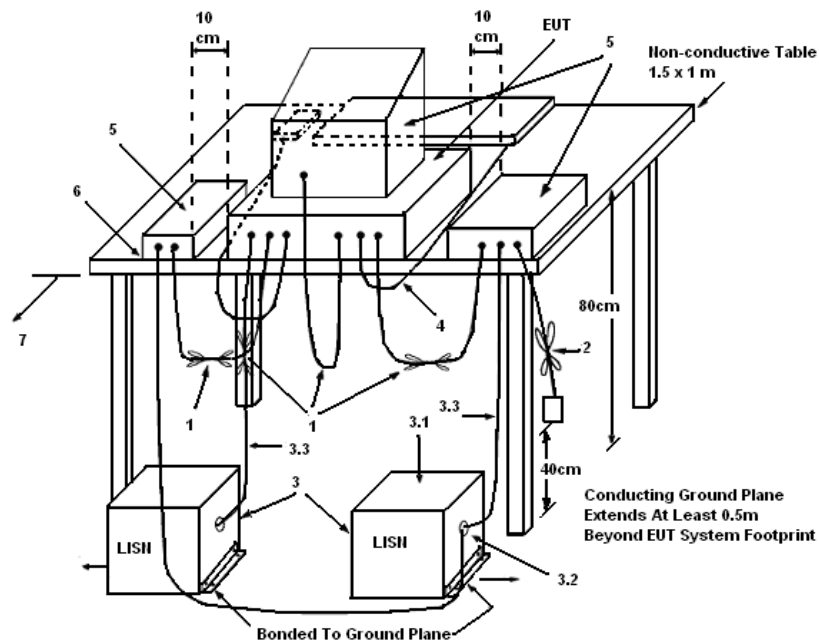

#### LEGEND:

- (1) Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- (2) I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- (3) EUT connected to one LISN. Unused LISN measuring port connectors shall be terminated in 50  $\Omega$ . LISN can be placed on top of, or immediately beneath, reference ground plane.
  - (3.1) All other equipment powered from additional LISN(s).
  - (3.2) Multiple outlet strip can be used for multiple power cords of non-EUT equipment.
  - (3.3) LISN at least 80 cm from nearest part of EUT chassis.
- (4) Cables of hand-operated devices, such as keyboards, mice, etc., shall be placed as for normal use.
- (5) Non-EUT components of EUT system being tested.
- (6) Rear of EUT, including peripherals, shall all be aligned and flush with rear of tabletop.
- (7) Rear of tabletop shall be 40 cm removed from a vertical conducting plane that is bonded to the ground plane.

#### 4.1.5. Test Deviation


There is no deviation with the original standard.

#### 4.1.6. EUT Operation during Test

The EUT was placed on the test table and programmed in normal function.


## 4.1.7. Results of AC Power Line Conducted Emissions Measurement

Temperature	24°C	Humidity	48%
Test Engineer	Simon Yang	Phase	Line
Configuration	Normal Link		

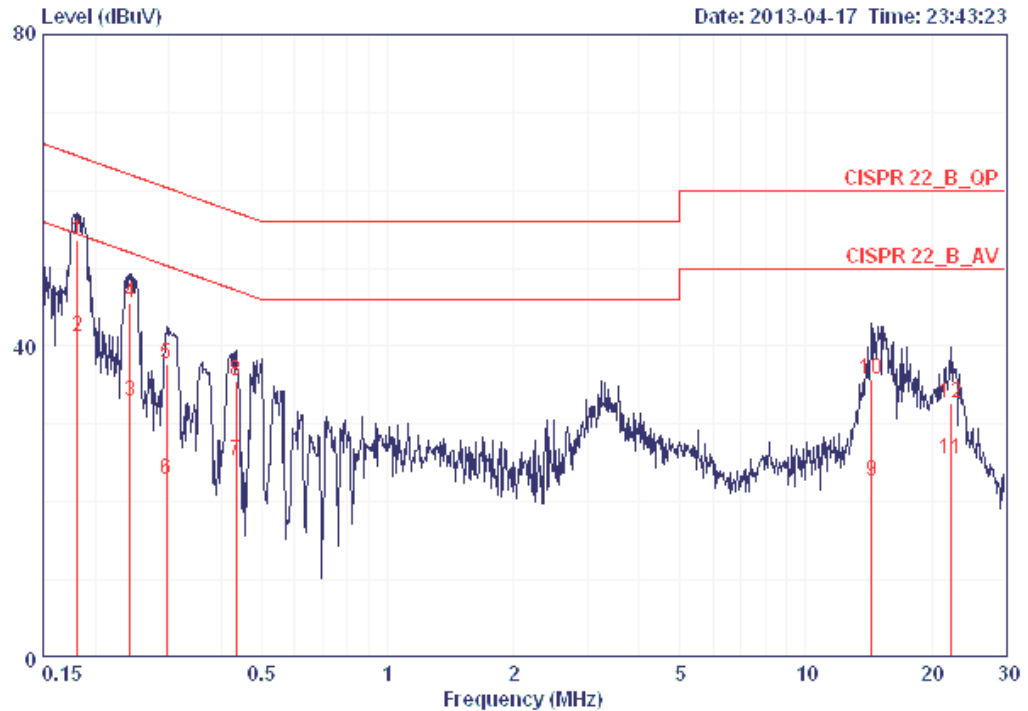

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18152	53.69	-10.72	64.42	53.35	0.15	0.19	QP
2	0.18152	41.30	-13.11	54.42	40.96	0.15	0.19	AVERAGE
3	0.24165	32.93	-19.11	52.04	32.58	0.15	0.20	AVERAGE
4	0.24165	45.49	-16.55	62.04	45.14	0.15	0.20	QP
5	0.29555	37.77	-22.60	60.37	37.42	0.15	0.20	QP
6	0.29555	22.84	-27.53	50.37	22.49	0.15	0.20	AVERAGE
7	0.43511	25.24	-21.91	47.15	24.89	0.15	0.20	AVERAGE
8	0.43511	35.52	-21.63	57.15	35.17	0.15	0.20	QP
9	14.364	22.60	-27.40	50.00	21.79	0.40	0.40	AVERAGE
10	14.364	35.80	-24.20	60.00	34.99	0.40	0.40	QP
11	22.180	25.41	-24.59	50.00	24.38	0.53	0.50	AVERAGE
12	22.180	32.67	-27.33	60.00	31.64	0.53	0.50	QP

Temperature	24°C	Humidity	48%
Test Engineer	Simon Yang	Phase	Neutral
Configuration	Normal Link		

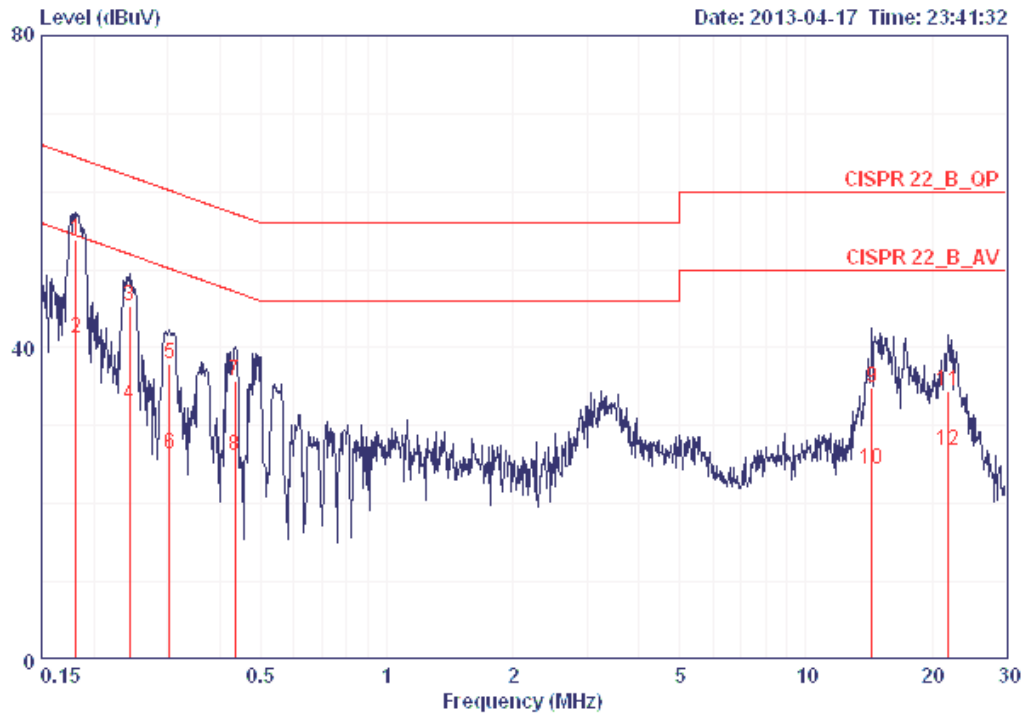

	Freq	Level	Over Limit	Limit Line	Read Level	LISN Factor	Cable Loss	Remark
	MHz	dBuV	dB	dBuV	dBuV	dB	dB	
1	0.18152	53.80	-10.61	64.42	53.53	0.08	0.19	QP
2	0.18152	41.23	-13.18	54.42	40.96	0.08	0.19	AVERAGE
3	0.24293	45.32	-16.68	62.00	45.04	0.08	0.20	QP
4	0.24293	32.65	-19.35	52.00	32.37	0.08	0.20	AVERAGE
5	0.30348	37.96	-22.19	60.15	37.68	0.08	0.20	QP
6	0.30348	26.33	-23.82	50.15	26.05	0.08	0.20	AVERAGE
7	0.43511	35.67	-21.48	57.15	35.39	0.08	0.20	QP
8	0.43511	26.14	-21.01	47.15	25.86	0.08	0.20	AVERAGE
9	14.364	34.90	-25.10	60.00	34.19	0.31	0.40	QP
10	14.364	24.52	-25.48	50.00	23.81	0.31	0.40	AVERAGE
11	21.830	34.37	-25.63	60.00	33.44	0.43	0.50	QP
12	21.830	26.88	-23.12	50.00	25.95	0.43	0.50	AVERAGE

Note:

Level = Read Level + LISN Factor + Cable Loss.

## 4.2. 26dB Bandwidth & 99% Occupied Bandwidth Measurement

### 4.2.1. Limit

No restriction limits.

### 4.2.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

26dB Bandwidth	
Spectrum Parameters	Setting
Attenuation	Auto
Span Frequency	> 26dB Bandwidth
RBW	Approximately 1% of the emission bandwidth
VBW	VBW > RBW
Detector	Peak
Trace	Max Hold
Sweep Time	Auto
99% Occupied Bandwidth	
Spectrum Parameters	Setting
Span	1.5 times to 5.0 times the OBW
RBW	1 % to 5 % of the OBW
VBW	$\geq 3 \times \text{RBW}$
Detector	Peak
Trace	Max Hold

### 4.2.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer in peak hold mode.
2. Measure the maximum width of the emission that is 26 dB down from the peak of the emission. Compare this with the RBW setting of the analyzer. Readjust RBW and repeat measurement as needed until the RBW/EBW ratio is approximately 1%.

### 4.2.4. Test Setup Layout

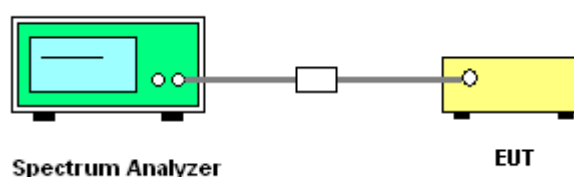

#### 4.2.5. Test Deviation

There is no deviation with the original standard.

#### 4.2.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.2.7. Test Result of 26dB Bandwidth & 99% Occupied Bandwidth

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac

##### Configuration IEEE 802.11ac MCS0/Nss1 20MHz

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
36	5180 MHz	20.48	17.76
40	5200 MHz	20.48	17.76
48	5240 MHz	20.16	17.76

##### Configuration IEEE 802.11ac MCS0/Nss1 40MHz

Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
38	5190 MHz	40.32	36.16
46	5230 MHz	40.32	36.16

##### Configuration IEEE 802.11ac MCS0/Nss1 80MHz


Channel	Frequency	26dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
42	5210 MHz	80.64	76.16

<b>Temperature</b>	23°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Benson Peng	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a**


<b>Channel</b>	<b>Frequency</b>	<b>26dB Bandwidth (MHz)</b>	<b>99% Occupied Bandwidth (MHz)</b>
36	5180 MHz	20.48	16.96
40	5200 MHz	21.44	16.96
48	5240 MHz	20.16	16.96

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1  
20MHz / 5180 MHz

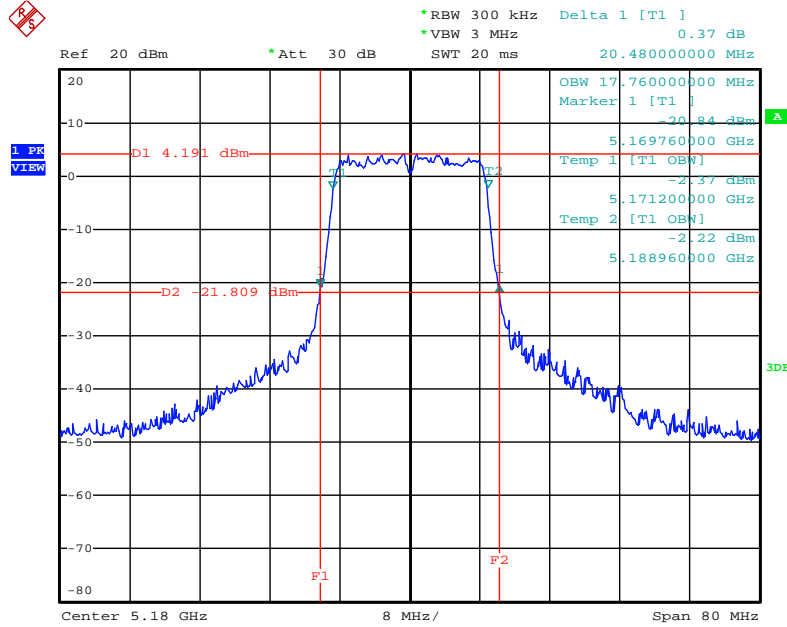


Date: 24.APR.2013 18:32:39

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1  
20MHz / 5200 MHz

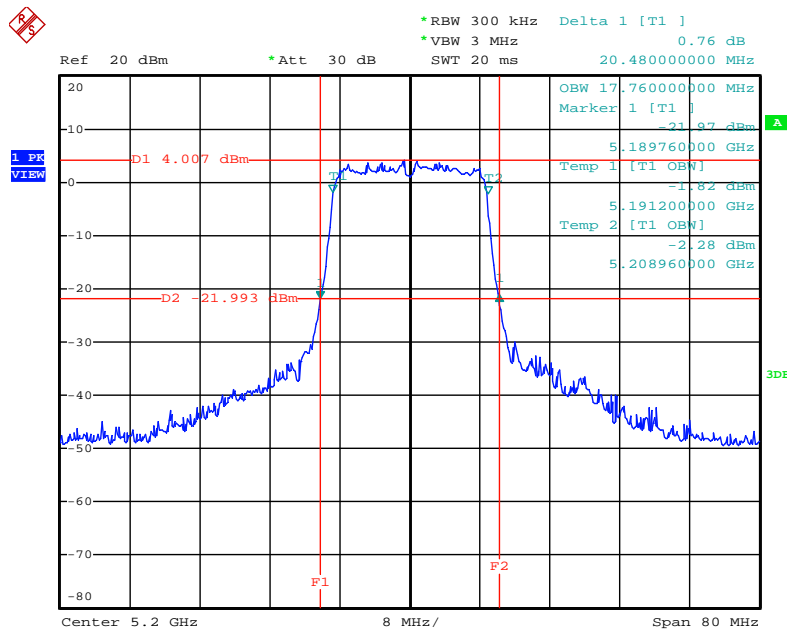


Date: 24.APR.2013 18:33:03

### 26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / 5240 MHz

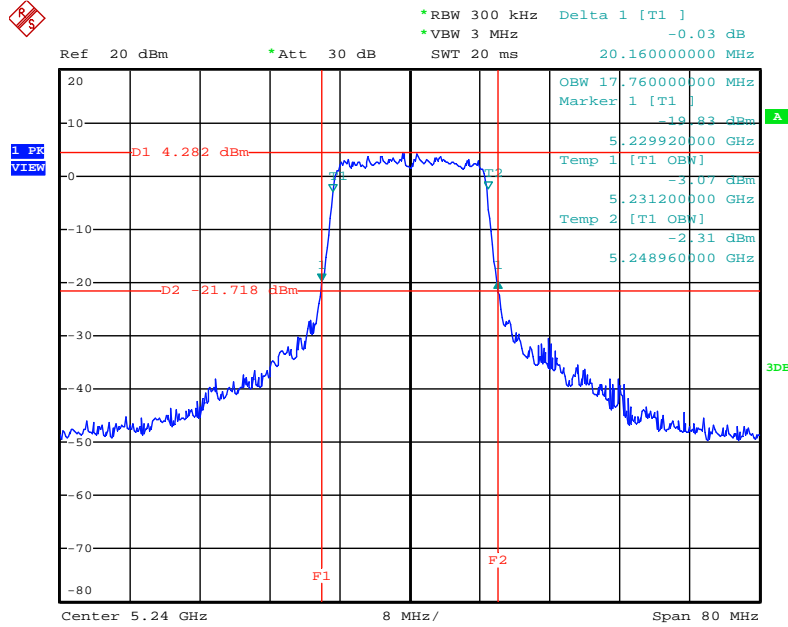


Date: 24.APR.2013 18:33:32

### 26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / 5190 MHz

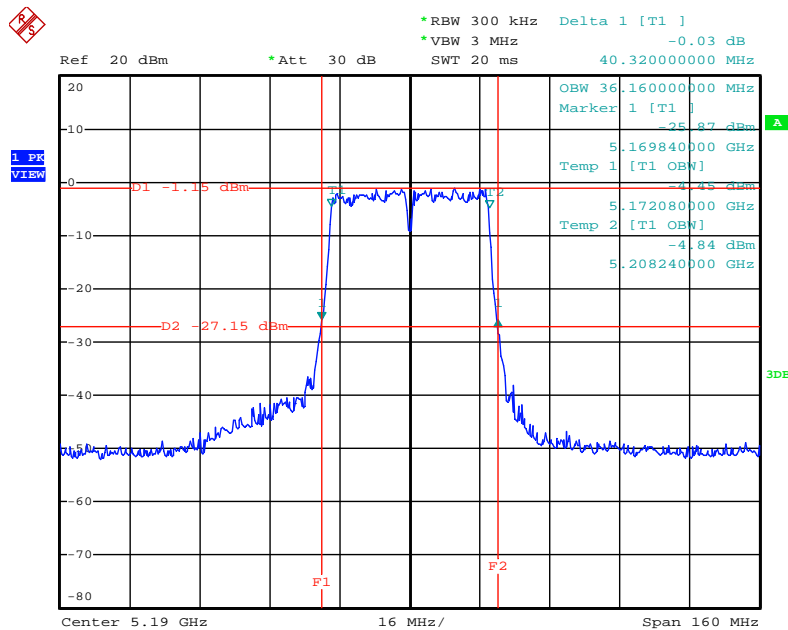


Date: 24.APR.2013 18:44:36

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1  
40MHz / 5230 MHz

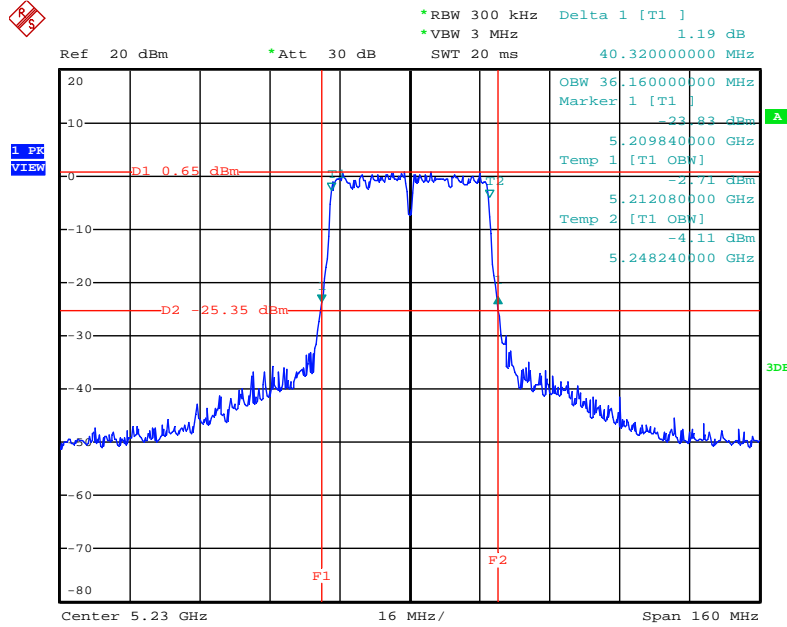


Date: 24.APR.2013 18:45:06

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11ac MCS0/Nss1  
80MHz / 5210 MHz

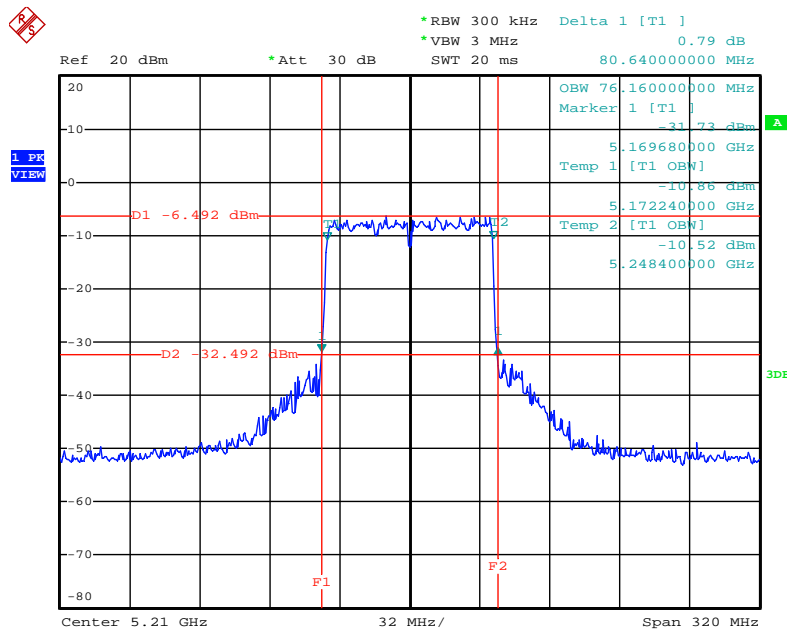


Date: 24.APR.2013 18:50:52

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / 5180 MHz

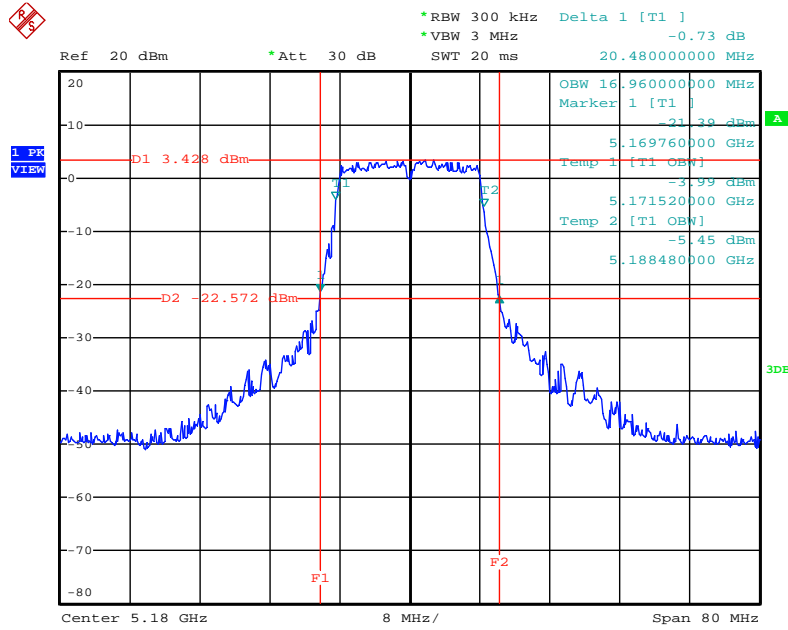


Date: 24.APR.2013 18:37:49

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / 5200 MHz

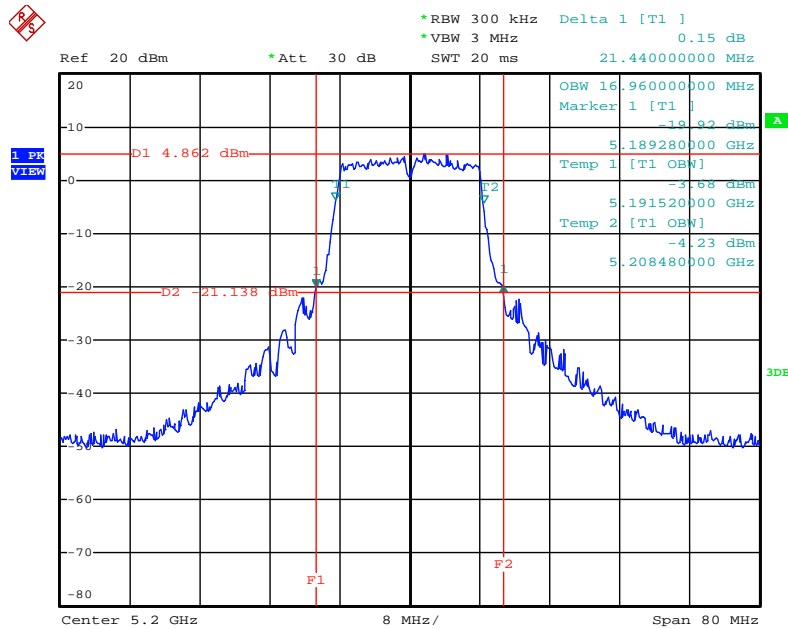

Date: 24.APR.2013 18:38:14

26dB Bandwidth & 99% Occupied Bandwidth Plot on Configuration IEEE 802.11a / 5240 MHz

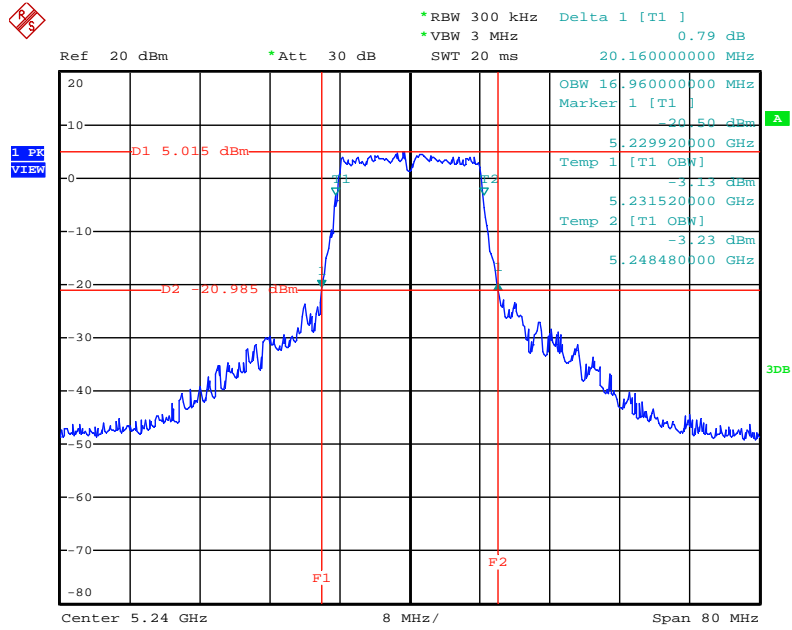

Date: 24.APR.2013 18:38:51

### 4.3. Maximum Conducted Output Power Measurement

#### 4.3.1. Limit

For the band 5.15~5.25 GHz, the maximum conducted output power over the frequency band of operation shall not exceed the lesser of 50 mW (17dBm) or  $4 \text{ dBm} + 10\log B$ , where B is the 26 dB emissions bandwidth in MHz. If transmitting antennas of directional gain greater than 6 dBi are used, both the maximum conducted output power and the peak power spectral density shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

#### 4.3.2. Measuring Instruments and Setting


The following table is the setting of the peak power meter.

Power Meter Parameter	Setting
Detector	AVERAGE

#### 4.3.3. Test Procedures

1. The transmitter output (antenna port) was connected to the power meter.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (E) Maximum conducted output power =>(3) Method PM (Measurement using an RF average power meter) Multiple antenna systems was performed in accordance with KDB 662911 D01 v02 Emissions Testing of Transmitters with Multiple Outputs in the Same Band.
3. When measuring maximum conducted output power with multiple antenna systems, add every result of the values by mathematic formula.

#### 4.3.4. Test Setup Layout



#### 4.3.5. Test Deviation

There is no deviation with the original standard.

#### 4.3.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.3.7. Test Result of Maximum Conducted Output Power

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac
Test Date	May 24, 2013		

##### Configuration IEEE 802.11ac MCS0/Nss1 20MHz

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	13.21	17.00	Complies
40	5200 MHz	13.18	17.00	Complies
48	5240 MHz	13.21	17.00	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 40MHz

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
38	5190 MHz	13.19	17.00	Complies
46	5230 MHz	13.21	17.00	Complies

##### Configuration IEEE 802.11ac MCS0/Nss1 80MHz

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
42	5210 MHz	12.60	17.00	Complies

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11a
Test Date	May 24, 2013		

**Configuration IEEE 802.11a**

Channel	Frequency	Conducted Power (dBm)	Max. Limit (dBm)	Result
36	5180 MHz	12.62	17.00	Complies
40	5200 MHz	12.51	17.00	Complies
48	5240 MHz	12.97	17.00	Complies

## 4.4. Power Spectral Density Measurement

### 4.4.1. Limit

The power spectral density is defined as the highest level of power in dBm per MHz generated by the transmitter within the power envelope. The following table is power spectral density limits and decrease power density limit rule refer to section 4.3.1.

Frequency Range	Power Spectral Density limit (dBm/MHz)
5.15–5.25 GHz	4

### 4.4.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1000 kHz
VBW	3000 kHz
Detector	RMS
Trace	AVERAGE
Sweep Time	Auto
Trace Average	100 times

### 4.4.3. Test Procedures

1. The transmitter output (antenna port) was connected RF switch to the spectrum analyzer.
2. Test was performed in accordance with KDB 789033 D01 v01r03 for Compliance Testing of Unlicensed National Information Infrastructure (U-NII) Devices - Part 15, Subpart E, section (C) Maximum conducted output power => (d) Method SA-2 (trace averaging across on and off times of the EUT transmissions, followed by duty cycle correction).
3. Multiple antenna systems was performed in accordance KDB 662911 D01 v02 in-Band Power Spectral Density (PSD) Measurements (1) Measure and sum the spectra across the outputs.
4. When measuring first spectral bin of output 1 is summed with that in the first spectral bin of output 2 and that from the first spectral bin of output 3 and so on up to the Nth output to obtain the value for the first frequency bin of the summed spectrum. The summed spectrum value for each of the other frequency bins is computed in the same way.

#### 4.4.4. Test Setup Layout

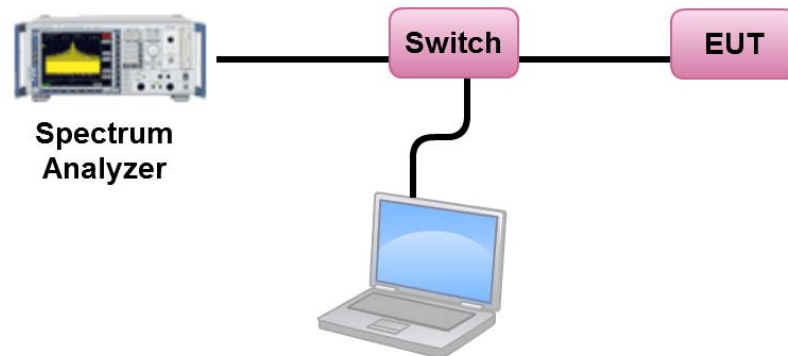

#### 4.4.5. Test Deviation

There is no deviation with the original standard.

#### 4.4.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.4.7. Test Result of Power Spectral Density

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac

## Configuration IEEE 802.11ac MCS0/Nss1 20MHz

Channel	Frequency	Power Density (dBm/MHz)	Limit (dBm/MHz)	Result
36	5180 MHz	-0.01	4.00	Complies
40	5200 MHz	-0.13	4.00	Complies
48	5240 MHz	0.11	4.00	Complies

## Configuration IEEE 802.11ac MCS0/Nss1 40MHz

Channel	Frequency	Power Density (dBm/MHz)	Limit (dBm/MHz)	Result
38	5190 MHz	-3.39	4.00	Complies
46	5230 MHz	-3.05	4.00	Complies

## Configuration IEEE 802.11ac MCS0/Nss1 80MHz

Channel	Frequency	Power Density (dBm/MHz)	Limit (dBm/MHz)	Result
42	5210 MHz	-7.83	4.00	Complies

<b>Temperature</b>	23°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Benson Peng	<b>Configurations</b>	IEEE 802.11a


**Configuration IEEE 802.11a**

<b>Channel</b>	<b>Frequency</b>	<b>Power Density (dBm/MHz)</b>	<b>Limit (dBm/MHz)</b>	<b>Result</b>
36	5180 MHz	-0.60	4.00	<b>Complies</b>
40	5200 MHz	-0.43	4.00	<b>Complies</b>
48	5240 MHz	0.00	4.00	<b>Complies</b>


Note: All the test values were listed in the report.

For plots, only the channel with maximum results was shown.


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / 5240 MHz

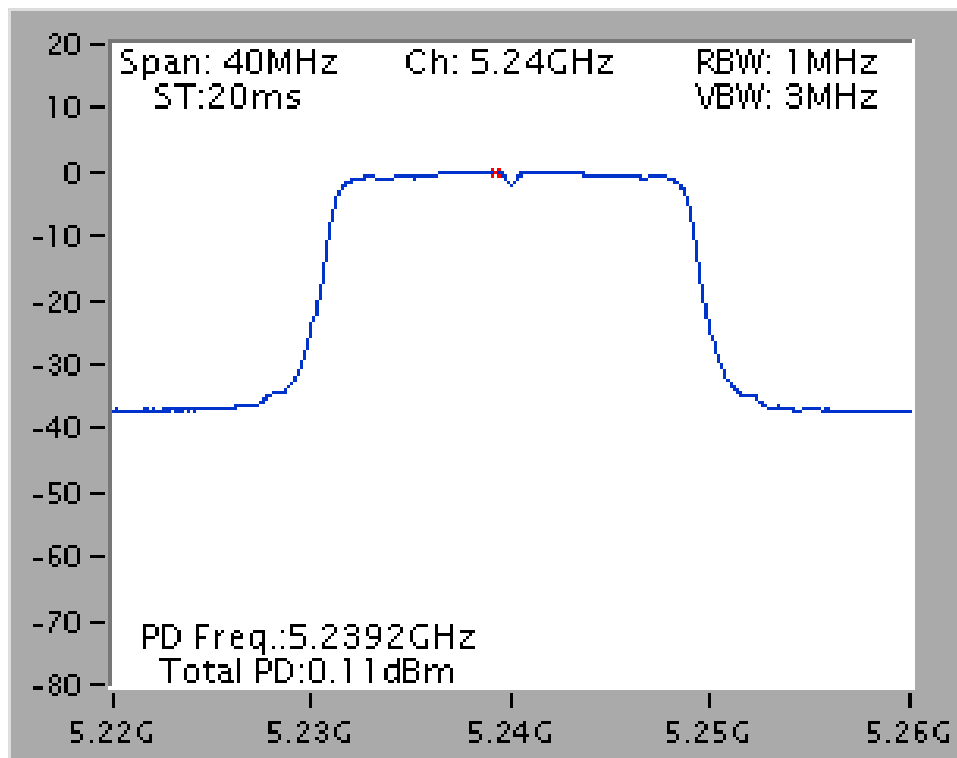


Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / 5230 MHz

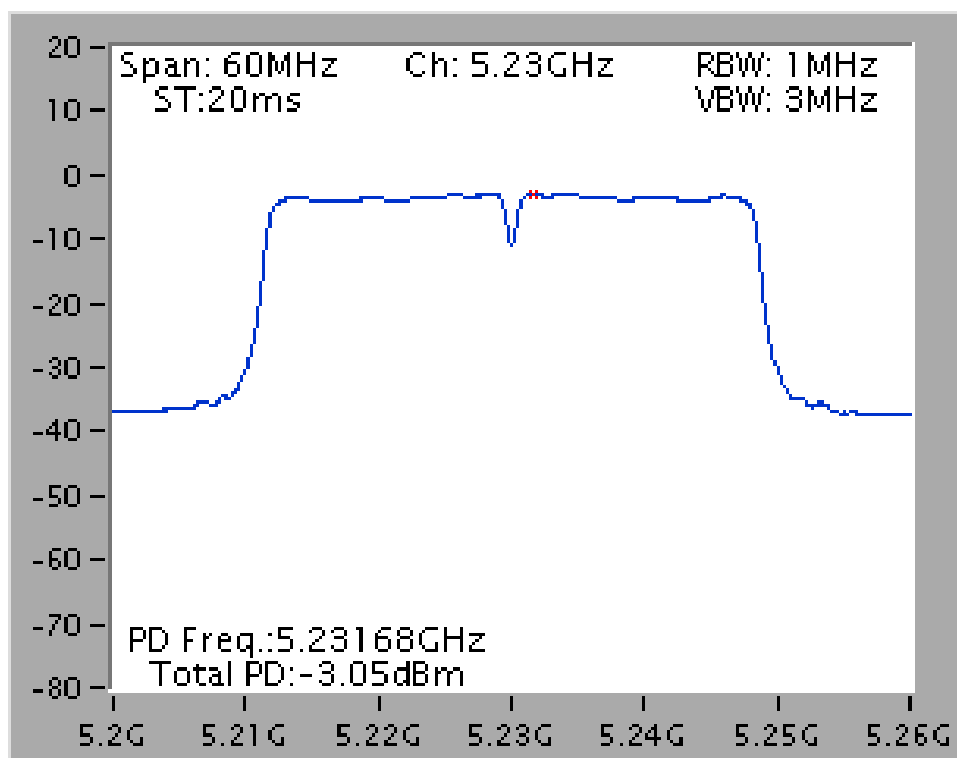

Power Density Plot on Configuration IEEE 802.11ac MCS0/Nss1 VHT 80MHz / 5210 MHz

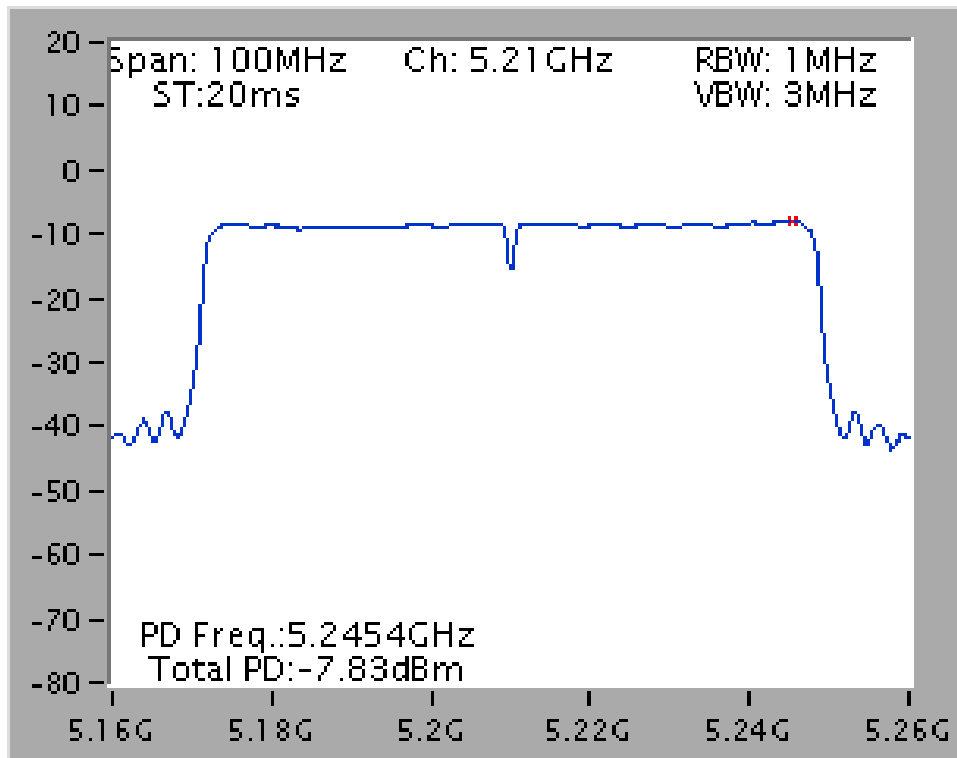

Power Density Plot on Configuration IEEE 802.11a / 5240 MHz

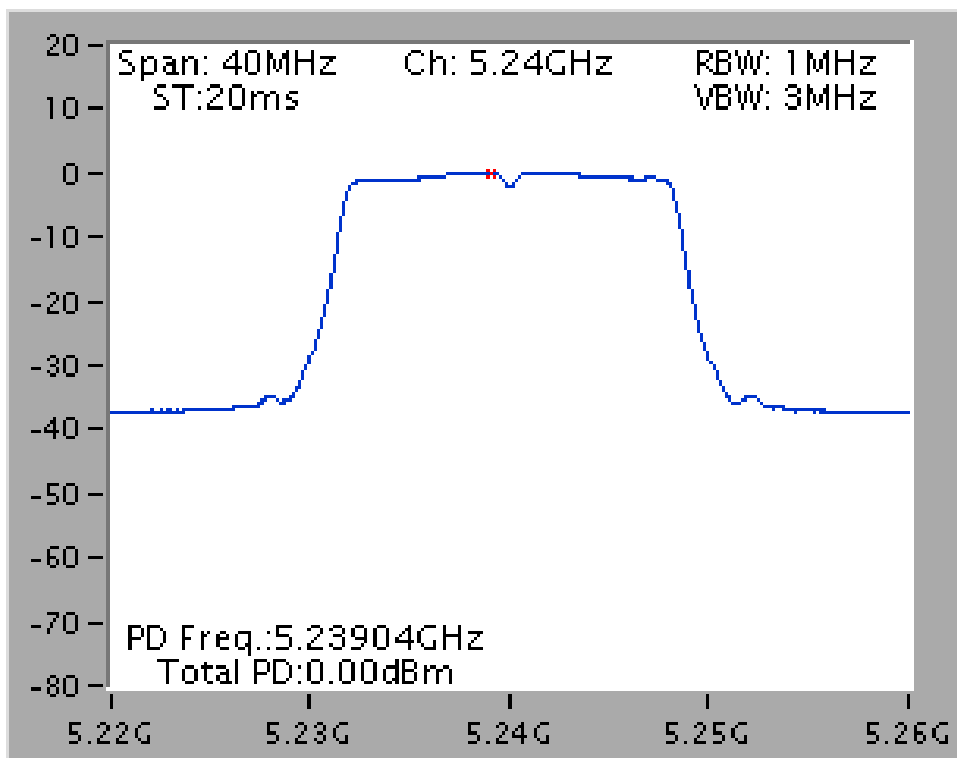



## 4.5. Peak Excursion Measurement

### 4.5.1. Limit

The ratio of the peak excursion of the modulation envelope (measured using a peak hold function) to the maximum conducted output power (measured as specified above) shall not exceed 13 dB across any 1 MHz bandwidth or the emissions bandwidth whichever is less.

### 4.5.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Encompass the entire emissions bandwidth (EBW) of the signal
RBW	1MHz (Peak Trace) / 1MHz (Average Trace)
VBW	≥ 3MHz (Peak Trace) / ≥ 3MHz (Average Trace)
Detector	Peak (Peak Trace) / RMS (Average Trace)
Trace	Trace: Max hold (Peak Trace) / Trace Average Sweep Count 100 (Average Trace)
Sweep Time	AUTO

### 4.5.3. Test Procedures

- Trace A, Set RBW = 1MHz, VBW = 3MHz, Span >26dB bandwidth, Max. hold.
- Delta Mark trace A Maximum frequency and trace B same frequency.
- Repeat the above procedure until measurements for all frequencies were complete.
- Testing each modulation mode on a single channel in single operating band at single output port. All signal types need test (DSSS, OFDM). All modulation types need test (BPSK, QPSK, 16-QAM, 64-QAM, 256-QAM). All bandwidth modes need test.

### 4.5.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.4.4.

### 4.5.5. Test Deviation

There is no deviation with the original standard.

### 4.5.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

## 4.5.7. Test Result of Peak Excursion

Temperature	23°C	Humidity	63%
Test Engineer	Benson Peng	Configurations	IEEE 802.11ac

## Configuration IEEE 802.11ac MCS0/Nss1 20MHz

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5180 MHz	8.87	13	Complies
QPSK(MCS1)	5180 MHz	9.22	13	Complies
16QAM(MCS3)	5180 MHz	9.48	13	Complies
64QAM(MCS5)	5180 MHz	9.81	13	Complies
256QAM(MCS8)	5180 MHz	8.80	13	Complies

## Configuration IEEE 802.11ac MCS0/Nss1 40MHz

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5230 MHz	9.12	13	Complies
QPSK(MCS1)	5230 MHz	9.16	13	Complies
16QAM(MCS3)	5230 MHz	9.42	13	Complies
64QAM(MCS5)	5230 MHz	9.15	13	Complies
256QAM(MCS8)	5230 MHz	9.52	13	Complies

## Configuration IEEE 802.11ac MCS0/Nss1 80MHz

Modulation	Frequency	Peak Excursion (dB)	Max. Limit (dB)	Result
BSPK(MCS0)	5210 MHz	8.91	13	Complies
QPSK(MCS1)	5210 MHz	8.05	13	Complies
16QAM(MCS3)	5210 MHz	9.44	13	Complies
64QAM(MCS5)	5210 MHz	9.94	13	Complies
256QAM(MCS8)	5210 MHz	8.91	13	Complies




<b>Temperature</b>	23°C	<b>Humidity</b>	63%
<b>Test Engineer</b>	Benson Peng	<b>Configurations</b>	IEEE 802.11a

**Configuration IEEE 802.11a**


<b>Modulation</b>	<b>Frequency</b>	<b>Peak Excursion (dB)</b>	<b>Max. Limit (dB)</b>	<b>Result</b>
BSPK(6Mbps)	5240 MHz	9.35	13	<b>Complies</b>
QPSK(12Mbps)	5240 MHz	8.66	13	<b>Complies</b>
16QAM(24Mbps)	5240 MHz	8.58	13	<b>Complies</b>
64QAM(48Mbps)	5240 MHz	8.60	13	<b>Complies</b>

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / BSPK(MCS0) / 5180 MHz

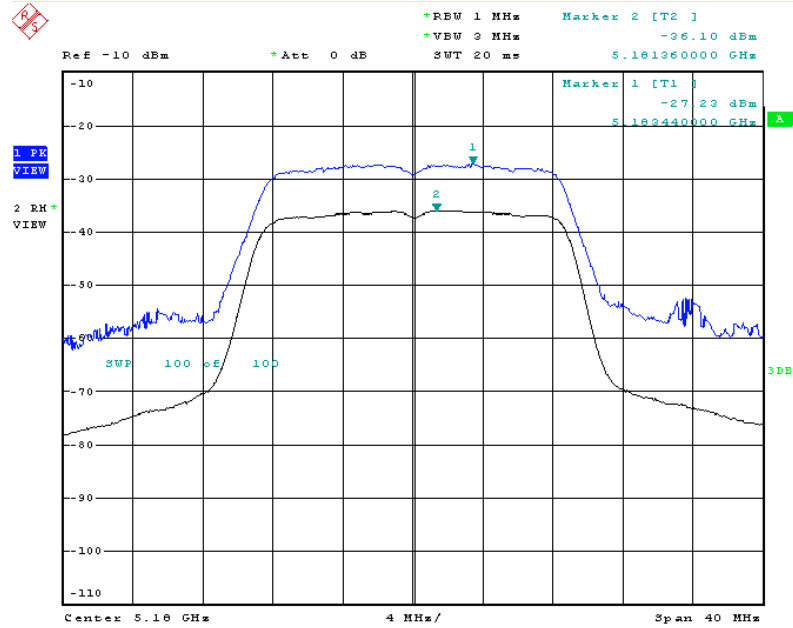


Date: 24.APR.2013 19:37:46

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / QPSK(MCS1) / 5180 MHz

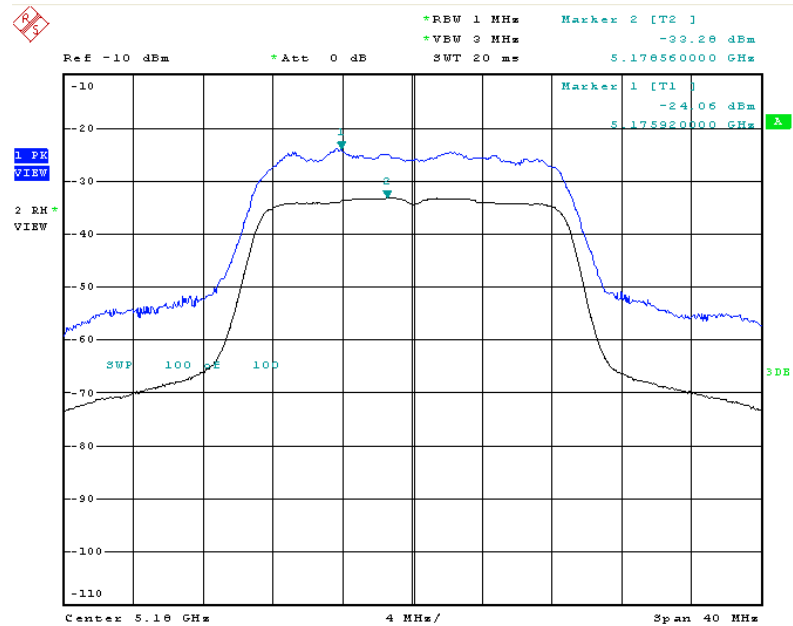


Date: 25.APR.2013 14:14:04

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / 16QAM(MCS3) / 5180 MHz

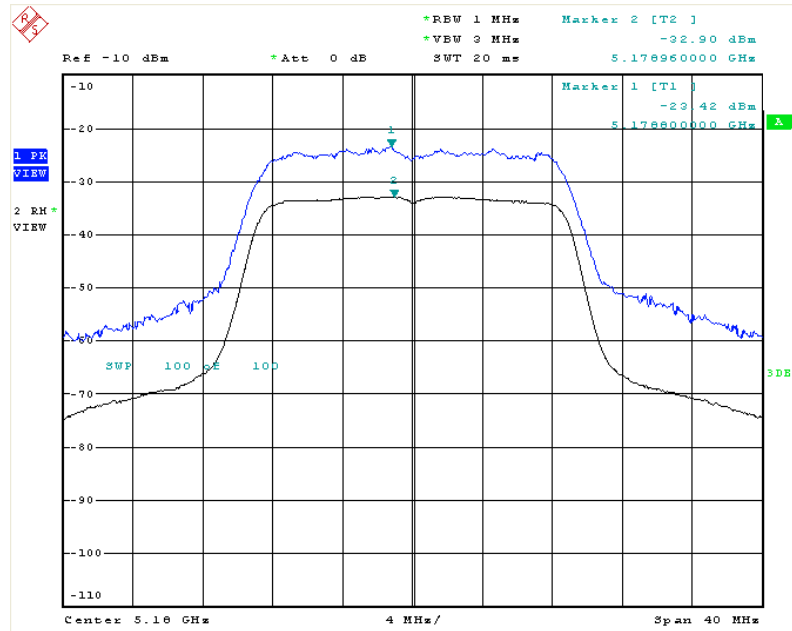


Date: 25.APR.2013 14:18:22

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / 64QAM(MCS5) / 5180 MHz

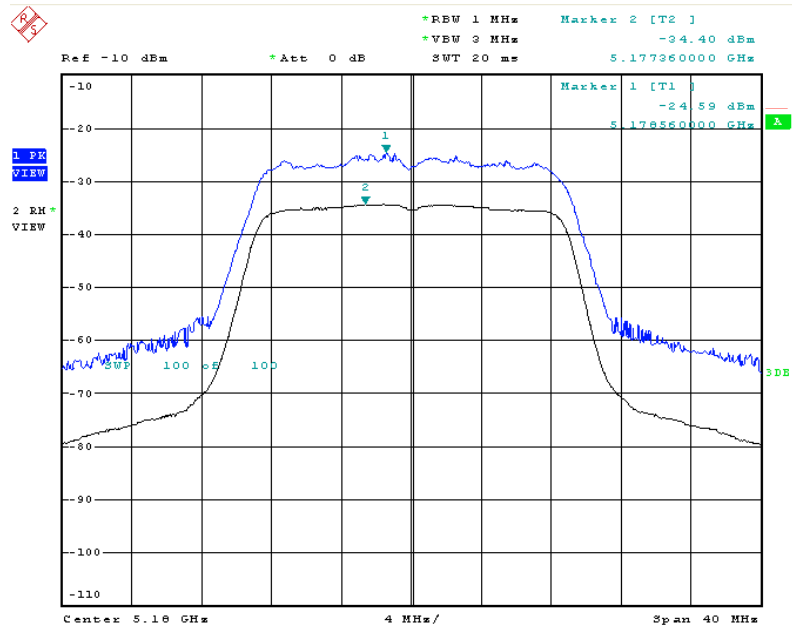


Date: 25.APR.2013 14:19:03

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 20MHz / 256QAM(MCS8)/5180 MHz

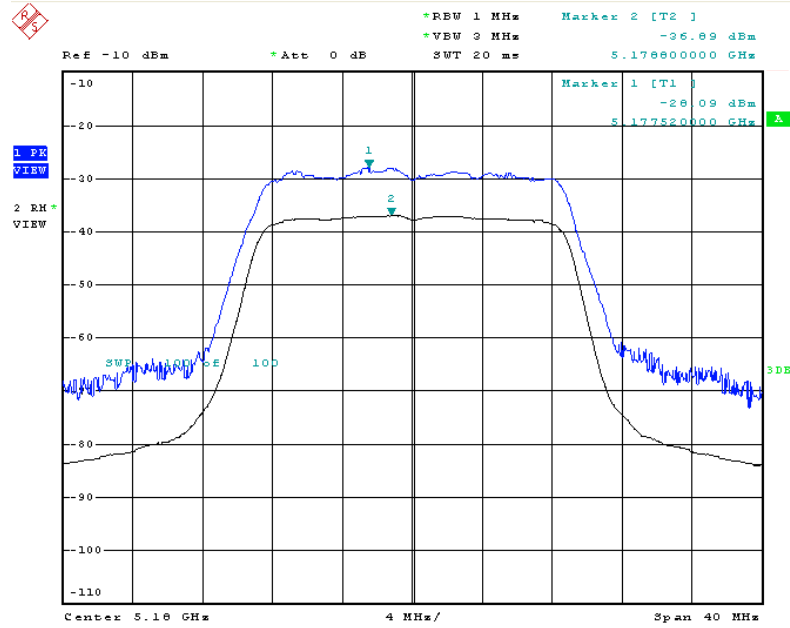


Date: 25.APR.2013 14:19:35

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / BSPK(MCS0) / 5230 MHz

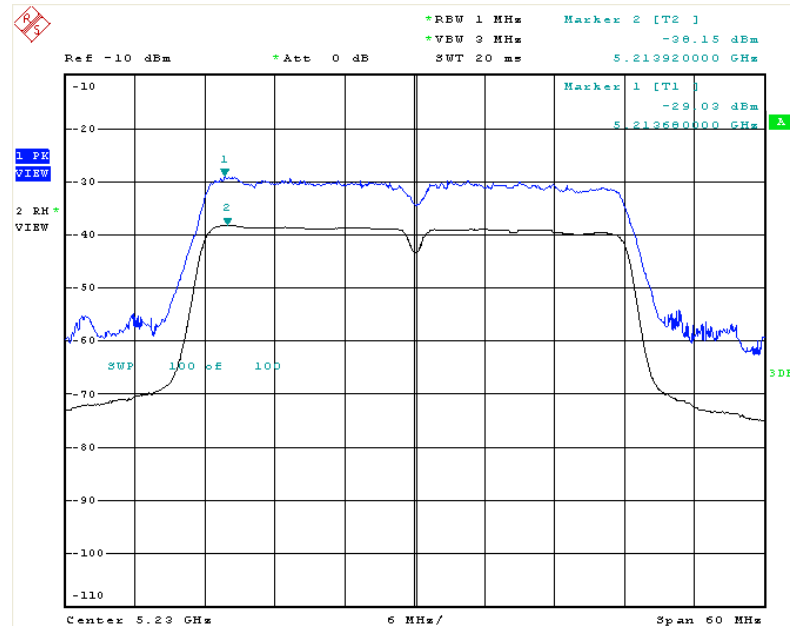


Date: 24.APR.2013 19:40:02


Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / QPSK(MCS1) / 5230 MHz

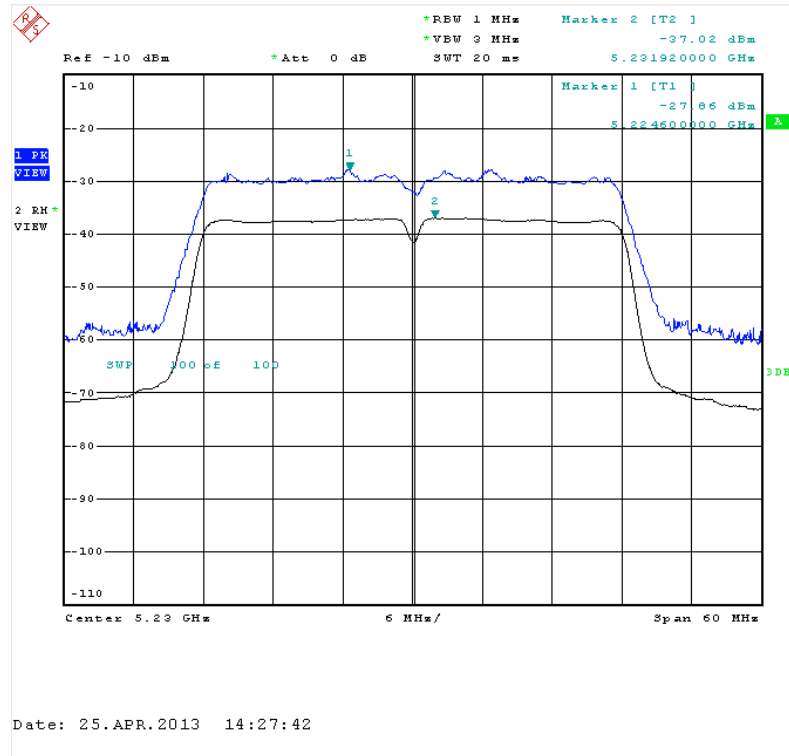

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / 16QAM(MCS3) / 5230 MHz

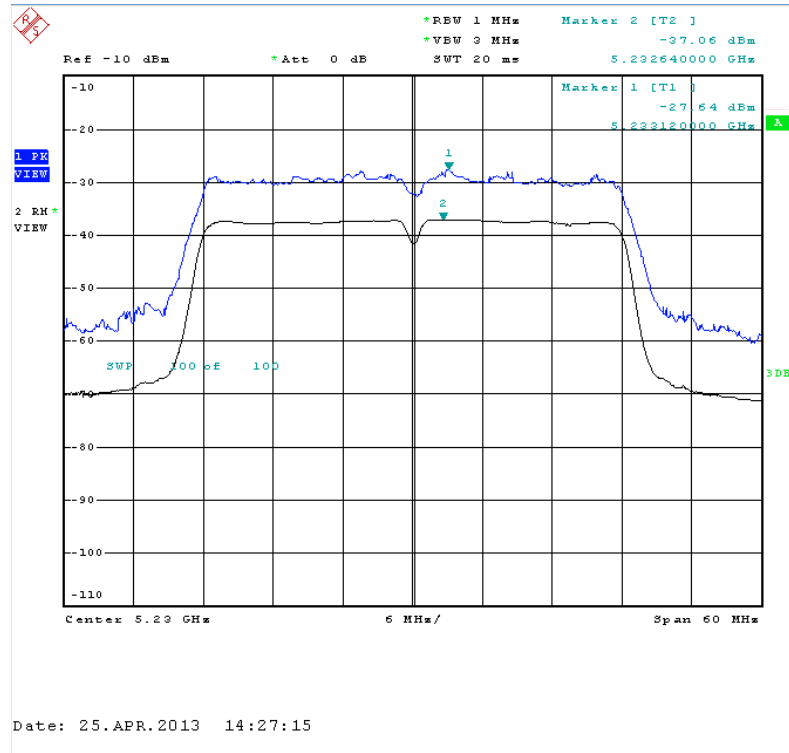


Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / 64QAM(MCS5) / 5230 MHz

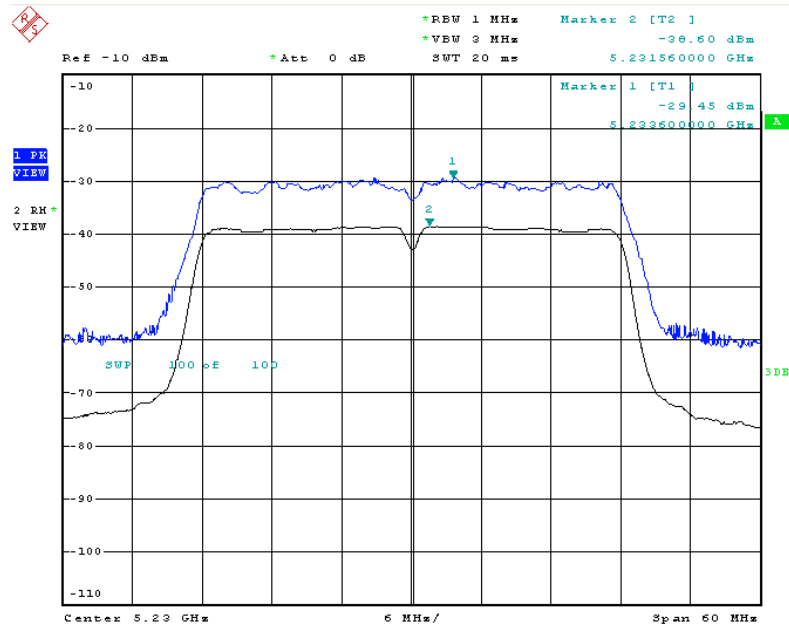

Date: 25.APR.2013 14:26:49


Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 40MHz / 256QAM(MCS8)/5230 MHz

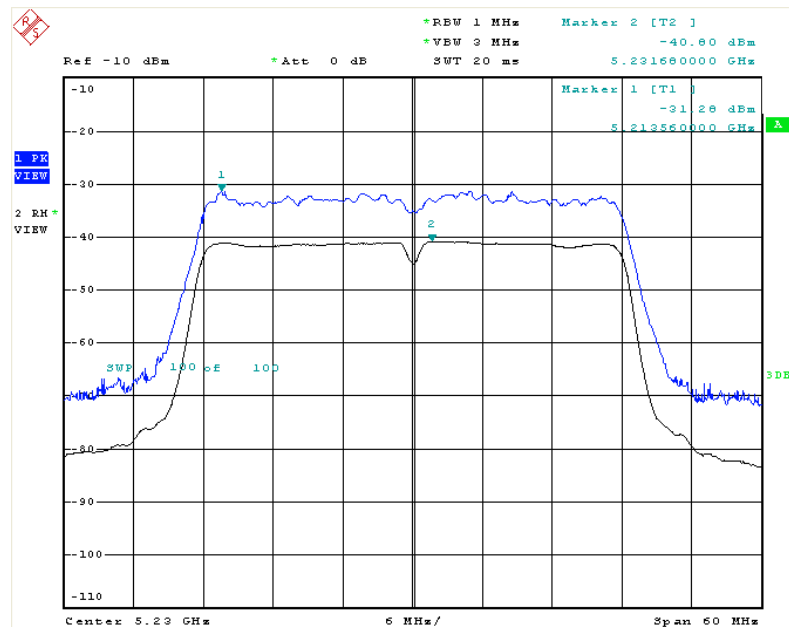

Date: 25.APR.2013 14:26:13




Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / BSPK(MCS0) / 5210 MHz

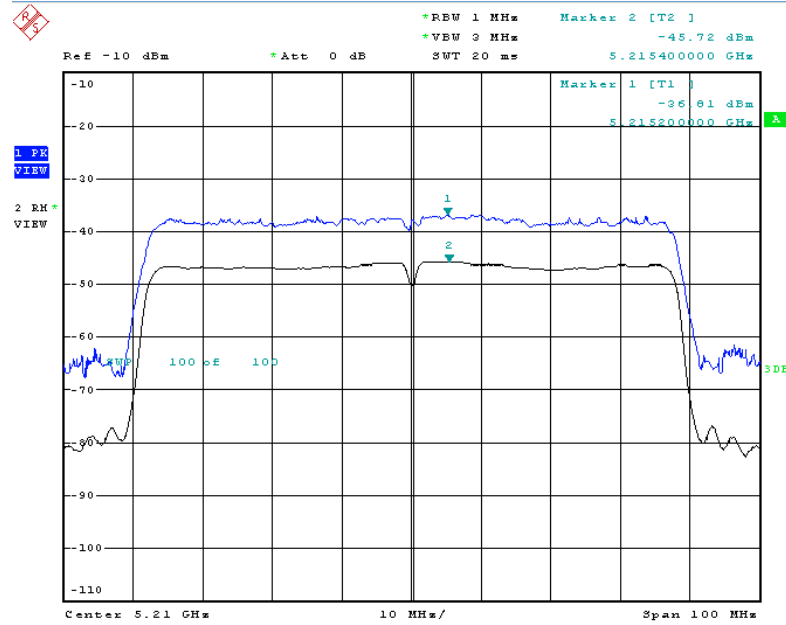


Date: 24.APR.2013 19:42:43

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / QPSK(MCS1) / 5210 MHz

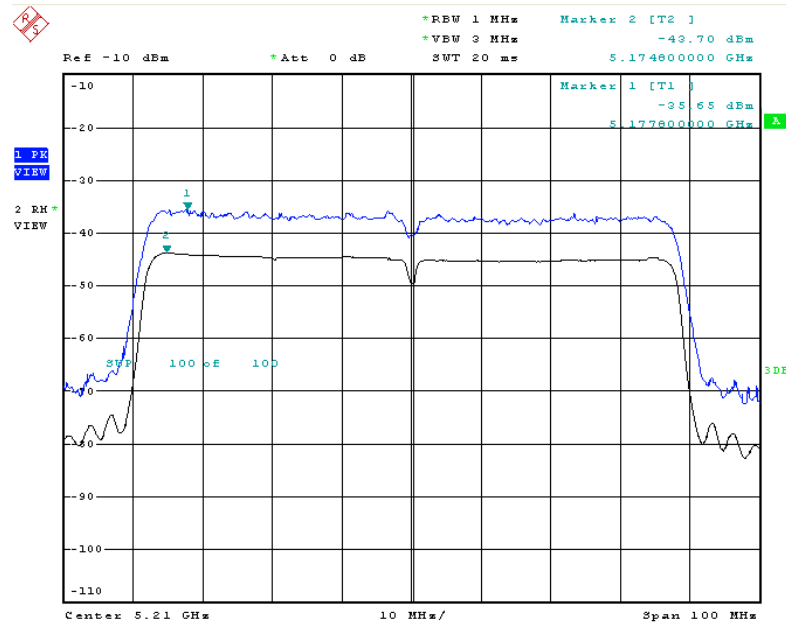


Date: 25.APR.2013 14:33:46

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / 16QAM(MCS3) / 5210 MHz

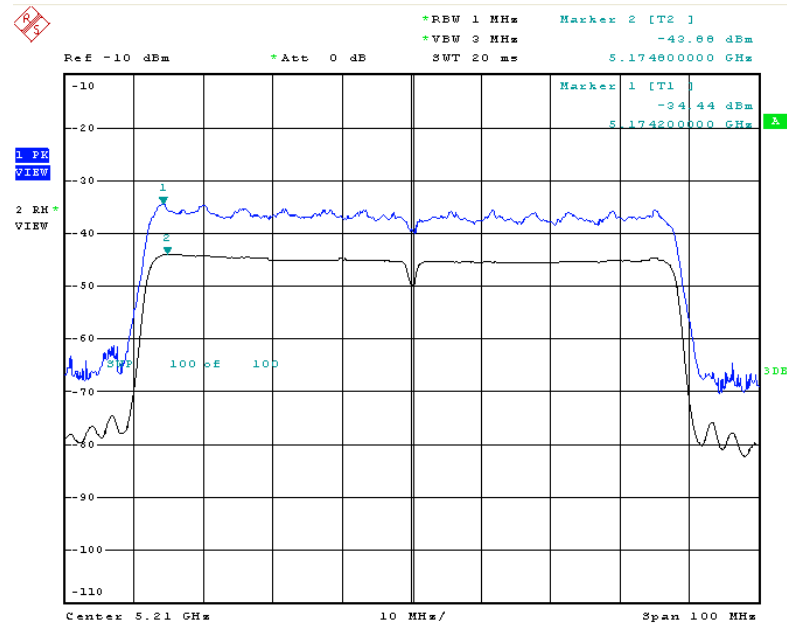


Date: 25.APR.2013 14:34:29

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / 64QAM(MCS5) / 5210 MHz

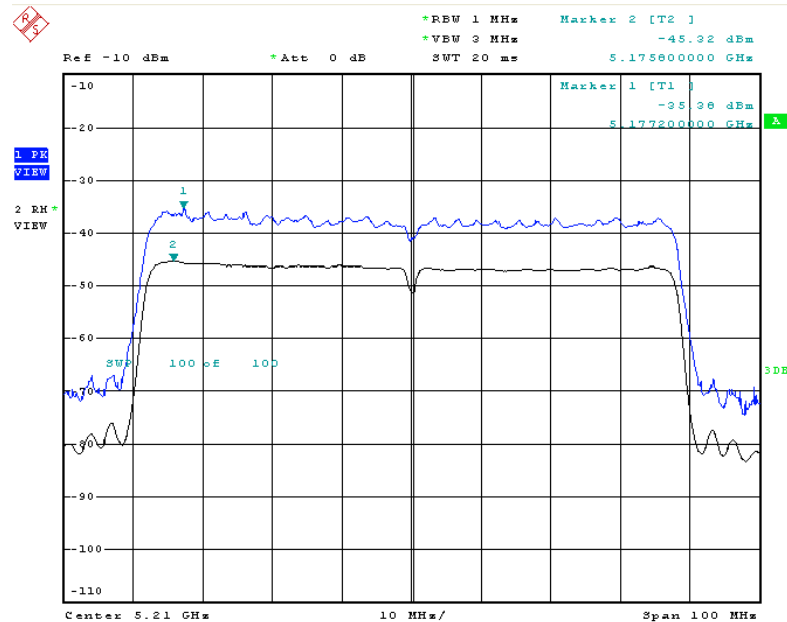


Date: 25.APR.2013 14:35:00

Peak Excursion Plot on Configuration IEEE 802.11ac MCS0/Nss1 80MHz / 256QAM(MCS8)/5210 MHz

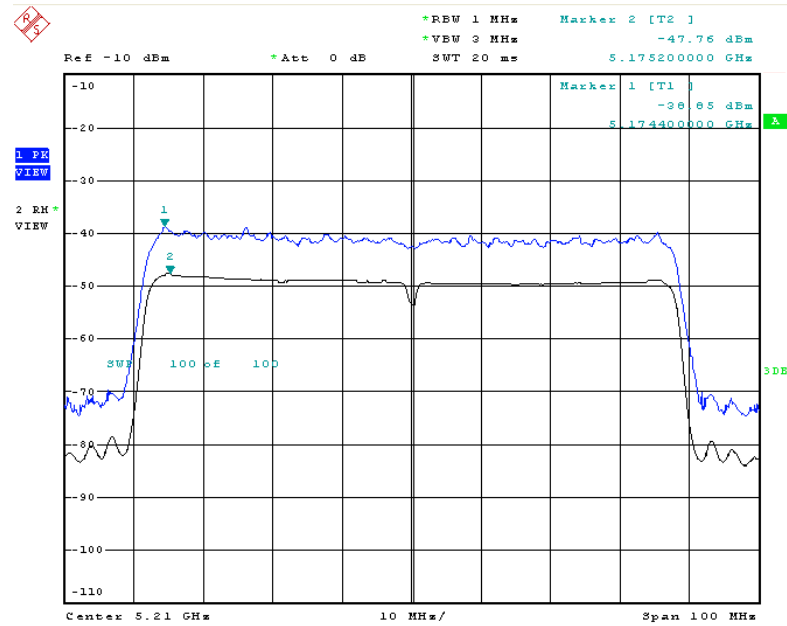


Date: 25.APR.2013 14:35:29

Peak Excursion Plot on Configuration IEEE 802.11a /BSPK(6Mbps) / 5240 MHz

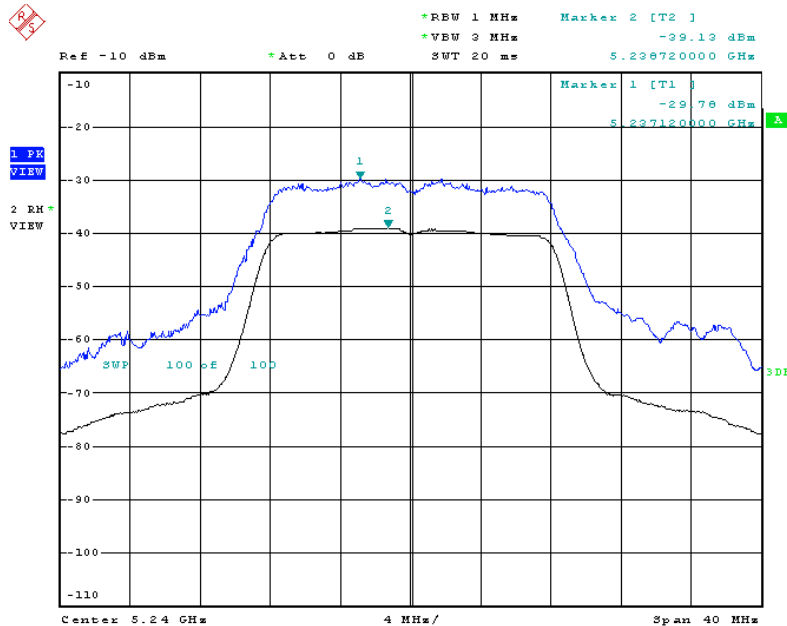


Date: 24.APR.2013 19:34:41

Peak Excursion Plot on Configuration IEEE 802.11a / QPSK(12Mbps) / 5240 MHz

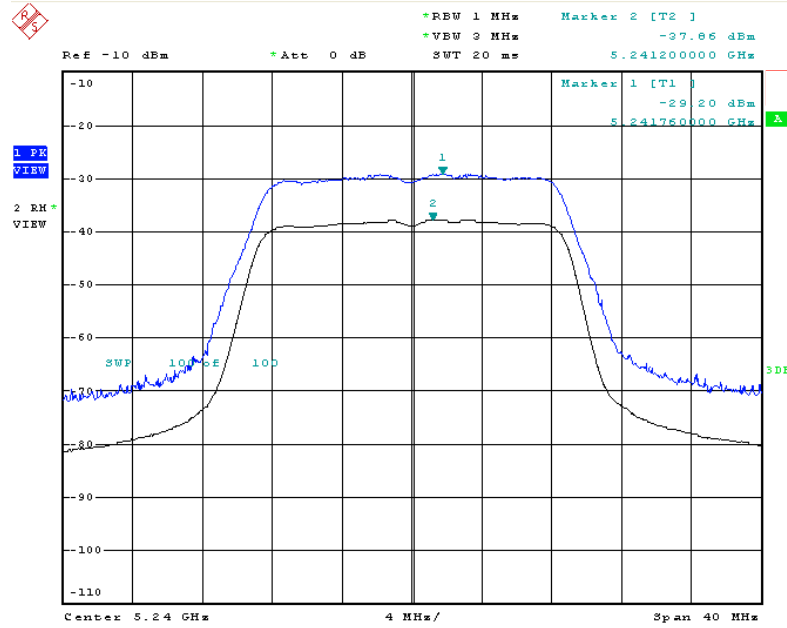


Date: 25.APR.2013 14:53:17

Peak Excursion Plot on Configuration IEEE 802.11a / 16QAM(24Mbps) / 5240 MHz

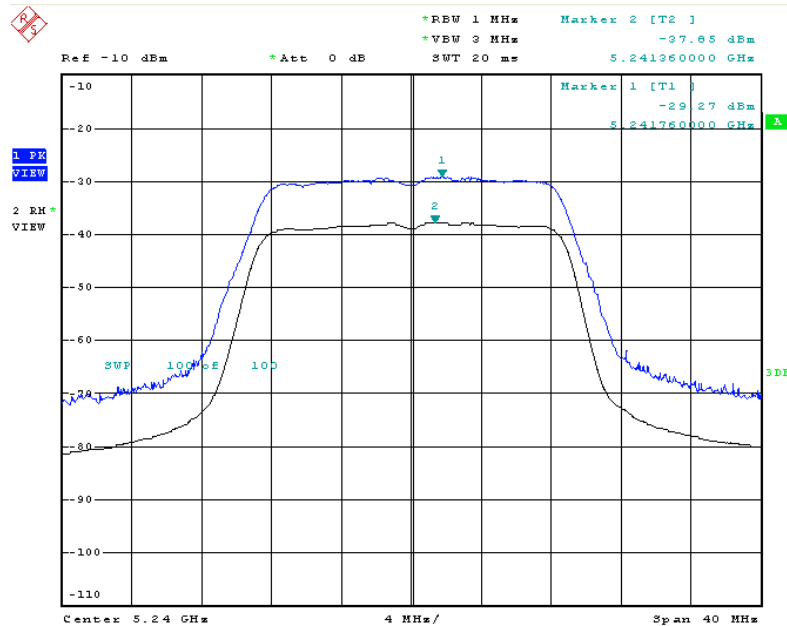

Date: 25.APR.2013 14:53:51

Peak Excursion Plot on Configuration IEEE 802.11a / 64QAM(48Mbps) / 5240 MHz

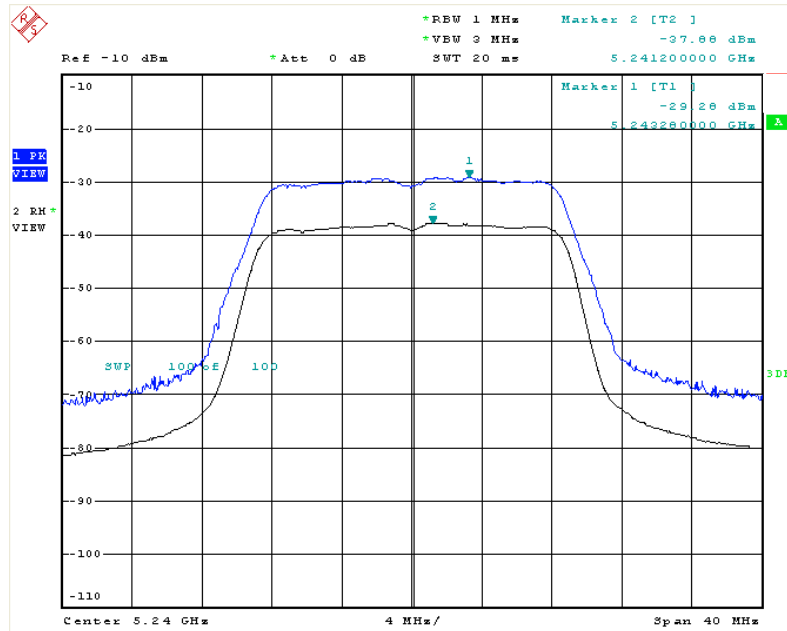

Date: 25.APR.2013 14:54:19

## 4.6. Radiated Emissions Measurement

### 4.6.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. For transmitters operating in the In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.6.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	40 GHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak


Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RBW 200Hz for QP
Start ~ Stop Frequency	150kHz~30MHz / RBW 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RBW 120kHz for QP

#### 4.6.3. Test Procedures


1. Configure the EUT according to ANSI C63.10. The EUT was placed on the top of the turntable 0.8 meter above ground. The phase center of the receiving antenna mounted on the top of a height-variable antenna tower was placed 3 meters far away from the turntable.
2. Power on the EUT and all the supporting units. The turntable was rotated by 360 degrees to determine the position of the highest radiation.
3. The height of the broadband receiving antenna was varied between one meter and four meters above ground to find the maximum emissions field strength of both horizontal and vertical polarization.
4. For each suspected emissions, the antenna tower was scan (from 1 M to 4 M) and then the turntable was rotated (from 0 degree to 360 degrees) to find the maximum reading.
5. Set the test-receiver system to Peak or CISPR quasi-peak Detect Function with specified bandwidth under Maximum Hold Mode.
6. For emissions above 1GHz, use 1MHz VBW and RBW for peak reading. Then 1MHz RBW and 10Hz VBW for average reading in spectrum analyzer.
7. When the radiated emissions limits are expressed in terms of the average value of the emissions, and pulsed operation is employed, the measurement field strength shall be determined by averaging over one complete pulse train, including blanking intervals, as long as the pulse train does not exceed 0.1 seconds. As an alternative (provided the transmitter operates for longer than 0.1 seconds) or in cases where the pulse train exceeds 0.1 seconds, the measured field strength shall be determined from the average absolute voltage during a 0.1 second interval during which the field strength is at its maximum value.
8. If the emissions level of the EUT in peak mode was 3 dB lower than the average limit specified, then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions which do not have 3 dB margin will be repeated one by one using the quasi-peak method for below 1GHz.
9. For testing above 1GHz, the emissions level of the EUT in peak mode was lower than average limit (that means the emissions level in peak mode also complies with the limit in average mode), then testing will be stopped and peak values of EUT will be reported, otherwise, the emissions will be measured in average mode again and reported.
10. In case the emission is lower than 30MHz, loop antenna has to be used for measurement and the recorded data should be QP measured by receiver. High – Low scan is not required in this case.

#### 4.6.4. Test Setup Layout

For radiated emissions below 1GHz

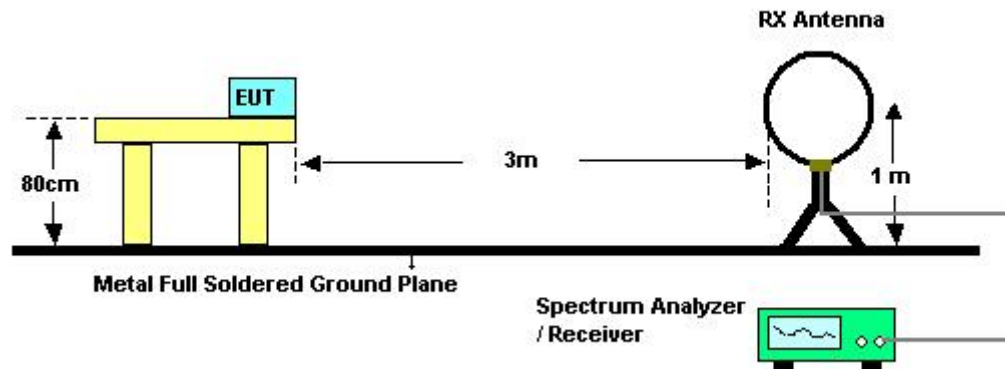

For radiated emissions above 1GHz

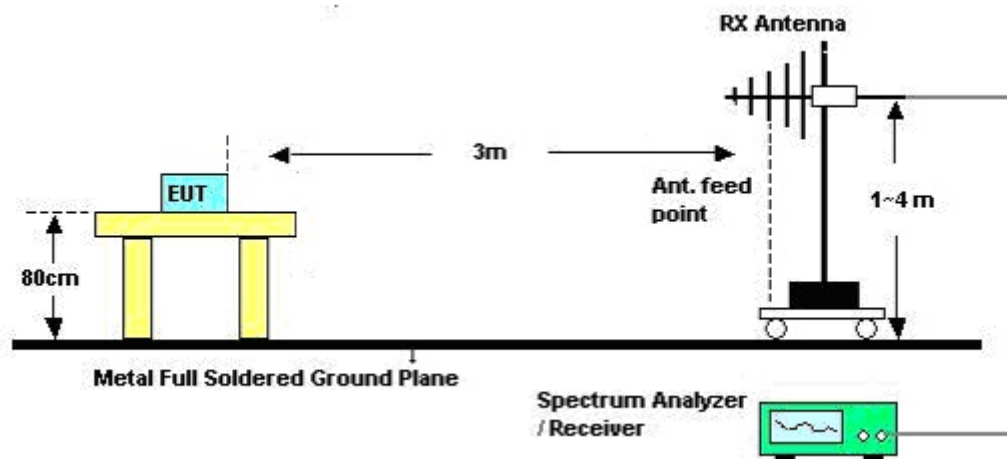

#### 4.6.5. Test Deviation

There is no deviation with the original standard.

#### 4.6.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



#### 4.6.7. Results of Radiated Emissions (9kHz~30MHz)

<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Jim Huang	<b>Configurations</b>	Normal Link
<b>Test Date</b>	Feb. 05, 2013		

<b>Freq. (MHz)</b>	<b>Level (dBuV)</b>	<b>Over Limit (dB)</b>	<b>Limit Line (dBuV)</b>	<b>Remark</b>
-	-	-	-	See Note

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.


Distance extrapolation factor =  $40 \log (\text{specific distance} / \text{test distance})$  (dB);

Limit line = specific limits (dBuV) + distance extrapolation factor.

## 4.6.8. Results of Radiated Emissions (30MHz~1GHz)


Temperature	26°C	Humidity	60%
Test Engineer	Jim Huang	Configurations	Normal Link

Horizontal

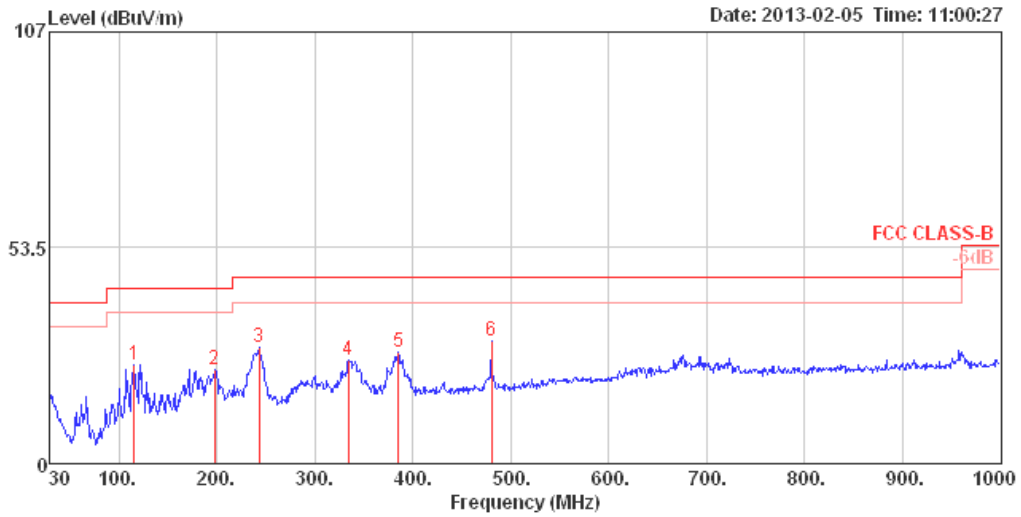

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	115.36	24.58	43.50	-18.92	43.37	1.27	11.49	31.55	300	316	HORIZONTAL Peak
2	197.81	23.25	43.50	-20.25	44.32	1.69	8.75	31.51	125	303	HORIZONTAL Peak
3	243.40	28.66	46.00	-17.34	47.05	1.87	11.20	31.46	100	2	HORIZONTAL Peak
4	334.58	25.58	46.00	-20.42	40.86	2.27	13.84	31.39	100	360	HORIZONTAL Peak
5	385.02	27.49	46.00	-18.51	41.28	2.46	15.20	31.45	100	304	HORIZONTAL Peak
6 pp	480.08	30.36	46.00	-15.64	42.03	2.72	16.81	31.20	125	40	HORIZONTAL Peak

*Vertical*

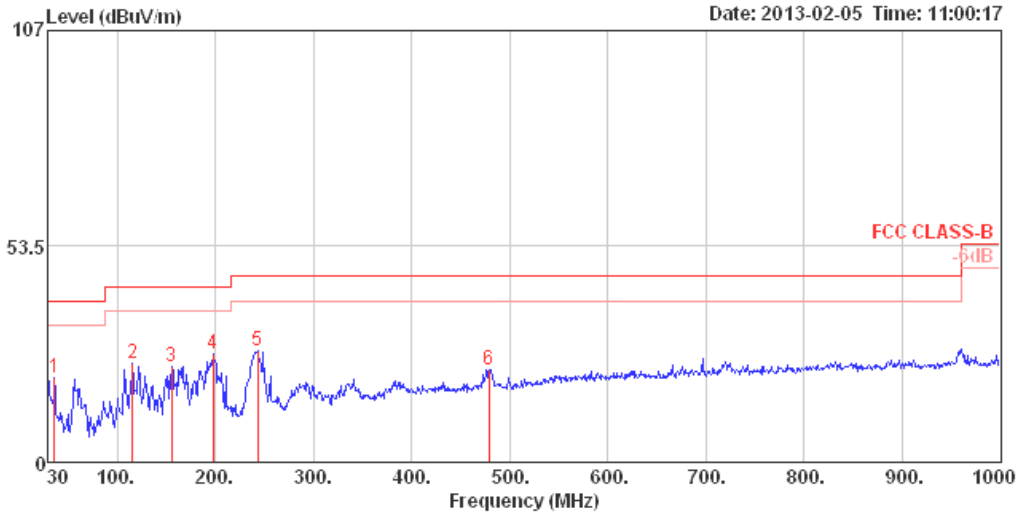

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	A/Pos	T/Pos	Pol/Phase	Remark
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg		
1	35.82	20.87	40.00	-19.13	37.43	0.70	14.62	31.88	150	286	VERTICAL	Peak
2	115.36	24.35	43.50	-19.15	43.14	1.27	11.49	31.55	100	228	VERTICAL	Peak
3	155.13	23.72	43.50	-19.78	44.04	1.50	9.75	31.57	100	287	VERTICAL	Peak
4	pp 197.81	26.66	43.50	-16.84	47.73	1.69	8.75	31.51	150	249	VERTICAL	Peak
5	243.40	27.63	46.00	-18.37	46.02	1.87	11.20	31.46	100	307	VERTICAL	Peak
6	479.11	23.09	46.00	-22.91	34.77	2.72	16.80	31.20	125	285	VERTICAL	Peak

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.



4.6.9. Results for Radiated Emissions (1GHz~40GHz)

Temperature	26°C	Humidity	60%
Test Engineer	Jim Huang	Configurations	IEEE 802.1ac MCS0/Nss1 20MHz Ch 36
Test Date	Mar. 14, 2013		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15540.00	39.34	54.00	-14.66	30.87	6.13	37.65	35.31	Average	100	283	HORIZONTAL
2	15540.00	50.06	74.00	-23.94	41.59	6.13	37.65	35.31	Peak	100	283	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15540.74	41.52	54.00	-12.48	33.01	6.13	37.69	35.31	Average	100	175	VERTICAL
2	15540.74	50.93	74.00	-23.07	42.42	6.13	37.69	35.31	Peak	100	175	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Jim Huang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 20MHz Ch 40
<b>Test Date</b>	Mar. 14, 2013		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15600.00	39.70	54.00	-14.30	31.31	6.13	37.60	35.34	Average	101	219	HORIZONTAL
2	15600.00	50.08	74.00	-23.92	41.69	6.13	37.60	35.34	Peak	101	219	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15600.00	42.83	54.00	-11.17	34.44	6.13	37.60	35.34	Average	100	279	VERTICAL
2	15600.00	54.89	74.00	-19.11	46.50	6.13	37.60	35.34	Peak	100	279	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Jim Huang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 20MHz Ch 48
<b>Test Date</b>	Mar. 14, 2013		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10478.24	68.02	68.30	-0.28	60.15	5.00	38.39	35.52	Peak	100	204	HORIZONTAL
2	15718.48	40.49	54.00	-13.51	32.26	6.14	37.48	35.39	Average	100	300	HORIZONTAL
3	15718.48	53.28	74.00	-20.72	45.05	6.14	37.48	35.39	Peak	100	300	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10478.00	63.65	68.30	-4.65	55.77	5.00	38.40	35.52	Peak	101	300	VERTICAL
2	15718.40	42.72	54.00	-11.28	34.49	6.14	37.48	35.39	Average	100	290	VERTICAL
3	15718.40	54.22	74.00	-19.78	45.99	6.14	37.48	35.39	Peak	100	290	VERTICAL



<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Jim Huang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 40MHz Ch 38
<b>Test Date</b>	Mar. 14, 2013		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15570.00	37.68	54.00	-16.32	29.25	6.13	37.63	35.33	Average	100	187	HORIZONTAL
2	15570.00	46.85	74.00	-27.15	38.42	6.13	37.63	35.33	Peak	100	187	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15570.00	37.39	54.00	-16.61	28.94	6.13	37.65	35.33	Average	100	120	VERTICAL
2	15570.00	47.68	74.00	-26.32	39.23	6.13	37.65	35.33	Peak	100	120	VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac MCS0/Nss1 40MHz Ch 46
Test Date	Mar. 14, 2013		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15690.00	37.40	54.00	-16.60	29.12	6.14	37.51	35.37	Average	100	168	HORIZONTAL
2	15690.00	48.68	74.00	-25.32	40.40	6.14	37.51	35.37	Peak	100	168	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15690.00	38.10	54.00	-15.90	29.82	6.14	37.51	35.37	Average	100	269	VERTICAL
2	15690.00	48.99	74.00	-25.01	40.71	6.14	37.51	35.37	Peak	100	269	VERTICAL





<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Jim Huang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 80MHz Ch 42
<b>Test Date</b>	Mar. 14, 2013		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15630.00	37.49	54.00	-16.51	29.14	6.14	37.56	35.35	Average	100	202	HORIZONTAL
2	15630.00	47.80	74.00	-26.20	39.45	6.14	37.56	35.35	Peak	100	202	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	15630.00	37.18	54.00	-16.82	28.83	6.14	37.56	35.35	Average	100	106	VERTICAL
2	15630.00	47.95	74.00	-26.05	39.60	6.14	37.56	35.35	Peak	100	106	VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a Ch 36
Test Date	Mar. 14, 2013		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10361.92	42.81	54.00	-11.19	35.09	4.97	38.37	35.62	Average	100	360	HORIZONTAL
2	10362.08	54.93	74.00	-19.07	47.21	4.97	38.37	35.62	Peak	100	360	HORIZONTAL
3	15536.99	38.69	54.00	-15.31	30.18	6.13	37.67	35.29	Average	100	225	HORIZONTAL
4	15538.93	51.13	74.00	-22.87	42.66	6.13	37.65	35.31	Peak	100	225	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10358.80	53.55	74.00	-20.45	45.83	4.97	38.37	35.62	Peak	100	110	VERTICAL
2	10360.08	40.79	54.00	-13.21	33.07	4.97	38.37	35.62	Average	100	110	VERTICAL
3	15542.12	51.02	74.00	-22.98	42.51	6.13	37.69	35.31	Peak	100	189	VERTICAL
4	15543.32	38.73	54.00	-15.27	30.22	6.13	37.69	35.31	Average	100	189	VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a Ch 40
Test Date	Mar. 14, 2013		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10401.84	65.73	74.00	-8.27	57.95	4.98	38.38	35.58	Peak	100	186	HORIZONTAL
2	10402.00	51.61	54.00	-2.39	43.83	4.98	38.38	35.58	Average	100	186	HORIZONTAL
3	15603.40	38.48	54.00	-15.52	30.09	6.13	37.60	35.34	Average	100	108	HORIZONTAL
4	15604.62	51.49	74.00	-22.51	43.10	6.13	37.60	35.34	Peak	100	108	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10400.16	48.97	54.00	-5.03	41.19	4.98	38.38	35.58	Average	100	110	VERTICAL
2	10401.76	62.56	74.00	-11.44	54.78	4.98	38.38	35.58	Peak	100	110	VERTICAL
3	15596.73	38.52	54.00	-15.48	30.13	6.13	37.60	35.34	Average	100	286	VERTICAL
4	15600.30	51.96	74.00	-22.04	43.57	6.13	37.60	35.34	Peak	100	286	VERTICAL



Temperature	26°C	Humidity	60%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a Ch 48
Test Date	Mar. 14, 2013		

*Horizontal*

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10480.80	68.07	68.30	-0.23	60.20	5.00	38.39	35.52	Peak	100	205	HORIZONTAL
2	15719.33	39.91	54.00	-14.09	31.68	6.14	37.48	35.39	Average	100	261	HORIZONTAL
3	15719.52	53.05	74.00	-20.95	44.82	6.14	37.48	35.39	Peak	100	261	HORIZONTAL

*Vertical*

	Freq	Level	Limit Line	Over Limit	Read Level	Cable Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	10474.55	62.07	68.30	-6.23	54.20	5.00	38.39	35.52	Peak	100	111	VERTICAL
2	15719.49	43.63	54.00	-10.37	35.40	6.14	37.48	35.39	Average	100	288	VERTICAL
3	15721.31	55.80	74.00	-18.20	47.57	6.14	37.48	35.39	Peak	100	288	VERTICAL

Note:

The amplitude of spurious emissions that are attenuated by more than 20dB below the permissible value has no need to be reported.

Emission level (dBuV/m) = 20 log Emission level (uV/m).

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level.

## 4.7. Band Edge Emissions Measurement

### 4.7.1. Limit

For transmitters operating in the 5.15-5.35 GHz band: all emissions outside of the 5.15-5.35 GHz band shall not exceed a -27dBm peak limit or average 54dBuV/m and peak 74dBuV/m limits. In addition, In case the emission fall within the restricted band specified on 15.205(a), then the 15.209(a) limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

### 4.7.2. Measuring Instruments and Setting

Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	100 MHz
RBW / VBW (Emission in restricted band)	1MHz / 3MHz for Peak, 1 MHz / 10Hz for Average
RBW / VBW (Emission in non-restricted band)	1MHz / 3MHz for peak

### 4.7.3. Test Procedures

1. The test procedure is the same as section 4.6.3, only the frequency range investigated is limited to 100MHz around bandedges.
2. In case the emission is fail due to the used RB/VB is too wide, marker-delta method of FCC Public Notice DA00-705 will be followed.

#### 4.7.4. Test Setup Layout

This test setup layout is the same as that shown in section 4.6.4.

#### 4.7.5. Test Deviation

There is no deviation with the original standard.

#### 4.7.6. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.



4.7.7. Test Result of Band Edge and Fundamental Emissions

Temperature	26°C	Humidity	60%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac MCS0/Nss1 20MHz Ch 36, 40, 48
Test Date	Mar. 14, 2013		

Channel 36

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.84	70.80	74.00	-3.20	33.70	3.43	33.67	0.00	105	268	VERTICAL
2	5150.00	53.31	54.00	-0.69	16.21	3.43	33.67	0.00	105	268	VERTICAL
3	5179.04	111.30			74.13	3.44	33.73	0.00	105	268	VERTICAL
4	5183.05	101.53			64.36	3.44	33.73	0.00	105	268	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

Channel 40

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5149.36	70.20	74.00	-3.80	33.10	3.43	33.67	0.00	101	268	VERTICAL
2	5150.00	53.88	54.00	-0.12	16.78	3.43	33.67	0.00	101	268	VERTICAL
3	5196.80	107.69			70.48	3.45	33.76	0.00	101	268	VERTICAL
4	5197.12	117.86			80.65	3.45	33.76	0.00	101	268	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

Channel 48

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB	cm	deg	
1	5150.00	47.29	54.00	-6.71	10.19	3.43	33.67	0.00	100	321	VERTICAL
2	5150.00	61.72	74.00	-12.28	24.62	3.43	33.67	0.00	100	321	VERTICAL
3	5237.44	108.43			71.15	3.46	33.82	0.00	100	321	VERTICAL
4	5241.28	119.86			82.58	3.46	33.82	0.00	100	321	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level

Temperature	26°C	Humidity	60%
Test Engineer	Jim Huang	Configurations	IEEE 802.11ac MCS0/Nss1 40MHz Ch 38, 46
Test Date	Mar. 14, 2013		

### Channel 38

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	53.06	54.00	-0.94	15.96	3.43	33.67	0.00	Average	101	321	VERTICAL
2	5150.00	69.30	74.00	-4.70	32.20	3.43	33.67	0.00	Peak	101	321	VERTICAL
3	5191.60	97.94			60.77	3.44	33.73	0.00	Average	101	321	VERTICAL
4	5200.26	107.66			70.45	3.45	33.76	0.00	Peak	101	321	VERTICAL

Item 3, 4 are the fundamental frequency at 5190 MHz.

### Channel 46

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	53.48	54.00	-0.52	16.38	3.43	33.67	0.00	Average	101	321	VERTICAL
2	5150.00	70.20	74.00	-3.80	33.10	3.43	33.67	0.00	Peak	101	321	VERTICAL
3	5231.60	104.11			66.83	3.46	33.82	0.00	Average	101	321	VERTICAL
4	5233.85	113.90			76.62	3.46	33.82	0.00	Peak	101	321	VERTICAL

Item 3, 4 are the fundamental frequency at 5230 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level





<b>Temperature</b>	26°C	<b>Humidity</b>	60%
<b>Test Engineer</b>	Jim Huang	<b>Configurations</b>	IEEE 802.11ac MCS0/Nss1 80MHz Ch 42
<b>Test Date</b>	Mar. 14, 2013		

**Channel 42**

	Freq	Level	Limit	Over	Read	Cable	Antenna	Preamp	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	53.89	54.00	-0.11	16.79	3.43	33.67	0.00	Average	103	268	VERTICAL
2	5150.00	68.30	74.00	-5.70	31.20	3.43	33.67	0.00	Peak	103	268	VERTICAL
3	5174.74	92.31			55.17	3.44	33.70	0.00	Average	103	268	VERTICAL
4	5176.35	101.46			64.32	3.44	33.70	0.00	Peak	103	268	VERTICAL

Item 3, 4 are the fundamental frequency at 5210 MHz.

Note:

Emission level (dBuV/m) = 20 log Emission level (uV/m)

Corrected Reading: Antenna Factor + Cable Loss + Read Level - Preamp Factor = Level



Temperature	26°C	Humidity	60%
Test Engineer	Jim Huang	Configurations	IEEE 802.11a Ch 36, 40, 48
Test Date	Mar. 14, 2013		

**Channel 36**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5148.56	70.88	74.00	-3.12	33.78	3.43	33.67	0.00	Peak	102	268	VERTICAL
2	5150.00	53.86	54.00	-0.14	16.76	3.43	33.67	0.00	Average	102	268	VERTICAL
3	5181.12	104.91			67.74	3.44	33.73	0.00	Average	102	268	VERTICAL
4	5183.37	114.42			77.25	3.44	33.73	0.00	Peak	102	268	VERTICAL

Item 3, 4 are the fundamental frequency at 5180 MHz.

**Channel 40**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5150.00	53.77	54.00	-0.23	16.67	3.43	33.67	0.00	Average	102	267	VERTICAL
2	5150.00	69.75	74.00	-4.25	32.65	3.43	33.67	0.00	Peak	102	267	VERTICAL
3	5197.12	117.64			80.43	3.45	33.76	0.00	Peak	102	267	VERTICAL
4	5199.36	108.19			70.98	3.45	33.76	0.00	Average	102	267	VERTICAL

Item 3, 4 are the fundamental frequency at 5200 MHz.

**Channel 48**

	Freq	Level	Limit Line	Over Limit	Read Level	CableAntenna Loss	Antenna Factor	Preamp Factor	Remark	A/Pos	T/Pos	Pol/Phase
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB	dB/m	dB		cm	deg	
1	5149.52	54.61	74.00	-19.39	17.51	3.43	33.67	0.00	Peak	100	88	VERTICAL
2	5150.00	42.39	54.00	-11.61	5.29	3.43	33.67	0.00	Average	100	88	VERTICAL
3	5241.44	106.76			69.48	3.46	33.82	0.00	Average	100	88	VERTICAL
4	5247.21	117.15			79.84	3.46	33.85	0.00	Peak	100	88	VERTICAL
5	5350.00	43.17	54.00	-10.83	5.65	3.49	34.03	0.00	Average	100	88	VERTICAL
6	5350.00	53.95	74.00	-20.05	16.43	3.49	34.03	0.00	Peak	100	88	VERTICAL

Item 3, 4 are the fundamental frequency at 5240 MHz.

Note:

$$\text{Emission level (dBuV/m)} = 20 \log \text{Emission level (uV/m)}$$

$$\text{Corrected Reading: Antenna Factor} + \text{Cable Loss} + \text{Read Level} - \text{Preamp Factor} = \text{Level}$$

## 4.8. Frequency Stability Measurement

### 4.8.1. Limit

In-band emission is maintained within the band of operation under all conditions of normal operation as specified in the user’s manual.

The transmitter center frequency tolerance shall be  $\pm 20$  ppm maximum for the 5 GHz band (IEEE 802.11n specification).

### 4.8.2. Measuring Instruments and Setting


Please refer to section 5 of equipments list in this report. The following table is the setting of the spectrum analyzer.

Spectrum Parameter	Setting
Attenuation	Auto
Span Frequency	Entire absence of modulation emissions bandwidth
RBW	10 kHz
VBW	10 kHz
Sweep Time	Auto

### 4.8.3. Test Procedures

1. The transmitter output (antenna port) was connected to the spectrum analyzer.
2. EUT have transmitted absence of modulation signal and fixed channelize.
3. Set the spectrum analyzer span to view the entire absence of modulation emissions bandwidth.
4. Set RBW = 10 kHz, VBW = 10 kHz with peak detector and maxhold settings.
5.  $f_c$  is declaring of channel frequency. Then the frequency error formula is  $(f_c - f) / f_c \times 10^6$  ppm and the limit is less than  $\pm 20$  ppm (IEEE 802.11n specification).
6. The test extreme voltage is to change the primary supply voltage from 85 to 115 percent of the nominal value
7. Extreme temperature rule is  $-30^\circ\text{C} \sim 50^\circ\text{C}$ .

### 4.8.4. Test Setup Layout

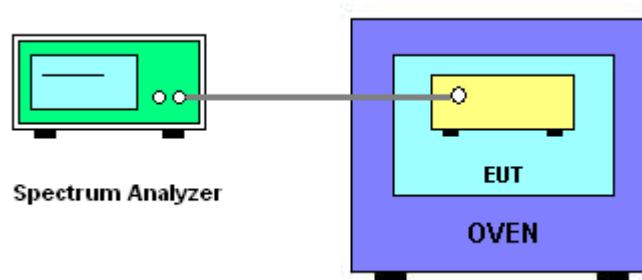

#### 4.8.5. Test Deviation

There is no deviation with the original standard.

#### 4.8.6. EUT Operation during Test

The EUT was programmed to be in continuously un-modulation transmitting mode.

#### 4.8.7. Test Result of Frequency Stability

##### Voltage vs. Frequency Stability

Voltage	Measurement Frequency (MHz)
(V)	5200
126.50	5200.0084
110.00	5200.0062
93.50	5200.0076
Max. Deviation (MHz)	0.008400
Max. Deviation (ppm)	1.62

##### Temperature vs. Frequency Stability

Temperature	Measurement Frequency (MHz)
(°C)	5200
-30	5199.9940
-20	5199.9942
-10	5199.9938
0	5199.9956
10	5199.9938
20	5199.9944
30	5200.0320
40	5200.0242
50	5200.0228
Max. Deviation (MHz)	0.032000
Max. Deviation (ppm)	6.15

## 4.9. Antenna Requirements

### 4.9.1. Limit

Except for special regulations, the Low-power Radio-frequency Devices must not be equipped with any jacket for installing an antenna with extension cable. An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that the user can replace a broken antenna, but the use of a standard antenna jack or electrical connector is prohibited. Further, this requirement does not apply to intentional radiators that must be professionally installed.

### 4.9.2. Antenna Connector Construction

Please refer to section 3.3 in this test report; antenna connector complied with the requirements.

## 5. LIST OF MEASURING EQUIPMENTS

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
EMI Test Receiver	R&S	ESCS 30	100377	9kHz ~ 2.75GHz	Sep. 14, 2012	Conduction (CO01-CB)
LISN	F.C.C.	FCC-LISN-50-16-2	04083	150kHz ~ 100MHz	Nov. 14, 2012	Conduction (CO01-CB)
V- LISN	Schwarzbeck	NSLK 8127	8127-478	9K ~ 30MHz	Jun. 22, 2012	Conduction (CO01-CB)
PULSE LIMITER	R&S	ESH3-Z2	100430	9K-30MHz	Feb. 03, 2013	Conduction (CO01-CB)
COND Cable	Woken	Cable	01	0.15MHz~30MHz	Dec. 04, 2012	Conduction (CO01-CB)
BILOG ANTENNA	Schaffner	CBL6112D	22021	20MHz ~ 2GHz	Dec. 04, 2012	Radiation (03CH01-CB)
Loop Antenna	Teseq	HLA 6120	24155	9 kHz - 30 MHz	Nov. 05, 2012*	Radiation (03CH01-CB)
Horn Antenna	EMCO	3115	00075790	750MHz~18GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Horn Antenna	SCHWARZBEAK	BBHA 9170	BBHA9170252	15GHz ~ 40GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8447D	2944A10991	0.1MHz ~ 1.3GHz	Nov. 27, 2012	Radiation (03CH01-CB)
Pre-Amplifier	Agilent	8449B	3008A02310	1GHz ~ 26.5GHz	Nov. 23, 2012	Radiation (03CH01-CB)
Pre-Amplifier	WM	TF-130N-R1	923365	26.5GHz ~ 40GHz	Jul. 31, 2012	Radiation (03CH01-CB)
Spectrum analyzer	R&S	FSP40	100056	9KHz~40GHz	Nov. 16, 2012	Radiation (03CH01-CB)
EMI Test Receiver	R&S	ESCS 30	100355	9KHz ~ 2.75GHz	Nov. 16, 2012	Radiation (03CH01-CB)
Turn Table	INN CO	CO 2000	N/A	0 ~ 360 degree	N.C.R	Radiation (03CH01-CB)
Antenna Mast	INN CO	CO2000	N/A	1 m - 4 m	N.C.R	Radiation (03CH01-CB)
RF Cable-low	Woken	Low Cable-1	N/A	30 MHz - 1 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-1	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-2	N/A	1 GHz – 26.5 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-3	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
RF Cable-high	Woken	High Cable-4	N/A	1 GHz - 40 GHz	Nov. 18, 2012	Radiation (03CH01-CB)
Signal analyzer	R&S	FSV40	100979	9KHz~40GHz	Oct. 08, 2012	Conducted (TH01-CB)
Temp. and Humidity Chamber	Ten Billion	TTH-D3SP	TBN-931011	-30~100 degree	Jun. 05, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	2 Way	0120A02056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Power Divider	Woken	3 Way	MDC2366	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)



Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Calibration Date	Remark
RF Power Divider	Woken	4 Way	0120A04056002D	2GHz ~ 18GHz	Nov. 18, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-7	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-8	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-9	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-10	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
RF Cable-high	Woken	High Cable-11	-	1 GHz – 26.5 GHz	Nov. 19, 2012	Conducted (TH01-CB)
Power Sensor	Anritsu	MA2411B	0917223	300MHz~40GHz	Nov. 28, 2012	Conducted (TH01-CB)
Power Meter	Anritsu	ML2495A	1035008	300MHz~40GHz	Nov. 27, 2012	Conducted (TH01-CB)

Note: Calibration Interval of instruments listed above is one year.

“\*\*” Calibration Interval of instruments listed above is two years.

NCR means Non-Calibration required.

## 6. TEST LOCATION

SHIJR	ADD : 6Fl., No. 106, Sec. 1, Shintai 5th Rd., Shijr City, Taipei, Taiwan 221, R.O.C. TEL : 886-2-2696-2468 FAX : 886-2-2696-2255
HWA YA	ADD : No. 52, Hwa Ya 1st Rd., Kwei-Shan Hsiang, Tao Yuan Hsien, Taiwan, R.O.C. TEL : 886-3-327-3456 FAX : 886-3-318-0055
LINKOU	ADD : No. 30-2, Dingfu Tsuen, Linkou Shiang, Taipei, Taiwan 244, R.O.C TEL : 886-2-2601-1640 FAX : 886-2-2601-1695
DUNGHU	ADD : No. 3, Lane 238, Kangle St., Neihu Chiu, Taipei, Taiwan 114, R.O.C. TEL : 886-2-2631-4739 FAX : 886-2-2631-9740
JUNGHE	ADD : 7Fl., No. 758, Jungjeng Rd., Junghe City, Taipei, Taiwan 235, R.O.C. TEL : 886-2-8227-2020 FAX : 886-2-8227-2626
NEIHU	ADD : 4Fl., No. 339, Hsin Hu 2 <sup>nd</sup> Rd., Taipei 114, Taiwan, R.O.C. TEL : 886-2-2794-8886 FAX : 886-2-2794-9777
JHUBEI	ADD : No.8, Lane 724, Bo-ai St., Jhubei City, HsinChu County 302, Taiwan, R.O.C. TEL : 886-3-656-9065 FAX : 886-3-656-9085



## 7. MEASUREMENT UNCERTAINTY

### Uncertainty of Conducted Emission Measurement (150kHz ~ 30MHz)

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.026	dB	normal(k=2)	0.013
Cable loss	0.002	dB	normal(k=2)	0.001
AMN/LISN specification	1.200	dB	normal(k=2)	0.600
Mismatch Receiver VSWR 1= AMN/LISN VSWR 2=	-0.080	dB	U-shaped	0.060
combined standard uncertainty $Ue(y)$	1.2			
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	2.4			

### Uncertainty of Conducted Emission Measurement

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Cable loss	0.038	dB	normal(k=2)	0.019
Attenuator	0.047	dB	normal(k=2)	0.024
Power Meter specification	0.300	dB	normal(k=2)	0.150
Power Sensor specification	0.300	dB	normal(k=2)	0.150
Mismatch Receiver VSWR 1= Antenna VSWR 2= Pre Amplifier VSWR 3=	-0.080	dB	U-shaped	0.060
combined standard uncertainty $Ue(y)$	0.403			
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	0.806			

**Uncertainty of Radiated Emission Measurement (30MHz ~ 1,000MHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.1727	dB	normal(k=1)	0.1727
Cable loss	0.1736	dB	normal(k=2)	0.0868
Antenna gain	0.1687	dB	normal(k=2)	0.0843
Site imperfection	0.4898	dB	Triangular	0.2
Pre-amplifier gain	0.3661	dB	normal(k=2)	0.183
Transmitter antenna	1.7	dB	rectangular	0.9815
Signal generator	0.5	dB	rectangular	0.2887
Mismatch	0.08	dB	u-shape	0.244
Spectrum analyzer	0.5	dB	rectangular	0.2887
combined standard uncertainty $Ue(y)$	1.1434			
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	2.2869			

**Uncertainty of Radiated Emission Measurement (1GHz ~ 18GHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.1908	dB	normal(k=1)	0.1908
Cable loss	0.1685	dB	normal(k=2)	0.0843
Antenna gain	0.1912	dB	normal(k=2)	0.0956
Site imperfection	1.3091	dB	Triangular	0.5344
Pre-amplifier gain	0.3043	dB	normal(k=2)	0.1521
Transmitter antenna	1.7	dB	rectangular	0.9815
Signal generator	0.5	dB	rectangular	0.2887
Mismatch	0.08	dB	u-shape	0.244
Spectrum analyzer	0.8	dB	rectangular	0.4619
combined standard uncertainty $Ue(y)$	1.2965			
Measuring uncertainty for a level of confidence of 95% $U=2Ue(y)$	2.593			

**Uncertainty of Radiated Emission Measurement (18GHz ~ 40GHz)**

Contribution	Uncertainty of $x_i$			$u(x_i)$
	Value	Unit	Probability Distribution k	
Receiver reading	0.1864	dB	normal(k=1)	0.1864
Cable loss	0.1666	dB	normal(k=2)	0.0833
Antenna gain	0.1904	dB	normal(k=2)	0.0952
Site imperfection	0.4882	dB	Triangular	0.1993
Pre-amplifier gain	0.2688	dB	normal(k=2)	0.1344
Transmitter antenna	1.7	dB	rectangular	0.9815
Signal generator	0.5	dB	rectangular	0.2887
Mismatch	0.08	dB	u-shape	0.244
Spectrum analyzer	0.8	dB	rectangular	0.4619
combined standard uncertainty $U_e(y)$	1.1874			
Measuring uncertainty for a level of confidence of 95% $U=2U_e(y)$	2.3749			