

EMC TEST REPORT

Report No.: TS08100040-EME
Model No.: P-870HW-51a v2, P-870HW-53a v2
P-870HW-51a v2, Telefonica
VDSL2 11g CPE for Telefonica
P-870H-51a v2, P-870H-53a v2
VDSL2 11g Router for Telefonica

Issued Date: Dec. 18, 2008

Applicant: ZyXEL Communications Corporation
6, Innovation Rd II, Science-Based Industrial Park,
Hsin-Chu, Taiwan

**Test Method/
Standard:** 47 CFR FCC Part 15.247 & ANSI C63.4 2003

Test By: Intertek Testing Services Taiwan Ltd.
No. 11, Lane 275, Ko-Nan 1 Street, Chia-Tung Li,
Shiang-Shan District, Hsinchu City, Taiwan

This test report consists of 49 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of Intertek Laboratory. The test result(s) in this report only applies to the tested sample(s).

The test report was prepared by: Sign on File
Sammi Liu/Assistant

These measurements were taken by: Sign on File
Leon Cheng/Engineer

The test report was reviewed by:

Name Jimmie Liu
Title Engineer

Table of Contents

1. Summary of Test Data..... 3

2. General Information 4

3. Maximum 6 dB Bandwidth 7

4. 99 % Occupied Bandwidth 11

5. Maximum Output Power..... 16

6. Power Spectral Density 18

7. RF Antenna conducted Spurious..... 23

8. Radiated Spurious Emission 33

9. Emission on Band Edge..... 38

Appendix A: Test Equipment List..... 38

1. Summary of Test Data

Test/Requirement Description	Applicable Rule	Result
Minimum 6 dB Bandwidth	15.247(a)(2)	Pass
Maximum Output Power	15.247(b)	Pass
Power Spectral Density	15.247(e)	Pass
RF Antenna Conducted Spurious	15.247(d)	Pass
Radiated Spurious Emission	15.247(d), 15.205, 15.209	Pass
Emission on the Band Edge	15.247(d)	Pass
AC Power Line Conducted Emission	15.207	Pass

2. General Information

Identification of the EUT

Applicant:	ZyXEL Communications Corporation
Product:	802.11bg Wireless VDSL2 4-Port Gateway
Model No.:	P-870HW-51a v2
FCC ID.:	I88P870HW51AV2
Frequency Range:	2412MHz ~ 2462MHz
Channel Number:	11 channels
Rated Power:	DC 12 V from adapter (LEI, MU12-2120100-A1) I/P: 100-240 Vac, 50/60 Hz
Power Cord:	N/A
Data Cable:	1.RJ-45 UTP Cat.5 10 meter × 4 2.RJ-11 unshielded cable 10 meter × 1
Sample Received:	Sep. 30, 2008
Test Date(s):	Oct. 06, 2008 ~ Oct. 16, 2008
Note 1:	This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.
Note 2:	When determining the test conclusion, the Measurement Uncertainty of test has been considered.

Description of EUT

The EUT is an 802.11bg Wireless VDSL2 4-Port Gateway, and was defined as information technology equipment.

The customer confirmed the models listed as below are series model to model P-870HW-51a v2 (EUT), the difference between main model and series model are listed as below.

Trade Name	Model Number	Differential
ZyXEL	P-870HW-51a v2	VDSL2 router, over POTS version
ZyXEL	P-870HW-53a v2	Same as P-870HW-51a v2, but change to over ISDN version
Telefonica	P-870HW-51a v2, Telefonica	Same as P-870HW-51a v2, only different model/trade name for market strategy.
Telefonica	VDSL2 11g CPE for Telefonica	Same as P-870HW-51a v2, only different model/trade name for market strategy.
ZyXEL	P-870H-51a v2	Same as P-870HW-51a v2, but remove the wireless module
ZyXEL	P-870H-53a v2	Same as P-870HW-53a v2, but change to over ISDN version
Telefonica	VDSL2 11g Router for Telefonica	Same as P-870HW-51a v2, only different model/trade name for market strategy.

For more detail features, please refer to User's manual as file name "Installation guide.pdf"

Antenna description

The antenna is affixed to the EUT using a unique connector, which allows for replacement of a broken antenna, but DOES NOT use a standard antenna jack or electrical connector.

Antenna Gain : 3dBi max
Antenna Type : Dipole antenna
Connector Type : SMA reverse

Operation mode

The EUT was supplied with DC 12V from adapter (Input voltage: 100-240 Vac, 50/60 Hz) and it was running in normal operating mode.

The EUT was transmitted continuously during the test.

With individual verifying, the maximum output power was found at 1 Mbps data rate for 802.11b mode and 6 Mbps data rate for 802.11g mode. The final tests were executed under these conditions and recorded in this report individually.

11b (ch6 2437 MHz)	
Data rate (Mbps)	PK
1	22.60
2	22.55
5.5	22.50
11	22.40

11g (ch6 2437 MHz)	
Data rate (Mbps)	PK
6	25.58
9	25.54
12	25.50
18	25.52
24	25.51
36	25.45
48	25.42
54	25.44

3. Maximum 6 dB Bandwidth

Name of Test	Maximum 6 dB Bandwidth
Base Standard	FCC 15.247 (a)(2)


Test Result: Complies
Measurement Data: See Table 1 & plots below

Method of Measurement:

Reference FCC document: KDB558074

A portion of the transmitted signal is coupled to a Spectrum Analyzer with a resolution bandwidth of at least 1 % of the bandwidth of the transmitted signal. The resolution bandwidth is chosen so as not to reduce the peak level of the measured waveform. The appropriate bandwidth mask is applied to the output waveform to verify compliance.

Test Diagram:

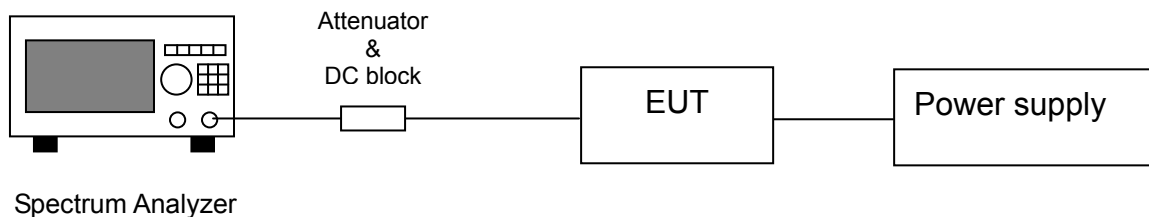


Note: The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps for 802.11b and 6 Mbps for 802.11g. The EUT was tuned to a low, middle and high channel.


Table1. Maximum 6 dB Bandwidth

Mode	Channel	Frequency (MHz)	Bandwidth (MHz)	Min. Limit (MHz)	Pass/Fail
802.11b	1	2412	10.32	0.5	Pass
	6	2437	11.20	0.5	Pass
	11	2462	10.32	0.5	Pass
802.11g	1	2412	16.64	0.5	Pass
	6	2437	16.72	0.5	Pass
	11	2462	16.56	0.5	Pass


6 dB Bandwidth @ 802.11b mode channel 1

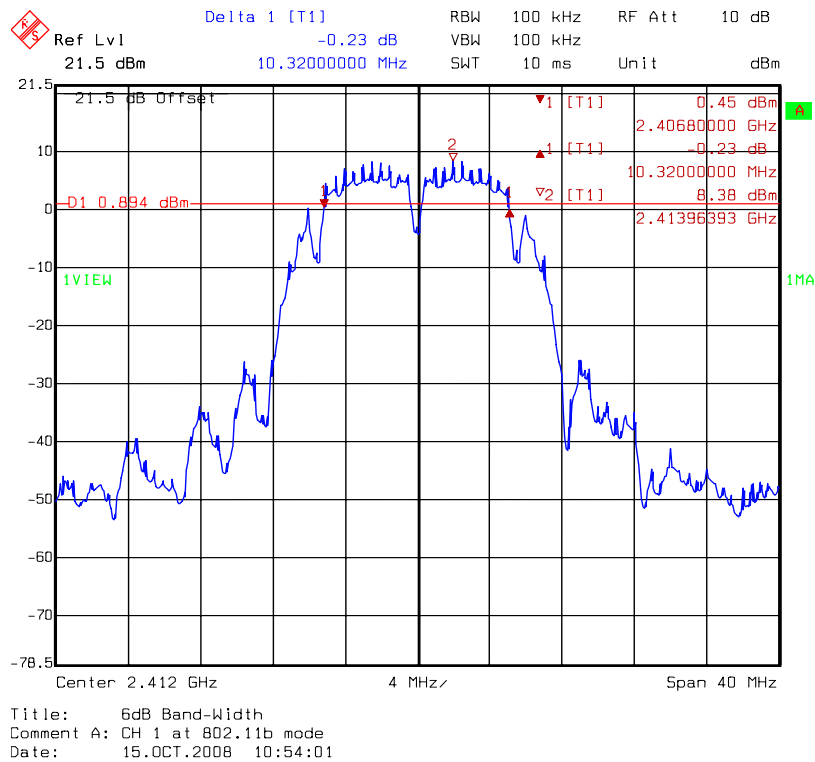


6 dB Bandwidth @ 802.11b mode channel 6

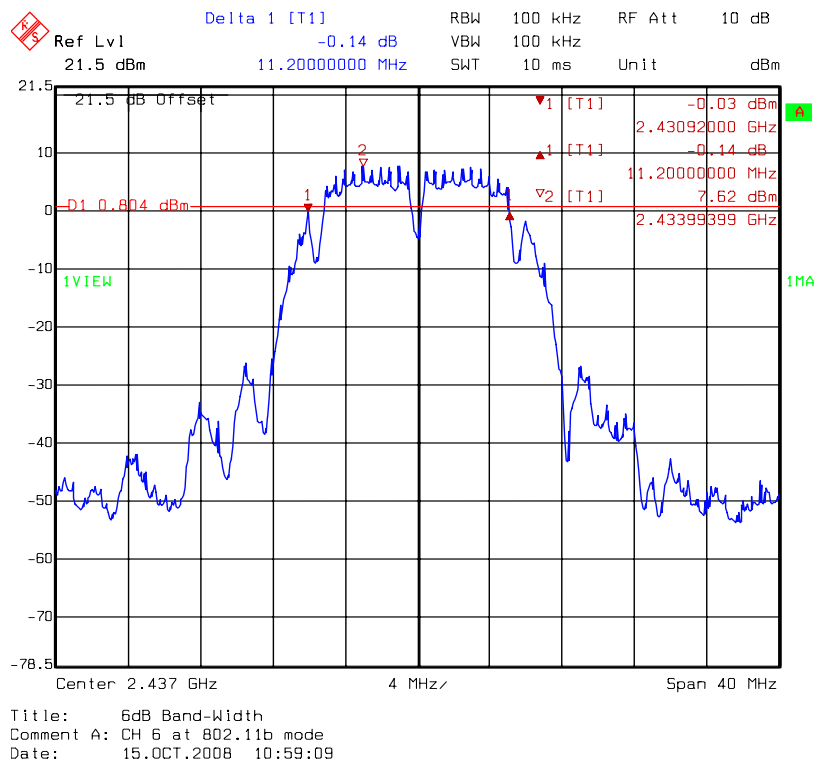


6 dB Bandwidth @ 802.11b mode channel 11

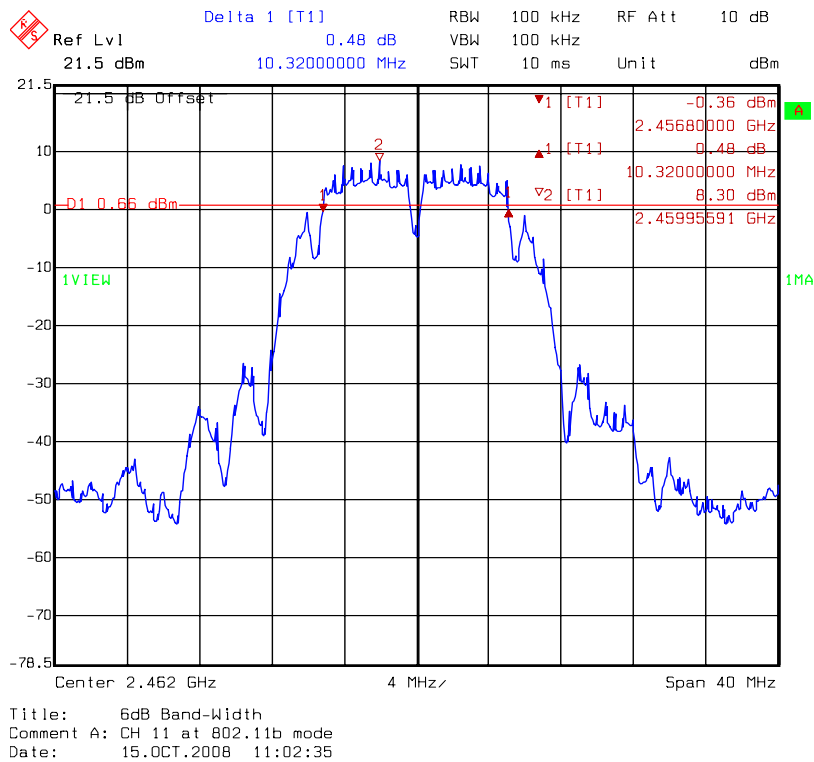


6 dB Bandwidth @ 802.11g mode channel 1

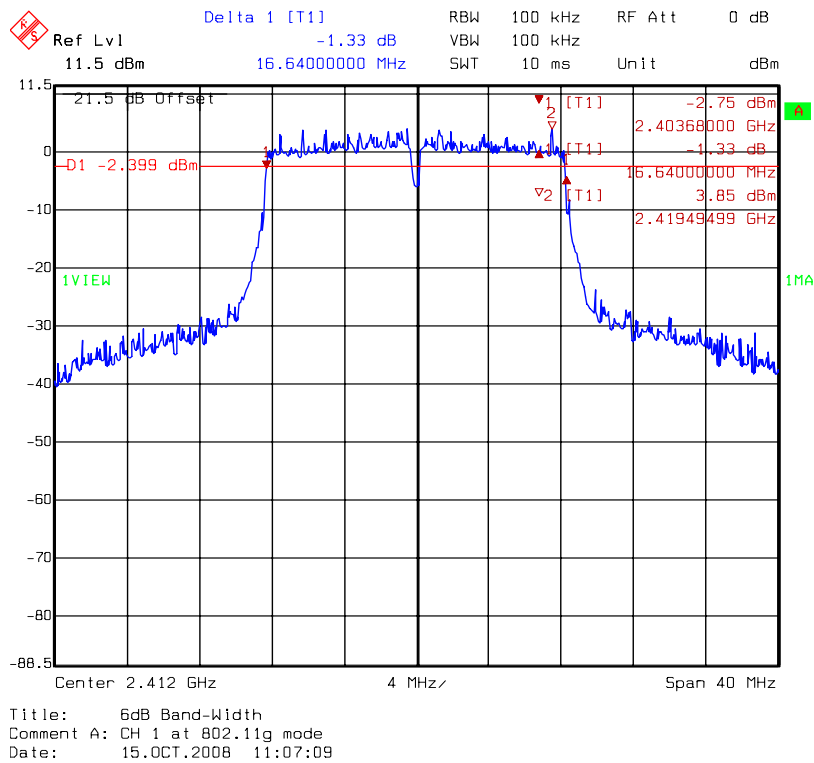

6 dB Bandwidth @ 802.11g mode channel 6

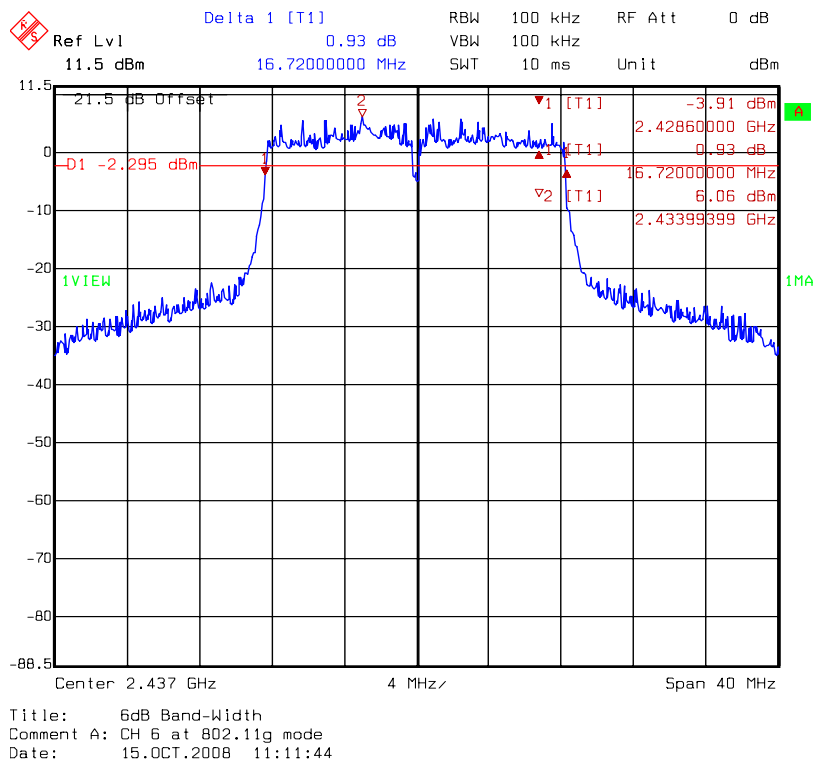

6 dB Bandwidth @ 802.11g mode channel 11

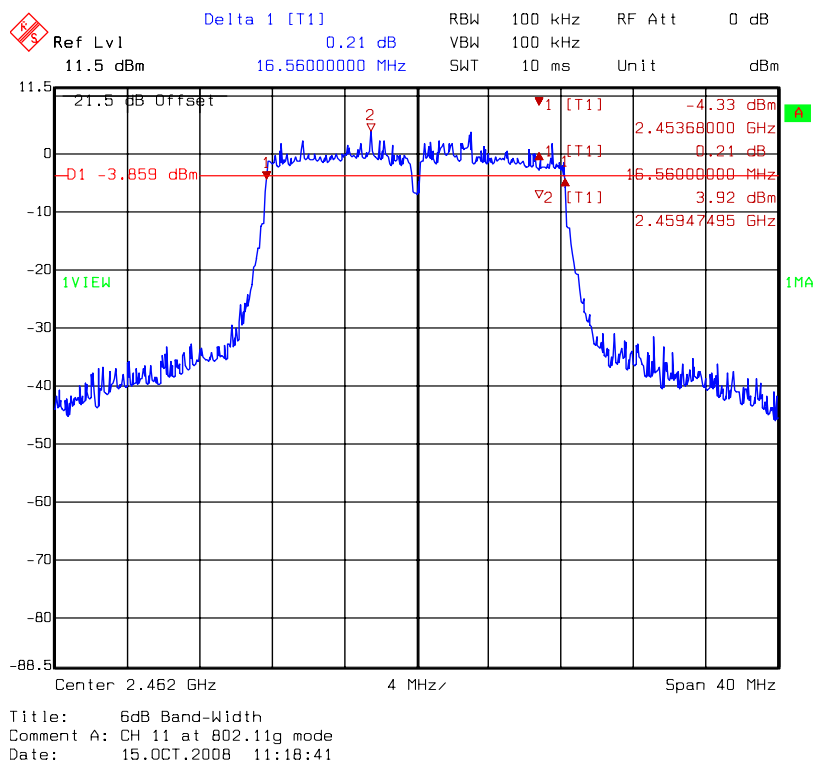

4. 99 % Occupied Bandwidth

Name of Test	99 % Occupied Bandwidth
Base Standard	None; for reporting purposes only


Test Result: Complies
Measurement Data: See Table & plots below

Method of Measurement:

Reference FCC document: KDB558074

A portion of the transmitted signal is coupled to a Spectrum Analyzer with a resolution bandwidth of at least 1 % of the bandwidth of the transmitted signal. The resolution bandwidth is chosen so as not to reduce the peak level of the measured waveform. The appropriate bandwidth mask is applied to the output waveform to verify compliance.

Test Diagram:

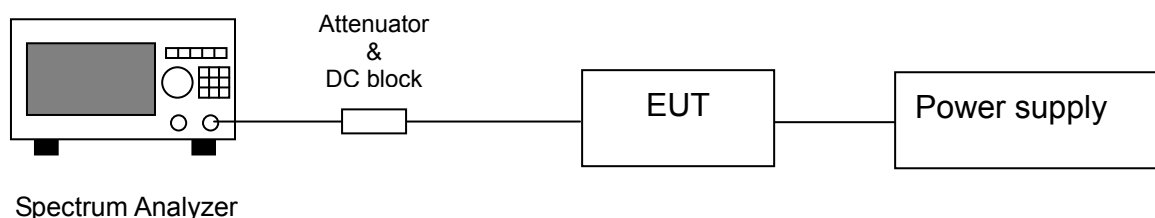

Note: The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps for 802.11b and 6 Mbps for 802.11g. The EUT was tuned to a low, middle and high channel.

Table 2. 99 % Occupied Bandwidth

Mode	Channel	Frequency (MHz)	Occupied Bandwidth (MHz)
802.11b	1	2412	12.67
	6	2437	12.75
	11	2462	12.75
802.11g	1	2412	16.43
	6	2437	16.51
	11	2462	16.51


99 % Occupied Bandwidth @ 802.11b mode channel 1




99 % Occupied Bandwidth @ 802.11b mode channel 6




99 % Occupied Bandwidth @ 802.11b mode channel 11

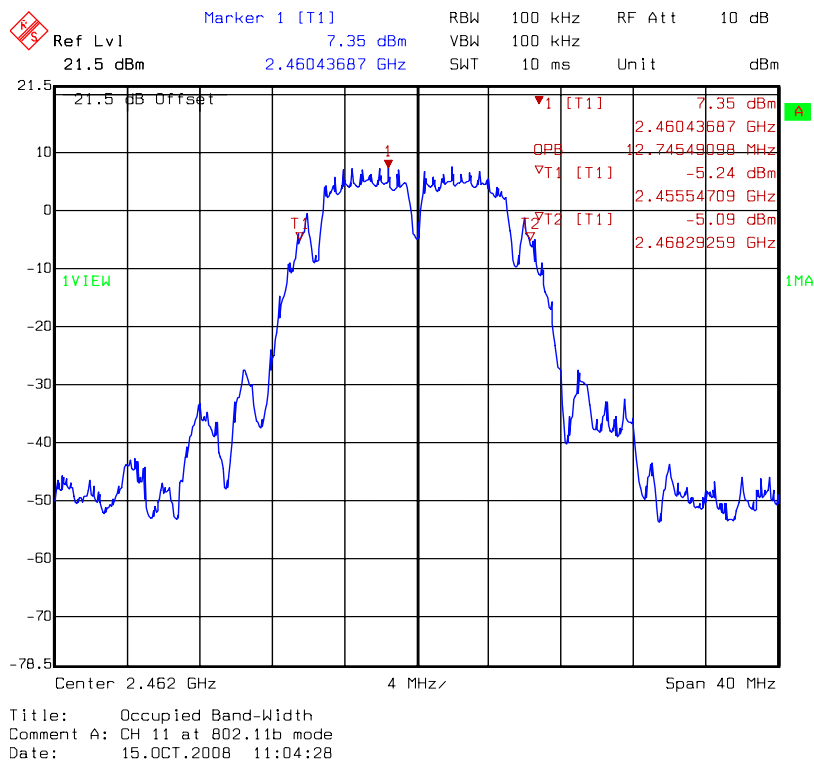

99 % Occupied Bandwidth @ 802.11g mode channel 1

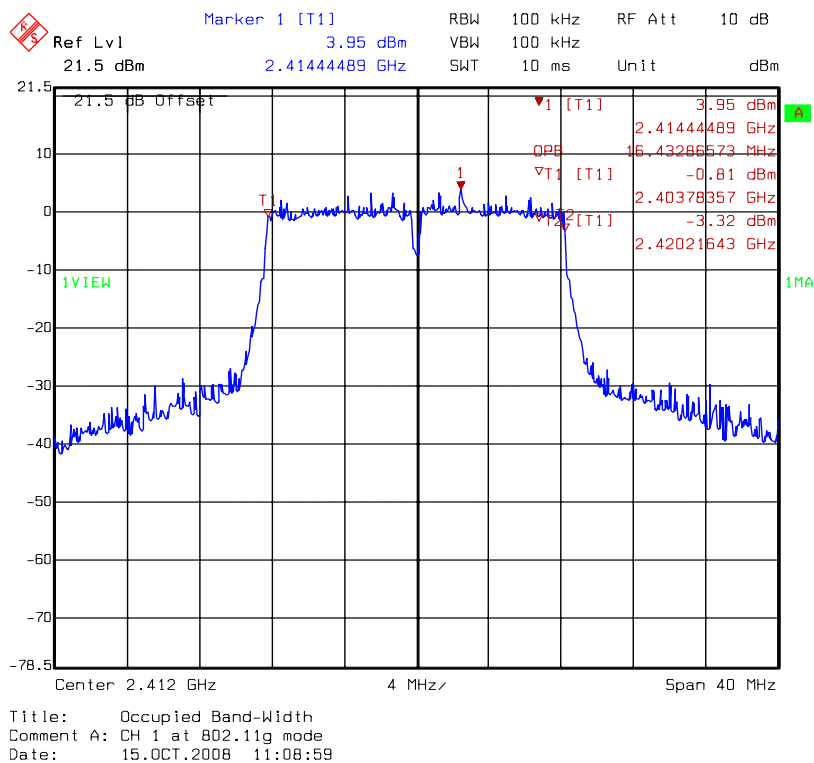


99 % Occupied Bandwidth @ 802.11g mode channel 6

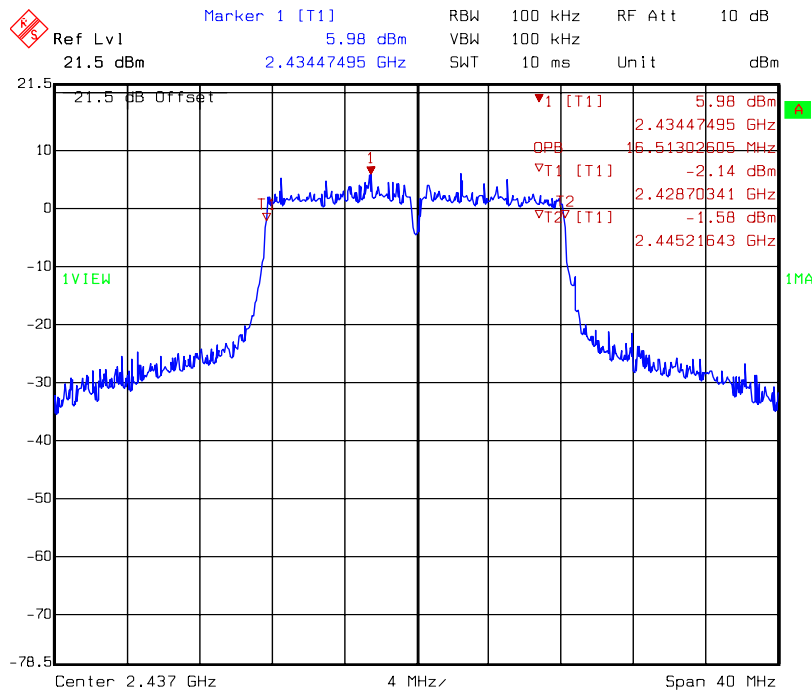

Title: Occupied Band-Width
Comment A: CH 6 at 802.11g mode
Date: 15.OCT.2008 11:13:34

99 % Occupied Bandwidth @ 802.11g mode channel 11

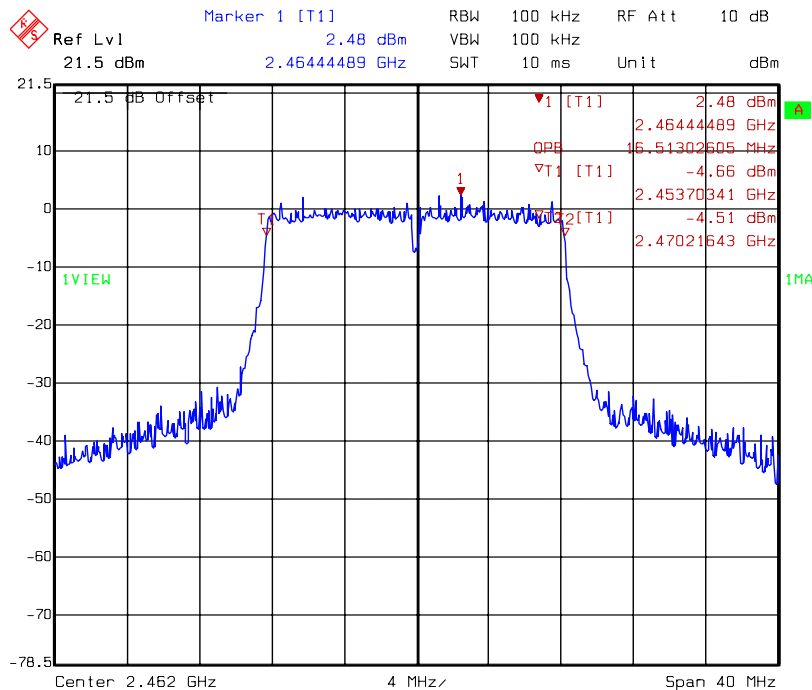

Title: Occupied Band-Width
Comment A: CH 11 at 802.11g mode
Date: 15.OCT.2008 11:20:31

5. Maximum Output Power

Name of Test	Maximum output power
Base Standard	FCC 15.247(b)


Measurement Uncertainty: $\pm 2\text{dB}$ (k=2)
Test Result: Complies
Measurement Data: See Table below

Method of Measurement:

Reference FCC document: KDB558074

The peak power at antenna terminals is measured using a Wideband Peak Power Meter. Power output is measured with the maximum rated input level.

Test Diagram:

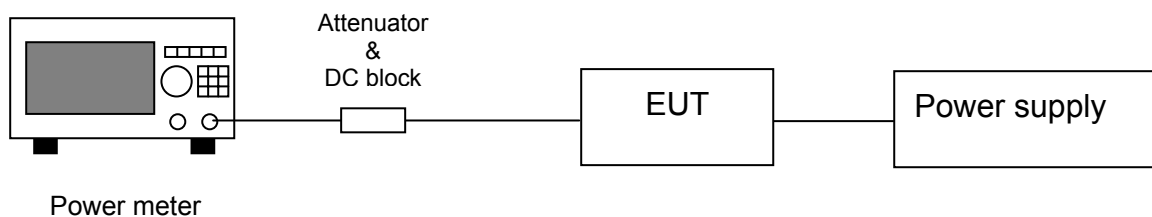

Note 1: The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps for 802.11b and 6 Mbps for 802.11g. The EUT was tuned to a low, middle and high channel.

Note 2: §15.247 (b) (4) Except as shown in paragraphs (b)(3) (i), (ii) and (iii) of this section, if transmitting antennas of directional gain greater than 6 dBi are used the peak output power from the intentional radiator shall be reduced below the stated values in paragraphs (b)(1) or (b)(2) of this section, as appropriate, by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Table 3. Maximum output power

Mode	Channel	Frequency (MHz)	C.L. (dB)	Reading (dBm)	Conducted Peak Output Power		Limit (W)
					(dBm)	(mW)	
802.11b	1	2412	2	20.82	22.82	191.43	1
	6	2437	2	20.60	22.60	181.97	1
	11	2462	2	20.70	22.70	186.21	1
802.11g	1	2412	2	23.18	25.18	329.61	1
	6	2437	2	23.58	25.58	361.41	1
	11	2462	2	22.54	24.54	284.45	1

6. Power Spectral Density

Name of Test	Power Spectral Density
Base Standard	FCC 15.247(e)


Test Result: Complies
Measurement Data: See Table & plots below

Method of Measurement:

Reference FCC document: KDB558074

A portion of the transmitted signal is coupled to a Spectrum Analyzer with a resolution bandwidth of at least 1 % of the bandwidth of the transmitted signal. The resolution bandwidth is chosen so as not to reduce the peak level of the measured waveform. The appropriate bandwidth mask is applied to the output waveform to verify compliance.

Test Diagram:

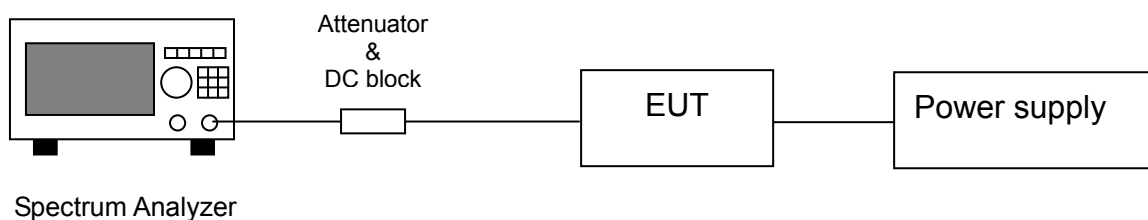


Note: The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps for 802.11b and 6 Mbps for 802.11g. The EUT was tuned to a low, middle and high channel.


Table 4. Power Spectral Density

Mode	Channel	Frequency (MHz)	Power spectrum density (dBm)	Limit (dBm)
802.11b	1	2412	-5.39	8
	6	2437	-6.22	8
	11	2462	-6.87	8
802.11g	1	2412	-10.70	8
	6	2437	-9.22	8
	11	2462	-10.74	8


Power Spectral Density @ 802.11b mode channel 1

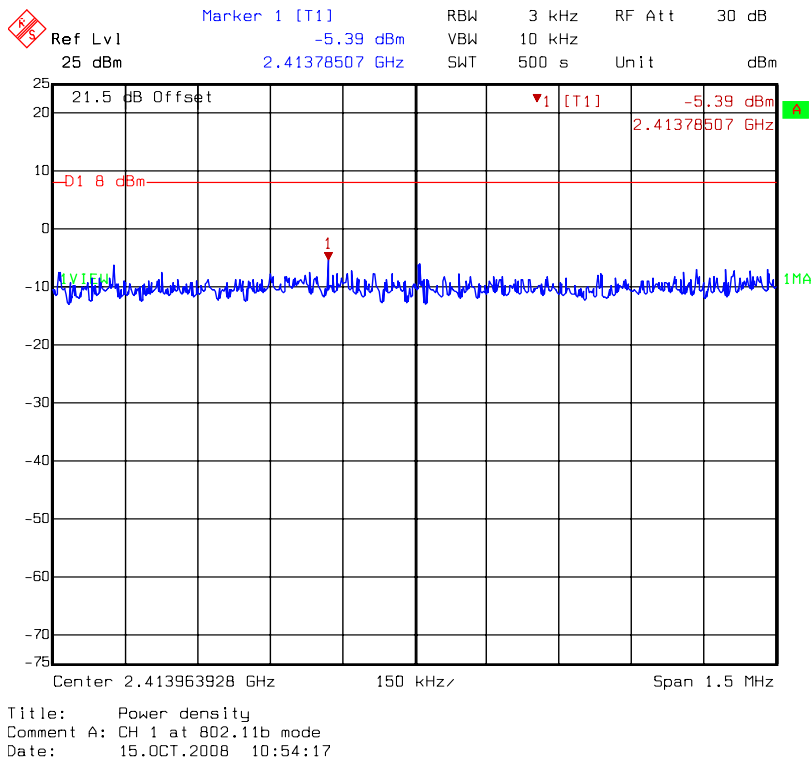

Power Spectral Density @ 802.11b mode channel 6

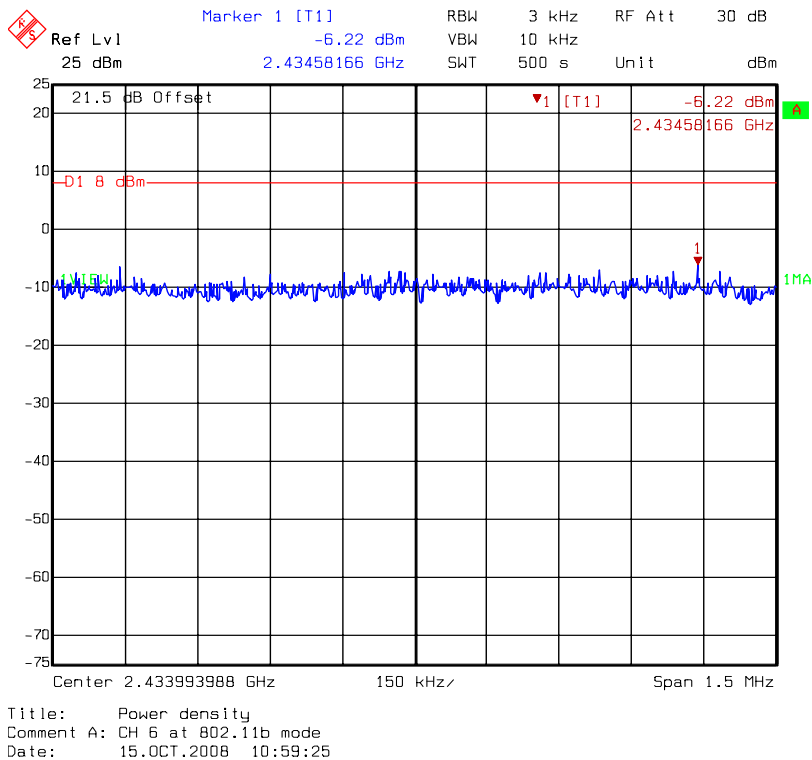


Power Spectral Density @ 802.11b mode channel 11

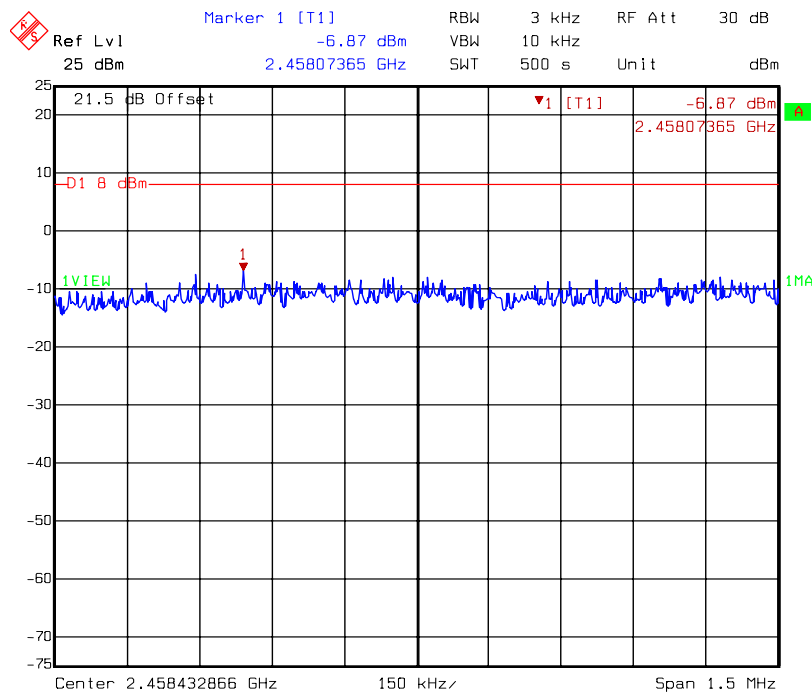


Title: Power density
 Comment A: CH 11 at 802.11b mode
 Date: 15.OCT.2008 11:02:51

Power Spectral Density @ 802.11g mode channel 1

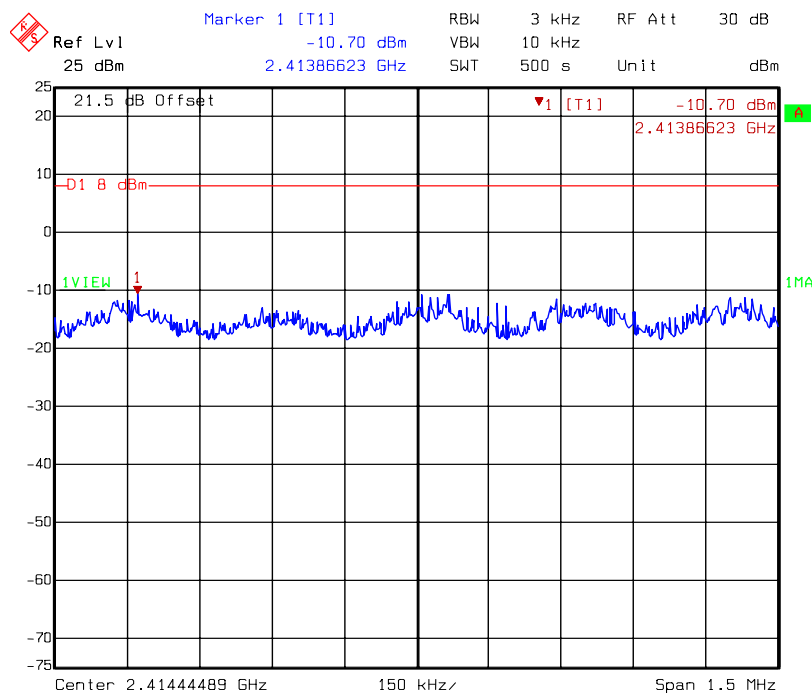


Title: Power density
 Comment A: CH 1 at 802.11g mode
 Date: 15.OCT.2008 11:07:25

Power Spectral Density @ 802.11g mode channel 6

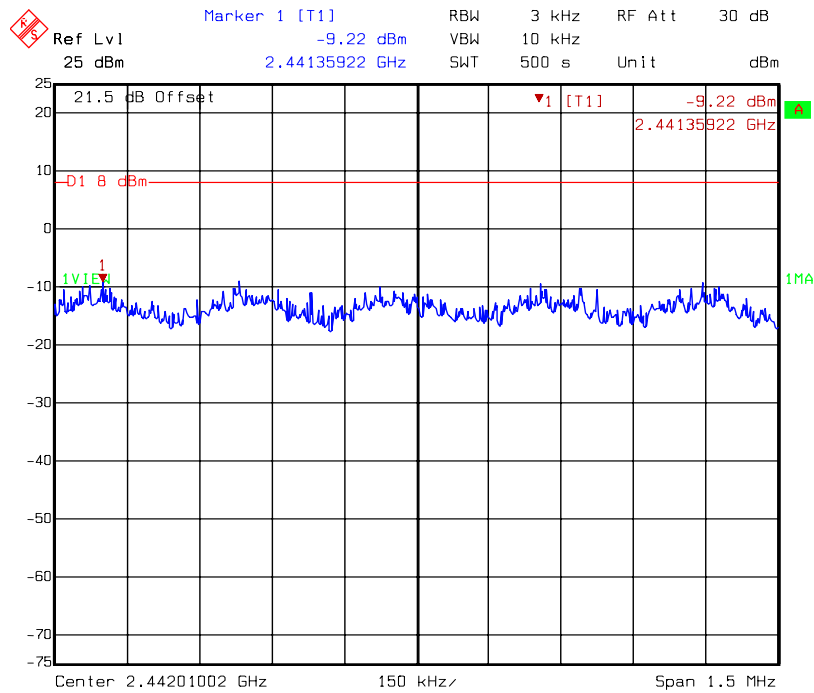

Title: Power density
 Comment A: CH 6 at 802.11g mode
 Date: 15.OCT.2008 11:12:00

Power Spectral Density @ 802.11g mode channel 11

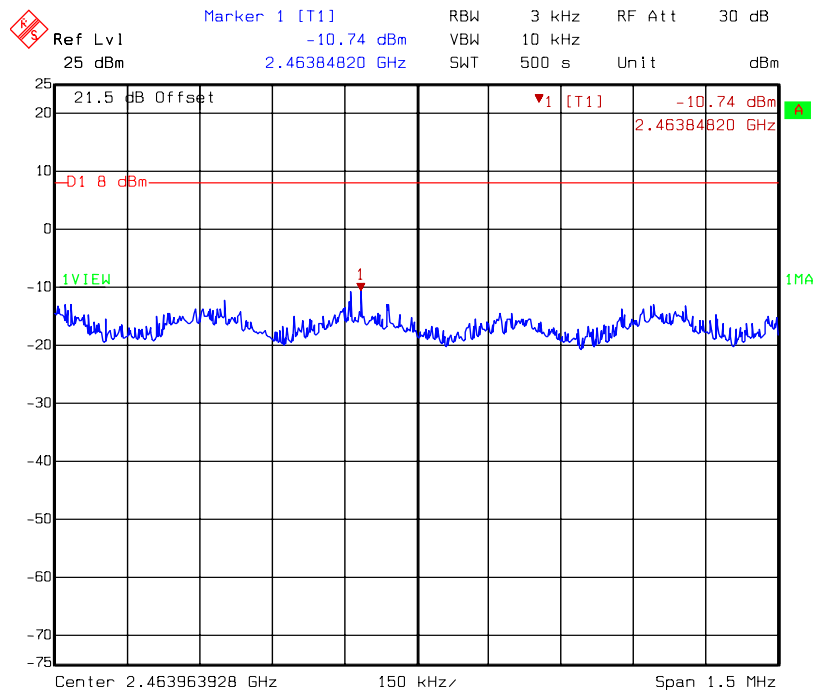

Title: Power density
 Comment A: CH 11 at 802.11g mode
 Date: 15.OCT.2008 11:18:57

7. RF Antenna conducted Spurious

Name of Test	RF Antenna Conducted Spurious
Base Standard	FCC 15.247(d)


Test Result: Complies
Measurement Data: See plots below

Method of Measurement:

Reference FCC document: KDB558074


The measurements were performed from 30 MHz to 25 GHz RF antenna conducted per FCC 15.247 (d) was measured from the EUT antenna port using a 50 ohm spectrum analyzer with the resolution bandwidth set at 100 kHz, and the video bandwidth set at 100 kHz. Harmonics and spurious noise must be at least 20 dB down from the highest emission level within the authorized band as measured with a 100 kHz RBW. The table below is the results from the highest emission for each channel within the authorized band. This table was used to determine the spurious limits for each channel.

Test Diagram:

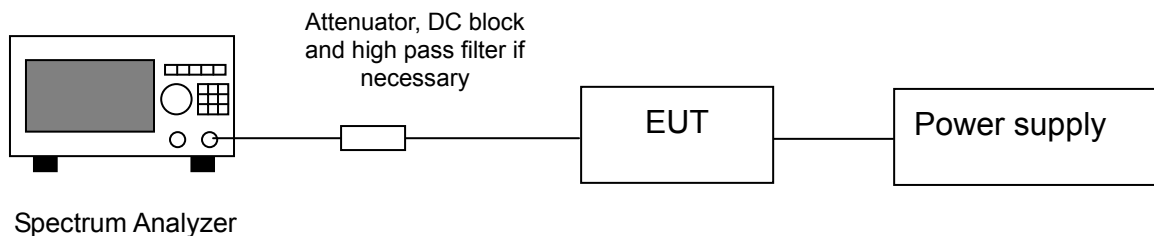

- Note:**
- (1) The EUT was tested while in a continuous transmit mode and the worst case data rates are 1Mbps for 802.11b and 6Mbps for 802.11g. The EUT was tuned to a low, middle and high channel.
 - (2) The EUT operating at 2.4 GHz ISM band. Frequency Range scanned from 30 MHz to 25 GHz.


conducted spurious @ 802.11b mode channel 1 (1 of 3)

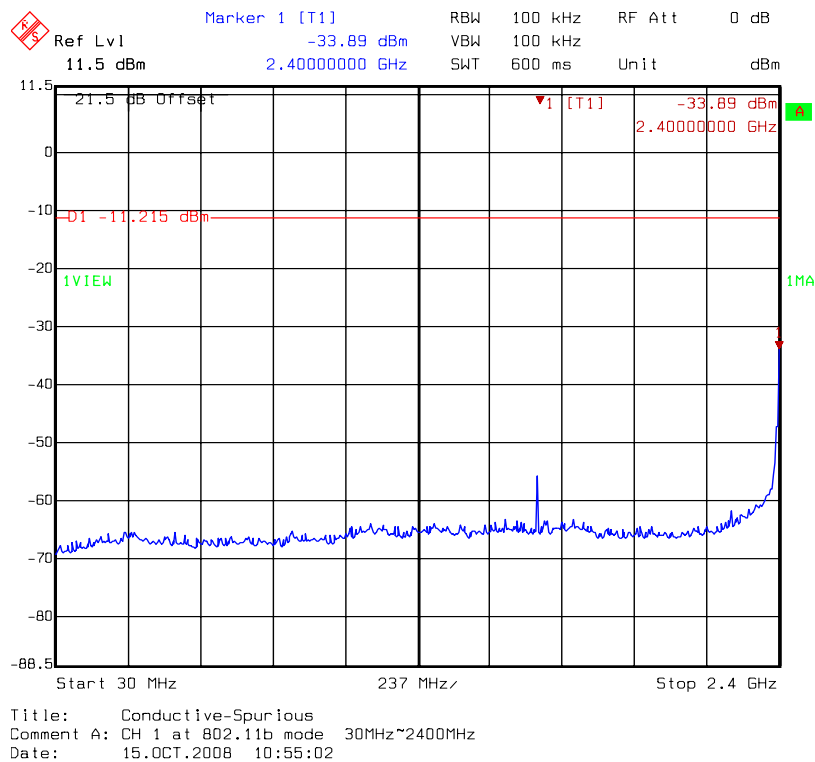


conducted spurious @ 802.11b mode channel 1 (2 of 3)




conducted spurious @ 802.11b mode channel 1 (3 of 3)

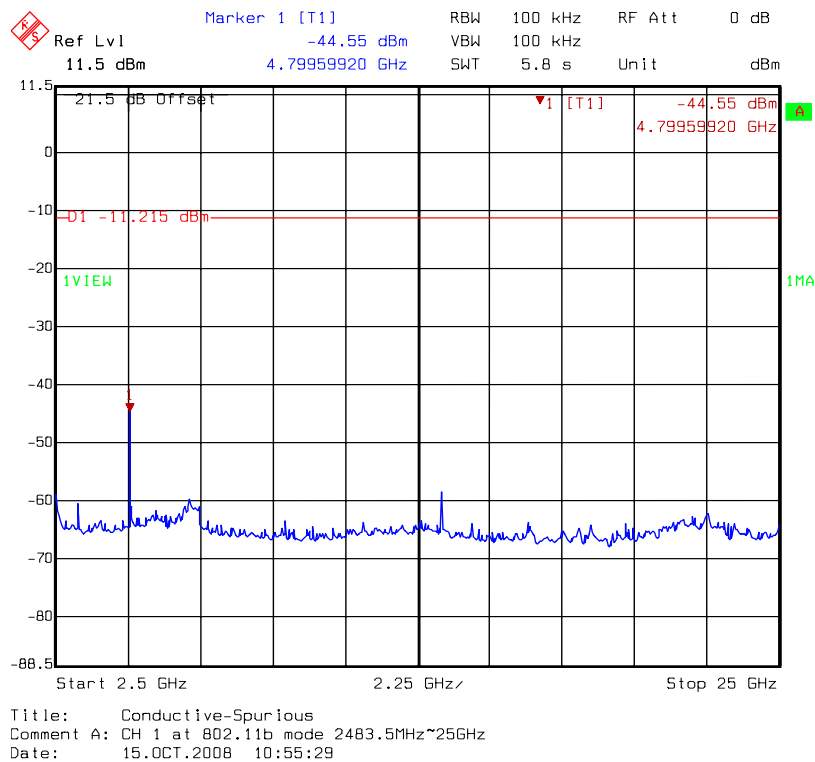

conducted spurious @ 802.11b mode channel 6 (1 of 3)

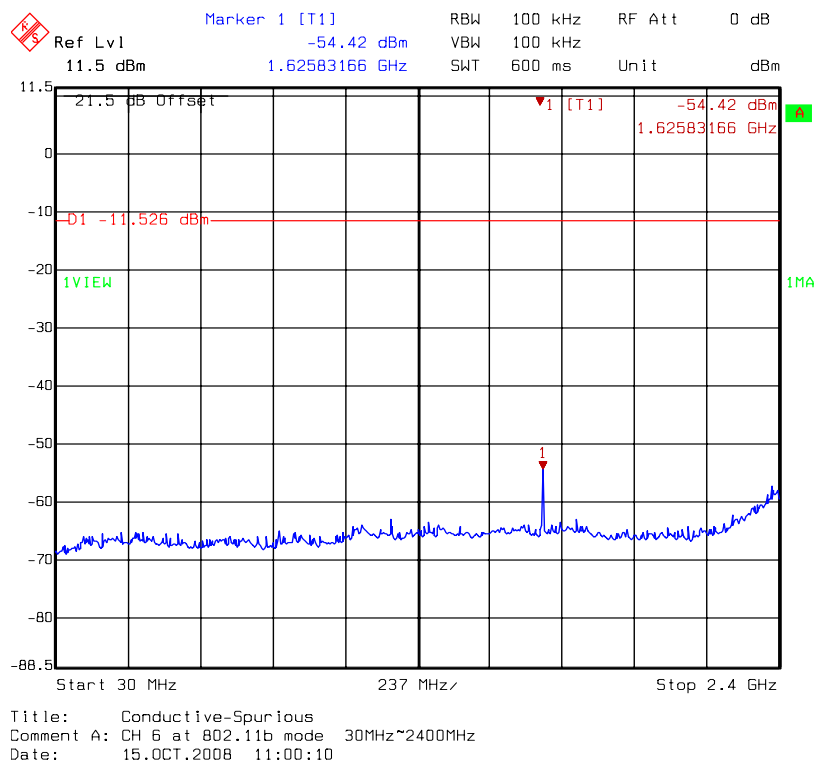


conducted spurious @ 802.11b mode channel 6 (2 of 3)

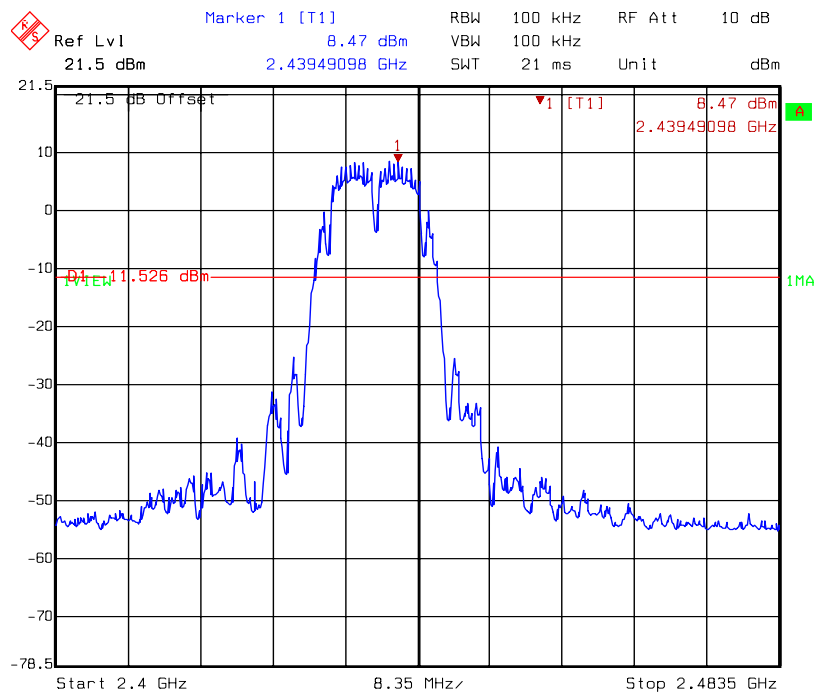


Title: Conductive-Spurious
Comment A: CH 6 at 802.11b mode 2400MHz~2483.5MHz
Date: 15.OCT.2008 10:59:49

conducted spurious @ 802.11b mode channel 6 (3 of 3)

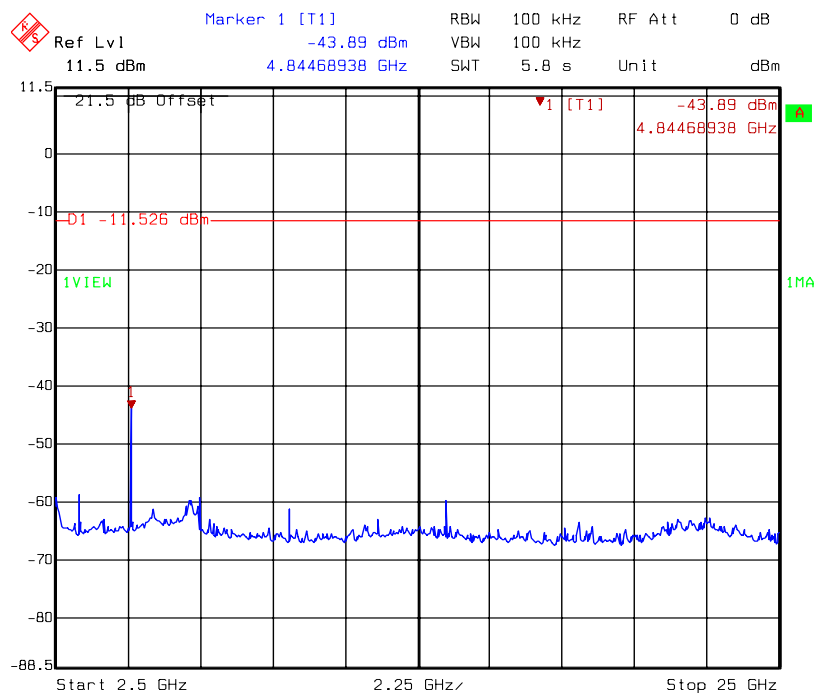


Title: Conductive-Spurious
Comment A: CH 6 at 802.11b mode 2483.5MHz~25GHz
Date: 15.OCT.2008 11:00:37


conducted spurious @ 802.11b mode channel 11 (1 of 3)

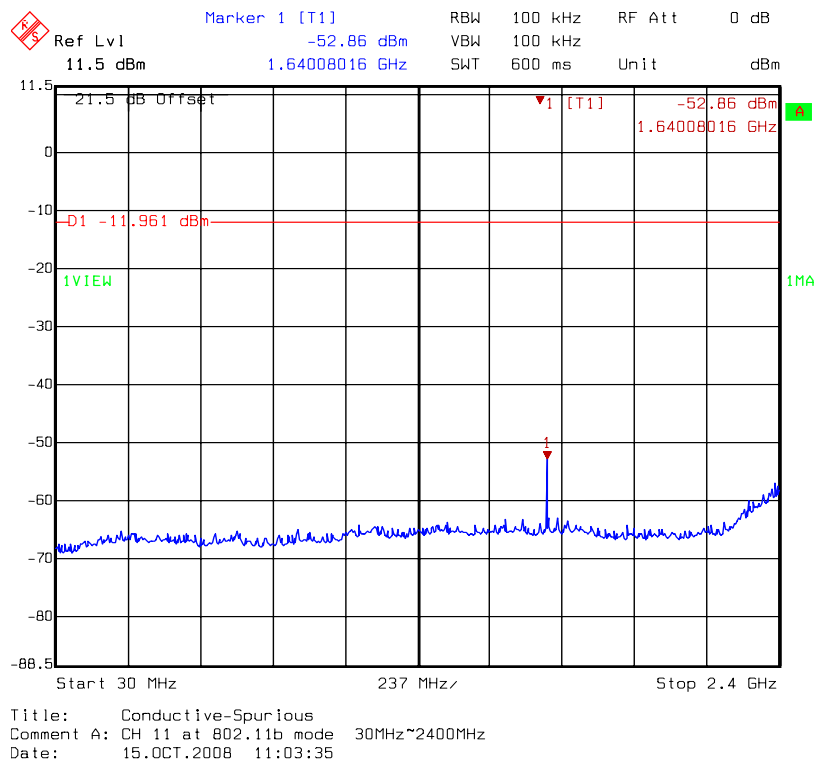

conducted spurious @ 802.11b mode channel 11 (2 of 3)

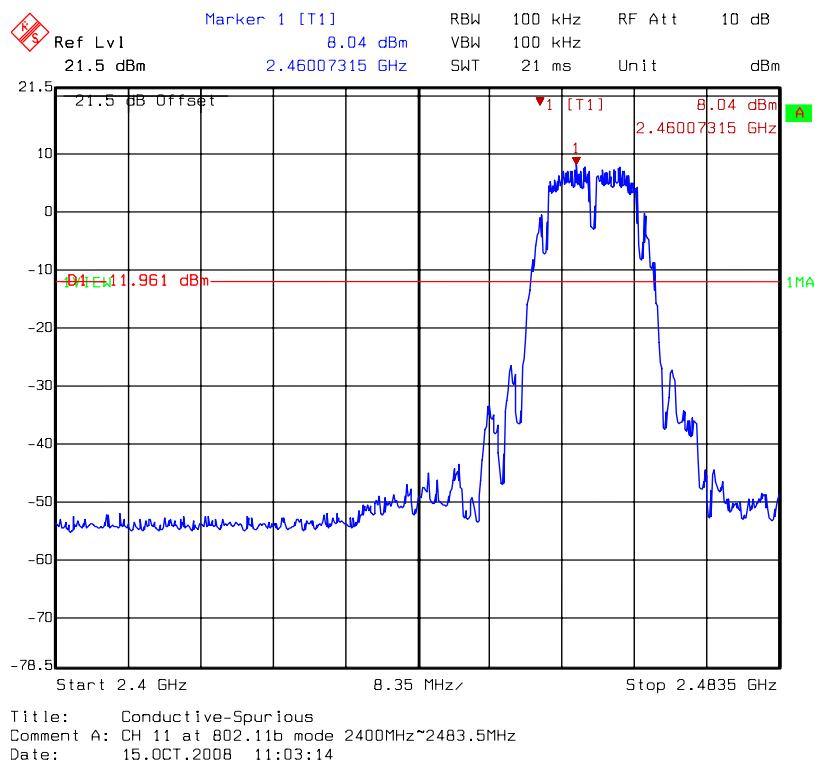


conducted spurious @ 802.11b mode channel 11 (3 of 3)

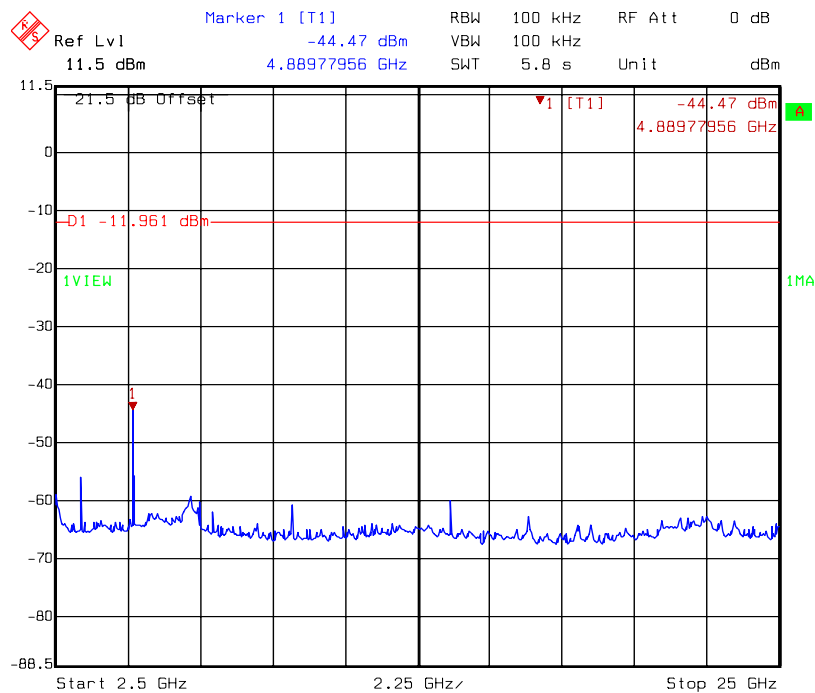


Title: Conductive-Spurious
Comment A: CH 11 at 802.11b mode 2483.5MHz~25GHz
Date: 15.OCT.2008 11:04:02

conducted spurious @ 802.11g mode channel 1 (1 of 3)

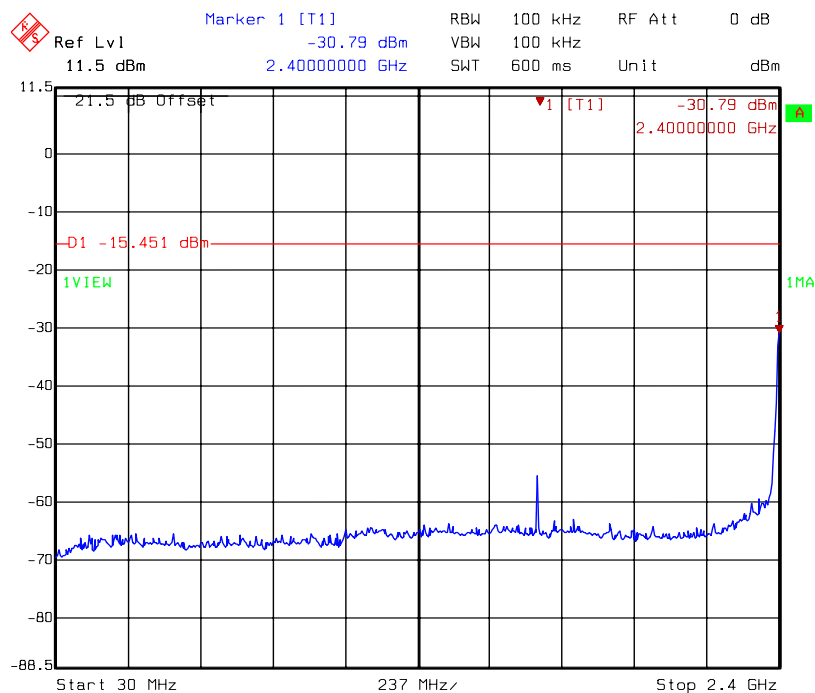


Title: Conductive-Spurious
Comment A: CH 1 at 802.11g mode 30MHz~2400MHz
Date: 15.OCT.2008 11:08:06

conducted spurious @ 802.11g mode channel 1 (2 of 3)

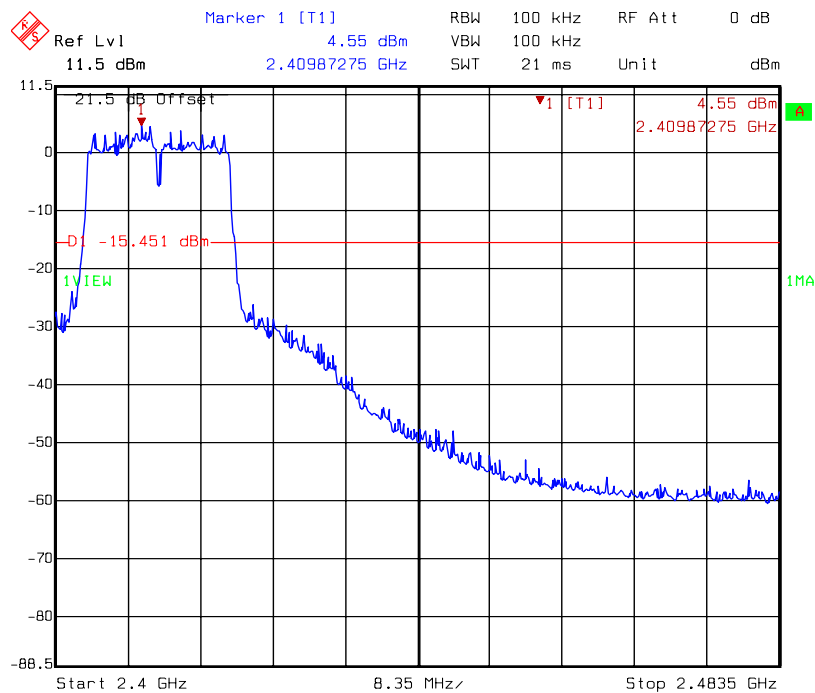


Title: Conductive-Spurious
Comment A: CH 1 at 802.11g mode 2400MHz~2483.5MHz
Date: 15.OCT.2008 11:07:45

conducted spurious @ 802.11g mode channel 1 (3 of 3)

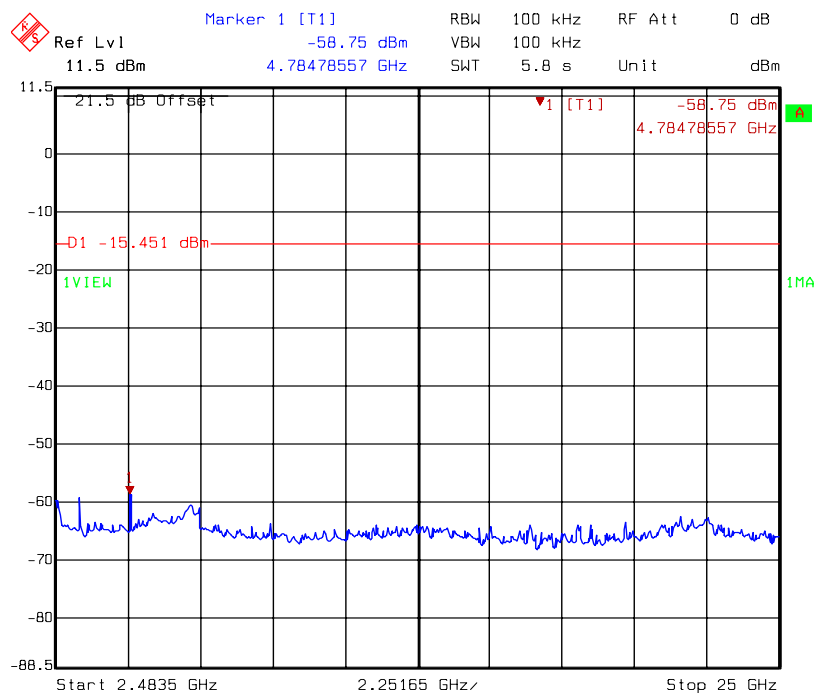


Title: Conductive-Spurious
Comment A: CH 1 at 802.11g mode 2483.5MHz~25000MHz
Date: 15.OCT.2008 11:08:33


conducted spurious @ 802.11g mode channel 6 (1 of 3)

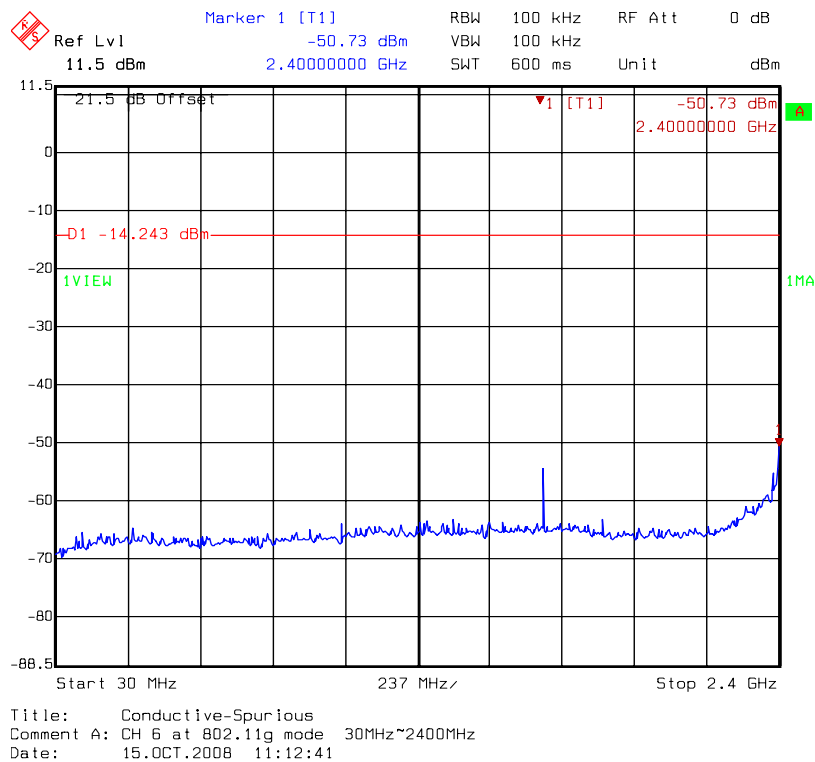


conducted spurious @ 802.11g mode channel 6 (2 of 3)

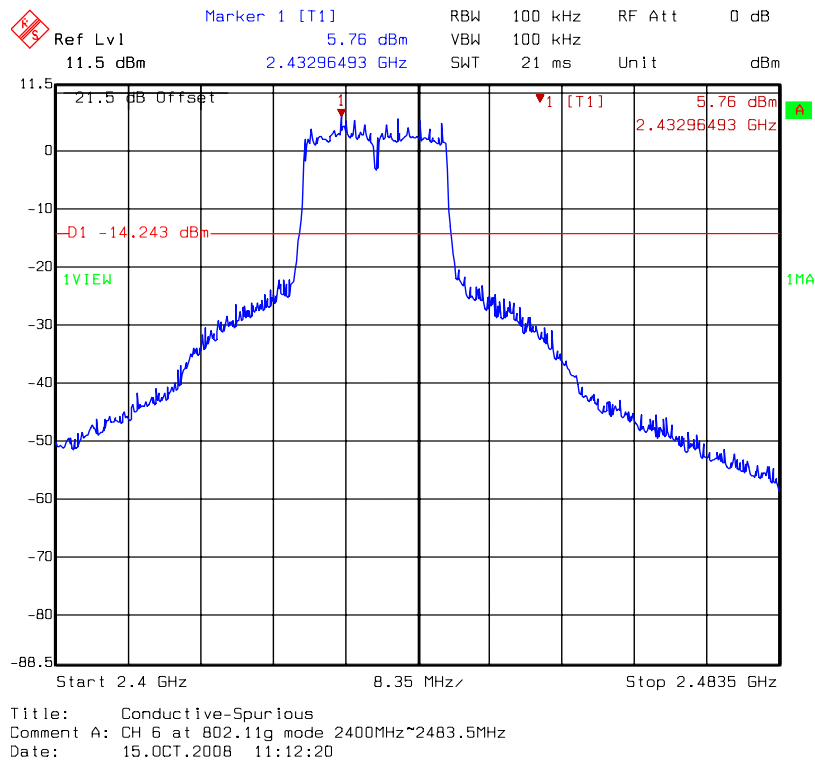


conducted spurious @ 802.11g mode channel 6 (3 of 3)

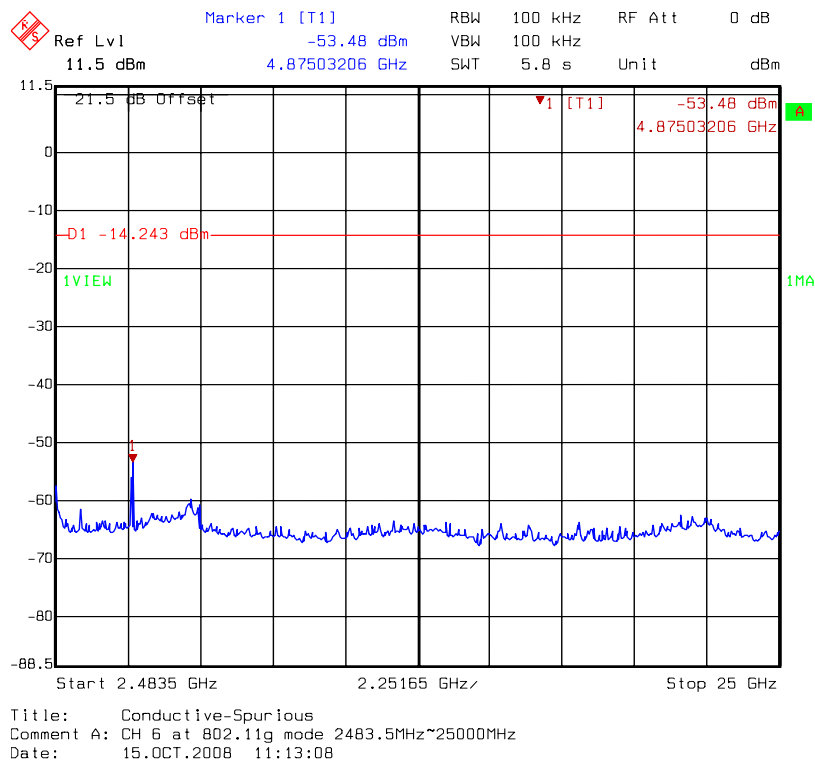

conducted spurious @ 802.11g mode channel 11 (1 of 3)

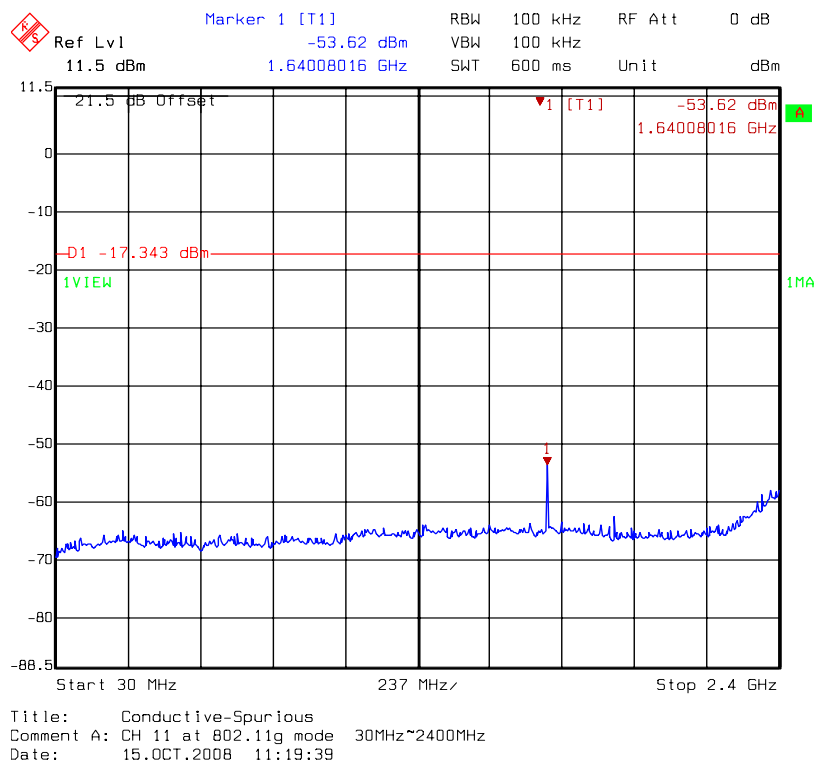


conducted spurious @ 802.11g mode channel 11 (2 of 3)

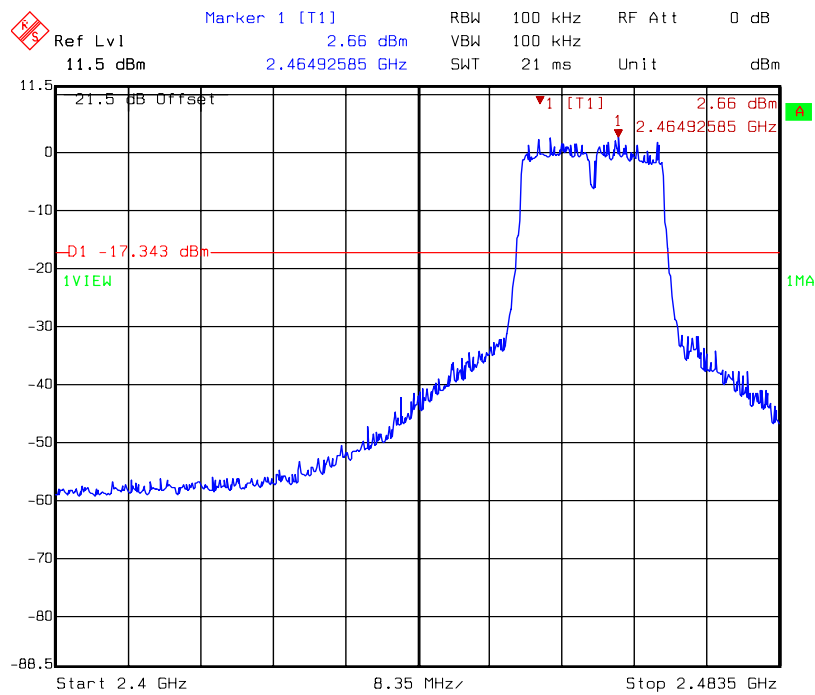

Title: Conductive-Spurious
Comment A: CH 11 at 802.11g mode 2400MHz~2483.5MHz
Date: 15.OCT.2008 11:19:17

conducted spurious @ 802.11g mode channel 11 (3 of 3)

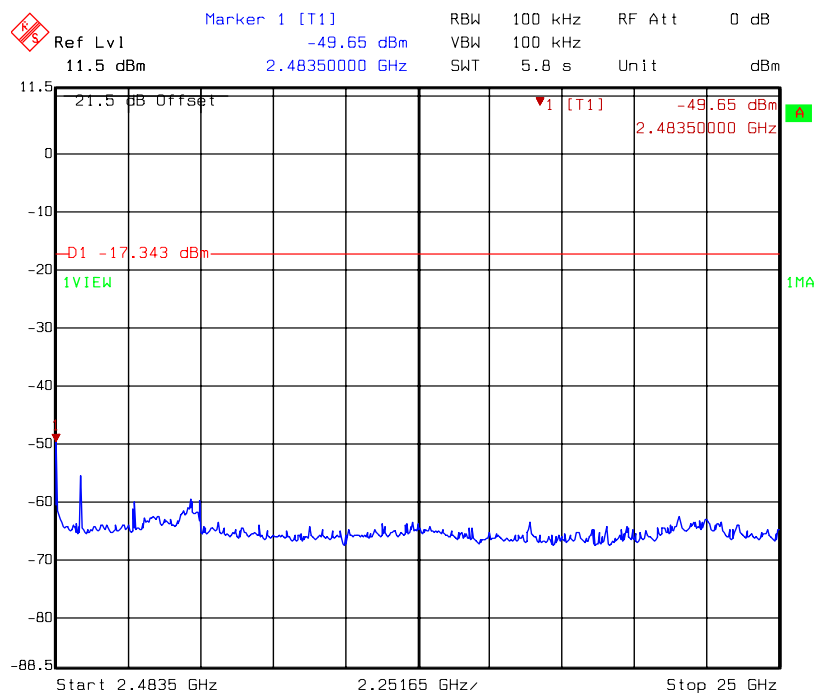

Title: Conductive-Spurious
Comment A: CH 11 at 802.11g mode 2483.5MHz~25000MHz
Date: 15.OCT.2008 11:20:06

8. Radiated Spurious Emission

Name of Test	Radiated Spurious Emission
Base Standard	FCC 15.247(d), 15.209, 15.205

Test Result: Complies
Measurement Data: See Tables below

Method of Measurement:


Reference FCC document: KDB558074, ANSI C63.4

The frequency range from 30 MHz to 1000 MHz using Bilog Antenna.
The frequency range over 1 GHz using Horn Antenna.

Radiated emissions were investigated cover the frequency range from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz and 10 Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/VBW) recorded also on the report. The EUT for testing is arranged on a wooden turntable. If some peripherals apply to the EUT, the peripherals will be connected to EUT and the whole system. During the test, all cables were arranged to produce worst-case emissions. The signal is maximized through rotation. The height of antenna and polarization is changing constantly for exploring for maximum signal level. The height of antenna can be up to 4 meters and down to 1 meter. The measurement for radiated emission will be done at the distance of three meters unless the signal level is too low to measure at that distance. In the case of the reading under noise floor, a pre-amplifier is used and/or the test is conducted at a closer distance. And then all readings are extrapolated back to the equivalent 3 meters reading using inverse scaling with distance.

The EUT configuration please refer to the "Spurious set-up photo.pdf".

Test Diagram:

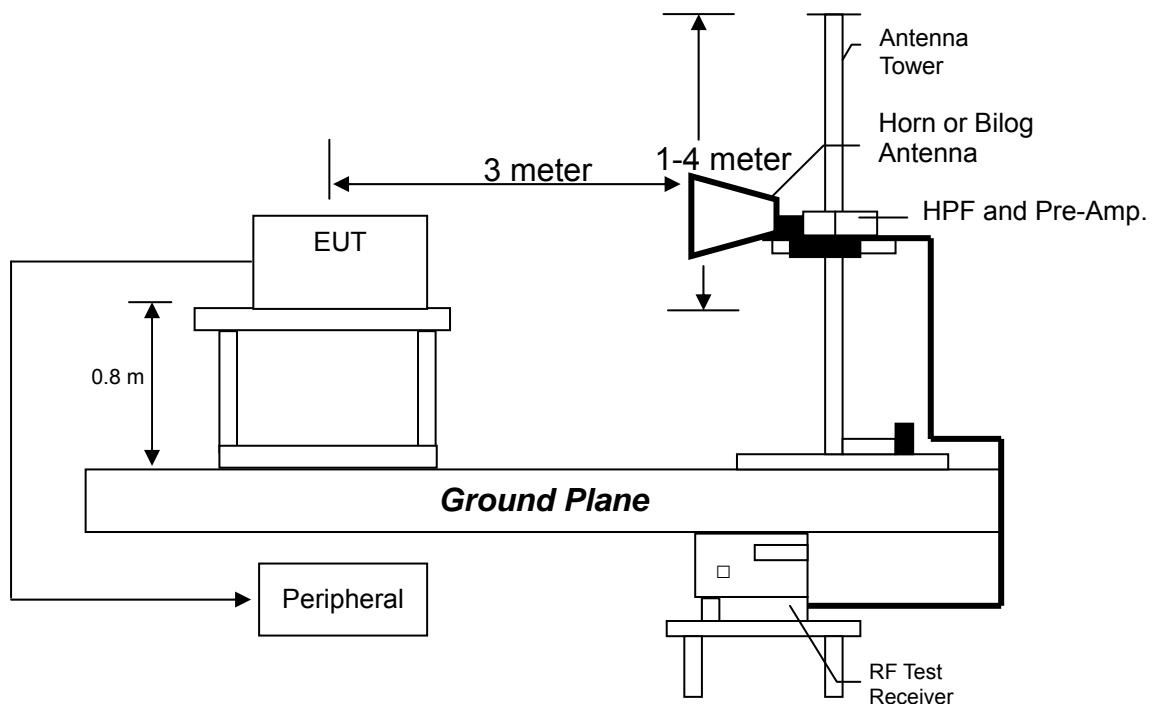

Emission Limit:

The spurious Emission shall test through the 10th harmonic. In addition, radiated emissions which fall in the restricted bands, as defined in §15.205(a), must also comply with the radiated emission limits specified in §15.209(a).

Frequency (MHz)	Limits (dBμV/m@ 3 meter)
30-88	40
88-216	43.5
216-960	46
Above 960	54

Remark:

1. In the above table, the tighter limit applies at the band edges.
2. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system

- Note:**
- (1) The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps for 802.11b and 6 Mbps for 802.11g. The EUT was tuned to a low, middle and high channel.
 - (2) The EUT operating at 2.4 GHz ISM band. Frequency Range scanned from 30 MHz to 25 GHz.

Measurement results: frequencies equal to or less than 1 GHz

The test was performed on EUT under 802.11b and 802.11g continuously transmitting mode. The worst case occurred at 802.11b Tx channel 1.

EUT : P-870HW-51a v2
Worst Case : 802.11b Tx at channel 1

Antenna Polariz. (V/H)	Freq. (MHz)	Receiver Detector	Corr. Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
V	42.610	QP	12.38	26.79	39.16	40.00	-0.84
V	480.080	QP	18.43	13.60	32.02	46.00	-13.98
V	499.480	QP	18.43	17.75	36.17	46.00	-9.83
V	624.610	QP	20.75	12.41	33.16	46.00	-12.84
V	639.160	QP	21.53	11.12	32.65	46.00	-13.35
V	749.740	QP	22.74	12.19	34.93	46.00	-11.07
H	249.220	QP	12.36	23.04	35.40	46.00	-10.60
H	480.080	QP	18.64	17.57	36.21	46.00	-9.79
H	499.480	QP	18.64	18.68	37.32	46.00	-8.68
H	749.740	QP	22.95	16.68	39.63	46.00	-6.37
H	799.210	QP	23.52	15.75	39.27	46.00	-6.73
H	959.260	QP	25.54	12.62	38.16	46.00	-7.84

Remark:

1. Corr. Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Corr. Factor

Measurement results: frequency above 1GHz

EUT : P-870HW-51a v2
Test Condition : 802.11b Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1623.40	PK	V	-	29.16	14.76	43.92	54	-10.08
1624.40	PK	H	-	29.16	16.68	45.84	54	-8.16
4824.00	PK	V	35.1	38.54	42.64	46.08	54	-7.92
7236.00	PK	V	33.0	44.60	41.39	52.99	54	-1.01
4824.00	PK	H	35.1	38.54	38.4	41.84	54	-12.16

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : P-870HW-51a v2
Test Condition : 802.11b Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4874.00	PK	V	35.1	38.54	40.90	44.34	54	-9.66
7311.00	PK	V	33.0	44.60	41.92	53.52	54	-0.48
4874.00	PK	H	35.1	38.54	37.14	40.58	54	-13.42

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : P-870HW-51a v2
Test Condition : 802.11b Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4924.00	PK	V	35.1	38.54	41.03	44.47	54	-9.53
7386.00	PK	V	33.0	44.60	45.35	56.95	74	-17.05
7386.00	AV	V	33.0	44.60	38.95	50.55	54	-3.45
4924.00	PK	H	35.1	38.54	36.55	39.99	54	-14.01

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : P-870HW-51a v2
Test Condition : 802.11g Tx at channel 1

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4824.00	PK	V	35.1	38.54	39.05	42.49	54	-11.51
7236.00	PK	V	33.0	44.60	39.32	50.92	54	-3.08
4824.00	PK	H	35.1	38.54	35.98	39.42	54	-14.58

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : P-870HW-51a v2
Test Condition : 802.11g Tx at channel 6

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4874.00	PK	V	35.1	38.54	42.54	45.98	54	-8.02
7311.00	PK	V	33.0	44.60	44.90	56.50	74	-17.50
7311.00	AV	V	33.0	44.60	37.10	48.70	54	-5.30
4874.00	PK	H	35.1	38.54	38.64	42.08	54	-11.92

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

EUT : P-870HW-51a v2
Test Condition : 802.11g Tx at channel 11

Frequency (MHz)	Spectrum Analyzer Detector	Antenna Polariz. (H/V)	Preamp. Gain (dB)	Correction Factor (dB/m)	Reading (dBuV)	Corrected Level (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
4924.00	PK	V	35.1	38.54	36.04	39.48	54	-14.52
7386.00	PK	V	33.0	44.60	40.39	51.99	54	-2.01
4924.00	PK	H	35.1	38.54	38.86	42.3	54	-11.70

Remark:

1. Correction Factor = Antenna Factor + Cable Loss
2. Corrected Level = Reading + Correction Factor – Preamp. Gain
3. The frequency measured ranges from 1 GHz to 25 GHz.The data value listed above which is higher than the system noise floor.

9. Emission on Band Edge

Name of Test	Emission Band Edge
Base Standard	FCC 15.247(d)

Test Result: Complies

Measurement Data: See Tables & plots below

Method of Measurement:

Reference FCC document: KDB558074, ANSI C63.4

The frequency range from 30 MHz to 1000 MHz using Bilog Antenna.

The frequency range over 1 GHz using Horn Antenna.

Radiated emissions were investigated cover the frequency range from 30 MHz to 1000 MHz using a receiver RBW of 120 kHz record QP reading, and the frequency over 1 GHz using a spectrum analyzer RBW of 1 MHz and 10 Hz VBW record Average reading. (15.209 paragraph), the Peak reading (1 MHz RBW/VBW) recorded also on the report.

Note: The EUT was tested while in a continuous transmit mode and the worst case data rates are 1 Mbps for 802.11b and 6 Mbps for 802.11g. The EUT was tuned to a low, middle and high channel.


Test Mode: 802.11b

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	59.24	74	-14.76
		AV	50.33	54	-3.67
11 (highest)	2483.5-2500	PK	60.35	74	-13.65
		AV	52.10	54	-1.90


Test Mode: 802.11g

Channel	Measurement Freq.Band (MHz)	Detector	The Max. Field Strength in Restrict Band (dBuV/m)	Limit @ 3 m (dBuV/m)	Margin (dB)
1 (lowest)	2310-2390	PK	70.27	74	-3.73
		AV	51.19	54	-2.81
11 (highest)	2483.5-2500	PK	72.64	74	-1.36
		AV	51.43	54	-2.57


Band edge @ 802.11b mode channel 1 PK

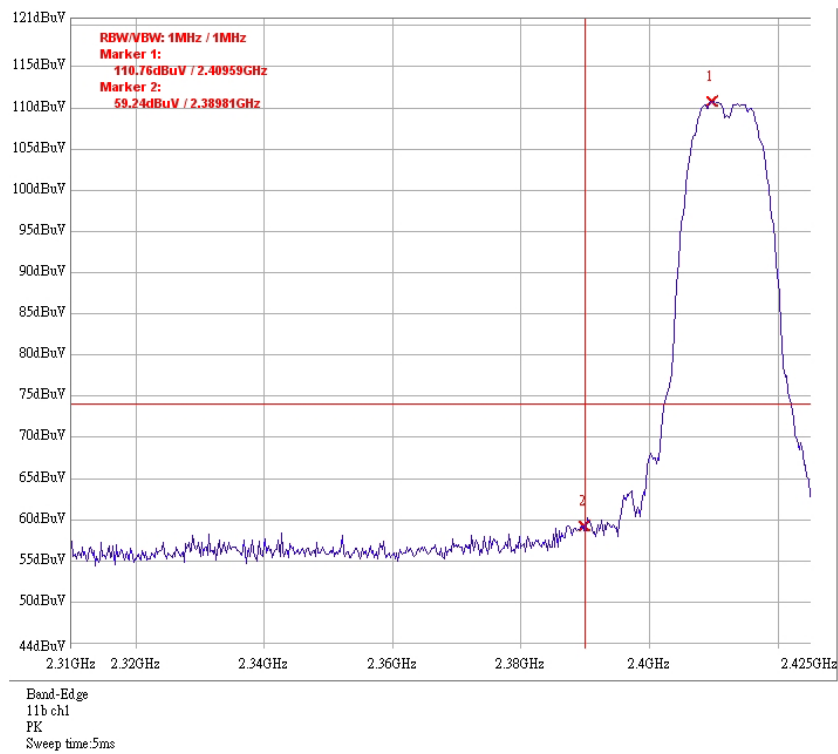


Band edge @ 802.11b mode channel 1 AV

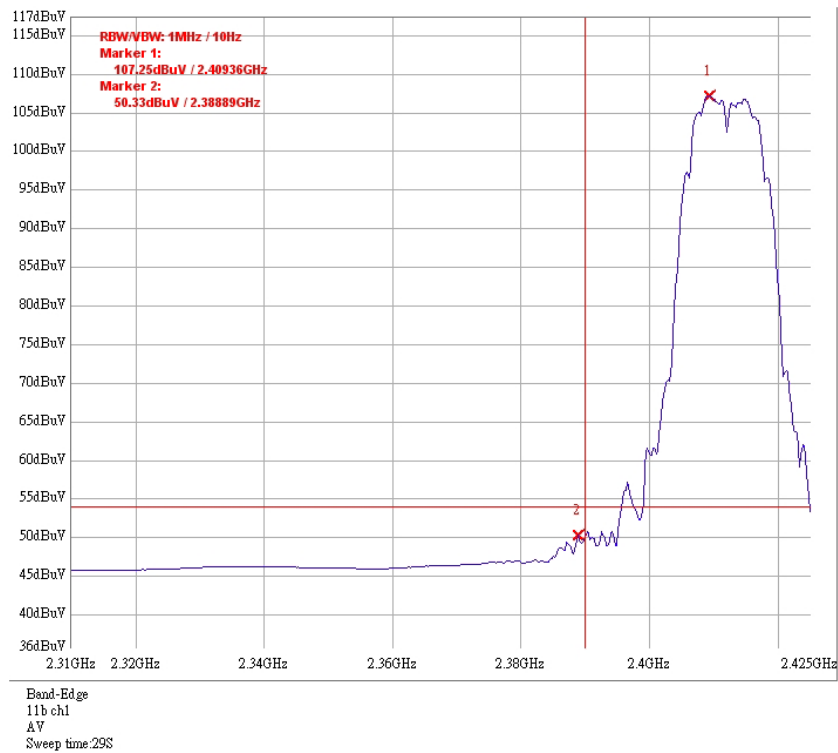


Band edge @ 802.11b mode channel 11 PK

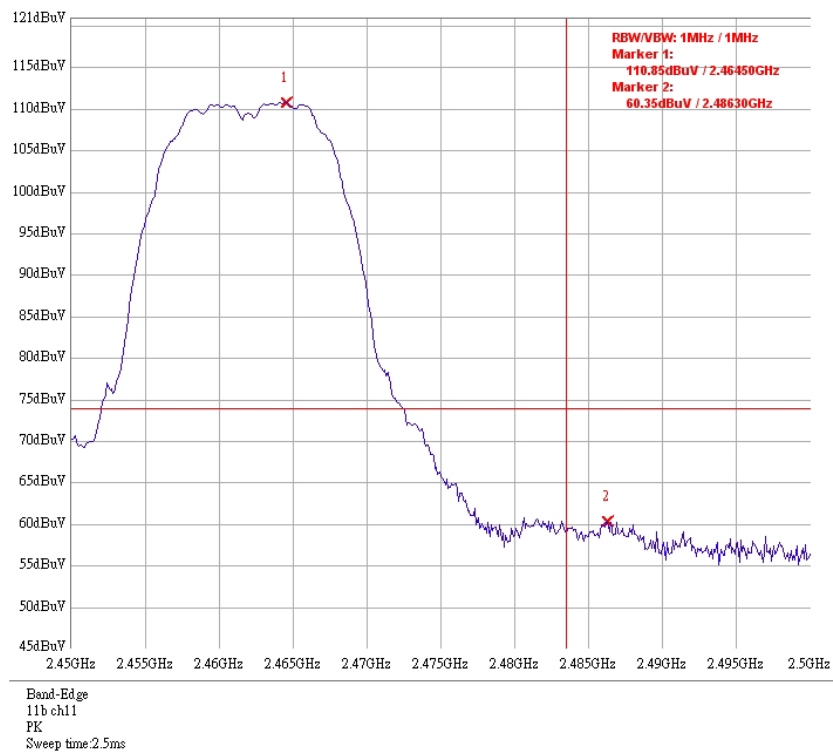


Band edge @ 802.11b mode channel 11 AV

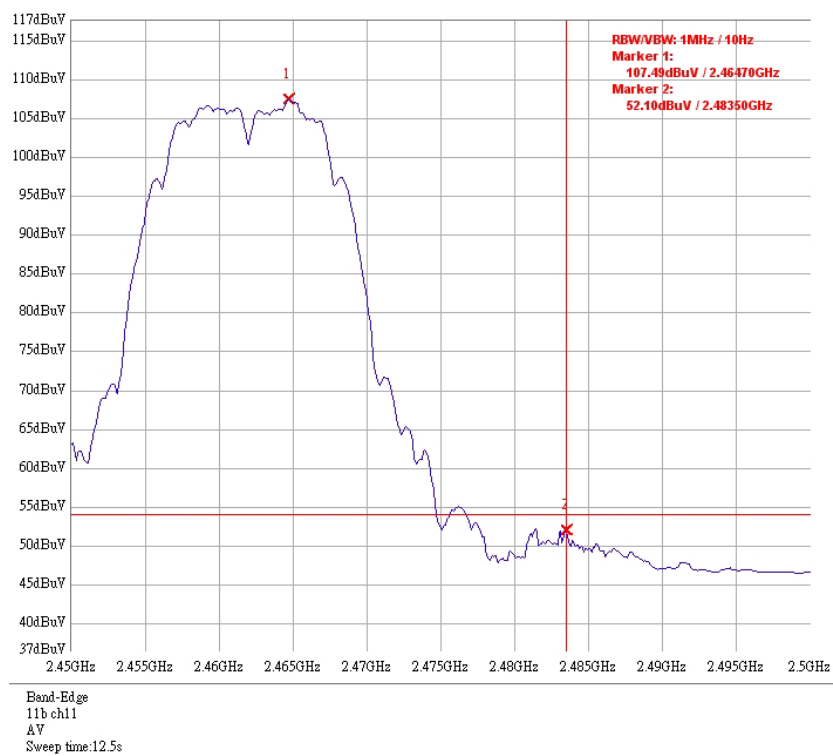


Band edge @ 802.11g mode channel 1 PK

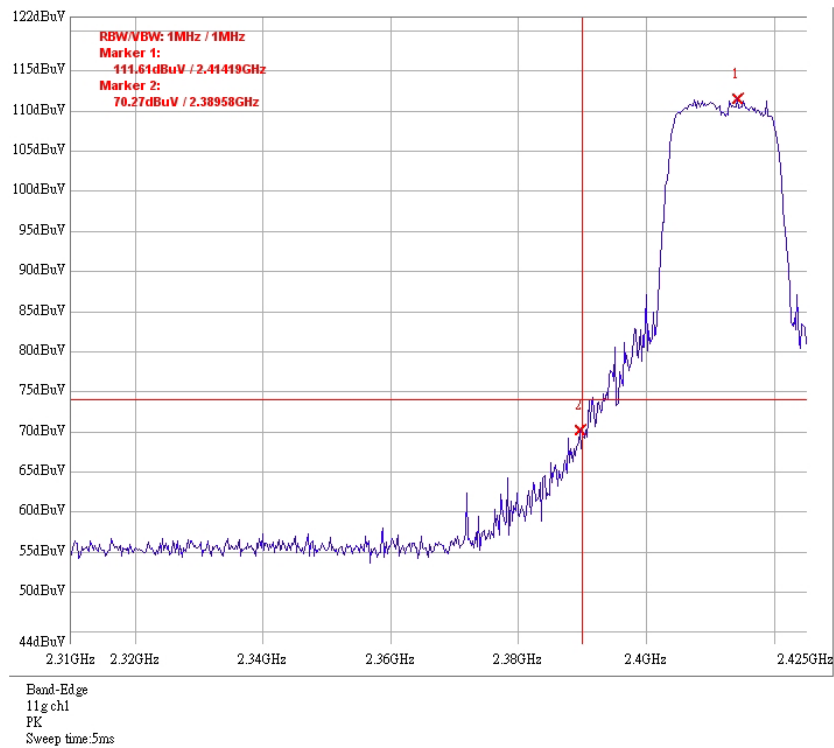


Band edge @ 802.11g mode channel 1 AV

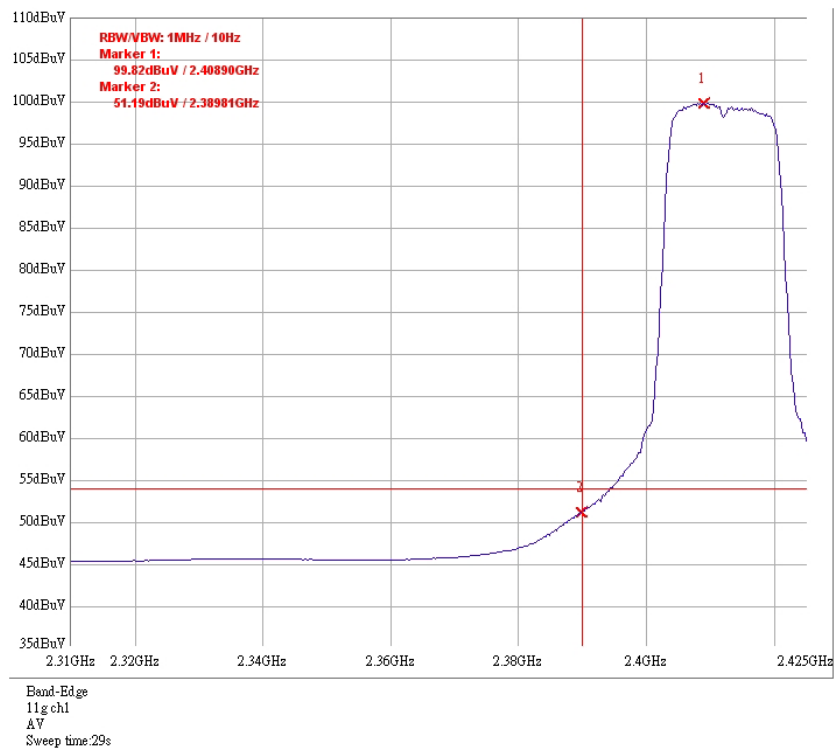

Band edge @ 802.11g mode channel 11 PK

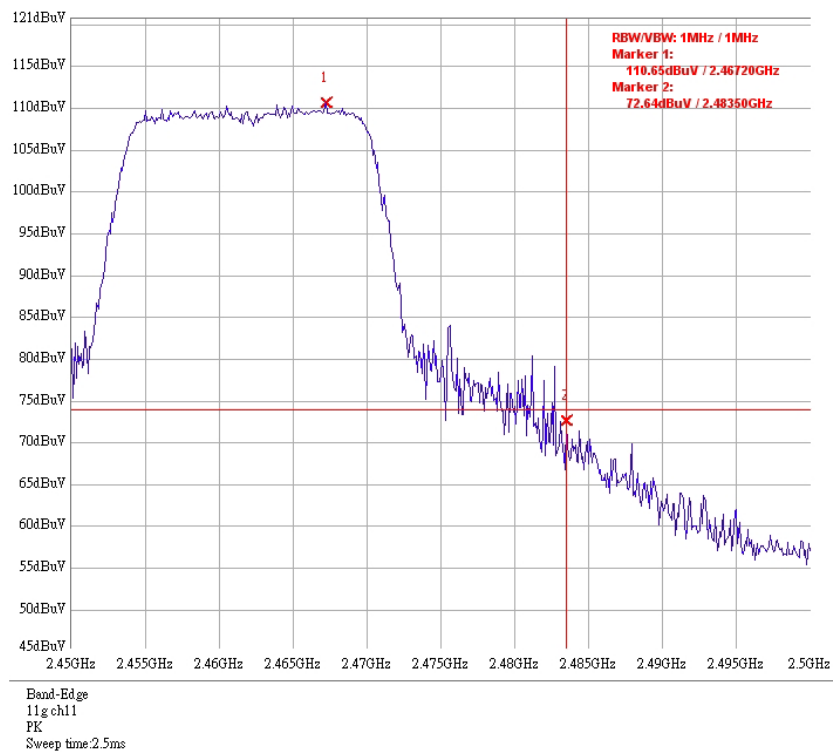

Band edge @ 802.11g mode channel 11 AV

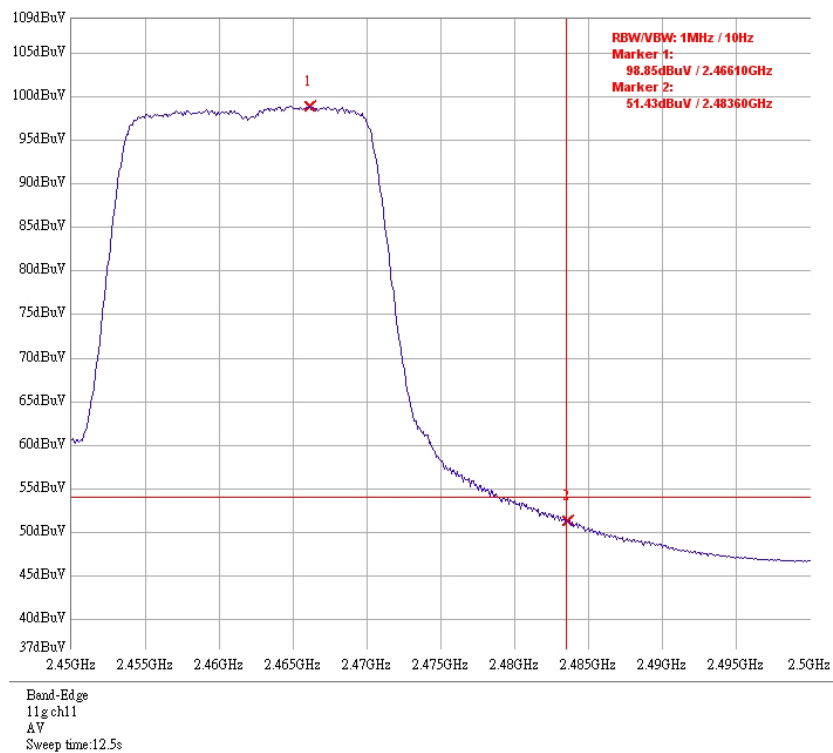

10. AC power line conducted emission

Name of Test	AC power line conducted emission
Base Standard	FCC 15.207

Test Result: Complies
Measurement Data: See Tables & plots below

Method of Measurement:

Reference FCC document: KDB558074, ANSI C63.4


The EUT are connected to the main power through a line impedance stabilization network (LISN). This provides a 50 ohm/50 uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50 ohm/ 50 uH coupling impedance with 50 ohm termination.

Both sides (Line and Neutral) of AC line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4/2003 on conducted measurement.

The bandwidth of the field strength meter (R & S Test Receiver ESCS 30) is set at 9kHz.

The EUT configuration please refer to the "Conducted set-up photo.pdf".

Test Diagram:

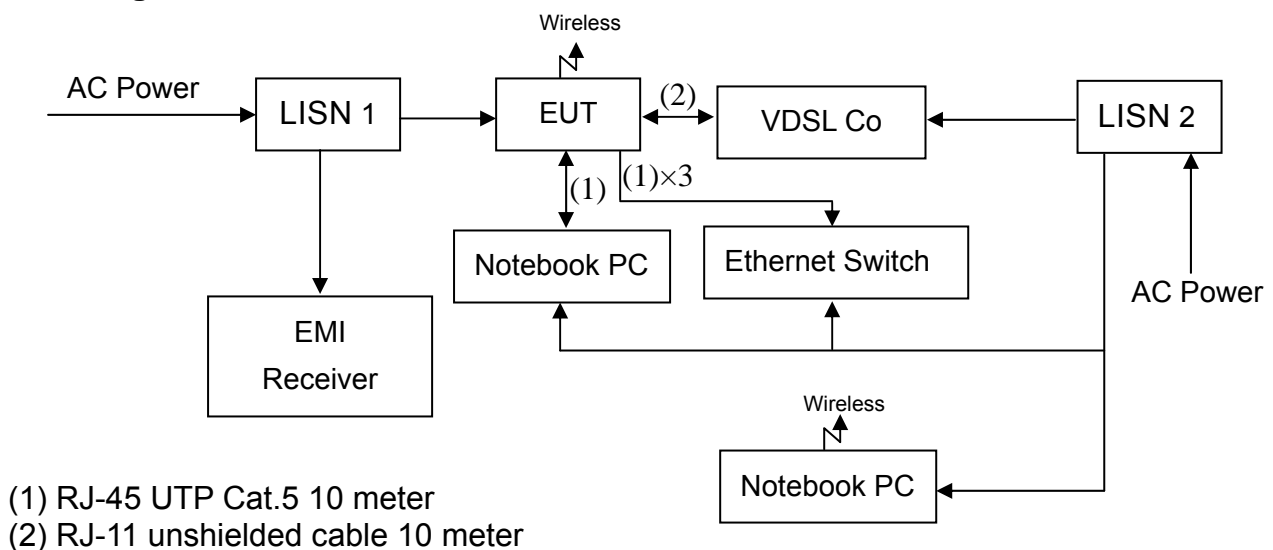

Emission Limit:

Freq. (MHz)	Conducted Limit (dBuV)	
	Q.P.	Ave.
0.15~0.50	66 – 56*	56 – 46*
0.50~5.00	56	46
5.00~30.0	60	50

*Decreases with the logarithm of the frequency.


Note: The EUT was tested while in normal communication mode.

Phase :Line
EUT :P-870HW-51a v2
Test Condition :Normal operating mode

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level Av (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
0.15	0.81	45.08	65.96	19.60	55.96	-20.88	-36.36
0.21	0.77	53.26	63.27	42.82	53.27	-10.02	-10.46
0.28	0.47	42.22	60.85	34.05	50.85	-18.63	-16.80
0.35	0.25	40.00	59.05	36.28	49.05	-19.04	-12.76
2.29	0.17	36.80	56.00	34.70	46.00	-19.20	-11.30
4.93	0.34	36.05	56.00	32.41	46.00	-19.95	-13.59

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

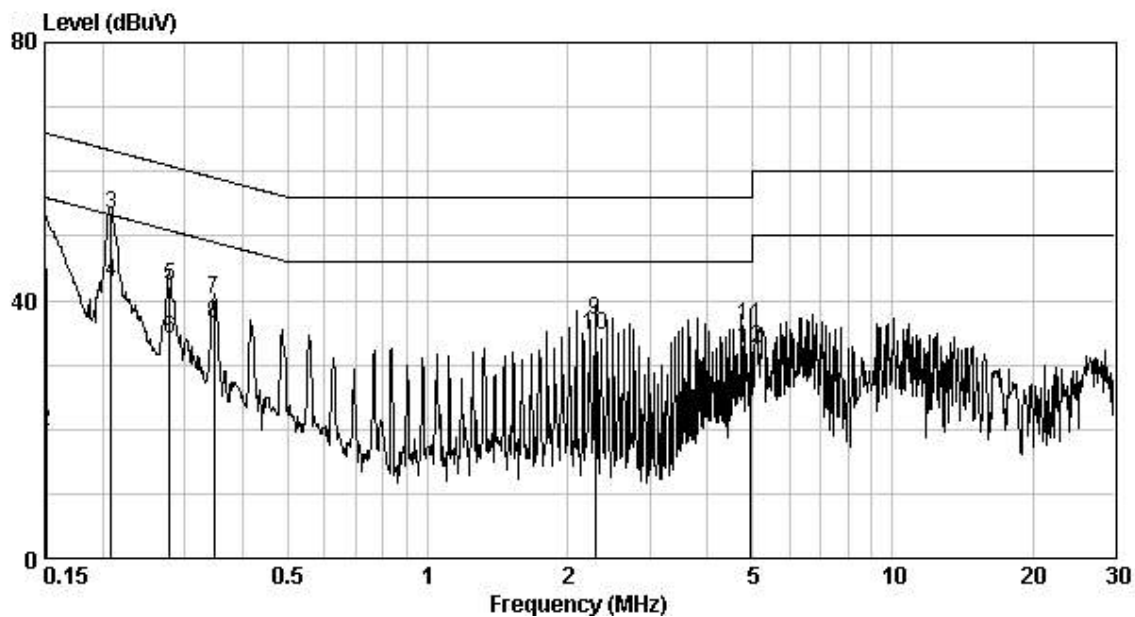


Phase :Neutral
EUT :P-870HW-51a v2
Test Condition :Normal operating mode

Frequency (MHz)	Corr. Factor (dB)	Level Qp (dBuV)	Limit Qp (dBuV)	Level AV (dBuV)	Limit Av (dBuV)	Margin (dB)	
						Qp	Av
0.15	0.11	43.04	65.96	17.35	55.96	-22.92	-38.61
0.21	0.11	50.85	63.26	40.40	53.26	-12.42	-12.87
0.28	0.11	41.64	60.90	34.66	50.90	-19.26	-16.24
0.35	0.11	38.62	59.05	35.32	49.05	-20.43	-13.73
2.22	0.16	42.34	56.00	37.55	46.00	-13.66	-8.45
2.42	0.18	40.93	56.00	36.56	46.00	-15.07	-9.44

Remark:

1. Correction Factor (dB)= LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Level (dBuV) – Limit (dBuV)

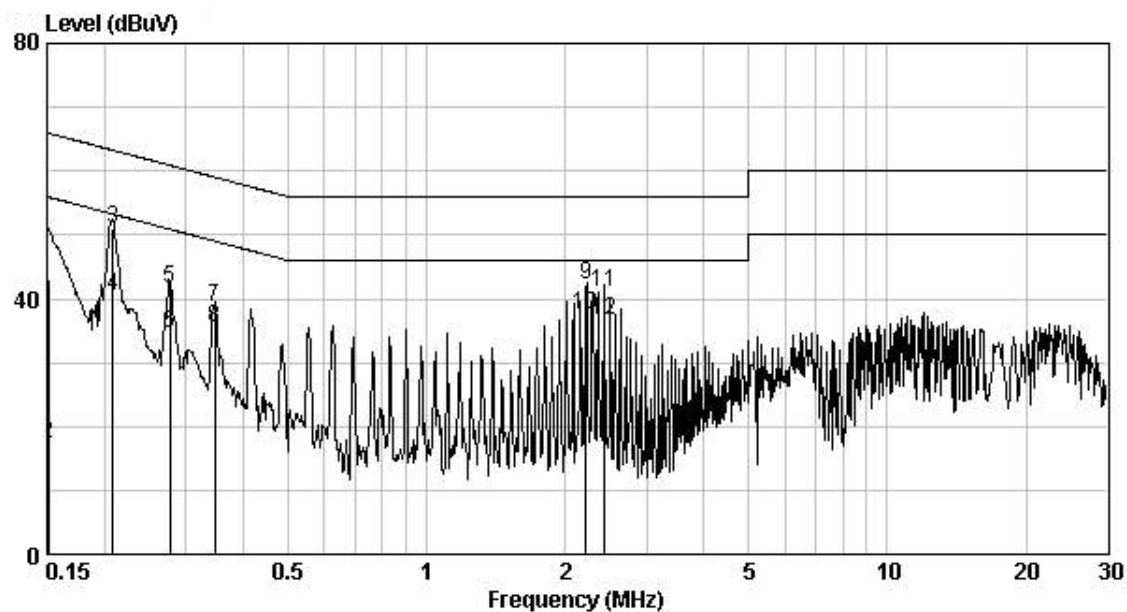

Appendix A: Test Equipment List

Equipment	Brand	Model No.
EMI Test Receiver	Rohde & Schwarz	ESCS 30
Spectrum Analyzer	Rohde & Schwarz	FSP 30
Spectrum Analyzer	Rohde & Schwarz	FSEK 30
Signal Generator	Rohde & Schwarz	SMR27
Horn Antenna	SCHWARZBECK	BBHA 9120 D
Horn Antenna	SCHWARZBECK	BBHA 9170
Bilog Antenna	SCHWARZBECK	VULB 9168
Pre-Amplifier	MITEQ	919981
Pre-Amplifier	MITEQ	828825
Controller	HDGmbH	CM 100
Antenna Tower	HDGmbH	MA 2400
LISN	Rohde & Schwarz	ESH3-Z5
Wideband Peak Power Meter/ Sensor	Anritsu	ML2487A/ MA2491A
Temperature Humidity Test Chamber	Juror	TR-4010

- Note: 1. The above equipments are within the valid calibration period.
2. The test antennas (receiving antenna) are calibration per 3 years.

Measurement Uncertainty:

Measurement uncertainty was calculated in accordance with NAMAS NIS 81.

Parameter	Uncertainty
Radiated Emission	± 4.98 dB
Conducted Emission	± 2.6 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level using a coverage factor of $k=2$.