

WHA YU INDUSTRIAL CO., LTD. (HEAD OFFICE)
 TAI HWA ELECTRONIC CO., LTD.(CHINA)
 SHANGHAI HUA YU ELECTRONIC CO., LTD.(CHINA)
 AEON TECH CO., LTD. (CHINA)

SPECIFICATION FOR APPROVAL

CUSTOMER: 合勤科技(無錫)有限公司


PART NAME: RF Antenna Assembly

PART NO.:

REVISION:

W. Y. P/NO.:C034-510447-A

REV.: X2

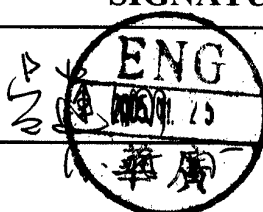	MANUFACTURER SIGNATURE	CUSTOMER SIGNATURE
APPROVED BY :		
DATE :		

WHA YU GROUP

WHA YU INDUSTRIAL CO., LTD.(HEAD OFFICE)

譚裕實業股份有限公司

Address: #70 Shui Li Road, Hsin Chu City, Taiwan, R.O.C.

Tel:+886-3-5714225(REP.)

Fax:+ 886-3-5713853 · + 886-3-5723600

TAI HWA ELECTRONIC CO., LTD. (CHINA)

台樺電業製品廠

Address: Pak Ho District, Hiu Street Town, Dong Guan City, Guangdong, China

Tel: + 86-769-5599375 · + 86-769-5912375

Fax: + 86-769-5599376

HUA HONG INTERNATIONAL LTD.

華弘國際有限公司

Rm.1103A,President Commercial Centre,608 Nathan Road,Mong Kok,Kowloon,Hong Kong

Tel: + 86-852-27712210

Fax: + 86-852-23843747

SHANGHAI HUA YU ELECTRONIC CO., LTD. (CHINA)

上海譚裕電子有限公司

Address:3586,Wai Qing Song Road, Qing Pu County, Shanghai China

Tel: + 86-21-59741348 · + 86-21-59744101~4

Fax: + 86-21-59741347

SU ZHOU AEON TECH CO., LTD. (CHINA)

蘇州華廣電通有限公司

Address:Limin North Road, LiLi Town,Wu Jiang City, Jiang Su Province China

Tel: + 86-512-63627980

Fax: + 86-512-63627981

Contents

<i>Item</i>	<i>Description</i>	<i>Page</i>
1.	天線規格表 1
2.	成品圖 2
3.	測試報告 3~6
4.	Cable 規格 7~8
5.	杆套材質特性 9~15
6.	上固定座材質特性 16
7.	下固定座材質特性 17~21
8.	Connector 材質特性 22
9.	H.S Tube 材質特性 23~24
10.	SGS 測試 25~56
11.	BILL OF MATERIAL 57
12.	有害物質調查表 58~61
13.	保證書 62~65

RF Antenna Assembly

Specification


1. Electrical Properties :

- 1.1 Frequency Range..... 2.4GHz ~ 2.5GHz
- 1.2 Impedance 50Ω Nominal
- 1.3 VSWR 1.92 Max.
- 1.4 Return Loss..... -10 dB Maximum
- 1.5 Radiation Omni-directional
- 1.6 Gain(peak)..... 3.0dBi
- 1.7 Polarization..... Linear Vertical
- 1.8 Admitted Power..... 1W

2. Physical Properties :


- 2.1 Cable..... RG-178 Coaxial Cable
- 2.2 Antenna Cover..... TPE
- 2.3 Antenna Base..... PC
- 2.4 Antenna Base..... PBT
- 2.5 Operating Temp. -20°C ~ +65°C
- 2.6 Storage Temp. -30°C ~ +75°C
- 2.7 Color Black
- 2.8 Connector..... SMA Plug Reverse

REV	DATE	DESCRIPTION
X2	2005.11.24	New Issue

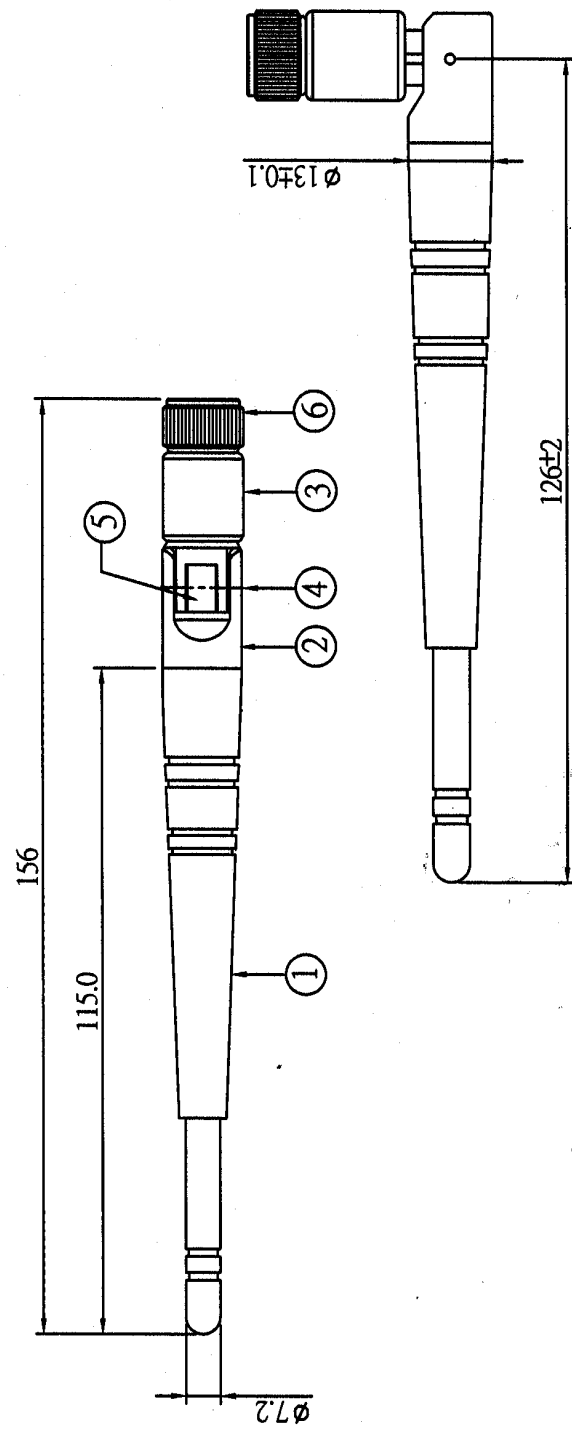

NO.	ITEM	DESCRIPTION	QTY	REMARK
6	Connector	SMA Straight Plug/Reverse	1	EQUIVALENT
5	Cable	RG-178 Cable	1	EQUIVALENT
4	Rivet	POM Black	2	EQUIVALENT
3	Antenna Base	PBT Color:Black	1	EQUIVALENT
2	Antenna Base	PC Color:Black	1	EQUIVALENT
1	Antenna Body	TPE Color:Black	1	EQUIVALENT

APPROVED		Edmond	
CHECKED		Sew	
DRAWN		陈东	
W.Y PNO:	C034-510447-A	CUSTOMER: 合勤科技(無錫)有限公司	
PART NAME:	RF Antenna Assembly	SUZHOU AEON TECH CO., LTD.	
PART NO.:		蘇州華廣電通有限公司	
REV.	X2	FILE:	C034-510447-A.DWG
UNIT	m/m	TIME:	2005.11.24

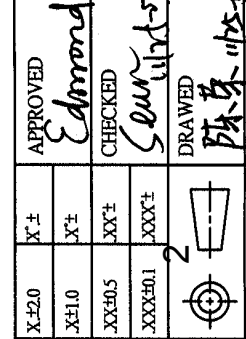




蘇州華廣電通有限公司

AEON TECH CO.,LTD.(CHINA)

RF Antenna Cable Assembly

P/NO:C034-510447-A SPEC:2.4GHz

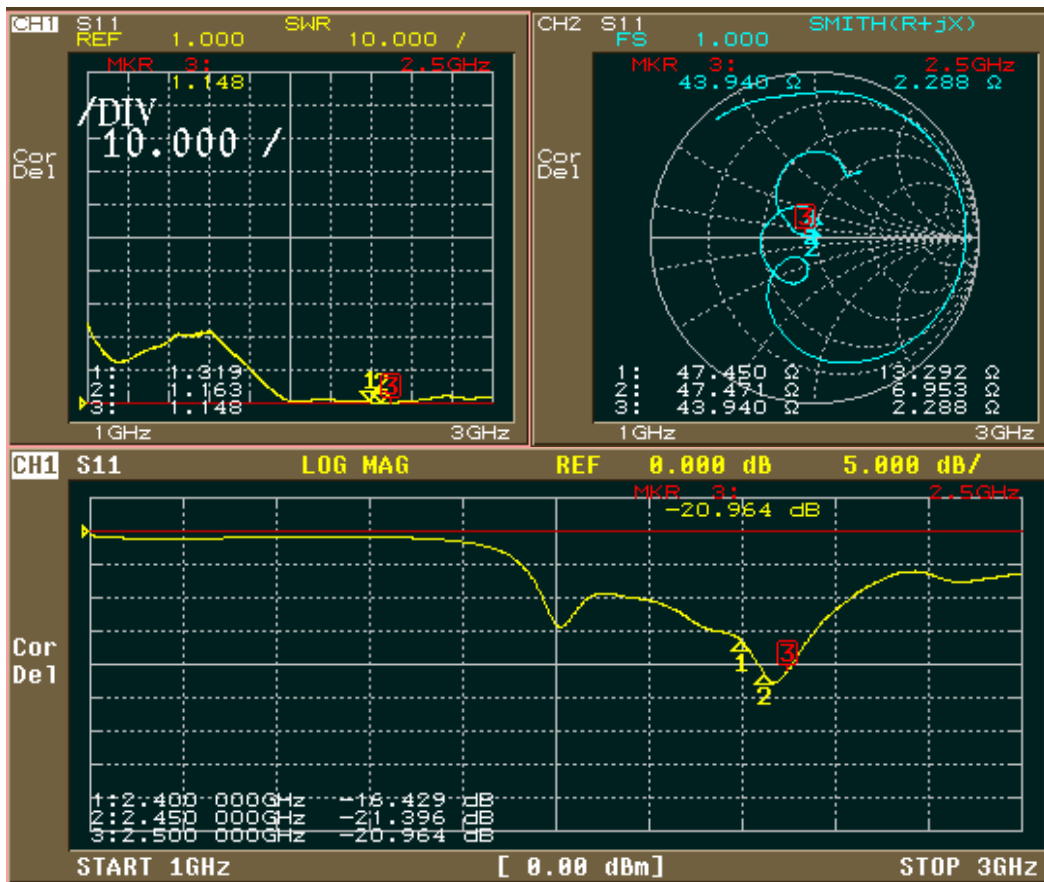




蘇州華廣電通有限公司


AEON TECH CO.,LTD(CHINA)

Far-field amplitude of C034-510447-A-H-plane 1

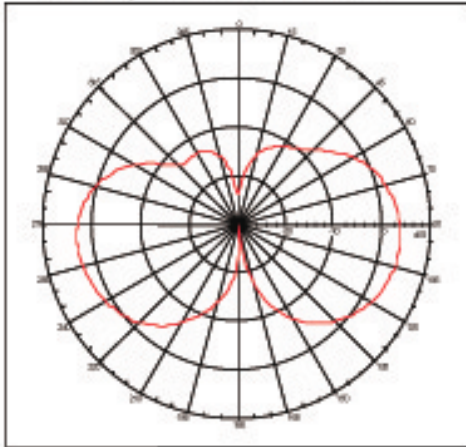


2.4GHz Gain = 3.44033 dBi

Far-field amplitude of C034-510447-A-V-plane X1

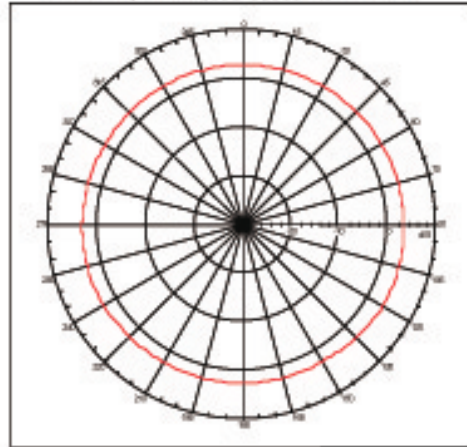


2.4GHz Gain = 3.25968 dBi

Far-field amplitude of C034-510447-A-H-plane 1

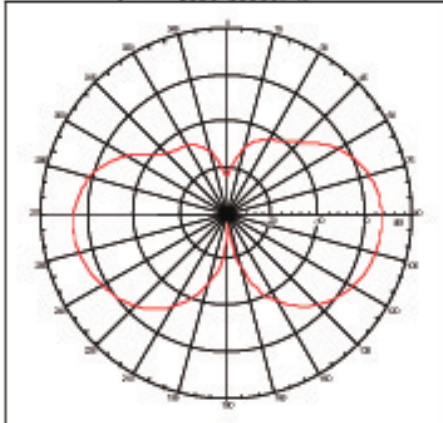


2.45GHz Gain = 3.44743 dBi

Far-field amplitude of C034-510447-A-V-plane X1

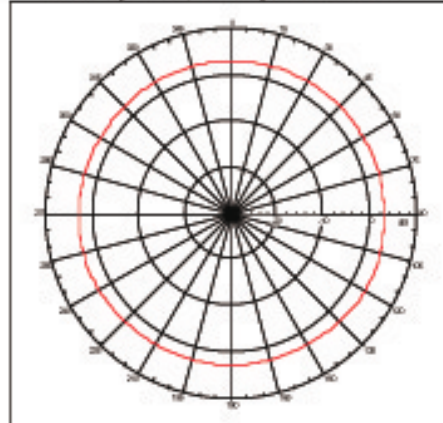


2.45GHz Gain = 3.23752 dBi

Far-field amplitude of C034-510447-A-H-plane 1

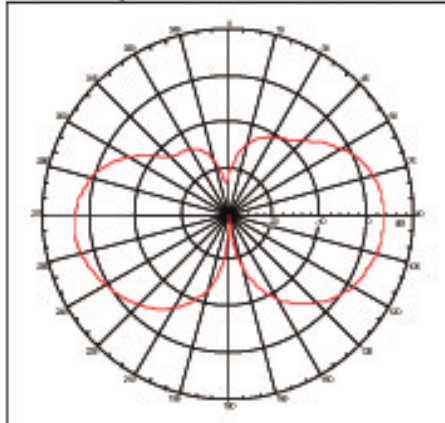

2.5GHz Gain = 3.52501 dBi

Far-field amplitude of C034-510447-A-V-plane X1

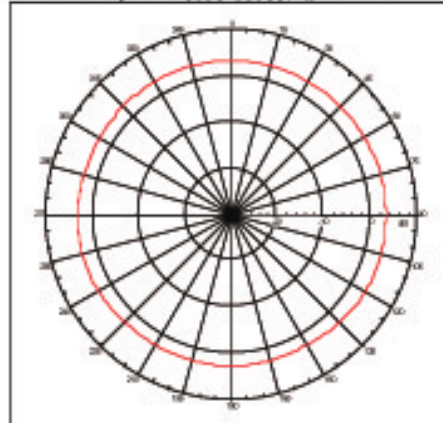


2.5GHz Gain = 3.28526 dBi



蘇州華廣電通有限公司
AEON TECH CO.,LTD(CHINA)

RF Antenna Assembly

P/NO:C034-510447-A SPEC:2.4GHz

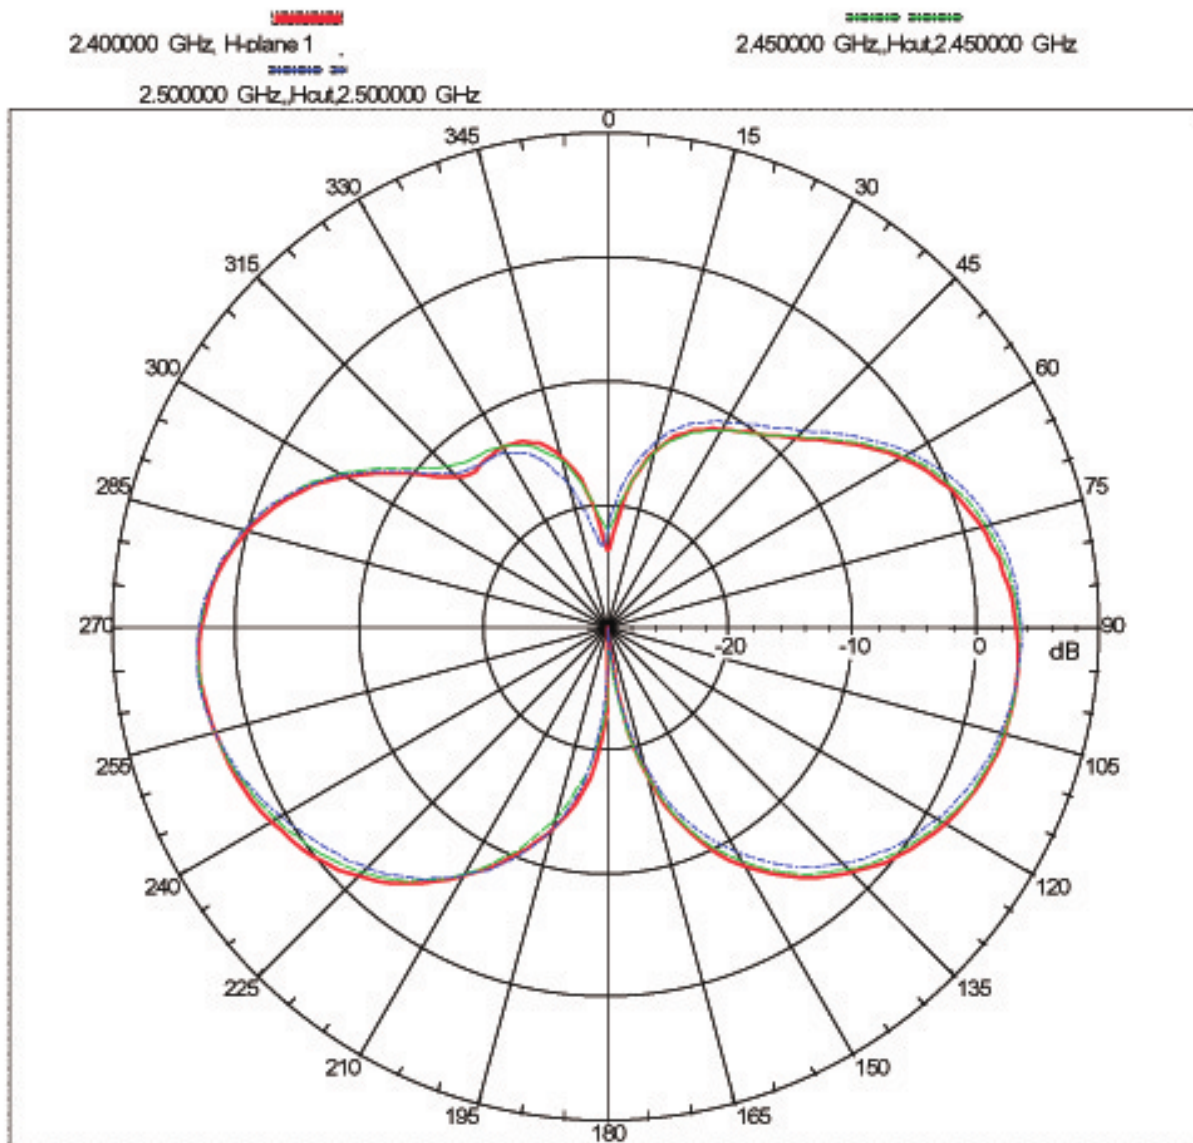




蘇州華廣電通有限公司
AEON TECH CO.,LTD(CHINA)

RF Antenna Assembly

P/NO:C034-510447-A SPEC:2.4GHz

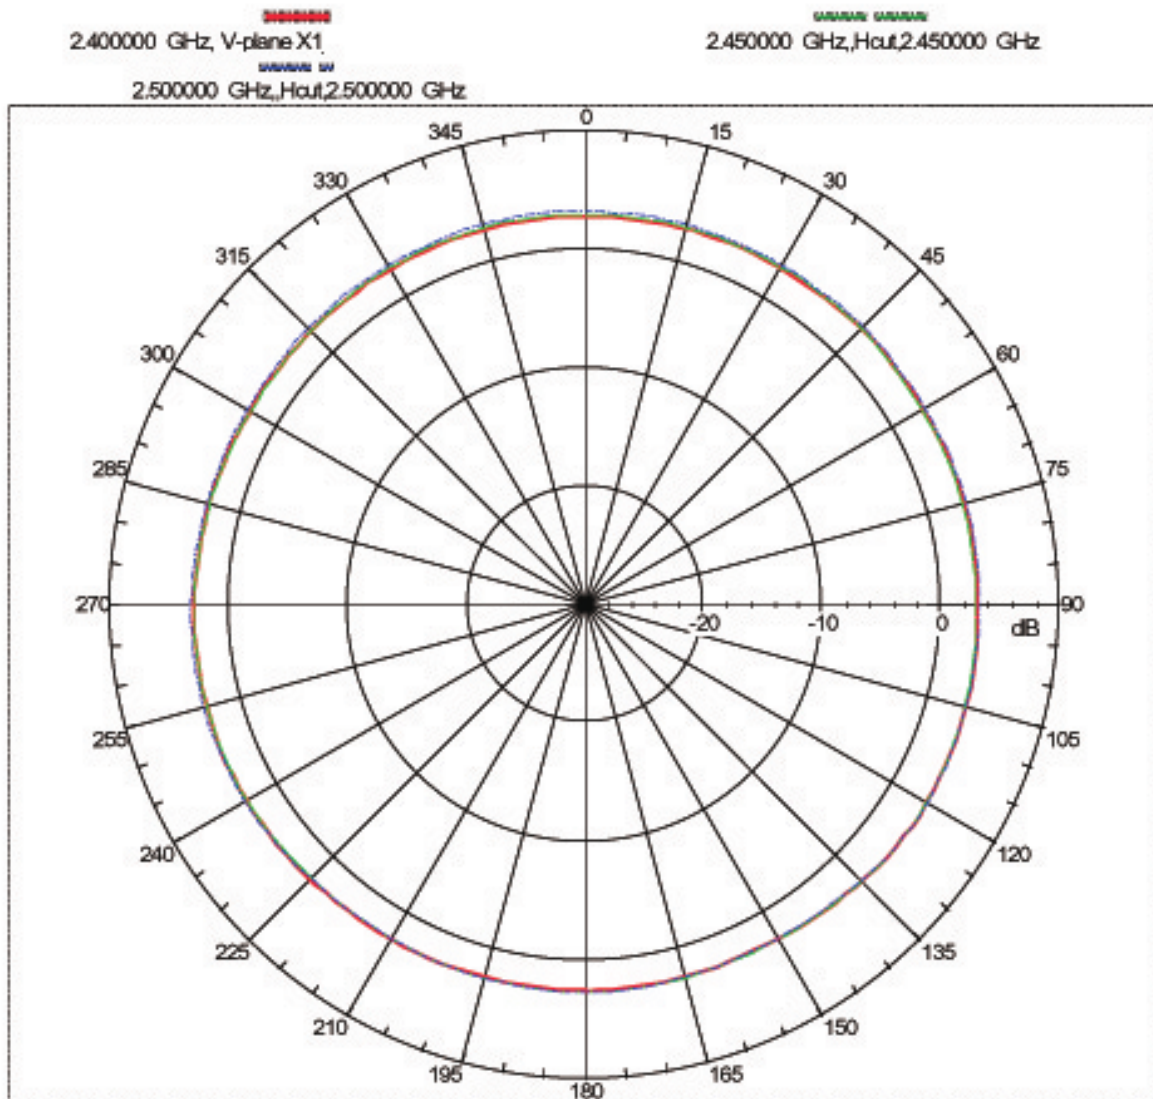


RG 178 B/U	FEP INSULATED HIGH-FREQUENCY COAXIAL CABLE	PAGE	1 / 2
PRODUCT STANDARD		ISSUED	16. Oct. 2003
		REVISED	

I - Scope

This specification presents a FEP insulated high-frequency coaxial cable AWG 30, 1.8 mm O.D. for internal wiring of electronic equipment, such as Computer / Notebook with wireless communication systems.

II - Construction

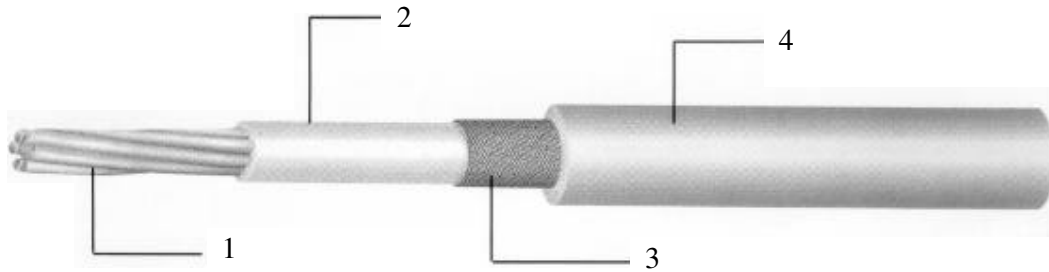

Item	Unit	Details
1. Inner Conductor	Material	— CP-AG
	Composition	No./mm AWG 30 or 7 ×0.1
	Dia. (approx.)	mm 0.305
2. Dielectric	Material	— Extruded FEP
	Nom. O.D.	mm 0.84 ± 0.05
	Color	— Natural
3. Outer Conductor	Material	— Silver coated copper
	Composition	— Braided (16 / 3 / 0.1)
	Dia. (approx)	mm 1.29 ±0.01
4. Jacket	Material	— Extruded FEP
	Dia.	mm 1.80 ±0.1
	Color	— Standard color is Light Orange

Note :	MADE BY	
	APPROVALS	

RG 178 B/U	FEP INSULATED HIGH-FREQUENCY COAXIAL CABLE	PAGE	2 / 2
PRODUCT STANDARD		ISSUED	16. Oct. 2003
		REVISED	

III – Characteristics

Item	Unit	Specified Value	Note
Temperature Rating	°C	-55 ~ +200	
Voltage Lasting	V	1000	
Dielectric strength	—	Dielectric core: No breakdown at AC 3 kv for 0.2 sec.	Spark test
		Jacket: No breakdown at AC 3 kv for 0.2 sec.	Spark test
Characteristic Impedance	Ω	50 ± 2	TDR method
Capacitance	pF / m	29.4	at 1 kHz
Attenuation. (Max.)	dB / 30m	52.0	1.0 GHz
		94.0	3.0 GHz
		-	5.0 GHz
		16.0	100.0 GHz
		33.0	400.0 GHz
Approx. Weight	g / m	7.68	

Note :

MADE BY

APPROVALS

Arnitel
polyether esters
polyetherester
esters de polyether

天線桿套材質特性表



Units Einheiten Unites	EM400	EM460	EL550	EL630	EL740	PL380
	1.12	1.16	1.20	1.23	1.27	1.18
°C	195	185	202	212	221	197
μ m/m.k	220	160	180	140	110	150
°C	\	\	110	115	120	\
°C	130	150	180	200	200	145
°C	\	50	85	115	150	\
%	0.30	0.30	0.20	0.20	0.15	0.40
%	0.75	0.70	0.55	0.60	0.90	7.0
*	HB	HB	HB	HB	HB	HB
Mpa	55	110	220	375	900	60
Mpa	4.0	7.1	13.2	20.2	26.9	3.5
Mpa	5.4	9.0	15.7	23	22.6	5.2
Mpa	8.4	11.4	16.6	22.0	26.3	8.5
Mpa	17	21	32	40	45	16
%	700	800	600	600	360	450
kj/m ²	NB	NB	NB	NB	NB	NB
kj/m ²	NB	NB	NB	NB	200	NB
kj/m ²	NB	NB	NB	NB	9	NB
kj/m ²	NB	NB	20	4	4	NB
	38	45	55	63	74	38
MV/m	\	\	\	\	\	\
Ω .cm	5*10 ¹⁴	10 ¹⁴	10 ¹⁴	10 ¹⁴	10 ¹²	10 ¹²
Ω	>10 ¹³	>10 ¹⁴	>10 ¹⁴	>10 ¹⁴	>10 ¹⁰	>10 ¹³
\	4.1	\	\	3.8	\	4.7
\	4.0	4.4	4.0	3.4	3.3	4.4
x10 ¹⁴	10	\	\	3.8	\	310
x10 ¹⁴	170	350	400	350	300	350
\	800	800	600	600	600	800
\	600	600	600	800	800	600

Arnitel

2.2 Product coding

The structure of the Arnitel productcodes is illustrated with the following example:

U M 55 1 - V

Thermoplastic elastomer type:

- E = polyether ester; polyether = PTHF
- P = polyether ester; polyether = PEO/PPO
- U = polyester ester; (with extra urethane linkages)

Indication of viscosity range or processing technique

- L, M = injection moulding and extrusion
- B = blow moulding grade

Indication of hardness (Shore D)

Serial number

Indication of additives, performance

- H = heat-stabilized
- L = light/UV stabilized
- V = flame-retardant (not V-0)
- S = flame-retardant (V-0)

Figure 2.2: Arnitel product coding

2.3 Product portfolio

The Arnitel productrange is available with a hardness from 38 to 74 Shore D. The general Arnitel grades are shown in table 2.2. In order to enhance the flexibility of the portfolio a set of masterbatches (a.o. for heat, UV, etc) are on offer (refer to § 2.4).

Because of the development of these masterbatches heat stabilised Arnitel P is suggested for application areas where thermo-oxidative stability is an issue. For applications where colour and UV stability is required, the Arnitel E range is advised.

	Shore D					
	38	40	46	55	63	74
Arnitel E		EM400	EM460	EL550 EM550	EL630 EM630	EL740 EM740
Arnitel P	PL380		PL460	PL580 PM581		
Arnitel U				UM551 UM551-V UM552 UM552-V	UM622	

Table 2.2: Arnitel productrange for general purpose

Besides these multi-purpose grades, specialty grades can be offered for specific purposes and/or application areas. These grades are not intended for regular sales and are therefore restricted. Permission from marketing is needed before sampling is initiated.

	Arnitel E	Arnitel P	Arnitel U
Automotive			
• CVJ boots	EB460 EB463 EB464		
• Boyplugs		PL380-M0	
Extrusion			
• Roofing foil	EM402-L		

Table 2.3: Examples of specialty grades

Arnitel® EL630/EM630

2.8.31 General:

Arnitel is the brand name of a series polyester based thermoplastic elastomers. These polymers combine excellent processability with good elastomeric properties between -40 and 200°C. Arnitel EL630 and EM630 are excellent materials for injection moulding and extrusion applications respectively.

The chemical structure of Arnitel EL630/EM630 is shown below.

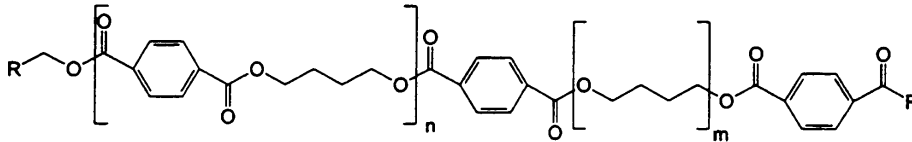


Figure 2.9: Chemical structure of Arnitel EL630/EM630.

Another way of writing the structure of Arnitels is shown below in Figure 2.




Figure 2.10: Simplified structure of Arnitel EL630/EM630 .

Arnitel EL630/EM630 is TOSCA registered (including DSL-Canada) under CAS 37282-12-5

2.8.32 Thermal properties:

• **Modulus-temperature behaviour:**

The materials have a glass transition at circa -40°C and a typical melting point at 213°C. The modulus-temperature behaviour is shown in graph 2.76, for comparison, accompanied by other Arnitel E types.

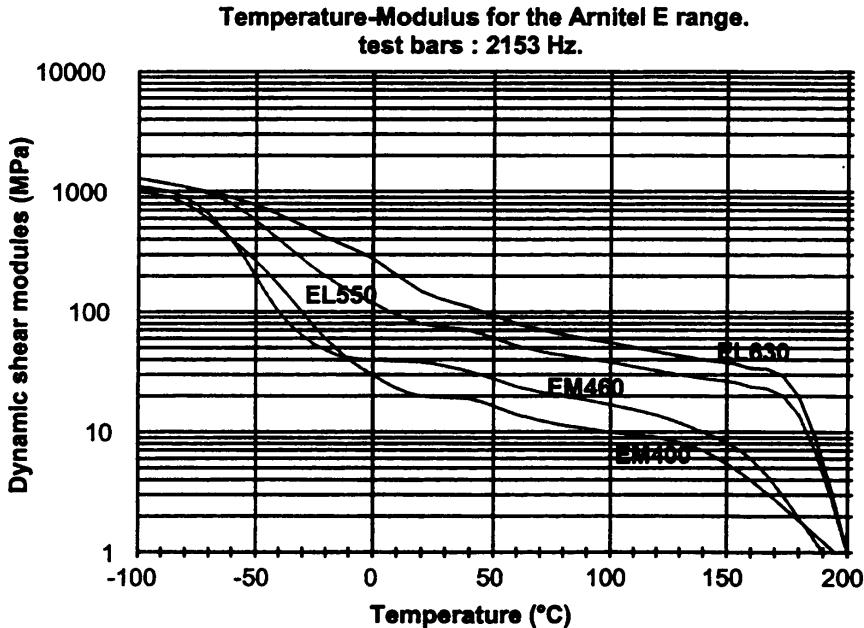

Graph 2.76: Modulus-temperature behaviour of Arnitel EL630/EM630.

DSM Engineering Plastics

Arnitel® EL630/EM630

Although information on performance at higher temperatures may be extracted from the above shown graph, a Vicat or HDT are shown in table 2.29.

analysis	SI unit	typical data	test method
Vicat A	(°C)	200	ISO 306/A
Vicat B	(°C)	125	ISO 306/B
HDT-B	(°C)	115	ISO 75-1

Table 2.29: Vicat and HDT data on Arnitel® EL630 and EM630


Arnitel EL630 and EM630 have a melting point of 213°C as found in the second heating curve of a DSC. The polymer will crystallize at 155°C using a 20°C/min cooling rate. The thermal expansion coefficient of Arnitel EL630/EM630 and is $140 \cdot 10^{-4}$ $\mu\text{m}/\text{m.K}$.

• **Heat aging:**

Arnitel EL630/EM630 shows an optimum between heat resistance and colour stability. Heat aging for EL630/EM630 is under test at this moment, however the data will be between EL550 and EL740. Arrhenius curves of thermo-oxidative heat aging are shown in graph 2.77. Criterium chosen is retention of 50% original elongation at break.

Heat aging of Arnitel E40D, 46D, 55D and 74D.

Natural products, Arrhenius plot.

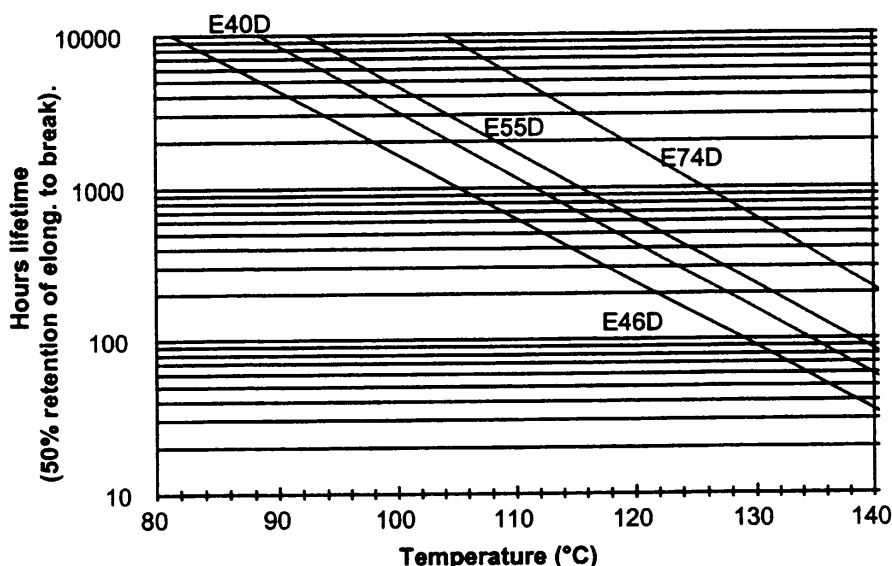

Graph 2.77: Heat stability for Arnitel E-range.

Heat ageing can be improve using a stabilisation masterbatch, however for heat stabilisation the P-range is preferred for it's excellence in performance. These data can be found in the Arnitel properties summary or an Arnitel P datasheet.

2.8.33 Processing and Handling:

Arnitel EL630/EM630 is a polyester with a density of 1.12 g/cm³ according ISO 1183. Due to the polyester nature of these materials it is of major importance to store the material dry prior to processing. Materials packaged in sealed packaging should have a moisture content lower then 500 ppm. The polymer will contain 0.12% moisture in 50% RH and 0.58% water after saturation in water. Both numbers are in equilibrium. If samples have become wet during storage a drying step of 24 hours 120°C (or 6 hours 140°C) prior to use will prevent degradation of the material during processing combined with an eventual loss of properties. The air or nitrogen will have to have a dew point of at least -30°C.

DSM Engineering Plastics

Arnitel® EL630/EM630

• **Processing:**

Arnitel EL630/EM630 shows a single melting point at 195°C in DSC. Processing conditions are shown in the table below.

polymer	zone 1	zone 2	zone 3	additional	melt	mold
EL630	225	230	235	235	225-235	20-50
EM630	225	230	235	235	235	50


All temperatures are in °C.

Table 2.30: *Processing conditions for Arnitel EL630 and Arnitel EM630.*

• **Rheology:**


The temperature depending melt viscosity of Arnitel EL630/EM630 and are shown below in graph 2.80 and 2.81 respectively.

**Shear rate dependent of the melt viscosity of Arnitel EL630.
Effect of melt temperature.**

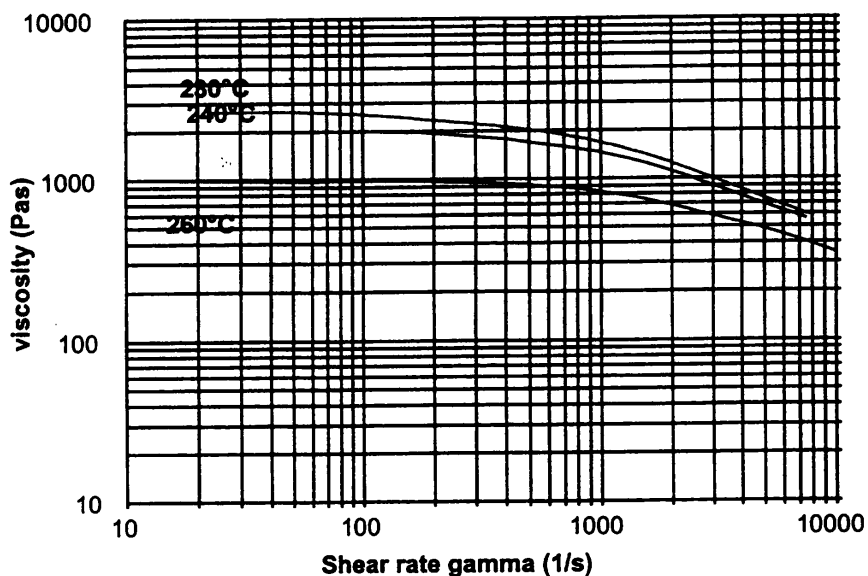

Arnitel® EL630/EM630

Capillar melt viscosity of Arnitel EM630.
240, 250 and 260°C.

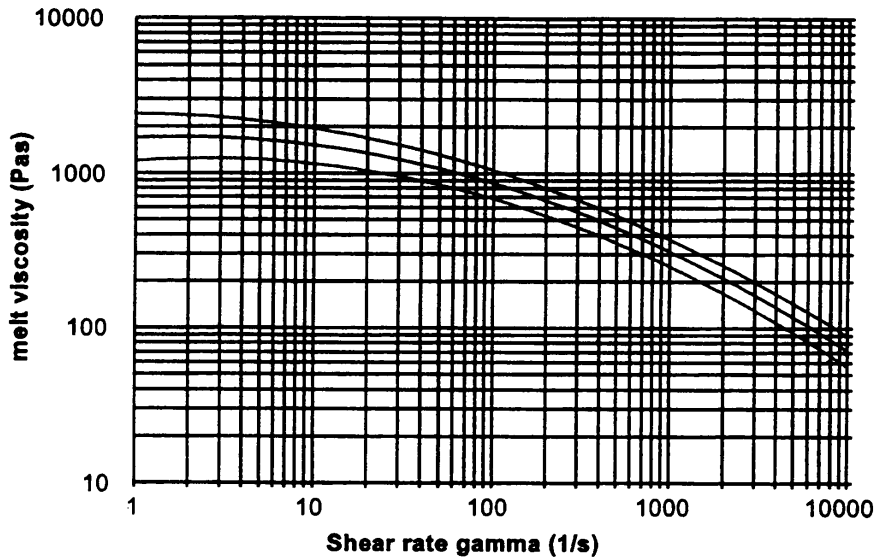

Graph 2.80 and 2.81: Temperature dependency of the melt viscosity for Arnitel EL630 and EM630 .

The MFI values are shown in table 2.31.

		EL630	EM630	
MFI 230°C	g/10 min		7	ISO 1133
MFI 240°C	g/10 min	30		ISO 1133

Table 2.31: MFI for Arnitel EL630/EM630.

• Use of regrind:

Arnitel can readily be recycled. If the MFI of the regrind is up or down to four points higher, 20% can be recycled. A difference of 2 MFI points allows up to 50% of regrind. Obviously the regrind should be dried properly before use.

2.8.34 Mechanical properties:

If Arnitel EL630 or Arnitel EM630 are processed properly the materials will have mechanical properties as shown in table 2.32.

Mechanical property	SI Unit	typical data*		test method
		EL630	EM630	
Hardness	Shore D	63	63	ISO 868
Tensile modulus (1 mm/min)	MPa	330	330	ISO 527
Tensile strength (50 mm/min)	MPa	30	30	ISO 527
Strain at break	%	350	350	ISO 527
Tensile stress at 5% strain	Mpa	11.5	11.5	
Tensile stress at 10% strain	Mpa	15.9	15.9	
Tensile stress at 50% strain	Mpa	17.3	17.3	
Tear strength Graves	KN/m	145	145	DIN53515
Izod notched 23°C (73°F)	KJ/m ²	NB	NB	ISO 180/1A
Izod notched -30°C (-22°F)	KJ/m ²	4	4	ISO 180/1A
Charpy notched 23°C (73°F)	KJ/m ²	NB	NB	ISO 179/1eA
Charpy notched -30°C (-22°F)	KJ/m ²	12	12	ISO 179/1eA

Data for dry natural materials.

*1 NB: No Break

Table 2.32: mechanical properties of Arnitel® EL630.

Amitel[®] EL630/EM630

- **Abrasion:**

Amitels show good abrasion resistance in both Taber and DIN 53516 abrasion tests. Data are shown in the Amitel general property overview (also included in the EPIC)

2.8.35 Flame retardancy:

Amitel EL630 and EM630 show in an ISO1210/A flammability test a burning rate leading to a classification FH-1. Flame retardancy can be improved using a halogenated or halogen free FR masterbatch.

2.8.36 Electrical properties:

Amitel EL630/EM630 can be used for cable jacketing applications. If the material is in permanent contact with copper a copper stabilisation package should be added. If the copper wires are coated with a tin layer, no stabilisation is necessary. The electrical properties are shown in table 33.

Electrical property	SI Unit	typical data*		test method
		EL630	EM630	
Dielectric strength	KV/mm	22	22	IEC 243-1
Relative permittivity (ϵ_r) at 1 kHz	-	4.4	4.4	IEC 250
Dissipation factor ($\tan \delta$) at 1kHz	-	0.019	0.019	IEC 250
Comparative tracking index	-	600	600	IEC 112
Volume resistivity	$10^{14} \Omega \cdot \text{cm}$	1	1	IEC 93
Surface resistivity	$10^{14} \Omega$	1	1	IEC 93

Table 2.33: Typical electrical properties of Amitel[®] EL630 and EM630.

2.8.37 Chemical resistance:

Amitel EL630 and EM630 are sensitive to strong bases and strong acids, especially at elevated temperatures. In some halogenated hydrocarbons (like tetrachloroethane), the materials (partially) dissolve. For a full review on chemical resistance of Amitel EL630 and EM630 request the chemical resistance brochure.

- **Hydrolysis**

Like all polyesters Amitel are sensitive to moisture, however Amitels are more stable to water than e.g. PET and PBT. graph 2.84 shows the hydrolytic stability of Amitel EL630 at 100°C and in steam (120°C). For improved hydrolysis stability, using a polycarbodiimid containing masterbatch like Stabaxol[®] is an option. To maintain all other properties use a masterbatch based on polyester. Data on the Stabaxol stabilised grade are shown in graph 2.85.