


# FCC C2PC Test Report

**FCC ID** : I88WAC6303D-S  
**Equipment** : 802.11ac Wave 2 Dual-Radio Unified Pro  
Access Point  
**Model No.** : WAC6303D-S  
**Multiple Listing** : Refer to item 1.1.1 for more details  
**Brand Name** : ZYXEL  
**Applicant** : Zyxel Communications Corporation  
**Address** : No.2 Industry East RD. IX, Hsinchu Science  
Park, Hsinchu 30075, Taiwan, R.O.C.  
**Standard** : 47 CFR FCC Part 15.407  
**Received Date** : Jun. 22, 2017  
**Tested Date** : Sep. 05 ~ Oct. 06, 2017

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

Approved by:

  
\_\_\_\_\_  
Along Chen / Assistant Manager

  
\_\_\_\_\_  
Gary Chang / Manager



---

## Table of Contents

<b>1</b>	<b>GENERAL DESCRIPTION .....</b>	<b>5</b>
1.1	Information.....	5
1.2	Local Support Equipment List.....	11
1.3	Test Setup Chart.....	12
1.4	The Equipment List .....	14
1.5	Testing Applied Standards .....	15
1.6	Measurement Uncertainty .....	15
<b>2</b>	<b>TEST CONFIGURATION.....</b>	<b>16</b>
2.1	Testing Condition .....	16
2.2	The Worst Test Modes and Channel Details.....	16
<b>3</b>	<b>TRANSMITTER TEST RESULTS .....</b>	<b>18</b>
3.1	Conducted Emissions .....	18
3.2	Transmitter Radiated and Band Edge Emissions .....	27
<b>4</b>	<b>TEST LABORATORY INFORMATION .....</b>	<b>120</b>

---

## Release Record

Report No.	Version	Description	Issued Date
FR762203-02AN	Rev. 01	Initial issue	Nov. 15, 2017

## Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.207	Conducted Emissions	[dBuV]: 0.561MHz 38.70 (Margin -7.30dB) - AV	Pass
15.407(b) 15.209	Radiated Emissions	[dBuV/m at 3m]: 5350.00MHz 53.72 (Margin -0.28dB) - AV	Pass
15.407(a)	Emission Bandwidth	Refer to FR762202-03	Pass
15.407(a)	RF Output Power	Refer to FR762202-03	Pass
15.407(a)	Peak Power Spectral Density	Refer to FR762202-03	Pass
15.407(g)	Frequency Stability	Refer to FR762202-03	Pass
15.203	Antenna Requirement	Meet the requirement of limit	Pass

# 1 General Description

## 1.1 Information

This report is issued as a FCC Class II Permissive Change. The modification is only concerned with adding 5250~5350MHz and 5470~5725 MHz band by software setting.

### 1.1.1 Product Details

The following models are provided to this EUT.

Brand Name	Model Name	Product Name
ZYXEL	WAC6303D-S	802.11ac Wave 2 Dual-Radio Unified Pro Access Point
	NWA1123-AC SHD	802.11ac Wave 2 Dual-Radio Nebula Cloud Managed Access Point

† All models are electrically identical, different model names are for marketing purpose.  
 † The above models, model **WAC6303D-S** was selected as a representative one for the final test and only its data was recorded in this report.

### 1.1.2 Specification of the Equipment under Test (EUT)

RF General Information					
Frequency Range (MHz)	IEEE Std. 802.11	Ch. Freq. (MHz)	Channel Number	Transmit Chains ( $N_{TX}$ )	Data Rate / MCS
5250-5350 5470-5725	a	5260-5320 5500-5720	52-64 [4] 100-144 [12]	3	6-54 Mbps
5250-5350 5470-5725	n (HT20)	5260-5320 5500-5720	52-64 [4] 100-144 [12]	3	MCS 0-23
5250-5350 5470-5725	n (HT40)	5270-5310 5510-5710	54-62 [2] 102-142 [6]	3	MCS 0-23
5250-5350 5470-5725	ac (VHT20)	5260-5320 5500-5720	52-64 [4] 100-144 [12]	3	MCS 0-9
5250-5350 5470-5725	ac (VHT40)	5270-5310 5510-5710	54-62 [2] 102-142 [6]	3	MCS 0-9
5250-5350 5470-5725	ac (VHT80)	5290 5530-5690	58 [1] 106-138 [3]	3	MCS 0-9

SW Version: V5.10(ABGL.1)b6  
 Note 1: RF output power specifies that Maximum Conducted Output Power.  
 Note 2: 802.11a/n/ac uses a combination of OFDM-BPSK, QPSK, 16QAM, 64QAM, 256QAM modulation.  
 Note 3: 802.11n/ac supports beamforming mode.

### 1.1.3 Antenna Details

Model	Type	Connector	Antenna Gain (dBi)	
			5250~5350 MHz	5470~5725 MHz
AD32	Direction	UFL	1.29	1.07

### 1.1.4 Power Supply Type of Equipment under Test (EUT)

<b>Power Supply Type</b>	From AC adapter: 12Vdc From PoE: 54Vdc
--------------------------	---

### 1.1.5 Accessories

N/A


### 1.1.6 Channel List

802.11 a / HT20 / VHT20		HT40 / VHT40	
Channel	Frequency(MHz)	Channel	Frequency(MHz)
52	5260	54	5270
56	5280	62	5310
60	5300	102	5510
64	5320	110	5550
100	5500	118	5590
104	5520	126	5630
108	5540	134	5670
112	5560	142	5710
116	5580	<b>VHT80</b>	
120	5600	58	5290
124	5620	106	5530
128	5640	122	5610
132	5660	138	5690
136	5680	---	---
140	5700	---	---
144	5720	---	---


### 1.1.7 Test Tool and Duty Cycle

Test Tool	putty, V0.6				
Duty Cycle and Duty Factor	Mode	Non-beamforming		Beamforming	
		Duty cycle (%)	Duty factor (dB)	Duty cycle (%)	Duty factor (dB)
	11a	96.27%	0.17	---	---
	VHT20	99.26%	0.03	99.27%	0.03
	VHT40	98.22%	0.08	98.67%	0.06
VHT80	95.97%	0.18	95.10%	0.22	

#### Non-beamforming mode

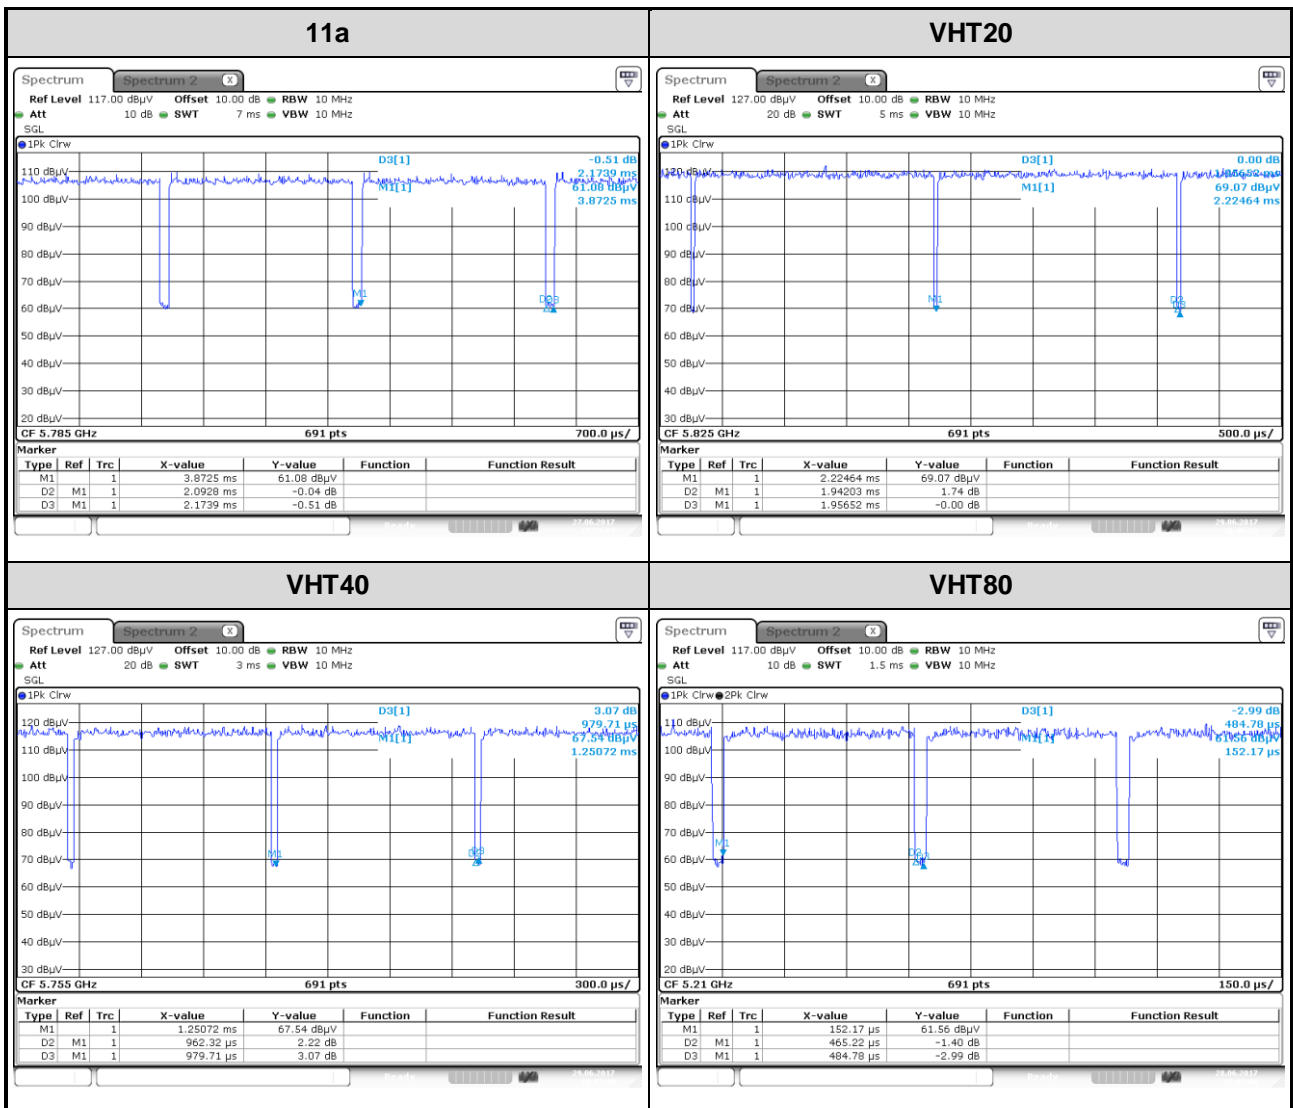

**Beamforming mode**

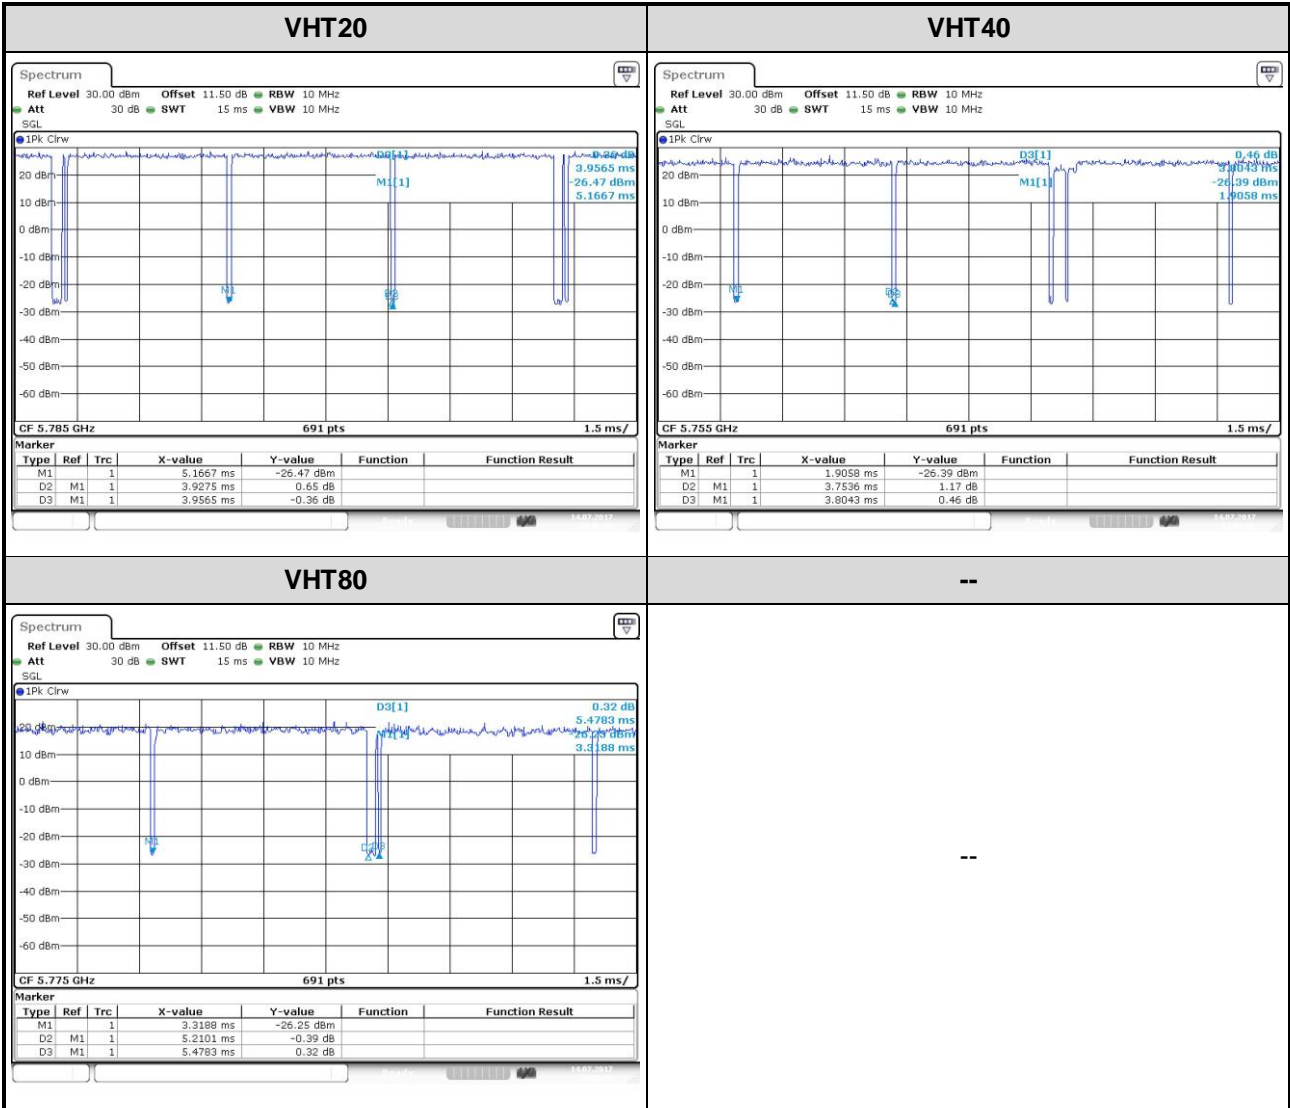



### 1.1.8 Power Setting

For Frequency band 5250~5350 MHz			
Modulation Mode	Test Frequency (MHz)	Power Set	
		Non-Beamforming	Beamforming
11a	5260	64	---
11a	5300	64	---
11a	5320	64	---
HT20	5260	64	62
HT20	5300	64	62
HT20	5320	64	62
HT40	5270	70	62
HT40	5310	67	56
VHT20	5260	64	62
VHT20	5300	64	62
VHT20	5320	64	62
VHT40	5270	70	62
VHT40	5310	67	56
VHT80	5290	56	50

For Frequency band 5470~5725 MHz			
Modulation Mode	Test Frequency (MHz)	Power Set	
		Non-Beamforming	Beamforming
11a	5500	68	---
11a	5580	64	---
11a	5700	68	---
HT20	5500	68	64
HT20	5580	64	60
HT20	5700	64	62
HT40	5510	70	64
HT40	5590	76	66
HT40	5670	72	66
VHT20	5500	68	64
VHT20	5580	64	60
VHT20	5700	64	62
VHT40	5510	70	64
VHT40	5590	76	66
VHT40	5670	72	66
VHT80	5530	58	54
VHT80	5610	70	66

**Channel that extends across the 5.725 GHz boundary**

For Frequency band 5470~5725 MHz			
Modulation Mode	Test Frequency (MHz)	Power Set	
		Non-Beamforming	Beamforming
11a	5720	68	---
HT20	5720	68	62
HT40	5710	74	66
VHT20	5720	68	62
VHT40	5710	74	66
VHT80	5690	80	66

## 1.2 Local Support Equipment List

### *Non-beamforming mode*



Support Equipment List					
No.	Equipment	Brand	Model	S/N	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	9ZFB4X1	RJ45, 10m non-shielded.
2	POE	ZYXEL	GS1900-8HP	---	---
3	Adapter	APD	WA-24Q12R	---	---

### *Beamforming mode*



Support Equipment List					
No.	Equipment	Brand	Model	S/N	Signal cable / Length (m)
1	Notebook	DELL	Latitude E6430	9ZFB4X1	RJ45, 10m non-shielded.
2	Client	ASUS	PCE-AC68	---	---
3	POE	ZYXEL	GS1900-8HP	---	---
4	Adapter	APD	WA-24Q12R	---	---

## 1.3 Test Setup Chart

### *Non-beamforming mode*

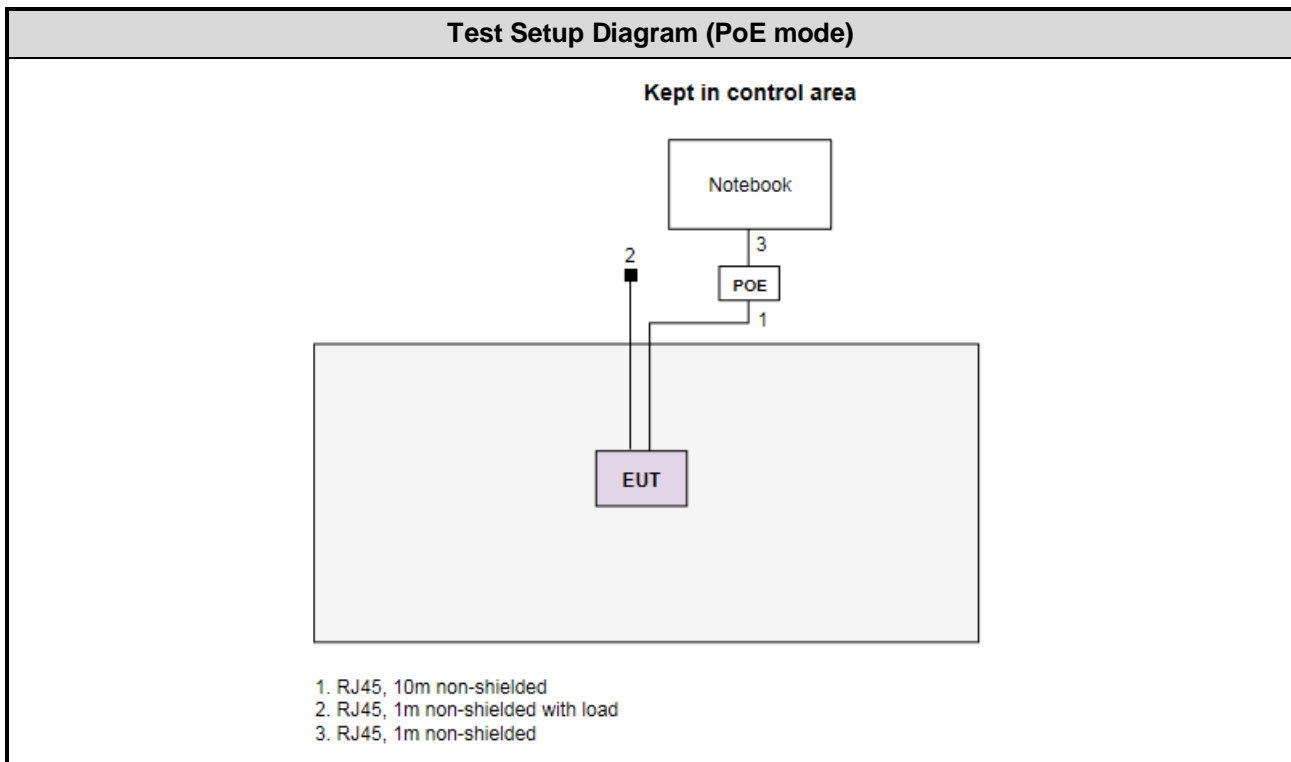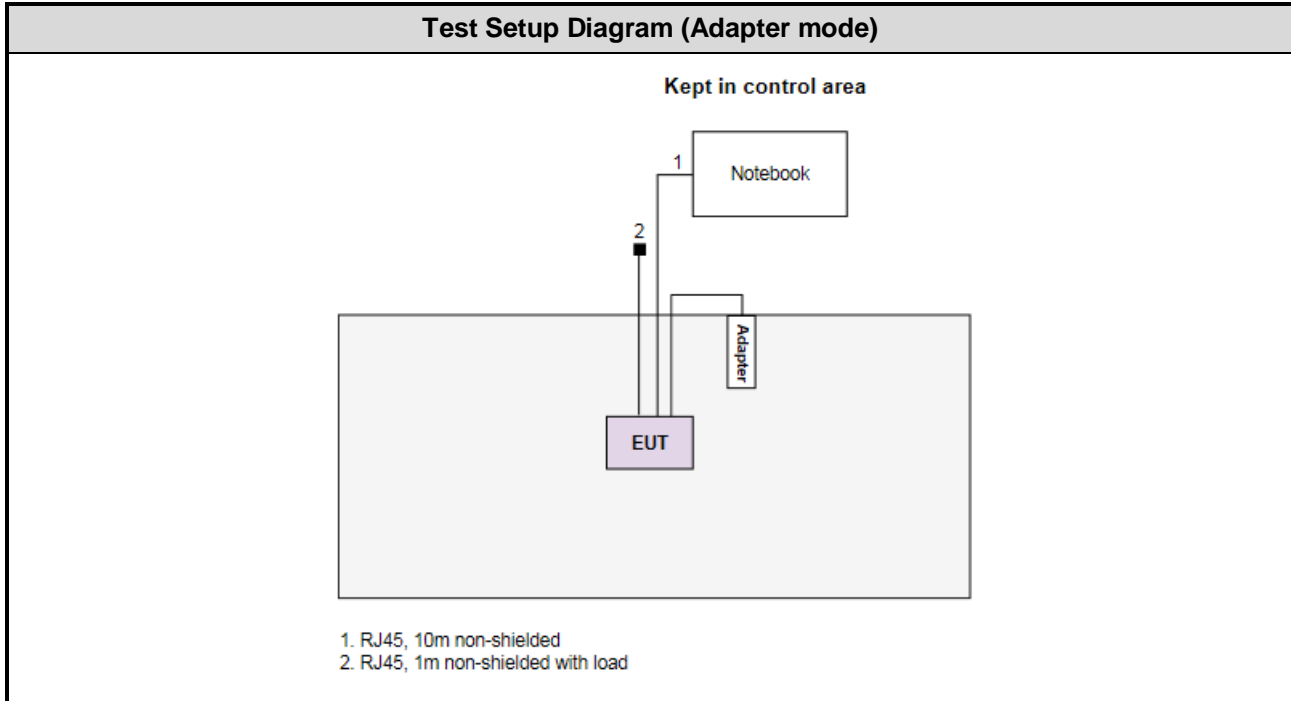

**Beamforming mode**

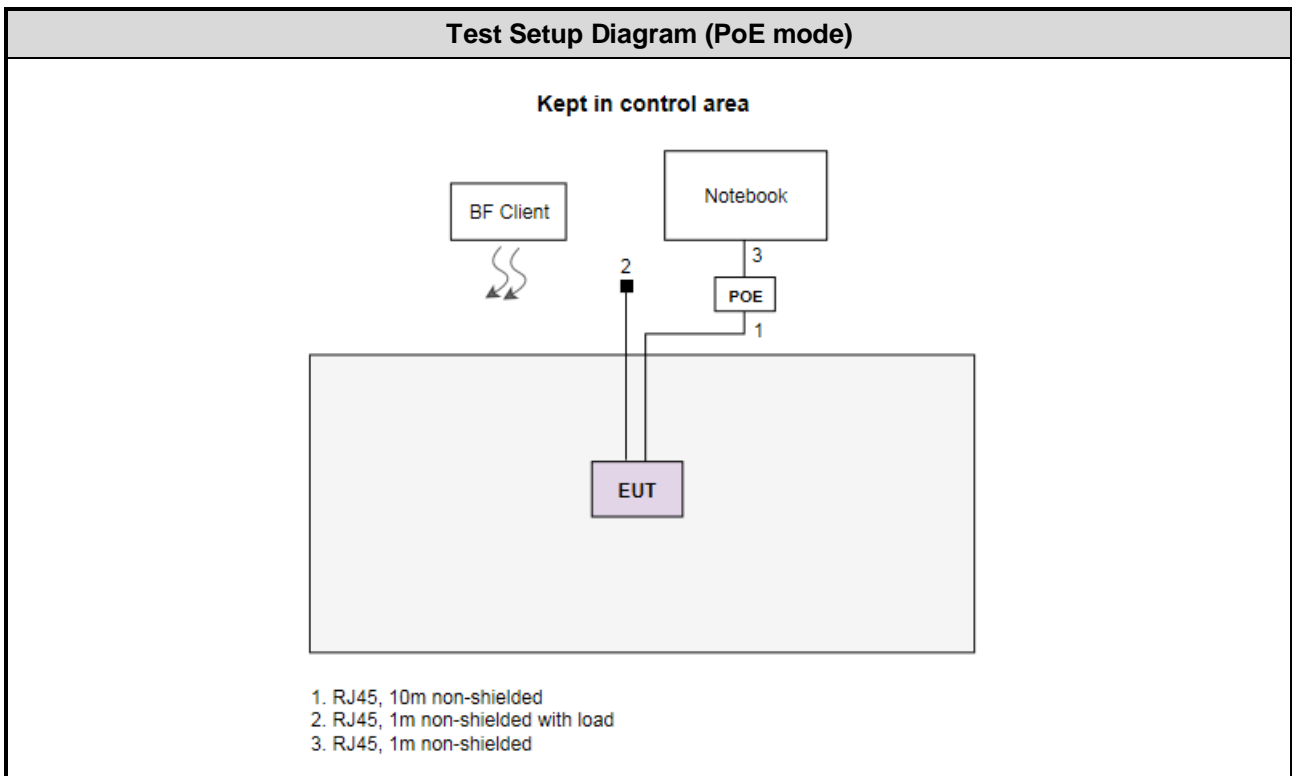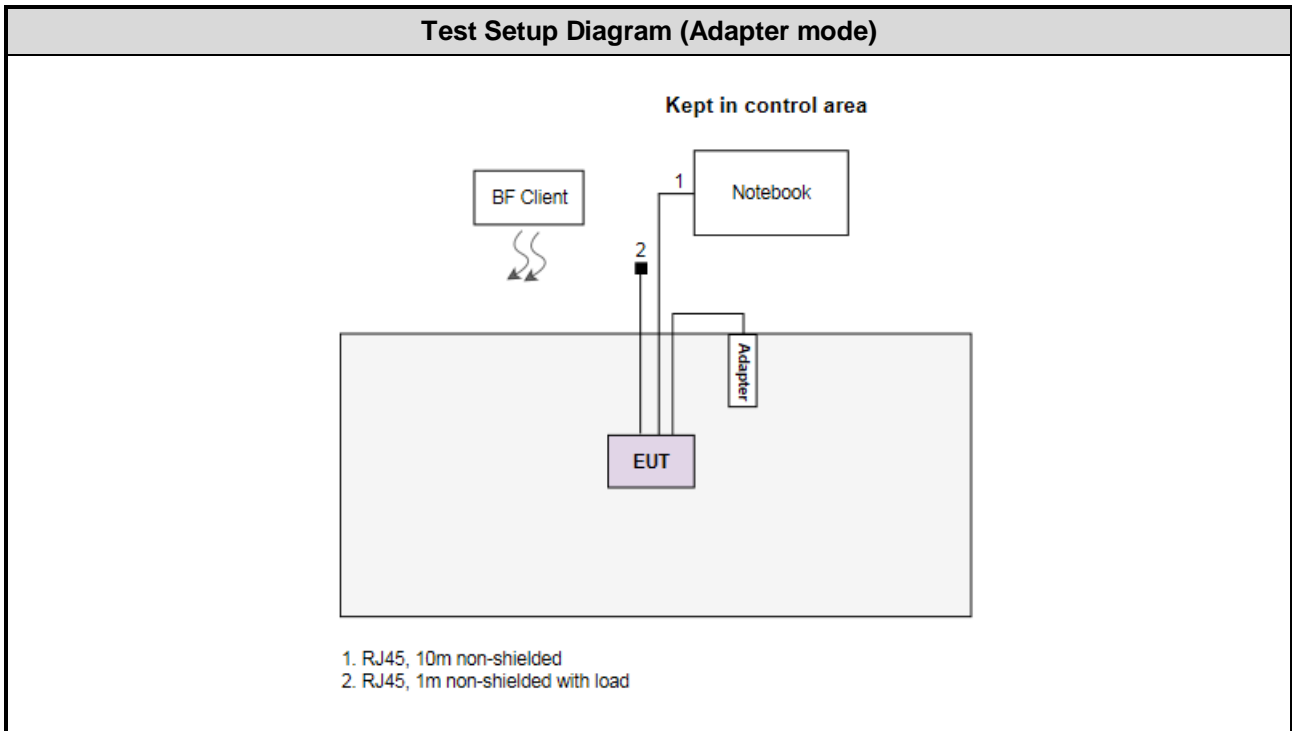

## 1.4 The Equipment List

<b>Test Item</b>	Conducted Emission				
<b>Test Site</b>	Conduction room 1 / (CO01-WS)				
<b>Tested Date</b>	Oct. 06, 2017				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Receiver	R&S	ESR3	101657	Dec. 21, 2016	Dec. 20, 2017
LISN	R&S	ENV216	101579	Jan. 19, 2017	Jan. 18, 2018
RF Cable-CON	EMC	EMCCFD300-BM-BM-6000	50821	Dec. 20, 2016	Dec. 19, 2017
Measurement Software	AUDIX	e3	6.120210k	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

<b>Test Item</b>	Radiated Emission				
<b>Test Site</b>	966 chamber 3 / (03CH03-WS)				
<b>Tested Date</b>	Sep. 13 ~ Sep. 28, 2017				
<b>Instrument</b>	<b>Manufacturer</b>	<b>Model No.</b>	<b>Serial No.</b>	<b>Calibration Date</b>	<b>Calibration Until</b>
Spectrum Analyzer	ROHDE&SCHWARZ	FSV40	101486	Nov. 15, 2016	Nov. 14, 2017
Receiver	Agilent	N9038A	MY53290044	Oct. 06, 2016	Oct. 05, 2017
Bilog Antenna	SCHWARZBECK	VULB9168	VULB9168-685	Apr. 28, 2017	Apr. 27, 2018
Horn Antenna 1G-18G	SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1206	Feb. 09, 2017	Feb. 08, 2018
Horn Antenna 18G-40G	SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017
Loop Antenna	R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017
Loop Antenna Cable	KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017
Preamplifier	EMC	EMC02325	980187	Sep. 04, 2017	Sep. 03, 2018
Preamplifier	Agilent	83017A	MY53270014	Aug. 21, 2017	Aug. 20, 2018
Preamplifier	EMC	EMC184045B	980192	Aug. 22, 2017	Aug. 21, 2018
RF cable-3M	HUBER+SUHNER	SUCOFLEX104	MY22620/4	Feb. 04, 2017	Feb. 03, 2018
RF cable-8M	HUBER+SUHNER	SUCOFLEX104	MY22600/4	Feb. 04, 2017	Feb. 03, 2018
RF cable-1M	HUBER+SUHNER	SUCOFLEX104	MY22624/4	Feb. 04, 2017	Feb. 03, 2018
LF cable-0.8M	EMC	EMC8D-NM-NM-800	EMC8D-NM-NM-800-001	Feb. 04, 2017	Feb. 03, 2018
LF cable-3M	EMC	EMC8D-NM-NM-3000	131103	Feb. 04, 2017	Feb. 03, 2018
LF cable-13M	EMC	EMC8D-NM-NM-13000	131104	Feb. 04, 2017	Feb. 03, 2018
Measurement Software	AUDIX	e3	6.120210g	NA	NA
Note: Calibration Interval of instruments listed above is one year.					

## 1.5 Testing Applied Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04

FCC KDB 644545 D03 Guidance for IEEE 802 11ac New Rules v01

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

## 1.6 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor ( $k=2$ ))

Measurement Uncertainty	
Parameters	Uncertainty
Bandwidth	$\pm 34.134$ Hz
Conducted power	$\pm 0.808$ dB
Frequency error	$\pm 34.134$ Hz
Power density	$\pm 0.463$ dB
Conducted emission	$\pm 2.670$ dB
AC conducted emission	$\pm 2.90$ dB
Radiated emission $\leq 1$ GHz	$\pm 3.66$ dB
Radiated emission $> 1$ GHz	$\pm 5.37$ dB
Time	$\pm 0.1\%$
Temperature	$\pm 0.6$ °C

## 2 Test Configuration

### 2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
AC Conduction	CO01-WS	23°C / 59%	Alex Tsai
Radiated Emissions	03CH03-WS	24-25°C / 65-66%	Aska Huang Brad Wu
RF Conducted	TH01-WS	22°C / 63%	Felix Sung

- FCC Designation No.: TW0009
- FCC site registration No.: 207696
- IC site registration No.: 10807C-1

### 2.2 The Worst Test Modes and Channel Details

#### Non-beamforming mode

For Frequency band 5250-5350 MHz, 5470-5725 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	VHT80	5690	MCS 0	1, 2
Radiated Emissions ≤1GHz	VHT80	5690	MCS 0	1, 2
	VHT80	5290 / 5530 / 5610 / 5690	MCS 0	
Radiated Emissions >1GHz	11a	5260 / 5300 / 5320 5500 / 5580 / 5700 / 5720	6 Mbps	1
	VHT20	5260 / 5300 / 5320 5500 / 5580 / 5700 / 5720	MCS 0	
	VHT40	5270 / 5310 5510 / 5590 / 5670 / 5710	MCS 0	
	VHT80	5290 / 5530 / 5610 / 5690	MCS 0	

#### NOTE:

1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The **X-plane** results were found as the worst case and were shown in this report.
2. This device can be powered by **AC adapter** or **POE**. Each power supply was selected for final testing as below configuration.
  - 1) Test configuration 1: POE mode
  - 2) Test configuration 2: Adapter mode



**Beamforming mode**

For Frequency band 5250-5350 MHz, 5470-5725 MHz				
Test item	Modulation Mode	Test Frequency (MHz)	Data Rate	Test Configuration
Conducted Emissions	VHT40	5670	MCS 0	1, 2
Radiated Emissions ≤1GHz	VHT40	5670	MCS 0	1, 2
Radiated Emissions >1GHz	VHT20	5260 / 5300 / 5320 5500 / 5580 / 5700 / 5720	MCS 0	1
	VHT40	5270 / 5310 5510 / 5590 / 5670 / 5710	MCS 0	
	VHT80	5290 / 5530 / 5610 / 5690	MCS 0	
<b>NOTE:</b>				
1. The EUT was pretested with 3 orientations placed on the table for the radiated emission measurement – X, Y, and Z-plane. The <b>X-plane</b> results were found as the worst case and were shown in this report.				
2. This device can be powered by AC adapter or POE. Each power supply was selected for final testing as below configuration.				
1) Test configuration 1: POE mode				
2) Test configuration 2: Adapter mode				

## 3 Transmitter Test Results

### 3.1 Conducted Emissions

#### 3.1.1 Limit of Conducted Emissions


Conducted Emissions Limit		
Frequency Emission (MHz)	Quasi-Peak	Average
0.15-0.5	66 - 56 *	56 - 46 *
0.5-5	56	46
5-30	60	50

Note 1: \* Decreases with the logarithm of the frequency.

#### 3.1.2 Test Procedures

1. The device is placed on a test table, raised 80 cm above the reference ground plane. The vertical conducting plane is located 40 cm to the rear of the device.
2. The device is connected to line impedance stabilization network (LISN) and other accessories are connected to other LISN. Measured levels of AC power line conducted emission are across the 50  $\Omega$  LISN port.
3. AC conducted emission measurements is made over frequency range from 150 kHz to 30 MHz.
4. This measurement was performed with AC 120V/60Hz

#### 3.1.3 Test Setup

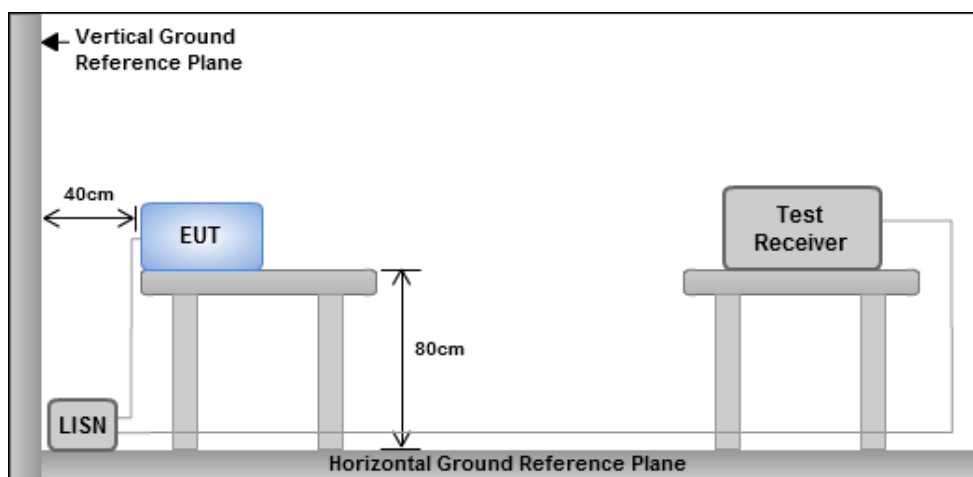


- Note: 1. Support units were connected to second LISN.  
2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes

### 3.1.4 Test Result of Conducted Emissions

#### Non- beamforming mode

Modulation	VHT80	Test Freq. (MHz)	5690
Power Phase	Line	Test configuration	1

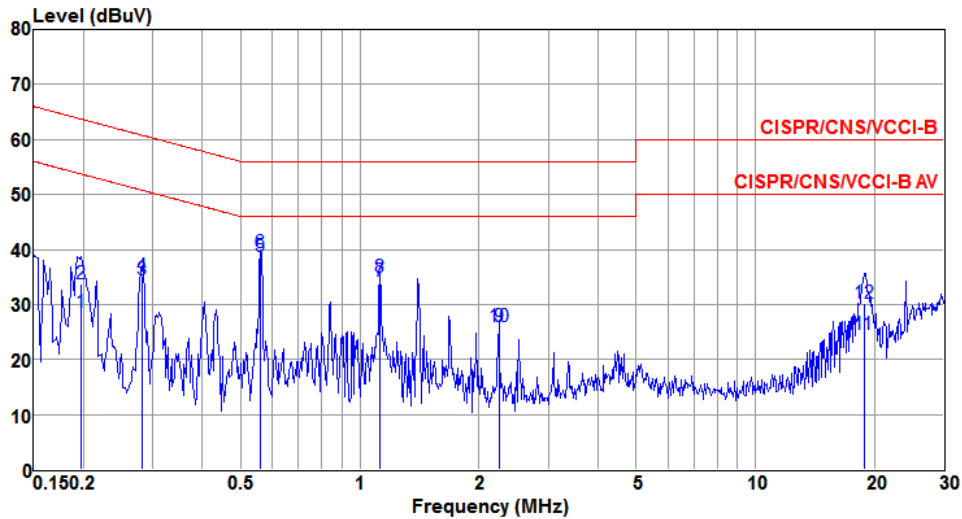


	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1	0.198	28.52	53.71	-25.19	18.98	9.50	0.04	Average
2	0.198	33.80	63.71	-29.91	24.26	9.50	0.04	QP
3	0.282	34.48	50.76	-16.28	24.89	9.55	0.04	Average
4	0.282	35.17	60.76	-25.59	25.58	9.55	0.04	QP
5②	0.561	38.65	46.00	-7.35	29.06	9.55	0.04	Average
6	0.561	39.51	56.00	-16.49	29.92	9.55	0.04	QP
7	1.124	34.17	46.00	-11.83	24.64	9.49	0.04	Average
8	1.124	34.88	56.00	-21.12	25.35	9.49	0.04	QP
9	2.246	25.89	46.00	-20.11	16.22	9.61	0.06	Average
10	2.246	25.95	56.00	-30.05	16.28	9.61	0.06	QP
11	18.820	24.52	50.00	-25.48	14.56	9.71	0.25	Average
12	18.820	30.28	60.00	-29.72	20.32	9.71	0.25	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).

2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).


<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5690
<b>Power Phase</b>	Neutral	<b>Test configuration</b>	1

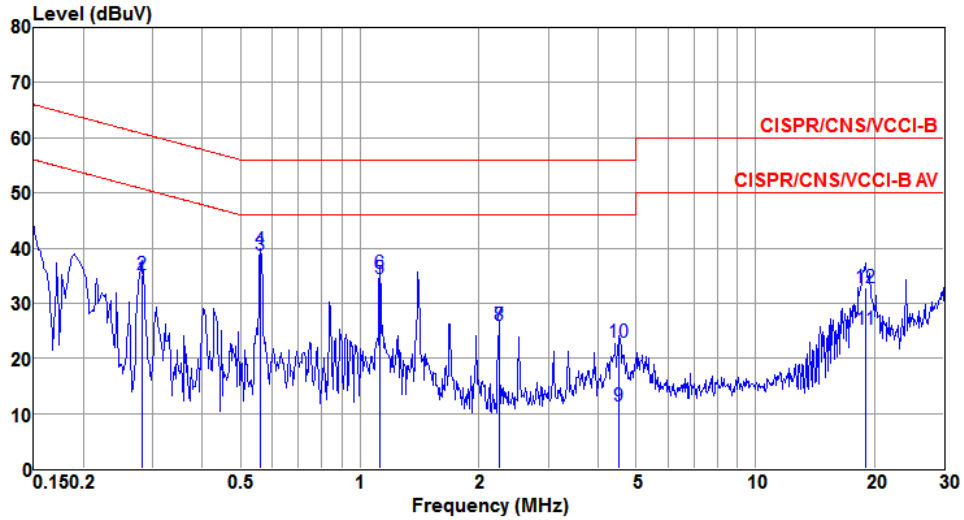

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.282	34.54	50.76	-16.22	24.93	9.57	0.04	Average
2	0.282	35.22	60.76	-25.54	25.61	9.57	0.04	QP
3	0.561	38.70	46.00	-7.30	29.07	9.59	0.04	Average
4	0.561	39.55	56.00	-16.45	29.92	9.59	0.04	QP
5	1.123	34.46	46.00	-11.54	24.77	9.65	0.04	Average
6	1.123	35.35	56.00	-20.65	25.66	9.65	0.04	QP
7	2.247	25.96	46.00	-20.04	16.35	9.55	0.06	Average
8	2.247	26.07	56.00	-29.93	16.46	9.55	0.06	QP
9	4.525	11.34	46.00	-34.66	1.46	9.71	0.17	Average
10	4.525	22.85	56.00	-33.15	12.97	9.71	0.17	QP
11	19.021	25.26	50.00	-24.74	15.29	9.72	0.25	Average
12	19.021	32.76	60.00	-27.24	22.79	9.72	0.25	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).


<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5690
<b>Power Phase</b>	Line	<b>Test configuration</b>	2

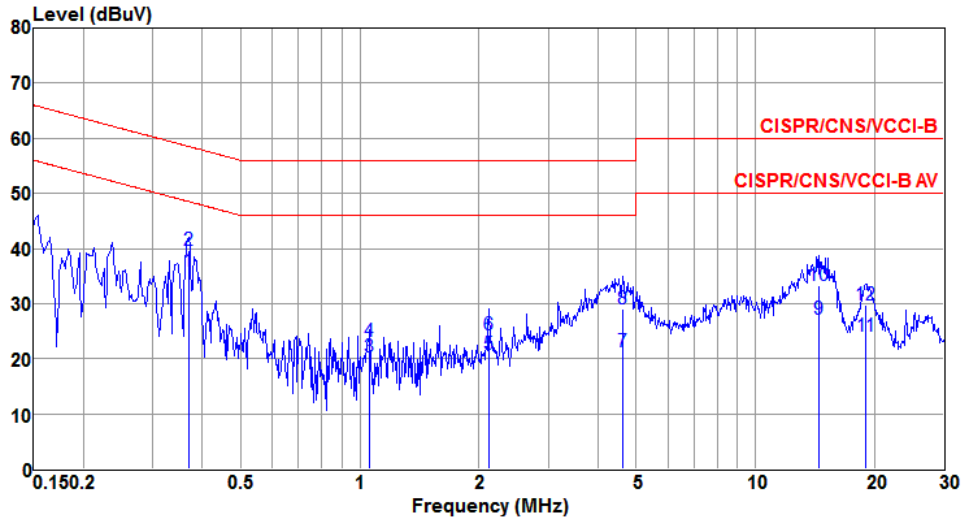

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1@	0.369	35.91	48.52	-12.61	26.28	9.59	0.04	Average
2	0.369	39.73	58.52	-18.79	30.10	9.59	0.04	QP
3	1.060	20.40	46.00	-25.60	10.89	9.47	0.04	Average
4	1.060	23.03	56.00	-32.97	13.52	9.47	0.04	QP
5	2.115	20.73	46.00	-25.27	11.05	9.63	0.05	Average
6	2.115	24.39	56.00	-31.61	14.71	9.63	0.05	QP
7	4.622	21.14	46.00	-24.86	11.46	9.51	0.17	Average
8	4.622	29.13	56.00	-26.87	19.45	9.51	0.17	QP
9	14.517	27.06	50.00	-22.94	17.14	9.69	0.23	Average
10	14.517	33.26	60.00	-26.74	23.34	9.69	0.23	QP
11	19.021	24.16	50.00	-25.84	14.20	9.71	0.25	Average
12	19.021	29.65	60.00	-30.35	19.69	9.71	0.25	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5690
<b>Power Phase</b>	Neutral	<b>Test configuration</b>	2

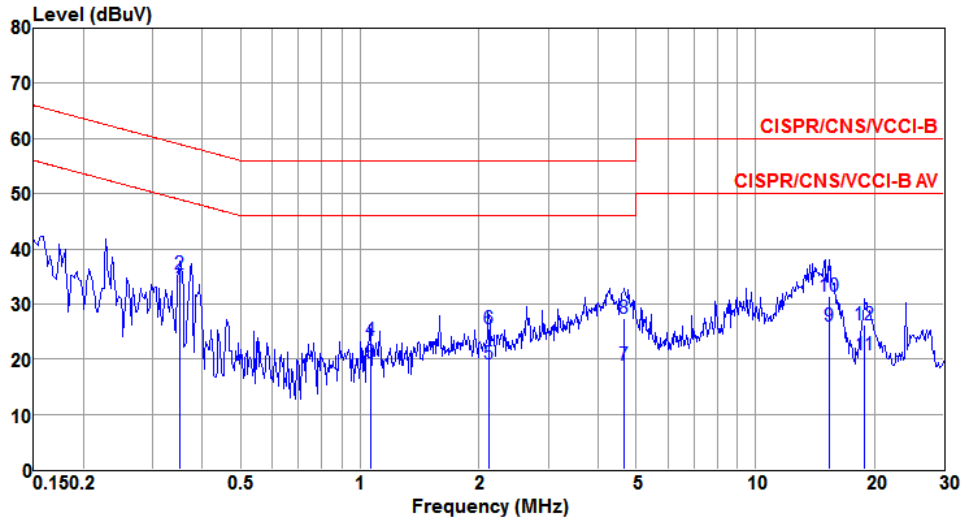


	Freq	Level	Limit	Over	Read	LISN	cable	Remark
	MHz	dBuV	Line	Limit	Level	factor	loss	
			dBuV	dB	dBuV	dB	dB	
1@	0.350	33.08	48.96	-15.88	23.49	9.55	0.04	Average
2	0.350	35.36	58.96	-23.60	25.77	9.55	0.04	QP
3	1.062	19.39	46.00	-26.61	9.69	9.66	0.04	Average
4	1.062	23.40	56.00	-32.60	13.70	9.66	0.04	QP
5	2.128	19.03	46.00	-26.97	9.44	9.54	0.05	Average
6	2.128	25.50	56.00	-30.50	15.91	9.54	0.05	QP
7	4.672	18.96	46.00	-27.04	9.08	9.71	0.17	Average
8	4.672	27.44	56.00	-28.56	17.56	9.71	0.17	QP
9	15.388	26.00	50.00	-24.00	16.08	9.69	0.23	Average
10	15.388	31.44	60.00	-28.56	21.52	9.69	0.23	QP
11	18.920	20.73	50.00	-29.27	10.77	9.71	0.25	Average
12	18.920	26.14	60.00	-33.86	16.18	9.71	0.25	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

### Beamforming mode


Modulation	VHT40	Test Freq. (MHz)	5670
Power Phase	Line	Test configuration	1

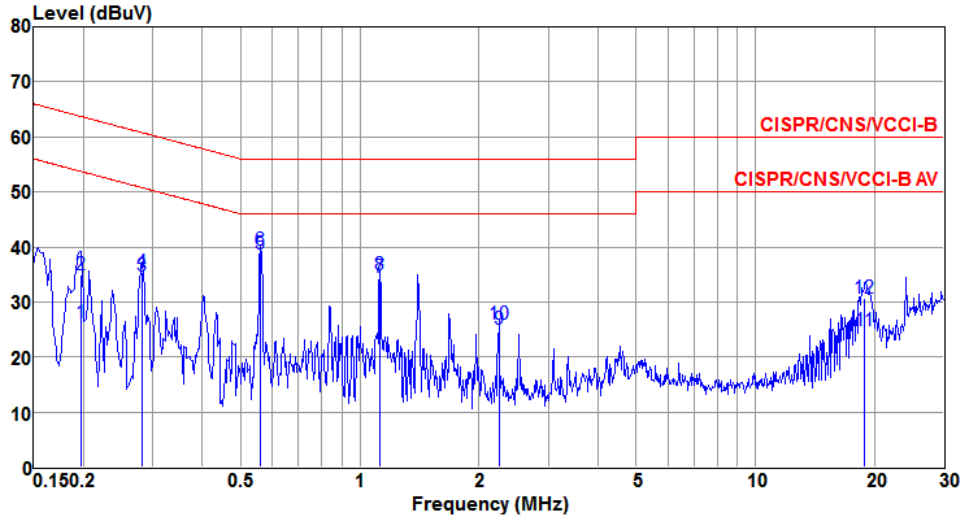

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.198	26.32	53.71	-27.39	16.78	9.50	0.04	Average
2	0.198	34.99	63.71	-28.72	25.45	9.50	0.04	QP
3	0.282	34.67	50.76	-16.09	25.08	9.55	0.04	Average
4	0.282	35.39	60.76	-25.37	25.80	9.55	0.04	QP
5②	0.561	38.63	46.00	-7.37	29.04	9.55	0.04	Average
6	0.561	39.52	56.00	-16.48	29.93	9.55	0.04	QP
7	1.124	34.41	46.00	-11.59	24.88	9.49	0.04	Average
8	1.124	35.03	56.00	-20.97	25.50	9.49	0.04	QP
9	2.245	25.02	46.00	-20.98	15.35	9.61	0.06	Average
10	2.245	25.95	56.00	-30.05	16.28	9.61	0.06	QP
11	18.920	24.89	50.00	-25.11	14.93	9.71	0.25	Average
12	18.920	30.79	60.00	-29.21	20.83	9.71	0.25	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Power Phase</b>	Neutral	<b>Test configuration</b>	1

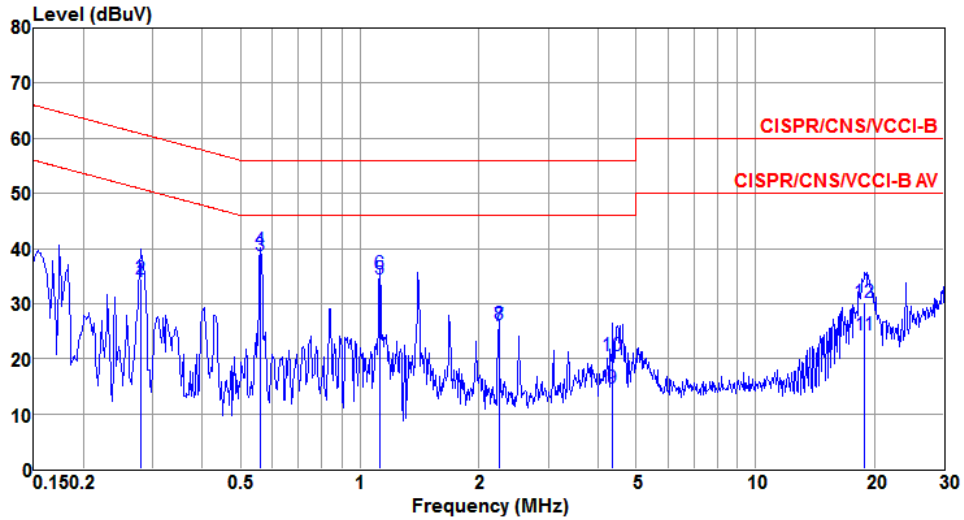


	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1	0.279	33.92	50.85	-16.93	24.31	9.57	0.04	Average
2	0.279	34.50	60.85	-26.35	24.89	9.57	0.04	QP
3	0.561	38.69	46.00	-7.31	29.06	9.59	0.04	Average
4	0.561	39.54	56.00	-16.46	29.91	9.59	0.04	QP
5	1.123	34.46	46.00	-11.54	24.77	9.65	0.04	Average
6	1.123	35.39	56.00	-20.61	25.70	9.65	0.04	QP
7	2.246	26.04	46.00	-19.96	16.43	9.55	0.06	Average
8	2.246	26.18	56.00	-29.82	16.57	9.55	0.06	QP
9	4.361	14.65	46.00	-31.35	4.77	9.71	0.17	Average
10	4.361	20.62	56.00	-35.38	10.74	9.71	0.17	QP
11	18.920	24.27	50.00	-25.73	14.31	9.71	0.25	Average
12	18.920	30.26	60.00	-29.74	20.30	9.71	0.25	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).




<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Power Phase</b>	Line	<b>Test configuration</b>	2

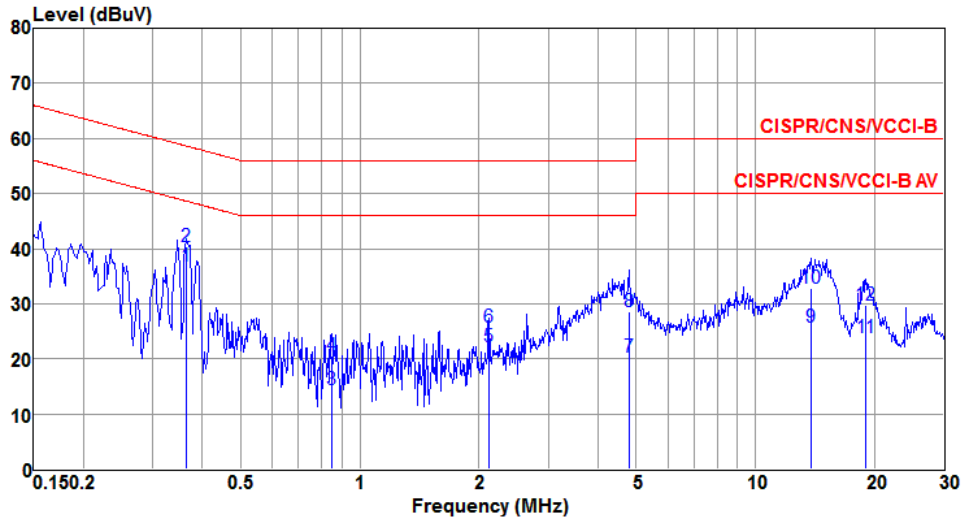

	Freq MHz	Level dBUV	Limit Line dBUV	Over Limit dB	Read Level dBUV	LISN factor dB	cable loss dB	Remark
1@	0.363	36.72	48.65	-11.93	27.09	9.59	0.04	Average
2	0.363	40.30	58.65	-18.35	30.67	9.59	0.04	QP
3	0.848	14.45	46.00	-31.55	4.92	9.49	0.04	Average
4	0.848	20.58	56.00	-35.42	11.05	9.49	0.04	QP
5	2.121	22.11	46.00	-23.89	12.43	9.63	0.05	Average
6	2.121	25.71	56.00	-30.29	16.03	9.63	0.05	QP
7	4.797	20.40	46.00	-25.60	10.71	9.52	0.17	Average
8	4.797	28.55	56.00	-27.45	18.86	9.52	0.17	QP
9	13.841	25.66	50.00	-24.34	15.74	9.69	0.23	Average
10	13.841	32.79	60.00	-27.21	22.87	9.69	0.23	QP
11	19.021	23.83	50.00	-26.17	13.87	9.71	0.25	Average
12	19.021	29.68	60.00	-30.32	19.72	9.71	0.25	QP

Note 1: Level (dBUV) = Read Level (dBUV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBUV) – Limit Line (dBUV).

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Power Phase</b>	Neutral	<b>Test configuration</b>	2

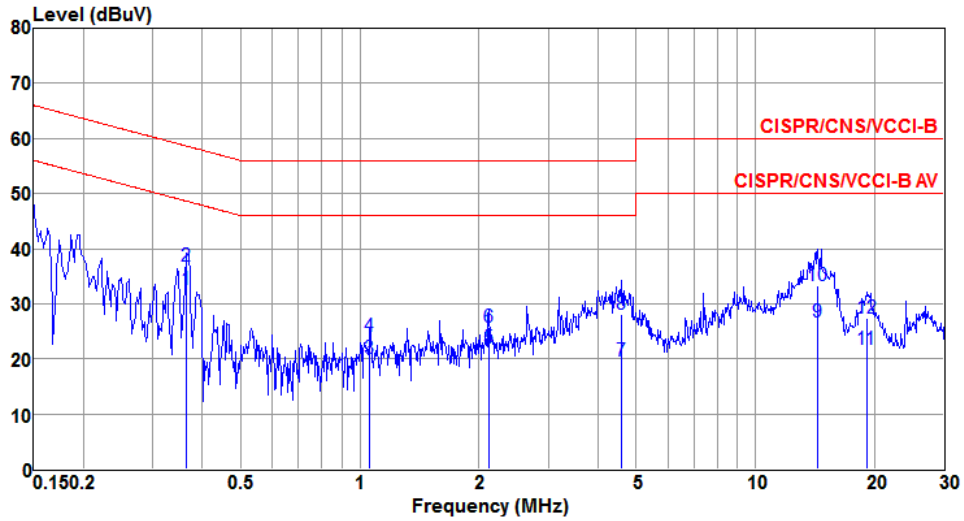

	Freq MHz	Level dBuV	Limit Line dBuV	Over Limit dB	Read Level dBuV	LISN factor dB	cable loss dB	Remark
1@	0.363	32.69	48.65	-15.96	23.10	9.55	0.04	Average
2	0.363	36.71	58.65	-21.94	27.12	9.55	0.04	QP
3	1.061	20.06	46.00	-25.94	10.36	9.66	0.04	Average
4	1.061	24.10	56.00	-31.90	14.40	9.66	0.04	QP
5	2.118	22.02	46.00	-23.98	12.43	9.54	0.05	Average
6	2.118	25.76	56.00	-30.24	16.17	9.54	0.05	QP
7	4.598	19.54	46.00	-26.46	9.66	9.71	0.17	Average
8	4.598	28.11	56.00	-27.89	18.23	9.71	0.17	QP
9	14.364	26.71	50.00	-23.29	16.79	9.69	0.23	Average
10	14.364	33.19	60.00	-26.81	23.27	9.69	0.23	QP
11	19.122	21.76	50.00	-28.24	11.79	9.72	0.25	Average
12	19.122	27.45	60.00	-32.55	17.48	9.72	0.25	QP

Note 1: Level (dBuV) = Read Level (dBuV) + LISN Factor (dB) + Cable Loss (dB).  
 2: Over Limit (dB) = Level (dBuV) – Limit Line (dBuV).

## 3.2 Transmitter Radiated and Band Edge Emissions

### 3.2.1 Limit of Transmitter Radiated and Band Edge Emissions

Restricted Band Emissions Limit			
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300
0.490~1.705	24000/F(kHz)	33.8 - 23	30
1.705~30.0	30	29	30
30~88	100	40	3
88~216	150	43.5	3
216~960	200	46	3
Above 960	500	54	3

**Note 1:**  
Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit

**Note 2:**  
Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

Un-restricted band emissions above 1GHz Limit	
Operating Band	Limit
5.25 - 5.35 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]
5.47 - 5.725 GHz	e.i.r.p. -27 dBm [68.2 dBuV/m@3m]

Note 1: Measurements may be performed at a distance other than the limit distance provided they are not performed in the near field and the emissions to be measured can be detected by the measurement equipment. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade (inverse of linear distance for field-strength measurements, inverse of linear distance-squared for power-density measurements).

### 3.2.2 Test Procedures


1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m
2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

### 3.2.3 Test Setup

#### Radiated Emissions below 1 GHz

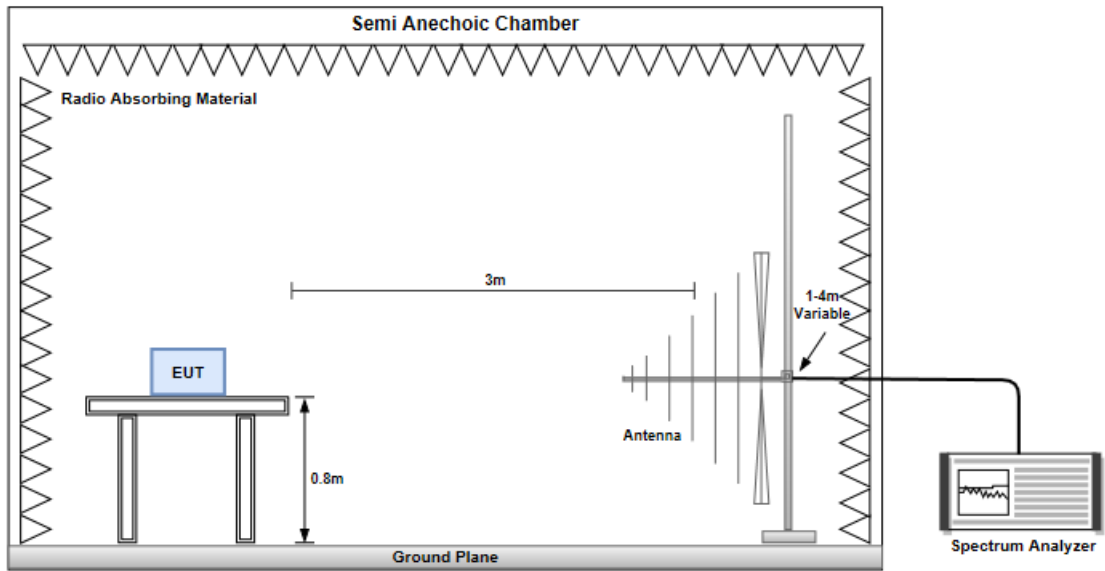


#### Radiated Emissions above 1 GHz

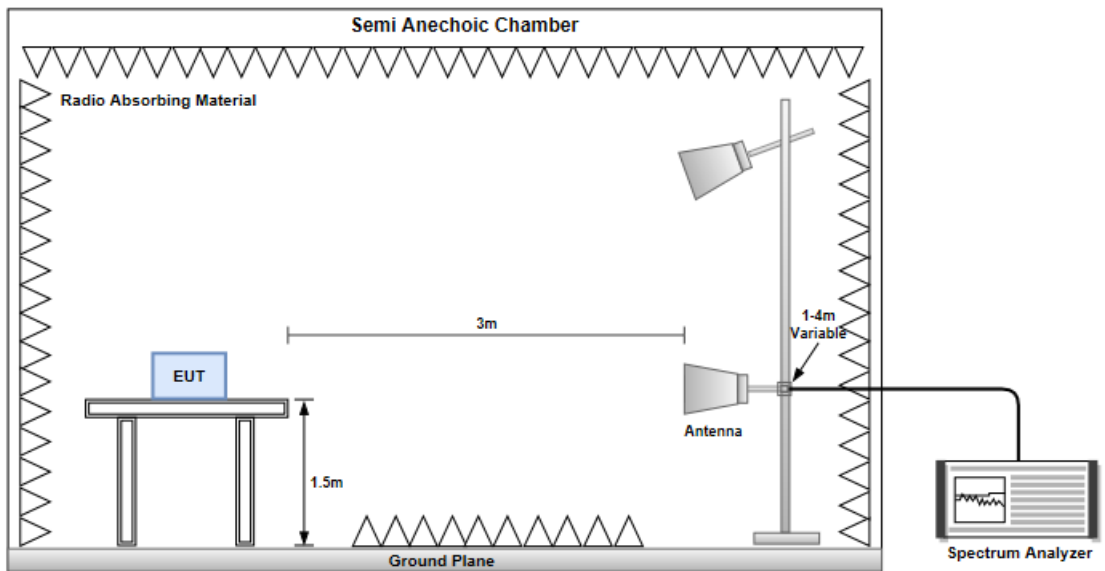

## Non-beamforming mode

### 3.2.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

Modulation	VHT80	Test Freq. (MHz)	5690
Polarization	Horizontal	Test configuration	1

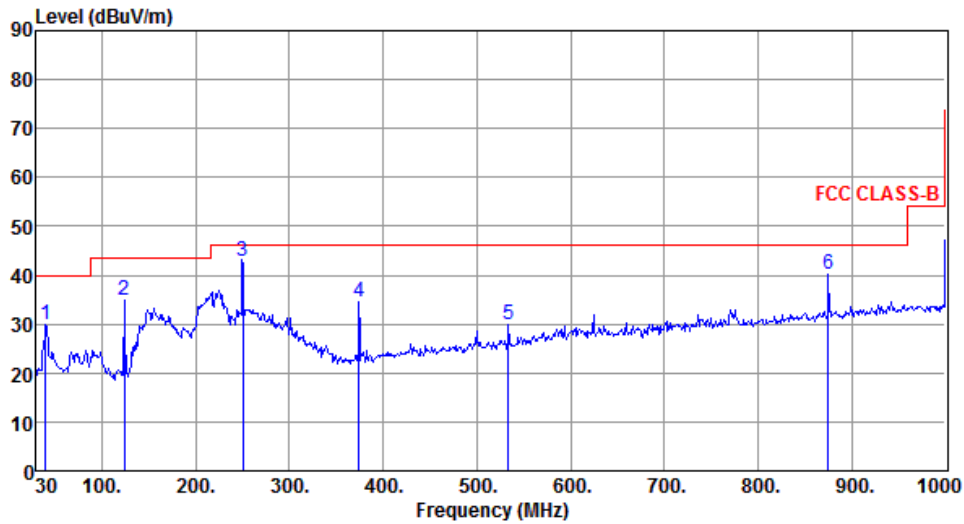

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	39.70	29.87	40.00	-10.13	38.65	-8.78	Peak	---	---
2	124.09	34.71	43.50	-8.79	45.24	-10.53	Peak	---	---
3	250.00	42.92	46.00	-3.08	52.29	-9.37	QP	100	116
4	374.35	34.68	46.00	-11.32	40.74	-6.06	Peak	---	---
5	533.43	29.75	46.00	-16.25	32.41	-2.66	Peak	---	---
6	874.87	40.09	46.00	-5.91	36.85	3.24	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5690
<b>Polarization</b>	Vertical	<b>Test configuration</b>	1

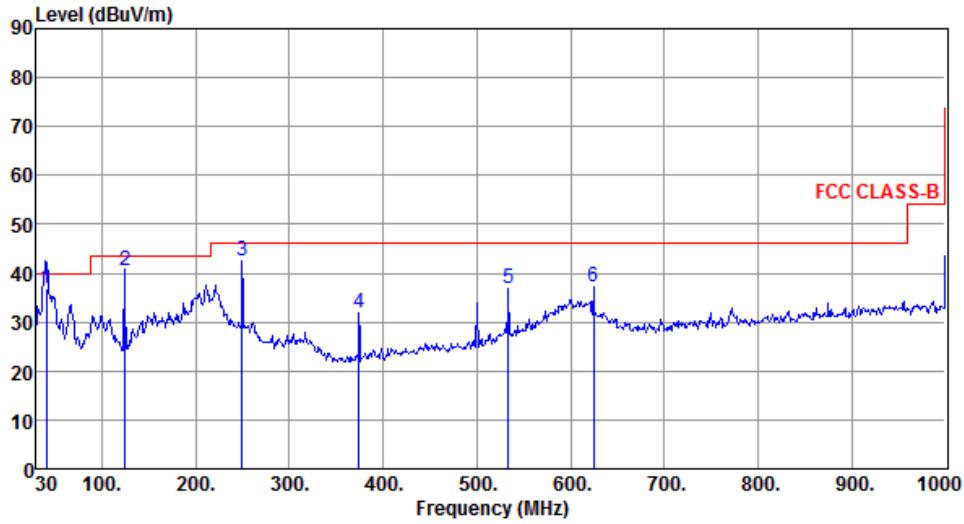

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	40.56	36.86	40.00	-3.14	45.57	-8.71	QP	100	18
2	125.00	40.46	43.50	-3.04	50.91	-10.45	QP	100	89
3	249.22	42.56	46.00	-3.44	51.95	-9.39	Peak	---	---
4	374.35	31.83	46.00	-14.17	37.89	-6.06	Peak	---	---
5	533.43	36.95	46.00	-9.05	39.61	-2.66	Peak	---	---
6	624.61	37.22	46.00	-8.78	37.93	-0.71	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5690
<b>Polarization</b>	Horizontal	<b>Test configuration</b>	2

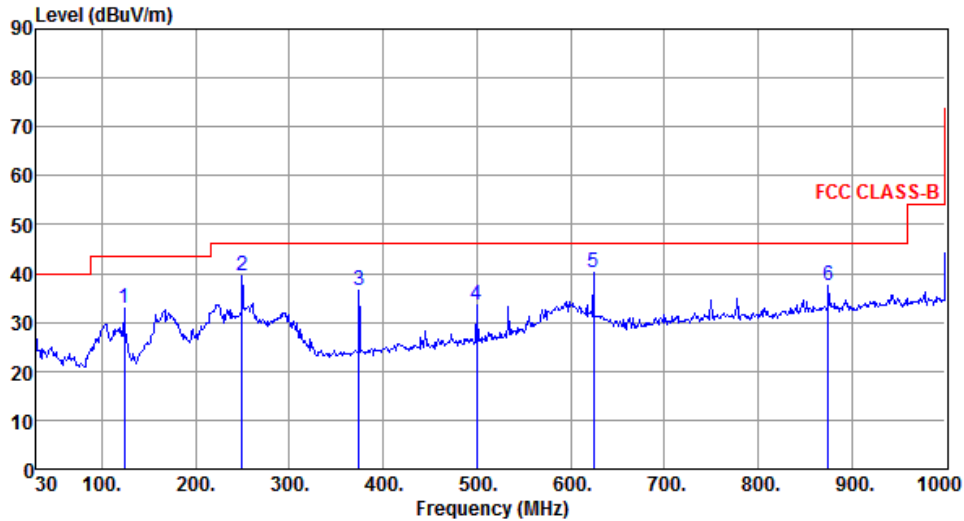

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	124.09	32.98	43.50	-10.52	43.51	-10.53	Peak	---	---
2	249.22	39.59	46.00	-6.41	48.98	-9.39	Peak	---	---
3	374.35	36.47	46.00	-9.53	42.53	-6.06	Peak	---	---
4	499.48	33.53	46.00	-12.47	36.89	-3.36	Peak	---	---
5	624.61	40.30	46.00	-5.70	41.01	-0.71	Peak	---	---
6	874.87	37.68	46.00	-8.32	34.44	3.24	Peak	---	---

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.



<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5690
<b>Polarization</b>	Vertical	<b>Test configuration</b>	2

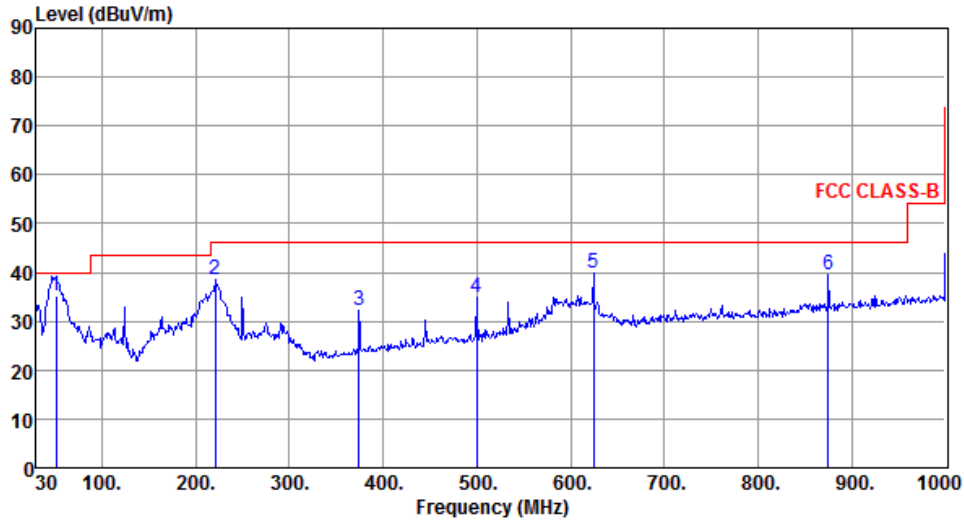

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	50.87	35.25	40.00	-4.75	43.47	-8.22	QP	101	84
2	221.09	38.40	46.00	-7.60	49.29	-10.89	Peak	---	---
3	374.35	32.13	46.00	-13.87	38.19	-6.06	Peak	---	---
4	499.48	34.97	46.00	-11.03	38.33	-3.36	Peak	---	---
5	624.61	39.97	46.00	-6.03	40.68	-0.71	Peak	---	---
6	874.87	39.68	46.00	-6.32	36.44	3.24	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.2.5 Transmitter Radiated Unwanted Emissions (Above 1GHz) for 11a

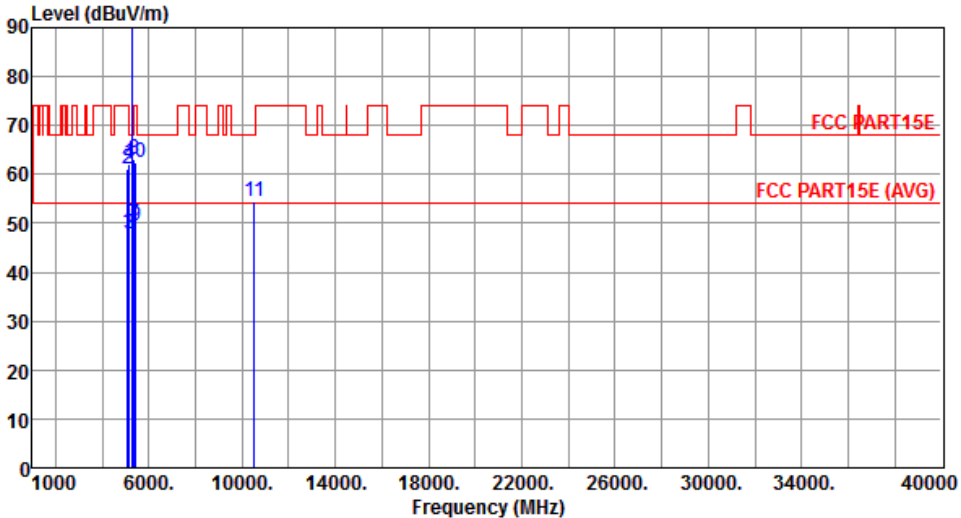Modulation	11a	Test Freq. (MHz)	5260						
Polarization	Horizontal								
									
	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5100.00	48.05	54.00	-5.95	42.91	5.14	Average	379	105
2	5100.00	60.98	74.00	-13.02	55.84	5.14	Peak	379	105
3	5150.00	47.97	54.00	-6.03	42.76	5.21	Average	379	105
4	5150.00	61.94	74.00	-12.06	56.73	5.21	Peak	379	105
5 *	5260.00	95.81			90.44	5.37	Average	379	105
6 *	5260.00	106.26			100.89	5.37	Peak	379	105
7	5350.00	49.68	54.00	-4.32	44.18	5.50	Average	379	105
8	5350.00	63.07	74.00	-10.93	57.57	5.50	Peak	379	105
9	5420.00	49.62	54.00	-4.38	44.01	5.61	Average	379	105
10	5420.00	62.38	74.00	-11.62	56.77	5.61	Peak	379	105
11	10520.00	54.36	68.20	-13.84	40.38	13.98	Peak	100	63

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
 \*Factor includes antenna factor , cable loss and amplifier gain  
 Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
 Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5260
<b>Polarization</b>	Vertical		

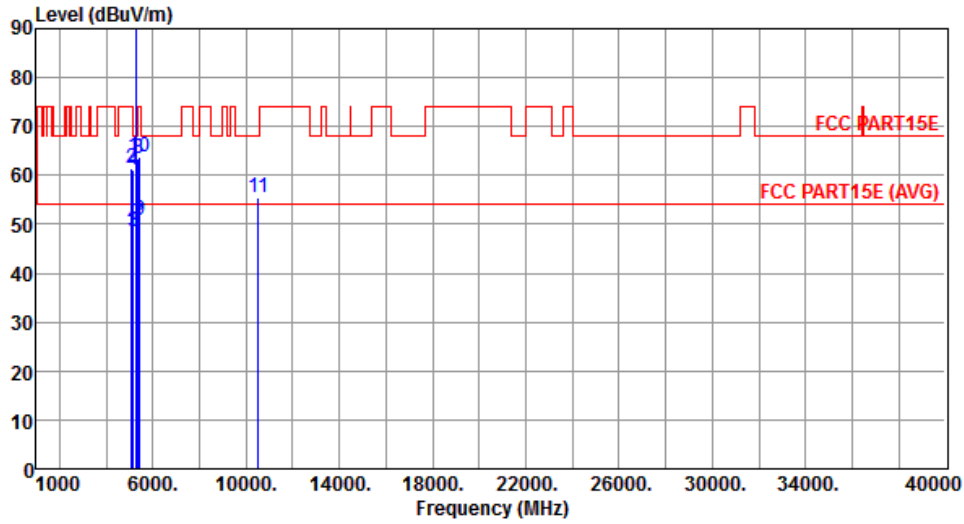

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5100.00	48.42	54.00	-5.58	43.28	5.14	Average	320	57
2	5100.00	61.34	74.00	-12.66	56.20	5.14	Peak	320	57
3	5150.00	48.41	54.00	-5.59	43.20	5.21	Average	320	57
4	5150.00	61.25	74.00	-12.75	56.04	5.21	Peak	320	57
5 *	5260.00	105.07			99.70	5.37	Average	320	57
6 *	5260.00	116.58			111.21	5.37	Peak	320	57
7	5350.00	50.30	54.00	-3.70	44.80	5.50	Average	320	57
8	5350.00	63.58	74.00	-10.42	58.08	5.50	Peak	320	57
9	5420.00	50.71	54.00	-3.29	45.10	5.61	Average	320	57
10	5420.00	63.67	74.00	-10.33	58.06	5.61	Peak	320	57
11	10520.00	55.40	68.20	-12.80	41.42	13.98	Peak	100	37


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Horizontal		

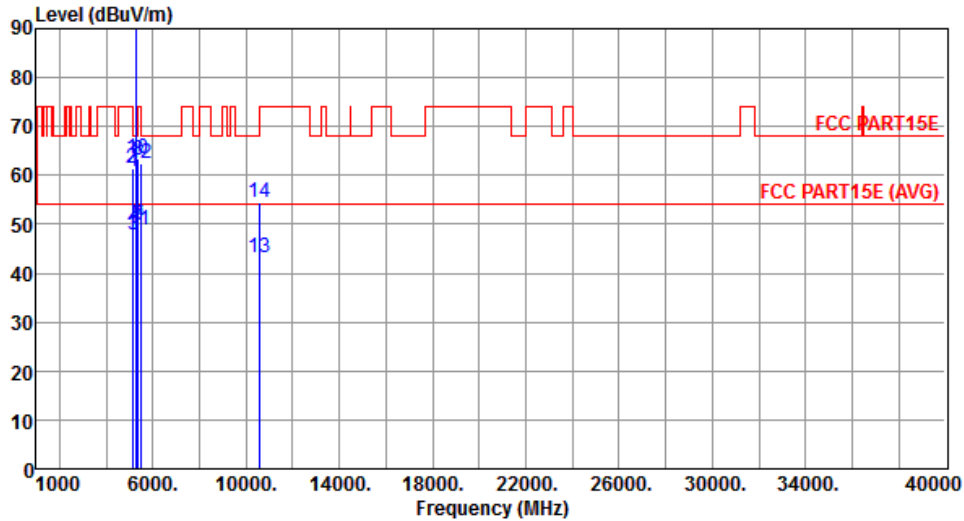

	Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
	MHz	level	dBuV/m	dB	reading	dB		High	Table
		dBuV/m			dBuV			cm	deg
1	5140.00	47.88	54.00	-6.12	42.68	5.20	Average	376	108
2	5140.00	61.32	74.00	-12.68	56.12	5.20	Peak	376	108
3	5150.00	47.99	54.00	-6.01	42.78	5.21	Average	376	108
4	5150.00	60.84	74.00	-13.16	55.63	5.21	Peak	376	108
5 *	5300.00	95.51			90.08	5.43	Average	376	108
6 *	5300.00	106.33			100.90	5.43	Peak	376	108
7	5350.00	49.87	54.00	-4.13	44.37	5.50	Average	376	108
8	5350.00	62.95	74.00	-11.05	57.45	5.50	Peak	376	108
9	5380.00	49.97	54.00	-4.03	44.42	5.55	Average	376	108
10	5380.00	63.40	74.00	-10.60	57.85	5.55	Peak	376	108
11	5460.00	48.97	54.00	-5.03	43.32	5.65	Average	376	108
12	5460.00	62.30	74.00	-11.70	56.65	5.65	Peak	376	108
13	10600.00	43.32	54.00	-10.68	29.26	14.06	Average	100	225
14	10600.00	54.55	74.00	-19.45	40.49	14.06	Peak	100	225


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Vertical		

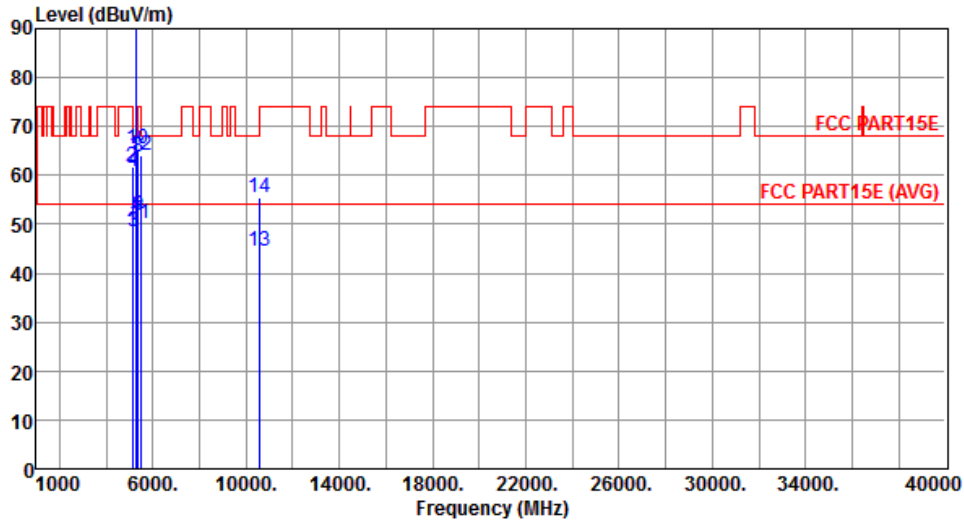

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5140.00	48.59	54.00	-5.41	43.39	5.20	Average	333	62
2	5140.00	61.87	74.00	-12.13	56.67	5.20	Peak	333	62
3	5150.00	48.39	54.00	-5.61	43.18	5.21	Average	333	62
4	5150.00	60.90	74.00	-13.10	55.69	5.21	Peak	333	62
5 *	5300.00	105.30			99.87	5.43	Average	333	62
6 *	5300.00	116.82			111.39	5.43	Peak	333	62
7	5350.00	50.82	54.00	-3.18	45.32	5.50	Average	333	62
8	5350.00	63.66	74.00	-10.34	58.16	5.50	Peak	333	62
9	5380.00	51.85	54.00	-2.15	46.30	5.55	Average	333	62
10	5380.00	65.30	74.00	-8.70	59.75	5.55	Peak	333	62
11	5460.00	50.13	54.00	-3.87	44.48	5.65	Average	333	62
12	5460.00	63.96	74.00	-10.04	58.31	5.65	Peak	333	62
13	10600.00	44.47	54.00	-9.53	30.41	14.06	Average	100	102
14	10600.00	55.34	74.00	-18.66	41.28	14.06	Peak	100	102


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5320
<b>Polarization</b>	Horizontal		

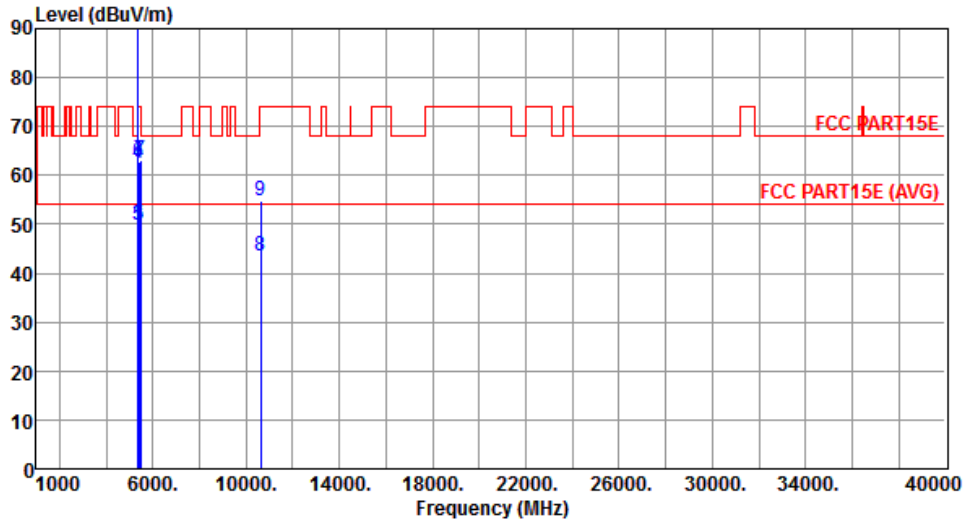

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	5320.00	95.80			90.35	5.45	Average	367	106
2	*	5320.00	105.95			100.50	5.45	Peak	367	106
3		5350.00	49.79	54.00	-4.21	44.29	5.50	Average	367	106
4		5350.00	62.43	74.00	-11.57	56.93	5.50	Peak	367	106
5		5400.00	49.87	54.00	-4.13	44.29	5.58	Average	367	106
6		5400.00	62.92	74.00	-11.08	57.34	5.58	Peak	367	106
7		5480.00	63.07	68.20	-5.13	57.40	5.67	Peak	367	106
8		10640.00	43.42	54.00	-10.58	29.31	14.11	Average	100	221
9		10640.00	54.65	74.00	-19.35	40.54	14.11	Peak	100	221


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5320
<b>Polarization</b>	Vertical		

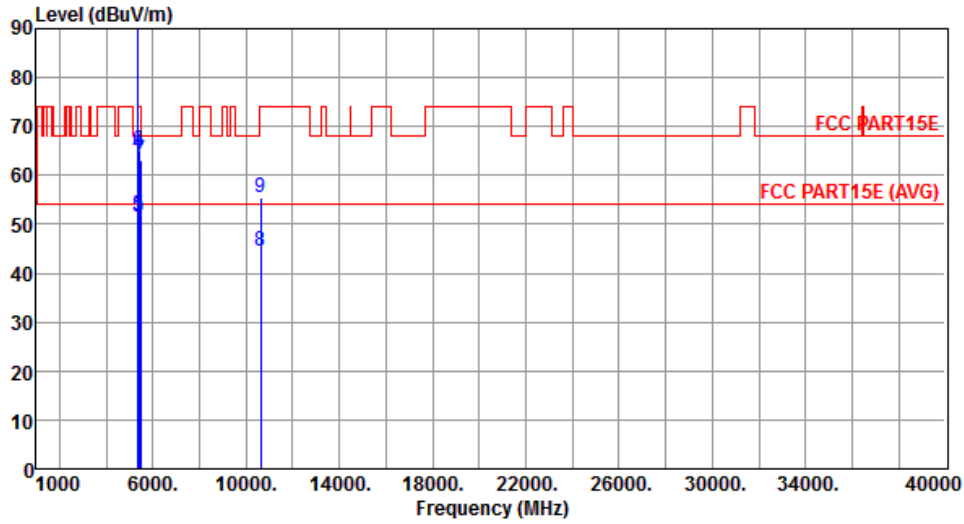

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	5320.00	106.11			100.66	5.45	Average	328	59
2	*	5320.00	117.64			112.19	5.45	Peak	328	59
3		5350.00	51.54	54.00	-2.46	46.04	5.50	Average	328	59
4		5350.00	64.35	74.00	-9.65	58.85	5.50	Peak	328	59
5		5400.00	51.78	54.00	-2.22	46.20	5.58	Average	328	59
6		5400.00	64.94	74.00	-9.06	59.36	5.58	Peak	328	59
7		5480.00	62.98	68.20	-5.22	57.31	5.67	Peak	328	59
8		10640.00	44.64	54.00	-9.36	30.53	14.11	Average	100	108
9		10640.00	55.47	74.00	-18.53	41.36	14.11	Peak	100	108


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5500
<b>Polarization</b>	Horizontal		

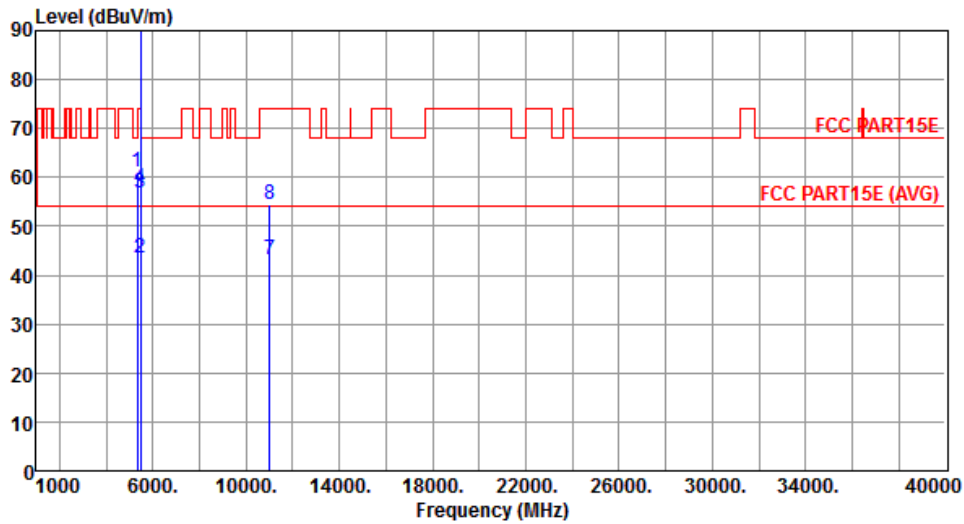

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5340.00	61.25	68.20	-6.95	55.77	5.48	Peak	367	110
2	5460.00	43.54	54.00	-10.46	37.89	5.65	Average	367	110
3	5460.00	56.69	74.00	-17.31	51.04	5.65	Peak	367	110
4	5470.00	57.88	68.20	-10.32	52.22	5.66	Peak	367	110
5 *	5500.00	95.94			90.24	5.70	Average	367	110
6 *	5500.00	106.12			100.42	5.70	Peak	367	110
7	11000.00	43.25	54.00	-10.75	28.79	14.46	Average	100	224
8	11000.00	54.51	74.00	-19.49	40.05	14.46	Peak	100	224

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency



<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5500
<b>Polarization</b>	Vertical		

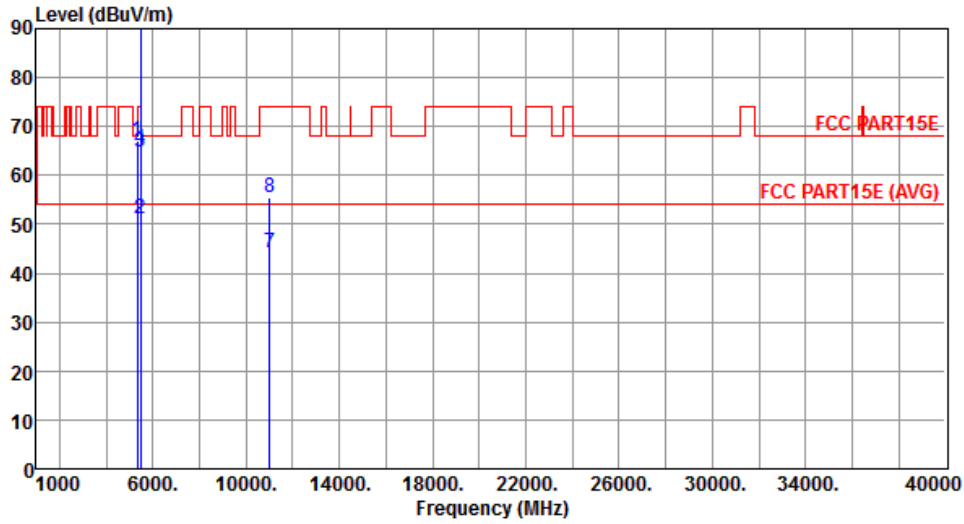

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5340.00	67.00	68.20	-1.20	61.52	5.48	Peak	328	62
2	5460.00	51.05	54.00	-2.95	45.40	5.65	Average	328	62
3	5460.00	64.76	74.00	-9.24	59.11	5.65	Peak	328	62
4	5470.00	65.49	68.20	-2.71	59.83	5.66	Peak	328	62
5 *	5500.00	106.33			100.63	5.70	Average	328	62
6 *	5500.00	118.21			112.51	5.70	Peak	328	62
7	11000.00	44.25	54.00	-9.75	29.79	14.46	Average	100	121
8	11000.00	55.31	74.00	-18.69	40.85	14.46	Peak	100	121


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5580
<b>Polarization</b>	Horizontal		

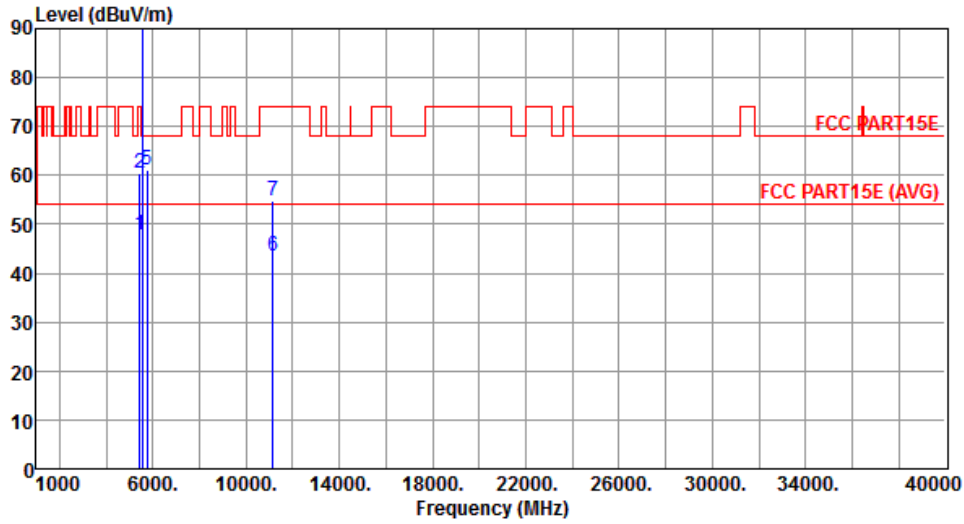

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5420.00	47.75	54.00	-6.25	42.14	5.61	Average	367	106
2	5420.00	60.48	74.00	-13.52	54.87	5.61	Peak	367	106
3 *	5580.00	94.86			89.09	5.77	Average	367	106
4 *	5580.00	105.02			99.25	5.77	Peak	367	106
5	5740.00	61.23	68.20	-6.97	55.21	6.02	Peak	367	106
6	11160.00	43.54	54.00	-10.46	28.94	14.60	Average	100	209
7	11160.00	54.68	74.00	-19.32	40.08	14.60	Peak	100	209


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5580
<b>Polarization</b>	Vertical		

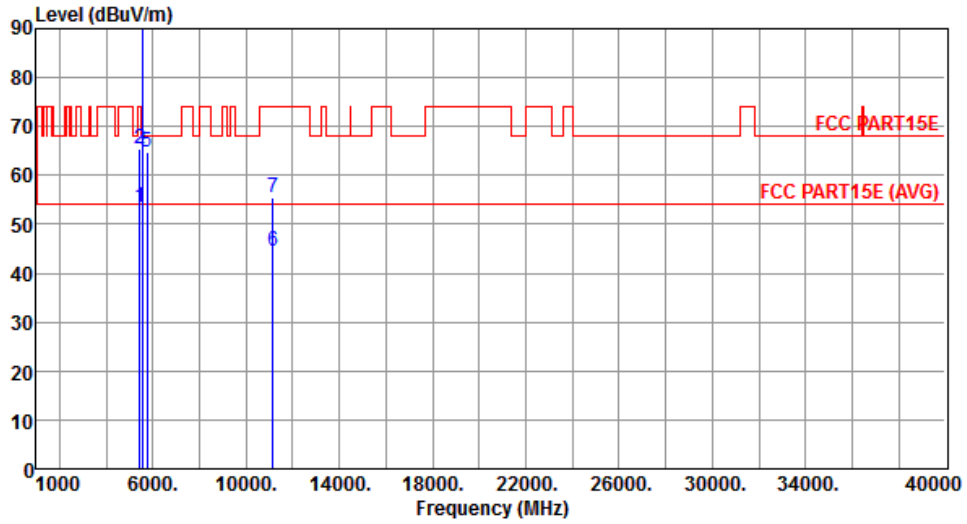

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5420.00	53.60	54.00	-0.40	47.99	5.61	Average	329	62
2	5420.00	65.37	74.00	-8.63	59.76	5.61	Peak	329	62
3 *	5580.00	105.07			99.30	5.77	Average	329	62
4 *	5580.00	116.79			111.02	5.77	Peak	329	62
5	5740.00	64.87	68.20	-3.33	58.85	6.02	Peak	329	62
6	11160.00	44.36	54.00	-9.64	29.76	14.60	Average	100	98
7	11160.00	55.42	74.00	-18.58	40.82	14.60	Peak	100	98


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5700
<b>Polarization</b>	Horizontal		

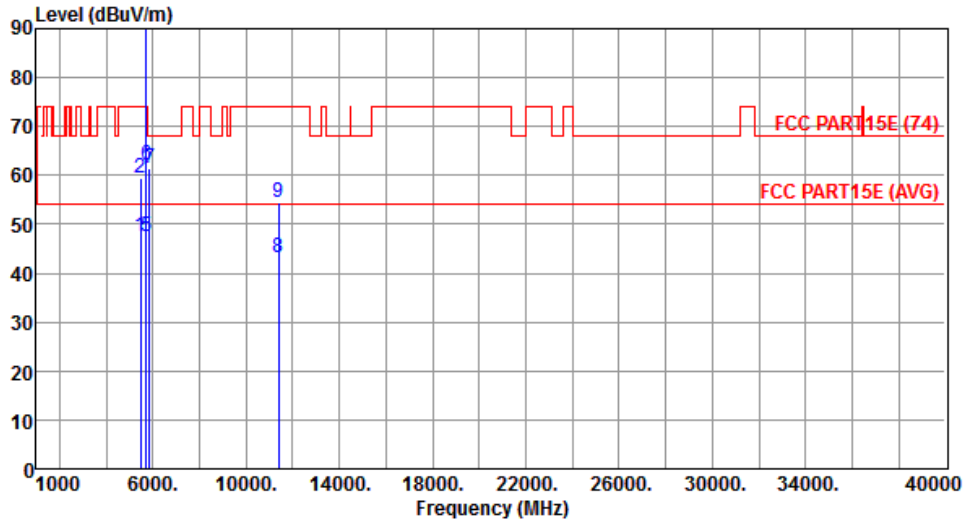

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.51	54.00	-6.49	41.86	5.65	Average	365	104
2	5460.00	59.34	74.00	-14.66	53.69	5.65	Peak	365	104
3 *	5700.00	95.06			89.10	5.96	Average	365	104
4 *	5700.00	105.21			99.25	5.96	Peak	365	104
5	5725.00	47.44	54.00	-6.56	41.45	5.99	Average	365	104
6	5725.00	61.95	74.00	-12.05	55.96	5.99	Peak	365	104
7	5860.00	61.30	68.20	-6.90	55.12	6.18	Peak	365	104
8	11400.00	43.32	54.00	-10.68	28.50	14.82	Average	100	201
9	11400.00	54.53	74.00	-19.47	39.71	14.82	Peak	100	201


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5700
<b>Polarization</b>	Vertical		

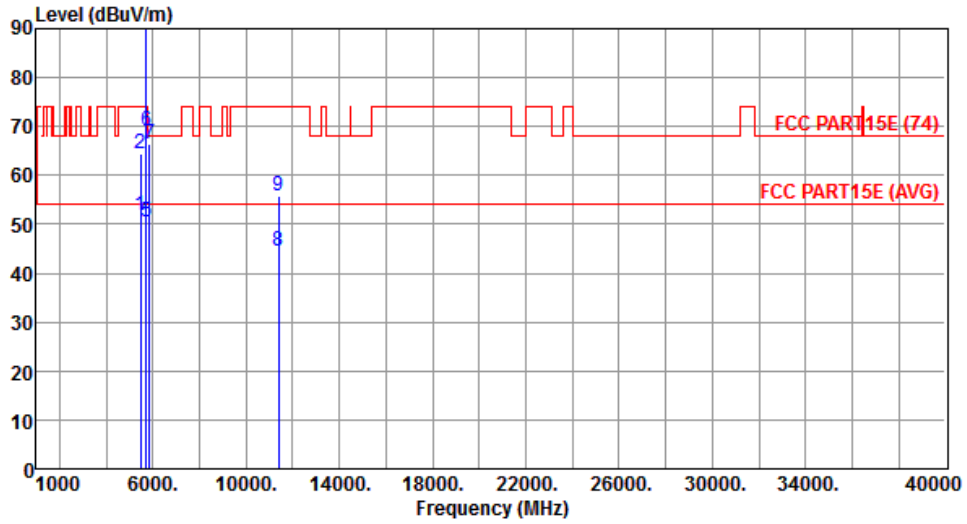

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	51.83	54.00	-2.17	46.18	5.65	Average	328	61
2	5460.00	64.30	74.00	-9.70	58.65	5.65	Peak	328	61
3 *	5700.00	106.26			100.30	5.96	Average	328	61
4 *	5700.00	118.11			112.15	5.96	Peak	328	61
5	5725.00	50.49	54.00	-3.51	44.50	5.99	Average	328	61
6	5725.00	69.17	74.00	-4.83	63.18	5.99	Peak	328	61
7	5860.00	66.37	68.20	-1.83	60.19	6.18	Peak	328	61
8	11400.00	44.54	54.00	-9.46	29.72	14.82	Average	100	121
9	11400.00	55.63	74.00	-18.37	40.81	14.82	Peak	100	121


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5720
<b>Polarization</b>	Horizontal		

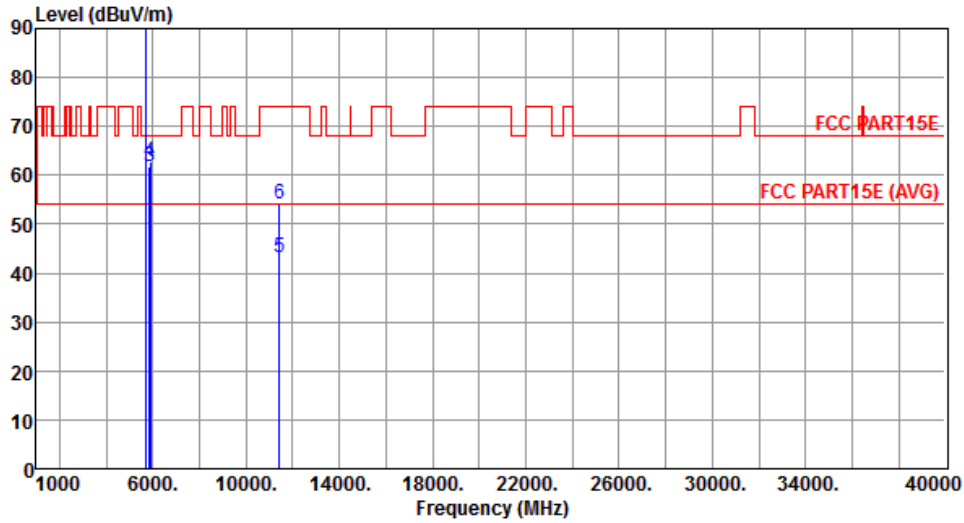

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	5720.00	95.65			89.67	5.98	Average	362	101
2	*	5720.00	105.82			99.84	5.98	Peak	362	101
3		5850.00	61.68	68.20	-6.52	55.51	6.17	Peak	362	101
4		5880.00	62.66	68.20	-5.54	56.45	6.21	Peak	362	101
5		11440.00	43.16	54.00	-10.84	28.30	14.86	Average	106	195
6		11440.00	54.28	74.00	-19.72	39.42	14.86	Peak	106	195


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	11a	<b>Test Freq. (MHz)</b>	5720
<b>Polarization</b>	Vertical		

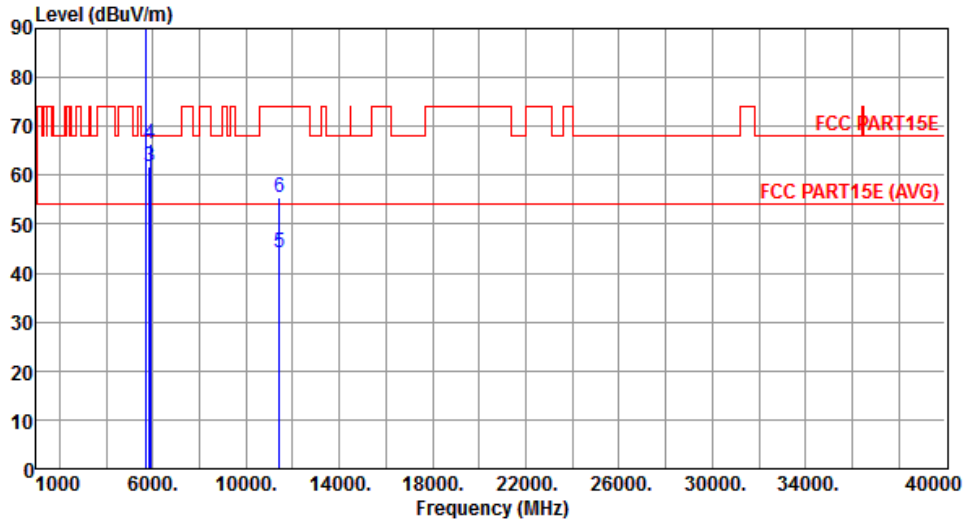

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	5720.00	105.80			99.82	5.98	Average	320	63
2	*	5720.00	117.56			111.58	5.98	Peak	320	63
3		5850.00	61.73	68.20	-6.47	55.56	6.17	Peak	320	63
4		5880.00	66.35	68.20	-1.85	60.14	6.21	Peak	320	63
5		11440.00	44.25	54.00	-9.75	29.39	14.86	Average	105	103
6		11440.00	55.36	74.00	-18.64	40.50	14.86	Peak	105	103


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: "\*" is Peak / Average value of fundamental frequency

### 3.2.6 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

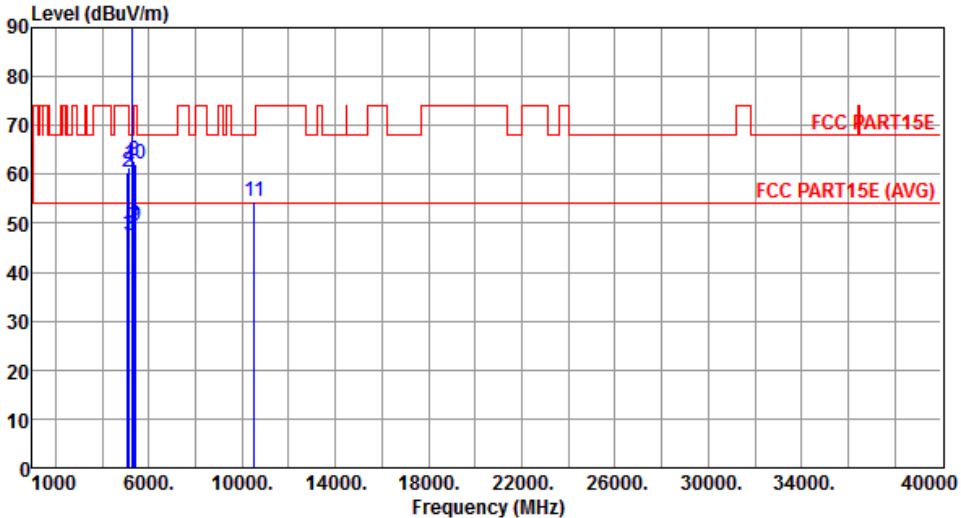Modulation	VHT20	Test Freq. (MHz)	5260																																																																																																																			
Polarization	Horizontal																																																																																																																					
																																																																																																																						
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>5100.00</td><td>47.68</td><td>54.00</td><td>-6.32</td><td>42.54</td><td>5.14</td><td>Average</td><td>359 108</td></tr> <tr><td>2</td><td>5100.00</td><td>60.52</td><td>74.00</td><td>-13.48</td><td>55.38</td><td>5.14</td><td>Peak</td><td>359 108</td></tr> <tr><td>3</td><td>5150.00</td><td>47.45</td><td>54.00</td><td>-6.55</td><td>42.24</td><td>5.21</td><td>Average</td><td>359 108</td></tr> <tr><td>4</td><td>5150.00</td><td>61.52</td><td>74.00</td><td>-12.48</td><td>56.31</td><td>5.21</td><td>Peak</td><td>359 108</td></tr> <tr><td>5 *</td><td>5260.00</td><td>94.06</td><td></td><td></td><td>88.69</td><td>5.37</td><td>Average</td><td>359 108</td></tr> <tr><td>6 *</td><td>5260.00</td><td>104.45</td><td></td><td></td><td>99.08</td><td>5.37</td><td>Peak</td><td>359 108</td></tr> <tr><td>7</td><td>5350.00</td><td>49.21</td><td>54.00</td><td>-4.79</td><td>43.71</td><td>5.50</td><td>Average</td><td>359 108</td></tr> <tr><td>8</td><td>5350.00</td><td>62.64</td><td>74.00</td><td>-11.36</td><td>57.14</td><td>5.50</td><td>Peak</td><td>359 108</td></tr> <tr><td>9</td><td>5420.00</td><td>49.33</td><td>54.00</td><td>-4.67</td><td>43.72</td><td>5.61</td><td>Average</td><td>359 108</td></tr> <tr><td>10</td><td>5420.00</td><td>62.05</td><td>74.00</td><td>-11.95</td><td>56.44</td><td>5.61</td><td>Peak</td><td>359 108</td></tr> <tr><td>11</td><td>10520.00</td><td>54.48</td><td>68.20</td><td>-13.72</td><td>40.50</td><td>13.98</td><td>Peak</td><td>109 186</td></tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5100.00	47.68	54.00	-6.32	42.54	5.14	Average	359 108	2	5100.00	60.52	74.00	-13.48	55.38	5.14	Peak	359 108	3	5150.00	47.45	54.00	-6.55	42.24	5.21	Average	359 108	4	5150.00	61.52	74.00	-12.48	56.31	5.21	Peak	359 108	5 *	5260.00	94.06			88.69	5.37	Average	359 108	6 *	5260.00	104.45			99.08	5.37	Peak	359 108	7	5350.00	49.21	54.00	-4.79	43.71	5.50	Average	359 108	8	5350.00	62.64	74.00	-11.36	57.14	5.50	Peak	359 108	9	5420.00	49.33	54.00	-4.67	43.72	5.61	Average	359 108	10	5420.00	62.05	74.00	-11.95	56.44	5.61	Peak	359 108	11	10520.00	54.48	68.20	-13.72	40.50	13.98	Peak	109 186
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																																																														
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																																																														
1	5100.00	47.68	54.00	-6.32	42.54	5.14	Average	359 108																																																																																																														
2	5100.00	60.52	74.00	-13.48	55.38	5.14	Peak	359 108																																																																																																														
3	5150.00	47.45	54.00	-6.55	42.24	5.21	Average	359 108																																																																																																														
4	5150.00	61.52	74.00	-12.48	56.31	5.21	Peak	359 108																																																																																																														
5 *	5260.00	94.06			88.69	5.37	Average	359 108																																																																																																														
6 *	5260.00	104.45			99.08	5.37	Peak	359 108																																																																																																														
7	5350.00	49.21	54.00	-4.79	43.71	5.50	Average	359 108																																																																																																														
8	5350.00	62.64	74.00	-11.36	57.14	5.50	Peak	359 108																																																																																																														
9	5420.00	49.33	54.00	-4.67	43.72	5.61	Average	359 108																																																																																																														
10	5420.00	62.05	74.00	-11.95	56.44	5.61	Peak	359 108																																																																																																														
11	10520.00	54.48	68.20	-13.72	40.50	13.98	Peak	109 186																																																																																																														
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: "*" is Peak / Average value of fundamental frequency</p>																																																																																																																						



<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5260
<b>Polarization</b>	Vertical		

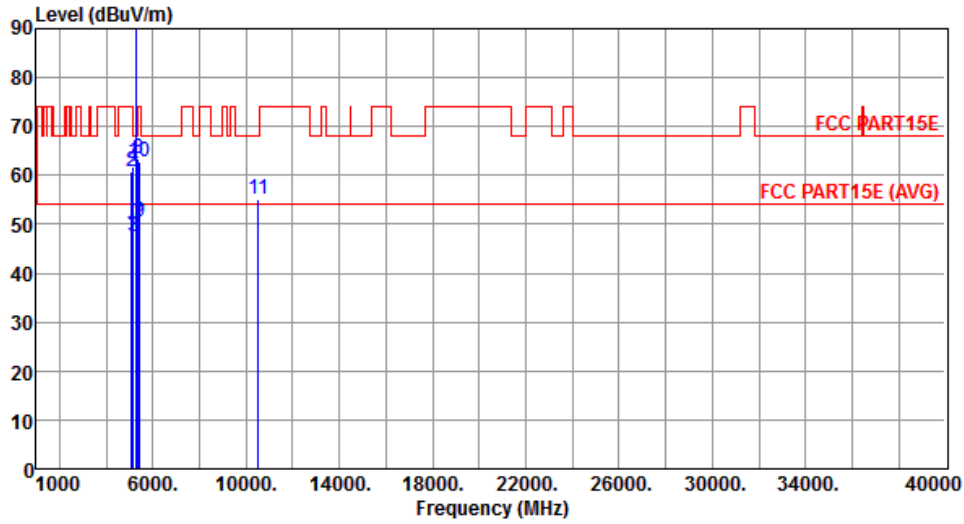

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5100.00	48.05	54.00	-5.95	42.91	5.14	Average	303	59
2	5100.00	60.62	74.00	-13.38	55.48	5.14	Peak	303	59
3	5150.00	47.64	54.00	-6.36	42.43	5.21	Average	303	59
4	5150.00	61.90	74.00	-12.10	56.69	5.21	Peak	303	59
5 *	5260.00	104.53			99.16	5.37	Average	303	59
6 *	5260.00	115.82			110.45	5.37	Peak	303	59
7	5350.00	50.15	54.00	-3.85	44.65	5.50	Average	303	59
8	5350.00	63.32	74.00	-10.68	57.82	5.50	Peak	303	59
9	5420.00	50.48	54.00	-3.52	44.87	5.61	Average	303	59
10	5420.00	62.90	74.00	-11.10	57.29	5.61	Peak	303	59
11	10520.00	55.12	68.20	-13.08	41.14	13.98	Peak	106	114


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Horizontal		

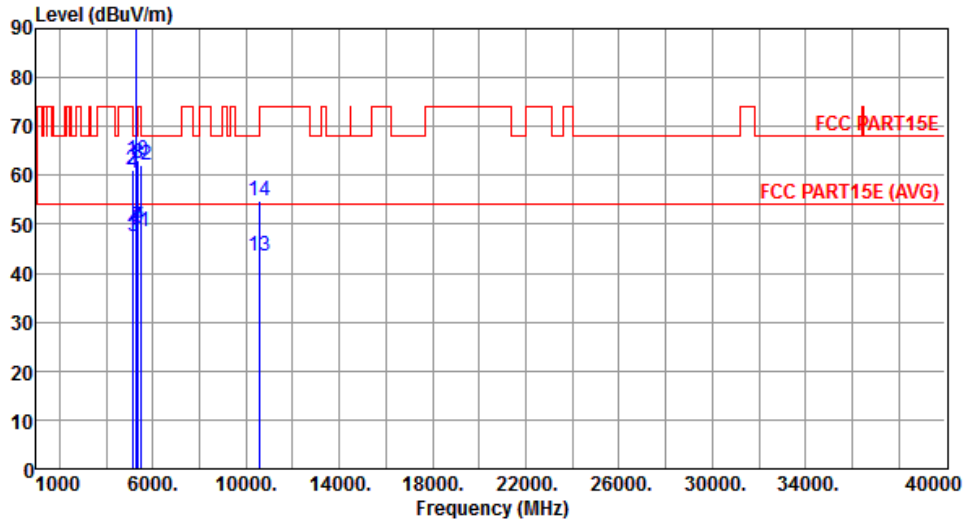

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5140.00	47.65	54.00	-6.35	42.45	5.20	Average	355	106
2	5140.00	60.95	74.00	-13.05	55.75	5.20	Peak	355	106
3	5150.00	47.56	54.00	-6.44	42.35	5.21	Average	355	106
4	5150.00	60.32	74.00	-13.68	55.11	5.21	Peak	355	106
5 *	5300.00	94.14			88.71	5.43	Average	355	106
6 *	5300.00	104.69			99.26	5.43	Peak	355	106
7	5350.00	49.45	54.00	-4.55	43.95	5.50	Average	355	106
8	5350.00	62.58	74.00	-11.42	57.08	5.50	Peak	355	106
9	5380.00	49.22	54.00	-4.78	43.67	5.55	Average	355	106
10	5380.00	62.95	74.00	-11.05	57.40	5.55	Peak	355	106
11	5460.00	48.35	54.00	-5.65	42.70	5.65	Average	355	106
12	5460.00	61.94	74.00	-12.06	56.29	5.65	Peak	355	106
13	10600.00	43.62	54.00	-10.38	29.56	14.06	Average	103	181
14	10600.00	54.69	74.00	-19.31	40.63	14.06	Peak	103	181


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Vertical		

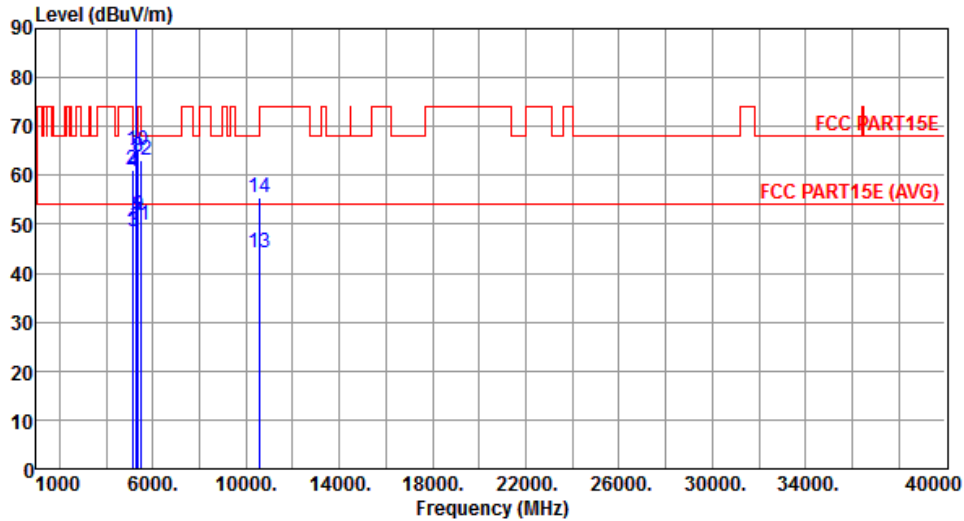

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5140.00	48.65	54.00	-5.35	43.45	5.20	Average	303	60
2	5140.00	61.02	74.00	-12.98	55.82	5.20	Peak	303	60
3	5150.00	48.58	54.00	-5.42	43.37	5.21	Average	303	60
4	5150.00	60.65	74.00	-13.35	55.44	5.21	Peak	303	60
5 *	5300.00	104.25			98.82	5.43	Average	303	60
6 *	5300.00	115.64			110.21	5.43	Peak	303	60
7	5350.00	50.62	54.00	-3.38	45.12	5.50	Average	303	60
8	5350.00	63.74	74.00	-10.26	58.24	5.50	Peak	303	60
9	5380.00	51.86	54.00	-2.14	46.31	5.55	Average	303	60
10	5380.00	65.12	74.00	-8.88	59.57	5.55	Peak	303	60
11	5460.00	49.69	54.00	-4.31	44.04	5.65	Average	303	60
12	5460.00	63.04	74.00	-10.96	57.39	5.65	Peak	303	60
13	10600.00	44.28	54.00	-9.72	30.22	14.06	Average	109	111
14	10600.00	55.31	74.00	-18.69	41.25	14.06	Peak	109	111


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5320
<b>Polarization</b>	Horizontal		

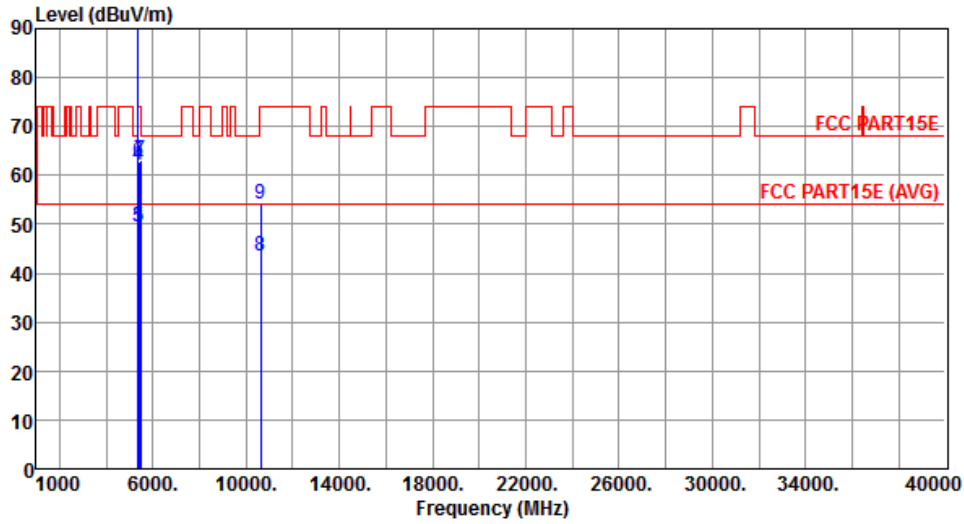

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	5320.00	94.65			89.20	5.45	Average	351	109
2	*	5320.00	104.92			99.47	5.45	Peak	351	109
3		5350.00	49.56	54.00	-4.44	44.06	5.50	Average	351	109
4		5350.00	62.14	74.00	-11.86	56.64	5.50	Peak	351	109
5		5400.00	49.62	54.00	-4.38	44.04	5.58	Average	351	109
6		5400.00	62.74	74.00	-11.26	57.16	5.58	Peak	351	109
7		5480.00	62.95	68.20	-5.25	57.28	5.67	Peak	351	109
8		10640.00	43.35	54.00	-10.65	29.24	14.11	Average	105	192
9		10640.00	54.28	74.00	-19.72	40.17	14.11	Peak	105	192


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5320
<b>Polarization</b>	Vertical		

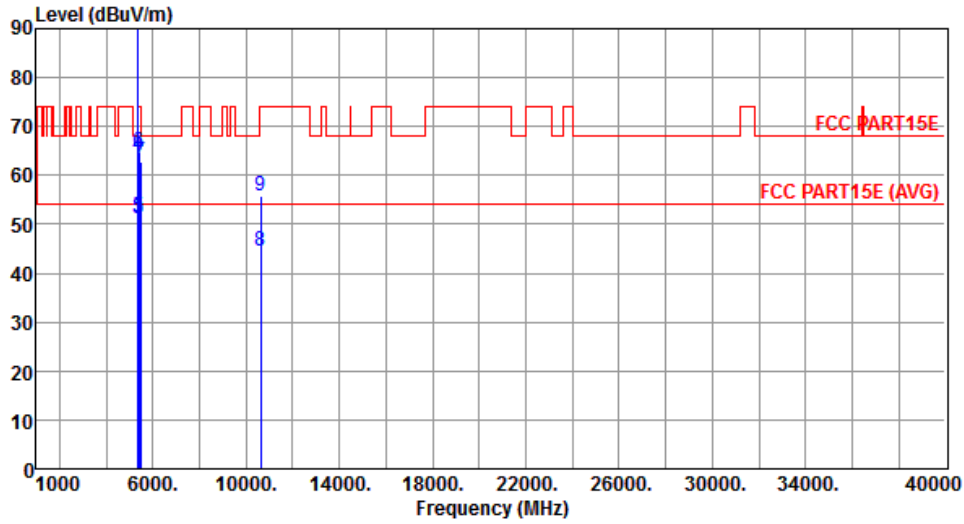

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	5320.00	104.70			99.25	5.45	Average	324	65
2	*	5320.00	115.86			110.41	5.45	Peak	324	65
3		5350.00	51.25	54.00	-2.75	45.75	5.50	Average	324	65
4		5350.00	64.13	74.00	-9.87	58.63	5.50	Peak	324	65
5		5400.00	51.54	54.00	-2.46	45.96	5.58	Average	324	65
6		5400.00	64.65	74.00	-9.35	59.07	5.58	Peak	324	65
7		5480.00	62.81	68.20	-5.39	57.14	5.67	Peak	324	65
8		10640.00	44.52	54.00	-9.48	30.41	14.11	Average	109	103
9		10640.00	55.67	74.00	-18.33	41.56	14.11	Peak	109	103


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5500
<b>Polarization</b>	Horizontal		

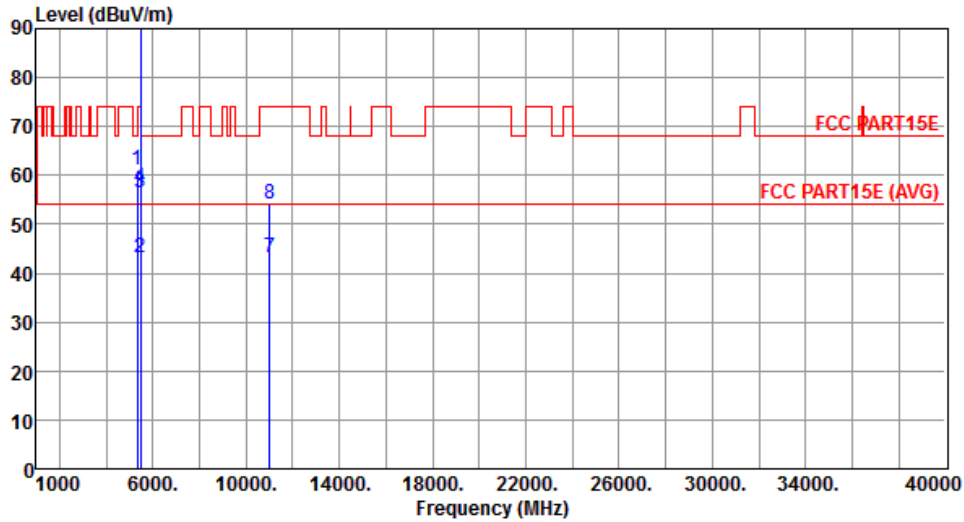

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5340.00	61.04	68.20	-7.16	55.56	5.48	Peak	349	110
2	5460.00	43.29	54.00	-10.71	37.64	5.65	Average	349	110
3	5460.00	56.33	74.00	-17.67	50.68	5.65	Peak	349	110
4	5470.00	57.61	68.20	-10.59	51.95	5.66	Peak	349	110
5 *	5500.00	94.81			89.11	5.70	Average	349	110
6 *	5500.00	105.06			99.36	5.70	Peak	349	110
7	11000.00	43.12	54.00	-10.88	28.66	14.46	Average	105	192
8	11000.00	54.06	74.00	-19.94	39.60	14.46	Peak	105	192


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5500
<b>Polarization</b>	Vertical		

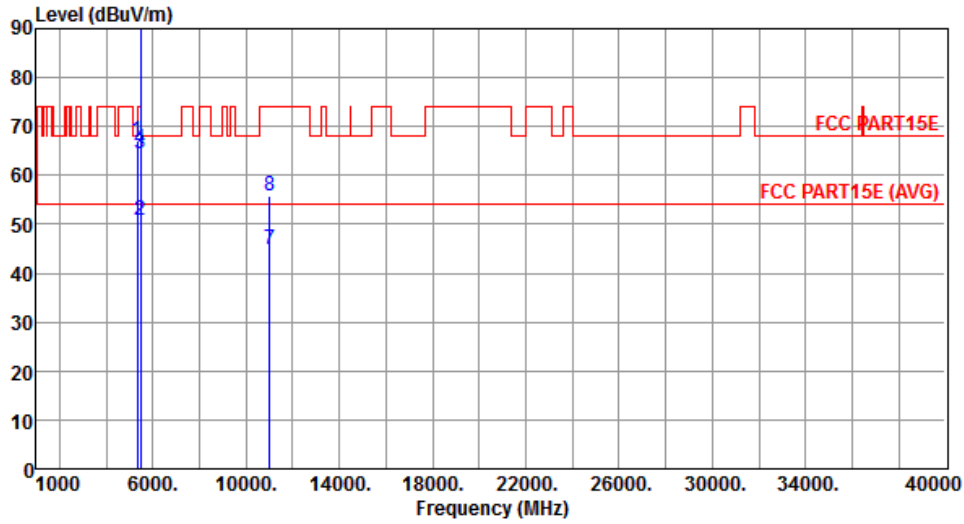

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5340.00	66.95	68.20	-1.25	61.47	5.48	Peak	326	65
2	5460.00	50.86	54.00	-3.14	45.21	5.65	Average	326	65
3	5460.00	64.51	74.00	-9.49	58.86	5.65	Peak	326	65
4	5470.00	65.32	68.20	-2.88	59.66	5.66	Peak	326	65
5 *	5500.00	105.89			100.19	5.70	Average	326	65
6 *	5500.00	117.16			111.46	5.70	Peak	326	65
7	11000.00	44.86	54.00	-9.14	30.40	14.46	Average	108	123
8	11000.00	55.91	74.00	-18.09	41.45	14.46	Peak	108	123


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5580
<b>Polarization</b>	Horizontal		

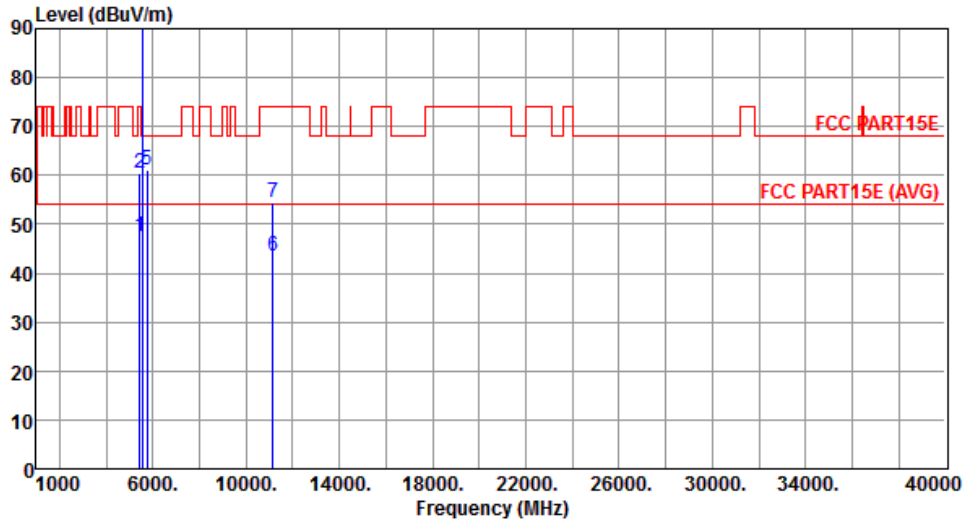

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5420.00	47.61	54.00	-6.39	42.00	5.61	Average	349	102
2	5420.00	60.35	74.00	-13.65	54.74	5.61	Peak	349	102
3 *	5580.00	93.25			87.48	5.77	Average	349	102
4 *	5580.00	104.82			99.05	5.77	Peak	349	102
5	5740.00	61.12	68.20	-7.08	55.10	6.02	Peak	349	102
6	11160.00	43.65	54.00	-10.35	29.05	14.60	Average	105	188
7	11160.00	54.52	74.00	-19.48	39.92	14.60	Peak	105	188

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency



<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5580
<b>Polarization</b>	Vertical		

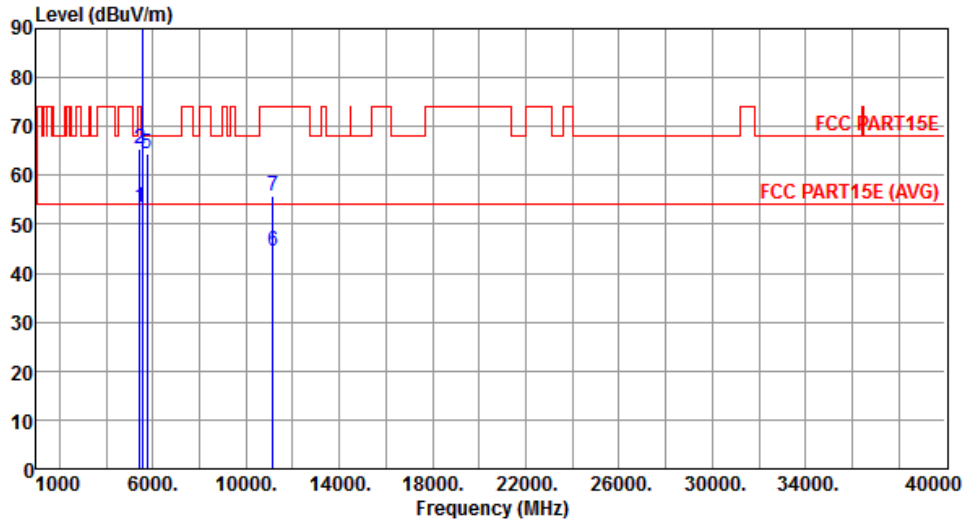

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5420.00	53.42	54.00	-0.58	47.81	5.61	Average	326	63
2	5420.00	65.26	74.00	-8.74	59.65	5.61	Peak	326	63
3 *	5580.00	103.25			97.48	5.77	Average	326	63
4 *	5580.00	115.36			109.59	5.77	Peak	326	63
5	5740.00	64.51	68.20	-3.69	58.49	6.02	Peak	326	63
6	11160.00	44.65	54.00	-9.35	30.05	14.60	Average	109	118
7	11160.00	55.82	74.00	-18.18	41.22	14.60	Peak	109	118


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5700
<b>Polarization</b>	Horizontal		

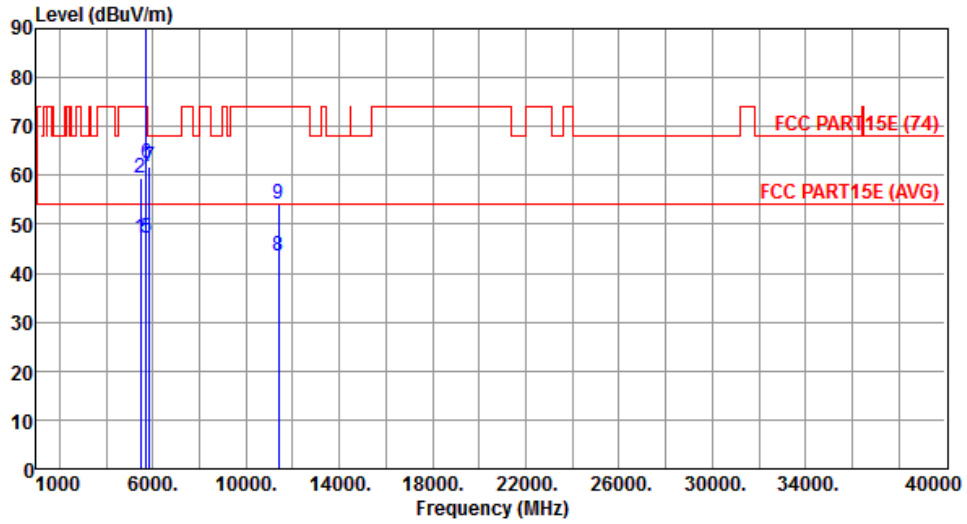

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.29	54.00	-6.71	41.64	5.65	Average	345	108
2	5460.00	59.46	74.00	-14.54	53.81	5.65	Peak	345	108
3 *	5700.00	94.26			88.30	5.96	Average	345	108
4 *	5700.00	104.53			98.57	5.96	Peak	345	108
5	5725.00	47.29	54.00	-6.71	41.30	5.99	Average	345	108
6	5725.00	62.35	74.00	-11.65	56.36	5.99	Peak	345	108
7	5860.00	61.66	68.20	-6.54	55.48	6.18	Peak	345	108
8	11400.00	43.59	54.00	-10.41	28.77	14.82	Average	101	193
9	11400.00	54.28	74.00	-19.72	39.46	14.82	Peak	101	193


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5700
<b>Polarization</b>	Vertical		

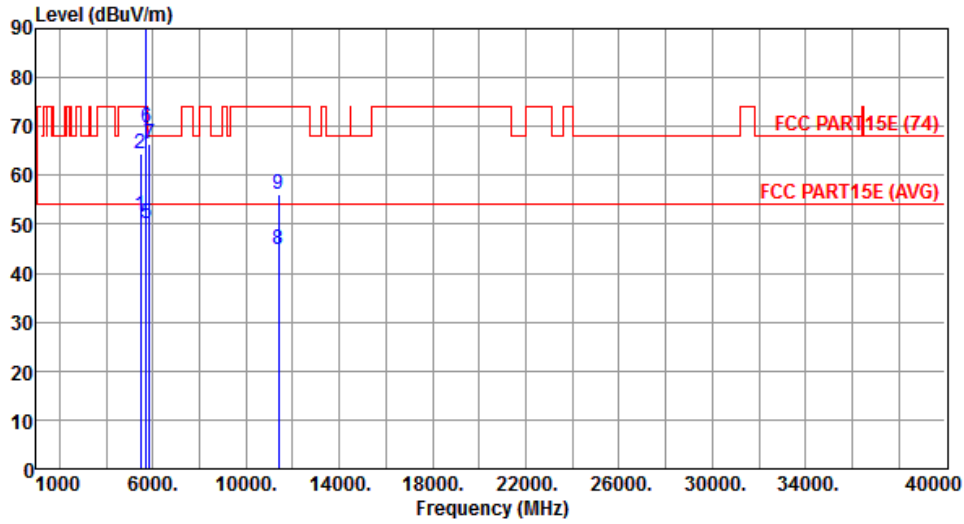

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	51.68	54.00	-2.32	46.03	5.65	Average	326	64
2	5460.00	64.53	74.00	-9.47	58.88	5.65	Peak	326	64
3 *	5700.00	104.69			98.73	5.96	Average	326	64
4 *	5700.00	116.38			110.42	5.96	Peak	326	64
5	5725.00	50.31	54.00	-3.69	44.32	5.99	Average	326	64
6	5725.00	69.65	74.00	-4.35	63.66	5.99	Peak	326	64
7	5860.00	66.52	68.20	-1.68	60.34	6.18	Peak	326	64
8	11400.00	44.83	54.00	-9.17	30.01	14.82	Average	113	115
9	11400.00	55.96	74.00	-18.04	41.14	14.82	Peak	113	115


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5720
<b>Polarization</b>	Horizontal		

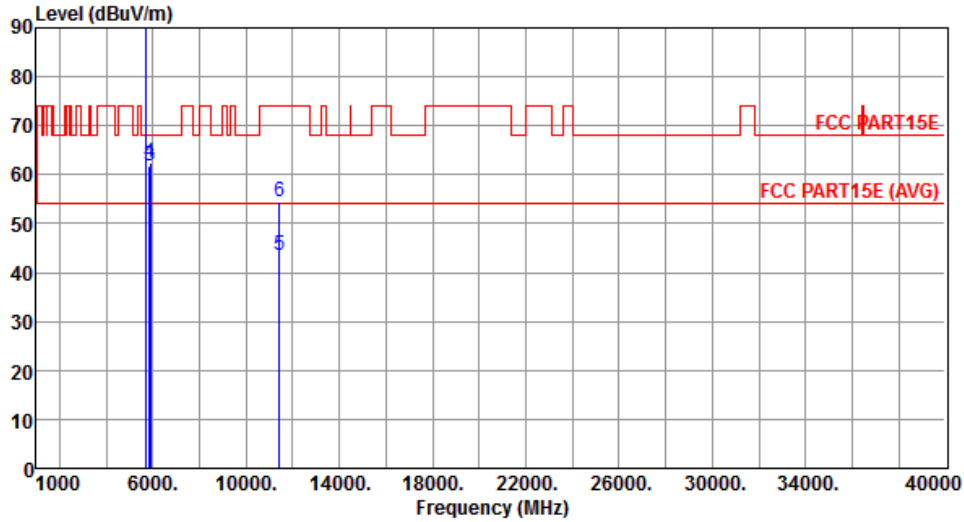

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	
1	*	5720.00	95.16		89.18	5.98	Average	344	110	
2	*	5720.00	105.33		99.35	5.98	Peak	344	110	
3		5850.00	61.75	68.20	-6.45	55.58	6.17	Peak	344	110
4		5880.00	62.43	68.20	-5.77	56.22	6.21	Peak	344	110
5		11440.00	43.36	54.00	-10.64	28.50	14.86	Average	101	196
6		11440.00	54.45	74.00	-19.55	39.59	14.86	Peak	101	196


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5720
<b>Polarization</b>	Vertical		

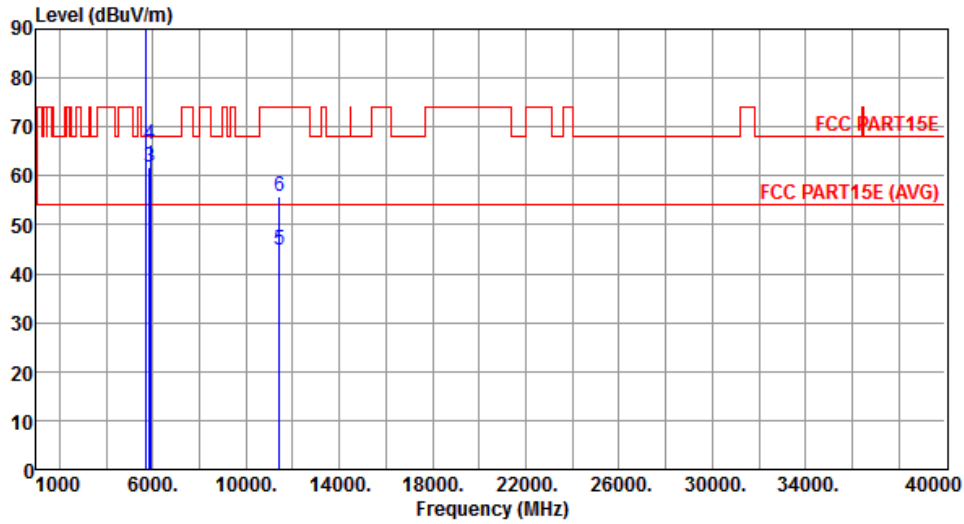

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg	
1	*	5720.00	105.36		99.38	5.98	Average	326	61	
2	*	5720.00	117.08		111.10	5.98	Peak	326	61	
3		5850.00	61.88	68.20	-6.32	55.71	6.17	Peak	326	61
4		5880.00	66.51	68.20	-1.69	60.30	6.21	Peak	326	61
5		11440.00	44.96	54.00	-9.04	30.10	14.86	Average	115	103
6		11440.00	55.87	74.00	-18.13	41.01	14.86	Peak	115	103


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: "\*" is Peak / Average value of fundamental frequency

### 3.2.7 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

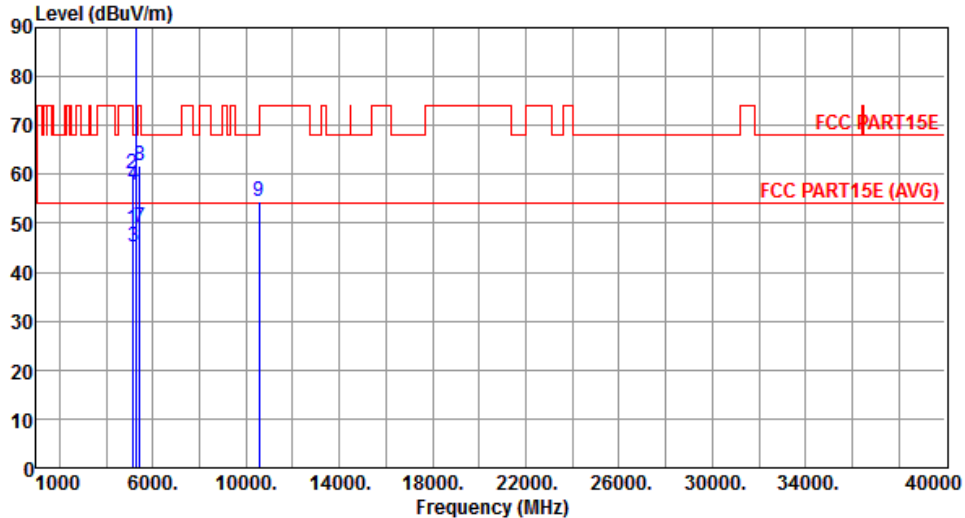Modulation	VHT40	Test Freq. (MHz)	5270						
Polarization	Horizontal								
									
	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table
	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg
1	5110.00	48.84	54.00	-5.16	43.69	5.15	Average	341	105
2	5110.00	60.12	74.00	-13.88	54.97	5.15	Peak	341	105
3	5150.00	45.11	54.00	-8.89	39.90	5.21	Average	341	105
4	5150.00	57.82	74.00	-16.18	52.61	5.21	Peak	341	105
5 *	5270.00	93.24			87.86	5.38	Average	341	105
6 *	5270.00	103.65			98.27	5.38	Peak	341	105
7	5430.00	49.25	54.00	-4.75	43.63	5.62	Average	341	105
8	5430.00	61.91	74.00	-12.09	56.29	5.62	Peak	341	105
9	10540.00	54.62	68.20	-13.58	40.62	14.00	Peak	101	158

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)  
\*Factor includes antenna factor , cable loss and amplifier gain  
Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).  
Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5270
<b>Polarization</b>	Vertical		

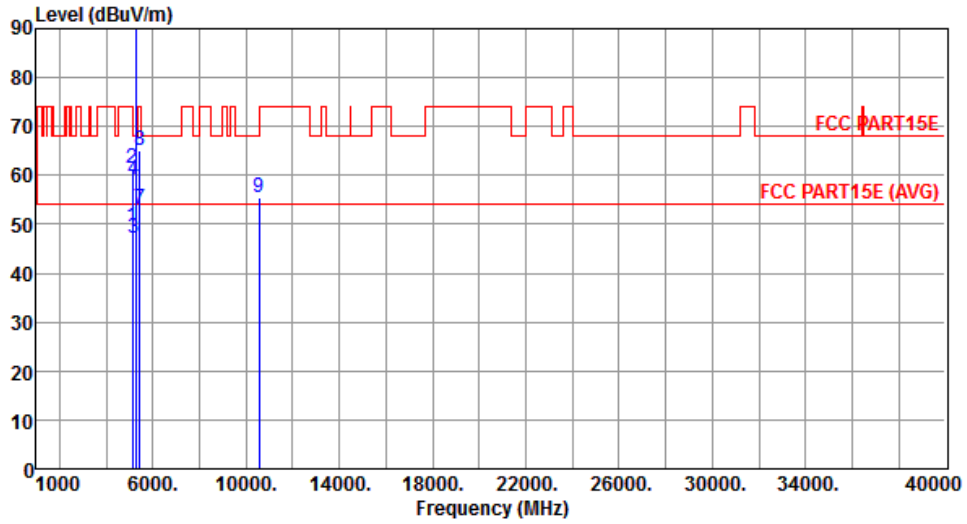

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5110.00	49.45	54.00	-4.55	44.30	5.15	Average	308	23
2	5110.00	61.42	74.00	-12.58	56.27	5.15	Peak	308	23
3	5150.00	47.29	54.00	-6.71	42.08	5.21	Average	308	23
4	5150.00	59.06	74.00	-14.94	53.85	5.21	Peak	308	23
5 *	5270.00	103.84			98.46	5.38	Average	308	23
6 *	5270.00	114.86			109.48	5.38	Peak	308	23
7	5430.00	53.04	54.00	-0.96	47.42	5.62	Average	308	23
8	5430.00	65.10	74.00	-8.90	59.48	5.62	Peak	308	23
9	10540.00	55.47	68.20	-12.73	41.47	14.00	Peak	115	101


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5310
<b>Polarization</b>	Horizontal		

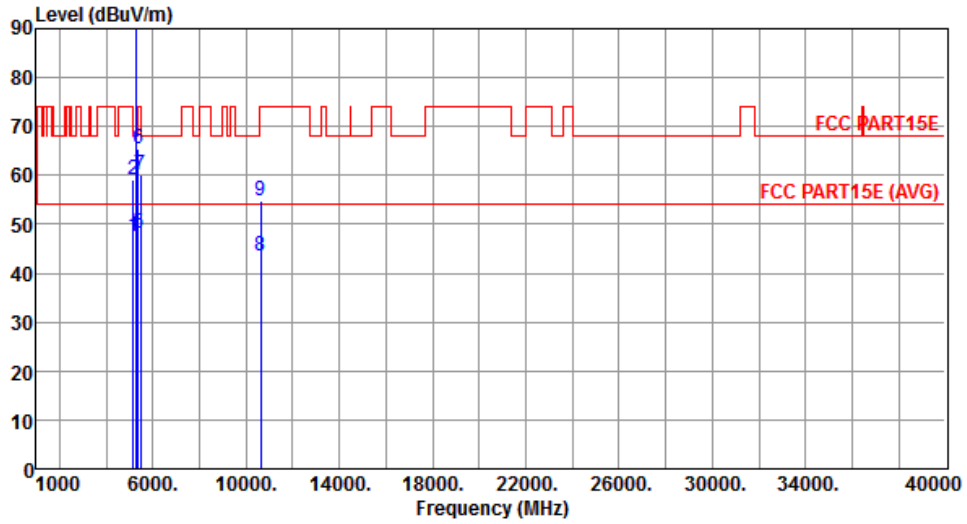

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.65	54.00	-6.35	42.44	5.21	Average	338	101
2	5150.00	59.21	74.00	-14.79	54.00	5.21	Peak	338	101
3 *	5310.00	93.02			87.57	5.45	Average	338	101
4 *	5310.00	103.24			97.79	5.45	Peak	338	101
5	5350.00	48.11	54.00	-5.89	42.61	5.50	Average	338	101
6	5350.00	65.42	74.00	-8.58	59.92	5.50	Peak	338	101
7	5470.00	60.06	68.20	-8.14	54.40	5.66	Peak	338	101
8	10620.00	43.62	54.00	-10.38	29.55	14.07	Average	105	143
9	10620.00	54.82	74.00	-19.18	40.75	14.07	Peak	105	143

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency



<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5310
<b>Polarization</b>	Vertical		

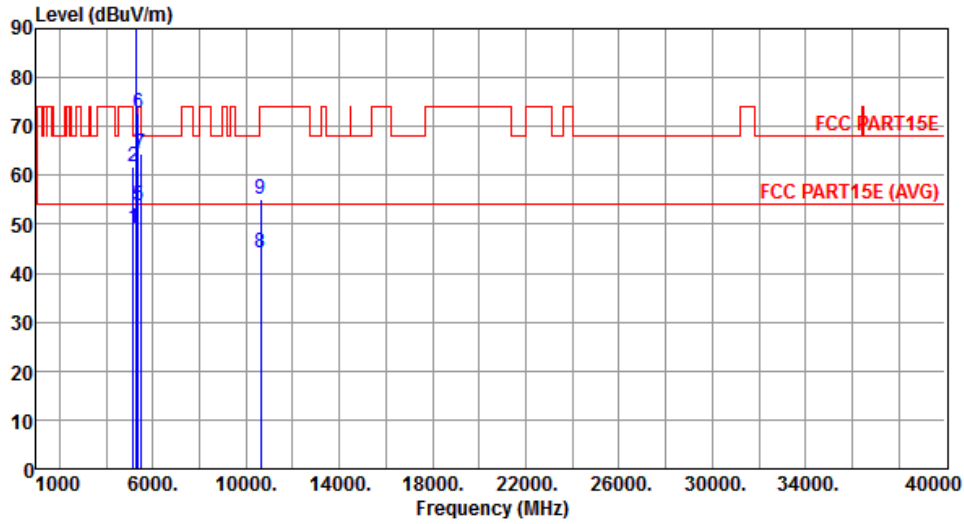

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	49.14	54.00	-4.86	43.93	5.21	Average	319	24
2	5150.00	61.85	74.00	-12.15	56.64	5.21	Peak	319	24
3 *	5310.00	103.56			98.11	5.45	Average	319	24
4 *	5310.00	114.38			108.93	5.45	Peak	319	24
5	5350.00	53.66	54.00	-0.34	48.16	5.50	Average	319	24
6	5350.00	72.72	74.00	-1.28	67.22	5.50	Peak	319	24
7	5470.00	64.32	68.20	-3.88	58.66	5.66	Peak	319	24
8	10620.00	44.21	54.00	-9.79	30.14	14.07	Average	113	92
9	10620.00	55.26	74.00	-18.74	41.19	14.07	Peak	113	92


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5510
<b>Polarization</b>	Horizontal		

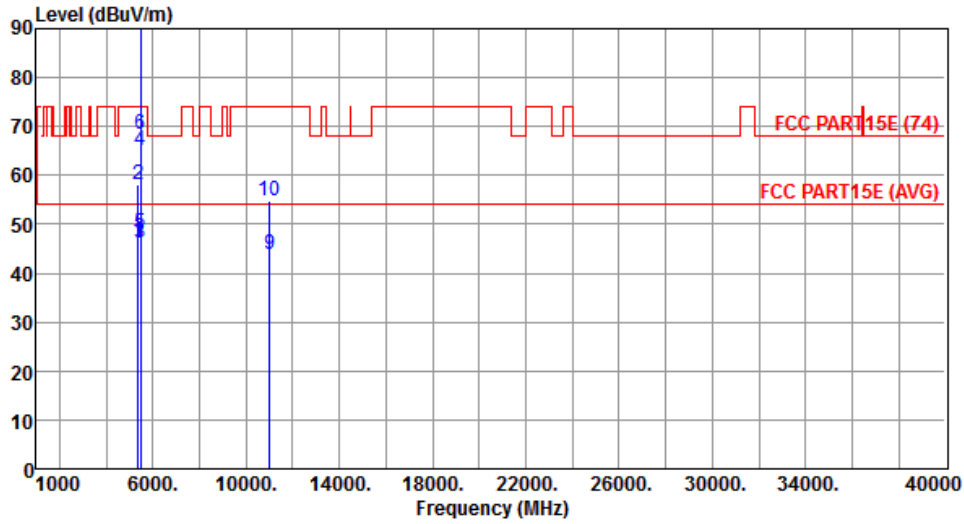

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	46.41	54.00	-7.59	40.91	5.50	Average	338	114
2	5350.00	58.03	74.00	-15.97	52.53	5.50	Peak	338	114
3	5460.00	46.12	54.00	-7.88	40.47	5.65	Average	338	114
4	5460.00	65.21	74.00	-8.79	59.56	5.65	Peak	338	114
5	5470.00	48.02	54.00	-5.98	42.36	5.66	Average	338	114
6	5470.00	68.25	74.00	-5.75	62.59	5.66	Peak	338	114
7 *	5510.00	92.86			87.16	5.70	Average	338	114
8 *	5510.00	103.04			97.34	5.70	Peak	338	114
9	11020.00	43.85	54.00	-10.15	29.37	14.48	Average	101	148
10	11020.00	54.67	74.00	-19.33	40.19	14.48	Peak	101	148


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5510
<b>Polarization</b>	Vertical		

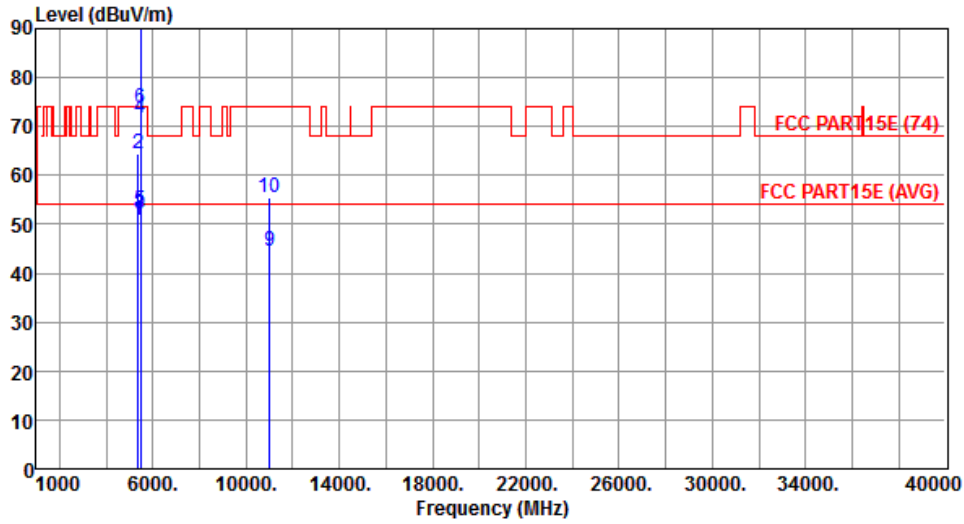

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	50.86	54.00	-3.14	45.36	5.50	Average	320	63
2	5350.00	64.52	74.00	-9.48	59.02	5.50	Peak	320	63
3	5460.00	52.05	54.00	-1.95	46.40	5.65	Average	320	63
4	5460.00	71.75	74.00	-2.25	66.10	5.65	Peak	320	63
5	5470.00	52.81	54.00	-1.19	47.15	5.66	Average	320	63
6	5470.00	73.68	74.00	-0.32	68.02	5.66	Peak	320	63
7 *	5510.00	103.13			97.43	5.70	Average	320	63
8 *	5510.00	114.16			108.46	5.70	Peak	320	63
9	11020.00	44.35	54.00	-9.65	29.87	14.48	Average	103	96
10	11020.00	55.31	74.00	-18.69	40.83	14.48	Peak	103	96


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5590
<b>Polarization</b>	Horizontal		

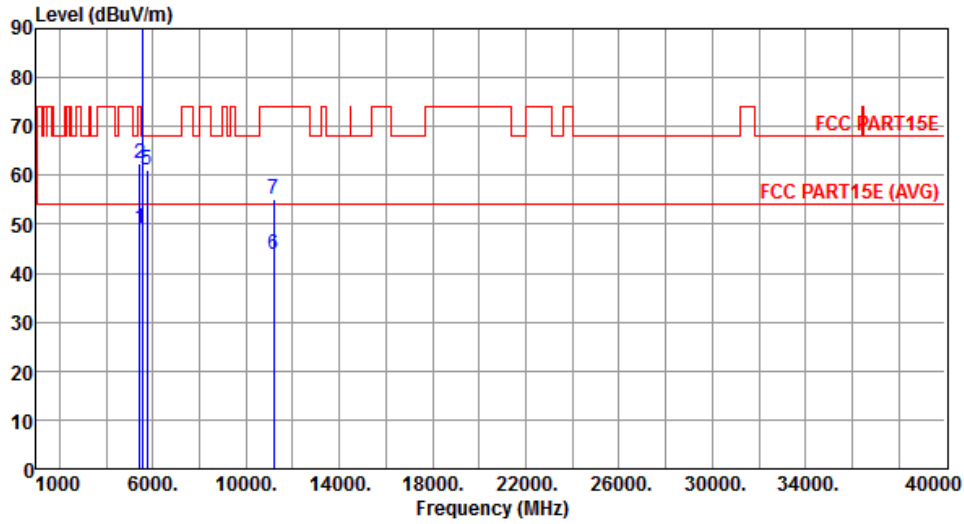

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	49.25	54.00	-4.75	43.63	5.62	Average	338	113
2	5430.00	62.28	74.00	-11.72	56.66	5.62	Peak	338	113
3 *	5590.00	93.28			87.50	5.78	Average	338	113
4 *	5590.00	103.56			97.78	5.78	Peak	338	113
5	5750.00	61.22	68.20	-6.98	55.19	6.03	Peak	338	113
6	11180.00	43.69	54.00	-10.31	29.07	14.62	Average	101	144
7	11180.00	55.14	74.00	-18.86	40.52	14.62	Peak	101	144


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5590
<b>Polarization</b>	Vertical		

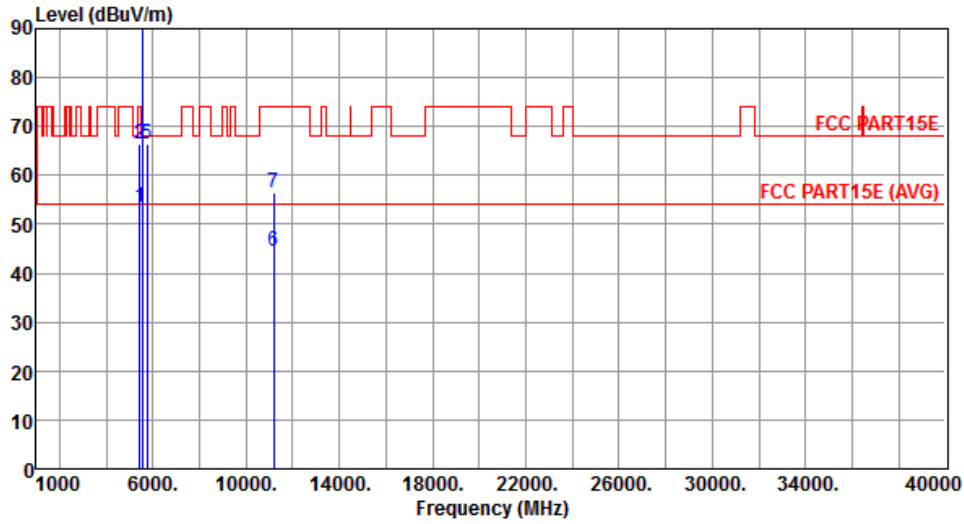

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	53.41	54.00	-0.59	47.79	5.62	Average	320	62
2	5430.00	66.42	74.00	-7.58	60.80	5.62	Peak	320	62
3 *	5590.00	103.60			97.82	5.78	Average	320	62
4 *	5590.00	114.96			109.18	5.78	Peak	320	62
5	5750.00	66.36	68.20	-1.84	60.33	6.03	Peak	320	62
6	11180.00	44.62	54.00	-9.38	30.00	14.62	Average	109	100
7	11180.00	56.48	74.00	-17.52	41.86	14.62	Peak	109	100


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Polarization</b>	Horizontal		

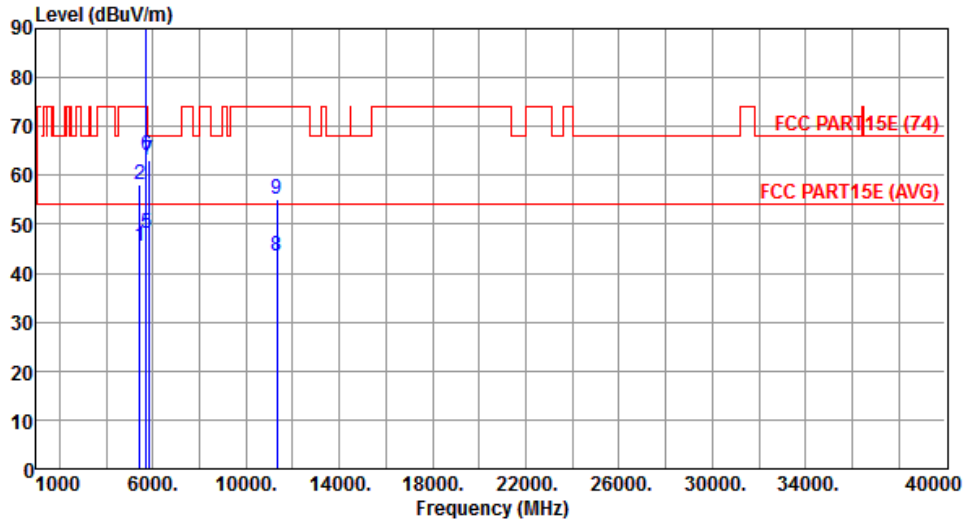

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	45.34	54.00	-8.66	39.72	5.62	Average	336	115
2	5430.00	58.02	74.00	-15.98	52.40	5.62	Peak	336	115
3 *	5670.00	93.02			87.12	5.90	Average	336	115
4 *	5670.00	103.24			97.34	5.90	Peak	336	115
5	5725.00	48.21	54.00	-5.79	42.22	5.99	Average	336	115
6	5725.00	63.95	74.00	-10.05	57.96	5.99	Peak	336	115
7	5830.00	63.14	68.20	-5.06	56.99	6.15	Peak	336	115
8	11340.00	43.45	54.00	-10.55	28.68	14.77	Average	103	146
9	11340.00	55.02	74.00	-18.98	40.25	14.77	Peak	103	146


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Polarization</b>	Vertical		

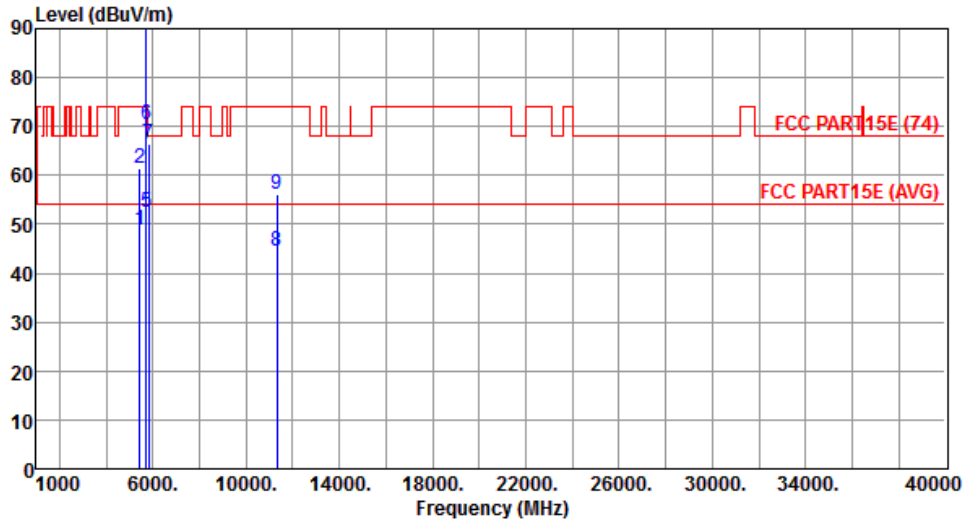

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	48.90	54.00	-5.10	43.28	5.62	Average	320	61
2	5430.00	61.32	74.00	-12.68	55.70	5.62	Peak	320	61
3 *	5670.00	104.04			98.14	5.90	Average	320	61
4 *	5670.00	114.85			108.95	5.90	Peak	320	61
5	5725.00	52.33	54.00	-1.67	46.34	5.99	Average	320	61
6	5725.00	70.57	74.00	-3.43	64.58	5.99	Peak	320	61
7	5830.00	66.40	68.20	-1.80	60.25	6.15	Peak	320	61
8	11340.00	44.39	54.00	-9.61	29.62	14.77	Average	110	94
9	11340.00	56.21	74.00	-17.79	41.44	14.77	Peak	110	94


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5710
<b>Polarization</b>	Horizontal		

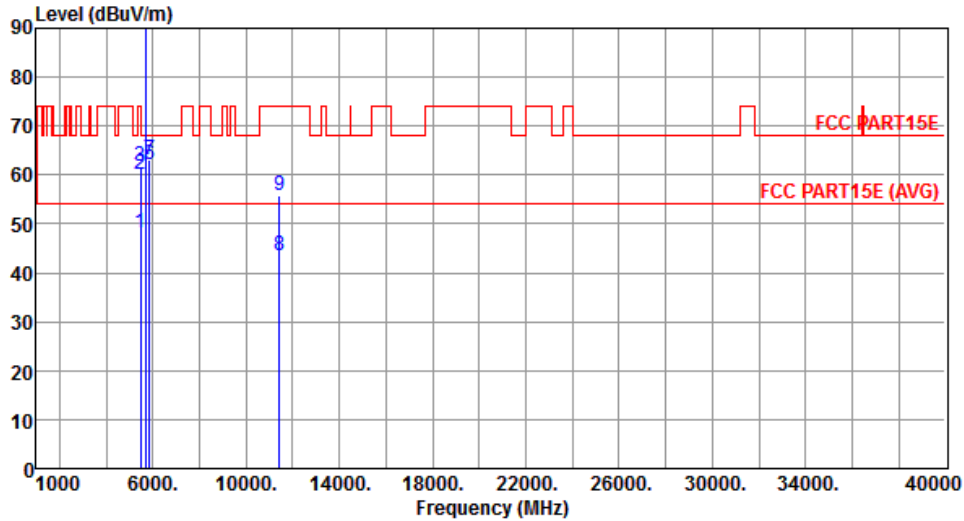

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	48.21	54.00	-5.79	42.56	5.65	Average	335	113
2	5460.00	60.14	74.00	-13.86	54.49	5.65	Peak	335	113
3	5470.00	61.75	68.20	-6.45	56.09	5.66	Peak	335	113
4 *	5710.00	93.25			87.29	5.96	Average	335	113
5 *	5710.00	103.46			97.50	5.96	Peak	335	113
6	5850.00	62.13	68.20	-6.07	55.96	6.17	Peak	335	113
7	5870.00	63.24	68.20	-4.96	57.05	6.19	Peak	335	113
8	11420.00	43.59	54.00	-10.41	28.75	14.84	Average	106	151
9	11420.00	55.64	74.00	-18.36	40.80	14.84	Peak	106	151

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency



<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5710
<b>Polarization</b>	Vertical		

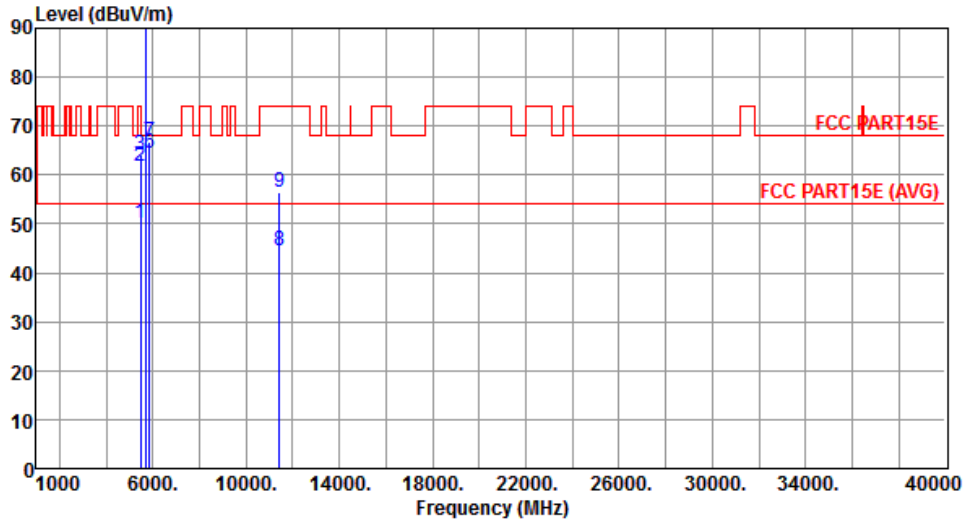

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	50.09	54.00	-3.91	44.44	5.65	Average	321	66
2	5460.00	61.75	74.00	-12.25	56.10	5.65	Peak	321	66
3	5470.00	64.02	68.20	-4.18	58.36	5.66	Peak	321	66
4 *	5710.00	104.62			98.66	5.96	Average	321	66
5 *	5710.00	115.51			109.55	5.96	Peak	321	66
6	5850.00	64.56	68.20	-3.64	58.39	6.17	Peak	321	66
7	5870.00	66.70	68.20	-1.50	60.51	6.19	Peak	321	66
8	11420.00	44.51	54.00	-9.49	29.67	14.84	Average	110	87
9	11420.00	56.35	74.00	-17.65	41.51	14.84	Peak	110	87


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

### 3.2.8 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

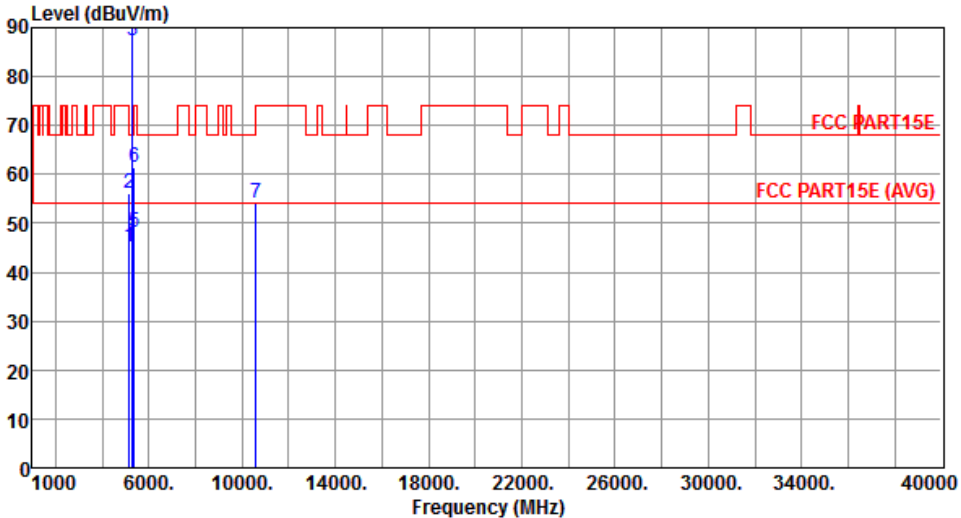Modulation	VHT80	Test Freq. (MHz)	5290																																																																																									
Polarization	Horizontal																																																																																											
																																																																																												
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>45.13</td> <td>54.00</td> <td>-8.87</td> <td>39.92</td> <td>5.21</td> <td>Average</td> <td>344</td> <td>103</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>56.22</td> <td>74.00</td> <td>-17.78</td> <td>51.01</td> <td>5.21</td> <td>Peak</td> <td>344</td> <td>103</td> </tr> <tr> <td>3 *</td> <td>5290.00</td> <td>87.45</td> <td></td> <td></td> <td>82.04</td> <td>5.41</td> <td>Average</td> <td>344</td> <td>103</td> </tr> <tr> <td>4 *</td> <td>5290.00</td> <td>97.53</td> <td></td> <td></td> <td>92.12</td> <td>5.41</td> <td>Peak</td> <td>344</td> <td>103</td> </tr> <tr> <td>5</td> <td>5350.00</td> <td>48.14</td> <td>54.00</td> <td>-5.86</td> <td>42.64</td> <td>5.50</td> <td>Average</td> <td>344</td> <td>103</td> </tr> <tr> <td>6</td> <td>5350.00</td> <td>61.53</td> <td>74.00</td> <td>-12.47</td> <td>56.03</td> <td>5.50</td> <td>Peak</td> <td>344</td> <td>103</td> </tr> <tr> <td>7</td> <td>10580.00</td> <td>54.23</td> <td>68.20</td> <td>-13.97</td> <td>40.19</td> <td>14.04</td> <td>Peak</td> <td>108</td> <td>144</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	45.13	54.00	-8.87	39.92	5.21	Average	344	103	2	5150.00	56.22	74.00	-17.78	51.01	5.21	Peak	344	103	3 *	5290.00	87.45			82.04	5.41	Average	344	103	4 *	5290.00	97.53			92.12	5.41	Peak	344	103	5	5350.00	48.14	54.00	-5.86	42.64	5.50	Average	344	103	6	5350.00	61.53	74.00	-12.47	56.03	5.50	Peak	344	103	7	10580.00	54.23	68.20	-13.97	40.19	14.04	Peak	108	144			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																																				
1	5150.00	45.13	54.00	-8.87	39.92	5.21	Average	344	103																																																																																			
2	5150.00	56.22	74.00	-17.78	51.01	5.21	Peak	344	103																																																																																			
3 *	5290.00	87.45			82.04	5.41	Average	344	103																																																																																			
4 *	5290.00	97.53			92.12	5.41	Peak	344	103																																																																																			
5	5350.00	48.14	54.00	-5.86	42.64	5.50	Average	344	103																																																																																			
6	5350.00	61.53	74.00	-12.47	56.03	5.50	Peak	344	103																																																																																			
7	10580.00	54.23	68.20	-13.97	40.19	14.04	Peak	108	144																																																																																			
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: "*" is Peak / Average value of fundamental frequency</p>																																																																																												

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5290
<b>Polarization</b>	Vertical		

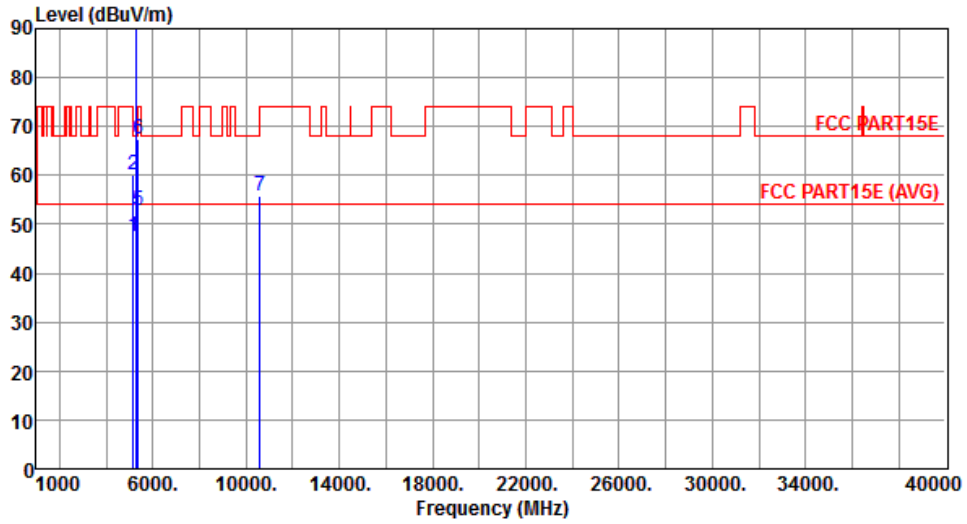

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	47.42	54.00	-6.58	42.21	5.21	Average	311	66
2	5150.00	60.20	74.00	-13.80	54.99	5.21	Peak	311	66
3 *	5290.00	97.29			91.88	5.41	Average	311	66
4 *	5290.00	107.38			101.97	5.41	Peak	311	66
5	5350.00	52.90	54.00	-1.10	47.40	5.50	Average	308	23
6	5350.00	67.50	74.00	-6.50	62.00	5.50	Peak	308	23
7	10580.00	55.63	68.20	-12.57	41.59	14.04	Peak	119	86


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5530
<b>Polarization</b>	Horizontal		

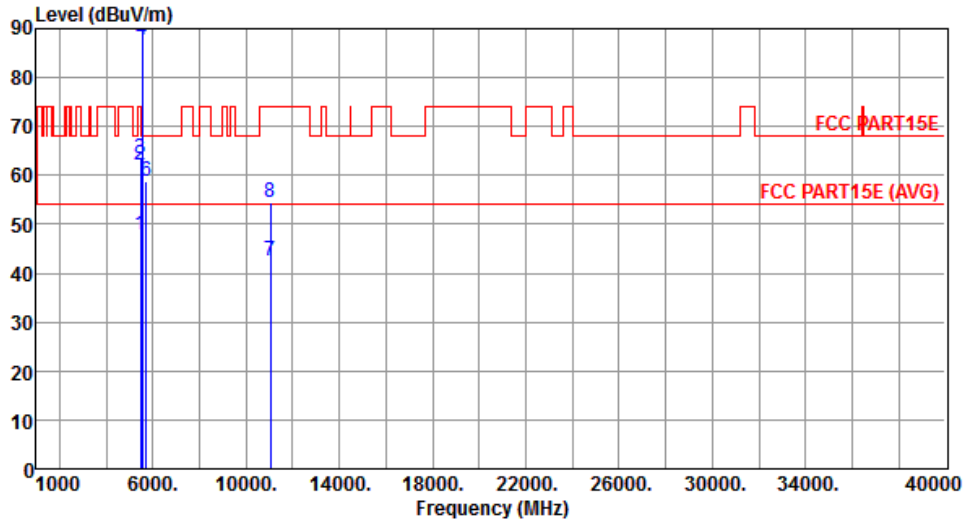

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	47.86	54.00	-6.14	42.21	5.65	Average	341	106
2	5460.00	62.14	74.00	-11.86	56.49	5.65	Peak	341	106
3	5470.00	63.45	68.20	-4.75	57.79	5.66	Peak	341	106
4 *	5530.00	87.62			81.90	5.72	Average	341	106
5 *	5530.00	97.68			91.96	5.72	Peak	341	106
6	5725.00	58.66	68.20	-9.54	52.67	5.99	Peak	341	106
7	11060.00	42.45	54.00	-11.55	27.94	14.51	Average	114	139
8	11060.00	54.63	74.00	-19.37	40.12	14.51	Peak	114	139


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5530
<b>Polarization</b>	Vertical		

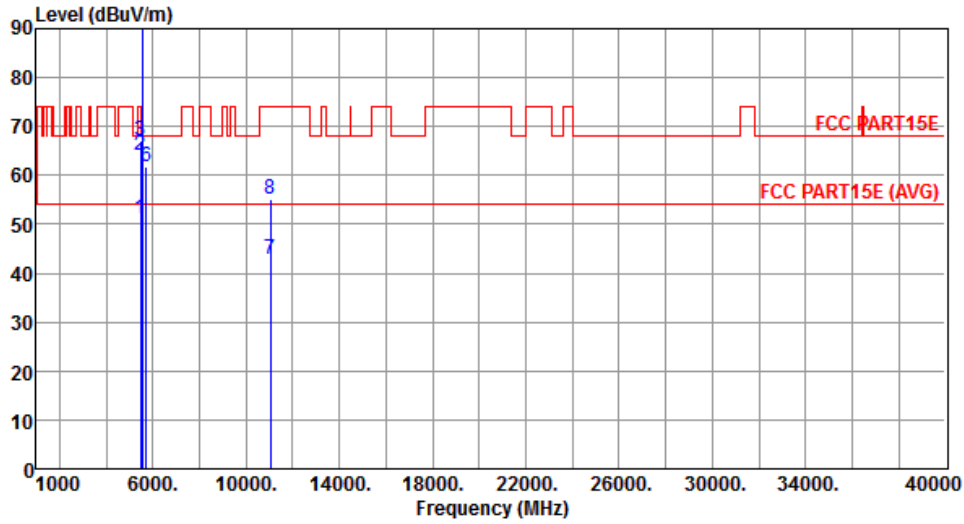

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	51.03	54.00	-2.97	45.38	5.65	Average	301	64
2	5460.00	64.10	74.00	-9.90	58.45	5.65	Peak	301	64
3	5470.00	67.18	68.20	-1.02	61.52	5.66	Peak	301	64
4 *	5530.00	96.82			91.10	5.72	Average	301	64
5 *	5530.00	107.40			101.68	5.72	Peak	301	64
6	5725.00	61.90	68.20	-6.30	55.91	5.99	Peak	301	64
7	11060.00	42.94	54.00	-11.06	28.43	14.51	Average	113	97
8	11060.00	55.24	74.00	-18.76	40.73	14.51	Peak	113	97


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5610
<b>Polarization</b>	Horizontal		

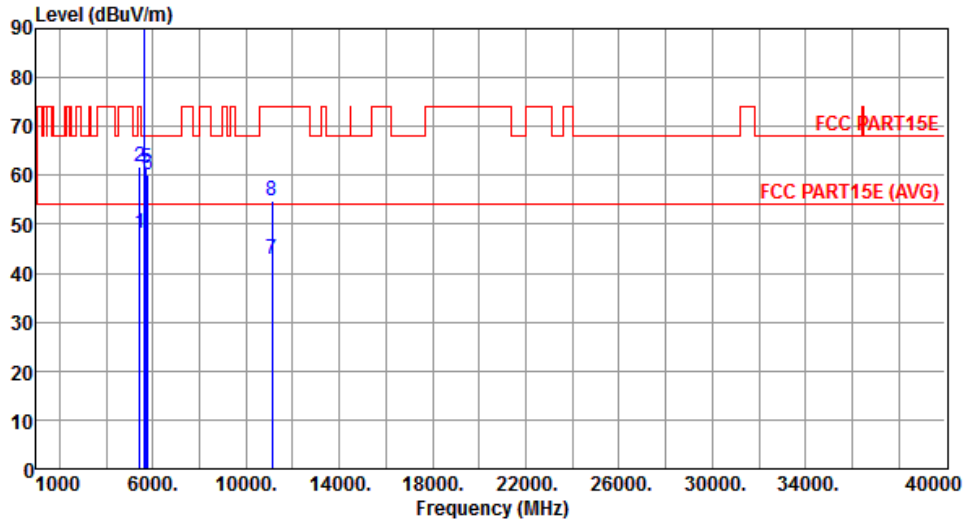

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5450.00	48.13	54.00	-5.87	42.50	5.63	Average	345	101
2	5450.00	61.62	74.00	-12.38	55.99	5.63	Peak	345	101
3 *	5610.00	89.82			84.02	5.80	Average	345	101
4 *	5610.00	98.75			92.95	5.80	Peak	345	101
5	5725.00	61.35	68.20	-6.85	55.36	5.99	Peak	345	101
6	5770.00	60.21	68.20	-7.99	54.15	6.06	Peak	345	101
7	11120.00	42.93	54.00	-11.07	28.36	14.57	Average	119	136
8	11120.00	54.86	74.00	-19.14	40.29	14.57	Peak	119	136


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5610
<b>Polarization</b>	Vertical		

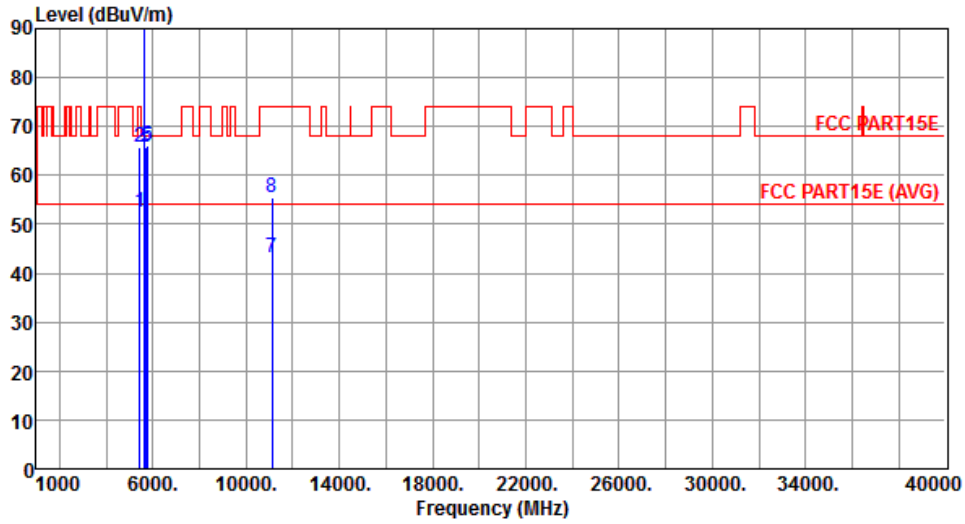

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5450.00	52.49	54.00	-1.51	46.86	5.63	Average	301	62
2	5450.00	65.78	74.00	-8.22	60.15	5.63	Peak	301	62
3 *	5610.00	99.71			93.91	5.80	Average	301	62
4 *	5610.00	109.90			104.10	5.80	Peak	301	62
5	5725.00	65.77	68.20	-2.43	59.78	5.99	Peak	301	62
6	5770.00	65.93	68.20	-2.27	59.87	6.06	Peak	301	62
7	11120.00	43.18	54.00	-10.82	28.61	14.57	Average	119	106
8	11120.00	55.62	74.00	-18.38	41.05	14.57	Peak	119	106


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5690
<b>Polarization</b>	Horizontal		

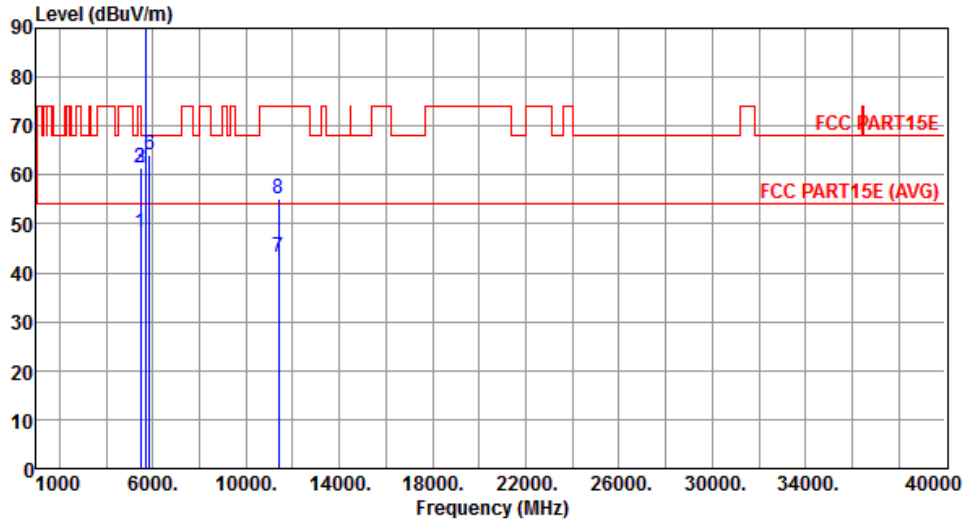

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	48.24	54.00	-5.76	42.59	5.65	Average	345	103
2	5460.00	61.53	74.00	-12.47	55.88	5.65	Peak	345	103
3	5470.00	61.35	68.20	-6.85	55.69	5.66	Peak	345	103
4 *	5690.00	92.76			86.82	5.94	Average	345	103
5 *	5690.00	102.62			96.68	5.94	Peak	345	103
6	5850.00	64.05	68.20	-4.15	57.88	6.17	Peak	345	103
7	11380.00	43.25	54.00	-10.75	28.45	14.80	Average	103	145
8	11380.00	55.13	74.00	-18.87	40.33	14.80	Peak	103	145

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency



<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5690
<b>Polarization</b>	Vertical		

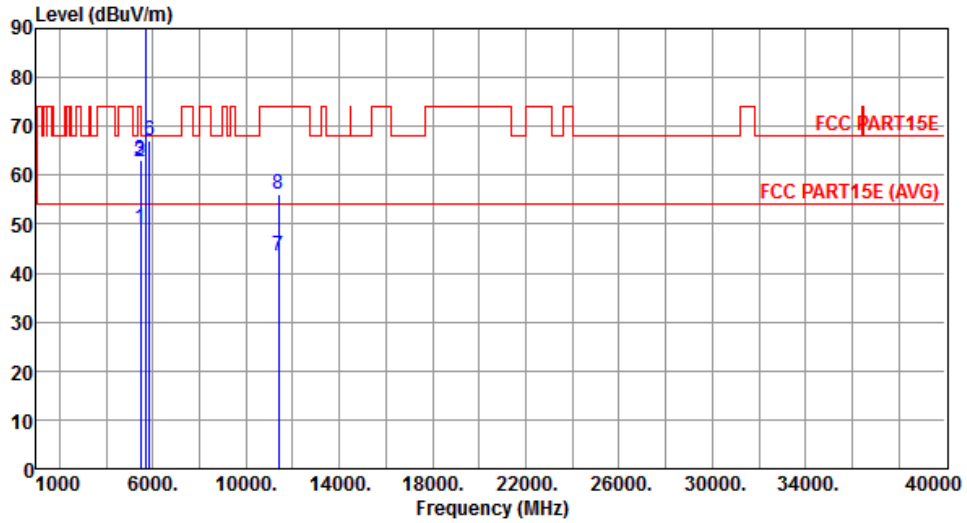

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	49.24	54.00	-4.76	43.59	5.65	Average	303	65
2	5460.00	62.79	74.00	-11.21	57.14	5.65	Peak	303	65
3	5470.00	63.11	68.20	-5.09	57.45	5.66	Peak	303	65
4 *	5690.00	102.82			96.88	5.94	Average	303	65
5 *	5690.00	113.07			107.13	5.94	Peak	303	65
6	5850.00	67.06	68.20	-1.14	60.89	6.17	Peak	303	65
7	11380.00	43.45	54.00	-10.55	28.65	14.80	Average	121	104
8	11380.00	55.98	74.00	-18.02	41.18	14.80	Peak	121	104

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

## Beamforming mode

### 3.2.9 Transmitter Radiated Unwanted Emissions (Below 1GHz)

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Polarization</b>	Horizontal	<b>Test configuration</b>	1

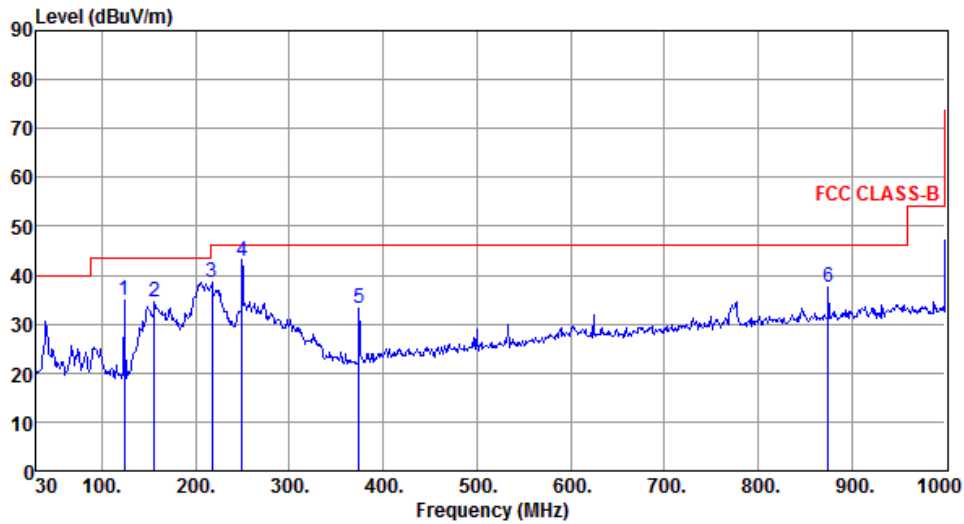

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	124.09	34.93	43.50	-8.57	45.46	-10.53	Peak	---	---
2	156.10	34.60	43.50	-8.90	42.94	-8.34	Peak	---	---
3	217.21	38.51	46.00	-7.49	49.48	-10.97	Peak	---	---
4	249.22	42.95	46.00	-3.05	52.34	-9.39	QP	100	108
5	374.35	33.15	46.00	-12.85	39.21	-6.06	Peak	---	---
6	874.87	37.40	46.00	-8.60	34.16	3.24	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Polarization</b>	Vertical	<b>Test configuration</b>	1

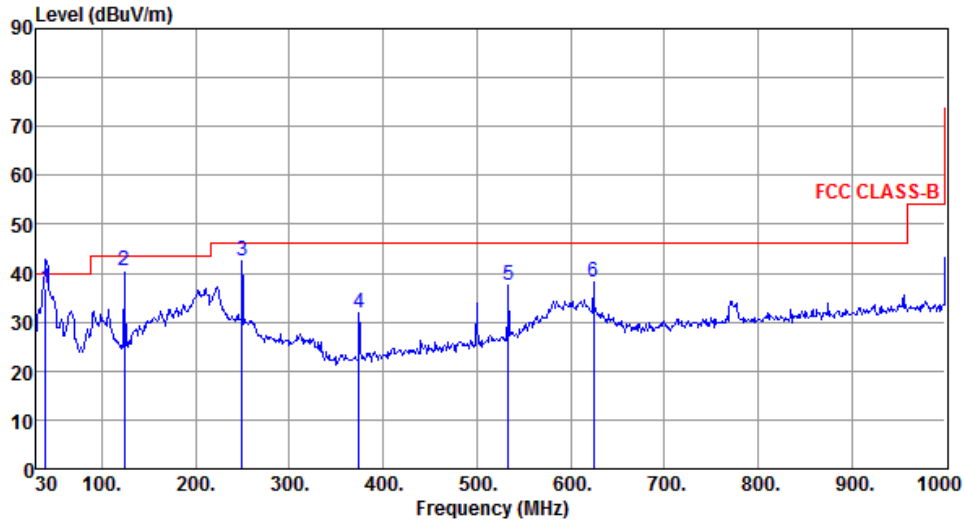

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	39.70	36.82	40.00	-3.18	45.60	-8.78	QP	100	21
2	124.09	40.42	43.50	-3.08	50.95	-10.53	QP	100	81
3	249.22	42.45	46.00	-3.55	51.84	-9.39	Peak	---	---
4	374.35	31.88	46.00	-14.12	37.94	-6.06	Peak	---	---
5	533.43	37.41	46.00	-8.59	40.07	-2.66	Peak	---	---
6	624.61	38.16	46.00	-7.84	38.87	-0.71	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Polarization</b>	Horizontal	<b>Test configuration</b>	2

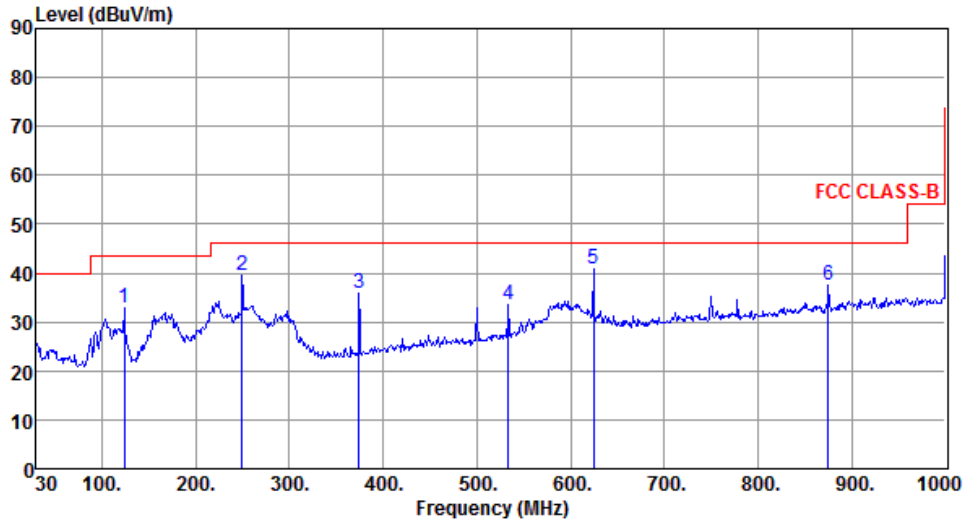

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	124.09	33.04	43.50	-10.46	43.57	-10.53	Peak	---	---
2	249.22	39.47	46.00	-6.53	48.86	-9.39	Peak	---	---
3	374.35	35.82	46.00	-10.18	41.88	-6.06	Peak	---	---
4	533.43	33.51	46.00	-12.49	36.17	-2.66	Peak	---	---
5	624.61	40.78	46.00	-5.22	41.49	-0.71	Peak	---	---
6	874.87	37.51	46.00	-8.49	34.27	3.24	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Polarization</b>	Vertical	<b>Test configuration</b>	2

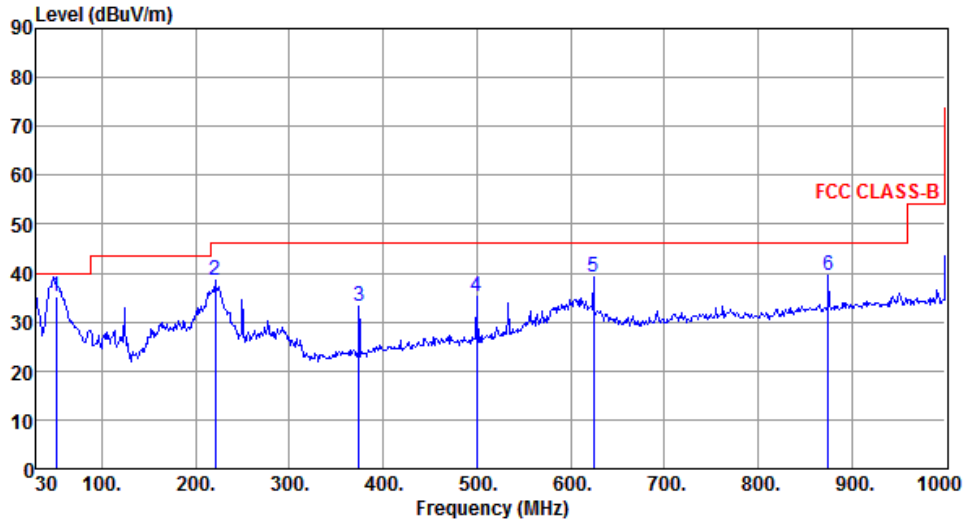

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	50.88	35.23	40.00	-4.77	43.45	-8.22	QP	102	81
2	221.09	38.68	46.00	-7.32	49.57	-10.89	Peak	---	---
3	374.35	33.27	46.00	-12.73	39.33	-6.06	Peak	---	---
4	499.48	35.30	46.00	-10.70	38.66	-3.36	Peak	---	---
5	624.61	39.10	46.00	-6.90	39.81	-0.71	Peak	---	---
6	874.87	39.35	46.00	-6.65	36.11	3.24	Peak	---	---


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

### 3.2.10 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT20

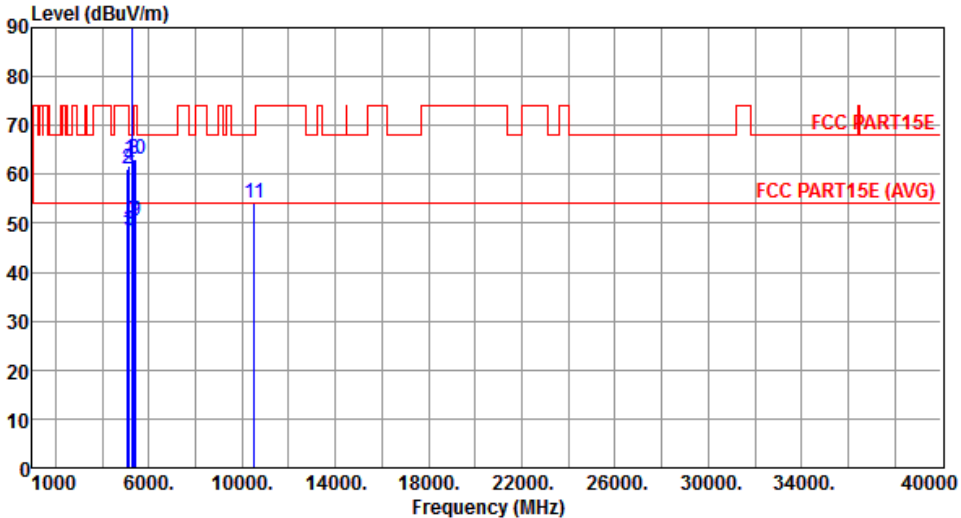Modulation	VHT20	Test Freq. (MHz)	5260																																																																																																																														
Polarization	Horizontal																																																																																																																																
																																																																																																																																	
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr><td>1</td><td>5100.00</td><td>48.27</td><td>54.00</td><td>-5.73</td><td>43.13</td><td>5.14</td><td>Average</td><td>308</td><td>135</td></tr> <tr><td>2</td><td>5100.00</td><td>61.08</td><td>74.00</td><td>-12.92</td><td>55.94</td><td>5.14</td><td>Peak</td><td>308</td><td>135</td></tr> <tr><td>3</td><td>5150.00</td><td>48.61</td><td>54.00</td><td>-5.39</td><td>43.40</td><td>5.21</td><td>Average</td><td>308</td><td>135</td></tr> <tr><td>4</td><td>5150.00</td><td>61.67</td><td>74.00</td><td>-12.33</td><td>56.46</td><td>5.21</td><td>Peak</td><td>308</td><td>135</td></tr> <tr><td>5 *</td><td>5260.00</td><td>93.70</td><td></td><td></td><td>88.33</td><td>5.37</td><td>Average</td><td>308</td><td>135</td></tr> <tr><td>6 *</td><td>5260.00</td><td>104.59</td><td></td><td></td><td>99.22</td><td>5.37</td><td>Peak</td><td>308</td><td>135</td></tr> <tr><td>7</td><td>5350.00</td><td>50.41</td><td>54.00</td><td>-3.59</td><td>44.91</td><td>5.50</td><td>Average</td><td>308</td><td>135</td></tr> <tr><td>8</td><td>5350.00</td><td>63.26</td><td>74.00</td><td>-10.74</td><td>57.76</td><td>5.50</td><td>Peak</td><td>308</td><td>135</td></tr> <tr><td>9</td><td>5420.00</td><td>50.36</td><td>54.00</td><td>-3.64</td><td>44.75</td><td>5.61</td><td>Average</td><td>308</td><td>135</td></tr> <tr><td>10</td><td>5420.00</td><td>63.00</td><td>74.00</td><td>-11.00</td><td>57.39</td><td>5.61</td><td>Peak</td><td>308</td><td>135</td></tr> <tr><td>11</td><td>10520.00</td><td>54.27</td><td>68.20</td><td>-13.93</td><td>40.29</td><td>13.98</td><td>Peak</td><td>100</td><td>175</td></tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5100.00	48.27	54.00	-5.73	43.13	5.14	Average	308	135	2	5100.00	61.08	74.00	-12.92	55.94	5.14	Peak	308	135	3	5150.00	48.61	54.00	-5.39	43.40	5.21	Average	308	135	4	5150.00	61.67	74.00	-12.33	56.46	5.21	Peak	308	135	5 *	5260.00	93.70			88.33	5.37	Average	308	135	6 *	5260.00	104.59			99.22	5.37	Peak	308	135	7	5350.00	50.41	54.00	-3.59	44.91	5.50	Average	308	135	8	5350.00	63.26	74.00	-10.74	57.76	5.50	Peak	308	135	9	5420.00	50.36	54.00	-3.64	44.75	5.61	Average	308	135	10	5420.00	63.00	74.00	-11.00	57.39	5.61	Peak	308	135	11	10520.00	54.27	68.20	-13.93	40.29	13.98	Peak	100	175
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																																																																									
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																																																																									
1	5100.00	48.27	54.00	-5.73	43.13	5.14	Average	308	135																																																																																																																								
2	5100.00	61.08	74.00	-12.92	55.94	5.14	Peak	308	135																																																																																																																								
3	5150.00	48.61	54.00	-5.39	43.40	5.21	Average	308	135																																																																																																																								
4	5150.00	61.67	74.00	-12.33	56.46	5.21	Peak	308	135																																																																																																																								
5 *	5260.00	93.70			88.33	5.37	Average	308	135																																																																																																																								
6 *	5260.00	104.59			99.22	5.37	Peak	308	135																																																																																																																								
7	5350.00	50.41	54.00	-3.59	44.91	5.50	Average	308	135																																																																																																																								
8	5350.00	63.26	74.00	-10.74	57.76	5.50	Peak	308	135																																																																																																																								
9	5420.00	50.36	54.00	-3.64	44.75	5.61	Average	308	135																																																																																																																								
10	5420.00	63.00	74.00	-11.00	57.39	5.61	Peak	308	135																																																																																																																								
11	10520.00	54.27	68.20	-13.93	40.29	13.98	Peak	100	175																																																																																																																								
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: "*" is Peak / Average value of fundamental frequency</p>																																																																																																																																	

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5260
<b>Polarization</b>	Vertical		

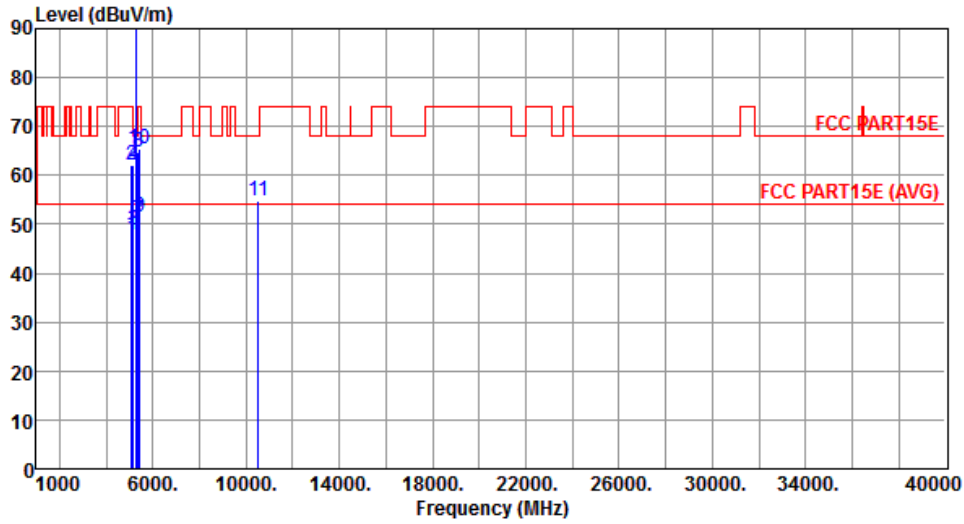

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5100.00	47.87	54.00	-6.13	42.73	5.14	Average	324	86
2	5100.00	61.96	74.00	-12.04	56.82	5.14	Peak	324	86
3	5150.00	48.67	54.00	-5.33	43.46	5.21	Average	324	86
4	5150.00	62.09	74.00	-11.91	56.88	5.21	Peak	324	86
5 *	5260.00	103.19			97.82	5.37	Average	324	86
6 *	5260.00	115.50			110.13	5.37	Peak	324	86
7	5350.00	50.69	54.00	-3.31	45.19	5.50	Average	324	86
8	5350.00	64.84	74.00	-9.16	59.34	5.50	Peak	324	86
9	5420.00	51.50	54.00	-2.50	45.89	5.61	Average	324	86
10	5420.00	65.40	74.00	-8.60	59.79	5.61	Peak	324	86
11	10520.00	54.83	68.20	-13.37	40.85	13.98	Peak	100	121


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Horizontal		

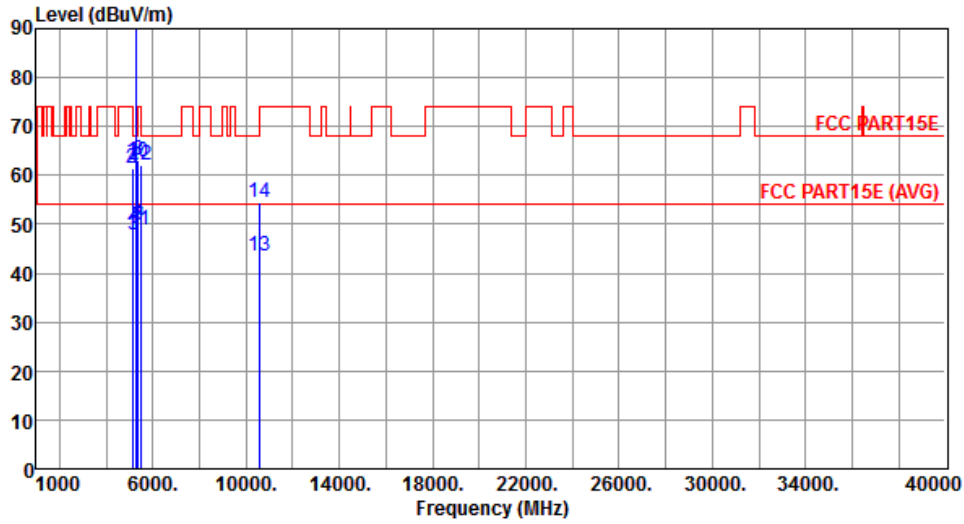

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5140.00	47.81	54.00	-6.19	42.61	5.20	Average	355	112
2	5140.00	61.42	74.00	-12.58	56.22	5.20	Peak	355	112
3	5150.00	47.79	54.00	-6.21	42.58	5.21	Average	355	112
4	5150.00	61.44	74.00	-12.56	56.23	5.21	Peak	355	112
5 *	5300.00	93.91			88.48	5.43	Average	355	112
6 *	5300.00	105.81			100.38	5.43	Peak	355	112
7	5350.00	49.59	54.00	-4.41	44.09	5.50	Average	355	112
8	5350.00	63.15	74.00	-10.85	57.65	5.50	Peak	355	112
9	5380.00	49.68	54.00	-4.32	44.13	5.55	Average	355	112
10	5380.00	62.88	74.00	-11.12	57.33	5.55	Peak	355	112
11	5460.00	48.83	54.00	-5.17	43.18	5.65	Average	355	112
12	5460.00	62.18	74.00	-11.82	56.53	5.65	Peak	355	112
13	10600.00	43.48	54.00	-10.52	29.42	14.06	Average	100	178
14	10600.00	54.45	74.00	-19.55	40.39	14.06	Peak	100	178

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency



<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5300
<b>Polarization</b>	Vertical		

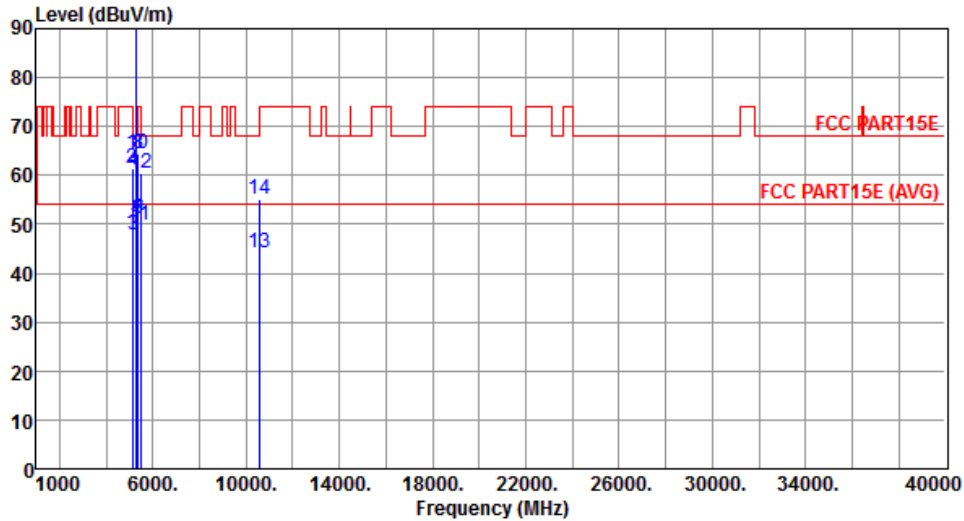

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5140.00	47.99	54.00	-6.01	42.79	5.20	Average	329	62
2	5140.00	61.47	74.00	-12.53	56.27	5.20	Peak	329	62
3	5150.00	47.99	54.00	-6.01	42.78	5.21	Average	329	62
4	5150.00	61.17	74.00	-12.83	55.96	5.21	Peak	329	62
5 *	5300.00	103.75			98.32	5.43	Average	329	62
6 *	5300.00	116.55			111.12	5.43	Peak	329	62
7	5350.00	50.93	54.00	-3.07	45.43	5.50	Average	329	62
8	5350.00	64.27	74.00	-9.73	58.77	5.50	Peak	329	62
9	5380.00	51.17	54.00	-2.83	45.62	5.55	Average	329	62
10	5380.00	64.46	74.00	-9.54	58.91	5.55	Peak	329	62
11	5460.00	49.67	54.00	-4.33	44.02	5.65	Average	329	62
12	5460.00	60.35	74.00	-13.65	54.70	5.65	Peak	329	62
13	10600.00	44.24	54.00	-9.76	30.18	14.06	Average	100	102
14	10600.00	55.14	74.00	-18.86	41.08	14.06	Peak	100	102


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5320
<b>Polarization</b>	Horizontal		

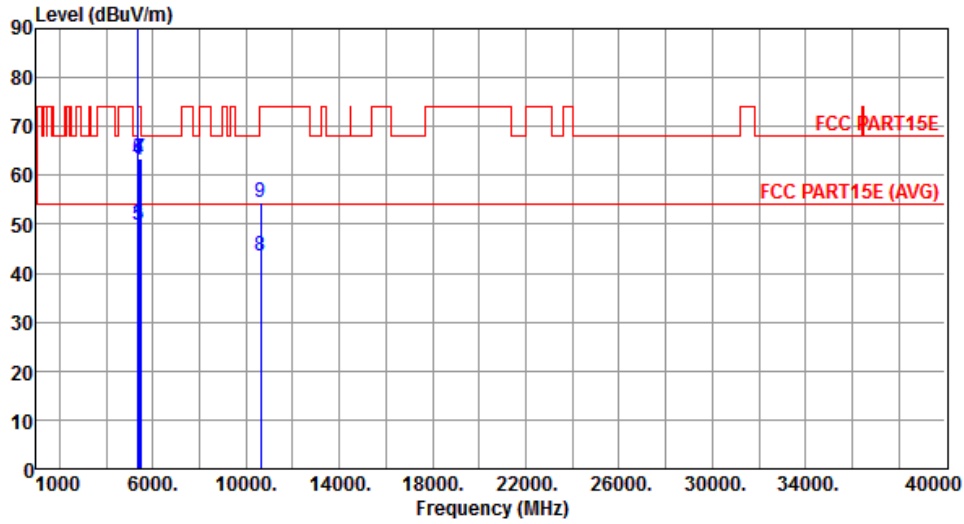

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	5320.00	95.07			89.62	5.45	Average	348	105
2	*	5320.00	106.53			101.08	5.45	Peak	348	105
3		5350.00	49.71	54.00	-4.29	44.21	5.50	Average	348	105
4		5350.00	63.04	74.00	-10.96	57.54	5.50	Peak	348	105
5		5400.00	49.71	54.00	-4.29	44.13	5.58	Average	348	105
6		5400.00	63.46	74.00	-10.54	57.88	5.58	Peak	348	105
7		5480.00	63.55	68.20	-4.65	57.88	5.67	Peak	348	105
8		10640.00	43.46	54.00	-10.54	29.35	14.11	Average	100	181
9		10640.00	54.32	74.00	-19.68	40.21	14.11	Peak	100	181


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5320
<b>Polarization</b>	Vertical		

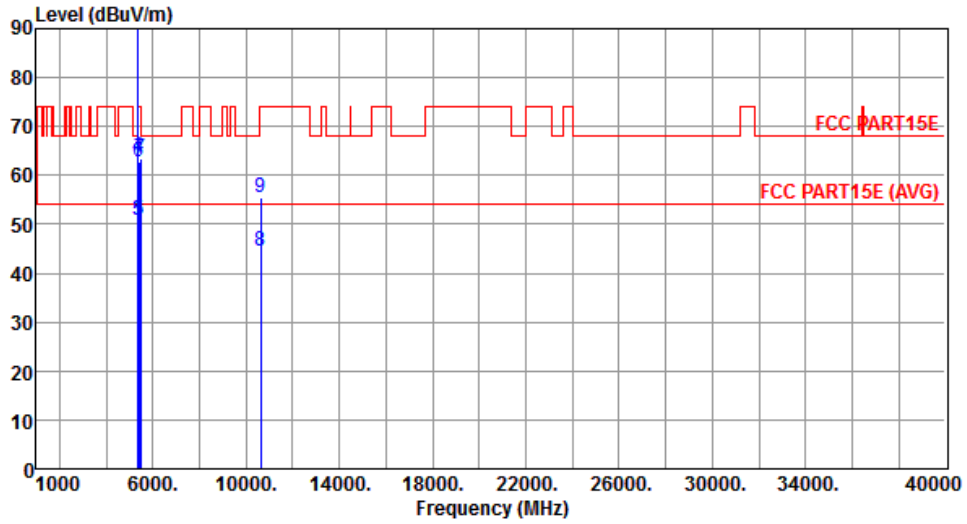

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	5320.00	105.32			99.87	5.45	Average	325	94
2	*	5320.00	117.81			112.36	5.45	Peak	325	94
3		5350.00	50.76	54.00	-3.24	45.26	5.50	Average	325	94
4		5350.00	63.87	74.00	-10.13	58.37	5.50	Peak	325	94
5		5400.00	50.87	54.00	-3.13	45.29	5.58	Average	325	94
6		5400.00	62.92	74.00	-11.08	57.34	5.58	Peak	325	94
7		5480.00	63.33	68.20	-4.87	57.66	5.67	Peak	325	94
8		10640.00	44.59	54.00	-9.41	30.48	14.11	Average	100	118
9		10640.00	55.51	74.00	-18.49	41.40	14.11	Peak	100	118


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5500
<b>Polarization</b>	Horizontal		

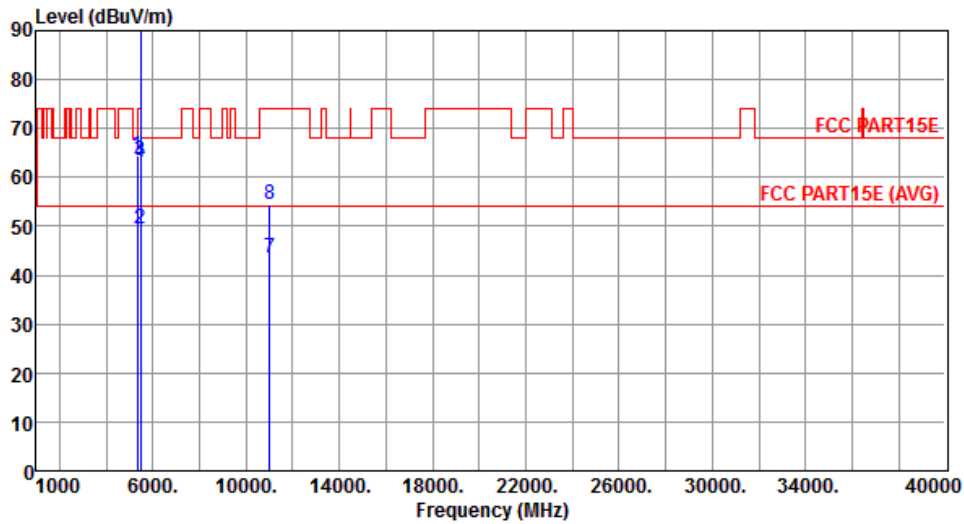

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5340.00	64.31	68.20	-3.89	58.83	5.48	Peak	322	11
2	5460.00	49.57	54.00	-4.43	43.92	5.65	Average	322	11
3	5460.00	63.39	74.00	-10.61	57.74	5.65	Peak	322	11
4	5470.00	63.08	68.20	-5.12	57.42	5.66	Peak	322	11
5 *	5500.00	94.92			89.22	5.70	Average	322	11
6 *	5500.00	106.96			101.26	5.70	Peak	322	11
7	11000.00	43.51	54.00	-10.49	29.05	14.46	Average	100	177
8	11000.00	54.49	74.00	-19.51	40.03	14.46	Peak	100	177


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5500
<b>Polarization</b>	Vertical		

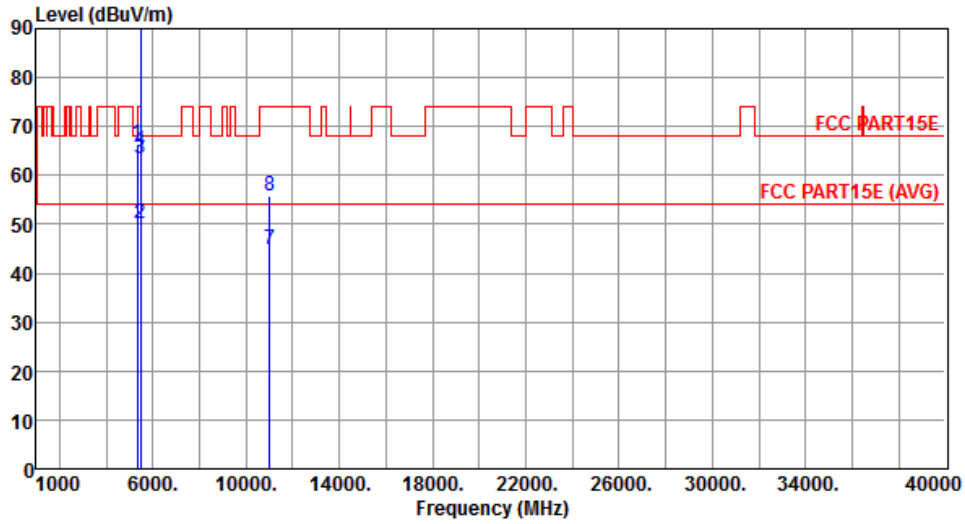

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5340.00	66.55	68.20	-1.65	61.07	5.48	Peak	304	49
2	5460.00	50.06	54.00	-3.94	44.41	5.65	Average	304	49
3	5460.00	63.52	74.00	-10.48	57.87	5.65	Peak	304	49
4	5470.00	65.11	68.20	-3.09	59.45	5.66	Peak	304	49
5 *	5500.00	105.26			99.56	5.70	Average	304	49
6 *	5500.00	117.72			112.02	5.70	Peak	304	49
7	11000.00	44.75	54.00	-9.25	30.29	14.46	Average	100	136
8	11000.00	55.75	74.00	-18.25	41.29	14.46	Peak	100	136


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5580
<b>Polarization</b>	Horizontal		

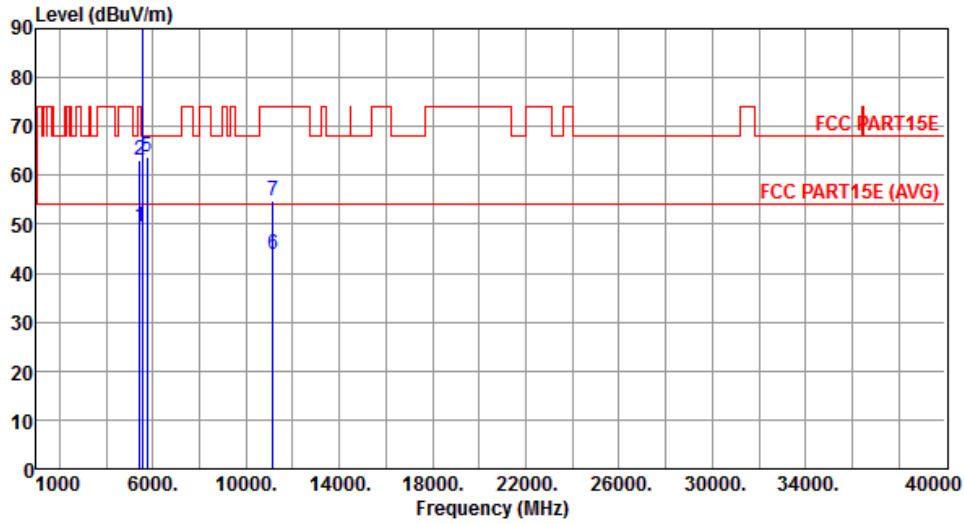

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5420.00	49.63	54.00	-4.37	44.02	5.61	Average	359	112
2	5420.00	63.10	74.00	-10.90	57.49	5.61	Peak	359	112
3 *	5580.00	94.15			88.38	5.77	Average	359	112
4 *	5580.00	105.53			99.76	5.77	Peak	359	112
5	5740.00	63.63	68.20	-4.57	57.61	6.02	Peak	359	112
6	11160.00	43.95	54.00	-10.05	29.35	14.60	Average	100	172
7	11160.00	54.79	74.00	-19.21	40.19	14.60	Peak	100	172


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5580
<b>Polarization</b>	Vertical		

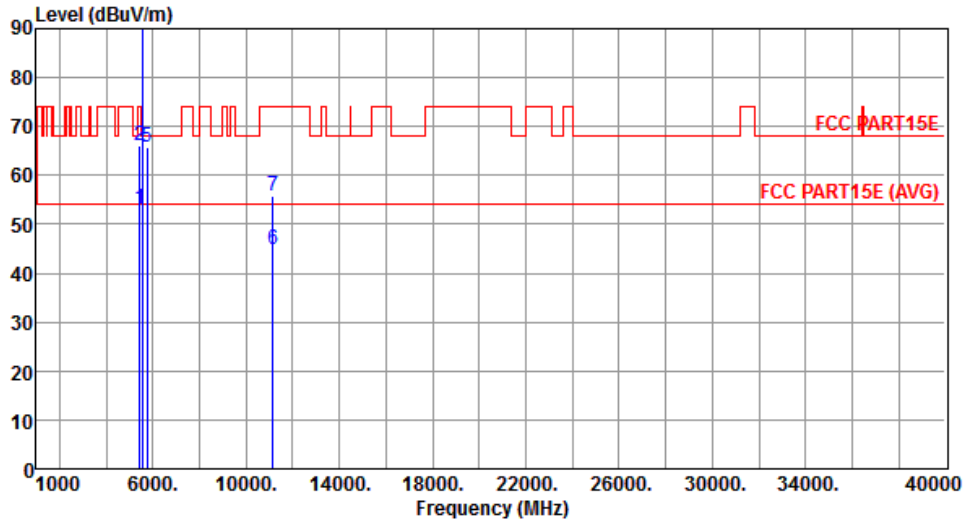

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5420.00	53.23	54.00	-0.77	47.62	5.61	Average	313	5
2	5420.00	66.04	74.00	-7.96	60.43	5.61	Peak	313	5
3 *	5580.00	104.57			98.80	5.77	Average	313	5
4 *	5580.00	116.71			110.94	5.77	Peak	313	5
5	5740.00	65.79	68.20	-2.41	59.77	6.02	Peak	313	5
6	11160.00	44.87	54.00	-9.13	30.27	14.60	Average	100	132
7	11160.00	55.88	74.00	-18.12	41.28	14.60	Peak	100	132


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5700
<b>Polarization</b>	Horizontal		

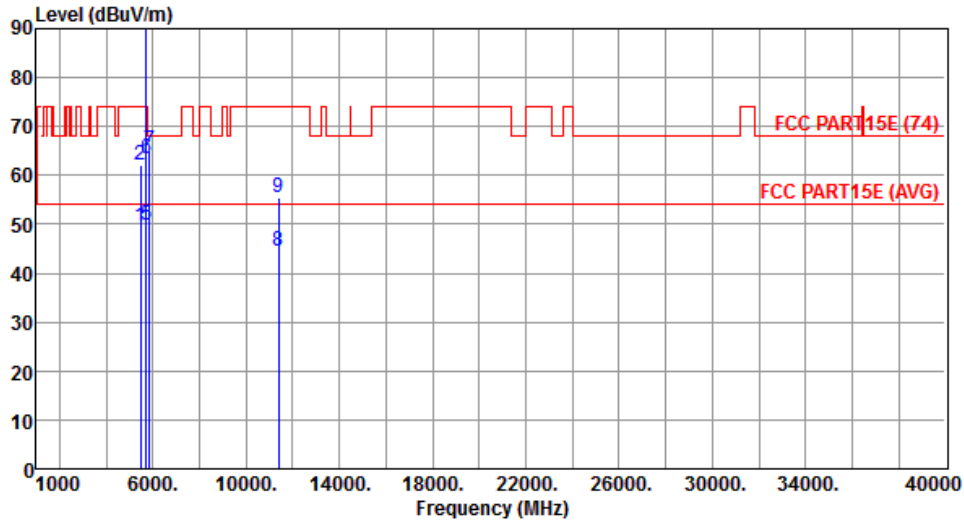

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	49.45	54.00	-4.55	43.80	5.65	Average	335	133
2	5460.00	62.05	74.00	-11.95	56.40	5.65	Peak	335	133
3 *	5700.00	95.05			89.09	5.96	Average	335	133
4 *	5700.00	106.35			100.39	5.96	Peak	335	133
5	5725.00	49.94	54.00	-4.06	43.95	5.99	Average	335	133
6	5725.00	63.54	74.00	-10.46	57.55	5.99	Peak	335	133
7	5860.00	65.07	68.20	-3.13	58.89	6.18	Peak	335	133
8	11400.00	44.53	54.00	-9.47	29.71	14.82	Average	100	118
9	11400.00	55.38	74.00	-18.62	40.56	14.82	Peak	100	118

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency



<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5700
<b>Polarization</b>	Vertical		

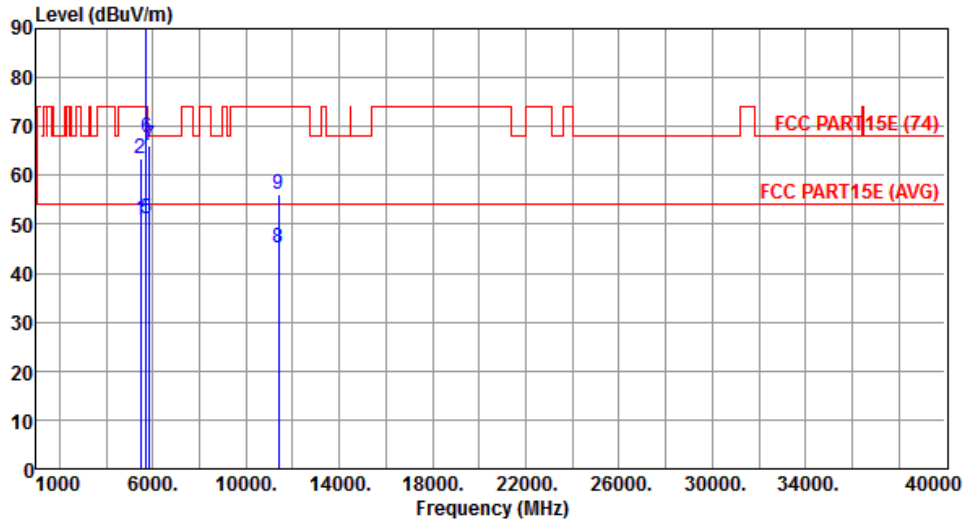

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	50.73	54.00	-3.27	45.08	5.65	Average	330	109
2	5460.00	63.54	74.00	-10.46	57.89	5.65	Peak	330	109
3 *	5700.00	106.75			100.79	5.96	Average	330	109
4 *	5700.00	117.63			111.67	5.96	Peak	330	109
5	5725.00	51.25	54.00	-2.75	45.26	5.99	Average	330	109
6	5725.00	67.59	74.00	-6.41	61.60	5.99	Peak	330	109
7	5860.00	66.03	68.20	-2.17	59.85	6.18	Peak	330	109
8	11400.00	45.20	54.00	-8.80	30.38	14.82	Average	100	104
9	11400.00	56.28	74.00	-17.72	41.46	14.82	Peak	100	104


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5720
<b>Polarization</b>	Horizontal		

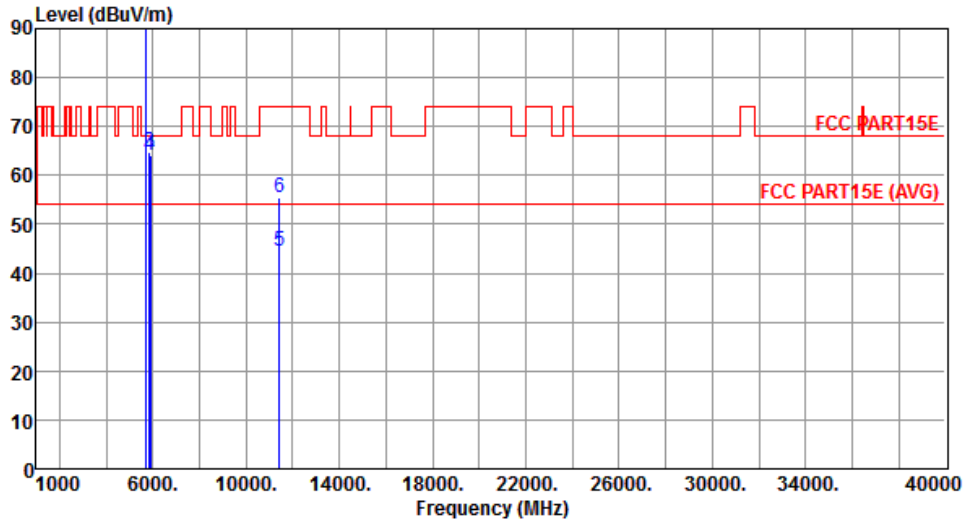

		Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	*	5720.00	95.72			89.74	5.98	Average	239	194
2	*	5720.00	105.18			99.20	5.98	Peak	239	194
3		5850.00	64.92	68.20	-3.28	58.75	6.17	Peak	239	194
4		5880.00	64.18	68.20	-4.02	57.97	6.21	Peak	239	194
5		11440.00	44.49	54.00	-9.51	29.63	14.86	Average	100	182
6		11440.00	55.35	74.00	-18.65	40.49	14.86	Peak	100	182


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT20	<b>Test Freq. (MHz)</b>	5720
<b>Polarization</b>	Vertical		

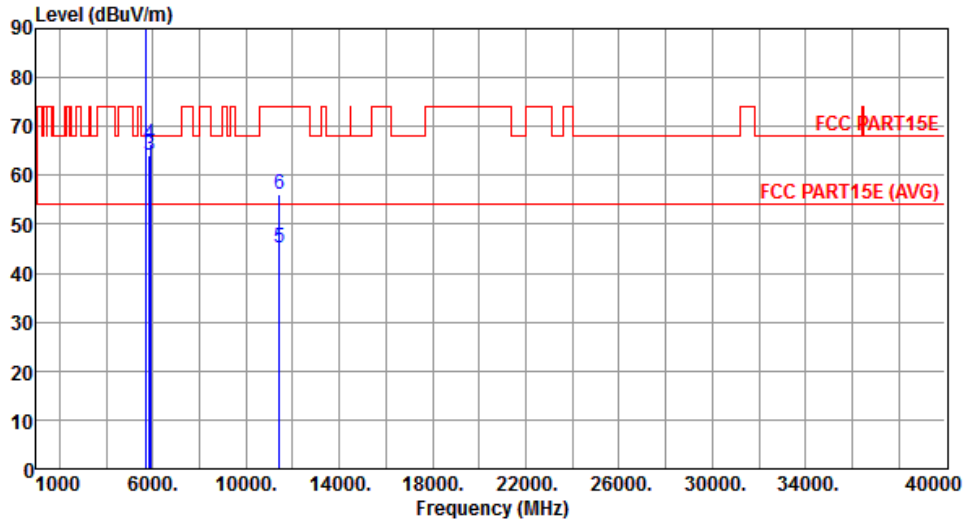

		Freq.	Emission	Limit	Margin	SA	Factor	Remark	ANT	Turn
		MHz	level	dBuV/m	dB	reading	dB		High	Table
			dBuV/m			dBuV			cm	deg
1	*	5720.00	106.44			100.46	5.98	Average	325	66
2	*	5720.00	117.10			111.12	5.98	Peak	325	66
3		5850.00	64.25	68.20	-3.95	58.08	6.17	Peak	325	66
4		5880.00	66.45	68.20	-1.75	60.24	6.21	Peak	325	66
5		11440.00	45.19	54.00	-8.81	30.33	14.86	Average	100	114
6		11440.00	56.14	74.00	-17.86	41.28	14.86	Peak	100	114

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

### 3.2.11 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT40

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5270
<b>Polarization</b>	Horizontal		

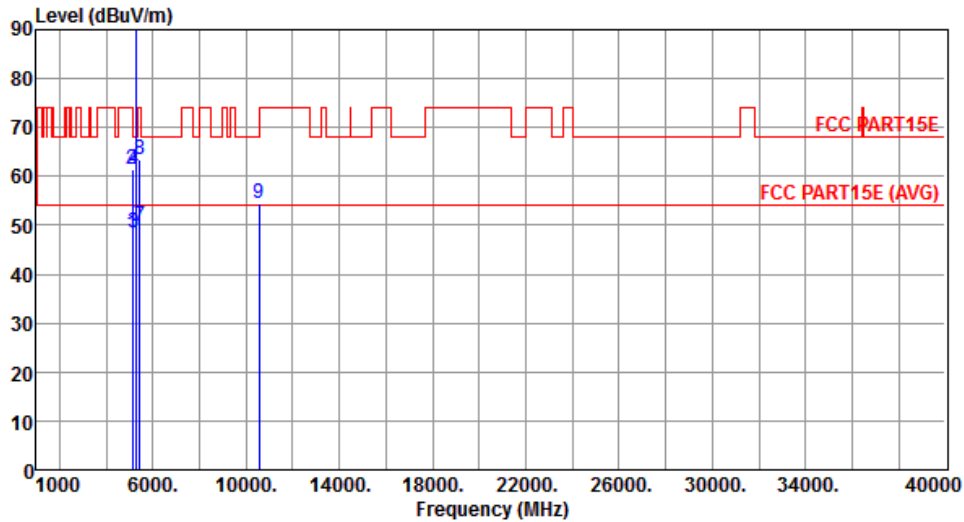

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5110.00	48.31	54.00	-5.69	43.16	5.15	Average	396	141
2	5110.00	61.30	74.00	-12.70	56.15	5.15	Peak	396	141
3	5150.00	48.41	54.00	-5.59	43.20	5.21	Average	396	141
4	5150.00	61.56	74.00	-12.44	56.35	5.21	Peak	396	141
5 *	5270.00	92.57			87.19	5.38	Average	396	141
6 *	5270.00	103.91			98.53	5.38	Peak	396	141
7	5430.00	49.96	54.00	-4.04	44.34	5.62	Average	396	141
8	5430.00	63.57	74.00	-10.43	57.95	5.62	Peak	396	141
9	10540.00	54.46	68.20	-13.74	40.46	14.00	Peak	100	135


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3:"\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5270
<b>Polarization</b>	Vertical		

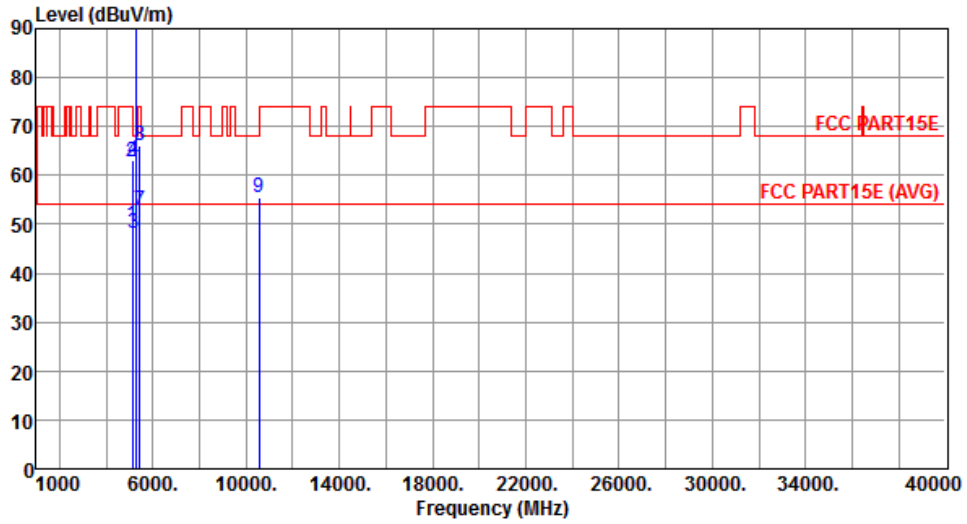

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5110.00	49.86	54.00	-4.14	44.71	5.15	Average	339	57
2	5110.00	62.72	74.00	-11.28	57.57	5.15	Peak	339	57
3	5150.00	48.23	54.00	-5.77	43.02	5.21	Average	339	57
4	5150.00	62.97	74.00	-11.03	57.76	5.21	Peak	339	57
5 *	5270.00	103.06			97.68	5.38	Average	339	57
6 *	5270.00	115.24			109.86	5.38	Peak	339	57
7	5430.00	52.86	54.00	-1.14	47.24	5.62	Average	339	57
8	5430.00	66.14	74.00	-7.86	60.52	5.62	Peak	339	57
9	10540.00	55.32	68.20	-12.88	41.32	14.00	Peak	100	115


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5310
<b>Polarization</b>	Horizontal		

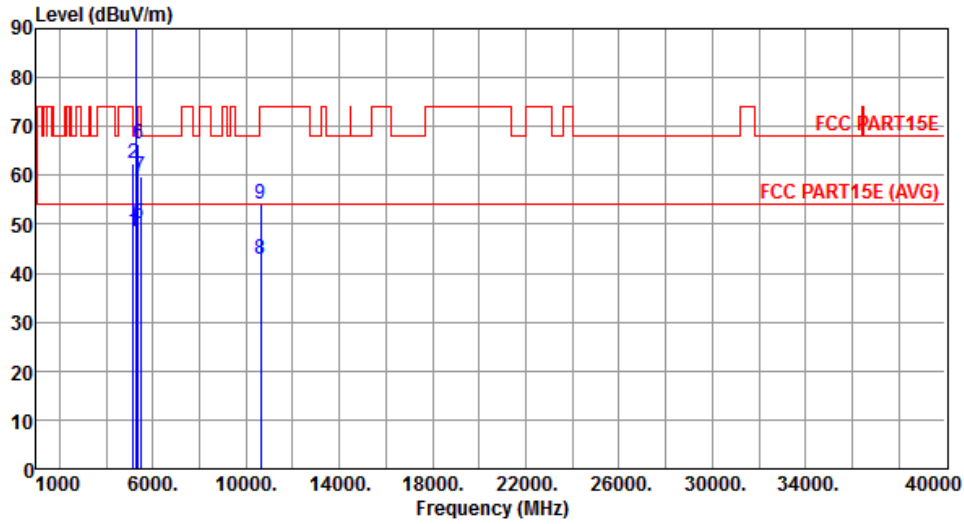

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	48.36	54.00	-5.64	43.15	5.21	Average	320	218
2	5150.00	62.52	74.00	-11.48	57.31	5.21	Peak	320	218
3 *	5310.00	93.70			88.25	5.45	Average	320	218
4 *	5310.00	104.24			98.79	5.45	Peak	320	218
5	5350.00	50.04	54.00	-3.96	44.54	5.50	Average	320	218
6	5350.00	66.28	74.00	-7.72	60.78	5.50	Peak	320	218
7	5470.00	59.72	68.20	-8.48	54.06	5.66	Peak	320	218
8	10620.00	42.91	54.00	-11.09	28.84	14.07	Average	100	162
9	10620.00	54.24	74.00	-19.76	40.17	14.07	Peak	100	162


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5310
<b>Polarization</b>	Vertical		

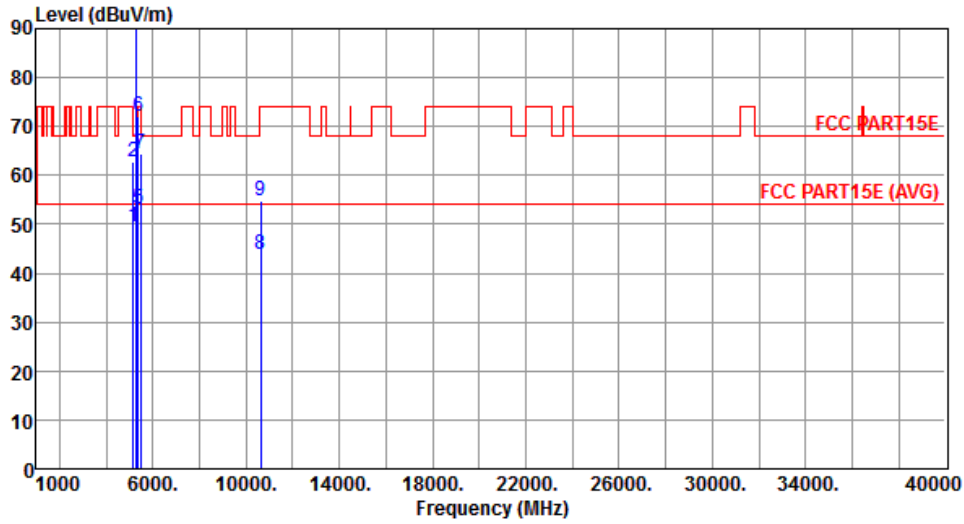

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	49.36	54.00	-4.64	44.15	5.21	Average	329	70
2	5150.00	62.73	74.00	-11.27	57.52	5.21	Peak	329	70
3 *	5310.00	103.71			98.26	5.45	Average	329	70
4 *	5310.00	114.25			108.80	5.45	Peak	329	70
5	5350.00	53.12	54.00	-0.88	47.62	5.50	Average	329	70
6	5350.00	71.92	74.00	-2.08	66.42	5.50	Peak	329	70
7	5470.00	64.28	68.20	-3.92	58.62	5.66	Peak	329	70
8	10620.00	43.86	54.00	-10.14	29.79	14.07	Average	100	105
9	10620.00	54.74	74.00	-19.26	40.67	14.07	Peak	100	105


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5510
<b>Polarization</b>	Horizontal		

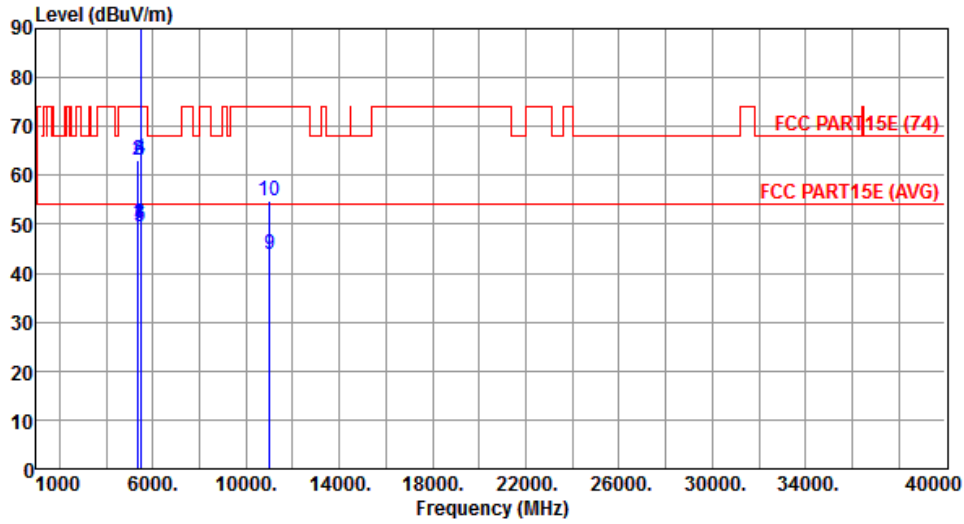

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	50.20	54.00	-3.80	44.70	5.50	Average	384	112
2	5350.00	63.14	74.00	-10.86	57.64	5.50	Peak	384	112
3	5460.00	50.01	54.00	-3.99	44.36	5.65	Average	384	112
4	5460.00	63.27	74.00	-10.73	57.62	5.65	Peak	384	112
5	5470.00	49.51	54.00	-4.49	43.85	5.66	Average	384	112
6	5470.00	63.12	74.00	-10.88	57.46	5.66	Peak	384	112
7 *	5510.00	93.94			88.24	5.70	Average	384	112
8 *	5510.00	105.33			99.63	5.70	Peak	384	112
9	11020.00	43.90	54.00	-10.10	29.42	14.48	Average	100	158
10	11020.00	54.79	74.00	-19.21	40.31	14.48	Peak	100	158

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency



<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5510
<b>Polarization</b>	Vertical		

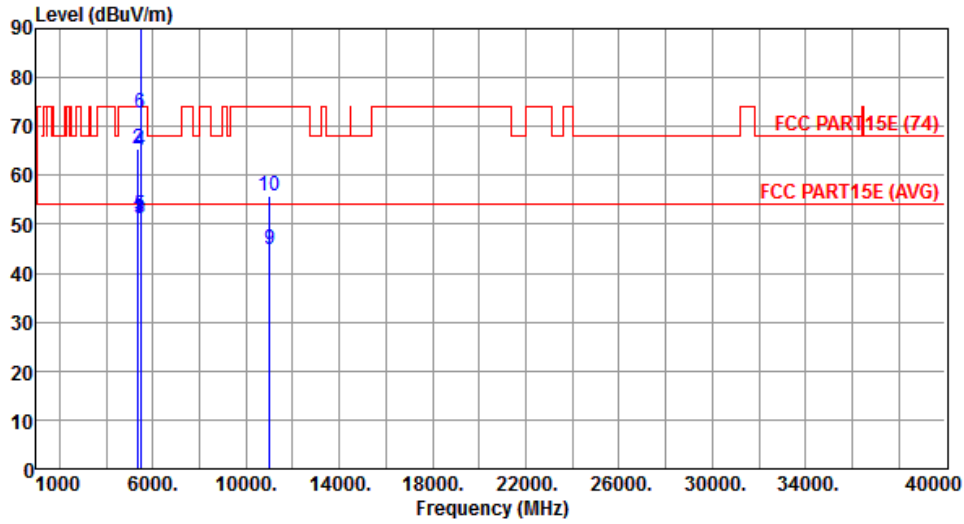

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5350.00	51.16	54.00	-2.84	45.66	5.50	Average	327	55
2	5350.00	65.38	74.00	-8.62	59.88	5.50	Peak	327	55
3	5460.00	51.08	54.00	-2.92	45.43	5.65	Average	327	55
4	5460.00	65.07	74.00	-8.93	59.42	5.65	Peak	327	55
5	5470.00	51.81	54.00	-2.19	46.15	5.66	Average	327	55
6	5470.00	72.82	74.00	-1.18	67.16	5.66	Peak	327	55
7 *	5510.00	103.32			97.62	5.70	Average	327	55
8 *	5510.00	114.38			108.68	5.70	Peak	327	55
9	11020.00	44.82	54.00	-9.18	30.34	14.48	Average	100	101
10	11020.00	55.91	74.00	-18.09	41.43	14.48	Peak	100	101


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5590
<b>Polarization</b>	Horizontal		

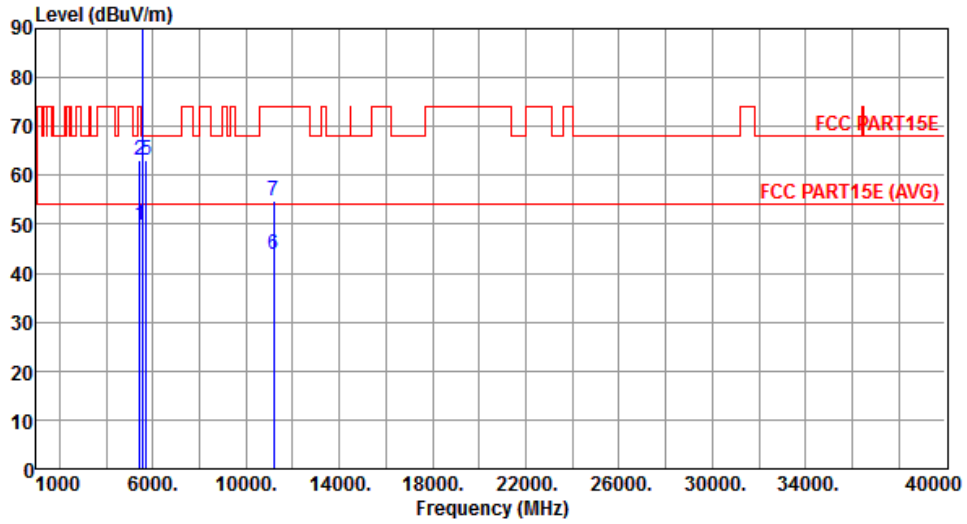

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	49.93	54.00	-4.07	44.31	5.62	Average	350	112
2	5430.00	63.14	74.00	-10.86	57.52	5.62	Peak	350	112
3 *	5590.00	94.04			88.26	5.78	Average	350	112
4 *	5590.00	104.31			98.53	5.78	Peak	350	112
5	5725.00	63.06	68.20	-5.14	57.07	5.99	Peak	350	112
6	11180.00	43.80	54.00	-10.20	29.18	14.62	Average	100	155
7	11180.00	54.88	74.00	-19.12	40.26	14.62	Peak	100	155


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5590
<b>Polarization</b>	Vertical		

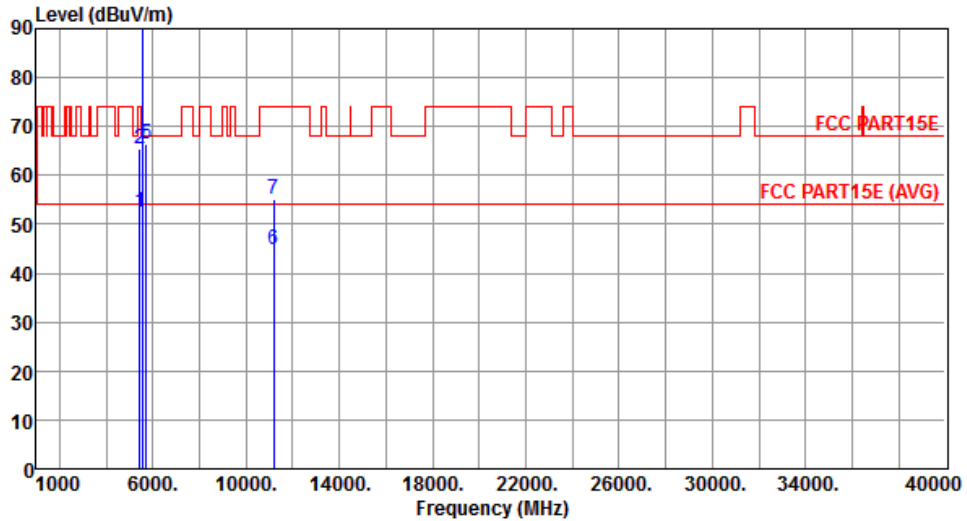

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	52.53	54.00	-1.47	46.91	5.62	Average	274	102
2	5430.00	65.32	74.00	-8.68	59.70	5.62	Peak	274	102
3 *	5590.00	104.08			98.30	5.78	Average	274	102
4 *	5590.00	114.79			109.01	5.78	Peak	274	102
5	5725.00	66.28	68.20	-1.92	60.29	5.99	Peak	274	102
6	11180.00	44.86	54.00	-9.14	30.24	14.62	Average	100	110
7	11180.00	55.19	74.00	-18.81	40.57	14.62	Peak	100	110


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Polarization</b>	Horizontal		

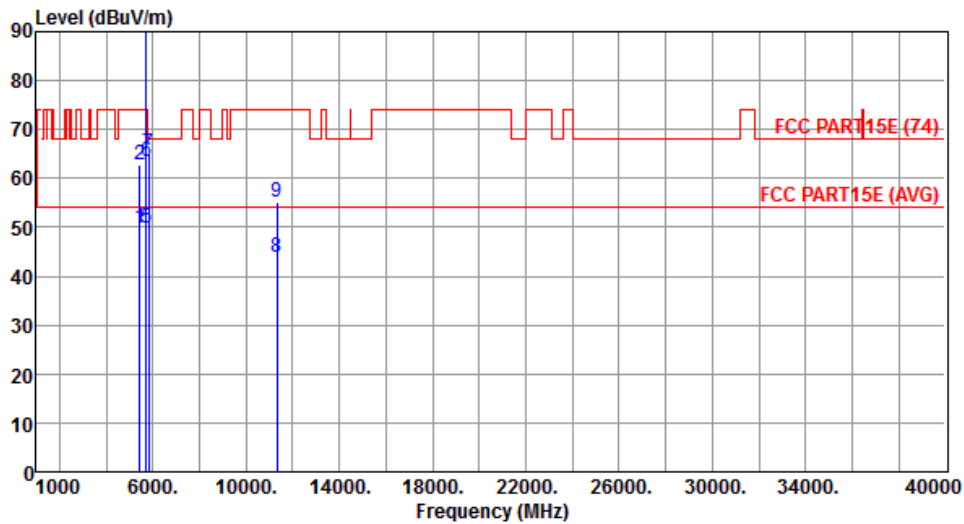

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	49.79	54.00	-4.21	44.17	5.62	Average	336	69
2	5430.00	62.79	74.00	-11.21	57.17	5.62	Peak	336	69
3 *	5670.00	93.06			87.16	5.90	Average	336	69
4 *	5670.00	103.56			97.66	5.90	Peak	336	69
5	5725.00	49.97	54.00	-4.03	43.98	5.99	Average	336	69
6	5725.00	63.35	74.00	-10.65	57.36	5.99	Peak	336	69
7	5830.00	64.94	68.20	-3.26	58.79	6.15	Peak	336	69
8	11340.00	43.83	54.00	-10.17	29.06	14.77	Average	100	161
9	11340.00	55.23	74.00	-18.77	40.46	14.77	Peak	100	161


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5670
<b>Polarization</b>	Vertical		

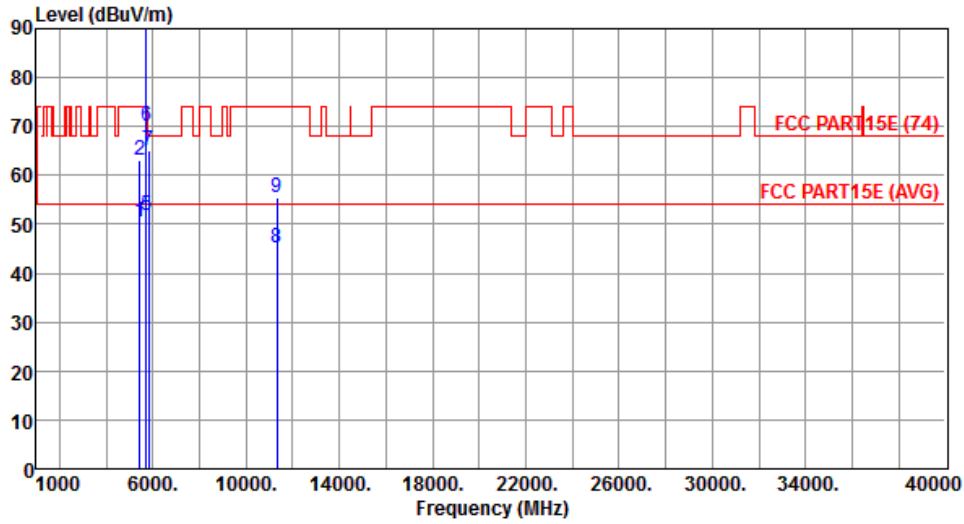

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5430.00	50.50	54.00	-3.50	44.88	5.62	Average	307	154
2	5430.00	63.13	74.00	-10.87	57.51	5.62	Peak	307	154
3 *	5670.00	105.80			99.90	5.90	Average	307	154
4 *	5670.00	115.70			109.80	5.90	Peak	307	154
5	5725.00	51.85	54.00	-2.15	45.86	5.99	Average	307	154
6	5725.00	70.03	74.00	-3.97	64.04	5.99	Peak	307	154
7	5830.00	65.17	68.20	-3.03	59.02	6.15	Peak	307	154
8	11340.00	45.11	54.00	-8.89	30.34	14.77	Average	100	112
9	11340.00	55.59	74.00	-18.41	40.82	14.77	Peak	100	112


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5710
<b>Polarization</b>	Horizontal		

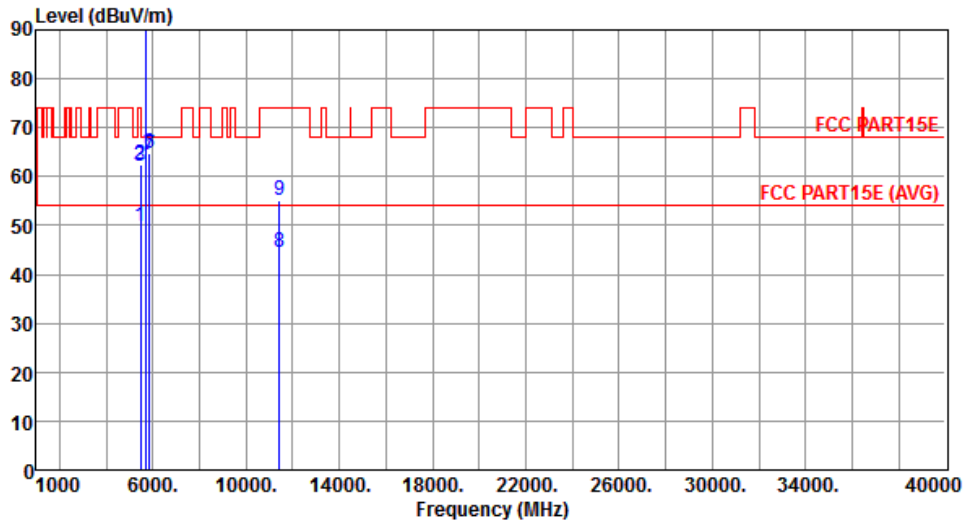

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	49.96	54.00	-4.04	44.31	5.65	Average	368	128
2	5460.00	62.51	74.00	-11.49	56.86	5.65	Peak	368	128
3	5470.00	62.14	68.20	-6.06	56.48	5.66	Peak	368	128
4 *	5710.00	92.48			86.52	5.96	Average	368	128
5 *	5710.00	103.64			97.68	5.96	Peak	368	128
6	5850.00	64.88	68.20	-3.32	58.71	6.17	Peak	368	128
7	5870.00	64.47	68.20	-3.73	58.28	6.19	Peak	368	128
8	11420.00	44.42	54.00	-9.58	29.58	14.84	Average	100	142
9	11420.00	55.22	74.00	-18.78	40.38	14.84	Peak	100	142


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT40	<b>Test Freq. (MHz)</b>	5710
<b>Polarization</b>	Vertical		

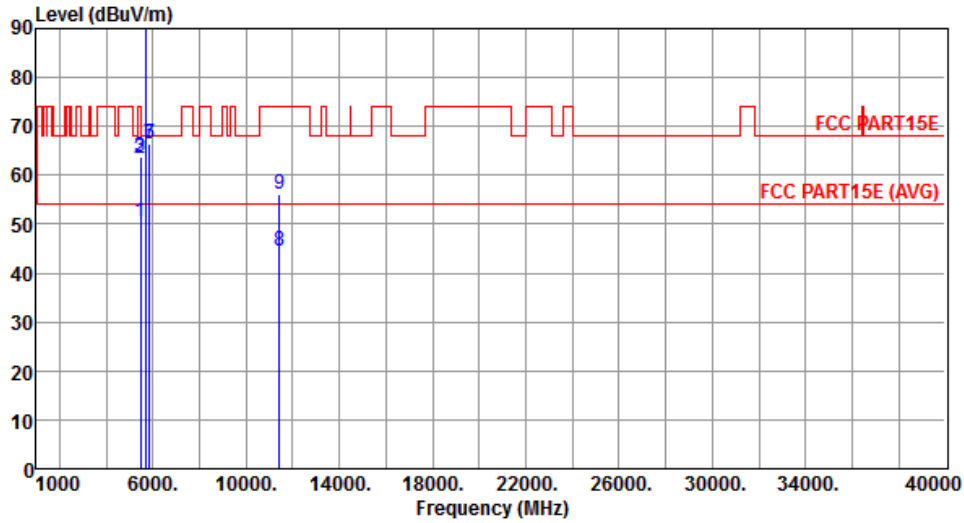

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	50.44	54.00	-3.56	44.79	5.65	Average	335	103
2	5460.00	63.54	74.00	-10.46	57.89	5.65	Peak	335	103
3	5470.00	63.78	68.20	-4.42	58.12	5.66	Peak	335	103
4 *	5710.00	105.02			99.06	5.96	Average	335	103
5 *	5710.00	115.72			109.76	5.96	Peak	335	103
6	5850.00	66.27	68.20	-1.93	60.10	6.17	Peak	335	103
7	5870.00	66.47	68.20	-1.73	60.28	6.19	Peak	335	103
8	11420.00	44.39	54.00	-9.61	29.55	14.84	Average	100	125
9	11420.00	56.15	74.00	-17.85	41.31	14.84	Peak	100	125


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).


Note 3: "\*" is Peak / Average value of fundamental frequency

### 3.2.12 Transmitter Radiated Unwanted Emissions (Above 1GHz) for VHT80

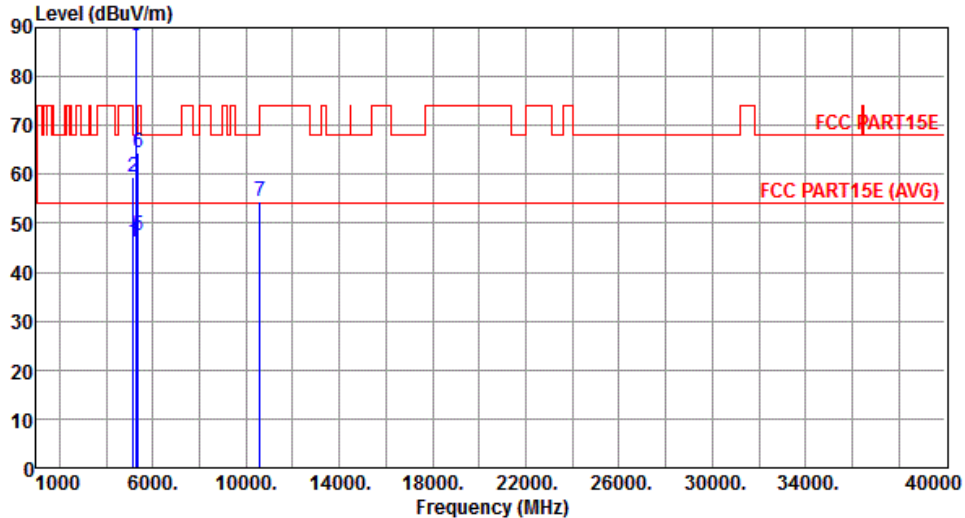Modulation	VHT80	Test Freq. (MHz)	5290																																																																																									
Polarization	Horizontal																																																																																											
																																																																																												
	<table border="1"> <thead> <tr> <th>Freq.</th> <th>Emission level</th> <th>Limit</th> <th>Margin</th> <th>SA reading</th> <th>Factor</th> <th>Remark</th> <th>ANT High</th> <th>Turn Table</th> </tr> <tr> <th>MHz</th> <th>dBuV/m</th> <th>dBuV/m</th> <th>dB</th> <th>dBuV</th> <th>dB</th> <th></th> <th>cm</th> <th>deg</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>5150.00</td> <td>46.33</td> <td>54.00</td> <td>-7.67</td> <td>41.12</td> <td>5.21</td> <td>Average</td> <td>372</td> <td>141</td> </tr> <tr> <td>2</td> <td>5150.00</td> <td>59.49</td> <td>74.00</td> <td>-14.51</td> <td>54.28</td> <td>5.21</td> <td>Peak</td> <td>372</td> <td>141</td> </tr> <tr> <td>3 *</td> <td>5290.00</td> <td>88.38</td> <td></td> <td></td> <td>82.97</td> <td>5.41</td> <td>Average</td> <td>372</td> <td>141</td> </tr> <tr> <td>4 *</td> <td>5290.00</td> <td>99.51</td> <td></td> <td></td> <td>94.10</td> <td>5.41</td> <td>Peak</td> <td>372</td> <td>141</td> </tr> <tr> <td>5</td> <td>5350.00</td> <td>47.63</td> <td>54.00</td> <td>-6.37</td> <td>42.13</td> <td>5.50</td> <td>Average</td> <td>372</td> <td>141</td> </tr> <tr> <td>6</td> <td>5350.00</td> <td>64.31</td> <td>74.00</td> <td>-9.69</td> <td>58.81</td> <td>5.50</td> <td>Peak</td> <td>372</td> <td>141</td> </tr> <tr> <td>7</td> <td>10580.00</td> <td>54.60</td> <td>68.20</td> <td>-13.60</td> <td>40.56</td> <td>14.04</td> <td>Peak</td> <td>100</td> <td>196</td> </tr> </tbody> </table>	Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table	MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg	1	5150.00	46.33	54.00	-7.67	41.12	5.21	Average	372	141	2	5150.00	59.49	74.00	-14.51	54.28	5.21	Peak	372	141	3 *	5290.00	88.38			82.97	5.41	Average	372	141	4 *	5290.00	99.51			94.10	5.41	Peak	372	141	5	5350.00	47.63	54.00	-6.37	42.13	5.50	Average	372	141	6	5350.00	64.31	74.00	-9.69	58.81	5.50	Peak	372	141	7	10580.00	54.60	68.20	-13.60	40.56	14.04	Peak	100	196			
Freq.	Emission level	Limit	Margin	SA reading	Factor	Remark	ANT High	Turn Table																																																																																				
MHz	dBuV/m	dBuV/m	dB	dBuV	dB		cm	deg																																																																																				
1	5150.00	46.33	54.00	-7.67	41.12	5.21	Average	372	141																																																																																			
2	5150.00	59.49	74.00	-14.51	54.28	5.21	Peak	372	141																																																																																			
3 *	5290.00	88.38			82.97	5.41	Average	372	141																																																																																			
4 *	5290.00	99.51			94.10	5.41	Peak	372	141																																																																																			
5	5350.00	47.63	54.00	-6.37	42.13	5.50	Average	372	141																																																																																			
6	5350.00	64.31	74.00	-9.69	58.81	5.50	Peak	372	141																																																																																			
7	10580.00	54.60	68.20	-13.60	40.56	14.04	Peak	100	196																																																																																			
<p>Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor* (dB)            *Factor includes antenna factor , cable loss and amplifier gain            Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).            Note 3: "*" is Peak / Average value of fundamental frequency</p>																																																																																												



<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5290
<b>Polarization</b>	Vertical		

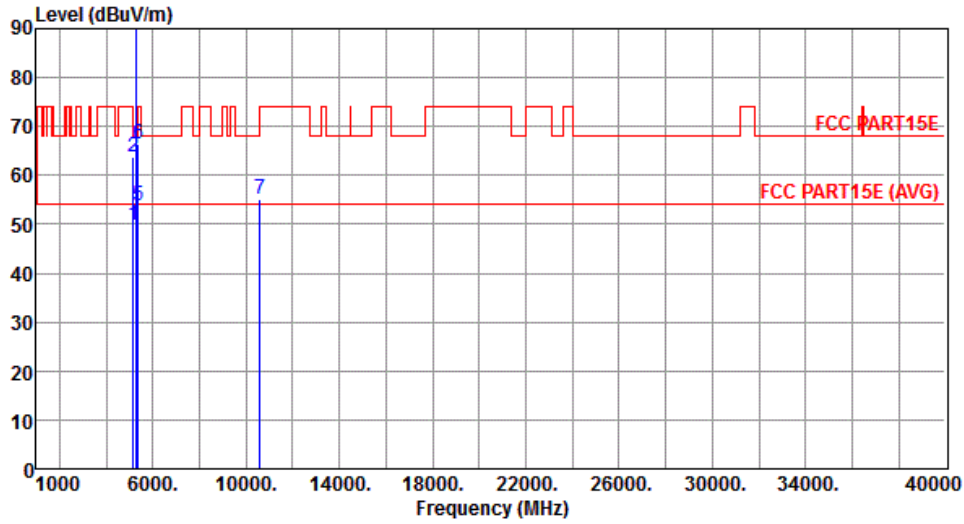

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5150.00	49.80	54.00	-4.20	44.59	5.21	Average	318	17
2	5150.00	63.75	74.00	-10.25	58.54	5.21	Peak	318	17
3 *	5290.00	97.46			92.05	5.41	Average	318	17
4 *	5290.00	109.24			103.83	5.41	Peak	318	17
5	5350.00	53.72	54.00	-0.28	48.22	5.50	Average	318	17
6	5350.00	66.39	74.00	-7.61	60.89	5.50	Peak	318	17
7	10580.00	55.29	68.20	-12.91	41.25	14.04	Peak	100	145


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5530
<b>Polarization</b>	Horizontal		

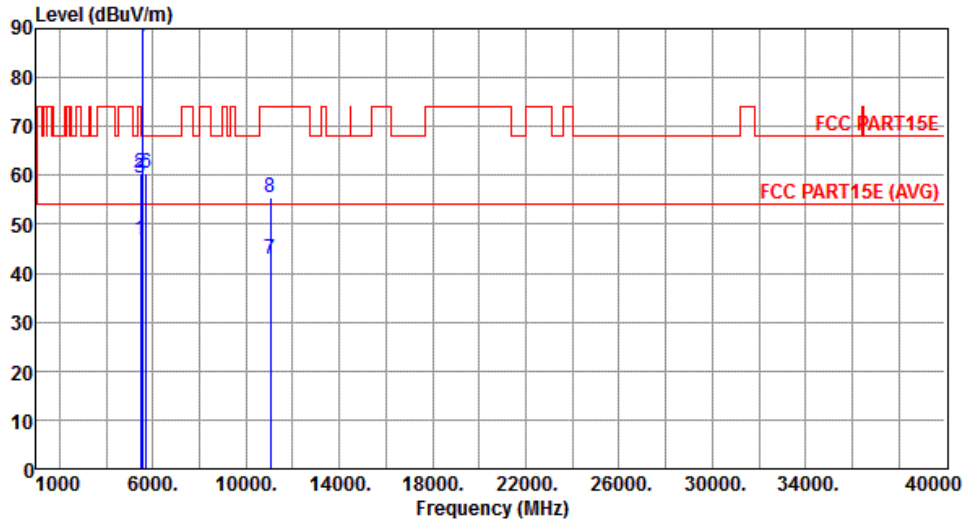

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	46.84	54.00	-7.16	41.19	5.65	Average	361	116
2	5460.00	60.61	74.00	-13.39	54.96	5.65	Peak	361	116
3	5470.00	59.46	68.20	-8.74	53.80	5.66	Peak	361	116
4 *	5530.00	88.18			82.46	5.72	Average	361	116
5 *	5530.00	99.04			93.32	5.72	Peak	361	116
6	5725.00	60.55	68.20	-7.65	54.56	5.99	Peak	361	116
7	11060.00	42.72	54.00	-11.28	28.21	14.51	Average	100	163
8	11060.00	55.56	74.00	-18.44	41.05	14.51	Peak	100	163


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5530
<b>Polarization</b>	Vertical		

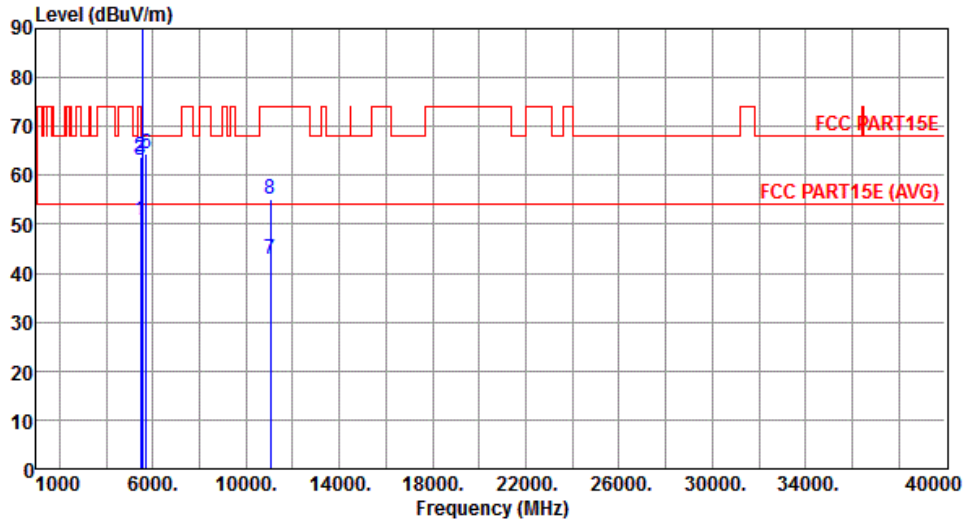

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	50.78	54.00	-3.22	45.13	5.65	Average	346	14
2	5460.00	63.92	74.00	-10.08	58.27	5.65	Peak	346	14
3	5470.00	62.97	68.20	-5.23	57.31	5.66	Peak	346	14
4 *	5530.00	96.60			90.88	5.72	Average	346	14
5 *	5530.00	108.53			102.81	5.72	Peak	346	14
6	5725.00	64.42	68.20	-3.78	58.43	5.99	Peak	346	14
7	11060.00	42.82	54.00	-11.18	28.31	14.51	Average	100	172
8	11060.00	55.24	74.00	-18.76	40.73	14.51	Peak	100	172


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5610
<b>Polarization</b>	Horizontal		

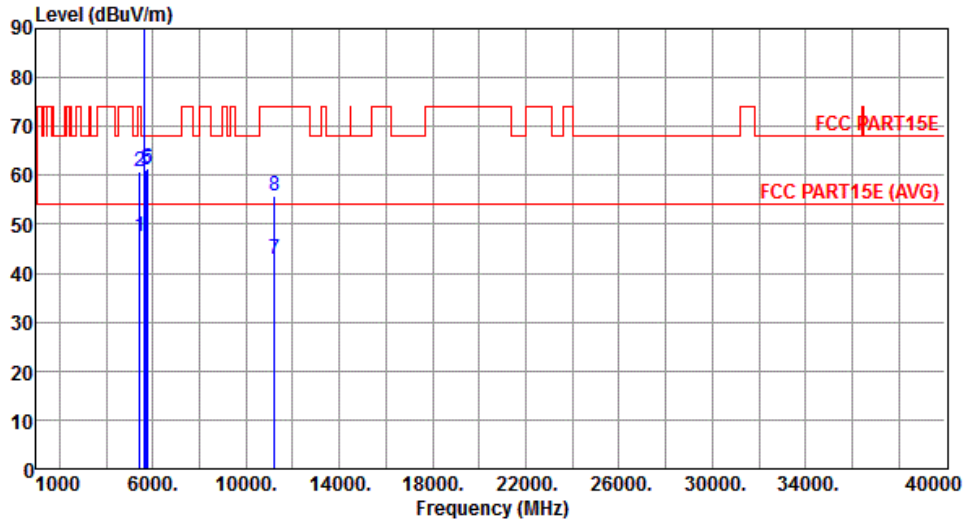

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5450.00	47.46	54.00	-6.54	41.83	5.63	Average	361	119
2	5450.00	60.82	74.00	-13.18	55.19	5.63	Peak	361	119
3 *	5610.00	89.45			83.65	5.80	Average	361	119
4 *	5610.00	101.49			95.69	5.80	Peak	361	119
5	5725.00	61.25	68.20	-6.95	55.26	5.99	Peak	361	119
6	5770.00	61.56	68.20	-6.64	55.50	6.06	Peak	361	119
7	11220.00	42.97	54.00	-11.03	28.31	14.66	Average	100	173
8	11220.00	55.94	74.00	-18.06	41.28	14.66	Peak	100	173


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5610
<b>Polarization</b>	Vertical		

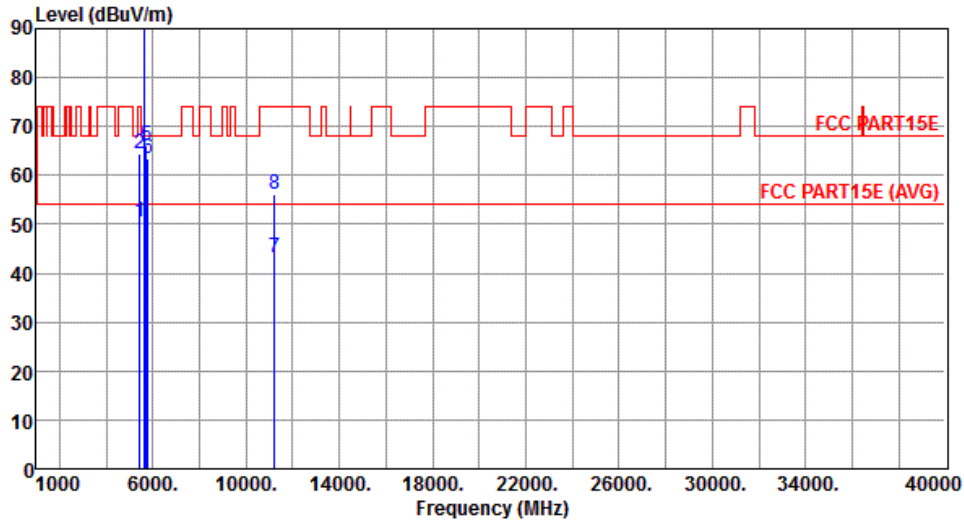

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5450.00	50.40	54.00	-3.60	44.77	5.63	Average	306	62
2	5450.00	64.45	74.00	-9.55	58.82	5.63	Peak	306	62
3 *	5610.00	100.85			95.05	5.80	Average	306	62
4 *	5610.00	111.42			105.62	5.80	Peak	306	62
5	5725.00	66.06	68.20	-2.14	60.07	5.99	Peak	306	62
6	5770.00	63.52	68.20	-4.68	57.46	6.06	Peak	306	62
7	11220.00	43.04	54.00	-10.96	28.38	14.66	Average	100	163
8	11220.00	56.11	74.00	-17.89	41.45	14.66	Peak	100	163


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5690
<b>Polarization</b>	Horizontal		

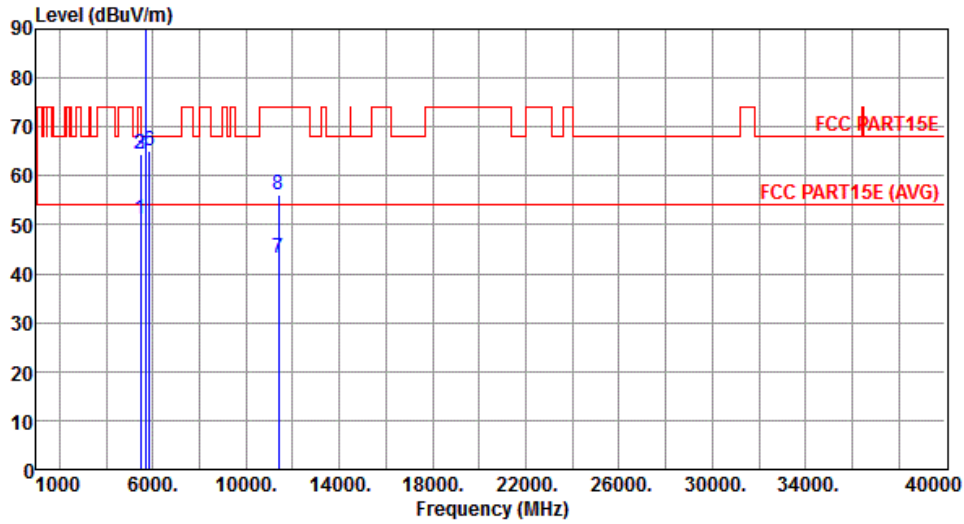

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	51.13	54.00	-2.87	45.48	5.65	Average	359	281
2	5460.00	64.42	74.00	-9.58	58.77	5.65	Peak	359	281
3	5470.00	64.42	68.20	-3.78	58.76	5.66	Peak	359	281
4 *	5690.00	89.71			83.77	5.94	Average	359	281
5 *	5690.00	100.74			94.80	5.94	Peak	359	281
6	5850.00	65.14	68.20	-3.06	58.97	6.17	Peak	359	281
7	11380.00	43.04	54.00	-10.96	28.24	14.80	Average	100	183
8	11380.00	56.23	74.00	-17.77	41.43	14.80	Peak	100	183


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

<b>Modulation</b>	VHT80	<b>Test Freq. (MHz)</b>	5690
<b>Polarization</b>	Vertical		

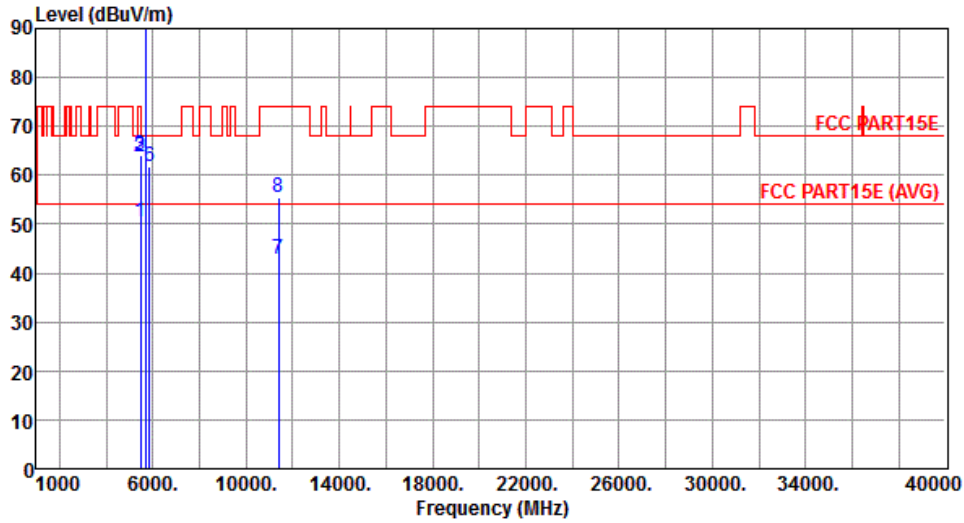

	Freq. MHz	Emission level dBuV/m	Limit dBuV/m	Margin dB	SA reading dBuV	Factor dB	Remark	ANT High cm	Turn Table deg
1	5460.00	50.32	54.00	-3.68	44.67	5.65	Average	328	20
2	5460.00	63.82	74.00	-10.18	58.17	5.65	Peak	328	20
3	5470.00	64.24	68.20	-3.96	58.58	5.66	Peak	328	20
4 *	5690.00	100.94			95.00	5.94	Average	328	20
5 *	5690.00	110.38			104.44	5.94	Peak	328	20
6	5850.00	61.87	68.20	-6.33	55.70	6.17	Peak	328	20
7	11380.00	42.93	54.00	-11.07	28.13	14.80	Average	100	173
8	11380.00	55.36	74.00	-18.64	40.56	14.80	Peak	100	173

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor , cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: "\*" is Peak / Average value of fundamental frequency

## 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <http://www.icertifi.com.tw>.

### **Linkou**

Tel: 886-2-2601-1640

No. 30-2, Ding Fwu Tsuen, Lin  
Kou District, New Taipei City,  
Taiwan, R.O.C.

### **Kwei Shan**

Tel: 886-3-271-8666

No. 3-1, Lane 6, Wen San 3rd St.,  
Kwei Shan District, Tao Yuan City  
333, Taiwan, R.O.C.

### **Kwei Shan Site II**

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd  
St., Kwei Shan District, Tao Yuan  
City 333, Taiwan, R.O.C.

If you have any suggestion, please feel free to contact us as below information.

Tel: 886-3-271-8666

Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==