

FCC Co-Location Test Report

FCC ID	:	I88WSQ50
Equipment	:	Multy X AC3000 Tri-Band WiFi System
Model No.	:	WSQ50
Brand Name	:	ZYXEL
Applicant	:	Zyxel Communications Corporation
Address	:	No.2, Industry East Road IX, Hsinchu Science Park, Hsinchu, 30075, Taiwan, R.O.C.
Standard	:	47 CFR FCC Part 15.247 47 CFR FCC Part 15.407
Received Date	:	May 26, 2017
Tested Date	:	Jun. 20 ~ Jun. 30, 2017

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by:

ong Chem

Along Cher Assistant Manager

Approved by:





Gary Chang / Manager



Table of Contents

1	GENERAL DESCRIPTION	5
1.1	Information	
1.2	The Equipment List	
1.3	Test Standards	
1.4	Measurement Uncertainty	.7
2	TEST CONFIGURATION	.8
2.1	Testing Condition	8
2.2	The Worst Test Modes and Channel Details	.8
3	TRANSMITTER TEST RESULTS	.9
3.1	Unwanted Emissions into Restricted Frequency Bands	.9
4	TEST LABORATORY INFORMATION	15



Release Record

Report No.	Version	Description	Issued Date
FR760801CO	Rev. 01	Initial issue	Sep. 04, 2017



Summary of Test Results

FCC Rules	Test Items	Measured	Result
15.247(d)			
15.407(b)	Radiated Emissions	[dBuV/m at 3m]: 51.34MHz 36.64 (Margin -3.36dB) - PK	Pass
15.209			



1 General Description

1.1 Information

1.1.1 Specification of the Equipment under Test (EUT)

WLAN					
Operating Frequency 802.11b/g/n: 2412 MHz ~ 2462 MHz 802.11a/n/ac: 5180 MHz ~ 5240 MHz; 5745 ~ 5825 MHz					
Modulation Type 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11a/g/n/ac: OFDM (BPSK / QPSK / 16QAM / 64QAM / 256QAM)					
BT LE					
Operating Frequency 2402 MHz ~ 2480 MHz					
Modulaton Type	Bluetooth 4.1 LE: GFSK				

1.1.2 Main Chipset / RF Chipset

Function	Model No.
Main Chipset	IPQ4019
2.4G	IPQ4019
5G 2T2R	IPQ4019
5G 4T4R	QCA9984
Bluetooth LE	CSR8811

1.1.3 Antenna Details

For WLAN

Ant.	Ant. Model	Type	Connector	Connector Operating F		Frequency (MHz) / Gain (dBi)	
No.	Woder	Туре	Connector	2400~2483.5	5150~5250	5725~5850	
1	ALX17M-126XX3-A	PIFA	UFL	0	0	0.43	

For BT

Ant. No.	Туре	Connector	Gain (dBi)	Remarks
1	PIFA	UFL	4.94	

1.1.4 Power Supply Type of Equipment under Test (EUT)

Power Supply Type 12Vdc from adapter



1.2 The Equipment List

	H01-WS)						
	966 chamber1 / (03CH01-WS)						
Manufacturer	Model No.	Serial No.	Calibration Date	Calibration Until			
R&S	FSV40	101498	Nov. 25, 2016	Nov. 24, 2017			
R&S	ESR3	101658	Nov. 24, 2016	Nov. 23, 2017			
SCHWARZBECK	VULB9168	VULB9168-522	Aug. 04, 2016	Aug. 03, 2017			
SCHWARZBECK	BBHA 9120 D	BBHA 9120 D 1096	Dec. 21, 2016	Dec. 20, 2017			
SCHWARZBECK	BBHA 9170	BBHA 9170517	Oct. 25, 2016	Oct. 24, 2017			
R&S	HFH2-Z2	100330	Nov. 10, 2016	Nov. 09, 2017			
KOAX KABEL	101354-BW	101354-BW	Dec. 09, 2016	Dec. 08, 2017			
EMC	EMC02325	980225	Aug. 05, 2016	Aug. 04, 2017			
Agilent	83017A	MY39501308	Oct. 06, 2016	Oct. 05, 2017			
EMC	EMC184045B	980192	Aug. 24, 2016	Aug. 23, 2017			
HUBER+SUHNER	SUCOFLEX104	MY16014/4	Dec. 09, 2016	Dec. 08, 2017			
HUBER+SUHNER	SUCOFLEX104	MY16019/4	Dec. 09, 2016	Dec. 08, 2017			
HUBER+SUHNER	SUCOFLEX104	MY16139/4	Dec. 09, 2016	Dec. 08, 2017			
EMC	EMCCFD400-NM-N M-1000	16052	Dec. 09, 2016	Dec. 08, 2017			
Woken	CFD400NL-LW	CFD400NL-001	Dec. 09, 2016	Dec. 08, 2017			
Woken	CFD400NL-LW	CFD400NL-002	Dec. 09, 2016	Dec. 08, 2017			
AUDIX	e3	6.120210g	NA	NA			
	SCHWARZBECK SCHWARZBECK SCHWARZBECK R&S KOAX KABEL EMC Agilent EMC HUBER+SUHNER HUBER+SUHNER HUBER+SUHNER HUBER+SUHNER Woken Woken AUDIX	SCHWARZBECKVULB9168SCHWARZBECKBBHA 9120 DSCHWARZBECKBBHA 9170SCHWARZBECKBBHA 9170R&SHFH2-Z2KOAX KABEL101354-BWEMCEMC02325Agilent83017AEMCEMC184045BHUBER+SUHNERSUCOFLEX104HUBER+SUHNERSUCOFLEX104HUBER+SUHNERSUCOFLEX104HUBER+SUHNERSUCOFLEX104WokenCFD400NL-LWWokenCFD400NL-LW	SCHWARZBECKVULB9168VULB9168-522SCHWARZBECKBBHA 9120 DBBHA 9120 D 1096SCHWARZBECKBBHA 9170BBHA 9170517R&SHFH2-Z2100330KOAX KABEL101354-BW101354-BWEMCEMC02325980225Agilent83017AMY39501308EMCEMC184045B980192HUBER+SUHNERSUCOFLEX104MY16014/4HUBER+SUHNERSUCOFLEX104MY16019/4HUBER+SUHNERSUCOFLEX104MY16139/4EMCEMCCFD400-NM-N M-100016052WokenCFD400NL-LWCFD400NL-001WokenCFD400NL-LWCFD400NL-002AUDIXe36.120210g	R&S ESR3 101658 Nov. 24, 2016 SCHWARZBECK VULB9168 VULB9168-522 Aug. 04, 2016 SCHWARZBECK BBHA 9120 D BBHA 9120 D 1096 Dec. 21, 2016 SCHWARZBECK BBHA 9120 D BBHA 9170517 Oct. 25, 2016 SCHWARZBECK BBHA 9170 BBHA 9170517 Oct. 25, 2016 R&S HFH2-Z2 100330 Nov. 10, 2016 KOAX KABEL 101354-BW 101354-BW Dec. 09, 2016 EMC EMC02325 980225 Aug. 05, 2016 Agilent 83017A MY39501308 Oct. 06, 2016 HUBER+SUHNER SUCOFLEX104 MY16014/4 Dec. 09, 2016 HUBER+SUHNER SUCOFLEX104 MY16019/4 Dec. 09, 2016 HUBER+SUHNER SUCOFLEX104 MY16139/4 Dec. 09, 2016 Woken CFD400NL-LW CFD400NL-001 Dec. 09, 2016 Woken CFD400NL-LW CFD400NL-002 Dec. 09, 2016 Woken CFD400NL-LW CFD400NL-002 Dec. 09, 2016 MuDIX e3 6.120210			



1.3 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247 47 CFR FCC Part 15.407 ANSI C63.10-2013 FCC KDB 558074 D01 DTS Meas Guidance v04 FCC KDB 662911 D01 Multiple Transmitter Output v02r01 FCC KDB 789033 D02 General UNII Test Procedures New Rules v01r04 FCC KDB 412172 D01 Determining ERP and EIRP v01r01

1.4 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

Measurement Uncertainty				
Parameters	Uncertainty			
Radiated emission ≤ 1GHz	±3.66 dB			
Radiated emission > 1GHz	±5.63 dB			



2 Test Configuration

2.1 Testing Condition

Test Item	Test Site	Ambient Condition	Tested By
Radiated Emissions	03CH01-WS	24°C / 62%	Vincent Yeh Kevin Lee

➢ FCC Designation No.: TW2732

➢ FCC site registration No.: 181692

➢ IC site registration No.: 10807A-1

WIFI 2.4G 11B +5G B1 11A +5G B4 11A +BLE CH6 CH40 CH157 CH39

2.2 The Worst Test Modes and Channel Details

Test item	Test Mode		
Radiated Emissions	2.4G 11b CH6 + 5G B1 11a CH40 + 5G B4 11a CH157 + BLE CH39		

Note1: The selected channel is the maximum power channel of each function



3 Transmitter Test Results

3.1 Unwanted Emissions into Restricted Frequency Bands

3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

Restricted Band Emissions Limit				
Frequency Range (MHz)	Field Strength (uV/m)	Field Strength (dBuV/m)	Measure Distance (m)	
0.009~0.490	2400/F(kHz)	48.5 - 13.8	300	
0.490~1.705	24000/F(kHz)	33.8 - 23	30	
1.705~30.0	30	29	30	
30~88	100	40	3	
88~216	150	43.5	3	
216~960	200	46	3	
Above 960	500	54	3	

Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2:**

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

3.1.2 Test Procedures


- Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
- Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.

Note:


- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- 2. RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.



3.1.3 Test Setup

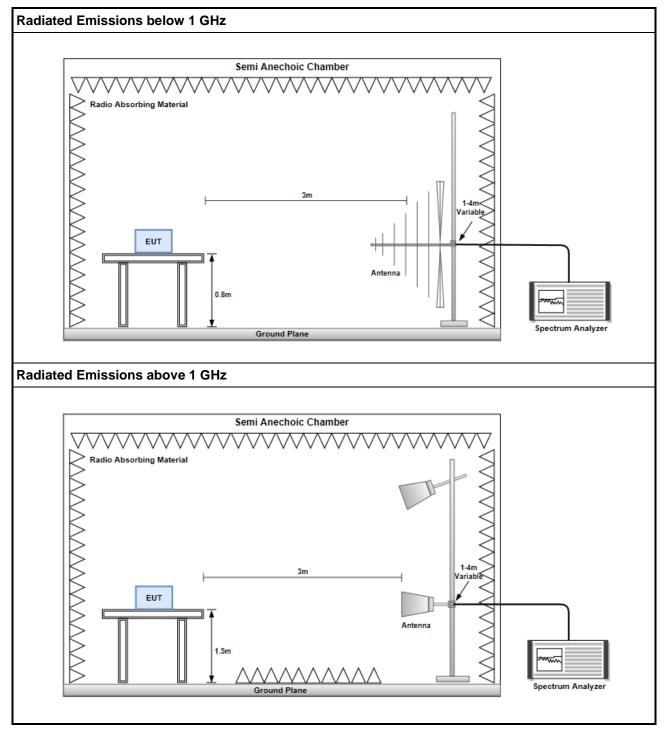




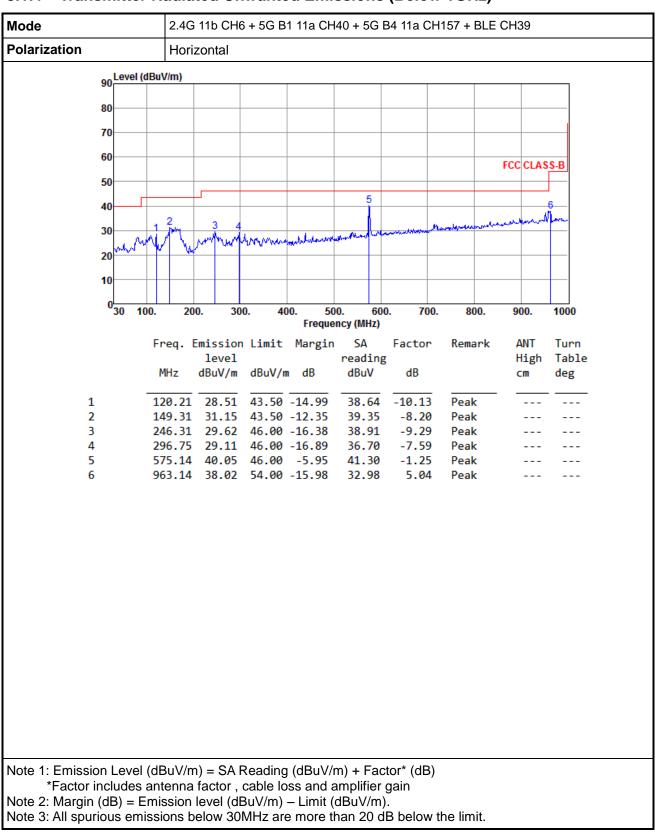


3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)



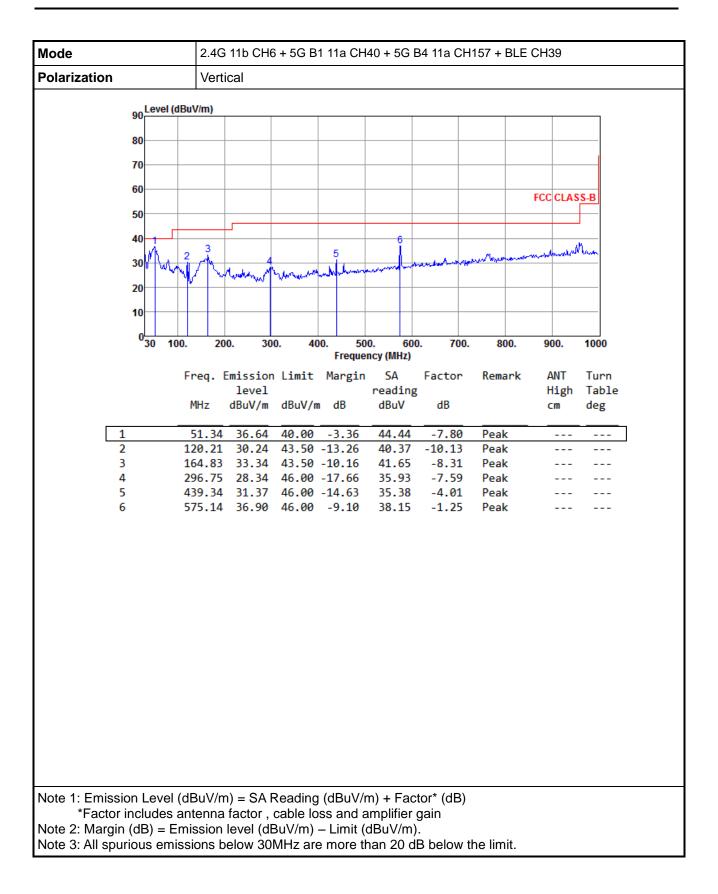




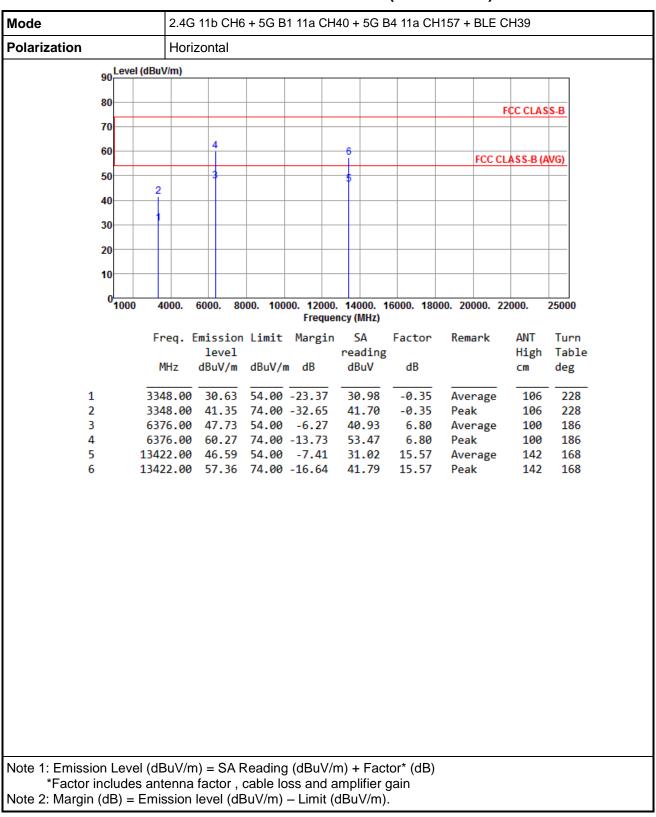

3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)



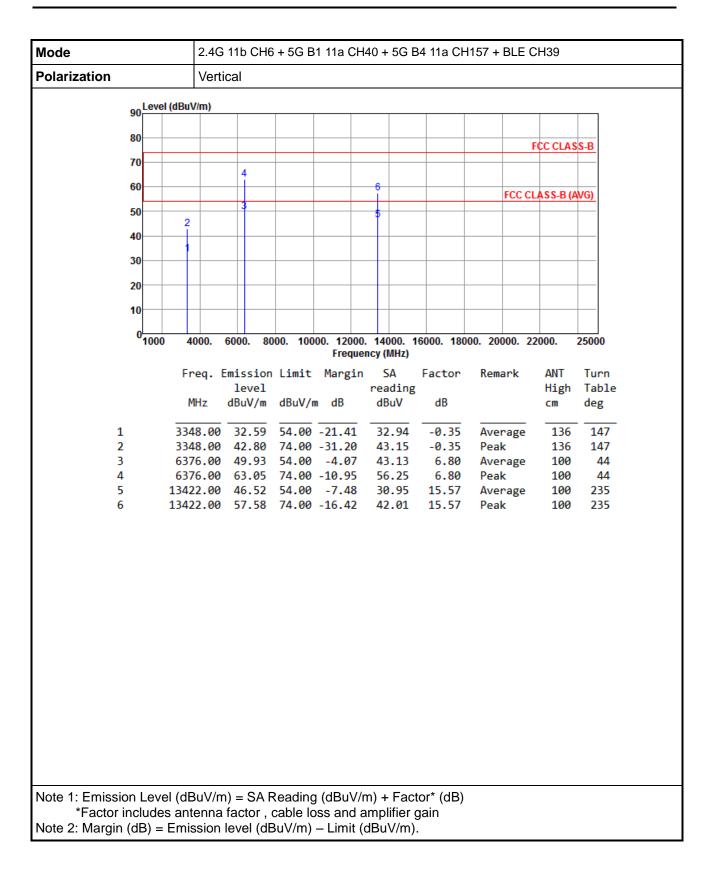



4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <u>http://www.icertifi.com.tw</u>.

Linkou Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City, Taiwan, R.O.C. Kwei Shan Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C. Kwei Shan Site II Tel: 886-3-271-8640 No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C..

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155 Email: ICC_Service@icertifi.com.tw

—END—