

# **FCC Co-Location Test Report**

FCC ID : 188WX3310-B0

Equipment : Dual-Band Wireless AX Gigabit Access Point /

Extender

Model No. : WX3310-B0

Brand Name : ZYXEL

Applicant : Zyxel Communications Corporation

Address No.2 Industry East RD. IX, Hsinchu Science Park,

Hsinchu 30075, Taiwan, R.O.C

Standard : 47 CFR FCC Part 15.247 47 CFR FCC Part 15.407

Received Date : Feb. 03, 2020

Tested Date : Apr. 28 ~ May 21, 2020

We, International Certification Corp., would like to declare that the tested sample has been evaluated and in compliance with the requirement of the above standards. The test results contained in this report refer exclusively to the product. It may be duplicated completely for legal use with the approval of the applicant. It shall not be reproduced except in full without the written approval of our laboratory.

Reviewed by: Approved by:

long Chen/ Assistant Manager Gary Chang / Manager

Report No.: FR020306CO Page: 1 of 16



# **Table of Contents**

| 1   | GENERAL DESCRIPTION                                    | 5  |
|-----|--|----|
| 1.1 | Information  | 5  |
| 1.2 | The Equipment List                                     | 6  |
| 1.3 | Test Standards   | 7  |
| 1.4 | Deviation from Test Standard and Measurement Procedure |    |
| 1.5 | Measurement Uncertainty                                | 7  |
| 2   | TEST CONFIGURATION                                     | 8  |
| 2.1 | Testing Condition                                      | 8  |
| 2.2 | The Worst Test Modes and Channel Details               |    |
| 3   | TRANSMITTER TEST RESULTS                               | 9  |
| 3.1 | Unwanted Emissions into Restricted Frequency Bands     | 9  |
| 4   | TEST LABORATORY INFORMATION                            | 16 |



# **Release Record**

| Report No. | Version | Description   | Issued Date   |
|------------|---------|---------------|---------------|
| FR020306CO | Rev. 01 | Initial issue | Jun. 02, 2020 |

Report No.: FR020306CO Page: 3 of 16



# **Summary of Test Results**

| FCC Rules           | Test Items         | Measured   | Result |
|---------------------|--------------------|--|--------|
| 15.247(d)           |                    |  |        |
| 15.407(b)<br>15.209 | Radiated Emissions | [dBuV/m at 3m]:41.64MHz<br>34.96 (Margin -5.04dB) - QP | Pass   |

#### **Declaration of Conformity:**

The test results with all measurement uncertainty excluded are presented in accordance with the regulation limits or requirements declared by manufacturers.

#### **Comments and Explanations:**

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

Report No.: FR020306CO Page: 4 of 16



# 1 General Description

# 1.1 Information

## 1.1.1 Specification of the Equipment under Test (EUT)

| WLAN                |   |
|---------------------|---|
| Operating Frequency | 2412 MHz ~ 2462 MHz<br>5180 MHz ~ 5240 MHz<br>5260 MHz ~ 5320 MHz<br>5500 MHz ~ 5720 MHz<br>5745 MHz ~ 5825 MHz |
| Modulation Type     | 802.11b: DSSS (DBPSK / DQPSK / CCK)<br>802.11a/g/n/ac/ax: BPSK / QPSK / 16QAM / 64QAM / 256QAM /1024 QAM        |

### 1.1.2 Antenna Details

| Ant. | Model                        | Tyne    | Type Connector | Operating Frequencies (MHz) / Antenna Gain (dBi) |           |           |           |           |
|------|------------------------------|---------|----------------|--|-----------|-----------|-----------|-----------|
| No.  |                              | 1 )   0 |                | 2400~2483.5                                      | 5150~5250 | 5250~5350 | 5470~5725 | 5725~5850 |
| 1    | Ant1<br>(RFPCA242309IMLB901) | PIFA    | ipex           | 0  | 0.5       | 1         | 1.5       | 1.75      |
| 2    | Ant2<br>(RFPCA242311IMLB901) | PIFA    | ipex           | 0  | 0.5       | 1         | 1.5       | 1.75      |
| 3    | Ant3<br>(RFPCA221116IM5B901) | Dipole  | ipex           |  | 0.5       | 1         | 1.5       | 1.75      |
| 4    | Ant4<br>(RFPCA232007IMLB901) | Dipole  | ipex           |  | 0.5       | 1         | 1.5       | 1.75      |

## 1.1.3 Power Supply Type of Equipment under Test (EUT)

| Power Supply Type | 12Vdc from AC adapter |
|-------------------|-----------------------|
|-------------------|-----------------------|

### 1.1.4 Accessories

|     | Accessories |   |  |  |  |  |
|-----|-------------|---|--|--|--|--|
| No. | Equipment   | Description   |  |  |  |  |
| 1   | AC adapter  | Brand: MNC Model: MAUS-1201501801 I/P: 100-240Vac, 50/60Hz, 0.5A O/P: 12Vdc, 1.5A Power Line: DC 1.5m non-shielded without core |  |  |  |  |
| 2   | RJ45 cable  | 1.5m non-shielded without core  |  |  |  |  |

Report No.: FR020306CO Page: 5 of 16



# 1.2 The Equipment List

| Test Item               | Radiated Emission          |                          |                  |                  |                   |  |  |  |
|-------------------------|----------------------------|--------------------------|------------------|------------------|-------------------|--|--|--|
| Test Site               | 966 chamber1 / (03CH01-WS) |                          |                  |                  |                   |  |  |  |
| Tested Date             | Apr. 28 ~ Apr. 30, 2020    |                          |                  |                  |                   |  |  |  |
| Instrument              | Manufacturer               | Model No.                | Serial No.       | Calibration Date | Calibration Until |  |  |  |
| Spectrum Analyzer       | R&S                        | FSV40                    | 101498           | Dec. 17, 2019    | Dec. 16, 2020     |  |  |  |
| Receiver                | R&S                        | ESR3                     | 101658           | Dec. 12, 2019    | Dec. 11, 2020     |  |  |  |
| Bilog Antenna           | SCHWARZBECK                | VULB9168                 | VULB9168-522     | Jul. 12, 2019    | Jul. 11, 2020     |  |  |  |
| Horn Antenna<br>1G-18G  | SCHWARZBECK                | BBHA 9120 D              | BBHA 9120 D 1096 | Dec. 12, 2019    | Dec. 11, 2020     |  |  |  |
| Horn Antenna<br>18G-40G | SCHWARZBECK                | BBHA 9170                | BBHA 9170517     | Nov. 15, 2019    | Nov. 14, 2020     |  |  |  |
| Loop Antenna            | R&S                        | HFH2-Z2                  | 100330           | Nov. 13, 2019    | Nov. 12, 2020     |  |  |  |
| Loop Antenna Cable      | KOAX KABEL                 | 101354-BW                | 101354-BW        | Oct. 07, 2019    | Oct. 06, 2020     |  |  |  |
| Preamplifier            | EMC                        | EMC02325                 | 980225           | Jul. 09, 2019    | Jul. 08, 2020     |  |  |  |
| Preamplifier            | Agilent                    | 83017A                   | MY39501308       | Oct. 08, 2019    | Oct. 07, 2020     |  |  |  |
| Preamplifier            | EMC                        | EMC184045B               | 980192           | Aug. 01, 2019    | Jul. 31, 2020     |  |  |  |
| RF Cable                | EMC                        | EMC104-SM-SM-80<br>00    | 181106           | Oct. 07, 2019    | Oct. 06, 2020     |  |  |  |
| RF Cable                | HUBER+SUHNER               | SUCOFLEX104              | MY16019/4        | Oct. 07, 2019    | Oct. 06, 2020     |  |  |  |
| RF Cable                | HUBER+SUHNER               | SUCOFLEX104              | MY16014/4        | Oct. 07, 2019    | Oct. 06, 2020     |  |  |  |
| LF cable 1M             | EMC                        | EMCCFD400-NM-N<br>M-1000 | 160502           | Oct. 07, 2019    | Oct. 06, 2020     |  |  |  |
| LF cable 3M             | Woken                      | CFD400NL-LW              | CFD400NL-001     | Oct. 07, 2019    | Oct. 06, 2020     |  |  |  |
| LF cable 10M            | Woken                      | CFD400NL-LW              | CFD400NL-002     | Oct. 07, 2019    | Oct. 06, 2020     |  |  |  |
| Measurement<br>Software | AUDIX                      | e3                       | 6.120210g        | NA               | NA                |  |  |  |
| Note: Calibration Inter | val of instruments liste   | d above is one year.     |                  |                  |                   |  |  |  |

| Test Item               | RF Conducted              | RF Conducted         |            |                  |                   |  |  |  |  |
|-------------------------|---------------------------|----------------------|------------|------------------|-------------------|--|--|--|--|
| Test Site               | (TH01-WS)                 |                      |            |                  |                   |  |  |  |  |
| Test Date               | May 21, 2020              | lay 21, 2020         |            |                  |                   |  |  |  |  |
| Instrument              | Manufacturer              | Model No.            | Serial No. | Calibration Date | Calibration Until |  |  |  |  |
| Spectrum Analyzer       | R&S                       | FSV40                | 101063     | Apr. 30, 2020    | Apr. 29, 2021     |  |  |  |  |
| Power Meter             | Anritsu                   | ML2495A              | 1241002    | Oct. 23, 2019    | Oct. 22, 2020     |  |  |  |  |
| Power Sensor            | Anritsu                   | MA2411B              | 1207366    | Oct. 23, 2019    | Oct. 22, 2020     |  |  |  |  |
| AC POWER<br>SOURCE      | APC                       | AFC-500W             | F312060012 | Dec. 02, 2019    | Dec. 01, 2020     |  |  |  |  |
| Measurement<br>Software | Sporton                   | Sporton_1            | 1.3.30     | NA               | NA                |  |  |  |  |
| Note: Calibration Inter | rval of instruments liste | d above is one year. |            |                  |                   |  |  |  |  |

Report No.: FR020306CO Page: 6 of 16



#### 1.3 Test Standards

According to the specification of EUT, the EUT must comply with following standards and KDB documents.

47 CFR FCC Part 15.247

47 CFR FCC Part 15.407

ANSI C63.10-2013

FCC KDB 558074 D01 15.247 Meas Guidance v05r02

FCC KDB 662911 D01 Multiple Transmitter Output v02r01

FCC KDB 789033 D02 General UNII Test Procedures New Rules v02r01

FCC KDB 412172 D01 Determining ERP and EIRP v01r01

#### 1.4 Deviation from Test Standard and Measurement Procedure

None

# 1.5 Measurement Uncertainty

ISO/IEC 17025 requires that an estimate of the measurement uncertainties associated with the emissions test results be included in the report. The measurement uncertainties given below are based on a 95% confidence level (based on a coverage factor (k=2)

| Measurement Uncertainty  |             |  |  |  |  |
|--------------------------|-------------|--|--|--|--|
| Parameters               | Uncertainty |  |  |  |  |
| Radiated emission ≤ 1GHz | ±3.41 dB    |  |  |  |  |
| Radiated emission > 1GHz | ±4.59 dB    |  |  |  |  |

Report No.: FR020306CO Page: 7 of 16



# 2 Test Configuration

# 2.1 Testing Condition

| Test Item           | Test Site | Ambient Condition | Tested By  |
|---------------------|-----------|-------------------|------------|
| Radiated Emissions  | 03CH01-WS | 23-24°C / 65%     | Akun Chung |
| Conducted Emissions | TH01-WS   | 22°C / 63%        | Alex Huang |

FCC Designation No.: TW0009FCC site registration No.: 207696

➤ ISED#: 10807A

➤ CAB identifier: TW2732

# 2.2 The Worst Test Modes and Channel Details

| Test item  | Modulation Mode       | Test Channel | Data Rate      | Test<br>Configuration |  |  |
|--|-----------------------|--------------|----------------|-----------------------|--|--|
| Radiated Emissions ≤1GHz   |                       | CH06 + CH149 | 6 Mbps +6 Mbps |                       |  |  |
| Radiated Emissions >1GHz   | 2.4GHz 11g + 5GHz 11a |              |                |                       |  |  |
| Conducted Emissions  |                       |              |                |                       |  |  |
| Note: The selected channel is the maximum power channel of WiFi mode |                       |              |                |                       |  |  |

Report No.: FR020306CO Page: 8 of 16



### 3 Transmitter Test Results

### 3.1 Unwanted Emissions into Restricted Frequency Bands

### 3.1.1 Limit of Unwanted Emissions into Restricted Frequency Bands

| Restricted Band Emissions Limit |                       |                         |                      |
|---------------------------------|-----------------------|-------------------------|----------------------|
| Frequency Range (MHz)           | Field Strength (uV/m) | Field Strength (dBuV/m) | Measure Distance (m) |
| 0.009~0.490                     | 2400/F(kHz)           | 48.5 - 13.8             | 300                  |
| 0.490~1.705                     | 24000/F(kHz)          | 33.8 - 23               | 30                   |
| 1.705~30.0                      | 30                    | 29                      | 30                   |
| 30~88                           | 100                   | 40                      | 3                    |
| 88~216                          | 150                   | 43.5                    | 3                    |
| 216~960                         | 200                   | 46                      | 3                    |
| Above 960                       | 500                   | 54                      | 3                    |

#### Note 1:

Qusai-Peak value is measured for frequency below 1GHz except for 9–90 kHz, 110–490 kHz frequency band. Peak and average value are measured for frequency above 1GHz. The limit on average radio frequency emission is as above table. The limit on peak radio frequency emissions is 20 dB above the maximum permitted average emission limit **Note 2**:

Measurements may be performed at a distance other than what is specified provided. When performing measurements at a distance other than that specified, the results shall be extrapolated to the specified distance using an extrapolation factor as below, Frequency at or above 30 MHz: 20 dB/decade Frequency below 30 MHz: 40 dB/decade.

### 3.1.2 Test Procedures

- 1. Measurement is made at a semi-anechoic chamber that incorporates a turntable allowing a EUT rotation of 360°. A continuously-rotating, remotely-controlled turntable is installed at the test site to support the EUT and facilitate determination of the direction of maximum radiation for each EUT emission frequency. The EUT is placed at test table. For emissions testing at or below 1 GHz, the table height is 80 cm above the reference ground plane. For emission measurements above 1 GHz, the table height is 1.5 m.
- 2. Measurement is made with the antenna positioned in both the horizontal and vertical planes of polarization. The measurement antenna is varied in height (1m ~ 4m) above the reference ground plane to obtain the maximum signal strength. Distance between EUT and antenna is 3 m.
- 3. This investigation is performed with the EUT rotated 360°, the antenna height scanned between 1 m and 4 m, and the antenna rotated to repeat the measurements for both the horizontal and vertical antenna polarizations.


#### Note:

- 1. 120kHz measurement bandwidth of test receiver and Quasi-peak detector is for radiated emission below 1GHz.
- RBW=1MHz, VBW=3MHz and Peak detector is for peak measured value of radiated emission above 1GHz.
- 3. RBW=1MHz, VBW=1/T and Peak detector is for average measured value of radiated emission above 1GHz.

Report No.: FR020306CO Page: 9 of 16




## 3.1.3 Test Setup

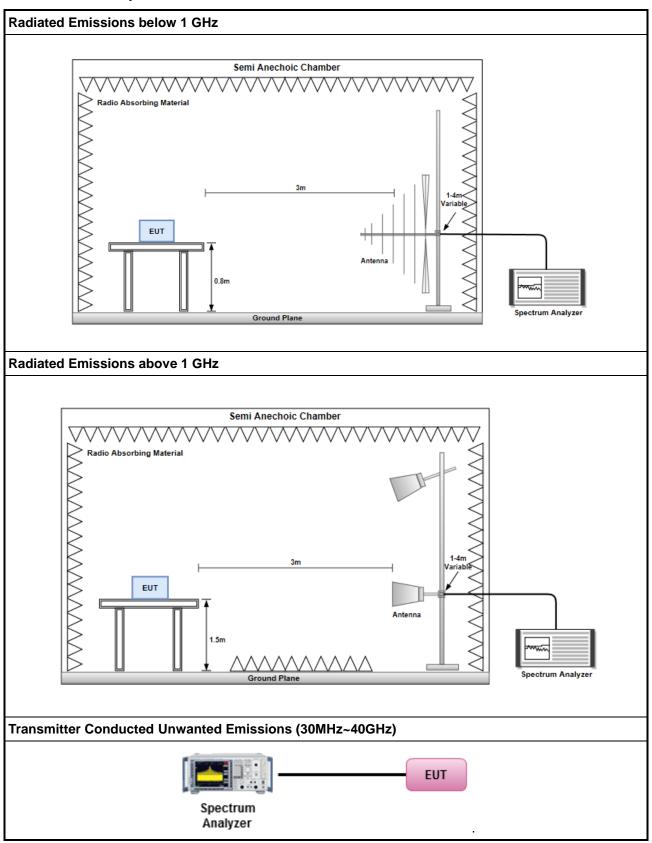

Report No.: FR020306CO Page: 10 of 16



### 3.1.4 Transmitter Radiated Unwanted Emissions (Below 1GHz)

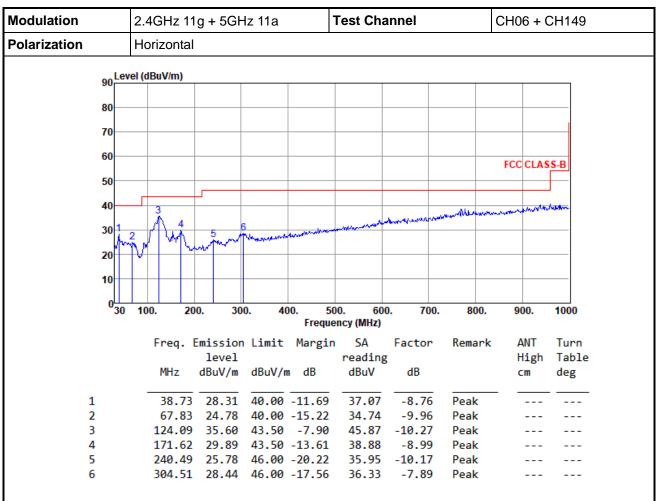

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) - Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR020306CO Page: 11 of 16



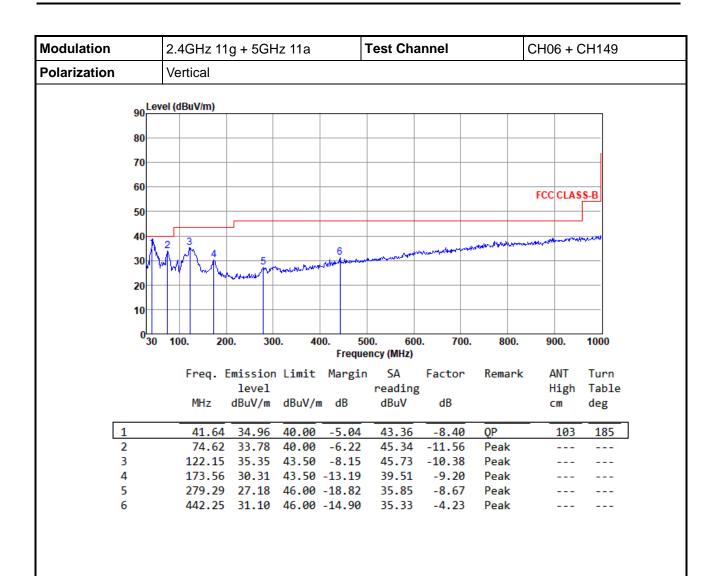

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain


Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Note 3: All spurious emissions below 30MHz are more than 20 dB below the limit.

Report No.: FR020306CO Page: 12 of 16



### 3.1.5 Transmitter Radiated Unwanted Emissions (Above 1GHz)

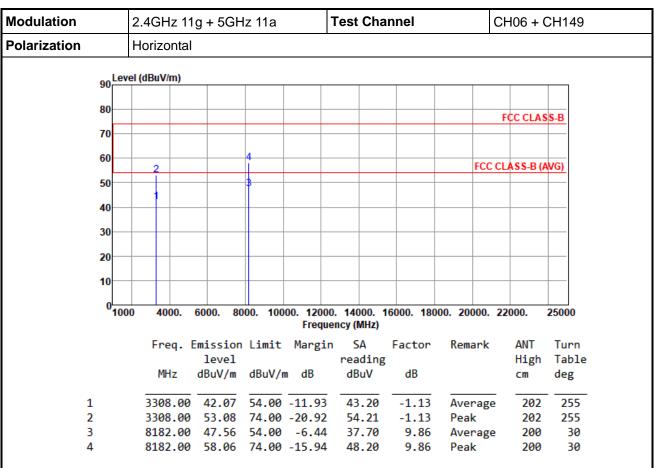


Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)

\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR020306CO Page: 13 of 16



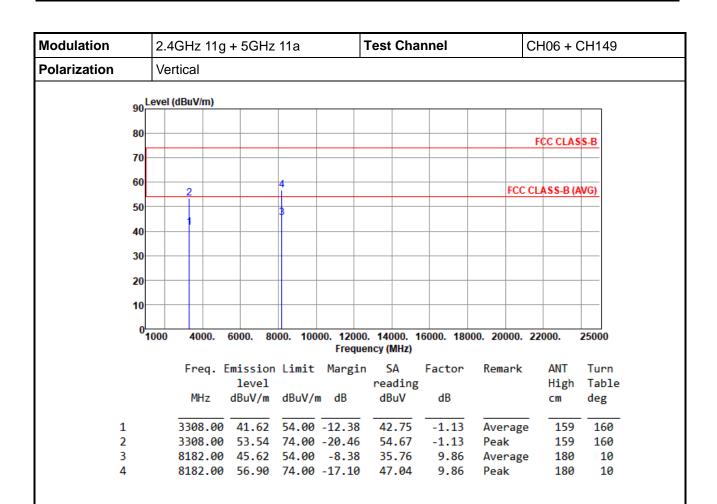

Note 1: Emission Level (dBuV/m) = SA Reading (dBuV/m) + Factor\* (dB)


\*Factor includes antenna factor, cable loss and amplifier gain

Note 2: Margin (dB) = Emission level (dBuV/m) – Limit (dBuV/m).

Report No.: FR020306CO Page: 14 of 16



# 3.1.6 Conducted Emissions (30MHz~40GHz)

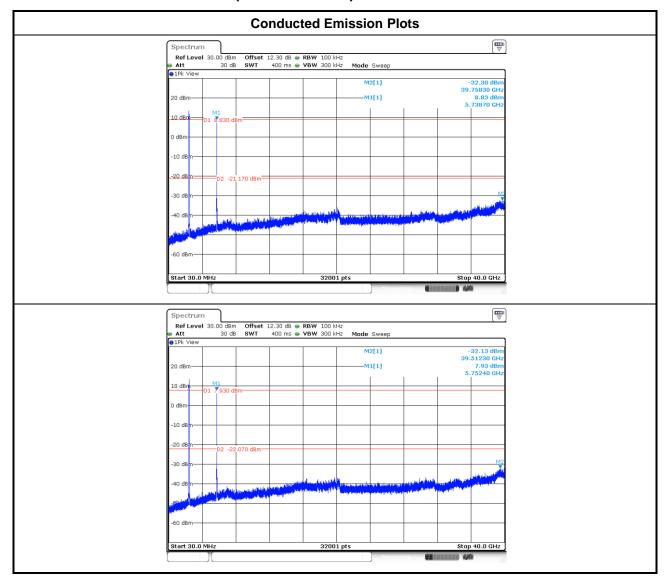

Report No.: FR020306CO Page: 15 of 16



# 4 Test laboratory information

Established in 2012, ICC provides foremost EMC & RF Testing and advisory consultation services by our skilled engineers and technicians. Our services employ a wide variety of advanced edge test equipment and one of the widest certification extents in the business.

International Certification Corp (EMC and Wireless Communication Laboratory), it is our definitive objective is to institute long term, trust-based associations with our clients. The expectation we set up with our clients is based on outstanding service, practical expertise and devotion to a certified value structure. Our passion is to grant our clients with best EMC / RF services by oriented knowledgeable and accommodating staff.

Our Test sites are located at Linkou District and Kwei Shan District. Location map can be found on our website <a href="http://www.icertifi.com.tw">http://www.icertifi.com.tw</a>.

#### Linkou

Tel: 886-2-2601-1640 No. 30-2, Ding Fwu Tsuen, Lin Kou District, New Taipei City,

Taiwan, R.O.C.

#### Kwei Shan

Tel: 886-3-271-8666 No. 3-1, Lane 6, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C.

#### Kwei Shan Site II

Tel: 886-3-271-8640

No. 14-1, Lane 19, Wen San 3rd St., Kwei Shan District, Tao Yuan City 333, Taiwan, R.O.C..

If you have any suggestion, please feel free to contact us as below information

Tel: 886-3-271-8666 Fax: 886-3-318-0155

Email: ICC\_Service@icertifi.com.tw

==END==

Report No.: FR020306CO Page: 16 of 16