



EMC

TEST REPORT

REPORT NO. : F88012804
MODEL NO. : LT561E, LT541F, LT541C
DATE OF TEST : Feb. 23, 1999

PREPARED FOR : MAG TECHNOLOGY CO., LTD.

ADDRESS : 9F, 245, SEC. 1, TUNHWA S. RD.,
TAIPEI, TAIWAN, R.O.C.

PREPARED BY: ADVANCE DATA TECHNOLOGY CORPORATION



Accredited Laboratory

11F, NO.1, SEC.4, NAN-KING EAST RD.,
TAIPEI, TAIWAN, R.O.C.

This test report consists of 30 pages in total. It may be duplicated completely for legal use with the allowance of the applicant. It shall not be reproduced except in full, without the written approval of our laboratory. It should not be used by the client to claim product endorsement by NVLAP or any agency of the U.S. government. The test result in the report only applies to the tested sample.



TABLE OF CONTENTS

1. CERTIFICATION.....	3
2. GENERAL INFORMATION	4
2.1 GENERAL DESCRIPTION OF EUT	4
2.2 DESCRIPTION OF SUPPORT UNITS	5
2.3 TEST METHODOLOGY AND CONFIGURATION.....	5
3. TEST INSTRUMENTS	6
3.1 TEST INSTRUMENTS (EMISSION).....	6
3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION.....	7
4. TEST RESULTS (EMISSION)	8
4.1 RADIO DISTURBANCE	8
4.2 EUT OPERATION CONDITION	8
4.3 TEST DATA OF CONDUCTED EMISSION (A).....	9
4.4 TEST DATA OF CONDUCTED EMISSION (B)	10
4.5 TEST DATA OF CONDUCTED EMISSION (C)	11
4.6 TEST DATA OF CONDUCTED EMISSION (D).....	12
4.7 TEST DATA OF RADIATED EMISSION (A)	13
4.8 TEST DATA OF RADIATED EMISSION (B)	15
4.9 TEST DATA OF RADIATED EMISSION (C)	17
4.10 TEST DATA OF RADIATED EMISSION (D)	19
5. PHOTOGRAPHS OF THE TEST CONFIGURATION WITH MINIMUM MARGIN....	21
6. ATTACHMENT 1 - TECHNICAL DESCRIPTION OF EUT	29
7. APPENDIX - INFORMATION OF THE TESTING LABORATORY	30



1.

CERTIFICATION

Issue date: Feb. 25, 1999

Product : LCD MONITOR
Trade Name : MAG
Model No. : LT561E, LT541F, LT541C
Applicant : MAG TECHNOLOGY CO., LTD.
Standard : FCC Part 15, Subpart B, Class B
ANSI C63.4-1992
CISPR 22:1993+A1:1995+A2:1996

We hereby certify that one sample of the designation has been tested in our facility on Feb. 22, 1999. The test record, data evaluation and Equipment Under Test (EUT) configurations represent herein are true and accurate representation of the measurements of the sample's EMC characteristics under the conditions herein specified.

The test results show that the EUT as described in this report is in compliance with the Class B limits of conducted and radiated emission of applicable standards.

TESTED BY : Ken Lin , DATE: 02/05/99
(Ken Liu)

CHECKED BY : Yemmy , DATE: 02/25/99
(Yemmy Soong)

APPROVED BY : Mike Su , DATE: 2/25/99
(Mike Su)

ADVANCE DATA TECHNOLOGY CORPORATION**NVLAP[®]**

Accredited Laboratory



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF EUT

Product	:	LCD MONITOR
Model No.	:	LT561E, LT541F, LT541C
Power Supply Type	:	Switching
Power Cord	:	Nonshielded AC (1.8m)
Data Cable	:	Shielded (1.5m)

Note: The EUT is a 15" LCD monitor with resolution up to 1024 x 768.

The EUT has three model names which are identical to each other except for their external appearance, base and the following:

- Model : LT561E, with built-in two speakers
- Model : LT541F, without speaker
- Model : LT541C, without speaker

The above three models were tested separately using the following modes:

Mode 1 - Model : LT561E
using Toshiba Panel and MAG Adapter, Model: PM1230,
Input: 100-240V, 1.0A, 50-60Hz
Output: 12Vdc, 3.0A

Mode 2 - Model : LT561E
using Toshiba Panel and MAG Adapter, Model: PA1232,
Input: 100-240V, 1.0A, 50-60 Hz
Output: 12Vdc, 3.2A

Mode 3 - Model : LT541F
using Toshiba Panel and MAG Adapter, Model: PM1230,
Input: 100-240V, 1.0A, 50-60Hz
Output: 12Vdc, 3.0A

Mode 4 - Model : LT541C
using Toshiba Panel and MAG Adapter, Model: PA1232,
Input: 100-240V, 1.0A, 50-60 Hz
Output: 12Vdc, 3.2A

There are two ferrite cores on the cable of both the above power adapters.

There are two ferrite cores on the video cable outside the LCD monitor.

For more detailed features description, please refer to ATTACHMENT 1 – TECHNICAL DESCRIPTION OF EUT and User's Manual.



2.2 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories are used to form representative test configuration during the tests.

No.	Product	Brand	Model No.	FCC ID.	I/O Cable
1.	PERSONAL COMPUTER	NTI	PII-233	FCC Doc Approved	Nonshielded Power (1.8m)
2.	KEYBOARD	FORWARD	FDA-104GA	F4ZDA-104G	Shielded Signal (1.4m)
3.	PRINTER	HP	2225C+	DSI6XU2225	Shielded Signal (1.2m) Nonshielded Power (1.4m)
4.	MODEM	ACEEX	1414	IFAXDM1414	Shielded signal (1.2m) Nonshielded Power (1.2m)
5.	MOUSE	DEXIN	A2P800A	NIYA2P800A	Shielded signal (1.5m)
6.	CCD CAMERA 2X	COMPAQ	YC72-CPQ	EDUYC72-CPQ	Shielded signal (1.8m)
7.	VGA CARD	CARDEX	CD-GX2A44T	ICUVGA-GW710	N/A
8	SOUND CARD	YA SHIN	AUDIO 1869	FCC Doc Approved	N/A

- Note:
1. Support unit 6 was connected to the USB port of EUT.
 2. Two USB cables (each 1.8 m) were connected to the two USB ports of EUT to form two open loop cables.
 3. A USB cable (1.5 m) was connected from EUT to PC.
 4. An audio cable (1.8 m) was connected from the EUT to PC. (For Mode 1 & Mode 2)

2.3 TEST METHODOLOGY AND CONFIGURATION

Both conducted and radiated testing were performed according to the procedures in ANSI C63.4:1992. Radiated testing was performed at an antenna to EUT distance of 10m on an open area test site.

Please refer to the photos of test configuration in Item 5.



3. TEST INSTRUMENTS

3.1 TEST INSTRUMENTS (EMISSION)

CONDUCTED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
ROHDE & SCHWARZ Test Receiver	ESHS30	828109/007	July 22, 1999
ROHDE & SCHWARZ Artificial Mains Network	ESH2-Z5	892107/003	July 20, 1999
EMCO L.I.S.N.	3825/2	9504-2359	July 20, 1999
Shielded Room	Site 3	ADT-C03	N/A

Note: 1. The measurement uncertainty is less than +/- 2.6dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.

And the calibrations are traceable to NML/ROC and NIST/USA.

RADIATED EMISSION MEASUREMENT

Description & Manufacturer	Model No.	Serial No.	Calibrated Until
HP Spectrum Analyzer	8594E	3412A01132	Sept. 24, 1999
CHASE Preamplifier	CPA9231A/4	3215	Nov. 1, 1999
HP Preamplifier	8347A	3307A01088	Sept. 9, 1999
ROHDE & SCHWARZ TEST RECEIVER	ESVS 30	841977/002	Jan. 11, 2000
SCHWARZBECK Tunable Dipole Antenna	VHA 9103 UHA 9105	E101051 E101055	Nov. 25, 1999
CHASE BILOG Antenna	CBL6112	2074	Dec. 25, 1999
EMCO Double Ridged Guide Antenna	3115	9312-4192	April 3, 1999
CHANCE Turn Table & Tower Controller	ACS-I	N/A	N/A
Open Field Test Site	Site 6	ADT-R06	Dec. 24, 1999

Note: 1. The measurement uncertainty is less than +/- 3dB, which is calculated as per NAMA's document NIS81.

2. The calibration interval of the above test instruments is 12 months.

And the calibrations are traceable to NML/ROC and NIST/USA.



3.2 LIMITS OF CONDUCTED AND RADIATED EMISSION

LIMIT OF RADIATED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (at 10m) *	Class B (at 10m) *
	dBuV/m	dBuV/m
30 - 230	40	30
230 - 1000	47	37

* Detector Function: Quasi-Peak

LIMIT OF RADIATED EMISSION OF FCC PART 15, SUBPART B FOR FREQUENCY ABOVE 1000 MHz

FREQUENCY (MHz)	Class A (dBuV/m) (at 3m)		Class B (dBuV/m) (at 3m)	
	Peak	Average	Peak	Average
Above 1000	80.0	60.0	74.0	54.0

Note: (1) The lower limit shall apply at the transition frequencies.

(2) Emission level (dBuV/m) = 20 log Emission level (uV/m).

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

LIMIT OF CONDUCTED EMISSION OF CISPR 22

FREQUENCY (MHz)	Class A (dBuV)		Class B (dBuV)	
	Quasi-peak	Average	Quasi-peak	Average
0.15 - 0.5	79	66	66 - 56	56 - 46
0.50 - 5.0	73	60	56	46
5.0 - 30.0	73	60	60	50

Note: (1) The lower limit shall apply at the transition frequencies.

(2) The limit decreases linearly with the logarithm of the frequency in the range 0.15 to 0.50 MHz

(3) All emanation from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.



4. TEST RESULTS (EMISSION)

4.1 RADIO DISTURBANCE

Frequency Range : 0.15 - 30 MHz (Conducted Emission)
30 - 1000 MHz (Radiated Emission)
Input Voltage : 120 Vac, 60 Hz
Temperature : 22 °C
Humidity : 78 %
Atmospheric Pressure : 1005 mbar

TEST RESULT	Remarks
PASS	Minimum passing margin of conducted emission: -2.2 dB at 6.412, 6.255 & 6.201 MHz Minimum passing margin of radiated emission: -2.2 dB at 450.00 MHz

Note: The EUT was pretested under the following resolution & horizontal synchronization speed mode:

- * 1024x768 mode (69 kHz),
- * 800x600 mode (54 kHz)
- * 640x480 mode (31.5 kHz)

The worst emission levels were found under 1024x768 (69 kHz) and therefore the test data of only this mode is recorded.

4.2 EUT OPERATION CONDITION

1. Turn on the power of all equipments.
2. PC runs a test program to enable all functions.
3. PC reads and writes messages from FDD and HDD.
4. CCD cameras capture an image and send it to PC.
5. PC sends "H" messages & picture messages to LCD monitor (EUT) and displays them on its screen.
6. PC sends "H" messages to modem.
7. PC sends "H" messages to printer, and the printer prints them on paper.
8. PC sends audio messages to internal speaker of EUT. (mode 1 & mode 2)
9. Repeat steps 3-9.



4.3 TEST DATA OF CONDUCTED EMISSION (A)

EUT: LCD MONITORMODEL: LT561E

MODE : 1

6 dB Bandwidth: 10 kHz

Freq.	L Level		N Level		Limit		Margin [dB (μV)]			
[MHz]	[dB (μV)]		[dB (μV)]		[dB (μV)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.192	42.8	-	44.4	-	63.9	53.9	-21.1	-	-19.5	-
0.384	32.5	-	41.7	-	58.2	48.2	-25.7	-	-16.5	-
1.158	27.7	-	37.3	-	56.0	46.0	-28.3	-	-18.7	-
4.632	31.7	-	36.8	-	56.0	46.0	-24.3	-	-19.2	-
6.478	55.3	47.2	54.0	46.8	60.0	50.0	-4.7	-2.8	-6.0	-3.2
20.069	47.9	-	47.0	-	60.0	50.0	-12.1	-	-13.0	-

- Remarks:
1. "***": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value

ADT CO. Shielded Room 3
CISPR 22 CLASS B

23. Feb 99 15:57

EUT: LT551E
Test Spec: LISN : L
Comment: 1024X768 85HZ/60KHZ
MODE: 1


Report No. F88012804

Page 9-1

Tested by Ken Lin

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpAmp
150k	450k	3k	10k	PK	1ms	10dB	LN OFF	60dB
450k	5M	3k	10k	PK	1ms	10dB	LN OFF	60dB
5M	30M	3k	10k	PK	1ms	10dB	LN OFF	60dB

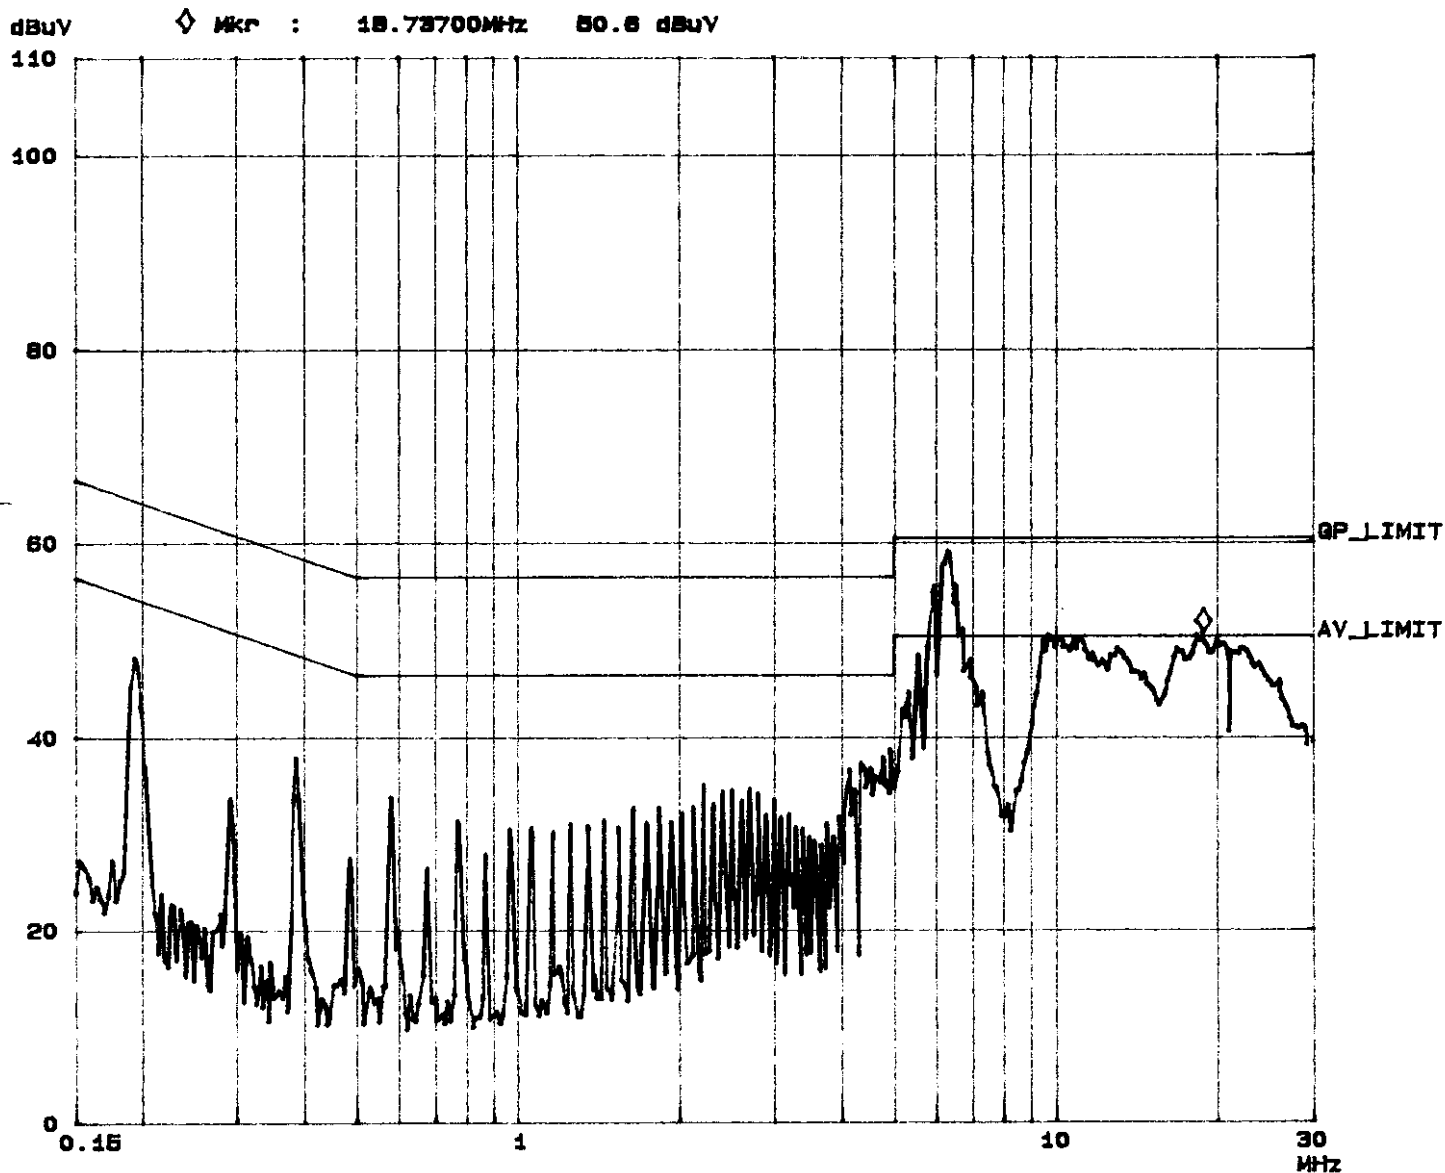

ADT CO. Shielded Room 3
CISPR 22 CLASS B

23. Feb 99 15:42

EUT: L7881E
Test Spec: LISN : N
Comment: 1024X768 85HZ/80KHZ
MODE: 1


Report No. F88012804

Page 9-2

Tested by Ken Lin

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preampl	OpRge
150k	450k	3k	10k	PK	1ms	10dB	LN OFF	80dB
450k	5M	3k	10k	PK	1ms	10dB	LN OFF	80dB
5M	30M	3k	10k	PK	1ms	10dB	LN OFF	80dB

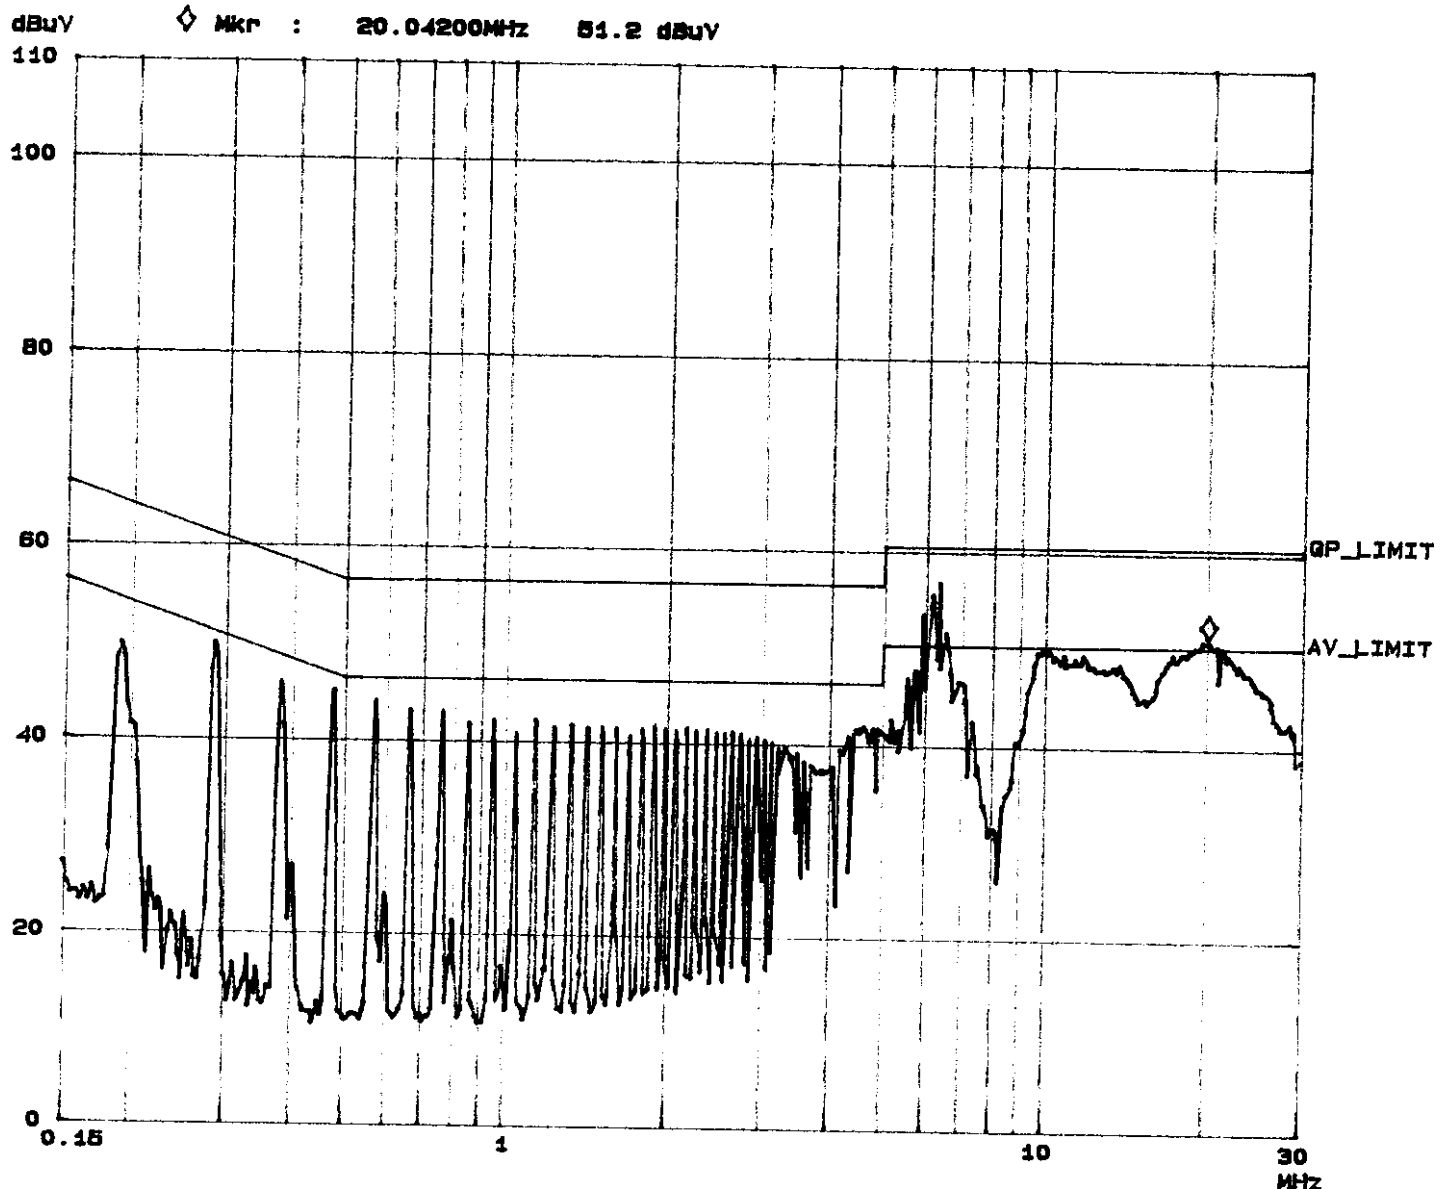



4.4 TEST DATA OF CONDUCTED EMISSION (B)

EUT: LCD MONITORMODEL: LT561E

MODE : 2

6 dB Bandwidth: 10 kHz

Freq.	L Level		N Level		Limit		Margin [dB (μV)]			
[MHz]	[dB (μV)]		[dB (μV)]		[dB (μV)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.155	43.3	-	40.1	-	65.7	55.7	-22.4	-	-25.6	-
0.201	37.4	-	35.2	-	63.6	53.6	-26.2	-	-28.4	-
0.789	20.3	-	21.0	-	56.0	46.0	-35.7	-	-35.0	-
2.292	27.1	-	28.2	-	56.0	46.0	-28.9	-	-27.8	-
6.255	53.4	47.4	54.0	47.8	60.0	50.0	-6.6	-2.6	-6.0	-2.2
10.529	38.2	-	36.2	-	60.0	50.0	-21.8	-	-23.8	-

- Remarks:
1. "*": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value

ADT CO. Shielded Room 3
CISPR 22 CLASS B

23. Feb 99 12:17

EUT: LT561E
Test Spec: LISN : L
Comment: 1024X768 85HZ/69KHZ
MODE: 2

Report No. F88012804


Page 10-1

Tested by Ken Liu

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge
150k	450k	3k	10k	PK	1ms	10dB	LN OFF	50dB
450k	5M	3k	10k	PK	1ms	10dB	LN OFF	50dB
5M	30M	3k	10k	PK	1ms	10dB	LN OFF	50dB

dBuV $\diamond$ Mkr : 155.00 kHz 57.2 dBuV

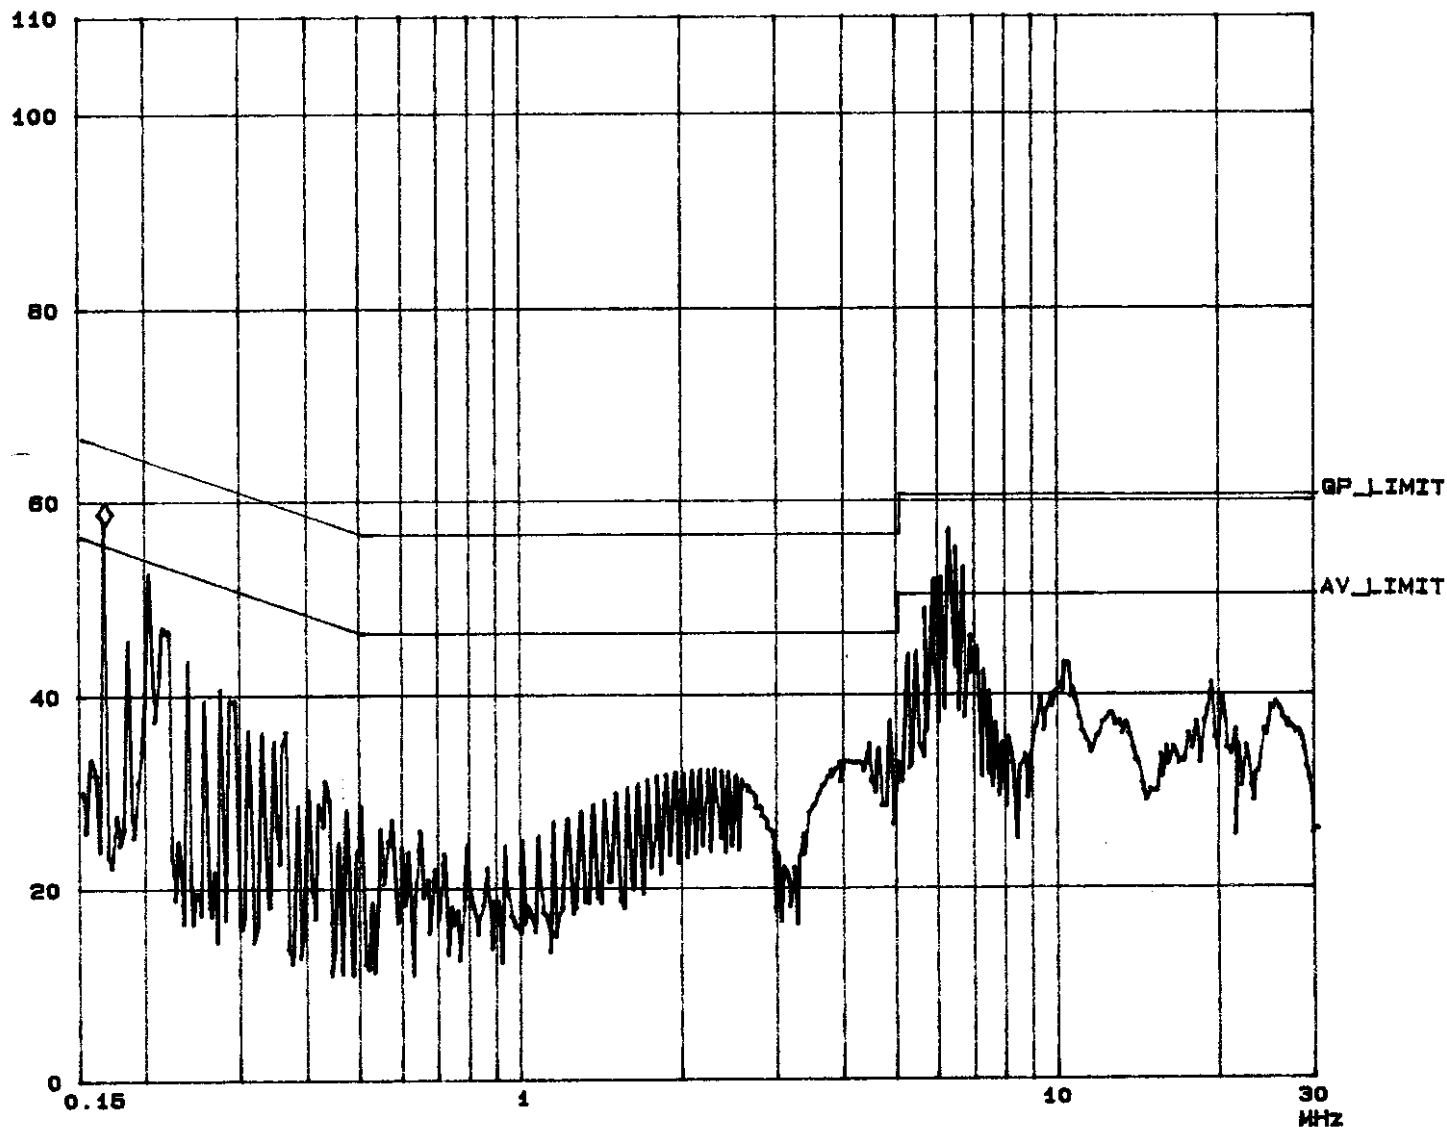

ADT CO. Shielded Room 3
CISPR 22 CLASS B

23. Feb 98 13:22

EUT: L7561E
Test Spec: LISN : N
Comment: 1024X768 85HZ/68KHZ
MODE: 2

Report No. F88012804

Page


10-2

Tested by Ken Lin

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpAmp
150k	450k	3k	10k	PK	1ms	10dB	LN OFF	60dB
450k	5M	3k	10k	PK	1ms	10dB	LN OFF	60dB
5M	30M	3k	10k	PK	1ms	10dB	LN OFF	60dB

dBuV ◇ Mkr : 10.48400MHz 41.2 dBuV

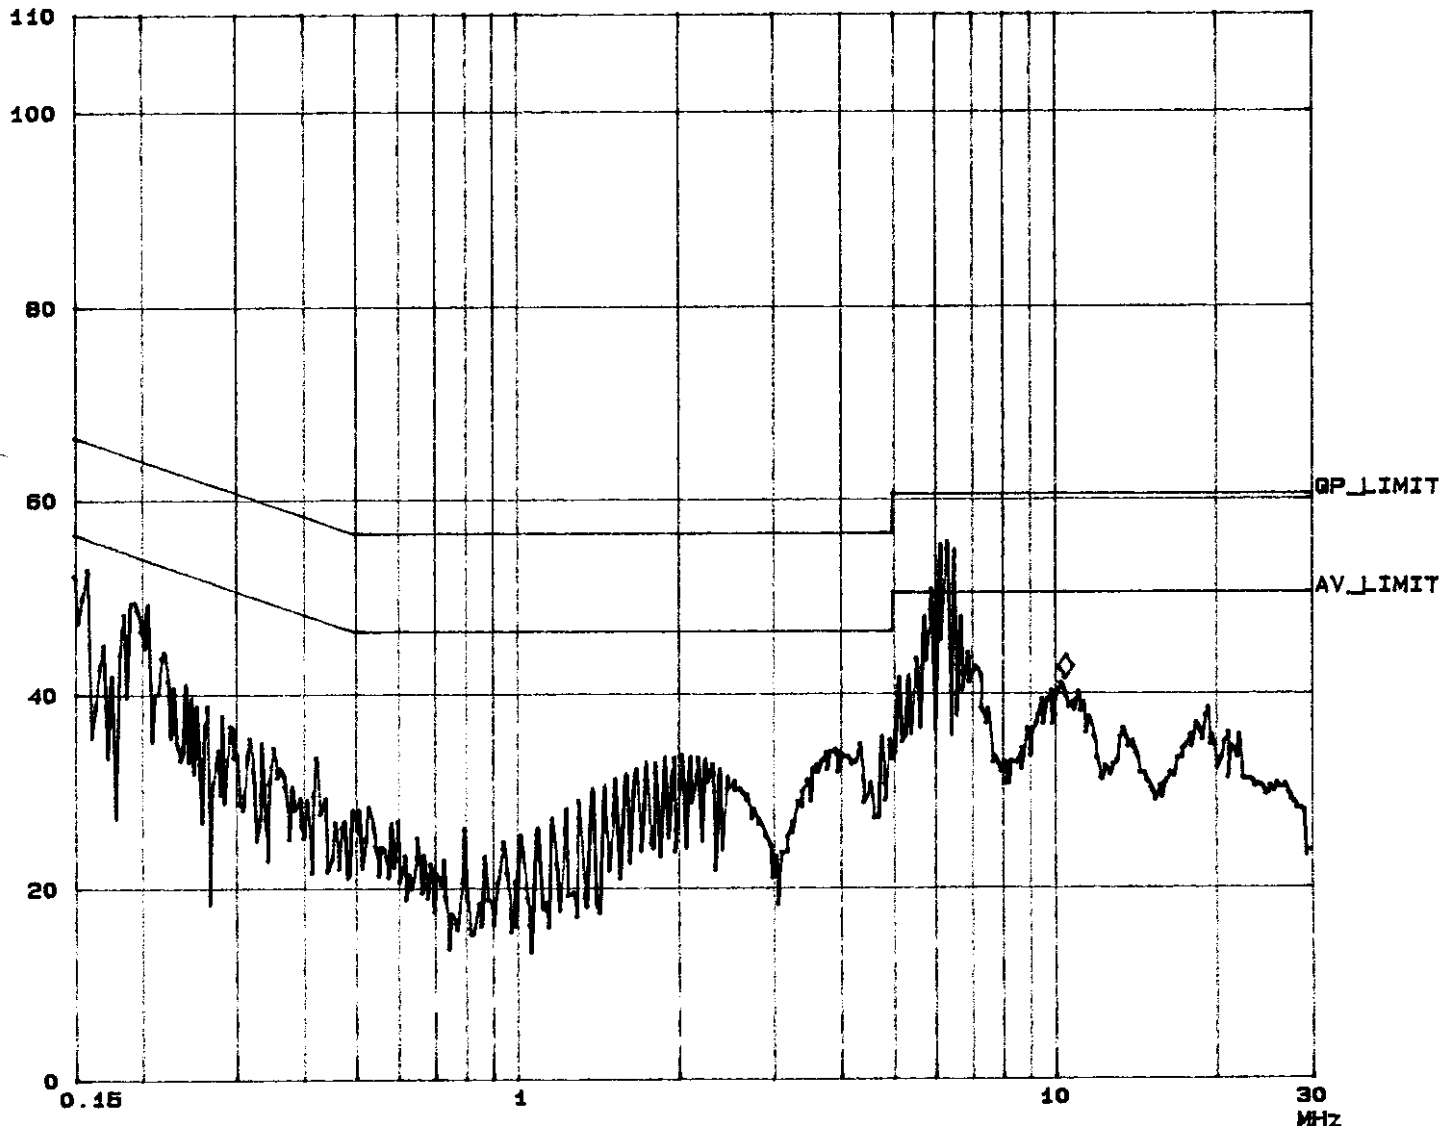



4.5 TEST DATA OF CONDUCTED EMISSION (C)

EUT: LCD MONITOR

MODEL: LT541F

MODE : 3

6 dB Bandwidth: 10 kHz

Freq.	L Level		N Level		Limit		Margin [dB (μV)]			
[MHz]	[dB (μV)]		[dB (μV)]		[dB (μV)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.198	34.0	-	34.3	-	63.7	53.7	-29.7	-	-29.4	-
0.297	37.6	-	33.3	-	60.3	50.3	-22.7	-	-27.0	-
0.789	27.5	-	25.1	-	56.0	46.0	-28.5	-	-30.9	-
4.044	33.5	-	38.3	-	56.0	46.0	-22.5	-	-17.7	-
6.201	53.3	47.8	53.0	45.2	60.0	50.0	-6.7	-2.2	-7.0	-4.8
9.819	53.7	46.4	53.2	46.1	60.0	50.0	-6.3	-3.6	-6.8	-3.9

- Remarks:
1. "": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value

ADT CO. Shielded Room 3

23. Feb 88 11:34

CISPR 22 CLASS B

EUT: L7561E
Test Spec: LISN : L
Comment: 1024X768 85HZ/89KHZ
MODE: 3


Report No. F88012804

Page 11-1

Tested by Ken Liu

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpRge
150k	450k	3k	10k	PK	1ms	10dBLN OFF	80dB
450k	5M	3k	10k	PK	1ms	10dBLN OFF	80dB
5M	30M	3k	10k	PK	1ms	10dBLN OFF	80dB

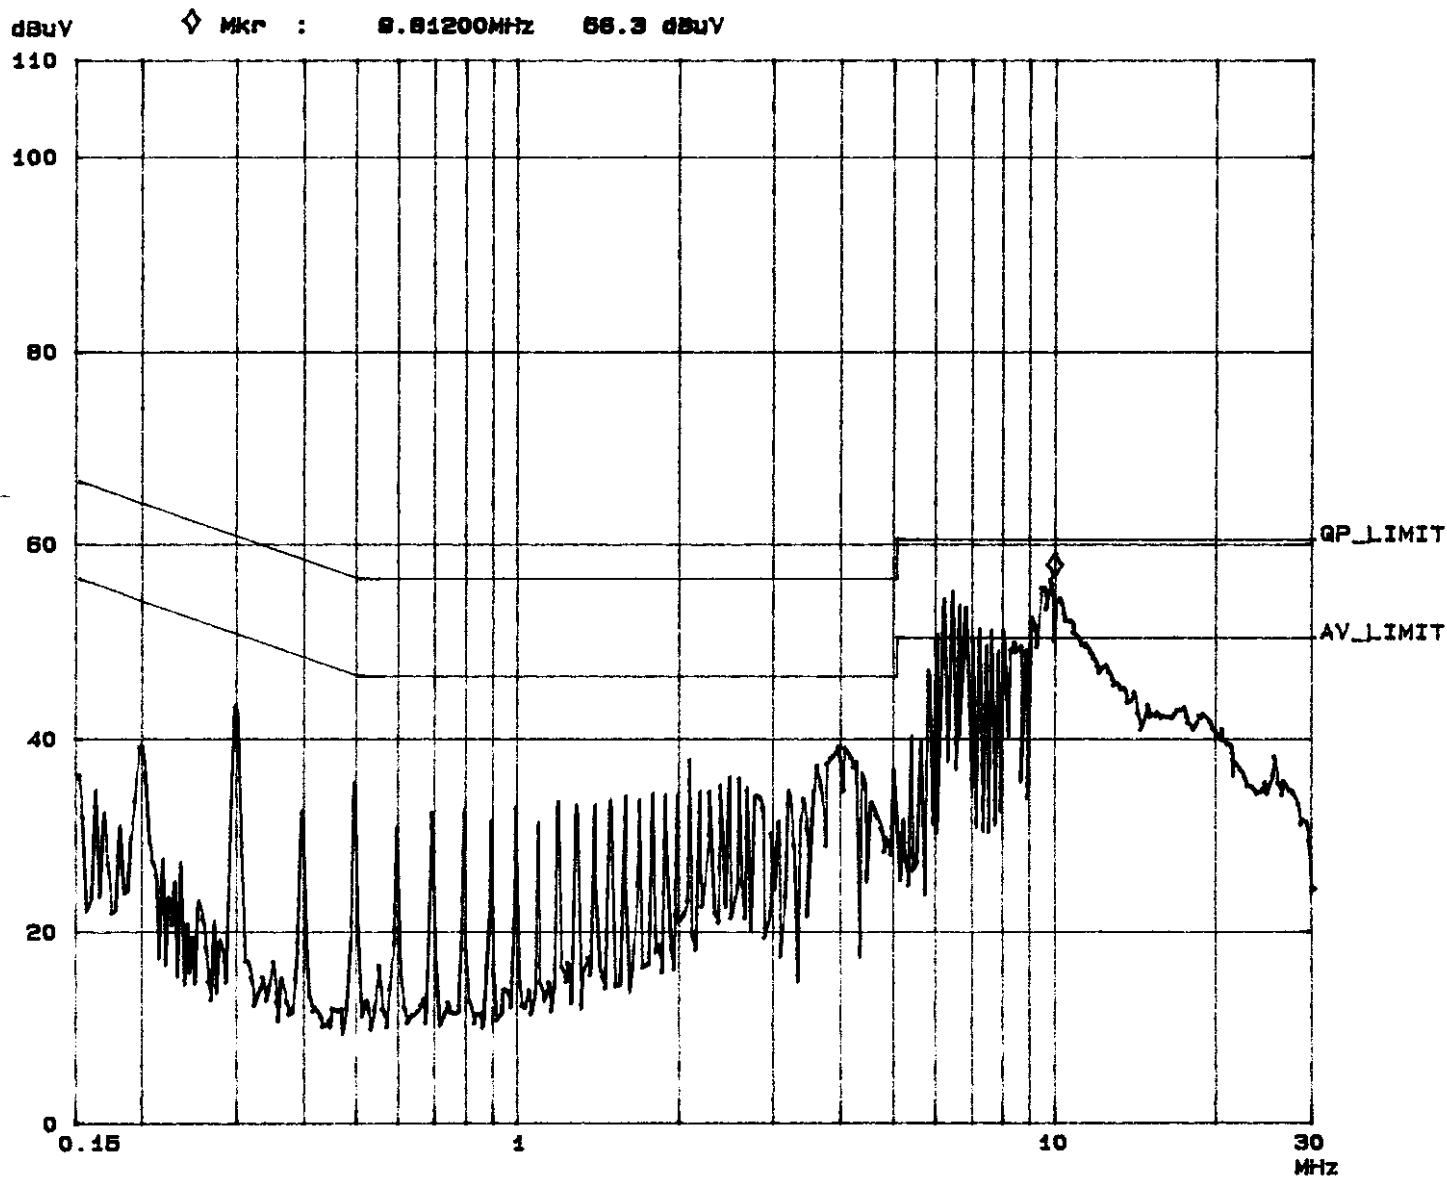

ADT CO. Shielded Room 3
CISPR 22 CLASS B

23. Feb 98 11:18

EUT: LT561E
Test Spec: LISN : N
Comment: 1024X768 85HZ/69KHZ
MODE: 3

Report No. F88012804


Page 11-2

Tested by Ken Lin

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings						
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpRge	
150k	450k	3k	10k	PK	1ms	10dBLN	OFF	80dB	
450k	5M	3k	10k	PK	1ms	10dBLN	OFF	80dB	
5M	30M	3k	10k	PK	1ms	10dBLN	OFF	80dB	

dBuV $\diamond$ MKR : 9.82100MHz 55.7 dBuV

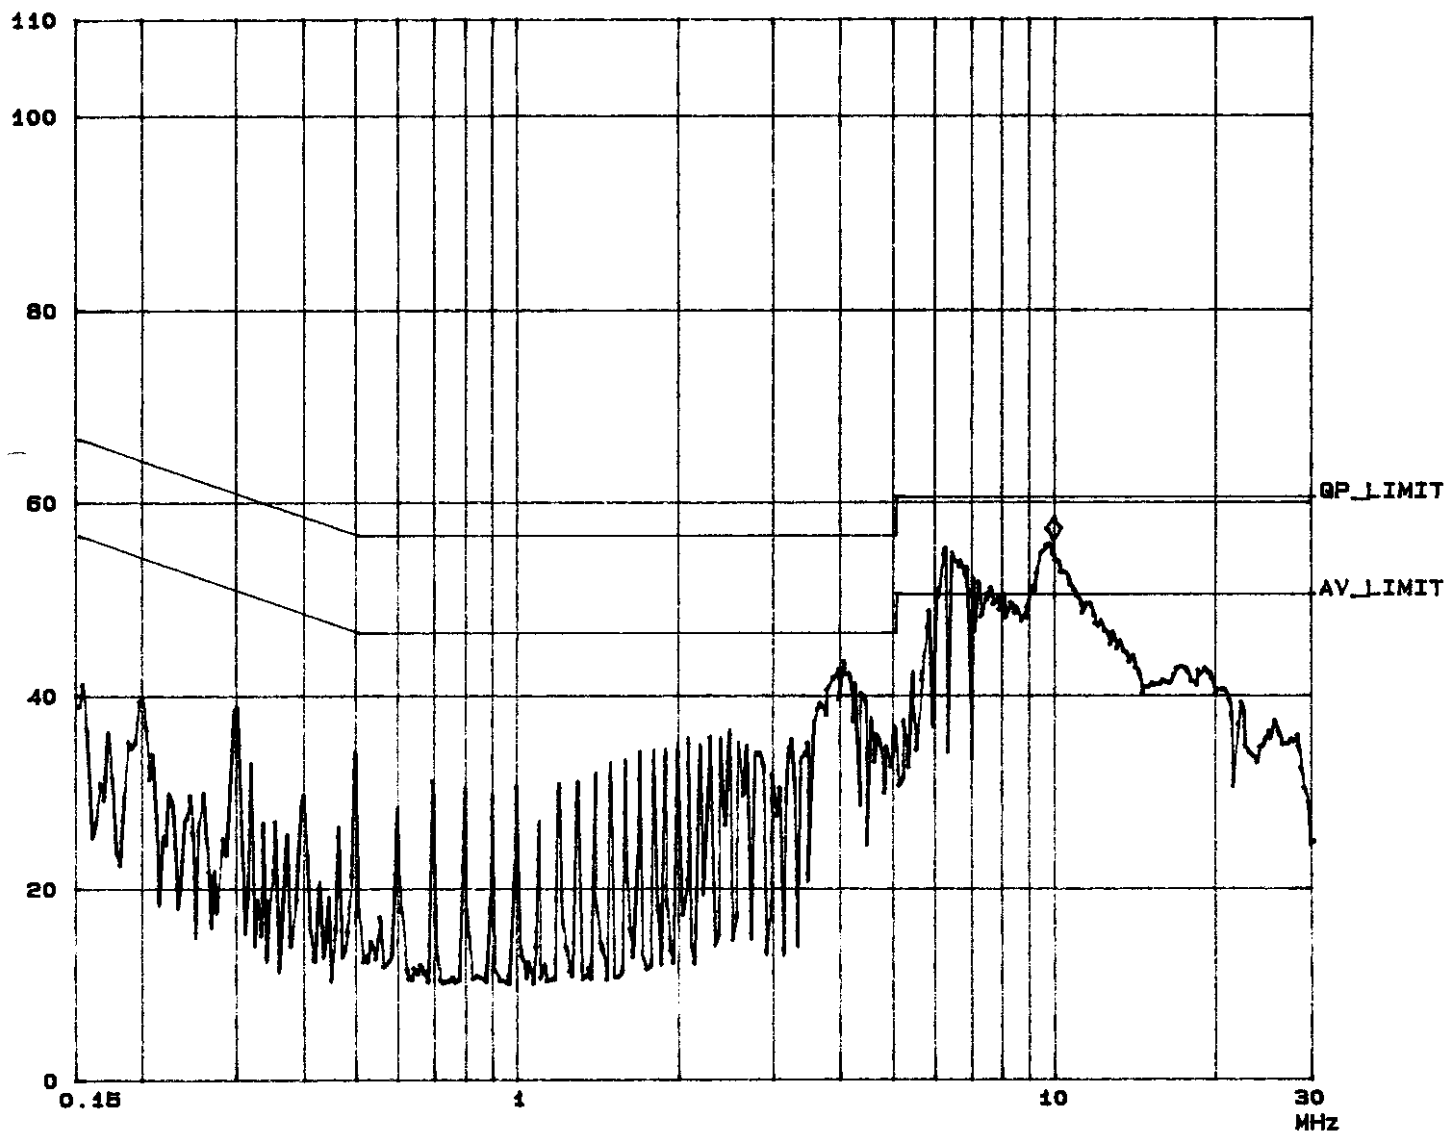



4.6 TEST DATA OF CONDUCTED EMISSION (D)

EUT: LCD MONITORMODEL: LT541C

MODE : 4

6 dB Bandwidth: 10 kHz

Freq.	L Level		N Level		Limit		Margin [dB (μV)]			
[MHz]	[dB (μV)]		[dB (μV)]		[dB (μV)]		L		N	
	QP	AV	QP	AV	QP	AV	QP	AV	QP	AV
0.153	47.9	-	45.2	-	65.8	55.8	-17.9	-	-20.6	-
0.231	37.7	-	36.1	-	62.4	52.4	-24.7	-	-26.3	-
2.013	28.4	-	27.5	-	56.0	46.0	-27.6	-	-28.5	-
4.026	33.7	-	34.8	-	56.0	46.0	-22.3	-	-21.2	-
6.412	52.1	47.2	52.6	47.8	60.0	50.0	-7.9	-2.8	-7.4	-2.2
10.020	49.9	-	50.0	-	60.0	50.0	-10.1	-	-10.0	-

- Remarks:
1. "*": Undetectable
 2. Q.P. and AV. are abbreviations of quasi-peak and average individually.
 3. "-": The Quasi-peak reading value also meets average limit and measurement with the average detector is unnecessary.
 4. The emission levels of other frequencies were very low against the limit.
 5. Margin value = Emission level - Limit value

ADT CO. Shielded Room 3
CISPR 22 CLASS B

23. Feb 99 15:03

EUT: LT561E
Test Spec: LISN : L
Comment: 1024X768 85HZ/68KHZ
MODE: 4


Report No. F88012804

Page 12-1

Tested by Ken Liu

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings					
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp	OpAmp
150k	450k	3k	10k	PK	1ms	10dB	LN OFF	60dB
450k	5M	3k	10k	PK	1ms	10dB	LN OFF	60dB
5M	30M	3k	10k	PK	1ms	10dB	LN OFF	60dB

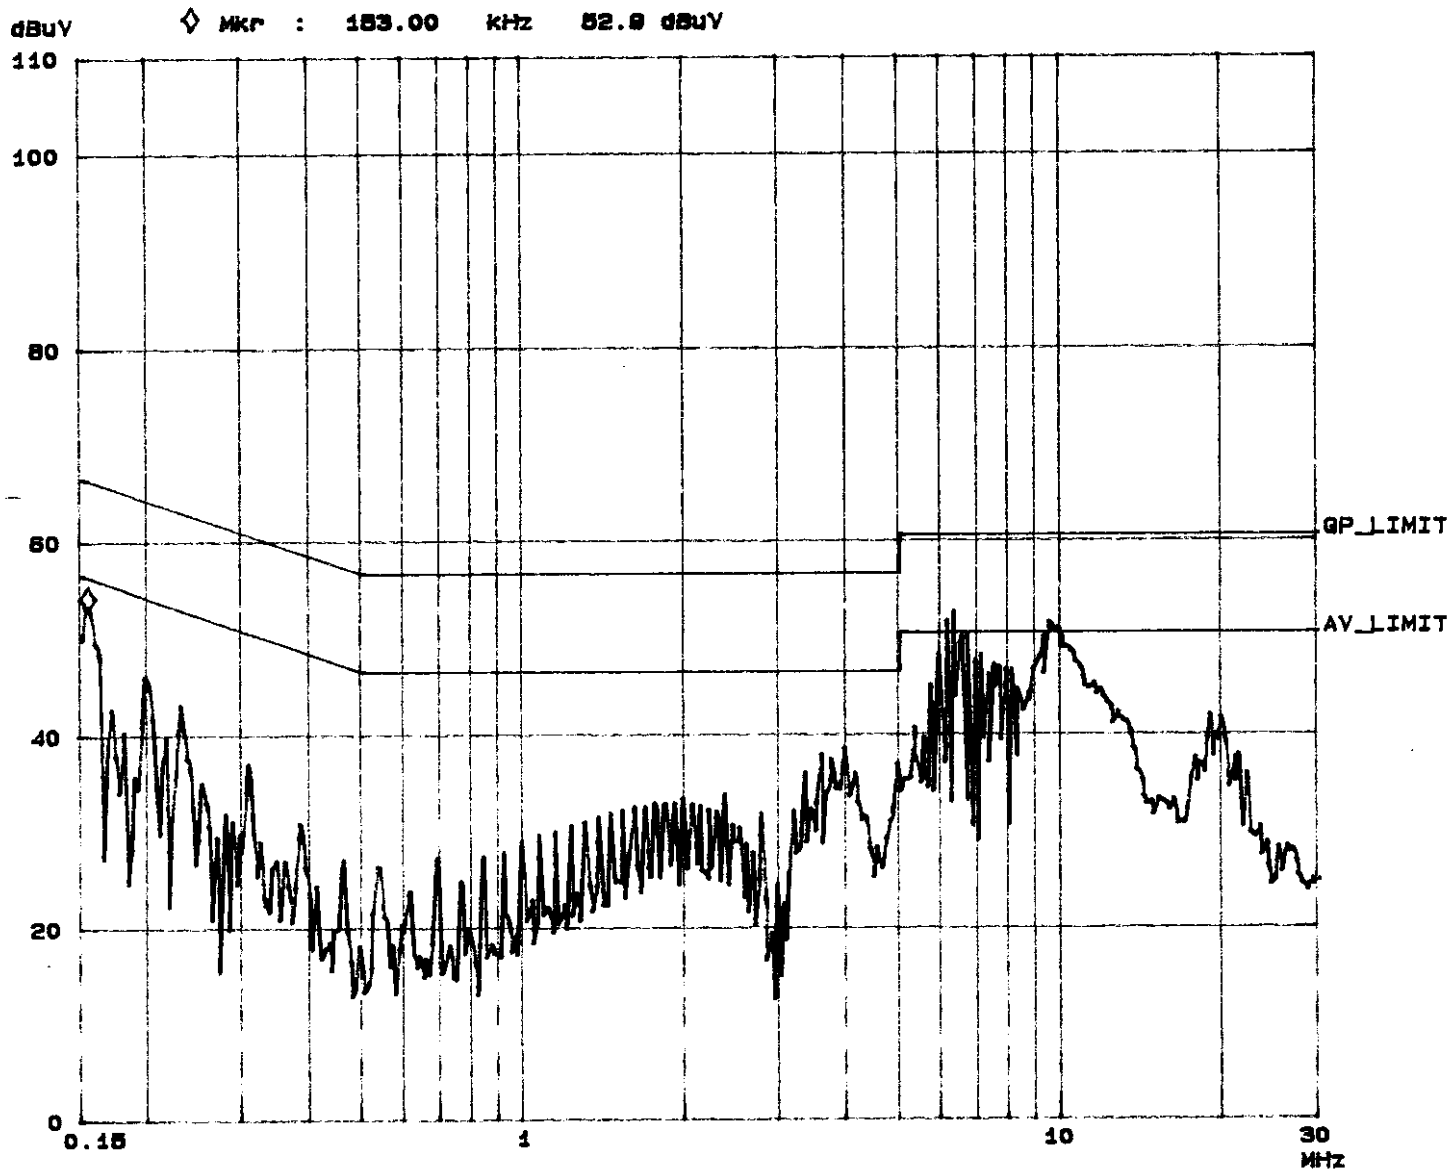

ADT CO. Shielded Room 3
CISPR 22 CLASS B

23. Feb 98 15:19

EUT: LT561E
Test Spec: LISN: N
Comment: 1024X768 85HZ/60KHZ
MODE: 4

Report No. P88012804

Page


12-2

Tested by Ken Lin

Fast Scan Settings (3 Ranges)

Frequencies			Receiver Settings				
Start	Stop	Step	IF BW	Detector	M-Time	Atten	Preamp OpAmp
150k	450k	3k	10k	PK	1ms	10dB LN OFF	60dB
450k	5M	3k	10k	PK	1ms	10dB LN OFF	60dB
5M	30M	3k	10k	PK	1ms	10dB LN OFF	60dB

dBuV $\diamond$ Mkr : 9.82100MHz 51.9 dBuV

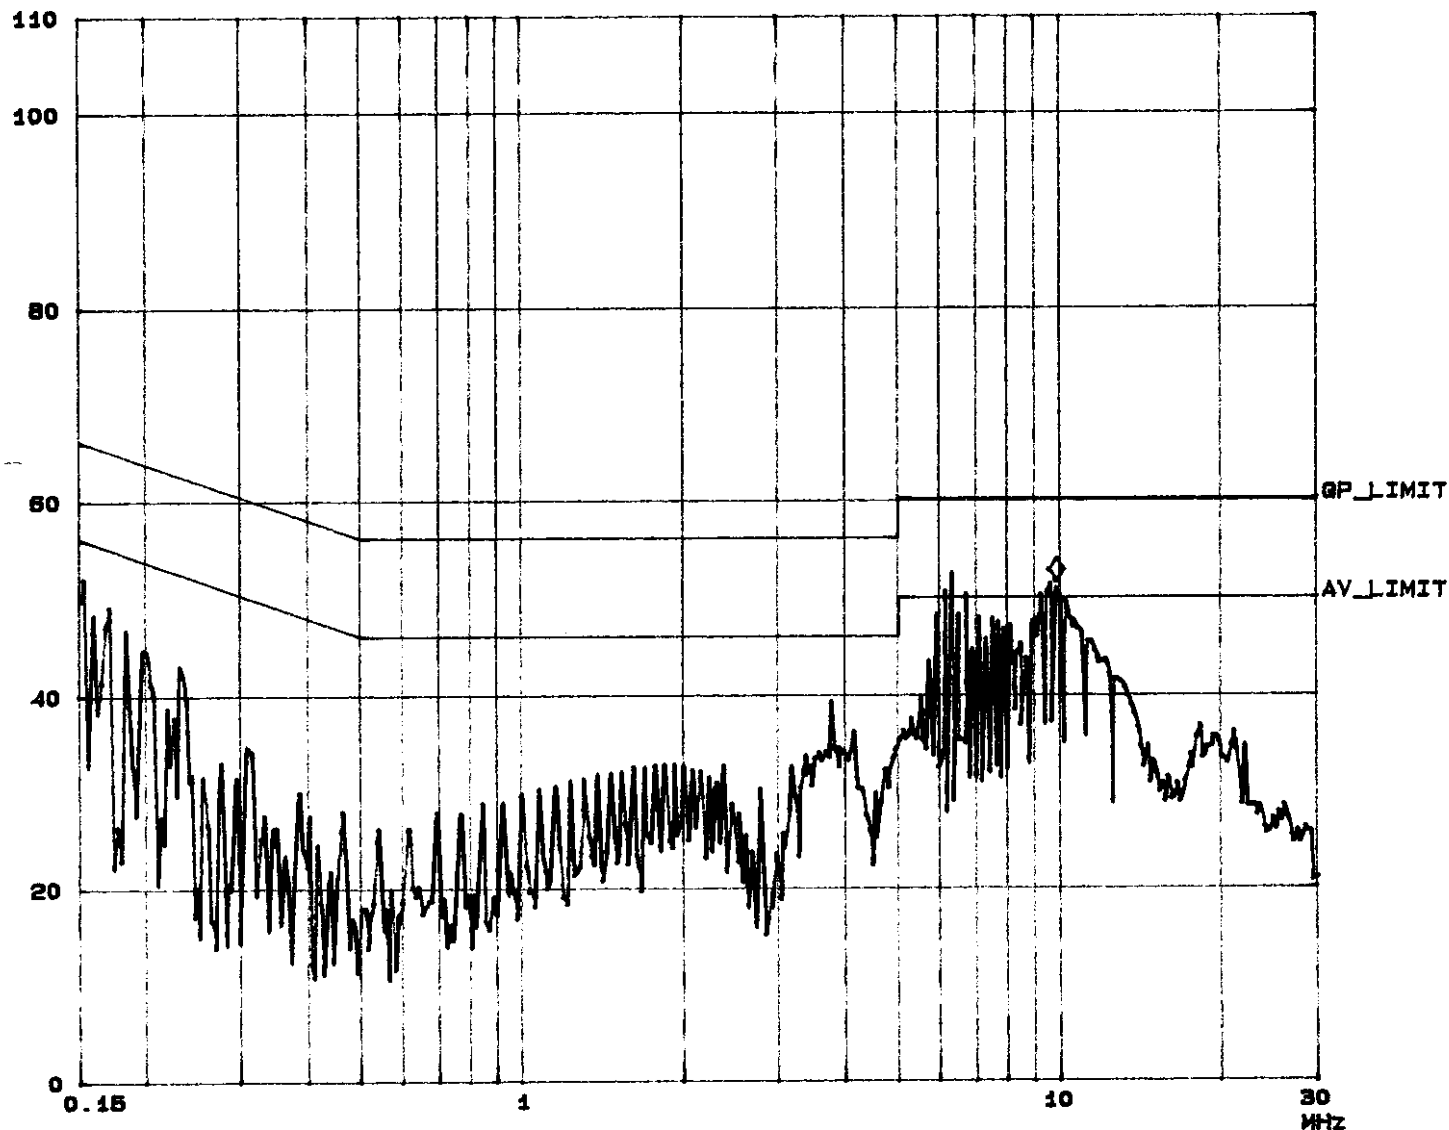



4.7 TEST DATA OF RADIATED EMISSION (A)

EUT: LCD MONITORMODEL: LT561EMODE: 1ANT. POLARITY: HorizontalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
149.53	12.4	13.1	25.5	30.0	-4.5
182.05	10.9	14.3	25.2	30.0	-4.8
192.03	11.0	15.0	26.0	30.0	-4.0
208.02	11.8	14.8	26.6	30.0	-3.4
214.58	12.5	14.7	27.2	30.0	-2.8
227.49	13.7	11.8	25.5	30.0	-4.5
264.07	17.4	15.3	32.7	37.0	-4.3
288.07	16.4	15.2	31.6	37.0	-5.4
403.05	21.8	9.5	31.3	37.0	-5.7

REMARKS:

1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION (A)

EUT: LCD MONITORMODEL: LT561EMODE: 1ANT. POLARITY: VerticalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
56.50	7.9	17.3	25.2	30.0	-4.8
69.50	7.6	18.3	25.9	30.0	-4.1
127.08	12.8	12.7	25.5	30.0	-4.5
145.50	13.6	11.4	25.0	30.0	-5.0
162.53	13.0	10.6	23.6	30.0	-6.4
192.04	11.6	13.4	25.0	30.0	-5.0
214.51	12.6	12.2	24.8	30.0	-5.2
216.06	12.7	13.4	26.1	30.0	-3.9
450.00	22.6	11.7	34.3	37.0	-2.7
900.28	31.5	.9	32.4	37.0	-4.6

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



4.8 TEST DATA OF RADIATED EMISSION (B)

EUT: LCD MONITORMODEL: LT561EMODE: 2ANT. POLARITY: HorizontalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
132.01	14.2	11.4	25.6	30.0	-4.4
143.02	13.4	9.8	23.2	30.0	-6.8
149.52	12.4	12.8	25.2	30.0	-4.8
182.03	10.9	14.8	25.7	30.0	-4.3
192.03	11.0	11.6	22.6	30.0	-7.4
195.02	11.0	12.4	23.4	30.0	-6.6
208.06	11.8	12.8	24.6	30.0	-5.4
214.54	12.5	10.6	23.1	30.0	-6.9

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION (B)

EUT: LCD MONITORMODEL: LT561EMODE: 2ANT. POLARITY: VerticalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
74.74	8.1	12.7	20.8	30.0	-9.2
120.30	12.4	8.7	21.1	30.0	-8.9
132.04	13.1	12.9	26.0	30.0	-4.0
149.52	13.5	10.3	23.8	30.0	-6.2
159.51	13.3	11.0	24.3	30.0	-5.7
180.57	10.8	13.1	23.9	30.0	-6.1
192.00	11.6	13.0	24.6	30.0	-5.4
195.03	11.8	8.6	20.4	30.0	-9.6

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



4.9 TEST DATA OF RADIATED EMISSION (C)

EUT: LCD MONITORMODEL: LT541FMODE: 3ANT. POLARITY: HorizontalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
110.50	13.9	7.0	20.9	30.0	-9.1
117.02	14.4	10.3	24.7	30.0	-5.3
143.01	13.4	11.8	25.2	30.0	-4.8
182.03	10.9	11.9	22.8	30.0	-7.2
194.96	11.0	13.6	24.6	30.0	-5.4
227.51	13.7	14.0	27.7	30.0	-2.3
450.00	22.4	12.4	34.8	37.0	-2.2

REMARKS:

1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION (C)

EUT: LCD MONITORMODEL: LT541FMODE: 3ANT. POLARITY: VerticalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
84.51	9.0	12.0	21.0	30.0	-9.0
84.51	9.0	15.5	24.5	30.0	-5.5
110.51	12.8	13.5	26.3	30.0	-3.7
117.04	12.5	13.2	25.7	30.0	-4.3
194.98	11.8	14.4	26.2	30.0	-3.8
216.09	12.7	12.3	25.0	30.0	-5.0
260.01	15.7	13.7	29.4	37.0	-7.6
292.53	16.1	15.4	31.5	37.0	-5.5
450.20	22.6	12.0	34.6	37.0	-2.4

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



4.10 TEST DATA OF RADIATED EMISSION (D)

EUT: LCD MONITORMODEL: LT541CMODE: 4ANT. POLARITY: HorizontalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
117.03	14.4	9.4	23.8	30.0	-6.2
143.03	13.4	8.5	21.9	30.0	-8.1
182.00	10.9	11.3	22.2	30.0	-7.8
195.04	11.0	13.9	24.9	30.0	-5.1
204.01	11.5	12.4	23.9	30.0	-6.1
216.04	12.6	12.1	24.7	30.0	-5.3
227.56	13.7	12.3	26.0	30.0	-4.0
450.21	22.4	10.5	32.9	37.0	-4.1

REMARKS:

1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
3. The other emission levels were very low against the limit.
4. Margin value = Emission level - Limit value



TEST DATA OF RADIATED EMISSION (D)

EUT: LCD MONITORMODEL: LT541CMODE: 4ANT. POLARITY: VerticalDETECTOR FUNCTION: Quasi-peak6 dB BANDWIDTH: 120 kHzFREQUENCY RANGE: 30-1000 MHzMEASURED DISTANCE: 10 M

Frequency (MHz)	Correction Factor (dB/m)	Reading Data (dBuV)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)
84.51	9.0	17.5	26.5	30.0	-3.5
110.54	12.8	13.4	26.2	30.0	-3.8
116.99	12.5	11.5	24.0	30.0	-6.0
149.49	13.5	10.1	23.6	30.0	-6.4
195.06	11.8	12.6	24.4	30.0	-5.6
216.07	12.7	11.6	24.3	30.0	-5.7
292.53	16.1	17.4	33.5	37.0	-3.5
344.55	18.9	8.6	27.5	37.0	-9.5
416.04	22.0	9.5	31.5	37.0	-5.5
450.21	22.6	12.0	34.6	37.0	-2.4

- REMARKS:
1. Emission level (dBuV/m) = Correction Factor (dB/m) + Meter Reading (dBuV).
 2. Correction Factor (dB/m) = Ant. Factor (dB/m) + Cable loss (dB)
 3. The other emission levels were very low against the limit.
 4. Margin value = Emission level - Limit value



6. ATTACHMENT 1 - TECHNICAL DESCRIPTION OF EUT

Specifications :

* Panel Part:

LCD: 15.0" 1024x768 TFT (Thin Film Transistor)

* Monitor part:

Effective Display Size: (Diagonal) 15.0 inch (304.1 mm x 228.1 mm)

Viewable area (~17" CRT)

Resolution & Display Colors: XGA (1024x768) 60/70/75/85 Hz

SVGA (800x600) 56/60/72/75/85 Hz

VGA (640x480) 50/60/72/75/85 Hz

US Text (720x400) 70/85 Hz

* Display Color 256K Max. (based on graphic card setting)

* XGA is standard mode, SVGA and VGA can be expanded close to XGA size

Pixel pitch: 0.297 mm RGB Stripe

Brightness (Luminance): Two Lamps (CCFT) for Monitor 200 cd/m2 Typ.

Contrast ratio: 200:1 Min.

Response time: 80 ms Typ.

View angle: Left/Right +/- 70 deg. (H), Up/Down +70/-50 deg. (V)

User controls:

Front Panel POWER LED, POWER KEY, MENU, SELECT-R, SELECT-L, +, -, SP+, SP-, MUTE

Rear Cover Video In (D-SUB), DC In (+12V)

Input Signal: Video --- Analog 0.7 Volts peak to peak
Sync --- TTL Pos, or Neg.

DDC2B Plug & Play Compatible

* Power Supply: 35 Watts Max. (ON), Power Down Mode < 5 Watts (SUSPEND/OFF)

AC/DC Adapter: Input: 90-264 V A/C I/P, +12V DC O/P



7. APPENDIX - INFORMATION OF THE TESTING LABORATORY

Information of the testing laboratory

We, ADT Corp., is founded in 1988, to provide our best service in EMC and Safety consultation. Our laboratory is accredited by the following approval agencies according to ISO/IEC Guide 25 or EN 45001:

- | | |
|---------------|---------------------|
| ● USA | FCC, UL, NVLAP |
| ● Germany | TUV Rheinland |
| | TUV Product Service |
| ● Japan | VCCI |
| ● New Zealand | RFS |
| ● Norway | NEMKO |
| ● U.K. | INCHCAPE, SGS |
| ● R.O.C. | BSMI |

Enclosed please find some certificates of our laboratory obtained from approval agencies. If you have any comments, please feel free to contact us with the following:

Lin Kou EMC Lab.:

Tel: 886-2-26032180

Fax: 886-2-26022943

Hsin Chu EMC Lab:

Tel: 886-35-935343

Fax: 886-35-935342

Lin Kou Safety Lab.:

Tel: 886-2-26093195

Fax: 886-2-26093184

Design Center:

Tel: 886-2-26093195

Fax: 886-2-26093184

E-mail: service@mail.adt.com.tw<http://www.adt.com.tw>

FEDERAL COMMUNICATIONS COMMISSION

7438 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1588 (ext-218)
Facsimile: 301-344-3050

October 21, 1996

IN REPLY REFER TO
31040/SIT
1300F2

Advance Data Technology Corporation
12F, No. 1, Sec. 4
Nan-King East Rd.
Taipei, Taiwan, R.O.C.

Attention: Harris W. Lai


Re: Measurement facility located at above address, Site No. 1
(3 and 10 meters)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the regulated and AC line conducted test site criteria in ANSI C83.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is published periodically and is also available on the Laboratory's Public Access Link as described in the enclosed Public Notice.

Sincerely,



Thomas W. Phillips
Electronics Engineer
Customer Service Branch

Enclosure:
PAL PN

FEDERAL COMMUNICATIONS COMMISSION

7438 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1588 (ext-218)
Facsimile: 301-344-3050

September 15, 1996

IN REPLY REFER TO
31040/SIT
1300F2

Advance Data Technology Corporation
12F, No. 1, Sec. 4
Nan-King E. Rd.
Taipei, Taiwan, R.O.C.

Attention: Harris Lai


Re: Measurement facility located at Lin Kou, Sites 2 & 3
(3 & 10 meters)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has also been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list is available on the Internet at the FCC Website www.fcc.gov under Electronic Filing.

Sincerely,



Thomas W. Phillips
Electronics Engineer
Customer Service Branch

FEDERAL COMMUNICATIONS COMMISSION

7438 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1588 (ext-218)
Facsimile: 301-344-3050

April 17, 1996

IN REPLY REFER TO
31040/SIT
1300F2

Advance Data Technology Corporation
12F, No. 1, Sec. 4
Nan-King E. Rd.
Taipei, Taiwan, R.O.C.

Attention: Harris W. Lai


Re: Measurement facility located at above address
Site No. 4 (3 and 10 meters)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the regulated and AC line conducted test site criteria in ANSI C83.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is published periodically and is also available on the Laboratory's Public Access Link as described in the enclosed Public Notice.

Sincerely,



Thomas W. Phillips
Electronics Engineer
Customer Service Branch

Enclosure:
PAL PN

FEDERAL COMMUNICATIONS COMMISSION

7438 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1588 (ext-218)
Facsimile: 301-344-3050

October 21, 1996

IN REPLY REFER TO
31040/SIT
1300F2

Advance Data Technology Corporation
12F, No. 1, Sec. 4
Nan-King East Rd.
Taipei, Taiwan, R.O.C.

Attention: Harris W. Lai

Re: Measurement facility located at above address, Site No. 5
(3 and 10 meters)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the regulated and AC line conducted test site criteria in ANSI C83.4-1992. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is published periodically and is also available on the Laboratory's Public Access Link as described in the enclosed Public Notice.

Sincerely,



Thomas W. Phillips
Electronics Engineer
Customer Service Branch

Enclosure:
PAL PN

FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1585 (ext-218)
Facsimile: 301-344-2050

February 25, 1998

IN REPLY REFER TO
31040/SIT
1300F2

Advance Data Technology Corporation
12F, No. 1, Sec. 4, Nan-King E. Rd.
Taipei, Taiwan

Attention: Harris W. Lai

Re: Measurement facility located at above address, Site No. 6
(3 and 10 meters)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that the filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has been also added to our list of those who perform these measurement services for the public on a fee basis. This list is updated monthly and is available on the Laboratory's Public Access Link (PAL) at 301-725-1072, and also on the Internet at the FCC Website www.fcc.gov/ceftfor/database/atestsite/.

Sincerely,

Thomas W. Phillips

Thomas W. Phillips
Electronics Engineer
Customer Service Branch

FEDERAL COMMUNICATIONS COMMISSION

7435 Oakland Mills Road
Columbia, MD 21046
Telephone: 301-725-1585 (ext-218)
Facsimile: 301-344-2050

July 16, 1998

IN REPLY REFER TO
31040/SIT
1300F2

Advance Data Technology Corporation
12F, No. 1, Sec. 4
Nan-King East Rd.
Taipei, Taiwan, R.O.C.

Attention: Harris W. Lai

Re: Measurement facility located at Han Chu (3 & 10 meter site)

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for certification or notification under Parts 15 or 18 of the Commission's Rules. Our list will also indicate that the facility complies with the radiated and AC line conducted test site criteria in ANSI C63.4-1992. Please note that the filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

Per your request, the above mentioned facility has also been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list is available on the Internet at the FCC Website www.fcc.gov under Electronic Filing.

Sincerely,

Thomas W. Phillips

Thomas W. Phillips
Electronics Engineer
Customer Service Branch

FEDERAL COMMUNICATIONS COMMISSION

Equipment Authorization Division
7435 Oakland Mills Road
Columbia, MD 21046

December 21, 1998

Registration Number: 92753

Advance Data Technology Corporation
12F, No. 1, Sec. 4
Nan-King East Road
Taipei
Taiwan, R.O.C.

Attention: Harris Lai

Re: Measurement facility located at Han-Chu, Site B
3 & 10 meter site

Gentlemen:

Your submission of the description of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC Rules. The description has, therefore, been placed on file and the name of your organization added to the Commission's list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that this filing must be updated for any changes made to the facility, and at least every three years the data on file must be certified as current.

If requested, the above mentioned facility has been added to our list of those who perform these measurement services for the public on a fee basis. An up-to-date list of such public test facilities is available on the Internet on the FCC Website at WWW.FCC.GOV, Electronic Filing, SET Equipment Authorization Electronic Filing.

Sincerely,

Thomas W. Phillips

Thomas W. Phillips
Electronics Engineer



Technischer Überwachungs-Verein Rheinland

Certificate of Appointment

No. I-9763928-9707

The applicant:

Advance Data Technology (ADT) Corporation
No. 47, 14 Ling, Chis Pan Tsuen, Lin Kou Hotang, Taipei Hsien,
Taiwan, R.O.C.

has been authorized to carry out EMC tests by order and under supervision of
TUV Rheinland according to

CISPR16, EN 55 011:1991, EN 55 014:1993, EN 55 015:1993, EN 55 022:1994/A1,
EN 55 104:1995, EN 60 525-2:1987, EN 61 000-3-2:1995, EN 61 000-3-3:1995,
EN 50 081-1:1992, EN 50 082-1:1992, EN 50 081-2:1993, EN 50 082-2:1995,
IEC 801-2:1991, IEC 801-3:1984, IEC 801-4:1988, IEC 801-5:1990, EN 61 000-4-2:1995,
ENV 50 146:1993, ENV 50 141:1993, IEC 1 000-4-3:1995, EN 61 000-4-4:1995,
EN 61 000-4-5:1995, EN 61 000-4-6:1993, EN 61 000-4-11:1994, EN 60 601-1-2:1993

An inspection of the facility was conducted according to the Document
"Approval of Test Site" with reference to EN 45 001 by a TUV Rheinland inspector.

Audit Report No. P 9763928E01, Rev. A

This certificate is valid until the next scheduled inspection or up to 15 month,
at the discretion of TUV Rheinland.

TUV Rheinland Taiwan Ltd.
Taipei, 16.07.1997

Dieter G. Lück
Dieter G. Lück
Vice General Manager
Product Safety Department

U. Meyer
Dipl.-Ing. U. Meyer
Auditor

The contents of the Filing and Certificate Registered are an integral part of this certificate.



CERTIFICATE

Facility: NO. 1 SITE

(Radiation 3 and 10 meter site)

Company : Advance Data Technology Corp.

Address : No.47, CHIA PAU TSUEN, LIN KOU HSIANG,
TAIPEI HSIEN, TAIWAN

*This is to certify that the following measuring facility
has been registered in accordance with the Regulations
for Voluntary Control Measures.*

Registration No. : R-236

Date of Registration : July 1, 1998

This Certificate is valid until September 30, 2001

Voluntary Control Council for Interference
Information Technology Equipment



CERTIFICATE

Facility: NO. 2 SITE

(Radiation 3 and 10 meter site)

Company : Advance Data Technology Corp.

Address : No.47, CHIA PAU TSUEN, LIN KOU HSIANG,
TAIPEI HSIEN, TAIWAN

*This is to certify that the following measuring facility
has been registered in accordance with the Regulations
for Voluntary Control Measures.*

Registration No. : R-237

Date of Registration : July 1, 1998

This Certificate is valid until September 30, 2001

Voluntary Control Council for Interference
Information Technology Equipment



CERTIFICATE

Facility: NO. 2 SITE

(Conducted Interference Measurement)

Company : Advance Data Technology Corp.

Address : No.47, CHIA PAU TSUEN, LIN KOU HSIANG,
TAIPEI HSIEN, TAIWAN

*This is to certify that the following measuring facility
has been registered in accordance with the Regulations
for Voluntary Control Measures.*

Registration No. : C-240

Date of Registration : July 1, 1998

This Certificate is valid until September 30, 2001

Voluntary Control Council for Interference
Information Technology Equipment



CERTIFICATE

Facility: No.3 Site

(Radiation 3 and 10 meter site)

Company : Advance Data Technology Corp.

Address : No.47 CHIA PAU TSUEN, LIN KOU HSIANG, TAIPEI
HSIEN, TAIWAN

*This is to certify that the following measuring facility
has been registered in accordance with the Regulations
for Voluntary Control Measures*

Registration No. : R-269

Date of Registration : January 1, 1999

This Certificate is valid until March 31, 2002

Voluntary Control Council for Interference
Information Technology Equipment





CERTIFICATE

Facility: No.3 Site
 (Conducted Interference Measurement)
 Company : Advance Data Technology Corp.
 Address : No.47 CHIA PAU TSUEN, LIN KOU HSIANG, TAIPEI
 HSIEN, TAIWAN

*This is to certify that the following measuring facility
 has been registered in accordance with the Regulations
 for Voluntary Control Measures*

Registration No. : C-274
 Date of Registration : January 1, 1999
 This Certificate is valid until March 31, 2002

Voluntary Control Council for Interference by
 Information Technology Equipment



CERTIFICATE

Facility: No.4 Site
 (Radiation 3 and 10 meter site)
 Company : ADVANCE DATA TECHNOLOGY
 CORP.
 Address : No.47, CHIA PAU TSUEN, LIN KOU
 HSIANG, TAIPEI HSIEN, TAIWAN

*This is to certify that the following measuring facility
 has been registered in accordance with the Regulations
 for Voluntary Control Measures, Article 8.*

Registration No. : R-489
 Date of Registration : December 20, 1996
 This Certificate is valid until December 31, 1999

Voluntary Control Council for Interference by
 Information Technology Equipment



CERTIFICATE

Facility: No.5 Site
 (Radiation 3 and 10 meter site)
 Company : ADVANCE DATA TECHNOLOGY
 CORP.
 Address : No.47, CHIA PAU TSUEN, LIN KOU
 HSIANG, TAIPEI HSIEN, TAIWAN

*This is to certify that the following measuring facility
 has been registered in accordance with the Regulations
 for Voluntary Control Measures, Article 8.*

Registration No. : R-490
 Date of Registration : December 20, 1996
 This Certificate is valid until December 31, 1999

Voluntary Control Council for Interference by
 Information Technology Equipment



CERTIFICATE

Facility: ADVANCE DATA TECHNOLOGY
 CORPORATION
 (Conducted Interference Measurement)
 Company : ADVANCE DATA TECHNOLOGY
 CORPORATION
 Address : No.47, CHIA PAU TSUEN, LIN KOU
 HSIANG, TAIPEI HSIEN, TAIWAN

*This is to certify that the following measuring facility
 has been registered in accordance with the Regulations
 for Voluntary Control Measures, Article 8.*

Registration No. : C-505
 Date of Registration : December 20, 1996
 This Certificate is valid until December 31, 1999

Voluntary Control Council for Interference by
 Information Technology Equipment





CERTIFICATE

Facility: Advance Data Technology Corp Site 6
(Radiation 3 and 10 meter site)
Company : Advance Data Technology Corp.
Address : No.47, CHIA PAU TSUEN, LIN KOU HSIANG,
TAIPEI HSIEN, TAIWAN

*This is to certify that the following measuring facility
has been registered in accordance with the Regulations
for Voluntary Control Measures.*

Registration No. : R-728
Date of Registration : May 19, 1998
This Certificate is valid until June 30, 2001

Voluntary Control Council for Interference
Information Technology Equipment




CERTIFICATE

Facility: Advance Data Technology Corp Site A
(Radiation 3 and 10 meter site)
Company : Advance Data Technology Corp.
Address : NO. 41-1, LI LIAO KENG, 9 LONG, WU LIANG TSUEN,
CHIUNG LIN HSIANG, HSIN CHU HSIEN, TAIWAN

*This is to certify that the following measuring facility
has been registered in accordance with the Regulations
for Voluntary Control Measures*

Registration No. : R-782
Date of Registration : September 29, 1998
This Certificate is valid until September 30, 2001

Voluntary Control Council for Interference
Information Technology Equipment



CERTIFICATE

Facility: Advance Data Technology Corp Shielded Room A
(Conducted Interference Measurement)
Company : Advance Data Technology Corp.
Address : NO. 41-1, LI LIAO KENG, 9 LONG, WU LIANG TSUEN,
CHIUNG LIN HSIANG, HSIN CHU HSIEN, TAIWAN

*This is to certify that the following measuring facility
has been registered in accordance with the Regulations
for Voluntary Control Measures*

Registration No. : C-817
Date of Registration : September 29, 1998
This Certificate is valid until September 30, 2001

Voluntary Control Council for Interference
Information Technology Equipment





Worldwide Testing and Certification

ELA 4

EMC Laboratory Authorization Aut. No. : ELA 112

EMC Laboratory: ADT Advance Data Technology Corporation
No. 47, 14 Ling, Chia Pau Trees,
Lia Koo Hsiang, Taipei Hsien,
Taiwan R.O.C.

Scope of Authorization: All CENELEC standards (ENs) for EMC that are listed on the accompanying page, and, all of the corresponding CISPR, IEC, and ISO EMC standards that are listed on the accompanying page.

This Authorization Document confirms that the above mentioned EMC Laboratory has been validated against EN 45001 and found to be compliant. The laboratory also fulfils the conditions described in Nemko Document ELA 10. During Nemko's visit to the laboratory on 9. October 1996, an assessment was made of the relevant parts of your organisation - i.e. facilities, personnel qualifications, test equipment, and testing practices. It was found that the EMC Laboratory is capable of performing tests within the Scope of Authorization given on the accompanying page. Accordingly, Nemko will accept your test reports as a basis for attesting conformity to these EMC Standards for the products in question under either the European Union EMC Directive or the European Union Automotive EMC Directive (as applicable).

In case of applications for Product Certification(s) to be issued by Nemko, your EMC Laboratory's test report(s) will be accepted by Nemko if they are enclosed with the Application Form submitted by the manufacturer.

In order to maintain the Authorization, the information given in the enclosed ELA-INFOS (if any) must be carefully followed. Nemko is to be promptly notified about any changes in the situation at your EMC Laboratory which may affect the basis for this Authorization. The Authorization may at any time be withdrawn if the conditions are no longer considered to be fulfilled.

The Authorization is valid through February 28, 1999.

Oslo, 13 March 1998

For Nemko AS:

Kjell Bergh
Kjell Bergh, Head of EMC Section

Postal address:
P.O. Box 75 Blindern
N-0407 OSLO, NORWAY

Telephone: +47 22 16 00 00
Fax: +47 22 16 00 00



Worldwide Testing and Certification

ELA 4

EMC Laboratory Authorisation Aut. No. : ELA 112 (Page 2 of 2)

SCOPE OF AUTHORIZATION

GENERIC & PRODUCT-FAMILY STANDARDS

EN 50081-1, EN 50081-2	EN 50082-1, EN 50082-2	EN 55011, Gr. 1, CISPR 11
EN 55013, CISPR 13	EN 55014-1, CISPR 14-1	EN 55015, CISPR 15
EN 55022	EN 60555-2, IEC 555-2, EN 61000-3-2, IEC 61000-3-2	EN 60555-3, IEC 555-3, EN 61000-3-3, IEC 61000-3-3

BASIC STANDARDS

EN 61000-4-2, IEC 61000-4-2, IEC 301-2	EN 61000-4-3, ENV 50140, ENV 50204, IEC 61000-4-3, IEC 801-3	EN 61000-4-4, IEC 61000-4-4, IEC 301-4
EN 61000-4-5, IEC 61000-4-5	EN 61000-4-6, ENV 50141, IEC 61000-4-6	EN 61000-4-8, IEC 61000-4-8
EN 61000-4-11, IEC 61000-4-11		

Oslo, 13 March 1998

Kjell Bergh
Kjell Bergh, Nemko EMC Services

Postal address:
P.O. Box 75 Blindern
N-0407 OSLO, NORWAY

Telephone: +47 22 16 00 00
Fax: +47 22 16 00 00

World-wide Testing and
Certification

ELA 4

EMC Laboratory Authorization Aut. No. : ELA 112-b Hsin Chu EMC Laboratory

EMC Laboratory: ADT Advance Data Technology Corporation
Hsin Chu EMC Laboratory
No. 21-1, La Line Kang, 9 Ling,
Wu Lung Tseu, Chung Lia Hsiang,
Hsin Chu Hsien, Taiwan R.O.C.

Scope of Authorization: All CENELEC standards (ENs) for EMC that are listed on the accompanying page, and, all of the corresponding CISPR, IEC, and ISO EMC standards that are listed on the accompanying page.

This Authorization Document confirms that the above mentioned EMC Laboratory has been validated against EN 45001 and found to be compliant. The laboratory also fulfils the conditions described in Nemko Document ELA 10. Based on submitted material, an assessment has been made of the relevant parts of your organisation - i.e. facilities, personnel qualifications, test equipment, and testing practices. It was found that the EMC Laboratory is capable of performing tests within the Scope of Authorization given on the accompanying page. Accordingly, Nemko will accept your test reports as a basis for attesting conformity to these EMC Standards for the products in question under the European Union EMC Directive.

In case of applications for Product Certification(s) to be issued by Nemko, your EMC Laboratory's test report(s) will be accepted by Nemko if they are enclosed with the Application Form submitted by the manufacturer.

In order to maintain the Authorization, the information given in the enclosed ELA-INFOS (if any) must be carefully followed. Nemko is to be promptly notified about any changes in the situation at your EMC Laboratory which may affect the basis for this Authorization. The Authorization may at any time be withdrawn if the conditions are no longer considered to be fulfilled.

The Authorization is valid through February 28, 1999.

Oslo, 15 December 1998

For Nemko AS:

Kjell Bergh
Kjell Bergh, Head of EMC Section

Postal address:
P.O. Box 75 Blindern

Telephone: +47 22 16 00 00
Fax: +47 22 16 00 00

World-wide Testing and
Certification

ELA 4

EMC Laboratory Authorisation Aut. No. : ELA 112-b Hsin Chu EMC Laboratory (Page 2 of 2)

SCOPE OF AUTHORIZATION

GENERIC & PRODUCT-FAMILY STANDARDS

EN 50081-1, EN 50081-2	EN 50082-1, EN 50082-2	EN 55011, Gr. 1, CISPR 11
EN 55014-1, CISPR 14-1 (except discontinuous noise)	EN 55014-2, CISPR 14-2	EN 55022, CISPR 22
EN 55024, CISPR 24	EN 60555-2, IEC 60555-2, EN 61000-3-2, IEC 61000-3-2	EN 60555-3, IEC 60555-3, EN 61000-3-3, IEC 61000-3-3

BASIC STANDARDS

EN 61000-4-2, IEC 61000-4-2,	EN 61000-4-3, IEC 61000-4-3, ENV 50204	EN 61000-4-4, IEC 61000-4-4
EN 61000-4-5, IEC 61000-4-5	EN 61000-4-6, ENV 50141, IEC 61000-4-6	EN 61000-4-8, IEC 61000-4-8
EN 61000-4-11, IEC 61000-4-11		

Oslo, 15 December 1998

Kjell Bergh
Kjell Bergh, Nemko EMC Services

Postal address:
P.O. Box 75 Blindern

Telephone: +47 22 16 00 00
Fax: +47 22 16 00 00

NVLAP[®]
National Institute of Standards and Technology
National Voluntary Laboratory Accreditation Program

Scope of Accreditation

ISO/IEC GUIDE 25:1990
ISO 9002:1987

Page: 1 of 1
NVLAP LAB CODE: 200102-0

ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS

ADVANCE DATA TECHNOLOGY CORPORATION
No. 47, 14 Ling, Chia Pau Tsuen,
Lun Kwei Hsueh
Taipei Hsien
TAIWAN
Mr. Hsiao W. Lu
Phone: 886-2-6032180 Fax: 886-2-6032943

NVLAP Code Designation / Description

International Special Committee on Radio Interference (CISPR) Methods

12/CISPR IEC/CISPR 11:1993: Limits and methods of measurement of radio disturbance characteristics of information technology equipment

Federal Communications Commission (FCC) Methods

12/F01 FCC Method - 47 CFR Part 15 - Digital Devices

12/F01a Conducted Emissions, Power Lines, +50 KHz to 30 MHz

12/F01b Radiated Emissions

Australian Standards referred to by clauses in AUSTEL Technical Standards

12/TS1 AS/NZS 3548: Electromagnetic Interference - Limits and Methods of Measurement of Information Technology Equipment

December 31, 1999

Effective through

NVLAP 015 (11/99)

United States Department of Commerce
National Institute of Standards and Technology

NVLAP[®]

ISO/IEC GUIDE 25:1990
ISO 9002:1987

Certificate of Accreditation

ADVANCE DATA TECHNOLOGY CORPORATION
TAIPEI HSIEN
TAIWAN

is recognized under the National Voluntary Laboratory Accreditation Program for voluntary compliance with criteria established in Title 15, Part 255 of Federal Regulations. These criteria encompass the requirements of EMC/RFI, Guide 25 and the relevant requirements of ISO 9002:1987, AS/NZS 3548:1993, and the requirements of validation of test results. Accreditation is available for specific services, based on the scope of accreditation for:

**ELECTROMAGNETIC COMPATIBILITY AND TELECOMMUNICATIONS
FCC**

December 31, 1999

NVLAP Lab Code: 200102-0

COMMERCE
MINISTRY OF COMMERCE
Taichung, Taiwan

ENG 3/8
A/D

6th January 1999

Advance Data Technology Corporation
No. 47
14 Ling
Chia Pau Tsuen
Lun Kwei Hsueh
Taipei
R.O.C.

Attention: Ms Sharon Hsueh

Dear Ms Hsueh

LABORATORY APPROVAL

Thank you for your submission of 5th January regarding the re-certification of your testing laboratory to the Ministry of Commerce's laboratory approval criteria.

I am pleased to advise that your submission has been successful and your approval has been extended until 30th June 1999. At this time, the Approved Laboratory scheme will cease operation with the implementation of the new telecommunications regulations. Test reports from your laboratory will be accepted under the new framework. Please find enclosed a copy of the Ministry's discussion paper, DP10, outlining the proposed compliance process from 1 January 1999.

If you have any further questions on this matter please do not hesitate to contact me.

Yours faithfully
Brian Emmett

Technical Officer (Regulatory)
e-mail: brian.emmett@moc.gov.tw

RADIO SPECTRUM MANAGEMENT GROUP

Department and R&M Management Branch, One B, 32 Mananville Street, Raffles City, Singapore, New 7 House
P.O. Box 3562, Telephone (755) 343 1245, Fax (65) 343 1210

SGS

Certificate of Assessment

This is to Certify

That **ADVANCE DATA TECHNOLOGY CORP.**

has been approved as a supplier of
"EMC TESTING SERVICES"
and in particular for specifications implemented by

The EC DIRECTIVE on EMC

SGS EMC SERVICES

in accordance with
SGS Laboratory Approval Scheme

The scope of approval is detailed in the
Schedule of Assessment

SGS EMC Services
Suite 101, 102
Boulevard
Co. Durham
DN6 5AD
UNITED KINGDOM

Issued
For and on behalf of
SGS EMC Services
J.S. WEALEY
General Manager
Date: 03/03/99

經濟部商品檢驗局(通)

中華民國八十五年
檢字(八十五)三字第
號

受文者：誠信科技股份有限公司

行文單位：正本：誠信科技股份有限公司
副本：本局第二組(二份)、第三組、秘書室(各一份)、各分局(均函附件)

主旨：有關貴公司電腦相容性測試實驗室申請本局電腦相容性測試認可案，業經實地評鑑結果，同意認可登錄，請查照。

說明：

一、貴公司八十五年十月四日未列字號函。

二、認可登錄範圍如下：

實驗室名稱：誠信科技股份有限公司電腦相容性測試實驗室

實驗室地址：台北縣林口鄉馬場村二鄰之號

認可代號	認可產品類別	報告簽發人
20823	(一)資訊設備	賴輝煌
20823	(二)系統集成與相關產品(電腦、網路設備)	賴輝煌
20823	(三)系統集成與相關產品(網路設備)	賴輝煌
20823	(四)系統集成與相關產品(網路設備)	賴輝煌

評鑑標準：ISO Guide 25 (1990年版)

三、本實驗室認可期限三年，自八十五年十月二十二日起至八十八年十月二十一日止，評鑑通過後每兩年乙次，得視需要增加檢量次數，惟首次評鑑後須於六個月內執行。

四、上開已認可領域如有變更事項，請於變更日起二週內函送相關資料至本局辦理。

五、貴中心執行本局指定之檢驗業務，依「商品檢驗法」第二十六條規定以執行公務。

六、檢送「商品電腦相容性測試實驗室管理作業要點」乙份。

七、檢送「商品電腦相容性測試報告」格式乙份，請自行印製使用。

局長許鵬翔

依照分層負責規定授權單位主管執行

經濟部商品檢驗局(通)

中華民國八十六年
檢字(八十六)三字第
號

受文者：誠信科技股份有限公司

附件如文

1295

行文單位：正本：誠信科技股份有限公司

副本：本局第二組(二份)、第三組、秘書室(請刊登於國際網際網路)、各分局(均函附件)

主旨：有關貴公司電腦相容性測試實驗室申請本局電腦相容性測試認可案，業經實地評鑑結果，同意認可登錄，請查照。

說明：

一、貴公司八十六年二月二十一日未列字號函。

二、認可登錄範圍如下：

實驗室名稱：誠信科技股份有限公司電腦相容性測試實驗室

實驗室地址：台北縣林口鄉馬場村二鄰之號

認可代號	認可產品類別	報告簽發人
1295	(一)資訊設備	賴輝煌
1295	(二)系統集成與相關產品(電腦、網路設備)	賴輝煌
1295	(三)系統集成與相關產品(網路設備)	賴輝煌
1295	(四)系統集成與相關產品(網路設備)	賴輝煌

評鑑標準：ISO Guide 25 (1990年版)

三、本實驗室認可期限自八十六年七月七日起至八十八年十月二十一日止，評鑑通過後每兩年乙次，得視需要增加檢量次數，惟首次評鑑後須於六個月內執行。

四、上開已認可領域如有變更事項，請於變更日起二週內函送相關資料至本局辦理。

五、貴公司執行本局指定之檢驗業務，依「商品檢驗法」第二十六條規定以執行公務。

六、檢送「商品電腦相容性測試實驗室管理作業要點」格式乙份，請自行印製使用。

局長陳佐鎮

依照分層負責規定授權單位主管執行



TEL:(02)2603-2180-3

FAX:(02)2602-2943

TEST REPORT & CERTIFICATION SERVICES QUESTIONNAIRE

We, ADT Corp., would like to provide you a high quality report and certification in a timely manner. To achieve this goal, we would like you to response to the brief questions listed below in this questionnaire. Therefore your feed back is vital to us in order to determine how good our services are, and what areas could be improved.

Please indicate beside each question what you feel is the rating. Also, feel free to make comments and suggestions directly on this questionnaire, or by attaching separate sheet. The completed form should then be returned by mail or FAX to Harris W. Lai, Director. Your cooperation and effort are truly appreciated.

TEST REPORT NUMBER : _____

	YES	NO
1. Was the information presented clearly	[]	[]
2. Was the report complete ?	[]	[]
3. Was the report timely ?	[]	[]
4. Did the report satisfy your requirement ?	[]	[]
5. Was the Certification (if any) completed in the scheduled time ?	[]	[]
Your working field ?	[] Engineering	[] Manufacturing
	[] Marketing	[] Other

YOUR CONTACT INFORMATION (OPTIONAL) : _____

OPTIONAL COMMENTS : _____