

**FCC TEST REPORT
FOR THE
L3 COMMUNICATIONS
AVIATION RECORDERS CORPORATION
AUTOMATIC IDENTIFICATION SYSTEM (AISA1)**

Prepared for:

L3 Communications Aviation Recorders Corp.
6000 Fruitville Road
Sarasota, FL 34232
USA

Submitted by:

Green Mountain Electromagnetics, Inc.



(802) 388-3390
Fax: (802) 388-6279
E-mail: gme@gmelectro.com
219 Blake Roy Road • Middlebury, Vermont 05753

Copyright: November 27, 2006

**L3 Communications Aviation Recorders Corporation
FCC Tests
At
Green Mountain Electromagnetics, Inc.
Middlebury, Vermont**

Unit: Automatic Identification System (AISA1)

Evaluated: November 7-10, 2006

I. Applicable Standards:

The unit described in this report was measured for certification with the Code of Federal Regulations Chapter 47 – "Telecommunication, Part 2 – Frequency Allocations and Radio Treaty Matters: General Rules and Regulations, Subpart J – Equipment Authorization Procedures (2002)." Measurements required were per paragraphs 2.1046 RF Power Output, 2.1047 Modulation Characteristics, 2.1049 Occupied Bandwidth, 2.1051 Spurious Emissions at Antenna Terminals, 2.1053 Field Strength of Spurious Radiation, 2.1055 Frequency Stability, and 2.1091 Radiofrequency Radiation Exposure Evaluation: Mobile Devices.

The AISA1 was also measured for verification of compliance with "CFR47 – Telecommunication, Part 80 – Stations in the Maritime Services, Subpart E: General Technical Standards (2002)." Paragraphs used were 80.205 Bandwidths, 80.209 Transmitter Frequency Tolerances, 80.211 Emission Limitations, 80.213 Modulation Requirements, 80.215 Transmitter Power, and 80.217 Suppression of Interference Aboard Ships. Additionally, the AISA1 was measured for verification of compliance with "CFR47, Part 15 – Radio Frequency Devices, Subpart B: Unintentional Radiators, Paragraph 15.109, Radiated Emissions Limits (2002)."

Measurement procedures were in accordance with ANSI C63.4, "Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz (2000)," IEC 61993-2, "Maritime Navigation and Radiocommunication Equipment and Systems – Automatic Identification Systems (AIS), Part 2: Class A Shipborne Equipment of the Universal AIS – Operational and Performance Requirements, Methods of Test and Required Test Results (December 2001)," and FCC OET Bulletin 65, "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields (August 1997)."

II. Unit Tested:

The L3 Communications Aviation Recorders Corporation, Automatic Identification System provides continuous signal and data transmission for ship identification. The AISA1 uses DC power and has TDMA/DSC transmitters and TDMA/GPS/DSC receivers. It consists of the two-piece metal enclosure with connector hardware, the transmit/receive circuits, the micro-processor/data-storage electronics, and the antenna interface. The table below describes the unit tested to determine compliance with the standards:

Model/P/N	Manufacturer	Serial Number
AISA1-000-10	L3 Communications Corp.	000383088

The following table describes the system physical and electrical properties:

Model	Volts/Amps/Hertz	H/W/D in cm
AISA1-000-10	12 - 24 VDC, 5 A	8/16/19

The table below describes the support equipment used:

Product	Manufacturer	Model	Serial Number
AISA1	L3	AISA1-000-90	000374785
Power Supply	MFJ	MFJ-4035MV	L3ID 5144
Power Supply	Tenma	72-7695	0003094
PC	Antec	Custom by L3	L3ID 9851
Attenuator, Fixed	Bird	25-A-MFN-30	0323
Attenuator, Variable	Agilent	8496A	MY42140708
Attenuator, Variable	Agilent	8494A	MY42140564
Monitor	Princeton	EO700	KNAA4621773
Mouse	Microsoft	Intellimouse	3882A611
Keyboard	Microsoft	KWD 203	9910249571
Antennas (2)	L3	GPS	n/a

The table below describes the cables used:

Type	Description	Rating
Power	Twisted Shielded pair	n/a
RF Power/Signal	UHF Coaxial	n/a
Digital	Serial Twisted Shielded pair	n/a
Signal	Ethernet Unshielded, Plastic Jack	UL

The highest frequency investigated is ten times the AISA1 highest fundamental (1.63 GHz). IEC 61993-2, Paragraph 13 masks are used to demonstrate modulation characteristics.

III. Measurement Location:

The GME laboratory and Open Area Test Site (OATS) are located at 219 Blake Roy Road, Middlebury, VT. The OATS is a 3-meter site complete with antenna positioner, ground plane and motorized turntable. The OATS is constructed in accordance with ANSI C63.7-1992 and complies with the requirements for radiated emissions testing in ANSI C63.4-2000 and CISPR 16-1993. The electromagnetic laboratory is constructed in accordance with CE immunity standards and ANSI C63.4-2000 (conducted emissions).

GME is internationally accredited by the American Association for Laboratory Accreditation (A2LA) and meets the quality requirements in ISO/IEC 17025 (2005), "General Requirements for the Competence of Testing and Calibration Laboratories." For scope of accreditation, contact GME.


IV. Summary of Results:

The L3 Communications Aviation Recorders Corp., AISA1 complies with the requirements in CFR 47, Paragraphs 2, 15 and 80. Section IX contains the results summarized in the table below.

Test	Mode/Port	CFR 47 Paragraph	Frequency Range/Level	Specified Values	Measured Values
1	Carrier Power	Transmit 2.1046 80.215	±1.5 dB 1 W - 25 W	40.96 dBm 33.01 dBm	40.25 dBm 34.02 dBm
2	Modulation Characteristics	Transmit 2.1047 80.213	25 kHz lmt. 12.5 kHz lt.	61993-2 Fig. 4 61993-2 Fig. 5	Within Limit Within Limit
3	Occupied Bandwidth	Transmit 2.1049 80.205	Fundamental	0.5 %	Within Limit
4	Conducted Spurious	Receive/ Transmit 2.1051 80.217	Below 30 MHz 30 - 100 MHz 100 - 300 MHz 300 MHz to 1.63 GHz	-4 dBm 6 dBm 16 dBm 26 dBm	<-4 dBm <6 dBm <16 dBm <26 dBm
5	Frequency Tolerance	Transmit 2.1055 80.209	± 10 ppm 85% - 115% V	156,025,000 Hz 157,412,500 Hz 160,637,500 Hz 162,025,000 Hz 12.75 -27.6V	156,025,167 Hz 157,412,661 Hz 160,637,658 Hz 162,025,157 Hz 12.75 -27.6V
6	Radiated Emissions	Enclosure 15.109 2.1053 80.211	30 - 88 MHz 88 - 216 MHz 216 - 960 MHz 960 - 1630 MHz	40 dBuV/m 43.5 dBuV/m 46 dBuV/m 54 dBuV/m	Within All Limits
7	Exposure Evaluation	Enclosure 2.1091	0.3 - 3 MHz 3 - 30 MHz 30 - 300 MHz 300 - 1630 MHz	100 mW/cm ² 900/f ² mW/cm ² 1 mW/cm ² f/300 mW/cm ²	Within All Limits

Testing was performed by Kyle R. Kowalczyk, president, Green Mountain Electromagnetics and requested by:

L3 Communications Aviation Recorders Corp.
6000 Fruitville Road
Sarasota, FL 34232
USA



Kyle R. Kowalczyk

11/27/06

V. Measuring Equipment:

The table below describes the instrumentation used by Green Mountain Electromagnetics to perform this testing:

Unit	Manufacturer	Model	Serial #	Last Cal.	Next Cal.
Spectrum Analyzer	Hewlett-Packard	8592	3624A00631	3/8/06	3/08/07
Amplifier	Hewlett-Packard	8447 D	2944A07313	6/1/06	6/1/07
Signal Generator	Hewlett-Packard	E4421B	US38220195	11/14/05	11/14/06
Plotter	Hewlett-Packard	7475A	2517A05281	n/a	n/a
Broadband E-field Antenna	Antenna Research Associates	LPB-2513/A	1125	11/14/05	11/14/06
Frequency Counter	Agilent	53181A	MY40003289	4/26/06	4/27/07
Power Meter	Agilent	E4418B	GB42421582	4/26/05	4/27/07

VI. Equipment and Cable Configuration:

GME witnessed the unit in satisfactory condition for testing, however the manufacturer is responsible for ensuring that the equipment under test (EUT) represents the product line. The manufacturer is also responsible for the EMC test plan and for assuring that this report is consistent with that plan. The EUT configuration was arranged to produce maximum radiated emissions as shown in the block diagram below, as well as in the photographs in Section VIII. The equipment was subjected to complete emissions tests.

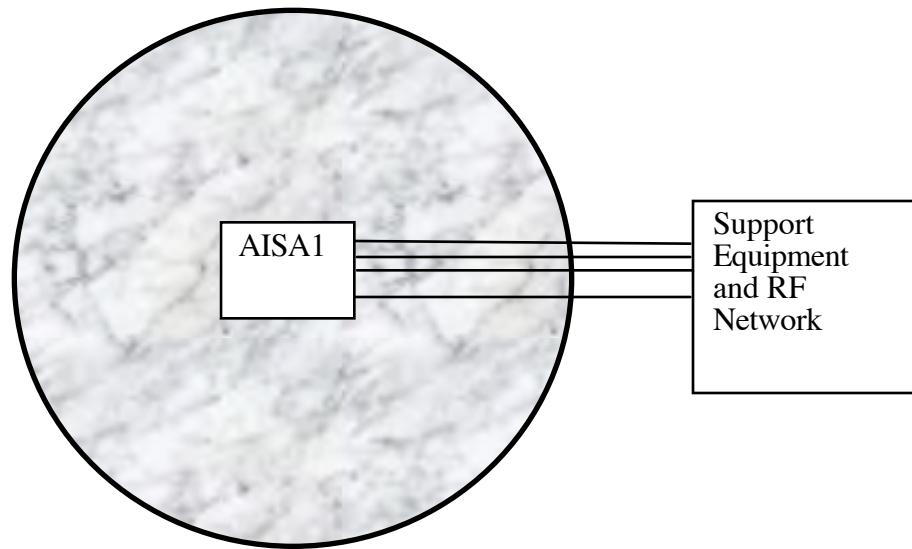


Figure 1 – Block Diagram of EUT on Turntable

The EUT was operating in a continuous mode utilizing and testing its RF signal processing functions. Data with known properties were downloaded from the PC to the AISA1, uploaded from the AISA1 to the PC, and evaluated for errors during testing. The AISA1 was also set to self-test upon power up.


VII. Measurement Procedures for AISA1 FCC Tests:

1. Carrier Power.

High Specification: 40.96 ± 1.5 dBm (12.5W +5.1W/-3.1W) Normal Operation

Low Specification: 33.01 ± 1.5 dBm (2W +.8W/-6W) Normal Operation

- a. Set up EUT and test instrumentation in laboratory.
 - i. Connect AISA1 to 24-VDC power and GPS antenna; attach 30-dB attenuator to VHF port.
- b. Verify power meter and AISA1 operation.
 - i. Power meter is connected to 30-dB attenuator. Zero and calibrate meter.
 - ii. AISA1 test signals 1, 2 & 3 per 61993-2, Para. 10.4 are selected from front panel.
 - iii. Power meter requires warm-up period, then zero and calibrate.
- c. Operate EUT at high power, unmodulated.
- d. Record level displayed on meter.
- e. Repeat for low power.



Block Diagram of Carrier Power Test


VII. Measurement Procedures for AISA1 FCC Tests Cont'd:

2. Modulation Characteristics.

25kHz Envelope: 0dB \pm 10kHz, decrease -25dBc to -70dBc from \pm 10kHz to \pm 25kHz

12.5kHz Envelope: 0dB \pm 2.5kHz, decrease 0dBc to -60dBc from \pm 2.5kHz to \pm 12.5kHz

- a. Set up EUT and test instrumentation in laboratory.
 - i. Connect AISA1 to 24-VDC power and GPS antenna; attach 30-dB attenuator to VHF port.
- b. Verify analyzer and AISA1 operation.
 - i. Spectrum analyzer is connected to 30-dB attenuator.
 - ii. AISA1 test signals 1, 2 & 3 per 61993-2, Para. 10.4 are selected from front panel.
 - iii. Spectrum analyzer requires warm-up period.
- c. Verify AISA1 test signal on spectrum analyzer.
- d. Operate EUT at first selected test signal with standard modulation.
- e. Record frequency spectrum displayed on analyzer.
- f. Repeat for each TDMA test signal.

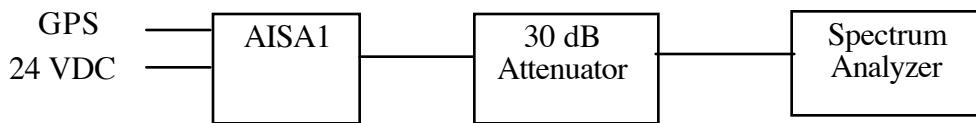


Block Diagram of Modulation Spectrum Test

VII. Measurement Procedures for AISA1 FCC Tests Cont'd:

3. Occupied Bandwidth.

Specification: 0.5% carrier power

- a. Set up EUT and test instrumentation in laboratory.
 - i. Connect AISA1 to 24-VDC power and GPS antenna.
- b. Verify analyzer and AISA1 operation.
 - i. Spectrum analyzer is connected to VHF port.
 - ii. AISA1 test signals 1, 2 & 3 are selected from front panel.
 - iii. Spectrum analyzer requires warm-up period.
- c. Verify AISA1 test signal on spectrum analyzer.
- d. Operate EUT at first selected test signal with standard modulation.
- e. Record fundamental frequency displayed on analyzer.
 - i. Repeat for each TDMA test signal.

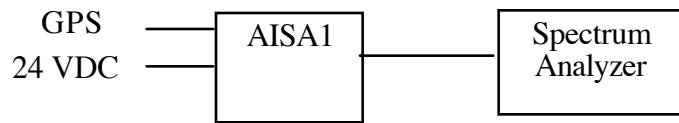

Block Diagram of Occupied Bandwidth Test

VII. Measurement Procedures for AISA1 FCC Tests Cont'd:

4. Conducted Spurious.


Specification: Below 30 MHz: -4 dBm

30 MHz to 100 MHz: 6 dBm

100 MHz to 300 MHz: 16 dBm

300 MHz to 1.63 GHz: 26 dBm

- a. Set up EUT and test instrumentation in laboratory.
 - i. Connect AISA1 to 24-VDC power and GPS antenna.
- b. Verify analyzer and AISA1 operation.
 - i. Spectrum analyzer is connected to VHF port.
 - ii. AISA1 test signals 1, 2 & 3 are selected from front panel.
 - iii. Spectrum analyzer requires warm-up period.
- c. Verify AISA1 test signal on spectrum analyzer.
- d. Operate EUT at first selected test signal with standard modulation.
- e. Record frequency spectrum displayed on analyzer.
 - i. Repeat for each TDMA test signal.

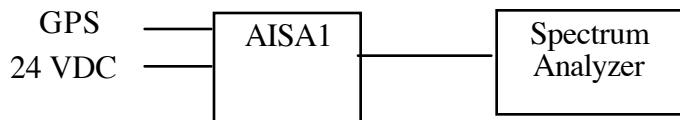

Block Diagram of Conducted Spurious Test

VII. Measurement Procedures for AISA1 FCC Tests Cont'd:


5. Frequency Tolerance.

TDMA Frequencies: 156.025, 157.4125, 160.6375, 162.025 MHz

Specification: ± 1.56 , 1.57, 1.60, 1.62 kHz Normal Operation

Voltage Specification: 12.75 V to 27.6 V Normal Operation

- a. Set up EUT and test instrumentation in laboratory.
 - i. Connect AISA1 to 24-VDC power and GPS antenna; attach 30-dB attenuator to VHF port.
- b. Verify frequency counter and AISA1 operation.
 - i. Frequency counter is connected to 30-dB attenuator.
 - ii. AISA1 channels are selected from front panel.
 - iii. Frequency counter requires warm-up period.
- c. Verify AISA1 frequency with non-contact probe and spectrum analyzer.
- d. Operate EUT at first selected channel with no modulation.
- e. Record frequency displayed on counter.
 - i. Repeat for each TDMA channel – settings are 1060, 1228, 2260 & 2088.
- f. Operate EUT at first selected channel with no modulation and at low voltage.
- g. Record frequency displayed on counter.
 - i. Sweep voltage from low to high and observe any variation in frequency.

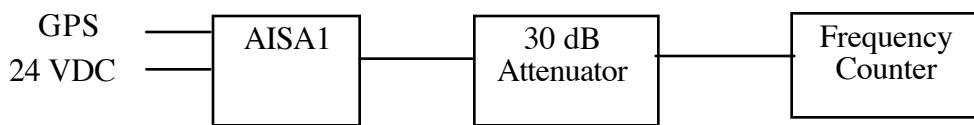

Block Diagram of Frequency Test

VII. Measurement Procedures for AISA1 FCC Tests Cont'd:

6. Radiated Emissions.

Frequency range: 30 MHz to 88 MHz

Limit: 40 dBuV/m @ 3 meters

Frequency range: 88 kHz to 216 MHz

Limit: 43.5 dBuV/m @ 3 meters

Frequency range: 216 MHz to 960 MHz

Limit: 46 dBuV/m @ 3 meters

Frequency range: 960 MHz to 1.63 GHz

Limit: 54 dBuV/m @ 3 meters

- a. Set up instrumentation at open area test site.
 - i. Mount EUT on turntable and broadband antenna on antenna positioner.
 - ii. Observe temperature, humidity and atmospheric pressure.
 - iii. Measurement distance is 3 meters and antenna scan height is varied from 1 to 4 meters.
- b. Verify spectrum analyzer and antenna operation.
 - i. Spectrum analyzer is connected to antenna.
 - ii. Preamplifier is inserted between antenna and analyzer to ensure analyzer noise threshold is at least 6 dB below specification limit (not normally necessary below 30 MHz).
- c. Set up, power and operate EUT as described in Section VI.
- d. Perform preliminary evaluation of equipment in the near field.
 - i. Vary antenna height, antenna polarization, and antenna orientation to EUT.
 - ii. Repeat step d.i. while evaluating electromagnetic radiation in the 30-MHz to 1.63-GHz spectrum.
 - iii. Ensure appropriate resolution bandwidth is set and less than or equal to video bandwidth.
 - iv. Near field measurements of unit emissions are made at ambient frequencies.
- e. Determine frequencies and equipment orientations that produce maximum radiation.
 - i. Identify any processor, clock and beat frequencies, and harmonics.
- f. Perform final evaluation of unit by recording spectrum analyzer data on the plotter.
 - i. Ensure the EUT is producing the maximum radiation found in step e.
 - ii. Collect data over the entire frequency range.
 - iii. Identify all ambient signals.

VII. Measurement Procedures for AISA1 FCC Tests Cont'd:

7. Exposure Evaluation.

Frequency range: 0.3 MHz - 3 MHz

Limit: 100 mW/cm²

Frequency range: 3 MHz - 30 MHz

Limit: 900/f² mW/cm²

Frequency range: 30 MHz - 300 MHz


Limit: 1 mW/cm²

Frequency range: 300 MHz - 1630 MHz

Limit: f/300 mW/cm²

- a. Set up instrumentation at open area test site.
 - i. Mount EUT on table and isotropic probe or loop on antenna positioner.
 - ii. Observe temperature, humidity and atmospheric pressure.
 - iii. Measurement distance is 1 meter and antenna scan height is varied over human body dimensions (0.1 to 2 meters).
- b. Verify spectrum analyzer and antenna operation.
 - i. Spectrum analyzer is connected to antenna.
 - ii. Preamplifier is inserted between antenna and analyzer to ensure analyzer noise threshold is at least 6 dB below specification limit (not normally necessary below 30 MHz).
- c. Set up, power and operate EUT as described in Section VI.
- d. Perform preliminary evaluation of equipment in the near field.
 - i. Vary antenna height, antenna polarization, and antenna orientation to EUT.
 - ii. Repeat step d.i. while evaluating electromagnetic radiation in the 0.3-MHz to 1630-MHz spectrum. H- and E-field are both measured below 300 MHz.
 - iii. Ensure appropriate resolution bandwidth is set and less than or equal to video bandwidth.
 - iv. Near field measurements of unit emissions are made at ambient frequencies.
- e. Determine frequencies and equipment orientations that produce maximum radiation.
 - i. Set peak hold on analyzer for 6 minutes while slowly varying antenna height.
- f. Perform final evaluation of unit by recording spectrum analyzer data on the plotter.
 - i. Ensure the EUT is producing the maximum radiation found in step e.
 - ii. Collect data over the entire frequency range.
 - iii. Identify all ambient signals.

VIII. Test Setup Photographs for AISA1 FCC Tests:

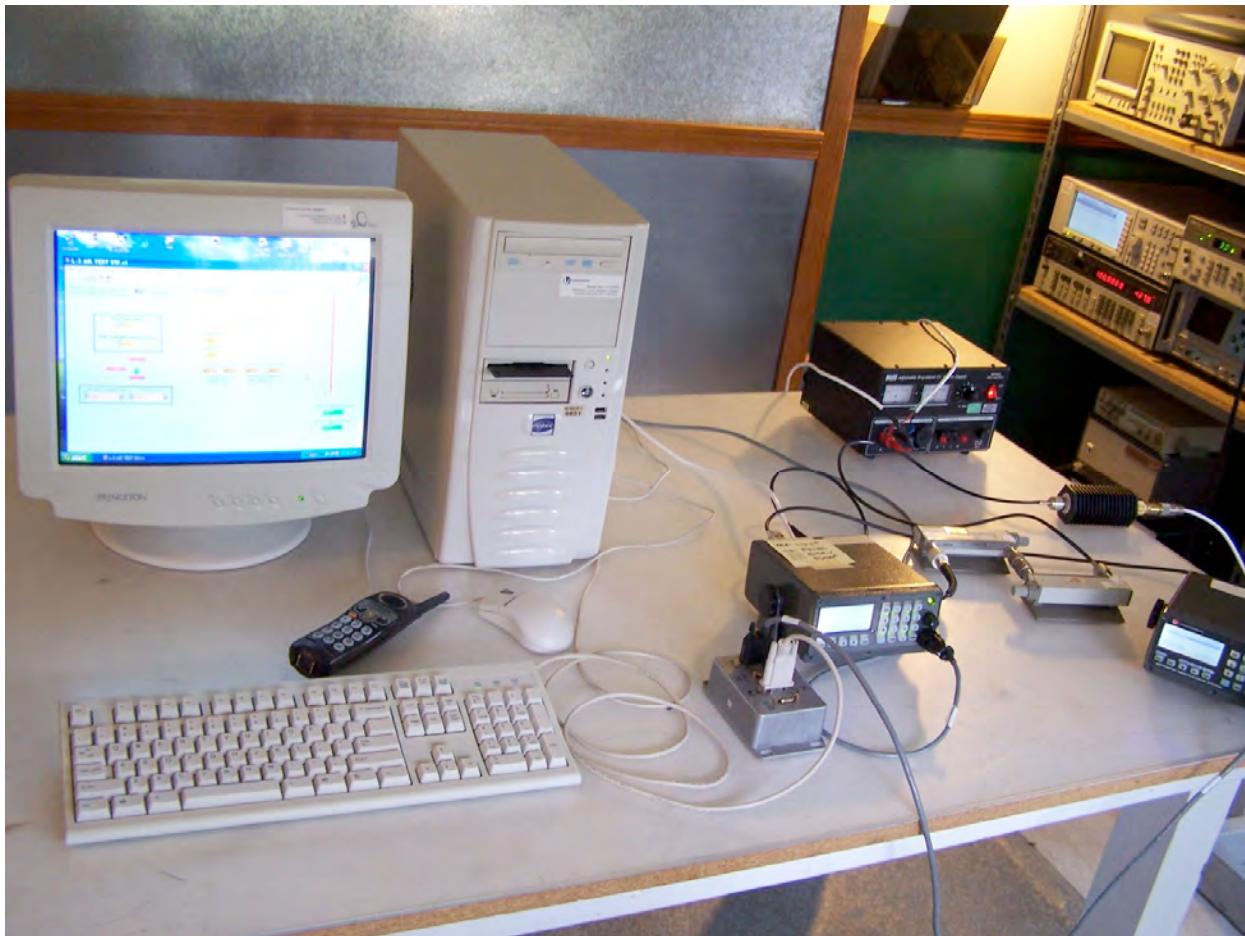

EUT and Support Equipment

VIII. Test Setup Photographs for AISA1 FCC Tests Cont'd:



Radiated Emissions Test Setup

IX. Measurement Results for AISA1 FCC Tests:

1. Carrier Power.

High Specification: 40.96 ± 1.5 dBm (12.5W +5.1W/-3.1W)


Low Specification: 33.01 ± 1.5 dBm (2W +.8W/-6W)



IX. Measurement Results for AISA1 FCC Tests Cont'd:

2. Modulation Spectrum 25 kHz Channel TDMA Signals 2 & 3.


25kHz Envelope: 0dB \pm 10kHz, decrease -25dBc to -70dBc from \pm 10kHz to \pm 25kHz

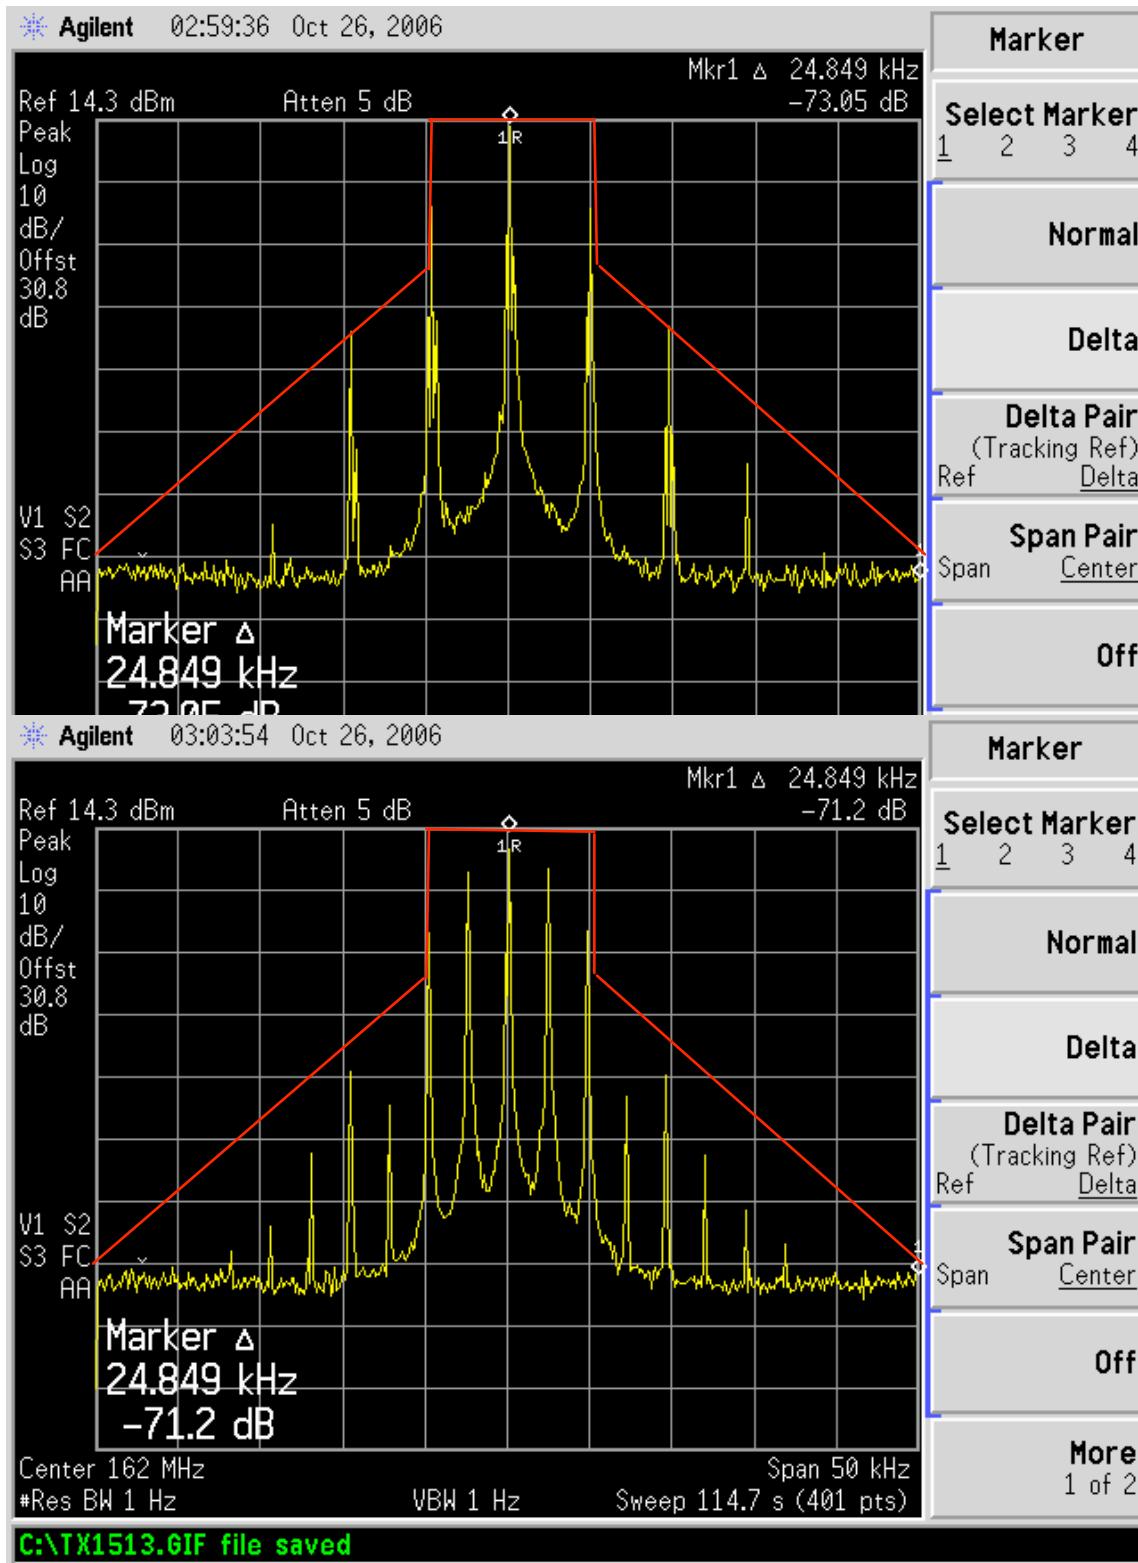

IX. Measurement Results for AISA1 FCC Tests Cont'd:


2. Modulation Spectrum 12.5 kHz TDMA Signals 2 & 3.

12.5kHz Envelope: 0dB \pm 2.5kHz, decrease 0dBc to -60dBc from \pm 2.5kHz to \pm 12.5kHz

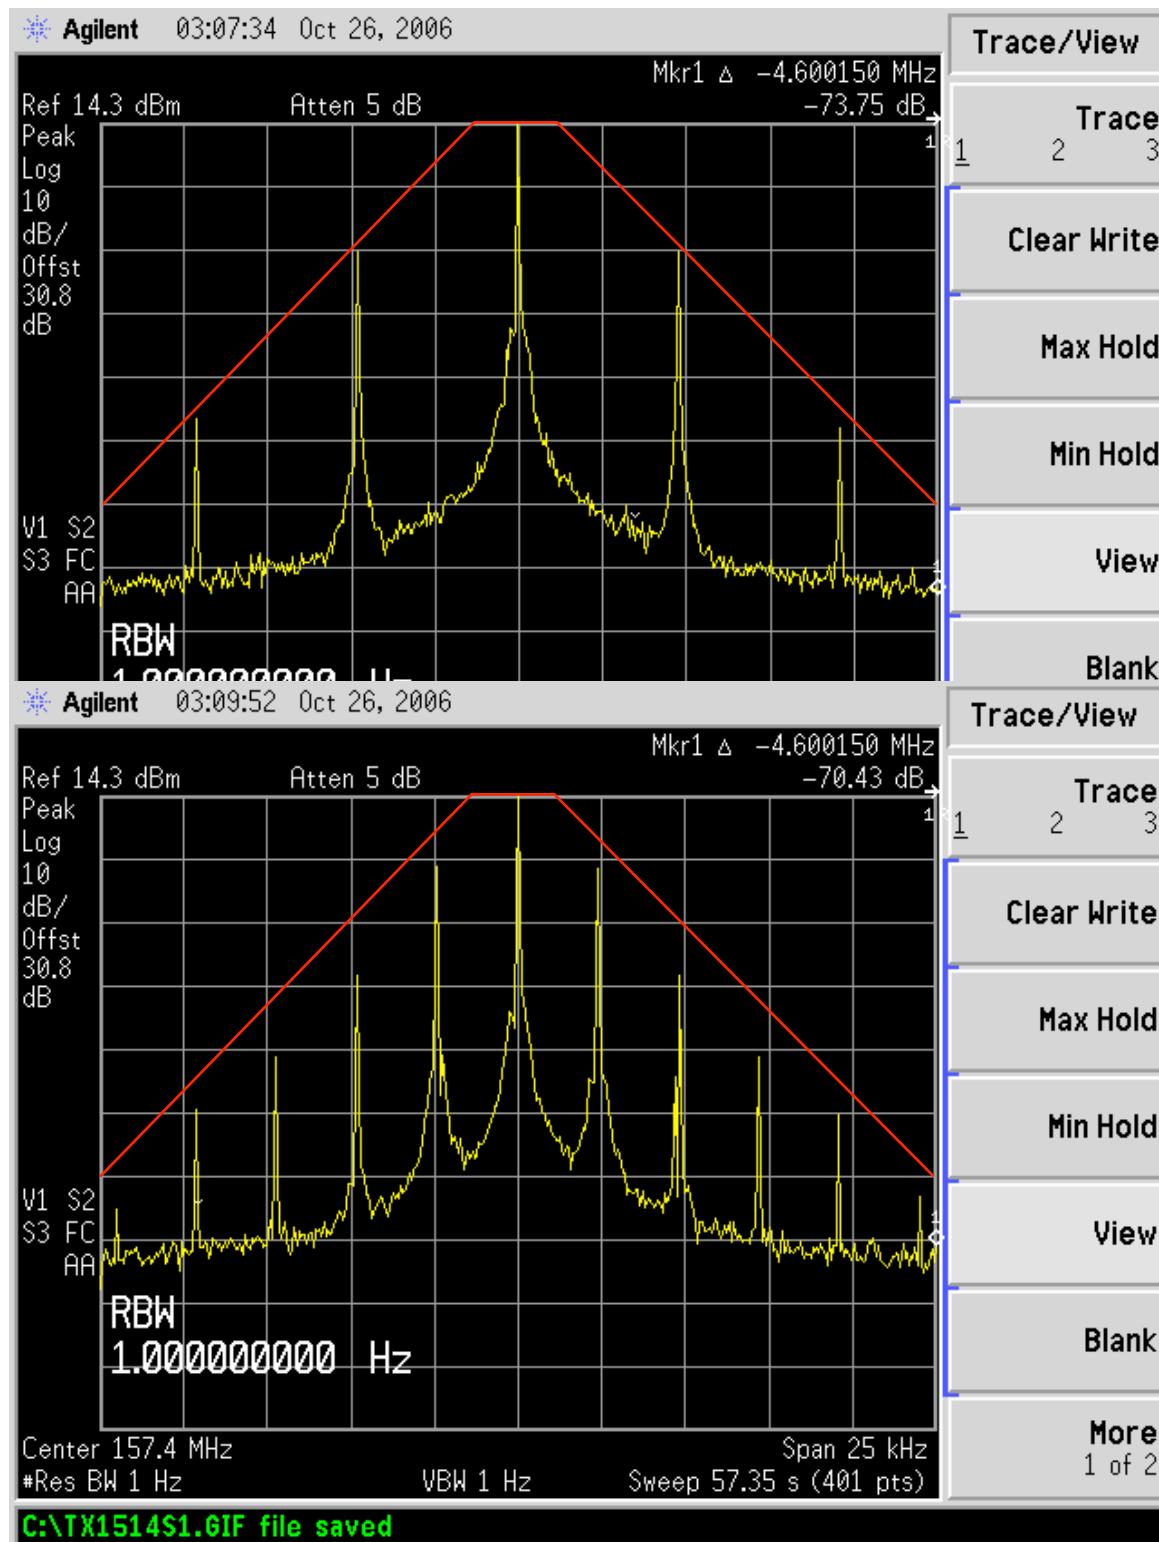

IX. Measurement Results for AISA1 FCC Tests Cont'd:


3. Occupied Bandwidth.

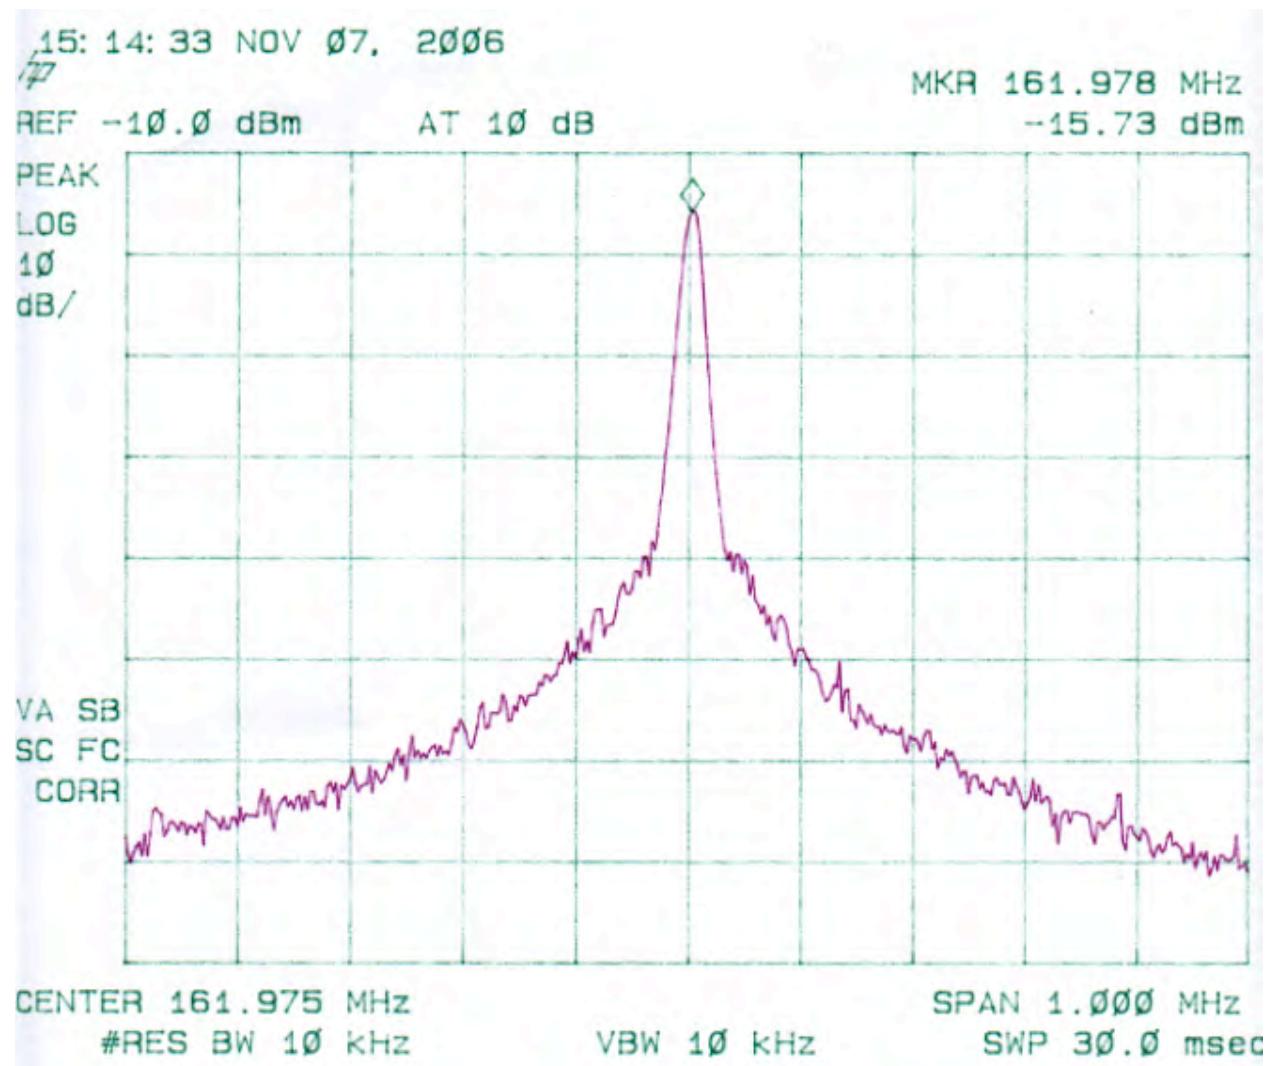

IX. Measurement Results for AISA1 FCC Tests Cont'd:

4. Conducted Spurious.


Specification: -4 dBm below 30 MHz, 6 dBm from 30 MHz to 100 MHz

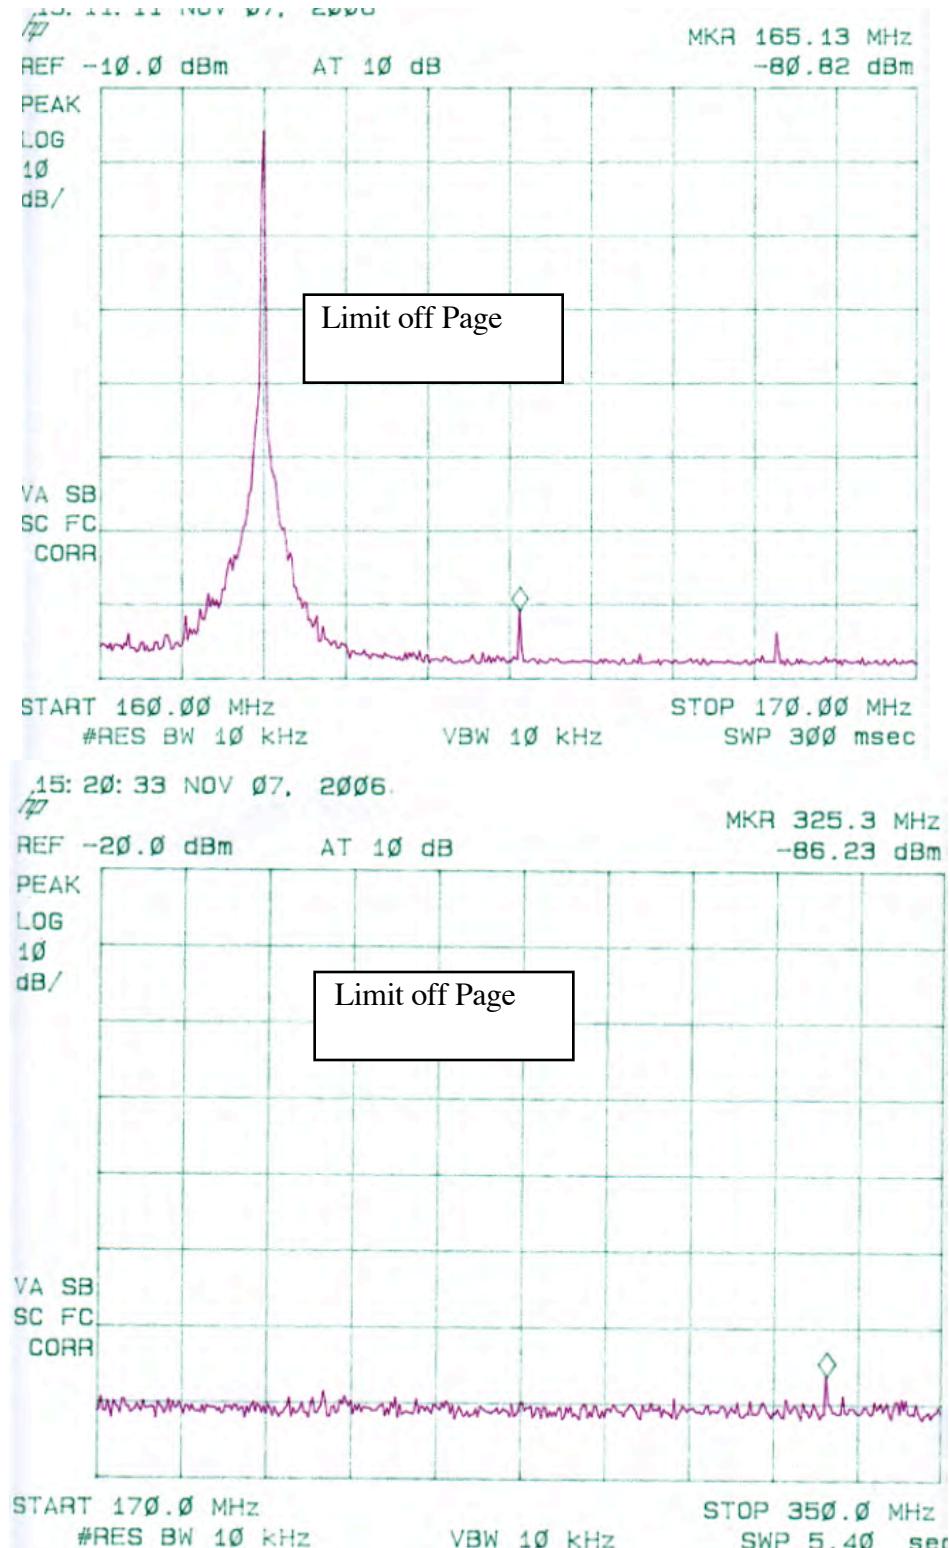

IX. Measurement Results for AISA1 FCC Tests Cont'd:

4. Conducted Spurious.

Specification: 16 dBm from 100 MHz to 300 MHz, 26 dBm from 300 MHz to 1.63 GHz

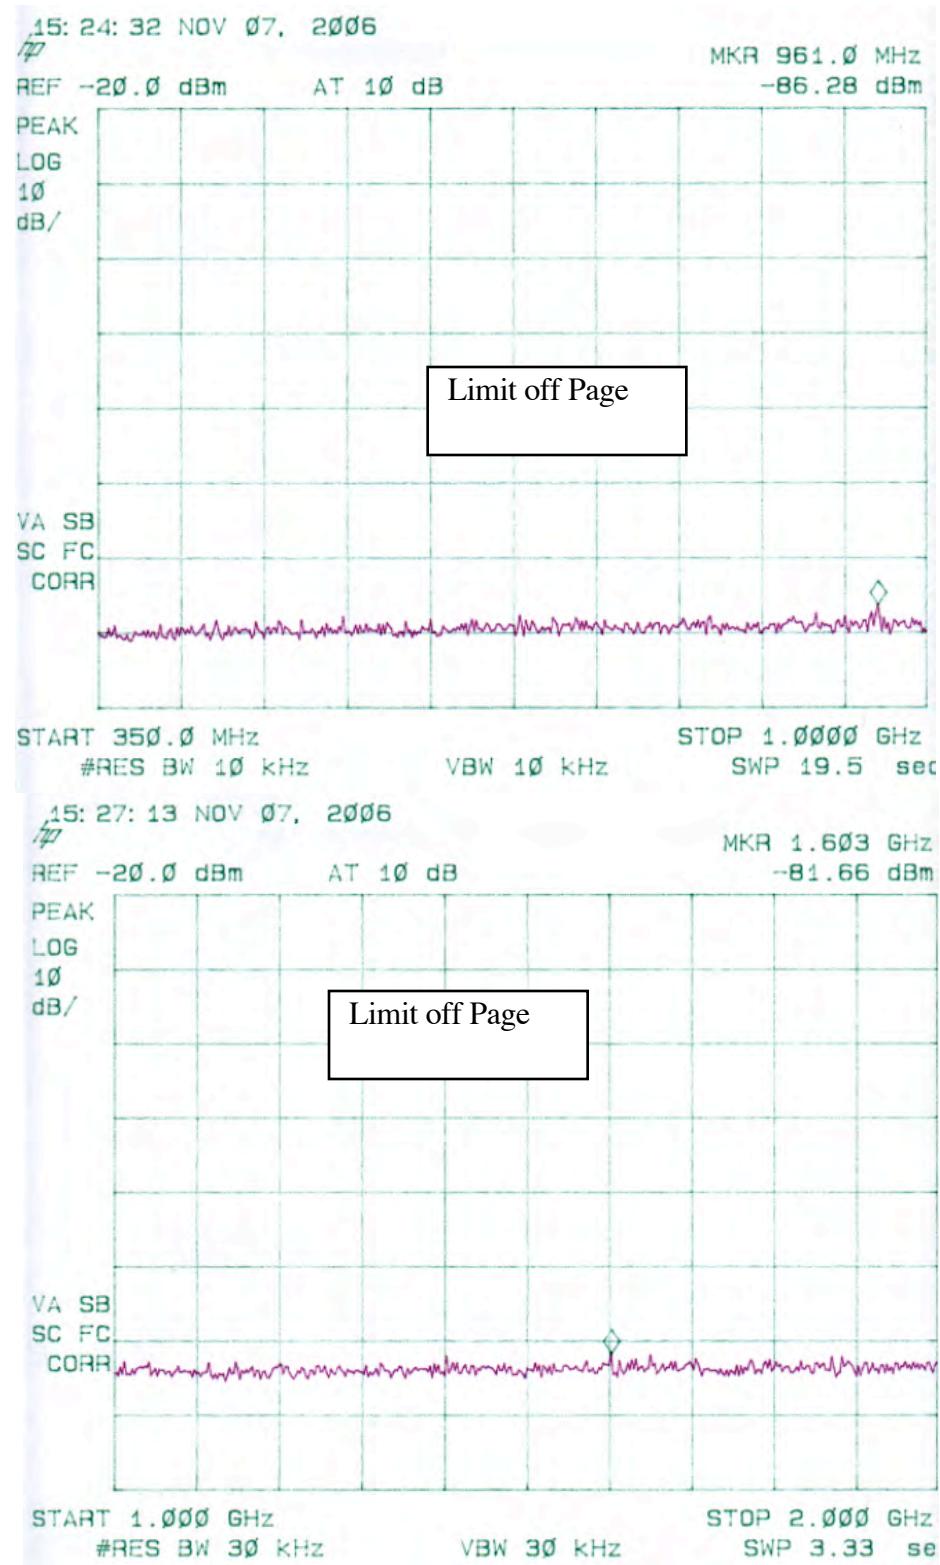

IX. Measurement Results for AISA1 FCC Tests Cont'd:

5. Frequency Stability/Tolerance.

Frequencies: 156.025, 157.4125 MHz

Specification: ± 1.5 kHz Normal Operation



IX. Measurement Results for AISA1 FCC Tests Cont'd:

5. Frequency Stability/Tolerance Cont'd.

Frequencies: 160.6375, 162.025 MHz

Specification: ± 1.5 kHz Normal Operation



IX. Measurement Results for AISA1 FCC Tests Cont'd:

5. Frequency Stability/Tolerance Cont'd.

Frequencies: 162.025 MHz

Specification: 12.75 VDC through 27.6 VDC Normal Operation

The table below shows the variation in frequency with selected applied voltage:

Voltage (VDC)	% Nominal	Frequency (Hz)
12.75	-15	162,025,157
13.5	-10	162,025,155
15-24	Nominal	162,025,154
25.2	+5	162,025,153
26.4	+10	162,025,152
27.6	+15	162,025,150

IX. Measurement Results for AISA1 FCC Tests Cont'd:

6. Radiated Emissions.

The table below contains the spectrum analyzer output and the correction factors necessary to apply the limit to the data.

Field (dBuV/m) = Vmeas (dBuV) + Antenna Factor (dB/m) + Cable Loss (dB) - Amp Gain (dB).

Deviation (dB) = Field (dBuV/m) - Limit (dBuV/m); Negative deviation is compliant.

Freq MHz	Pol H/V	RBW kHz	VBW kHz	Vmeas dBuV	AF dB1/m	Amp dB	Cable dB	Field dBuV/m	Dist dB	Limit dBuV/m	Dev dB
30	H	120	300	33	18.6	29	1	23.6	0	40	-16.4
30	V	120	300	35	18.6	29	1	25.6	0	40	-14.4
35	H	120	300	35	18.2	29	1	25.2	0	40	-14.8
35	V	120	300	36	18.2	29	1	26.2	0	40	-13.8
40	H	120	300	36	18.3	29	1	26.3	0	40	-13.7
40	V	120	300	38	18.3	29	1	28.3	0	40	-11.7
45	H	120	300	45	17.8	29	1	34.8	0	40	-5.2
45	V	120	300	40	17.8	29	1	29.8	0	40	-10.2
50	H	120	300	45	15.1	29	2	33.1	0	40	-6.9
50	V	120	300	35	15.1	29	2	23.1	0	40	-16.9
60	H	120	300	36	11.1	29	2	20.1	0	40	-19.9
60	V	120	300	40	11.1	29	2	24.1	0	40	-15.9
70	H	120	300	45	8.1	29	2	26.1	0	40	-13.9
70	V	120	300	55	8.1	29	2	36.1	0	40	-3.9
80	H	120	300	50	9.8	29	2	32.8	0	40	-7.2
80	V	120	300	45	9.8	29	2	27.8	0	40	-12.2
90	H	120	300	50	10.9	29	2	33.9	0	43.5	-9.6
90	V	120	300	55	10.9	29	2	38.9	0	43.5	-4.6
100	H	120	300	45	12.2	29	3	31.2	0	43.5	-12.3
100	V	120	300	48	12.2	29	3	34.2	0	43.5	-9.3
125	H	120	300	44	12.9	29	3	30.9	0	43.5	-12.6
125	V	120	300	50	12.9	29	3	36.9	0	43.5	-6.6

Table 1 – Corrected Radiated Emissions Data and FCC Limit

IX. Measurement Results for AISA1 FCC Tests Cont'd:

6. Radiated Emissions Cont'd.

The table below contains the spectrum analyzer output and the correction factors necessary to apply the limit to the data.

Freq MHz	Pol H/V	RBW kHz	VBW kHz	Vmeas dBuV	AF dB1/m	Amp dB	Cable dB	Field dBuV/m	Dist dB	Limit dBuV/m	Dev dB
140	H	120	300	59	10	29	3	43	0	43.5	-0.5
140	V	120	300	59	10	29	3	43	0	43.5	-0.5
175	H	120	300	52	10.9	29	4	37.9	0	43.5	-5.6
175	V	120	300	53	10.9	29	4	38.9	0	43.5	-4.6
200	H	120	300	53	11.3	29	4	39.3	0	43.5	-4.2
200	V	120	300	55	11.3	29	4	41.3	0	43.5	-2.2
250	H	120	300	38	13.4	29	4	26.4	0	46	-19.6
250	V	120	300	39	13.4	29	4	27.4	0	46	-18.6
300	H	120	300	41	14.9	28	4	31.9	0	46	-14.1
300	H	120	300	41	14.9	28	4	31.9	0	46	-14.1
500	H	120	300	46	18.6	28	5	41.6	0	46	-4.4
500	V	120	300	45	18.6	28	5	40.6	0	46	-5.4
600	H	120	300	40	19.7	28	5	36.7	0	46	-9.3
600	V	120	300	43	19.7	28	5	39.7	0	46	-6.3
700	H	120	300	34	20.2	28	5.5	31.7	0	46	-14.3
700	V	120	300	33	20.2	28	5.5	30.7	0	46	-15.3
800	H	120	300	31	21.5	28	6	30.5	0	46	-15.5
800	V	120	300	32	21.5	28	6	31.5	0	46	-14.5
900	H	120	300	31	22.4	27	6	32.4	0	46	-13.6
900	V	120	300	32	22.4	27	6	33.4	0	46	-12.6
959	H	120	300	33	22.4	27	7	35.4	0	46	-10.6
959	V	120	300	31	22.4	27	7	33.4	0	46	-12.6
960	H	120	300	33	22.4	27	7	35.4	0	46	-10.6
960	V	120	300	32	22.4	27	7	34.4	0	46	-11.6

Table 1 Cont'd. – Corrected Radiated Emissions Data and FCC Limit

IX. Measurement Results for AISA1 FCC Tests Cont'd:

6. Radiated Emissions Cont'd.

The table below contains the spectrum analyzer output and the correction factors necessary to apply the limit to the data.

Freq MHz	Pol H/V	RBW kHz	VBW kHz	Vmeas dBuV	AF dB1/m	Amp dB	Cable dB	Field dBuV/m	Dist dB	Limit dBuV/m	Dev dB
1000	H	1000	1000	34	24.2	27	8	39.2	0	54	-14.8
1000	V	1000	1000	32	24.2	27	8	37.2	0	54	-16.8
1200	H	1000	1000	33	24.8	26	9	40.8	0	54	-13.2
1200	V	1000	1000	32	24.8	26	9	39.8	0	54	-14.2
1400	H	1000	1000	34	25.3	25	10	44.3	0	54	-9.7
1400	V	1000	1000	33	25.3	25	10	43.3	0	54	-10.7
1630	H	1000	1000	32	26.1	24	12	46.1	0	54	-7.9
1630	V	1000	1000	33	26.1	24	12	47.1	0	54	-6.9

Table 1 Cont'd. – Corrected Radiated Emissions Data and FCC Limit

IX. Measurement Results for AISA1 FCC Tests Cont'd:

7. Exposure Evaluation.

The table below compares the measured fields to the occupational exposure limit. The unit produces no significant electric or magnetic fields that would create an exposure hazard. Above 300 MHz the power density in mW/cm² is related to the electric field in V/m by: $S = E^2 / 3770$.

Freq MHz	H-field A/m	Limit A/m	Dev A/m	E-Field V/m	Limit V/m	Dev V/m	Power mW/cm ²	Limit mW/cm ²	Dev mW/cm ²
0.3	< 0.1	1.63	-1.53	< 0.1	614	-613.9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
0.5	0.1	1.63	-1.53	0.1	614	-613.9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
1	0.1	1.63	-1.53	0.1	614	-613.9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
3	0.1	1.63	-1.53	0.1	614	-613.9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
5	0.1	0.98	-0.88	0.1	368	-367.9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
10	0.1	0.49	-0.39	0.1	184	-183.9	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
30	< 0.01	0.163	-0.153	0.1	61.4	-61.3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
50	0.01	0.163	-0.153	0.1	61.4	-61.3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
100	0.01	0.163	-0.153	0.1	61.4	-61.3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
156	0.01	0.163	-0.153	< 1	61.4	-60.4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
163	0.01	0.163	-0.153	< 1	61.4	-60.4	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
300	0.01	0.163	-0.153	0.1	61.4	-61.3	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
500	<input type="checkbox"/>	< 0.1	1.7	-1.6					
600	<input type="checkbox"/>	0.1	2.0	-1.9					
800	<input type="checkbox"/>	0.1	2.7	-2.6					
1000	<input type="checkbox"/>	0.1	3.3	-3.2					
1200	<input type="checkbox"/>	0.1	4.0	-3.9					
1500	<input type="checkbox"/>	0.1	5.0	-4.9					
1630	<input type="checkbox"/>	0.1	5.4	-5.3					

Table 2 - Exposure Evaluation Results