

No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 Report No.: SZEMO10110702201

Email: sgs\_internet\_operations@sgs.com Page: 1 of 72

## **FCC REPORT**

**Application No:** SZEMO101107022RF

**Applicant:** Creative Labs Inc

**Manufacturer:** Creative Technology Ltd.

Product Name: ZEN Touch 2

**Operation Frequency:** 2.402GHz to 2.480GHz

FCC ID: IBADVP-FL0016

Standards: FCC CFR Title 47 Part 15 Subpart C Section 15.247: 2009

**Date of Receipt:** 2010-11-16

**Date of Test:** 2010-11-16 to 2010-11-30

**Date of Issue:** 2010-12-08

Test Result : PASS \*

Authorized Signature:

Jack Zhang

Laboratory Manager

The manufacturer should ensure that all products in series production are in conformity with the product sample detailed in this report. If the product in this report is used in any configuration other than that detailed in the report, the manufacturer must ensure the new system complies with all relevant standards. Any mention of SGS International Electrical Approvals or testing done by SGS International Electrical Approvals in connection with, distribution or use of the product described in this report must be approved by SGS International Electrical Approvals in writing.

The report must not be used by the client to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the federal government. All test results in this report can be traceable to National or International Standards.

<sup>\*</sup> In the configuration tested, the EUT complied with the standards specified above.

# SGS

## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO10110702201

Page: 2 of 72

## 2 Contents

			Page
1	CC	OVER PAGE	1
2	CC	ONTENTS	2
3		EST SUMMARY	
4		ENERAL INFORMATION	
	4.1	CLIENT INFORMATION	
	4.2	GENERAL DESCRIPTION OF E.U.T.	
	4.3	E.U.T OPERATION MODE	
	4.4	DESCRIPTION OF SUPPORT UNITS	
	4.5	TEST FACILITY	
	4.6	TEST LOCATION	
	4.7	OTHER INFORMATION REQUESTED BY THE CUSTOMER	
	4.8	TEST INSTRUMENTS LIST	
5	TE	EST RESULTS AND MEASUREMENT DATA	10
	5.1	Antenna requirement:	10
	5.2	CONDUCTED EMISSIONS	
	5.3	CONDUCTED PEAK OUTPUT POWER	14
	5.4	20DB OCCUPY BANDWIDTH	21
	5.5	CARRIER FREQUENCIES SEPARATION	
	5.6	HOPPING CHANNEL NUMBER	
	5.7	DWELL TIME	
	5.8	BAND EDGE	
	5.9	RF ANTENNA CONDUCTED SPURIOUS EMISSIONS	
	5.10	PSEUDORANDOM FREQUENCY HOPPING SEQUENCE	
	5.11	RADIATED EMISSION	
	•	11.1 Radiated emission below 1GHz	
	•	11.2 Transmitter emission above 1GHz	
	<i>5.</i> '	11.3 Band edge (Radiated Emission)	65-72



Report No.: SZEMO10110702201

Page: 3 of 72

## 3 Test Summary

Test Item	Section in CFR 47	Result
Antenna Requirement	15.203/15.247 (c)	Pass
AC Power Line Conducted Emission	15.207	Pass
Conducted Peak Output Power	15.247 (b)(1)	Pass
20dB Occupied Bandwidth	15.247 (a)(1)	Pass
Carrier Frequencies Separation	15.247 (a)(1)	Pass
Hopping Channel Number	15.247 (b)	Pass
Dwell Time	15.247 (a)(1)	Pass
Pseudorandom Frequency Hopping Sequence	15.247(b)(4)&TCB Exclusion List	Pass
Radiated Emission	15.205/15.209	Pass
Band Edge	15.247(d)	Pass

Remark: Pass: The EUT complies with the essential requirements in the standard.

Fail: The EUT does not comply with the essential requirements in the standard.



Report No.: SZEMO10110702201

Page: 4 of 72

## 4 General Information

## 4.1 Client Information

Applicant:	Creative Labs Inc
Manufacturer:	Creative Technology Ltd.
Address of Applicant:	1901 McCarthy Blvd., Milpitas California 94035 United States
Address of Manufacturer:	31, International Business Park, Creative Resource Singapore 609921

## 4.2 General Description of E.U.T.

EUT Name:	ZEN Touch 2
Model No.:	DVP-FL0016
Trade mark:	Creative
Operation Frequency:	2402MHz~2480MHz
Channel numbers:	79
Channel separation:	1MHz
Modulation type:	GFSK, Pi/4QPSK, 8DPSK
Antenna Type:	Integral
Antenna gain:	-0.7dBi
Power Supply:	Model: SW0510F3A Input: 100-240~50/60Hz 0.25A output: 5.0V === 1A Output port type: Mini USB DC 3.7V (Rechargeable Battery)

Remark:

Model No.: DVP-FL0016

don't provide GPS function.

Version 2: Model DVP-FL0016 with serial number XXPF2531XXXXXXXXX provide GPS function.

Only the Version 2 was tested, since they are electrically identical.

Identifiableness is specified as follows:

Printed Circuit Board (PCB), Enclosure, Software, RF module (Wi-Fi, Bluetooth), RF antenna.

Difference is specified as follows:

Version 2 has feature set that including GPS receiver, eCompass, FM and vibrator. While

Version 1 does not support these features.





Report No.: SZEMO10110702201

Page: 5 of 72

Operation Frequency each of channel							
Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
1	2402MHz	21	2422MHz	41	2442MHz	61	2462MHz
2	2403MHz	22	2423MHz	42	2443MHz	62	2463MHz
3	2404MHz	23	2424MHz	43	2444MHz	63	2464MHz
4	2405MHz	24	2425MHz	44	2445MHz	64	2465MHz
5	2406MHz	25	2426MHz	45	2446MHz	65	2466MHz
6	2407MHz	26	2427MHz	46	2447MHz	66	2467MHz
7	2408MHz	27	2428MHz	47	2448MHz	67	2468MHz
8	2409MHz	28	2429MHz	48	2449MHz	68	2469MHz
9	2410MHz	29	2430MHz	49	2450MHz	69	2470MHz
10	2411MHz	30	2431MHz	50	2451MHz	70	2471MHz
11	2412MHz	31	2432MHz	51	2452MHz	71	2472MHz
12	2413MHz	32	2433MHz	52	2453MHz	72	2473MHz
13	2414MHz	33	2434MHz	53	2454MHz	73	2474MHz
14	2415MHz	34	2435MHz	54	2455MHz	74	2475MHz
15	2416MHz	35	2436MHz	55	2456MHz	75	2476MHz
16	2417MHz	36	2437MHz	56	2457MHz	76	2477MHz
17	2418MHz	37	2438MHz	57	2458MHz	77	2478MHz
18	2419MHz	38	2439MHz	58	2459MHz	78	2479MHz
19	2420MHz	39	2440MHz	59	2460MHz	79	2480MHz
20	2421MHz	40	2441MHz	60	2461MHz		

#### Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Channel	Frequency
The lowest channel	2402MHz
The middle channel	2441MHz
The Highest channel	2480MHz



Report No.: SZEMO10110702201

Page: 6 of 72

## 4.3 E.U.T Operation mode

<u> </u>	
Operating Environment:	
Temperature:	24.0 °C
Humidity:	52 % RH
Atmospheric Pressure:	1010 mbar
Test mode:	
Wi-Fi	The EUT wireless linked to TP-link router, Switching packets.
Bluetooth	The EUT wireless linked to the other Bluetooth, Switching packets.
BT Tx	The Bluetooth module transmitted the continuous modulation test signal at the specific channel.
GPS Rx	The GPS module searched and received the useful test signal.

## 4.4 Description of Support Units

The EUT has been tested as an independent unit.

Report No.: SZEMO10110702201

Page: 7 of 72

## 4.5 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

#### CNAS (No. CNAS L2929)

CNAS has accredited SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch EMC Lab to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing.

#### VCCI

The 3m Semi-anechoic chamber and Shielded Room (7.5m x 4.0m x 3.0m) of SGS-CSTC Standards Technical Services Co., Ltd. have been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-2197 and C-2383 respectively.

Date of Registration: September 29, 2008. Valid until September 28, 2011.

#### FCC - Registration No.: 556682

SGS-CSTC Standards Technical Services Co., Ltd., Shenzhen EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files. Registration 556682, June 27, 2008.

#### Industry Canada (IC)

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 4620C-1.

## 4.6 Test Location

All tests were performed at:

SGS-CSTC Standards Technical Services Co., Ltd. Shenzhen Branch E&E Lab No. 1 Workshop, M-10, Middle section, Science & Technology Park, Shenzhen, Guangdong, China 518057

Telephone: +86 (0) 755 2601 2053 Fax: +86 (0) 755 2671 0594 No tests were sub-contracted.

## 4.7 Other Information Requested by the Customer

None.



Report No.: SZEMO10110702201

Page: 8 of 72

## 4.8 Test Instruments list

RE i	RE in Chamber					
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	3m Semi-Anechoic Chamber	ETS-LINDGREN	N/A	SEL0017	2010-06-17	2011-06-17
2	EMI Test Receiver	Rohde & Schwarz	ESIB26	SEL0023	2010-11-05	2011-11-05
3	EMI Test software	AUDIX	E3	SEL0050	N/A	N/A
4	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18
5	BiConiLog Antenna (26-3000MHz)	ETS-LINDGREN	3142C	SEL0015	2010-11-09	2011-11-09
6	Double-ridged horn (1-18GHz)	ETS-LINDGREN	3117	SEL0006	2010-11-09	2011-11-09
7	Horn Antenna (18-26GHz)	ETS-LINDGREN	3160	SEL0076	2010-11-09	2011-11-09
8	Pre-amplifier (0.1-1300MHz)	Agilent Technologies	8447D	SEL0053	2010-06-02	2011-06-02
9	Pre-Amplifier (0.1-26.5GHz)	Compliance Directions Systems Inc.	PAP-0126	SEL0168	2010-10-27	2011-10-27
10	Pre-amplifier (18-26GHz)	Rohde & Schwarz	AFS33-18002 650-30-8P-44	SEL0080	2010-06-04	2011-06-04
11	Band filter	Amindeon	82346	SEL0094	2010-06-02	2011-06-02

Con	Conducted Emission						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)	
1	Shielding Room	ZhongYu Electron	GB-88	SEL0042	N/A	N/A	
2	LISN	ETS-LINDGREN	3816/2	SEL0021	2010-06-02	2011-06-02	
3	Two-Line V-Network	Rohde & Schwarz	ENV216	SEL0152	2010-10-27	2011-10-27	
4	EMI Test Receiver	Rohde & Schwarz	ESCI	SEL0022	2010-06-02	2011-06-02	
5	Coaxial Cable	SGS	N/A	SEL0024	2008-06-18	2011-06-18	



Report No.: SZEMO10110702201

Page: 9 of 72

RF conducted						
Item	Test Equipment	Manufacturer	Model No.	Inventory No.	Cal.Date (yyyy-mm-dd)	Cal.Due date (yyyy-mm-dd)
1	Spectrum Analyzer	Rohde & Schwarz	FSP 30	SEL0154	2010-10-27	2011-10-27
2	Coaxial cable	SGS	N/A	SEL0028	2008-06-18	2011-06-18



Report No.: SZEMO10110702201

Page: 10 of 72

## 5 Test results and Measurement Data

## 5.1 Antenna requirement:

Standard requirement: FCC Part15 C Section 15.203 /247(c)

15.203 requirement:

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator, the manufacturer may design the unit so that a broken antenna can be replaced by the user, but the use of a standard antenna jack or electrical connector is prohibited.


15.247(c) (1)(i) requirement:

(i) Systems operating in the 2400-2483.5 MHz band that is used exclusively for fixed. Point-to-point operations may employ transmitting antennas with directional gain greater than 6dBi provided the maximum conducted output power of the intentional radiator is reduced by 1 dB for every 3 dB that the directional gain of the antenna exceeds 6dBi.

#### E.U.T Antenna:

The antenna is integrated on the main PCB and no consideration of replacement. The best case gain of the antenna is -0.7dBi.

Technical Data Sheet of Antenna reference to antenna test report :REMH10003-SE\_A

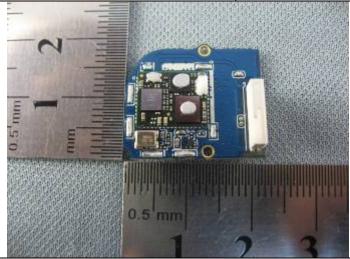



Report No.: SZEMO10110702201

Page: 11 of 72

## 5.2 Conducted Emissions

Test Requirement:	FCC Part15 C Section 15.207				
Test Method:	ANSI C63.10: 2009				
Test Frequency Range:	150KHz to 30MHz				
Class / Severity:	Class B				
Limit:	Limit (dBuV)				
	Frequency range (MHz)	Quasi-peak	Average		
	0.15-0.5	66 to 56*	56 to 46*		
	0.5-5	56	46		
	5-30	60	50		
	* Decreases with the logarithm				
Test procedure	The E.U.T and simulators are connected to the main power through a line impedance stabilization network(L.I.S.N.). The provide a 50ohm/50uH coupling impedance for the measuring equipment. The peripheral devices are also connected to the main power through a LISN that provides a 50ohm/50uH coupling impedance with 50ohm termination. (Please refers to the block diagram of the test setup and photographs). Both sides of A.C. line are checked for maximum conducted interference. In order to find the maximum emission, the relative positions of equipment and all of the interface cables must be changed according to ANSI C63.4: 2003 on conducted measurement.				
Test setup:	Reference Plane				
	AUX Equipment E.U  Test table/Insulation pla  Remark E.U.T: Equipment Under Test LISN: Line Impedence Stabilization Test table height=0.8m		er — AC power		
Test Instruments:	Refer to section 4.7 for details				
Test mode:	Wi-Fi + Bluetooth +GPS Rx mode				
Test results:	Pass	<del></del>			
	•				

## **Measurement Data**

An initial pre-scan was performed on the live and neutral lines with peak detector.


Quasi-Peak and Average measurement were performed at the frequencies with maximized peak emission were detected.



Report No.: SZEMO10110702201

Page: 12 of 72

#### Live line:

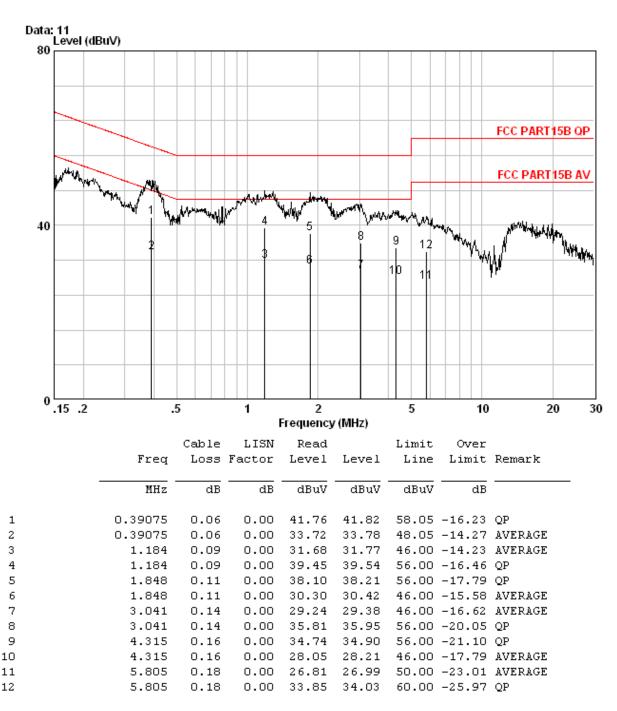

#### Notes:


- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEMO10110702201

Page: 13 of 72

#### **Neutral line:**

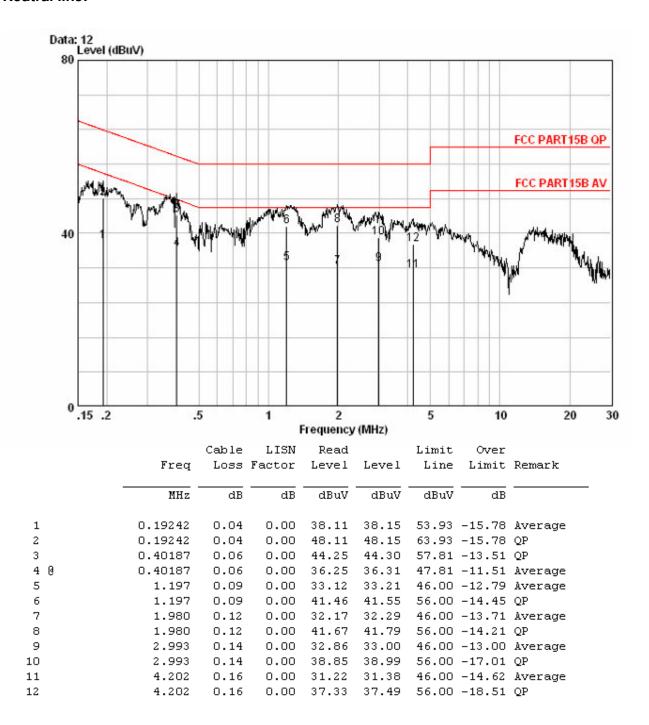

#### Notes:

- 1. The following Quasi-Peak and Average measurements were performed on the EUT:
- 2. Final Test Level =Receiver Reading + LISN Factor + Cable Loss.



Report No.: SZEMO10110702201

Page: 14 of 72

## 5.3 Conducted Peak Output Power

Test Requirement:	FCC Part15 C Section 15.247 (b)(1)		
Test Method:	ANSI C63.10: 2009 and KDB DA00-705		
Limit:	30dBm		
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table		
	Ground Reference Plane		
	Remark: Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.		
Test Instruments:	Refer to section 4.7 for details		
Test state:	Non-hopping transmitting with all kinds of modulation.		
Test results:	Pass		

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEMO10110702201

Page: 15 of 72

#### Measurement Data


Measurement Data			
GFSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.06	30.00	Pass
Middle	0.88	30.00	Pass
Highest	1.02	30.00	Pass
Pi/4QPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	-1.39	30.00	Pass
Middle	-1.31	30.00	Pass
Highest	-1.08	30.00	Pass
8DPSK mode			
Test channel	Peak Output Power (dBm)	Limit (dBm)	Result
Lowest	1.57	30.00	Pass
Middle	1.30	30.00	Pass
Highest	1.35	30.00	Pass




Report No.: SZEMO10110702201

Page: 16 of 72

#### Test plot as follows:

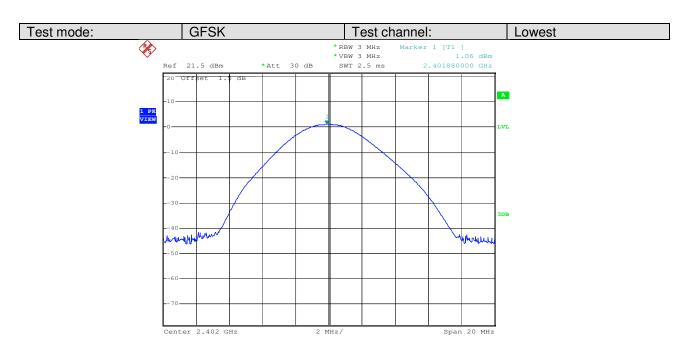

Date: 18.NOV.2010 12:59:54

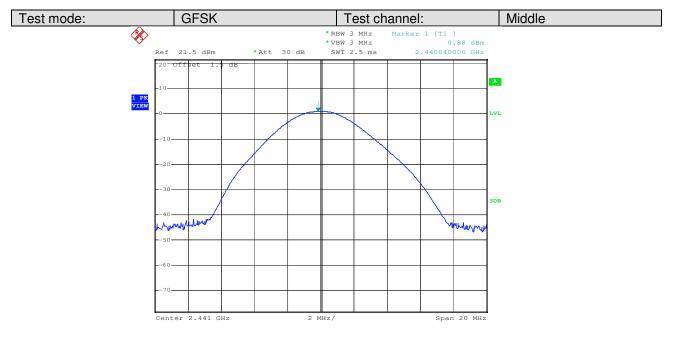


Date: 18.NOV.2010 13:01:29




Report No.: SZEMO10110702201

Page: 17 of 72

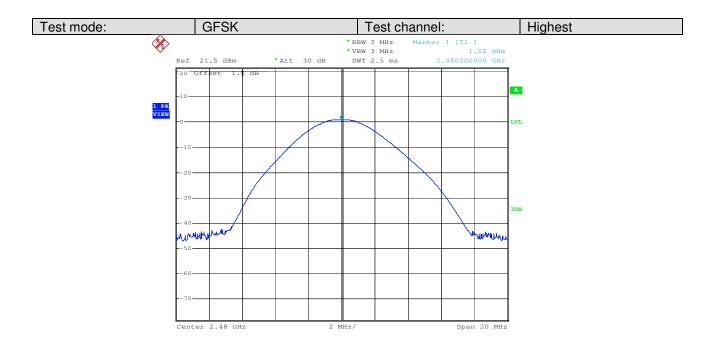

Date: 18.NOV.2010 13:02:21

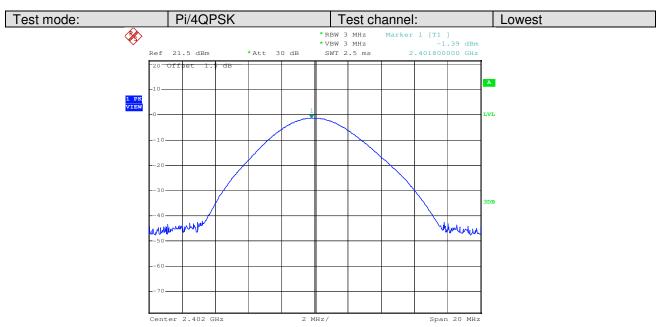


Date: 18.NOV.2010 13:55:19




Report No.: SZEMO10110702201

Page: 18 of 72

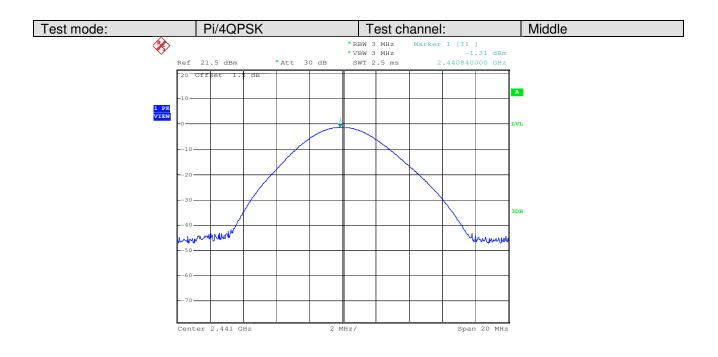

Date: 18.NOV.2010 13:56:18

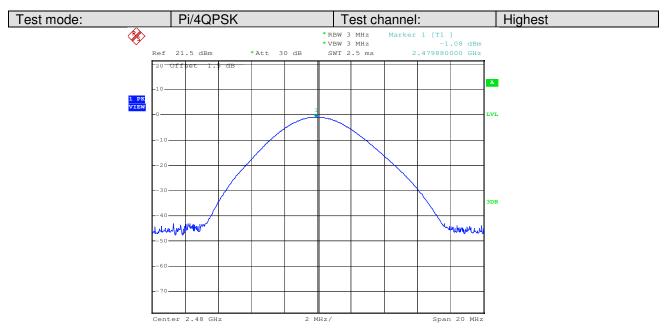


Date: 18.NOV.2010 13:57:14




Report No.: SZEMO10110702201

Page: 19 of 72

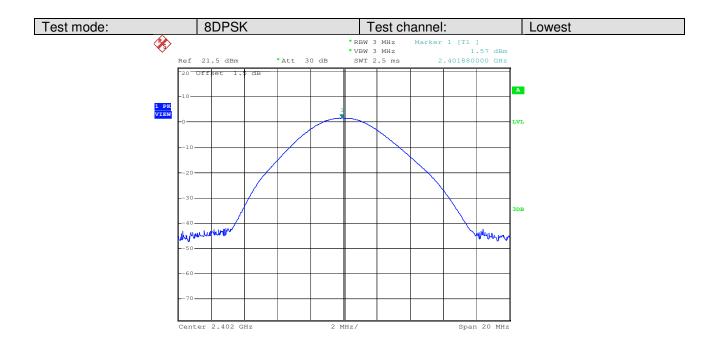

Date: 18.NOV.2010 16:35:41

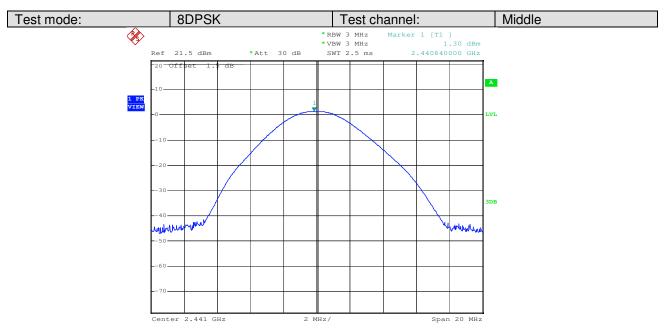


Date: 18.NOV.2010 16:36:30



Report No.: SZEMO10110702201

Page: 20 of 72

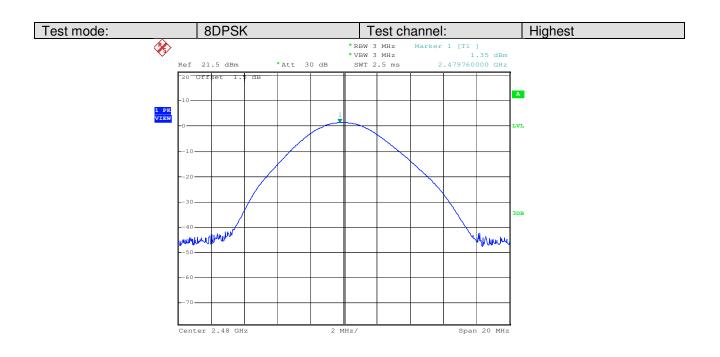

Date: 18.NOV.2010 16:37:18



Report No.: SZEMO10110702201

Page: 21 of 72

## 5.4 20dB Occupy Bandwidth

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)	
Test Method:	ANSI C63.10: 2009 and KDB DA00-705	
Limit:	NA	
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table	
Test Instruments:	Refer to section 4.7 for details	
Test state:	Non-hopping transmitting with all kind of modulation.	
Test results:	Pass	

#### **Measurement Data**


Test channel	20dB Occupy Bandwidth (KHz)		
	GFSK	Pi/4QPSK	8DPSK
Lowest	1110	1380	1368
Middle	1116	1386	1356
Highest	1122	1380	1362



Report No.: SZEMO10110702201

Page: 22 of 72

#### Test plot as follows:

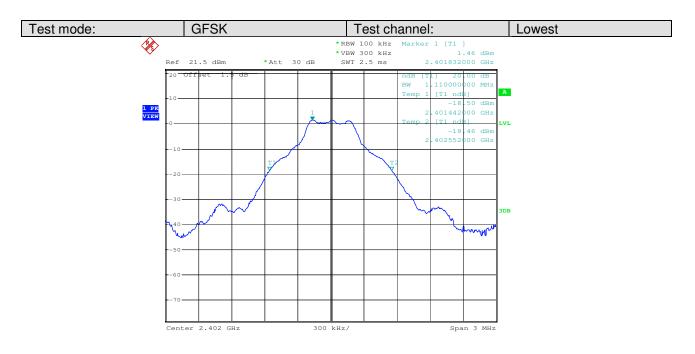

Date: 18.NOV.2010 12:43:40




Date: 18.NOV.2010 12:44:37




Report No.: SZEMO10110702201

Page: 23 of 72

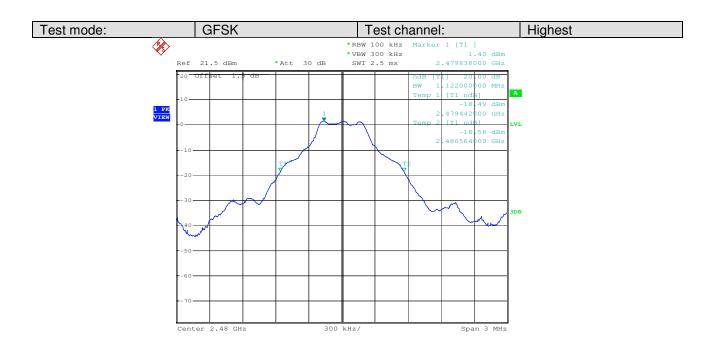

Date: 18.NOV.2010 12:45:30

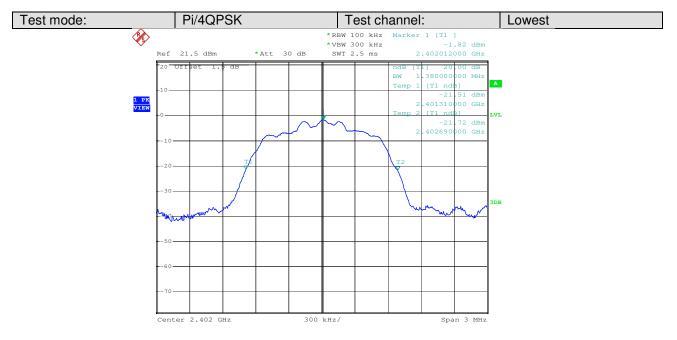


Date: 18.NOV.2010 13:43:45




Report No.: SZEMO10110702201

Page: 24 of 72

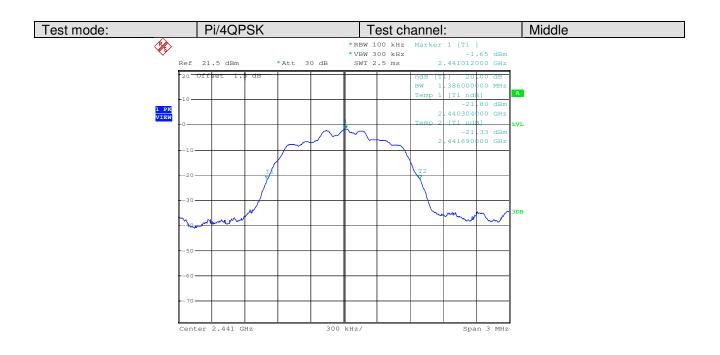

Date: 18.NOV.2010 13:44:58

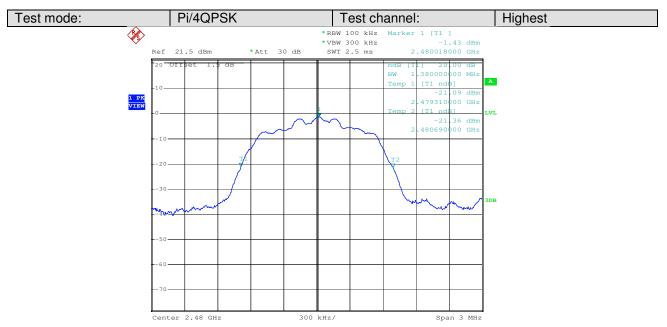


Date: 18.NOV.2010 13:46:11




Report No.: SZEMO10110702201

Page: 25 of 72

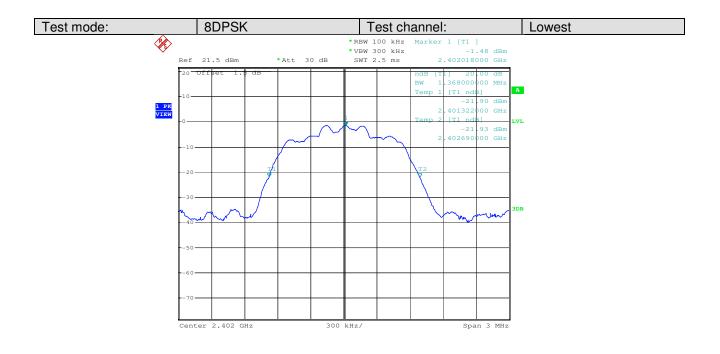

Date: 18.NOV.2010 15:34:55

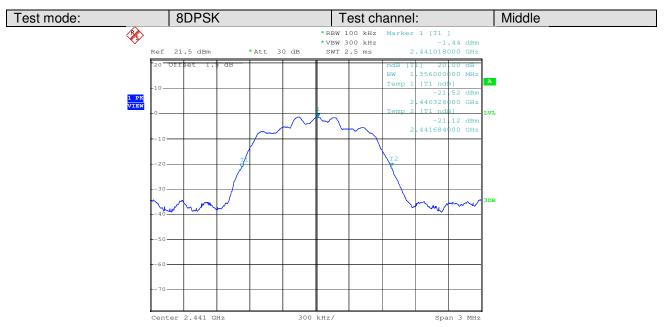


Date: 18.NOV.2010 15:36:16



Report No.: SZEMO10110702201

Page: 26 of 72

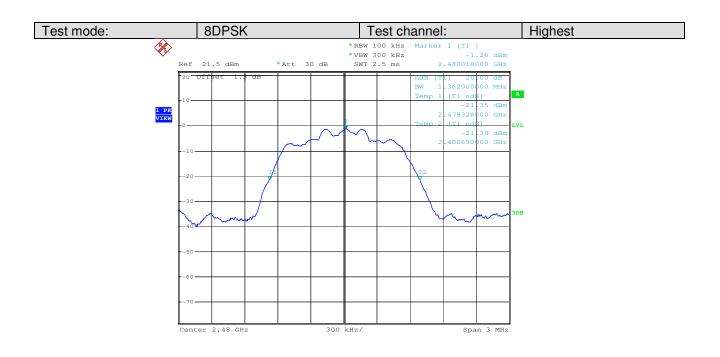


Date: 18.NOV.2010 15:37:24



Report No.: SZEMO10110702201

Page: 27 of 72

## 5.5 Carrier Frequencies Separation

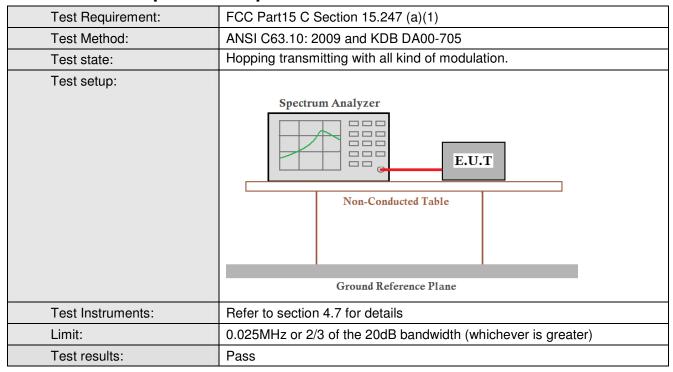



Report No.: SZEMO10110702201

Page: 28 of 72

#### Measurement Data

Measurement Data				
GFSK mode				
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result	
Lowest	1000	924.0	Pass	
Middle	1000	924.0	Pass	
Highest	1000	924.0	Pass	
Pi/4QPSK mode				
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result	
Lowest	1000	924.0	Pass	
Middle	1000	924.0	Pass	
Highest	1000	924.0	Pass	
8DPSK mode				
Test channel	Carrier Frequencies Separation (KHz)	Limit (KHz)	Result	
Lowest	1000	924.0	Pass	
Middle	1000	924.0	Pass	
Highest	1000	924.0	Pass	

Note: According to section 5.4,


Mode	20dB bandwidth (KHz) (worse case)	Limit (KHz) (Carrier Frequencies Separation)
GFSK	1122	748.0
PI/4QPSK	1386	924.0
8DPSK	1368	912.0




Report No.: SZEMO10110702201

Page: 29 of 72

## Test plot as follows:

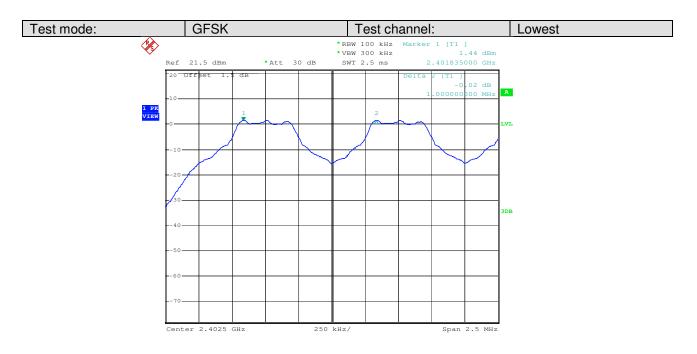

Date: 18.NOV.2010 12:47:59

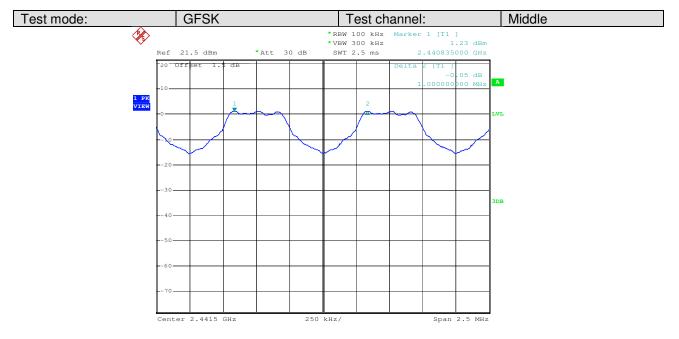


Date: 18.NOV.2010 12:50:34




Report No.: SZEMO10110702201

Page: 30 of 72

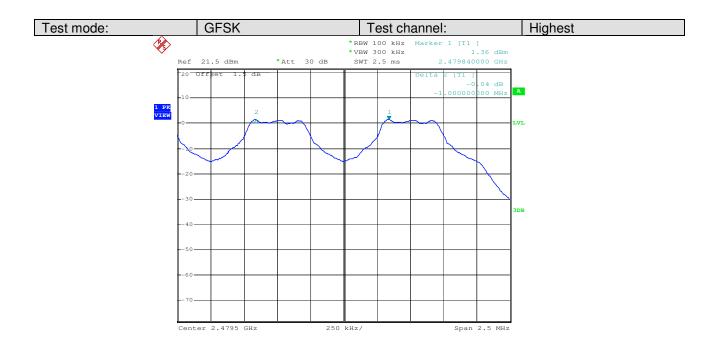

Date: 18.NOV.2010 12:52:46

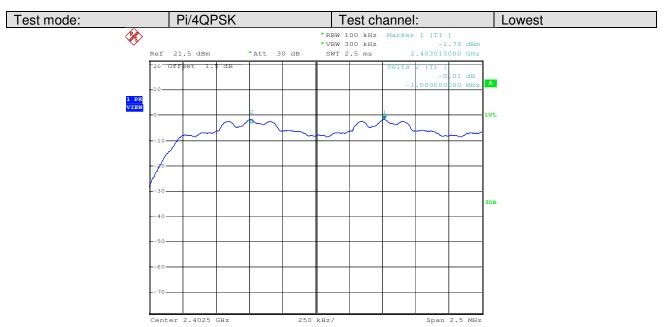


Date: 18.NOV.2010 13:49:00




Report No.: SZEMO10110702201

Page: 31 of 72

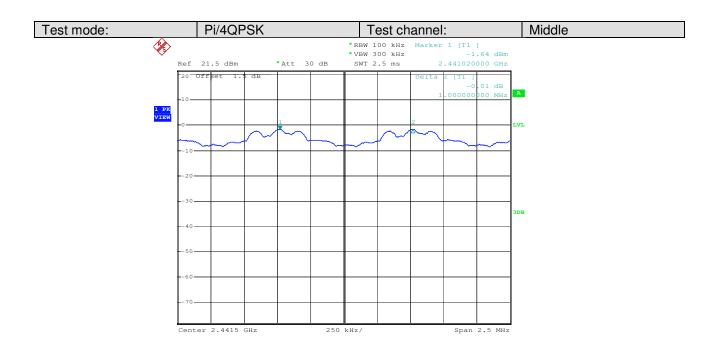

Date: 18.NOV.2010 13:50:57

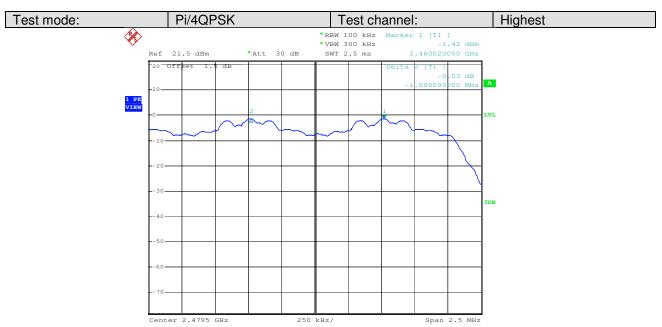


Date: 18.NOV.2010 13:52:45




Report No.: SZEMO10110702201

Page: 32 of 72

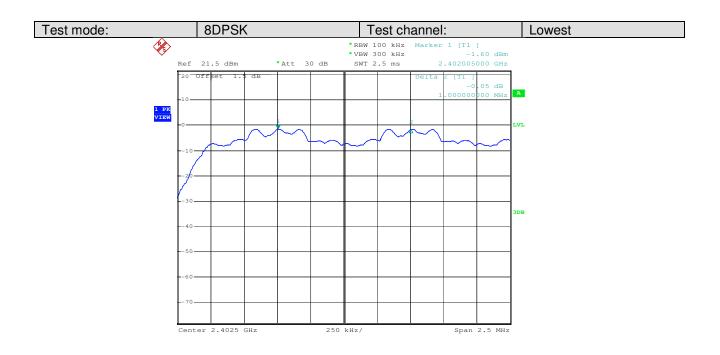

Date: 18.NOV.2010 15:40:58

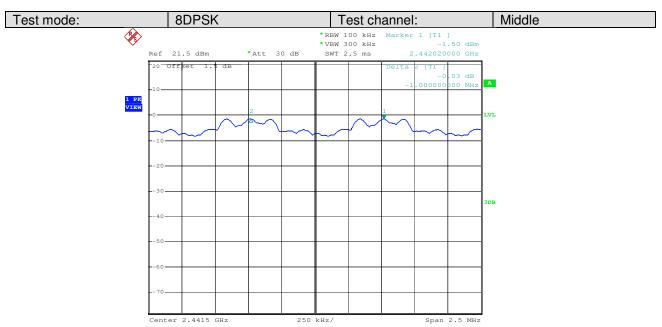


Date: 18.NOV.2010 15:43:08



Report No.: SZEMO10110702201

Page: 33 of 72

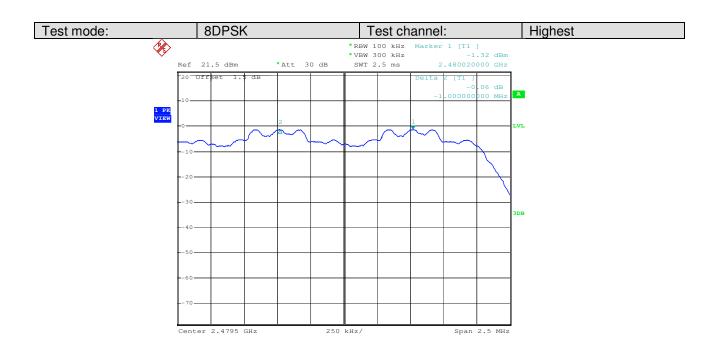

Date: 18.NOV.2010 15:44:57



Report No.: SZEMO10110702201

Page: 34 of 72

## 5.6 Hopping Channel Number

Test Requirement:	FCC Part15 C Section 15.247 (b)	
Test Method:	ANSI C63.10: 2009 and KDB DA00-705	
Limit:	75 channels	
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane	
Test Instruments:	Refer to section 4.7 for details	
Test state:	Hopping transmitting with all kind of modulation.	
Test results:	Pass	

#### **Measurement Data**


Mode	Hopping channel numbers	Limit
GFSK	79	75
Pi/4QPSK	79	75
8DPSK	79	75



Report No.: SZEMO10110702201

Page: 35 of 72

## Test plot as follows

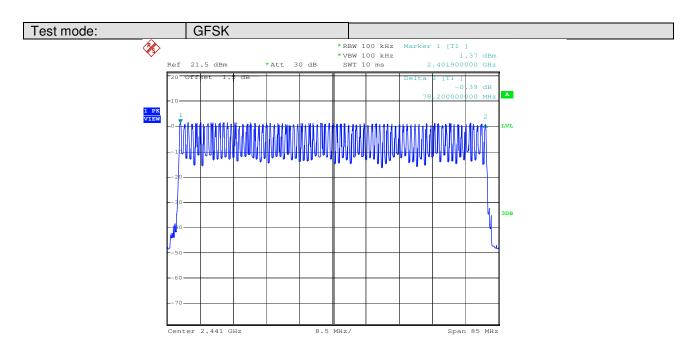


Date: 18.NOV.2010 09:22:28



Report No.: SZEMO10110702201

Page: 36 of 72

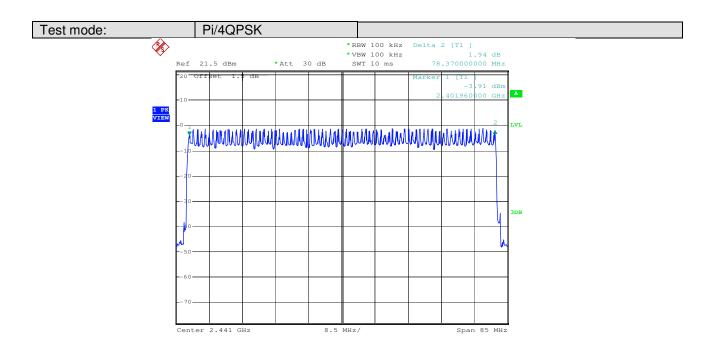


Date: 18.NOV.2010 09:59:26



Report No.: SZEMO10110702201

Page: 37 of 72

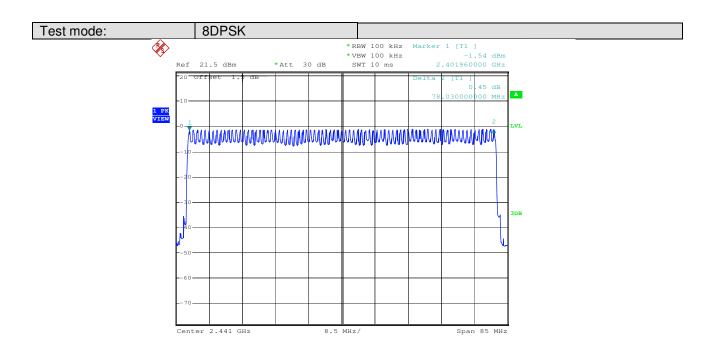

Date: 18.NOV.2010 10:56:08



Report No.: SZEMO10110702201

Page: 38 of 72

## 5.7 Dwell Time

Test Requirement:	FCC Part15 C Section 15.247 (a)(1)					
Test Method:	ANSI C63.10: 2009 and KDB DA00-705					
Limit:	0.4 Second					
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane					
Test Instruments:	Refer to section 4.7 for details					
Test state:	Hopping transmitting with all kind of modulation.					
Test results:	Pass					

#### **Measurement Data**

WCasarcincin Data			
Mode	Packet	Dwell time (second)	Limit (second)
	DH1	0.1568	0.4
GFSK	DH3	0.2800	0.4
	DH5	0.3211	0.4
	2-DH1	0.1632	0.4
Pi/4QPSK	2-DH3	0.2816	0.4
	2-DH5	0.1915	0.4
	3-DH1	0.1616	0.4
8DPSK	3-DH3	0.2792	0.4
	3-DH5	0.3205	0.4


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sgs.com/terms">www.sgs.com/terms</a> e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."




Report No.: SZEMO10110702201

Page: 39 of 72

#### Test plot as follows

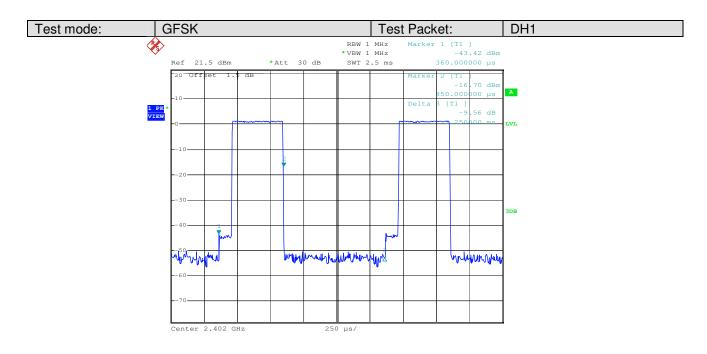

Date: 18.NOV.2010 09:09:08

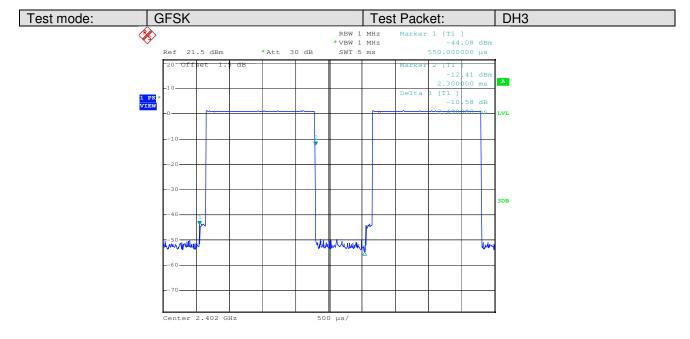


Date: 18.NOV.2010 09:10:24




Report No.: SZEMO10110702201

Page: 40 of 72

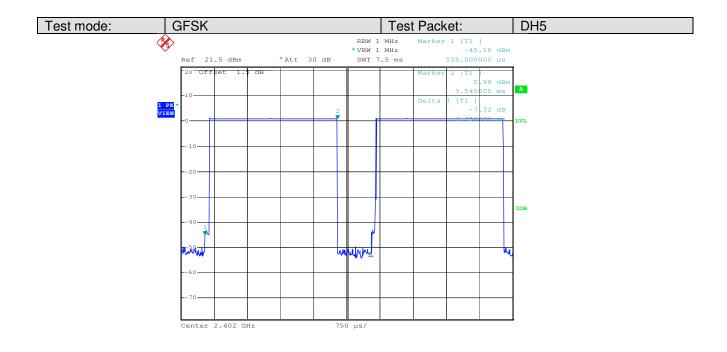

Date: 18.NOV.2010 09:11:51

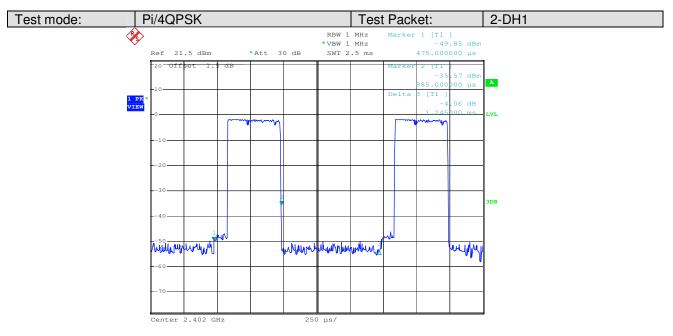


Date: 18.NOV.2010 09:45:59




Report No.: SZEMO10110702201

Page: 41 of 72

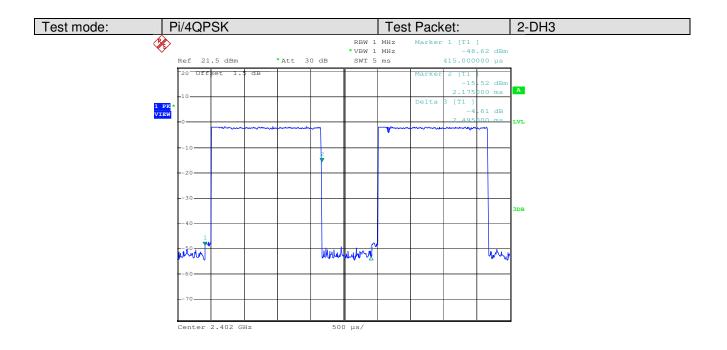

Date: 18.NOV.2010 09:46:56

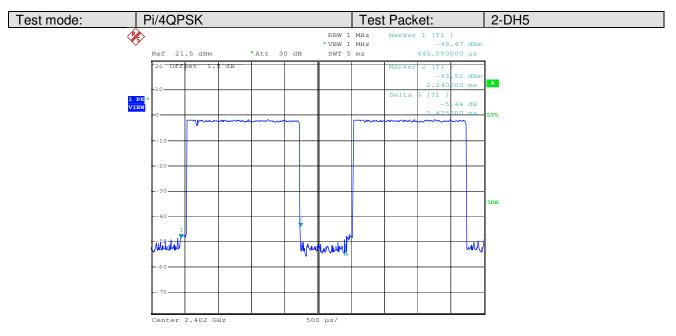


Date: 18.NOV.2010 09:48:38




Report No.: SZEMO10110702201

Page: 42 of 72

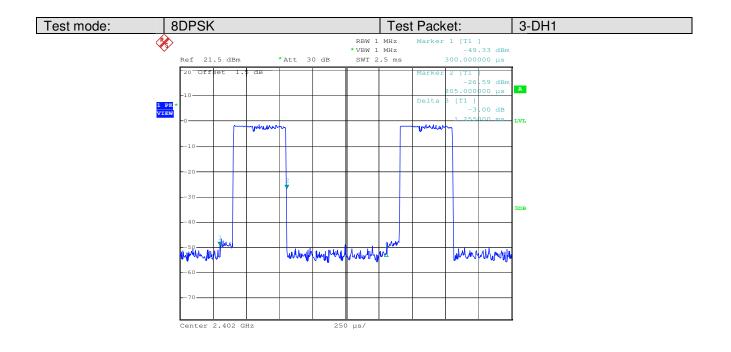

Date: 18.NOV.2010 10:15:29

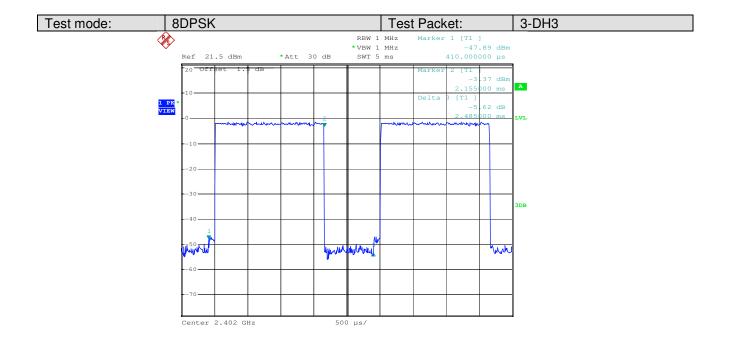


Date: 18.NOV.2010 10:16:26



Report No.: SZEMO10110702201

Page: 43 of 72

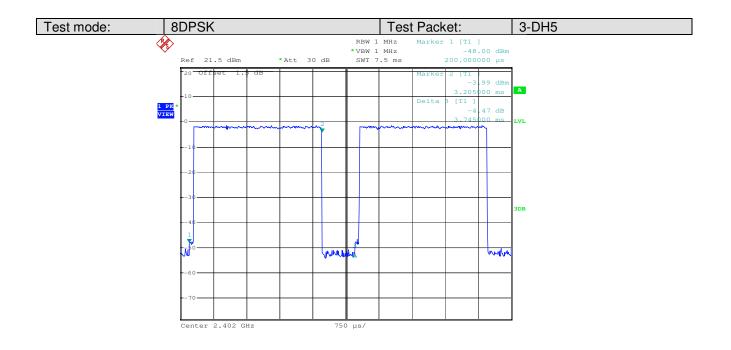

Date: 18.NOV.2010 10:17:46



Report No.: SZEMO10110702201

Page: 44 of 72

# 5.8 Band Edge


Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.10: 2009 and KDB DA00-705						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Test setup:							
	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:						
	Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Test Instruments:	Refer to section 4.7 for details						
Test state:	Hopping transmitting with all kinds of modulation.						
Test results:	Pass						




Report No.: SZEMO10110702201

Page: 45 of 72

#### Test plot as follows:

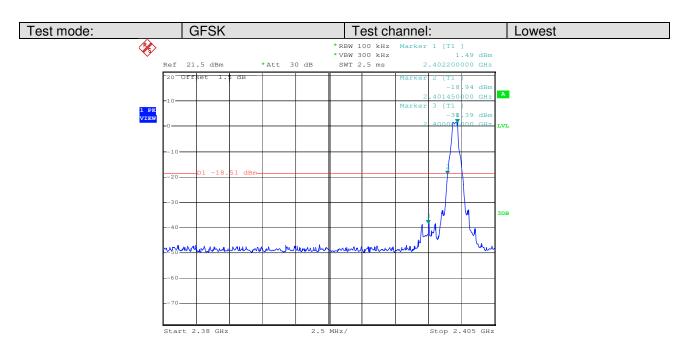

Date: 18.NOV.2010 13:09:07

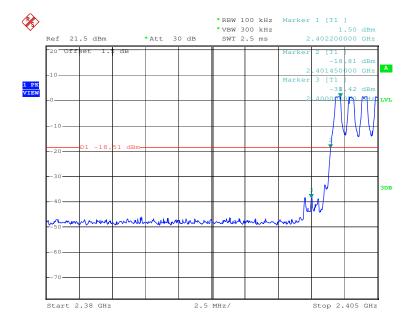


Date: 18.NOV.2010 13:11:19




Report No.: SZEMO10110702201

Page: 46 of 72

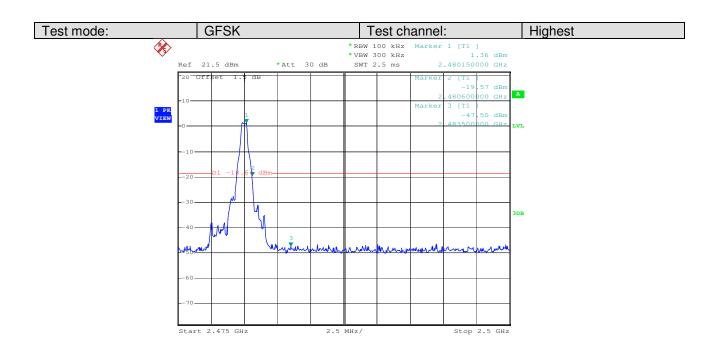

Date: 18.NOV.2010 13:12:46

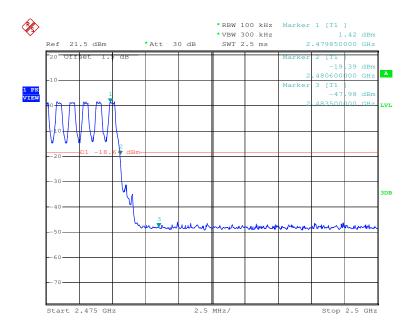


Date: 18.NOV.2010 13:15:18




Report No.: SZEMO10110702201

Page: 47 of 72

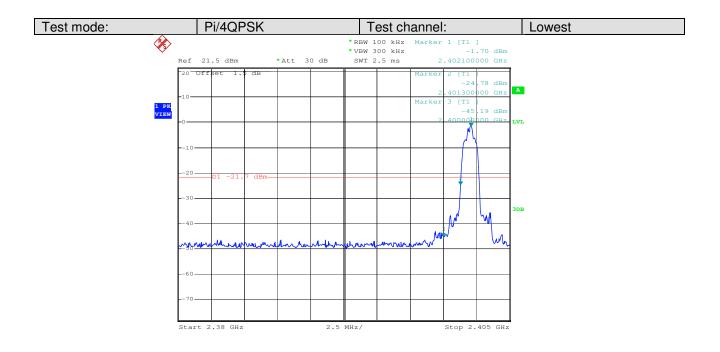

Date: 18.NOV.2010 13:59:11

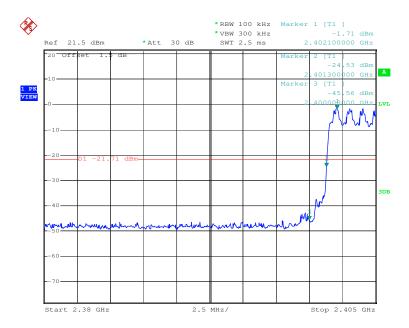


Date: 18.NOV.2010 14:01:22




Report No.: SZEMO10110702201

Page: 48 of 72

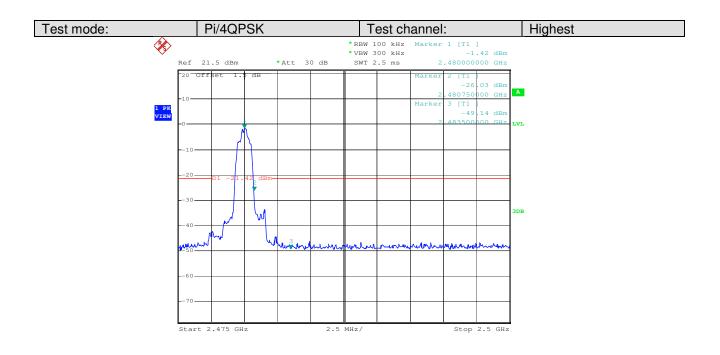

Date: 18.NOV.2010 14:03:26

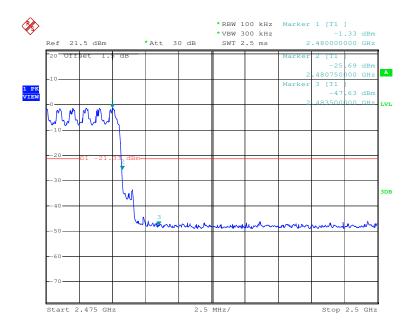


Date: 18.NOV.2010 14:07:03




Report No.: SZEMO10110702201

Page: 49 of 72

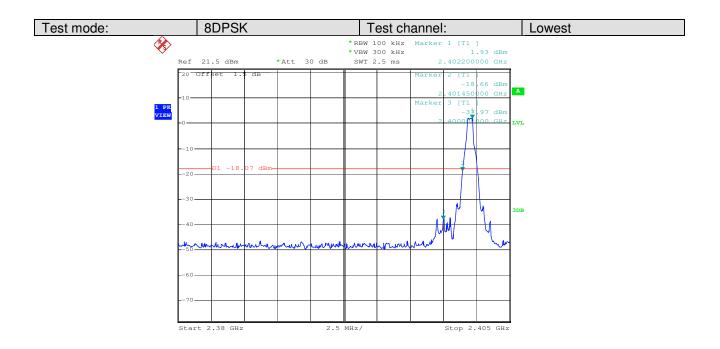

Date: 18.NOV.2010 16:39:05

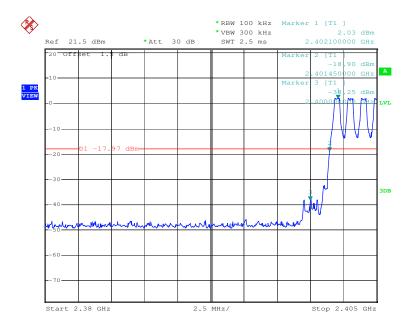


Date: 18.NOV.2010 16:43:34




Report No.: SZEMO10110702201

Page: 50 of 72

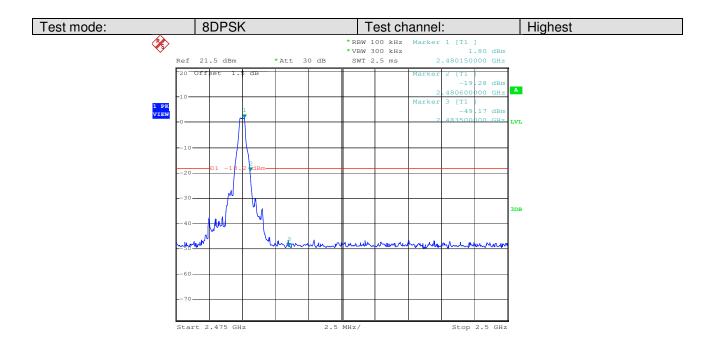

Date: 18.NOV.2010 16:40:39

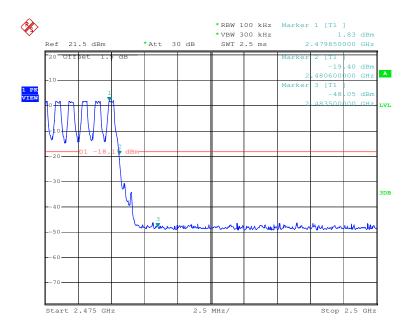

Date: 18.NOV.2010 16:46:09



Report No.: SZEMO10110702201

Page: 51 of 72


# 5.9 RF Antenna Conducted spurious emissions

Test Requirement:	FCC Part15 C Section 15.247 (d)						
Test Method:	ANSI C63.10: 2009 and KDB DA00-705						
Limit:	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.						
Test setup:	Spectrum Analyzer  E.U.T  Non-Conducted Table  Ground Reference Plane  Remark:  Offset the High-Frequency cable loss 1.5dB in the spectrum analyzer.						
Test Instruments:	Refer to section 4.7 for details						
Test results:	Pass						




Report No.: SZEMO10110702201

Page: 52 of 72

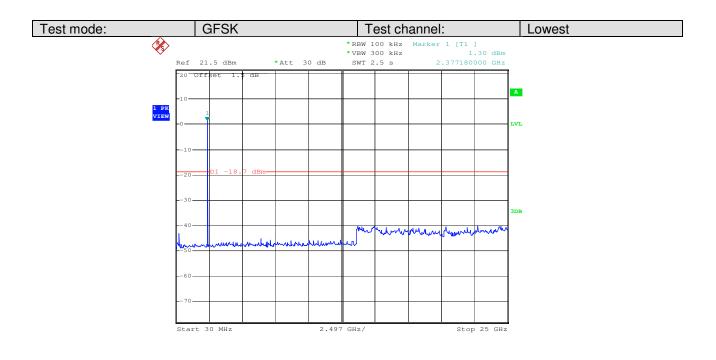

Date: 18.NOV.2010 13:26:34

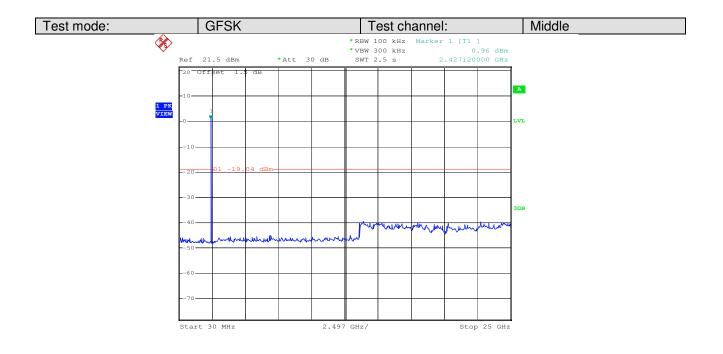


Date: 18.NOV.2010 13:21:00




Report No.: SZEMO10110702201

Page: 53 of 72

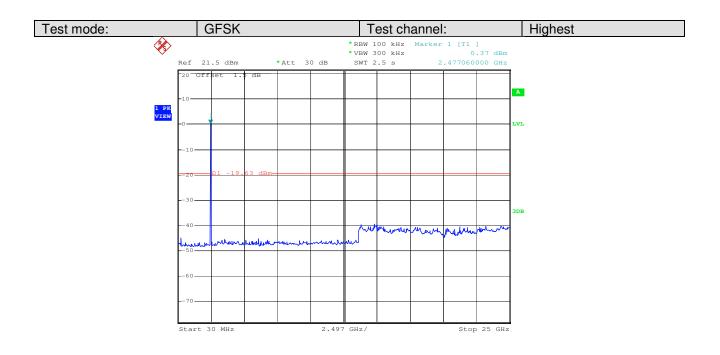

Date: 18.NOV.2010 13:25:17

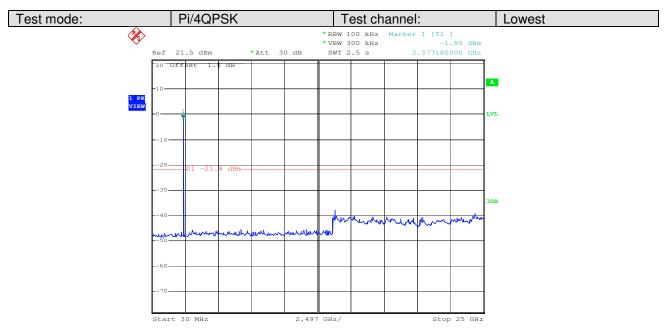


Date: 18.NOV.2010 14:11:26




Report No.: SZEMO10110702201

Page: 54 of 72

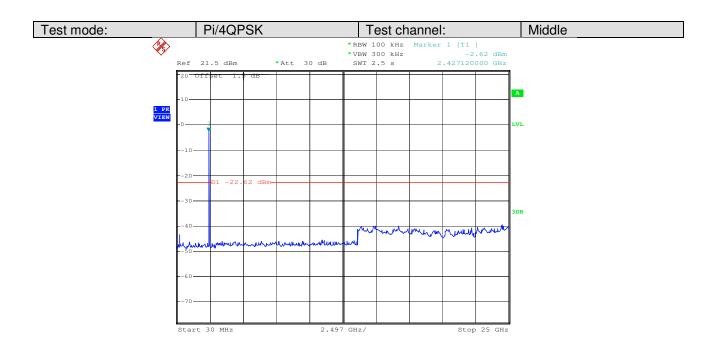

Date: 18.NOV.2010 14:16:21

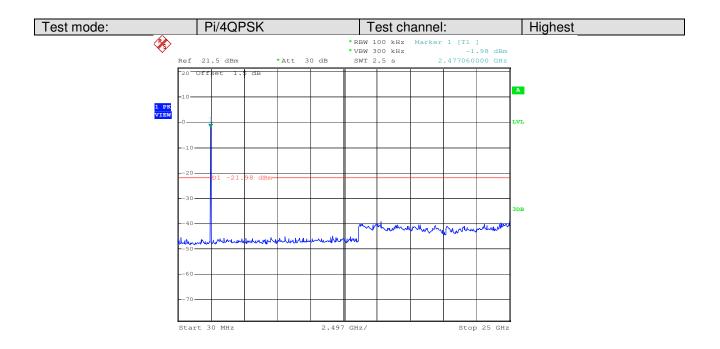


Date: 18.NOV.2010 14:18:45




Report No.: SZEMO10110702201

Page: 55 of 72

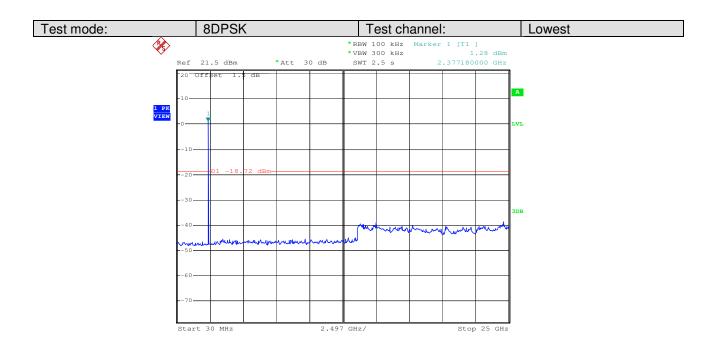

Date: 18.NOV.2010 16:50:56

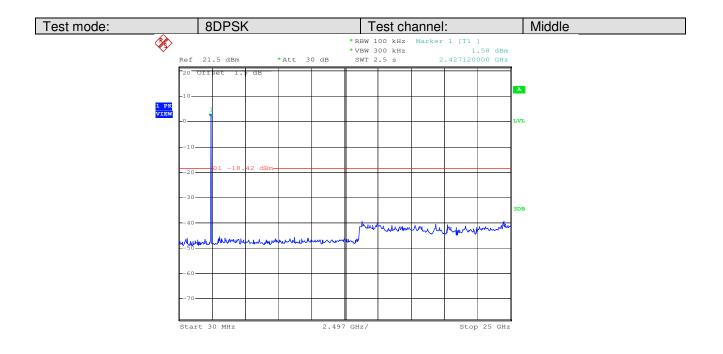


Date: 18.NOV.2010 16:51:50



Report No.: SZEMO10110702201

Page: 56 of 72

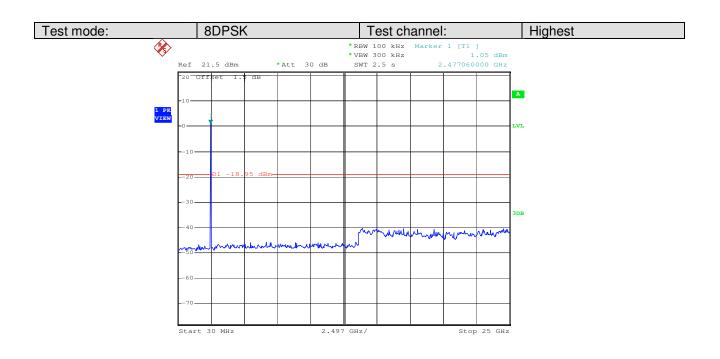

Date: 18.NOV.2010 16:52:48

# SGS

#### SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO10110702201

Page: 57 of 72

# 5.10 Pseudorandom Frequency Hopping Sequence

#### Test Requirement: FCC Part15 C Section 15.247 (a)(1) requirement:


Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.

Alternatively. Frequency hopping systems operating in the 2400-2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW. The system shall hop to channel frequencies that are selected at the system hopping rate from a Pseudorandom ordered list of hopping frequencies. Each frequency must be used equally on the average by each transmitter. The system receivers shall have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shall shift frequencies in synchronization with the transmitted signals.

#### **EUT Pseudorandom Frequency Hopping Sequence**

The pseudorandom sequence may be generated in a nine-stage shift register whose 5th and 9th stage outputs are added in a modulo-two addition stage. And the result is fed back to the input of the first stage. The sequence begins with the first ONE of 9 consecutive ONEs; i.e. the shift register is initialized with nine ones.

- Number of shift register stages: 9
- Length of pseudo-random sequence: 29 -1 = 511 bits
- · Longest sequence of zeros: 8 (non-inverted signal)



Linear Feedback Shift Register for Generation of the PRBS sequence An example of Pseudorandom Frequency Hopping Sequence as follow:

0 2 4 6 62 64 78 1 73 75 77

Each frequency used equally on the average by each transmitter.

The system receivers have input bandwidths that match the hopping channel bandwidths of their corresponding transmitters and shift frequencies in synchronization with the transmitted signals.



Report No.: SZEMO10110702201

Page: 58 of 72


## 5.11 Radiated Emission

Test Requirement:	FCC Part15 C Section 15.209 and 15.205							
Test Method:	ANSI C63.10: 2009							
Test Frequency Range:	30MHz to 25GH	lz						
Test site:	Measurement Distance: 3m (Semi-Anechoic Chamber)							
Receiver setup:		(			,			
ricociver setup.	Frequency	Detector	RBW	VBW	Remark			
	30MHz-1GHz	Quasi-peak	100KHz	300KHz	Quasi-peak Value			
	Above 1GHz	Peak	1MHz	3MHz	Peak Value			
	Above rariz	Peak	1MHz	10Hz	Average Value			
Limit:								
	Freque		Limit (dBuV/		Remark			
	30MHz-8		40.0		Quasi-peak Value			
	88MHz-21		43.5		Quasi-peak Value			
	216MHz-9		46.0		Quasi-peak Value			
	90010172-	IGHZ			·			
	Above 1	GHz			-			
Test Procedure:	960MHz-1GHz  Above 1GHz  The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic camber. The table was rotated 360 degrees to determine the position of the highest radiation.  b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.  c. The antenna height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.  d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.  e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.  f. If the emission level of the EUT in peak mode was 10dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10dB margin would be re-tested one by one using peak, quasipeak or average method as specified and then reported in a data sheet.  g. The radiation measurements are performed in X, Y, Z axis positioning.							
Test Instruments:	Refer to section	rst case is sho 4 7 for details		JUIL.				
rost instruments.	1 10101 10 36011011	T. I TOT GETAILS						



Report No.: SZEMO10110702201

Page: 59 of 72

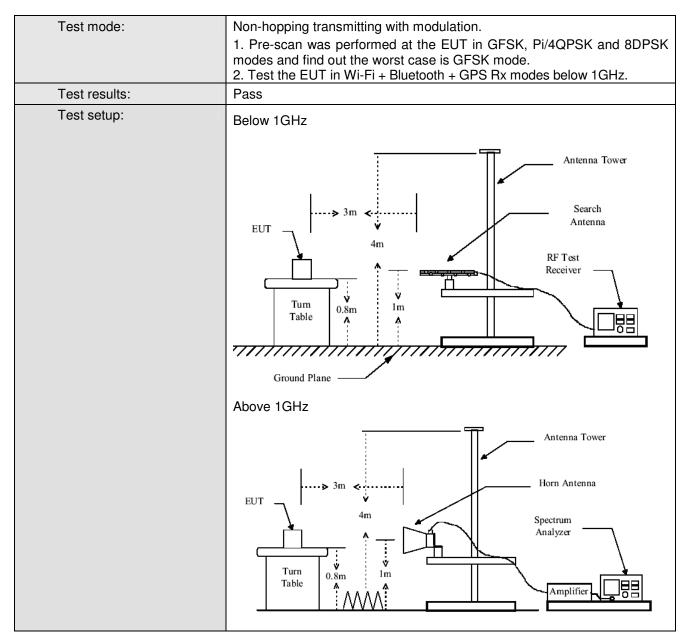

#### Note:

The field strength is calculated by adding the Antenna Factor, Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor




Report No.: SZEMO10110702201

Page: 60 of 72

#### 5.11.1 Radiated emission below 1GHz

#### Vertical:

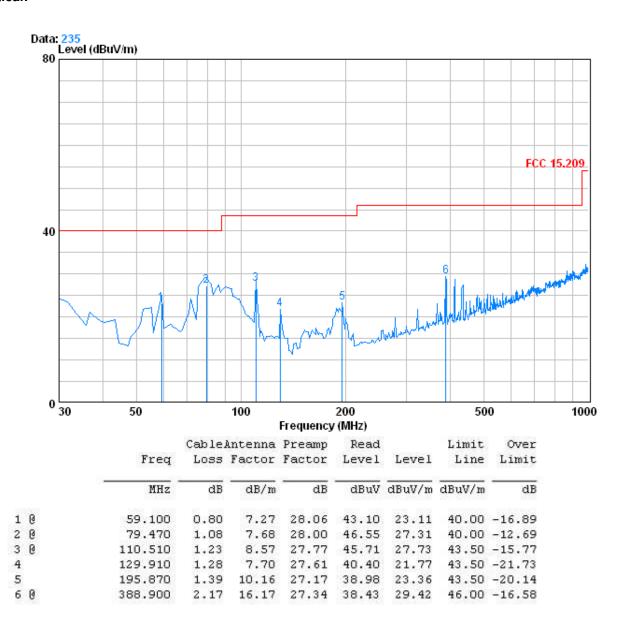


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEMO10110702201

Page: 61 of 72

#### Horizontal:

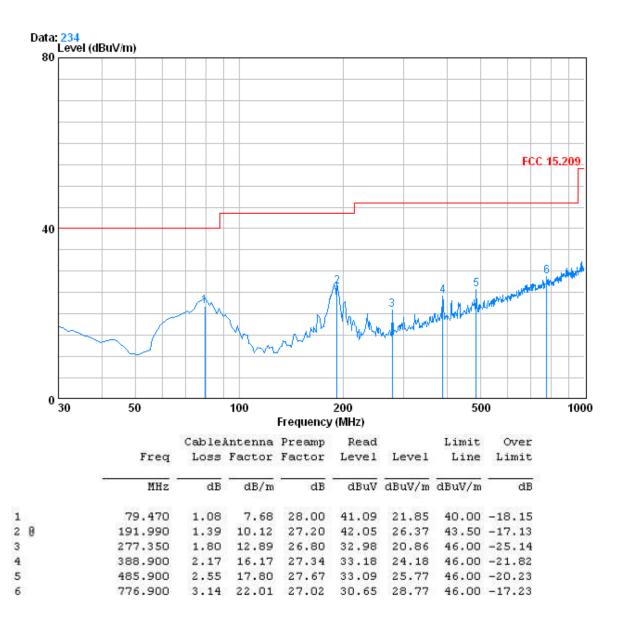

<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Worst case mode: GESK

## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO10110702201

Romark:

Average

Page: 62 of 72

#### 5.11.2 Transmitter emission above 1GHz

Worst case m	Worst case mode: GFSK		Test	channel:	Lowest	Rem	ark:	Peak
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804	9.36	34.04	41.53	57.63	59.50	74.00	-14.50	Vertical
7206	13.38	36.33	40.98	49.74	58.47	74.00	-15.53	Vertical
9608	13.39	36.99	37.56	43.85	56.67	74.00	-17.33	Vertical
12010	16.45	38.80	39.09	42.60	58.76	74.00	-15.24	Vertical
14412	17.44	39.40	44.77	44.81	56.88	74.00	-17.12	Vertical
4804	9.36	34.04	41.53	55.65	57.52	74.00	-16.48	Horizontal
7206	13.38	36.33	40.98	47.95	56.68	74.00	-17.32	Horizontal
9608	13.39	36.99	37.56	44.80	57.62	74.00	-16.38	Horizontal
12010	16.45	38.80	39.09	44.65	60.81	74.00	-13.19	Horizontal
14412	17.44	39.40	44.77	46.25	58.32	74.00	-15.68	Horizontal

WOISE Case II	ioue.	ai oit	1631	Charine.	LOWEST	I TEITI	ain.	Average
Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4804	9.36	34.04	41.53	43.40	45.27	54.00	-8.73	Vertical
7206	13.38	36.33	40.98	35.81	44.54	54.00	-9.46	Vertical
9608	13.39	36.99	37.56	31.91	44.73	54.00	-9.27	Vertical
12010	16.45	38.80	39.09	28.11	44.27	54.00	-9.73	Vertical
14412	17.44	39.40	44.77	32.55	44.62	54.00	-9.38	Vertical
4804	9.36	34.04	41.53	45.23	47.10	54.00	-6.90	Horizontal
7206	13.38	36.33	40.98	38.31	47.04	54.00	-6.96	Horizontal
9608	13.39	36.99	37.56	31.01	43.83	54.00	-10.17	Horizontal
12010	16.45	38.80	39.09	28.02	44.18	54.00	-9.82	Horizontal
14412	17.44	39.40	44.77	32.62	44.69	54.00	-9.31	Horizontal

Test channel: Lowest



Report No.: SZEMO10110702201

Page: 63 of 72

Worst case mode	: GFSK	Test channel:	Middle	Remark:	Peak

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882	10.57	34.02	40.33	53.64	57.90	74.00	-16.10	Vertical
7323	12.91	36.10	40.40	46.87	55.48	74.00	-18.52	Vertical
9764	13.89	37.10	37.94	43.98	57.03	74.00	-16.97	Vertical
12205	17.95	38.93	39.30	42.97	60.55	74.00	-13.45	Vertical
14646	17.18	39.63	45.96	45.39	56.24	74.00	-17.76	Vertical
4882	10.57	34.02	40.33	54.03	58.29	74.00	-15.71	Horizontal
7323	12.91	36.10	40.40	48.77	57.38	74.00	-16.62	Horizontal
9764	13.89	37.10	37.94	42.96	56.01	74.00	-17.99	Horizontal
12205	17.95	38.93	39.30	42.58	60.16	74.00	-13.84	Horizontal
14646	17.18	39.63	45.96	43.04	53.89	74.00	-20.11	Horizontal

Worst case mode: GFSK Test channel: Middle Remark: Average
--

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4882	10.57	34.02	40.33	41.50	45.76	54.00	-8.24	Vertical
7323	12.91	36.10	40.40	35.95	44.56	54.00	-9.44	Vertical
9764	13.89	37.10	37.94	30.58	43.63	54.00	-10.37	Vertical
12205	17.95	38.93	39.30	26.97	44.55	54.00	-9.45	Vertical
14646	17.18	39.63	45.96	31.72	42.57	54.00	-11.43	Vertical
4882	10.57	34.02	40.33	42.23	46.49	54.00	-7.51	Horizontal
7323	12.91	36.10	40.40	36.00	44.61	54.00	-9.39	Horizontal
9764	13.89	37.10	37.94	29.76	42.81	54.00	-11.19	Horizontal
12205	17.95	38.93	39.30	25.79	43.37	54.00	-10.63	Horizontal
14646	17.18	39.63	45.96	31.22	42.07	54.00	-11.93	Horizontal



Report No.: SZEMO10110702201

Page: 64 of 72

Worst case mode: GFSK	Test channel:	Highest	Remark:	Peak
-----------------------	---------------	---------	---------	------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960	10.43	34.01	41.03	54.15	57.56	74.00	-16.44	Vertical
7440	12.72	35.91	40.01	46.15	54.77	74.00	-19.23	Vertical
9920	14.24	37.23	37.78	45.39	59.08	74.00	-14.92	Vertical
12400	17.55	39.04	39.48	43.56	60.67	74.00	-13.33	Vertical
14880	16.69	39.80	46.61	45.30	55.18	74.00	-18.82	Vertical
4960	10.43	34.01	41.03	55.78	59.19	74.00	-14.81	Horizontal
7440	12.72	35.91	40.01	48.89	57.51	74.00	-16.49	Horizontal
9920	14.24	37.23	37.78	42.74	56.43	74.00	-17.57	Horizontal
12400	17.55	39.04	39.48	42.89	60.00	74.00	-14.00	Horizontal
14880	16.69	39.80	46.61	44.35	54.23	74.00	-19.77	Horizontal

Worst case mode:	GFSK	Test channel:	Highest	Remark:	Average
------------------	------	---------------	---------	---------	---------

Frequency (MHz)	Cable Loss (dB)	Antenna Factor (dB/m)	Preamp Factor (dB)	Read Level (dBuV)	Level (dBuV/m)	Limit Line (dBuV/m)	Over Limit (dB)	polarization
4960	10.43	34.01	41.03	41.79	45.20	54.00	-8.80	Vertical
7440	12.72	35.91	40.01	36.79	45.41	54.00	-8.59	Vertical
9920	14.24	37.23	37.78	29.82	43.51	54.00	-10.49	Vertical
12400	17.55	39.04	39.48	27.78	44.89	54.00	-9.11	Vertical
14880	16.69	39.80	46.61	31.80	41.68	54.00	-12.32	Vertical
4960	10.43	34.01	41.03	42.91	46.32	54.00	-7.68	Horizontal
7440	12.72	35.91	40.01	35.77	44.39	54.00	-9.61	Horizontal
9920	14.24	37.23	37.78	30.02	43.71	54.00	-10.29	Horizontal
12400	17.55	39.04	39.48	25.81	42.92	54.00	-11.08	Horizontal
14880	16.69	39.80	46.61	31.55	41.43	54.00	-12.57	Horizontal

#### Remark:

The disturbance above 15GHz was very low, and the above harmonics were the highest point could be found when testing, so only the above harmonics had been displayed.




Report No.: SZEMO10110702201

Page: 65 of 72

5.11.3 Band e	dge (Radiated	Emission)			
Test mode:	BT Tx	Test channel:	Lowest	Remark:	Peak

Vertical:

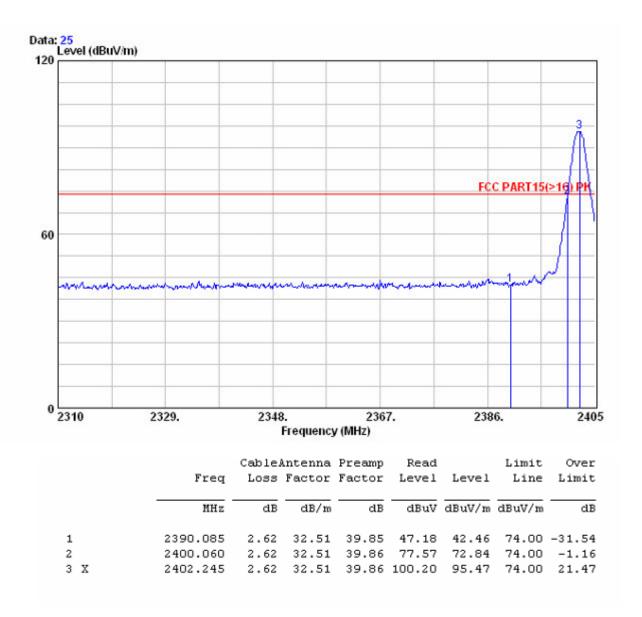


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> and conditions.htm</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="https://www.sqs.com/terms">www.sqs.com/terms</a> e-document.htm</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEMO10110702201

Page: 66 of 72

#### Horizontal:

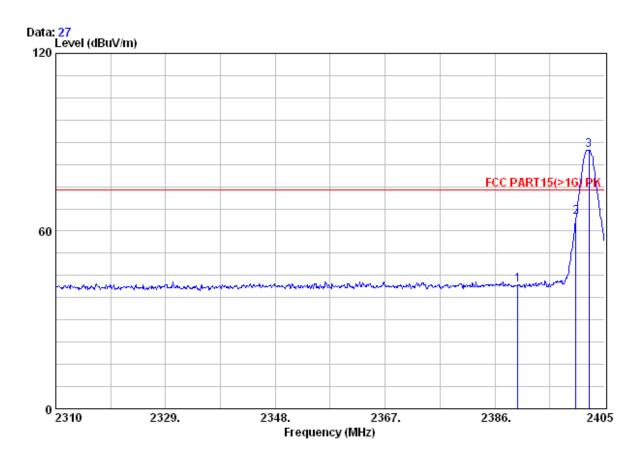

			Cable	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor dB		Level	Line	Limit
		MHz	dB	dB/m			dBuV/m		dB
1		2390.000	2.62	32.51	39.85	46.68	41.96	74.00	-32.04
2		2400.000	2.62	32.51	39.86	69,48	64.75	74.00	-9.25
3	X	2402.245	2.62	32.51	39.86	92.09	87.36	74.00	13.36




Report No.: SZEMO10110702201

Page: 67 of 72

	Test mode:	BT Tx	Test channel:	Lowest	Remark:	Average
--	------------	-------	---------------	--------	---------	---------

#### Vertical:

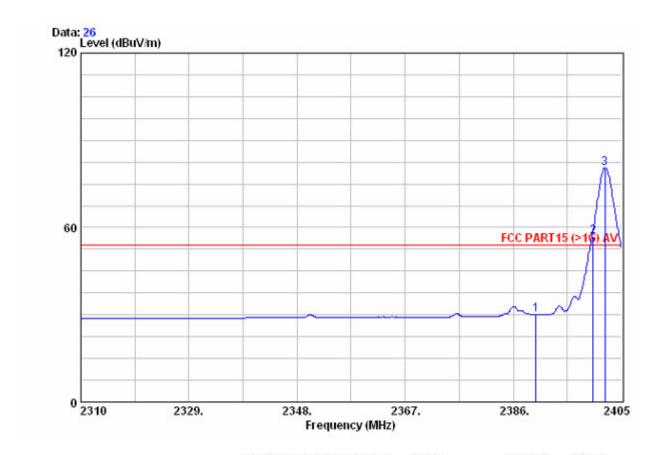


			Cable	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1		2390.000	2.62	32.51	39.85	34.76	30.04	54.00	-23.96
2	X	2400.000	2.62	32.51	39.86	61.76	57.03	54.00	3.03
3	X	2402.150	2.62	32.51	39.86	85.28	80.55	54.00	26.55



Report No.: SZEMO10110702201

Page: 68 of 72

#### Horizontal:

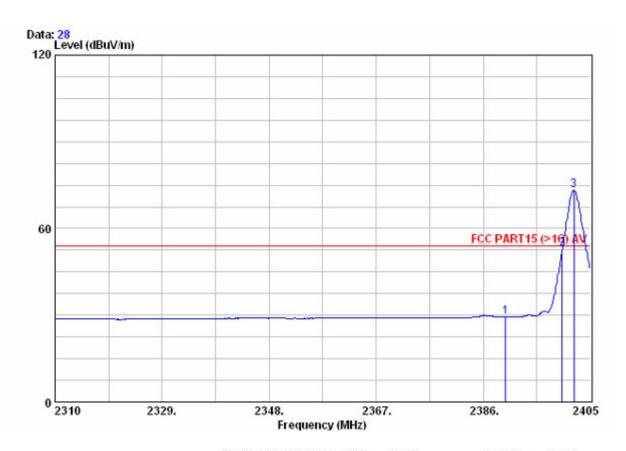

			Cable.	Antenna	Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor dB	Level dBuV	Level	Line dBuV/m	
		MHz	dB	dB/m			dBuV/m		
1		2390.000	2.62	32.51	39.85	34.22	29.51	54.00	-24.49
2		2400.000	2.62	32.51	39.86	57.65	52.92	54.00	-1.08
3	x	2402.150	2.62	32.51	39.86	77.88	73.15	54.00	19.15



1 X

2480.175

2483.500

2.63

2.63

32.67

32.67 39.92


## SGS-CSTC Standards Technical Services Ltd.

Report No.: SZEMO10110702201

69 of 72 Page:

Test mode: E	BT Tx	Test channel:	Highest	Remark:	Peak
--------------	-------	---------------	---------	---------	------

#### Vertical:

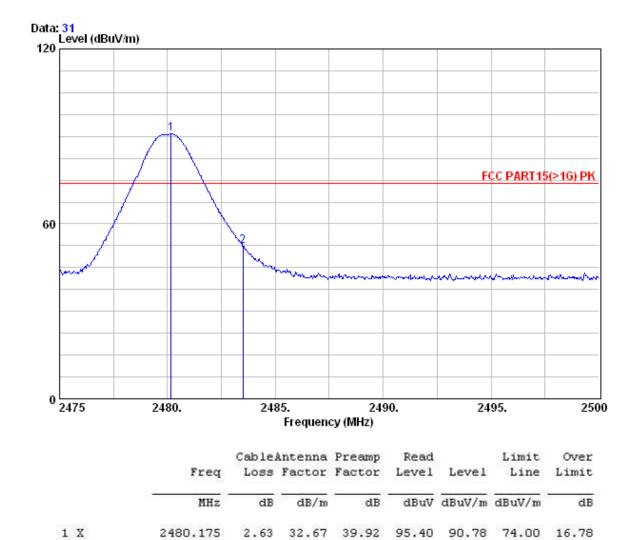

95.40

56.88

52.26

74.00 16.78

74.00 -21.74


<sup>&</sup>quot;This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 90 days only."



Report No.: SZEMO10110702201

Page: 70 of 72

#### Horizontal:

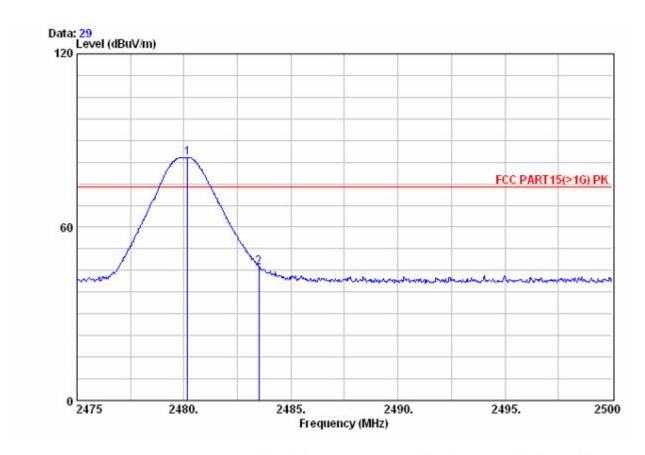

		Freq			Preamp Factor	Read Level		Limit Line	
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	——dB
1	x	2480.175	2.63	32.67	39.92	88.76	84.14	74.00	10.14
2		2483.500	2.63	32.67	39.92	50.79	46.17	74.00	-27.83




Report No.: SZEMO10110702201

Page: 71 of 72

Test mode: BT Tx Test channel: Highest Remark: Average	
--	--

#### Vertical:

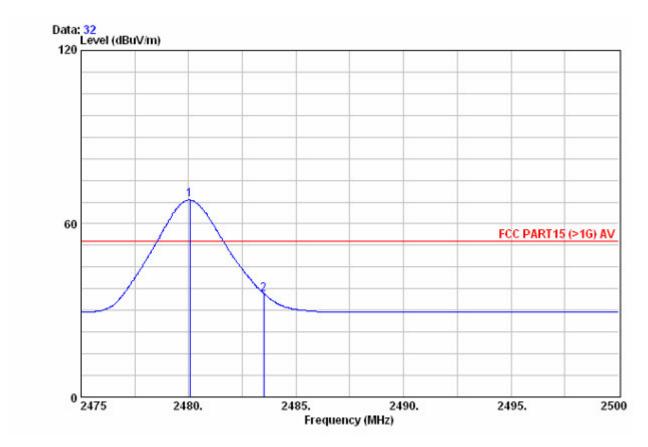


	Freq		Antenna Factor		Read Level	Level	Limit Line	Over Limit
	MHz	dB	dB dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	2480.050	2.63	32.67	39.92	72.82	68.20	54.00	14.20
2	2483.500	2.63	32.67	39.92	40.36	35.74	54.00	-18.26



Report No.: SZEMO10110702201

Page: 72 of 72

#### Horizontal:

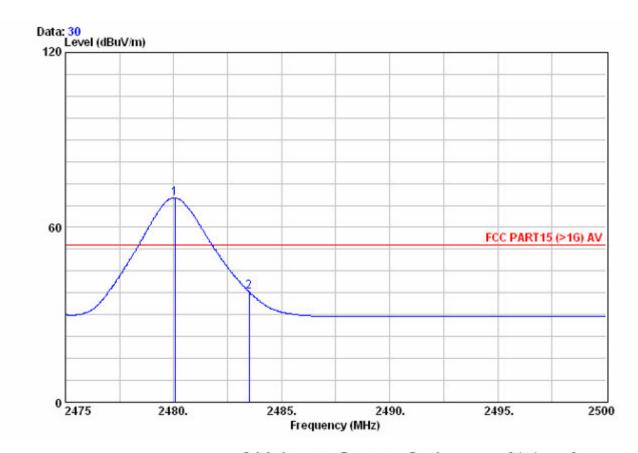

			CableAntenna		Preamp	Read		Limit	Over
		Freq	Loss	Factor	Factor	Level	Level	Line	Limit
		MHz	dB	dB/m	dB	dBuV	dBuV/m	dBuV/m	dB
1 X	:	2480.050	2.63	32.67	39.92	74.69	70.06	54.00	16.06
2		2483.500	2.63	32.67	39.92	42.54	37.92	54.00	-16.08