



Report No.: SZ11030176E03

CNAS L3572

FCC BLUETOOTH TEST REPORT

Issued to

Creative Labs Inc.

For

Bluetooth Headset

Model Name	EF0490
Trade Name	Creative
Brand Name	N/A
FCC ID	IBAEF0490
IC ID	2315A-EF0490
Standard	47 CFR Part 15 Subpart C
Test date	April 11, 2011 – April 22, 2011
Issue date	May 11, 2011

by

Shenzhen Morlab Communications Technology Co., Ltd.

Tested by

Tu Lang

Tu Lang

Date

2011.5.11

Approved by

Shu Luan

Shu Luan

Date

2011.5.11

Review by

Huang Pulong

Huang Pulong

Date

2011.5.11

CTIA Authorized Test Lab

LAB CODE 20081223-00

IEEE 1725

OTA

OFTA

電訊管理局



GCF

Official Observer of
Global Certification Forum

Bluetooth

BQTF

FCC

Reg. No.
741109

The report refers only to the sample tested and does not apply to the bulk. This report is issued in confidence to the client and it will be strictly treated as such by the Shenzhen MORLAB Communication Technology Co., Ltd. It may not be reproduced rather in its entirety or in part and it may not be used for advertising. The client to whom the report is issued may, however, show or send it or a certified copy thereof prepared by the Shenzhen MORLAB Telecommunication Co., Ltd to his customer. Supplier or others persons directly concerned. Shenzhen MORLAB Telecommunication Co., Ltd will not, without the consent of the client enter into any discussion of correspondence with any third party concerning the contents of the report. In the event of the improper use of the report, Shenzhen MORLAB Telecommunication Co., Ltd reserves the rights to withdraw it and to adopt any other remedies which may be appropriate.

Shenzhen MORLAB Communication Technology Co., Ltd.

3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 61281201 Fax: +86 755 86130218

TABLE OF CONTENTS

1.	GENERAL INFORMATION	4
1.1	EUT Description	4
1.2	Test Standards and Results	5
1.3	Facilities and Accreditations	6
1.3.1	Facilities	6
1.3.2	Test Environment Conditions	6
2.	47 CFR PART 15C REQUIREMENTS	7
2.1	Number of Hopping Frequency	7
2.1.1	Requirement	7
2.1.2	Test Description	7
2.1.3	Test Result	7
2.2	Peak Output Power	10
2.2.1	Requirement	10
2.2.2	Test Description	10
2.2.3	Test Result	10
2.3	20dB Bandwidth	17
2.3.1	Definition	17
2.3.2	Test Description	17
2.3.3	Test Result	17
2.4	Carried Frequency Separation	22
2.4.1	Definition	22
2.4.2	Test Description	22
2.4.3	Test Result	22
2.5	Time of Occupancy (Dwell time)	24
2.5.1	Requirement	24
2.5.2	Test Description	24
2.5.3	Test Result	24
2.6	Conducted Spurious Emissions	31
2.6.1	Requirement	31
2.6.2	Test Description	31
2.6.3	Test Result	31

2.7	Band Edge	42
2.7.1	Requirement	42
2.7.2	Test Description	42
2.7.3	Test Result	43
2.8	Conducted Emission	51
2.9	Radiated Emission	52
2.9.1	Requirement	52
2.9.2	Test Description	52
2.9.3	Test Result	53

Change History		
Issue	Date	Reason for change
1.0	May 6, 2011	First edition

1. GENERAL INFORMATION

1.1 EUT Description

EUT Type: Bluetooth Headset
Serial No.....: (n.a, marked #1 by test site)
Hardware Version: V01
Software Version: V1.0
Applicant: Creative Labs Inc.
1901 McCarthy Blvd, Milpitas, California 95035, United States
Manufacturer: Creative Technology Ltd.
31 International Business Park, Creative Resource, Singapore
609921
Frequency Range.....: The frequency range used is 2402MHz - 2480MHz (79 channels, at
intervals of 1MHz);
The frequency block is 2400MHz to 2483.5MHz.
Modulation Type.....: FHSS
Power Supply: Battery
Model Name: AEC352535
Brand name: AEC
Capacitance: 250mAh
Rated voltage: 3.8V
Manufacturer: Apower Electronics Co., Ltd.
Manufacturer Address: Unit F1, Guoguang Industrial Park 8, Jing
Hu Road, Xin Hua Street, Huadu District, Guangzhou

Note 1: The EUT is a Bluetooth Headset, it contains Bluetooth Module operating at 2.4GHz ISM band; the frequencies allocated for the Bluetooth Module is $F(\text{MHz})=2402+1*n$ ($0 \leq n \leq 78$). The lowest, middle, highest channel numbers of the Bluetooth Module used and tested in this report are separately 0 (2402MHz), 39 (2441MHz) and 78 (2480MHz).

Note 2: For a more detailed description, please refer to Specification or User's Manual supplied by the applicant and/or manufacturer.

1.2 Test Standards and Results

The objective of the report is to perform testing according to 47 CFR Part 15 Subpart C (Bluetooth, 2.4GHz ISM band radiators) for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-09 Edition)	Radio Frequency Devices
2	RSS-210: Issue 7, June 2007	Low-power Licence-exempt Radio communication Devices (All Frequency Bands): Category I Equipment

Test detailed items/section required by FCC/IC rules and results are as below:

No.	Section in CFR 47	Section in RSS-GEN or RSS-210	Description	Result
1	15.247(a)	A8.1 (4)	Number of Hopping Frequency	PASS
2	15.247(b)	A8.4 (2)	Peak Output Power	PASS
3	15.247(a)	A8.1 (1)	20dB Bandwidth	PASS
4	15.247(a)	A8.1 (2)	Carrier Frequency Separation	PASS
5	15.247(a)	A8.1 (4)	Time of Occupancy (Dwell time)	PASS
6	15.247(c)	A8.5	Conducted Spurious Emission	PASS
7	15.247(c)	A8.5	Band Edge	PASS
8	15.207	7.2.2	Conducted Emission	N.A
9	15.209 15.247(c)	A8.5	Radiated Emission	PASS

NOTE:

The tests were performed according to the method of measurements prescribed in DA-00-705.

1.3 Facilities and Accreditations

1.3.1 Facilities

Shenzhen Morlab Communications Technology Co., Ltd. Morlab Laboratory is a testing organization accredited by China National Accreditation Service for Conformity Assessment (CNAS) according to ISO/IEC 17025. The accreditation certificate number is L3572.

All measurement facilities used to collect the measurement data are located at 3/F, Electronic Testing Building, Shahe Road, Xili, Nanshan District, Shenzhen, 518055 P. R. China. The test site is constructed in conformance with the requirements of ANSI C63.7, ANSI C63.4 and CISPR Publication 22; the FCC registration number is 741109.

1.3.2 Test Environment Conditions

During the measurement, the environmental conditions were within the listed ranges:

Temperature (°C):	15 - 35
Relative Humidity (%):	30 -60
Atmospheric Pressure (kPa):	86-106

2. 47 CFR PART 15C REQUIREMENTS


2.1 Number of Hopping Frequency

2.1.1 Requirement

According to FCC §15.247(a)(1)(iii) and RSS-210 A8.1 (4), frequency hopping systems operating in the 2400MHz to 2483.5MHz bands shall use at least 15 hopping frequencies.

2.1.2 Test Description

A. Test Setup:

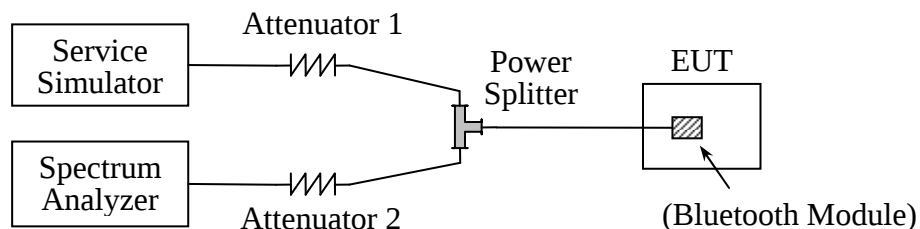

The Bluetooth Module of the EUT, which is powered by the Battery, is coupled to the Spectrum Analyzer (SA) and the Bluetooth Service Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. During the measurement, the Bluetooth Module of the EUT is activated and controlled by the SS, and is set to operate under test mode transmitting 339 bytes DH5 packages at maximum power.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
Service Simulator	Agilent	E5515C	GB43130131	2010.09
Spectrum Analyzer	Agilent	E7405A	US44210471	2010.09
Power Splitter	Weinschel	1506A	NW521	(n.a.)
Attenuator 1	Resnet	20dB	(n.a.)	(n.a.)
Attenuator 2	Resnet	3dB	(n.a.)	(n.a.)


2.1.3 Test Result

The Bluetooth Module operates at hopping-on test mode; the frequencies number employed is counted to verify the Module's using the number of hopping frequency.


A. Test Verdict:

Test Mode	Frequency Block (MHz)	Measured Channel Numbers	Min. Limit	Refer to Plot	Verdict
GFSK	2400 - 2483.5	79	15	Plot A	PASS
$\pi/4$ -DQPSK	2400 - 2483.5	79	15	Plot B	PASS
8-DPSK	2400 - 2483.5	79	15	Plot C	PASS


B. Test Plot:

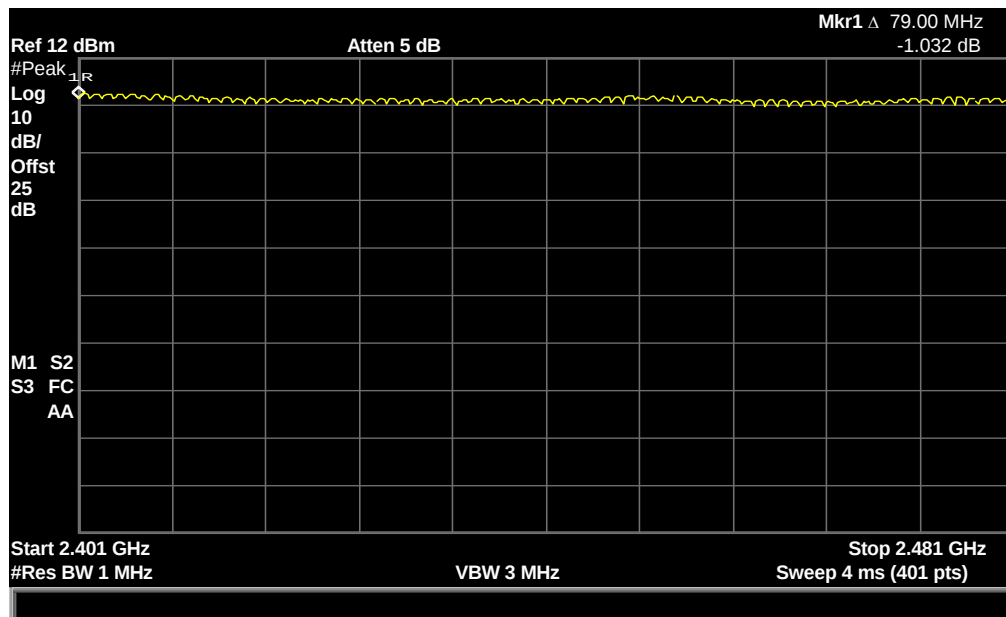

(Plot A: GFSK)

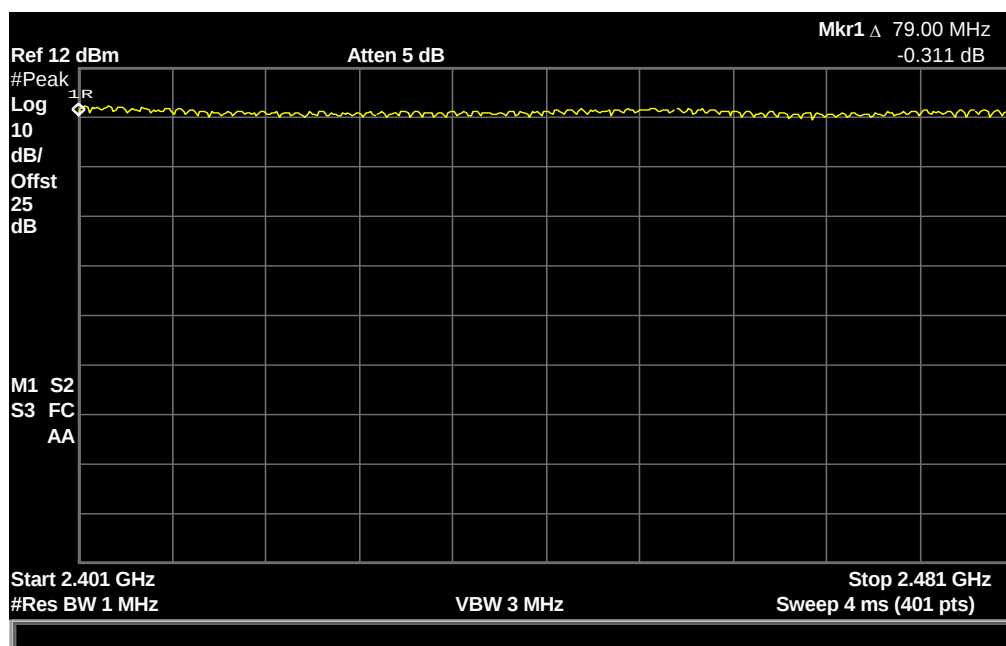

(Plot B: $\pi/4$ -DQPSK)

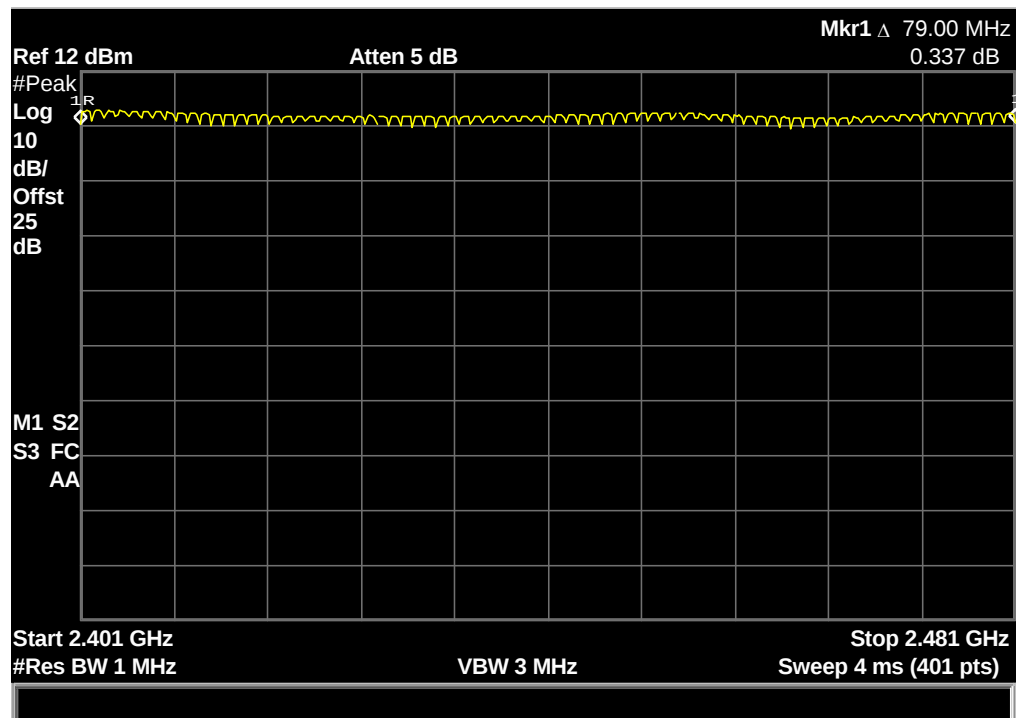

(Plot C: 8- DPSK)

2.2 Peak Output Power

2.2.1 Requirement

According to FCC §15.247(b)(1) and RSS-210 A8.4 (2), for frequency hopping systems that operates in the 2400MHz to 2483.5MHz band employing at least 75 hopping channels, the maximum peak output power of the intentional radiator shall not exceed 1Watt. For all other frequency hopping systems in the 2400MHz to 2483.5MHz band, it is 0.125Watts.

2.2.2 Test Description

See section 2.1.2 of this report.

2.2.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to verify the conducted RF output peak power of the Module.

A. Test Verdict:


GFSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	4.775	0.003	Plot A	30	1	PASS
39	2441	3.867	0.0024	Plot B			PASS
78	2480	4.229	0.0026	Plot C			PASS


B. Test Plot:

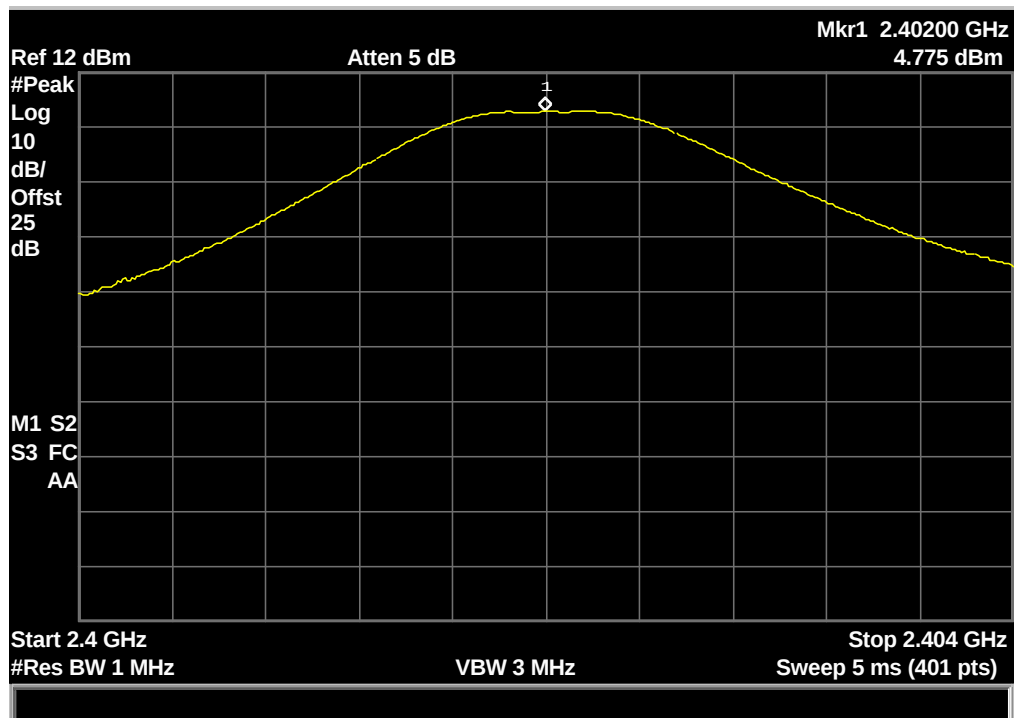

(Plot A: Channel = 2402)

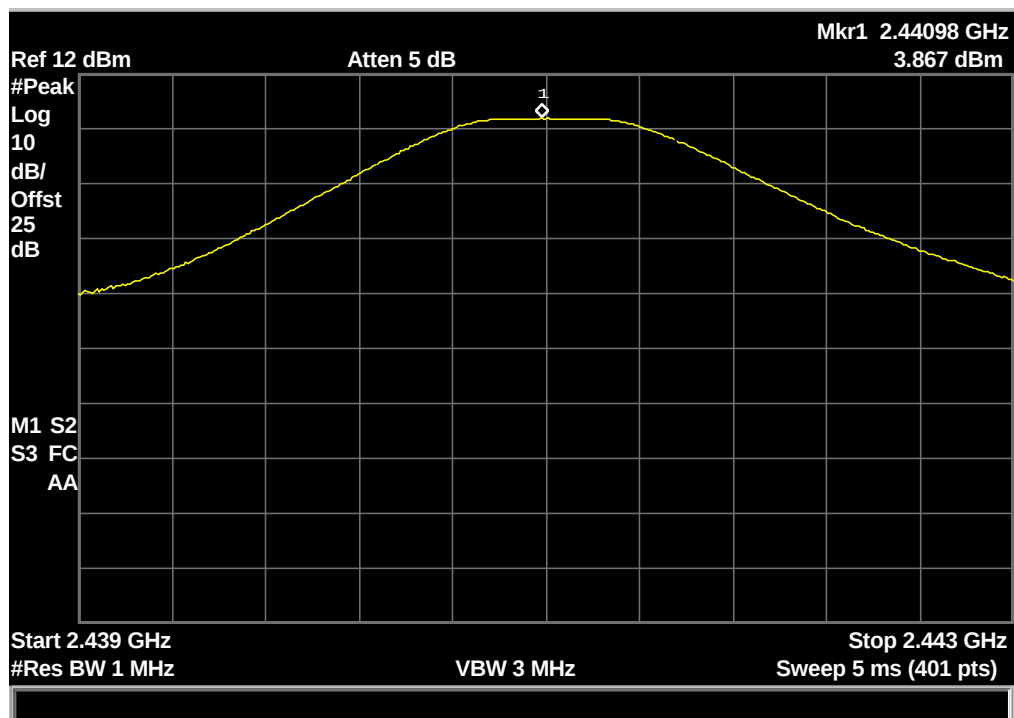

(Plot B: Channel = 2441)

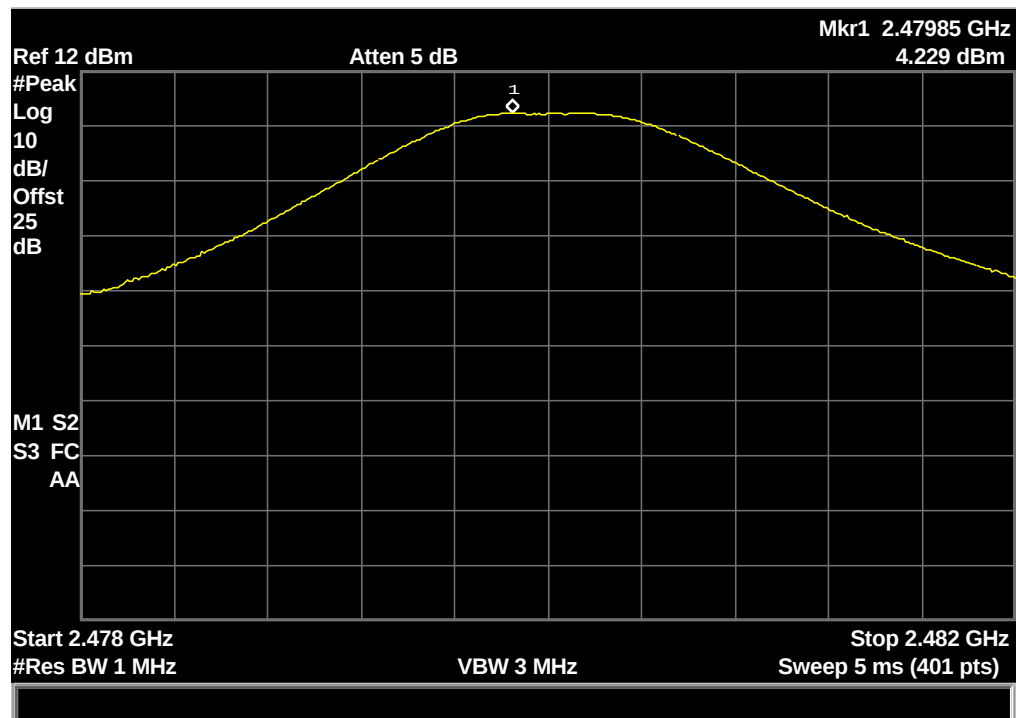


(Plot C: Channel = 2480)

A. Test Verdict:


$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	5.348	0.0034	Plot D	30	1	PASS
39	2441	4.531	0.0028	Plot E			PASS
78	2480	4.473	0.0028	Plot F			PASS


B. Test Plot:

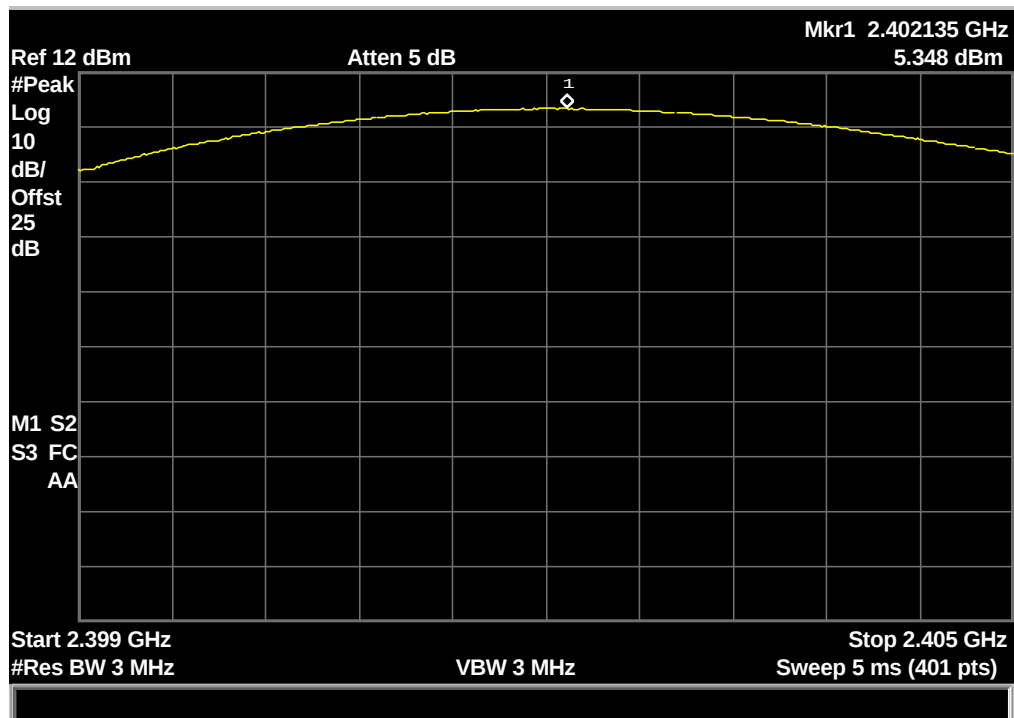

(Plot D: Channel = 2402)

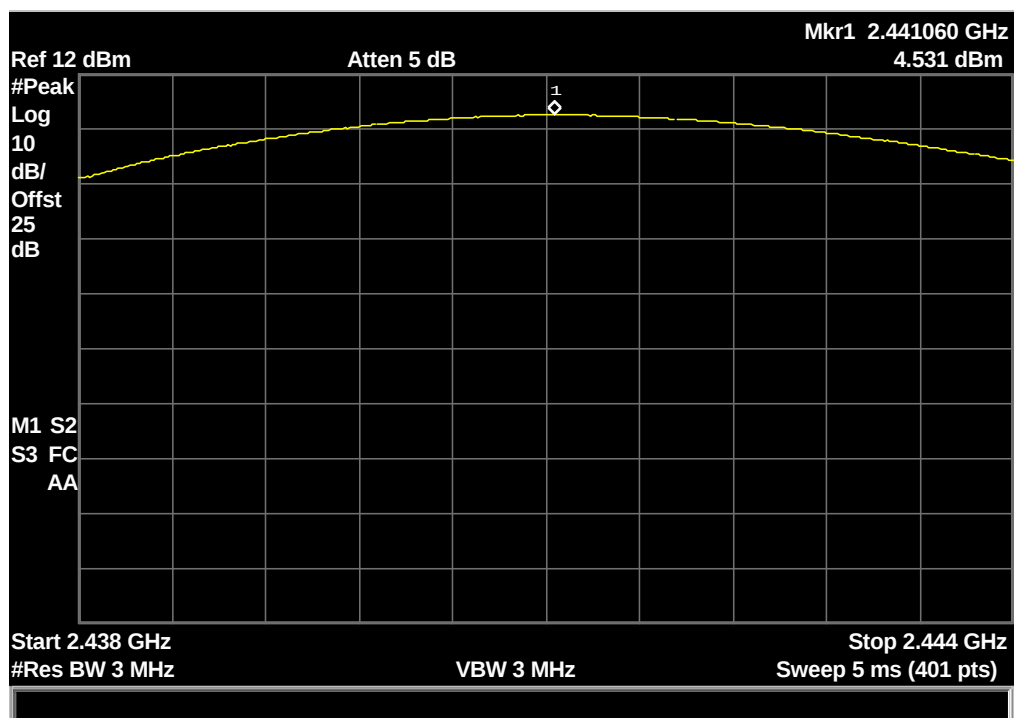

(Plot E: Channel = 2441)

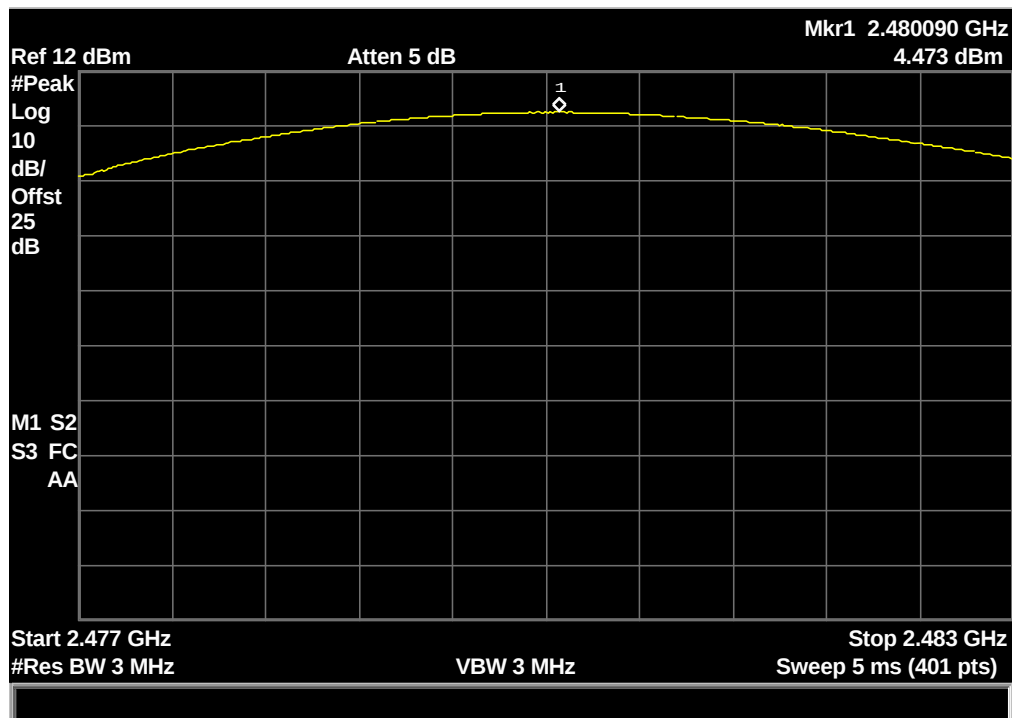


(Plot F: Channel = 2480)

C. Test Verdict:


8-DPSK Mode

Channel	Frequency (MHz)	Measured Output Peak Power			Limit		Verdict
		dBm	W	Refer to Plot	dBm	W	
0	2402	5.106	0.0032	Plot G	30	1	PASS
39	2441	4.194	0.0026	Plot H			PASS
78	2480	4.306	0.0027	Plot I			PASS


D. Test Plot:

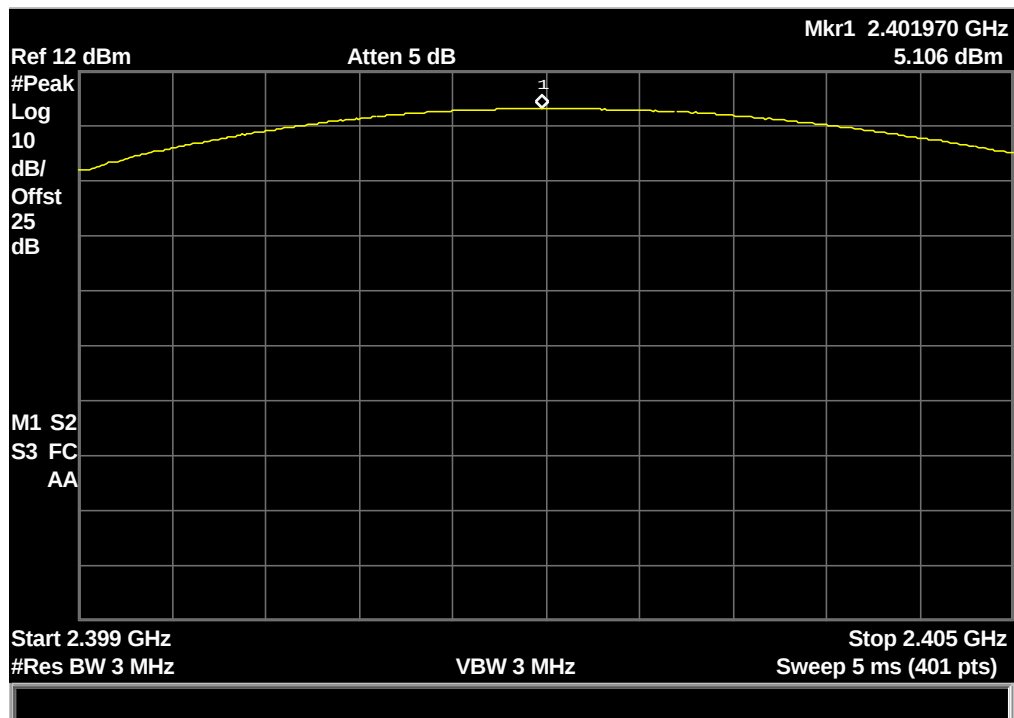

(Plot G: Channel = 2402)

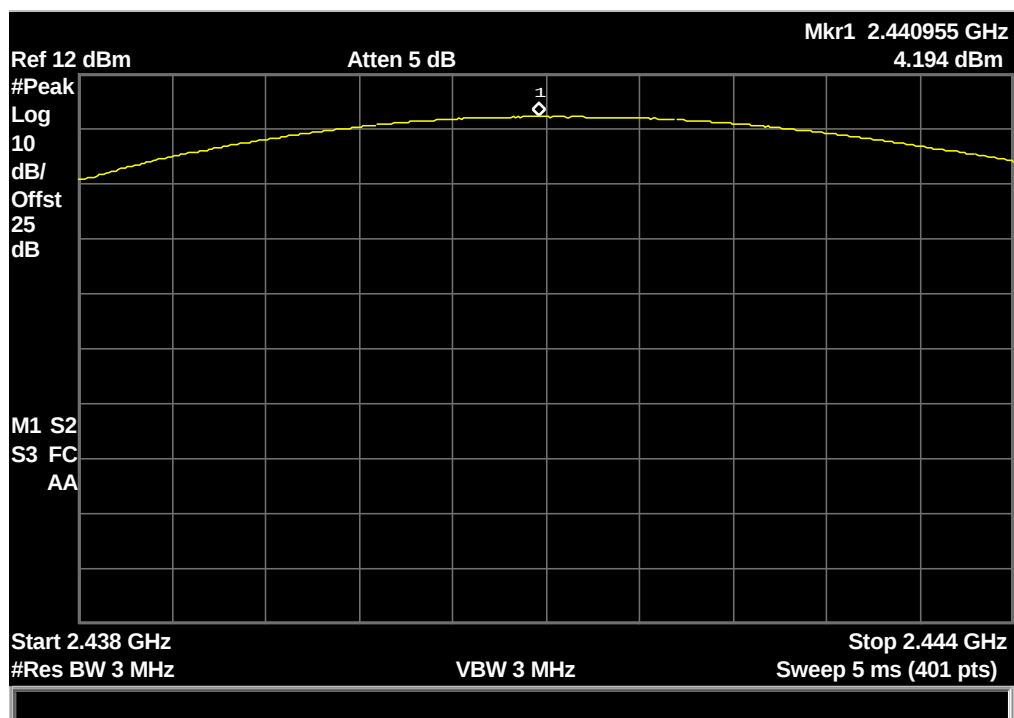

(Plot H: Channel = 2441)

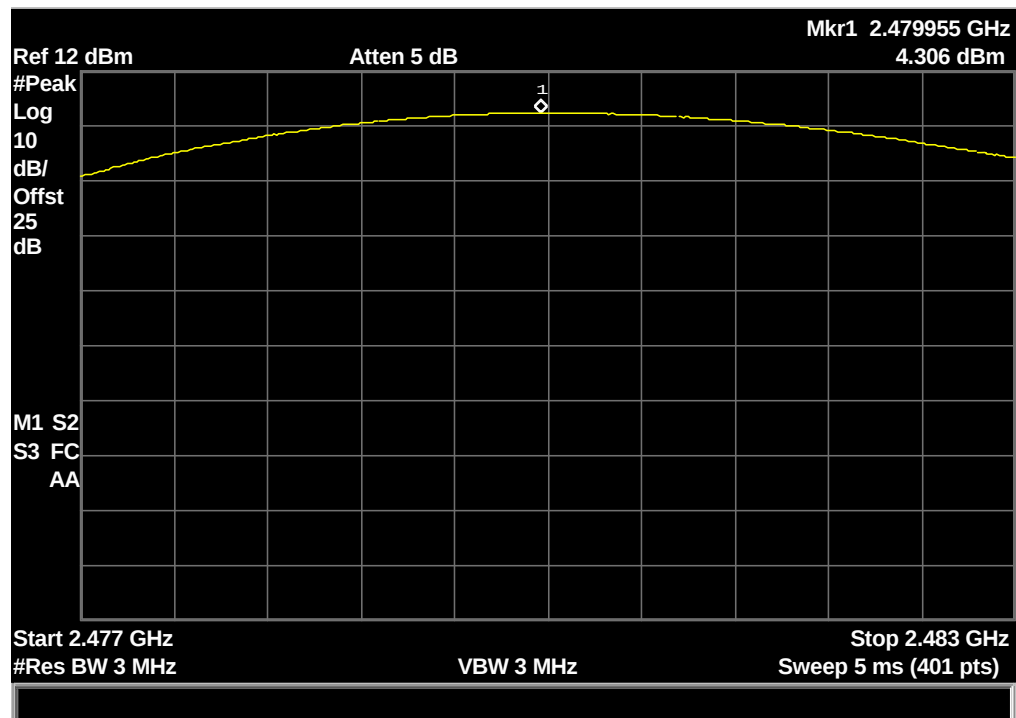

(Plot I: Channel = 2480)

2.3 20dB Bandwidth

2.3.1 Definition

According to FCC §15.247(a)(1) and RSS-210 A8.1 (1), the 20dB bandwidth is known as the 99% emission bandwidth, or 20dB bandwidth ($10 \cdot \log 1\% = 20\text{dB}$) taking the total RF output power.

2.3.2 Test Description

See section 2.1.2 of this report.

2.3.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The lowest, middle and highest channels are selected to perform testing to record the 20dB bandwidth of the Module.


A. Test Verdict:

GFSK Mode


The maximum 20dB bandwidth measured is 930KHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (KHz)	Refer to Plot
0	2402	930.0	Plot A
39	2441	930.0	Plot B
78	2480	930.0	Plot C


B. Test Plot:

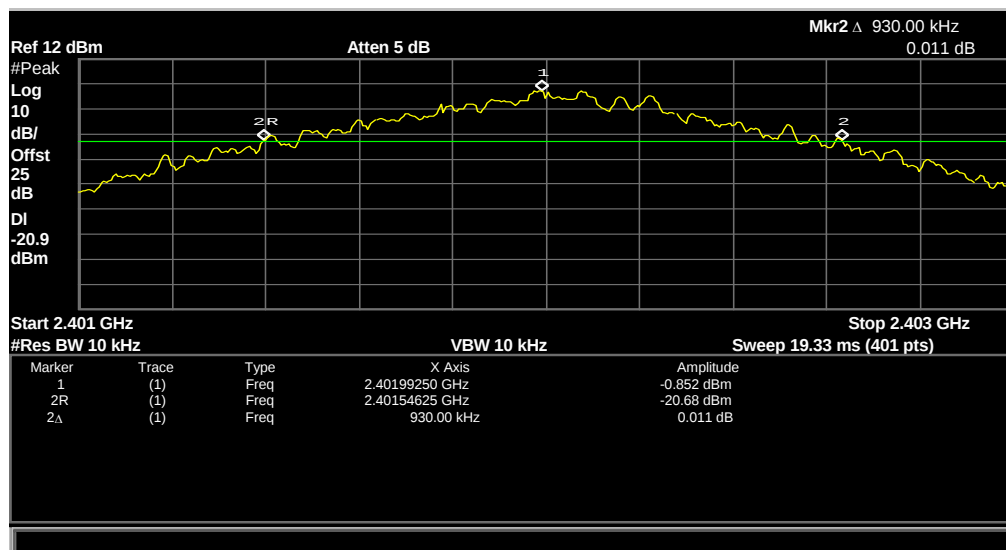

(Plot A: Channel = 2402)

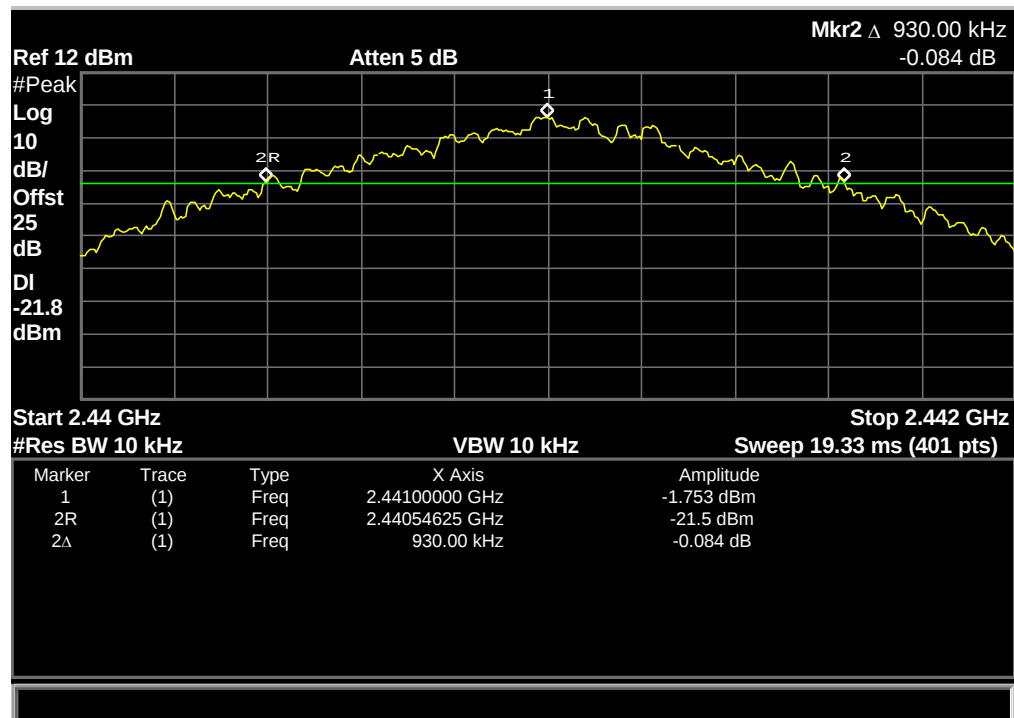

(Plot B: Channel = 2441)

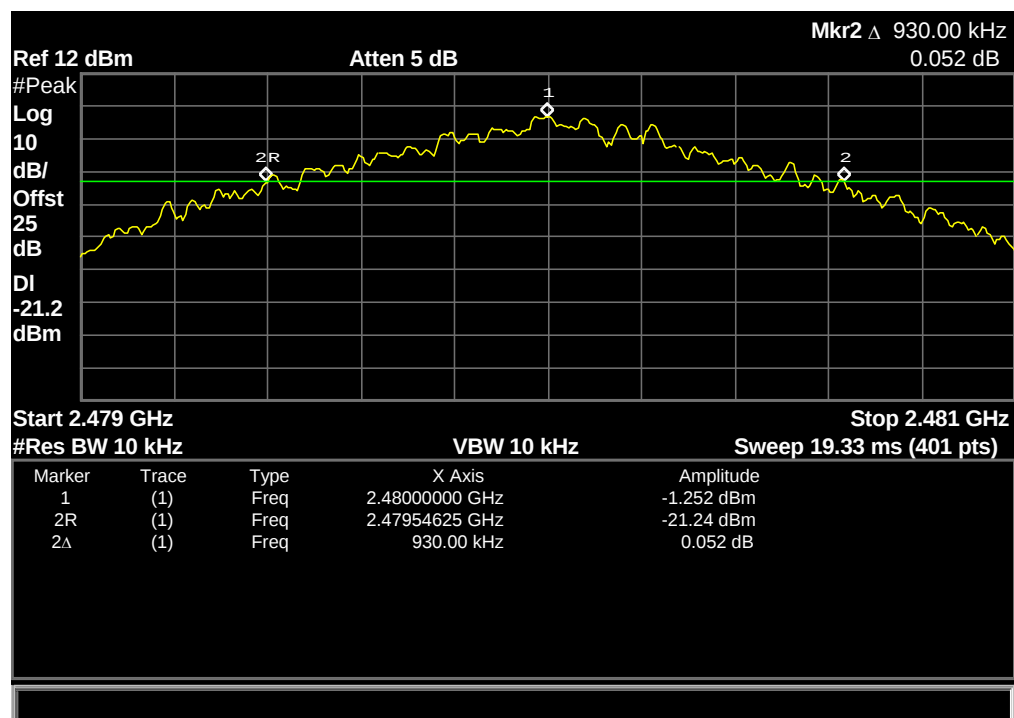

(Plot C: Channel = 2480)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


The maximum 20dB bandwidth measured is 1.260MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.260	Plot D
39	2441	1.256	Plot E
78	2480	1.256	Plot F


D. Test Plot:

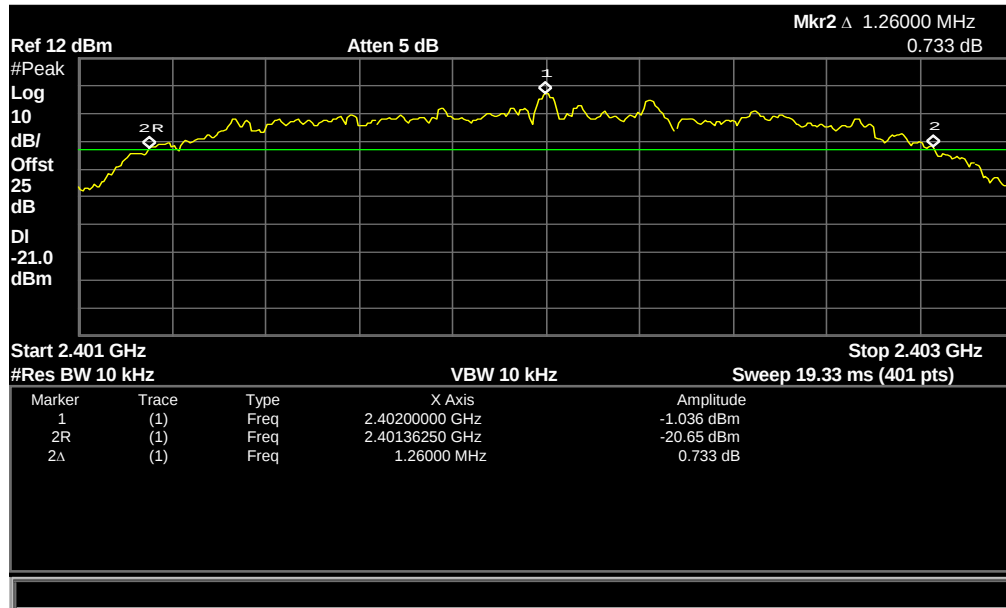

(Plot D: Channel = 2402)

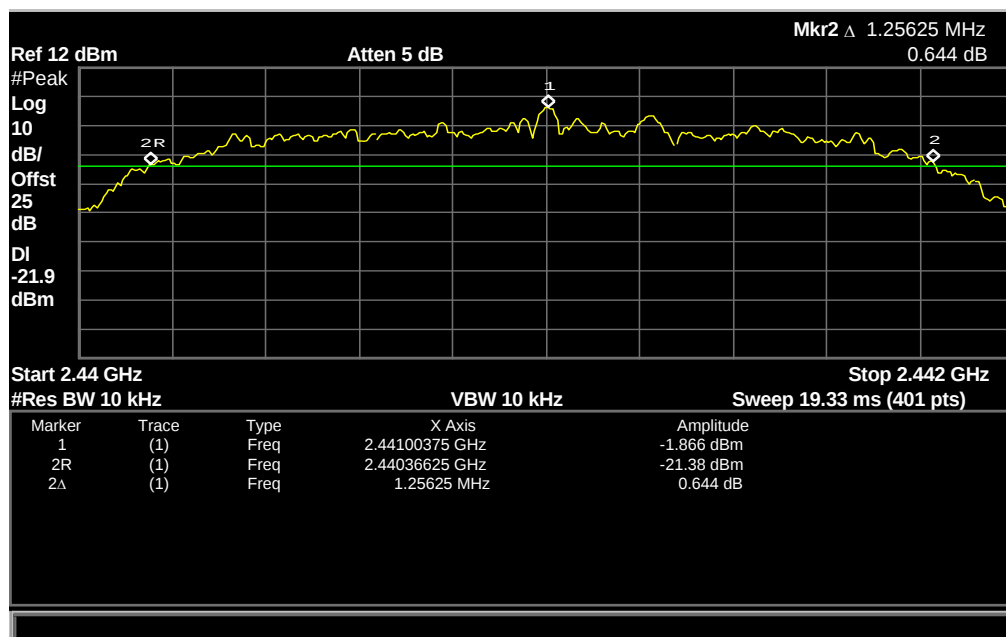

(Plot E: Channel = 2441)

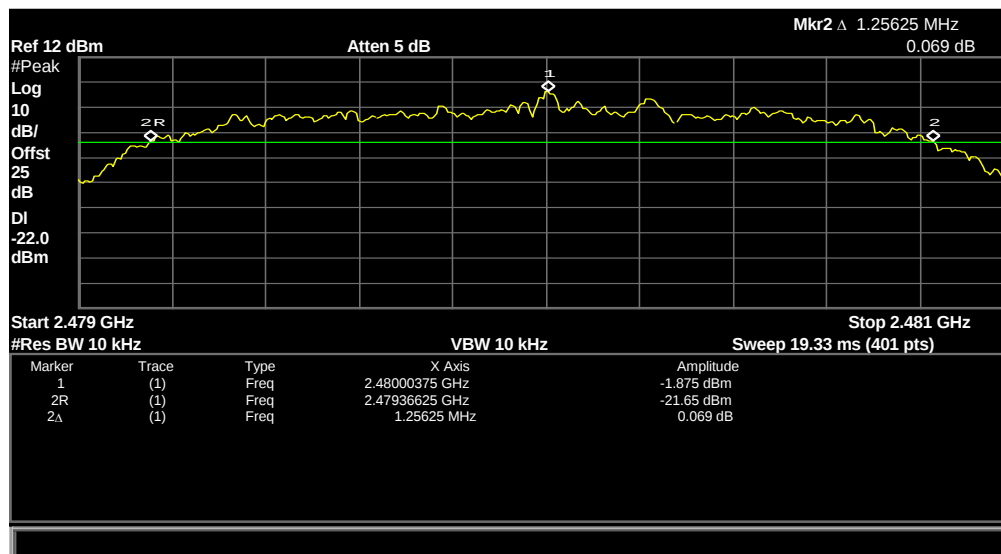

(Plot F: Channel = 2480)


E. Test Verdict:

8-DPSK Mode


The maximum 20dB bandwidth measured is 1.305MHz according to the table below.

Channel	Frequency (MHz)	20dB Bandwidth (MHz)	Refer to Plot
0	2402	1.305	Plot G
39	2441	1.305	Plot H
78	2480	1.260	Plot I


F. Test Plot:

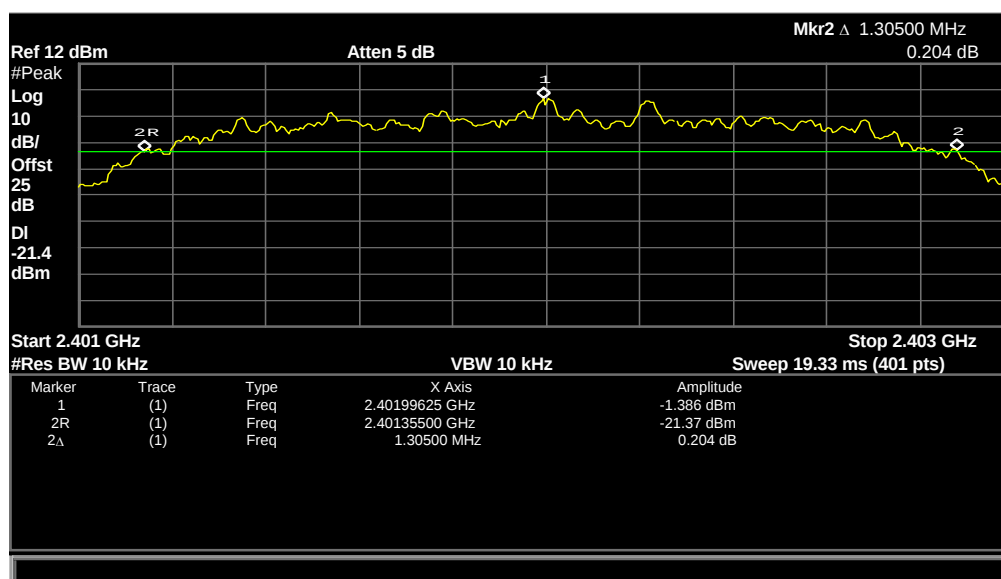

(Plot G: Channel = 2402)

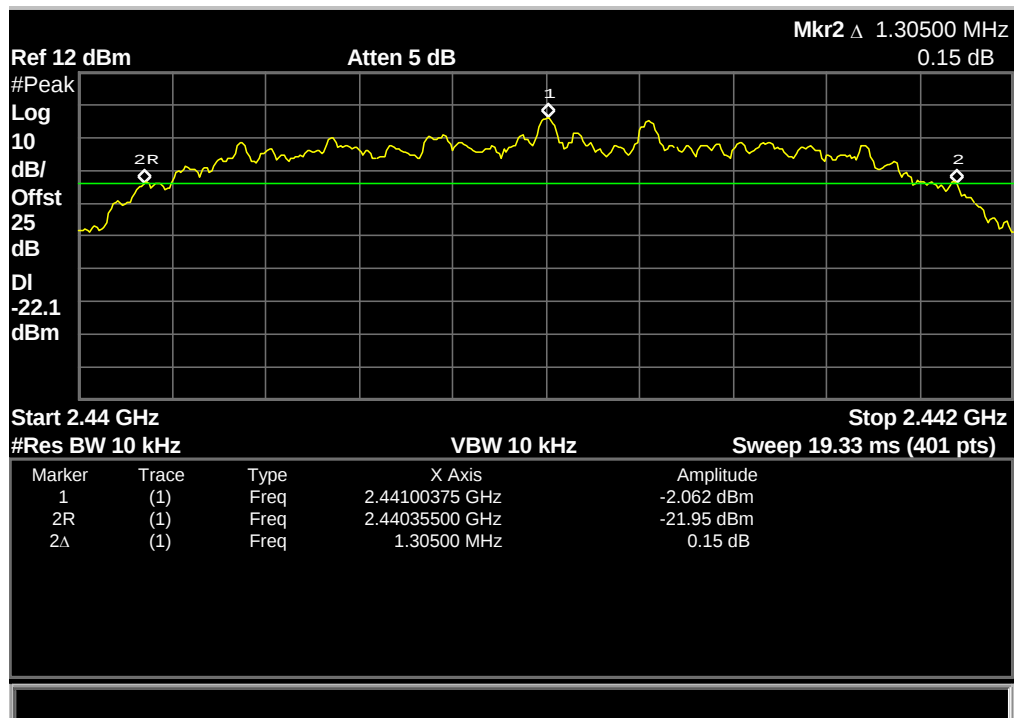

(Plot H: Channel = 2441)

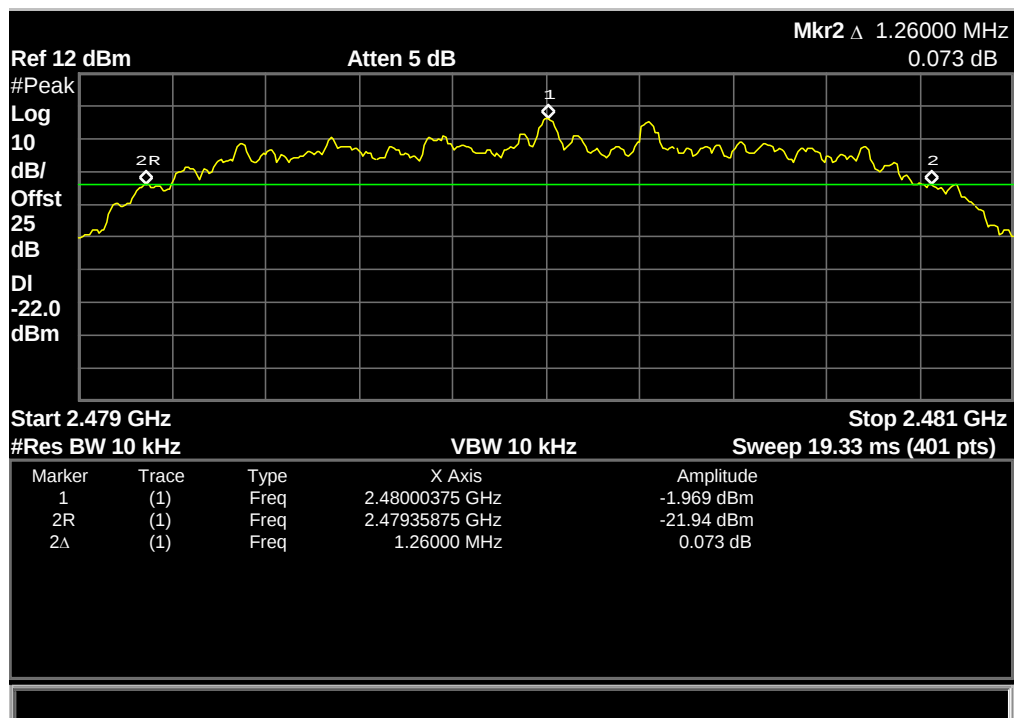

(Plot I: Channel = 2480)

2.4 Carried Frequency Separation

2.4.1 Definition

According to FCC §15.247(a)(1) and RSS-210 A8.1 (2), frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel, whichever is greater.


2.4.2 Test Description

See section 2.1.2 of this report.



2.4.3 Test Result

The Bluetooth Module operates at hopping-on test mode.

For any adjacent channels (e.g. the channel 39 and 40 as showed in the Plot A), the Module does have hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of the hopping channel (922.50KHz for GFSK mode, 1.263MHz for $\pi/4$ -DQPSK mode and 1.263MHz for 8-DPSK mode, refer to section 2.3.3), whichever is greater. So, the verdict is PASS.

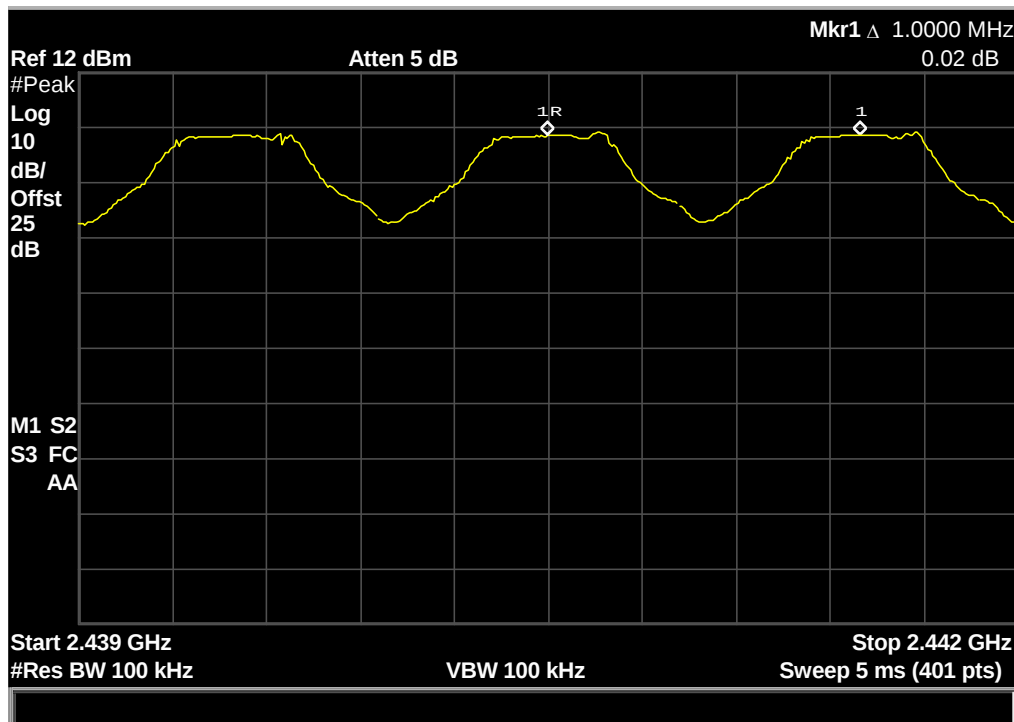

(Plot A: GFSK)

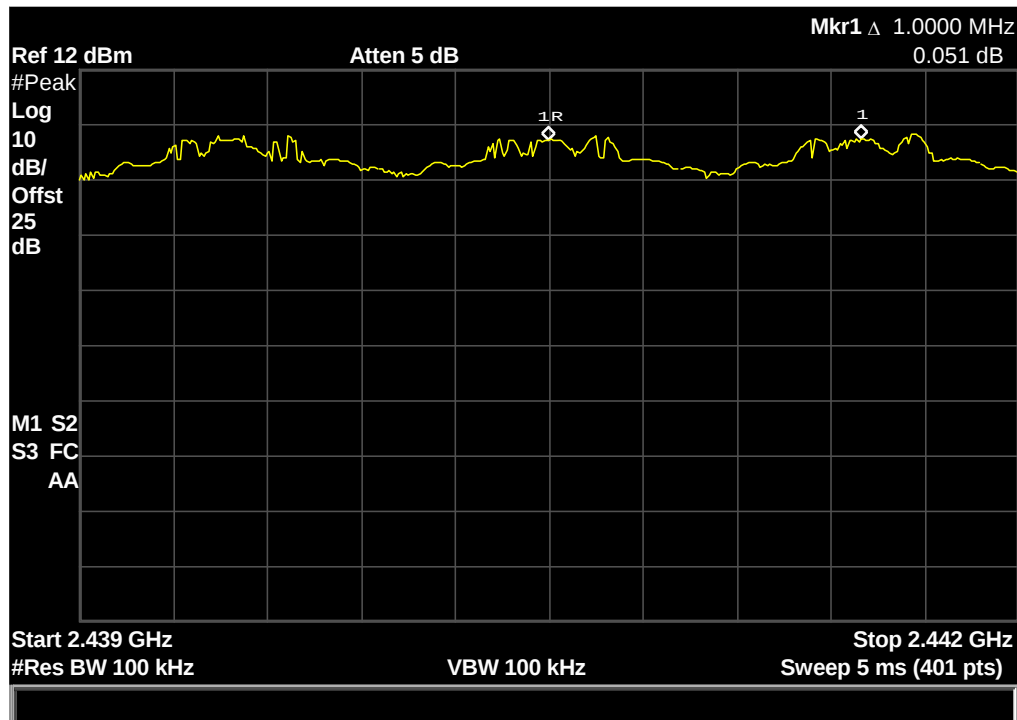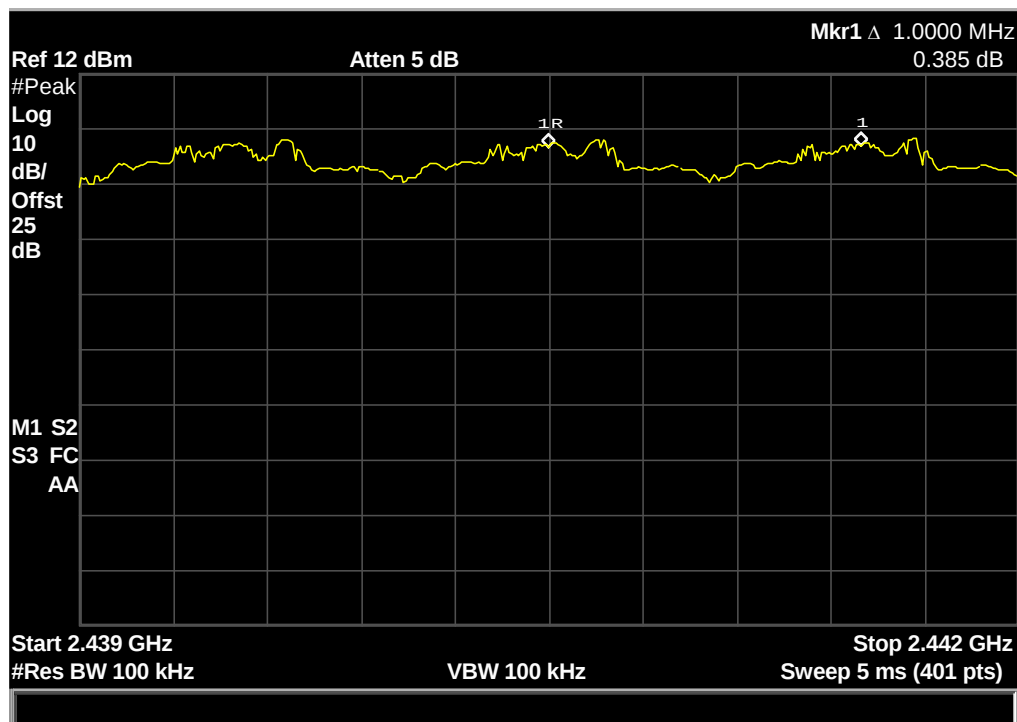
(Plot B: $\pi/4$ -DQPSK)


(Plot C: 8-DPSK)

2.5 Time of Occupancy (Dwell time)

2.5.1 Requirement

According to FCC §15.247(a)(1)(iii) and RSS-210 A8.1 (4), frequency hopping systems in the 2400 - 2483.5MHz band shall use at least 15 non-overlapping channels. The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed. Frequency hopping systems may avoid or suppress transmissions on a particular hopping frequency provided that a minimum of 15 channels are used.

2.5.2 Test Description

See section 2.1.2 of this report.

2.5.3 Test Result

The average time of occupancy on any channel within the Period can be calculated with formulas (for DH5 package type):

$$\begin{aligned} \{\text{Total of Dwell}\} &= \{\text{Pulse Time}\} * (1600 / 6) / \{\text{Number of Hopping Frequency}\} * \{\text{Period}\} \\ \{\text{Period}\} &= 0.4s * \{\text{Number of Hopping Frequency}\} \end{aligned}$$

The lowest, middle and highest channels are selected to perform testing to record the dwell time of each occupation measured in this channel, which is called Pulse Time here.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.925	Plot A	312.00	400	PASS
39	2441	2.900	Plot B	309.33		PASS
78	2480	2.925	Plot C	312.00		PASS

B. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

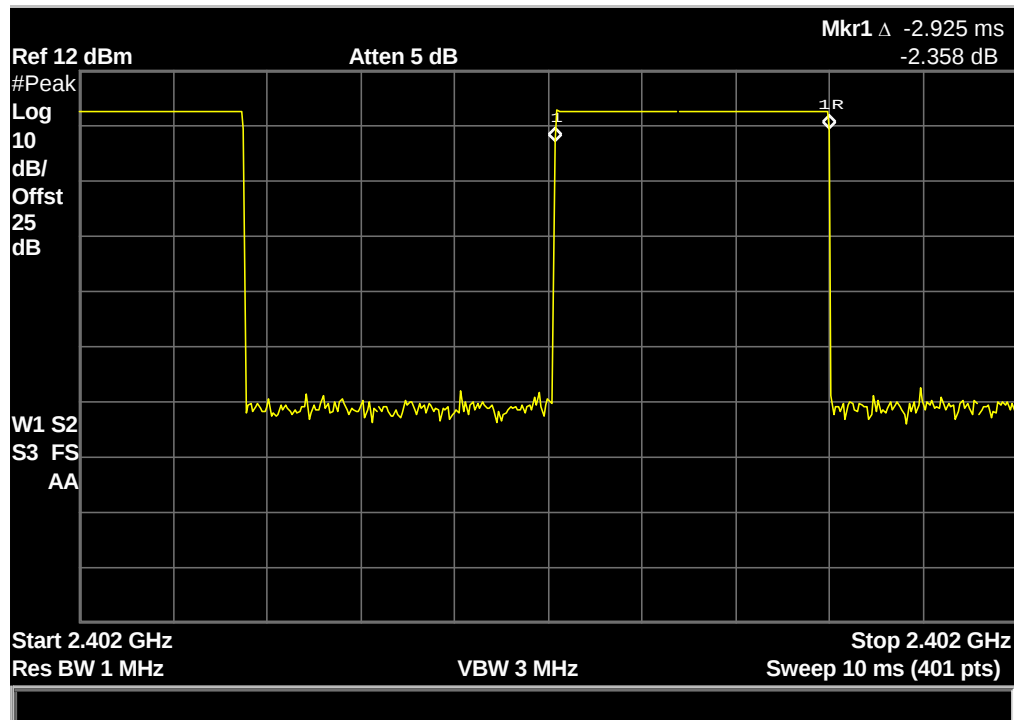

(Plot A: Channel = 2402)

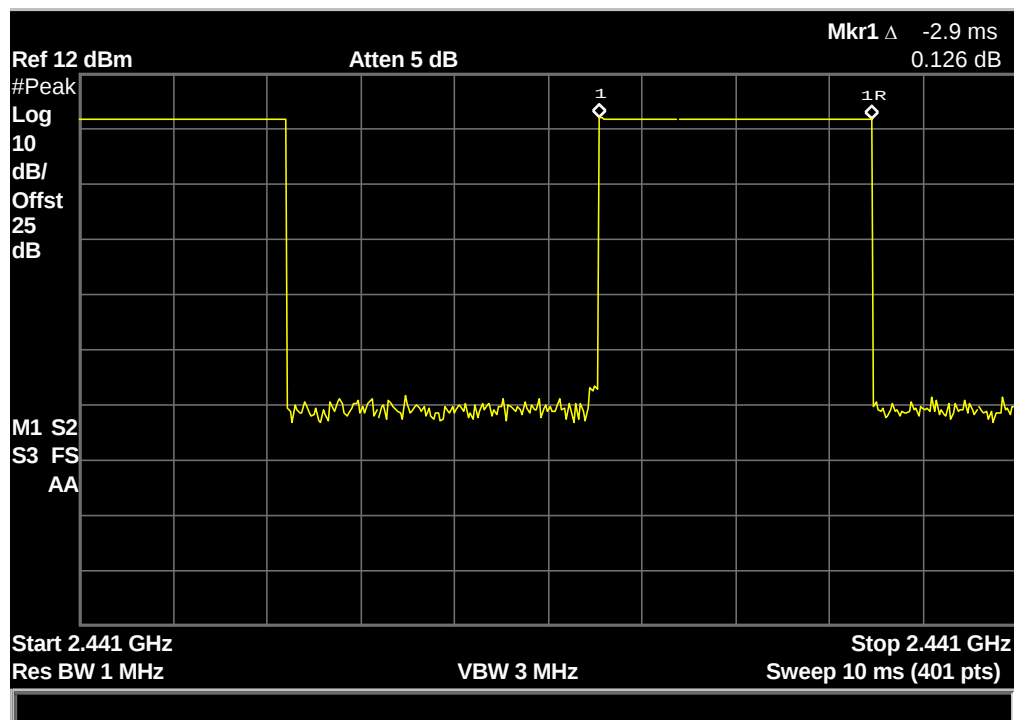

(Plot B: Channel = 2441)

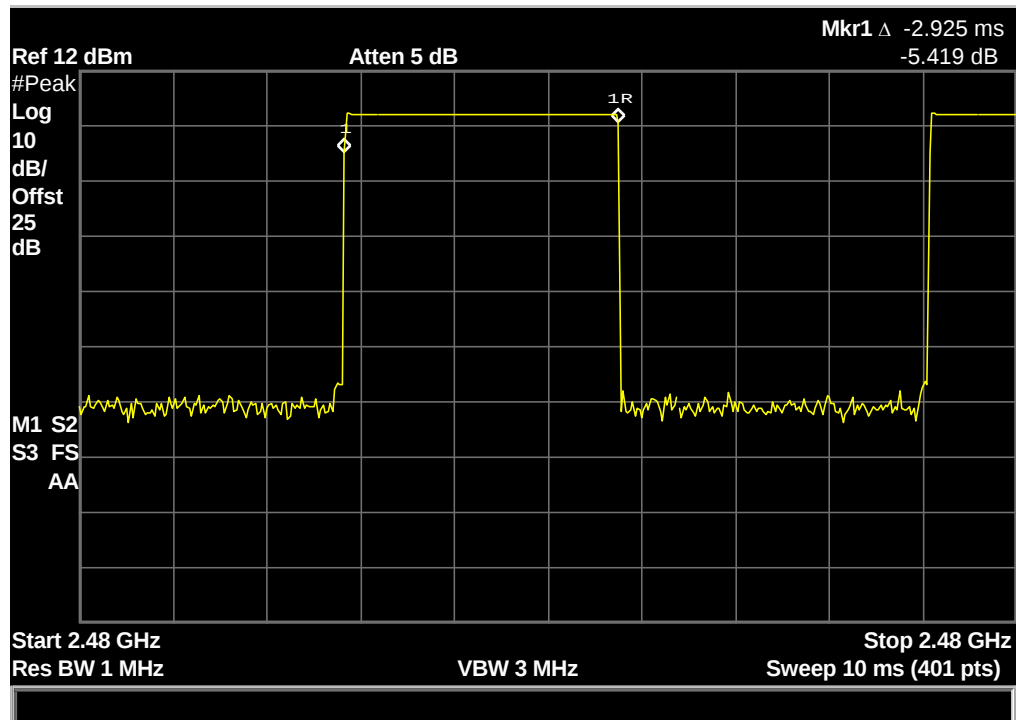

(Plot C: Channel = 2480)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.925	Plot D	312.00	400	PASS
39	2441	2.925	Plot E	312.00		PASS
78	2480	2.925	Plot F	312.00		PASS

D. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

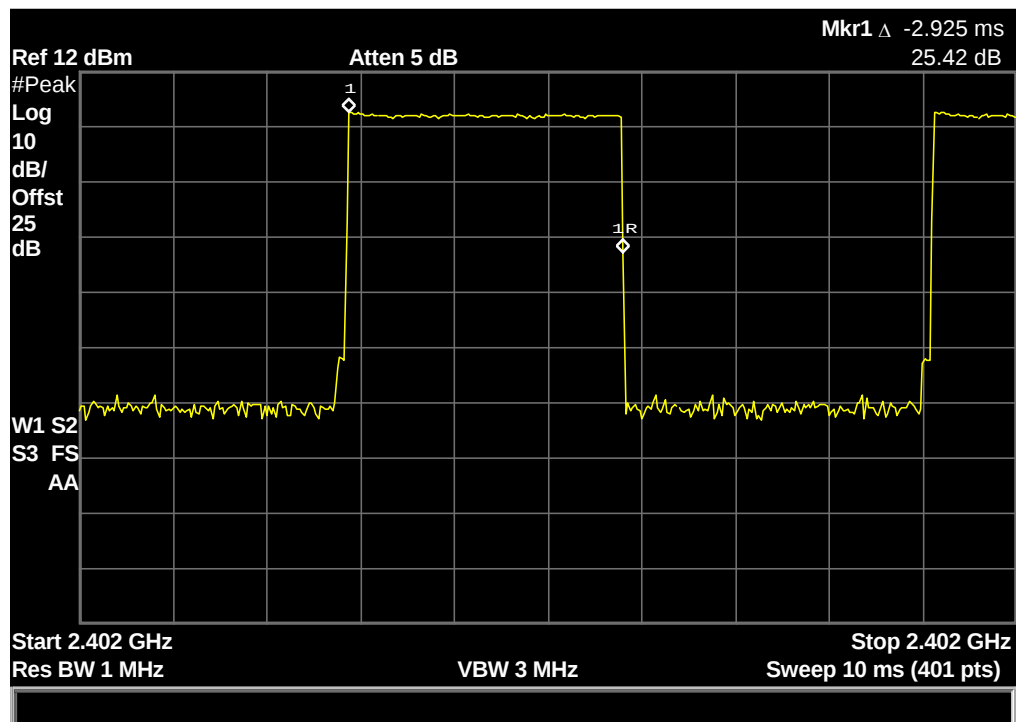

(Plot D: Channel = 2402)

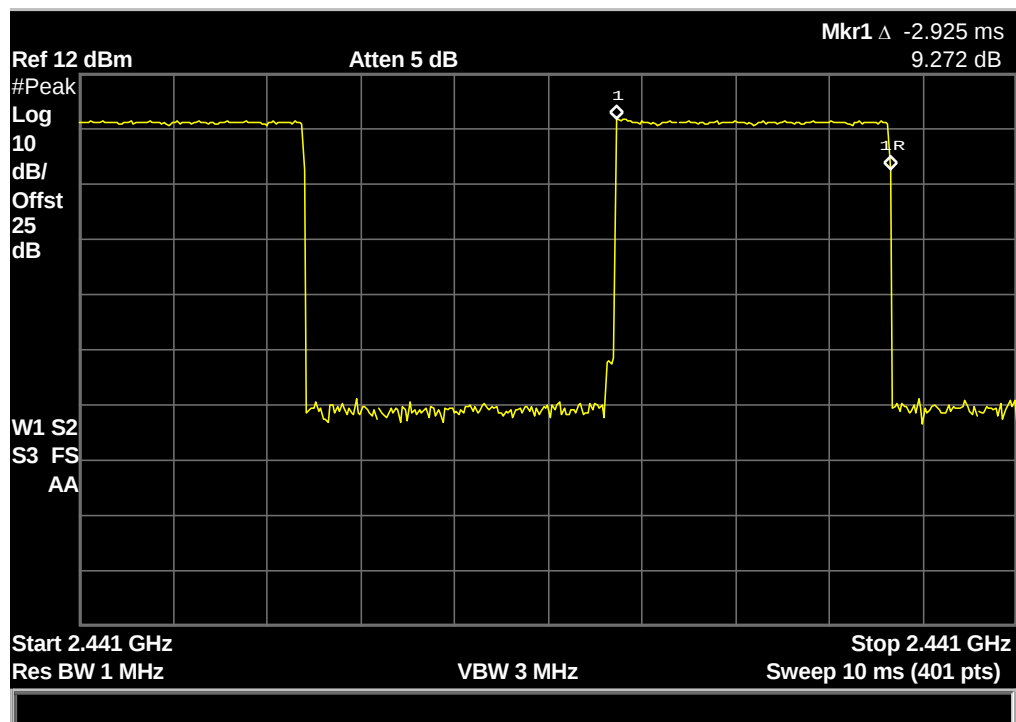

(Plot E: Channel = 2441)

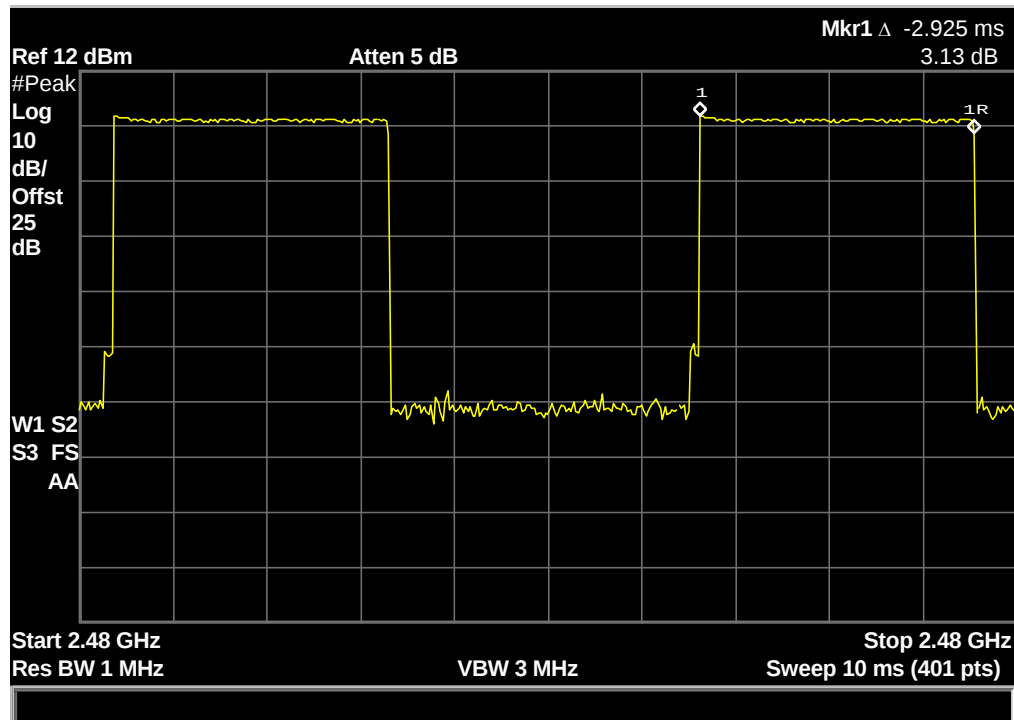

(Plot F: Channel = 2480)


E. Test Verdict (8-DPSK mode):

8-DPSK Mode


Channel	Frequency (MHz)	Pulse Time		Total of Dwell (ms)	Limit (ms)	Verdict
		ms	Refer to Plot			
0	2402	2.925	Plot G	312.00	400	PASS
39	2441	2.925	Plot H	312.00		PASS
78	2480	2.925	Plot I	312.00		PASS

F. Test Plot:


Note: the following plots record the Pulse Time of the Module carrier.

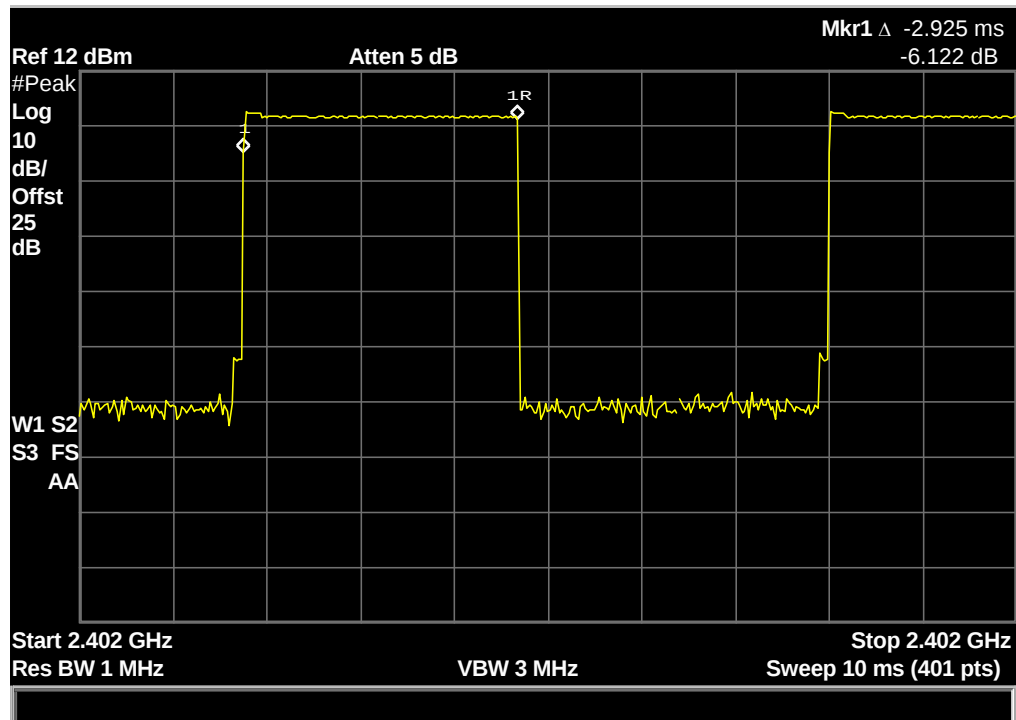

(Plot G: Channel = 2402)

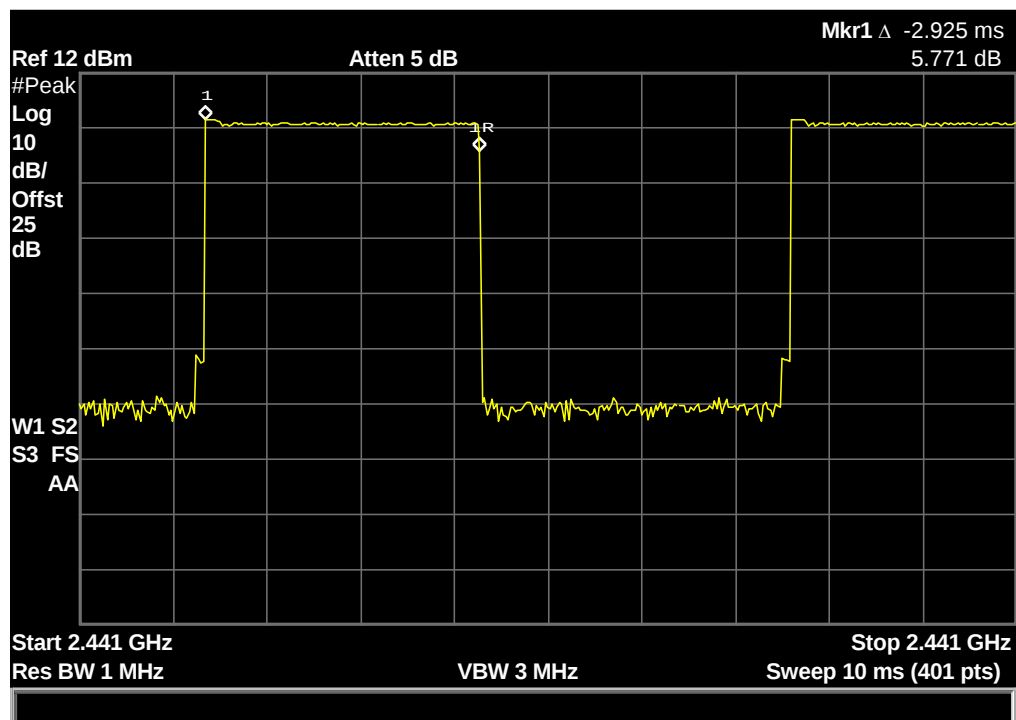

(Plot H: Channel = 2441)

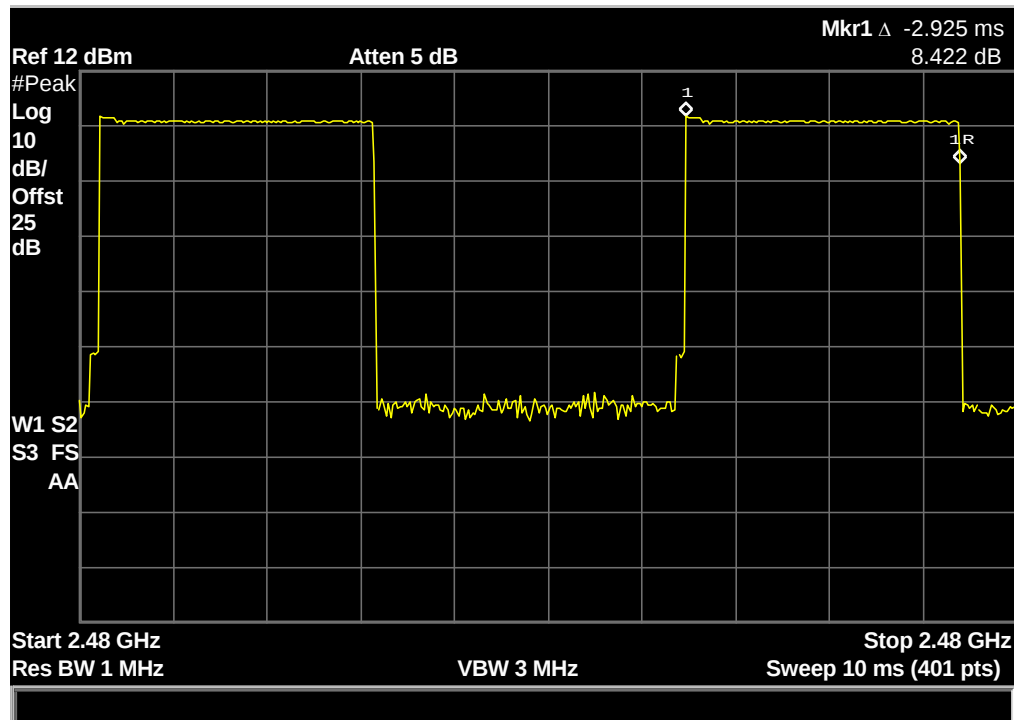

(Plot I: Channel = 2480)

2.6 Conducted Spurious Emissions

2.6.1 Requirement

According to FCC §15.247(c) and RSS-A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.6.2 Test Description

See section 2.1.2 of this report.

2.6.3 Test Result

The Bluetooth Module operates at hopping-off test mode. The measurement frequency range is from 30MHz to the 10th harmonic of the fundamental frequency. The lowest, middle and highest channels are tested to verify the spurious emissions.


A. Test Verdict:

GFSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-39.07	Plot A.1/A.2	3.759	-16.2	PASS
39	2441	-41.53	Plot B.1/B.2	3.232	-16.8	PASS
78	2480	-43.39	Plot C.1/C.2	3.278	-16.7	PASS

B. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

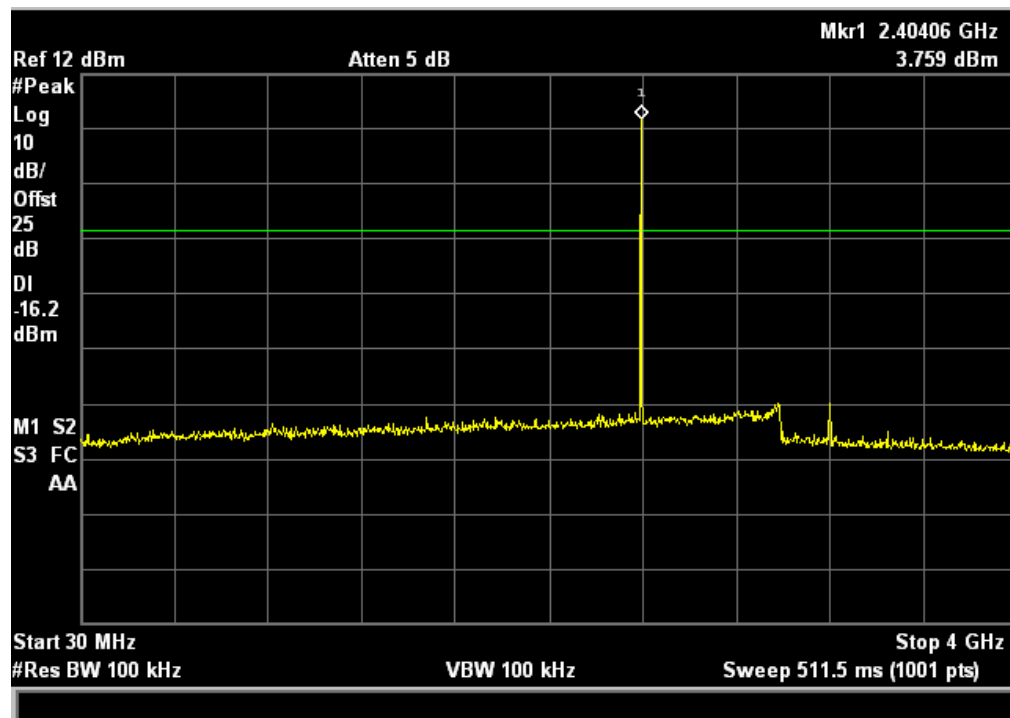


(Plot A.1: Channel = 0, 30MHz to 4GHz)

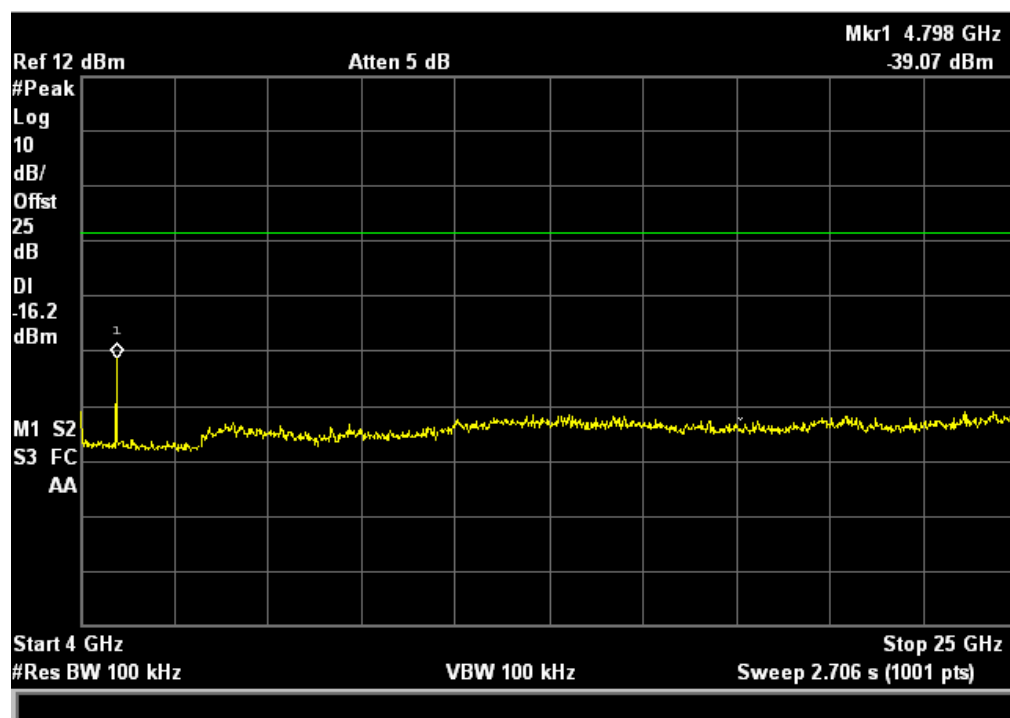


(Plot A.2: Channel = 0, 4GHz to 25GHz)

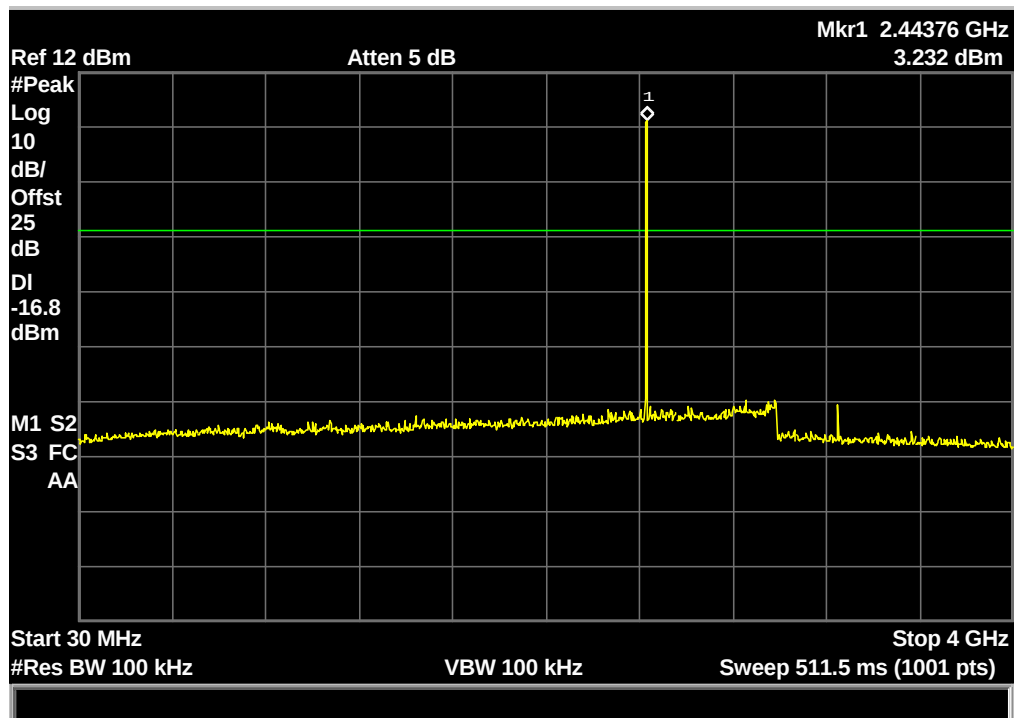


(Plot B.1: Channel = 39, 30MHz to 4GHz)

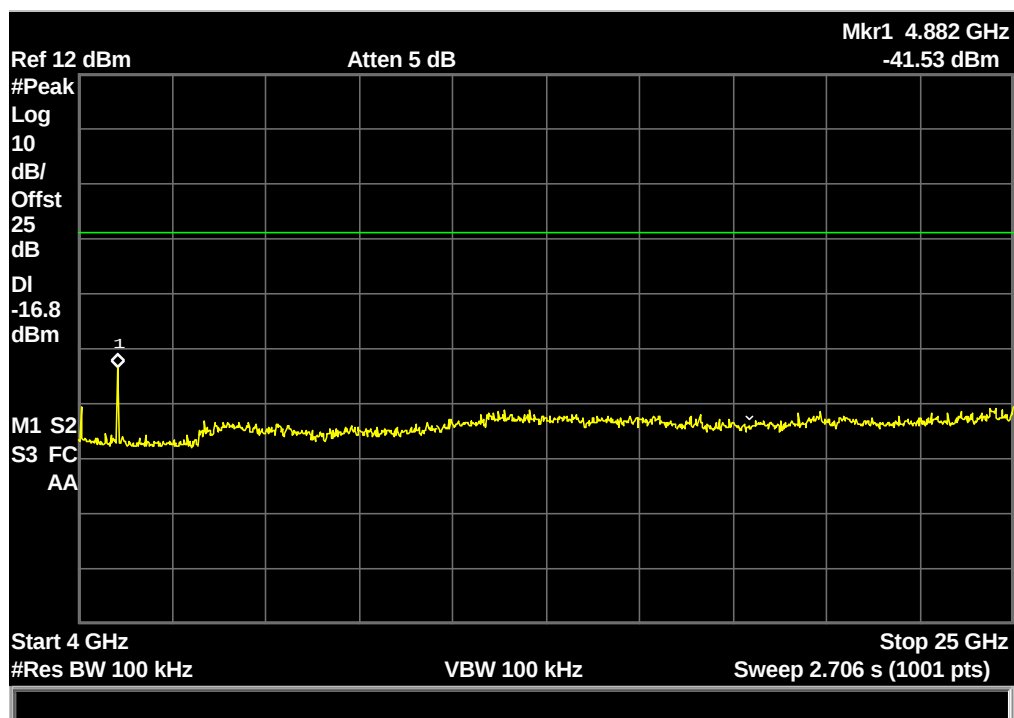

(Plot B.2: Channel = 39, 4GHz to 25GHz)

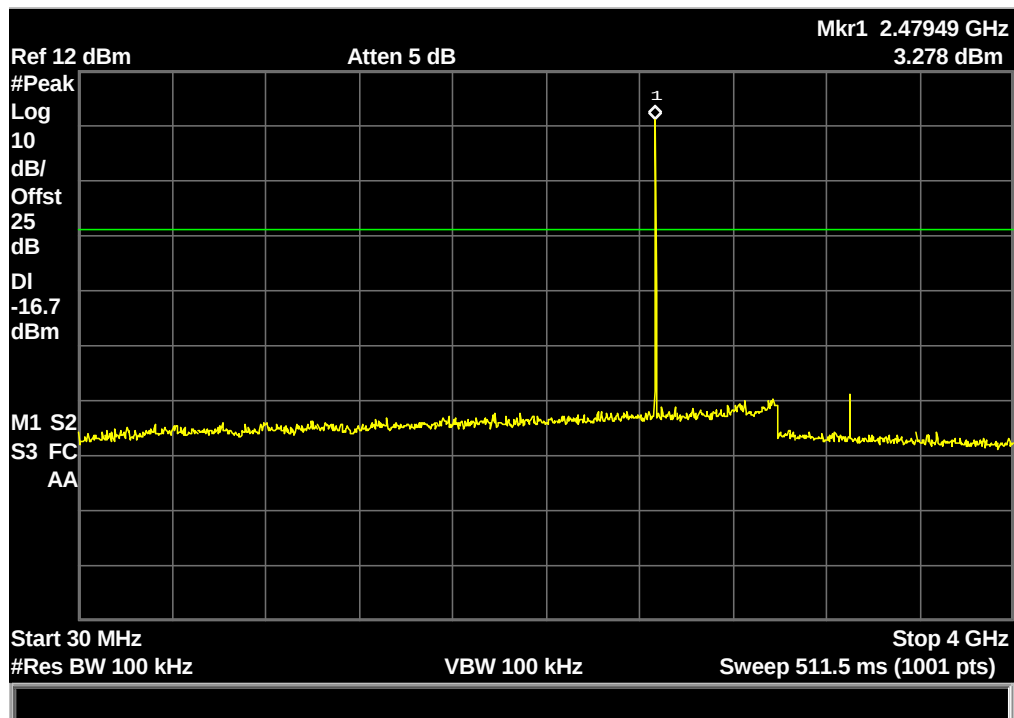

(Plot C.1: Channel = 78, 30MHz to 4GHz)

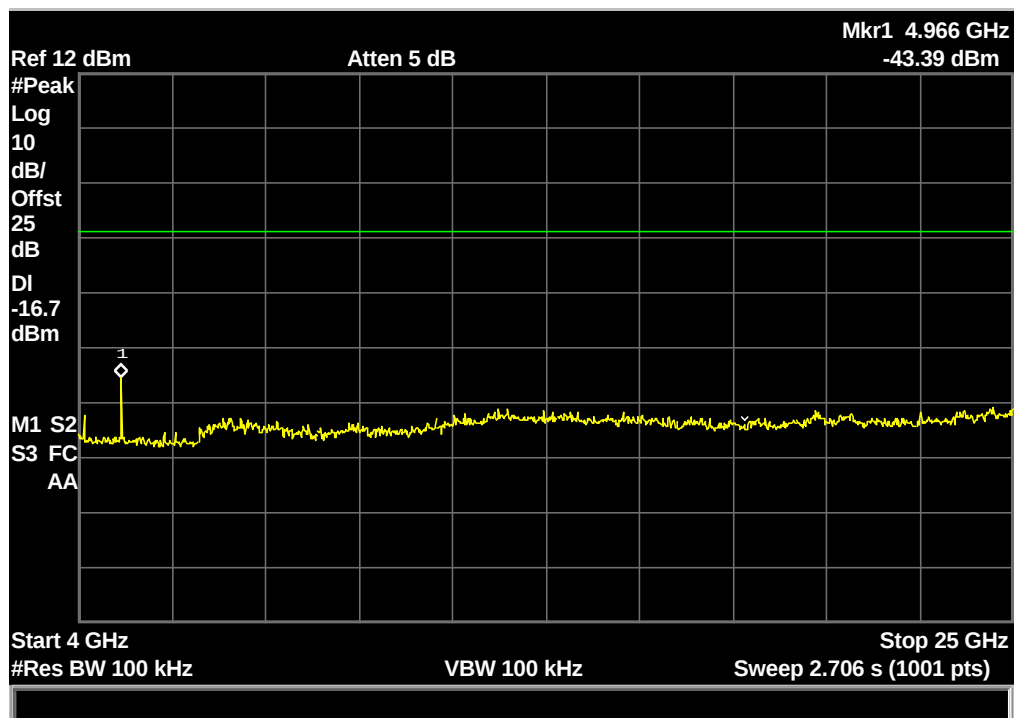

(Plot C.2: Channel = 78, 4GHz to 25GHz)


C. Test Verdict:

$\pi/4$ -DQPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-40.11	Plot D.1/D.2	0.848	-19.2	PASS
39	2441	-46.23	Plot E.1/E.2	-0.114	-20.1	PASS
78	2480	-47.2	Plot F.1/F.2	1.917	-18.1	PASS

D. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

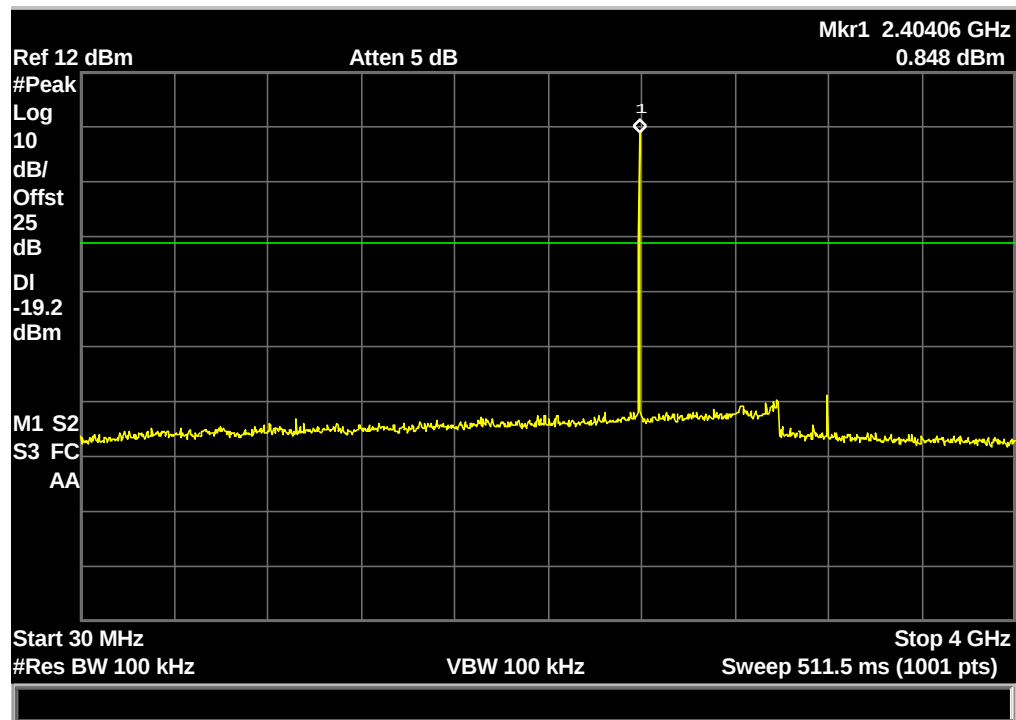


(Plot D.1: Channel = 0, 30MHz to 4GHz)

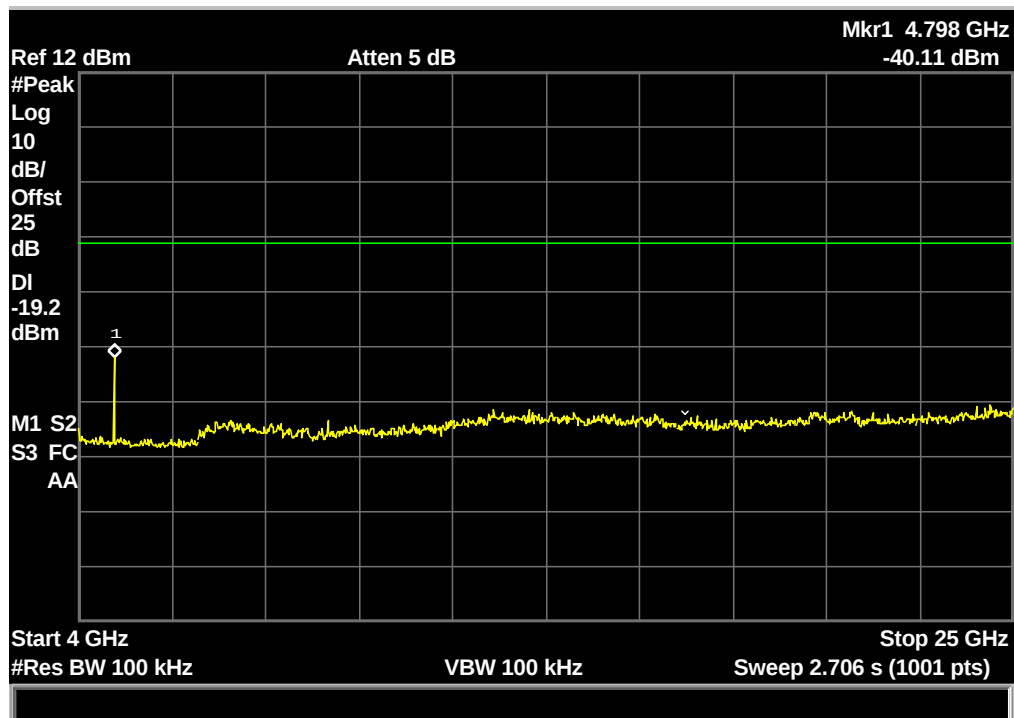


(Plot D.2: Channel = 0, 4GHz to 25GHz)

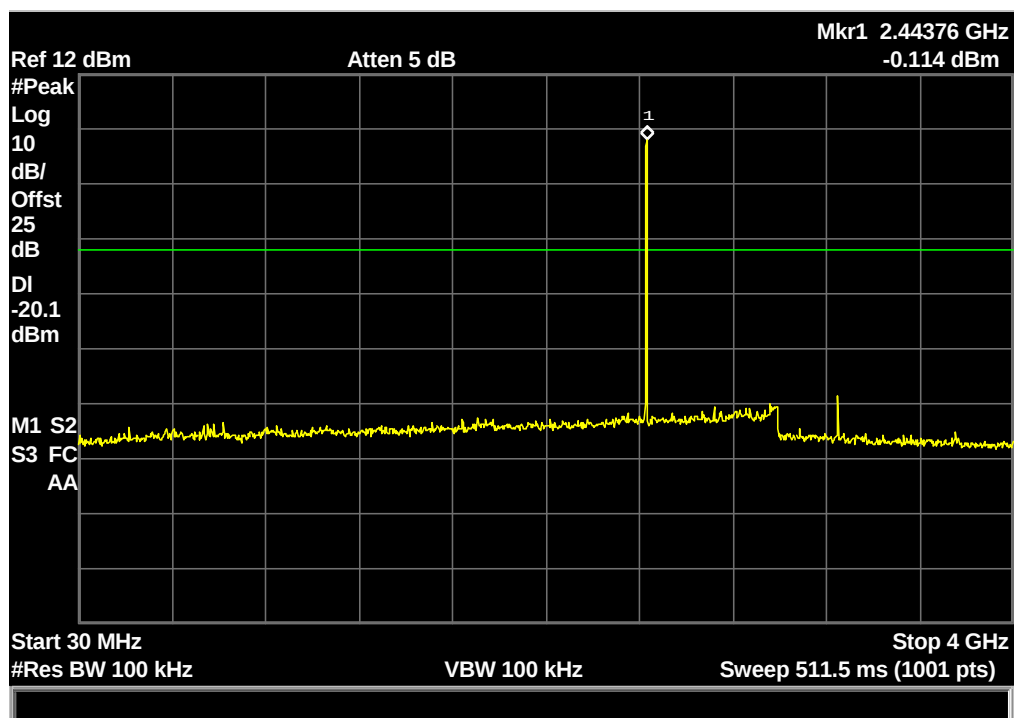


(Plot E.1: Channel = 39, 30MHz to 4GHz)

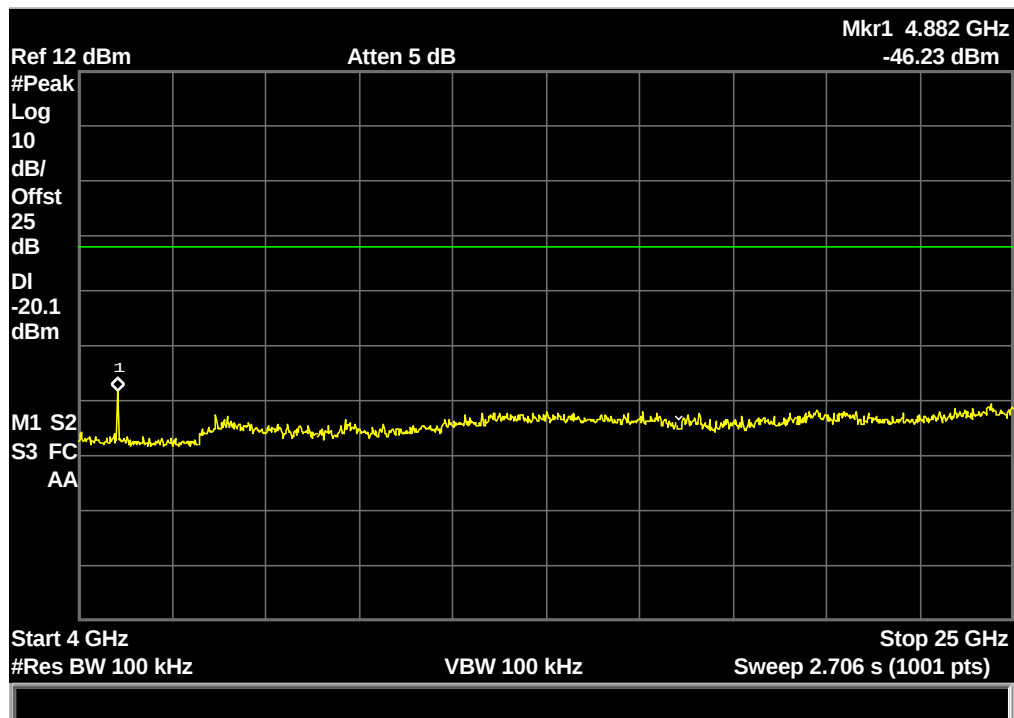

(Plot E.2: Channel = 39, 4GHz to 25GHz)

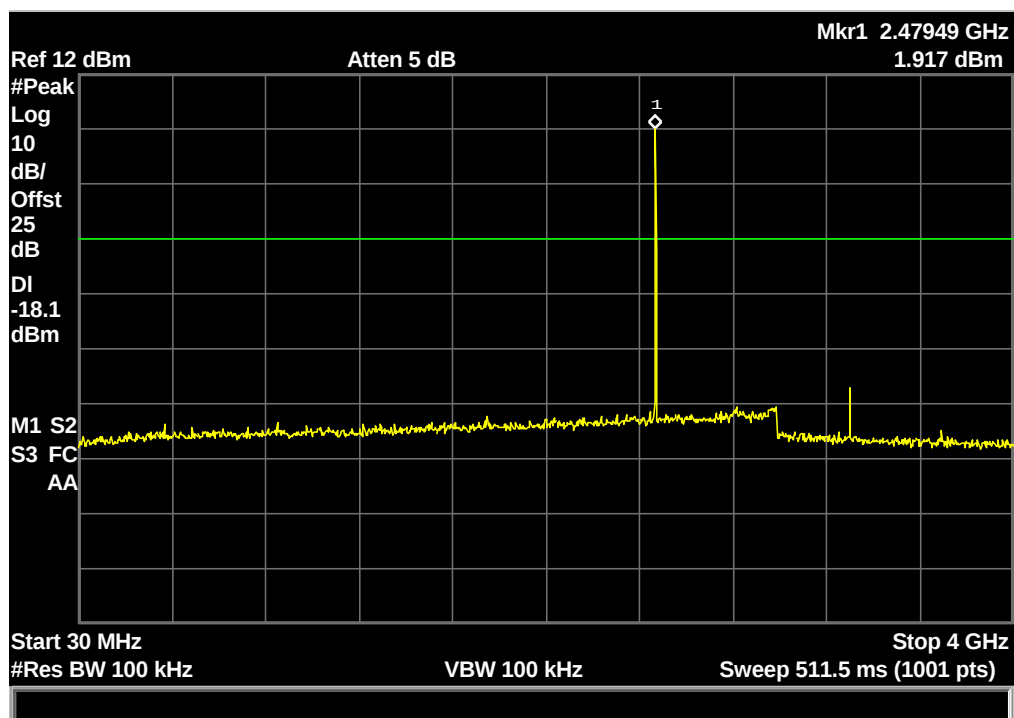

(Plot F.1: Channel = 78, 30MHz to 4GHz)

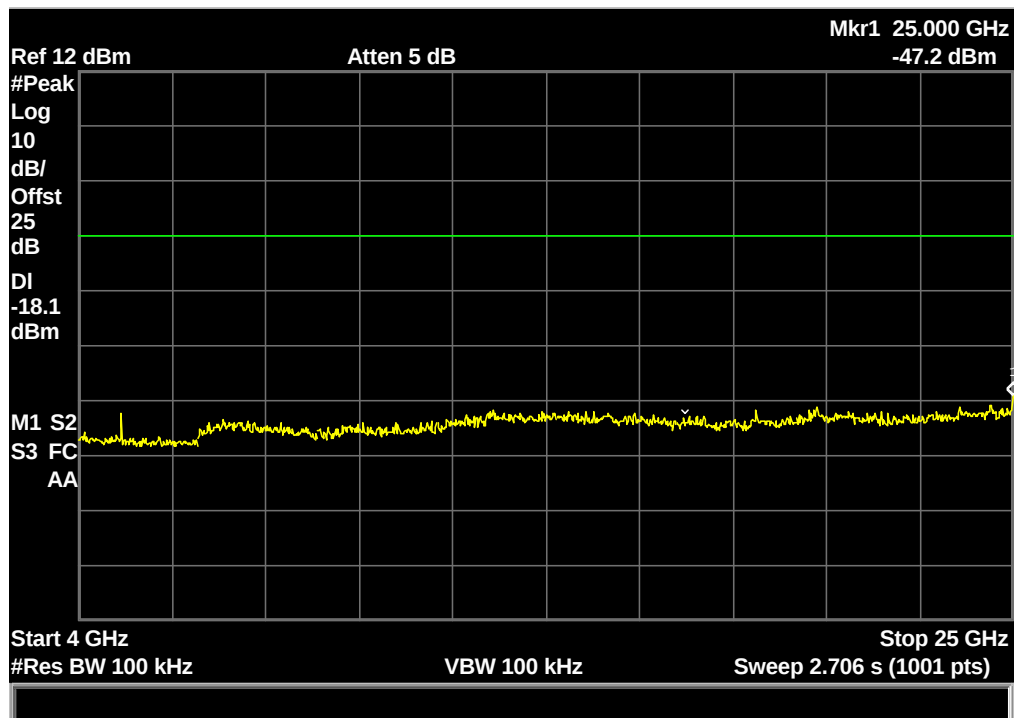

(Plot F.2: Channel = 78, 4GHz to 25GHz)


E. Test Verdict:

8-DPSK Mode


Channel	Frequency (MHz)	Measured Max. Out of Band Emission (dBm)	Refer to Plot	Limit (dBm)		Verdict
				Carrier Level	Calculated -20dBc Limit	
0	2402	-47.1	Plot G.1/G.2	1.532	-19.5	PASS
39	2441	-48.88	Plot H.1/H.2	0.055	-20.0	PASS
78	2480	-48.33	Plot I.1/I.2	-2.884	-17.1	PASS

F. Test Plot:


Note: the power of the Module transmitting frequency should be ignored.

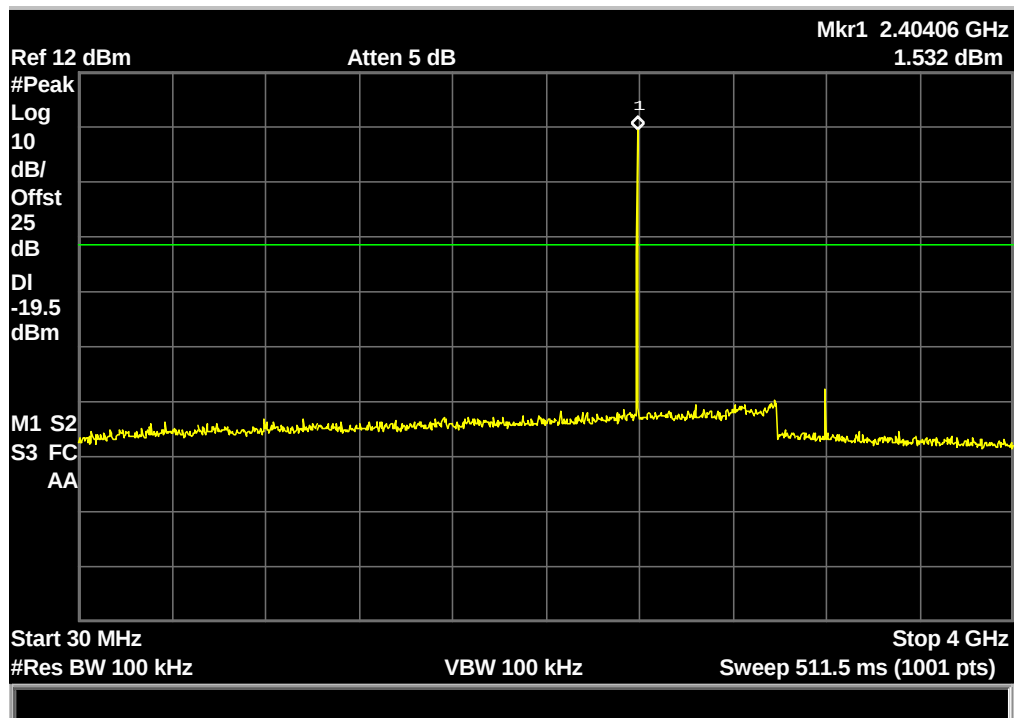


(Plot G.1: Channel = 0, 30MHz to 4GHz)

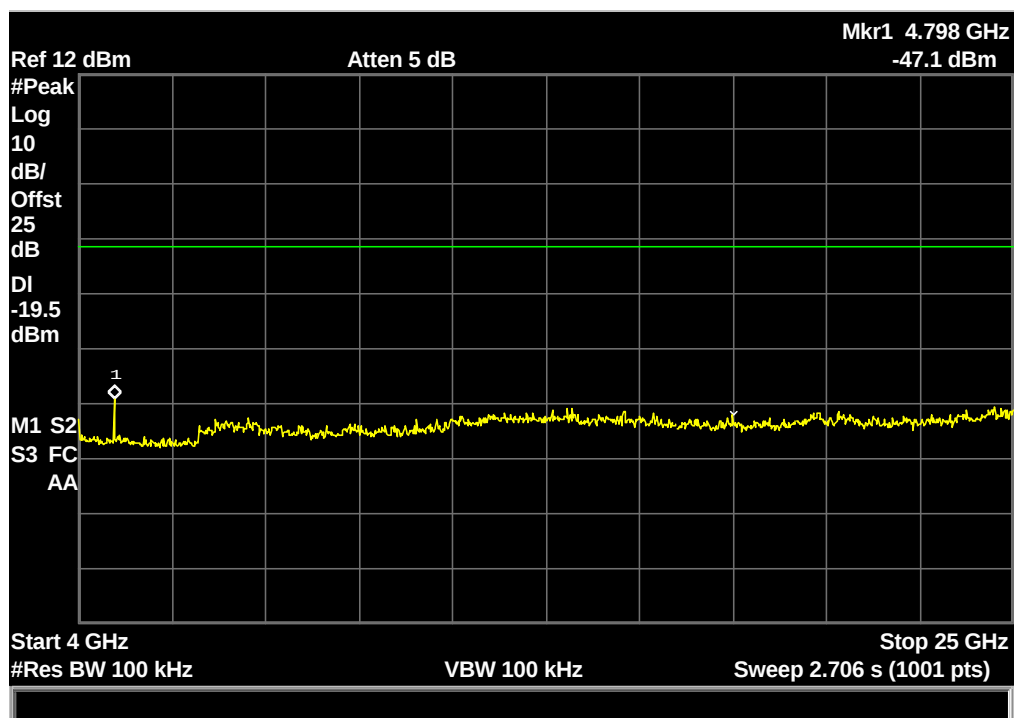


(Plot G.2: Channel = 0, 4GHz to 25GHz)

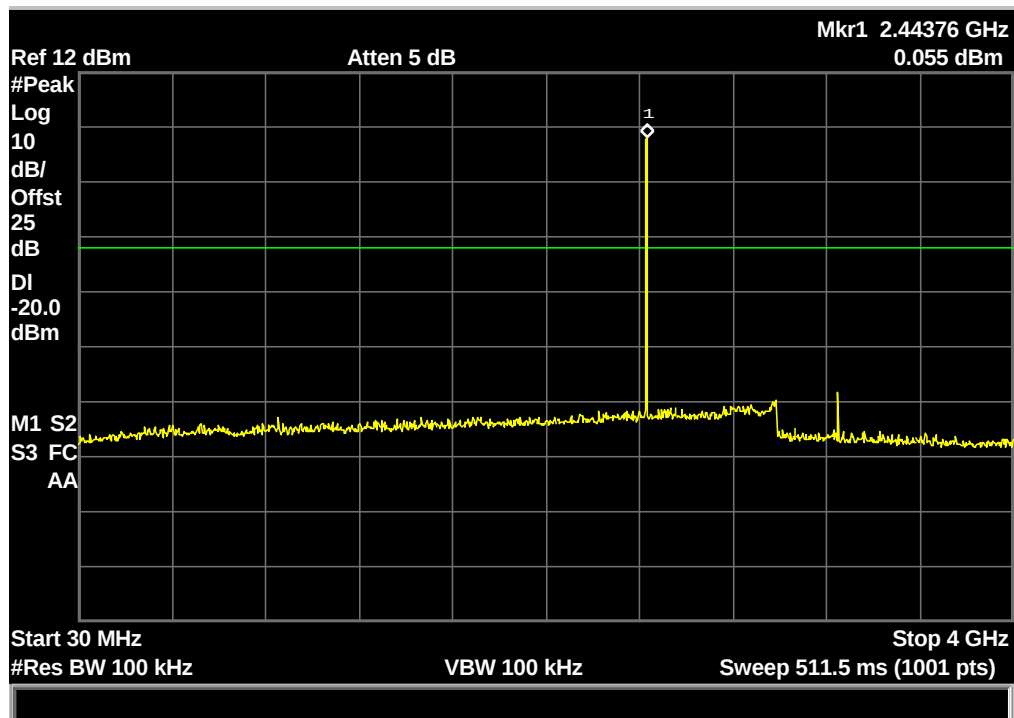


(Plot H.1: Channel = 39, 30MHz to 4GHz)

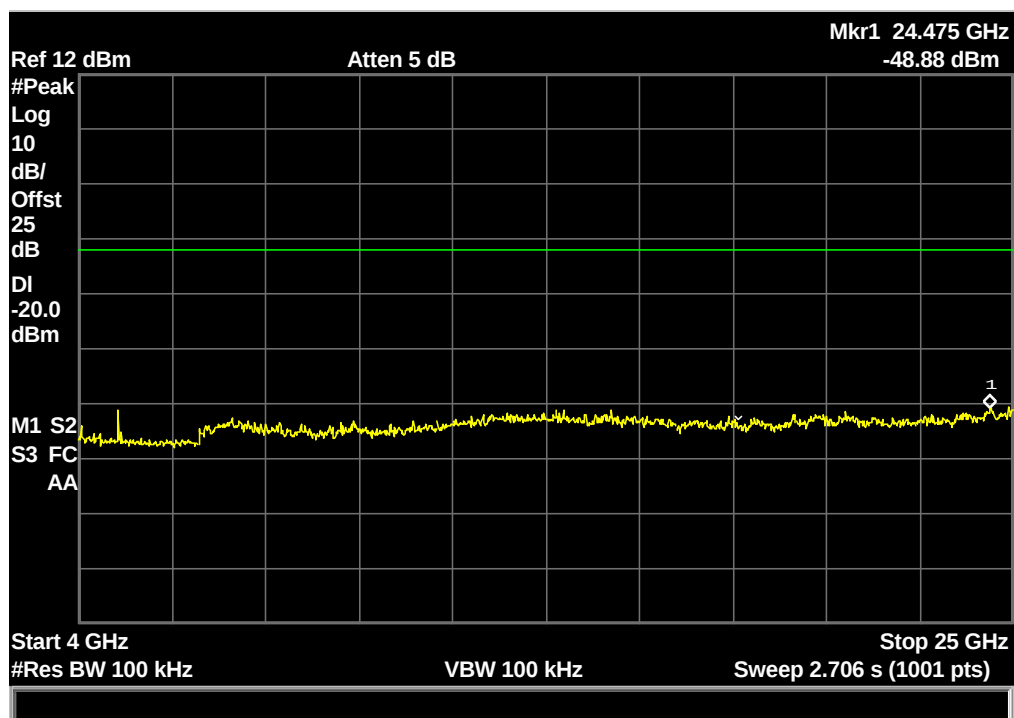

(Plot H.2: Channel = 39, 4GHz to 25GHz)

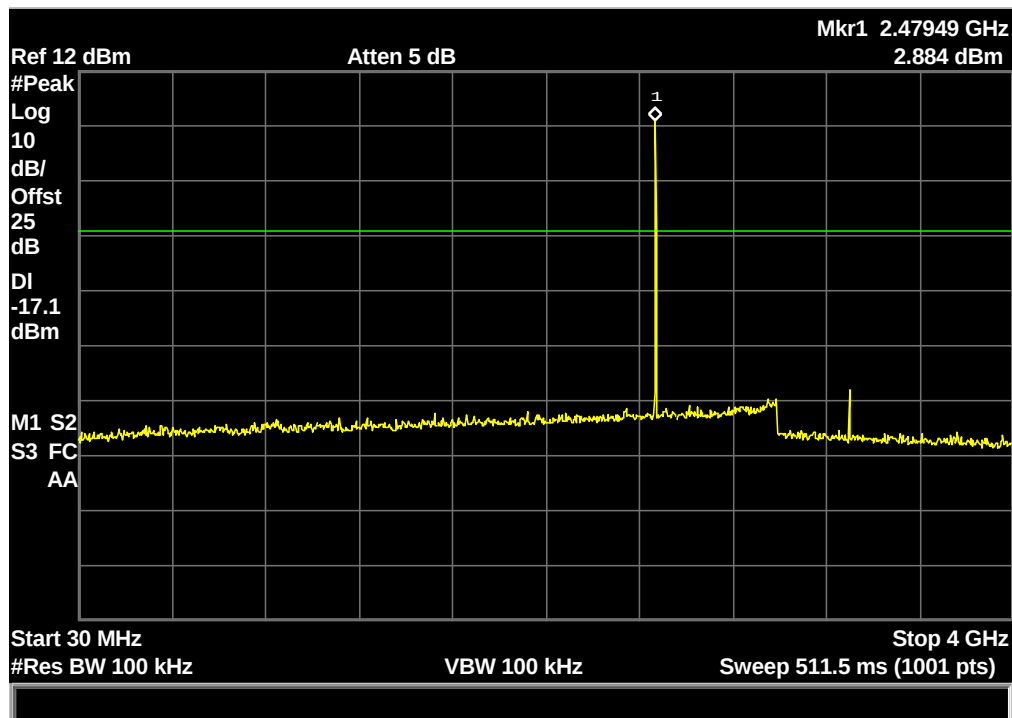

(Plot I.1: Channel = 78, 30MHz to 4GHz)

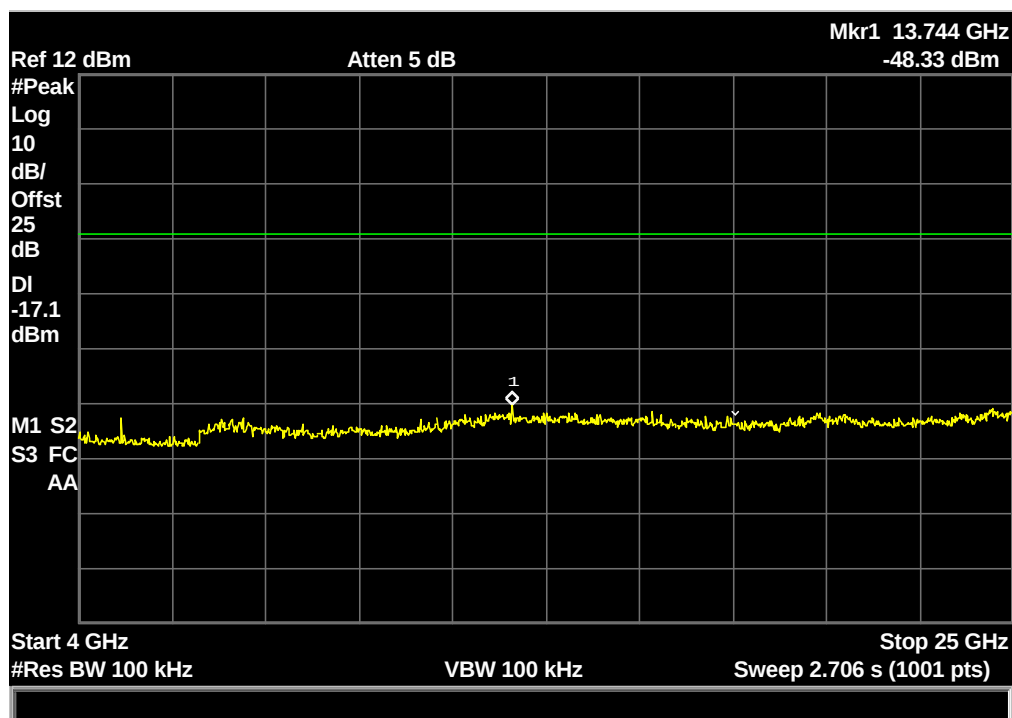

(Plot I.2: Channel = 78, 4GHz to 25GHz)


2.7 Band Edge

2.7.1 Requirement

According to FCC section 15.247(c) and RSS- A8.5, in any 100kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

2.7.2 Test Description

A. Test Setup:

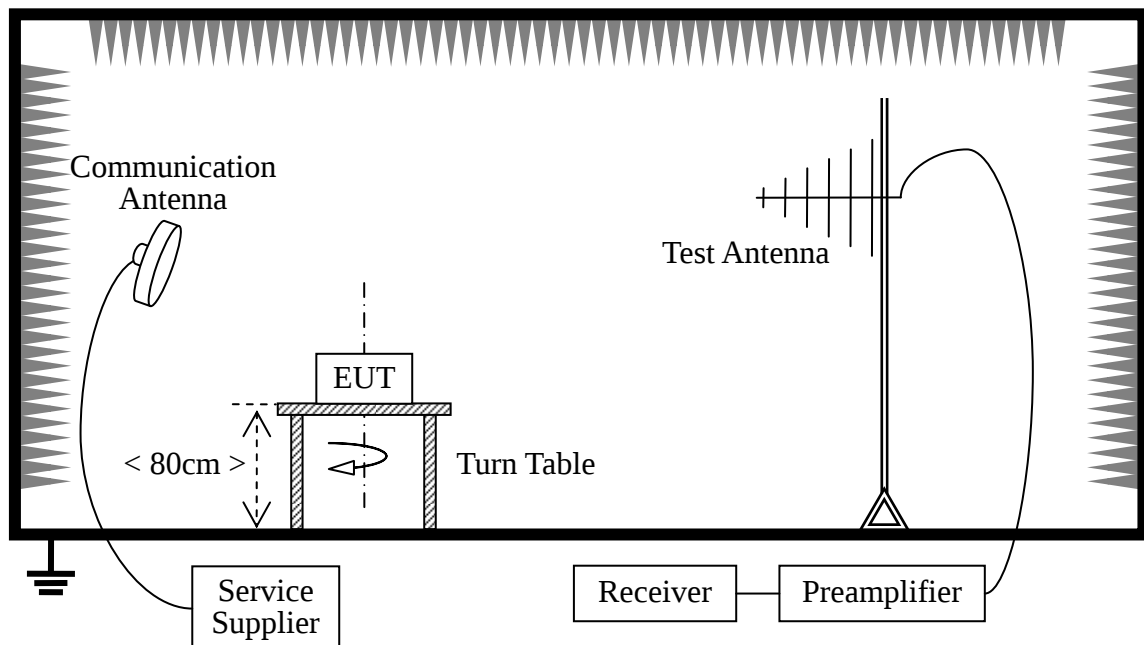

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna:

Horn Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength..

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
-------------	--------------	-------	------------	-----------

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2010.9
Receiver	Agilent	E7405A	US44210471	2010.9
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2010.9
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2010.9

2.7.3 Test Result


The Bluetooth Module operates at hopping-off test mode. The lowest and highest channels are tested to verify the band edge emissions.

A. Test Verdict:


GFSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	39.23	36.22	74	54	PASS
78	2480	39.23	35.7	74	54	PASS


B. Test Plot:

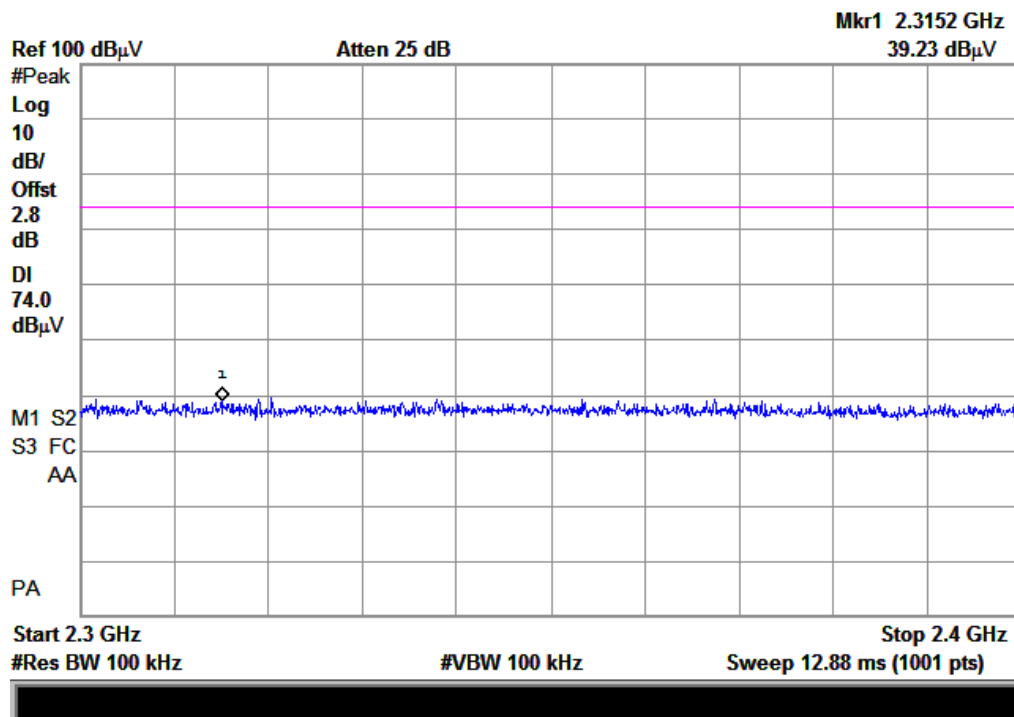


(Plot A1: Channel = 0 PEAK)

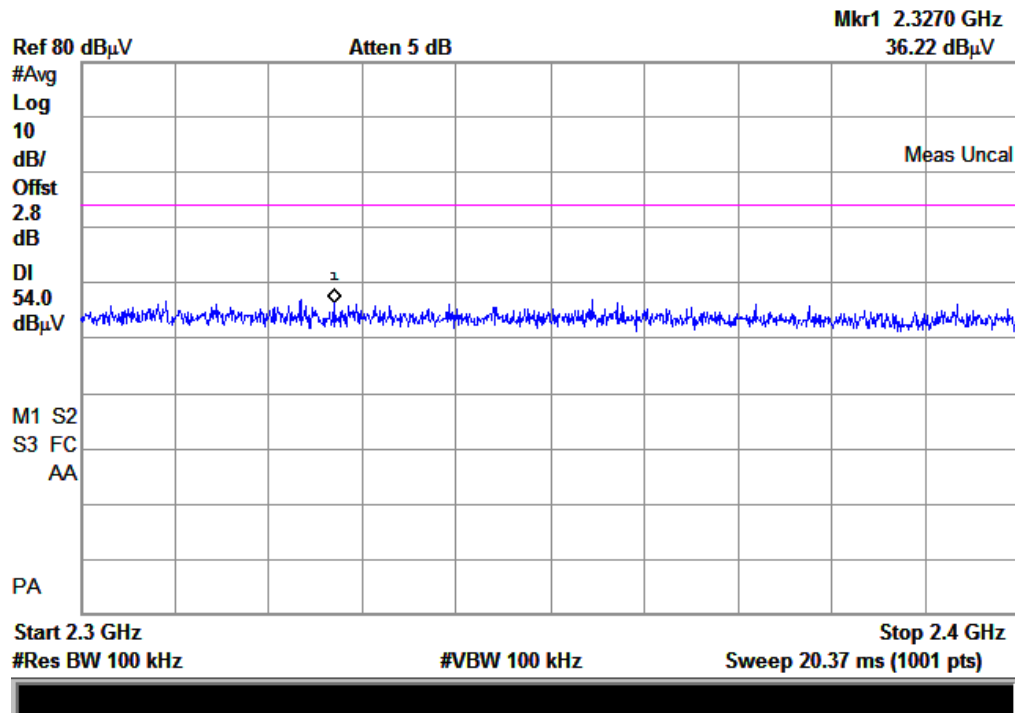

(Plot A2: Channel = 0 AVERAGE)

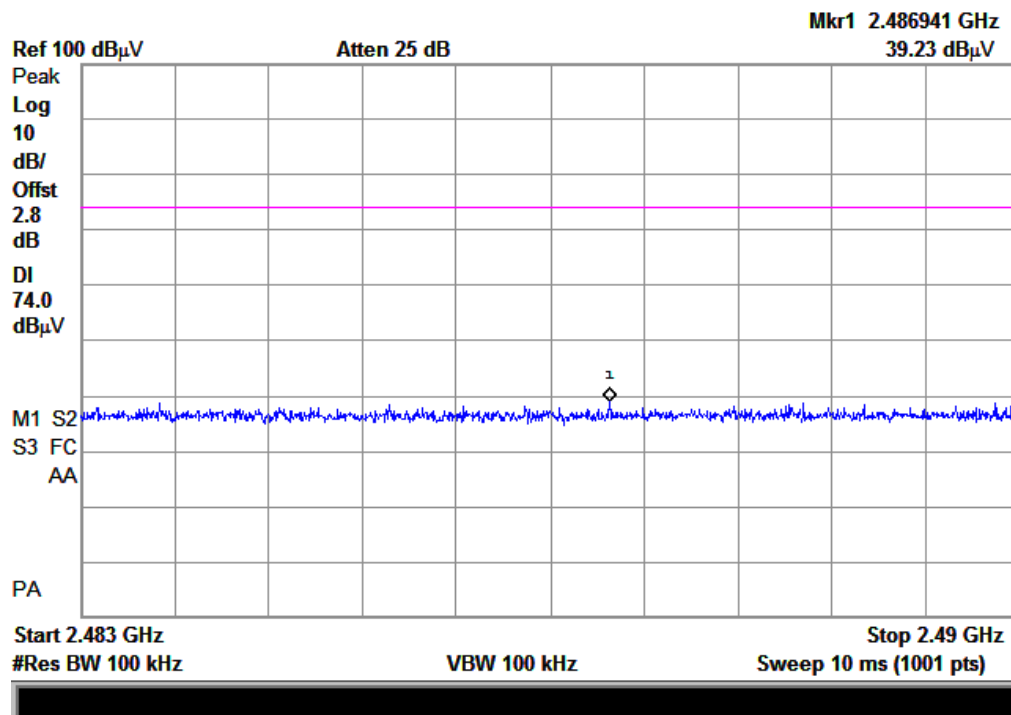

(Plot B1: Channel = 78 PEAK)

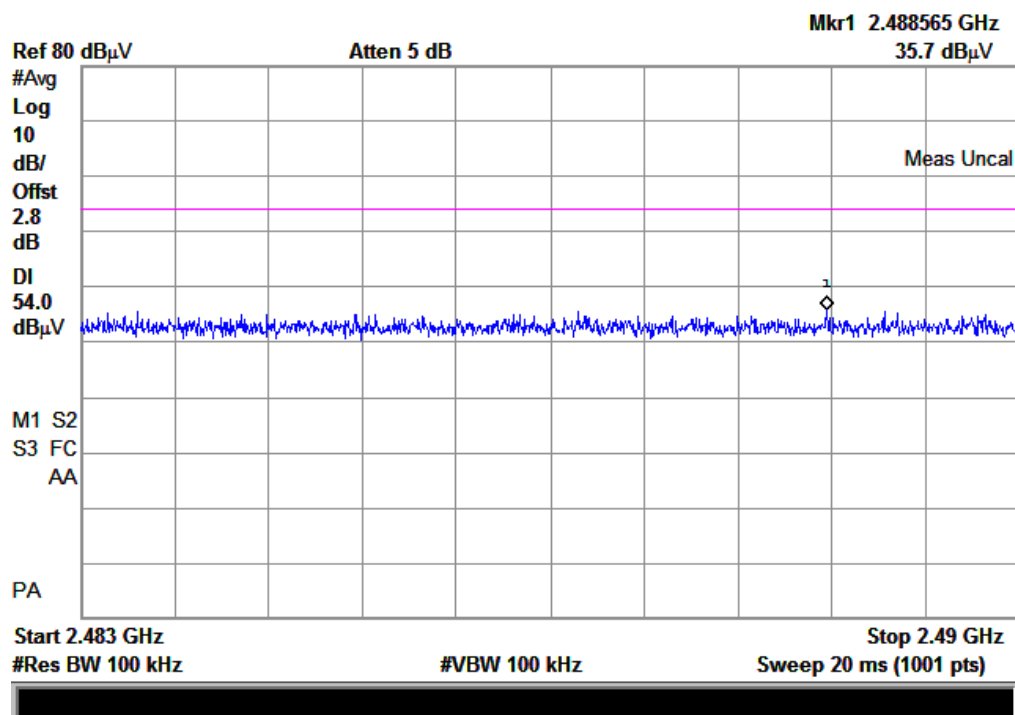


(Plot B2: Channel = 78 AVERAGE)

C. Test Verdict:


$\pi/4$ -DQPSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	40.34	38.93	74	54	PASS
78	2480	39.26	38.66	74	54	PASS


D. Test Plot:

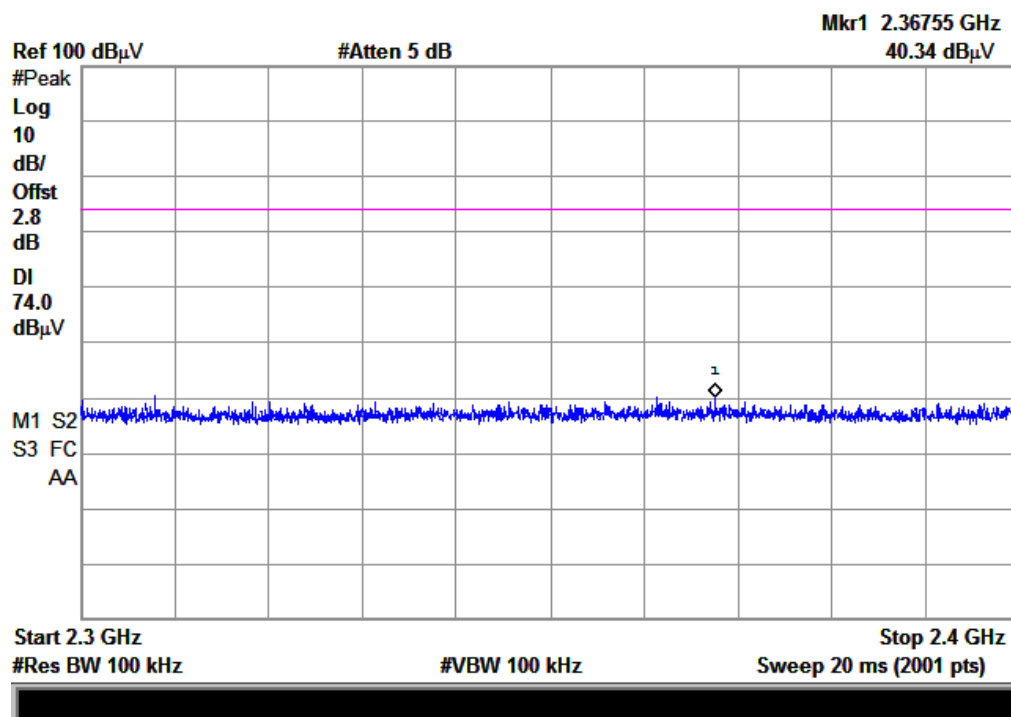


(Plot A1: Channel = 0 PEAK)

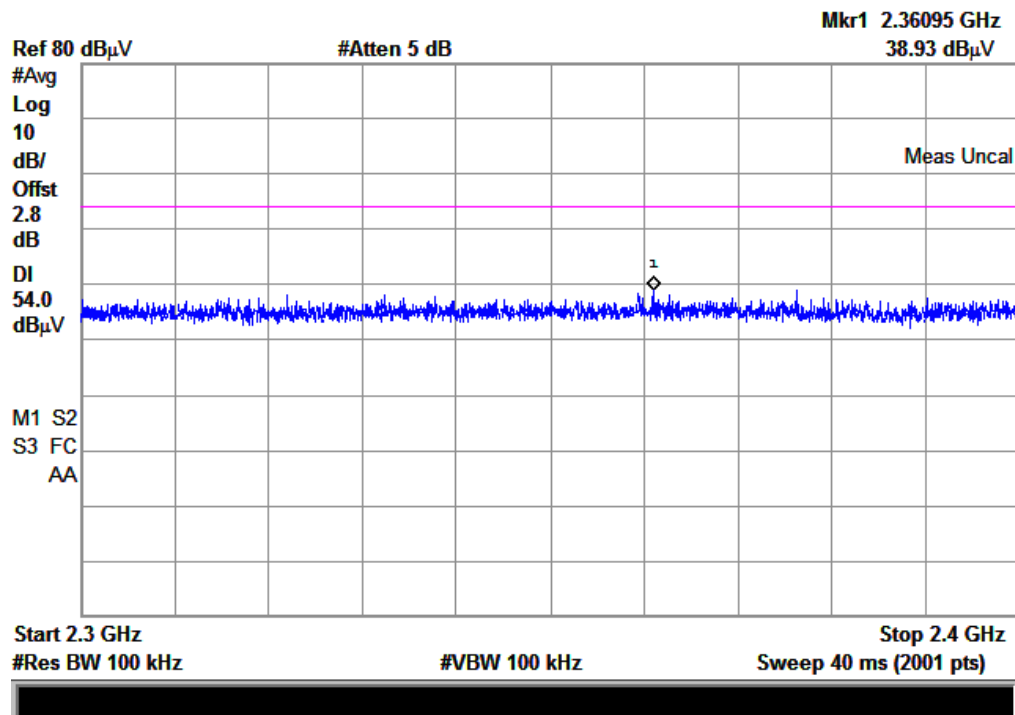

(Plot A2: Channel = 0 AVERAGE)

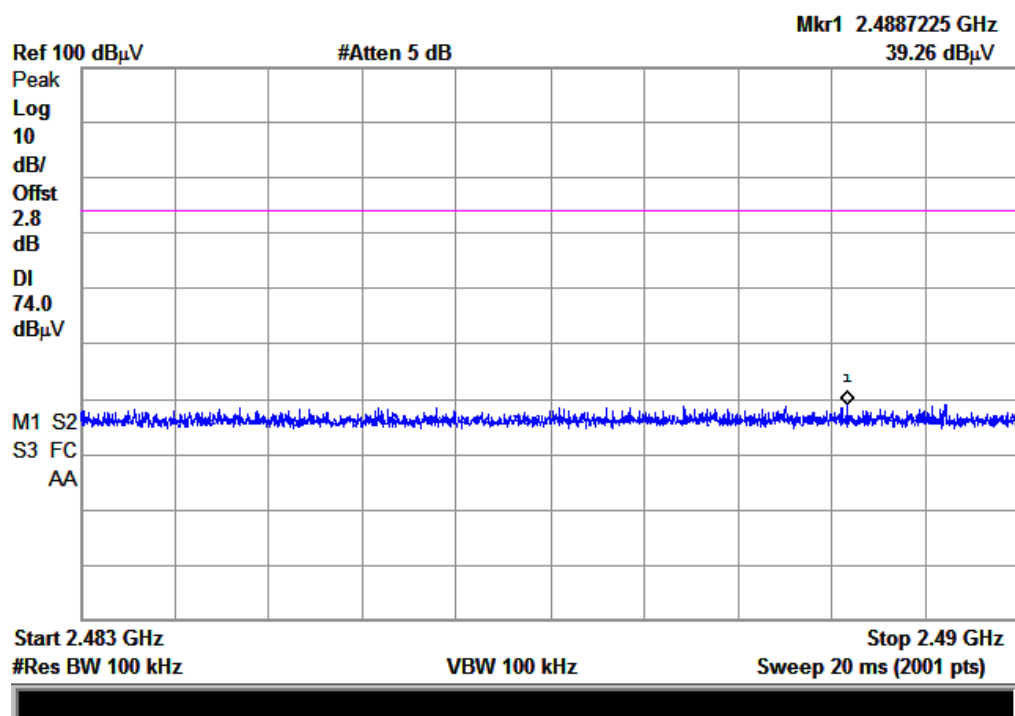

(Plot B1: Channel = 78 PEAK)

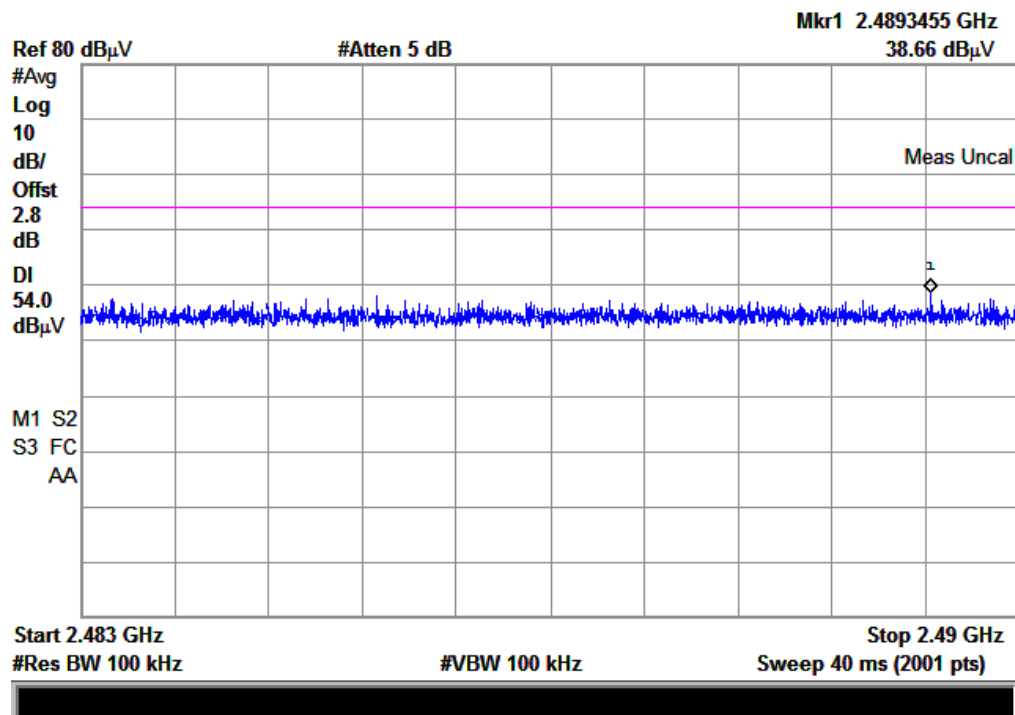


(Plot B2: Channel = 78 AVERAGE)

E. Test Verdict:


8-DPSK Mode

Channel	Frequency (MHz)	Max. Emission in the Restricted Bands (dB μ V/m)		Limit (dB μ V/m)		Verdict
		PK	AV	PK	AV	
0	2402	39.66	37.89	74	54	PASS
78	2480	39.34	37.74	74	54	PASS


F. Test Plot:

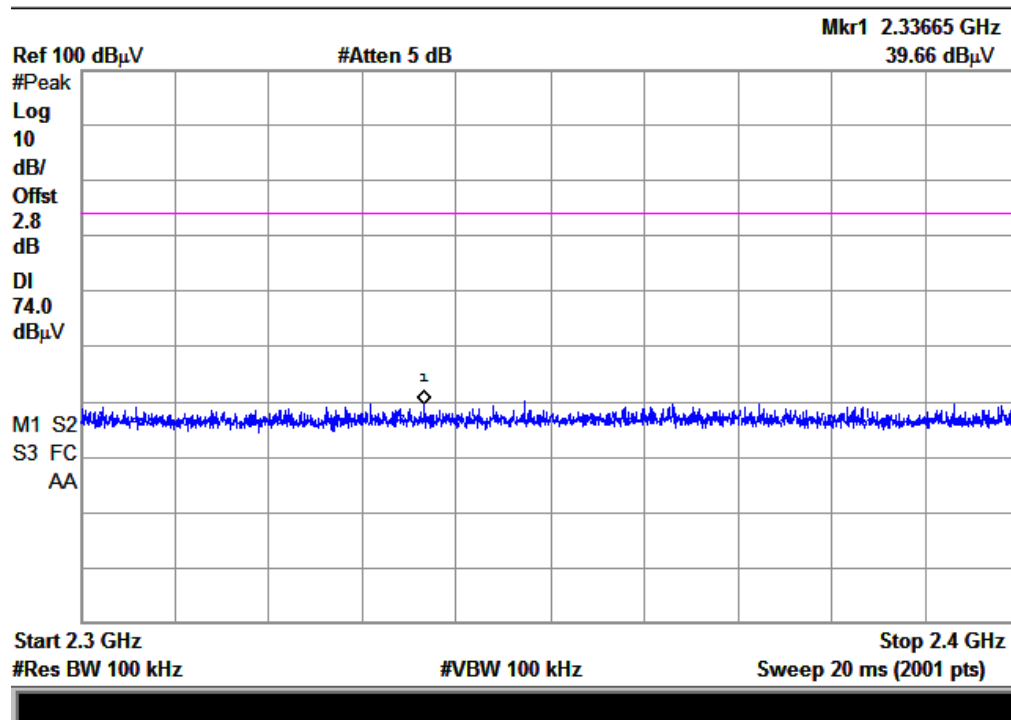


(Plot A1: Channel = 0 PEAK)

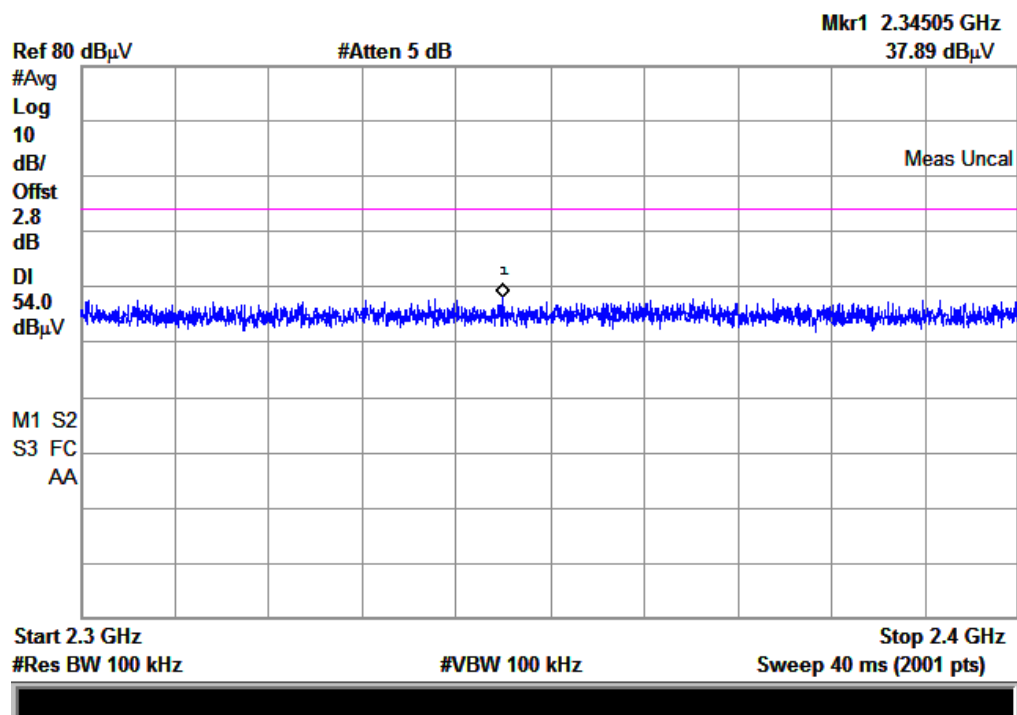

(Plot A2: Channel = 0 AVERAGE)

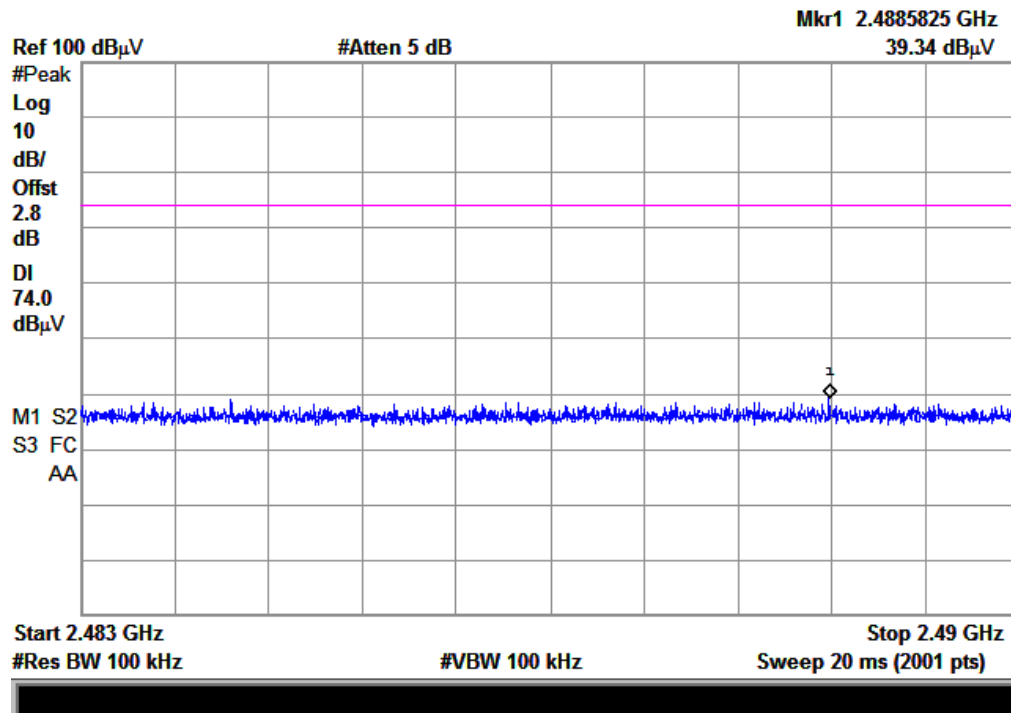

(Plot B1: Channel = 78 PEAK)

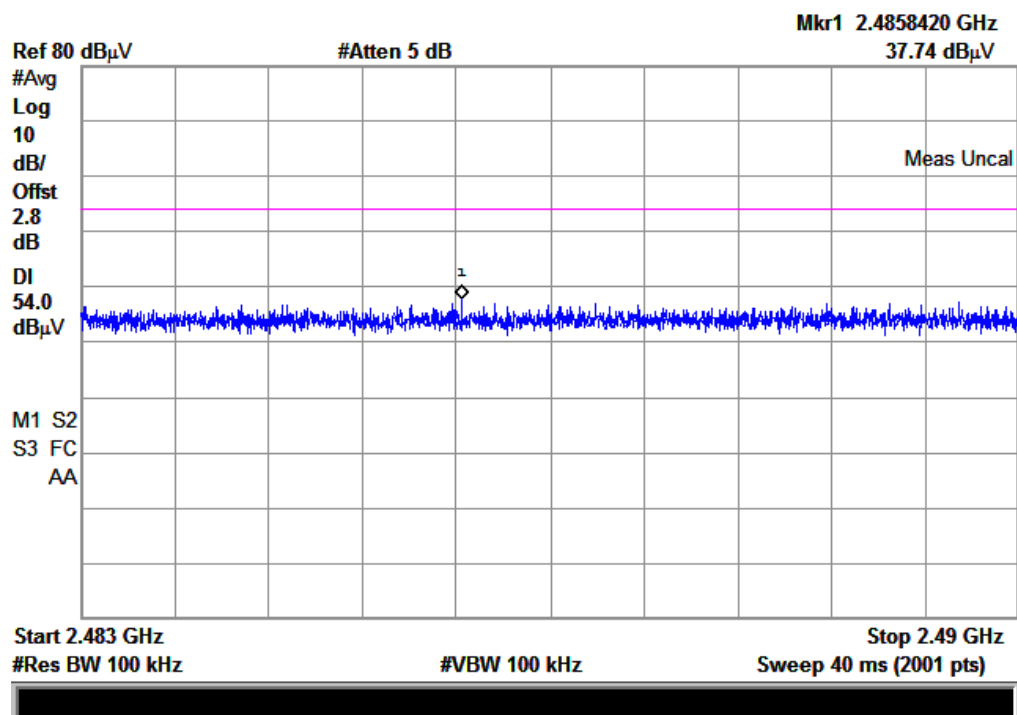

(Plot B2: Channel = 78 AVERAGE)

2.8 Conducted Emission

The test is not applicable, because the EUT is not switched, contains no switches, does not include inductive loads

2.9 Radiated Emission

2.9.1 Requirement

According to FCC section 15.247(c) and RSS-A8.5, radiated emission outside the frequency band attenuation below the general limits specified in FCC section 15.209(a) is not required. In addition, radiated emissions which fall in the restricted bands, as defined in FCC section 15.205(a), must also comply with the radiated emission limits specified in FCC section 15.209(a).


According to FCC section 15.209 (a), except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength ($\mu\text{V/m}$)	Measurement Distance (m)	Detector
30 - 88	100	3	QP
88 - 216	150	3	QP
216 - 960	200	3	QP
960 - 1000	500	3	QP
Above 1000	500	3	AV

In addition, radiated emissions which fall in the restricted bands, as defined in Section 15.205(a), also should comply with the radiated emission limits specified in Section 15.209(a)(above table)

2.9.2 Test Description

A. Test Setup:

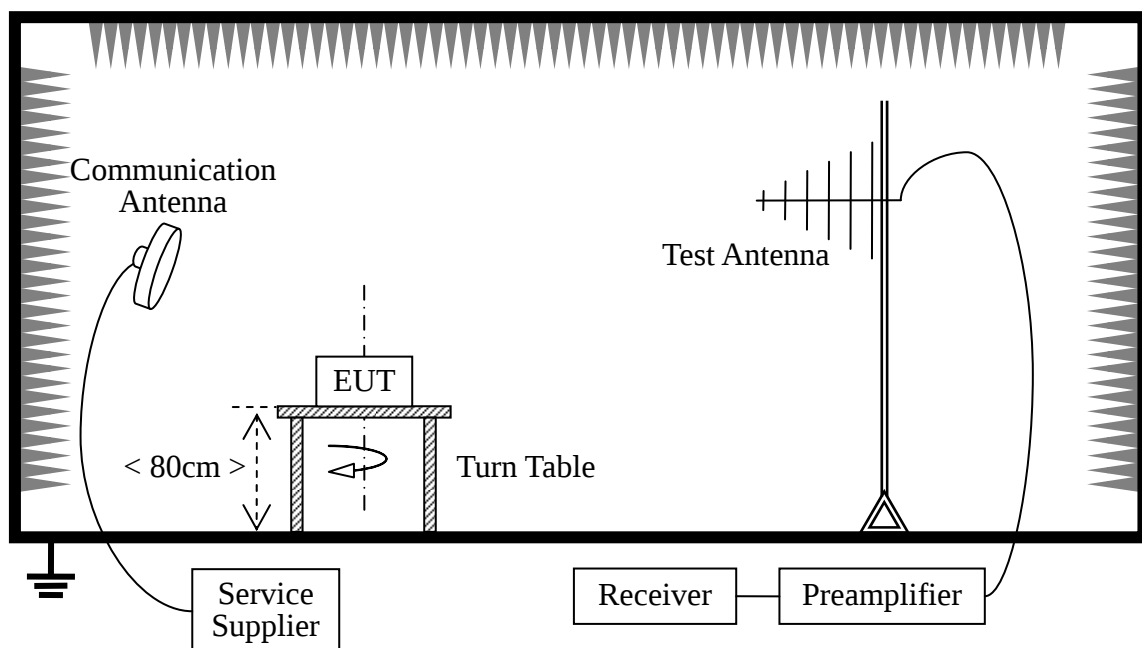

The test site semi-anechoic chamber has met the requirement of NSA tolerance 4dB according to the standards: ANSI C63.4 (2003). The EUT was set-up on insulator 80cm above the Ground Plane. The set-up and test methods were according to ANSI C63.4.

The Bluetooth Module of the EUT is powered by the Battery. The Module is located in a 3m Semi-Anechoic Chamber; the antenna factors, cable loss and so on of the site as factors are calculated to correct the reading. During the measurement, the Bluetooth Module is activated and controlled by the Bluetooth Service Supplier (SS) via a Common Antenna, and is set to operate under hopping-on test mode transmitting 339 bytes DH5 packages at maximum power.

For the Test Antenna: In the frequency range above 30MHz, Bi-Log Test Antenna (30MHz to 1GHz) and Horn Test Antenna (above 1GHz) are used. Test Antenna is 3m away from the EUT. Test Antenna height is varied from 1m to 4m above the ground to determine the maximum value of the field strength, the azimuth range of turntable was 0° to 360°, the receive antenna has two polarizations horizontal and vertical. When doing measurements above 1GHz, the EUT was placed within the 3dB beam width range of the horn antenna, and the EUT was tested in 3 orthogonal positions as recommended in ANSI C63.4 for Radiated Emissions and the worst-case data was presented.

B. Equipments List:

Description	Manufacturer	Model	Serial No.	Cal. Date
System Simulator	R&S	CMU200	100448	2010.9
Receiver	Agilent	E7405A	US44210471	2010.9
Full-Anechoic Chamber	Albatross	9m*6m*6m	(n.a.)	2010.9
Test Antenna - Bi-Log	Schwarzbeck	VULB 9163	9163-274	2010.9
Test Antenna - Horn	Schwarzbeck	BBHA 9120C	9120C-384	2010.9
Test Antenna - circular	R&S	AC004R1	0749.3000.03	2010.9

2.9.3 Test Result

GFSK Mode:

A. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	90.58	78.3	Horizontal	Plot A.1
		95.54	83.5	Vertical	Plot A.2
39	2441	91.10	79.0	Horizontal	Plot B.1
		89.66	77.8	Vertical	Plot B.2

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
78	2480	88.04	76.2	Horizontal	Plot C.1
		93.15	81.4	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
3.940 G	47.47	54	-6.53	340	100	Vertical
720.6 M	32.67	46	-13.33	4	100	Vertical
664.4 M	35.16	46	-10.84	113	100	Horizontal

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	33.58	46	-12.42	28	100	Vertical
664.4 M	37.71	46	-8.29	125	100	Horizontal
2.793 G	48.87	54	-5.13	20	100	Horizontal

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	32.67	46	-13.33	114	100	Vertical
720.6 M	32.7	46	-13.3	60	100	Horizontal
912.7 M	32.96	46	-13.04	46	100	Horizontal
2.793 G	47.76	54	-6.24	92	100	Horizontal

B. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

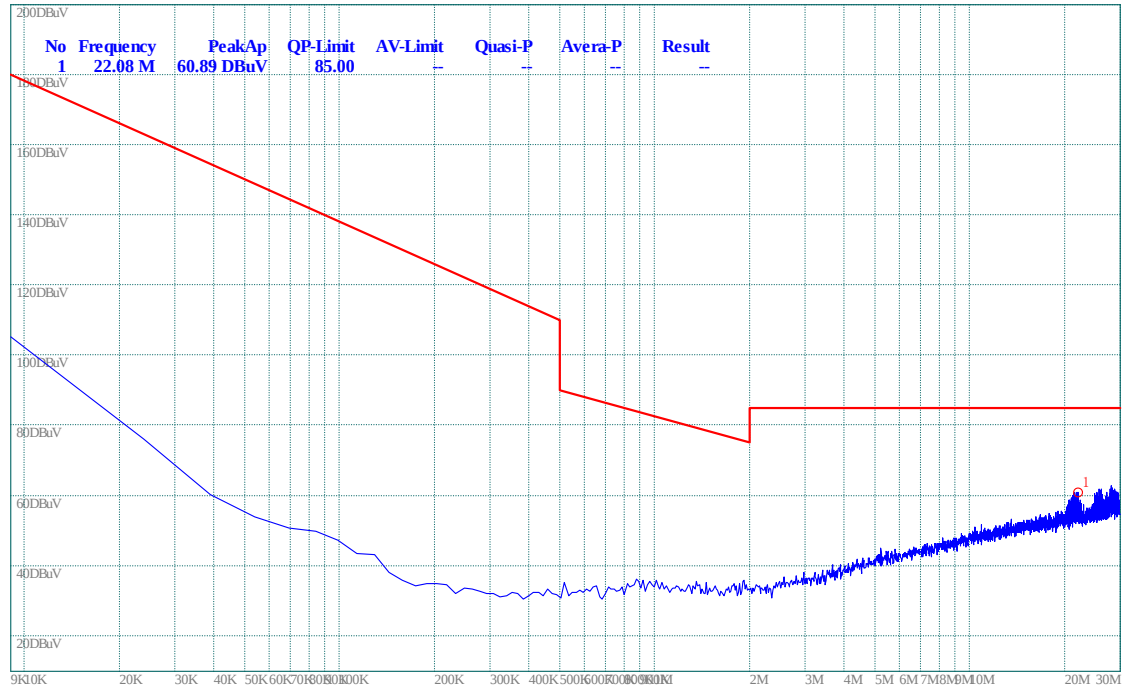

(Plot A.0: 9kHz to 30MHz)

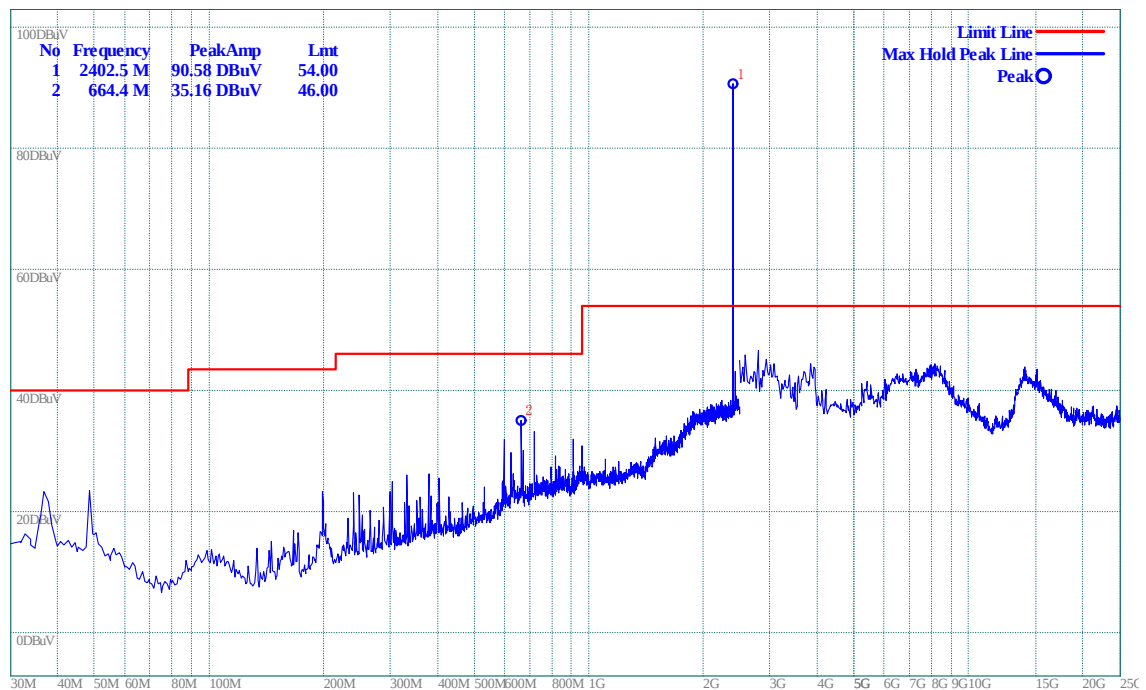


(Plot A.1: Antenna Horizontal)

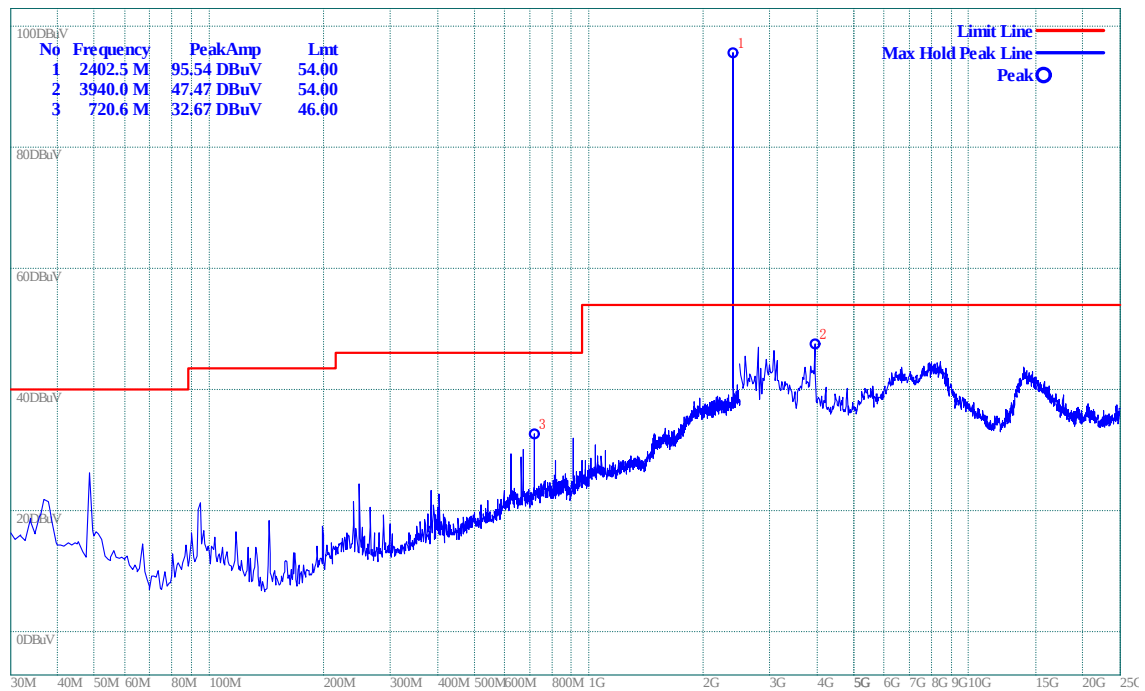


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

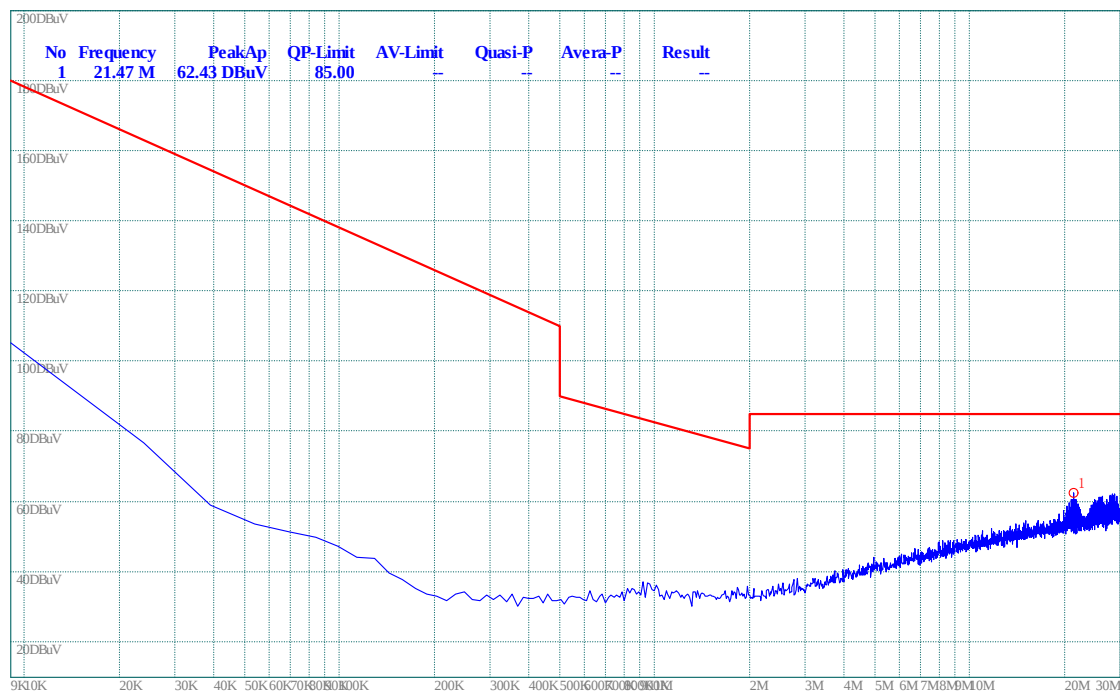

(Plot B.0: 9kHz to 30MHz)

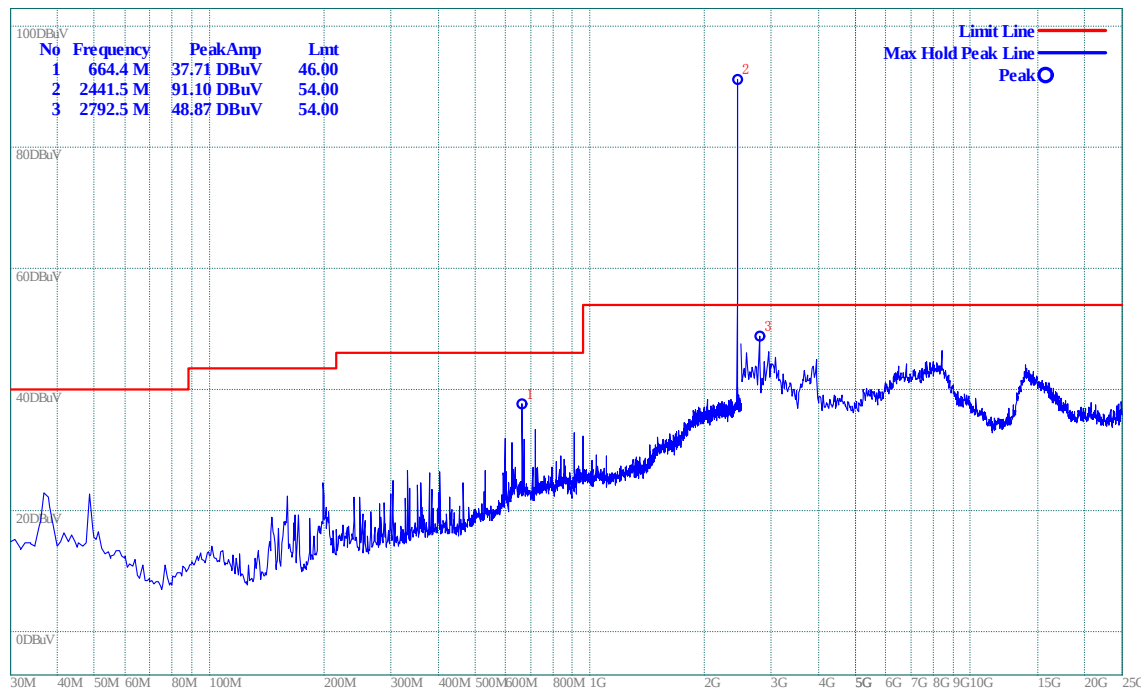


(Plot B.1: Antenna Horizontal)

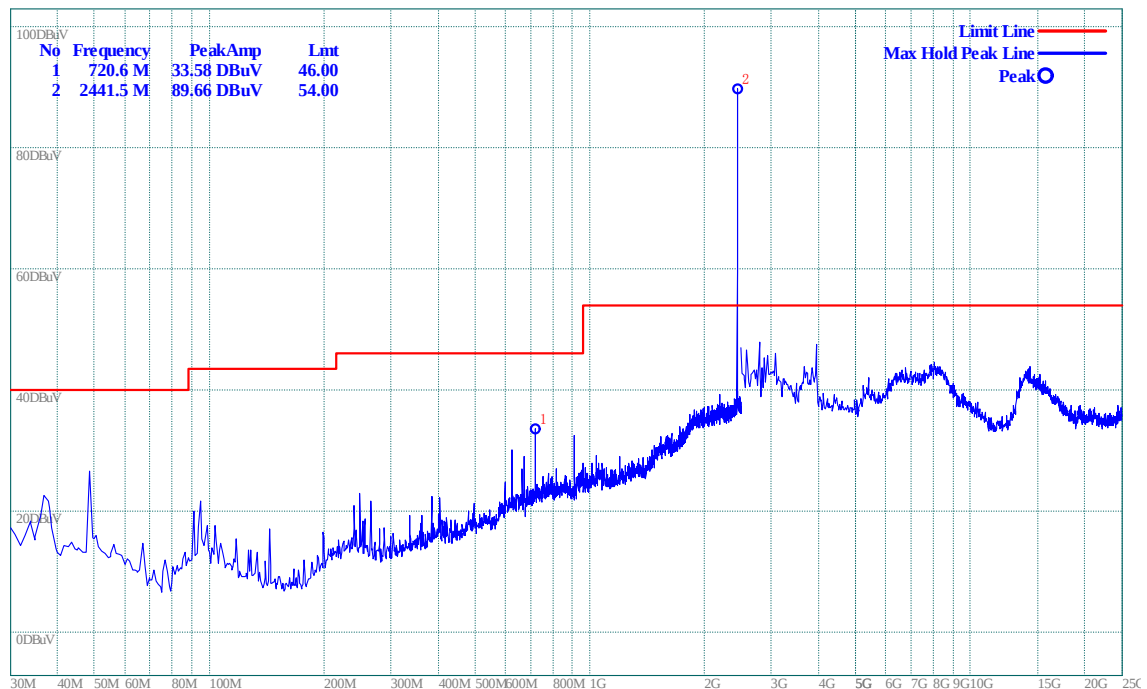


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

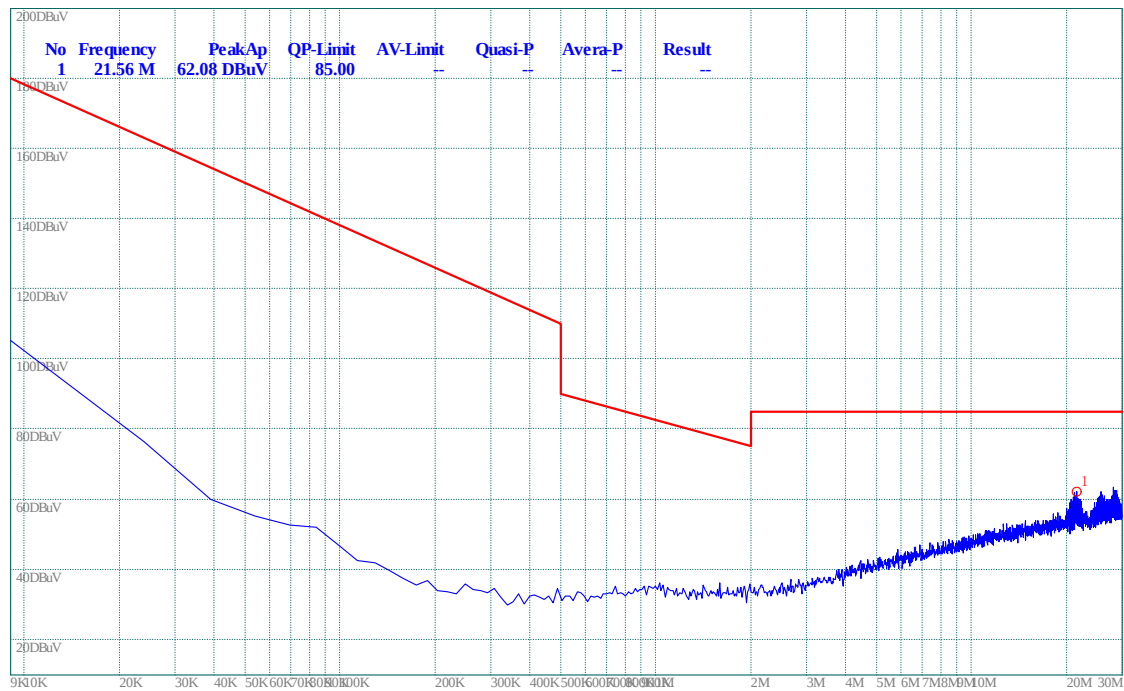

(Plot C.0: 9kHz to 30MHz)

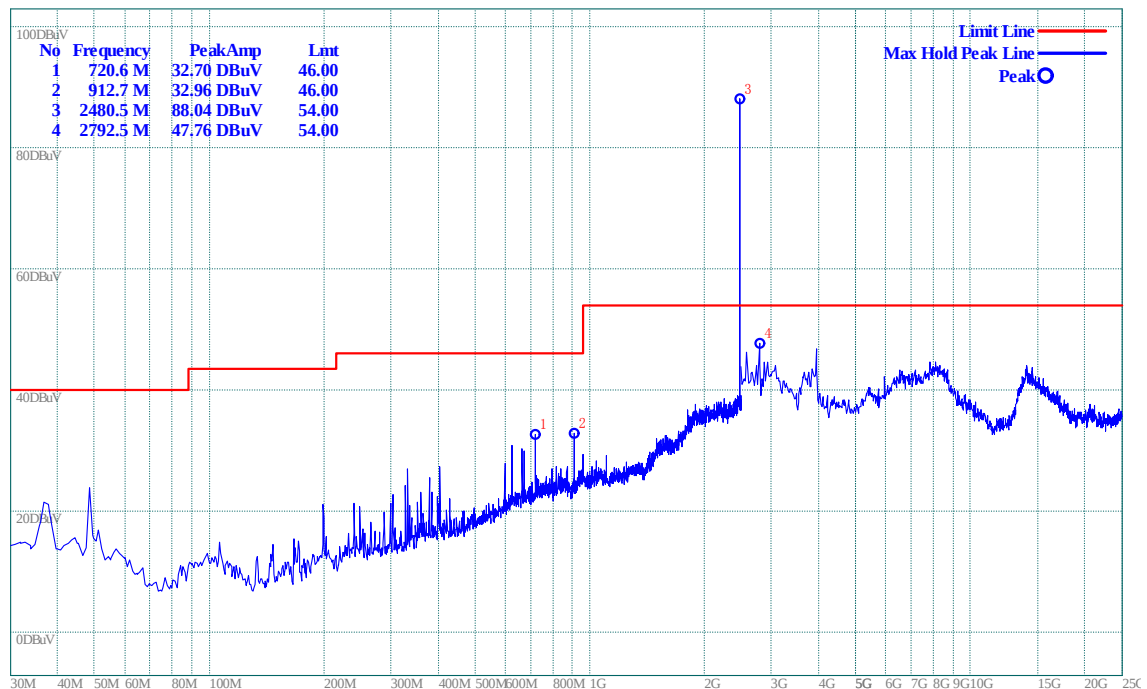

(Plot C.1: Antenna Horizontal)

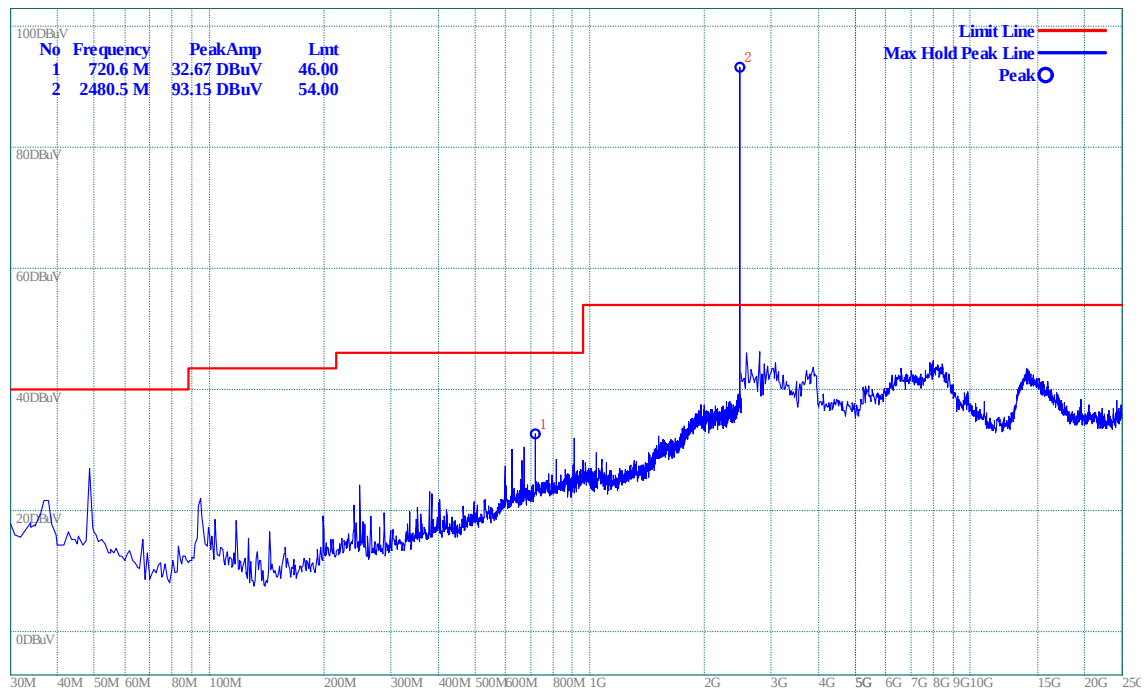

(Plot C.2: Antenna Vertical)

$\pi/4$ -DQPSK Mode:

C. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dB μ V/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	81.31	70.6	Horizontal	Plot A.1
		87.17	76.4	Vertical	Plot A.2
39	2441	83.74	72.3	Horizontal	Plot B.1
		92.21	81.5	Vertical	Plot B.2
78	2480	82.95	71.4	Horizontal	Plot C.1
		83.96	71.9	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	34.52	46	-11.48	9	100	Vertical
3.950 G	42.99	54	-11.01	0	100	Vertical
3.940 G	46.26	54	-7.74	67	100	Vertical
598.4 M	37.5	46	-8.5	217	100	Horizontal
2.793 G	48.74	54	-5.26	140	100	Horizontal

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	34.8	46	-11.2	359	100	Vertical
6.460 G	48.4	54	-5.6	291	100	Vertical
598.4 M	36.48	46	-9.52	211	100	Horizontal
720.6 M	34.49	46	-11.51	198	100	Horizontal

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	34.17	46	-11.83	33	100	Vertical
912.7 M	31.75	46	-14.25	18	100	Vertical
3.940 G	48.82	54	-5.18	116	100	Vertical
354.0 M	29.74	46	-16.26	214	100	Horizontal
598.4 M	36.72	46	-9.28	220	100	Horizontal
720.6 M	34.6	46	-11.4	220	100	Horizontal
2.793 G	47.54	54	-6.46	140	100	Horizontal

D. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

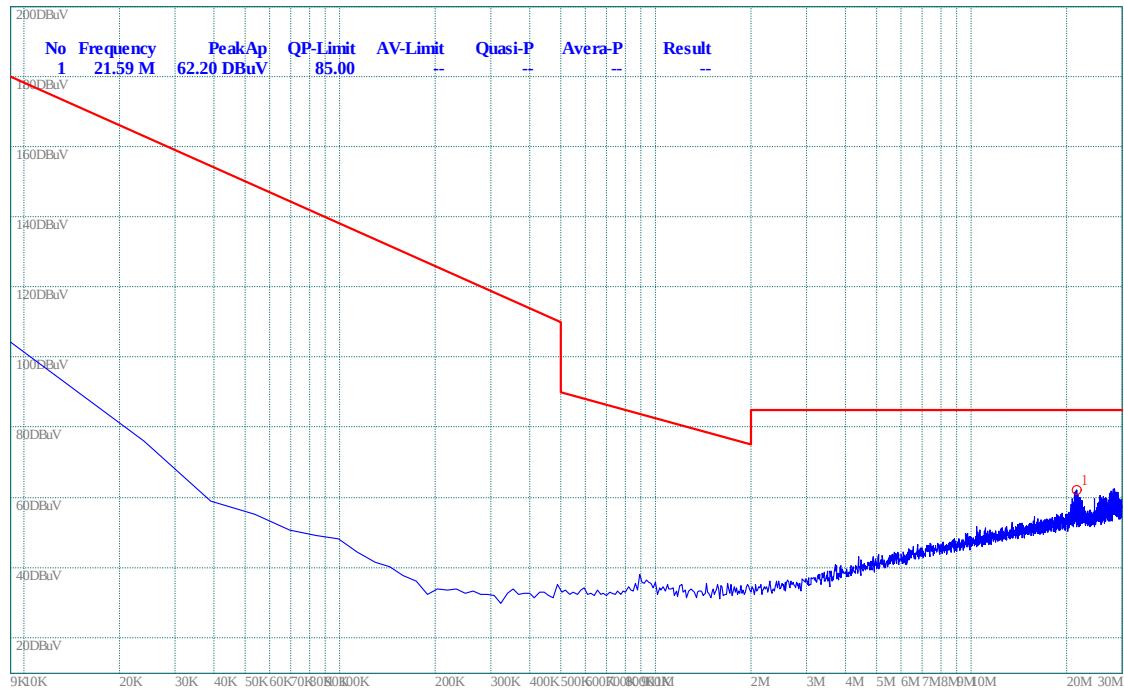

(Plot A.0: 9kHz to 30MHz)

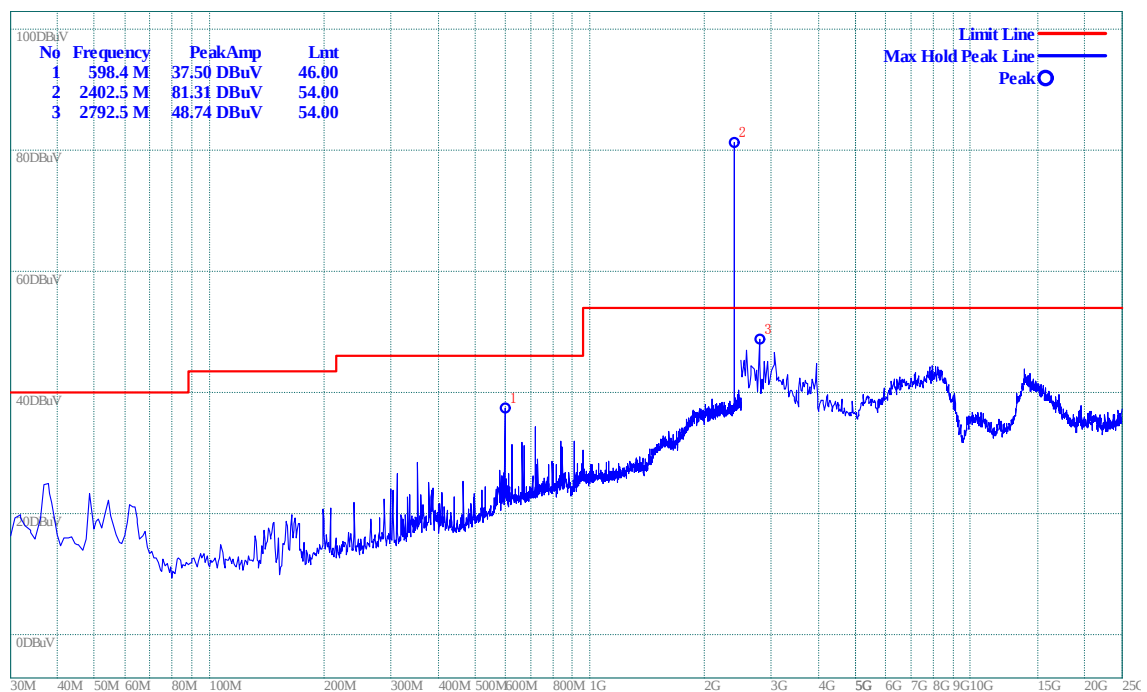


(Plot A.1: Antenna Horizontal)

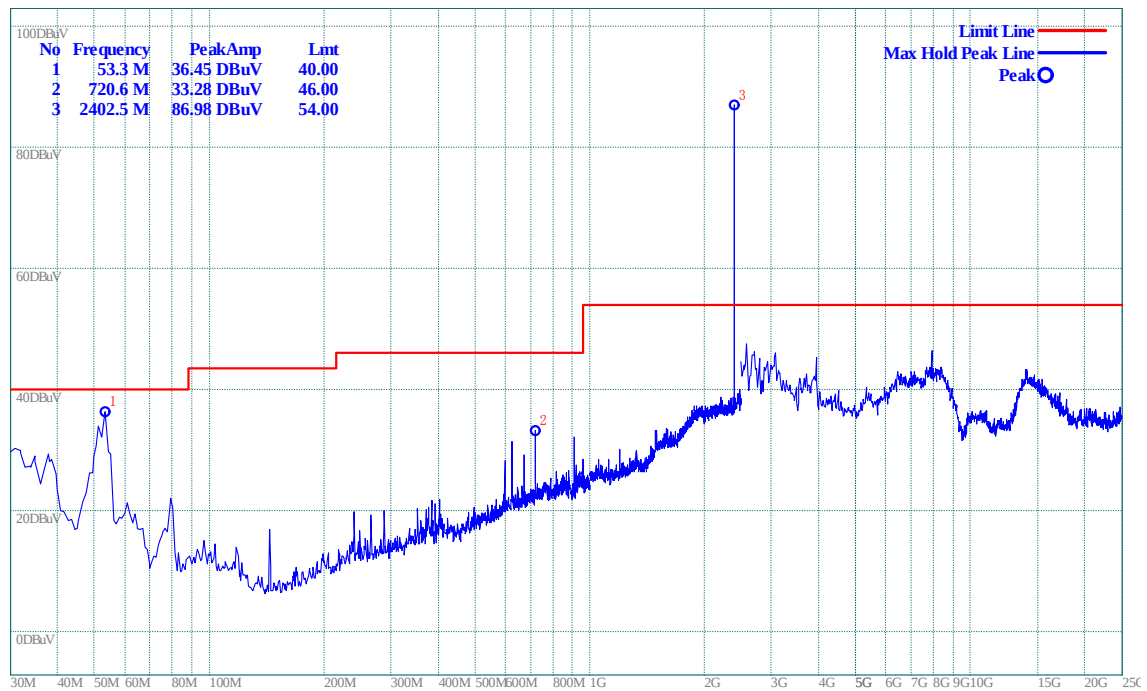


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

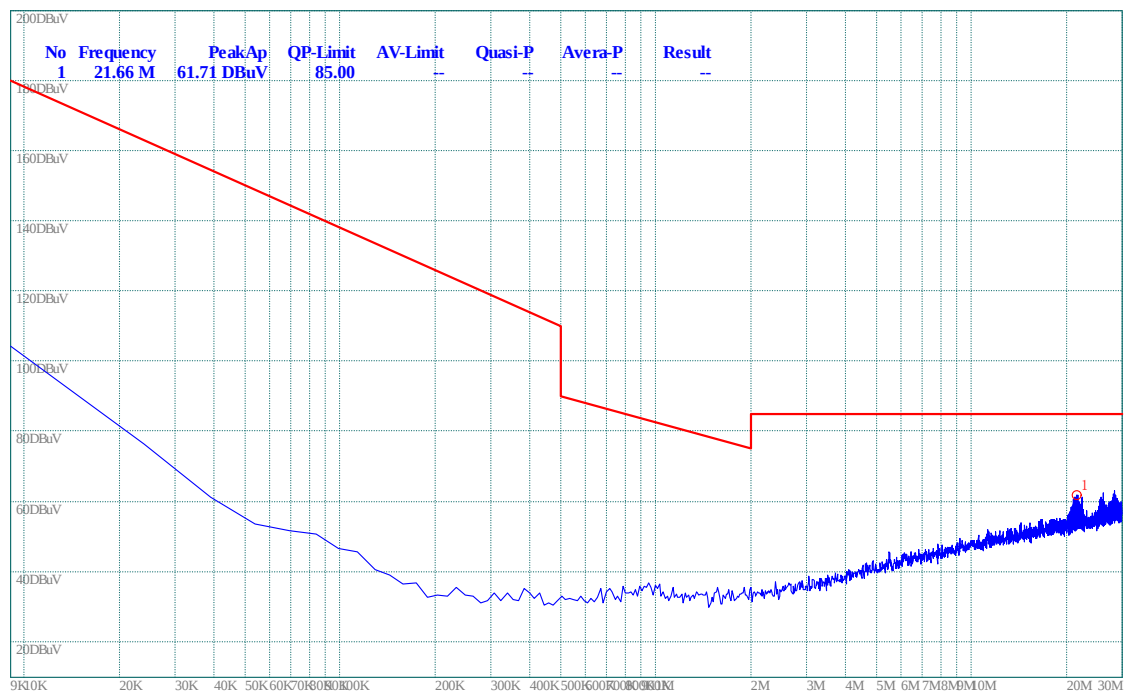

(Plot B.0: 9kHz to 30MHz)

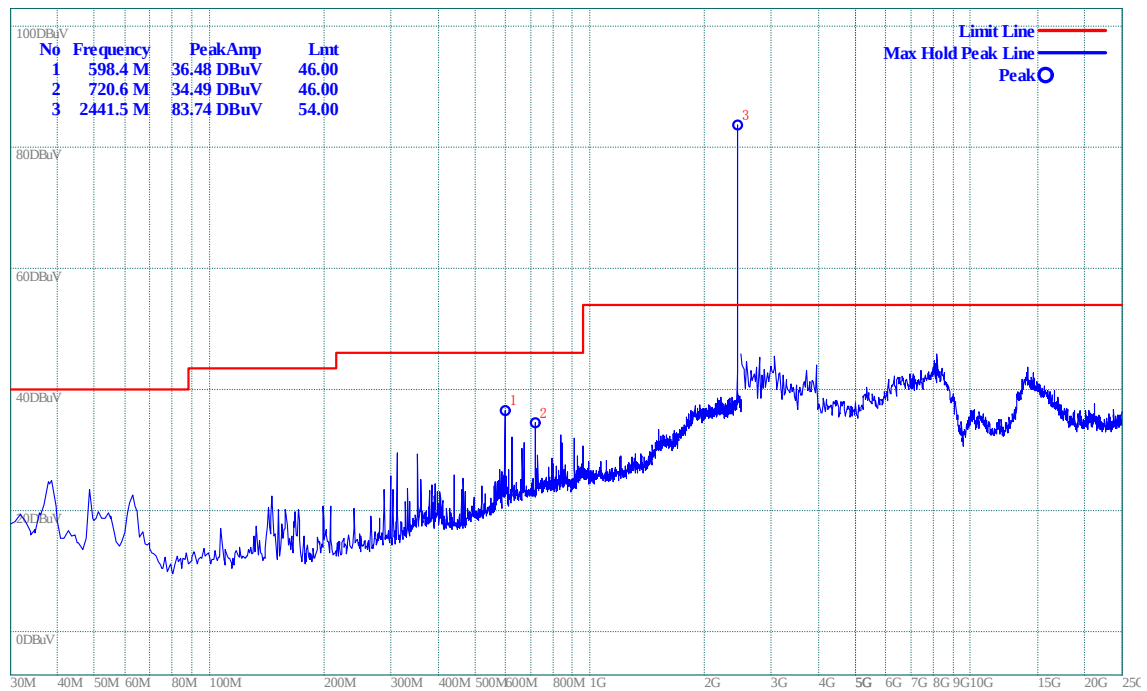


(Plot B.1: Antenna Horizontal)

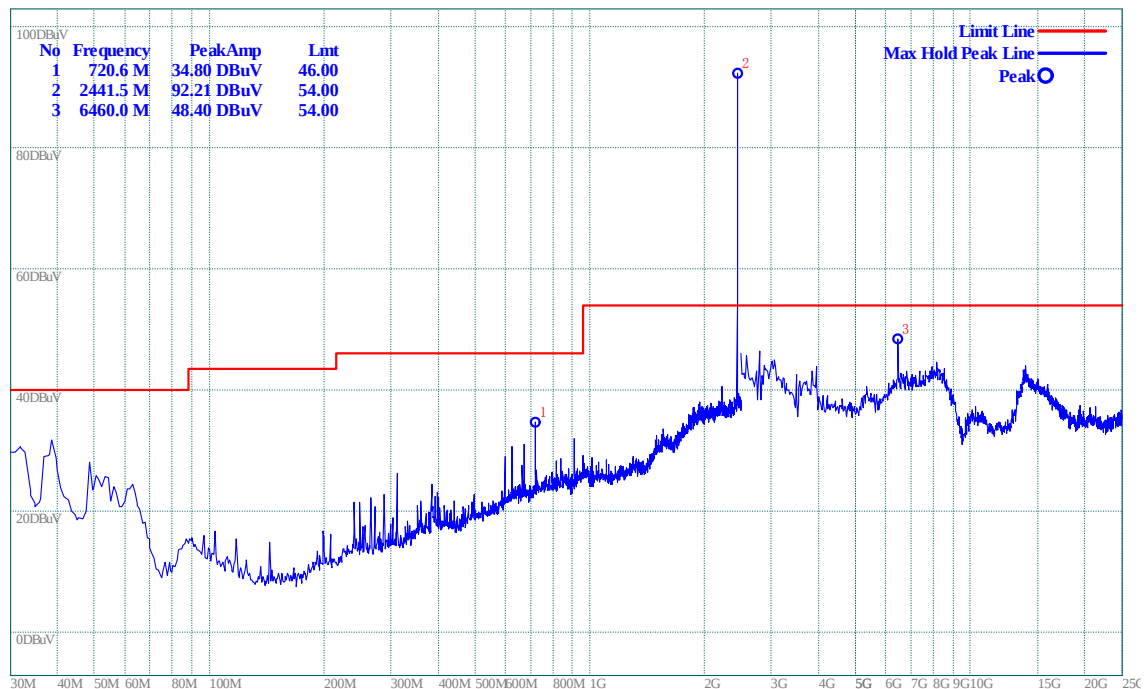


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

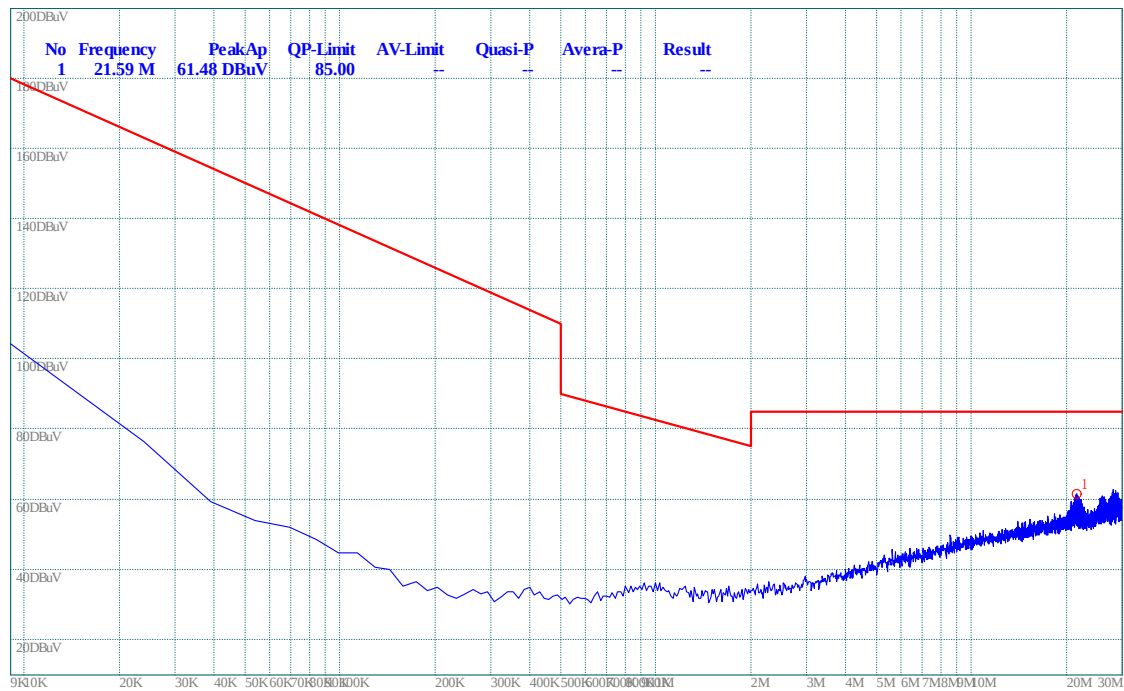

(Plot C.0: 9kHz to 30MHz)

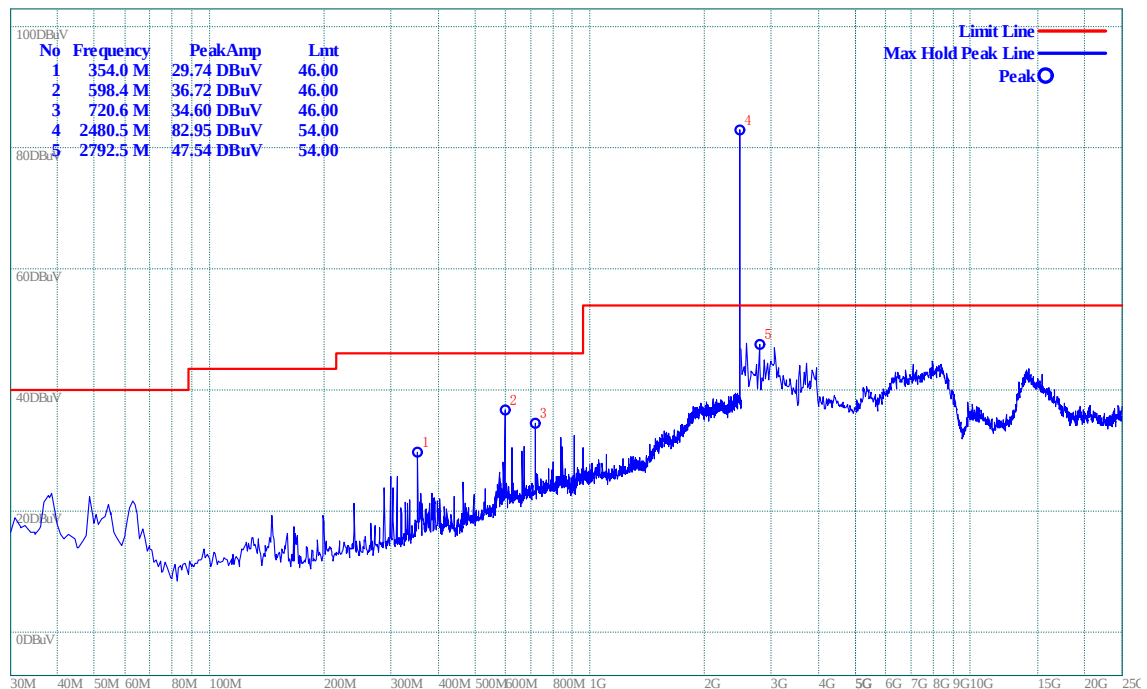

(Plot C.1: Antenna Horizontal)

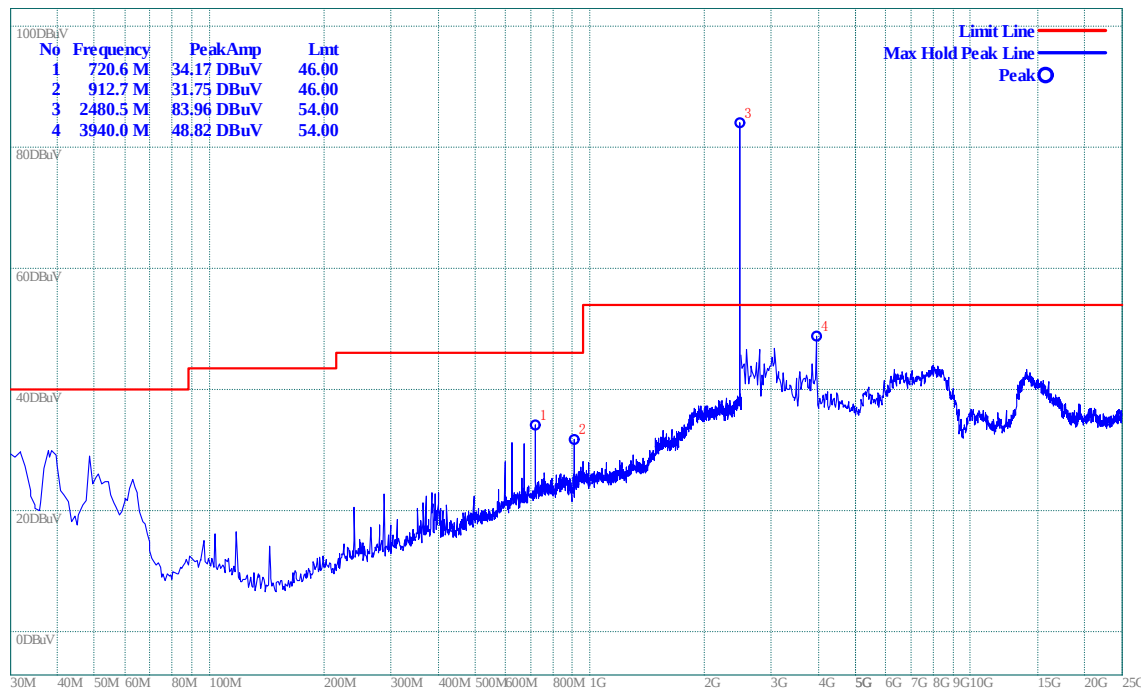

(Plot C.2: Antenna Vertical)

8-DPSK Mode:

E. Test Verdict for Harmonics:

The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.

Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	79.96	70.5	Horizontal	Plot A.1
		86.98	75.8	Vertical	Plot A.2
39	2441	83.66	72.1	Horizontal	Plot B.1
		85.38	73.0	Vertical	Plot B.2
78	2480	79.27	70.2	Horizontal	Plot C.1
		89.38	80.3	Vertical	Plot C.2

The un-wanted Emissions:

Test result of channel: 0 (2402MHz)

Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
53.3 M	36.45	40	-3.55	0	100	Vertical
720.6 M	33.28	46	-12.72	4	100	Vertical
720.6 M	34.16	46	-11.84	0	100	Horizontal
912.7 M	32.09	46	-13.91	31	100	Horizontal
3.940 G	47.44	54	-6.56	244	100	Horizontal

Test result of channel: 39 (2442MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
289.0 M	23.12	46	-22.88	0	100	Vertical
720.6 M	34.26	46	-11.74	2	100	Vertical
598.4 M	35.92	46	-10.08	216	100	Horizontal
720.6 M	34.7	46	-11.3	176	100	Horizontal

Test result of channel: 78 (2480MHz)


Frequency (MHz)	PK Level (dB μ V/m)	Limits (dB μ V/m)	Margin (dB)	Height (cm)	Azimuth (deg)	Antenna Polarization
720.6 M	33.33	46	-12.67	136	100	Vertical
912.7 M	32.55	46	-13.45	18	100	Vertical
3.940 G	47.38	54	-6.62	315	100	Vertical
598.4 M	33.72	46	-12.28	226	100	Horizontal
720.6 M	33.59	46	-12.41	327	100	Horizontal

F. Test Plots for the Whole Measurement Frequency Range:


Plots for Channel = 0

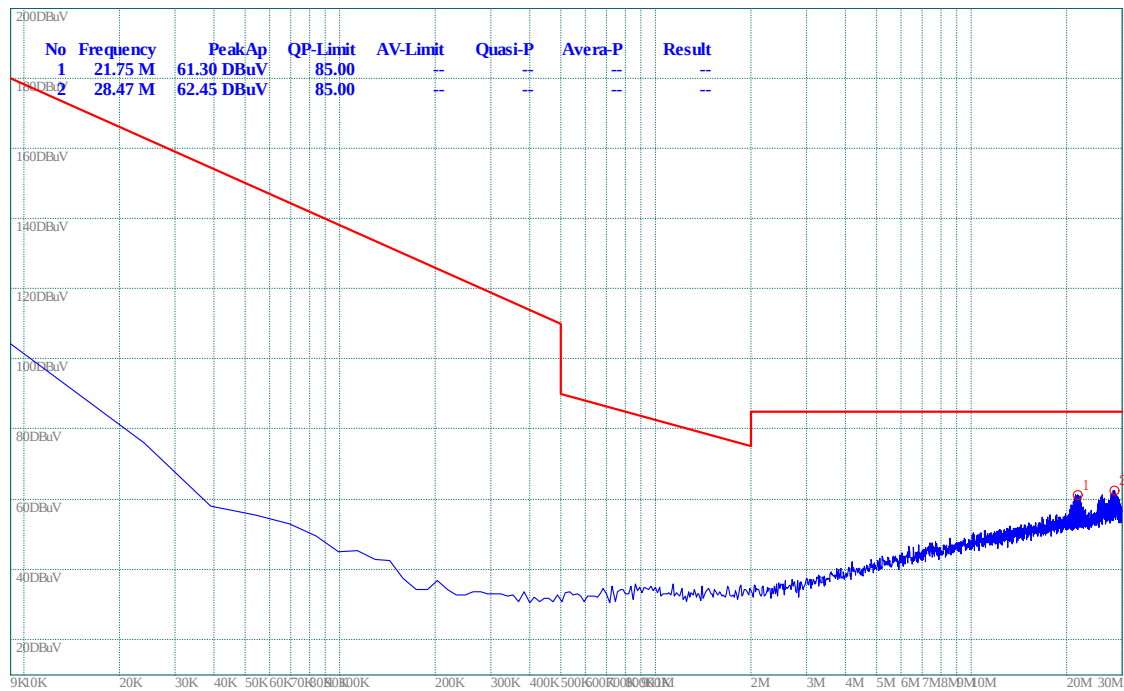

(Plot A.0: 9kHz to 30MHz)

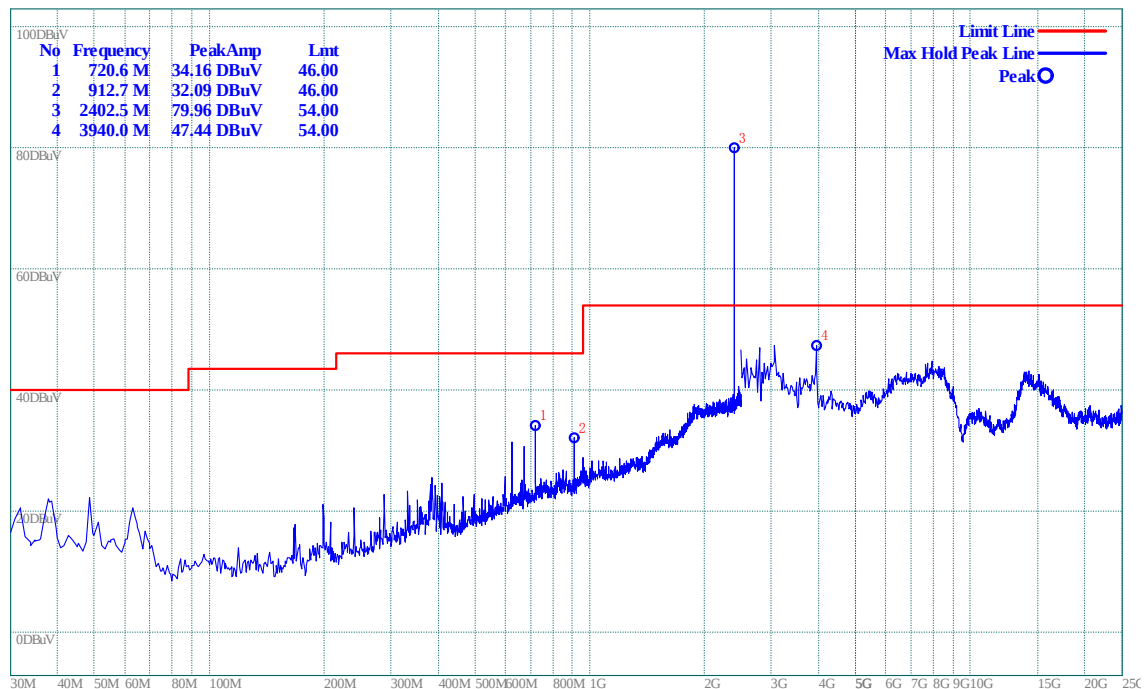


(Plot A.1: Antenna Horizontal)

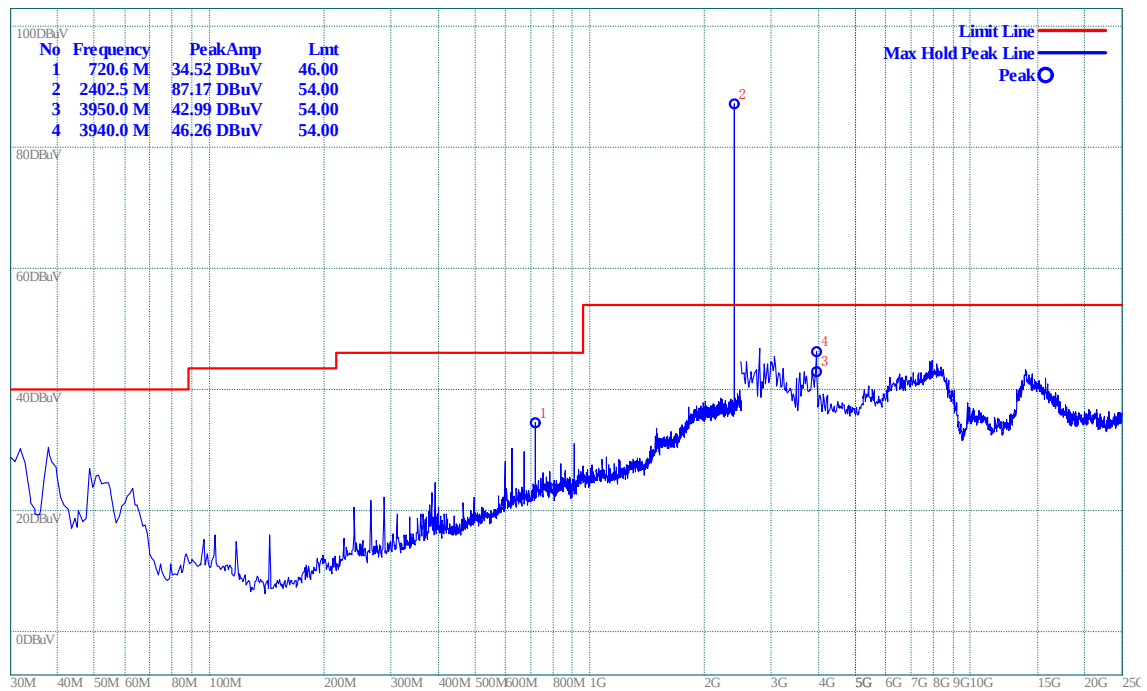


(Plot A.2: Antenna Vertical)


Plot for Channel = 39

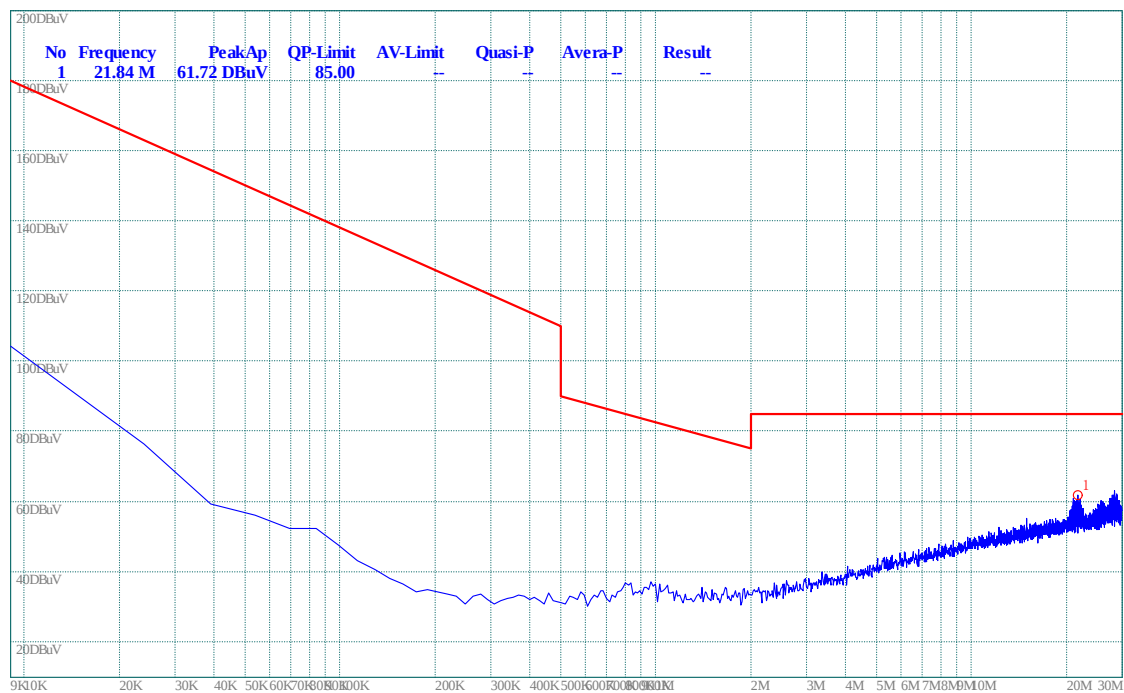

(Plot B.0: 9kHz to 30MHz)

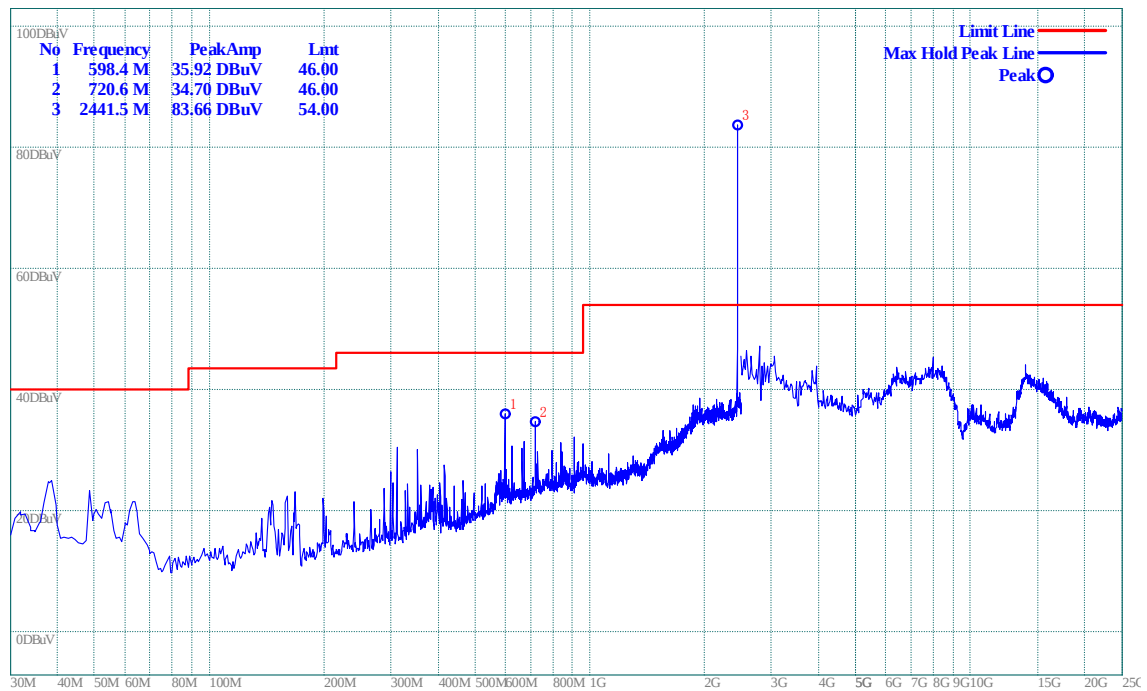


(Plot B.1: Antenna Horizontal)

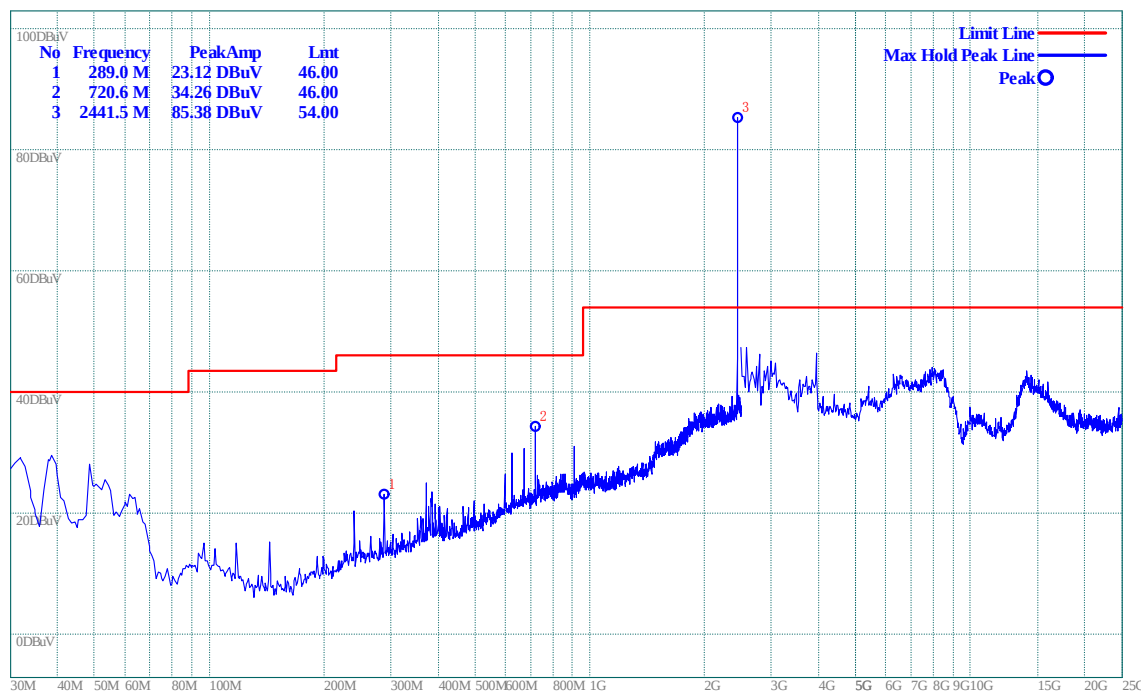


(Plot B.2: Antenna Vertical)


Plot for Channel = 78

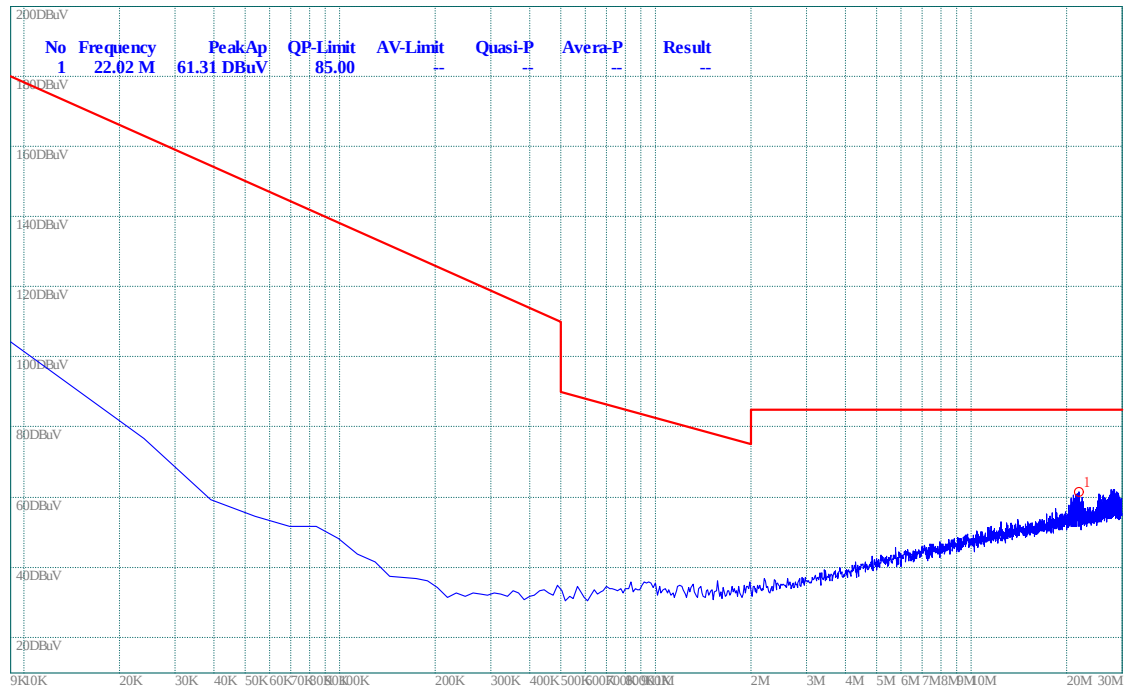

(Plot C.0: 9kHz to 30MHz)

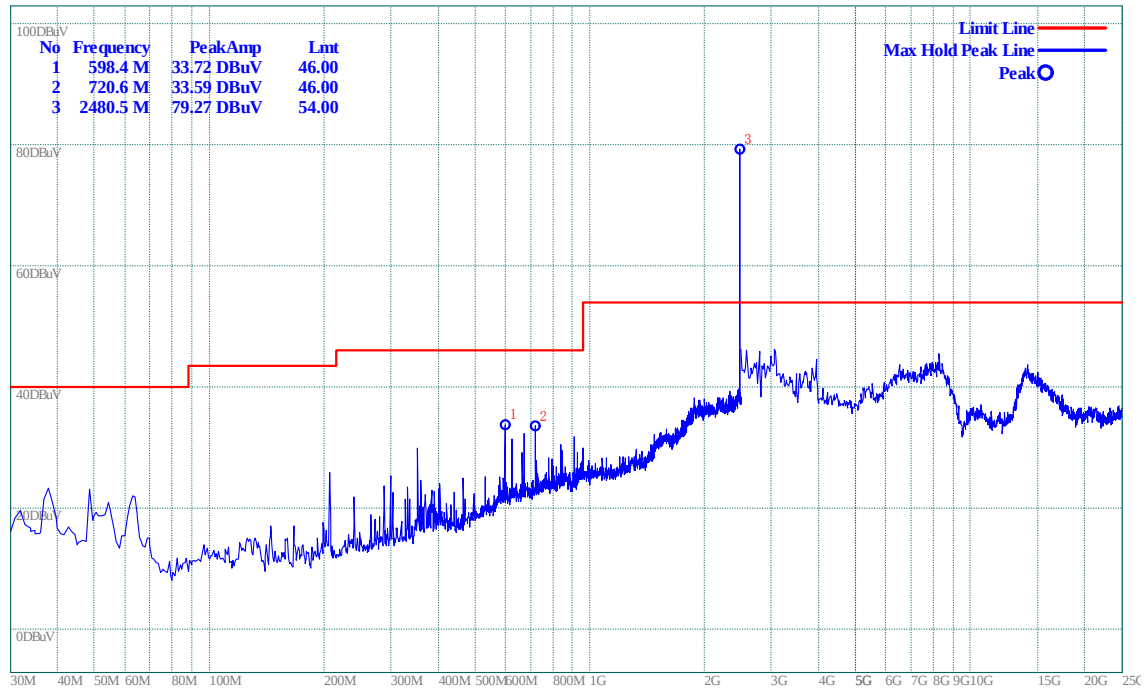

(Plot C.1: Antenna Horizontal)

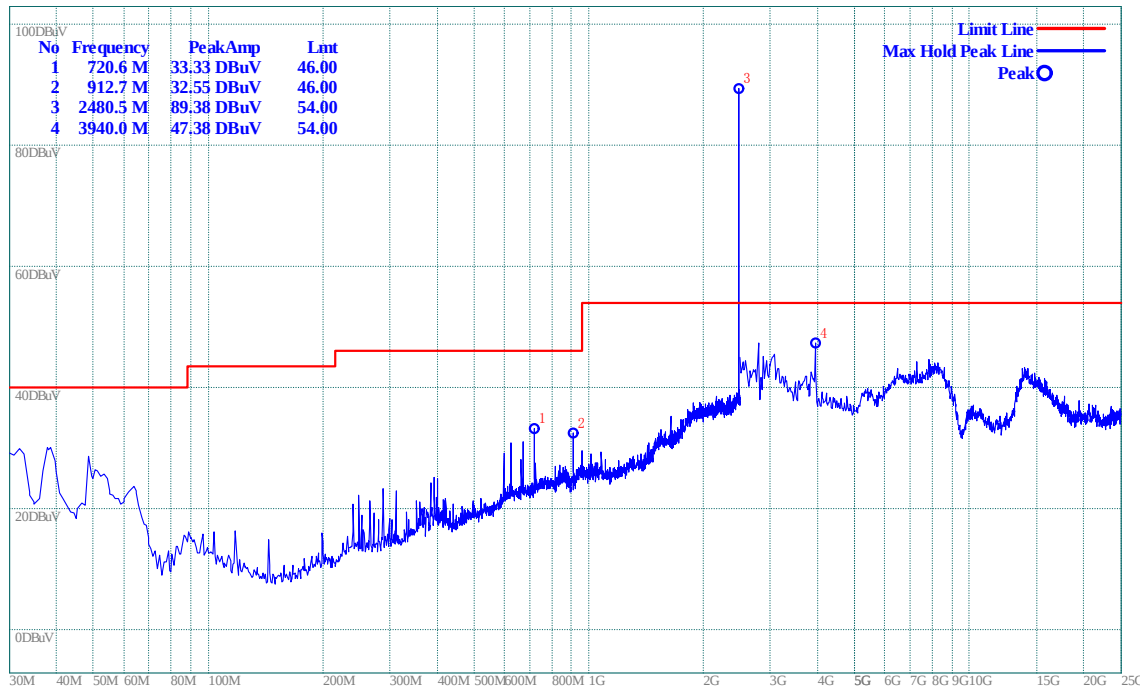

(Plot C.2: Antenna Vertical)

Receiver Mode:

G. Test Verdict for Harmonics:


The Fundamental Emissions

The field strength of {Fundamental Emission} listed below is recorded, and used in the next table.


Channel	Frequency (MHz)	Fundamental Emission (dBμV/m)		Antenna Polarization	Refer to Plot
		PK	AV		
0	2402	34.22	--	Horizontal	Plot A.1
		49.87	--	Vertical	Plot A.2
39	2441	51.33	--	Horizontal	Plot B.1
		50.44	--	Vertical	Plot B.2
78	2480	47.50	--	Horizontal	Plot C.1
		50.77	--	Vertical	Plot C.2

H. Test Plots for the Whole Measurement Frequency Range:

Plots for Channel = 0

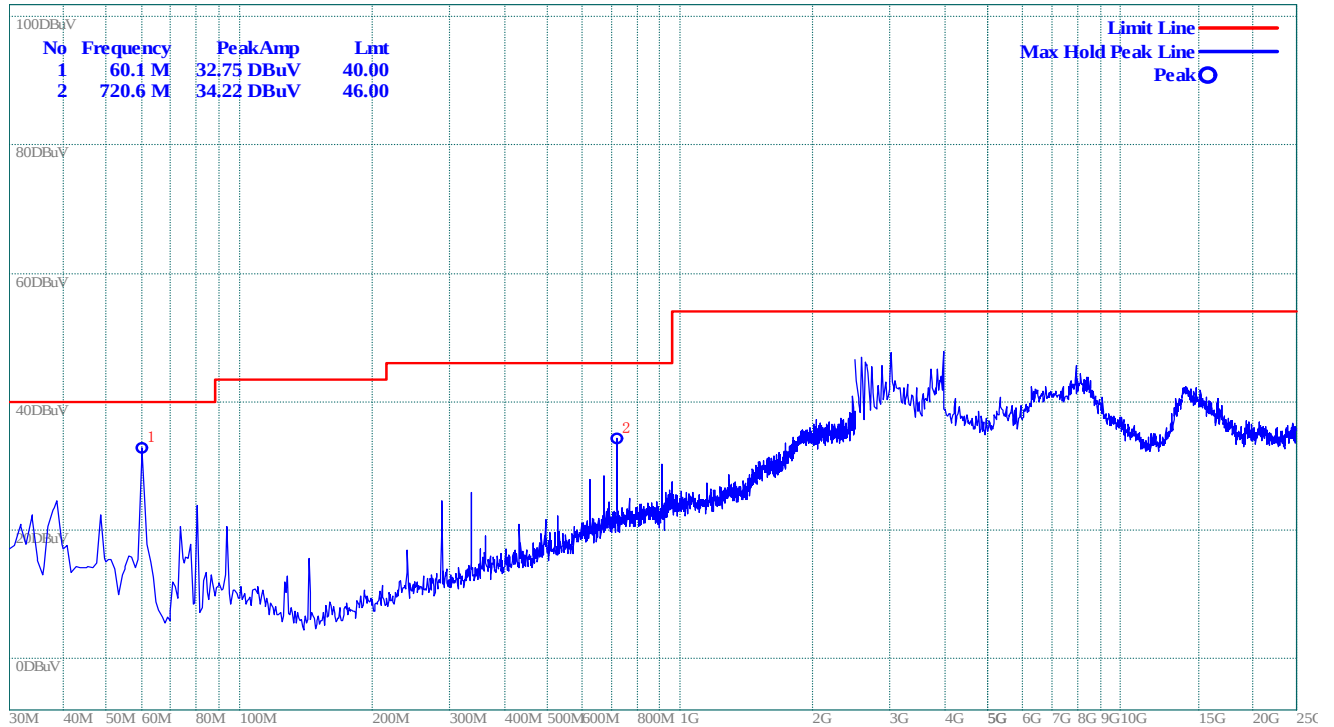


(Plot A.1: Antenna Horizontal)

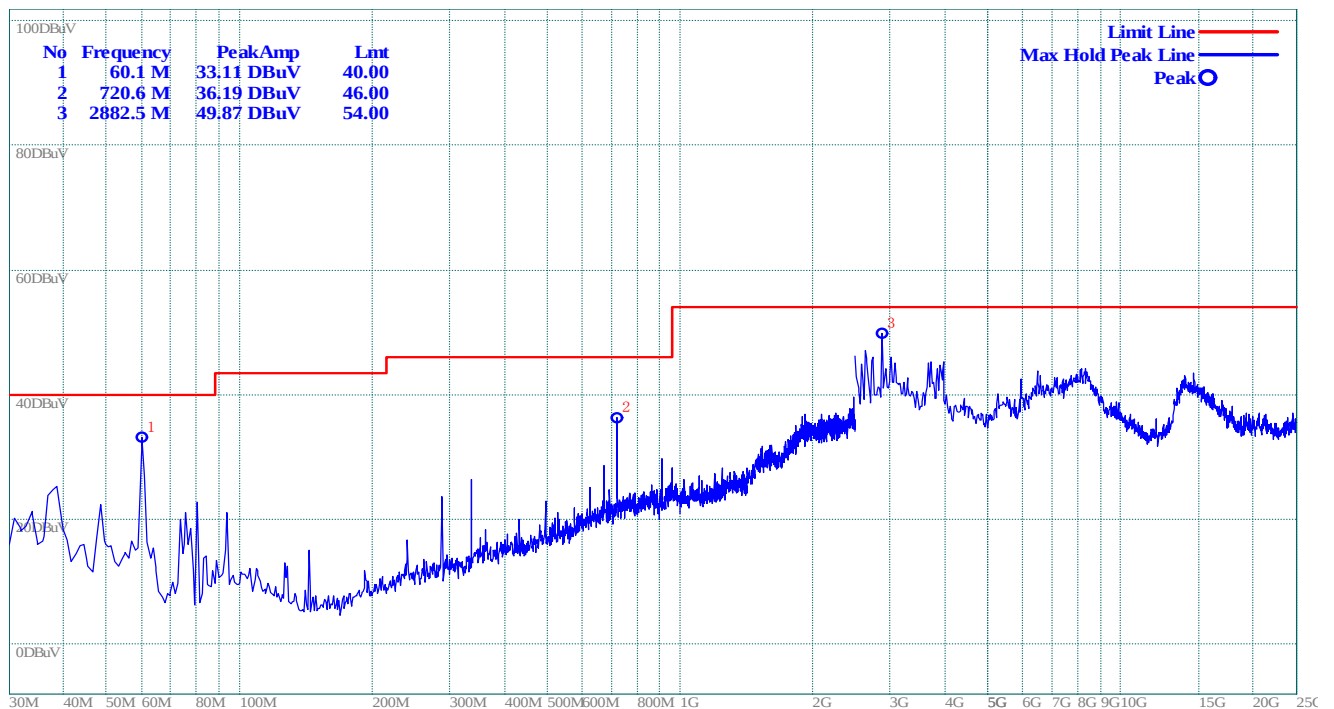


(Plot A.2: Antenna Vertical)

Plot for Channel = 39

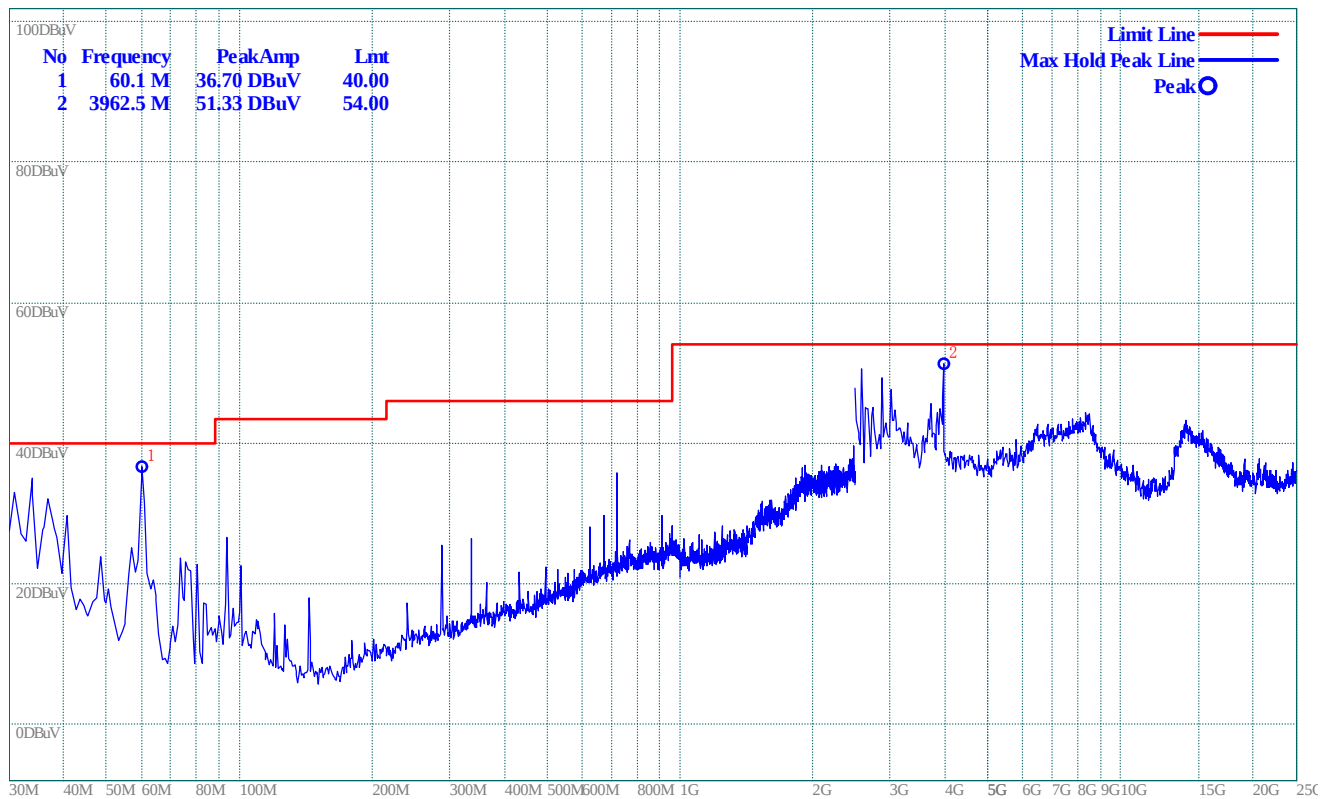


(Plot B.1: Antenna Horizontal)

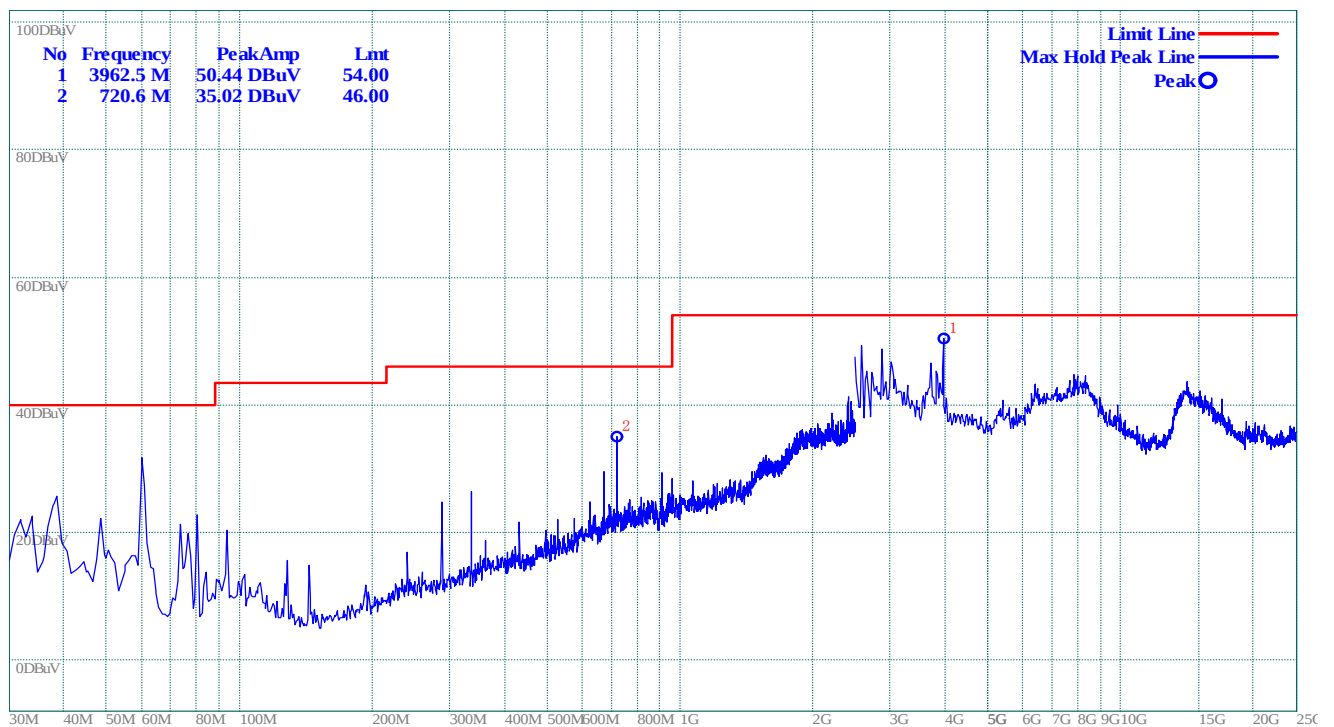


(Plot B.2: Antenna Vertical)

Plot for Channel = 78

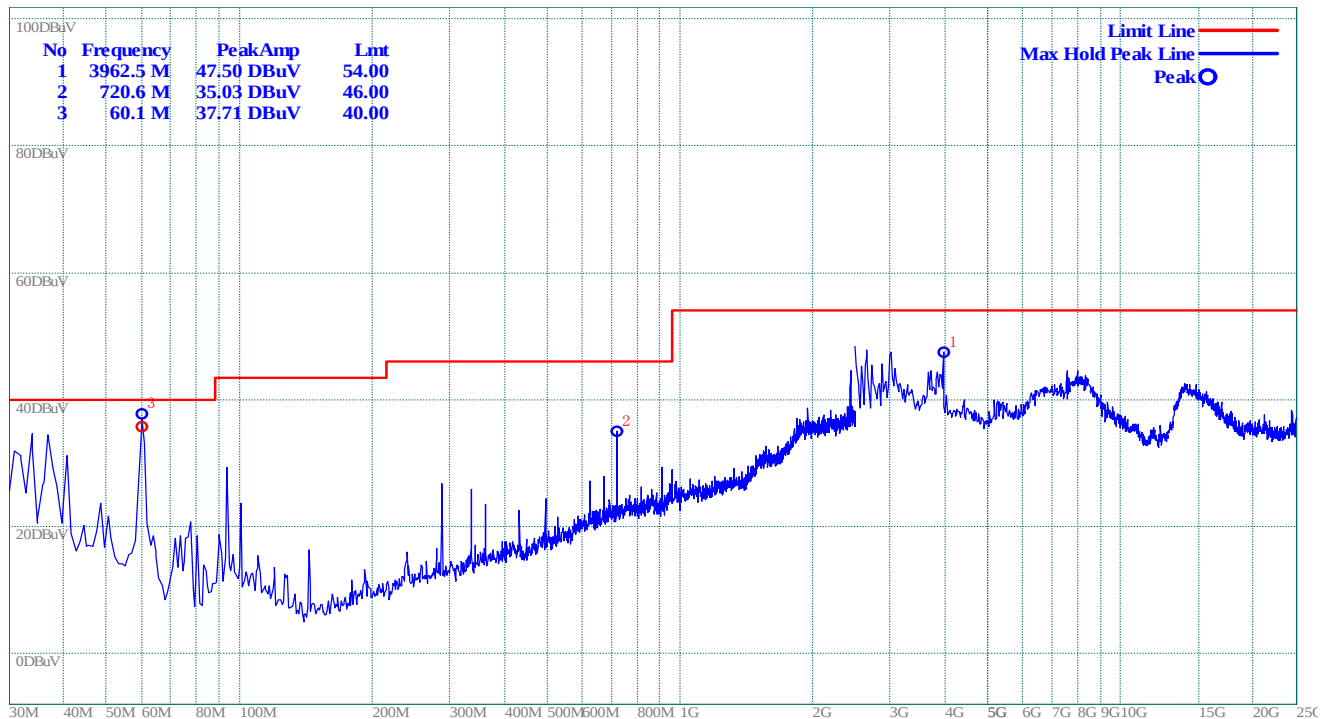

(Plot C.1: Antenna Horizontal)

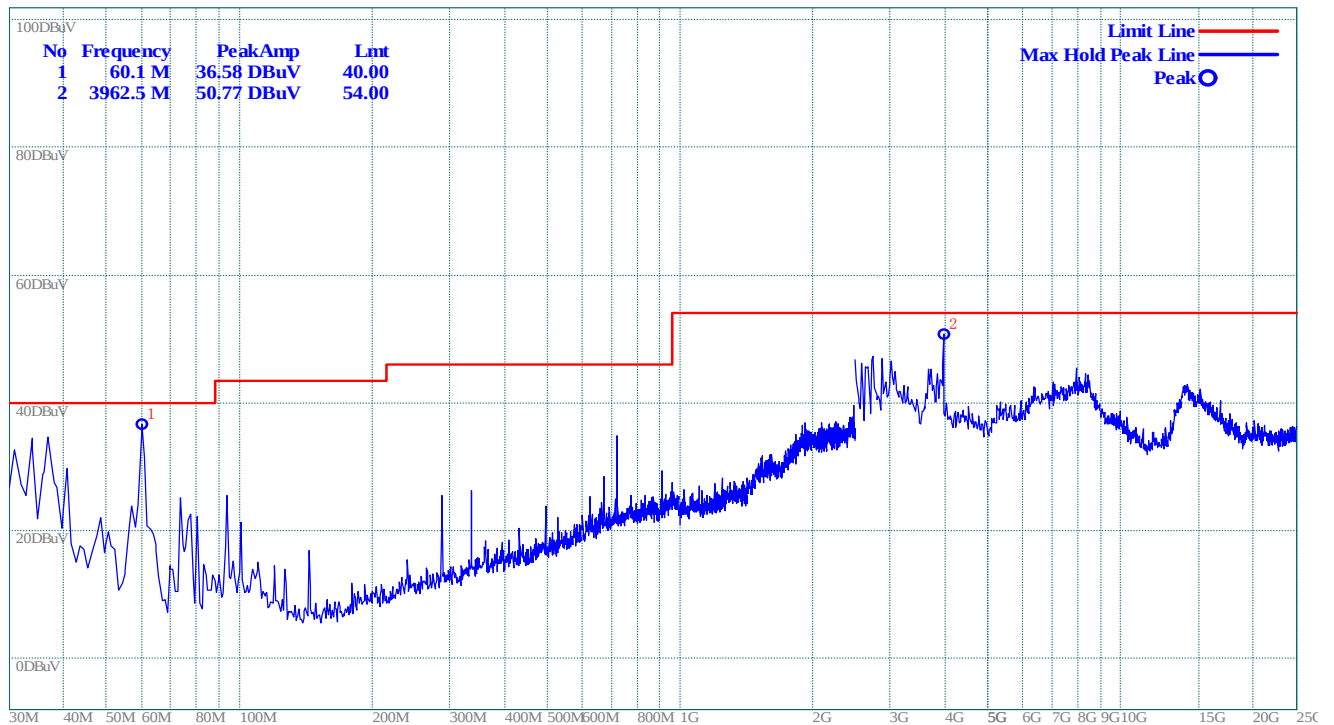

(Plot C.2: Antenna Vertical)

** END OF REPORT **