



FCC SAR

TEST REPORT

of

ZiiO

Model Name: PMT-FL05
Brand Name: Creative
Report No.: SH10090005S01
FCC ID: IBAPMT-FL05
IC ID: 2315A-PMTFL05

prepared for

Creative Technology Ltd.

31, International Business Park, Creative Resource Singapore 609921



**Shenzhen Electronic Product Quality Testing Center
Morlab Laboratory**

3/F, Electronic Testing Building, Shahe Road, Xili,
Nanshan District, Shenzhen, 518055 P. R. China

Tel: +86 755 86130398

Fax: +86 755 86130218



Bluetooth®



Authorized Test Lab

LAB CODE 20081223-00

NOTE: This test report can be duplicated completely for the legal use with the approval of the applicant, it shall not be reproduced except in full, without the written approval of Shenzhen Electronic Product Quality Testing Center Morlab Laboratory. Any objections should be raised to us within thirty workdays since the date of issue.



Report No: SH10090005S01

GENERAL SUMMARY

Product Name	ZiiO	Model	PMT-FL05
Brand Name	Creative	Carrier	Tan Keng Wah
Quantity of EUT	One	Manufacturer	Creative Technology Ltd.
Standard(s)	<p>ANSI C95.1-1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fieldst.</p> <p>IEEE 1528-2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.</p> <p>RSS-102 Issue 4-2010:Radio Frequency (RF) Exposure Compliance of Radiocommunication Apparatus (All Frequency Bands)</p> <p>OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.</p> <p>KDB Publication 447498:Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies</p> <p>KDB248227: SAR measurement procedures for 802.112abg transmitters.</p>		
Conclusion	<p>Localized Specific Absorption Rate (SAR) of this portable wireless equipment has been measured in all cases requested by the relevant standards cited in Clause 5.2 of this test report. Maximum localized SAR is below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.</p> <p>General Judgment: Pass</p> <p style="text-align: right;">Date of issue: Nov. 12. 2010</p>		
Comment	<p>TX Freq. Band: 2412MHz-2462MHz (wifi 802.11b/g)</p> <p>TX Freq. Band: 2400MHz-2483.5 MHz (Bluetooth)</p> <p>Antenna Character : build inside</p> <p>The test result only responds to the measured sample.</p>		

Tested by: Huang yunlong, Date: 2010.11.15Checked by: Zhang Jun, Date: 2010.11.15Approved by: Wei Bei, Date: 2010.11.15

TABLE OF CONTENT

1	GENERAL CONDITIONS.....	4
2	ADMINISTRATIVE DATE.....	5
2.1	IDENTIFICATION OF THE RESPONSIBLE TESTING LABORATORY	5
2.2	IDENTIFICATION OF THE RESPONSIBLE TESTING LOCATION(S)	5
2.3	ORGANIZATION ITEM	5
2.4	IDENTIFICATION OF APPLICANT.....	5
3	EQUIPMENT UNDER TEST (EUT).....	6
4	OPERATIONAL CONDITIONS DURING TEST	7
4.1	SCHEMATIC TEST CONFIGURATION	7
4.2	SAR MEASUREMENT SYSTEM	7
4.2.1	<i>Robot system specification</i>	8
4.2.2	<i>Probe Specification</i>	8
	ISOTROPIC E-FIELD PROBE SPECIFICATION.....	10
	BOUNDARY DETECTION UNIT AND PROBE MOUNTING DEVICE	10
	DAQ-PAQ (ANALOG TO DIGITAL ELECTRONICS).....	11
4.2.3	<i>Phantoms, Device Holder and Simulant Liquid</i>	12
	ALSAS UNIVERSAL WORKSTATION	13
	UNIVERSAL DEVICE POSITIONER.....	13
4.2.4	<i>SAR measurement procedure</i>	14
4.2.5	<i>Validation Test Using Flat Phantom</i>	15
	VALIDATION DIPOLES	15
	Validation Result	16
4.2.6	<i>Measurement Procedure</i>	16
4.2.7	<i>Description of Interpolation/Extrapolation Scheme</i>	16
5	CHARACTERISTICS OF THE TEST	17
5.1.1	<i>Applicable Limit Regulations</i>	17
5.1.2	<i>Applicable Measurement Standards</i>	17
6	LABORATORY ENVIRONMENT	18
7	TEST RESULTS	19
7.1	EXPLAIN	19
7.2	DIELECTRIC PERFORMANCE.....	19
7.3	CONDUCTED POWER	19
7.4	SUMMARY OF MEASUREMENT RESULTS (802.11B).....	20
7.5	SUMMARY OF MEASUREMENT RESULTS (WIRELESS LAN/ WLAN AND BLUETOOTH FUNCTION).....	20
7.6	CONCLUSION	21
8	MEASUREMENT UNCERTAINTIES.....	22
9	MAIN TEST INSTRUMENTS.....	24



ANNEX A- ACCREDITATION CERTIFICATE.....	25
ANNEX B- TEST LAYOUT	27
ANNEX C- SAMPLE PHOTOGRAPHS.....	32
ANNEX D- GRAPH TEST RESULTS.....	33

1 GENERAL CONDITIONS

This report only refers to the item that has undergone the test. This report standalone does not constitute or imply by its own an approval of the product by the certification Bodies or competent Authorities.

This document is only valid if complete; no partial reproduction can be made without written approval of Shenzhen Morlab Communications Technology Co., Ltd.

This report cannot be used partially or in full for publicity and/or promotional purposes without previous written approval of Shenzhen Morlab Communications Technology Co., Ltd. and the Accreditation Bodies, if it applies.

2 Administrative Data

2.1 Identification of the Responsible Testing Laboratory

Company Name: Shenzhen Morlab Communications Technology Co.,Ltd.
Department: Testing Department
Address: 3Fl, Electronic Testing Building, ShaHe Road, NanShan District, Shenzhen, P. R. China
Telephone: +86 755 86130268
Fax: +86 755 86130218
Responsible Test Lab Managers: Mr. Shu Luan

2.2 Identification of the Responsible Testing Location(s)

Company Name: Shenzhen Electronic Product Quality Testing Center Morlab Laboratory
Address: 3Fl, Electronic Testing Building, ShaHe Road, NanShan District, Shenzhen, P. R. China

2.3 Organization Item

Morlab Report No.: SH10090005S01
Morlab Project Leader: Mr. Zhang Jun
Morlab Responsible for Accreditation scope: Mrs. Wei Bei
Start of Testing: 2010-11-11
End of Testing: 2010-11-11

2.4 Identification of Applicant

Company Name: Creative Technology Ltd.
Address: 31, International Business Park , Creative Resource Singapore 609921
Contact person: Tan Keng Wah
Telephone: +65 6895 4490
Fax: +65 6985 4483

2.5. Identification of Manufacture

Company Name: Creative Technology Ltd.
Address: 31, International Business Park , Creative Resource Singapore 609921

Notes: This data is based on the information offered by the applicant.

3 Equipment Under Test (EUT)

3.1. Identification of the Equipment under Test

Product Name:	ZiiO	
Brand name:	Creative	
Model No:	PMT-FL05	
General description:	Test frequency	Wireless LAN/ WLAN
	Accessories	Charger, Battery,
	Battery Model	PR-43100113N
	Battery specification	3.7V 5000 mAh
	Battery Manufacture	TCL HYPERPOWER BATTERIES INC
	Antenna type	Wireless LAN/ WLAN,Bluetooth
	Wireless LAN/ WLAN	
	Modulation mode	DSSS and OFDM
	Buletooth Information	Modulation Mode: GFSK, π /4DQPSK,8-DPSK
		Frequency Range: 2400-2483.5MHz Occupied

3.2. Identification of all used Test Sample of the Equipment under Test

EUT Code	Serial Number	Hardware Version	Software Version	IMEI
#1	N.A	ZP0290B_001042	Beta 2B	/

NOTE:

1. The EUT consists of Hand-Held Terminal Set and normal options: Charger, Lithium Battery as listed above.
2. Please refer to Appendix C for the photographs of the EUT. For a more detailed features description of the EUT, please refer to its User's Manual.

4 OPERATIONAL CONDITIONS DURING TEST

4.1 Schematic Test Configuration

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, The EUT is a bluetooth、Wireless LAN/ WLAN portable device. It provides Wireless LAN/ WLAN (IEEE 802.11b and IEEE 802.11g) wireless interface, operating at 2.4GHz ISM band. The Wireless LAN/ WLAN Modulations are Direct Sequence Spread Spectrum (DSSS) for IEEE 802.11b and Orthogonal Frequency Division Multiplexing (OFDM) for IEEE 802.11g. The Channels and transmitter center frequencies are: Channel 1: 2412 MHz (lowest channel) - Channel 6: 2437 MHz (middle channel) - Channel 11: 2462 MHz (highest channel). The EUT is commanded to operate at maximum transmitting power.


The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the manufacturer. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

4.2 SAR Measurement System

ALSAS-10-U is fully compliant with the technical and scientific requirements of IEEE 1528, IEC 62209, CENELEC, ARIB, ACA, and the Federal Communications Commission. The system comprises of a six axes articulated robot which utilizes a dedicated controller. ALSAS-10U uses the latest methodologies and FDTD order to provide a platform which is repeatable with minimum uncertainty.

Applications Predefined measurement procedures compliant with the guidelines of CENELEC, IEEE, IEC, FCC, etc are utilized during the assessment for the device. Automatic detection for all SAR maxima are embedded within the core architecture for the system, ensuring that peak locations used for centering the zoom scan are within a 1mm resolution and a 0.05mm repeatable position. System operation range currently is available up to 6 GHz in simulated tissue.

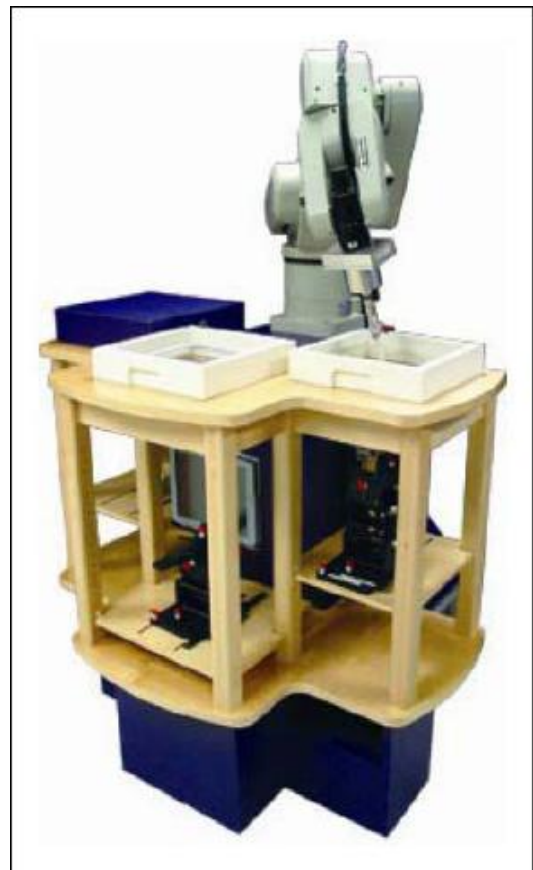

4.2.1 Robot system specification

ALSAS-10U utilizes a six articulated robot, which is controlled using a Pentium based real-time movement controller. The movement kinematics engine utilizes proprietary (Thermo CRS) interpolation and extrapolation algorithms, which allow full freedom of movement for each of the six joints within the working envelop. Utilization of joint 6 allows for full probe rotation with a tolerance better than 0.05mm around the central axis.




Robot/Controller Manufacturer	Thermo CRS
Number of Axis	Six independently controlled axis
Positioning Repeatability	0.05mm
Controller Type	Single phase Pentium based C500C
Robot Reach	710mm
Communication	RS232 and LAN compatible

4.2.2 Probe Specification

The isotropic E-Field probe has been fully calibrated and assessed for isotropic, and boundary effect within a controlled environment. Depending on the frequency for which the probe is calibrated the method utilized for calibration will change. A number of methods is used for calibrating probes, and these are outlined in the table below:

Calibration Frequency	Air Calibration	Tissue Calibration
850MHZ	TEM Cell	Temperature
1900MHZ	TEM Cell	Temperature
2450 MHZ	Waveguide	Waveguide

The E-Field probe utilizes a triangular sensor arrangement as detailed in the diagram below:

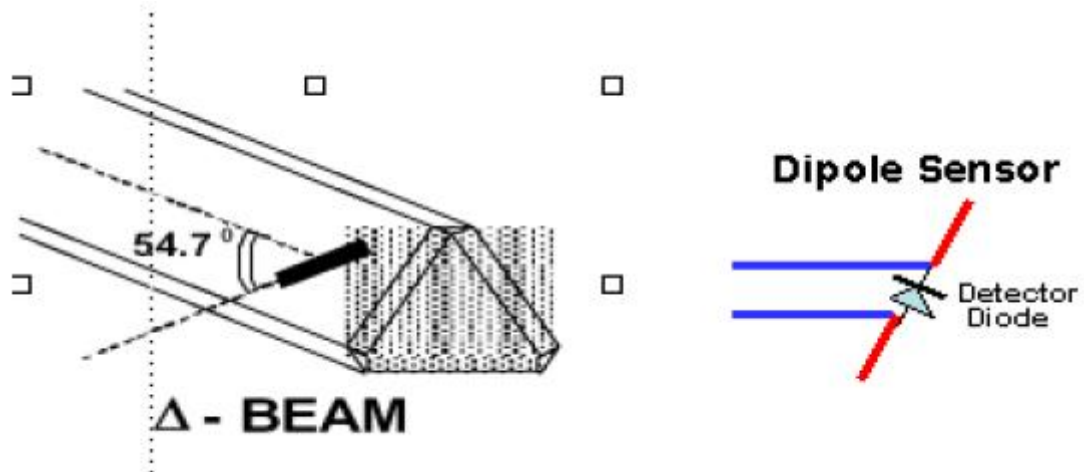

SAR is assessed with a calibrated probe which moves at a default height of 5mm from the center of the diode, which is mounted to the sensor, to the phantom surface (in the Z Axis). The 5mm offset height has been selected so as to minimize any resultant boundary effect due to the probe being in close proximity to the phantom surface.

The following algorithm is an example of the function used by the system for linearization of the output from the probe when measuring complex modulation schemes.

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Isotropic E-Field Probe Specification

Calibration in Air	Frequency Dependent Below 2GHz Calibration in air performed in a TEM Cell Above 2GHz Calibration in air performed in waveguide
Sensitivity	0.70 $\mu\text{V}/(\text{V}/\text{m})^2$ to 0.85 $\mu\text{V}/(\text{V}/\text{m})^2$
Dynamic Range	0.0005 W/kg to 100W/kg
Isotropic Response	Better than 0.2dB
Diode Compression point (DCP)	Calibration for Specific Frequency
Probe Tip Radius	< 5mm
Sensor Offset	1.56 (+/- 0.02mm)
Probe Length	290mm
Video Bandwidth	@ 500 Hz: 1dB @1.02 KHz: 3dB
Boundary Effect	Less than 2% for distance greater than 2.4mm
Spatial Resolution	Diameter less than 5mm Compliant with Standards

Boundary detection Unit and Probe Mounting Device

ALSAS-10U incorporates a boundary detection unit with a sensitivity of 0.05mm for detecting all types of surfaces. The robust design allows for detecting during probe tilt (probe normalize) exercises, and utilizes a second stage emergency stop. The signal electronics are directly into the robot controller for high accuracy surface detection in lateral and axial detection modes (X, Y, &Z). The probe is mounted directly onto the Boundary Detection unit for accurate tooling and displacement calculations controlled by the robot kinematics. The probe is connected to an isolated probe interconnect where the output stage of the probe is fed directly into the amplifier stage of the Daq-Paq.

Daq-Paq (Analog to Digital Electronics)


ALSAS-10U incorporates a fully calibrated Daq-Paq (analog to digital conversion system) which has a 4 channel input stage, sent via a 2 stage auto-set amplifier module. The input signal is amplified accordingly so as to offer a dynamic range from $5\mu\text{ V}$ to 800mV. Integration of the fields measured is carried out at board level utilizing a Co-Processor which then sends the measured fields down into the main computational module in digitized form via a RS232 communications port. Probe linearity and duty cycle compensation is carried out within the main Daq-Paq module.

ADC	12 Bit
Amplifier Range	20mV to 200mV and 150mV to 800mV
Field Integration	Local Co-Processor utilizing proprietary integration algorithms
Number of Input Channels	4 in total 3 dedicated and 1 spare
Communication	Packet data via RS232

4.2.3 Phantoms, Device Holder and Simulant Liquid

4.2.3.1 Sam Phantom

The SAM phantoms developed using the IEEE SAM CAD file. They are fully compliant with the requirements for both IEEE 1528 and FCC Supplement C. Both the left and right SAM phantoms are interchangeable, transparent and include the IEEE 1528 grid with visible NF and MB lines.

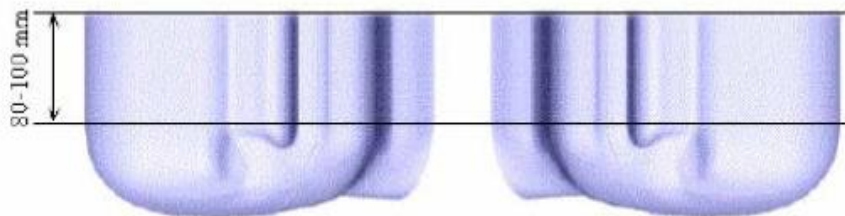

APREL Laboratories Universal Phantom

The Universal Phantom is used on the ALSAS-10U as a system validation phantom. The Universal Phantom has been fully validated both experimentally from 800MHz to 6GHz and numerically using XFDTD numerical software. The shell thickness is 2mm overall, with a 4mm spacer located at the NF/MB intersection providing an overall thickness of 6mm in line with the requirements of IEEE-1528.

The design allows for fast and accurate measurements, of handsets, by allowing the conservative SAR to be evaluated at on frequency for both left and right head experiments in one measurement.



Device and Dipole Holder

ALSAS Universal Workstation

ALSAS Universal workstation allows for repeatability and fast adaptability. It allows users to do calibration, testing and measurement using different types of phantoms with one set up, which significantly speeds up the measurement process.

Universal Device Positioner

The universal device positioner allows complete freedom of movement of the EUT. Developed to hold a EUT in a free-space scenario any additional loading attributable to the material used in the construction of the positioner has been eliminated. Repeatability has been enhanced through the linear scales which form the design used to indicate positioning for any given test scenario in all major axes. A 15° tilt movements for head SAR analysis. Overall uncertainty for measurements has been reduced due to the design of the Universal device positioner, which allows positioning of a device in as near to a free-space scenario as possible, and by providing the means for complete repeatability.



4.2.3.2 Tissue Simulating Liquids

There is no simulating liquids that can cover all frequency bands. Therefore, our system is using different liquids for the measured band as explained bellows.


The parameters of the simulating solution strongly influence the SAR values. The different normalization organizations have defined adapted solutions for the each mobile system.

2.45GHz Liquid: is made of de-ionized water, Glycol monobutyl and NaCl, reconstituting the electric properties of human tissues at 2450MHz

Several measurement systems are available for measuring the dielectric parameters.

Antennessa has developed its own software, based on a coaxial probe. This method allows measurement of liquid permittivity between 300 MHz and 6GHz.

4.2.4 SAR measurement procedure

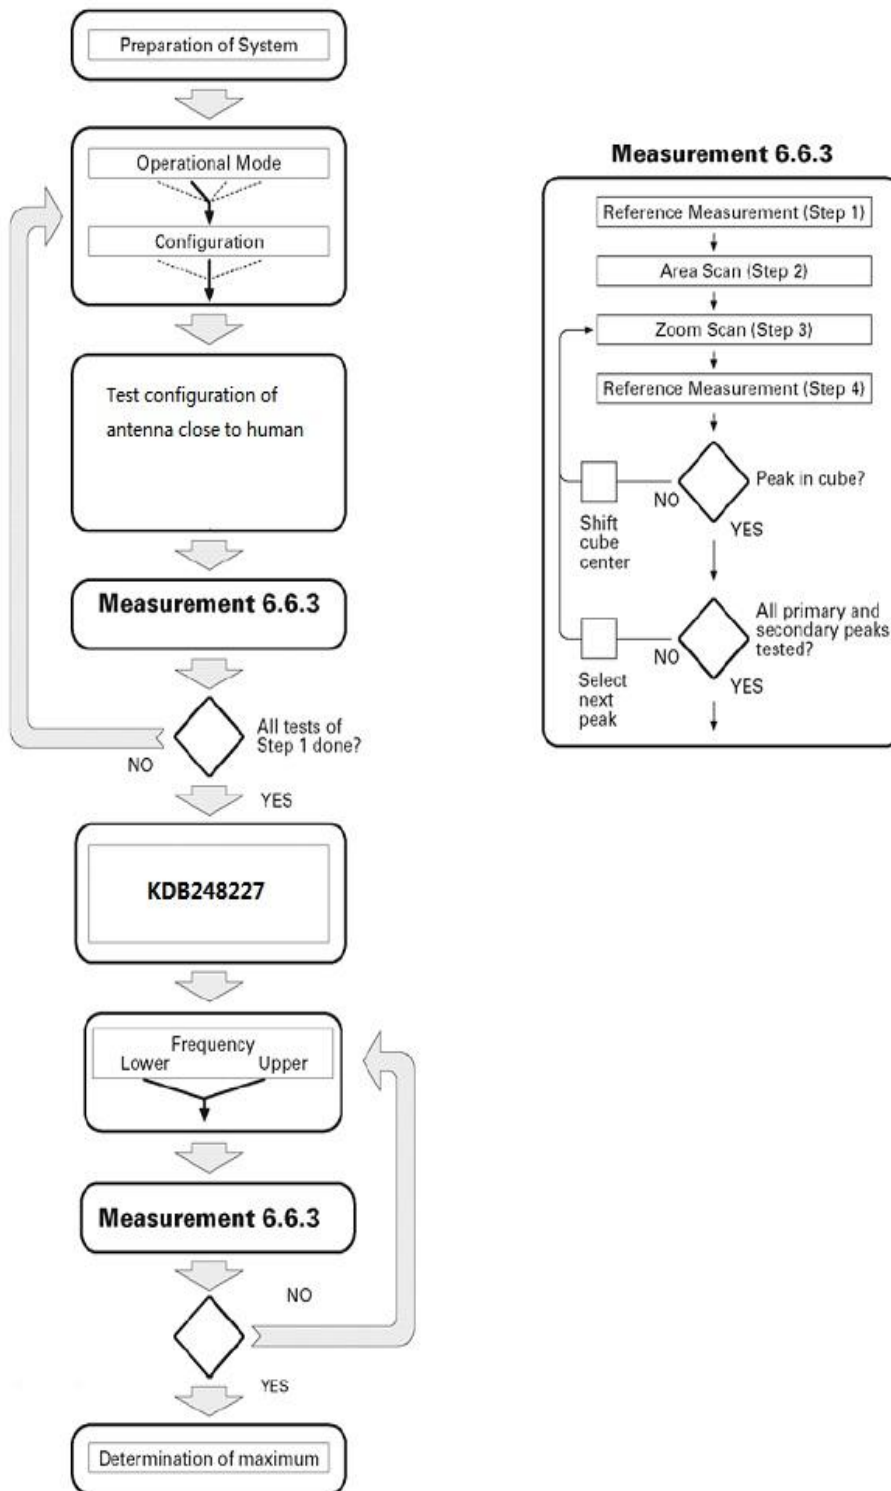


After an area scan has been done at a fixed distance of 8mm from the surface of the phantom on the source side, a 3D scan is set up around the location of the maximum spot SAR. First, a point within the scan area is visited by the probe and a SAR reading taken at the start of testing. At the end of testing, the probe is returned to the same point and a second reading is taken. Comparison between

these start and end readings enables the power drift during measurement to be assessed.

Above is the scanning procedure flow chart and table from the IEEE P1528 standard. This is the procedure for which all compliant testing should be carried out to ensure that all variations of the device position and transmission behavior are tested.


4.2.5 Validation Test Using Flat Phantom

The following procedure, recommended for performing validation tests using flat phantom is based on the procedures described in the IEEE standard P1528. Setup according to the setup diagram below:

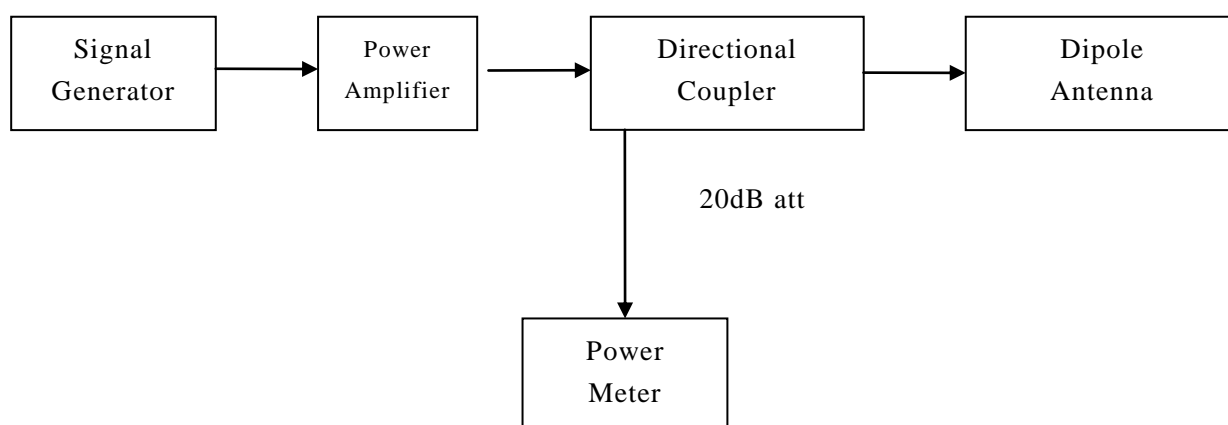

4.2.5.1 Setting up the Box Phantom for Validation Testing

Validation Dipoles

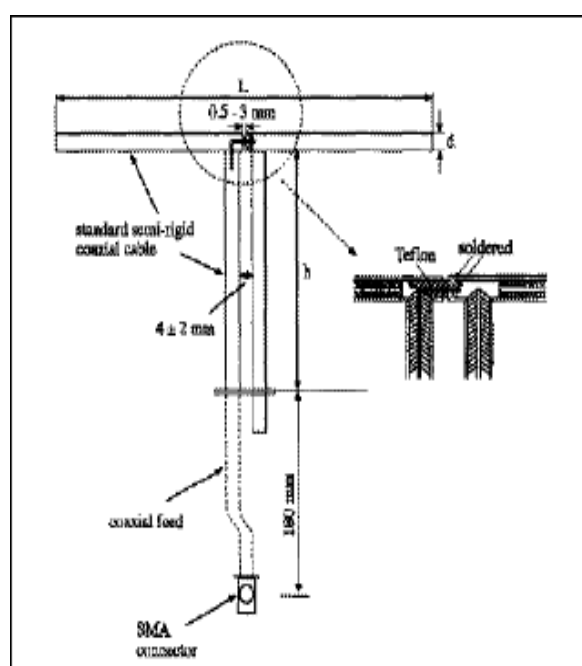

The dipoles used are based on the IEEE-1528 standard, and is complied with mechanical and electrical specifications in line with the requirements of both IEEE and FCC Supplement C. The table below provides details for the mechanical and electrical specifications for the dipoles.

Frequency	L(mm)	h(mm)	d(mm)
2450 MHZ	54	30.4	3.6

Validation Result

System Performance Check at 2450MHz

Validation Kit: ASL-D-2450-S-2 Probe : E-020 (273-B)

Frequency(MHz)	Description	SAR(W/Kg) 1g	SAR(W/Kg) 10g	Tissue Temp.(°C)
2450MHz	Standard result	52.4	24.0	N/A
	Calibration data	53.1	24.4	
	25-Nov-11 Test Value(1W)	54.32	24.34	20.3
	25-Nov-11 Test Value(0.1W)	5.432	2.434	20.3

Note: Validation SAR values are normalized to 1W forward power= $5.43 \times 10 = 54.32$ (W/Kg) 1g

4.2.6 Measurement Procedure

The following steps are used for each test position

Establish a call with the maximum output power with a base station simulator. The connection between the mobile phone and the base station simulator is established via air interface.

Measurement of the local E-field distribution is done with a grid of 8 to 16mm*8 to 16mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolating scheme.

Around this point, a cube of 30*30*30mm or 32*32*32mm is assessed by measuring 5 or 8*5 or 8*4 or 5mm. With these data, the peak spatial-average SAR value can be calculated.

4.2.7 Description of Interpolation/Extrapolation Scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimise

measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is base on a fourth-order least square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8mm. to obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1gram requires a very fine resolution in the three-dimensional scanned data array.

5 CHARACTERISTICS OF THE TEST

5.1.1 Applicable Limit Regulations

ANSI C95.1–1999: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz. It specifies the maximum exposure limit of 1.6 W/kg as averaged over any 1 gram of tissue for portable devices being used within 20 cm of the user in the uncontrolled environment.

5.1.2 Applicable Measurement Standards

IEEE 1528–2003: Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Body Due to Wireless Communications Devices: Experimental Techniques.

OET Bulletin 65 (Edition 97-01) and Supplement C(Edition 01-01): Additional Information for Evaluating Compliance of Mobile and Portable Devices with FCC Limits.

KDB648474 D01 SAR Handsets Multi Xmitter and Ant, v01r05: SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas.

KDB248227: SAR measurement procedures for 802.11abg transmitters.

It specifies the measurement method for demonstration of compliance with the SAR limits for such equipments.

KDB Publication 447498: Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies

6 LABORATORY ENVIRONMENT

Table: The Ambient Conditions during SAR Test

Temperature	Min. =15 °C, Max. =30 °C
Relative humidity	Min. =30%, Max. =70%
Ground system resistance	<0.5Ω
Ambient noise is checked and found very low and in compliance with requirement of standards. Reflection of surrounding objects is minimized and in compliance with requirement of standards.	

7 TEST RESULTS

7.1 Explain

The EUT has been tested under the operating conditions.

7.2 Dielectric Performance

For body-worn measurements, the device was tested against flat phantom representing the user body.

Under measurement phone was put on in the belt holder.

Table: Dielectric Performance of Body Tissue Simulating Liquid

Temperature: 23.0~23.8 °C, humidity: 54~60%.			
/	Frequency	Permittivity ϵ	Conductivity σ (S/m)
Target value	2450 MHz	52.70	1.95
Validation value (Nov 11)	2450 MHz	53.12	1.90

7.3 Conducted Power

The conducted power for Wireless LAN/ WLAN is as following:

802.11b/data rate	Peak Output Power (dBm)		
	2412MHz	2437MHz	2462MHz
1M	14.16	14.26	14.38
2M	14.10	14.23	14.29
5.5M	14.15	14.22	14.31
11M	14.12	14.18	14.25
802.11g/data rate	Peak Output Power (dBm)		
	2412MHz	2437MHz	2462MHz
6M	11.19	11.40	11.49
9M	11.10	11.37	11.43
12M	11.15	11.45	11.25
18M	11.15	11.36	11.50
24M	11.25	11.51	11.27
36M	11.31	11.34	11.43
48M	11.37	11.41	11.45
54M	11.28	11.38	11.46
Bluetooth	Peak Output Power (dBm)		
	2402MHz	2441MHz	2480MHz
Results	-0.22	0.13	0.51

NOTES:

- 802.11g is not required when the maximum average output power is less than ¼ dB higher than measured on the corresponding 802.11b channels.
- BT and Wireless LAN/ WLAN can not simultaneous transmission and BT output power<60/f(GHz), so BT SAR not required.
- According to the conducted power as above, the body measurements are performed with 802.11b 1M data rate.

7.4 Summary of Measurement Results (802.11b)


Table 1: SAR Values (802.11b 1M data rate- Body)

Temperature: 21.0~23.5 °C, Relative Humidity: 60~65%.		
Limit of SAR (W/kg)	1 g Average	
	1.6	
Test Configuration	Measurement Result (W/kg)	
	1 g Average(W/kg)	Power Drift(%)
Frontside Towards phantom with 2412MHz	0.23	0.56
Frontside Towards phantom with 2437MHz	0.233	1.23
Frontside Towards phantom with 2462MHz	0.243	0.23
Leftside Towards phantom with 2412MHz	0.401	2.11
Leftside Towards phantom with 2437MHz	0.408	-0.43
Leftside Towards phantom with 2462MHz	0.412	0.56
Topside Towards phantom with 2412MHz	0.341	1.52
Topside Towards phantom with 2437MHz	0.427	2.38
Topside Towards phantom with 2462MHz	0.467	-1.34
Backside Towards phantom with 2412MHz	0.961	1.28
Backside Towards phantom with 2437MHz	0.962	-1.62
Backside Towards phantom with 2462MHz	0.964	0.34
Backside Towards phantom with 2462MHz with earphone	1.107	1.45

7.5 Summary of Measurement Results (Wireless LAN/ WLAN and Bluetooth function)

The distance between BT antenna and GSM antenna is 0cm<2.5cm. Both BT and Wireless LAN/ WLAN antenna can not Simultaneous Transmission. Because of ‘Stand-alone SAR is not required for an unlicensed transmitter with output power \leq PRef mW when either the output power or 1-g SAR for each of the other antennas within 2.5 cm of that unlicensed transmitting antenna is \leq PRef mW or < 1.2 W/kg.’ in KDB 648474, SAR for BT is not required.

The location of the antennas inside is shown below:

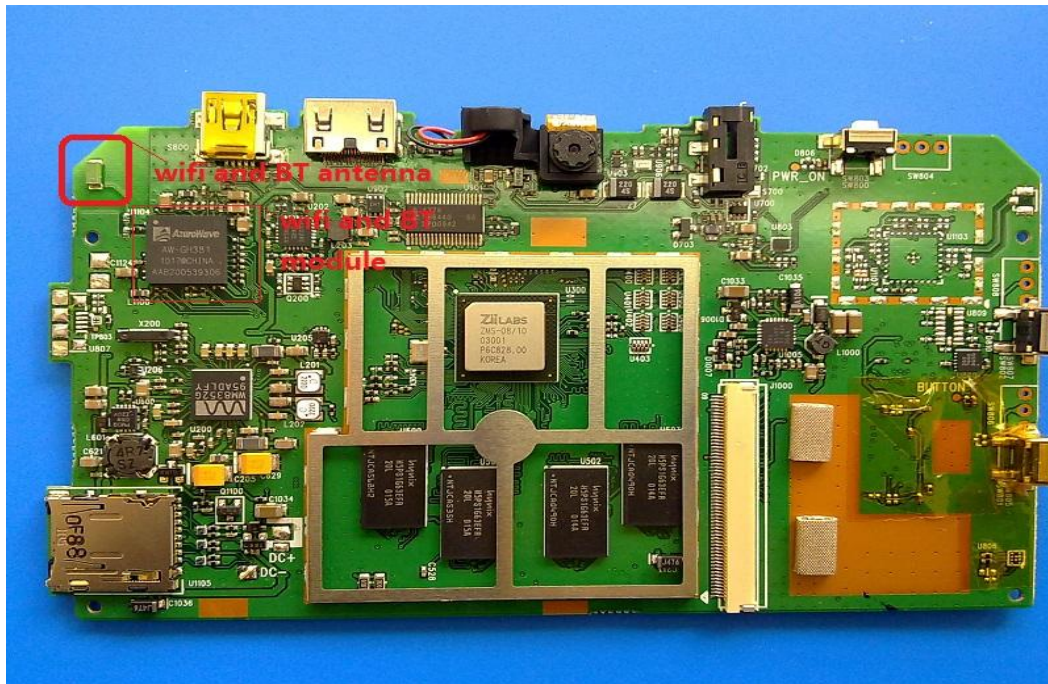

Because the conducted power for Wireless LAN/ WLAN transmitter is $> 2P_{ref}$, stand-alone SAR for Wireless LAN/ WLAN should be performed. Then, simultaneous transmission SAR for Wireless LAN/ WLAN is considered with measurement results of Wireless LAN/ WLAN.

Because SAR is not required for 802.11g channels since the output power is less than 0.25dB higher than that measured on the corresponding 802.11b channels, and for each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 0.25dB higher than those measured at the lowest data rate. According to the above conducted power, the EUT should be tested for “802.11b, 1Mbps, channel 11”. If SAR for highest output channel is $> 50\%$ of SAR limit, test all channels.

7.6 Conclusion

Peak Spatial-Average Specific Absorption Rate (SAR) of this portable wireless device has been measured in all configurations requested by the relevant standards cited in Clause 5.2 of this report. SAR values are below exposure limits specified in the relevant standards cited in Clause 5.1 of this test report.

8 Measurement Uncertainties

The following table includes the uncertainty table of the IEEE 1528. The values are determined by Antennessa.

UNCERTAINTY EVALUATION FOR HANDSET SAR TEST

Source of Uncertainty	Tolerance Value	Probability Distribution	Divisor	ci1 (1-g)	ci1 (10-g)	Standard Uncertainty (1-g) %	Standard Uncertainty (10-g) %
Measurement System							
Probe Calibration	3.5	normal	1	1	1	3.5	3.5
Axial Isotropy	3.7	rectangular	$\sqrt{3}$	$(1-cp)^{1/2}$	$(1-cp)^{1/2}$	1.5	1.5
Hemispherical Isotropy	10.9	rectangular	$\sqrt{3}$	\sqrt{cp}	\sqrt{cp}	4.4	4.4
Boundary Effect	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Linearity	4.7	rectangular	$\sqrt{3}$	1	1	2.7	2.7
Detection Limit	1.0	rectangular	$\sqrt{3}$	1	1	0.6	0.6
Readout Electronics	1.0	normal	1	1	1	1.0	1.0
Response Time	0.8	rectangular	$\sqrt{3}$	1	1	0.5	0.5
Integration Time	1.7	rectangular	$\sqrt{3}$	1	1	1.0	1.0
RF Ambient Condition	3.0	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Probe Positioner Mech.	0.4	rectangular	$\sqrt{3}$	1	1	0.2	0.2
Restriction							
Probe Positioning with respect to Phantom Shell	2.9	rectangular	$\sqrt{3}$	1	1	1.7	1.7
Extrapolation and Integration	3.7	rectangular	$\sqrt{3}$	1	1	2.1	2.1

Test Sample Positioning	4.0	normal	1	1	1	4.0	4.0
Device Holder Uncertainty	2.0	normal	1	1	1	2.0	2.0
Drift of Output Power	0.6	rectangular	$\sqrt{3}$	1	1	0.3	0.3
Phantom and Setup							
Phantom Uncertainty(s hape & thickness tolerance)	3.4	rectangular	$\sqrt{3}$	1	1	2.0	2.0
Liquid Conductivity(target)	5.0	rectangular	$\sqrt{3}$	0.7	0.5	2.0	1.4
Liquid Conductivity(meas.)	0.0	normal	1	0.7	0.5	0.0	0.0
Liquid Permittivity(target)	5.0	rectangular	$\sqrt{3}$	0.6	0.5	1.7	1.4
Liquid Permittivity(meas.)	2.4	normal	1	0.6	0.5	1.4	1.2
Combined Uncertainty		RSS				9.3	9.2
Combined Uncertainty (coverage factor=2)		Normal(k=2)				18.7	18.3

9 MAIN TEST INSTRUMENTS

Instrument	Manufacture	Model No.	Serial No.	Last Calibration
Universal Work Station	Apel	ALS-UWS	100-00154	Jun.2010
Data Acquisition Package	Apel	ALS-DAQ-PAQ-3	110-00215	Jun.2010
Probe Mounting Device and Boundary Detection Sensor System	Apel	ALS-PMDPS-3	120-00265	Jun.2010
Miniature E-Field Probe	Apel	ALS-E-020	273-B	Sept.2010
Left ear SAM Phantom	Apel	ALS-P-SAM-L	130-00312	N/A
Right ear SAM Phantom	Apel	ALS-P-SAM-R	140-00362	N/A
Universal SAM Phantom	Apel	ALS-P-SU-1	150-00410	N/A
Reference Validation Dipole 900MHz	Apel	ALS-D-900-S-2	190-00607	N/A
Reference Validation Dipole 1800MHz	Apel	ALS-D-1800-S-2	200-00657	N/A
Reference Validation Dipole 2450MHz	Apel	ALS-D-2450-S-2	301581	May.2010
Dielectric Probe Kit	Apel	ALS-PR-DIEL	260-00955	N/A
Device Holder 2.0	Apel	ALS-H-E-SET-2	170-00506	N/A
SAR software	Apel	ALS-SAR-AL-10	Ver.2.3.6	N/A
CRS C500C Controller	Thermo	ALS-C500	RCF0504291	N/A
CRS F3 Robot	Apel	ALS-F3-SW	N/A	N/A
Power Amplifier	Mini-Circuit	SN0974	040306	N/A
Directional Coupler	Agilent	778D-012	N/A	N/A
Universal Radio Communication Tester	Rohde&Schwarz	CMU200	104845	Jan.10
Vector Network	Anritsu	MS4623B	N/A	Nov.10
Signal Generator	Agilent	E8257D	N/A	Jan.10
Power Meter	Rohde&Schwarz	NRP	N/A	Jan.10



Report No: SH10090005S01

ANNEX A- Accreditation Certificate

of

Shenzhen Morlab Communications Technology Co.,Ltd.

**CONFORMANCE TEST REPORT FOR
HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS**

ZiiO

REPORT NO: SH10090005S01

Type Name: Creative

Hardware Version: ZP0290B_001042

Software Version: Beta 2B

Accreditation Certificate





China National Accreditation Service for Conformity Assessment

LABORATORY ACCREDITATION CERTIFICATE

(No. CNAS L1659)

China National Accreditation Service for Conformity Assessment has accredited

Shenzhen Electronic Product Quality Testing Center

Electronic Testing Building, Shahe Road, Xili, Nanshan District,

Shenzhen, Guangdong, China

to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories(CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing and calibration.

The scope of accreditation is detailed in the attached schedule bearing the same accreditation number as above. The schedule forms an integral part of this certificate.

Date of Issue: 2009-09-29

Date of Expiry: 2012-09-28

Date of Initial Accreditation: 1999-08-03



Signed on behalf of China National Accreditation Service
for Conformity Assessment

China National Accreditation Service for Conformity Assessment(CNAS) is authorized by Certification and Accreditation Administration of the People's Republic of China (CNCA) to operate the national accreditation systems for conformity assessment. CNAS is the signatory to International Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (ILAC MRA), and the signatory to Asia Pacific Laboratory Accreditation Cooperation Multilateral Recognition Arrangement (APLAC MRA).

ANNEX B- Test Layout

of

Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

ZiiO

REPORT NO: SH10090005S01

Type Name: Creative

Hardware Version: ZP0290B_001042

Software Version: Beta 2B

Test Layout

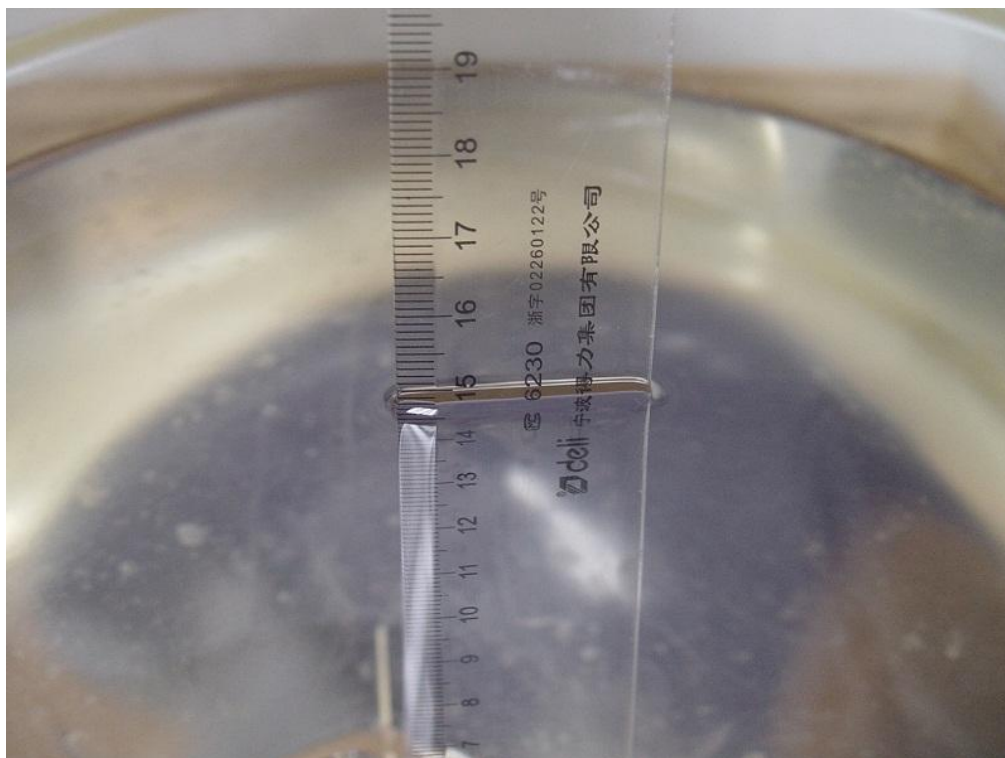


Figure B.1 Depth of Simulating Liquid in SAM Head Phantom

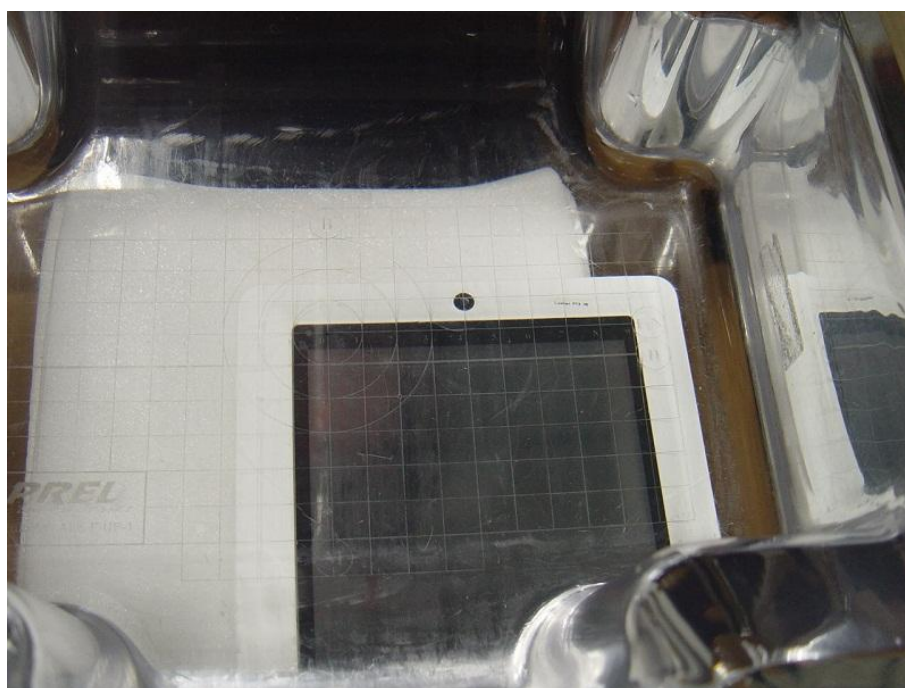


Figure B.2 EUT Frontside Towards phantom



Figure B.3 EUT Backside Towards phantom

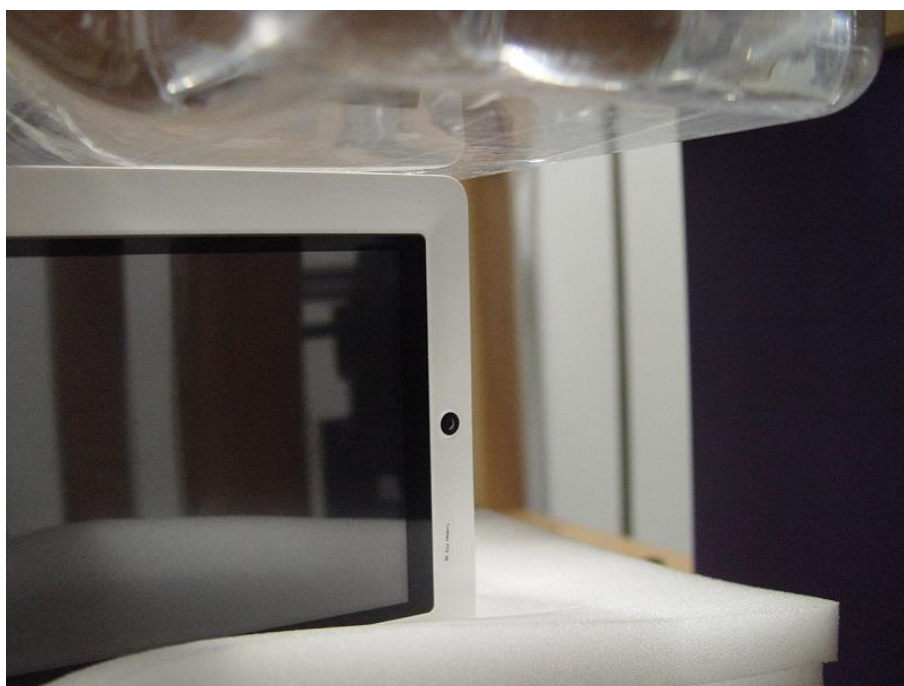


Figure B.4 EUT Leftside Towards phantom

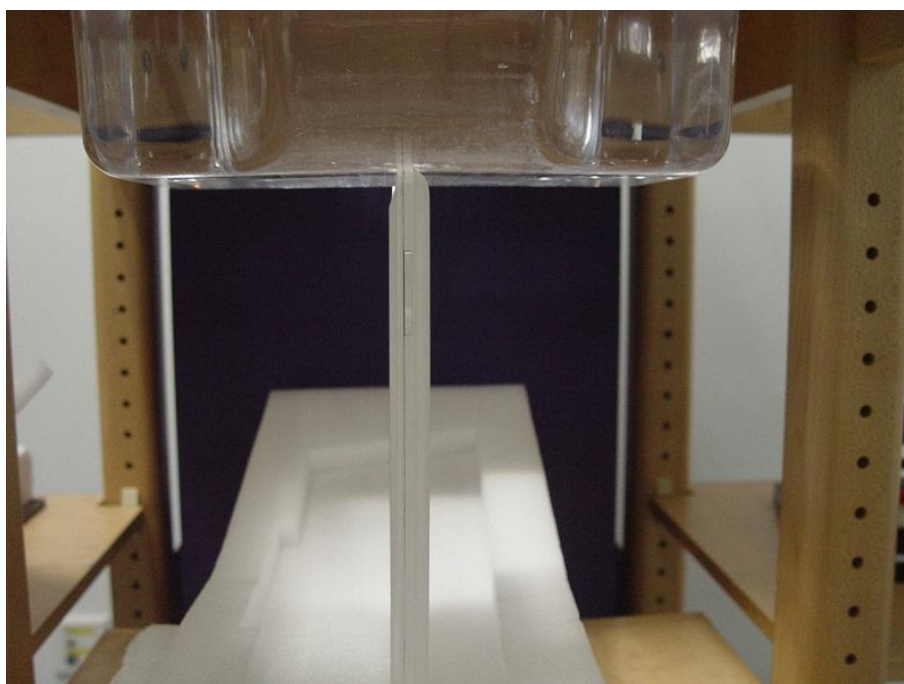


Figure B.5 EUT Topside Towards phantom



Figure B.6 EUT Backside Towards phantom with earphone

ANNEX C- Sample Photographs

of

Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

ZiiO

REPORT NO: SH10090005S01

Type Name: Creative

Hardware Version: ZP0290B_001042

Software Version: Beta 2B



Photograph of the Equipment under Test



ANNEX D- Graph Test Results

of

Shenzhen Morlab Communications Technology Co.,Ltd.

CONFORMANCE TEST REPORT FOR HUMAN EXPOSURE TO ELECTROMAGNETIC FIELDS

ZiiO

REPORT NO: SH10090005S01

Type Name: Creative

Hardware Version: ZP0290B_001042



Software Version: Beta 2B

Graph Test Results



Frontside Towards phantom with 2412MHz


Frequency (MHz)	2412
Relative permittivity (real part)	52.014
Conductivity (S/m)	1.9234
Variation (%)	0.56
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Data	2010-11-11

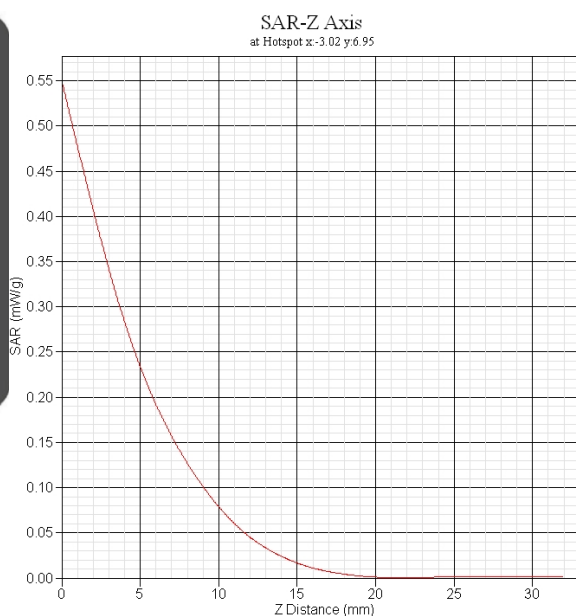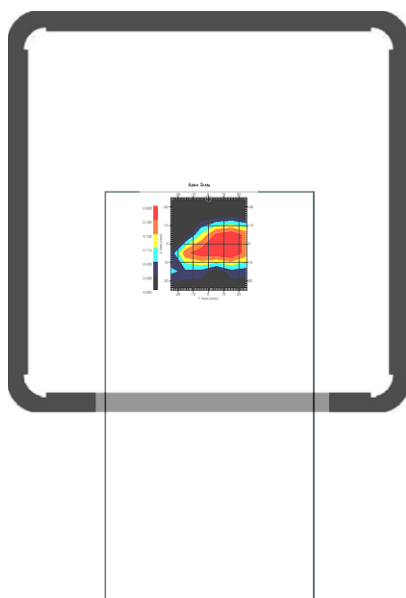

SAR 10g (W/Kg)	0.090
SAR 1g (W/Kg)	0.230

Frontside Towards phantom with 2437MHz


Frequency (MHz)	2437
Relative permittivity (real part)	52.167
Conductivity (S/m)	1.9301
Variation (%)	1.232
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Data	2010-11-11

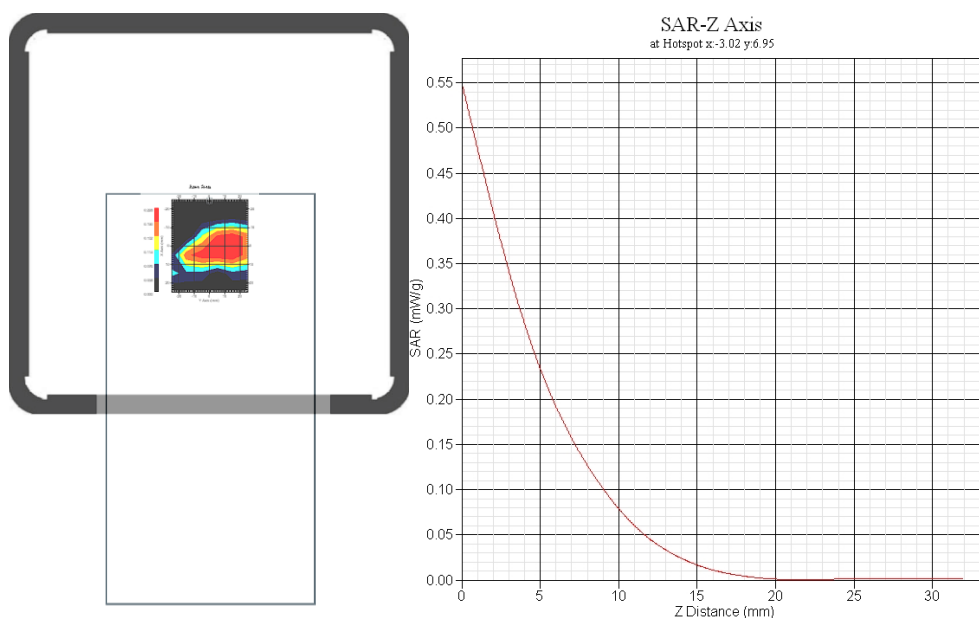

SAR 10g (W/Kg)	0.091
SAR 1g (W/Kg)	0.233

Frontside Towards phantom with 2462MHz


Frequency (MHz)	2462
Relative permittivity (real part)	52.311
Conductivity (S/m)	1.9436
Variation (%)	0.23
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Data	2010-11-11

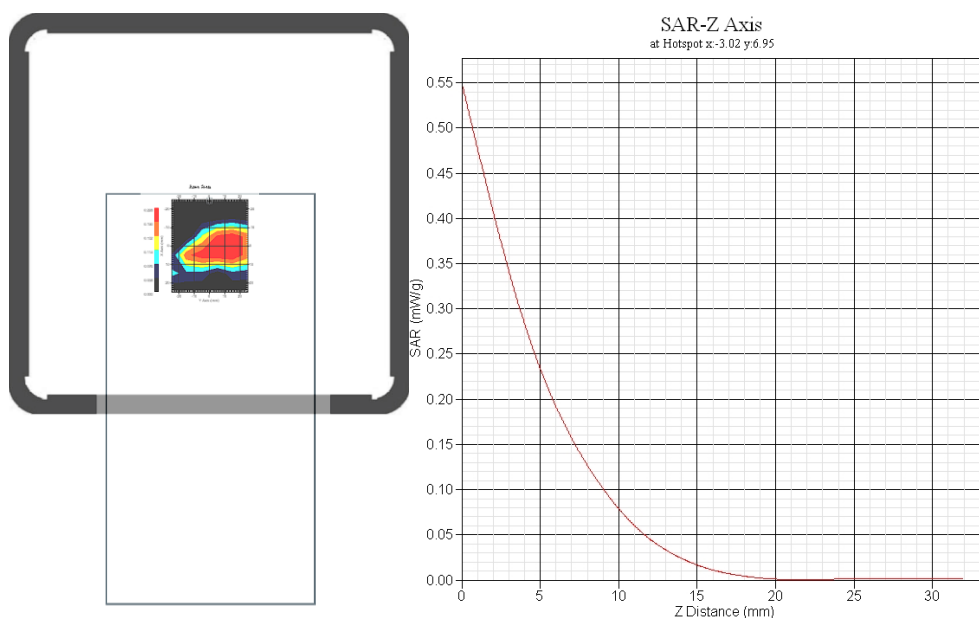

SAR 10g (W/Kg)	0.097
SAR 1g (W/Kg)	0.243

Leftside Towards phantom with 2412MHz


Frequency (MHz)	2412
Relative permittivity (real part)	52.014
Conductivity (S/m)	1.9234
Variation (%)	2.11
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Data	2010-11-11

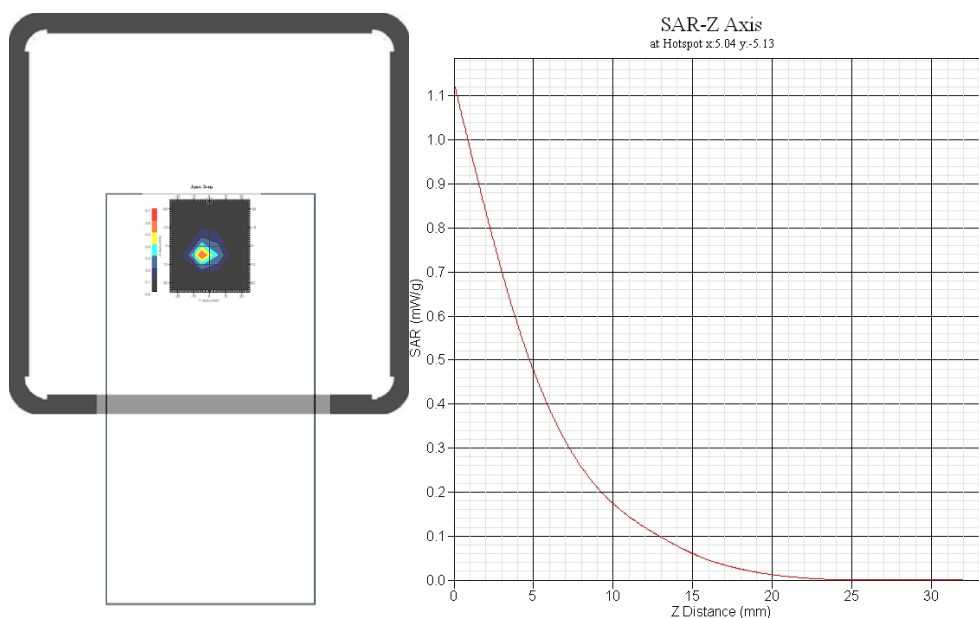

SAR 10g (W/Kg)	0.113
SAR 1g (W/Kg)	0.401

Leftside Towards phantom with 2437MHz


Frequency (MHz)	2437
Relative permittivity (real part)	52.167
Conductivity (S/m)	1.9301
Variation (%)	-0.43
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Data	2010-11-11

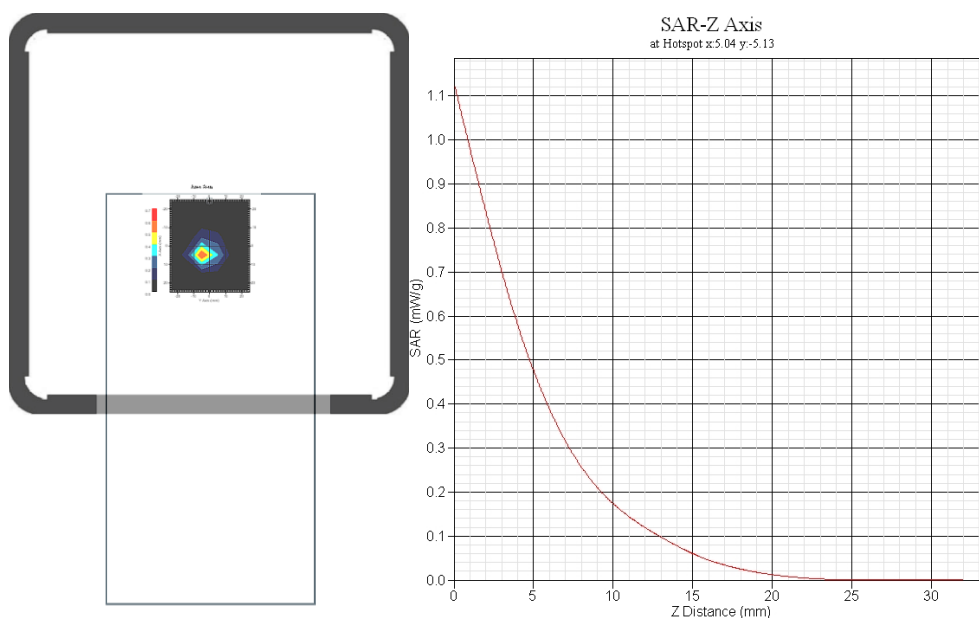

SAR 10g (W/Kg)	0.118
SAR 1g (W/Kg)	0.408

Leftside Towards phantom with 2462MHz



Frequency (MHz)	2462
Relative permittivity (real part)	52.311
Conductivity (S/m)	1.9436
Variation (%)	0.56
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Data	2010-11-11

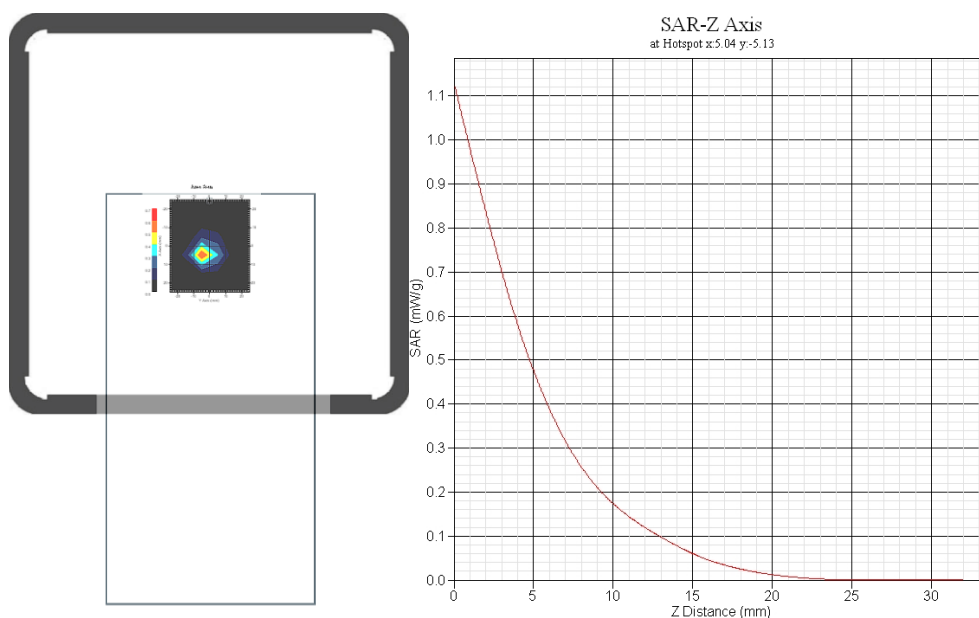

SAR 10g (W/Kg)	0.129
SAR 1g (W/Kg)	0.412

Topside Towards phantom with 2412MHz



Frequency (MHz)	2412
Relative permittivity (real part)	52.014
Conductivity (S/m)	1.9234
Variation (%)	1.52
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Data	2010-11-11

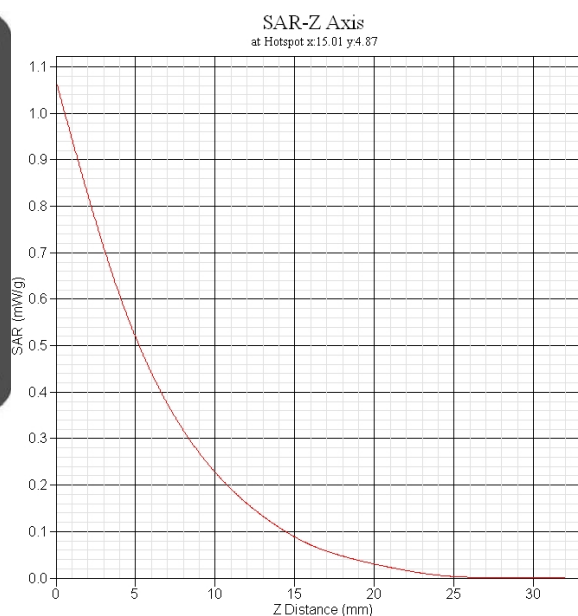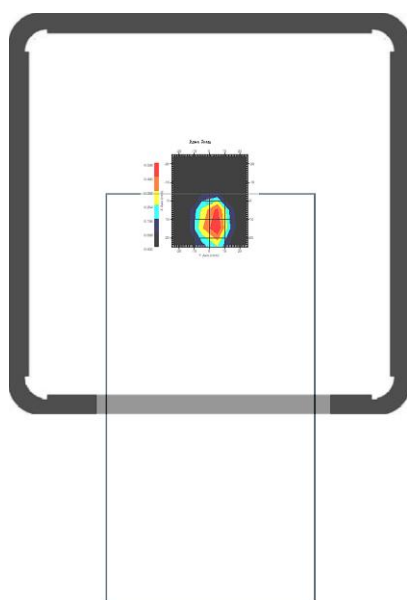

SAR 10g (W/Kg)	0.151
SAR 1g (W/Kg)	0.341

Topside Towards phantom with 2437MHz



Frequency (MHz)	2437
Relative permittivity (real part)	52.167
Conductivity (S/m)	1.9301
Variation (%)	2.38
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Data	2010-11-11

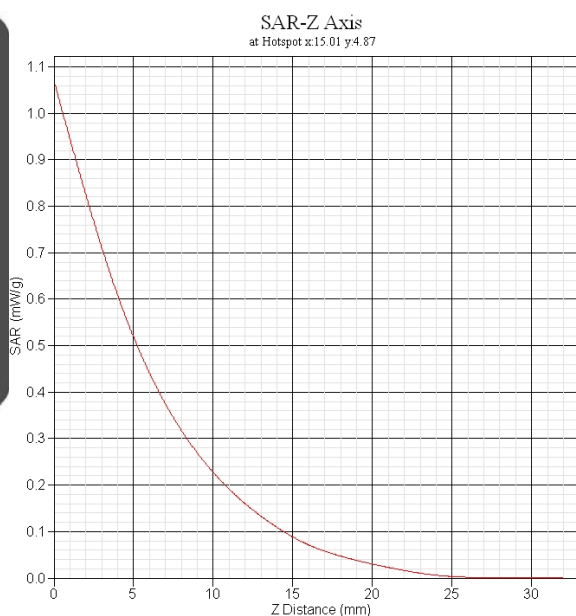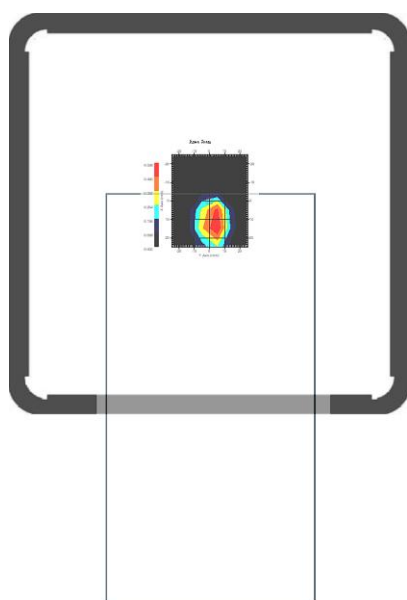

SAR 10g (W/Kg)	0.168
SAR 1g (W/Kg)	0.427

Topside Towards phantom with 2462MHz



Frequency (MHz)	2462
Relative permittivity (real part)	52.311
Conductivity (S/m)	1.9436
Variation (%)	-1.34
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Data	2010-11-11

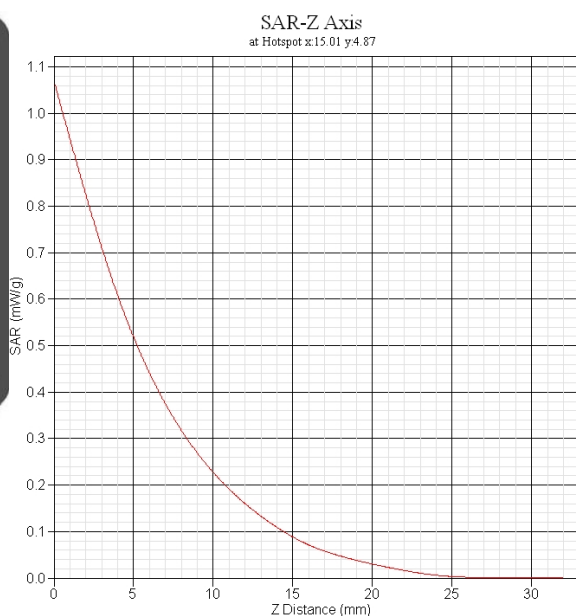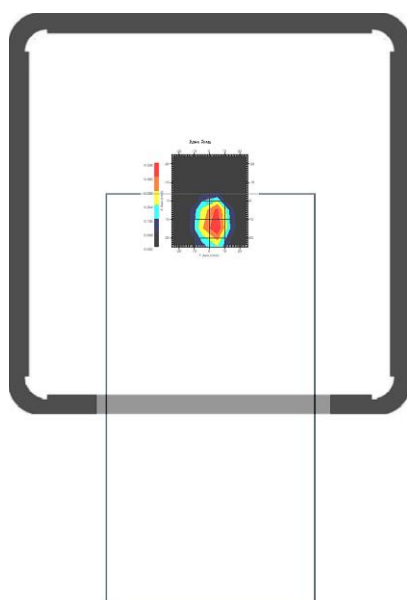

SAR 10g (W/Kg)	0.171
SAR 1g (W/Kg)	0.467

Backside Towards phantom with 2412MHz


Frequency (MHz)	2412
Relative permittivity (real part)	52.014
Conductivity (S/m)	1.9234
Variation (%)	1.28
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Data	2010-11-11

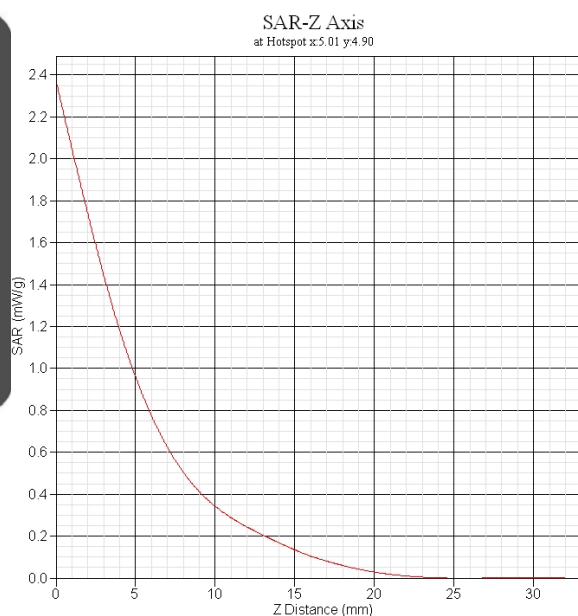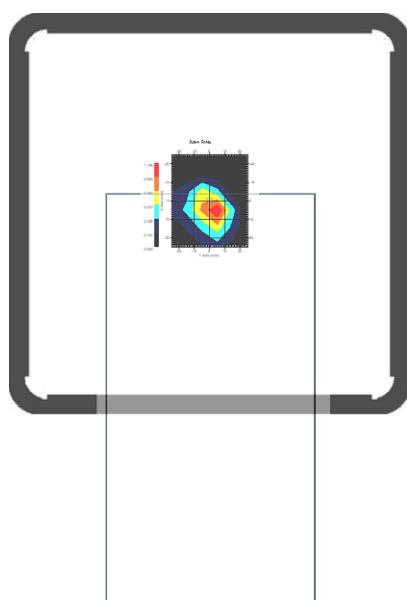

SAR 10g (W/Kg)	0.378
SAR 1g (W/Kg)	0.961

Backside Towards phantom with 2437MHz



Frequency (MHz)	2437
Relative permittivity (real part)	52.167
Conductivity (S/m)	1.9301
Variation (%)	-1.62
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Data	2010-11-11

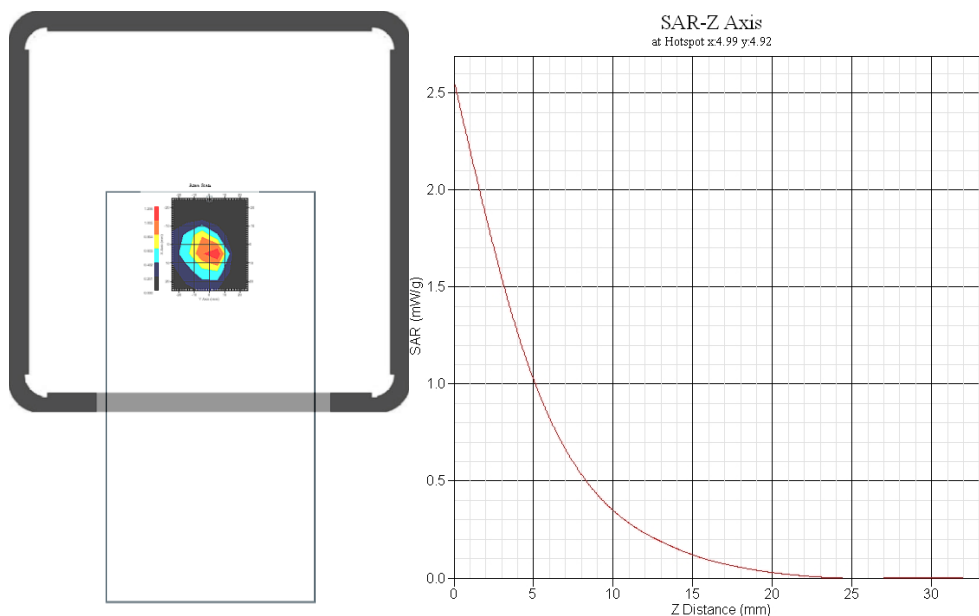

SAR 10g (W/Kg)	0.354
SAR 1g (W/Kg)	0.962

Backside Towards phantom with 2462MHz



Frequency (MHz)	2462
Relative permittivity (real part)	52.311
Conductivity (S/m)	1.9436
Variation (%)	0.34
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Data	2010-11-11

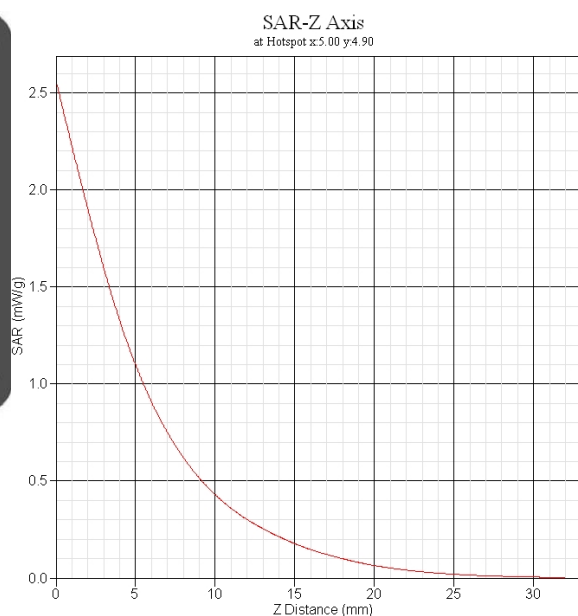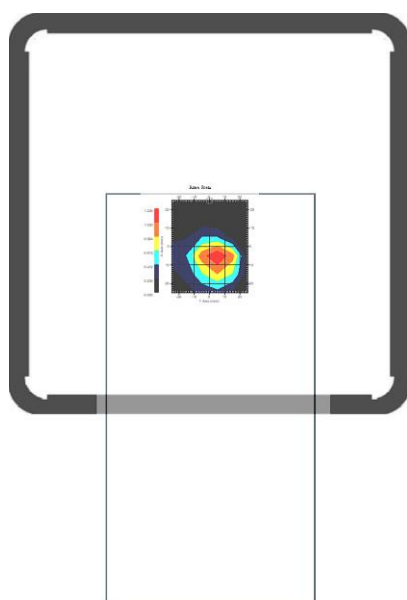

SAR 10g (W/Kg)	0.360
SAR 1g (W/Kg)	0.964

Backside Towards phantom with 2462MHz with earphone



Frequency (MHz)	2462
Relative permittivity (real part)	52.311
Conductivity (S/m)	1.9436275
Variation (%)	1.45
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V/m})^2$
Data	2010-11-11

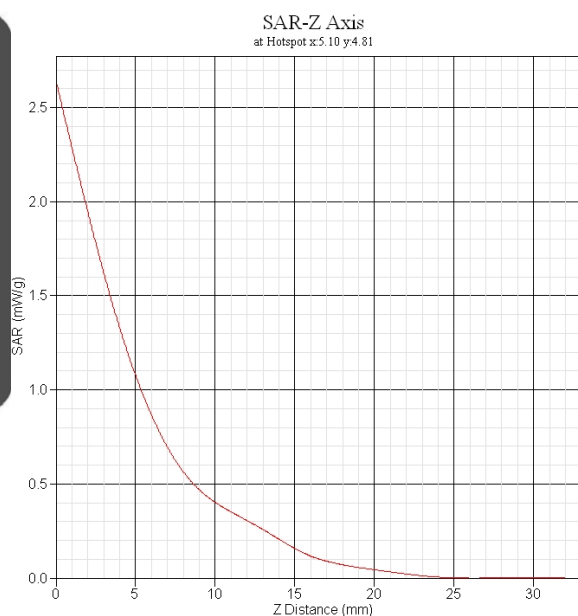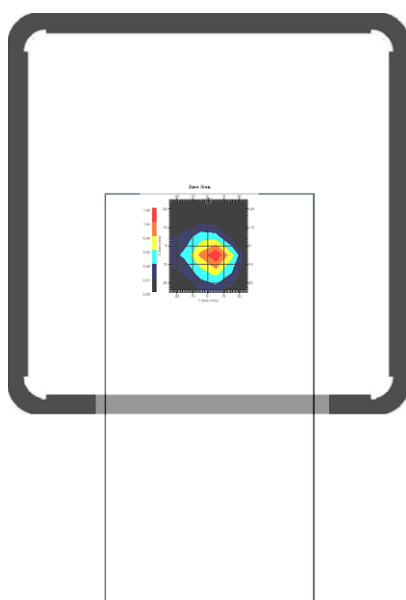

SAR 10g (W/Kg)	0.438
SAR 1g (W/Kg)	1.107

System Performance Check Data(Body)

Frequency (MHz)	2450
Relative permittivity (real part)	53.123
Conductivity (S/m)	1.902
Variation (%)	-0.32
Duty Cycle Factor	1
Crest Factor	1
Conversion Factor	3.6
Probe Sensitivity	1.20 1.20 1.20 $\mu\text{V}/(\text{V}/\text{m})^2$
Data	2010-11-11

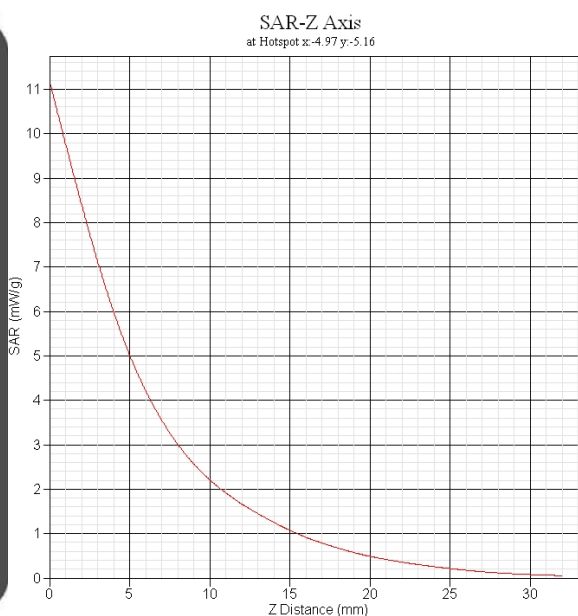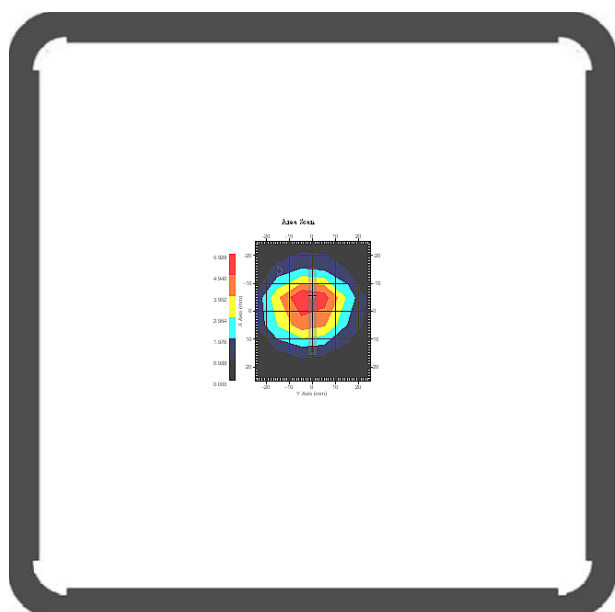

SAR 10g (W/Kg)	2.434
SAR 1g (W/Kg)	5.432

** END OF REPORT **